

**UMTS Terrestrial Radio Access Network (UTRAN);  
Layer 1;  
General Requirements  
(UMTS YY.02 version 1.2.1)**

---

**UMTS**

Universal Mobile  
Telecommunications System



---

**Reference**

DTR/SMG-02YY02U (00o00ios.PDF)

---

**Keywords**

Digital cellular telecommunications system,  
Universal Mobile Telecommunication System  
(UMTS), UTRAN

**ETSI**

---

**Postal address**

F-06921 Sophia Antipolis Cedex - FRANCE

---

**Office address**

650 Route des Lucioles - Sophia Antipolis  
Valbonne - FRANCE  
Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16  
Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

---

**Internet**

secretariat@etsi.fr  
Individual copies of this ETSI deliverable  
can be downloaded from  
<http://www.etsi.org>

---

**Copyright Notification**

---

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1999.  
All rights reserved.

# Contents

Intellectual Property Rights .....	5
Foreword .....	5
1 Scope .....	6
2 References .....	6
3 Definitions, abbreviations and symbols .....	6
3.1 Definitions.....	6
3.2 Abbreviations .....	6
3.3 Symbols.....	6
4 Interfaces to the physical layer .....	6
4.1 Interface to MAC .....	7
4.2 Interface to RRC .....	7
5 Services and functions of the physical layer .....	7
5.1 General.....	7
5.2 Overview of L1 functions .....	7
5.3 L1 interactions with L2 retransmission functionality .....	8
6 Model of physical layer of the UE .....	8
6.1 Uplink models.....	8
6.2 Downlink models .....	9
6.3 Relay link Model.....	10
7 Formats and configurations for L1 data transfer .....	11
7.1 General concepts about Transport Channels .....	11
7.1.1 Transport Block.....	11
7.1.2 Transport Block Size.....	11
7.1.3 Transport Block Set Size.....	11
7.1.4 Transmission Time Interval.....	11
7.1.5 Transport Format .....	12
7.1.6 Transport Format Set.....	12
7.1.7 Transport Format Combination .....	13
7.1.8 Transport Format Combination Set .....	13
7.1.9 Transport Format Indicator (TFI).....	14
7.1.10 Transport Format Combination Indicator (TFCI).....	14
7.2 Types of Transport Channels .....	14
7.3 Slotted Mode.....	16
8 Primitives of the physical layer .....	16
8.1 Generic names of primitives between layers 1 and 2 .....	16
8.1.1 PH-CONNECT.....	16
8.1.2 PH-DISCONNECT .....	16
8.1.3 PH-DATA .....	17
8.1.4 PH-STATUS .....	17
8.2 Generic names of primitives between layers 1 and 3 .....	17
8.2.1 STATUS PRIMITIVES .....	17
8.2.2 MPH-ERROR.....	17
8.2.3 CONTROL PRIMITIVES.....	18
8.3 Parameter definition.....	18
8.3.1 Received transmission quality parameters.....	18
8.3.2 Radio link to be reported.....	18
8.3.3 Error code.....	18
8.3.4 Physical channel description .....	19
8.3.5 Action.....	19
9 Radio Frame transmission .....	19
9.1 Downlink Frame format.....	19

9.2 Uplink Frame format..... 19

9.3 Order of bit transmission..... 19

**Annex A: Example of table that describes a Transport Format Set ..... 19**

History ..... 20

---

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available **free of charge** from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

---

## Foreword

This description has been produced by the Special Mobile Group (SMG) of the European Telecommunications Standards Institute (ETSI).

This description defines the general requirements of the Layer 2 and Layer 3 radio protocols on the physical layer of the UTRAN Radio Interface.

# 1 Scope

This description defines the general requirements of the Layer 2 and Layer 3 radio protocols on the physical layer of the UTRAN Radio Interface.

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
  - For a specific reference, subsequent revisions do not apply.
  - For a non-specific reference, the latest version applies.
  - A non-specific reference to an ETS shall also be taken to refer to later versions published as an EN with the same number.
- [1] UMTS 23.10 : UMTS Access Stratum Services and Functions  
 [2] UMTS YY.01 : UE-UTRAN Radio Interface Protocol Architecture  
 [3] XX.04 UTRA FDD multiplexing, channel coding and interleaving description  
 [4] XX.10 UTRA TDD multiplexing, channel coding and interleaving description

# 3 Definitions, abbreviations and symbols

## 3.1 Definitions

For the purposes of the present document, the [following] terms and definitions [given in ... and the following] apply.

## 3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:


## 3.3 Symbols

For the purposes of the present document, the following symbols apply:

# 4 Interfaces to the physical layer

The physical layer (layer 1) is the lowest layer in the OSI Reference Model and it supports all functions required for the transmission of bit streams on the physical medium.

The physical layer interfaces the Medium Access Control (MAC) Layer and the Radio Resource Control (RRC) Layer as depicted in figure 2.1.

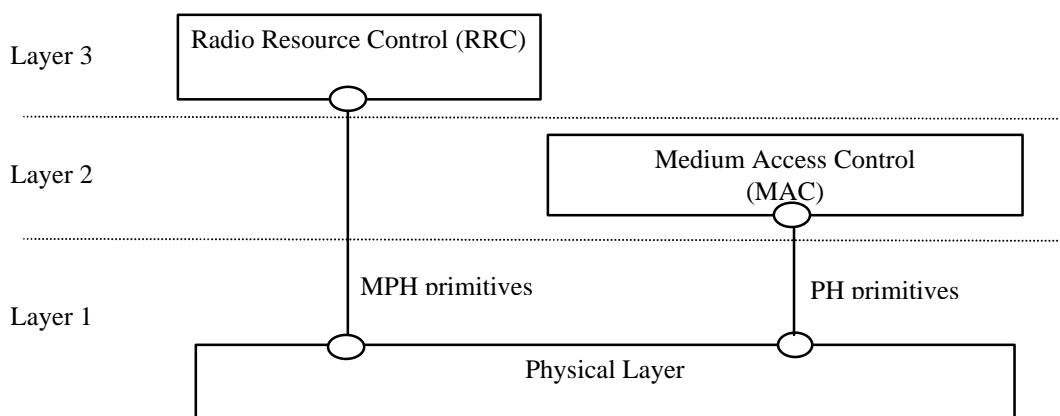

**Figure 1 : Interfaces with the Physical Layer**

## 4.1 Interface to MAC

The physical layer interfaces the MAC entity of layer 2.. Communication between the Physical Layer and MAC is in an abstract way performed by means of PH-primitives defined which do not constrain implementations.

NOTE: The terms physical layer and layer 1, will be used synonymously in this description.

The PH-primitives exchanged between the physical layer and the data link layer provide the following functions:

- transfer of transport blocks over the radio interface
- indicate the status of the layer 1 to layer 2

## 4.2 Interface to RRC

The physical layer interfaces the RRC entity of layer 3 in the UE and in the network.

Communication is performed in an abstract way by means of MPH-primitives. They do not constrain implementations.


The MPH-primitives exchanged between the physical layer and the Network layer provide the following function:

- control of the configuration of the physical layer

The currently identified exchange of information across that interface have only a local significance to the UE or Network.

---

# 5 Services and functions of the physical layer

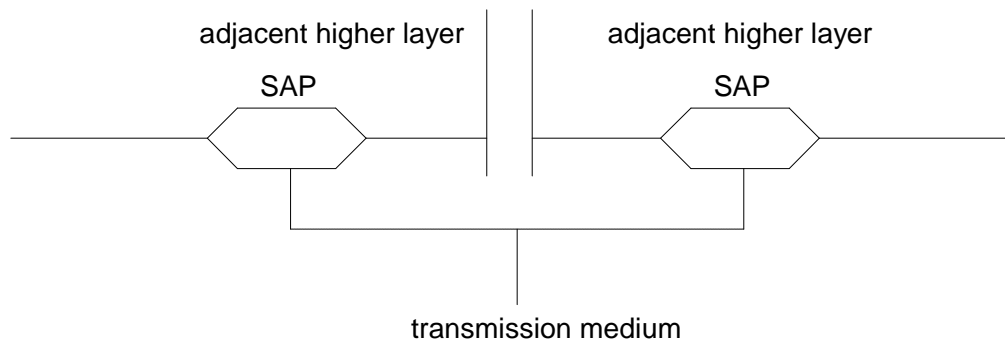

**Figure 5.1: Services and functions of the physical layer**

## 5.1 General

The physical layer offers data transport services to higher layers. The access to these services is through the use of transport channels via the MAC sub-layer. The characteristics of a transport channel are defined by its transport format (or format set), specifying the physical layer processing to be applied to the transport channel in question, such as outer coding and interleaving (if any), and inner channel coding and interleaving, and any service-specific rate matching as needed.

The physical layer operates exactly according to the L1 radio frame timing. A transport block is defined as the data accepted by the physical layer to be jointly encoded. The transmission block timing is then tied exactly to this L1 frame timing, e.g. every transmission block is generated precisely every 10ms, or a multiple of 10 ms.

A UE can set up multiple transport channels simultaneously, each having own transport characteristics (e.g. offering different error correction capability). Each transport channel can be used for information stream transfer of one radio bearer or for layer 2 and higher layer signalling messages.

The multiplexing of these transport channels onto the same or different physical channels is carried out by L1. In addition, the Transport Format Combination Indication field (TFCI) shall uniquely identify the transport format used by each transport channel of the Coded Composite Transport Channel within the current radio frame.

## 5.2 Overview of L1 functions

The physical layer performs the following main functions:

- FEC encoding/decoding of transport channels
- Measurements
- Macrodiversity distribution/combining and soft handover execution
- Error detection on transport channels
- Multiplexing of transport channels and demultiplexing of coded composite transport channels

- Mapping of coded composite transport channels on physical channels
- Modulation and spreading/demodulation and despreading of physical channels
- Frequency and time (chip, bit, slot, frame) synchronization
- Closed-loop power control
- Power weighting and combining of physical channels
- RF processing

### 5.3 L1 interactions with L2 retransmission functionality

Provided that the RLC PDUs are mapped one-to-one onto the Transport Blocks, Error indication may be provided by L1 to L2. For that purpose, the L1 CRC can be used for individual error indication of each RLC PDU. The L1 CRC will then serve multiple purposes:

- Error indication for uplink macro diversity selection combining (L1)
- Frame error indication for speech services
- Quality indication
- Error indication for L2 retransmissions

For Transport Channels using outer coding (RS-coding) information from the RS-decoder may be used for error indication for the purpose of L2 re-transmissions.


As a conclusion, L1 needs to give an error indication to L2 for each erroneous Transport Block delivered.

## 6 Model of physical layer of the UE

### 6.1 Uplink models

Figure 2 shows models of the UE’s physical layer in the uplink for both FDD and TDD mode. It shows two models: DCH model and RACH model. Only one type of transport channel is used at a time by one UE. Hence, both models are not in use simultaneously within one UE. More details can be found in [3] and [4].

*Editors note: Models for uplink transport channels currently marked ffs will be necessary if these channels are included in the description.*

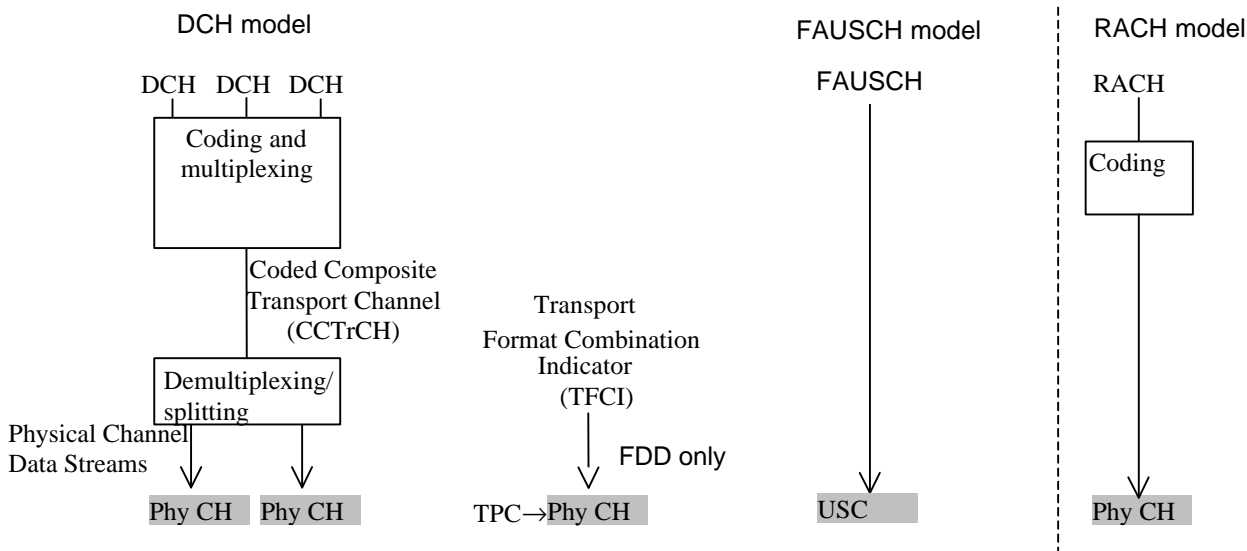

**Figure 2: Model of the UE’s physical layer – uplink**

The DCH model shows that one or several DCHs can be processed and multiplexed together by the same coding and multiplexing unit. The detailed functions of the coding and multiplexing unit are not defined in this document but in XX.04 [1] and XX.10 [2]. The single output data stream from the coding and multiplexing unit is denoted *Coded Composite Transport Channel (CCTrCH)*.

The data stream of the CCTrCH is fed to a data demultiplexing/splitting unit that demultiplexes/splits the CCTrCH’s data stream onto one or several *Physical Channel Data Streams*.

*Editors’s note: The term “splitting” used for above function in FDD mode has been replaced by “demultiplexing/splitting”. The intention of using the term splitting is to express that this function is performed on bit*



level not on some block level. The term demultiplexing/splitting shall cover both cases, block or bit level demultiplexing, where block lengths larger than 1 bit may be applied in the TDD mode. This needs to be confirmed by the L1 group


The current configuration of the coding and multiplexing unit is either signalled to, or optionally blindly detected by, the network for each 10 ms frame. If the configuration is signalled, it is represented by the *Transport Format Combination Indicator (TFCI)* bits. Note that the TFCI signalling only consists of pointing out the current transport format combination within the already configured transport format combination set. In the uplink there is only one TFCI representing the current transport formats on all DCHs of one CCTrCH simultaneously. In FDD mode, the physical channel data stream carrying the TFCI is mapped onto the physical channel carrying the power control bits and the pilot. For the FAUSCH, there is no coding, since the FAUSCH is only used for the transmission of a reservation request by sending an up-link signalling code (USC) at the time-offset allocated for the specific UE during the 10 ms frame. Due to the fixed time-offset allotted to a specific UE, the FAUSCH is a dedicated control channel.

The model for the RACH case shows that RACH is the only common type transport channel in the uplink. RACHs are always mapped one-to-one onto physical channels, i.e. there is no physical layer multiplexing of RACH. Service multiplexing is handled by the MAC layer.


## 6.2 Downlink models

Figure 3 and Figure 4 show the model of the UE's physical layer for the downlink in FDD and TDD mode, respectively. Note that there is a different model for each transport channel type.

*Editors note: Models for downlink transport channels currently marked ffs will be necessary if these channels are included in the description.*

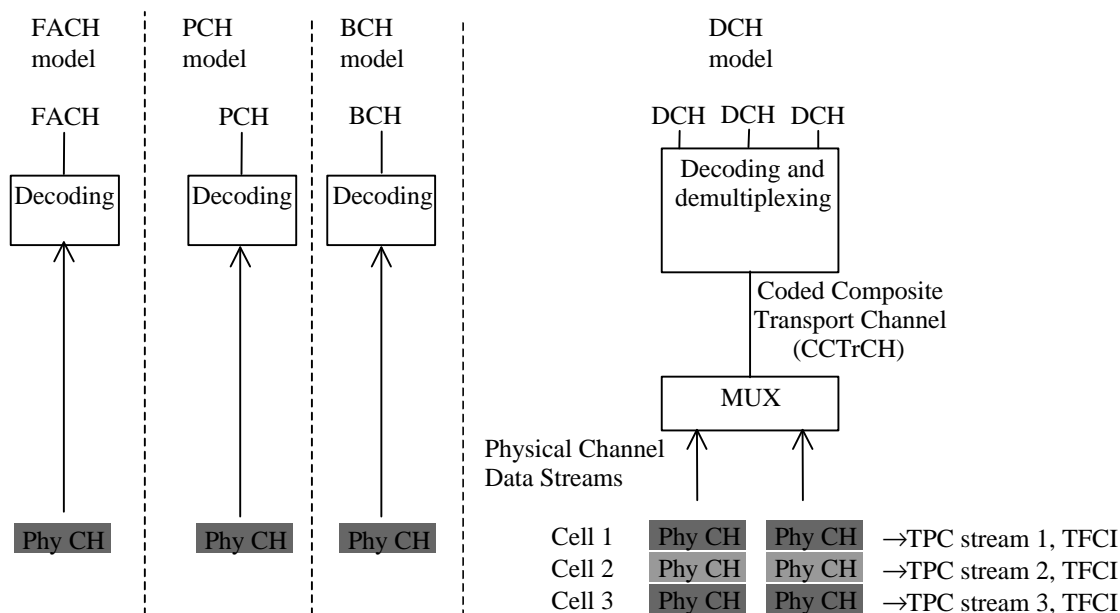

**Figure 3: Model of the UE's physical layer – downlink FDD mode**

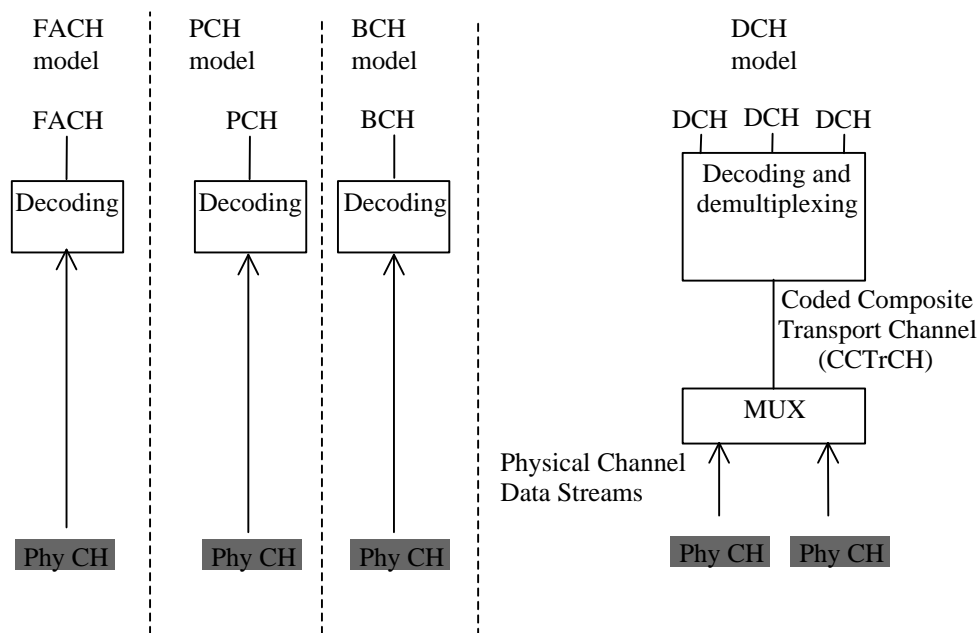

**Figure 4: Model of the UE's physical layer – downlink TDD mode**

For the DCH case, the mapping between DCHs and physical channel data streams works in the same way as for the uplink. Note however, that the number of DCHs, the coding and multiplexing etc. may be different in uplink and downlink.

In the FDD mode, the differences are mainly due to the soft and softer handover. Further, the pilot, TPC bits and TFCI are time multiplexed onto the same physical channel(s) as the DCHs. Further, the definition of physical channel data stream is somewhat different from the uplink.

Note that it is logically one and the same physical data stream in the active set of cells, even though physically there is one stream for each cell. The same processing and multiplexing is done in each cell. The only difference between the cells is the actual codes, and these codes correspond to the same spreading factor.


The physical channels carrying the same physical channel data stream are combined in the UE receiver, excluding the pilot, and in some cases the TPC bits. TPC bits received on certain physical channels may be combined provided that UTRAN has informed the UE that the TPC information on these channels is identical.

The downlink models for the BCH, PCH and FACH show that BCH, PCH and FACH are always mapped one-to-one onto physical channels, i.e. there is no physical layer multiplexing of BCH, PCH and FACH. Service multiplexing is handled by the MAC layer. Note, in the TDD mode there is the SCH in addition (not shown in Figure 4).

### 6.3 Relay link Model

The Relay link applies to the TDD mode only. The applicability to the FDD mode is FFS.

Figure 5 illustrates the model of the UE's physical layer for the TDD mode.

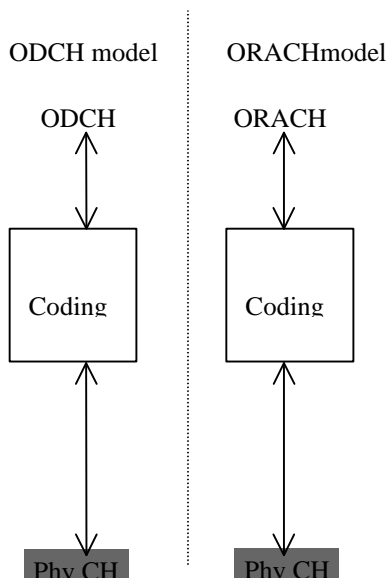

**Figure 5 : Model of the UE's physical layer - relay link TDD mode.**

The ORACH is a channel used within UE's to transmit and receive probing messages, and also to transmit and receive small packets of information. The ODCH is used to transmit larger amounts of data over a number of hops between UE's.

## 7 Formats and configurations for L1 data transfer

### 7.1 General concepts about Transport Channels

Layer 2 is responsible for the mapping of data onto L1 via the L1/L2 interface that is formed by the transport channels. In order to describe how the mapping is performed and how it is controlled, some definitions and terms are required. The required definitions are given in the following sections. Note that the definitions are generic for all transport channel types, i.e. not only for DCHs.

All Transport Channels are defined as unidirectional (i.e. uplink, downlink, or relay-link). This means that a UE can have simultaneously (depending on the services and the state of the UE) one or several transport channels in the downlink, and one or more Transport Channel in the uplink.

#### 7.1.1 Transport Block

This is the basic unit exchanged between L1 and MAC, for L1 processing.

A Transport Block typically corresponds to an RLC PDU or corresponding unit. In the TDD mode it may possibly also be formed by a MAC peer-to-peer message. Layer 1 adds a CRC for each Transport Block.

**Transport Block Set** This is defined as a set of Transport Blocks which are exchanged between L1 and MAC at the same time instance using the same transport channel.

#### 7.1.2 Transport Block Size

This is defined as the number of bits in a Transport Block.

#### 7.1.3 Transport Block Set Size

This is defined as the number of bits in a Transport Block Set.

#### 7.1.4 Transmission Time Interval

This is defined as the inter-arrival time of Transport Block Sets, i.e. the periodicity at which a Transport Block Set is transferred by the physical layer. It is always a multiple of the minimum interleaving period (e.g. 10ms, the length of one Radio Frame).

Figure 6 shows an example where Transport Block Sets, at certain time instances, are exchanged between MAC and L1 via three parallel transport channels. Each Transport Block Set consists of a number of Transport Blocks. The Transmission Time Interval, i.e. the time between consecutive deliveries of data between MAC and L1, is also illustrated. Last, the case when the last Transport Block is smaller than the allowed size is shown, with the topmost Transport Block being partially empty.

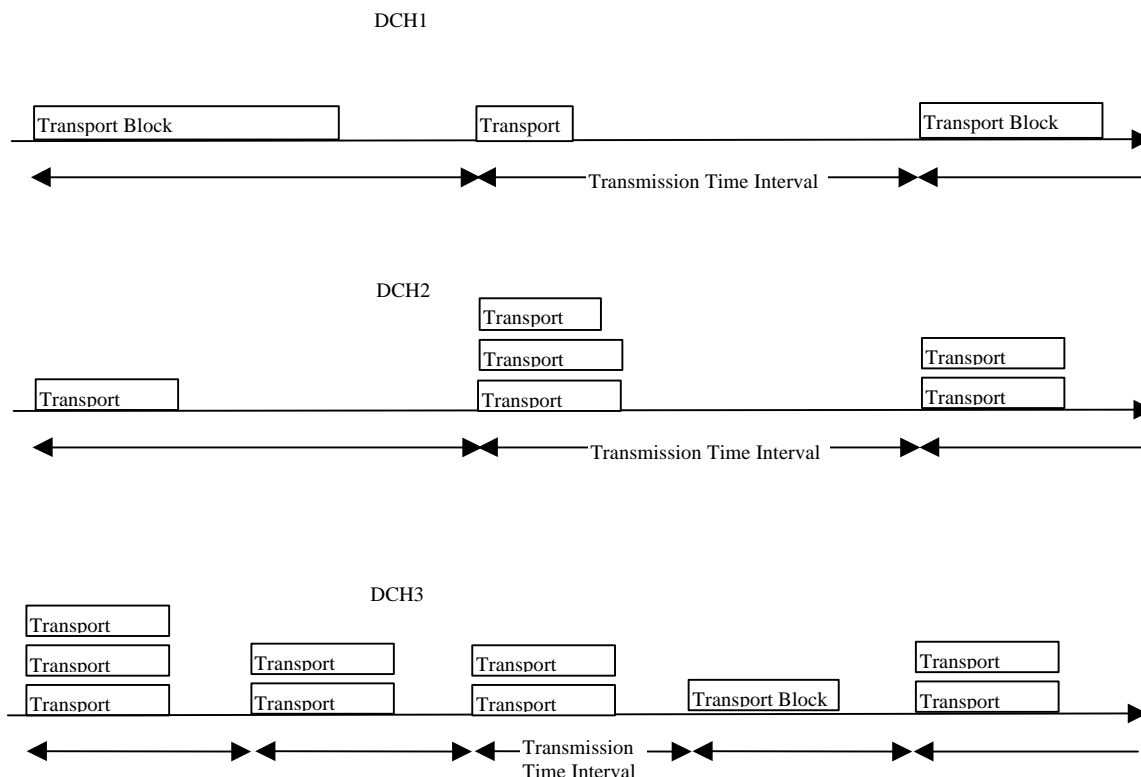


Figure 6. Exchange of data between MAC and L1

### 7.1.5 Transport Format

This is defined as a format offered by L1 to MAC (and vice versa) for the delivery of a Transport Block Set during a Transmission Time Interval on a Transport Channel. The Transport Format constitutes of two parts – one *dynamic* part and one *semi-static* part.

Attributes of the dynamic part are:

- Transport Block Size
- Transport Block Set Size
- Transmission Time Interval (option for TDD only)

Attributes of the semi-static part are:

- Transmission Time Interval (mandatory for FDD, optional for the dynamic part of TDD NRT bearers)
- Type of channel coding
  - Outer coding (e.g. Reed-Solomon)
  - Outer interleaving (depth of the outer interleaving in radio frames)
  - Inner coding
  - Inner interleaving (depth of the inner interleaving in radio frames)
- Rate matching

In the following example, the Transmission time Interval is seen as a semi-static part

Example:

- Dynamic part: {320 bits, 640 bits}, Semi-static part: {10ms, Inner coding only, repeat 1/12 of the bits}

### 7.1.6 Transport Format Set

This is defined as the set of Transport Formats associated to a Transport Channel.

The semi-static parts of all Transport Formats are the same within a Transport Format Set.

Effectively the first two attributes of the dynamic part form the instantaneous bit rate on the Transport Channel. Variable bit rate on a Transport Channel may, depending on the type of service which is mapped onto the transport channel, be achieved by changing between each Transmission Time Interval one of the following:

- 1) the Transport Block Size only
- 2) the Transport Block Set Size only
- 3) both the Transport Block Size and the Transport Block Set Size

Example 1:

- Dynamic part: {20 bits, 20 bits}; {40 bits, 40 bits}; {80 bits, 80 bits}; {160 bits, 160 bits}
- Semi-static part: {10ms, Inner coding only, repeat 1/12 of the bits}

Example 2:

- Dynamic part: {320 bits, 320 bits}; {320 bits, 640 bits}; {320 bits, 1280 bits}
- Semi-static part: {10ms, Inner coding only, repeat 1/12 of the bits}

The first example may correspond to a Transport Channel carrying a speech service, requiring blocks delivered on a constant time basis. In the second example, which illustrates the situation where a non-real time service is carried by the Transport Channel, the number of blocks delivered per Transmission Time Interval varies between the different Transport Formats within the Transport Format Set. Referring to Figure 6, the Transport Block Size is varied on DCH1 whereas the Transport Block Set Size is fix. That is, a Transport Format Set where the dynamic part has a variable Transport Block Size has been assigned for DCH1. On DCH2 and DCH3 it is instead the Transport Block Set Sizes that are varied. That is, the dynamic parts of the corresponding Transport Format Sets include variable Transport Block Set Sizes.

### 7.1.7 Transport Format Combination

The layer 1 multiplexes one or several Transport Channels, and for each Transport Channel, there exists a list of transport formats (Transport Format Set) which are applicable. Nevertheless, at a given point of time, not all combinations may be submitted to layer 1 but only a subset, the Transport Format Combination. This is defined as an authorised combination of the combination of currently valid Transport Formats that can be submitted simultaneously to the layer 1 for transmission on a Coded Composite Transport Channel of a UE, i.e. containing one Transport Format from each Transport Channel.

Example:

DCH1: Dynamic part: {20 bits, 20 bits}, Semi-static part: {10ms, Inner coding only, repeat 1/12 of the bits}

DCH2: Dynamic part: {320 bits, 1280 bits}, Semi-static part: {10ms, Inner coding only, puncture 1/14 of the bits}

DCH3: Dynamic part: {320 bits, 320 bits}, Semi-static part: {40ms, Outer coding, repeat 1/20 of the bits}

### 7.1.8 Transport Format Combination Set

This is defined as a set of Transport Format Combinations on a Coded Composite Transport Channel.

Example:

Dynamic part:

Combination 1: DCH1: {20 bits, 20 bits}, DCH2: {320 bits, 1280 bits}, DCH3: {320 bits, 320 bits}

Combination 2: DCH1: {40 bits, 40 bits}, DCH2: {320 bits, 1280 bits}, DCH3: {320 bits, 320 bits}

Combination 3: DCH1: {160 bits, 160 bits}, DCH2: {320 bits, 320 bits}, DCH3: {320 bits, 320 bits}

Semi-static part:

DCH1: {10ms, Inner coding only, repeat 1/12 of the bits}

DCH2: {10ms, Inner coding only, puncture 1/14 of the bits}

DCH3: {40ms, Outer coding, repeat 1/20 of the bits}

The Transport Format Combination Set is what is given to MAC for control. However, the assignment of the Transport Format Combination Set is done by L3. When mapping data onto L1, MAC chooses between the different Transport Format Combinations given in the Transport Format Combination Set. Since it is only the dynamic part that differ between the Transport format Combinations, it is in fact only the dynamic part that MAC has any control over.

The semi-static part, together with the target value for the L1 closed loop power control, correspond to the service attributes:

Quality (e.g. BER)

Transfer delay

These service attributes are then offered by L1. However, it is L3 that guarantees that the L1 services are fulfilled since it is in charge of controlling the L1 configuration, i.e. the setting of the semi-static part of the Transport Formats.

Furthermore, L3 controls the target for the L1 closed loop power control through the outer loop power control (which actually is a quality control rather than a power control).

Note that a Transport Format Combination Set need not contain all possible Transport Format Combinations that can be formed by Transport Format Sets of the corresponding Transport Channels. It is only the allowed combinations that are included. Thereby a maximum total bit rate of all transport channels of a Code Composite Transport Channel can be set

appropriately. That can be achieved by only allowing Transport Format Combinations for which the included Transport Formats (one for each Transport Channel) do not correspond to high bit rates simultaneously.

The selection of Transport Format Combinations can be seen as a fast part of the radio resource control. The dedication of these fast parts of the radio resource control to MAC, close to L1, means that the flexible variable rate scheme provided by L1 can be fully utilised. These parts of the radio resource control should be distinguished from the slower parts, which are handled by L3. Thereby the bit rate can be changed very fast, without any need for L3 signalling.

### 7.1.9 Transport Format Indicator (TFI)

The TFI is a label for a specific transport format within a transport format set. It is used in the inter-layer communication between MAC and L1 each time a transport block set is exchanged between the two layers on a transport channel.

### 7.1.10 Transport Format Combination Indicator (TFCI)

This is a representation of the current Transport Format Combination.

There is a one-to-one correspondence between a certain value of the TFCI and a certain Transport Format Combination. The TFCI is used in order to inform the receiving side of the currently valid Transport Format Combination, and hence how to decode, de-multiplex and deliver the received data on the appropriate Transport Channels.

MAC indicates the TFI to Layer 1 at each delivery of Transport Block Sets on each Transport Channel. Layer 1 then builds the TFCI from the TFIs of all parallel transport channels of the UE, processes the Transport Blocks appropriately and appends the TFCI to the physical control signalling. Through the detection of the TFCI the receiving side is able to identify the Transport Format Combination. For FDD, in case of limited Transport Format Combination Sets the TFCI signalling may be omitted, instead relying on blind detection. Nevertheless, from the assigned Transport Format Combinations, the receiving side has all information it needs in order to decode the information and transfer it to MAC on the appropriate Transport Channels.

The multiplexing and exact rate matching patterns follow predefined rules and may therefore be derived (given the Transport Format Combinations) by transmitter and receiver without signalling over the radio interface.

When the meaning of the TFCI field needs to be reconfigured, two procedures can be used depending on the level of reconfiguration:

- **Complete reconfiguration of TFCI:** In this procedure all TFCI values are reinitialized and new values are defined instead. The complete reconfiguration requires an explicit synchronization between the UE and UTRAN regarding when the reconfiguration becomes valid.
- **Incremental reconfiguration of TFCI:** In this procedure, a part of the TFCI values before and after the reconfiguration remain identical (note that this must be true for at least a TFCI that carry the signaling connection). This procedure supports addition, removal or redefinition of TFCI values. This procedure does not require an explicit execution time.

## 7.2 Types of Transport Channels

A general classification of transport channels is into two groups:

- common channels (where there is a need for in-band identification of the UEs when particular UEs are addressed) and
- dedicated channels (where the UEs are identified by the physical channel, i.e. code and frequency)

Common transport channel types are:

- 1) Random Access Channel(s) (RACH) characterized by:
  - existence in uplink only,
  - collision risk,
  - open loop power control,
  - requirement for in-band identification of the UEs.
- 2) ODMA Random Access Channel(s) (ORACH) characterized by:
  - used in TDD mode only (FDD is for FFS)
  - existence in relay-link
  - collision risk,
  - open loop power control,
  - no timing advance control
  - requirement for in-band identification of the UE.
- 3) Forward Access Channel(s) (FACH) characterized by:
  - existence in downlink only,
  - possibility to use beam forming,
  - possibility to use slow power control,

- possibility to change rate fast (each 10ms),
  - lack of fast power control and
  - requirement for in-band identification of UEs.
- 4) Broadcast Channel (BCH) characterized by:
- existence in downlink only,
  - low fixed bit rate and
  - requirement to be broadcast in the entire coverage area of the cell.
- 5) Paging Channel (PCH) characterized by:
- existence in downlink only,
  - possibility for sleep mode procedures and
  - requirement to be broadcast in the entire coverage area of the cell.
- 6) Synchronisation channel (SCH) characterised by :
- existence in TDD and downlink only
  - low fixed bit rate
  - requirement to be broadcast in the entire coverage area of the cell
- 7) Downlink Shared Channel(s) (DSCH) characterised by:
- existence in downlink only,
  - possibility to use beamforming,
  - possibility to use slow power control,
  - possibility to use fast power control, when associated with dedicated channel(s)
  - possibility to be broadcast in the entire cell
  - possibility for implicit identification of destination UE based on signalling on another channel (DCH or DSCH Control Channel).

DSCH Control Channel characterised by:

- existence in downlink only,
- possibility to use beam forming,
- possibility to use slow power control,
- lack of fast power control and
- requirement for in-band identification of UEs.

*Editor's note: It is for further study whether or not the DSCH Control Channel needs to be regarded as separate transport channel type from FACH. Seen from the upper layers, the current requirements are identical to a FACH, but some extra L1 information (e.g.TPC bits) may lead to a different physical channel.*

Dedicated transport channel types are:

1) Dedicated Channel (DCH) characterized by:

- existing in uplink or downlink
- possibility to use beam forming,
- possibility to change rate fast (each 10ms),
- fast power control and
- inherent addressing of UEs.

2) Fast Uplink Signaling Channel (FAUSCH) to allocate, in conjunction with FACH, dedicated channels; the FAUSCH is characterized by:

- existing in uplink only,
- inherent addressing of a UE by a unique time-offset (indicating to a UE when to send an uplink signalling code, USC) related to the beginning of the 10 ms frame,
- allowing for a UE to notify (by sending an USC) a request for a DCH, the allocation of which is messaged via the FACH. No further information is conveyed via the FAUSCH,
- applicability for TDD mode is FFS.

*Editor's note : The existence of that Transport Channel depends on the conclusion on the L1 experts group. If the corresponding physical channel is not approved, then the FAUSCH Transport Channel will be removed.*

3) ODMA Dedicated Channel (ODCH) characterized by:

- used in TDD mode only (FDD is for FFS),
- possibility to use beam forming,
- possibility to change rate fast (each 10ms),
- closed loop power control,
- closed loop timing advance control,
- temporary addressing of UE.

To each transport channel (except for the FAUSCH, since it only conveys a reservation request), there is an associated Transport Format (for transport channels with a fixed or slow changing rate) or an associated Transport Format Set (for transport channels with fast changing rate).

## 7.3 Slotted Mode

Slotted Mode is defined as the mechanism whereby certain idle periods are created in downlink radio frames so that the UE can perform measurement reports during these periods (more details can be found in [3]). Applicability to uplink is FFS.

Slotted Mode is obtained by layer 2 using transport channels provided by the layer 1 as follows :

- Slotted Mode is controlled by the RRC layer which configures the layer 2 and the physical layer
- The number of occurrences of slotted frames is controlled by RRC, and can be modified by RRC signalling
- Layer 2 instructs every Transmission Time Interval the Layer 1 on whether slotted mode should be applied for a given Transport Format Combination Set. The instruction may indicate also the type of slotted mode (beginning, middle or end of the frame).
- The slotting can be either cyclic (typically for circuit services) or a-periodic (typically for NRT services)
- It is under the responsibility of the layer 2 if necessary to either buffer some layer 2 PDUs (typically at the RLC layer for NRT services) or to rate adapt the data flow (similarly to GSM) so that there is no loss of data because of slotted mode. This will be service dependant and controlled by the RRC layer.

## 8 Primitives of the physical layer

The Physical layer interacts with other entities as illustrated in figure 2.1. The interactions with the MAC layer and the RRC layer are shown in terms of primitives where the primitives represent the logical exchange of information and control between the physical layer and higher layers. They do not specify or constrain implementations. For the physical layer two sets of primitives are defined:

\* **Primitives between layer 1 and 2:**

PH - Generic name - Type: Parameters.

\* **Primitives between layer 1 and the RRC entity:**

MPH - Generic name - Type: Parameters.

### 8.1 Generic names of primitives between layers 1 and 2

*Editor's note : the following list of primitives contains the first part of the generic primitives between the physical layer and upper layers. It is not complete yet. Further primitives will be incorporated when the modelling of the physical layer is further refined. In particular, most of the parameters to the primitives are FFS.*

#### 8.1.1 PH-CONNECT

The PH-CONNECT primitives are used to request activation of the physical layer connection or to confirm that the physical layer connection has been activated.

**Primitives:** request, confirm.

**Request parameters:**

FFS

**Confirm parameters:**

FFS

#### 8.1.2 PH-DISCONNECT

The PH-DISCONNECT primitives are used to request deactivation of the physical layer connection or to indicate that the physical layer connection has been deactivated.

**Primitives:** request, indication (FFS)

**Request parameters:**

FFS

**Indication Parameters**

FFS



### 8.1.3 PH-DATA

The PH-DATA primitives are used to request and indicate SDUs used for Layer 2 peer to peer communications passed to and from the physical layer. One PH-DATA primitive is submitted every Transmission Time Interval for each Transport Channel.

**Primitives:** request, indication.

**Parameters:**

TFI  
 Type of slotted mode (e.g. no slotting, slotting of beginning/middle/end of frame)  
 Transport Block Set  
 FFS

### 8.1.4 PH-STATUS

The PH-STATUS primitive can be used by the layer 1 to notify higher layers of an event which has occurred.

**Primitives:** indication

**Parameters**

Event value  
 Maximum transmission power has been reached

## 8.2 Generic names of primitives between layers 1 and 3

### 8.2.1 STATUS PRIMITIVES

**MPH-Sync**

This primitive is used for L1 to indicate to RRC that synchronisation of a certain physical channel has been done in the receiver.

**Primitives:**  
 MPH-Sync-IND

**Parameters:**  
 FFS

**MPH-Out-of-Sync**

Primitive sent from L1 to RRC indicating that synchronisation of a previously configured connection has been lost in the receiver.

**Primitives:**  
 MPH-Out-of-Sync-IND

**Parameters:**  
 FFS

**MPH-Measurement**

The Request primitive is used for RRC to configure L1 measurements. The Indication primitive is used to report the measurement result from L1 to RRC.

**Primitives:**  
 MPH-Measurement-REQ  
 MPH-Measurement-IND  
*[Note: The need for a MPH-Measurement CNF is FFS.]*

**Parameters:**  
 Transmission quality parameters  
 FFS

### 8.2.2 MPH-ERROR

The MPH-ERROR primitive is used to indicate to the management entity that an error has occurred as a result of a physical layer fault.

**Primitives:** indication

**Indication Parameters**

Error Code

## 8.2.3 CONTROL PRIMITIVES

### MPH-Setup

The Request primitive is sent from RRC to L1 for establishment of a Radio link to a certain UE. The Confirm primitive is returned from L1 to RRC when the Radio link is established. In case L1 is unable to execute the request, this is indicated in the confirm primitive.

**Primitives:**

MPH-Setup-REQ

MPH-Setup-CNF

**Parameters:**

Physical channel description

### MPH-Release

The Request primitive is sent from RRC to L1 for release of a Radio link to a certain UE. The Confirm primitive is returned from L1 to RRC when the radio link is released.

**Primitives:**

MPH-Release-REQ

MPH-Release-CNF

**Parameters:**

FFS

### MPH-Modify

The Request primitive is sent from RRC to L1 for modification of a Radio link to a certain UE. The Confirm primitive is returned from L1 to RRC when the radio link is modified. In case L1 is unable to execute the request, this is indicated in the confirm primitive.

**Primitives:**

MPH-Modify-REQ

MPH-Modify-CNF

**Parameters:**

Physical channel description

## 8.3 Parameter definition

### 8.3.1 Received transmission quality parameters

	Request	Indication
Radio link list	-	-
SIR threshold	-	
FER threshold	-	
SIR measured		-
FER measured		-

### 8.3.2 Radio link to be reported

### 8.3.3 Error code

ffs

### 8.3.4 Physical channel description

	Primary SCH	Secondary SCH	Primary CCPCH	Secondary CCPCH	PRACH	DPCH
Radio frequency	-					-
Primary Synchronisation code	-					
Secondary Synchronisation code		-				
Scrambling code			-	-	-	-
Channelisation code			-	-	-	-
Available Access slot					-	
Transmission Power level					-	
Preamble signature					-	
Frame Offset				-		-

### 8.3.5 Action

	Primary SCH	Secondary SCH	Primary CCPCH	Secondary CCPCH	PRACH	DPCH
Activate Radio link	-	-	-	-	-	-
Deactivate Radio link	-	-	-	-	-	-

---

## 9 Radio Frame transmission

### 9.1 Downlink Frame format

### 9.2 Uplink Frame format

### 9.3 Order of bit transmission

---

## Annex A: Example of table that describes a Transport Format Set

The following table describes the characterisation of a Transport Format Set. The possible values for the attributes will be defined by the L1 experts group based on the requirements identified by the L23 experts group. Note that the allowed Transport Format Combinations are not described here, and will need to be covered also.

		Attribute values
Dynamic part	Transport Block Size	list of values
	Transport Block Set Size	list of values
	Transmission Time Interval (option for TDD only)	list of values
Semi-static part	Transmission Time Interval (FDD, option for TDD NRT bearers)	Value
	Type of channel coding	Value
	Outer coding	Value
	Outer interleaving	Value
	Inner coding	Value
	Inner interleaving	Value
	Rate matching	Value

# History

Document history		
Date	Version	Comment
April 1998	0.0.0	First proposal for the structure.
April 1998	0.0.1	Incorporation of changes approved in L23 meeting #2.
May 1998	0.0.2	Incorporation of changes approved in L23 meeting #3.
July 1998	0.1.0	Incorporation of changes approved in L23 meeting #4 according to tdoc SMG2/UMTS-L23 108/98 and 116/98.
September 1998	0.2.0	Incorporation of changes approved in L23 meeting #5 . Text was taken from contributions : tdoc SMG2/UMTS-L23 170/98 tdoc SMG2/UMTS-L23 177/98 tdoc SMG2/UMTS-L23 178/98 tdoc SMG2/UMTS-L23 220/98 As well some text agreed in the meeting have been incorporated.
October 1998	0.3.0	Incorporation of changes of L23 meeting #6 tdoc SMG2/UMTS-L23 264/98 tdoc SMG2/UMTS-L23 343/98 tdoc SMG2/UMTS-L23 323/98 tdoc SMG2/UMTS-L23 330/98 and some editorial clarifications.
October 1998	0.4.0	Changes according to review for approval in L23 meeting #6.
October 1998	0.4.1	Addition of section on the physical model of the UE for relay link
November 1998	0.5.0	Changes according to approved changes in L23 meeting #7. tdoc SMG2/UMTS-L23 429/98 Document has been approved in SMG2 plenary #28
December 1998	1.0.0	More editing according to approved changes in L23 meeting #7. tdoc SMG2/UMTS-L23 381/98 editorial re-insertion of FAUSCH in figure (it was in 0.4.0 and had disappeared from 0.5.0 from a Word mistake)
December 1998	1.1.0	Editing according to approved changes in L23 meeting #8. tdoc SMG2/UMTS-L23 520/98 tdoc SMG2/UMTS-L23 525/98 tdoc SMG2/UMTS-L23 545/98 agreements in the meeting: Clarification on DSCH definition Introduction of DSCH Control Channel (missing from last meeting) Change on FACH which can now change rate fast
January 1999	1.2.0	Changes according to approved changes in L23 meeting #9. tdoc SMG2/UMTS-L23 19/99 Document has been agreed to be presented to SMG2 plenary and TSG RAN WG2 #1
January 1999	1.2.1	Re-formatted for SMG#28 Clause renumbered
Rapporteur for UMTS YY.02 is:		
Denis Fauconnier Nortel Networks		
This document is written in Microsoft Word version 6.0.		