

TSG-RAN Meeting #7
Madrid, Spain, 13 – 15 March 2000

RP-000041

Title: Agreed CRs to TS 25.323

Source: TSG-RAN WG2

Agenda item: 6.3.3

Doc-1st-	Spec	CR	Rev	Subject	Cat	Version	Versio
R2-000620	25.323	004		Bit order of PDCP PDUs	F	3.0.0	3.1.0
R2-000636	25.323	005		Changes to PDCP	F	3.0.0	3.1.0

3GPP RAN WG2 #11
Turin, Italy, 28. Feb - 3. Mar, 2000

Document **R2-000620**

e.g. for 3GPP use the format TP-99xxx
or for SMG, use the format P-99-xxx

CHANGE REQUEST		Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.
25.323	CR 004	Current Version: 3.0.0
GSM (AA.BB) or 3G (AA.BBB) specification number ↑	↑ CR number as allocated by MCC support team	
For submission to: TSG-RAN #7 <small>list expected approval meeting # here</small> ↑	for approval <input checked="" type="checkbox"/> for information <input type="checkbox"/>	strategic <input type="checkbox"/> non-strategic <input type="checkbox"/> <small>(for SMG use only)</small>

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: ftp://ftp.3gpp.org/Information/CR-Form-v2.doc

Proposed change affects: (U)SIM ME UTRAN / Radio Core Network
(at least one should be marked with an X)

Source: TSG-RAN WG2 **Date:** 2000-03-02

Subject: Bit order of PDCP PDUs

Work item:

Category: <small>(only one category shall be marked with an X)</small>	F Correction <input checked="" type="checkbox"/>	Release:	Phase 2 <input type="checkbox"/>
	A Corresponds to a correction in an earlier release <input type="checkbox"/>		Release 96 <input type="checkbox"/>
	B Addition of feature <input type="checkbox"/>		Release 97 <input type="checkbox"/>
	C Functional modification of feature <input type="checkbox"/>		Release 98 <input type="checkbox"/>
	D Editorial modification <input type="checkbox"/>		Release 99 <input checked="" type="checkbox"/>
			Release 00 <input type="checkbox"/>

Reason for change: The description of the correct bit order of PDCP PDUs is missing in the PDCP specification.

Clauses affected: 8

Other specs affected:	Other 3G core specifications <input type="checkbox"/>	→ List of CRs:	
	Other GSM core specifications <input type="checkbox"/>	→ List of CRs:	
	MS test specifications <input type="checkbox"/>	→ List of CRs:	
	BSS test specifications <input type="checkbox"/>	→ List of CRs:	
	O&M specifications <input type="checkbox"/>	→ List of CRs:	

Other comments:



help.doc

<----- double-click here for help and instructions on how to create a CR.

8 Elements for peer-to-peer communication

8.1 Protocol data units

Currently two different protocol data unit formats are defined in PDCP. A configuration parameter provided by RRC with CPDCP-CONFIG primitive for every PDCP entity selects whether PDCP shall introduce a PDCP PDU header or not.

8.2 Formats

An PDCP PDU is a bit string, with a length not necessarily a multiple of 8 bits. In the drawings in clause 8.2, bit strings are represented by tables in which the first bit is the leftmost one on the first line of the table, the last bit is the rightmost on the last line of the table, and more generally the bit string is to be read from left to right and then in the reading order of the lines.

SDUs are bit strings, with any nonnull length. If not compressed within PDCP an SDU is included from first bit onward.

8.2.1 PDCP-No-Header PDU

The PDCP-No-Header PDU does not introduce any overhead to the PDCP-SDU. The data length is not constrained to be an integer number of octets.

The format of the PDCP-No-Header-PDU is shown in Table 4.

Table 4: PDCP-No-Header PDU

Bit	8	7	6	5	4	3	2	1
Oct 1	Data segment							
...								
N								



8.2.2 PDCP Data PDU

The data PDU is used to convey a payload unit containing a PDCP-SDU, header compression related control signalling or data that has been obtained from PDCP-SDU after header compression. The data length is not constrained to be an integer number of octets.

The format of the PDCP-Data-PDU is shown in Table 5.

Table 5: PDCP-Data-PDU format

Bit	8	7	6	5	4	3	2	1
Oct 1	PDU-type			PID				
...								
N	Data segment							

PDU type	PID
Data	

8.3 Parameters

If not otherwise mentioned in the definition of each field then the bits in the parameters shall be interpreted as follows: the left most bit string is the first and most significant and the right most bit is the last and least significant bit.

Unless otherwise mentioned, integers are encoded in standard binary encoding for unsigned integers. In all cases the bits appear ordered from MSB to LSB when read in the PDU.

8.3.1 PDCP-No-Header-PDU

The PDCP-No-Header-PDU does not contain any parameters.

8.3.2 PDCP-data-PDU

The PDCP-data-PDU parameters are defined as follows:

- PDU type
 - 000 PID field used for header compression information (PDCP-PDU format described in table 5)
 - 001 Not defined in release '99
 - ⋮
 - ⋮
 - 111 Not defined in release '99
- PID:
 - 0 No header compression
 - 1-31 Dynamically negotiated header compression identifier

PID field value defines used header compression type and packet type. One compression algorithm may reserve a certain amount of values from PID field value space for different packet types. Receiving PDCP makes reverse operation (e.g. header decompression) according to PID field value. There is not fixed relation between PID field value and used optimisation / packet type, but PID field values are defined dynamically at the PDCP parameter negotiation.

BSS test specifications
O&M specifications

→ List of CRs:

→ List of CRs:

**Other
comments:**



help.doc

<----- [double-click here for help and instructions on how to create a CR.](#)

1 Scope

The present document provides the description of the Packet Data Convergence Protocol (PDCP).

PDCP provides its services to the NAS at the UE or the relay at the Radio Network Controller (RNC).

PDCP uses the services provided by the Radio Link Control (RLC) sublayer.

The main functions of PDCP are:

- Compression of redundant Network PDU control information (header compression).
- Transfer of packet data protocol user data using services provided by RLC protocol.

The following function is not part of ~~release 99~~[Release 1999](#) but will be included in Release 2000:

- Multiplexing of different RBs onto the same RLC-entity.
 - [Transfer of states and header compression context information to target SRNC during SRNS relocation.](#)
-

2 References

The following documents contain ~~provisions which~~[provisions, which](#), through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

- [1] 3G TS 25.401: "UTRAN Overall Description" [_](#)
- [2] 3G TR 25.990: "Vocabulary for the UTRAN" [_](#)
- [3] 3G TS 25.301: "Radio Interface Protocol Architecture" [_](#)
- [4] 3G TS 25.303: "Interlayer Procedures in Connected Mode" [_](#)
- [5] 3G TS 25.322: "RLC Protocol Specification" [_](#)
- [6] 3G TS 25.331: "RRC Protocol Specification" [_](#)
- [7] 3G TS 23.121: "Architectural Requirements for Release 1999" [_](#)
- [8] IETF RFC 2507: "IP Header Compression" [_](#)
- [\[9\] 3G TS 23.060: "General Packet Radio Service \(GPRS\): Service description; Stage 2".](#)

3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

AS	Access Stratum
C-SAP	Control Service Access Point
IETF	Internet Engineering Task Force
<u>IP</u>	<u>Internet Protocol</u>
L2	Layer 2 (data link layer)
L3	Layer 3 (network layer)
NAS	Non Access Stratum
PDCP	Packet Data Convergence Protocol
PDU	Protocol Data Unit
PID	Packet Identifier
RB	Radio Bearer
<u>RFC</u>	<u>Request For Comments</u>
RLC	Radio Link Control
RRC	Radio Resource Control
<u>RTP</u>	<u>Real Time Protocol</u>
SDU	Service Data Unit
<u>TCP</u>	<u>Transmission Control Protocol</u>
<u>UDP</u>	<u>User Datagram Protocol</u>
UE	User Equipment
UMTS	Universal Mobile Telecommunications System
UTRA	UMTS Terrestrial Radio Access
UTRAN	UMTS Terrestrial Radio Access Network

4 General

4.1 Objective

The present document describes the functionality of the UTRAN PDCP. The overall UTRAN logical architecture is defined in 3GPP TS 25.301 [3].

Network layer protocols are intended to be capable of operating over services derived from a wide variety of subnetworks and data links. UMTS supports several network layer protocols providing protocol transparency for the users of the service. At that point of view supported protocols are IPv4 and IPv6. Introduction of new network layer protocols to be transferred over UTRAN shall be possible without any changes to UTRAN protocols. Therefore, all functions related to transfer of packets from higher layers (~~PDCP SDU~~PDCP SDUs) shall be carried out in a transparent way by the UTRAN network entities. This is one of the requirements for UTRAN PDCP.

Another requirement for the PDCP is to provide functions that help to improve channel efficiency. This requirement is fulfilled by the possibility to implement different kinds of optimisation methods. The currently known methods are standardised IETF header compression algorithms.

Multiplexing of RBs onto the same RLC entity will be included in ~~release-Release~~ 2000 but is not available in ~~release-99~~Release 1999. Therefore, in ~~release-99~~Release 1999 every RB, is connected to one PDCP entity and one PDCP entity is connected to one RLC entity. The PDCP entities are located in the PDCP sublayer.

Every PDCP entity uses zero, one or several header compression algorithm types with certain parameters. Several PDCP entities may use the same algorithm type. The algorithm types and their parameters are negotiated by RRC and indicated to PDCP through the PDCP Control Service Access Point (PDCP-C-SAP).

Since the adaptation of different network layer protocols to PDCP is implementation dependent, it is not defined in the present document.

4.2 Overview on sublayer architecture

Figure 1 shows the model of the PDCP within the UTRAN protocol architecture. Every PDCP-SAP uses exactly one PDCP entity. Each PDCP entity uses none, one or several header compression algorithm types

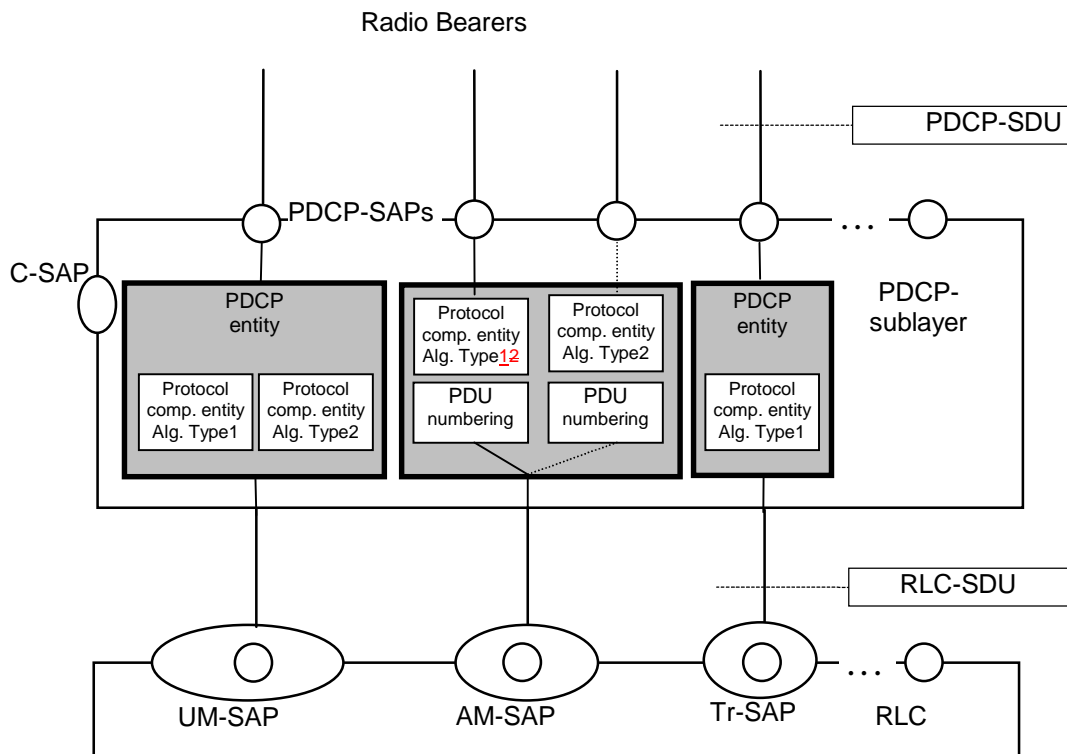


Figure 1: PDCP structure

Figure 1 represents only one possible structure for PDCP and this should not restrict implementation. However, Section 5.1 shall be adhered to.

5. ~~5.~~ Functions

Packet Data Convergence Protocol shall perform the following functions:

- Header compression and decompression of IP data streams (e.g., TCP/IP and RTP/UDP/IP headers) at the transmitting and receiving entity, respectively. The header compression method is specific to the particular network layer, transport layer or upper layer protocol combinations e.g. TCP/IP and RTP/UDP/IP.
- Transfer of user data. Transmission of user data means that PDCP receives ~~PDCP SDU~~ PDCP SDU from the NAS and forwards it to the RLC layer and vice versa.
- Forwarding of PDCP SDUs and associated PDCP sequence numbering only when lossless SRNS relocation is to be supported. Buffering of transmitted PDCP SDUs and associating PDCP SDU Sequence Numbers to the transmitted and received PDCP SDUs to guarantee lossless SRNS relocation.
- Multiplexing of different RBs onto the same RLC entity. Multiplexing is not part of ~~release-99~~ Release 1999 but will be included in ~~release~~ Release 2000.

5.1 ~~5.1~~ Header Compression

The header compression method is specific for each network layer protocol type. The network layer protocol type is indicated during PDP context activation as defined in 23.060 [9]. The header compression algorithms and their

parameters are negotiated by RRC for each PDCP entity and indicated to PDCP through the PDCP-C-SAP. Compressor and decompressor initiated signalling between peer PDCP entities, during operation, is carried out in the user plane.

The PDCP layer shall be able to support several header compression algorithms and it shall always be possible to extend the list of supported algorithms in the future.

The PDCP layer can have one or several PDCP entities. Each PDCP entity may use zero, one, or several header compression algorithms. It shall be possible to establish several header compression algorithms of different types related to one PDCP entity. Different PDCP entities may include header compression algorithms of the same type.

Figure 1 shows an example how PDCP may be configured.

5.1.1 Assignment of PID values

PDCP shall be able to distinguish different types of header compression packets to handle them with a correct header compression algorithm and furthermore to indicate the type of the packet within a certain algorithm. This is realised by utilising the PID field in the PDU structure. ~~PID values shall be assigned according to the dynamic PDCP entity specific allocation table which is configured during the configuration of the PDCP entity.~~ The table is reconfigured every time the PDCP entity is reconfigured.

The following table illustrates an example of the PID value allocation table when three arbitrary header compression methods (RFC2507, Methods A and B) are configured for one PDCP entity.

Table 1: Example of the PID value allocation table

PID Value	Optimisation method	Packet type
0	No header compression	-
1	RFC2507	Full header
2	RFC2507	Compressed TCP
3	RFC2507	Compressed TCP nondelta
4	RFC2507	Compressed non TCP
5	RFC2507	Context state
6	Method A	Uncompressed TCP/IP
7	Method A	Compressed TCP/IP
8	Method B	Uncompressed IP/UDP/RTP
9	Method B	Compressed IP/UDP/RTP
...	Unassigned value	-

The assignment of the PID values follow the general rules listed below:

- PID value 0 is reserved permanently for no compression.
- PID values are assigned in ascending order, starting from 1.
- PID values are assigned independently to each PDCP entity.
- PID values are reassigned for the PDCP entity after renegotiation of the header compression algorithms.
- The list of negotiated (or re-negotiated) header compression entities shall be examined, starting from the first one in the list. The number of PID values to be assigned is specified in the subclause for this algorithm.
- If there are not enough unused PID values to be assigned to a header compression algorithm, the negotiated header compression entities using this algorithm shall be ignored without error notification.
- PID values that are used and are not defined invalidate the PDCP PDU.
- For a certain algorithm in a PDCP entity the assignment of PID values starts from (n+1) where n is the number of PID values already assigned to other algorithms. The assignment is done in the order the algorithms are negotiated by RRC. In the example given in ~~table Table 1~~ RFC 2507 was the first, ~~method Method A~~ was the second and ~~method Method B~~ was the third algorithm in the *PDCP Info* information element exchanged between peer RRC entities. The PID follows this order.

The used header compression algorithm and the packet type ~~is-are~~ unambiguously known by the basis of the PID value and shall apply to peer PDCP entities. While transferring data, the PID values are conveyed in the field of the PDCP header belonging to the PDCP-PDU. Any successfully negotiated algorithm may be used for header compression of ~~an-a~~ PDCP-SDU/PDCP SDU.

5.1.2 TCP/IP and UDP/IP header compression (RFC2507)

Detailed operation of the RFC2507 header compression is described in the ~~chapter-Section~~ 3 of the IETF specification RFC 2507 [8]. Furthermore the mechanisms related to error recovery and packet reordering are described in the ~~chapters-Section~~ 10 and 11 of the RFC 2507. These mechanisms shall be included in the functionality of the header compression supported by PDCP.

5.1.2.1 Assignment of PID values for RFC2507

The following PID values shall be assigned to the RFC2507 header compression in the order presented in the table where n is the number of PID values already assigned to other algorithms

Table 2: PID values assigned to RFC 2507 header compression algorithm

PID value	Optimisation method	Packet type
n+1	RFC2507	Full header
n+2	RFC2507	Compressed TCP
n+3	RFC2507	Compressed TCP non-delta
n+4	RFC2507	Compressed non-TCP
n+5	RFC2507	Context state

~~5.2~~ 5.2 Multiplexing

Multiplexing of different RBs onto the same RLC entity is not part of ~~release-99~~ Release 1999 but will be included in ~~release-Release~~ 2000.

~~NOTE:— A detailed description of the multiplexing function is to be added here~~

~~5.3~~ 5.3 PDCP-SDU buffering and numbering

~~The PDCP-SDUs, which require reliable data transfer, shall be buffered and numbered in the PDCP layer. Numbering is carried out after header compression. The reception of an CPDCP RELEASE.Req shall trigger the deletion of the buffer for the related PDCP entity.~~

~~If lossless SRNS relocation is required, the PDCP entity shall buffer an PDCP-SDU until information of successful transmission of PDCP PDU has been received from RLC. The confirmation is carried out using RLC-AM-DATA.Conf primitive from the RLC layer.~~

~~For each radio bearer, an UL-Send PDCP Sequence Number is associated with each sent PDCP PDU in the UE and a DL-Send PDCP Sequence Number is associated with each sent PDCP PDU in the SRNC. For each radio bearer, an UL-Receive PDCP Sequence Number is associated with each received PDCP PDU in the SRNC and a DL-Receive PDCP Sequence Number is associated with each received PDCP PDU in the UE.~~

~~When the PDCP entity is setup for the first time for the PDCP user the PDCP Sequence Numbers are initialised to zero. The corresponding values are incremented by one at each transmission and reception of a PDCP PDU. The value of the PDCP sequence number ranges from 0 to 255.~~

~~For unacknowledged mode RLC data transfer, the PDCP entity shall delete an PDCP-SDU immediately after the corresponding PDCP PDU has been delivered to RLC.~~

~~NOTE:— The technique of PDCP-SDU buffering is described only to provide a model for PDCP functions in case of lossless SRNS relocation. It shall not restrict implementation.~~

5.3 ~~5.4~~ Data Transfer

5.3.1 ~~5.4.1~~ Data transfer over acknowledged mode RLC

If header compression is negotiated the PDCP entity shall perform header compression upon reception of a PDCP-DATA Req. The PDCP-PDU is then ~~forwarded~~ delivered in RLC-AM-DATA Req to ~~the RLC~~. ~~The PDCP SDU shall be stored into the buffer of the PDCP entity if lossless SRNS relocation is required. Buffered PDCP SDU shall be deleted when the PDCP SDU is confirmed to be transmitted by an RLC AM DATA Conf.~~

During operation, when the peer PDCP entity receives the PDCP-PDU in a RLC-AM-DATA Ind primitive, the PDCP entity shall perform the header decompression (if negotiated) of PDCP-PDU to obtain the ~~PDCP SDU~~ PDCP SDU and ~~forward~~ deliver the ~~PDCP SDU~~ PDCP SDU to the PDCP user with the PDCP-DATA Ind. The following figure illustrates data transfer over acknowledged mode RLC.

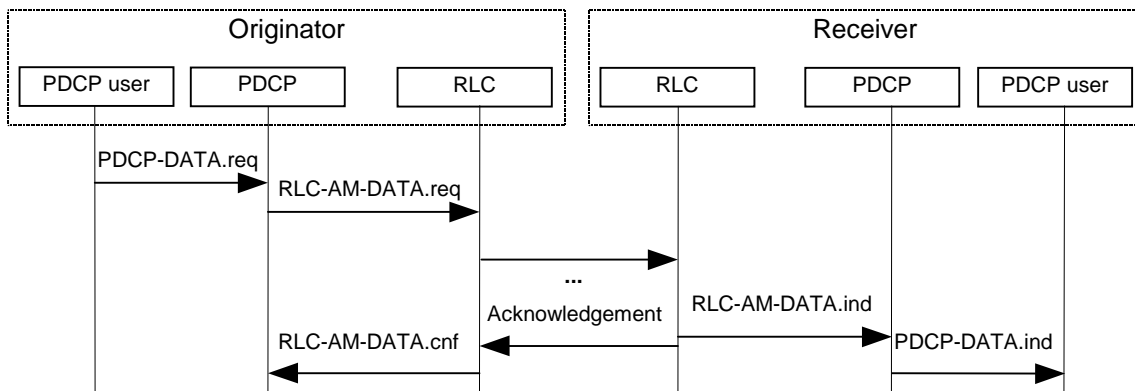


Figure 2: PDCP data transfer over acknowledged mode RLC

5.3.2 ~~5.4.2~~ Data transfer over unacknowledged and transparent mode RLC

If header compression is negotiated the PDCP entity shall perform header compression upon reception of a PDCP-DATA Req. The PDCP-PDU is then ~~forwarded~~ delivered in RLC-UM-DATA Req or RLC-Tr-DATA Req to ~~the RLC layer~~. ~~The PDCP SDU shall be deleted immediately after the data has been delivered to the RLC layer.~~

When the peer PDCP entity receives the PDCP-PDU in the RLC-UM-DATA Ind or RLC-Tr-DATA Ind primitive, the PDCP entity shall perform the header decompression (if negotiated) of PDCP-PDU to obtain the ~~PDCP SDU~~ PDCP SDU and ~~forward~~ deliver the ~~PDCP SDU~~ PDCP SDU to the PDCP user with the PDCP-DATA Ind. The following figure illustrates data transfer over unacknowledged and transparent mode RLC.

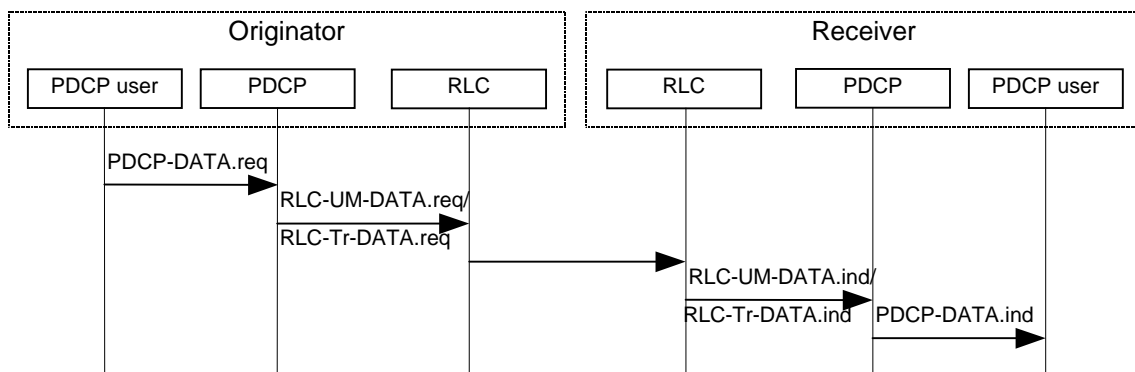


Figure 3: PDCP data transfer over unacknowledged or transparent mode RLC

5.4 ~~5.5~~ SRNS Relocation

Lossless SRNS relocation is only applicable when RLC is in in-sequence delivery and acknowledged mode RLC. PDCP will only support lossless SRNS relocation if it is 'capable' of doing so. This is indicated by RRC in the information element "Support for lossless SRNS relocation" in PDCP Capability and PDCP info.

The PDCP layer shall carry out the following functions during lossless SRNS relocation:

- ~~— transmission of all PDCP SDUs to target SRNC that have not been received correctly,~~
- forwarding of PDCP SDU~~PDCP SDUs~~ and associated sequence numbering ~~from old SRNC to target SRNC;~~
- transfer of the next expected PDCP SDU sequence number from UE to target SRNC and vice versa (by RRC) and
- ~~either~~ reset of PDCP entities ~~(when negotiated for the entity);~~
- ~~— or forwarding of internal protocol information from source to target SRNC (when negotiated for the entity).~~

~~These procedures are started by CPDCP-RELOC-Req primitive from the RRC layer.~~ For each radio bearer, the Receive PDCP Sequence Number of the next PDCP SDU expected to be received is transferred from the source to target SRNC. For each radio bearer the source SRNC forwards to the target SRNC the downlink PDCP ~~SDUs stored in its buffer.~~ Source SRNC provides the Send PDCP SDU Sequence sequence Number number of the first PDCP SDU which is first in the buffer to be forwarded to the target SRNC.

The target SRNC shall send to the UE the next expected UL Receive PDCP Sequence Number. ~~The UE shall send to the target SRNC the DL Receive PDCP Sequence Number of the next expected PDCP SDU.~~ The successfully transmitted ~~PDCP SDU~~PDCP SDUs are thus confirmed.

~~During the relocation the PDCP Sequence Numbers are either reset to zero (if PDCP reset is negotiated by RRC for the PDCP entity in case of SRNS relocation) or the PDCP contexts are transferred from the source to the target SRNC and the PDCP Sequence Numbers continue from their previous value (if PDCP reset is not negotiated by RRC for the PDCP entity in case of SRNS relocation).~~

The reset of all compression entities, for a RB, shall be made during SRNS relocation. Header compression is still possible during relocation, when negotiated by RRC in the Reconfiguration reset parameter for that PDCP entity. Negotiated compression parameters remain valid during reset, but all state information is initialised, e.g. header compression contexts. The PDCP sequence numbers are reset to zero after relocation, if lossless SRNS relocation is supported. Therefore, in header compression case, the first 'compressed' packet is a full header. For Release 2000, otherwise it may be considered, when RRC negotiated in the Reconfiguration reset parameter not to reset the PDCP entity, internal protocol information, i.e. states and header compression contexts, but to shall be forwarded these from the source SRNC to target SRNC in the network side. In header compression case, the hHeader compression for a PDCP entity can then continue from the status state that it had directly before SRNS relocation.

In the case where lossless SRNS relocation is not ~~required~~supported, the PDCP layer shall carry out following functions:

- reset of ~~compression~~PDCP entities ~~(if indicated by RRC in the Reconfiguration reset parameter).~~
- ~~if Reconfiguration reset parameter indicates not to reset the PDCP entity (in RRC signalling), internal protocol information, i.e. states and header compression contexts, shall be forwarded from source SRNC to target SRNC.~~

5.4.1 PDCP Sequence Numbering

PDCP sequence numbering is only applicable when lossless SRNS relocation is to be supported. The value of the PDCP sequence number ranges from 0 to 65535. When the PDCP entity is setup for the first time for the PDCP user the PDCP sequence numbers are initialised to zero.

For each radio bearer:

- An UL Send PDCP sequence number is associated with each sent PDCP-PDU in the UE and is incremented by one when a PDCP PDU is delivered to RLC.

- A DL Send PDCP sequence number is associated with each sent PDCP-PDU in the NW and is incremented by one when a PDCP PDU is delivered to RLC.
- An UL Receive PDCP sequence number is associated with each received PDCP-PDU in the NW and is incremented by one when a PDCP PDU is received from RLC or is incremented by one for each discarded RLC SDU, as indicated by the RLC SDU Discard function [TS 25.322].
- A DL Receive PDCP sequence number is associated with each received PDCP-PDU in the UE and is incremented by one when a PDCP PDU is received from RLC or is incremented by one for each discarded RLC SDU, as indicated by the RLC SDU Discard function [TS 25.322].

PDCP sequence numbers are never decremented.

6 Services

6.1 Services provided to upper layers

The following services are provided by PDCP to upper layers:

- ~~PDCP SDU~~ PDCP SDU delivering ~~delivery.~~

~~6.2~~ Services provided to RRC layer

~~The following services are provided by PDCP to RRC layer:~~

- ~~—The configuration of PDCP.~~

6.2 ~~6.3~~ Services expected from RLC layer

For a detailed description of the following functions see [5].

- Data transfer in acknowledged mode,
- Data transfer in unacknowledged mode,
- Data transfer in transparent mode,
- Segmentation and reassembly,
- In-Sequence delivery.

7 ~~7~~ Elements for layer-to-layer communication

The interaction between the PDCP layer and other layers are described in terms of primitives where the primitives represent the logical exchange of information and control between the PDCP layer and other layers. The primitives shall not specify or constrain implementations.

7.1 Primitives between PDCP and upper layers

The primitives between PDCP and upper layers are shown in Table 3.

Table 3: Primitives between PDCP and upper layers

Generic Name	Parameter			
	Req. Data	Ind. Data	Resp.	Conf.
PDCP-DATA			Not Defined	Not Defined
CPDCP-CONFIG	PDCP-Info, RLC-SAP	Not defined Defined	Not Defined	Not Defined
CPDCP-RELEASE	FFS RLC-SAP	Not defined Defined	Not Defined	Not Defined
CPDCP-RELOC	FFS No Parameter	FFS Not Defined	Not Defined	Not Defined

Each Primitive is defined as follows:

a) PDCP-DATA-Req./Ind.

PDCP-DATA-Req is used by higher user-plane protocol layers to request a transmission of higher layer PDU.
PDCP-DATA-Ind is used to deliver PDCP SDU that has been received to upper user plane protocol layers.

b) CPDCP-CONFIG-Req.

CPDCP-CONFIG Req is used to configure and – in case of already existing PDCP entity – to reconfigure a PDCP entity and to assign it to the radio bearer associated with that entity.

c) PDCP-RELEASE-Req.

CPDCP-RELEASE-Req is used by RRC to release a PDCP entity.

d) CPDCP-RELOC-Req.~~Ind.~~

~~See chapter 5.5. CPDCP-RELOC-Req initiates the SRNS relocation procedure in PDCP.~~

The following parameters are used in the primitives:

1) PDCP info

Contains the parameters for each of the header compression algorithms configured to be used by one PDCP entity.

2) RLC-SAP

The RLC-SAP (Tr/~~Um~~UM/~~Am~~AM) used by PDCP entity when communicating with RLC sublayer.

8 Elements for peer-to-peer communication

8.1 Protocol data units

~~Currently, two different protocol data unit formats are defined in PDCP for Release 1999. A configuration parameter provided by RRC with CPDCP-CONFIG primitive for every PDCP entity selects whether PDCP shall introduce a PDCP PDU header or not. This is configured for the PDCP entity by RRC with the information element, “PDCP PDU header” in PDCP info.~~

8.2 Formats

8.2.1 PDCP-No-Header PDU

The PDCP-No-Header PDU does not introduce any overhead to the ~~PDCP SDU~~PDCP SDU.

The format of the PDCP-No-Header-PDU is shown in Table 4.

Table 4: PDCP-No-Header PDU

Bit	8	7	6	5	4	3	2	1
Oct 1	Data-segment							
...								
N								

8.2.2 PDCP Data PDU

The data PDU is used to convey a payload unit containing a ~~PDCP-SDU~~PDCP SDU, header compression related control signalling or data that has been obtained from ~~PDCP-SDU~~PDCP SDU after header compression. The format of the PDCP-Data-PDU is shown in Table 5.

Table 5: PDCP-Data-PDU format

Bit	8	7	6	5	4	3	2	1
Oct 1	PDU type			PID				
...	Data-segment							
N								

8.3 ~~8.3~~ Parameters

~~8.3.1~~ 8.3.1 PDCP-No-Header-PDU

~~The PDCP No Header PDU does not contain any parameters.~~

8.3.1 ~~8.3.2~~ PDCP-data-PDU PDU Type

Length: 3 bits

The PDU type field indicates the PDCP-data-PDU type.

<u>Bit</u>	<u>PDU Type</u>
<u>000</u>	<u>PID field used for header compression information (PDCP-PDU format described in Table 5)</u>
<u>001-111</u>	<u>Reserved (PDUs with this encoding are invalid for this version of the protocol)</u>

8.3.2 PID

Length: 5 bits

The PID type field indicates the PDCP-data-PDU type.

<u>Bit</u>	<u>Description</u>
<u>00000</u>	<u>No header compression</u>
<u>00001-11111</u>	<u>Dynamically negotiated header compression identifier, as described in Section 5.1.1</u>

~~The PDCP data PDU parameters are defined as follows:~~

~~— PDU type~~

~~000 — PID field used for header compression information (PDCP PDU format described in table 5)~~

001 — Not defined in release '99

⋮

⋮

111 — Not defined in release '99

— PID:

0 — No header compression

1-31 — Dynamically negotiated header compression identifier

PID field value defines used header compression type and packet type. One compression algorithm may reserve a certain amount of values from PID field value space for different packet types. Receiving PDCP makes reverse operation (e.g. header decompression) according to PID field value. There is not fixed relation between PID field value and used optimisation / packet type, but PID field values are defined dynamically at the PDCP parameter negotiation.

8.3.3 Data

PDCP SDUs that have been header compressed, as described in RFC2507 for 1999, are mapped to this field if header compression is negotiated. Otherwise, PDCP SDUs are mapped to this field.