

3GPP TSG RAN WG Meeting #10
Bangkok, Thailand, December 6-8, 2000

Document RP-000684

e.g. for 3GPP use the format TP-99xxx
or for SMG, use the format P-99-xxx

CHANGE REQUEST

25.331 CR 641

Current Version: 3.4.1

GSM (AA.BB) or 3G (AA.BBB) specification number ?

? CR number as allocated by MCC support team

For submission to: **TSG-RAN**
#10

list expected approval meeting # here
?

for approval

| |
|---|
| X |
| |

for information

strategic

| |
|-----------------------|
| |
| (for SMG use only) |

non-strategic

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: [ftp://ftp.3gpp.org/Information/CR-Form-v2.doc](http://ftp.3gpp.org/Information/CR-Form-v2.doc)

Proposed change affects:
(at least one should be marked with an X)

(U)SIM

ME

UTRAN / Radio

Core Network

| |
|---|
| X |
| |

X

| |
|--|
| |
|--|

Source:

Motorola

Date:

December
5,2000

Subject:

Downlink Outer Loop Control

Work item:

Category:
(only one category
shall be marked
with an X)

- F Correction
- A Corresponds to a correction in an earlier release
- B Addition of feature
- C Functional modification of feature
- D Editorial modification

| |
|---|
| X |
| |
| |
| |

Release:
Phase 2
Release 96
Release 97
Release 98
Release 99
Release 00

| |
|---|
| |
| |
| |
| |
| X |
| |

**Reason for
change:**

In RAN WG4#14 additional test cases were proposed for Downlink Outer Loop control but were not accepted. This issue was then discussed in a joint RAN WG2, RAN WG4 meeting where both RAN WG2 and WG4 questioned the need for this message and associated procedure. The need for the Downlink Outer Loop control was explained as necessary to ensure that a UE did not ask for infinitely more power. However, it was ascertained that the Downlink Outer Loop Control message as defined in WG2 specifications used the SIR which in itself was not a testable quantity and thus the presence and use of the message would not solve anything. WG4 additionally pointed out the the need for the message was taken care of by other scenarios in WG4 specifications and thus there was no additional need for this message. Hence it was agreed to delete the Downlink Outer Loop Control message and associated procedure.

Clauses affected: 8.2.9, 8.2.9.2, 8.2.9.2, 8.2.9.3, 8.2.9.4, 10.2.9, 11.1, 11.2, 11.3.6, 14.7.1

**Other specs
affected:**

Other 3G core specifications
Other GSM core
specifications
MS test specifications
BSS test specifications
O&M specifications

| |
|--------------|
| ? |
| List of CRs: |

**Other
comments:**

8.2.9 ~~Downlink outer loop control~~Void

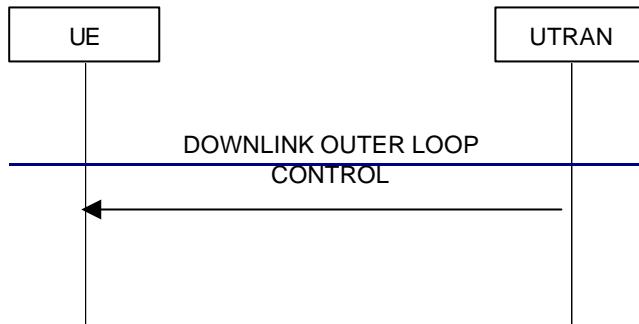


Figure 37: Downlink Outer Loop Control, normal flow

8.2.9.1 General

The downlink outer loop control procedure is used to control the downlink outer loop power control running in the UE.

8.2.9.2 Initiation

The UTRAN may transmit the **DL_NOMINAL_SIR** message on the downlink DCCH using AM or UM RLC.

To prevent the UE from increasing its DL_SIR target value above its current value, the UTRAN should:

- set the IE "Downlink Outer Loop Control" to the value "Increase not allowed".

To remove the previous restriction on the downlink outer loop power control, the UTRAN should:

- set the IE "Downlink Outer Loop Control" to the value "Increase allowed".

8.2.9.3 Reception of DOWNLINK OUTER LOOP CONTROL message by the UE

Upon reception of the DOWNLINK OUTER LOOP CONTROL message, the UE shall perform actions specified in 8.6 unless otherwise specified below:

- if the IE "Downlink Outer Loop Control" is set to "Increase not allowed":
— prevent its DL_SIR target value from increasing above the current value.
- if the IE "Downlink Outer Loop Control" is set to "Increase allowed":
— remove the above restriction.

8.2.9.4 Invalid DOWNLINK OUTER LOOP CONTROL message

If the UE receives a DOWNLINK OUTER LOOP CONTROL message, which contains a protocol error causing the variable PROTOCOL_ERROR_REJECT to be set to TRUE according to clause 16, the UE shall perform procedure specific error handling as follows:

- transmit an RRC STATUS message on the uplink DCCH using AM RLC;
- include the IE "Protocol error information" with contents set to the value of the variable PROTOCOL_ERROR_INFORMATION;
- when the successful delivery of the RRC STATUS message has been confirmed by RLC:
— resume normal operation as if the invalid DOWNLINK OUTER LOOP CONTROL message has not been received.

10.2.9 ~~VoidDOWNLINK OUTER LOOP CONTROL~~

This message is sent to suspend and resume the setting of the SIR target value for downlink outer loop power control.

RLC SAP: AM or UM

Logical channel: DCCH

Direction: UTRAN? UE

| Information Element/Group name | Need | Multi | Type and reference | Semantics description |
|---|------|-------|--|---|
| Message Type | MP | | Message Type | |
| UE information elements | | | | |
| Integrity check info | CH | | Integrity check info 10.3.3.14 | |
| PhyCH information elements | | | | |
| Downlink Outer Loop Control | MP | | Downlink Outer Loop Control 10.3.6.28 | Indicates whether the UE is allowed or not to increase its SIR target value above its current value |
| Downlink DPCH power control information | MD | | Downlink DPCH power control information 10.3.6.22 | Default value is the existing "Downlink DPCH power control information" |

(with ASN.1)

This clause contains definitions for RRC PDUs and IEs using a subset of ASN.1 as specified in TR 25.921. PDU and IE definitions are grouped into separate ASN.1 modules.

NOTE: The proposal is to keep both clause 10 and 11 (at least until all messages and information elements are fully discussed and agreed by 3GPP RAN WG2). Clause 10 is intended to give an abstract description (in English) of the messages and information elements whereas clause 11 should contain the exact normative definitions with all necessary details.

11.1 General message structure

```
Class-definitions DEFINITIONS AUTOMATIC TAGS ::=
```

```
BEGIN
```

```
IMPORTS
```

```

ActiveSetUpdate,
ActiveSetUpdateComplete,
ActiveSetUpdateFailure,
CellUpdate,
CellUpdateConfirm-CCCH,
CellUpdateConfirm,
CounterCheck,
CounterCheckResponse,
DownlinkDirectTransfer,
DownlinkOuterLoopControl,
HandoverToUTRANComplete,
InitialDirectTransfer,
InterSystemHandoverCommand-GSM,
InterSystemHandoverCommand-CDMA2000,
InterSystemHandoverFailure,
MeasurementControl,
MeasurementControlFailure,
MeasurementReport,
```

```

PagingType1,
PagingType2,
PhysicalChannelReconfiguration,
PhysicalChannelReconfigurationComplete,
PhysicalChannelReconfigurationFailure,
PhysicalSharedChannelAllocation,
PUSCHCapacityRequest,
RadioBearerReconfiguration,
RadioBearerReconfigurationComplete,
RadioBearerReconfigurationFailure,
RadioBearerRelease,
RadioBearerReleaseComplete,
RadioBearerReleaseFailure,
RadioBearerSetup,
RadioBearerSetupComplete,
RadioBearerSetupFailure,
RRCConnectionReEstablishment,
RRCConnectionReEstablishment-CCCH,
RRCConnectionReEstablishmentComplete,
RRCConnectionReEstablishmentRequest,
RRCConnectionReject,
RRCConnectionRelease,
RRCConnectionRelease-CCCH,
RRCConnectionReleaseComplete,
RRCConnectionReleaseComplete-CCCH,
RRCConnectionRequest,
RRCConnectionSetup,
RRCConnectionSetupComplete,
RRCStatus,
SecurityModeCommand,
SecurityModeComplete,
SecurityModeFailure,
SignallingConnectionRelease,
SignallingConnectionReleaseRequest,
SystemInformation-BCH,
SystemInformation-FACH,
SystemInformationChangeIndication,
TransportChannelReconfiguration,
TransportChannelReconfigurationComplete,
TransportChannelReconfigurationFailure,
TransportFormatCombinationControl,
TransportFormatCombinationControlFailure,
UECapabilityEnquiry,
UECapabilityInformation,
UECapabilityInformationConfirm,
UplinkDirectTransfer,
UplinkPhysicalChannelControl,
URAUpdate,
URAUpdateConfirm,
URAUpdateConfirm-CCCH,
UTRANMobilityInformation,
UTRANMobilityInformationConfirm,
UTRANMobilityInformationFailure
FROM PDU-definitions

IntegrityCheckInfo
FROM UserEquipment-IEs;

--***** --
-- Downlink DCCH messages
--***** --

DL-DCCH-Message ::= SEQUENCE {
    integrityCheckInfo    IntegrityCheckInfo      OPTIONAL,
    message               DL-DCCH-MessageType
}

DL-DCCH-MessageType ::= CHOICE {
    activeSetUpdate        ActiveSetUpdate,
    cellUpdateConfirm      CellUpdateConfirm,
    counterCheck           CounterCheck,
    downlinkDirectTransfer DownlinkDirectTransfer,
    downlinkOuterLoopControl DownlinkOuterLoopControl,
    interSystemHandoverCommand-GSM InterSystemHandoverCommand-GSM,
    interSystemHandoverCommand-CDMA2000 InterSystemHandoverCommand-CDMA2000,
    measurementControl     MeasurementControl,
}

```

```

pagingType2
physicalChannelReconfiguration
physicalSharedChannelAllocation
radioBearerReconfiguration
radioBearerRelease
radioBearerSetup
rrcConnectionReEstablishment
rrcConnectionRelease
securityModeCommand
signallingConnectionRelease
transportChannelReconfiguration
transportFormatCombinationControl
ueCapabilityEnquiry
ueCapabilityInformationConfirm
uplinkPhysicalChannelControl
uraUpdateConfirm
utranMobilityInformation
extension
}

--*****
-- Uplink DCCH messages
--*****

UL-DCCH-Message ::= SEQUENCE {
    integrityCheckInfo      IntegrityCheckInfo      OPTIONAL,
    message                 UL-DCCH-MessageType
}

UL-DCCH-MessageType ::= CHOICE {
    activeSetUpdateComplete
    activeSetUpdateFailure
    counterCheckResponse
    handoverToUTRANComplete
    initialDirectTransfer
    interSystemHandoverFailure
    measurementControlFailure
    measurementReport
    physicalChannelReconfigurationComplete
    physicalChannelReconfigurationFailure
    radioBearerReconfigurationComplete
    radioBearerReconfigurationFailure
    radioBearerReleaseComplete
    radioBearerReleaseFailure
    radioBearerSetupComplete
    radioBearerSetupFailure
    rrcConnectionReEstablishmentComplete
    rrcConnectionReleaseComplete
    rrcConnectionSetupComplete
    rrcStatus
    securityModeComplete
    securityModeFailure
    signallingConnectionReleaseRequest
    transportChannelReconfigurationComplete
    transportChannelReconfigurationFailure
    transportFormatCombinationControlFailure
    ueCapabilityInformation
    uplinkDirectTransfer
    utranMobilityInformationConfirm
    utranMobilityInformationFailure
    extension
}

--*****
-- Downlink CCCH messages
--*****


DL-CCCH-Message ::= SEQUENCE {

```

```

integrityCheckInfo      IntegrityCheckInfo      OPTIONAL,
message                 DL-CCCH-MessageType
}

DL-CCCH-MessageType ::= CHOICE {
  cellUpdateConfirm           CellUpdateConfirm-CCCH,
  rrcConnectionReEstablishment RRCConnectionReEstablishment-CCCH,
  rrcConnectionReject          RRCConnectionReject,
  rrcConnectionRelease         RRCConnectionRelease-CCCH,
  rrcConnectionSetup           RRCConnectionSetup,
  uraUpdateConfirm             URAUpdateConfirm-CCCH,
  extension                   NULL
}

--*****
-- Uplink CCCH messages
--
--*****

UL-CCCH-Message ::= SEQUENCE {
  integrityCheckInfo      IntegrityCheckInfo      OPTIONAL,
  message                 UL-CCCH-MessageType
}

UL-CCCH-MessageType ::= CHOICE {
  cellUpdate               CellUpdate,
  rrcConnectionReEstablishmentRequest RRCConnectionReEstablishmentRequest,
  rrcConnectionReleaseComplete    RRCConnectionReleaseComplete-CCCH,
  rrcConnectionRequest          RRCConnectionRequest,
  uraUpdate                  URAUpdate,
  extension                   NULL
}

--*****
-- PCCH messages
--
--*****

PCCH-Message ::= SEQUENCE {
  message                 PCCH-MessageType
}

PCCH-MessageType ::= CHOICE {
  pagingType1                PagingType1,
  extension                  NULL
}

--*****
-- Downlink SHCCH messages
--
--*****

DL-SHCCH-Message ::= SEQUENCE {
  message                 DL-SHCCH-MessageType
}

DL-SHCCH-MessageType ::= CHOICE {
  physicalSharedChannelAllocation PhysicalSharedChannelAllocation,
  extension                  NULL
}

--*****
-- Uplink SHCCH messages
--
--*****

UL-SHCCH-Message ::= SEQUENCE {
  message                 UL-SHCCH-MessageType
}

UL-SHCCH-MessageType ::= CHOICE {
  puschCapacityRequest        PUSCHCapacityRequest,
  extension                  NULL
}

```

```
--*****
-- BCCH messages sent on FACH
--*****
BCCH-FACH-Message ::= SEQUENCE {
    message      BCCH-FACH-MessageType
}

BCCH-FACH-MessageType ::= CHOICE {
    systemInformation      SystemInformation-FACH,
    systemInformationChangeIndication SystemInformationChangeIndication,
    extension               NULL
}

--*****
-- BCCH messages sent on BCH
--*****
BCCH-BCH-Message ::= SEQUENCE {
    message      SystemInformation-BCH
}

END
```

11.2 PDU definitions

```
--*****
-- TABULAR: The message type and integrity check info are not
-- visible in this module as they are defined in the class module.
-- Also, all FDD/TDD specific choices have the FDD option first
-- and TDD second, just for consistency.
--*****
PDU-definitions DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

--*****
-- IE parameter types from other modules
--*****
IMPORTS

    CN-DomainIdentity,
    CN-InformationInfo,
    FlowIdentifier,
    NAS-Message,
    PagingRecordTypeID,
    ServiceDescriptor,
    SignallingFlowInfoList
FROM CoreNetwork-IEs

    URA-Identity
FROM UTRANMobility-IEs

    ActivationTime,
    C-RNTI,
    CapabilityUpdateRequirement,
    CellUpdateCause,
    CipheringAlgorithm,
    CipheringModeInfo,
    DRX-Indicator,
    EstablishmentCause,
    FailureCauseWithProtErr,

    InitialUE-Identity,
    IntegrityProtActivationInfo,
```

```

    IntegrityProtectionModeInfo,
    PagingCause,
    PagingRecordList,
    ProtocolErrorIndicator,
    ProtocolErrorIndicatorWithInfo,
    Re-EstablishmentTimer,
    RedirectionInfo,
    RejectionCause,
    ReleaseCause,
    RRC-MessageTX-Count,
    SecurityCapability,
    START,
    STARTList,
    U-RNTI,
    U-RNTI-Short,
    UE-RadioAccessCapability,
    URA-UpdateCause,
    UTRAN-DRX-CycleLengthCoefficient,
    WaitTime
FROM UserEquipment-IEs

    PredefinedConfigIdentity,
    RAB-Info,
    RAB-Info-Short,
    RAB-InformationReconfigList,
    RAB-InformationSetupList,
    RB-ActivationTimeInfo,
    RB-ActivationTimeInfoList,
    RB-COUNT-C-InformationList,
    RB-COUNT-C-MSB-InformationList,
    RB-IdentityList,
    RB-InformationAffectedList,
    RB-InformationReconfigList,
    RB-InformationReleaseList,
    RB-InformationSetupList,
    RB-WithPDCP-InfoList,
    SRB-InformationSetupList,
    SRB-InformationSetupList2
FROM RadioBearer-IEs

    CPCH-SetID,
    DL-AddReconfTransChInfo2List,
    DL-AddReconfTransChInfoList,
    DL-CommonTransChInfo,
    DL-DeletedTransChInfoList,
    DRAC-StaticInformationList,
    TFC-Subset,
    TFCS-Identity,
    UL-AddReconfTransChInfoList,
    UL-CommonTransChInfo,
    UL-DeletedTransChInfoList
FROM TransportChannel-IEs

    AllocationPeriodInfo,
    CCTrCH-PowerControlInfo,
    ConstantValue,
    CPCH-SetInfo,
    DL-CommonInformation,
    DL-CommonInformationPost,
    DL-InformationPerRL,
    DL-InformationPerRL-List,
    DL-InformationPerRL-ListPostFDD,
    DL-InformationPerRL-PostTDD,
    DL-DPCH-PowerControlInfo,
    DL-OuterLoopControl,
    DL-PDSCH-Information,
    DPCH-CompressedModeStatusInfo,
    FrequencyInfo,
    FrequencyInfoFDD,
    FrequencyInfoTDD,
    IndividualTS-InterferenceList,
    MaxAllowedUL-TX-Power,
    PDSCH-CapacityAllocationInfo,
    PDSCH-Identity,
    PDSCH-Info,
    PRACH-RACH-Info,
    PrimaryCCPCH-TX-Power,
    PUSCH-CapacityAllocationInfo,

```

```

PUSCH-Identity,
RL-AdditionInformationList,
RL-RemovalInformationList,
SSDT-Information,
TFC-ControlDuration,
TimeslotList,
TX-DiversityMode,
UL-ChannelRequirement,
UL-DPCH-Info,
UL-DPCH-InfoPostFDD,
UL-DPCH-InfoPostTDD,
UL-TimingAdvance,
UL-TimingAdvanceControl
FROM PhysicalChannel-IEs

AdditionalMeasurementID-List,
EventResults,
MeasuredResults,
MeasuredResultsList,
MeasuredResultsOnRACH,
MeasurementCommand,
MeasurementIdentityNumber,
MeasurementReportingMode,
PrimaryCCPCH-RSCP,
TimeslotListWithISCP,
TrafficVolumeMeasuredResultsList
FROM Measurement-IEs

BCCH-ModificationInfo,
CDMA2000-MessageList,
GSM-MessageList,
InterSystemHO-Failure,
InterSystemMessage,
ProtocolErrorInformation,
SegCount,
SegmentIndex,
SFN-Prime,
SIB-Data-fixed,
SIB-Data-variable,
SIB-Type
FROM Other-IEs

maxSIBperMsg
FROM Constant-definitions;

-- *****
-- ACTIVE SET UPDATE (FDD only)
-- *****

ActiveSetUpdate ::= CHOICE {
    v1                               SEQUENCE {
        v1-IEs                         ActiveSetUpdate-v1-IEs,
        nonCriticalExtensions           SEQUENCE {}
    },
    criticalExtensions                SEQUENCE {}
}

ActiveSetUpdate-v1-IEs ::= SEQUENCE {
    -- User equipment IEs
    integrityProtectionModeInfo      IntegrityProtectionModeInfo      OPTIONAL,
    cipheringModeInfo                CipheringModeInfo             OPTIONAL,
    activationTime                   ActivationTime                  OPTIONAL,
    newU-RNTI                        U-RNTI                         OPTIONAL,
    -- Core network IEs
    cn-InformationInfo               CN-InformationInfo          OPTIONAL,
    -- Radio bearer IEs
    rb-WithPDCP-InfoList              RB-WithPDCP-InfoList         OPTIONAL,
    -- Physical channel IEs
    maxAllowedUL-TX-Power            MaxAllowedUL-TX-Power       OPTIONAL,
    rl-AdditionInformationList       RL-AdditionInformationList   OPTIONAL,
    rl-RemovalInformationList        RL-RemovalInformationList   OPTIONAL,
    tx-DiversityMode                 TX-DiversityMode            OPTIONAL,
    ssdt-Information                 SSDT-Information           OPTIONAL
}

-- *****

```

```

-- ACTIVE SET UPDATE COMPLETE (FDD only)
--
-- ****
ActiveSetUpdateComplete ::= SEQUENCE {
    -- User equipment IEs
    ul-IntegProtActivationInfo      IntegrityProtActivationInfo          OPTIONAL,
    -- Radio bearer IEs
    rb-UL-CiphActivationTimeInfo   RB-ActivationTimeInfo           OPTIONAL,
    rb-WithPDCP-InfoList           RB-WithPDCP-InfoList           OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions         SEQUENCE {}}
}

-- ****
-- ACTIVE SET UPDATE FAILURE (FDD only)
--
-- ****
ActiveSetUpdateFailure ::= SEQUENCE {
    -- User equipment IEs
    failureCause                  FailureCauseWithProtErr,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions         SEQUENCE {}}
}

-- ****
-- CELL UPDATE
--
-- ****
CellUpdate ::= SEQUENCE {
    -- User equipment IEs
    u-RNTI                         U-RNTI,
    startList                      STARTLIST,
    am-RLC-ErrorIndicationC-plane  BOOLEAN,
    am-RLC-ErrorIndicationU-plane  BOOLEAN,
    cellUpdateCause                 CellUpdateCause,
    protocolErrorIndicator        ProtocolErrorIndicatorWithInfo,
    -- TABULAR: Protocol error information is nested in
    -- ProtocolErrorIndicatorWithInfo.
    -- Measurement IEs
    measuredResultsOnRACH          MeasuredResultsOnRACH           OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions         SEQUENCE {}}
}

-- ****
-- CELL UPDATE CONFIRM
--
-- ****
CellUpdateConfirm ::= CHOICE {
    v1                               SEQUENCE {
        v1-IEs                    CellUpdateConfirm-v1-IEs,
        nonCriticalExtensions     SEQUENCE {}},
    criticalExtensions               SEQUENCE {}}
}

CellUpdateConfirm-v1-IEs ::= SEQUENCE {
    -- User equipment IEs
    integrityProtectionModeInfo   IntegrityProtectionModeInfo      OPTIONAL,
    cipheringModeInfo              CipheringModeInfo            OPTIONAL,
    new-U-RNTI                     U-RNTI
    new-C-RNTI                     C-RNTI
    drx-Indicator                  DRX-Indicator,
    utran-DRX-CycleLengthCoeff    UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
    rlc-ResetIndicatorC-Plane     BOOLEAN,
    rlc-ResetIndicatorU-Plane     BOOLEAN,
    -- CN information elements
    cn-InformationInfo            CN-InformationInfo          OPTIONAL,
    -- UTRAN mobility IEs
    ura-Identity                   URA-Identity                OPTIONAL,
}

```

```

-- Radio bearer IEs
rb-WithPDCP-InfoList RB-WithPDCP-InfoList OPTIONAL,
-- Physical channel IEs
frequencyInfo FrequencyInfo OPTIONAL,
maxAllowedUL-TX-Power MaxAllowedUL-TX-Power OPTIONAL,
prach-RACH-Info PRACH-RACH-Info OPTIONAL,
dl-InformationPerRL DL-InformationPerRL OPTIONAL
}

-- ****
-- 
-- CELL UPDATE CONFIRM for CCCH
-- 
-- ****

CellUpdateConfirm-CCCH ::= SEQUENCE {
    -- User equipment IEs
    u-RNTI U-RNTI,
    -- The rest of the message is identical to the one sent on DCCH.
    cellUpdateConfirm CellUpdateConfirm
}

-- ****
-- 
-- COUNTER CHECK
-- 
-- ****

CounterCheck ::= CHOICE {
    v1 SEQUENCE {
        v1-IEs CounterCheck-v1-IEs,
        nonCriticalExtensions SEQUENCE {}
    },
    criticalExtensions SEQUENCE {}
}

CounterCheck-v1-IEs ::= SEQUENCE {
    -- Radio bearer IEs
    rb-COUNT-C-MSB-InformationList RB-COUNT-C-MSB-InformationList
}

-- ****
-- 
-- COUNTER CHECK RESPONSE
-- 
-- ****

CounterCheckResponse ::= SEQUENCE {
    -- Radio bearer IEs
    rb-COUNT-C-InformationList RB-COUNT-C-InformationList OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions SEQUENCE {}
}

-- ****
-- 
-- DOWNLINK DIRECT TRANSFER
-- 
-- ****

DownlinkDirectTransfer ::= CHOICE {
    v1 SEQUENCE {
        v1-IEs DownlinkDirectTransfer-v1-IEs,
        nonCriticalExtensions SEQUENCE {}
    },
    criticalExtensions SEQUENCE {}
}

DownlinkDirectTransfer-v1-IEs ::= SEQUENCE {
    -- Core network IEs
    cn-DomainIdentity CN-DomainIdentity,
    nas-Message NAS-Message
}

*****  

|-----  

|----- DOWLINK OUTER LOOP CONTROL

```

```

*****
DownlinkOuterLoopControl ::= CHOICE {
    v1
        SEQUENCE {
            v1_IEs
                DownlinkOuterLoopControl_v1_IEs,
            nonCriticalExtensions
                SEQUENCE {}
        }
    criticalExtensions
        SEQUENCE {}
}

DownlinkOuterLoopControl_v1_IEs ::= SEQUENCE {
    Physical channel IEs
        dl OuterLoopControl
            DL_OuterLoopControl,
        dl DPCH PowerControlInfo
            DL_DPCH_PowerControlInfo
                OPTIONAL,
    Extension mechanism for non release99 information
        criticalExtension
            SEQUENCE {}
                OPTIONAL,
        nonCriticalExtensions
            SEQUENCE {}
                OPTIONAL
}

-- *****
-- HANOVER TO UTRAN COMMAND
-- *****

END
*****
```

next section to change

11.3.6 Physical channel information elements

PhysicalChannel-IEs DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

IMPORTS

```

hiPDSCHidentities,
hiPUSCHidentities,
maxASC,
maxASCmap,
maxASCpersist,
maxCCTrCH,
maxCPCHsets,
maxDPCH-DLchan,
maxDPCHcodesPerTS,
maxDPDCH-UL,
maxFACH,
maxPCPCH-APsig,
maxPCPCH-APsubCh,
maxPCPCH-CDsig,
maxPCPCH-CDsubCh,
maxPCPCH-SF,
maxPCPCHs,
maxPDSCH,
maxPDSCH-TFCIgroups,
maxPRACH,
maxPUSCH,
maxRL,
maxRL-1,
maxSCCPCH,
maxSig,
maxSubCh,
maxTF-CPCH,
maxTFCI-2-Combs,
maxTGPS,
maxTrCH,
maxTS,
maxTS-1
```

```

FROM Constant-definitions
  ActivationTime
FROM UserEquipment-IEs

  AllowedTFI-List,
  CPCH-SetID,
  TFCS,
  TFCS-Identity,
  TFCS-IdentityPlain,
  TransportChannelIdentity,
  TransportFormatSet
FROM TransportChannel-IEs

  SIB-ReferenceListFACH
FROM Other-IEs;

AC-To-ASC-Mapping ::= INTEGER (0..7)

AC-To-ASC-MappingTable ::= SEQUENCE (SIZE (maxASCmap)) OF
                           AC-To-ASC-Mapping

AccessServiceClass ::= SEQUENCE {
                           availableSignaturestartIndex
                           availableSignature endIndex
                           availableSubChannelstartIndex
                           availableSubChannel endIndex
                         }

AccessServiceClassIndex ::= INTEGER (1..8)

AICH-Info ::= SEQUENCE {
                           secondaryScramblingCode
                           channelisationCode256
                           sttd-Indicator
                           aich-TransmissionTiming
                         } OPTIONAL,

AICH-PowerOffset ::= INTEGER (-22..5)

AICH-TransmissionTiming ::= ENUMERATED {
                           e0, e1
                         }

AllocationPeriodInfo ::= SEQUENCE {
                           allocationActivationTime
                           allocationDuration
                         }

AP-AICH-ChannelisationCode ::= INTEGER (0..255)

AP-PreambleScramblingCode ::= INTEGER (0..79)

AP-Signature ::= INTEGER (0..15)

AP-Signature-VCAM ::= SEQUENCE {
                           ap-Signature
                           availableAP-SubchannelList
                         } OPTIONAL

AP-Subchannel ::= INTEGER (0..11)

ASC ::= SEQUENCE {
                           accessServiceClass
                           repetitionPeriodAndOffset
                           -- TABULAR: The offset is nested in the repetition period
                         } OPTIONAL

ASC-RepetitionPeriodAndOffset ::= CHOICE {
                           rp1
                           rp2
                           rp4
                           rp8
                         }

```

```

ASCSetting ::= SEQUENCE {
    -- TABULAR: This is MD in tabular description
    -- Default value is previous ASC
    -- If this is the first ASC, the default value is all available signature and sub-channels
    accessServiceClass           AccessServiceClass      OPTIONAL
}

AvailableAP-Signature-VCAMList ::= SEQUENCE (SIZE (1..maxPCPCH-APsig)) OF
                                    AP-Signature-VCAM

AvailableAP-SignatureList ::= SEQUENCE (SIZE (1..maxPCPCH-APsig)) OF
                            AP-Signature

AvailableAP-SubchannelList ::= SEQUENCE (SIZE (1..maxPCPCH-APsubCh)) OF
                                AP-Subchannel

AvailableMinimumSF-ListVCAM ::= SEQUENCE (SIZE (1..maxPCPCH-SF)) OF
                                AvailableMinimumSF-VCAM

AvailableMinimumSF-VCAM ::= SEQUENCE {
    minimumSpreadingFactor,
    nf-Max,
    maxAvailablePCPCH-Number,
    availableAP-Signature-VCAMList
}

AvailableSignatures ::= BIT STRING(SIZE(16))

AvailableSubChannelNumbers ::= BIT STRING(SIZE(12))

BurstType ::= ENUMERATED {
    short1, long2 }

BurstType1 ::= ENUMERATED { ms4, ms8, ms16 }

BurstType2 ::= ENUMERATED { ms3, ms6 }

CCTrCH-PowerControlInfo ::= SEQUENCE {
    tfcs-Identity           OPTIONAL,
    ul-DPCH-PowerControlInfo
}

CD-AccessSlotSubchannel ::= INTEGER (0..11)

CD-AccessSlotSubchannelList ::= SEQUENCE (SIZE (1..maxPCPCH-CDsubCh)) OF
                                CD-AccessSlotSubchannel

CD-CA-ICH-ChannelisationCode ::= INTEGER (0..255)

CD-PreambleScramblingCode ::= INTEGER (0..79)

CD-SignatureCode ::= INTEGER (0..15)

CD-SignatureCodeList ::= SEQUENCE (SIZE (1..maxPCPCH-CDsig)) OF
                           CD-SignatureCode

CellParametersID ::= INTEGER (0..127)

Cfntargetsfnframeoffset ::= INTEGER(0..255)

ChannelAssignmentActive ::= CHOICE {
    notActive,
    isActive
}

ChannelisationCode256 ::= INTEGER (0..255)

ChannelReqParamsForUCSM ::= SEQUENCE {
    availableAP-SignatureList,
    availableAP-SubchannelList
}

ClosedLoopTimingAdjMode ::= ENUMERATED {

```

```

slot1, slot2 }

CodeNumberDSCH ::=           INTEGER (0..255)

CodeRange ::=           SEQUENCE {
  pdsch-CodeMapList,
  codeNumberStart,
  codeNumberStop
}

CodeWordSet ::=           ENUMERATED {
  longCWS,
  mediumCWS,
  shortCWS,
  ssdtOff }

CommonTimeslotInfo ::=           SEQUENCE {
  -- TABULAR: The IE below is MD, but since it can be encoded in a single
  -- bit it is not defined as OPTIONAL.
  secondInterleavingMode      SecondInterleavingMode,
  tfci-Coding                 TFCI-Coding           OPTIONAL,
  puncturingLimit              PuncturingLimit        OPTIONAL,
  repetitionPeriodAndLength   RepetitionPeriodAndLength
}

CommonTimeslotInfoSCCPCH ::=           SEQUENCE {
  -- TABULAR: The IE below is MD, but since it can be encoded in a single
  -- bit it is not defined as OPTIONAL.
  secondInterleavingMode      SecondInterleavingMode,
  tfci-Coding                 TFCI-Coding           OPTIONAL,
  puncturingLimit              PuncturingLimit        OPTIONAL,
  repetitionPeriodLengthAndOffset RepetitionPeriodLengthAndOffset
}

-- Values from -35 to 10 are used in Release 99
ConstantValue ::=           INTEGER (-41..10)

CPCH-PersistenceLevels ::=           SEQUENCE {
  cpch-SetID,
  dynamicPersistenceLevelTF-List
}

CPCH-PersistenceLevelsList ::=           SEQUENCE (SIZE (1..maxCPCHsets)) OF
                                         CPCH-PersistenceLevels

CPCH-SetInfo ::=           SEQUENCE {
  cpch-SetID,
  transportFormatSet,
  tfcs,
  ap-PreambleScramblingCode,
  ap-AICH-ScramblingCode,
  ap-AICH-ChannelisationCode,
  cd-PreambleScramblingCode,
  cd-CA-ICH-ScramblingCode,
  cd-CA-ICH-ChannelisationCode,
  cd-AccessSlotSubchannelList,
  cd-SignatureCodeList,
  deltaPp-m,
  ul-DPCCH-SlotFormat,
  n-StartMessage,
  n-EOT,
  channelAssignmentActive,
  -- TABULAR: VCAM info has been nested inside ChannelAssignmentActive,
  -- which in turn is mandatory since it's only a binary choice.
  cpch-StatusIndicationMode,
  pcpch-ChannelInfoList
}

CPCH-SetInfoList ::=           SEQUENCE (SIZE (1..maxCPCHsets)) OF
                                         CPCH-SetInfo

CPCH-StatusIndicationMode ::=           ENUMERATED {
  pcpch-Availability,
  pcpch-AvailabilityAndMinAvailableSF }
```

```

CSICH-PowerOffset ::= INTEGER (-10..5)

-- Actual value = IE value * 512, only values from 0 to 599 used in Release 99.
DefaultDPCH-OffsetValueFDD ::= INTEGER (0..1023)

DefaultDPCH-OffsetValueTDD ::= INTEGER (0..7)

DeltaPp-m ::= INTEGER (-10..10)

-- Actual value = IE value * 0.1
DeltaSIR ::= INTEGER (0..30)

DL-CCTrCh ::= SEQUENCE {
    tfcs-Identity OPTIONAL,
    timeInfo,
    dl-CCTrCH-TimeslotsCodes OPTIONAL,
    ul-CCTrChTPCList OPTIONAL
}

DL-CCTrChList ::= SEQUENCE (SIZE (1..maxCCTrCH)) OF DL-CCTrCh

DL-ChannelisationCode ::= SEQUENCE {
    secondaryScramblingCode OPTIONAL,
    sf-AndCodeNumber OPTIONAL,
    scramblingCodeChange OPTIONAL
}

DL-ChannelisationCodeList ::= SEQUENCE (SIZE (1..maxDPCH-DLchan)) OF DL-ChannelisationCode

DL-CommonInformation ::= SEQUENCE {
    dl-DPCH-InfoCommon OPTIONAL,
    modeSpecificInfo CHOICE {
        fdd SEQUENCE {
            defaultDPCH-OffsetValue OPTIONAL,
            dpch-CompressedModeInfo OPTIONAL,
            tx-DiversityMode OPTIONAL,
            ssdt-Information OPTIONAL
        },
        tdd SEQUENCE {
            defaultDPCH-OffsetValueTDD OPTIONAL
        }
    }
}

DL-CommonInformationPost ::= SEQUENCE {
    dl-DPCH-InfoCommonPost OPTIONAL
}

DL-CommonInformationPredef ::= SEQUENCE {
    dl-DPCH-InfoCommonPredef OPTIONAL,
    modeSpecificInfo CHOICE {
        fdd SEQUENCE {
            defaultDPCH-OffsetValueFDD DEFAULT 0
        },
        tdd SEQUENCE {
            defaultDPCH-OffsetValueTDD DEFAULT 0
        }
    }
}

DL-CompressedModeMethod ::= ENUMERATED {
    puncturing, sf-2,
    higherLayerScheduling
}

DL-DPCH-InfoCommon ::= SEQUENCE {
    timingIndication,
    Cfntargetsfnframeoffset OPTIONAL,
    modeSpecificInfo CHOICE {
        fdd SEQUENCE {

```

```

dl-DPCH-PowerControlInfo          DL-DPCH-PowerControlInfo           OPTIONAL,
dl-rate-matching-restriction     Dl-rate-matching-restriction      OPTIONAL,
spreadingFactorAndPilot          SF512-AndPilot,
-- TABULAR: The number of pilot bits is nested inside the spreading factor.
positionFixedOrFlexible         PositionFixedOrFlexible,
tfci-Existence                  BOOLEAN

},
tdd                                SEQUENCE {
commonTimeslotInfo                CommonTimeslotInfo
}
}

DL-DPCH-InfoCommonPost ::=          SEQUENCE {
timingIndication                 TimingIndication,
cfntargetsfnframeoffset         Cfntargetsfnframeoffset
dl-DPCH-PowerControlInfo         DL-DPCH-PowerControlInfo
}

DL-DPCH-InfoCommonPredef ::=        SEQUENCE {
timingIndication                 TimingIndication,
cfntargetsfnframeoffset         Cfntargetsfnframeoffset
modeSpecificInfo                 CHOICE {
fdd                                SEQUENCE {
spreadingFactorAndPilot         SF512-AndPilot,
-- TABULAR: The number of pilot bits is nested inside the spreading factor.
positionFixedOrFlexible         PositionFixedOrFlexible,
tfci-Existence                  BOOLEAN
},
tdd                                SEQUENCE {
commonTimeslotInfo                CommonTimeslotInfo
}
}

DL-DPCH-InfoPerRL ::=              CHOICE {
fdd                                SEQUENCE {
pCPICH-UsageForChannelEst       PCPICH-UsageForChannelEst,
dcph-FrameOffset                 DPCH-FrameOffset
OPTIONAL,
secondaryCPICH-Info             SecondaryCPICH-Info
OPTIONAL,
dl-ChannelisationCodeList        DL-ChannelisationCodeList,
tpc-CombinationIndex            TPC-CombinationIndex,
ssdt-CellIdentity                SSDT-CellIdentity
OPTIONAL,
closedLoopTimingAdjMode         ClosedLoopTimingAdjMode
OPTIONAL
},
tdd                                DL-CCTrChList
}

DL-DPCH-InfoPerRL-PostFDD ::=       SEQUENCE {
pCPICH-UsageForChannelEst       PCPICH-UsageForChannelEst
OPTIONAL,
dl-ChannelisationCode            DL-ChannelisationCode,
tpc-CombinationIndex            TPC-CombinationIndex
}

DL-DPCH-InfoPerRL-PostTDD ::=       SEQUENCE {
dl-CCTrCH-TimeslotsCodes        DownlinkTimeslotsCodes
}

DL-DPCH-PowerControlInfo ::=        SEQUENCE {
modeSpecificInfo                 CHOICE {
fdd                                SEQUENCE {
dpc-Mode                           DPC-Mode
},
tdd                                SEQUENCE {
tpc-StepSizeTDD                    TPC-StepSizeTDD
OPTIONAL
}
}

DL-FrameType ::=                   ENUMERATED {
dl-FrameTypeA, dl-FrameTypeB
}

```

```

DL-InformationPerRL ::= SEQUENCE {
    modeSpecificInfo CHOICE {
        fdd SEQUENCE {
            primaryCPICH-Info,
            pdsch-SHO-DCH-Info,
            pdsch-CodeMapping
        },
        tdd PrimaryCCPCH-Info
    },
    dl-DPCH-InfoPerRL OPTIONAL,
    secondaryCCPCH-Info OPTIONAL,
    tfcs OPTIONAL,
    fach-PCH-InformationList OPTIONAL,
    sib-ReferenceList OPTIONAL
}

DL-InformationPerRL-List ::= SEQUENCE (SIZE (1..maxRL)) OF
    DL-InformationPerRL

DL-InformationPerRL-ListPostFDD ::= SEQUENCE (SIZE (1..maxRL)) OF
    DL-InformationPerRL-PostFDD

DL-InformationPerRL-PostFDD ::= SEQUENCE {
    primaryCPICH-Info,
    dl-DPCH-InfoPerRL
}

DL-InformationPerRL-PostTDD ::= SEQUENCE {
    primaryCCPCH-InfoPost,
    DL-DPCH-InfoPerRL-PostTDD
}

DL_OuterLoopControl ::= ENUMERATED {
    increaseAllowed, increaseNotAllowed
}

DL-PDSCH-Information ::= SEQUENCE {
    pdsch-SHO-DCH-Info,
    pdsch-CodeMapping
}

```

14 Specific functions

next section

14.7 Downlink power control

14.7.1 Generalities

This function is implemented in the UE in order to set the SIR target value on each CCTrCH used for the downlink power control. This SIR value shall be adjusted according to an autonomous function in the UE in order to achieve the same measured quality as the quality target set by UTRAN. The quality target is set as the transport channel BLER value for each transport channel as signalled by UTRAN. For CPCH the quality target is set as the BER of the DL DPCCH as signalled by UTRAN.

When transport channel BLER is used the UE shall run a quality target control loop such that the quality requirement is met for each transport channel, which has been assigned a BLER target.

When DL DPCCH BER is used the UE shall run a quality target control loop such that the quality requirement is met for each CPCH transport channel, which has been assigned a DL DPCCH BER target.

The UE shall set the SIR target when the physical channel has been set up or reconfigured. It shall not increase the SIR target value before the power control has converged on the current value. The UE may estimate whether the power control has converged on the current value, by comparing the averaged measured SIR to the SIR target value.

~~If the UE has received a DL outer loop control message from UTRAN indicating that the SIR target value shall not be increased above the current value, it shall record the current value as the maximum allowed value for the power control function, until it receives a new DL outer loop control message from UTRAN indicating that the restriction is removed.~~