

TSG-RAN Meeting #12
Stockholm, Sweden, 12 - 15 June 2001

RP-010324

Title: Agreed CRs (Rel-5) for WI "UMTS 1800"

Source: TSG-RAN WG2

Agenda item: 9.4.3

Doc-1st-	Status-	Spec	CR	Rev	Phase	Subject	Cat	Version	Versio	Workitem
R2-011237	agreed	25.331	873		Rel-5	Introduction of UTRA FDD 1800 MHz frequency band	B	4.0.0	5.0.0	RInImp-UMTS18

CHANGE REQUEST

⌘ **25.331 CR 873** ⌘ rev **-** ⌘ Current version: **4.0.0** ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

Proposed change affects: ⌘ (U)SIM ME/UE Radio Access Network Core Network

Title:	⌘ Introduction of UTRA FDD 1800 MHz frequency band		
Source:	⌘ TSG-RAN WG2		
Work item code:	⌘ RInImp-UMTS18	Date:	⌘ 21 May 2001
Category:	⌘ B	Release:	⌘ REL-5
	<i>Use one of the following categories:</i> F (essential correction) A (corresponds to a correction in an earlier release) B (Addition of feature), C (Functional modification of feature) D (Editorial modification) Detailed explanations of the above categories can be found in 3GPP TR 21.900.		<i>Use one of the following releases:</i> 2 (GSM Phase 2) R96 (Release 1996) R97 (Release 1997) R98 (Release 1998) R99 (Release 1999) REL-4 (Release 4) REL-5 (Release 5)

Reason for change:	⌘ This CR intruduces the support for UMTS 1800MHz frequency band		
Summary of change:	⌘ new frequency code point is introduced. The REL-5 specific part is highlighted in yellow. The rest of the changes corresponds to corrections in an earlier release, i.e. R99		
Consequences if not approved:	⌘ UMTS 1800 is not supported		

Clauses affected:	⌘ 8.1.3.6, 8.1.6.2, 8.6.3.x (new), 10.3.3.21, 10.3.3.21a (new), 10.3.3.33, 10.3.3.33a (new), 10.3.3.33b (new), 10.3.10, 11.2, 11.3, 11.4, 13.4.28, 13.4.28a (new)		
Other specs Affected:	⌘ <input checked="" type="checkbox"/> Other core specifications	⌘	
	<input checked="" type="checkbox"/> Test specifications		
	<input type="checkbox"/> O&M Specifications		
Other comments:	⌘		

How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at: http://www.3gpp.org/3G_Specs/CRs.htm. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://www.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2000-09 contains the specifications resulting from the September 2000 TSG meetings.

- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

8.1.3.6 Reception of an RRC CONNECTION SETUP message by the UE

The UE shall compare the value of the IE "Initial UE identity" in the received RRC CONNECTION SETUP message with the value of the variable INITIAL_UE_IDENTITY.

If the values are different, the UE shall:

- ignore the rest of the message;

If the values are identical, the UE shall:

- stop timer T300, and act upon all received information elements as specified in subclause 8.6, unless specified otherwise in the following;
- if the UE will be in the CELL_FACH state at the conclusion of this procedure:
 - if the IE "Frequency info" is included:
 - select a suitable UTRA cell according to [4] on that frequency;
 - select PRACH according to subclause 8.6.6.2;
 - select Secondary CCPCH according to subclause 8.6.6.5;
- enter a state according to subclause 8.6.3.3;
- submit an RRC CONNECTION SETUP COMPLETE message to the lower layers on the uplink DCCH after successful state transition per subclause 8.6.3.3, with the contents set as specified below:
 - set the IE "RRC transaction identifier" to
 - the value of "RRC transaction identifier" in the entry for the RRC CONNECTION SETUP message in the table "Accepted transactions" in the variable TRANSACTIONS; and
 - clear that entry.
 - calculate START values for each CN domain according to subclause 8.5.9 and include the result in the IE "START list";
 - retrieve its UTRA UE radio access capability information elements from variable UE_CAPABILITY_REQUESTED and include this in IE "UE radio access capability" and IE "UE radio access capability extension", provided this IE is included in variable UE_CAPABILITY_REQUESTED.
 - retrieve its inter-RAT-specific UE radio access capability information elements from variable UE_CAPABILITY_REQUESTED and include this in IE "UE system specific capability",
 - ~~if the IE "UE radio access FDD capability update requirement" included in the RRC CONNECTION SETUP message has the value TRUE:

 - ~~include its UTRAN-specific FDD capabilities and its UTRAN-specific capabilities common to FDD and TDD in the IE "UE radio access capability";~~~~
 - ~~if the IE "UE radio access 3.84Meps TDD capability update requirement" included in the RRC CONNECTION SETUP message has the value TRUE:

 - ~~include its UTRAN-specific 3.84Meps TDD capabilities and its UTRAN-specific capabilities common to FDD and TDD in the IE "UE radio access capability";~~~~
 - ~~if the IE "UE radio access 1.28Meps TDD capability update requirement" included in the RRC CONNECTION SETUP message has the value TRUE:

 - ~~include its UTRAN-specific 1.28Meps TDD capabilities and its UTRAN-specific capabilities common to FDD and TDD in the IE "UE radio access capability";~~~~
 - ~~if the IE "System specific capability update requirement list" is present in the RRC CONNECTION SETUP message:~~

— include its inter-RAT capabilities for the requested systems in the IE "UE system specific capability".

When of the RRC CONNECTION SETUP COMPLETE message has been submitted to lower layers for transmission the UE shall:

- if the UE has entered CELL_FACH state:
 - start timer T305 using its initial value if periodical update has been configured by T305 in the IE "UE Timers and constants in connected mode" set to any other value than "infinity" in system information block type 1;
- store the contents of the variable UE_CAPABILITY_REQUESTED into the update its variable UE_CAPABILITY_TRANSFERRED which UE capabilities it has transmitted to the UTRAN;
- clear the variable UE_CAPABILITY_REQUESTED;
- if the IE "Transport format combination subset" was not included in the RRC CONNECTION SETUP message:
 - set the IE "Current TFC subset" in the variable TFS_SUBSET to "Full transport format combination set";
- set the "Status" in the variable CIPHERING_STATUS to "Not started";
- set the "Reconfiguration" in the variable CIPHERING_STATUS to FALSE;
- set the "Status" in the variable INTEGRITY_PROTECTION_INFO to "Not started";
- set the "Historical status" in the variable INTEGRITY_PROTECTION_INFO to "Never been active";
- set the "Reconfiguration" in the variable INTEGRITY_PROTECTION_INFO to FALSE;
- set the variable CELL_UPDATE_STARTED to FALSE;
- set the variable ORDERED_RECONFIGURATION to FALSE;
- set the variable FAILURE_INDICATOR to FALSE;
- set the variable INCOMPATIBLE_SECURITY_RECONFIGURATION to FALSE;
- set the variable INVALID_CONFIGURATION to FALSE;
- set the variable PROTOCOL_ERROR_INDICATOR to FALSE;
- set the variable PROTOCOL_ERROR_REJECT to FALSE;
- set the variable TGSN_REPORTED to FALSE;
- set the variable UNSUPPORTED_CONFIGURATION to FALSE;
- clear all optional IEs in all variables, except those optional IEs that are set in this procedure;
- consider the procedure to be successful;

And the procedure ends.

8.1.6 Transmission of UE capability information

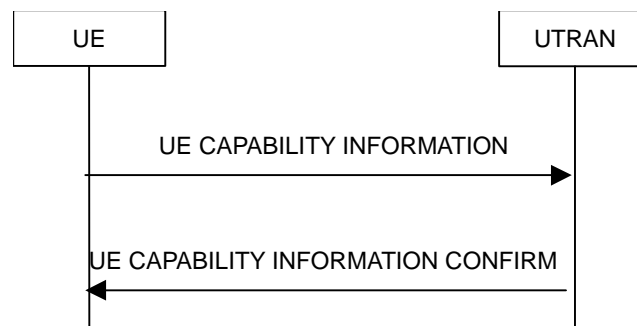


Figure 12: Transmission of UE capability information, normal flow

8.1.6.1 General

The UE capability update procedure is used by the UE to convey UE specific capability information to the UTRAN.

8.1.6.2 Initiation

The UE shall initiate the UE capability update procedure in the following situations:

- the UE receives a UE CAPABILITY ENQUIRY message from the UTRAN;
- while in connected mode the UE capabilities change compared to those stored in the variable UE_CAPABILITY_TRANSFERRED

If the UE CAPABILITY INFORMATION message is sent in response to a UE CAPABILITY ENQUIRY message, the UE shall:

- include the IE "RRC transaction identifier"; and
- set it to the value of "RRC transaction identifier" in the entry for the UE CAPABILITY ENQUIRY message in the table "Accepted transactions" in the variable TRANSACTIONS; and
- clear that entry;
- retrieve its UTRA UE radio access capability information elements and its inter-RAT-specific UE radio access capability information elements from variable UE_CAPABILITY_REQUESTED and include this in IE "UE radio access capability" and in IE "UE radio access capability extension", provided this IE is included in variable UE_CAPABILITY_REQUESTED.
- retrieve its inter-RAT-specific UE radio access capability information elements from variable UE_CAPABILITY_REQUESTED and include this in IE "UE system specific capability".
- include the UTRAN-specific UE capability information elements into the IE "UE radio capability", according to the requirement given in the IE "Capability update requirement" in the UE CAPABILITY ENQUIRY message;
- include one or more inter-RAT classmarks into the IE "UE system specific capability", according to the requirement given in the IE "Capability update requirement" in the UE CAPABILITY ENQUIRY message.

If the UE CAPABILITY INFORMATION message is sent because one or more of the UE capabilities change compared to those stored in the variable UE_CAPABILITY_TRANSFERRED while in connected state, the UE shall include the information elements associated with the capabilities that have changed in the UE CAPABILITY INFORMATION message.

If the UE is in CELL_PCH or URA_PCH state, it shall first perform a cell update procedure using the cause "uplink data transmission", see subclause 8.3.1.

The UE RRC shall submit the UE CAPABILITY INFORMATION message to the lower layers for transmission on the uplink DCCH using AM RLC. When the message has been sent on the radio interface the UE RRC shall start timer T304 and set counter V304 to 1.

8.1.6.4 Reception of the UE CAPABILITY INFORMATION CONFIRM message by the UE

Upon reception of a UE CAPABILITY INFORMATION CONFIRM message, the UE shall:

- stop timer T304;
 - update its variable UE_CAPABILITY_TRANSFERRED with the UE capabilities it has last transmitted to the UTRAN during the current RRC connection;
 - clear the variable UE_CAPABILITY_REQUESTED;
- and the procedure ends.;

8.1.7.3 Reception of an UE CAPABILITY ENQUIRY message by the UE

Upon reception of an UE CAPABILITY ENQUIRY message, the UE shall act on the received information elements as specified in subclause 8.6 and initiate the transmission of UE capability information procedure, which is specified in subclause 8.1.6.

8.6.3.11 RRC transaction identifier

If the IE "RRC transaction identifier" is included in a received message, the UE shall perform the actions below. The UE shall:

If the received message is any of the messages:

- RADIO BEARER SETUP; or
- RADIO BEARER RECONFIGURATION; or
- RADIO BEARER RELEASE; or
- TRANSPORT CHANNEL RECONFIGURATION; or
- PHYSICAL CHANNEL RECONFIGURATION;

the UE shall:

- if the variable ORDERED_RECONFIGURATION is set to FALSE; and
- if the variable CELL_UPDATE_STARTED is set to FALSE; and
- if the received message does not contain a protocol error according to clause 9 and the variable PROTOCOL_ERROR_REJECT is set to FALSE:
 - accept the transaction; and
 - store the IE "Message type" and the IE "RRC transaction identifier" of the received message in the table "Accepted transactions" in the variable TRANSACTIONS;
- else:
- if the variable ORDERED_RECONFIGURATION is set to TRUE; or
- if the variable CELL_UPDATE_STARTED is set to TRUE; or
- if the table "Accepted transactions" in the variable TRANSACTIONS contains an entry with an IE "Message Type" set to ACTIVE SET UPDATE; or
- if the received message contains a protocol error according to clause 9 causing the variable PROTOCOL_ERROR_REJECT to be set to TRUE:
 - if the IE "RRC transaction identifier" of the received message is identical to the "RRC transaction identifier" stored for the same "Message Type" as the received message in the table "Accepted transactions" in the variable TRANSACTIONS:
 - ignore the transaction; and
 - continue with any ongoing processes and procedures as the message was not received;
 - and end the procedure;
 - else:
 - reject the transaction; and
 - if the IE "Message Type" of the received message is not present in the table "Rejected transactions" in the variable TRANSACTIONS:
 - store the IE "Message type" and the IE "RRC transaction identifier" of the received message in the table "Rejected transactions" in the variable TRANSACTIONS.

Else:

If the received message is any of the messages:

- RRC CONNECTION SETUP; or
- CELL UPDATE CONFIRM; or
- URA UPDATE CONFIRM;

the UE shall:

- if the IE "Message Type" of the received message is not present in the table "Accepted transactions" in the variable TRANSACTIONS:
 - if the received message does not contain a protocol error according to clause 9 and the variable PROTOCOL_ERROR_REJECT is set to FALSE:
 - accept the transaction; and
 - store the IE "Message type" and the IE "RRC transaction identifier" of the received message in the table "Accepted transactions" in the variable TRANSACTIONS;
 - else:
 - if the received message contains a protocol error according to clause 9 causing the variable PROTOCOL_ERROR_REJECT to be set to TRUE:
 - reject the transaction; and
 - if the IE "Message Type" of the received message is not present in the table "Rejected transactions" in the variable TRANSACTIONS:
 - store the IE "Message type" and the IE "RRC transaction identifier" of the received message in the table "Rejected transactions" in the variable TRANSACTIONS.
 - else:
- if the IE "Message Type" of the received message is present in the table "Accepted transactions" in the variable TRANSACTIONS:
 - if the IE "RRC transaction identifier" of the received message is identical to the "RRC transaction identifier" stored for the "Message Type" in the table "Accepted transactions" in the variable TRANSACTIONS:
 - ignore the transaction; and
 - continue with any ongoing processes and procedures as the message was not received; and
 - end the procedure;
 - else:
 - if the IE "RRC transaction identifier" of the received message is different from the "RRC transaction identifier" stored for the "Message Type" in the table "Accepted transactions" in the variable TRANSACTIONS:
 - if the received message does not contain a protocol error according to clause 9 and the variable PROTOCOL_ERROR_REJECT is set to FALSE:
 - ignore the once accepted transaction and instead accept the new transaction; and
 - store the IE "Message type" and the IE "RRC transaction identifier" of the received message in the table "Accepted transactions" in the variable TRANSACTIONS, replacing the previous entry;
 - else:
 - if the received message contains a protocol error according to clause 9 causing the variable PROTOCOL_ERROR_REJECT to be set to TRUE:
 - reject the transaction; and

- if the IE "Message Type" of the received message is not present in the table "Rejected transactions" in the variable TRANSACTIONS:
 - store the IE "Message type" and the IE "RRC transaction identifier" of the received message in the table "Rejected transactions" in the variable TRANSACTIONS.

Else:

If the received message is any other message, the UE shall:

- if the IE "Message Type" of the received message is not present in the table "Accepted transactions" in the variable TRANSACTIONS:
 - if the received message does not contain a protocol error according to clause 9 and the variable PROTOCOL_ERROR_REJECT is set to FALSE:
 - accept the transaction; and
 - store the IE "Message type" and the IE "RRC transaction identifier" of the received message in the table "Accepted transactions" in the variable TRANSACTIONS;
 - else:
 - if the received message contains a protocol error according to clause 9 causing the variable PROTOCOL_ERROR_REJECT to be set to TRUE:
 - reject the transaction; and
 - store the IE "Message type" and the IE "RRC transaction identifier" of the received message in the table "Rejected transactions" in the variable TRANSACTIONS.
- else:
 - if the IE "Message Type" of the received message is present in the table "Accepted transactions" in the variable TRANSACTIONS:
 - if the IE "RRC transaction identifier" of the received message is identical to the "RRC transaction identifier" stored in any entry for the "Message Type" in the table "Accepted transactions" in the variable TRANSACTIONS:
 - ignore the transaction; and
 - continue with any ongoing processes and procedures as the message was not received; and
 - end the procedure;
 - else:
 - if the IE "RRC transaction identifier" of the received message is different from the "RRC transaction identifier" stored in all entries for the "Message Type" in the table "Accepted transactions" in the variable TRANSACTIONS:
 - if the received message does not contain a protocol error according to clause 9 and the variable PROTOCOL_ERROR_REJECT is set to FALSE:
 - accept the additional transaction; and
 - store the IE "Message type" and the IE "RRC transaction identifier" of the received message in the table "Accepted transactions" in the variable TRANSACTIONS, in addition to the already existing entries;
 - else:
 - if the received message contains a protocol error according to clause 9 causing the variable PROTOCOL_ERROR_REJECT to be set to TRUE:
 - reject the transaction; and

- store the IE "Message type" and the IE "RRC transaction identifier" of the received message in the table "Rejected transactions" in the variable TRANSACTIONS.

8.6.3.12 Capability Update Requirement

If the IE "Capability Update Requirement" is included the UE shall:

- if the IE "UE radio access FDD capability update requirement" has the value TRUE:
 - if the UE supports FDD mode:
 - include its UTRA FDD capabilities and its UTRA capabilities common to FDD and TDD in the IE "UE radio access capability" and the IE "UE radio access capability extension" within variable UE_CAPABILITY_REQUESTED as specified below:
 - if the UE supports multiple UTRA FDD Frequency Bands; or
 - if the UE supports a single UTRA FDD Frequency Band different from 2100 MHz:
 - include the IE "UE radio access capability, excluding IEs "RF capability FDD" and "Measurement capability";
 - include the IE "UE radio access capability extension", including the IEs "RF capability FDD extension" and the "Measurement capability extension" associated to each supported UTRA FDD frequency band indicated in the IE "Frequency band";
 - else:
 - include in the IE "UE radio access capability", including the IEs "RF capability FDD" and "Measurement capability" associated to the 2100 MHz UTRA FDD frequency band;
- if the IE "UE radio access 3.84Mcps TDD capability update requirement" has the value TRUE:
 - if the UE supports 3.84Mcps TDD mode:
 - include its UTRAN-specific 3.84Mcps TDD capabilities and its UTRAN-specific capabilities common to FDD and TDD within variable UE_CAPABILITY_REQUESTED;
- if the IE "UE radio access 1.28Mcps TDD capability update requirement" has the value TRUE:
 - if the UE supports 1.28Mcps TDD mode:
 - include its UTRAN-specific 1.28Mcps TDD capabilities and its UTRAN-specific capabilities common to FDD and TDD within variable UE_CAPABILITY_REQUESTED ;
- if the IE "System specific capability update requirement list" is present:
 - for each of the RAT requested in the IE "UE system specific capability"
 - if the UE supports the concerned RAT:
 - include its inter-RAT radio access capabilities for the concerned system in the IE "UE system specific capability" within variable UE_CAPABILITY_REQUESTED

If the IE "Capability update requirement" is not present, the UE shall assume the default values as specified in 10.3.3.2 and act in accordance with the above.

8.6.4 Radio bearer information elements

10.2.41 RRC CONNECTION SETUP COMPLETE

This message confirms the establishment of the RRC Connection by the UE.

RLC-SAP: AM

Logical channel: DCCH

Direction: UE → UTRAN

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Message Type	MP		Message Type	
UE Information Elements				
RRC transaction identifier	MP		RRC transaction identifier 10.3.3.36	
START list	MP	1 to <maxCNdomains>		START [40] values for all CN domains.
>CN domain identity	MP		CN domain identity 10.3.1.1	
>START	MP		START 10.3.3.38	START value to be used in this CN domain.
UE radio access capability	OP		UE radio access capability 10.3.3.42	
<u>UE radio access capability extension</u>	<u>OP</u>		<u>UE radio access capability extension</u> 10.3.3.42a	
Other information elements				
UE system specific capability	OP	1 to <maxSystemCapability>		
>Inter-RAT UE radio access capability	MP		Inter-RAT UE radio access capability 10.3.8.7	

10.2.56 UE CAPABILITY INFORMATION

This message is sent by UE to convey UE specific capability information to the UTRAN.

RLC-SAP: AM

Logical channel: DCCH

Direction: UE → UTRAN

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Message Type	MP		Message Type	
UE information elements				
RRC transaction identifier	OP		RRC transaction identifier 10.3.3.36	
Integrity check info	CH		Integrity check info 10.3.3.16	Integrity check info is included if integrity protection is applied
UE radio access capability	OP		UE radio access capability 10.3.3.42	
<u>UE radio access capability extension</u>	<u>OP</u>		<u>UE radio access capability extension</u> 10.3.3.42a	
Other information elements				
UE system specific capability	OP	1 to <maxSystemCapability>		
>Inter-RAT UE radio access capability	MP		Inter-RAT UE radio access capability 10.3.8.7	

10.3.3.21a Measurement capability extension

This IE may be used to replace the measurement capability information provided within IE “Measurement capability”

<u>Information Element/Group name</u>	<u>Need</u>	<u>Multi</u>	<u>Type and reference</u>	<u>Semantics description</u>
<u>FDD measurements</u>	<u>MP</u>	1 to <u><maxFreq BandsFDD</u> ≥		
<u>>FDD Frequency band</u>	<u>MD</u>		<u>Enumerated(</u> <u>FDD2100,</u> <u>FDD1900,</u> <u>FDD1800)</u>	The default value is the same as indicated in the IE "Frequency band" included in the IE " UE radio access capability extension". At least one spare value is needed
<u>>Need for DL compressed mode</u>	<u>MP</u>		<u>Boolean</u>	TRUE means that the UE requires DL compressed mode in order to perform measurements on the FDD frequency band indicated by the IE "FDD Frequency band"
<u>>Need for UL compressed mode</u>	<u>MP</u>		<u>Boolean</u>	TRUE means that the UE requires UL compressed mode in order to perform measurements on the FDD frequency band indicated by the IE "FDD Frequency band"
<u>TDD measurements</u>	<u>CV</u> <u>tdd_sup</u>	1 to <u><maxFreq BandsTDD</u> ≥		
<u>>TDD Frequency band</u>	<u>MP</u>		<u>Enumerated(</u> <u>a, b, c)</u>	
<u>>Need for DL compressed mode</u>	<u>MP</u>		<u>Boolean</u>	TRUE means that the UE requires DL compressed mode in order to perform measurements on TDD frequency band indicated by the IE "TDD Frequency band"
<u>>Need for UL compressed mode</u>	<u>MP</u>		<u>Boolean</u>	TRUE means that the UE requires UL compressed mode in order to perform measurements on TDD frequency band indicated by the IE "TDD Frequency band"
<u>GSM measurements</u>	<u>CV</u> <u>gsm_sup</u>	1 to <u><maxFreq BandsGS M></u>		
<u>>GSM Frequency band</u>	<u>MP</u>		<u>Enumerated(</u> <u>GSM450,</u> <u>GSM480,</u> <u>GSM850,</u> <u>GSM_900P,</u> <u>GSM900E,</u> <u>GSM1800,</u> <u>GSM1900)</u>	as defined in [45] at least one spare value
<u>>Need for DL compressed mode</u>	<u>MP</u>		<u>Boolean</u>	TRUE means that the UE requires DL compressed mode in order to perform measurements on GSM frequency band indicated by the IE "GSM Frequency band"
<u>>Need for UL compressed mode</u>	<u>MP</u>		<u>Boolean</u>	TRUE means that the UE requires UL compressed mode in order to perform measurements on GSM frequency band indicated by the IE "GSM Frequency band"
<u>Multi-carrier measurement</u>	<u>CV</u>			

	<i>mc_sup</i>			
<u>>Need for DL compressed mode</u>	MP		Boolean	<u>TRUE means that the UE requires DL compressed mode in order to perform measurements on multi-carrier</u>
<u>>Need for UL compressed mode</u>	MP		Boolean	<u>TRUE means that the UE requires UL compressed mode in order to perform measurements on multi-carrier</u>

<u>Condition</u>	<u>Explanation</u>
<i>tdd_sup</i>	<u>Presence is mandatory if IE Multi-mode capability has the value "TDD" or "FDD/TDD". Otherwise this field is not needed in the message.</u>
<i>Gsm_sup</i>	<u>Presence is mandatory if IE Support of GSM has the value TRUE. Otherwise this field is not needed in the message.</u>
<i>mc_sup</i>	<u>Presence is mandatory if IE Support of multi-carrier has the value TRUE. Otherwise this field is not needed in the message.</u>

10.3.3.33 RF capability FDD

Information Element/Group name	Need	Multi	Type and Reference	Semantics description	Version
FDD RF capability	CH- <i>fdd_req_su</i> <i>p</i>				
>UE power class	MP		Enumerated(1..4)	as defined in [21]	
>Tx/Rx frequency separation	MP		Enumerated(190, 174.8-205.2, 134.8-245.2)	In MHz as defined in [21]. NOTE: Not applicable if UE is not operating in frequency band a (as defined in [21]).	
TDD RF capability	CH- <i>tdd_req_su</i> <i>p</i>	1 to 2		One "TDD RF capability" entity shall be included for every Chip rate capability supported.	Multi=2 is included in REL-4
>UE power class	MP		Enumerated (1..4)	as defined in [22]	
>Radio frequency bands	MP		Enumerated(a, b, c, a+b, a+c, b+c, a+b+c)	as defined in [22]	
>Chip rate capability	MP		Enumerated(3.84Mcps, 1.28Mcps)	as defined in [22]	

Condition	Explanation
<i>tdd_req_sup</i>	Presence is mandatory if IE Multi-mode capability has the value "TDD" or "FDD/TDD" and a 3.84Mcps TDD capability update or a 1.28Mcps TDD capability update has been requested in a previous message. Otherwise this field is not needed in the message.
<i>fdd_req_sup</i>	Presence is mandatory if IE Multi-mode capability has the value "FDD" or "FDD/TDD" and a FDD capability update has been requested in a previous message. Otherwise this field is not needed in the message.

10.3.3.33a RF capability TDD

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
<u>UE power class</u>	<u>MP</u>		<u>Enumerated (1..4)</u>	<u>as defined in [22]</u>
<u>Radio frequency bands</u>	<u>MP</u>		<u>Enumerated(a, b, c, a+b, a+c, b+c, a+b+c)</u>	<u>as defined in [22]</u>
<u>Chip rate capability</u>	<u>MP</u>		<u>Enumerated(3.84Mcps, 1.28Mcps)</u>	<u>as defined in [22]</u>

10.3.3.33b RF capability FDD extension

<u>Information Element/Group name</u>	<u>Need</u>	<u>Multi</u>	<u>Type and Reference</u>	<u>Semantics description</u>
<u>UE power class extension</u>	<u>MP</u>		<u>Enumerated(1..4)</u>	<u>as defined in [21]. At least one spare value is needed</u>
<u>Tx/Rx frequency separation</u>	<u>MP</u>		<u>Enumerated(190, 174.8-205.2, 134.8-245.2)</u>	<u>In MHz as defined in [21]. NOTE: Not applicable if UE is not operating in frequency band a (as defined in [21]).</u>

10.3.3.42 UE radio access capability

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
ICS version	MP		Enumerated(R99, REL-4)	Indicates the release version of [42]-2 (Implementation Conformance Statement (ICS) proforma specification) that is applicable for the UE.	Value REL-4 added in REL-4
PDCP capability	MP		PDCP capability 10.3.3.24		
RLC capability	MP		RLC capability 10.3.3.34		
Transport channel capability	MP		Transport channel capability 10.3.3.40		
RF capability <u>FDD</u>	<u>MPOP</u>		RF capability 10.3.3.33		
RF capability <u>TDD</u>	<u>OP</u>	<u>1 to 2</u>	10.3.3.33a <u>RF capability TDD</u>	One "TDD RF capability" entity shall be included for every Chip rate capability supported.	<u>Multi=2 is included in REL-4</u>
Physical channel capability	MP		Physical channel capability 10.3.3.25		
UE multi-mode/multi-RAT capability	MP		UE multi-mode/multi-RAT capability 10.3.3.41		
Security capability	MP		Security capability 10.3.3.37		
UE positioning capability	MP		UE positioning capability 10.3.3.45		
Measurement capability	CH- <i>fdd_req_sup</i>		Measurement capability 10.3.3.21		

Condition	Explanation
<i>fdd_req_sup</i>	Presence is mandatory if IE Multi-mode capability has the value "FDD" or "FDD/TDD" and a FDD capability update has been requested in a previous message. Otherwise this field is not needed in the message.

10.3.3.42a UE radio access capability extension

<u>Information Element/Group name</u>	<u>Need</u>	<u>Multi</u>	<u>Type and reference</u>	<u>Semantics description</u>
<u>Frequency band specific capability list</u>	<u>MP</u>	1 to < <u>maxFreqbandsFDD</u> >		
> <u>Frequency band</u>	<u>MP</u>		Enumerated(<u>FDD2100</u> , <u>FDD1900</u> , <u>FDD1800</u>)	At least one spare value is <u>needed</u>
> <u>RF capability FDD extension</u>	<u>MD</u>		10.3.3.33b <u>RF capability FDD extension</u>	the default values are the <u>same values as in the immediately preceeding IE "RF capability FDD extension"; the first occurence is MP</u>
> <u>Measurement capability extension</u>	<u>MP</u>		<u>Measurement capability extension 10.3.3.21a</u>	

10.3.10 Multiplicity values and type constraint values

The following table includes constants that are either used as multi bounds (name starting with "max") or as high or low value in a type specification (name starting with "lo" or "hi"). Constants are specified only for values appearing more than once in the RRC specification. In case a constant is related to one or more other constants, an expression is included in the "value" column instead of the actual value.

Constant	Explanation	Value
CN information		
maxCNdomains	Maximum number of CN domains	4
UTRAN mobility information		
maxRAT	Maximum number of Radio Access Technologies	maxOtherRAT + 1
maxOtherRAT	Maximum number of other Radio Access Technologies	15
maxURA	Maximum number of URAs in a cell	8
maxInterSysMessages	Maximum number of Inter System Messages	4
maxRABsetup	Maximum number of RABs to be established	16
UE information		
maxtransactions	Maximum number of parallel RRC transactions in downlink	25
maxPDCPalgoType	Maximum number of PDCP algorithm types	8
maxDRACclasses	Maximum number of UE classes which would require different DRAC parameters	8
maxFrequencybands	Maximum number of frequency bands supported by the UE as defined in 25.102	4
maxFreqBandsFDD	Maximum number of frequency bands supported by the UE as defined in 25.101	8
maxFreqBandsTDD	Maximum number of frequency bands supported by the UE as defined in 25.102	4
maxFreqBandsGSM	Maximum number of frequency bands supported by the UE as defined in 05.05	16
maxPage1	Number of UEs paged in the Paging Type 1 message	8
maxSystemCapability	Maximum number of system specific capabilities that can be requested in one message.	16
RB information		
maxPredefConfig	Maximum number of predefined configurations	16
maxRB	Maximum number of RBs	32
maxSRBsetup	Maximum number of signalling RBs to be established	8
maxRBperRAB	Maximum number of RBs per RAB	8
maxRBallRABs	Maximum number of non signalling RBs	27
maxRBMuxOptions	Maximum number of RB multiplexing options	8
maxLoCHperRLC	Maximum number of logical channels per RLC entity	2
MaxROHC-PacketSizes	Maximum number of packet sizes that are allowed to be produced by ROHC.	16
MaxROHC-Profiles	Maximum number of profiles supported by ROHC on a given RB.	8
TrCH information		
maxTrCH	Maximum number of transport channels used in one direction (UL or DL)	32
maxTrCHpreconf	Maximum number of preconfigured Transport channels, per direction	16
maxCCTrCH	Maximum number of CCTrCHs	8
maxTF	Maximum number of different transport formats that can be included in the Transport format set for one transport channel	32
maxTF-CPCH	Maximum number of TFs in a CPCH set	16
maxTFC	Maximum number of Transport Format Combinations	1024
maxTFCl-1-Combs	Maximum number of TFCI (field 1) combinations	512
maxTFCl-2-Combs	Maximum number of TFCI (field 2) combinations	512
maxCPCHsets	Maximum number of CPCH sets per cell	16
maxSIBperMsg	Maximum number of complete system information blocks per SYSTEM INFORMATION message	16
maxSIB	Maximum number of references to other system information blocks.	32
maxSIB-FACH	Maximum number of references to system information blocks on the FACH	8
PhyCH information		
maxSubCh	Maximum number of sub-channels on PRACH	12
maxPCPCH-APsubCH	Maximum number of available sub-channels for AP signature on PCPCH	12
maxPCPCH-CDsubCH	Maximum number of available sub-channels for CD signature on PCPCH	12
maxSig	Maximum number of signatures on PRACH	16

maxPCPCH-APsig	Maximum number of available signatures for AP on PCPCH	16
maxPCPCH-CDsig	Maximum number of available signatures for CD on PCPCH	16
maxAC	Maximum number of access classes	16
maxASC	Maximum number of access service classes	8
maxASCmap	Maximum number of access class to access service classes mappings	7
maxASCpersist	Maximum number of access service classes for which persistence scaling factors are specified	6
maxPRACH	Maximum number of PRACHs in a cell	16 (1 for 1.28Mcps TDD)
MaxPRACH_FPACH	Maximum number of PRACH / FPACH pairs in a cell (1.28 Mcps TDD)	8
maxFACHPCH	Maximum number of FACHs and PCHs mapped onto one secondary CCPCHs	8
maxRL	Maximum number of radio links	8
maxSCCPCH	Maximum number of secondary CCPCHs per cell	16
maxDPDCH-UL	Maximum number of DPDCHs per cell	6
maxDPCH-DLchan	Maximum number of channelisation codes used for DL DPCH	8
maxDPCHcodesPerTS	Maximum number of codes for one timeslots (TDD)	16
maxPUSCH	Maximum number of PUSCHs	(8)
maxPDSCH	Maximum number of PDSCHs	8
maxPDSCHcodes	Maximum number of codes for PDSCH	16
maxPDSCH-TFCIgroups	Maximum number of TFCI groups for PDSCH	256
maxPDSCHcodeGroups	Maximum number of code groups for PDSCH	256
maxPCPCHs	Maximum number of PCPCH channels in a CPCH Set	64
maxPCPCH-SF	Maximum number of available SFs on PCPCH	7
maxTS	Maximum number of timeslots used in one direction (UL or DL)	6 (1.28 Mcps TDD) 14 (3.84 Mcps TDD)
HiPUSCHIdentities	Maximum number of PDSCH Identities	64
HiPDSCHIdentities	Maximum number of PDSCH Identities	64
Measurement information		
maxTGPS	Maximum number of transmission gap pattern sequences	6
maxAdditionalMeas	Maximum number of additional measurements for a given measurement identity	4
maxMeasEvent	Maximum number of events that can be listed in measurement reporting criteria	8
maxMeasParEvent	Maximum number of measurement parameters (e.g. thresholds) per event	2
maxMeasIntervals	Maximum number of intervals that define the mapping function between the measurements for the cell quality Q of a cell and the representing quality value	1
maxCellMeas	Maximum number of cells to measure	32
maxReportedGSMCells	Maximum number of GSM cells to be reported	6
maxFreq	Maximum number of frequencies to measure	8
maxSat	Maximum number of satellites to measure	16
HiRM	Maximum number that could be set as rate matching attribute for a transport channel	256
Frequency information		
maxFDDFreqList	Maximum number of FDD carrier frequencies to be stored in USIM	4
maxTDDFreqList	Maximum number of TDD carrier frequencies to be stored in USIM	4
maxFDDFreqCellList	Maximum number of neighbouring FDD cells to be stored in USIM	32
maxTDDFreqCellList	Maximum number of neighbouring TDD cells to be stored in USIM	32
maxGSMCellList	Maximum number of GSM cells to be stored in USIM	32
Other information		
maxNumGSMFreqRanges	Maximum number of GSM Frequency Ranges to store	32
maxNumFDDFreqs	Maximum number of FDD centre frequencies to store	8
maxNumTDDFreqs	Maximum number of TDD centre frequencies to store	8
maxNumCDMA200Freqs	Maximum number of CDMA2000 centre frequencies to store	8

11.2 PDU definitions

```

--*****
--
-- TABULAR: The message type and integrity check info are not
-- visible in this module as they are defined in the class module.
-- Also, all FDD/TDD specific choices have the FDD option first
-- and TDD second, just for consistency.
--
--*****

PDU-definitions DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

--*****
--
-- IE parameter types from other modules
--
--*****

IMPORTS

-- Core Network IEs :
  CN-DomainIdentity,
  CN-InformationInfo,
  NAS-Message,
  PagingRecordTypeID,
-- UTRAN Mobility IEs :
  URA-Identity,
-- User Equipment IEs :
  ActivationTime,
  C-RNTI,
  CapabilityUpdateRequirement,
  CapabilityUpdateRequirement-r4,
  CapabilityUpdateRequirement-r4Ext,
  CellUpdateCause,
  CipheringAlgorithm,
  CipheringModeInfo,
  EstablishmentCause,
  FailureCauseWithProtErr,
  FailureCauseWithProtErrTrId,
  InitialUE-Identity,
  IntegrityProtActivationInfo,
  IntegrityProtectionModeInfo,
  N-308,
  PagingCause,
  PagingRecordList,
  ProtocolErrorIndicator,
  ProtocolErrorIndicatorWithMoreInfo,
  Rb-timer-indicator,
  Re-EstablishmentTimer,
  RedirectionInfo,
  RejectionCause,
  ReleaseCause,
  RRC-StateIndicator,
  RRC-TransactionIdentifier,
  SecurityCapability,
  START-Value,
  STARTList,
  U-RNTI,
  U-RNTI-Short,
  UE-RadioAccessCapability,
  UE-RadioAccessCapability-r4ext,
  UE-RadioAccessCapabability-v370eExt,
  UE-ConnTimersAndConstants,
  URA-UpdateCause,
  UTRAN-DRX-CycleLengthCoefficient,
  WaitTime,
-- Radio Bearer IEs :
  DefaultConfigIdentity,
  DefaultConfigMode,
  DL-CounterSynchronisationInfo,
  PredefinedConfigIdentity,
  RAB-Info,
  RAB-Info-Post,

```

```

RAB-InformationList,
RAB-InformationReconfigList,
RAB-InformationSetupList,
RAB-InformationSetupList-r4,
RB-ActivationTimeInfo,
RB-ActivationTimeInfoList,
RB-COUNT-C-InformationList,
RB-COUNT-C-MSB-InformationList,
RB-IdentityList,
RB-InformationAffectedList,
RB-InformationReconfigList,
RB-InformationReconfigList-r4,
RB-InformationReleaseList,
RB-InformationSetupList,
RB-InformationSetupList-r4,
RB-WithPDCP-InfoList,
SRB-InformationSetupList,
SRB-InformationSetupList2,
UL-CounterSynchronisationInfo,
-- Transport Channel IEs:
  CPCH-SetID,
  DL-AddReconfTransChInfo2List,
  DL-AddReconfTransChInfoList,
  DL-CommonTransChInfo,
  DL-DeletedTransChInfoList,
  DRAC-StaticInformationList,
  TFC-Subset,
  TFCS-Identity,
  UL-AddReconfTransChInfoList,
  UL-CommonTransChInfo,
  UL-DeletedTransChInfoList,
-- Physical Channel IEs :
  AllocationPeriodInfo,
  Alpha,
  CTrCH-PowerControlInfo,
  CTrCH-PowerControlInfo-r4,
  ConstantValue,
  CPCH-SetInfo,
  DL-CommonInformation,
  DL-CommonInformation-r4,
  DL-CommonInformationPost,
  DL-InformationPerRL,
  DL-InformationPerRL-List,
  DL-InformationPerRL-List-r4,
  DL-InformationPerRL-ListPostFDD,
  DL-InformationPerRL-PostTDD,
  DL-InformationPerRL-PostTDD-LCR,
  DL-DPCH-PowerControlInfo,
  DL-PDSCH-Information,
  DPCH-CompressedModeStatusInfo,
  FrequencyInfo,
  FrequencyInfoFDD,
  FrequencyInfoTDD,
  IndividualTS-InterferenceList,
  MaxAllowedUL-TX-Power,
  OpenLoopPowerControl-IPDL-TDD,
  PDSCH-CapacityAllocationInfo,
  PDSCH-CapacityAllocationInfo-r4,
  PDSCH-Identity,
  PDSCH-Info,
  PDSCH-Info-r4,
  PRACH-RACH-Info,
  PrimaryCCPCH-TX-Power,
  PUSCH-CapacityAllocationInfo,
  PUSCH-CapacityAllocationInfo-r4,
  PUSCH-Identity,
  RL-AdditionInformationList,
  RL-RemovalInformationList,
  SpecialBurstScheduling,
  SSdT-Information,
  TFC-ControlDuration,
  SSdT-UL,
  TimeslotList,
  TimeslotList-r4,
  TX-DiversityMode,
  UL-ChannelRequirement,
  UL-ChannelRequirement-r4,
  UL-ChannelRequirementWithCPCH-SetID,

```

```

-- REL-4

```

```

UL-ChannelRequirementWithCPCH-SetID-r4,
UL-DPCH-Info,
UL-DPCH-Info-r4,
UL-DPCH-InfoPostFDD,
UL-DPCH-InfoPostTDD,
UL-DPCH-InfoPostTDD-LCR,
UL-SynchronisationParameters,
UL-TimingAdvance,
UL-TimingAdvanceControl,
UL-TimingAdvanceControl-r4,
-- Measurement IEs :
AdditionalMeasurementID-List,
Band-Indicator,
EventResults,
InterFreqEventResults-LCR,
InterRAT-TargetCellDescription,
MeasuredResults,
MeasuredResultsList,
MeasuredResultsList-LCR,
MeasuredResultsOnRACH,
MeasurementCommand,
MeasurementCommand-r4,
MeasurementIdentity,
MeasurementReportingMode,
PrimaryCCPCH-RSCP,
TimeslotListWithISCP,
TrafficVolumeMeasuredResultsList,
UE-Positioning-GPS-AssistanceData,
UE-Positioning-OTDOA-AssistanceData,
UP-IPDL-Parameters-TDD,
-- Other IEs :
BCCH-ModificationInfo,
CDMA2000-MessageList,
GSM-MessageList,
InterRAT-ChangeFailureCause,
InterRAT-HO-Failure,
InterRAT-UE-RadioAccessCapabilityList,
InterRAT-UE-SecurityCapList,
InterRATMessage,
IntraDomainNasNodeSelector,
ProtocolErrorInformation,
ProtocolErrorMoreInformation,
Rplmn-Information,
Rplmn-Information-r4,
SegCount,
SegmentIndex,
SFN-Prime,
SIB-Data-fixed,
SIB-Data-variable,
SIB-Type
FROM InformationElements

maxSIBperMsg,
maxSystemCapability
FROM Constant-definitions;

```

```

-- *****
--
-- RRC CONNECTION SETUP COMPLETE
--
-- *****

RRCConnectionSetupComplete ::= SEQUENCE {
  -- TABULAR: Integrity protection shall not be performed on this message.
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  startList                      STARTList,
  ue-RadioAccessCapability       UE-RadioAccessCapability          OPTIONAL,
  -- Other IEs
  ue-RATSpecificCapability       InterRAT-UE-RadioAccessCapabilityList  OPTIONAL,
  -- Extension mechanism for non-release99 information
  -- Non critical extensions
  v370NonCriticalExtensions      SEQUENCE {
    rrcConnectionSetupComplete-v370ext RRCConnectionSetupComplete-v370ext,
    -- Reserved for future non critical extension
  }
  v4NonCriticalExtensions        SEQUENCE {
    nonCriticalExtensions-r3        SEQUENCE {
      rrcConnectionSetupComplete-rrv4ext RRCConnectionSetupComplete-rrv4ext,
      nonCriticalExtensions-rrv4      SEQUENCE {}          OPTIONAL
    }
  }
  }
  OPTIONAL
}

RRCConnectionSetupComplete-v370ext ::= SEQUENCE {
  -- User equipment IEs
  ue-RadioAccessCapability-v370eExt UE-RadioAccessCapability-v370eExt  OPTIONAL
}

RRCConnectionSetupComplete-rrv4ext ::= SEQUENCE {
  -- User equipment IEs
  ue-RadioAccessCapability-rrv4ext   UE-RadioAccessCapability-rrv4ext   OPTIONAL
}

```

```

-- *****
--
-- UE CAPABILITY INFORMATION
--
-- *****

UECapabilityInformation ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier      OPTIONAL,
  ue-RadioAccessCapability       UE-RadioAccessCapability       OPTIONAL,
  -- Other IEs
  ue-RATSpecificCapability       InterRAT-UE-RadioAccessCapabilityList
  OPTIONAL,
  Extension mechanism for non-release99 information
  -- Non critical extensions
  v370NonCriticalExtensions      SEQUENCE {
    ueUECapabilityInformation-v370ext UECapabilityInformation-v370ext,
    -- Reserved for future non critical extension
    v4NonCriticalExtensions      SEQUENCE {
      nonCriticalExtensions-r3 SEQUENCE {
        ueCapabilityInformation-rv4ext UECapabilityInformation-rv4ext,
        nonCriticalExtensions-rv4 SEQUENCE {} OPTIONAL
      }
    } OPTIONAL
  } OPTIONAL
}

UECapabilityInformation-v370ext ::= SEQUENCE {
  -- User equipment IEs
  ue-RadioAccessCapability-v370ext UE-RadioAccessCapability-v370ext OPTIONAL
}

UECapabilityInformation-rv4ext ::= SEQUENCE {
  -- User equipment IEs
  ue-RadioAccessCapability-rv4ext UE-RadioAccessCapability-rv4ext OPTIONAL
}

```

11.3 Information element definitions

```

-- *****
--
--     USER EQUIPMENT INFORMATION ELEMENTS (10.3.3)
--
-- *****

ActivationTime ::=                               INTEGER (0..255)
-- TABULAR : value 'now' always appear as default, and is encoded by absence of the field

BackoffControlParams ::=                       SEQUENCE {
    n-AP-RetransMax                             N-AP-RetransMax,
    n-AccessFails                             N-AccessFails,
    nf-BO-NoAICH                             NF-BO-NoAICH,
    ns-BO-Busy                               NS-BO-Busy,
    nf-BO-AllBusy                             NF-BO-AllBusy,
    nf-BO-Mismatch                             NF-BO-Mismatch,
    t-CPCH                                     T-CPCH
}

C-RNTI ::=                                     BIT STRING (SIZE (16))

CapabilityUpdateRequirement ::=                SEQUENCE {
    ue-RadioCapabilityFDDUpdateRequirement-FDD  BOOLEAN,
-- The following is for 3.84Mcps TDD update requirement
    ue-RadioCapabilityTDDUpdateRequirement-TDD  BOOLEAN,
    systemSpecificCapUpdateReqList             SystemSpecificCapUpdateReqList    OPTIONAL
}

CapabilityUpdateRequirement-r4Ext ::= SEQUENCE {
    ue-RadioCapabilityUpdateRequirement-TDD128  BOOLEAN
}

CapabilityUpdateRequirement-r4 ::= SEQUENCE {
    ue-RadioCapabilityFDDUpdateRequirement-FDD  BOOLEAN,
    ue-RadioCapabilityTDDUpdateRequirement-TDD384  BOOLEAN,
    ue-RadioCapabilityTDDUpdateRequirement-TDD128  BOOLEAN,
    systemSpecificCapUpdateReqList             SystemSpecificCapUpdateReqList    OPTIONAL
}

CellUpdateCause ::=                           ENUMERATED {
    cellReselection,
    periodicalCellUpdate,
    uplinkDataTransmission,
    utran-pagingResponse,
    re-enteredServiceArea,
    radiolinkFailure,
    rlc-unrecoverableError,
    spare1 }

ChipRateCapability ::=                         ENUMERATED {
    mcps3-84, mcps1-28 }

CipheringAlgorithm ::=                         ENUMERATED {
    uea0, uea1 }

CipheringModeCommand ::=                       CHOICE {
    startRestart                               CipheringAlgorithm,
    stopCiphering                               NULL
}

CipheringModeInfo ::=                          SEQUENCE {
    cipheringModeCommand                       CipheringModeCommand,
-- TABULAR: The ciphering algorithm is included in
-- the CipheringModeCommand.
    activationTimeForDPCH                     ActivationTime    OPTIONAL,
    rb-DL-CiphActivationTimeInfo              RB-ActivationTimeInfoList    OPTIONAL
}

CN-DRX-CycleLengthCoefficient ::=              INTEGER (6..9)

CN-PagedUE-Identity ::=                       CHOICE {
    imsi-GSM-MAP                               IMSI-GSM-MAP,
    tmsi-GSM-MAP                               TMSI-GSM-MAP,
    p-TMSI-GSM-MAP                             P-TMSI-GSM-MAP,
}

```

```

    imsi-DS-41          IMSI-DS-41,
    tmsi-DS-41          TMSI-DS-41
}

CompressedModeMeasCapability ::= SEQUENCE {
    fdd-Measurements      BOOLEAN,
    -- TABULAR: The IEs below are made optional since they are conditional based
    -- on another information element. Their absence corresponds to the case where
    -- the condition is not true.
    -- tdd-Measurements indicates need for compressed mode for 3.84Mcps TDD measurements
    tdd-Measurements      BOOLEAN OPTIONAL,
    gsm-Measurements      GSM-Measurements OPTIONAL,
    multiCarrierMeasurements  BOOLEAN OPTIONAL
}

CompressedModeMeasCapability-LCR ::= SEQUENCE {
    tdd128-Measurements    BOOLEAN OPTIONAL
}

CompressedModeMeasCapabFDDList ::= SEQUENCE (SIZE (1..maxFreqBandsFDD)) OF
    CompressedModeMeasCapabFDD

CompressedModeMeasCapabFDD ::= SEQUENCE {
    radioFrequencyBandFDD  RadioFrequencyBandFDD OPTIONAL,
    dl-MeasurementsFDD     BOOLEAN,
    ul-MeasurementsFDD     BOOLEAN
}

CompressedModeMeasCapabTDDList ::= SEQUENCE (SIZE (1..maxFreqBandsTDD)) OF
    CompressedModeMeasCapabTDD

CompressedModeMeasCapabTDD ::= SEQUENCE {
    radioFrequencyBandTDD  RadioFrequencyBandTDD,
    dl-MeasurementsTDD     BOOLEAN,
    ul-MeasurementsTDD     BOOLEAN
}

CompressedModeMeasCapabGSMList ::= SEQUENCE (SIZE (1..maxFreqBandsGSM)) OF
    CompressedModeMeasCapabGSM

CompressedModeMeasCapabGSM ::= SEQUENCE {
    radioFrequencyBandGSM  RadioFrequencyBandGSM,
    dl-MeasurementsGSM     BOOLEAN,
    ul-MeasurementsGSM     BOOLEAN
}

CompressedModeMeasCapabMC ::= SEQUENCE {
    dl-MeasurementsMC      BOOLEAN,
    ul-MeasurementsMC      BOOLEAN
}

CPCH-Parameters ::= SEQUENCE {
    initialPriorityDelayList  InitialPriorityDelayList OPTIONAL,
    backoffControlParams     BackoffControlParams,
    powerControlAlgorithm     PowerControlAlgorithm,
    -- TABULAR: TPC step size nested inside PowerControlAlgorithm
    dl-DPCCH-BER             DL-DPCCH-BER
}

DL-DPCCH-BER ::= INTEGER (0..63)

DL-PhysChCapabilityFDD ::= SEQUENCE {
    maxNoDPCH-PDSCH-Codes    INTEGER (1..8),
    maxNoPhysChBitsReceived  MaxNoPhysChBitsReceived,
    supportForSF-512         BOOLEAN,
    supportOfPDSCH           BOOLEAN,
    simultaneousSCCPCH-DPCH-Reception  SimultaneousSCCPCH-DPCH-Reception
}

DL-PhysChCapabilityTDD ::= SEQUENCE {
    maxTS-PerFrame           MaxTS-PerFrame,
    maxPhysChPerFrame        MaxPhysChPerFrame,
    minimumSF                MinimumSF-DL,
    supportOfPDSCH           BOOLEAN,
    maxPhysChPerTS           MaxPhysChPerTS
}

DL-PhysChCapabilityTDD-LCR ::= SEQUENCE {

```



```

maxTS-PerSubFrame          MaxTS-PerSubFrame,
maxPhysChPerFrame          MaxPhysChPerSubFrame,
minimumSF                  MinimumSF-DL,
supportOfPDSCH             BOOLEAN,
maxPhysChPerTS            MaxPhysChPerTS,
supportOf8PSK              BOOLEAN
}

DL-TransChCapability ::=
  maxNoBitsReceived        MaxNoBits,
  maxConvCodeBitsReceived MaxNoBits,
  turboDecodingSupport     TurboSupport,
  maxSimultaneousTransChs  MaxSimultaneousTransChsDL,
  maxSimultaneousCCTrCH-Count MaxSimultaneousCCTrCH-Count,
  maxReceivedTransportBlocks MaxTransportBlocksDL,
  maxNumberOfTFC-InTFCS    MaxNumberOfTFC-InTFCS-DL,
  maxNumberOfTF            MaxNumberOfTF
}

DRAC-SysInfo ::=
  transmissionProbability  TransmissionProbability,
  maximumBitRate           MaximumBitRate
}

DRAC-SysInfoList ::=
  SEQUENCE (SIZE (1..maxDRACclasses)) OF
  DRAC-SysInfo

ESN-DS-41 ::=
  BIT STRING (SIZE (32))

EstablishmentCause ::=
  ENUMERATED {
    originatingConversationalCall,
    originatingStreamingCall,
    originatingInteractiveCall,
    originatingBackgroundCall,
    originatingSubscribedTrafficCall,
    terminatingConversationalCall,
    terminatingStreamingCall,
    terminatingInteractiveCall,
    terminatingBackgroundCall,
    emergencyCall,
    interRAT-CellReselection,
    interRAT-CellChangeOrder,
    registration,
    detach,
    originatingHighPrioritySignalling,
    originatingLowPrioritySignalling,
    callRe-establishment,
    terminatingHighPrioritySignalling,
    terminatingLowPrioritySignalling,
    terminatingCauseUnknown,
    spare1 }

FailureCauseWithProtErr ::=
  CHOICE {
    configurationUnsupported      NULL,
    physicalChannelFailure        NULL,
    incompatibleSimultaneousReconfiguration
                                  NULL,
    compressedModeRuntimeError    TGPSI,
    protocolError                 ProtocolErrorInformation,
    cellUpdateOccurred            NULL,
    invalidConfiguration          NULL,
    configurationIncomplete        NULL,
    unsupportedMeasurement        NULL,
    spare1                         NULL,
    spare2                         NULL,
    spare3                         NULL,
    spare4                         NULL,
    spare5                         NULL,
    spare6                         NULL,
    spare7                         NULL
  }

FailureCauseWithProtErrTrId ::=
  SEQUENCE {
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    failureCause                   FailureCauseWithProtErr
  }

GSM-Measurements ::=
  SEQUENCE {

```

```

    gsm900                BOOLEAN,
    dcs1800               BOOLEAN,
    gsm1900               BOOLEAN
}

-- If ICS-Version-r4 is included, the following IE shall be ignored.
ICS-Version ::=          ENUMERATED {
    r99 }

ICS-Version-r4 ::=      ENUMERATED {
    rel-4 }

IMSI-and-ESN-DS-41 ::=  SEQUENCE {
    imsi-DS-41           IMSI-DS-41,
    esn-DS-41           ESN-DS-41
}

IMSI-DS-41 ::=          OCTET STRING (SIZE (5..7))

InitialPriorityDelayList ::= SEQUENCE (SIZE (maxASC)) OF
    NS-IP

InitialUE-Identity ::=  CHOICE {
    imsi                 IMSI-GSM-MAP,
    tmsi-and-LAI         TMSI-and-LAI-GSM-MAP,
    p-TMSI-and-RAI       P-TMSI-and-RAI-GSM-MAP,
    imei                 IMEI,
    esn-DS-41           ESN-DS-41,
    imsi-DS-41         IMSI-DS-41,
    imsi-and-ESN-DS-41  IMSI-and-ESN-DS-41,
    tmsi-DS-41         TMSI-DS-41
}

IntegrityCheckInfo ::= SEQUENCE {
    messageAuthenticationCode MessageAuthenticationCode,
    rrc-MessageSequenceNumber RRC-MessageSequenceNumber
}

IntegrityProtActivationInfo ::= SEQUENCE {
    rrc-MessageSequenceNumberList RRC-MessageSequenceNumberList
}

IntegrityProtectionAlgorithm ::= ENUMERATED {
    uial }

IntegrityProtectionModeCommand ::= CHOICE {
    startIntegrityProtection SEQUENCE {
        integrityProtInitNumber IntegrityProtInitNumber
    },
    modify                    SEQUENCE {
        dl-IntegrityProtActivationInfo IntegrityProtActivationInfo
    }
}

IntegrityProtectionModeInfo ::= SEQUENCE {
    integrityProtectionModeCommand IntegrityProtectionModeCommand,
    -- TABULAR: DL integrity protection activation info and Integrity
    -- protection intialisation number have been nested inside
    -- IntegrityProtectionModeCommand.
    integrityProtectionAlgorithm IntegrityProtectionAlgorithm OPTIONAL
}

IntegrityProtInitNumber ::= BIT STRING (SIZE (32))

MaxHcContextSpace ::=      ENUMERATED {
    by512, by1024, by2048, by4096,
    by8192 }

MaxROHC-ContextSessions ::= ENUMERATED {
    s2, s4, s8, s12, s16, s24, s32, s48,
    s64, s128, s256, s512, s1024, s16384 }

MaximumAM-EntityNumberRLC-Cap ::= ENUMERATED {
    am3, am4, am5, am6,
    am8, am16, am30 }

```

```

-- Actual value = IE value * 16
MaximumBitRate ::= INTEGER (0..32)

MaximumRLC-WindowSize ::= ENUMERATED { mws2047, mws4095 }

MaxNoDPDCH-BitsTransmitted ::= ENUMERATED {
    b600, b1200, b2400, b4800,
    b9600, b19200, b28800, b38400,
    b48000, b57600 }

MaxNoBits ::= ENUMERATED {
    b640, b1280, b2560, b3840, b5120,
    b6400, b7680, b8960, b10240,
    b20480, b40960, b81920, b163840 }

MaxNoPhysChBitsReceived ::= ENUMERATED {
    b600, b1200, b2400, b3600,
    b4800, b7200, b9600, b14400,
    b19200, b28800, b38400, b48000,
    b57600, b67200, b76800 }

MaxNoSCCPCH-RL ::= ENUMERATED {
    r11 }

MaxNumberOfTF ::= ENUMERATED {
    tf32, tf64, tf128, tf256,
    tf512, tf1024 }

MaxNumberOfTFC-InTFCS-DL ::= ENUMERATED {
    tfc16, tfc32, tfc48, tfc64, tfc96,
    tfc128, tfc256, tfc512, tfc1024 }

MaxNumberOfTFC-InTFCS-UL ::= ENUMERATED {
    tfc4, tfc8, tfc16, tfc32, tfc48, tfc64,
    tfc96, tfc128, tfc256, tfc512, tfc1024 }

MaxPhysChPerFrame ::= INTEGER (1..224)

MaxPhysChPerSubFrame ::= INTEGER (1..96)

MaxPhysChPerTimeslot ::= ENUMERATED {
    ts1, ts2 }

MaxPhysChPerTS ::= INTEGER (1..16)

MaxSimultaneousCCTrCH-Count ::= INTEGER (1..8)

MaxSimultaneousTransChsDL ::= ENUMERATED {
    e4, e8, e16, e32 }

MaxSimultaneousTransChsUL ::= ENUMERATED {
    e2, e4, e8, e16, e32 }

MaxTransportBlocksDL ::= ENUMERATED {
    tb4, tb8, tb16, tb32, tb48,
    tb64, tb96, tb128, tb256, tb512 }

MaxTransportBlocksUL ::= ENUMERATED {
    tb2, tb4, tb8, tb16, tb32, tb48,
    tb64, tb96, tb128, tb256, tb512 }

MaxTS-PerFrame ::= INTEGER (1..14)

MaxTS-PerSubFrame ::= INTEGER (1..6)

-- TABULAR: This IE contains dependencies to UE-MultiModeRAT-Capability,
-- the conditional fields have been left mandatory for now.
MeasurementCapability ::= SEQUENCE {
    downlinkCompressedMode          CompressedModeMeasCapability,
    uplinkCompressedMode            CompressedModeMeasCapability
}

MeasurementCapability-v370 ::= SEQUENCE{
    compressedModeMeasCapabFDDList  CompressedModeMeasCapabFDDList,
    compressedModeMeasCapabTDDList  CompressedModeMeasCapabTDDList OPTIONAL,
    compressedModeMeasCapabGSMLList CompressedModeMeasCapabGSMLList OPTIONAL,
    compressedModeMeasCapabMC       CompressedModeMeasCapabMC       OPTIONAL
}

```

```

}
MeasurementCapability-r4Ext ::= SEQUENCE {
    downlinkCompressedMode-LCR
    uplinkCompressedMode-LCR
}
MessageAuthenticationCode ::= BIT STRING (SIZE (32))
MinimumSF-DL ::= ENUMERATED {
    sf1, sf16 }
MinimumSF-UL ::= ENUMERATED {
    sf1, sf2, sf4, sf8, sf16 }
MultiModeCapability ::= ENUMERATED {
    tdd, fdd, fdd-tdd }
MultiRAT-Capability ::= SEQUENCE {
    supportOfGSM
    supportOfMulticarrier
}
N-300 ::= INTEGER (0..7)
N-301 ::= INTEGER (0..7)
N-302 ::= INTEGER (0..7)
N-304 ::= INTEGER (0..7)
N-308 ::= INTEGER (1..8)
N-310 ::= INTEGER (0..7)
N-312 ::= ENUMERATED {
    s1, s50, s100, s200, s400,
    s600, s800, s1000 }
N-313 ::= ENUMERATED {
    s1, s2, s4, s10, s20,
    s50, s100, s200 }
N-315 ::= ENUMERATED {
    s1, s50, s100, s200, s400,
    s600, s800, s1000 }
N-AccessFails ::= INTEGER (1..64)
N-AP-RetransMax ::= INTEGER (1..64)
NetworkAssistedGPS-Supported ::= ENUMERATED {
    networkBased,
    ue-Based,
    bothNetworkAndUE-Based,
    noNetworkAssistedGPS }
NF-BO-AllBusy ::= INTEGER (0..31)
NF-BO-NoAICH ::= INTEGER (0..31)
NF-BO-Mismatch ::= INTEGER (0..127)
NS-BO-Busy ::= INTEGER (0..63)
NS-IP ::= INTEGER (0..28)
P-TMSI-and-RAI-GSM-MAP ::= SEQUENCE {
    p-TMSI
    rai
}
PagingCause ::= ENUMERATED {
    terminatingConversationalCall,
    terminatingStreamingCall,
    terminatingInteractiveCall,
    terminatingBackgroundCall,
    terminatingHighPrioritySignalling,

```

```

        terminatingLowPrioritySignalling,
        terminatingCauseUnknown
    }

PagingRecord ::=
    CHOICE {
        cn-Identity
            SEQUENCE {
                pagingCause
                cn-DomainIdentity
                cn-pagedUE-Identity
            },
        utran-Identity
            SEQUENCE {
                u-RNTI
                cn-OriginatedPage-connectedMode-UE
                pagingCause
                cn-DomainIdentity
                pagingRecordTypeID
            }
    } OPTIONAL

PagingRecordList ::=
    SEQUENCE (SIZE (1..maxPage1)) OF
        PagingRecord

PDCP-Capability ::=
    SEQUENCE {
        losslessSRNS-RelocationSupport
            BOOLEAN,
        supportForRfc2507
            CHOICE {
                notSupported
                supported
            }
    }

PDCP-Capability-r4ext ::=
    SEQUENCE {
        supportForRfc3095
            CHOICE {
                notSupported
                supported
            }
        maxROHC-ContextSessions
            INTEGER (0..65535)
        reverseCompressionDepth
            INTEGER (0..65535)
    }
    DEFAULT s16,
    DEFAULT 0

PhysicalChannelCapability ::=
    SEQUENCE {
        fddPhysChCapability
            SEQUENCE {
                downlinkPhysChCapability
                uplinkPhysChCapability
            }
        -- The following describes the 3.84Mcps TDD physical channel capability
        tddPhysChCapability
            SEQUENCE {
                downlinkPhysChCapability
                uplinkPhysChCapability
            }
    }

-- The following describes the 1.28Mcps TDD physical channel capability
PhysicalChannelCapability-LCR ::=
    SEQUENCE {
        tdd128-PhysChCapability
            SEQUENCE {
                downlinkPhysChCapability
                uplinkPhysChCapability
            }
    }
    OPTIONAL

PNBSCH-Allocation-r4 ::=
    SEQUENCE {
        numberOfRepetitionsPerSFNPeriod
            ENUMERATED {
                c2, c3, c4, c5, c6, c7, c8, c9, c10,
                c12, c14, c16, c18, c20, c24, c28, c32,
                c36, c40, c48, c56, c64, c72, c80
            }
    }

ProtocolErrorCause ::=
    ENUMERATED {
        asn1-ViolationOrEncodingError,
        messageTypeNonexistent,
        messageNotCompatibleWithReceiverState,
        ie-ValueNotComprehended,
        conditionalInformationElementError,
        messageExtensionNotComprehended,
        spare1, spare2
    }

ProtocolErrorIndicator ::=
    ENUMERATED {

```

```

noError, errorOccurred }

ProtocolErrorIndicatorWithMoreInfo ::=
    CHOICE {
        noError                NULL,
        errorOccurred          SEQUENCE {
            rrc-TransactionIdentifier  RRC-TransactionIdentifier,
            protocolErrorInformation    ProtocolErrorInformation
        }
    }

ProtocolErrorMoreInformation ::= SEQUENCE {
    diagnosticsType          CHOICE {
        type1                CHOICE {
            asnl-ViolationOrEncodingError  NULL,
            messageTypeNonexistent         NULL,
            messageNotCompatibleWithReceiverState
                IdentificationOfReveivedMessage,
            ie-ValueNotComprehended        IdentificationOfReveivedMessage,
            conditionalInformationElementError  IdentificationOfReveivedMessage,
            messageExtensionNotComprehended  IdentificationOfReveivedMessage,
            spare1                     NULL,
            spare2                     NULL
        },
        spare                    NULL
    }
}

RadioFrequencyBandFDD ::= ENUMERATED {
    fdd2100,
    fdd1900,
    fdd1800,
    spare1, spare2, spare3, spare4, spare5, spare6}

RadioFrequencyBandTDDList ::= ENUMERATED {
    a, b, c, ab, ac, bc, abc }

RadioFrequencyBandTDD ::= ENUMERATED (a, b, c, spare)

RadioFrequencyBandGSM ::= ENUMERATED {
    gsm450,
    gsm480,
    gsm850,
    gsm900P,
    gsm900E,
    gsm1800,
    gsm1900,
    spare1, spare2, spare3, spare4, spare5,
    spare6, spare7, spare8, spare9}

Rb-timer-indicator ::= SEQUENCE {
    t314-expired        BOOLEAN,
    t315-expired        BOOLEAN }

Re-EstablishmentTimer ::= ENUMERATED {
    useT314, useT315
}

RedirectionInfo ::= CHOICE {
    frequencyInfo      FrequencyInfo,
    interRATInfo       InterRATInfo
}

RejectionCause ::= ENUMERATED {
    congestion,
    unspecified }

ReleaseCause ::= ENUMERATED {
    normalEvent,
    unspecified,
    pre-emptiveRelease,
    congestion,
    re-establishmentReject,
    directedsignallingconnectionre-establishment,
    userInactivity }

RF-Capability ::= SEQUENCE {
    fddRF-Capability SEQUENCE {

```

```

        ue-PowerClass          UE-PowerClass,
        txRxFrequencySeparation TxRxFrequencySeparation
    }
    OPTIONAL,
    tddRF-Capability          SEQUENCE {
        ue-PowerClass          UE-PowerClass,
        radioFrequencyTDDBandList RadioFrequencyTDDBandList,
        chipRateCapability      ChipRateCapability
    }
    OPTIONAL
}

RF-Capability-r4Ext ::= SEQUENCE {
    tddRF-Capability          SEQUENCE {
        ue-PowerClass          UE-PowerClass,
        radioFrequencyBandList RadioFrequencyBand,
        chipRateCapability      ChipRateCapability
    }
    OPTIONAL
}

RLC-Capability ::= SEQUENCE {
    totalRLC-AM-BufferSize    TotalRLC-AM-BufferSize,
    maximumRLC-WindowSize     MaximumRLC-WindowSize,
    maximumAM-EntityNumber    MaximumAM-EntityNumberRLC-Cap
}

RRC-MessageSequenceNumber ::= INTEGER (0..15)

RRC-MessageSequenceNumberList ::= SEQUENCE (SIZE (4..5)) OF
    RRC-MessageSequenceNumber

RRC-StateIndicator ::= ENUMERATED {
    cell-DCH, cell-FACH, cell-PCH, ura-PCH }

RRC-TransactionIdentifier ::= INTEGER (0..3)

S-RNTI ::= BIT STRING (SIZE (20))

S-RNTI-2 ::= BIT STRING (SIZE (10))

SecurityCapability ::= SEQUENCE {
    cipheringAlgorithmCap      BIT STRING (SIZE (16)),
    integrityProtectionAlgorithmCap BIT STRING (SIZE (16))
}

SimultaneousSCCPCH-DPCH-Reception ::= CHOICE {
    notSupported              NULL,
    supported                 SEQUENCE {
        maxNoSCCPCH-RL        MaxNoSCCPCH-RL,
        simultaneousSCCPCH-DPCH-DPCH-Reception
                                BOOLEAN
        -- The IE above is applicable only if IE Support of PDSCH = TRUE
    }
}

SRNC-Identity ::= BIT STRING (SIZE (12))

START-Value ::= BIT STRING (SIZE (20))

STARTList ::= SEQUENCE (SIZE (1..maxCNdomains)) OF
    STARTSingle

STARTSingle ::= SEQUENCE {
    cn-DomainIdentity          CN-DomainIdentity,
    start-Value                START-Value
}

SystemSpecificCapUpdateReq ::= ENUMERATED {
    gsm }

SystemSpecificCapUpdateReqList ::= SEQUENCE (SIZE (1..maxSystemCapability)) OF
    SystemSpecificCapUpdateReq

T-300 ::= ENUMERATED {
    ms100, ms200, ms400, ms600, ms800,
    ms1000, ms1200, ms1400, ms1600,
}

```

```

ms1800, ms2000, ms3000, ms4000,
ms6000, ms8000 }

T-301 ::=
ENUMERATED {
ms100, ms200, ms400, ms600, ms800,
ms1000, ms1200, ms1400, ms1600,
ms1800, ms2000, ms3000, ms4000,
ms6000, ms8000 }

T-302 ::=
ENUMERATED {
ms100, ms200, ms400, ms600, ms800,
ms1000, ms1200, ms1400, ms1600,
ms1800, ms2000, ms3000, ms4000,
ms6000, ms8000 }

T-304 ::=
ENUMERATED {
ms100, ms200, ms400,
ms1000, ms2000, spare1, spare2, spare3 }

T-305 ::=
ENUMERATED {
noUpdate, m5, m10, m30,
m60, m120, m360, m720 }

T-307 ::=
ENUMERATED {
s5, s10, s15, s20,
s30, s40, s50 }

T-308 ::=
ENUMERATED {
ms40, ms80, ms160, ms320 }

T-309 ::=
INTEGER (1..8)

T-310 ::=
ENUMERATED {
ms40, ms80, ms120, ms160,
ms200, ms240, ms280, ms320 }

T-311 ::=
ENUMERATED {
ms250, ms500, ms750, ms1000,
ms1250, ms1500, ms1750, ms2000 }

T-312 ::=
INTEGER (0..15)

T-313 ::=
INTEGER (0..15)

T-314 ::=
ENUMERATED {
s0, s2, s4, s6, s8,
s12, s16, s20 }

T-315 ::=
ENUMERATED {
s0, s10, s30, s60, s180,
s600, s1200, s1800 }

T-316 ::=
ENUMERATED {
s0, s10, s20, s30, s40,
s50, s-inf }

T-317 ::=
ENUMERATED {
s0, s10, s30, s60, s180,
s600, s1200, s1800 }

T-CPCH ::=
ENUMERATED {
ct0, ct1 }

TMSI-and-LAI-GSM-MAP ::=
SEQUENCE {
tmsi
lai
}

TMSI-DS-41 ::=
OCTET STRING (SIZE (2..12))

TotalRLC-AM-BufferSize ::=
ENUMERATED {
kb2, kb10, kb50, kb100,
kb150, kb500, kb1000 }

-- Actual value = IE value * 0.125
TransmissionProbability ::=
INTEGER (1..8)

TransportChannelCapability ::=
SEQUENCE {

```



```

    dl-TransChCapability          DL-TransChCapability,
    ul-TransChCapability          UL-TransChCapability
}

TurboSupport ::=
    notSupported
    supported
}

TxRxFrequencySeparation ::=
    ENUMERATED {
        mhz190, mhz174-8-205-2,
        mhz134-8-245-2 }

U-RNTI ::=
    srnc-Identity
    s-RNTI
}

U-RNTI-Short ::=
    srnc-Identity
    s-RNTI-2
}

UE-ConnTimersAndConstants ::=
    SEQUENCE {
-- Optional is used also for parameters for which the default value is the last one read in SIB1
-- t-301 and n-301 should not be used by the UE in this release of the protocol
        t-301          T-301          DEFAULT ms2000,
        n-301          N-301          DEFAULT 2,
        t-302          T-302          DEFAULT ms4000,
        n-302          N-302          DEFAULT 3,
        t-304          T-304          DEFAULT ms2000,
        n-304          N-304          DEFAULT 2,
        t-305          T-305          DEFAULT m30,
        t-307          T-307          DEFAULT s30,
        t-308          T-308          DEFAULT ms160,
        t-309          T-309          DEFAULT 5,
        t-310          T-310          DEFAULT ms160,
        n-310          N-310          DEFAULT 4,
        t-311          T-311          DEFAULT ms2000,
        t-312          T-312          DEFAULT 1,
        n-312          N-312          DEFAULT s1,
        t-313          T-313          DEFAULT 3,
        n-313          N-313          DEFAULT s20,
        t-314          T-314          DEFAULT s12,
        t-315          T-315          DEFAULT s180,
        n-315          N-315          DEFAULT s1,
        t-316          T-316          DEFAULT s30,
        t-317          T-317          DEFAULT s180
    }

UE-IdleTimersAndConstants ::=
    SEQUENCE {
        t-300          T-300,
        n-300          N-300,
        t-312          T-312,
        n-312          N-312
    }

UE-MultiModeRAT-Capability ::=
    SEQUENCE {
        multiRAT-CapabilityList
        multiModeCapability
    }

UE-PowerClass ::=
    INTEGER (1..4)

UE-PowerClass-v370 ::=
    ENUMERATED(1, 2, 3, 4, spare1, spare2, spare3, spare4)

UE-RadioAccessCapability ::=
    SEQUENCE {
        ics-Version          ICS-Version,
        pdcp-Capability      PDCP-Capability,
        rlc-Capability        RLC-Capability,
        transportChannelCapability
                            TransportChannelCapability,
        rf-Capability         RF-Capability,
        physicalChannelCapability
                            PhysicalChannelCapability,
        ue-MultiModeRAT-Capability
                            UE-MultiModeRAT-Capability,
        securityCapability    SecurityCapability,
        ue-positioning-Capability
                            UE-Positioning-Capability,
        measurementCapability
                            MeasurementCapability OPTIONAL
    }

```

```

UE-RadioAccessCapability-v370 ::= SEQUENCE {
    ue-RadioAccessCapabBandFDDList    UE-RadioAccessCapabBandFDDList
}

UE-RadioAccessCapabBandFDDList ::= SEQUENCE (SIZE (1..maxFreqBandsFDD)) OF
    UE-RadioAccessCapabBandFDD

UE-RadioAccessCapabBandFDD ::= SEQUENCE{
    radioFrequencyBandFDD              RadioFrequencyBandFDD,
    fddRF-Capability                   SEQUENCE {
        ue-PowerClass                  UE-PowerClass-v370,
        txRxFrequencySeparation        TxRxFrequencySeparation
    }
    measurementCapability              MeasurementCapability-v370 OPTIONAL,
}

UE-RadioAccessCapability-r4ext ::= SEQUENCE {
    pdcp-Capability-r4ext              PDCP-Capability-r4ext,
    ics-Version-r4                     ICS-Version-r4,
    rf-Capability                     RF-Capability-r4Ext,
    physicalChannelCapability-LCR      PhysicalChannelCapability-LCR,
    measurementCapability-r4Ext        MeasurementCapability-r4Ext OPTIONAL
}

UL-PhysChCapabilityFDD ::= SEQUENCE {
    maxNoDPDCH-BitsTransmitted        MaxNoDPDCH-BitsTransmitted,
    supportOfPCPCH                    BOOLEAN
}

UL-PhysChCapabilityTDD ::= SEQUENCE {
    maxTS-PerFrame                    MaxTS-PerFrame,
    maxPhysChPerTimeslot              MaxPhysChPerTimeslot,
    minimumSF                          MinimumSF-UL,
    supportOfPUSCH                    BOOLEAN
}

UL-PhysChCapabilityTDD-LCR ::= SEQUENCE {
    maxTS-PerSubFrame                MaxTS-PerSubFrame,
    maxPhysChPerTimeslot              MaxPhysChPerTimeslot,
    minimumSF                          MinimumSF-UL,
    supportOfPUSCH                    BOOLEAN,
    supportOf8PSK                     BOOLEAN
}

UL-TransChCapability ::= SEQUENCE {
    maxNoBitsTransmitted              MaxNoBits,
    maxConvCodeBitsTransmitted        MaxNoBits,
    turboDecodingSupport              TurboSupport,
    maxSimultaneousTransChs           MaxSimultaneousTransChsUL,
    modeSpecificInfo                  CHOICE {
        fdd                            NULL,
        tdd                            SEQUENCE {
            maxSimultaneousCCTrCH-Count MaxSimultaneousCCTrCH-Count
        }
    },
    maxTransmittedBlocks              MaxTransportBlocksUL,
    maxNumberOfTFC-InTFCS             MaxNumberOfTFC-InTFCS-UL,
    maxNumberOfTF                     MaxNumberOfTF
}

UE-Positioning-Capability ::= SEQUENCE {
    standaloneLocMethodsSupported     BOOLEAN,
    ue-BasedOTDOA-Supported           BOOLEAN,
    networkAssistedGPS-Supported      NetworkAssistedGPS-Supported,
    gps-ReferenceTimeCapable          BOOLEAN,
    supportForIDL                     BOOLEAN
}

URA-UpdateCause ::= ENUMERATED {
    changeOfURA,
    periodicURAUpdate,
    re-enteredServiceArea,
    spare1 }

UTRAN-DRX-CycleLengthCoefficient ::= INTEGER (3..9)

WaitTime ::= INTEGER (0..15)

```


11.4 Constant definitions

Constant-definitions DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

```

hiPDSCHidentities          INTEGER ::= 64
hiPUSCHidentities         INTEGER ::= 64
hiRM                       INTEGER ::= 256
maxAC                     INTEGER ::= 16
maxAdditionalMeas         INTEGER ::= 4
maxASC                    INTEGER ::= 8
maxASCmap                 INTEGER ::= 7
maxASCpersist            INTEGER ::= 6
maxCCTrCH                INTEGER ::= 8
maxCellMeas              INTEGER ::= 32
maxCellMeas-1            INTEGER ::= 31
maxCNdomains             INTEGER ::= 4
maxCPCHsets              INTEGER ::= 16
maxDPCH-DLchan          INTEGER ::= 8
maxDPCHcodesPerTS       INTEGER ::= 16
-- **TODO**
maxDPDCH-UL              INTEGER ::= 6
maxDRACclasses           INTEGER ::= 8
-- **TODO**
maxFACH                   INTEGER ::= 8
maxFreq                   INTEGER ::= 8
maxFrequencybands      INTEGER ::= 4
maxFreqBandsFDD           INTEGER ::= 8
maxFreqBandsTDD           INTEGER ::= 4
maxFreqBandsGSM           INTEGER ::= 16
maxInterSysMessages      INTEGER ::= 4
maxLoCHperRLC            INTEGER ::= 2
maxMeasEvent              INTEGER ::= 8
maxMeasIntervals         INTEGER ::= 3
maxMeasParEvent           INTEGER ::= 2
maxNumCDMA2000Freqs      INTEGER ::= 8
maxNumGSMFreqRanges      INTEGER ::= 32
maxNumFDDFreqs           INTEGER ::= 8
maxNumTDDFreqs           INTEGER ::= 8
maxNoOfMeas              INTEGER ::= 16
maxOtherRAT              INTEGER ::= 15
maxPage1                  INTEGER ::= 8
maxPCPCH-APsig           INTEGER ::= 16
maxPCPCH-APsubCh         INTEGER ::= 12
maxPCPCH-CDsig           INTEGER ::= 16
maxPCPCH-CDsubCh         INTEGER ::= 12
maxPCPCH-SF              INTEGER ::= 7
maxPCPCHs                INTEGER ::= 64
maxPDCPAlgoType          INTEGER ::= 8
maxPDSCH                 INTEGER ::= 8
maxPDSCH-TFCIgroups      INTEGER ::= 256
maxPRACH                 INTEGER ::= 16
maxPRACH-FPACH           INTEGER ::= 8
maxPredefConfig          INTEGER ::= 16
maxPUSCH                 INTEGER ::= 8
maxRABsetup              INTEGER ::= 16
maxRAT                   INTEGER ::= 16
maxRB                    INTEGER ::= 32
maxRBallRABs             INTEGER ::= 27
maxRBMuxOptions          INTEGER ::= 8
maxRBperRAB              INTEGER ::= 8
maxReportedGSMCells      INTEGER ::= 6
maxRL                    INTEGER ::= 8
maxRL-1                  INTEGER ::= 7
maxROHC-PacketSizes      INTEGER ::= 16
maxROHC-Profile           INTEGER ::= 8
maxSat                   INTEGER ::= 16
maxSCCPCH                INTEGER ::= 16
maxSIB                   INTEGER ::= 32
-- **TODO**
maxSIB-FACH              INTEGER ::= 8
maxSIBperMsg             INTEGER ::= 16
maxSig                   INTEGER ::= 16
maxSRBsetup              INTEGER ::= 8
maxSubCh                 INTEGER ::= 12

```

```
maxSystemCapability    INTEGER ::= 16
maxTF                  INTEGER ::= 32
maxTF-CPCH             INTEGER ::= 16
maxTFC                INTEGER ::= 1024
maxTFCI-2-Combs       INTEGER ::= 512
maxTGPS               INTEGER ::= 6
maxTrCH               INTEGER ::= 32
maxTrCHpreconf        INTEGER ::= 16
maxTS                 INTEGER ::= 14
maxTS-1               INTEGER ::= 13
maxTS-LCR             INTEGER ::= 6
maxTS-LCR-1           INTEGER ::= 5
maxURA                INTEGER ::= 8
```

END

13.4.28 UE_CAPABILITY_TRANSFERRED

This variable stores information about which UE capabilities that have been transferred to UTRAN.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
UE radio access capability	OP		UE radio access capability 10.3.3.42	
<u>UE radio access capability extension</u>	<u>OP</u>		<u>UE radio access capability extension</u> 10.3.3.42a	
UE system specific capability	OP	1 to <maxSystemCapability>	Inter-RAT UE radio access capability 10.3.8.7	Includes inter-RAT classmark
>Inter-RAT UE radio access capability	MP		Inter-RAT UE radio access capability 10.3.8.7	

13.4.28a UE_CAPABILITY_REQUESTED

This variable stores information about the UE capabilities that have been requested by UTRAN but that have not yet been transferred to UTRAN.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
<u>UE radio access capability</u>	<u>OP</u>		<u>UE radio access capability</u> 10.3.3.42	
<u>UE radio access capability extension</u>	<u>OP</u>		<u>UE radio access capability extension</u> 10.3.3.42a	
<u>UE system specific capability</u>	<u>OP</u>	1 to <maxSystemCapability>	Inter-RAT UE radio access capability 10.3.8.7	<u>Includes inter-RAT classmark</u>
>Inter-RAT UE radio access capability	MP		Inter-RAT UE radio access capability 10.3.8.7	