

Technical Specification Group Services and System Aspects **TSGS#15(02)0089**
Meeting #15, Cheju Island, Korea, 11-14 March 2002

Source: TSG-SA WG4

Title: CR to TS 26.235 on " Update of AMR & AMR-WB RTP payload format " (Release 5)

Document for: Approval

Agenda Item: 7.4.3

The following CR, agreed at the TSG-SA WG4 meeting #20, is presented to TSG SA #15 for approval.

Spec	CR	Rev	Phase	Subject	Cat	Vers	WG	Meeting	S4 doc
26.235	003	2	REL-5	Update of AMR & AMR-WB RTP payload format	F	5.0.0	S4	TSG-SA WG4#20	S4-020222

CR-Form-v5

CHANGE REQUEST

⌘ **TS 26.235 CR 003** ⌘ rev **2** ⌘ Current version: **5.0.0** ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

Proposed change affects: ⌘ (U)SIM ME/UE Radio Access Network Core Network

Title:	⌘ Update of AMR & AMR-WB RTP payload format		
Source:	⌘ TSG SA WG4		
Work item code:	⌘ IMS-CODEC	Date:	⌘ 11 March 2002
Category:	⌘ F	Release:	⌘ REL-5
	<i>Use one of the following categories:</i> F (correction) A (corresponds to a correction in an earlier release) B (addition of feature), C (functional modification of feature) D (editorial modification) Detailed explanations of the above categories can be found in 3GPP TR 21.900.	<i>Use one of the following releases:</i> 2 (GSM Phase 2) R96 (Release 1996) R97 (Release 1997) R98 (Release 1998) R99 (Release 1999) REL-4 (Release 4) REL-5 (Release 5)	

Reason for change:	⌘ The normative annex B in TS 26.235 is copied from the IETF draft on AMR and AMR-WB RTP payload and storage format. The IETF draft has now changed and therefore the annex in 3GPP specification needs to be updated.		
Summary of change:	⌘ RTP payload and storage format is updated to match with the latest IETF draft		
Consequences if not approved:	⌘ Payload formats mandated in 3GPP and in IETF are different		

Clauses affected:	⌘ Annex B completely replaced with a new text		
Other specs affected:	⌘ <input type="checkbox"/> Other core specifications ⌘ <input type="checkbox"/> Test specifications ⌘ <input type="checkbox"/> O&M Specifications	⌘ TS 26.236	
Other comments:	⌘		

How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at: http://www.3gpp.org/3G_Specs/CRs.htm. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/>. For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

~~Annex B (normative): AMR and AMR-WB RTP payload and MIME type registration~~

This section specifies the ~~AMR and AMR-WB speech codec RTP payload and MIME type registration.~~

Note: ~~The intention is to replace this normative annex with the IETF RFC defining the AMR and AMR-WB RTP payload and MIME media type registration when the RFC is available.~~

~~B.1 AMR and AMR-WB RTP payload~~

The ~~AMR and AMR-WB payload format supports transmission of multiple frames per payload, the use of fast codec mode adaptation, and robustness against packet loss and bit errors.~~

The ~~payload format consists of one payload header with an optional interleaving extension, a table of contents, optionally one CRC per payload frame and zero or more payload frames.~~

The ~~payload format is either bandwidth efficient or octet aligned, the mode of operation to use has to be signalled at session establishment. Only the octet aligned format has the possibility to use the robust sorting, interleaving and CRC to make it robust to packet loss and bit errors. In the octet aligned format the payload header, table of contents entries and the payload frames are individually octet aligned to make implementations efficient, but in the bandwidth efficient format only the full payload is octet aligned. If the option to transmit a robust sorted payload is signaled the full payload SHALL finally be ordered in descending bit error sensitivity order to be prepared for unequal error protection or unequal error detection schemes. The encoded bit streams are defined in sensitivity order in Annex B of [2] and [4], the original order as delivered from the speech encoder is defined in [1] and [3].~~

~~Octet alignment of a field or payload means that the last octet MUST be padded with zeroes at the end to fill the octet. Note that this padding is separate from padding indicated by the P bit in the RTP header.~~

The ~~AMR frame types, or modes, are defined in [2] and the corresponding description for AMR-WB is found in [4]. The extra comfort noise types specified in table 1a in [2], i.e. frame type 9-11 GSM-EFR-CN, IS-641-CN and PDC-EFR-CN, MUST NOT be used in this payload format. Frame type 14 (only available for AMR-WB), SPEECH_LOST, and 15, NO_DATA, are needed to indicate not transmitted frames or lost frames. NO_DATA could mean both no data produced by the speech encoder for this frame or no data transmitted in this payload, i.e. valid data for this frame could be sent in an earlier or following packets. For example, when multiple frames are sent in each payload and comfort noise starts. A frame type sequence in a payload with 8 speech frames using AMR mode 7 is interrupted by DTX operation in the fifth frame, looks like: {7,7,7,7,8,15,15,8}. Note that packets containing only NO_DATA frames SHOULD not be transmitted. Also, NO_DATA frames at the end of a packet SHOULD NOT be transmitted, except in the case of interleaving. The AMR-SCR/DTX is described in [6] and AMR-WB-SCR/DTX in [7].~~

~~Robustness against packet loss can be accomplished by using the possibility to retransmit previously transmitted frames together with the current frame or frames. This is done by using a sliding window to group the speech frames to send in each payload, see figure 1. A packet containing redundant frames will not look different from a packet with only new frames. The receiver may receive multiple copies or versions (encoded with different modes) of a frame for a certain timestamp if no packet losses are experienced. If multiple versions of a speech frame is received, it is RECOMMENDED that the mode with the highest rate is used by the speech decoder.~~

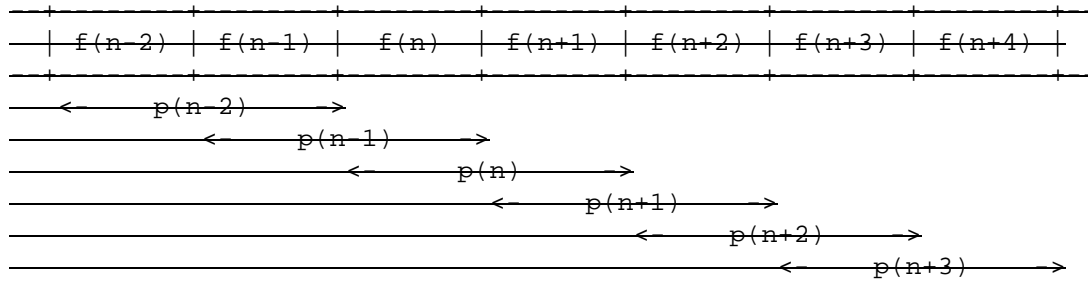


Figure 1: An example of retransmission where each frame is retransmitted one time in the following payload. $f(n-2)..f(n+4)$ denotes a sequence of speech frames and $p(n-2)..p(n+3)$ a sequence of payloads.

The sender is responsible for selecting an appropriate amount of redundancy based on feedback about the channel, e.g. RTCP receiver reports. To avoid congestion problems, congestion control **MUST** be considered, see also section B.2. With AMR it is possible to add redundancy with little or no extra bandwidth by switching to an AMR mode with lower rate.

Another approach to increase robustness against packet loss is to use the **OPTIONAL** frame interleaving to reduce the speech quality effect of packet losses. The interleaving improves perceived speech quality since it introduces single frame errors instead of several consecutive frame errors. Note that interleaving can be applied only if the receiver has signaled support for it in capability description.

The performance over error tolerant links can be improved by delivering also speech frames with bit errors. Unequal error detection is needed since bit errors **SHOULD** only be allowed in the least error sensitive bits. This payload format provides two alternative methods to implement unequal error detection:

A. CRC calculation over the class A speech bits

The **OPTIONAL** CRC **MAY** be used to protect the class A speech bits. The number of class A bits is specified as informative for AMR in [2] and therefore copied into table 1 as normative for this payload format. The number of class A bits for AMR-WB are specified as normative in table 2 in [4] and these numbers **MUST** be used also for this payload format. Speech frames with errors in class A bits **MUST** be marked with **SPEECH_BAD** for corrupted speech frames (FT=0..7 for AMR and FT=0..8 for AMR-WB) or **SID_BAD** for corrupted SID frames (FT=8 for AMR and FT=9 for AMR-WB) and be sent to the speech decoder, see [6] and [7]. In this case the RTP header, payload header and table of contents **SHOULD** be covered by a transport layer checksum, e.g. UDP lite [13]. Packets **SHOULD** be discarded if the transport layer checksum detects errors.

B. Robust sorting of payload bits

Robust behavior can also be accomplished by robust sorting of the payload. This enables the use of UED (e.g. UDP-lite) and UEP (e.g. ULP [19]). The UED and/or UEP is **RECOMMENDED** to cover at least the RTP header, payload header, table of contents and class A bits.

Support for unequal error detection is **OPTIONAL**. If either scheme is to be used, it **MUST** be signaled out of band.

Index	Class A		total speech	
	Mode	bits	bits	bits
0	AMR 4.75	42	95	
1	AMR 5.15	49	103	
2	AMR 5.9	55	118	
3	AMR 6.7	58	134	
4	AMR 7.4	61	148	
5	AMR 7.95	75	159	
6	AMR 10.2	65	204	
7	AMR 12.2	81	244	

Table 1. The number of class A bits for the AMR codec.

A frame quality indicator is included for interoperability with the ATM payload format described in ITU T.366.2, the UMTS Iu interface [17] and other transport formats. The speech quality is improved if damaged frames are forwarded to the speech decoder error concealment unit and not dropped. In many communication scenarios the AMR or AMR-WB encoded bits will be transmitted from one IP/UDP/RTP terminal to a terminal in a system with another transport format and/or vice versa. The transport format transcoding will be done in a gateway. A second likely scenario is that IP/UDP/RTP is used as transport between other systems, i.e. IP is originated and terminated in gateways on both sides of the IP transport.

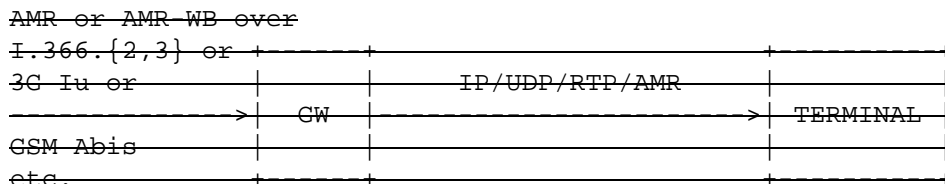


Figure 2: GW to VoIP terminal scenario

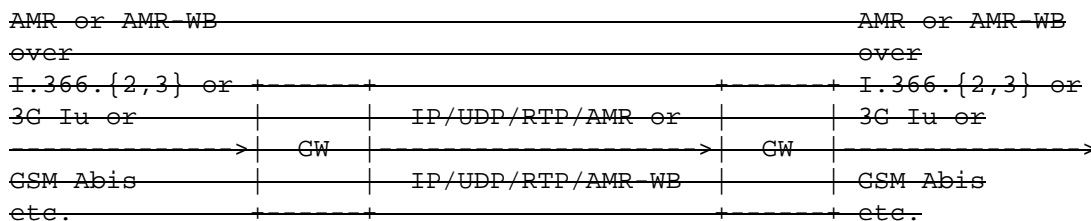


Figure 3: GW to GW scenario

The complete payload consists of one payload header (section B.1.2) a table of contents (section B.1.3) and one or more speech frames (section B.1.4) sorted in either simple or robust order. The process by which the complete payload is assembled is described in section B.1.5.

B.1.1. RTP header usage

The RTP header marker bit (M) is used to mark (M=1) the packages containing as their first frame the first speech frame after a comfort noise period in DTX operation. For all other packets the marker bit is set to zero (M=0).

The timestamp corresponds to the sampling instant of the first sample encoded for the first frame in the packet. A frame can be either encoded speech, comfort noise parameters, NO_DATA, or SPEECH_LOST (only for AMR-WB). The timestamp unit is in samples. The duration of one speech frame is 20 ms and the sampling frequency is 8 kHz, corresponding to 160 encoded speech samples per frame for AMR and 16 kHz corresponding to 320 samples per frame in AMR-WB. Thus, the timestamp is increased by 160 for AMR and 320 for AMR-WB for each consecutive frame. All frames in a packet MUST be successive 20 ms frames except if interleaving is employed, then frames encapsulated into a payload MUST be picked as defined in section B.1.2.

The payload MAY be padded using P bit in the RTP header. The assignment of an RTP payload type for this new packet format is outside the scope of this document, and will not be specified here. It is expected that the RTP profile for a particular class of applications will assign a payload type for this encoding, or if that is not done then a payload type in the dynamic range SHOULD be chosen.

B.1.2. The payload header

The payload header consists of a 4 bit codec mode request. If octet aligned operation is used the payload header is padded to fill an octet and optionally an 8 bit interleaving header may extend the payload header. The bits in the header are specified as follows:

CMR (4 bits): Indicates Codec Mode Requested for the other communication direction. It is only allowed to request one of the speech modes of the used codec, frame type index 0..7 for AMR, see Table 1a in [2] or frame type index 0..8 for AMR-WB, see Table 1a in [4]. CMR value 15 indicates that no mode request is present, other values are for future use. It is RECOMMENDED that the encoder follows a received mode request, but if the encoder has reason for not follow the mode request, e.g. congestion control, it MAY use another mode. The codec mode request (CMR) MUST be set to 15 for packets sent to a multicast group. The encoder in the sender SHOULD ignore mode requests when sending to a multicast session but MAY use RTP feedback information as a hint that a mode change is needed. The codec mode selection MAY be restricted by the mode set definition at session set up. If so, the selected codec mode MUST be in the signaled mode set.

R: Is a reserved bit that MUST be set to zero. All R bits MUST be ignored by the receiver.




Figure 4: Payload header for bandwidth efficient operation.




Figure 5: Payload header for octet aligned operation.

If the use of interleaving is signaled out of band at session set up, octet aligned operation MUST be used. When interleaving is used the payload header is extended with two 4 bit fields, ILL and ILP, used to describe the interleaving scheme.

ILL (4 bits): OPTIONAL field that is present only if interleaving is signaled. The value of this field specifies the interleaving length used for frames in this payload.

ILP (4 bits): OPTIONAL field that is present only if interleaving is signaled. The value of this field indicates the interleaving index for frames in this payload. The value of ILP MUST be smaller than or equal to the value of ILL. Erroneous value of ILP SHOULD cause the payload to be discarded.

The value of the ILL field defines the length of an interleave group:

$ILL=L$ implies that frames in $(L+1)$ frame intervals are picked into the same interleaved payload, and the interleave group consists of $L+1$ payloads. The size of the interleaving group is the $N*(L+1)$, if N is the number of frames per payload. The value of ILL MUST only be changed between interleave groups. The value of $ILP=p$ in payloads belonging to the same group runs from 0 to L . The interleaving is meaningful only when the number of frames per payload (N) is greater than or equal to 2. All payloads in an interleave group MUST contain equally many speech frames. When N frames are transmitted in each payload of a group, the interleave group consists of payloads with sequence numbers $s...s+L$, and frames encapsulated into these payloads are $f...f+N*(L+1)-1$.

To put this in a form of an equation, assume that the first frame of an interleave group is n , the first payload of the group is s , number of frames per payload is N , $ILL=L$ and $ILP=p$ (p in range $0...L$), the frames contained by the payload $s+p$ are $n+p+k*(L+1)$, where k runs from 0 to $N-1$. I.e.

- The first packet of an interleave group: $ILL=L, ILP=0$
 Payload: s
 Frames: $n, n+(L+1), n+2*(L+1), \dots, n+(N-1)*(L+1)$
- The second packet of an interleave group: $ILL=L, ILP=1$
 Payload: $s+1$
 Frames: $n+1, n+1+(L+1), n+1+2*(L+1), \dots, n+1+(N-1)*(L+1)$
- ...

The last packet of an interleave group: ILL=L, ILP=L
 Payload: s+L
 Frames: n+L, n+L+(L+1), n+L+2*(L+1), ..., n+L+(N-1)*(L+1)

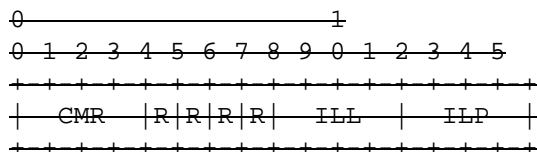


Figure 6: Octet aligned operation payload header with interleaving extension.

B.1.3. The payload table of contents and CRCs

The table of contents (ToC) consists of one entry for each speech frame in the payload. A table of contents entry includes several specified fields as follows:

F (1 bit): Indicates if this frame is followed by further speech frames in this payload or not. F=1 further frames follow, F=0 last frame.

FT (4 bits): Frame type indicator, indicating the AMR or AMR-WB speech coding mode or comfort noise (SID) mode. The mapping of existing modes to FT is given in Table 1a in [2] for AMR and in Table 1a in [4] for AMR-WB. If FT=14 (speech lost, available only in AMR-WB) or FT=15 (No transmission/no reception) no CRC or payload frame is present.

Q (1 bit): The payload quality bit indicates, if not set, that the payload is severely damaged and the receiver should set the RX_TYPE, see [6], to SPEECH_BAD or SID_BAD depending on the frame type (FT).

P: Is a padding bit, MUST be set to zero.




Figure 7: Table of contents entry field for bandwidth efficient operation.

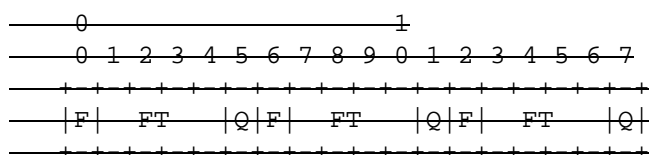


Figure 8: An example of a ToC when using bandwidth efficient operation.





Figure 9: Table of contents entry field for octet aligned operation.

CRC (8 bits): OPTIONAL field, exists if the use of CRC is signaled at session set up and SHALL only be used in octet aligned operation. The 8 bit CRC is used for error detection. The algorithm to generate these 8 parity bits are defined in section 4.1.4 in [2].






Figure 10: CRC field

The ToC and CRCs are arranged with all table of contents entries fields first followed by all CRC fields. The ToC starts with the frame data belonging to the oldest speech frame.

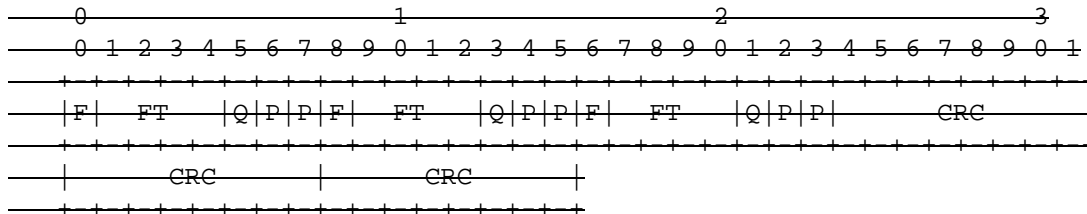


Figure 11: The ToC and CRCs for a payload with three speech frames when using octet aligned operation.

B.1.4. Speech frame

A speech frame represents one frame encoded with the mode according to the ToC field FT. The length of this field is implicitly defined by the mode in the FT field. The bits SHALL be sorted according to Annex B of [2] for AMR and Annex B of [4] for AMR-WB.

If octet aligned operation is used, the last octet of each speech frame MUST be padded with zeroes at the end if not all bits are used.

B.1.5. Compound payload

The compound payload consists of one payload header, the table of contents and one or more speech frames, see section B.1.2, B.1.3 and B.1.4. These elements SHALL be put together to form a payload with either simple or robust sorting. If the bandwidth efficient operation is used, simple sorting MUST be used.

Definitions for describing the compound payload:

- b(m) — bit m of the compound payload, octet aligned
- e(n,m) — bit m of octet n in the octet description of the compound payload, bit 0 is MSB
- t(n,m) — bit m in the table of contents entry for speech frame n
- p(n,m) — bit m in the CRC for speech frame n
- f(n,m) — bit m in speech frame n
- F(n) — number of bits in speech frame n, defined by FT
- h(m) — bit m of payload header
- C(n) — number of CRC bits for speech frame n, 0 or 8 bits
- P(n) — number of padding bits for speech frame n
- N — number of payload frames in the payload
- S — number of unused bits

Payload frames f(n,m) are ordered in consecutive order, where frame n is preceding frame n+1. Within one payload with multiple speech frames the sequence of speech frames MUST contain all speech frames in the sequence. If interleaving is used the interleaving rules defined in section B.1.2 applies for which frames that are contained in the payload. If speech data is missing for one or more frames in the sequence of frames in the payload, due to e.g. DTX, send the NO_DATA frame type in the ToC for these frames. This does not mean that all frames must be sent, only that the sequence of frames in one payload MUST indicate missing frames. Payloads containing only NO_DATA frames SHOULD NOT be transmitted.

The compound payload, b, is mapped into octets, o, where bit 0 is MSB.

B.1.5.1. Simple payload sorting

If multiple new frames are encapsulated into the payload and robust payload sorting is not used, the payload is formed by concatenating the payload header, the ToC, optional CRC fields and the speech frames in the payload. However, the bits inside a frame are ordered into sensitivity order as defined in [2] for AMR and [4] for AMR-WB.

B.1.5.1.1. Simple payload sorting for bandwidth efficient operation

The simple payload sorting algorithm is defined in C-style as:

```

/* payload header */
k=0; H=4;
for (i = 0; i < H; i++){
    b(k++) = h(i);
}
/* table of contents */
T=6;
for (j = 0; j < N; j++){
    for (i = 0; i < T; i++){
        b(k++) = t(j,i);
    }
}
/* payload frames */
for (j = 0; j < N; j++){
    for (i = 0; i < F(j); i++){
        b(k++) = f(j,i);
    }
}
/* padding */
S = (k%8 == 0) ? 0 : 8 - k%8;
for (i = 0; i < S; i++){
    b(k++) = 0;
}
/* map into octets */
for (i = 0; i < k; i++){
    o(i/8,i%8)=b(i)
}

```

B.1.5.1.2. Simple payload sorting for octet aligned operation

In octet aligned operation is the simple payload sorting algorithm defined in C-style as:

```

/* payload header */
k=0; H=8;
if (interleaving){
    H+=8; /* Interleaving extension */
}
for (i = 0; i < H; i++){
    b(k++) = h(i);
}
/* table of contents */
T=8;
for (j = 0; j < N; j++){
    for (i = 0; i < T; i++){
        b(k++) = t(j,i);
    }
}

/* CRCs, only if signaled */

```

```


if (cre) {
for (j = 0; j < N; j++) {
for (i = 0; i < C(j); i++) {
b(k++) = p(j,i);
}
}
}
/* payload frames */
for (j = 0; j < N; j++) {
for (i = 0; i < F(j); i++) {
b(k++) = f(j,i);
}
}
/* padding of each speech frame */
s = (k%8 == 0) ? 0 : 8 - k%8;
for (i = 0; i < S; i++) {
b(k++) = 0;
}
}
/* map into octets */
for (i = 0; i < k; i++) {
o(i/8, i%8) = b(i);
}
}


```

B.1.5.2. Robust payload sorting

Robust payload sorting is only supported in octet aligned operation and MUST be signaled at session set-up.

A bit error in a more sensitive bit is subjectively more annoying than in a less sensitive bit. Therefore, to be able to protect only the most sensitive bits in a payload packet with a forward error detection or correction code, e.g. a checksum outside RTP or ULP [19], the bits inside a frame are ordered into sensitivity order. The protection SHOULD cover an appropriate number of octets from the beginning of the payload, covering at least the payload header, ToC and class A bits, see table 1 (AMR) and [4] (AMR-WB). If CRCs are used together with robust sorting only the payload header and the ToC should be covered by the transport checksum. Exactly how many octets need protection depends on the network and application. To maintain sensitivity ordering inside the payload, when more than one speech frame is transmitted in one payload, reordering of the data is needed.

When robust sorting mode is used, the reordering to maintain the sensitivity ordered payload SHALL be performed on octet level. The payload header, ToC and CRCs SHALL still be placed unchanged in the beginning of the payload. Thereafter, the payload frames are sorted with one octet alternating from each payload frame.

The robust payload sorting algorithm is defined in C style as:

```

/* payload header */
k=0; H=8;
if (interleaving) {
H += 8; /* interleaving extension */
}
for (i = 0; i < H; i++) {
b(k++) = h(i);
}
/* table of contents */
for (j = 0; j < N; j++) {
for (i = 0; i < 8; i++) {
b(k++) = t(j,i);
}
}
/* CRCs */
if (cre) {
for (j = 0; j < N; j++) {
for (i = 0; i < C(j); i++) {

```

```


    b(k++) = p(j,i);
  }
}
}
/* payload frames */
for (j = 0; j < N; j++){
  P(j) = F(j)%8 == 0 ? 0 : 8 - F(j)%8;
}
max = max(F(0), ..., F(N-1));
for (i = 0; i < max; i+=8){
  for (j = 0; j < N; j++){
    for (l = 0; l < 8; l++){
      if (i+l < F(j)+P(j)){
        if (i+l < F(j)){
          b(k++) = f(j,i+l);
        }else{
          b(k++) = 0;
        }
      }
    }
  }
}
}
}
/* map into octets */
for (i = 0; i < k; i++){
  o(i/8,i%8)=b(i)
}


```

B.1.6. Decoding security consideration

If the payload length calculation, using the information from signaling plus the F and FT fields, does not indicate the same length as the size of the payload actually received, the payload SHOULD be dropped. Decoding a packet that has errors in length indicator bits could severely degrade the speech quality. Furthermore, all receivers MUST be able to receive any speech frame multiple times, both exact duplicates and in different AMR modes.

B.1.7. Implementation considerations

Implementations SHOULD include both bandwidth efficient and octet aligned operation to give a high possibility of interoperability. The implementation of robust sorting, interleaving and CRCs are OPTIONAL.

B.2. Congestion Control

The need of congestion control for data transported with RTP has to be considered. AMR and AMR-WB speech data have some elastic properties due to the different bandwidth demand for each mode. Another parameter that can reduce the bandwidth demand for AMR and AMR-WB is how many frames of speech data that are encapsulated in each payload. This will reduce the number of packets and the overhead from IP/UDP/RTP headers. If using forward error correction (FEC) there is also the need to regulate the amount, so the FEC itself does not worsen the problem. Therefore, it is RECOMMENDED that applications using this payload implement congestion control. The actual mechanism for congestion control is not specified but should be suitable for real time flows, e.g. "Equation Based Congestion Control for Unicast Applications" [18].

B.3. Security Considerations

RTP packets using the payload format defined in this specification are subject to the security considerations discussed in the RTP specification [11]. This implies that confidentiality of the media streams is achieved by encryption. Because the payload format is arranged end-to-end, encryption MAY be performed after encapsulation so there is no conflict between the two operations.

This payload type does not exhibit any significant non uniformity in the receiver side computational complexity for packet processing to cause a potential denial of service threat.

As this format transports encoded speech, the main security issues are decoding security (see section B.1.6), confidentiality and authentication of the speech itself. The payload format itself does not have any support for security. These issues have to be solved by a payload external mechanism, e.g. SRTP [23].

Interleaving MAY affect encryption. Depending on the used encryption scheme there MAY be restrictions on for example the time when keys can be changed.

B.3.1. Confidentiality

To achieve confidentiality of the encoded speech all speech data bits must be encrypted. There is less need to encrypt the payload header or the table of contents as they only carry information about the requested speech mode, frame type and frame quality. This information could be useful to some third party, e.g. quality monitoring. The type of encryption used can not only have impact on the confidentiality but also on error robustness. The error robustness against bit errors will be none, unless an encryption method without error propagation is used, e.g. a stream cipher. This is only an issue when using UEP/D, when bit errors can be accepted in some part of the payload.

B.3.2. Authentication

To authenticate the sender of the speech an external mechanism has to be added. It is RECOMMENDED that such a mechanism protects all the speech data bits. Note that the use of UED/UEP is difficult to combine with authentication. To prevent a man in the middle from tampering with the packetization of the speech data, some extra data SHOULD be protected. The data is: the payload header, ToC, CRCs, RTP timestamp, RTP sequence number, and the RTP marker bit. Tampering could result in erroneous depacketization/decoding that could lower speech quality. Tampering with the eodec mode request field can result in that the sender must receive speech in a different quality than desired.

B.4. Examples

B.4.1. Bandwidth efficient examples

B.4.1.1. Single frame example

The bandwidth efficient single frame per payload example is employing AMR, no valid Codec Mode Request CMR is sent (CMR=15), the payload was not damaged at IP origin (Q=1). The mode is AMR 7.4 kbps (FT=4). The speech encoded bits are put into f(0) to f(147) in descending sensitivity order according to [2].

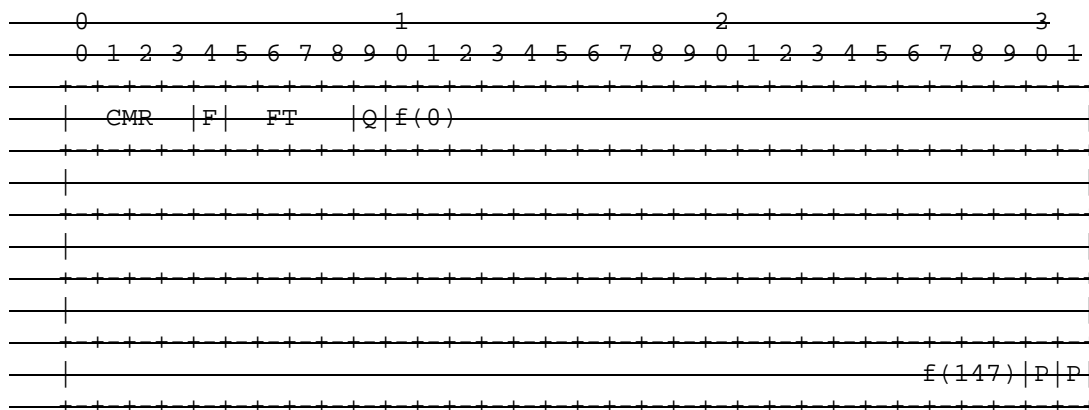


Figure 12: One frame per packet example.

B.4.1.2. Multi frame example

The bandwidth efficient multiple frame per payload example is employing AMR-WB, a Codec Mode Request CMR for the AMR-WB 8.85 kbps mode is sent (CMR=1), the payloads were not damaged at IP origin (Q=1). The mode is AMR-WB 6.6 kbps (FT=0) for the first frame, f(0) to f(131), and AMR-WB 8.85 kbps (FT=1) for the second frame, g(0) to g(176). The speech encoded bits are put into f(0) to f(131) and g(0) to g(176) in descending sensitivity order according to [4].

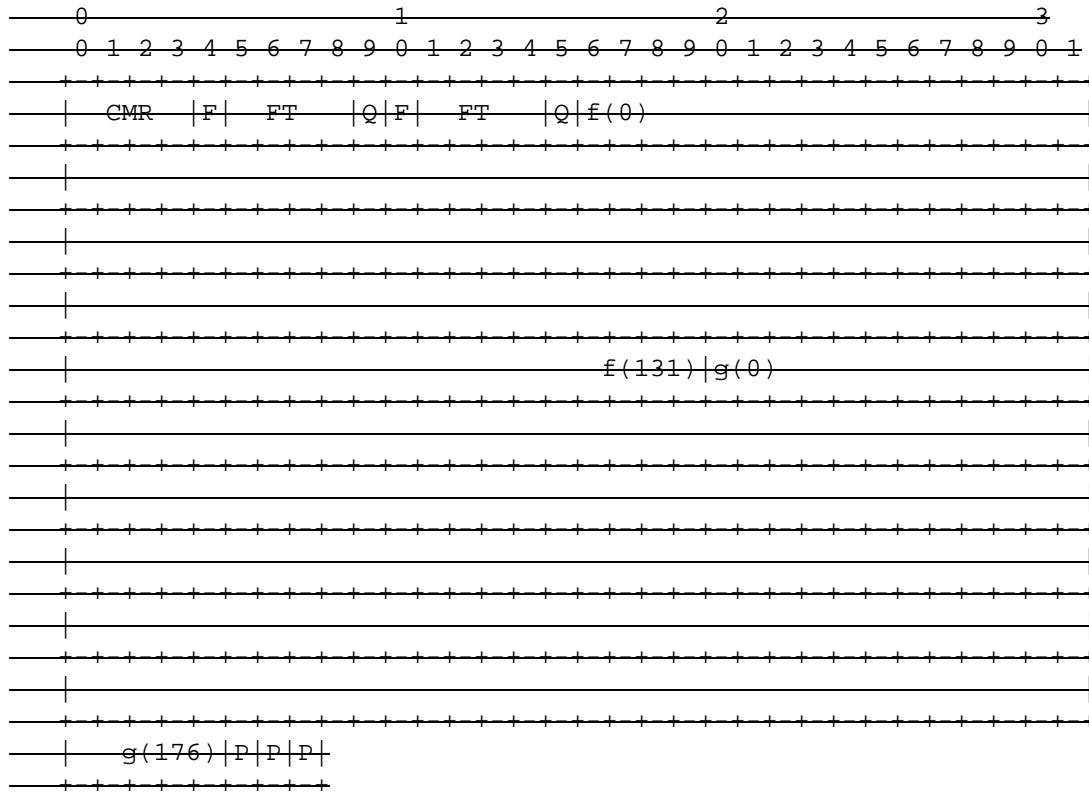


Figure 13: Two frame per packet example.

B.4.2. Octet aligned operation examples

In this example octet aligned operation of the payload format is used. Two AMR frames with 7.95 kbps mode (FT=5) are sent in the payload. A mode request is sent, requesting the 10.2 kbps mode for the other link (CMR=6). CRC is used. Interleaving is used with depth ILL=1 and index ILP=0. The first frame is frame 1, f1(0..158), and the second frame in the payload is frame 3 due to interleaving, f3(0..158). For each payload frame a CRC is calculated CRC1(0..7) for frame 1 and CRC3(0..7) for frame 3. Robust payload sorting is used.

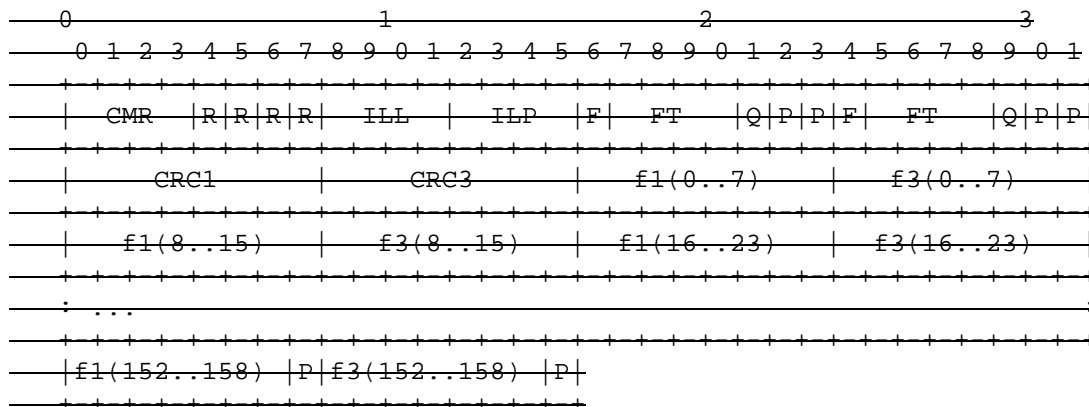


Figure 14: Example with CRCs, interleaving and robust sorting.

B.5. MIME type registration

This chapter defines the MIME types for the Adaptive Multi Rate (AMR) and Adaptive Multi Rate Wideband (AMR-WB) speech codecs, [1] and [3], respectively. To distinguish between the two codecs and emphasize that seamless switching is possible only within each of these two codecs the MIME types are kept separate although they are very similar. The data format and parameters are specified for both real-time transport and for storage-type applications (e.g. e-mail attachment, multimedia messaging). The former is referred to as RTP mode and the latter as storage mode.

Implementations according to [1] and [3] MUST support all eight coding modes for AMR and all nine coding modes for AMR-WB. The mode change within each codec can occur at any time during operation and therefore the mode information is transmitted in-band together with speech bits to allow mode change without any additional signaling.

In addition to the speech codec, AMR and AMR-WB specifications also include Discontinuous Transmission / comfort noise (DTX/CN) functionality [14] and [15]. The DTX/CN switches the transmission off during silent parts of the speech and only CN parameter updates, SID frames, are sent at regular intervals.

B.5.1. RTP mode

It is possible that the decoder may want to receive a certain speech mode or a subset of modes, due to link limitations in some cellular systems, e.g. the GSM radio link can only use a subset of at most four modes. A GSM subset can consist of any combination of the 8 AMR modes or 9 AMR-WB modes. Therefore, it is possible to request a specific set of speech modes in capability description and the encoder MUST abide by this request. If the request for mode set is not given any mode may be used or requested.

The codec can in principle perform a mode change at any time between any two modes. To support interoperability with GSM through a gateway it is possible to set limitations for mode changes. The decoder has the possibility to define the minimum number of frames between mode changes and to limit the mode change to transition into neighboring modes only.

It is also possible to limit the number of speech frames encapsulated into one RTP packet. This is an OPTIONAL feature and if no parameter is given in the capability description, the transmitter MAY encapsulate any number of speech frames into one RTP packet.

The payload CRC UED MUST be used if the receiver has signaled the use of this functionality in the capability description.

To support unequal error protection and/or detection the payload format supports robust payload sorting. The robust payload sorting is an OPTIONAL feature and SHALL be used if the receiver has signaled the use of this functionality in the capability description.

The speech quality in case of packet losses when transmitting several speech frames per packet can be improved by using the OPTIONAL frame-level interleaving. The interleaving improves perceived speech quality since it introduces series of single frame errors instead of several consecutive frame errors. Interleaving MUST be applied if the receiver has signaled the use of it in the capability description, and the interleaving length MUST NOT exceed the limitation given in capability description. Note that the receiver can use the MIME parameters to limit increased buffering requirements caused by the interleaving. For example, interleaving= I defines the maximum size of an interleave group to $I=N*(L+1)$ (see section B.1.2 for details on interleaving).

B.5.2. Storage mode

The storage mode is used for storing speech frames, e.g. as a file or e-mail attachment. The file begins with a magic number to identify that it is an AMR or AMR-WB file. AMR and AMR-WB have different magic numbers. The magic number for AMR corresponds to the ASCII character string "#!AMR\n" and for AMR-WB "#!AMR-WB\n", i.e. 0x2321414d520a and 0x2321414d522d57420a.

The speech frames are stored in consecutive order in octet aligned manner. This implies that the first octet after the last octet of frame n must be the first octet of frame $n+1$. The first octet of each stored speech frame consists of a 4-bit FT field (see definition in section B.1.3) and a Q-bit. The positions of the fields correspond to the positions of the corresponding fields of an octet aligned table of contents entry, see figure 9. Following this first octet comes the

encoded speech frames bits (see section B.1.4). The last octet of each frame is padded with zeroes, if needed, to achieve octet alignment. An example is given in figure 15.

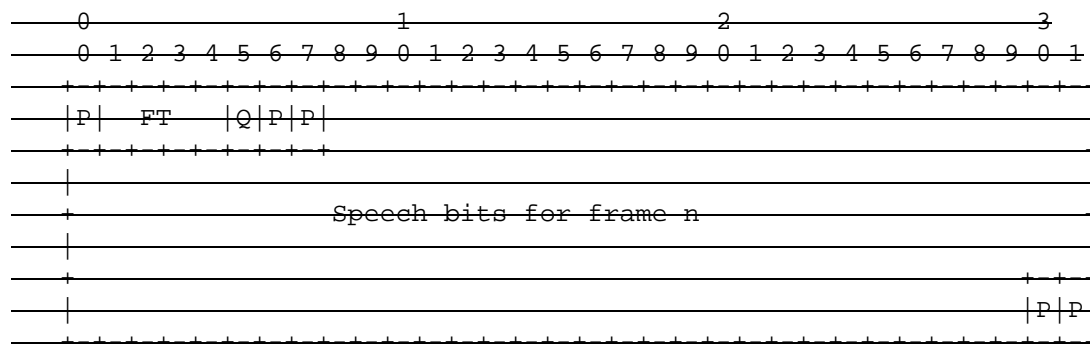


Figure 15: An example of storage format with one AMR 5.9 kbit/s frames (118 speech bits). Note that bits marked with P, "padding" MUST be set to zero.

Speech frames lost in transmission and non-received frames between SID updates during non-speech period MUST be stored as NO_DATA frames (frame type 15, see definition in [2] and [4]) or SPEECH_LOST (only available for AMR-WB) to keep synchronization with the original media.

B.5.3. AMR MIME Registration

MIME name for the AMR codec is allocated from IETF tree since AMR is expected to be widely used speech codec in VoIP applications. Some parts of this chapter will distinguish between RTP and storage modes.

Media Type name: audio

Media subtype name: AMR

Required parameters: none

Optional parameters for RTP mode:

octet-align: If present, octet aligned operation SHALL be used. If not present and no other signal indicate octet aligned operation, bandwidth efficient operation is employed.

mode-set: Requested AMR mode set. Restricts the active codec mode set to a subset of all modes. Possible values are comma separated list of modes: 0,...,7 (see Table 1a [2] an example is given in section B.5.5). If not present, all speech modes are available.

mode-change-period: Defines a number N which restricts the mode changes in such a way that mode changes are only allowed on multiples of N, initial state of the phase is arbitrary. If this parameter is not present, mode change can happen at any time.

mode-change-neighbor: If present, mode changes SHALL only be made to neighboring modes in the active codec mode set. Neighboring modes are the ones closest in bit rate to the current mode, both higher and lower rate included. If not present, change between any two modes in the active codec mode set is allowed.

maxframes: Maximum number of speech frames in one RTP packet. The receiver MAY set this parameter in order to limit the buffering requirements or delay.

erc: If present, CRCs SHALL be included in the payload, otherwise not. Implies automatically that octet-align operation is used.

robust-sorting: If present, the payload SHALL employ robust payload sorting. If not present simple payload sorting SHALL be used. Implies automatically that octet-align operation is used.

interleaving: Indicates that frame level interleaving SHALL be used and its value defines a maximum number of frames in the interleaving group (see section B.1.2). If this parameter is not present, interleaving SHALL not be used. Implies automatically that octet-align operation is used.

Optional parameters for storage mode: none

Encoding considerations for RTP mode: See chapter 2 of RFC XXXX.

Encoding considerations for storage mode: See section 6.2 of RFC XXXX.

Security considerations: see chapter 4 "Security" of RFC XXXX.

Public specification: please refer to chapter 7 "References" of RFC XXXX.

Additional information for storage mode:

Magic number: !#AMR\n

File extensions: amr, AMR

Macintosh file type code: none

Object identifier or OID: none

Intended usage: COMMON. It is expected that many VoIP applications (as well as mobile applications) will use this type.

~~B.5.4. AMR-WB MIME Registration~~

~~MIME name for the AMR-WB codec is allocated from IETF tree since AMR-WB is expected to be widely used speech codec in VoIP applications. Some parts of this chapter will distinguish between RTP and storage modes.~~

~~Media Type name: audio~~

~~Media subtype name: AMR-WB~~

~~Required parameters: none~~

~~Optional parameters for RTP mode: octet-align: If present, octet aligned operation SHALL be used. If not present and no other signal indicate octet aligned operation, bandwidth efficient operation is employed.~~

~~mode-set: Requested AMR-WB mode set. Restricts the active codec mode set to a subset of all modes. Possible values are comma separated list of modes: 0,...,8 (see Table 1a [4]). If not present, all speech modes are available.~~

~~mode-change-period: Defines a number N which restricts the mode changes in such a way that mode changes are only allowed on multiples of N, initial state of the phase is arbitrary. If this parameter is not present, mode change can happen at any time.~~

~~mode-change-neighbor: If present, mode changes SHALL only be made to neighboring modes in the active codec mode set. Neighboring modes are the ones closest in bit rate to the current mode, both higher and lower rate included. If not present, change between any two modes in the active codec mode set is allowed.~~

~~maxframes: Maximum number of speech frames in one RTP packet. The receiver MAY set this parameter in order to limit the buffering requirements or delay.~~

~~erc: If present, CRCs SHALL be included in the payload, otherwise not. Implies automatically that octet-align operation is used.~~

~~robust-sorting: If present, the payload SHALL employ robust payload sorting. If not present simple payload sorting SHALL be used. Implies automatically that octet-align operation is used.~~

~~interleaving: Indicates that frame level interleaving SHALL be used and its value defines a maximum number of frames in the interleaving group (see section B.1.2). If this parameter is not present, interleaving SHALL not be used. Implies automatically that octet-align operation is used.~~

Optional parameters for storage mode: none

Encoding considerations for RTP mode: See chapter 2 of RFC XXXX.

Encoding considerations for storage mode: See section 6.2 of RFC XXXX.

Security considerations: see chapter 4 "Security" of RFC XXXX.

Public specification: please refer to chapter 7 "References" of RFC XXXX.

Additional information for storage mode:

Magic number: `#!AMR-WB`

File extensions: `awb, AWB`

Macintosh file type code: `none`

Object identifier or OID: `none`

~~B.5.5 Mapping to SDP Parameters~~

Please note that this chapter applies only to the RTP mode.

Example of usage of AMR in SDP [16], possible GSM gateway scenario:

`m=audio 49120 RTP/AVP 97`

`a=rtpmap:97 AMR/8000`

`a=fmtp:97 mode set=0,2,5,7; mode change period=2; mode change neighbor; maxframes=1`

Example of usage of AMR-WB in SDP [16], possible VoIP scenario:

`m=audio 49120 RTP/AVP 98`

`a=rtpmap:98 AMR-WB/16000`

`a=fmtp:98 octet align`

Example of usage of AMR-WB in SDP [16], possible streaming scenario:

`m=audio 49120 RTP/AVP 99`

`a=rtpmap:99 AMR-WB/16000`

`a=fmtp:99 maxframes=3; interleaving=15`

~~B.6. References~~

[1] 3G TS 26.090, "Adaptive Multi-Rate (AMR) speech transcoding".

[2] 3G TS 26.101, "AMR Speech Codec Frame Structure".

[3] 3GPP TS 26.190 "AMR Wideband speech codec; Transcoding functions".

[4] 3GPP TS 26.201 "AMR Wideband speech codec; Frame Structure".

[5] IETF RFC 2119, "Key words for use in RFCs to Indicate Requirement Levels".

[6] 3G TS 26.093, "AMR Speech Codec; Source Controlled Rate operation".

[7] 3GPP TS 26.193 "AMR Wideband Speech Codec; Source Controlled Rate operation".

[8] GSM 06.60, "Enhanced Full Rate (EFR) speech transcoding".

[9] TIA/EIA-136 Rev.A, part 410 "TDMA Cellular/PCS Radio Interface, Enhanced Full Rate Voice Codec (ACELP). Formerly IS-641. TIA published standard, 1998".

[10] ARIB, RCR-STD-27H, "Personal Digital Cellular Telecommunication System RCR Standard".

[11] IETF RFC1889, "RTP: A Transport Protocol for Real-Time Applications".

[12] IETF draft-westberg-realtime-cellular-01.txt, "Realtime Traffic over Cellular Access Networks".

[13] IETF draft-larzon-udplite-04.txt, "The UDP Lite Protocol".

[14] GSM 06.92, "Comfort noise aspects for Adaptive Multi-Rate (AMR) speech traffic channels".

[15] 3GPP TS 26.192 "AMR Wideband speech codec; Comfort Noise aspects".

[16] M. Handley and V. Jacobson, "SDP: Session Description Protocol", RFC 2327, April 1998

[17] 3G TS 25.415 "UTRAN Iu Interface User Plane Protocols"

[18] S. Floyd, M. Handley, J. Padhye, J. Widmer, "Equation Based Congestion Control for Unicast Applications", ACM SIGCOMM 2000, Stockholm, Sweden

[19] ~~IETF draft-ietf-avt-ulp-00.txt, "An RTP Payload Format for Generic FEC with Uneven Level Protection".~~

[20] ~~IETF RFC2733, "An RTP Payload Format for Generic Forward Error Correction".~~

[21] ~~3G-TS 26.102, "AMR speech codec interface to Iu and Uu".~~

[22] ~~3GPP TS 26.202 "AMR Wideband speech codec; Interface to Iu and Uu".~~

[23] ~~draft-ietf-avt-srtp-00.txt, "The Secure Real Time Transport Protocol".~~

Annex B (normative): RTP payload format and file storage format for AMR and AMR-WB audio

This section specifies the AMR and AMR-WB speech codec RTP payload, storage format and MIME type registration. It is identical to "draft-ietf-avt-rtp-amr-12.txt". All references in the text in this Annex refer to the reference list in the end of the Annex.

NOTE: The intention is to replace this normative annex with the IETF RFC defining the AMR and AMR-WB RTP payload and MIME media type registration when the RFC is available.

B.1. Introduction

This document specifies the payload format for packetization of AMR and AMR-WB encoded speech signals into the Real-time Transport Protocol (RTP) [8]. The payload format supports transmission of multiple channels, multiple frames per payload, the use of fast codec mode adaptation, robustness against packet loss and bit errors, and interoperation with existing AMR and AMR-WB transport formats on non-IP networks, as described in Section B.3.

The payload format itself is specified in Section B.4. A related file format is specified in Section B.5 for transport of AMR and AMR-WB speech data in storage mode applications such as email. In Section B.8, two separate MIME type registrations are provided, one for AMR and one for AMR-WB.

Even though this RTP payload format definition supports the transport of both AMR and AMR-WB speech, it is important to remember that AMR and AMR-WB are two different codecs and they are always handled as different payload types in RTP.

B.2. Conventions and Acronyms

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in RFC2119 [5].

The following acronyms are used in this document:

3GPP - the Third Generation Partnership Project

AMR - Adaptive Multi-Rate Codec

AMR-WB - Adaptive Multi-Rate Wideband Codec

CMR - Codec Mode Request

CN - Comfort Noise

DTX - Discontinuous Transmission

ETSI - European Telecommunications Standards Institute

FEC - Forward Error Correction

SCR - Source Controlled Rate Operation

SID - Silence Indicator (the frames containing only CN parameters)

VAD - Voice Activity Detection

UED - Unequal Error Detection

UEP - Unequal Error Protection

The term "frame-block" is used in this document to describe the time-synchronized set of speech frames in a multi-channel AMR or AMR-WB session. In particular, in an N-channel session, a frame-block will contain N speech frames, one from each of the channels, and all N speech frames represents exactly the same time period.

B.3. Background on AMR/AMR-WB and Design Principles

AMR and AMR-WB were originally designed for circuit-switched mobile radio systems. Due to their flexibility and robustness, they are also suitable for other real-time speech communication services over packet-switched networks such as the Internet.

Because of the flexibility of these codecs, the behavior in a particular application is controlled by several parameters that select options or specify the acceptable values for a variable. These options and variables are described in general terms at appropriate points in the text of this specification as parameters to be established through out-of-band means. In Section B.8, all of the parameters are specified in the form of MIME subtype registrations for the AMR and AMR-WB encodings. The method used to signal these parameters at session setup or to arrange prior agreement of the participants is beyond the scope of this document; however, Section B.8.3 provides a mapping of the parameters into the Session Description Protocol (SDP) [11] for those applications that use SDP.

B.3.1. The Adaptive Multi-Rate (AMR) Speech Codec

The AMR codecs was originally developed and standardized by the European Telecommunications Standards Institute (ETSI) for GSM cellular systems. It is now chosen by the Third Generation Partnership Project (3GPP) as the mandatory codec for third generation (3G) cellular systems [1].

The AMR codec is a multi-mode codec that supports 8 narrow band speech encoding modes with bit rates between 4.75 and 12.2 kbps. The sampling frequency used in AMR is 8000 Hz and the speech encoding is performed on 20 ms speech frames. Therefore, each encoded AMR speech frame represents 160 samples of the original speech.

Among the 8 AMR encoding modes, three are already separately adopted as standards of their own. Particularly, the 6.7 kbps mode is adopted as PDC-EFR [14], the 7.4 kbps mode as IS-641 codec in TDMA [13], and the 12.2 kbps mode as GSM-EFR [12].

B.3.2. The Adaptive Multi-Rate Wideband (AMR-WB) Speech Codec

The Adaptive Multi-Rate Wideband (AMR-WB) speech codec [3] was originally developed by 3GPP to be used in GSM and 3G cellular systems.

Similar to AMR, the AMR-WB codec is also a multi-mode speech codec. AMR-WB supports 9 wide band speech coding modes with respective bit rates ranging from 6.6 to 23.85 kbps. The sampling frequency used in AMR-WB is 16000 Hz and the speech processing is performed on 20 ms frames. This means that each AMR-WB encoded frame represents 320 speech samples.

B.3.3. Multi-rate Encoding and Mode Adaptation

The multi-rate encoding (i.e., multi-mode) capability of AMR and AMR-WB is designed for preserving high speech quality under a wide range of transmission conditions.

With AMR or AMR-WB, mobile radio systems are able to use available bandwidth as effectively as possible. E.g. in GSM it is possible to dynamically adjust the speech encoding rate during a session so as to continuously adapt to the varying transmission conditions by dividing the fixed overall bandwidth between speech data and error protective coding to enable best possible trade-off between speech compression rate and error tolerance. To perform mode adaptation, the decoder (speech receiver) needs to signal the encoder (speech sender) the new mode it prefers. This mode change signal is called Codec Mode Request or CMR.

Since in most sessions speech is sent in both directions between the two ends, the mode requests from the decoder at one end to the encoder at the other end are piggy-backed over the speech frames in the reverse direction. In other words, there is no out-of-band signaling needed for sending CMRs.

Every AMR or AMR-WB codec implementation is required to support all the respective speech coding modes defined by the codec and must be able to handle mode switching to any of the modes at any time. However, some transport systems may impose limitations in the number of modes supported and how often the mode can change due to bandwidth limitations or other constraints. For this reason, the decoder is allowed to indicate its acceptance of a particular mode or a subset of the defined modes for the session using out-of-band means.

For example, the GSM radio link can only use a subset of at most four different modes in a given session. This subset can be any combination of the 8 AMR modes for an AMR session or any combination of the 9 AMR-WB modes for an AMR-WB session.

Moreover, for better interoperability with GSM through a gateway, the decoder is allowed to use out-of-band means to set the minimum number of frames between two mode changes and to limit the mode change among neighboring modes only.

Section B.8 specifies a set of MIME parameters that may be used to signal these mode adaptation controls at session setup.

B.3.4. Voice Activity Detection and Discontinuous Transmission

Both codecs support voice activity detection (VAD) and generation of comfort noise (CN) parameters during silence periods. Hence, the codecs have the option to reduce the number of transmitted bits and packets during silence periods to a minimum. The operation of sending CN parameters at regular intervals during silence periods is usually called discontinuous transmission (DTX) or source controlled rate (SCR) operation. The AMR or AMR-WB frames containing CN parameters are called Silence Indicator (SID) frames. See more details about VAD and DTX functionality in [9] and [10].

B.3.5. Support for Multi-Channel Session

Both the RTP payload format and the storage format defined in this document support multi-channel audio content (e.g., a stereophonic speech session).

Although AMR and AMR-WB codecs themselves do not support encoding of multi-channel audio content into a single bit stream, they can be used to separately encode and decode each of the individual channels.

To transport (or store) the separately encoded multi-channel content, the speech frames for all channels that are framed and encoded for the same 20 ms periods are logically collected in a frame-block.

At the session setup, out-of-band signaling, e.g., using the rtpmap attribute in SDP, must be used to indicate the number of channels in the session and the order of the speech frames from different channels in each frame-block.

When using SDP for signaling, the number and order of channels carried in each frame-block are specified in Section 4.1 in [24].

B.3.6. Unequal Bit-error Detection and Protection

The speech bits encoded in each AMR or AMR-WB frame have different perceptual sensitivity to bit errors. This property has been exploited in cellular systems to achieve better voice quality by using unequal error protection and detection (UEP and UED) mechanisms.

The UEP/UED mechanisms focus the protection and detection of corrupted bits to the perceptually most sensitive bits in an AMR or AMR-WB frame. In particular, speech bits in an AMR or AMR-WB frame are divided into class A, B, and C, where bits in class A are most sensitive and bits in class C least sensitive (see Table B.1 below for AMR and [4] for AMR-WB). A frame is only declared damaged if there are bit errors found in the most sensitive bits, i.e., the class A bits. On the other hand, it is acceptable to have some bit errors in the other bits, i.e., class B and C bits.

Index	Mode	Class A bits	total speech bits
0	AMR 4.75	42	95
1	AMR 5.15	49	103
2	AMR 5.9	55	118
3	AMR 6.7	58	134
4	AMR 7.4	61	148
5	AMR 7.95	75	159
6	AMR 10.2	65	204
7	AMR 12.2	81	244
8	AMR SID	39	39

Table B.1. The number of class A bits for the AMR codec.

Moreover, a damaged frame is still useful for error concealment at the decoder since some of the less sensitive bits can still be used. This approach can improve the speech quality compared to discarding the damaged frame.

B.3.6.1. Applying UEP and UED in an IP Network

To take full advantage of the bit-error robustness of the AMR and AMR-WB codec, the RTP payload format is designed to facilitate UEP/UED in an IP network. It should be noted however that the utilization of UEP and UED discussed below is OPTIONAL.

UEP/UED in an IP network can be achieved by detecting bit errors in class A bits and tolerating bit errors in class B/C bits of the AMR or AMR-WB frame(s) in each RTP payload.

Today there exist some link layers that do not discard packets with bit errors, e.g. SLIP and some wireless links. With the Internet traffic pattern shifting towards a more multimedia-centric one, more link layers of such nature may emerge in the future. With transport layer support for partial checksums, for example those supported by UDP-Lite [15] (work in progress), bit error tolerant AMR and AMR-WB traffic could achieve better performance over these types of links.

There are at least two basic approaches for carrying AMR and AMR-WB traffic over bit error tolerant IP networks:

1) Utilizing a partial checksum to cover headers and the most important speech bits of the payload. It is recommended that at least all class A bits are covered by the checksum.

2) Utilizing a partial checksum to only cover headers, but a frame CRC to cover the class A bits of each speech frame in the RTP payload.

In either approach, at least part of the class B/C bits are left without error-check and thus bit error tolerance is achieved.

Note, it is still important that the network designer pay attention to the class B and C residual bit error rate. Though less sensitive to errors than class A bits, class B and C bits are not insignificant and undetected errors in these bits cause degradation in speech quality. An example of residual error rates considered acceptable for AMR in UMTS can be found in [20] and for AMR-WB in [21].

The application interface to the UEP/UED transport protocol (e.g., UDP-Lite) may not provide any control over the link error rate, especially in a gateway scenario. Therefore, it is incumbent upon the designer of a node with a link interface

of this type to choose a residual bit error rate that is low enough to support applications such as AMR encoding when transmitting packets of a UEP/UED transport protocol.

Approach 1 is a bit efficient, flexible and simple way, but comes with two disadvantages, namely, a) bit errors in protected speech bits will cause the payload to be discarded, and b) when transporting multiple frames in a payload there is the possibility that a single bit error in protected bits will cause all the frames to be discarded.

These disadvantages can be avoided, if needed, with some overhead in the form of a frame-wise CRC (Approach 2). In problem a), the CRC makes it possible to detect bit errors in class A bits and use the frame for error concealment, which gives a small improvement in speech quality. For b), when transporting multiple frames in a payload, the CRCs remove the possibility that a single bit error in a class A bit will cause all the frames to be discarded. Avoiding that gives an improvement in speech quality when transporting multiple frames over links subject to bit errors.

The choice between the above two approaches must be made based on the available bandwidth, and desired tolerance to bit errors. Neither solution is appropriate to all cases. Section B.8 defines parameters that may be used at session setup to select between these approaches.

B.3.7. Robustness against Packet Loss

The payload format supports several means, including forward error correction (FEC) and frame interleaving, to increase robustness against packet loss.

B.3.7.1. Use of Forward Error Correction (FEC)

The simple scheme of repetition of previously sent data is one way of achieving FEC. Another possible scheme which is more bandwidth efficient is to use payload external FEC, e.g., RFC2733 [19], which generates extra packets containing repair data. The whole payload can also be sorted in sensitivity order to support external FEC schemes using UEP. There is also a work in progress on a generic version of such a scheme [18] that can be applied to AMR or AMR-WB payload transport.

With AMR or AMR-WB, it is possible to use the multi-rate capability of the codec to send redundant copies of the same mode or of another mode, e.g. one with lower-bandwidth. We describe such a scheme next.

This involves the simple retransmission of previously transmitted frame-blocks together with the current frame-block(s). This is done by using a sliding window to group the speech frame-blocks to send in each payload. Figure B.1 below shows us an example.

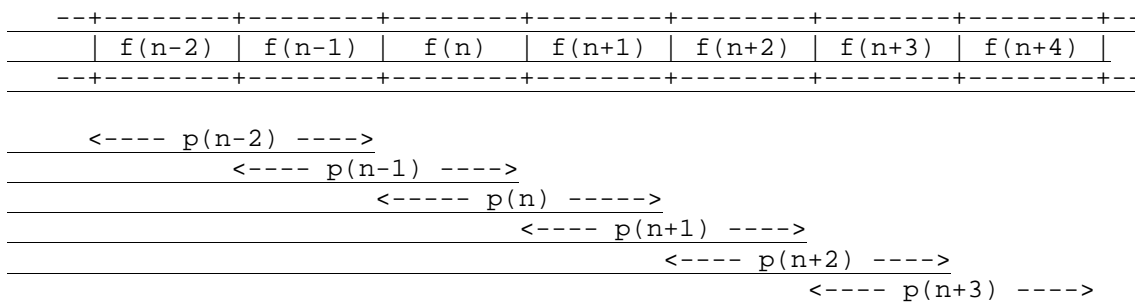


Figure B.1: An example of redundant transmission.

In this example each frame-block is retransmitted one time in the following RTP payload packet. Here, f(n-2)..f(n+4) denotes a sequence of speech frame-blocks and p(n-2)..p(n+3) a sequence of payload packets.

The use of this approach does not require signaling at the session setup. In other words, the speech sender can choose to use this scheme without consulting the receiver. This is because a packet containing redundant frames will not look different from a packet with only new frames. The receiver may receive multiple copies or versions (encoded with different modes) of a frame for a certain timestamp if no packet is lost. If multiple versions of the same speech frame are received, it is recommended that the mode with the highest rate be used by the speech decoder.

This redundancy scheme provides the same functionality as the one described in RFC 2198 "RTP Payload for Redundant Audio Data" [24]. In most cases the mechanism in this payload format is more efficient and simpler than requiring both endpoints to support RFC 2198 in addition. There are two situations in which use of RFC 2198 is

indicated: if the spread in time required between the primary and redundant encodings is larger than 5 frame times, the bandwidth overhead of RFC 2198 will be lower; or, if a non-AMR codec is desired for the redundant encoding, the AMR payload format won't be able to carry it.

The sender is responsible for selecting an appropriate amount of redundancy based on feedback about the channel, e.g. in RTCP receiver reports. A sender should not base selection of FEC on the CMR, as this parameter most probably was set based on none-IP information, e.g. radio link performance measures. The sender is also responsible for avoiding congestion, which may be exacerbated by redundancy (see Section B.6 for more details).

B.3.7.2. Use of Frame Interleaving

To decrease protocol overhead, the payload design allows several speech frame-blocks be encapsulated into a single RTP packet. One of the drawbacks of such approach is that in case of packet loss this means loss of several consecutive speech frame-blocks, which usually causes clearly audible distortion in the reconstructed speech. Interleaving of frame-blocks can improve the speech quality in such cases by distributing the consecutive losses into a series of single frame-block losses. However, interleaving and bundling several frame-blocks per payload will also increase end-to-end delay and is therefore not appropriate for all types of applications. Streaming applications will most likely be able to exploit interleaving to improve speech quality in lossy transmission conditions.

This payload design supports the use of frame interleaving as an option. For the encoder (speech sender) to use frame interleaving in its outbound RTP packets for a given session, the decoder (speech receiver) needs to indicate its support via out-of-band means (see Section B.8).

B.3.8. Bandwidth Efficient or Octet-aligned Mode

For a given session, the payload format can be either bandwidth efficient or octet aligned, depending on the mode of operation that is established for the session via out-of-band means.

In the octet-aligned format, all the fields in a payload, including payload header, table of contents entries, and speech frames themselves, are individually aligned to octet boundaries to make implementations efficient. In the bandwidth efficient format only the full payload is octet aligned, so fewer padding bits are added.

Note, octet alignment of a field or payload means that the last octet is padded with zeroes in the least significant bits to fill the octet. Also note that this padding is separate from padding indicated by the P bit in the RTP header.

Between the two operation modes, only the octet-aligned mode has the capability to use the robust sorting, interleaving, and frame CRC to make the speech transport robust to packet loss and bit errors.

B.3.9. AMR or AMR-WB Speech over IP scenarios

The primary scenario for this payload format is IP end-to-end between two terminals, as shown in Figure B.2. This payload format is expected to be useful for both conversational and streaming services.

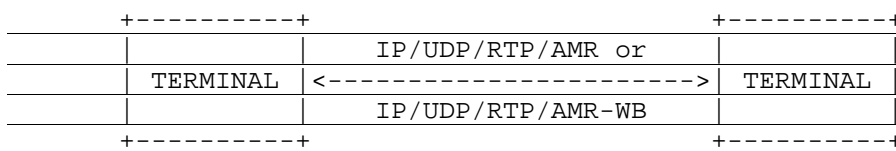


Figure B.2: IP terminal to IP terminal scenario

A conversational service puts requirements on the payload format. Low delay is one very important factor, i.e. few speech frame-blocks per payload packet. Low overhead is also required when the payload format traverses low bandwidth links, especially as the frequency of packets will be high. For low bandwidth links it also an advantage to support UED which allows a link provider to reduce delay and packet loss or to reduce the utilization of link resources.

Streaming service has less strict real-time requirements and therefore can use a larger number of frame-blocks per packet than conversational service. This reduces the overhead from IP, UDP, and RTP headers. However, including several frame-blocks per packet makes the transmission more vulnerable to packet loss, so interleaving may be used to reduce the effect packet loss will have on speech quality. A streaming server handling a large number of clients also

needs a payload format that requires as few resources as possible when doing packetization. The octet-aligned and interleaving modes require the least amount of resources, while CRC, robust sorting, and bandwidth efficient modes have higher demands.

Another scenario occurs when AMR or AMR-WB encoded speech will be transmitted from a non-IP system (e.g., a GSM or 3GPP network) to an IP/UDP/RTP VoIP terminal, and/or vice versa, as depicted in Figure B.3.

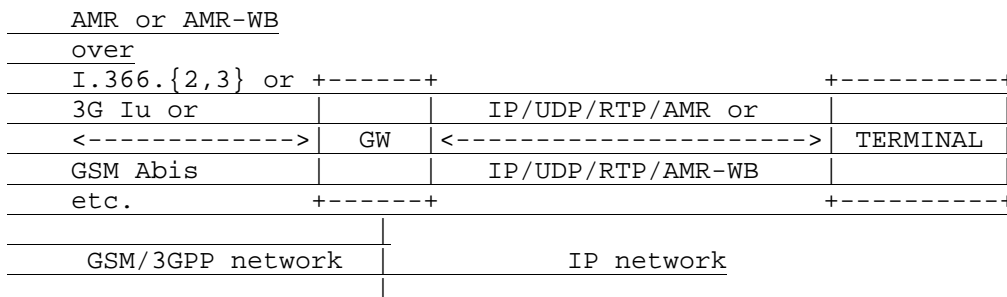


Figure B.3: GW to VoIP terminal scenario

In such a case, it is likely that the AMR or AMR-WB frame is packetized in a different way in the non-IP network and will need to be re-packetized into RTP at the gateway. Also, speech frames from the non-IP network may come with some UEP/UED information (e.g., a frame quality indicator) that will need to be preserved and forwarded on to the decoder along with the speech bits. This is specified in Section B.4.3.2.

AMR's capability to do fast mode switching is exploited in some non-IP networks to optimize speech quality. To preserve this functionality in scenarios including a gateway to an IP network, a codec mode request (CMR) field is needed. The gateway will be responsible for forwarding the CMR between the non-IP and IP parts in both directions. The IP terminal should follow the CMR forwarded by the gateway to optimize speech quality going to the non-IP decoder. The mode control algorithm in the gateway must accommodate the delay imposed by the IP network on the response to CMR by the IP terminal.

The IP terminal should not set the CMR (see Section B.4.3.1), but the gateway can set the CMR value on frames going toward the encoder in the non-IP part to optimize speech quality from that encoder to the gateway. The gateway can alternatively set a lower CMR value, if desired, as one means to control congestion on the IP network.

A third likely scenario is that IP/UDP/RTP is used as transport between two non-IP systems, i.e., IP is originated and terminated in gateways on both sides of the IP transport, as illustrated in Figure B.4 below.

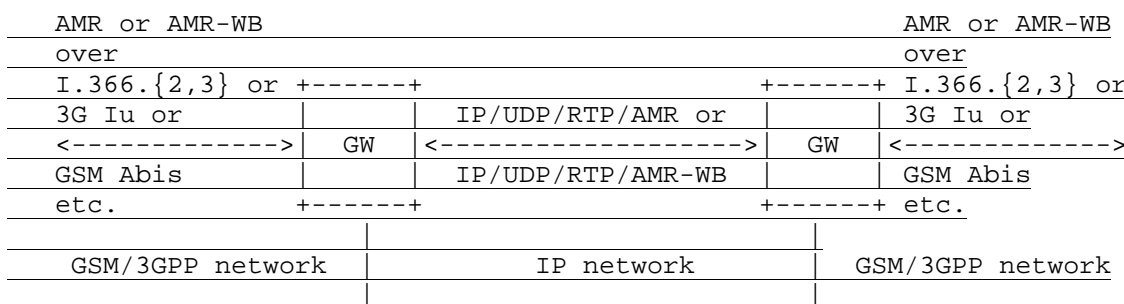


Figure B.4: GW to GW scenario

This scenario requires the same mechanisms for preserving UED/UEP and CMR information as in the single gateway scenario. In addition, the CMR value may be set in packets received by the gateways on the IP network side. The gateway should forward to the non-IP side a CMR value that is the minimum of three values:

- the CMR value it receives on the IP side;
- the CMR value it calculates based on its reception quality on the non-IP side; and
- a CMR value it may choose for congestion control of transmission on the IP side.

The details of the control algorithm are left to the implementation.

B.4. AMR and AMR-WB RTP Payload Formats

The AMR and AMR-WB payload formats have identical structure, so they are specified together. The only differences are in the types of codec frames contained in the payload. The payload format consists of the RTP header, payload header and payload data.

B.4.1. RTP Header Usage

The format of the RTP header is specified in [8]. This payload format uses the fields of the header in a manner consistent with that specification.

The RTP timestamp corresponds to the sampling instant of the first sample encoded for the first frame-block in the packet. The timestamp clock frequency is the same as the sampling frequency, so the timestamp unit is in samples.

The duration of one speech frame-block is 20 ms for both AMR and AMR-WB. For AMR, the sampling frequency is 8 kHz, corresponding to 160 encoded speech samples per frame from each channel. For AMR-WB, the sampling frequency is 16 kHz, corresponding to 320 samples per frame from each channel. Thus, the timestamp is increased by 160 for AMR and 320 for AMR-WB for each consecutive frame-block.

A packet may contain multiple frame-blocks of encoded speech or comfort noise parameters. If interleaving is employed, the frame-blocks encapsulated into a payload are picked according to the interleaving rules as defined in Section B.4.4.1. Otherwise, each packet covers a period of one or more contiguous 20 ms frame-block intervals. In case the data from all the channels for a particular frame-block in the period is missing, for example at a gateway from some other transport format, it is possible to indicate that no data is present for that frame-block rather than breaking a multi-frame-block packet into two, as explained in Section B.4.3.2.


To allow for error resiliency through redundant transmission, the periods covered by multiple packets MAY overlap in time. A receiver MUST be prepared to receive any speech frame multiple times, either in exact duplicates, or in different AMR rate modes, or with data present in one packet and not present in another. If multiple versions of the same speech frame are received, it is RECOMMENDED that the mode with the highest rate be used by the speech decoder. A given frame MUST NOT be encoded as speech in one packet and comfort noise parameters in another.

The payload is always made an integral number of octets long by padding with zero bits if necessary. If additional padding is required to bring the payload length to a larger multiple of octets or for some other purpose, then the P bit in the RTP in the header may be set and padding appended as specified in [8]. The RTP header marker bit (M) SHALL be set to 1 if the first frame-block carried in the packet contains a speech frame which is the first in a talkspurt. For all other packets the marker bit SHALL be set to zero (M=0).

The assignment of an RTP payload type for this new packet format is outside the scope of this document, and will not be specified here. It is expected that the RTP profile under which this payload format is being used will assign a payload type for this encoding or specify that the payload type is to be bound dynamically.

B.4.2. Payload Structure

The complete payload consists of a payload header, a payload table of contents, and speech data representing one or more speech frame-blocks. The following diagram shows the general payload format layout:




Payloads containing more than one speech frame-block are called compound payloads.

The following sections describe the variations taken by the payload format depending on whether the AMR session is set up to use the bandwidth-efficient mode or octet-aligned mode and any of the OPTIONAL functions for robust sorting, interleaving, and frame CRCs. Implementations SHOULD support both bandwidth-efficient and octet-aligned operation to increase interoperability.

B.4.3. Bandwidth-Efficient Mode

B.4.3.1. The Payload Header

In bandwidth-efficient mode, the payload header simply consists of a 4 bit codec mode request:



CMR (4 bits): Indicates a codec mode request sent to the speech encoder at the site of the receiver of this payload. The value of the CMR field is set to the frame type index of the corresponding speech mode being requested. The frame type index may be 0-7 for AMR, as defined in Table 1a in [2], or 0-8 for AMR-WB, as defined in Table 1a in [4]. CMR value 15 indicates that no mode request is present, and other values are for future use.

The mode request received in the CMR field is valid until the next CMR is received, i.e. a newly received CMR value overrides the previous one. Therefore, if a terminal continuously wishes to receive frames in the same mode X, it needs to set CMR=X for all its outbound payloads, and if a terminal has no preference in which mode to receive, it SHOULD set CMR=15 in all its outbound payloads.

If receiving a payload with a CMR value which is not a speech mode or NO_DATA, the CMR MUST be ignored by the receiver.

In a multi-channel session, CMR SHOULD be interpreted by the receiver of the payload as the desired encoding mode for all the channels in the session.

An IP end-point SHOULD NOT set the CMR based on packet losses or other congestion indications, for several reasons:

- The other end of the IP path may be a gateway to a non-IP network (such as a radio link) that needs to set the CMR field to optimize performance on that network.
- Congestion on the IP network is managed by the IP sender, in this case at the other end of the IP path. Feedback about congestion SHOULD be provided to that IP sender through RTCP or other means, and then the sender can choose to avoid congestion using the most appropriate mechanism. That may include adjusting the codec mode, but also includes adjusting the level of redundancy or number of frames per packet.

The encoder SHOULD follow a received mode request, but MAY change to a lower-numbered mode if it so chooses, for example to control congestion.


The CMR field MUST be set to 15 for packets sent to a multicast group. The encoder in the speech sender SHOULD ignore mode requests when sending speech to a multicast session but MAY use RTCP feedback information as a hint that a mode change is needed.

The codec mode selection MAY be restricted by a session parameter to a subset of the available modes. If so, the requested mode MUST be among the signalled subset (see Section B.8).

B.4.3.2. The Payload Table of Contents

The table of contents (ToC) consists of a list of ToC entries, each representing a speech frame.

In bandwidth-efficient mode, a ToC entry takes the following format:



F (1 bit): If set to 1, indicates that this frame is followed by another speech frame in this payload; if set to 0, indicates that this frame is the last frame in this payload.

FT (4 bits): Frame type index, indicating either the AMR or AMR-WB speech coding mode or comfort noise (SID) mode of the corresponding frame carried in this payload.

The value of FT is defined in Table 1a in [2] for AMR and in Table 1a in [4] for AMR-WB. FT=14 (SPEECH_LOST, only available for AMR-WB) and FT=15 (NO_DATA) are used to indicate frames that are either lost or not being transmitted in this payload, respectively.

NO_DATA (FT=15) frame could mean either that there is no data produced by the speech encoder for that frame or that no data for that frame is transmitted in the current payload (i.e., valid data for that frame could be sent in either an earlier or later packet).

If receiving a ToC entry with a FT value in the range 9-14 for AMR or 10-13 for AMR-WB the whole packet SHOULD be discarded. This is to avoid the loss of data synchronization in the depacketization process, which can result in a huge degradation in speech quality.

Note that packets containing only NO_DATA frames SHOULD NOT be transmitted. Also, frame-blocks containing only NO_DATA frames at the end of a packet SHOULD NOT be transmitted, except in the case of interleaving. The AMR SCR/DTX is described in [6] and AMR-WB SCR/DTX in [7].

The extra comfort noise frame types specified in table 1a in [2] (i.e., GSM-EFR CN, IS-641 CN, and PDC-EFR CN) MUST NOT be used in this payload format because the standardized AMR codec is only required to implement the general AMR SID frame type and not those that are native to the incorporated encodings.

Q (1 bit): Frame quality indicator. If set to 0, indicates the corresponding frame is severely damaged and the receiver should set the RX_TYPE (see [6]) to either SPEECH_BAD or SID_BAD depending on the frame type (FT).

The frame quality indicator is included for interoperability with the ATM payload format described in ITU-T I.366.2, the UMTS Iu interface [16], as well as other transport formats. The frame quality indicator enables damaged frames to be forwarded to the speech decoder for error concealment. This can improve the speech quality comparing to dropping the damaged frames. See Section B.4.4.2.1 for more details.

For multi-channel sessions, the ToC entries of all frames from a frame-block are placed in the ToC in consecutive order as defined in Section 4.1 in [24]. When multiple frame-blocks are present in a packet in bandwidth-efficient mode, they will be placed in the packet in order of their creation time.

Therefore, with N channels and K speech frame-blocks in a packet, there MUST be N*K entries in the ToC, and the first N entries will be from the first frame-block, the second N entries will be from the second frame-block, and so on.

The following figure shows an example of a ToC of three entries in a single channel session using bandwidth efficient mode.

0		1															
0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7
+-----+																	
	1		FT		Q		1		FT		Q		0		FT		Q
+-----+																	

Below is an example of how the ToC entries will appear in the ToC of a packet carrying 3 consecutive frame-blocks in a session with two channels (L and R).

+-----+											
	1L		1R		2L		2R		3L		3R
+-----+											
	<----->		<----->		<----->						
+-----+											
Frame-Block 1				Frame-Block 2				Frame-Block 3			

B.4.3.3 Speech Data

Speech data of a payload contains one or more speech frames or comfort noise frames, as described in the ToC of the payload.

Note, for ToC entries with FT=14 or 15, there will be no corresponding speech frame present in the speech data.

Each speech frame represents 20 ms of speech encoded with the mode indicated in the FT field of the corresponding ToC entry. The length of the speech frame is implicitly defined by the mode indicated in the FT field. The order and numbering notation of the bits are as specified for Interface Format 1 (IF1) in [2] for AMR and [4] for AMR-WB. As specified there, the bits of speech frames have been rearranged in order of decreasing sensitivity, while the bits of comfort noise frames are in the order produced by the encoder. The resulting bit sequence for a frame of length K bits is denoted d(0), d(1), ..., d(K-1).

B.4.3.4. Algorithm for Forming the Payload

The complete RTP payload in bandwidth-efficient mode is formed by packing bits from the payload header, table of contents, and speech frames, in order as defined by their corresponding ToC entries in the ToC list, contiguously into octets beginning with the most significant bits of the fields and the octets.

To be precise, the four-bit payload header is packed into the first octet of the payload with bit 0 of the payload header in the most significant bit of the octet. The four most significant bits (numbered 0-3) of the first ToC entry are packed into the least significant bits of the octet, ending with bit 3 in the least significant bit. Packing continues in the second octet with bit 4 of the first ToC entry in the most significant bit of the octet. If more than one frame is contained in the payload, then packing continues with the second and successive ToC entries. Bit 0 of the first data frame follows immediately after the last ToC bit, proceeding through all the bits of the frame in numerical order.

Bits from any successive frames follow contiguously in numerical order for each frame and in consecutive order of the frames.


If speech data is missing for one or more speech frame within the sequence, because of, for example, DTX, a ToC entry with FT set to NO_DATA SHALL be included in the ToC for each of the missing frames, but no data bits are included in the payload for the missing frame (see Section B.4.3.5.2 for an example).

B.4.3.5. Payload Examples

B.4.3.5.1. Single Channel Payload Carrying a Single Frame

The following diagram shows a bandwidth-efficient AMR payload from a single channel session carrying a single speech frame-block.


In the payload, no specific mode is requested (CMR=15), the speech frame is not damaged at the IP origin (Q=1), and the coding mode is AMR 7.4 kbps (FT=4). The encoded speech bits, d(0) to d(147), are arranged in descending sensitivity order according to [2]. Finally, two zero bits are added to the end as padding to make the payload octet aligned.

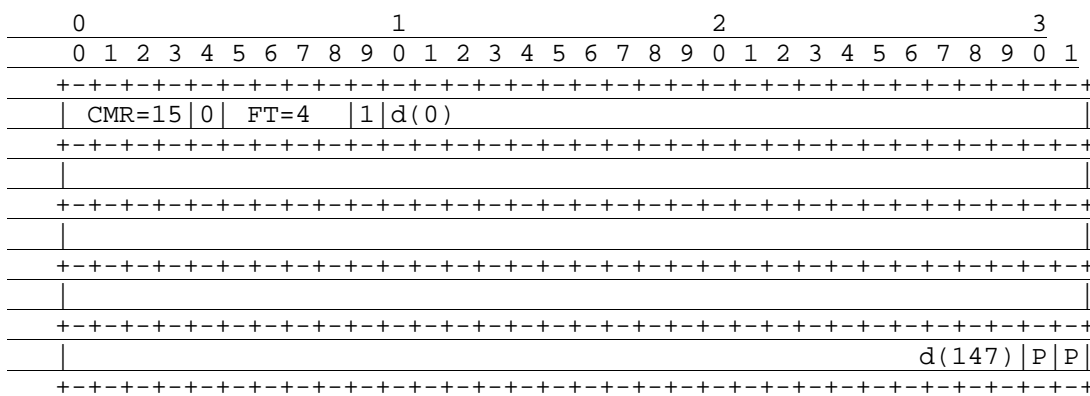

B.4.3.5.2. Single Channel Payload Carrying Multiple Frames

The following diagram shows a single channel, bandwidth efficient compound AMR-WB payload that contains four frames, of which one has no speech data. The first frame is a speech frame at 6.6 kbps mode (FT=0) that is composed of speech bits d(0) to d(131). The second frame is an AMR-WB SID frame (FT=9), consisting of bits g(0) to g(39). The third frame is NO_DATA frame and does not carry any speech information, it is represented in the payload by its ToC entry. The fourth frame in the payload is a speech frame at 8.85 kbps mode (FT=1), it consists of speech bits h(0) to h(176).


As shown below, the payload carries a mode request for the encoder on the receiver's side to change its future coding mode to AMR-WB 8.85 kbps (CMR=1). None of the frames is damaged at IP origin (Q=1). The encoded speech and SID bits, d(0) to d(131), g(0) to g(39) and h(0) to h(176), are arranged in the payload in descending sensitivity order according to [4]. (Note, no speech bits are present for the third frame). Finally, seven 0s are padded to the end to make the payload octet aligned.

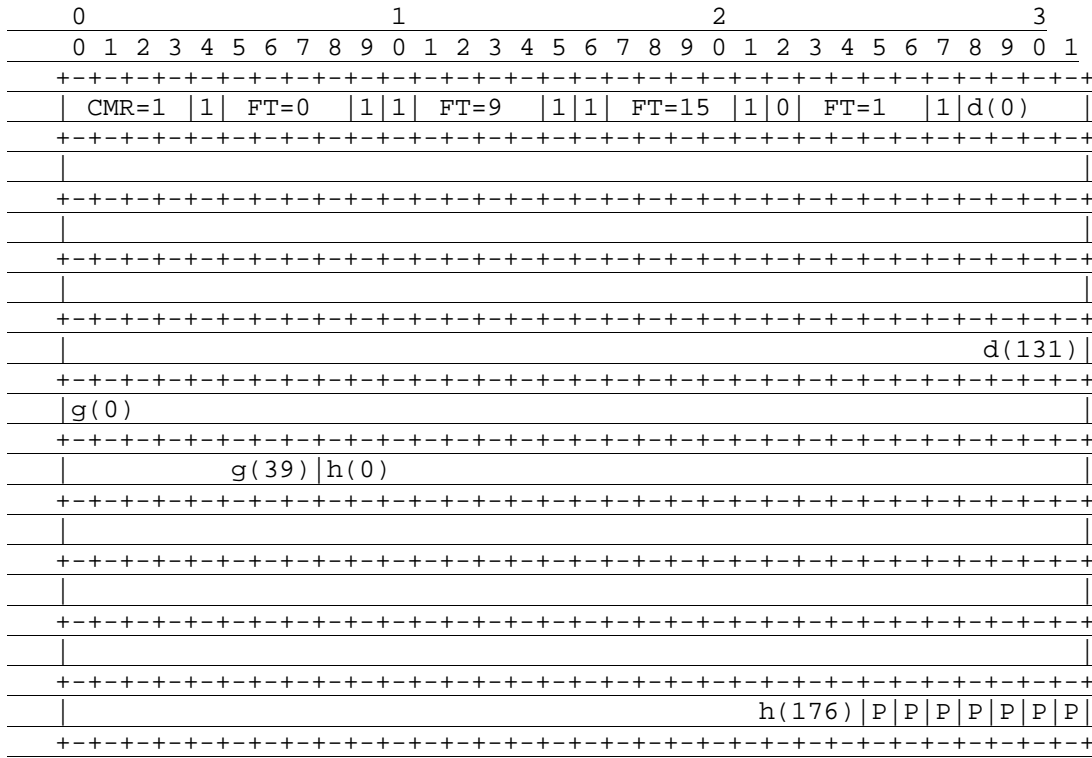


B.4.3.5.3. Multi-Channel Payload Carrying Multiple Frames

The following diagram shows a two channel payload carrying 3 frame-blocks, i.e. the payload will contain 6 speech frames.

In the payload all speech frames contain the same mode 7.4 kbit/s (FT=4) and are not damaged at IP origin. The CMR is set to 15, i.e., no specific mode is requested. The two channels are defined as left (L) and right (R) in that order. The encoded speech bits is designated dXY(0).. dXY(K-1), where X = block number, Y = channel, and K is the number of speech bits for that mode. Exemplifying this, for frame-block 1 of the left channel the encoded bits are designated as d1L(0) to d1L(147).

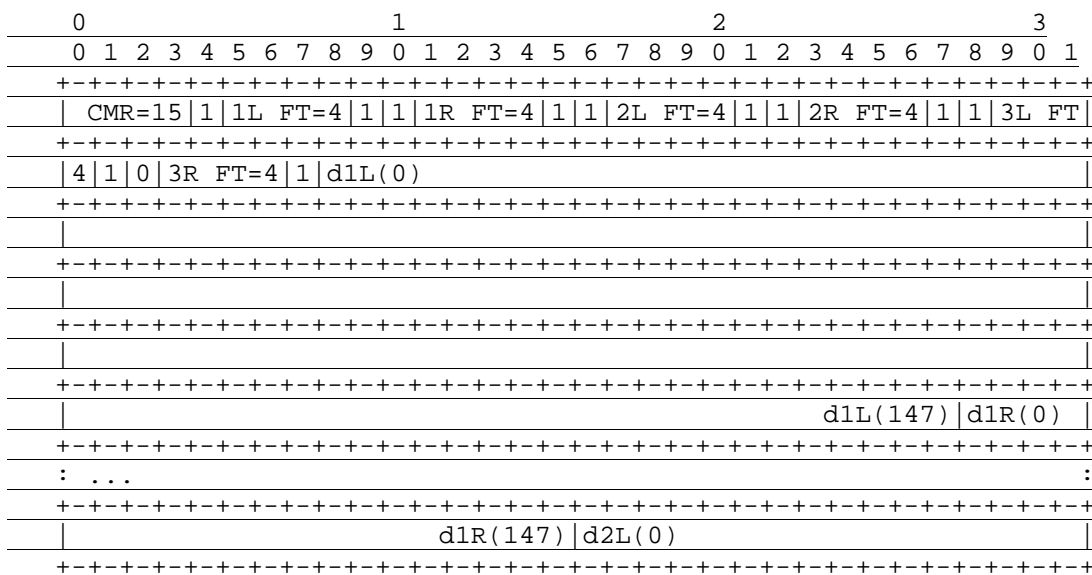


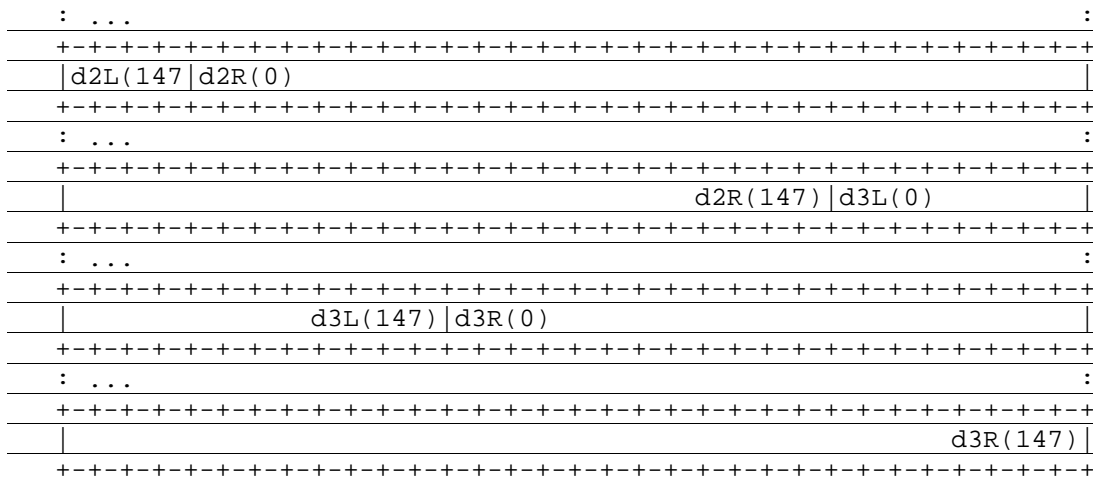

B.4.4. Octet-aligned Mode

B.4.4.1. The Payload Header

In octet-aligned mode, the payload header consists of a 4 bit CMR, 4 reserved bits, and optionally, an 8 bit interleaving header, as shown below:

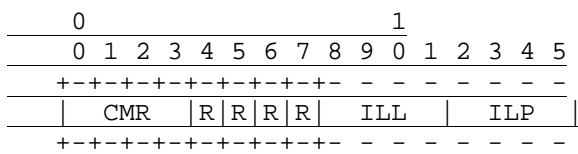

CMR (4 bits): same as defined in section B.4.3.1.

R: is a reserved bit that **MUST** be set to zero. All R bits **MUST** be ignored by the receiver.

ILL (4 bits, unsigned integer): This is an **OPTIONAL** field that is present only if interleaving is signalled out-of-band for the session. **ILL=L** indicates to the receiver that the interleaving length is L+1, in number of frame-blocks.

ILP (4 bits, unsigned integer): This is an **OPTIONAL** field that is present only if interleaving is signalled. **ILP MUST** take a value between 0 and **ILL**, inclusive, indicating the interleaving index for frame-blocks in this payload in the interleave group. If the value of **ILP** is found greater than **ILL**, the payload **SHOULD** be discarded.

ILL and ILP fields MUST be present in each packet in a session if interleaving is signalled for the session. Interleaving MUST be performed on a frame-block basis (i.e., NOT on a frame basis) in a multi-channel session.

The following example illustrates the arrangement of speech frame-blocks in an interleave group during an interleave session. Here we assume **ILL=L** for the interleave group that starts at speech frame-block n. We also assume that the first payload packet of the interleave group is s and the number of speech frame-blocks carried in each payload is N. Then we will have:

Payload s (the first packet of this interleave group):

ILL=L, ILP=0, Carry frame-blocks: n, n+(L+1), n+2*(L+1), ..., n+(N-1)*(L+1)

Payload s+1 (the second packet of this interleave group):

ILL=L, ILP=1, frame-blocks: n+1, n+1+(L+1), n+1+2*(L+1), ..., n+1+(N-1)*(L+1)

...

Payload s+L (the last packet of this interleave group):

ILL=L, ILP=L, frame-blocks: n+L, n+L+(L+1), n+L+2*(L+1), ..., n+L+(N-1)*(L+1)

The next interleave group will start at frame-block $n+N*(L+1)$.


There will be no interleaving effect unless the number of frame-blocks per packet (N) is at least 2. Moreover, the number of frame-blocks per payload (N) and the value of ILL MUST NOT be changed inside an interleave group. In other words, all payloads in an interleave group MUST have the same ILL and MUST contain the same number of speech frame-blocks.

The sender of the payload MUST only apply interleaving if the receiver has signalled its use through out-of-band means. Since interleaving will increase buffering requirements at the receiver, the receiver uses MIME parameter "interleaving=I" to set the maximum number of frame-blocks allowed in an interleaving group to I.

When performing interleaving the sender MUST use a proper number of frame-blocks per payload (N) and ILL so that the resulting size of an interleave group is less or equal to I, i.e., $N*(L+1) \leq I$.

B.4.4.2. The Payload Table of Contents and Frame CRCs


The table of contents (ToC) in octet-aligned mode consists of a list of ToC entries where each entry corresponds to a speech frame carried in the payload and, optionally, a list of speech frame CRCs, i.e.,

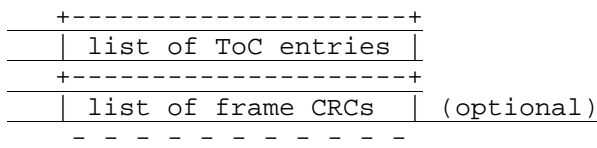


Note, for ToC entries with FT=14 or 15, there will be no corresponding speech frame or frame CRC present in the payload.


The list of ToC entries is organized in the same way as described for bandwidth-efficient mode in B.4.3.2, with the following exception: when interleaving is used the frame-blocks in the ToC will almost never be placed consecutive in time. Instead, the presence and order of the frame-blocks in a packet will follow the pattern described in B.4.4.1.

The following example shows the ToC of three consecutive packets, each carrying 3 frame-blocks, in an interleaved two-channel session. Here, the two channels are left (L) and right (R) with L coming before R, and the interleaving length is 3 (i.e., ILL=2). This makes the interleave group 9 frame-blocks large.

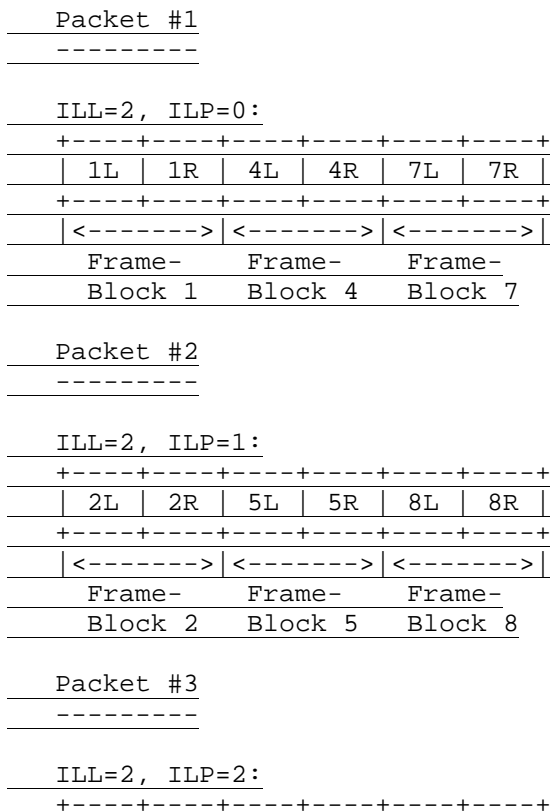

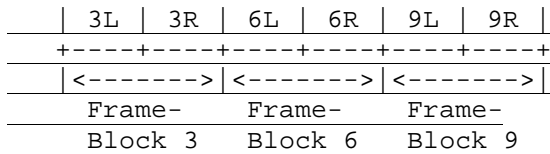

A ToC entry takes the following format in octet-aligned mode:



F (1 bit): see definition in Section B.4.3.2.

FT (4 bits unsigned integer): see definition in Section B.4.3.2.

Q (1 bit): see definition in Section B.4.3.2.

P bits: padding bits, MUST be set to zero.

The list of CRCs is OPTIONAL. It only exists if the use of CRC is signalled out-of-band for the session. When present, each CRC in the list is 8 bit long and corresponds to a speech frame (NOT a frame-block) carried in the payload. Calculation and use of the CRC is specified in the next section.

B.4.4.2.1. Use of Frame CRC for UED over IP

The general concept of UED/UEP over IP is discussed in Section B.3.6. This section provides more details on how to use the frame CRC in the octet-aligned payload header together with a partial transport layer checksum to achieve UED.


To achieve UED, one SHOULD use a transport layer checksum, for example, the one defined in UDP-Lite [15], to protect the RTP header, payload header, and table of contents bits in a payload. The frame CRC, when used, MUST be calculated only over all class A bits in the frame. Class B and C bits in the frame MUST NOT be included in the CRC calculation and SHOULD NOT be covered by the transport checksum.

Note, the number of class A bits for various coding modes in AMR codec is specified as informative in [2] and is therefore copied into Table B.1 in Section B.3.6 to make it normative for this payload format. The number of class A bits for various coding modes in AMR-WB codec is specified as normative in table 2 in [4], and the SID frame (FT=9) has 40 class A bits. These definitions of class A bits MUST be used for this payload format.


Packets SHOULD be discarded if the transport layer checksum detects errors.

The receiver of the payload SHOULD examine the data integrity of the received class A bits by re-calculating the CRC over the received class A bits and comparing the result to the value found in the received payload header. If the two values mismatch, the receiver SHALL consider the class A bits in the receiver frame damaged and MUST clear the Q flag of the frame (i.e., set it to 0). This will subsequently cause the frame to be marked as SPEECH_BAD, if the FT of the frame is 0..7 for AMR or 0..8 for AMR-WB, or SID_BAD if the FT of the frame is 8 for AMR or 9 for AMR-WB, before it is passed to the speech decoder. See [6] and [7] more details.

The following example shows an octet-aligned ToC with a CRC list for a payload containing 3 speech frames from a single channel session (assuming none of the FTs is equal to 14 or 15)

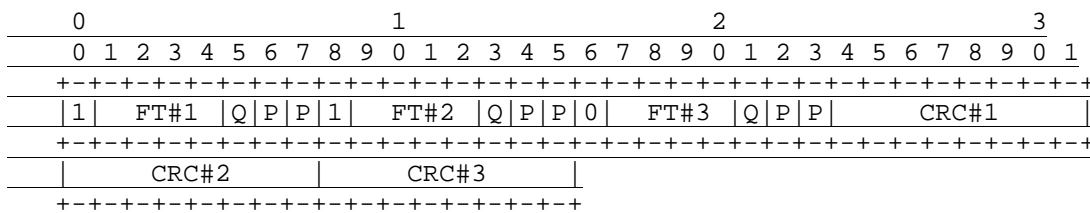

Each of the CRC's takes 8 bits



	c0		c1		c2		c3		c4		c5		c6		c7	
+	---	+	---	+	---	+	---	+	---	+	---	+	---	+	---	+

and is calculated by the cyclic generator polynomial,

$$C(x) = 1 + x^2 + x^3 + x^4 + x^8$$

where ^ is the exponentiation operator.

In binary form the polynomial has the following form: 101110001 (MSB..LSB).

The actual calculation of the CRC is made as follows:

First, an 8-bit CRC register is reset to zero: 00000000. For each bit over which the CRC shall be calculated, an XOR operation is made between the rightmost bit of the CRC register and the bit. The CRC register is then right shifted one step (inputting a "0" as the leftmost bit). If the result of the XOR operation mentioned above is a "1" "10111000" is then bit-wise XOR-ed into the CRC register. This operation is repeated for each bit that the CRC should cover. In this case, the first bit would be d(0) for the speech frame for which the CRC should cover. When the last bit (e.g. d(54) for AMR 5.9 according to Table B.1 in Section B.3.6) have been used in this CRC calculation, the contents in CRC register should simply be copied to the corresponding field in the list of CRC's.

Fast calculation of the CRC on a general-purpose CPU is possible using a table-driven algorithm.

B.4.4.3. Speech Data

In octet-aligned mode, speech data is carried in a similar way to that in the bandwidth-efficient mode as discussed in Section B.4.3.3, with the following exceptions:

- The last octet of each speech frame MUST be padded with zeroes at the end if not all bits in the octet are used. In other words, each speech frame MUST be octet-aligned.

- When multiple speech frames are present in the speech data (i.e., compound payload), the speech frames can be arranged either one whole frame after another as usual, or with the octets of all frames interleaved together at the octet level.

Since the bits within each frame are ordered with the most error-sensitive bits first, interleaving the octets collects those sensitive bits from all frames to be nearer the beginning of the packet. This is called "robust sorting order" which allows the application of UED (such as UDP-Lite [15]) or UEP (such as the ULP [18]) mechanisms to the payload data. The details of assembling the payload are given in the next section.

The use of robust sorting order for a session MUST be agreed via

out-of-band means. Section B.8 specifies a MIME parameter for this purpose.


Note, robust sorting order MUST only be performed on the frame level and thus is independent of interleaving which is at the frame-block level, as described in Section B.4.4.1. In other words, robust sorting can be applied to either non-interleaved or interleaved sessions.

B.4.4.4. Methods for Forming the Payload

Two different packetization methods, namely normal order and robust sorting order, exist for forming a payload in octet-aligned mode. In both cases, the payload header and table of contents are packed into the payload the same way; the difference is in the packing of the speech frames.

The payload begins with the payload header of one octet or two if frame interleaving is selected. The payload header is followed by the table of contents consisting of a list of one-octet ToC entries. If frame CRCs are to be included, they follow the table of contents with one 8-bit CRC filling each octet. Note that if a given frame has a ToC entry with FT=14 or 15, there will be no CRC present.

The speech data follows the table of contents, or the CRCs if present. For packetization in the normal order, all of the octets comprising a speech frame are appended to the payload as a unit. The speech frames are packed in the same order as their corresponding ToC entries are arranged in the ToC list, with the exception that if a given frame has a ToC entry with FT=14 or 15, there will be no data octets present for that frame.

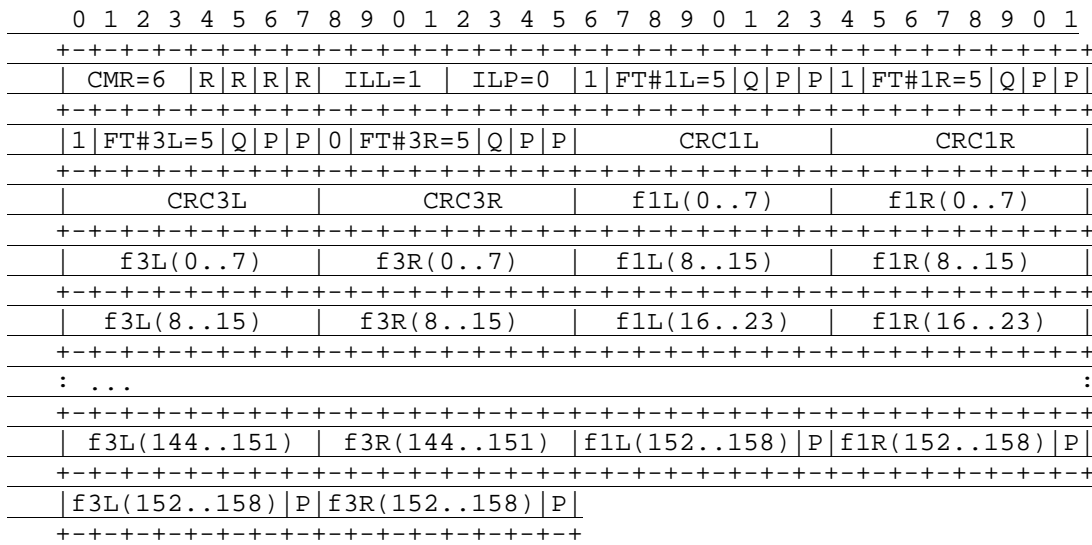

Note, in above example the last octet in all the four speech frames is padded with one zero bit to make it octet-aligned.

B.4.5. Implementation Considerations


An application implementing this payload format MUST understand all the payload parameters in the out-of-band signaling used. For example, if an application uses SDP, all the SDP and MIME parameters in this document MUST be understood. This requirement ensures that an implementation always can decide if it is capable or not of communicating.

No operation mode of the payload format is mandatory to implement. The requirements of the application using the payload format should be used to determine what to implement. To achieve basic interoperability an implementation SHOULD at least implement both bandwidth-efficient and octet-aligned mode for single channel. The other operations mode: interleaving, robust sorting, frame-wise CRC in both single and multi-channel is OPTIONAL to implement.

B.5. AMR and AMR-WB Storage Format

The storage format is used for storing AMR or AMR-WB speech frames in a file or as an e-mail attachment. Multiple channel content is supported.

In general, an AMR or AMR-WB file has the following structure:

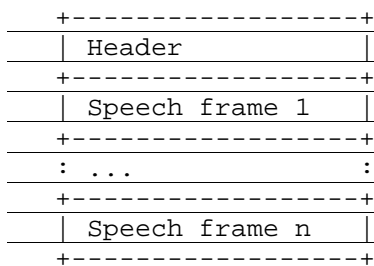

Note, to preserve interoperability with already deployed implementations, single channel content uses a file header format different from that of multi-channel content.

B.5.1. Single channel Header

A single channel AMR or AMR-WB file header contains only a magic number and different magic numbers are defined to distinguish AMR from AMR-WB. The magic number for single channel AMR files MUST consist of ASCII character string:

"#!AMR\n" (or 0x2321414d520a in hexadecimal).


The magic number for single channel AMR-WB files MUST consist of ASCII character string:

"#!AMR-WB\n" (or 0x2321414d522d57420a in hexadecimal).

Note, the "\n" is an important part of the magic numbers and MUST be included in the comparison, since, otherwise, the single channel magic numbers above will become indistinguishable from those of the multi-channel files defined in the next section.

B.5.2. Multi-channel Header

The multi-channel header consists of a magic number followed by a 32 bit channel description field, giving the multi-channel header the following structure:

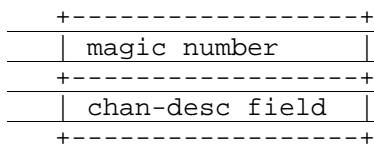

The magic number for multi-channel AMR files MUST consist of the ASCII character string:


"#!AMR MC1.0\n" (or 0x2321414d525f4d43312E300a in hexadecimal).

The magic number for multi-channel AMR-WB files MUST consist of the ASCII character string:

"#!AMR-WB MC1.0\n" (or 0x2321414d522d57425f4d43312E300a in hexadecimal).

The version number in the magic numbers refers to the version of the file format.

The 32 bit channel description field is defined as:

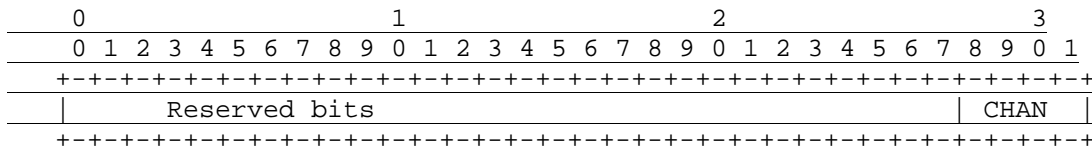

Reserved bits: MUST be set to 0 when written, and a reader MUST ignore them.

CHAN (4 bit unsigned integer): Specifies the number and formation of audio channels contained in this storage file, as defined in the following table:

CHAN	# of channels	description	channel					
			1	2	3	4	5	6
1	2	stereo	l	r				
2	3		l	r	c			
3	4	quadrophonic	F1	Fr	R1	Rr		
4	4		l	c	r	S		
5	5		F1	Fr	Fc	S1	Sr	
6	6		l	lc	c	r	rc	S
-----+-----								
0,7-15	Reserved for future use							
=====								


- Legends:
- l - left
 - r - right
 - c - center
 - S - surround
 - F - front
 - R - rear

Table B.2: Channel definitions for the storage format

B.5.3. Speech Frames

After the file header, speech frame-blocks consecutive in time are stored in the file. Each frame-block contains a number of octet-aligned speech frames equal to the number of channels, and stored in increasing order, starting with channel 1.


Each stored speech frame starts with a one octet frame header with the following format:



The FT field and the Q bit are defined in the same way as in Section B.4.1.2. The P bits are padding and MUST be set to 0.

Following this one octet header come the speech bits as defined in B.4.3.3. The last octet of each frame is padded with zeroes, if needed, to achieve octet alignment.

The following example shows an AMR frame in 5.9 kbit coding mode (with 118 speech bits) in the storage format.

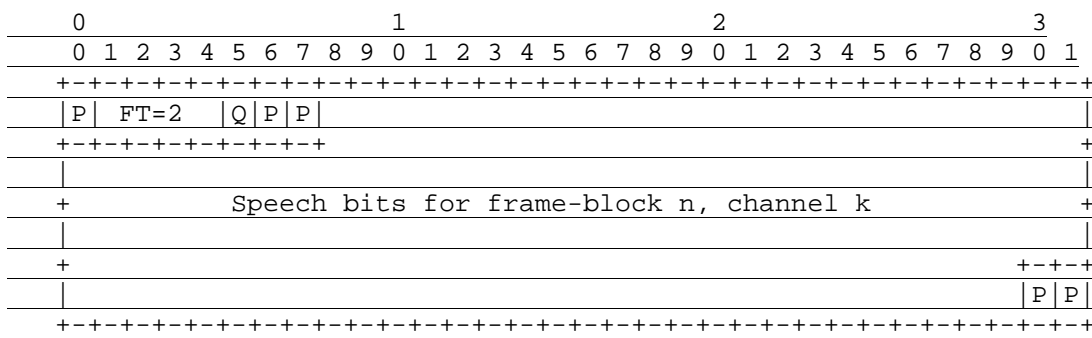

Frame-blocks or speech frames lost in transmission and non-received frame-blocks between SID updates during non-speech periods MUST be stored as NO_DATA frames (frame type 15, as defined in [2] and [4]) or SPEECH_LOST (frame type 14, only available for AMR-WB) in complete frame-blocks to keep synchronization with the original media.

B.6. Congestion Control

The general congestion control considerations for transporting RTP data apply to AMR or AMR-WB speech over RTP as well. However, the multi-rate capability of AMR and AMR-WB speech coding may provide an advantage over other payload formats for controlling congestion since the bandwidth demand can be adjusted by selecting a different coding mode.

Another parameter that may impact the bandwidth demand for AMR and AMR-WB is the number of frame-blocks that are encapsulated in each RTP payload. Packing more frame-blocks in each RTP payload can reduce the number of packets sent and hence the overhead from IP/UDP/RTP headers, at the expense of increased delay.

If forward error correction (FEC) is used to combat packet loss, the amount of redundancy added by FEC will need to be regulated so that the use of FEC itself does not cause a congestion problem.

It is RECOMMENDED that AMR or AMR-WB applications using this payload format employ congestion control. The actual mechanism for congestion control is not specified but should be suitable for real-time flows, e.g. "Equation-Based Congestion Control for Unicast Applications" [17].

B.7. Security Considerations

RTP packets using the payload format defined in this specification are subject to the general security considerations discussed in [8]. As this format transports encoded speech, the main security issues include confidentiality and authentication of the speech itself. The payload format itself does not have any built-in security mechanisms. External mechanisms, such as SRTP [22], MAY be used.

This payload format does not exhibit any significant non-uniformity in the receiver side computational complexity for packet processing and thus is unlikely to pose a denial-of-service threat due to the receipt of pathological data.

B.7.1. Confidentiality

To achieve confidentiality of the encoded AMR or AMR-WB speech, all speech data bits will need to be encrypted. There is less a need to encrypt the payload header or the table of contents due to 1) that they only carry information about the requested speech mode, frame type, and frame quality, and 2) that this information could be useful to some third party, e.g., quality monitoring.

As long as the AMR or AMR-WB payload is only packed and unpacked at either end, encryption may be performed after packet encapsulation so that there is no conflict between the two operations. Interleaving may affect encryption. Depending on the encryption scheme used, there may be restrictions on, for example, the time when keys can be changed. Specifically, the key change may need to occur at the boundary between interleave groups.

The type of encryption method used may impact the error robustness of the payload data. The error robustness may be severely reduced when the data is encrypted unless an encryption method without error-propagation is used, e.g. a stream cipher. Therefore, UED/UEP based on robust sorting may be difficult to apply when the payload data is encrypted.

B.7.2. Authentication

To authenticate the sender of the speech, an external mechanism has to be used. It is RECOMMENDED that such a mechanism protect all the speech data bits. Note that the use of UED/UEP may be difficult to combine with authentication because any bit errors will cause authentication to fail.

Data tampering by a man-in-the-middle attacker could result in erroneous depacketization/decoding that could lower the speech quality. Tampering with the CMR field may result in speech in a different quality than desired.

To prevent a man-in-the-middle attacker from tampering with the payload packets, some additional information besides the speech bits SHOULD be protected. This may include the payload header, ToC, frame CRCs, RTP timestamp, RTP sequence number, and the RTP marker bit.

B.7.3. Decoding Validation

When processing a received payload packet, if the receiver finds that the calculated payload length, based on the information of the session and the values found in the payload header fields, does not match the size of the received packet, the receiver SHOULD discard the packet. This is because decoding a packet that has errors in its length field could severely degrade the speech quality.

B.8. Payload Format Parameters

This section defines the parameters that may be used to select optional features of the AMR and AMR-WB payload formats. The parameters are defined here as part of the MIME subtype registrations for the AMR and AMR-WB speech codecs. A mapping of the parameters into the Session Description Protocol (SDP) [11] is

also provided for those applications that use SDP. Equivalent parameters could be defined elsewhere for use with control protocols that do not use MIME or SDP.

Two separate MIME registrations are made, one for AMR and one for AMR-WB, because they are distinct encodings that must be distinguished by the MIME subtype.

The data format and parameters are specified for both real-time transport in RTP and for storage type applications such as e-mail attachments.

B.8.1. AMR MIME Registration

The MIME subtype for the Adaptive Multi-Rate (AMR) codec is allocated from the IETF tree since AMR is expected to be a widely used speech codec in general VoIP applications. This MIME registration covers both real-time transfer via RTP and non-real-time transfers via stored files. Note, any unspecified parameter MUST be ignored by the receiver.

Media Type name: audio

Media subtype name: AMR

Required parameters: none

Optional parameters:

These parameters apply to RTP transfer only.

octet-align: Permissible values are 0 and 1. If 1, octet-aligned operation SHALL be used. If 0 or if not present, bandwidth efficient operation is employed.

mode-set: Requested AMR mode set. Restricts the active codec mode set to a subset of all modes. Possible values are a comma separated list of modes from the set: 0....7 (see Table 1a [2]). If such mode set is specified by the decoder, the encoder MUST abide by the request and MUST NOT use modes outside of the subset. If not present, all codec modes are allowed for the session.

mode-change-period: Specifies a number of frame-blocks, N, that is the interval at which codec mode changes are allowed. The initial phase of the interval is arbitrary, but changes must be separated by multiples of N frame-blocks. If this parameter is not present, mode changes are allowed at any time during the session.

mode-change-neighbor: Permissible values are 0 and 1. If 1, mode changes SHALL only be made to the neighboring modes in the active codec mode set. Neighboring modes are the ones closest in bit rate to the current mode, either the next higher or next lower rate. If 0 or if not present, change between any two modes in the active codec mode set is allowed.

maxptime: The maximum amount of media which can be encapsulated in a payload packet, expressed as time in milliseconds. The time is calculated as the sum of the time the media present in the packet represents. The time SHOULD be a multiple of the frame size. If this parameter is not present, the sender MAY encapsulate any number of speech frames into one RTP packet.

crc: Permissible values are 0 and 1. If 1, frame CRCs SHALL be included in the payload, otherwise not. If crc=1, this also implies automatically that octet-aligned operation SHALL be used for the session.

robust-sorting: Permissible values are 0 and 1. If 1, the payload SHALL employ robust payload sorting. If 0 or if not present, simple payload sorting SHALL be used. If robust-sorting=1, this also implies automatically that octet-aligned operation SHALL be used for the session.

interleaving: Indicates that frame-block level interleaving SHALL be used for the session and its value defines the maximum number of frame-blocks allowed in an interleaving group (see Section B.4.4.1). If this parameter is not present, interleaving SHALL not be used. The presence of this parameter also implies automatically that octet-aligned operation SHALL be used.

ptime: see RFC2327 [11].

channels: The number of audio channels. The possible values and their respective channel order is specified in section 4.1 in [24]. If omitted it has the default value of 1.

Encoding considerations:

This type is defined for transfer via both RTP (RFC1889) and stored-file methods as described in Sections 4 and 5, respectively, of RFC XXXX. Audio data is binary data, and must be encoded for non-binary transport; the Base64 encoding is suitable for Email.

Security considerations: See Section 7 of RFC XXXX.

Public specification: Please refer to Section 11 of RFC XXXX.

Additional information:

The following applies to stored-file transfer methods:

Magic numbers:

single channel: ASCII character string "#!AMR\n" (or 0x2321414d520a in hexadecimal)

multi-channel: ASCII character string "#!AMR_MC1.0\n" (or 0x2321414d525F4D43312E300a in hexadecimal)

File extensions: amr, AMR

Macintosh file type code: none

Object identifier or OID: none

Person & email address to contact for further information:

johan.sjoberg@ericsson.com

ari.lakaniemi@nokia.com

Intended usage: COMMON.

It is expected that many VoIP applications (as well as mobile applications) will use this type.

Author/Change controller:

johan.sjoberg@ericsson.com

ari.lakaniemi@nokia.com

IETF Audio/Video transport working group

B.8.2. AMR-WB MIME Registration

The MIME subtype for the Adaptive Multi-Rate Wideband (AMR-WB) codec is allocated from the IETF tree since AMR-WB is expected to be a widely used speech codec in general VoIP applications. This MIME registration covers both real-time transfer via RTP and non-real-time transfers via stored files.

Note, any unspecified parameter MUST be ignored by the receiver.

Media Type name: audio

Media subtype name: AMR-WB

Required parameters: none

Optional parameters:

These parameters apply to RTP transfer only.

octet-align: Permissible values are 0 and 1. If 1, octet-aligned operation SHALL be used. If 0 or if not present, bandwidth efficient operation is employed.

mode-set: Requested AMR-WB mode set. Restricts the active codec mode set to a subset of all modes. Possible values are a comma separated list of modes from the set: 0,...,8 (see Table 1a [4]). If such mode set is specified by the decoder, the encoder MUST abide by the request and MUST NOT use modes outside of the subset. If not present, all codec modes are allowed for the session.

mode-change-period: Specifies a number of frame-blocks, N, that is the interval at which codec mode changes are allowed. The initial phase of the interval is arbitrary, but changes must be separated by multiples of N frame-blocks. If this parameter is not present, mode changes are allowed at any time during the session.

mode-change-neighbor: Permissible values are 0 and 1. If 1, mode changes SHALL only be made to the neighboring modes in the active codec mode set. Neighboring modes are the ones closest in bit rate to the current mode, either the next higher or next lower rate. If 0 or if not present, change between any two modes in the active codec mode set is allowed.

maxptime: The maximum amount of media which can be encapsulated in a payload packet, expressed as time in milliseconds. The time is calculated as the sum of the time the media present in the packet represents. The time SHOULD be a multiple of the frame size. If this parameter is not present, the sender MAY encapsulated any number of speech frames into one RTP packet.

crc: Permissible values are 0 and 1. If 1, frame CRCs SHALL be included in the payload, otherwise not. If crc=1, this also implies automatically that octet-aligned operation SHALL be used for the session.

robust-sorting: Permissible values are 0 and 1. If 1, the payload SHALL employ robust payload sorting. If 0 or if not present, simple payload sorting SHALL be used. If robust-sorting=1, this also implies automatically that octet-aligned operation SHALL be used for the session.

interleaving: Indicates that frame-block level interleaving SHALL be used for the session and its value defines the maximum number of frame-blocks allowed in an interleaving group (see Section B.4.4.1). If this parameter is not present, interleaving SHALL not be used. The presence of this parameter also implies automatically that octet-aligned operation SHALL be used.

ptime: see RFC2327 [11].

channels: The number of audio channels. The possible values and their respective channel order is specified in section 4.1 in [24]. If omitted it has the default value of 1.

Encoding considerations:

This type is defined for transfer via both RTP (RFC1889) and stored-file methods as described in Sections 4 and 5, respectively, of RFC XXXX. Audio data is binary data, and must be encoded for non-binary transport; the Base64 encoding is suitable for Email.

Security considerations: See Section 7 of RFC XXXX.

Public specification: Please refer to Section 11 of RFC XXXX.

Additional information:

The following applies to stored-file transfer methods:

Magic numbers:

single channel:

ASCII character string "#!AMR-WB\n" (or 0x2321414d522d57420a in hexadecimal)

multi-channel:

ASCII character string "#!AMR-WB MC1.0\n" (or 0x2321414d522d57425F4D43312E300a in hexadecimal)

File extensions: awb, AWB

Macintosh file type code: none

Object identifier or OID: none

Person & email address to contact for further information:

johan.sjoberg@ericsson.com

ari.lakaniemi@nokia.com

Intended usage: COMMON.

It is expected that many VoIP applications (as well as mobile applications) will use this type.

Author/Change controller:

johan.sjoberg@ericsson.com

ari.lakaniemi@nokia.com

IETF Audio/Video transport working group

B.8.3. Mapping MIME Parameters into SDP

The information carried in the MIME media type specification has a specific mapping to fields in the Session Description Protocol (SDP) [11], which is commonly used to describe RTP sessions. When SDP is used to specify sessions employing the AMR or AMR-WB codec, the mapping is as follows:

- The MIME type ("audio") goes in SDP "m=" as the media name.

- The MIME subtype (payload format name) goes in SDP "a=rtpmap" as the encoding name. The RTP clock rate in "a=rtpmap" MUST be 8000 for AMR and 16000 for AMR-WB, and the encoding parameters (number of channels) MUST either be explicitly set to N or omitted, implying a default value of 1. The values of N that are allowed is specified in Section 4.1 in [24].

- The parameters "ptime" and "maxptime" go in the SDP "a=ptime" and "a=maxptime" attributes, respectively.

- Any remaining parameters go in the SDP "a=fmtp" attribute by copying them directly from the MIME media type string as a semicolon separated list of parameter=value pairs.

Some example SDP session descriptions utilizing AMR and AMR-WB encodings follow. In these examples, long a=fmtp lines are folded to meet the column width constraints of this document; the backslash ("\") at the end of a line and the carriage return that follows it should be ignored.

Example of usage of AMR in a possible GSM gateway scenario:

m=audio 49120 RTP/AVP 97

a=rtpmap:97 AMR/8000/1

a=fmtp:97 mode-set=0,2,5,7; mode-change-period=2; \

mode-change-neighbor=1

a=maxptime:20

Example of usage of AMR-WB in a possible VoIP scenario:

m=audio 49120 RTP/AVP 98

a=rtpmap:98 AMR-WB/16000

a=fmtp:98 octet-align=1

Example of usage of AMR-WB in a possible streaming scenario (two channel stereo):

m=audio 49120 RTP/AVP 99

a=rtpmap:99 AMR-WB/16000/2

a=fmtp:99 interleaving=30

a=maxptime:100

Note that the payload format (encoding) names are commonly shown in upper case. MIME subtypes are commonly shown in lower case. These names are case-insensitive in both places. Similarly, parameter names are case-insensitive both in MIME types and in the default mapping to the SDP a=fmtp attribute.

B.9. IANA Considerations

Two new MIME subtypes are to be registered, see Section B.8. A new SDP attribute "maxptime", also defined in Section B.8, needs to be registered. The "maxptime" attribute is expected to be defined in the revision of RFC 2327 [11] and is added here with a consistent definition.

B.10. Acknowledgements

The authors would like to thank Petri Koskelainen, Bernhard Wimmer, Tim Fingscheidt, Sanjay Gupta, Stephen Casner, and Colin Perkins for their significant contributions made throughout the writing and reviewing of this document.

B.11. References

- [1] 3GPP TS 26.090, "Adaptive Multi-Rate (AMR) speech transcoding", version 4.0.0 (2001-03), 3rd Generation Partnership Project (3GPP).
- [2] 3GPP TS 26.101, "AMR Speech Codec Frame Structure", version 4.1.0 (2001-06), 3rd Generation Partnership Project (3GPP).
- [3] 3GPP TS 26.190 "AMR Wideband speech codec; Transcoding functions", version 5.0.0 (2001-03), 3rd Generation Partnership Project (3GPP).
- [4] 3GPP TS 26.201 "AMR Wideband speech codec; Frame Structure", version 5.0.0 (2001-03), 3rd Generation Partnership Project (3GPP).
- [5] S. Bradner, "Key words for use in RFCs to Indicate Requirement Levels", IETF RFC 2119, March 1997.
- [6] 3GPP TS 26.093, "AMR Speech Codec; Source Controlled Rate operation", version 4.0.0 (2000-12), 3rd Generation Partnership Project (3GPP).
- [7] 3GPP TS 26.193 "AMR Wideband Speech Codec; Source Controlled Rate operation", version 5.0.0 (2001-03), 3rd Generation Partnership Project (3GPP).
- [8] H. Schulzrinne, S. Casner, R. Frederick, and V. Jacobson, "RTP: A Transport Protocol for Real-Time Applications", IETF RFC 1889, January 1996.
- [9] GSM 06.92, "Comfort noise aspects for Adaptive Multi-Rate (AMR) speech traffic channels", version 7.1.1 (1999-12), European Telecommunications Standards Institute (ETSI).
- [10] 3GPP TS 26.192 "AMR Wideband speech codec; Comfort Noise aspects", version 5.0.0 (2001-03), 3rd Generation Partnership Project (3GPP).
- [11] M. Handley and V. Jacobson, "SDP: Session Description Protocol", IETF RFC 2327, April 1998
- [24] H. Schulzrinne, "RTP Profile for Audio and Video Conferences with Minimal Control" IETF RFC 1890, January 1996.

B.11.1 Informative References

- [12] GSM 06.60, "Enhanced Full Rate (EFR) speech transcoding", version 8.0.1 (2000-11), European Telecommunications Standards Institute (ETSI).
- [13] ANSI/TIA/EIA-136-Rev.C, part 410 - "TDMA Cellular/PCS – Radio Interface, Enhanced Full Rate Voice Codec (ACELP)." Formerly IS-641. TIA published standard, June 1 2001.

- [14] ARIB, RCR STD-27H, "Personal Digital Cellular Telecommunication System RCR Standard", Association of Radio Industries and Businesses (ARIB).
- [15] Lars-Ake Larzon, Mikael Degermark, and Stephen Pink, "The UDP Lite Protocol", IETF Draft (Work in Progress), February 23, 2001.
- [16] 3GPP TS 25.415 "UTRAN Iu Interface User Plane Protocols", version 4.2.0 (2001-09), 3rd Generation Partnership Project (3GPP).
- [17] S. Floyd, M. Handley, J. Padhye, J. Widmer, "Equation-Based Congestion Control for Unicast Applications", ACM SIGCOMM 2000, Stockholm, Sweden
- [18] A. Li, et al., "An RTP Payload Format for Generic FEC with Uneven Level Protection ", IETF Draft (Work in Progress), October 2001.
- [19] J. Rosenberg, and H. Schulzrinne, "An RTP Payload Format for Generic Forward Error Correction", IETF RFC 2733, December 1999.
- [20] 3GPP TS 26.102, "AMR speech codec interface to Iu and Uu", version 4.0.0 (2001-03), 3rd Generation Partnership Project (3GPP).
- [21] 3GPP TS 26.202 "AMR Wideband speech codec; Interface to Iu and Uu", version 5.0.0 (2001-03), 3rd Generation Partnership Project (3GPP).
- [22] Baughner, et al., "The Secure Real Time Transport Protocol", IETF Draft (Work in Progress), November 2001.
- [23] C. Perkins, et al., "RTP Payload for Redundant Audio Data", IETF RFC 2198, September 1997.
- ETSI documents can be downloaded from the ETSI web server, "http://www.etsi.org/". Any 3GPP document can be downloaded from the 3GPP webserver, "http://www.3gpp.org/", see specifications. TIA documents can be obtained from "www.tiaonline.org".

B.12. Authors' Addresses

Johan Sjoberg Tel: +46 8 50878230
Ericsson Research Email: Johan.Sjoberg@ericsson.com
Ericsson Radio Systems AB
SE-164 80 Stockholm, SWEDEN

Magnus Westerlund Tel: +46 8 4048287
Ericsson Research Email: Magnus.Westerlund@ericsson.com
Ericsson Radio Systems AB
SE-164 80 Stockholm, SWEDEN

Ari Lakaniemi Tel: +358-71-8008000
Nokia Research Center Email: ari.lakaniemi@nokia.com
P.O.Box 407
FIN-00045 Nokia Group, FINLAND

Qiaobing Xie Tel: +1-847-632-3028
Motorola, Inc. Email: qxie1@email.mot.com
1501 W. Shure Drive, 2-B8
Arlington Heights, IL 60004, USA