

TR R1.04 V0.0.24 (1999-12)

Technical Report

**3rd Generation Partnership Project (3GPP);
Technical Specification Group (TSG);
Radio Access Network (RAN);
Working Group 1 (WG1);
Channel coding and multiplexing examples**



The present document has been developed within the 3rd Generation Partnership Project (3GPP™) and may be further elaborated for the purposes of 3GPP.

The present document has not been subject to any approval process by the 3GPP Organisational Partners and shall not be implemented. This Specification is provided for future development work within 3GPP only. The Organisational Partners accept no liability for any use of this Specification. Specifications and reports for implementation of the 3GPP™ system should be obtained via the 3GPP Organisational Partners' Publications Offices.

Reference

<Workitem>
(<Shortfilename>.PDF)

Keywords

<keyword[, keyword]>

3GPP

Postal address

Office address

Internet

secretariat@3gpp.org
Individual copies of this deliverable
can be downloaded from
<http://www.3gpp.org>

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

©
All rights reserved.

Contents

Intellectual Property Rights	5
Foreword.....	5
1 Scope	6
2 References.....	6
3 Definitions, symbols and abbreviations.....	6
3.1 Definitions	6
3.2 Symbols	6
3.3 Abbreviations.....	6
4 Channel coding and multiplexing examples	8
4.1 FDD mode.....	8
4.1.1 Downlink.....	8
4.1.1.1 BCH 8	8
4.1.1.2 Example for PCH and FACH.....	9
4.1.1.3 Example for DCH	10
4.1.1.3.1 DCH-> Radio frame segmentation	10
4.1.1.3.1.1 Example for 4 kbps data	10
4.1.1.3.1.2 Example for 12.35 kbps data.....	11
4.1.1.3.1.3 Example for 64/128/384 kbps packet data	12
4.1.1.3.1.4 Example for 64 kbps data	13
4.1.1.3.2 TrCh multiplexing -> Physical channel mapping	14
4.1.1.3.2.1 Example for Stand-alone mapping of 4 kbps data	14
4.1.1.3.2.2 Example for multiplexing of 12.35 kbps data and 4 kbps data.....	15
4.1.1.3.2.3 Example for multiplexing of 64/128/384 kbps packet data and 4 kbps data.....	16
4.1.1.3.2.4 Example for multiplexing of 64 kbps data and 4 kbps data	18
4.1.2 Uplink	19
4.1.2.1 Example for RACH.....	19
4.1.2.2 Example for DCH	20
4.1.2.2.1 DCH -> Radio frame segmentation	20
4.1.2.2.1.1 Example for 4 kbps data	20
4.1.2.2.1.2 Example for 12.35 kbps data.....	21
4.1.2.2.1.3 Example for 64/128/384 kbps packet data	22
4.1.2.2.1.4 Example for 64 kbps data	23
4.1.2.2.2 TrCH multiplexing -> Physical channel mapping.....	24
4.1.2.2.2.1 Example for Stand-alone mapping of 4 kbps data	24
4.1.2.2.2.2 Example for multiplexing of 12.35 kbps data and 4 kbps data.....	25
4.1.2.2.2.3 Example for multiplexing of 64/128/384 kbps packet data and 4 kbps data.....	26
4.1.2.2.2.4 Example for multiplexing of 64 kbps data and 4 kbps data	27
4.2 TDD mode	28
4.2.1 Downlink.....	28
4.2.1.1 BCH 28	28
4.2.1.2 Example for PCH.....	29
4.2.1.3 Example for FACH.....	30
4.2.1.4 Example for DCH	31
4.2.1.4.1 DCH-> Radio frame segmentation	31
4.2.1.4.1.1 Example for 2.4 kbps data	31
4.2.1.4.1.2 Example for 12.35 kbps data.....	32
4.2.1.4.1.3 Example of 64/128/384 kbps packet data	33
4.2.1.4.1.4 Example for 64 kbps data	34
4.2.1.4.2 TrCH multiplexing -> Physical channel mapping.....	35
4.2.1.4.2.1 Example for Stand-alone mapping of 2.4 kbps data	35
4.2.1.4.2.2 Example for multiplexing of 12.35 kbps data and 2.4 kbps data.....	36

4.2.1.4.2.3 Example for multiplexing of 64/128/384 kbps packet data and 2.4 kbps data37

4.2.1.4.2.4 Example for multiplexing of 64 kbps data and 2.4 kbps data.....38

4.2.2 Uplink39

4.2.2.1 RACH39

4.2.2.2 Example for DCH40

4.2.2.2.1 DCH-> Radio frame segmentation40

4.2.2.2.2 TrCH multiplexing -> Physical channel mapping.....41

4.2.2.2.2.1 Example for Stand-alone mapping of 2.4 kbps data41

4.2.2.2.2.2 Example for multiplexing of 12.35 kbps data and 2.4 kbps data.....42

4.2.2.2.2.3 Example for multiplexing of 64/128/384 kbps packet data and 2.4 kbps data43

4.2.2.2.2.4 Example for multiplexing of 64 kbps data and 2.4 kbps data.....45

5 History 46

Intellectual Property Rights

<IPR notice shall be provided once correct notice is available within 3GPP>

Foreword

This Technical Report has been produced by the 3rd Generation Partnership Project, Technical Specification Group Radio Access Network, Working Group 1 (3GPP TSG RAN WG1).

The contents of this TR may be subject to continuing work within the 3GPP and may change following formal TSG approval. Should the TSG modify the contents of this TR, it will be re-released with an identifying change of release date and an increase in version number as follows:

Version m.x.y

where:

- m indicates [major version number]
- x the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- y the third digit is incremented when editorial only changes have been incorporated into the report.

1 Scope

This technical report describes examples of channel coding and multiplexing for physical channels of FDD mode and TDD mode.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- [1] 3GPP TS 25.211: “Physical channels and mapping of transport channels onto physical channels (FDD)”
 - [2] 3GPP TS 25.212: “Multiplexing and channel coding (FDD)”
 - [3] 3GPP TS 25.213: “Spreading and modulation (FDD)”
 - [4] 3GPP TS 25.214: “Physical layer procedures (FDD)”
 - [5] 3GPP TS 25.215: “Physical layer – Measurements (FDD)”
 - [6] 3GPP TS 25.221: “Physical channels and mapping of transport channels onto physical channels (TDD)”
 - [7] 3GPP TS 25.222: “Multiplexing and channel coding (TDD)”
 - [8] 3GPP TS 25.223: “Spreading and modulation (TDD)”
 - [9] 3GPP TS 25.224: “Physical layer procedures (TDD)”
 - [10] 3GPP TS 25.225: “Physical layer – Measurements (TDD)”
-

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the [following] terms and definitions [given in ... and the following] apply.

<defined term>: <definition>.

example: text used to clarify abstract rules by applying them literally.

3.2 Symbols

For the purposes of the present document, the following symbols apply:

<symbol> <Explanation>

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

<ACRONYM> <Explanation>

BCH	Broadcast Channel
CC	Convolutional coding
CCPCH	Common Control Physical Channel
CRC	Cyclic Redundancy Code
DCH	Dedicated Channel
DCCH	Dedicated Control Channel
DL	Downlink
DPCH	Dedicated Physical Channel
DPCCCH	Dedicated Physical Control Channel
DPDCH	Dedicated Physical Data Channel
FACH	Forward Access Channel
FDD	Frequency Division Duplex
MA	Midamble

Mcps	Mega Chip Per Second
PCCPCH	Primary Common Control Physical Channel
PCH	Paging Channel
PRACH	Physical Random Access Channel
RACH	Random Access Channel
SF	Spreading Factor
SCCPCH	Secondary Common Control Physical Channel
TDD	Time Division Duplex
TFCI	Transport Format Combination Indicator
TPC	Transmit Power Control
TrBk	Transport Block
TrCh	Transport Channel
TTI	Transmission Time Interval
UL	Uplink

4 Channel coding and multiplexing examples

Following examples of channel coding and multiplexing is according to reference [2] and [7]. If there are any contradictions between following examples and the references, this technical report should be corrected according to the references unless it is clear that the contradiction comes from error in the references.

Number and variables in following figures show the number of bits in corresponding fields.

4.1 FDD mode

4.1.1 Downlink

4.1.1.1 BCH

Table 1: Parameters for BCH

Transport block size	246
CRC	16 bits
Coding	CC, coding rate = 1/2
TTI	20 ms
The number of codes	1
SF	256

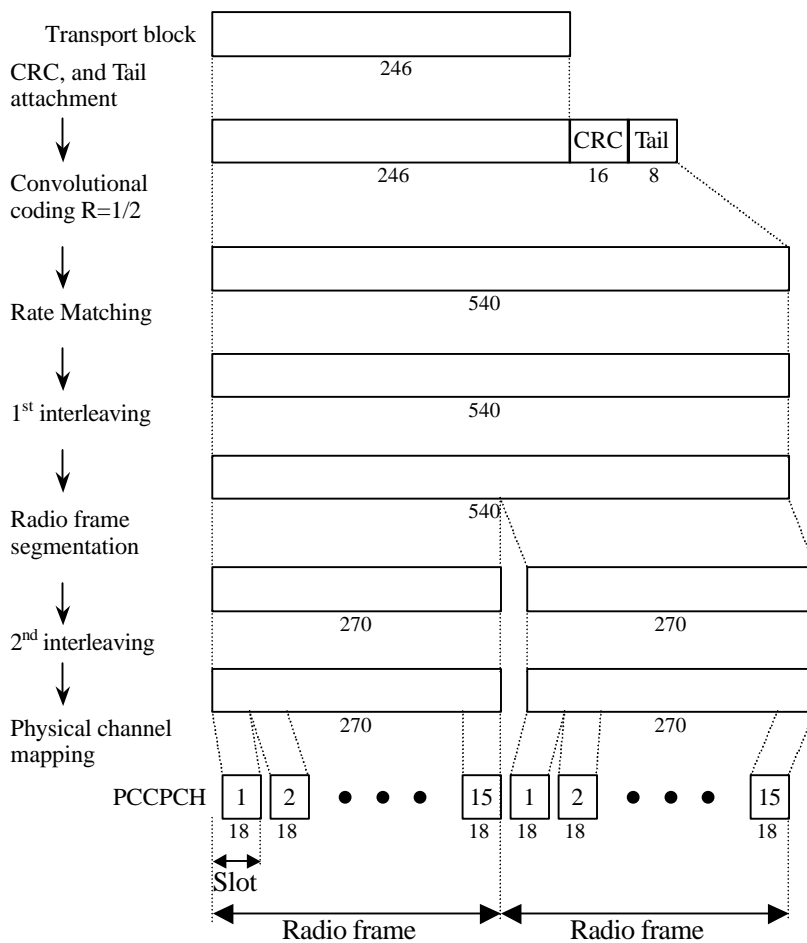


Figure 1: Channel coding for BCH

4.1.1.2 Example for PCH and FACH

Table 2: Parameter examples for PCH and FACH

Coding	CC, coding rate = 1/2
TTI	10 ms
The numbers of codes	1

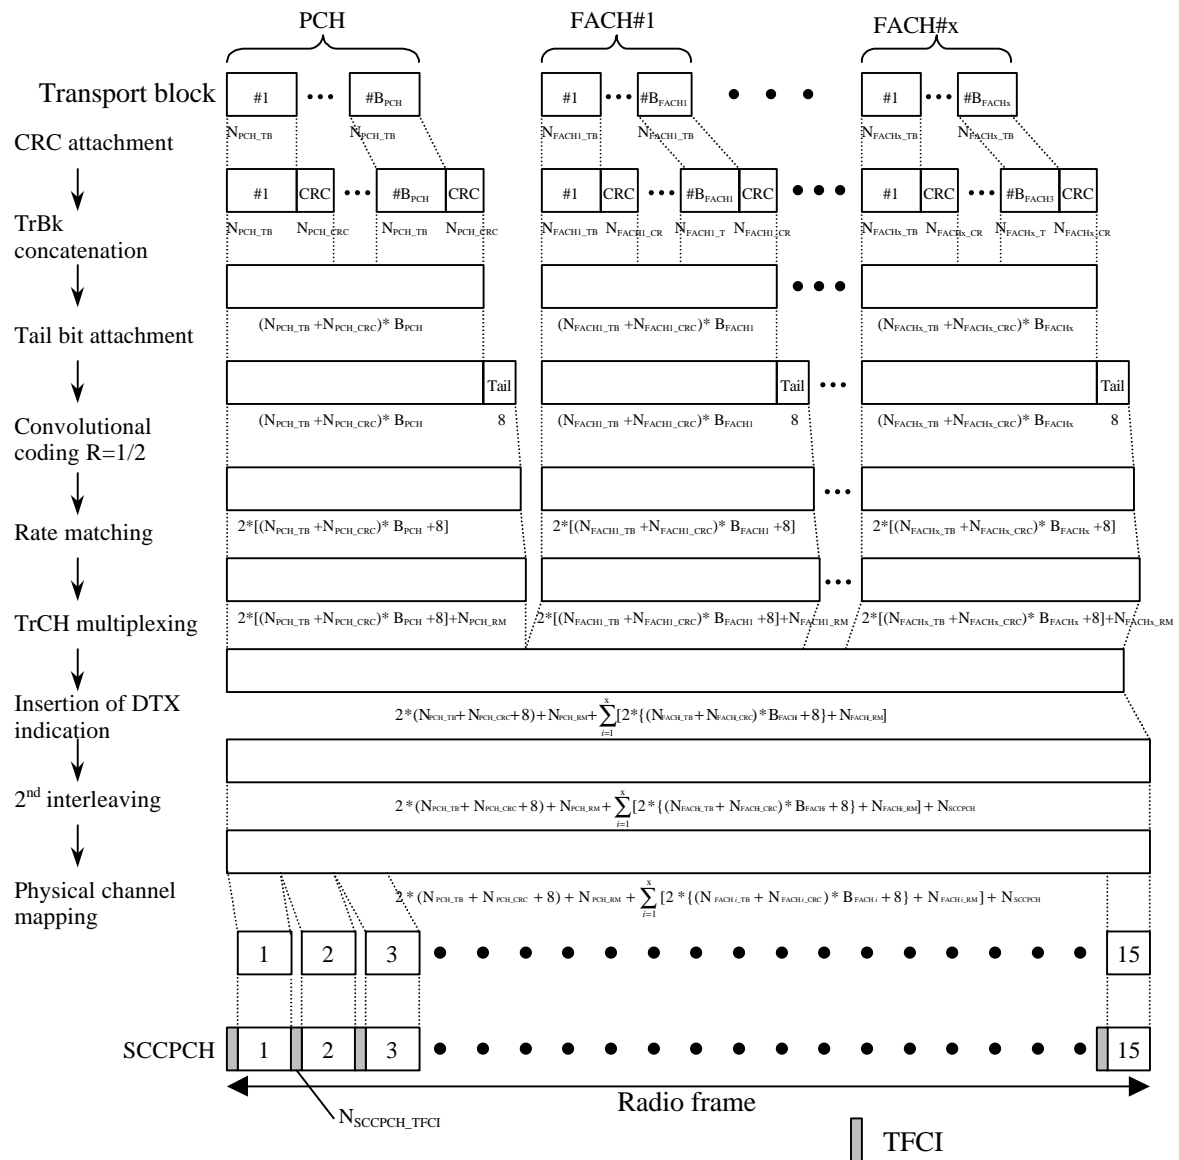


Figure 2: Channel coding and multiplexing example for PCH and FACH

4.1.1.3 Example for DCH

4.1.1.3.1 DCH-> Radio frame segmentation

4.1.1.3.1.1 Example for 4 kbps data

<Note: This example can be applied to DCCH.>

Table 3: Parameter examples for 4 kbps data

Transport block size	164 bits
Transport block set size	164 bits
CRC	16 bits
Coding	CC, coding rate = 1/3
TTI	40 ms

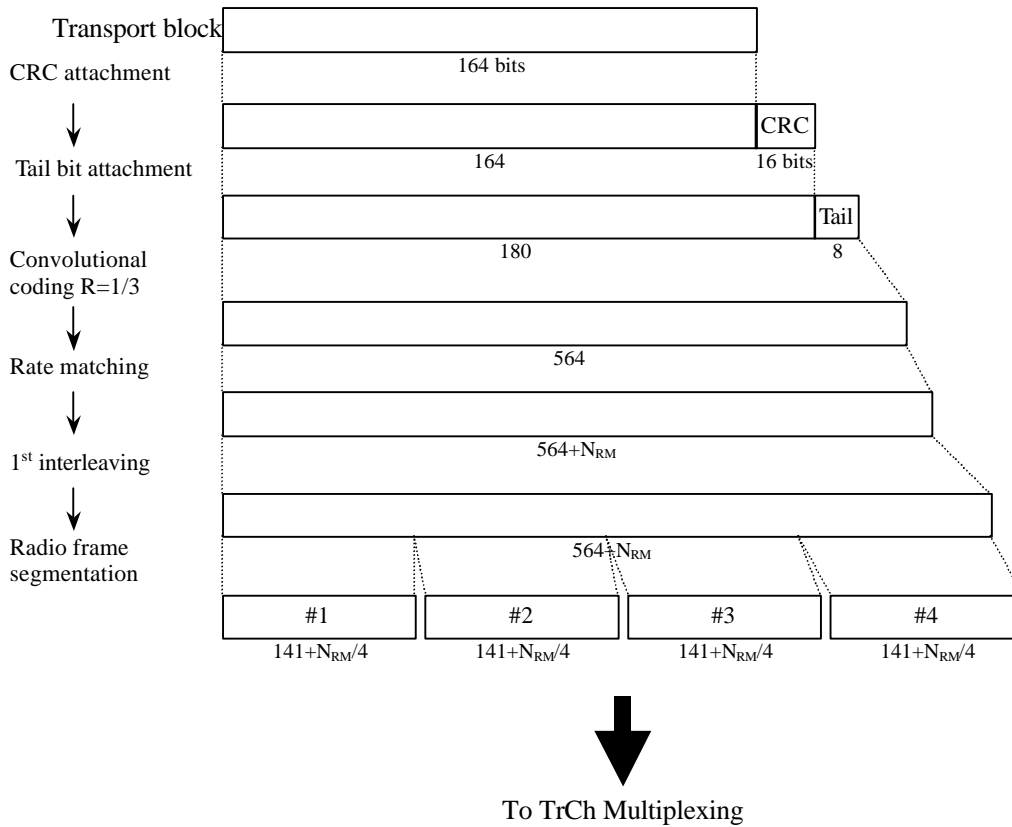


Figure 3: Channel coding and multiplexing example for 4 kbps data

4.1.1.3.1.2 Example for 12.35 kbps data

<Note: This example can be applied to AMR speech. >

<Editor's Note: coding scheme for TrCh#4 is to be described according to consensus of transmission scheme for mode command bits of AMR speech>

Table 4: Parameter examples for 12.35 kbps data

The number of TrChs	4
Transport block size	81, 103, 60, and 3 bits
CRC	12 bits (attached only to TrCh#1)
Coding	CC, coding rate = 1/3 for TrCh#1, 2 coding rate = 1/2 for TrCh#3
TTI	20 ms

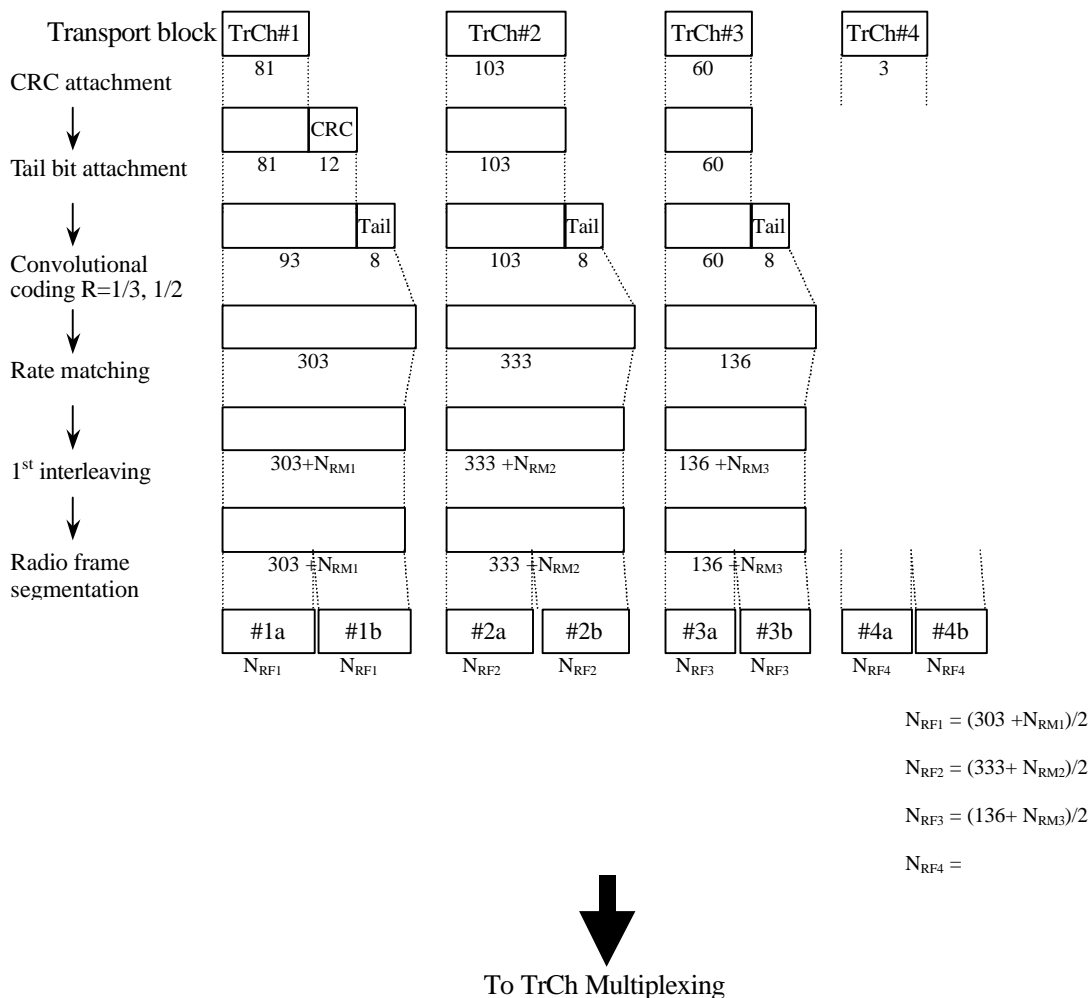


Figure 4: Channel coding and multiplexing example for 12.35 kbps data

4.1.1.3.1.3 Example for 64/128/384 kbps packet data

Table 5: Parameters for 64/128/384 kbps packet data

The number of TrChs		1
Transport block size		640 bits
Transport block Size size	64 kbps	640*B bits (B=0, 1)
	128 kbps	640*B bits (B=0, 1, 2)
	384 kbps	640*B bits (B=0, 1, 2, ..., 6)
CRC		16 bits
Coding		Turbo coding, coding rate = 1/3
TTI		10 ms

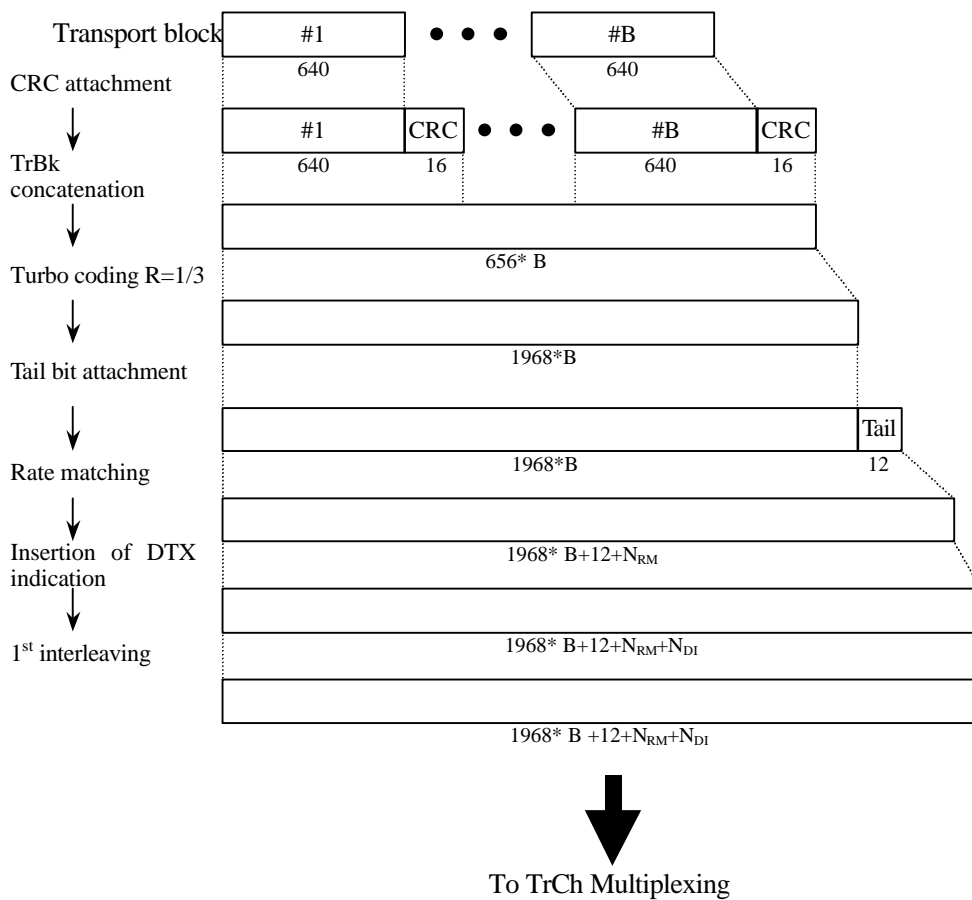


Figure 5: Channel coding and multiplexing example for 64/128/384 kbps packet data

4.1.1.3.1.4 Example for 64 kbps data

<Note: This example can be applied to ISDN service.>

Table 6: Parameters for 64 kbps data

The number of TrChs	1
Transport block size	640 bits
Transport block set size	4*640 bits
CRC	16 bits
Coding	Turbo coding, coding rate = 1/3
TTI	40 ms

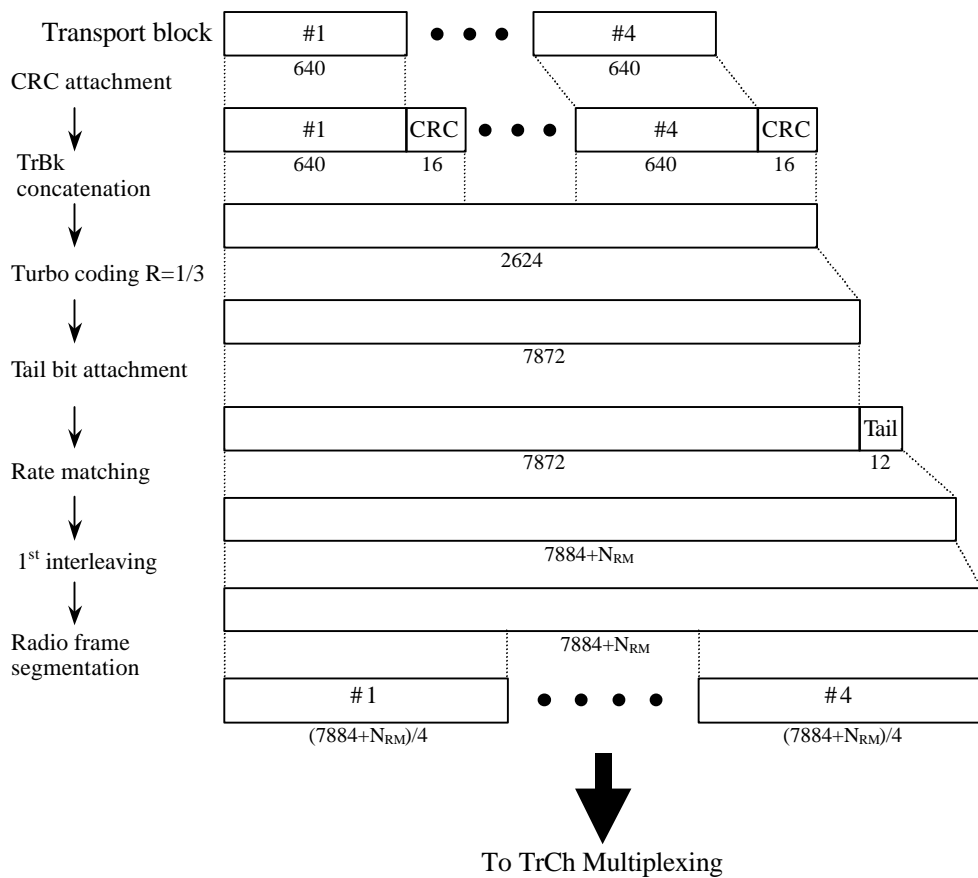


Figure 6: Channel coding and multiplexing example for 64 kbps data

4.1.1.3.2 TrCh multiplexing -> Physical channel mapping

4.1.1.3.2.1 Example for Stand-alone mapping of 4 kbps data

<Note: This example can be applied to Stand-alone mapping of DCCH.>

Table 7 shows example of physical channel parameters for stand-alone mapping of 4 kbps data.

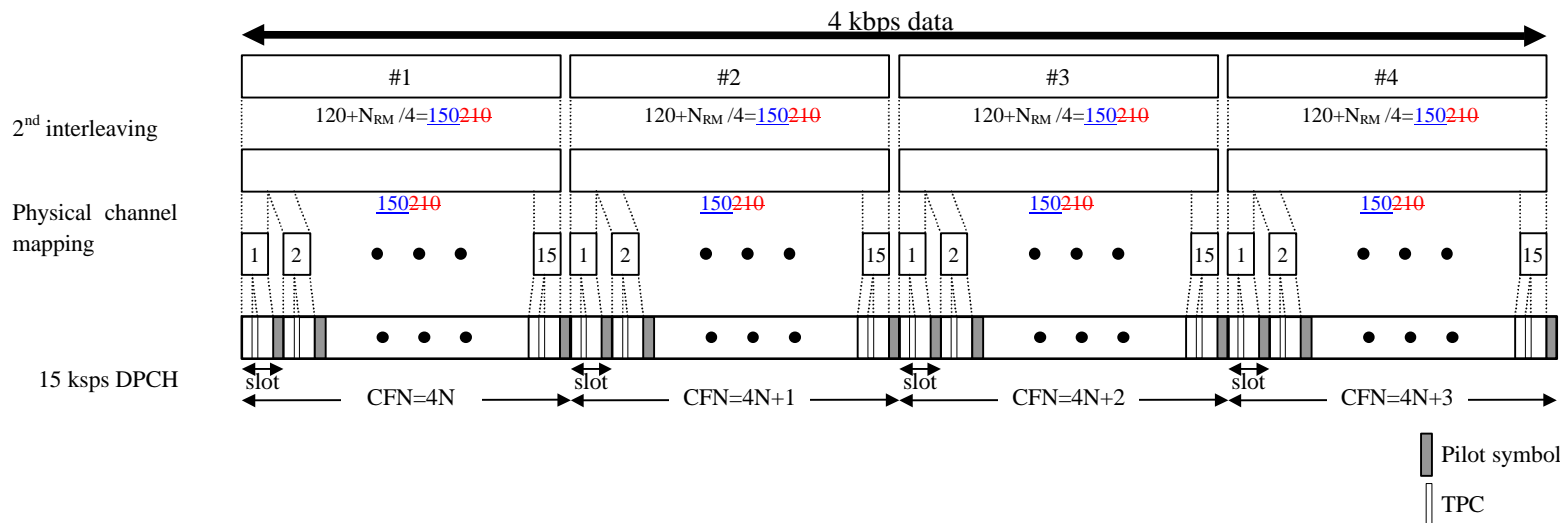


Figure 7: Channel coding and multiplexing example for stand-alone mapping of 4 kbps data

Table 7: Physical channel parameters for stand-alone mapping of 4 kbps data

Symbol rate (kps)	N_{pilot} (bits)	N_{TFCI} (bits)	N_{TPC} (bits)	N_{data1} (bits)	N_{data2} (bits)
15	8	0	2	2	8+2

4.1.1.3.2.2 Example for multiplexing of 12.35 kbps data and 4 kbps data

<Note: This example can be applied to multiplexing AMR speech and DCCH.>

Table 8 shows example of physical channel parameters for multiplexing of 12.35 kbps data and 4 kbps data.

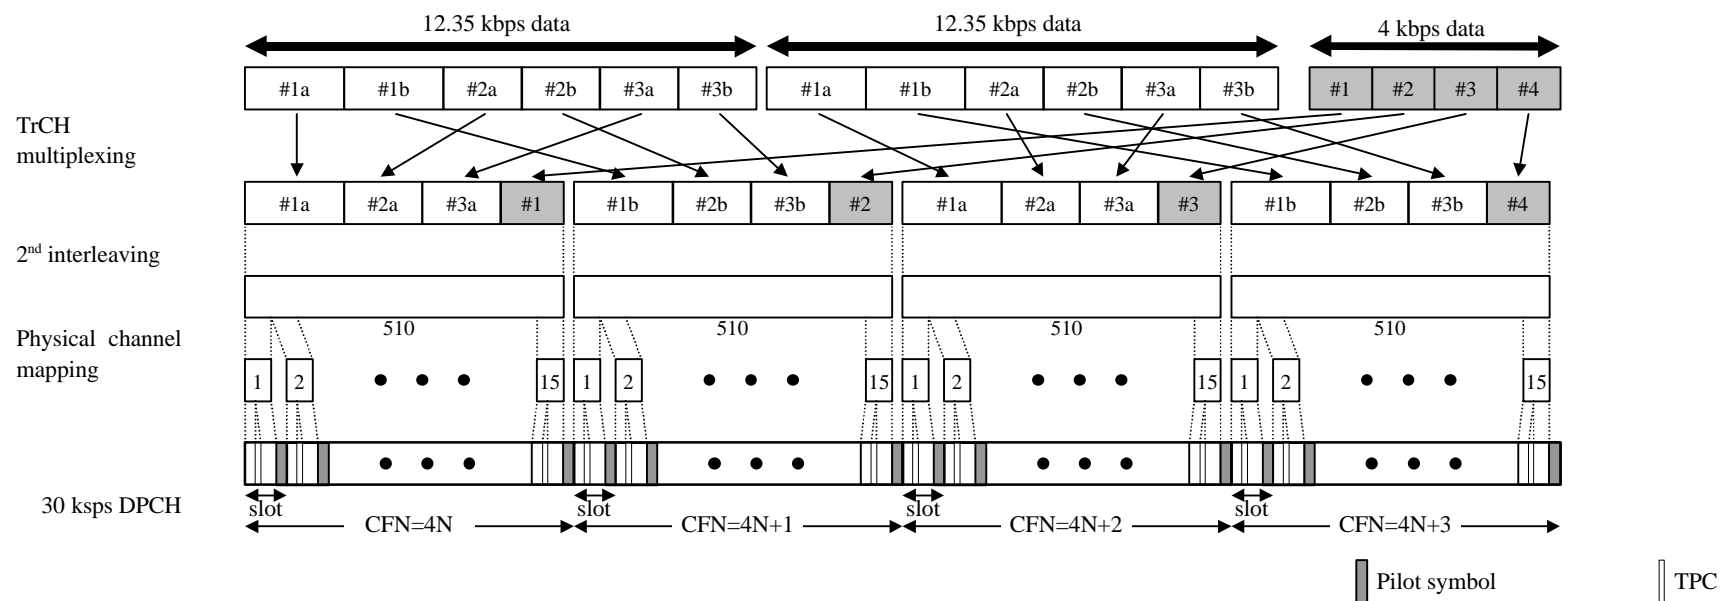


Figure 8: Channel coding and multiplexing example for multiplexing of 12.35 kbps data and 4 kbps data

Table 8: Physical channel parameters for multiplexing of 12.35 kbps data and 4 kbps data

Symbol rate (kps)	N_{pilot} (bits)	N_{TFCI} (bits)	N_{TPC} (bits)	N_{data1} (bits)	N_{data2} (bits)
30	4	0	2	6	28

4.1.1.3.2.3 Example for multiplexing of 64/128/384 kbps packet data and 4 kbps data

<Note: This example can be applied to multiplexing 64/128/384 kbps packet data and DCCH.>

Table 9 shows example of physical channel parameters for multiplexing of 64/128/384 kbps packet data and 4 kbps data.

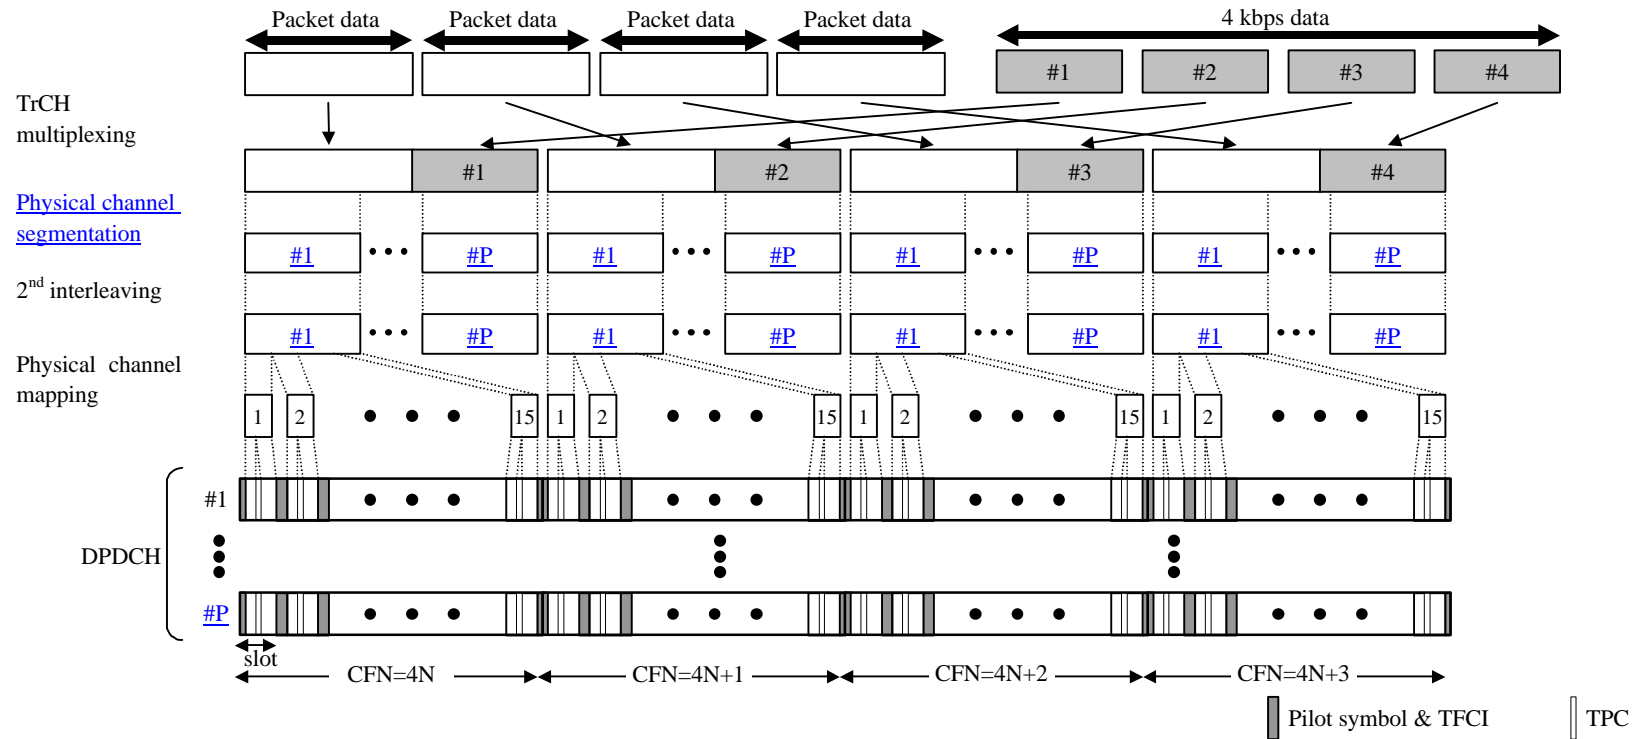


Figure 9: Channel coding and multiplexing example for multiplexing of 64/128/384 kbps packet data and 4 kbps data

Table 9: Physical channel parameters for multiplexing of 64/128/384 kbps packet data and 4 kbps data

Data rate (kbps)	Symbol rate (ksps)	No. of physical channel: P	N_{pilot} (bits)	N_{TFCI} (bits)	N_{TPC} (bits)	N_{data1} (bits)	N_{data2} (bits)
64	120	1	8	8	4	4	56

128	240	1	16	8	8	48	240
384	960 240	3 +	16	8	8	240 48	1008 240

4.1.1.3.2.4 Example for multiplexing of 64 kbps data and 4 kbps data

<Note: This example can be applied to multiplexing ISDNs data and DCCH.>

Table 10 shows example of physical channel parameters for multiplexing of 64 kbps data and 4 kbps data.

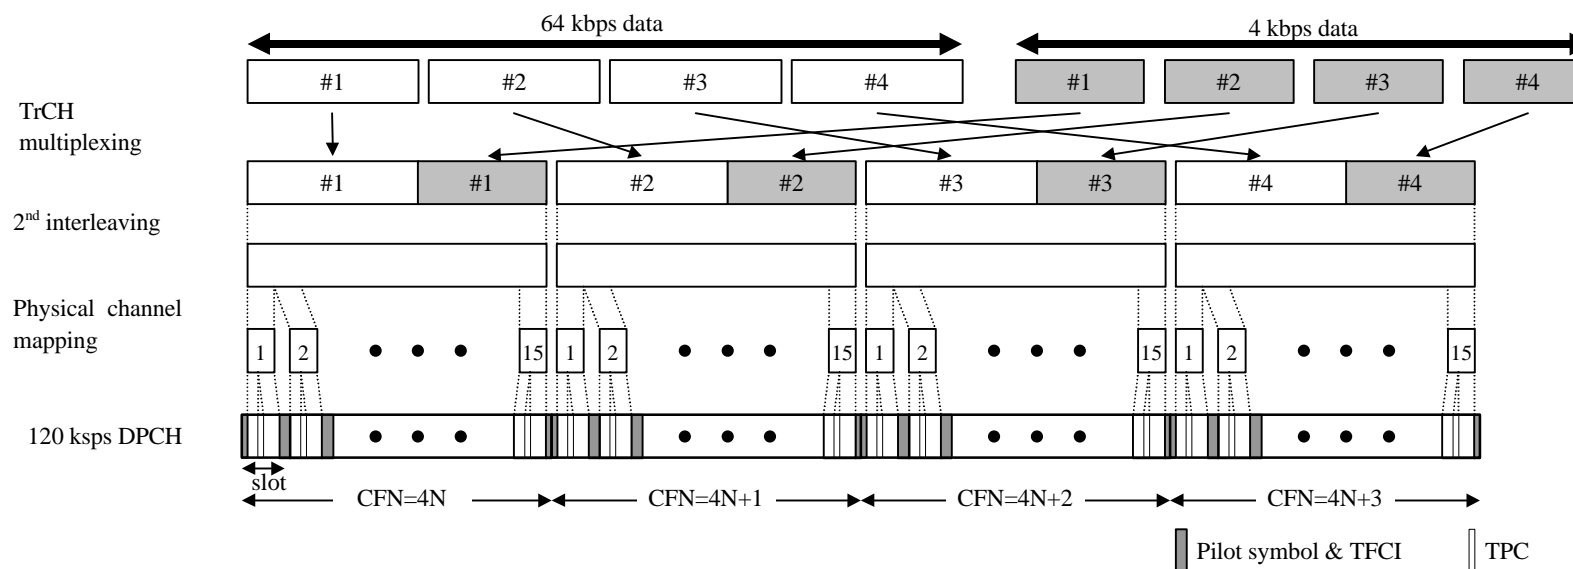


Figure 10: Channel coding and multiplexing example for multiplexing of 64 kbps data and 4 kbps data

Table 10: Physical channel parameters for multiplexing of 64 kbps data and 4 kbps data

Symbol rate (kps)	No. of physical channel	N_{pilot} (bits)	N_{TFCI} (bits)	N_{TPC} (bits)	N_{data1} (bits)	N_{data2} (bits)
120	1	8	8*	4	20	120

4.1.2 Uplink

4.1.2.1 Example for RACH

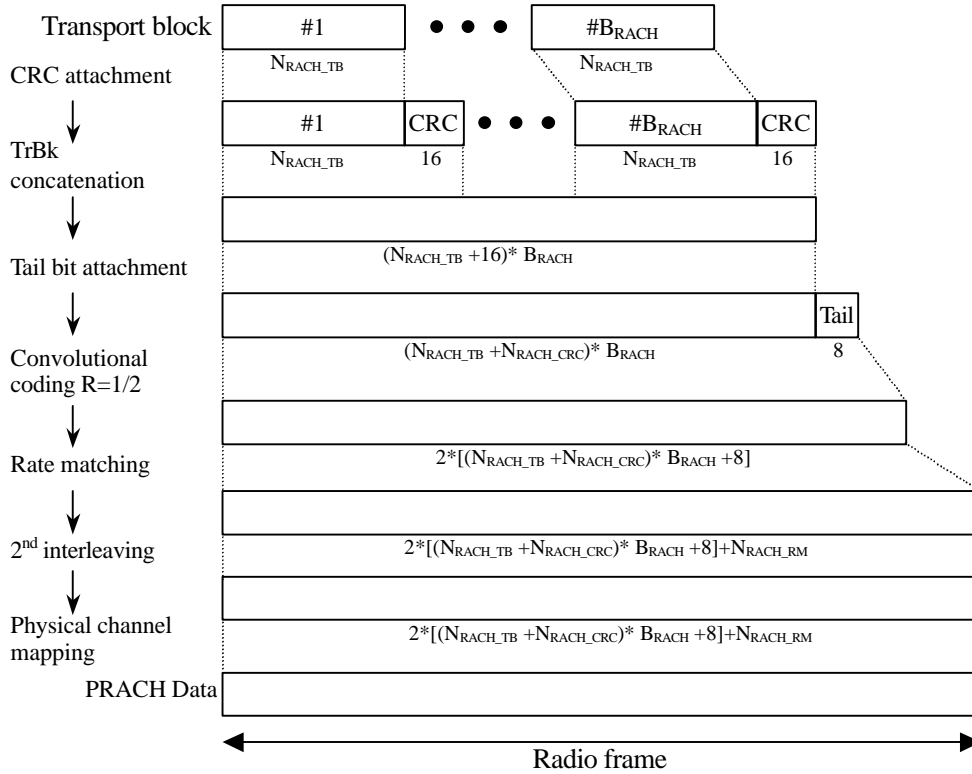


Figure 11: Channel coding and multiplexing example for PRACH

4.1.2.2 Example for DCH

4.1.2.2.1 DCH -> Radio frame segmentation

4.1.2.2.1.1 Example for 4 kbps data

<Note: This example can be applied to DCCH.>

Table 11: Parameter examples for 4 kbps data

Transport block size	164 bits
Transport block set size	164 bits
CRC	16 bits
Coding	CC, coding rate = 1/3
TTI	40 ms

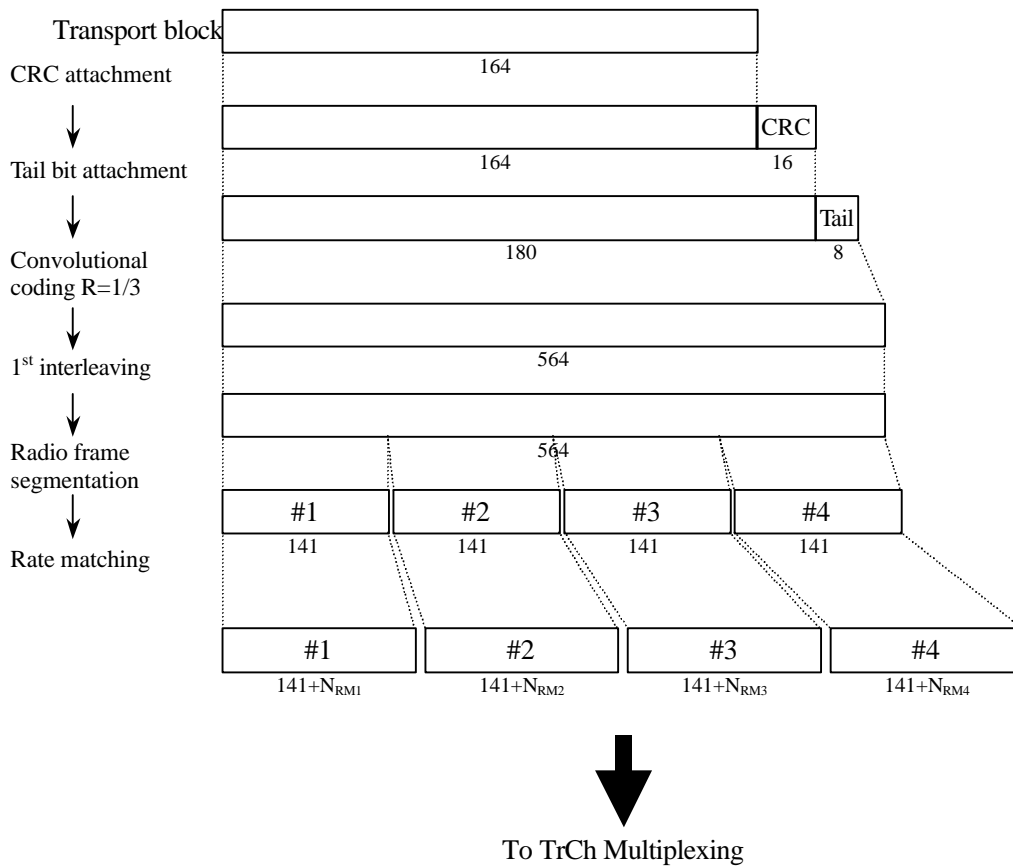


Figure 12: Channel coding and multiplexing example for 4 kbps data

4.1.2.2.1.2 Example for 12.35 kbps data

<Note: This example can be applied to AMR speech. >

<Editor's Note: coding scheme for TrCh#4 is to be described according to consensus of transmission scheme for mode command bits of AMR speech>

Table 12: Parameter examples for 12.35 kbps data

The number of TrChs	4
Transport block size	81, 103, 60, and 3 bits
CRC	12 bits (attached only to TrCh#1)
Coding	CC, coding rate = 1/3 for TrCh#1, 2 coding rate = 1/2 for TrCh#3
TTI	20 ms

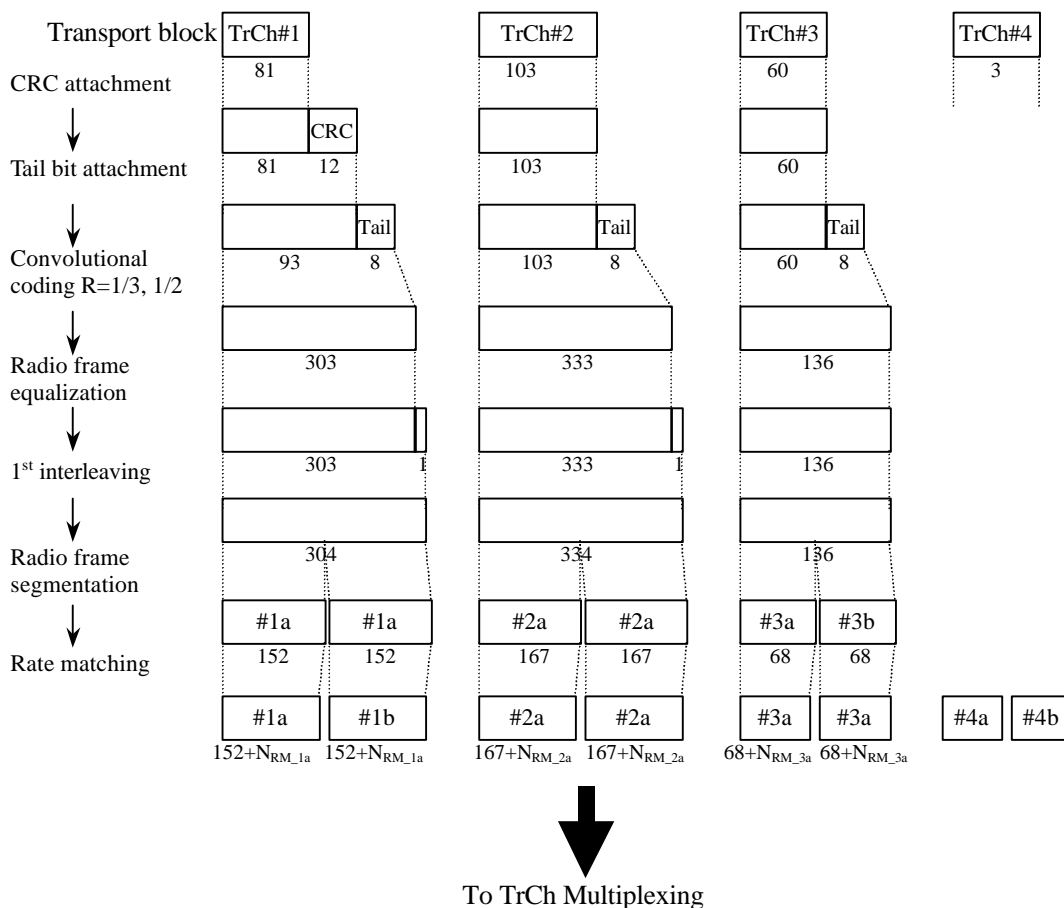


Figure 13: Channel coding and multiplexing example for 12.35 kbps data

4.1.2.2.1.3 Example for 64/128/384 kbps packet data

Table 13: Parameters for 64/128/384 kbps packet data

The number of TrChs		1
Transport block size		640 bits
Transport block Size size	64 kbps	640*B bits (B=0, 1)
	128 kbps	640*B bits (B=0, 1, 2)
	384 kbps	640*B bits (B=0, 1, 2, ..., 6)
CRC		16 bits
Coding		Turbo coding, coding rate = 1/3
TTI		10 ms

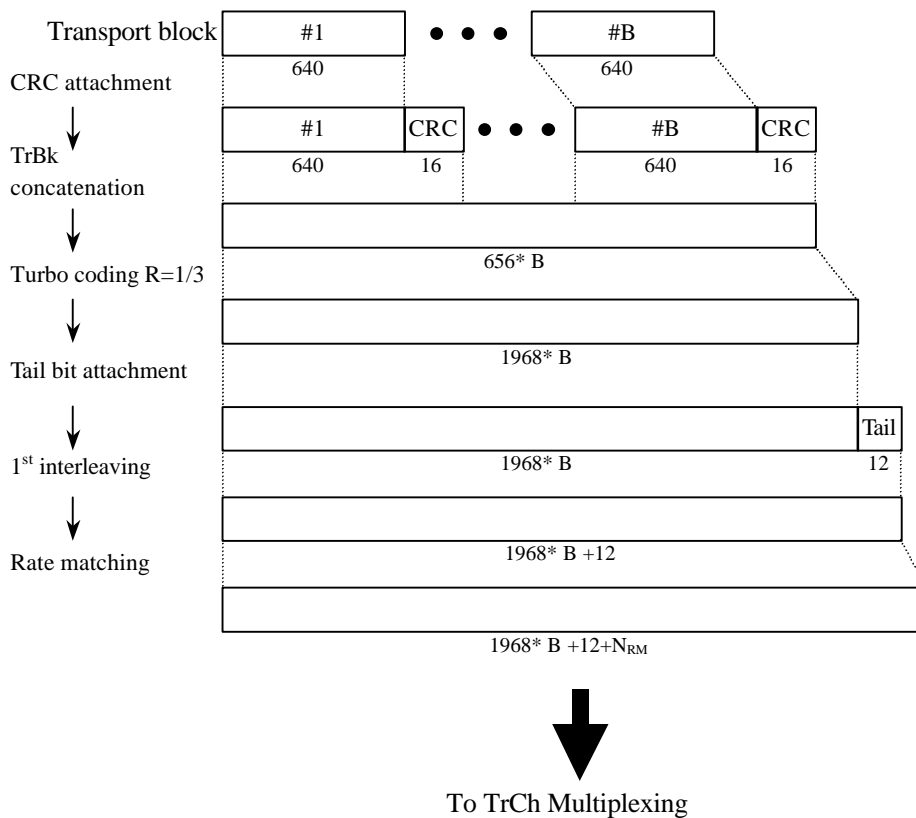


Figure 14: Channel coding and multiplexing example for 64/128/384 kbps packet data

4.1.2.2.1.4 Example for 64 kbps data

<Note: This example can be applied to ISDN service.>

Table 14: Parameters for 64 kbps data

The number of TrChs	1
Transport block size	640 bits
Transport block set size	4*640 bits
CRC	16 bits
Coding	Turbo coding, coding rate = 1/3
TTI	40 ms

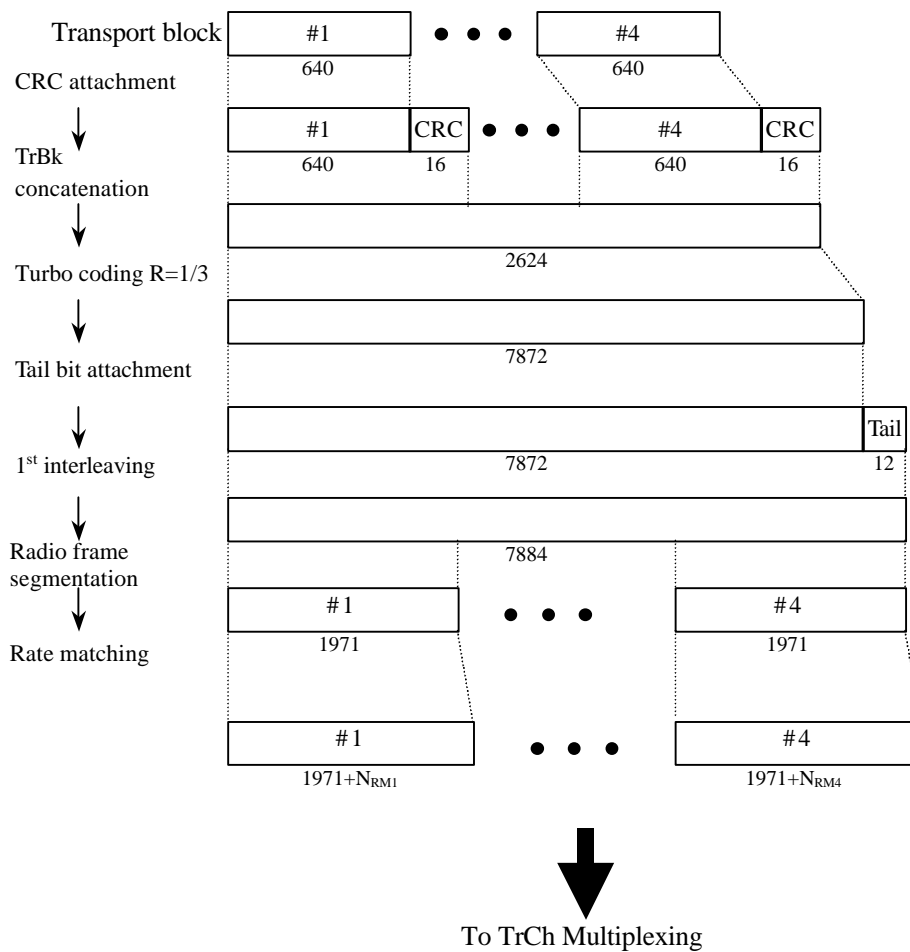


Figure 15: Channel coding and multiplexing example for 64 kbps data

4.1.2.2.2 TrCH multiplexing -> Physical channel mapping

4.1.2.2.2.1 Example for Stand-alone mapping of 4 kbps data

<Note: This example can be applied to Stand-alone mapping of DCCH.>

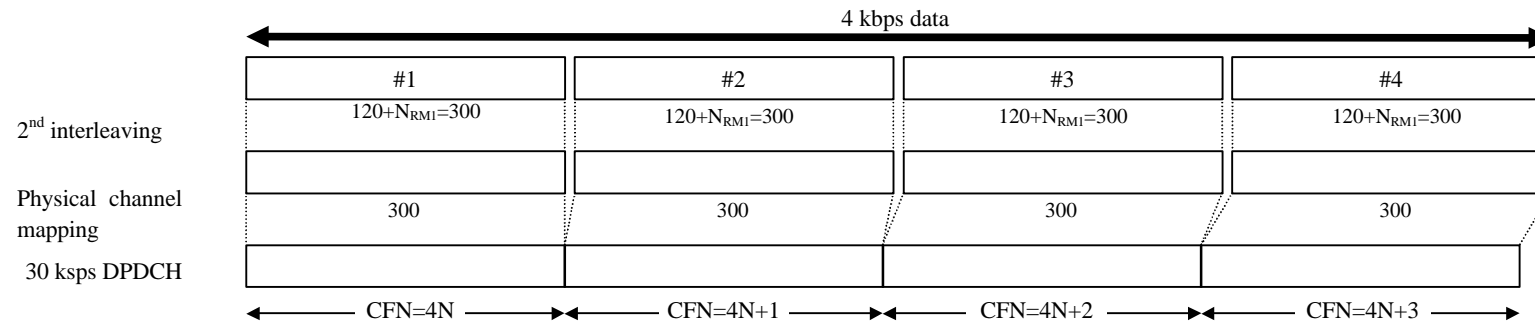


Figure 16: Channel coding and multiplexing example for stand-alone mapping of 4 kbps data

4.1.2.2.2.2 Example for multiplexing of 12.35 kbps data and 4 kbps data

<Note: This example can be applied to multiplexing AMR speech and DCCH.>

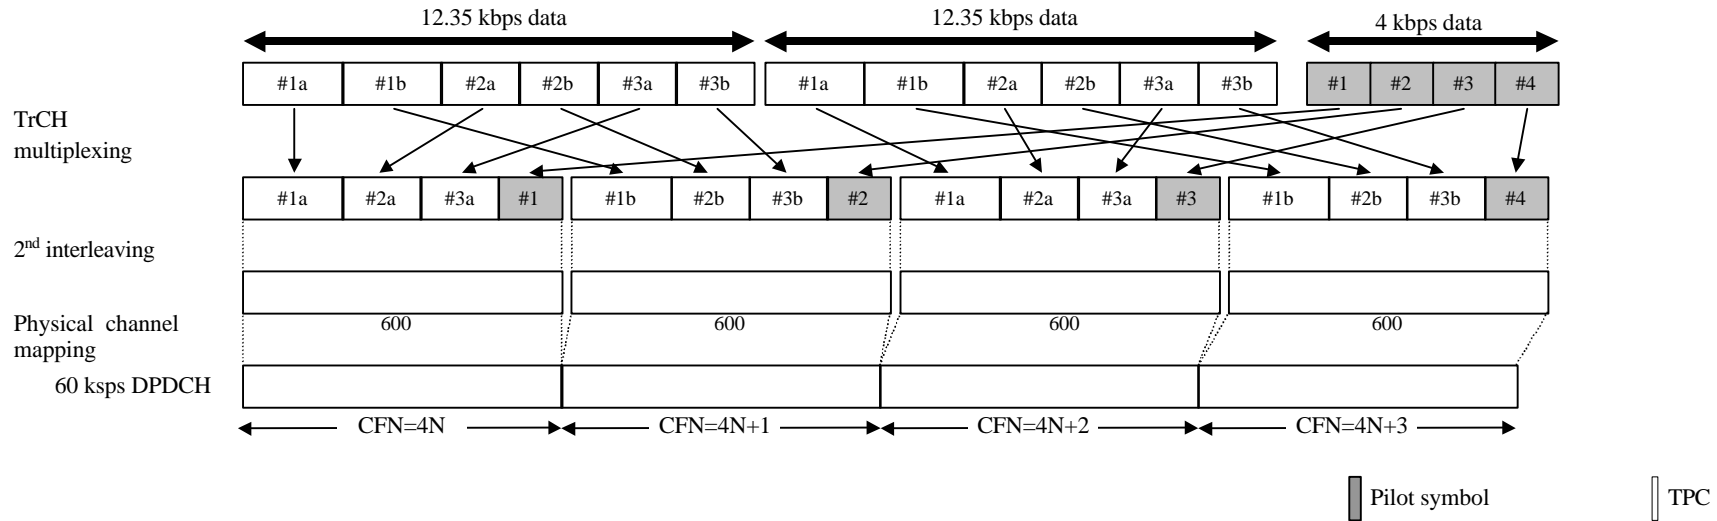


Figure 17: Channel coding and multiplexing example for multiplexing of 12.35 kbps data and 4 kbps data

4.1.2.2.3 Example for multiplexing of 64/128/384 kbps packet data and 4 kbps data

<Note: This example can be applied to multiplexing 64/128/384 kbps packet data and DCCH.>

Table 15 shows example of physical channel parameters for multiplexing of 64/128/384 kbps packet data and 4 kbps data.

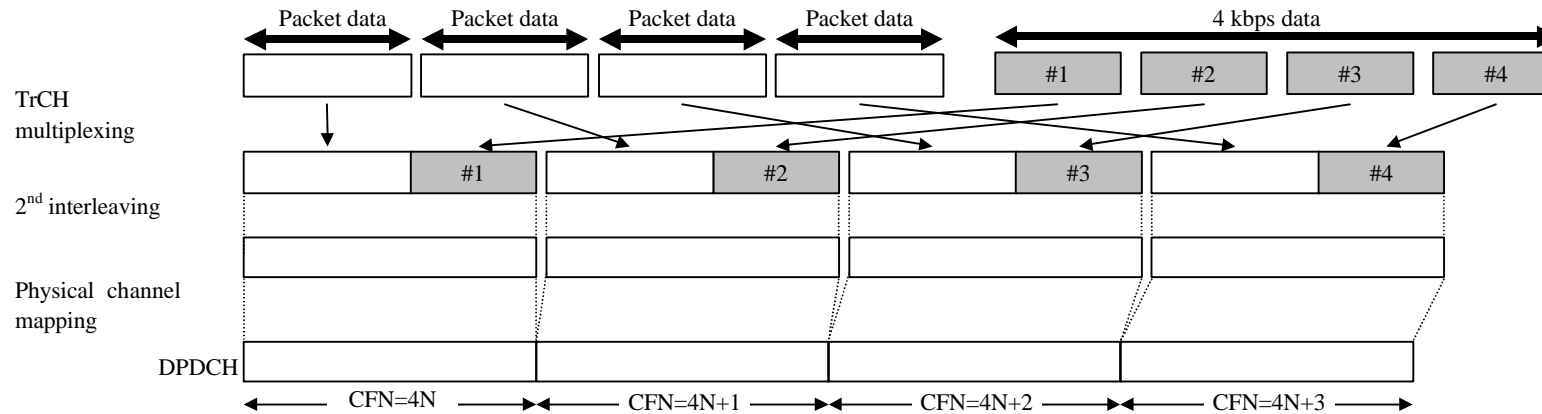


Figure 18: Channel coding and multiplexing example for multiplexing of 64/128/384 kbps packet data and 4 kbps data

Table 15: Physical channel parameters for multiplexing of 64/128/384 kbps packet data and 4 kbps data

Data rate (kbps)	Symbol rate (ksps)	No. of physical channel
64	240	1
128	480	1
384	960	1

4.1.2.2.2.4 Example for multiplexing of 64 kbps data and 4 kbps data

<Note: This example can be applied to multiplexing ISDNs data and DCCH.>

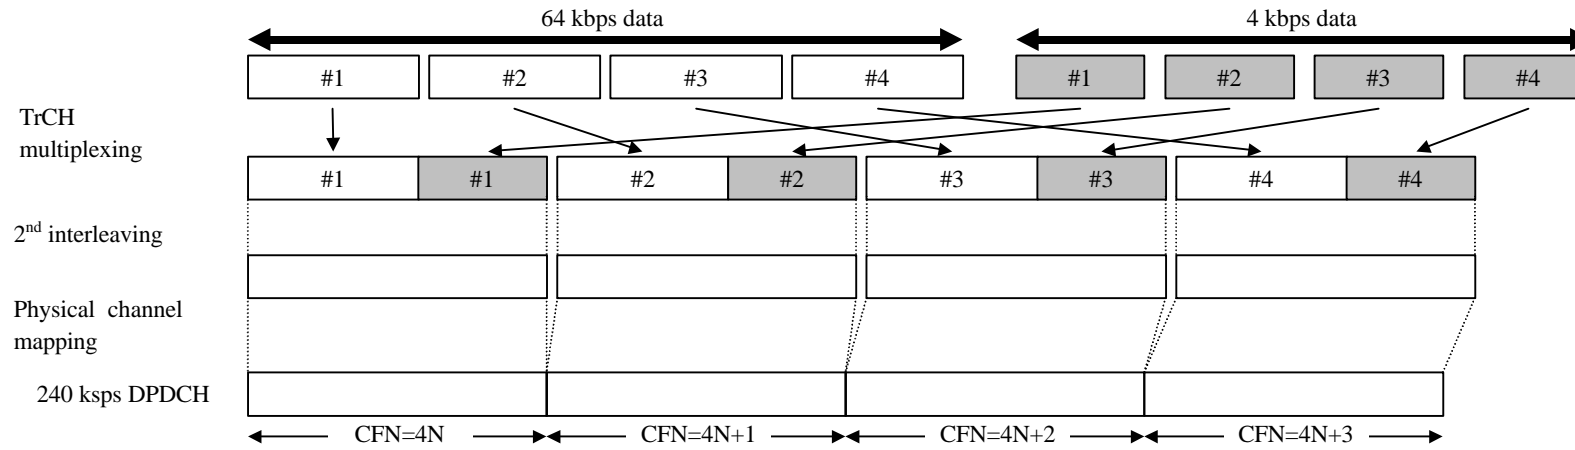


Figure 19: Channel coding and multiplexing example for multiplexing of 64 kbps data and 4 kbps data

4.2 TDD mode

4.2.1 Downlink

4.2.1.1 BCH

Table 16: Parameters for BCH

Transport block size	
CRC	16
Coding	CC, coding rate = 1/2
TTI	20 ms
Midamble	512 chips
RU's allocated	1 RU
TFCI	0 bit
TPC	0 bit

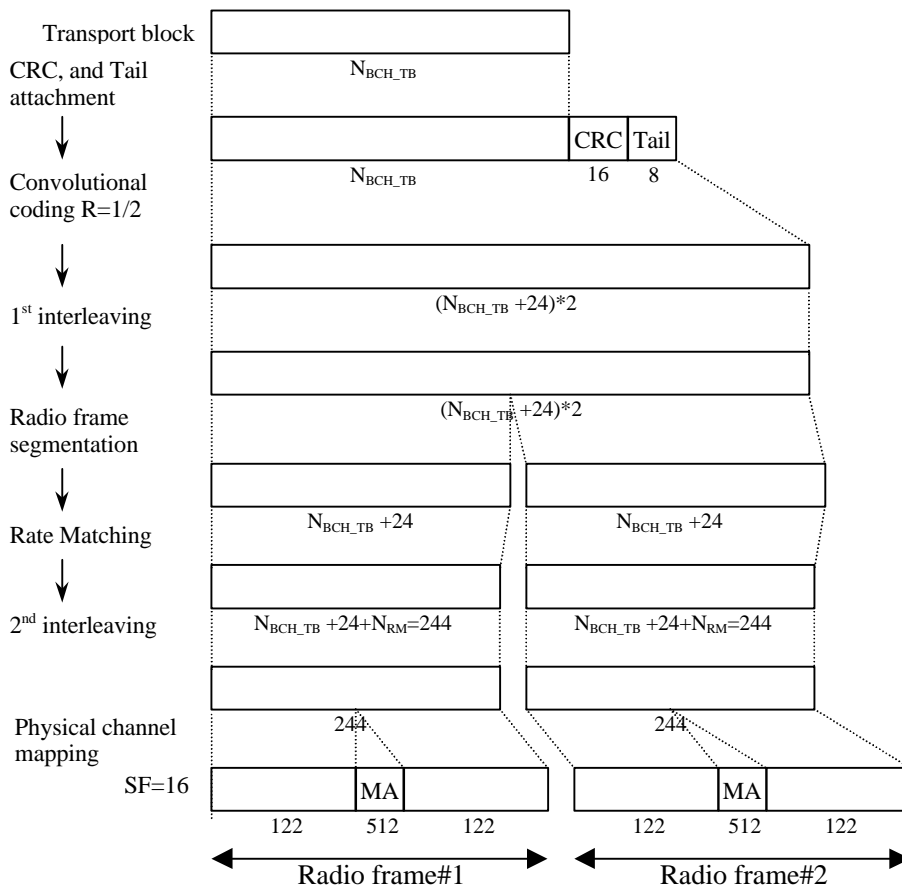


Figure 20 Channel coding for BCH

4.2.1.2 Example for PCH

Table 17: Parameters for PCH

CRC	8 bits
Coding	CC, coding rate = 1/2
TTI	20 ms
Midamble	512 chips
RU's allocated	1 RU
TFCI	0 bit
TPC	0 bit

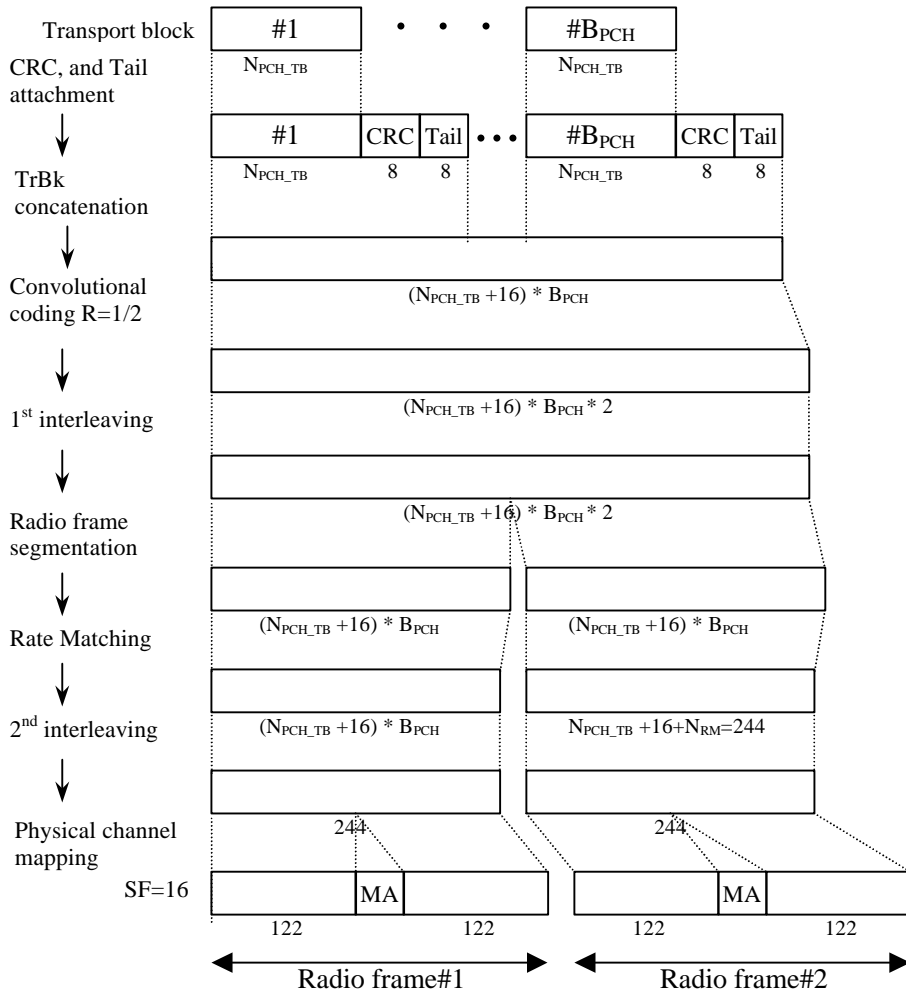


Figure 21: Channel coding and multiplexing example for PCH

4.2.1.3 Example for FACH

Table 18: Parameters for FACH

CRC	8 bits
Coding	CC, coding rate = 1/2
TTI	20 ms
Midamble	512 chips
RU's allocated	1 RU
TFCI	0 bit
TPC	0 bit

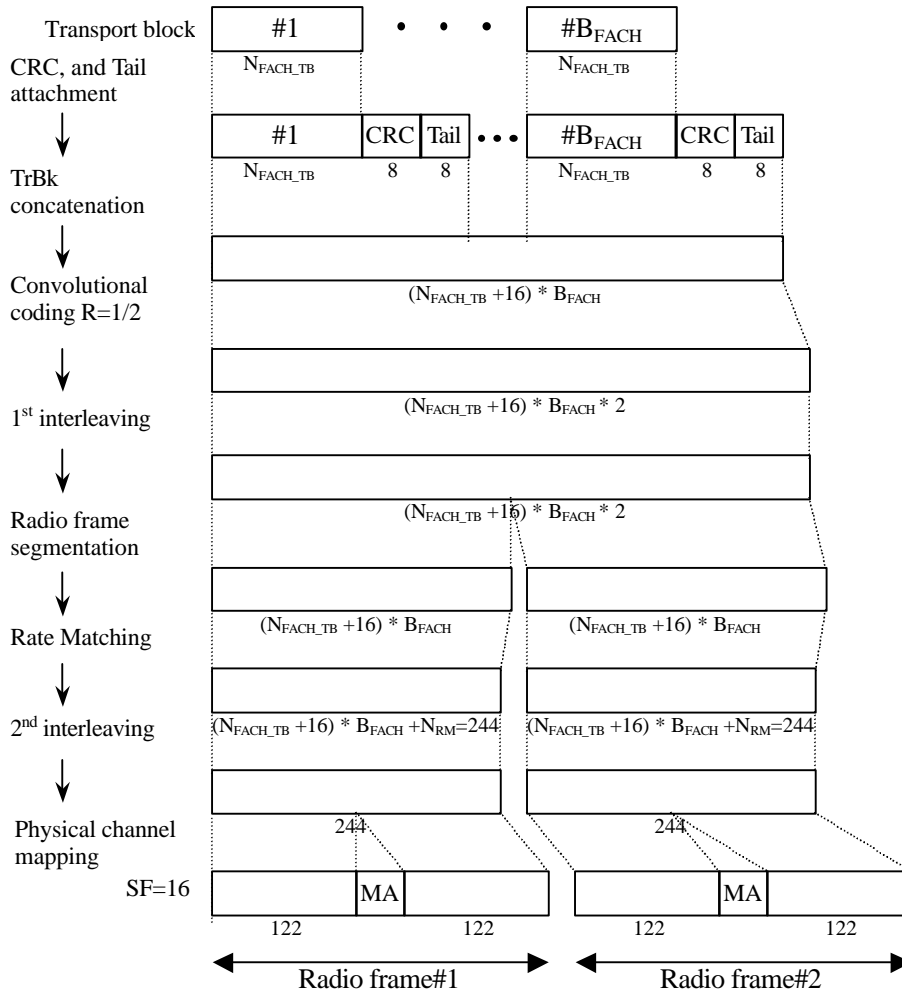


Figure 22: Channel coding and multiplexing example for FACH

4.2.1.4 Example for DCH

4.2.1.4.1 DCH-> Radio frame segmentation

4.2.1.4.1.1 Example for 2.4 kbps data

<Note: This example can be applied to DCCH.>

Table 19: Parameter examples for 2.4 kbps data

Transport block size	96 bits
Transport block set size	96 bits
CRC	16 bits
Coding	CC, coding rate = 1/3
TTI	40 ms

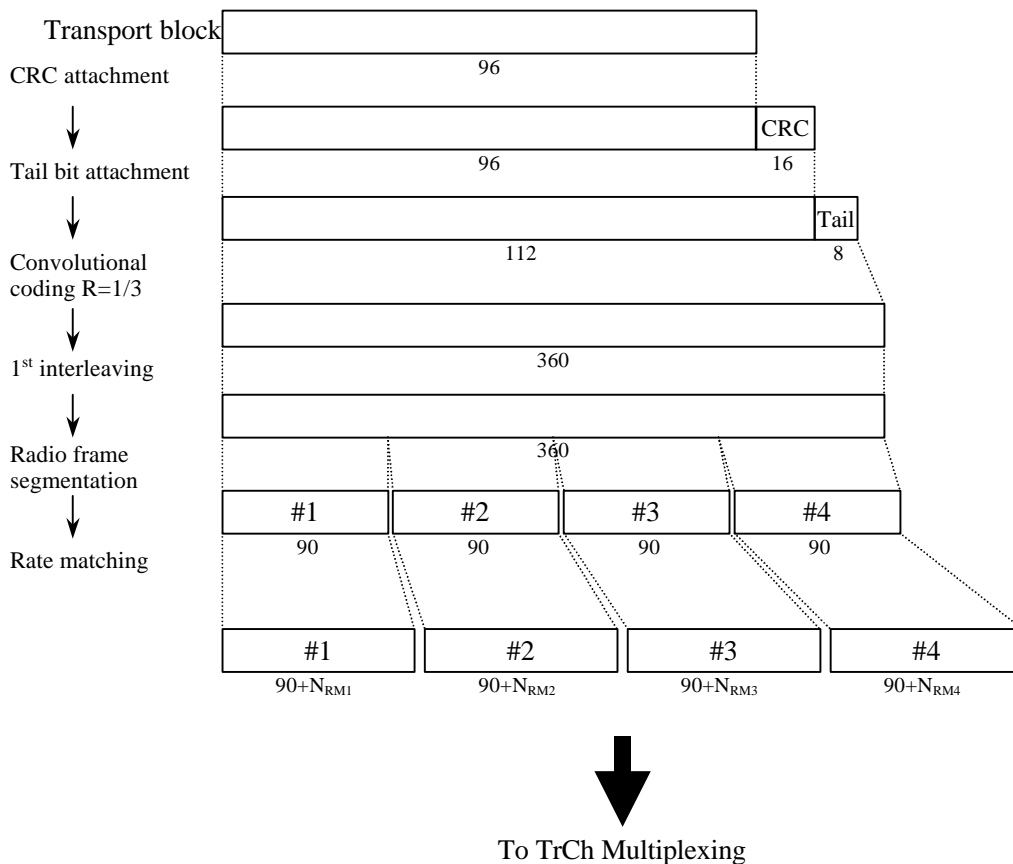


Figure 23: Channel coding and multiplexing example for 2.4 kbps data

4.2.1.4.1.2 Example for 12.35 kbps data

<Note: This example can be applied to AMR speech. >

<Editor's Note: coding scheme for TrCh#4 is to be described according to consensus of transmission scheme for mode command bits of AMR speech>

Table 20: Parameter examples for 12.35 kbps data

The number of TrChs	4
Transport block size	81, 103, 60, and 3 bits
CRC	12 bits (attached only to TrCh#1)
Coding	CC, coding rate = 1/3 for TrCh#1, 2 coding rate = 1/2 for TrCh#3
TTI	20 ms

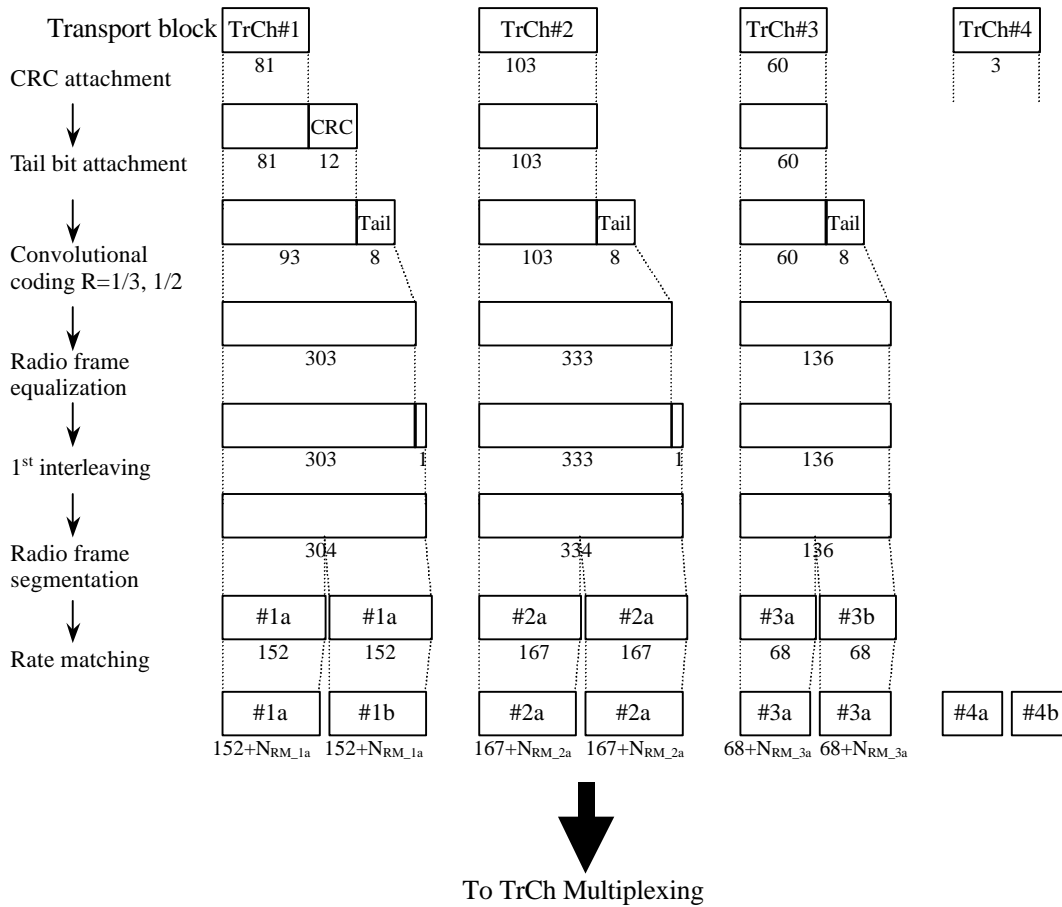


Figure 24: Channel coding and multiplexing example for 12.35 kbps data

4.2.1.4.1.3 Example of 64/128/384 kbps packet data

Table 21: Parameters for 64/128/384 kbps packet data

The number of TrChs	1	
Transport block Size: S	64 kbps	1280 bits
	128 kbps	2560 bits
	384 kbps	3840 bits
Transport block set size	64 kbps	1280*B bits (B=0, 1)
	128 kbps	2560*B bits (B=0, 1)
	384 kbps	3840*B bits (B=0, 1, 2)
Code block segmentation: C	64 kbps	1
	128 kbps	1
	384 kbps	1 (B=0, 1) or 2 (B=2)
CRC	16 bits	
Coding	Turbo coding, coding rate = 1/3	
TTI	20 ms	

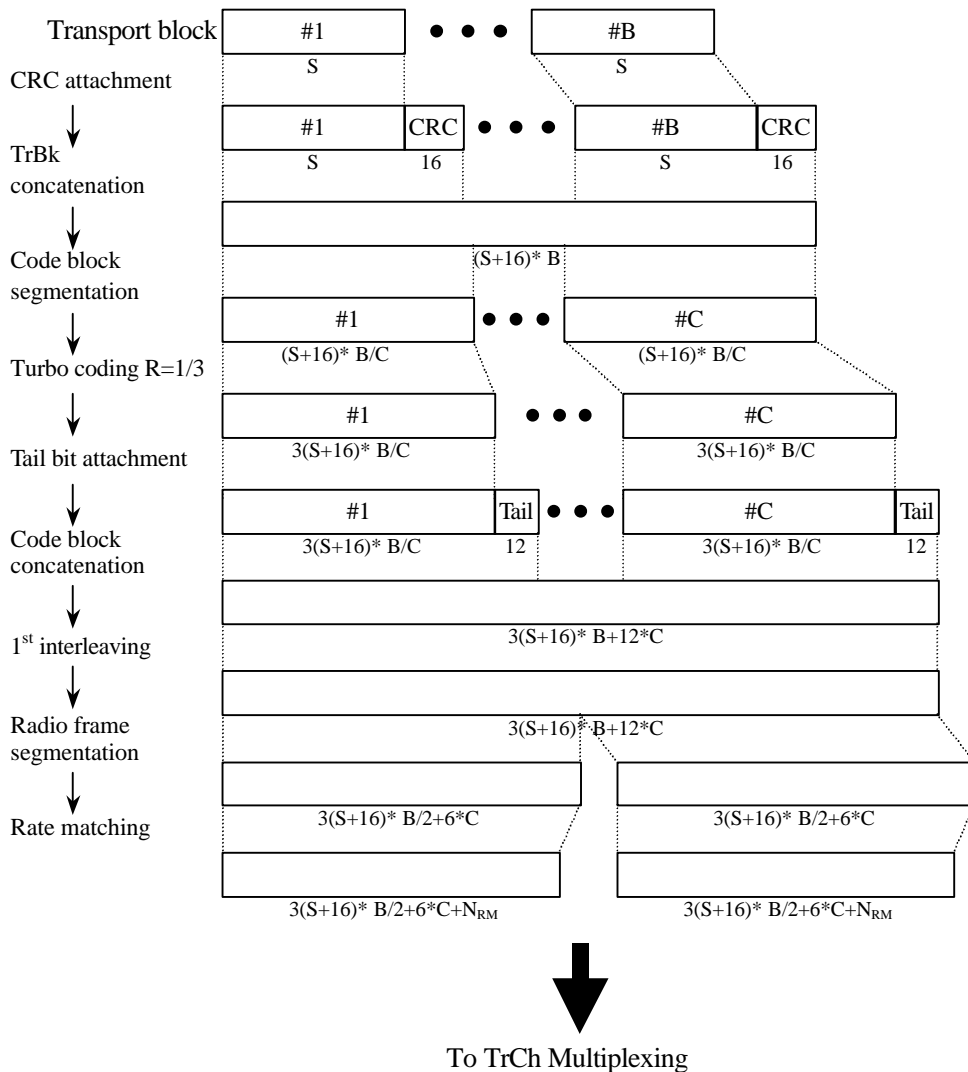


Figure 25: Channel coding and multiplexing example for 64/128/384 kbps packet data

4.2.1.4.1.4 Example for 64 kbps data

<Note: This example can be applied to ISDN service.>

Table 22: Parameters for 64 kbps data

The number of TrChs	1
Transport block size	1280 bits
Transport block set size	1280 bits
CRC	16 bits
Coding	Turbo coding, coding rate = 1/3
TTI	20 ms

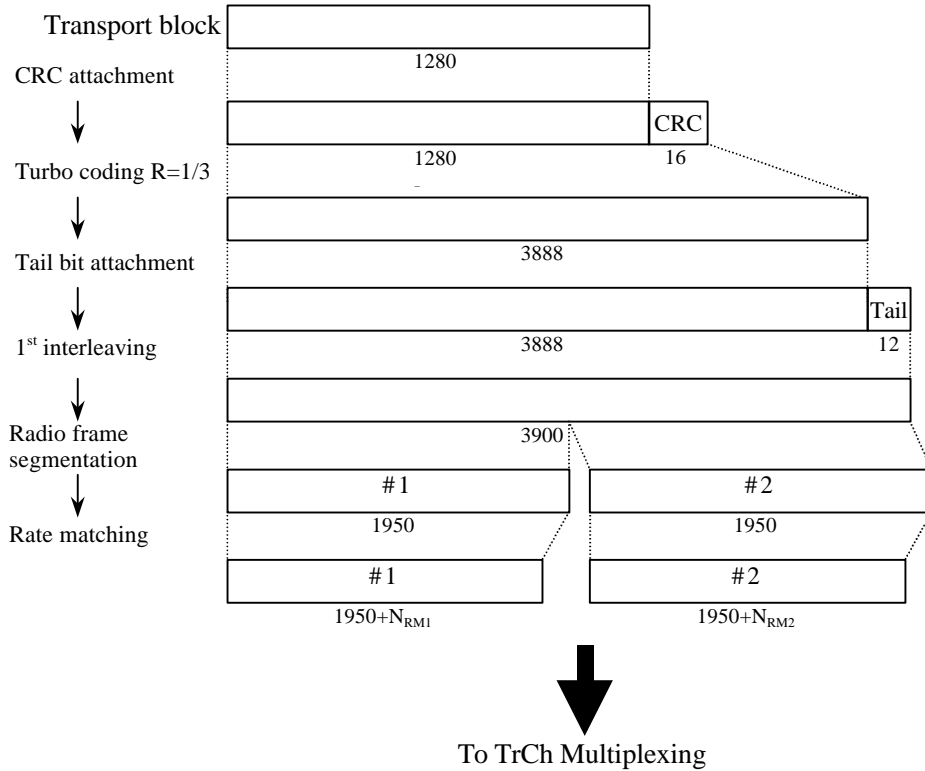


Figure 26: Channel coding and multiplexing example for 64 kbps data

4.2.1.4.2 TrCH multiplexing -> Physical channel mapping

4.2.1.4.2.1 Example for Stand-alone mapping of 2.4 kbps data

<Note: This example can be applied to Stand-alone mapping of DCCH.>

Table 23 shows example of physical channel parameters for Stand-alone mapping of 2.4 kbps data.

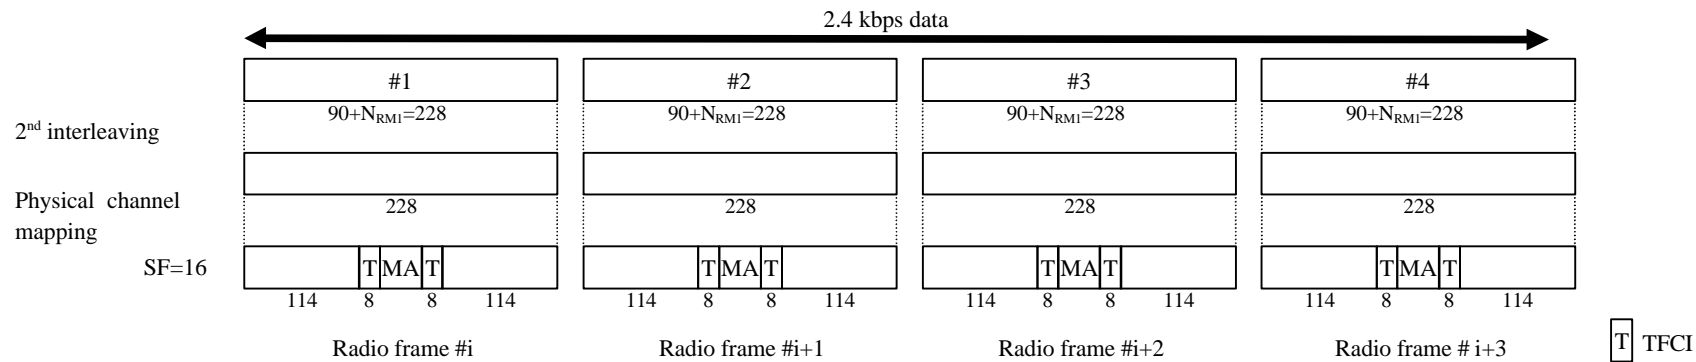


Figure 27: Channel coding and multiplexing example for Stand-alone mapping of 2.4 kbps data

Table 23: Physical channel parameters for Stand-alone mapping of 2.4 kbps data

Midamble	512 chips
Multi codes and time slots	SF16 x 1 code x 1 time slot
TFCI	16 bits per user
TPC	0 bit

4.2.1.4.2.2 Example for multiplexing of 12.35 kbps data and 2.4 kbps data

<Note: This example can be applied to multiplexing AMR speech and DCCH.>

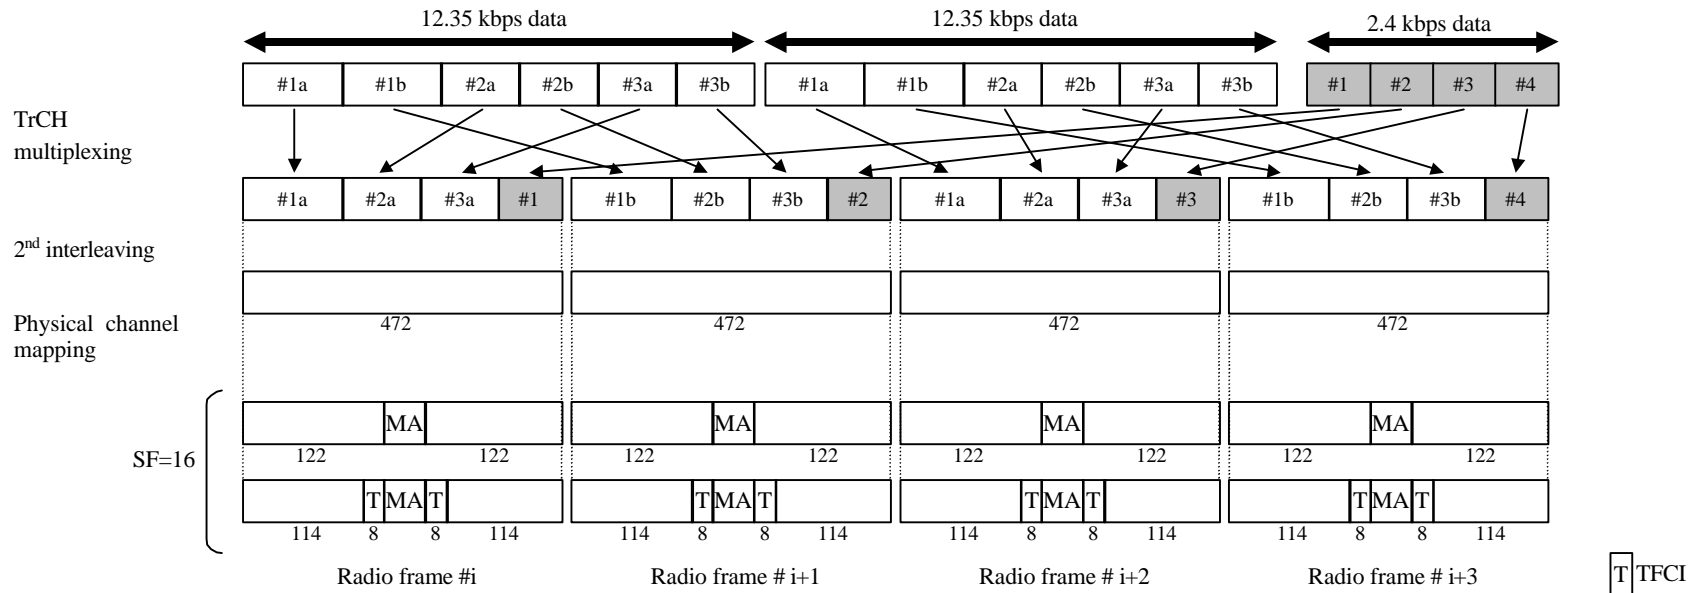


Figure 28: Channel coding and multiplexing example for multiplexing of 12.35 kbps data and 2.4 kbps data

Table 24: Physical channel parameters for Stand-alone mapping of 2.4 kbps data

Midamble	512 chips
Multi codes and time slots	SF16 x 2 code x 1 time slot
TFCI	16 bits per user
TPC	0 bit

4.2.1.4.2.4 Example for multiplexing of 64 kbps data and 2.4 kbps data

<Note: This example can be applied to multiplexing ISDNs data and DCCH.>

Table 26 shows example of physical channel parameters for multiplexing of 64/128/384 kbps packet data and 2.4 kbps data.

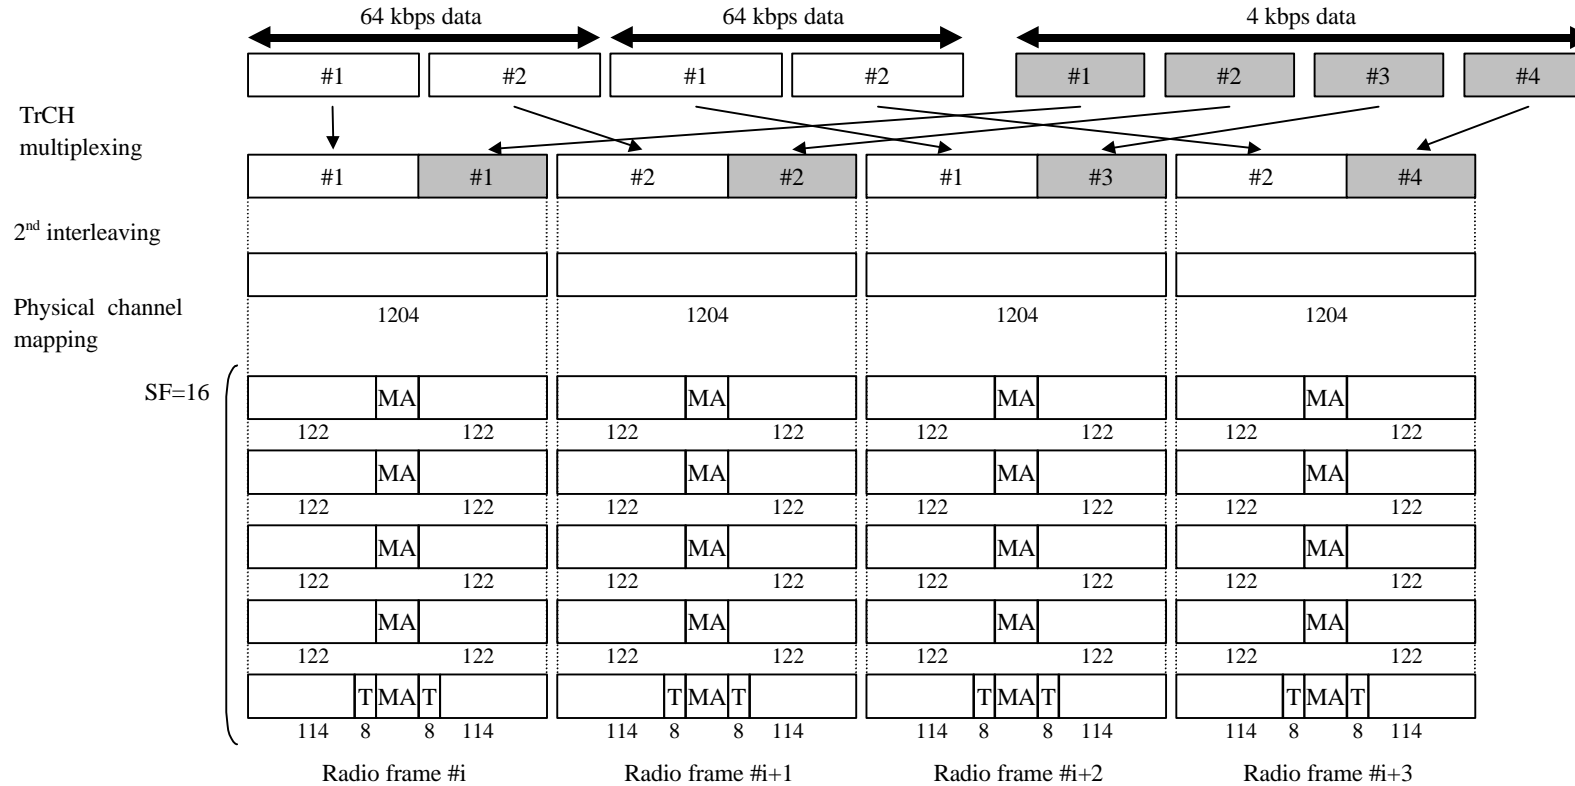


Figure 30: Channel coding and multiplexing example for multiplexing of 64/128/384 kbps packet data and 2.4 kbps data

Table 26: Physical channel parameters for multiplexing of 64/128/384 kbps packet data and 2.4 kbps data

Midamble	512 chips
Multi code & time slots	SF16 x 5 codes x 1 time slot
TFCI	16 bits per user
TPC	0 bit

4.2.2.2 Example for DCH

4.2.2.2.1 DCH-> Radio frame segmentation

See 4.2.1.4.2.

4.2.2.2.2 TrCH multiplexing -> Physical channel mapping

4.2.2.2.2.1 Example for Stand-alone mapping of 2.4 kbps data

<Note: This example can be applied to Stand-alone mapping of DCCH.>

Table 28 shows example of physical channel parameters for Stand-alone mapping of 2.4 kbps data.

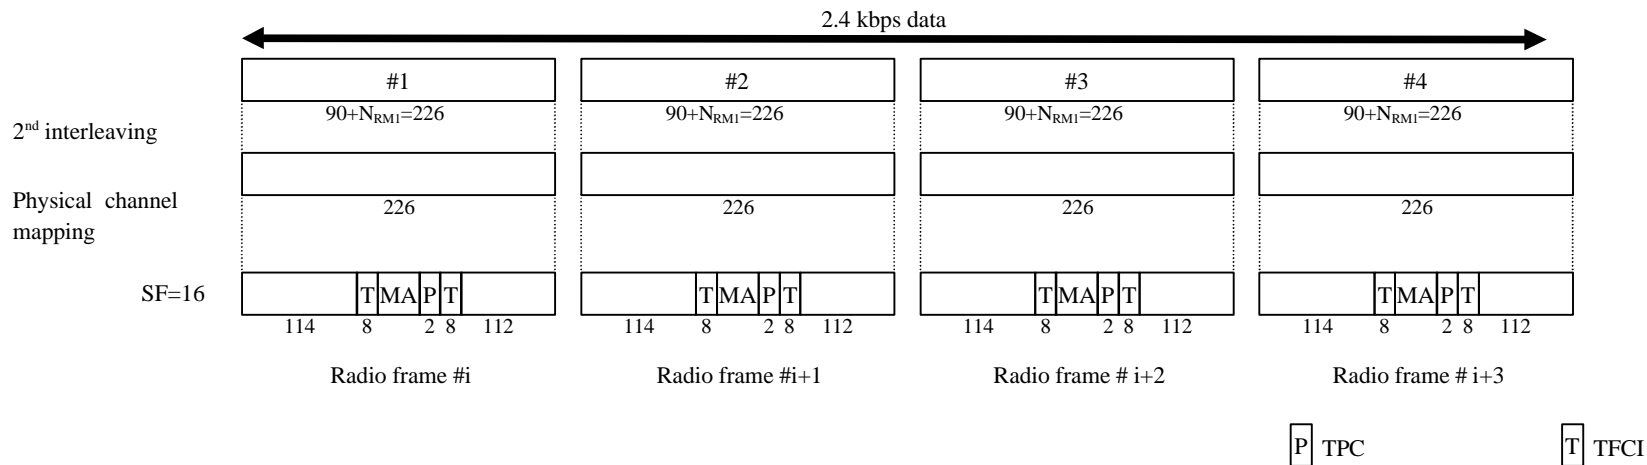


Figure 32: Channel coding and multiplexing example for Stand-alone mapping of 2.4 kbps data

Table 28: Physical channel parameters for Stand-alone mapping of 2.4 kbps data

Midamble	512 chips
Multi codes and time slots	SF16 x 1 code x 1 time slot
TFCI	16 bits per user
TPC	2 bit

4.2.2.2.2 Example for multiplexing of 12.35 kbps data and 2.4 kbps data

<Note: This example can be applied to multiplexing AMR speech and DCCH.>

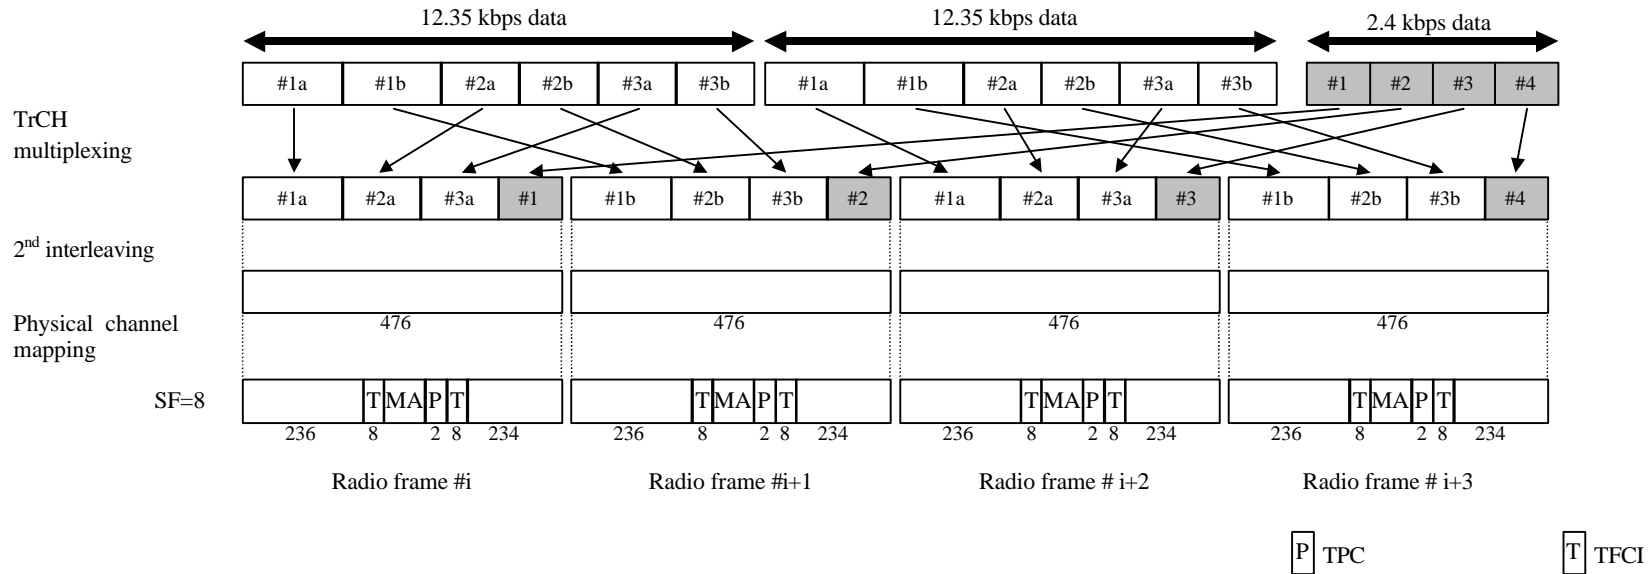


Figure 33: Channel coding and multiplexing example for multiplexing of 12.35 kbps data and 2.4 kbps data

Table 29: Physical channel parameters for Stand-alone mapping of 2.4 kbps data

Midamble	512 chips
Multi codes and time slots	SF8 x 1 code x 1 time slot
TFCI	16 bits per user
TPC	2 bit

4.2.2.2.3 Example for multiplexing of 64/128/384 kbps packet data and 2.4 kbps data

<Note: This example can be applied to multiplexing 64/128/384 kbps packet data and DCCH.>

Table 30 shows example of physical channel parameters for multiplexing of 64/128/384 kbps packet data and 2.4 kbps data.

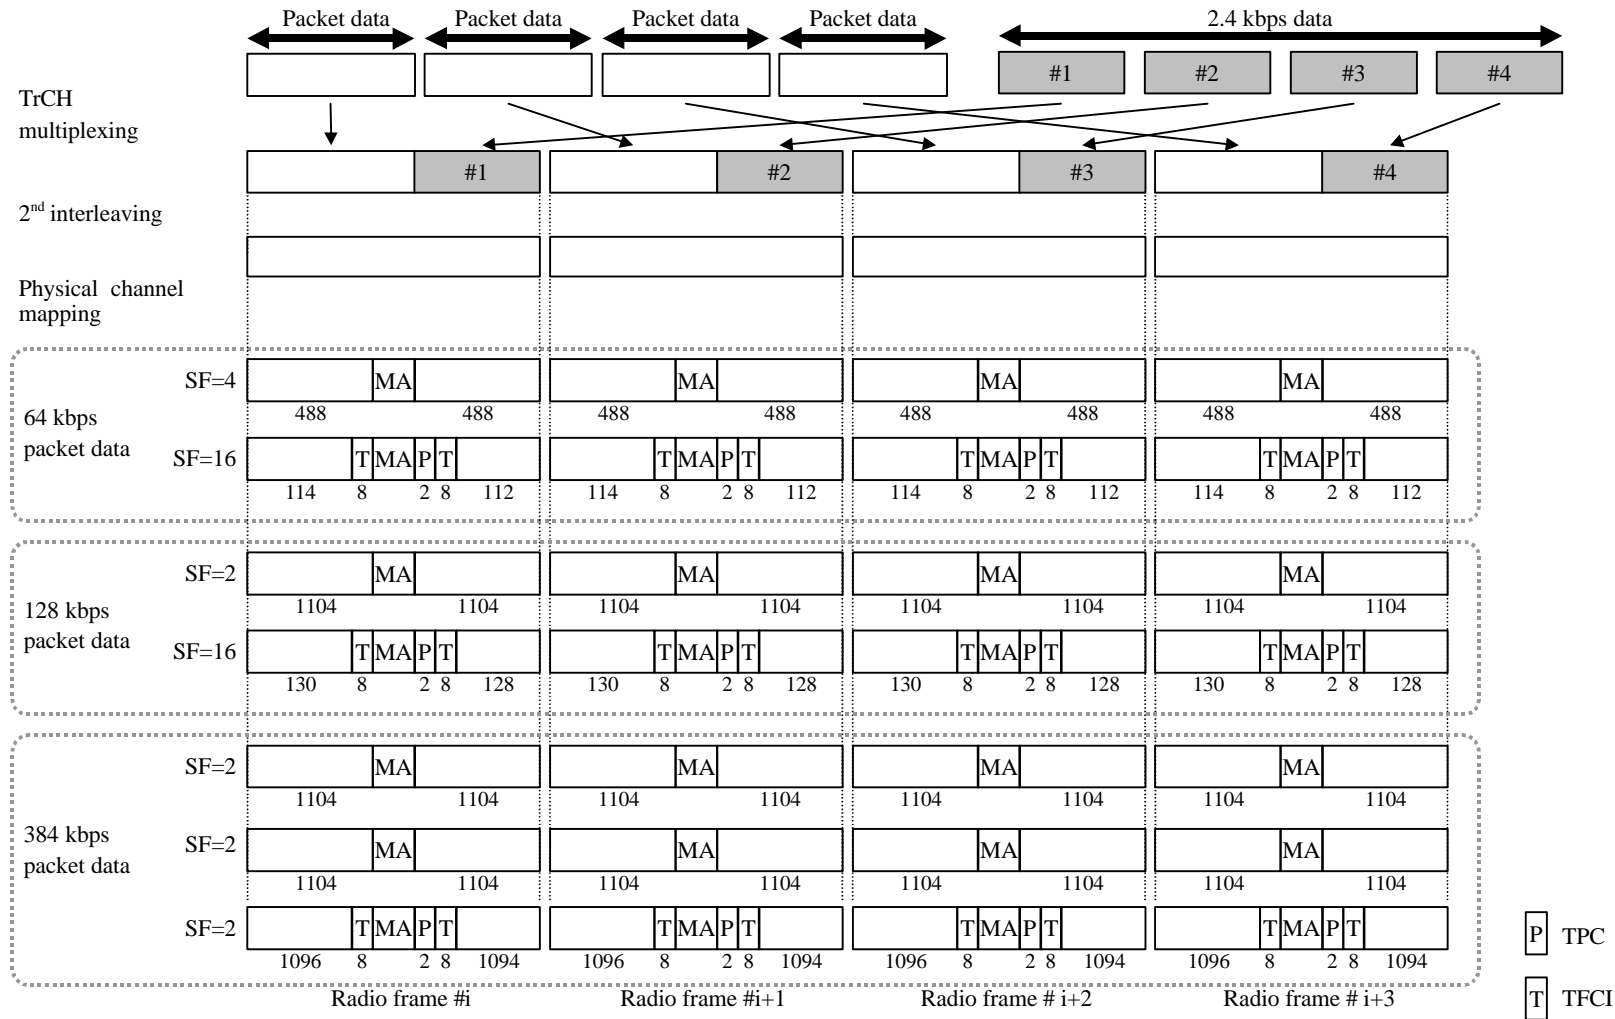


Figure 34: Channel coding and multiplexing example for multiplexing of 64/128/384 kbps packet data and 2.4 kbps data

Table 30: Physical channel parameters for multiplexing of 64/128/384 kbps packet data and 2.4 kbps data

Midamble	64 kbps	512 chips
	128 & 384 kbps	256 chips
Multi codes & time slots	64 kbps	{(SF16 x 1 code) + (SF4 x 1 code)} x 1 time slot
	128 kbps	{(SF16 x 1 code) + (SF2 x 1 code)} x 1 time slot
	384 kbps	SF2 x 1 code x 3 time slot
TFCI	16 bits per user	
TPC	2 bit	

4.2.2.2.4 Example for multiplexing of 64 kbps data and 2.4 kbps data

<Note: This example can be applied to multiplexing ISDNs data and DCCH.>

Table 31 shows example of physical channel parameters for multiplexing of 64/128/384 kbps packet data and 2.4 kbps data.

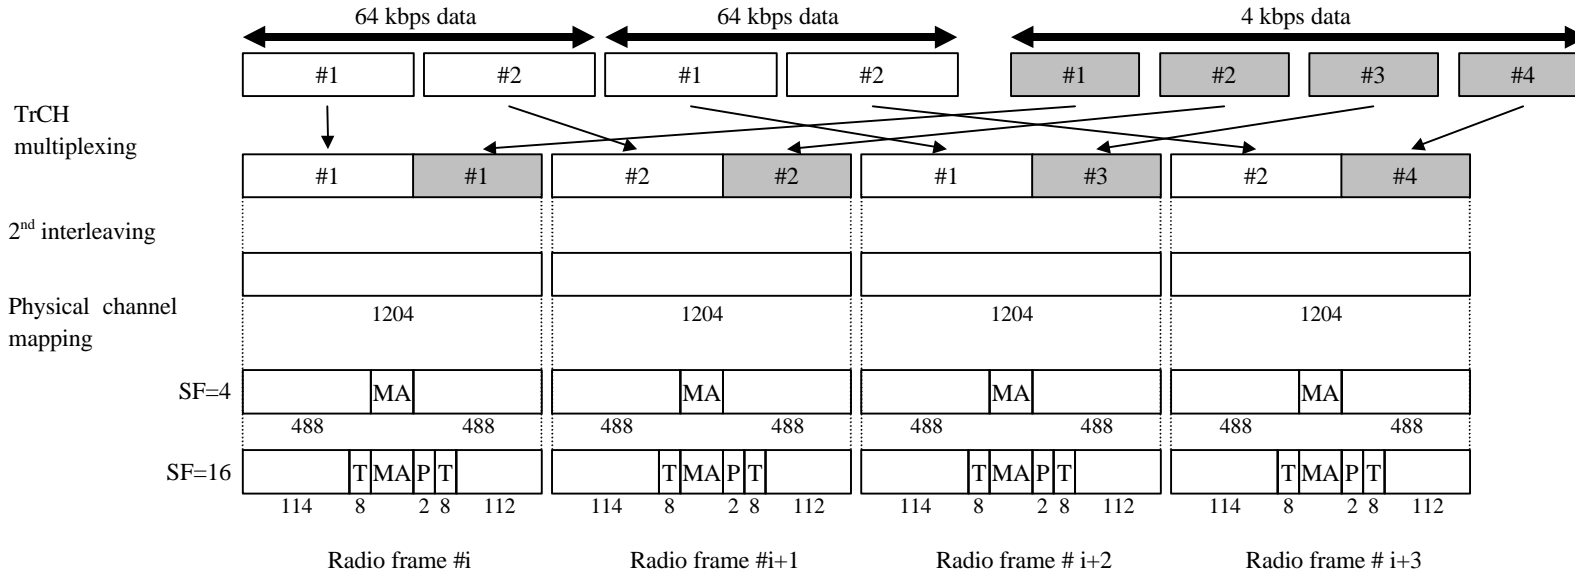


Figure 35: Channel coding and multiplexing example for multiplexing of 64 kbps packet data and 2.4 kbps data

Table 31: Physical channel parameters for multiplexing of 64 kbps packet data and 2.4 kbps data

Midamble	512 chips
Multi codes & time slots	{(SF16 x 1 code) + (SF4 x 1 code)} x 1 time slot
TFCI	16 bits per user
TPC	2 bit

5 History

Document history		
V0.0.1	1999-11-25	First version created by the editor.
<p>Editors for 3GPP TSG RAN S1.14 are:</p> <p>Takehiro Nakamura NTT DoCoMo R&D Headquarters Tel: +81 468 40 31 90 Mobile: +81 30 20 05 542 Fax: +81 468 40 38 40 E-mail: takehiro@wsp.yrp.nttdocomo.co.jp</p> <p>This document is written in Microsoft Word 2000.</p>		