

**Agenda Item** :  
**Source** : Samsung, GBT, LGIC, Lucent  
**Title** : CD/CA-ICH for dual mode CPCH  
**Document for** : Discussion and approval

---

For dual mode CPCH, namely, the UE channel selection method (UCSM) and the Versatile channel assign method (VCAM), the collision detection and/or channel assignment (CD/CA) indication channel (ICH) is proposed in this contribution replacing CD-AICH. The CD/CA-ICH is replaced for CD-AICH in dual mode CPCH. When the UCSM is used, the CD/CA-ICH operation is same as CD-AICH. In this case, CD/CA-ICH indicates that which CD is selected. On the other hand, for VCAM, CD/CA-ICH has two functions. One is indicating which CD is selected, the other is sending CA message to indicate the assigned channel. The hardware structure is same between UCSM and VCAM. Only the meaning of the message is different between CD only case and CD and CA case.

## CHANGE REQUEST

Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.

**25.211 CR 031**

Current Version: **3.1.1**

GSM (AA.BB) or 3G (AA.BBB) specification number ↑

↑ CR number as allocated by MCC support team

For submission to: **TSG-RAN #7**  
list expected approval meeting # here  
↑

for approval   
for information

strategic   
non-strategic  (for SMG use only)

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: <ftp://ftp.3gpp.org/Information/CR-Form-v2.doc>

**Proposed change affects:** (U)SIM  ME  UTRAN / Radio  Core Network   
(at least one should be marked with an X)

**Source:** Samsung, GBT, LGIC, Lucent **Date:** 28-Feb-2000

**Subject:** Dual mode CPCH

**Work item:**

**Category:** F Correction   
A Corresponds to a correction in an earlier release   
B Addition of feature   
C Functional modification of feature   
D Editorial modification   
(only one category shall be marked with an X)

**Release:** Phase 2   
Release 96   
Release 97   
Release 98   
Release 99   
Release 00

**Reason for change:** For dual mode CPCH, the CD/CA-ICH is used instead of CD-ICH. In UCSM, CD indicator is used only. On the other hand, the CD/CA are used for VCAM with the same hardware structure.

**Clauses affected:** 5.3.3.6 and 5.3.3.7 of TS25.211

**Other specs affected:** Other 3G core specifications  → List of CRs:  
Other GSM core specifications  → List of CRs:  
MS test specifications  → List of CRs:  
BSS test specifications  → List of CRs:  
O&M specifications  → List of CRs:

**Other comments:**

<----- double-click here for help and instructions on how to create a CR.

A DSCH may be mapped to multiple parallel PDSCHs as well, as negotiated at higher layer prior to starting data transmission. In such a case the parallel PDSCHs shall be operated with frame synchronization between each other.

**Table 19: PDSCH fields**

| Slot format #i | Channel Bit Rate (kbps) | Channel Symbol Rate (ksps) | SF  | Bits/ Frame | Bits/ Slot | Ndata |
|----------------|-------------------------|----------------------------|-----|-------------|------------|-------|
| 0              | 30                      | 15                         | 256 | 300         | 20         | 20    |
| 1              | 60                      | 30                         | 128 | 600         | 40         | 40    |
| 2              | 120                     | 60                         | 64  | 1200        | 80         | 80    |
| 3              | 240                     | 120                        | 32  | 2400        | 160        | 160   |
| 4              | 480                     | 240                        | 16  | 4800        | 320        | 320   |
| 5              | 960                     | 480                        | 8   | 9600        | 640        | 640   |
| 6              | 1920                    | 960                        | 4   | 19200       | 1280       | 1280  |


When transmit diversity is employed for the PDSCH, STTD encoding is used on the data bits as described in section 5.3.1.1.1.

### 5.3.3.6 Acquisition Indicator Channel (AICH)

The Acquisition Indicator channel (AICH) is a physical channel used to carry Acquisition Indicators (AI). Acquisition Indicator  $AI_s$  corresponds to signature  $s$  on the PRACH<sub>s</sub> or PCPCH. Note that for PCPCH, the AICH either corresponds to an access preamble or a CD preamble. The AICH corresponding to the access preamble is an AP AICH and the AICH corresponding to the CD preamble is a CD AICH. The AP AICH and CD AICH use different channelization codes, see further [4], Section 4.3.3.2.

Figure 19 illustrates the structure of the AICH. The AICH consists of a repeated sequence of 15 ~~consecutive~~ consecutive access slots (AS), each of length 40 bit intervals. Each access slot consists of two parts, an *Acquisition-Indicator* (AI) part consisting of 32 real-valued symbols  $a_0, \dots, a_{31}$  and an unused part consisting of 8 real-valued symbols  $a_{32}, \dots, a_{39}$ .

The phase reference for the AICH is the Primary CPICH.

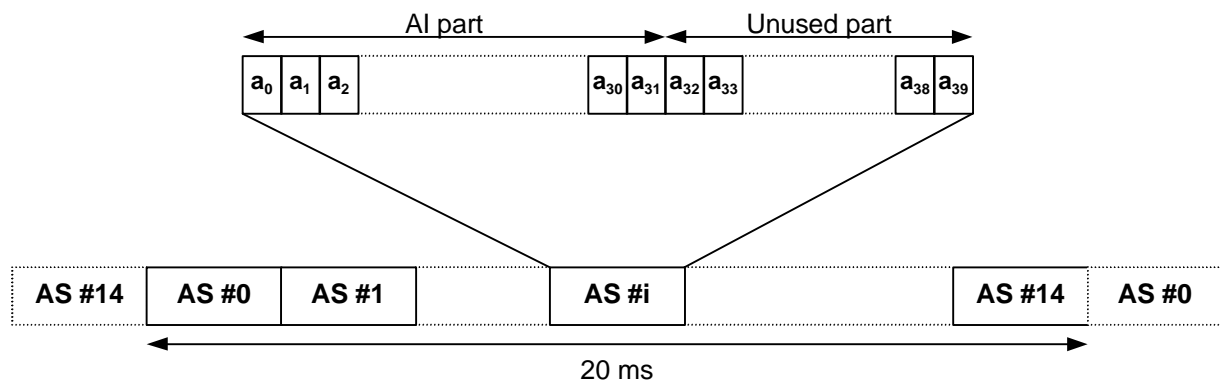

**Figure 19: Structure of Acquisition Indicator Channel (AICH)**

The real-valued symbols  $a_0, a_1, \dots, a_{31}$  in Figure 19 are given by

$$a_j = \sum_{s=0}^{15} AI_s \times b_{s,j}$$

where  $AI_s$ , taking the values +1, -1, and 0, is the acquisition indicator corresponding to signature  $s$  and the sequence  $b_{s,0}, \dots, b_{s,31}$  is given by Table 20.

The real-valued symbols  $a_{32}, a_{33}, \dots, a_{39}$  in Figure 19 are undefined.

In case STTD-based open-loop transmit diversity is applied to AICH, STTD encoding according to section 5.3.1.1.1 is applied to each sequence  $b_{s,0}, b_{s,1}, \dots, b_{s,31}$  separately before the sequences are combined into AICH symbols  $a_0, \dots, a_{31}$ .


**Table 20: AICH signature patterns**

| s  | $b_{s,0}, b_{s,1}, \dots, b_{s,31}$ |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----|-------------------------------------|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0  | 1                                   | 1 | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  |    |
| 1  | 1                                   | 1 | -1 | -1 | 1  | 1  | -1 | -1 | 1  | 1  | -1 | -1 | 1  | 1  | -1 | -1 | 1  | 1  | -1 | -1 | 1  | 1  | -1 | -1 | 1  | 1  | -1 | -1 | 1  | 1  | -1 | -1 | 1  | 1  | -1 | -1 |
| 2  | 1                                   | 1 | 1  | 1  | -1 | -1 | -1 | -1 | 1  | 1  | 1  | 1  | -1 | -1 | -1 | -1 | 1  | 1  | 1  | 1  | -1 | -1 | -1 | -1 | 1  | 1  | 1  | 1  | -1 | -1 | -1 | -1 | 1  | 1  | 1  | 1  |
| 3  | 1                                   | 1 | -1 | -1 | -1 | -1 | 1  | 1  | 1  | 1  | -1 | -1 | -1 | -1 | 1  | 1  | 1  | 1  | -1 | -1 | -1 | -1 | 1  | 1  | 1  | 1  | -1 | -1 | -1 | -1 | 1  | 1  | 1  | 1  | 1  |    |
| 4  | 1                                   | 1 | 1  | 1  | 1  | 1  | 1  | -1 | -1 | -1 | -1 | -1 | -1 | -1 | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | -1 | -1 | -1 | -1 | -1 | -1 | -1 | -1 | -1 |    |
| 5  | 1                                   | 1 | -1 | -1 | 1  | 1  | -1 | -1 | -1 | -1 | 1  | 1  | -1 | -1 | 1  | 1  | 1  | 1  | -1 | -1 | 1  | 1  | -1 | -1 | 1  | 1  | -1 | -1 | -1 | -1 | 1  | 1  | -1 | -1 | 1  |    |
| 6  | 1                                   | 1 | 1  | 1  | -1 | -1 | -1 | -1 | -1 | -1 | -1 | -1 | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | -1 | -1 | -1 | -1 | -1 | -1 | -1 | -1 | -1 | 1  | 1  |
| 7  | 1                                   | 1 | -1 | -1 | -1 | -1 | 1  | 1  | -1 | -1 | 1  | 1  | 1  | 1  | -1 | -1 | 1  | 1  | -1 | -1 | -1 | -1 | 1  | 1  | -1 | -1 | -1 | -1 | 1  | 1  | -1 | -1 | 1  | 1  | 1  | -1 |
| 8  | 1                                   | 1 | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | -1 | -1 | -1 | -1 | -1 | -1 | -1 | -1 | -1 | -1 | -1 | -1 |
| 9  | 1                                   | 1 | -1 | -1 | 1  | 1  | -1 | -1 | 1  | 1  | -1 | -1 | 1  | 1  | -1 | -1 | 1  | 1  | -1 | -1 | 1  | 1  | -1 | -1 | 1  | 1  | -1 | -1 | 1  | 1  | -1 | -1 | 1  | 1  | -1 | -1 |
| 10 | 1                                   | 1 | 1  | 1  | -1 | -1 | -1 | -1 | 1  | 1  | 1  | 1  | 1  | 1  | -1 | -1 | 1  | 1  | -1 | -1 | 1  | 1  | -1 | -1 | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  |
| 11 | 1                                   | 1 | -1 | -1 | -1 | -1 | 1  | 1  | 1  | 1  | -1 | -1 | -1 | -1 | 1  | 1  | 1  | 1  | -1 | -1 | 1  | 1  | -1 | -1 | 1  | 1  | 1  | 1  | -1 | -1 | -1 | -1 | 1  | 1  | 1  | -1 |
| 12 | 1                                   | 1 | 1  | 1  | 1  | 1  | 1  | -1 | -1 | -1 | -1 | -1 | -1 | -1 | -1 | -1 | -1 | -1 | -1 | -1 | -1 | -1 | -1 | -1 | -1 | -1 | -1 | -1 | -1 | -1 | -1 | -1 | -1 | -1 | -1 | -1 |
| 13 | 1                                   | 1 | -1 | -1 | 1  | 1  | -1 | -1 | -1 | -1 | 1  | 1  | -1 | -1 | 1  | 1  | -1 | -1 | 1  | 1  | -1 | -1 | 1  | 1  | -1 | -1 | 1  | 1  | -1 | -1 | 1  | 1  | -1 | -1 | 1  | -1 |
| 14 | 1                                   | 1 | 1  | 1  | -1 | -1 | -1 | -1 | -1 | -1 | -1 | -1 | 1  | 1  | 1  | 1  | -1 | -1 | -1 | -1 | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | -1 | -1 |
| 15 | 1                                   | 1 | -1 | -1 | -1 | -1 | 1  | 1  | -1 | -1 | 1  | 1  | 1  | 1  | -1 | -1 | -1 | -1 | 1  | 1  | 1  | 1  | 1  | 1  | 1  | -1 | -1 | 1  | 1  | -1 | -1 | -1 | -1 | 1  | 1  | 1  |

**5.3.3.7 Access Preamble Acquisition Indicator Channel (AP-AICH)**

The Access Preamble Acquisition Indicator channel (AP-AICH) is a physical channel used to carry AP acquisition indicators (API). AP acquisition indicator  $API_s$  corresponds to signature  $s$  on the PCPCH.

AP-AICH and PRACH/AICH may use the same or different channelisation codes. The phase reference for the AP-AICH is the Primary CPICH. Figure 20 illustrates the structure of the indicator part of PCPCH (AP-AICH and CD/CA ICH) which is the same as that of AICH.

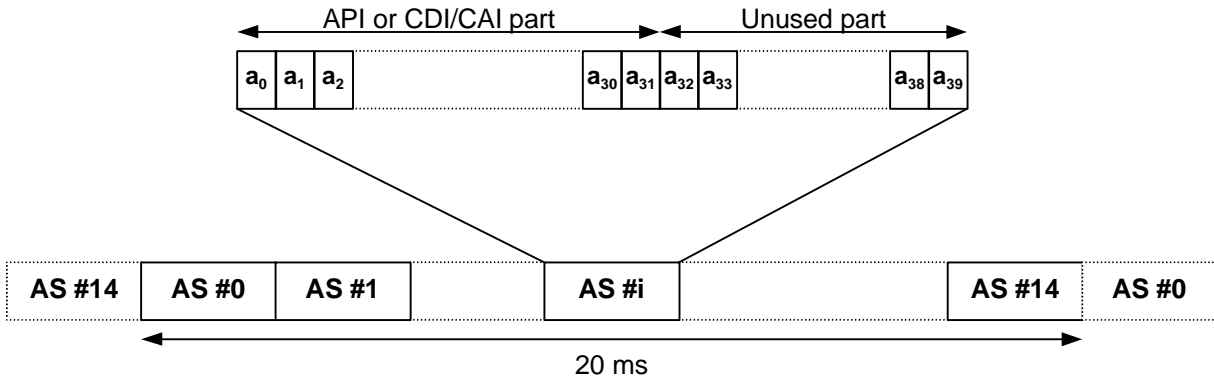

**Figure 20: Structure of PCPCH Indicator Channel (AP-AICH and CD/CA-ICH)**

The real-valued symbols  $a_0, a_1, \dots, a_{31}$  in Figure 20 are given by

$$a_j = \sum_{s=0}^{15} API_s \times b_{s,j}$$

where  $API_s$ , taking the values  $+1, -1$ , and  $0$ , is the AP acquisition indicator corresponding to Access Preamble signature  $s$  and the sequence  $b_{s,0}, \dots, b_{s,31}$  is given by Table 20. The real-valued symbols  $a_{32}, a_{33}, \dots, a_{39}$  in Figure 20 are undefined.

In case STTD-based open-loop transmit diversity is applied to AP-AICH, STTD encoding according to section 5.3.1.1.1 is applied to each sequence  $b_{s,0}, b_{s,1}, \dots, b_{s,31}$  separately before the sequences are combined into AP-AICH symbols  $a_0, \dots, a_{31}$ .

### 5.3.3.8 Collision Detection/Channel Assignment Indicator Channel (CD/CA-ICH)

The Collision Detection/Channel Assignment Indicator channel (CD/CA-ICH) is a physical channel used to carry CD Indicator ( $CDI_s$ ) if the Channel Assignment message is not active, or CD Indicator/CA Indicator ( $CDI_s/CAI_s$ ) at the same time if the Channel Assignment message is active. The structure of CD/CA-ICH is shown in Figure 20. CD/CA-ICH and AP-AICH may use the same or different channelisation codes. The CD/CA Indicators  $CDI_s/CAI_s$ , correspond to signature  $s$  on the PCPCH.

In case STTD-based open-loop transmit diversity is applied to AP-AICH, STTD encoding according to section 5.3.1.1.1 is applied to each sequence  $b_{s,0}, b_{s,1}, \dots, b_{s,31}$ , separately before the sequences are combined into CD/CA-ICH symbols  $a_0, \dots, a_{31}$ .

If the channel assignment message is not active, the real-valued symbols  $a_0, a_1, \dots, a_{31}$  in Figure 20 are given by

$$a_j = \sum_{s=0}^{15} CDI_s \times b_{s,j}$$

where  $CDI_s$ , taking the values +1, and 0, is the CD indicator corresponding to CD preamble signature  $s$  and the sequence  $b_{s,0}, \dots, b_{s,31}$  is given by Table 20. The real-valued symbols  $a_{32}, a_{33}, \dots, a_{39}$  in Figure 20 are undefined.

If the channel assignment message is active, the real-valued symbols  $a_0, a_1, \dots, a_{31}$  in Figure 20 are given by

$$a_j = \sum_{s=1,3,\dots}^{15} CDI_s \times b_{s,j} + \sum_{s=0,2,\dots}^{14} CAI_s \times b_{s,j}$$

where  $CDI_s$ , taking the values +1, -1, and 0, together with the odd-numbered signature  $s$  is the CD indicator corresponding to CD preamble transmitted by UE and  $CAI_s$ , taking the values +1, -1, 0, together with the even-numbered signature  $s$  is the CA indicator. The sequence  $b_{s,0}, \dots, b_{s,31}$  is given by Table 20.


**Table 21. Generation of  $CDI_s/CAI_s$**

| <u>UE Transmitted CD Preamble</u> | <u><math>CDI_s</math></u> | <u><math>s</math></u> | <u>Channel Assignment</u> | <u><math>CAI_s</math></u> | <u><math>s</math></u> |
|-----------------------------------|---------------------------|-----------------------|---------------------------|---------------------------|-----------------------|
| <u>0</u>                          | <u>+1/0</u>               | <u>1</u>              | <u>0</u>                  | <u>+1/0</u>               | <u>0</u>              |
| <u>1</u>                          | <u>-1/0</u>               |                       | <u>1</u>                  | <u>-1/0</u>               |                       |
| <u>2</u>                          | <u>+1/0</u>               | <u>3</u>              | <u>2</u>                  | <u>+1/0</u>               | <u>8</u>              |
| <u>3</u>                          | <u>-1/0</u>               |                       | <u>3</u>                  | <u>-1/0</u>               |                       |
| <u>4</u>                          | <u>+1/0</u>               | <u>5</u>              | <u>4</u>                  | <u>+1/0</u>               | <u>4</u>              |
| <u>5</u>                          | <u>-1/0</u>               |                       | <u>5</u>                  | <u>-1/0</u>               |                       |
| <u>6</u>                          | <u>+1/0</u>               | <u>7</u>              | <u>6</u>                  | <u>+1/0</u>               | <u>12</u>             |
| <u>7</u>                          | <u>-1/0</u>               |                       | <u>7</u>                  | <u>-1/0</u>               |                       |
| <u>8</u>                          | <u>+1/0</u>               | <u>9</u>              | <u>8</u>                  | <u>+1/0</u>               | <u>2</u>              |
| <u>9</u>                          | <u>-1/0</u>               |                       | <u>9</u>                  | <u>-1/0</u>               |                       |
| <u>10</u>                         | <u>+1/0</u>               | <u>11</u>             | <u>10</u>                 | <u>+1/0</u>               | <u>6</u>              |
| <u>11</u>                         | <u>-1/0</u>               |                       | <u>11</u>                 | <u>-1/0</u>               |                       |
| <u>12</u>                         | <u>+1/0</u>               | <u>13</u>             | <u>12</u>                 | <u>+1/0</u>               | <u>10</u>             |
| <u>13</u>                         | <u>-1/0</u>               |                       | <u>13</u>                 | <u>-1/0</u>               |                       |
| <u>14</u>                         | <u>+1/0</u>               | <u>15</u>             | <u>14</u>                 | <u>+1/0</u>               | <u>14</u>             |
| <u>15</u>                         | <u>-1/0</u>               |                       | <u>15</u>                 | <u>-1/0</u>               |                       |

### 5.3.3.97 Page Indicator Channel (PICH)

The Page Indicator Channel (PICH) is a fixed rate (SF=256) physical channel used to carry the Page Indicators (PI). The PICH is always associated with an S-CCPCH to which a PCH transport channel is mapped.

Figure 20 illustrates the frame structure of the PICH. One PICH frame of length 10 ms consists of 300 bits ( $b_0, b_1, \dots, b_{299}$ ). Of these, 288 bits ( $b_0, b_1, \dots, b_{287}$ ) are used to carry Page Indicators. The remaining 12 bits ( $b_{288}, b_{289}, \dots, b_{299}$ ) are undefined.

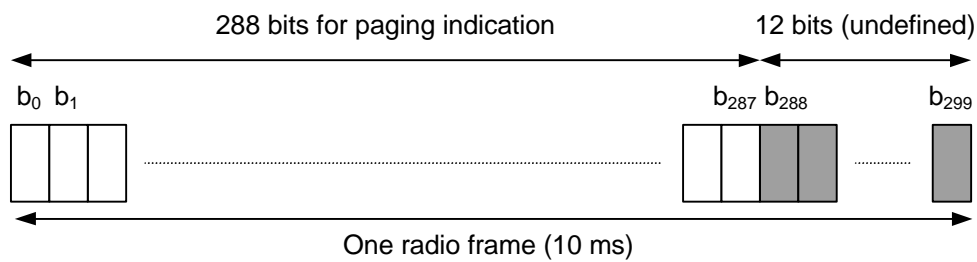

**Figure 20: Structure of Page Indicator Channel (PICH)**

N Page Indicators  $\{PI_0, \dots, PI_{N-1}\}$  are transmitted in each PICH frame, where  $N=18, 36, 72,$  or  $144$ .

The PI calculated by higher layers for use for a certain UE, is mapped to the paging indicator  $PI_p$ , where  $p$  is computed as a function of the PI computed by higher layers, the SFN of the P-CCPCH radio frame during which the start of the PICH radio frame occurs, and the number of paging indicators per frame (N):