

Source: T1
Title: CR's to TS 34.108 v4.5.0 for approval
Agenda item: 5.1.3
Document for: Approval

This document contains 18 CRs to TS 34.108 v4.5.0. These CRs have been agreed by T1 and are put forward to TSG T for approval.

CRs related to general corrections to Rel-4:

| Spec | CR | Rev | Release | Subject | Cat | Version Current | Version -New | Doc-2nd-Level | Workitem |
|--------|-----|-----|---------|-------------------------------------------------------------------------------|-----|-----------------|--------------|---------------|----------|
| 34.108 | 175 | - | Rel-4 | Combine all Radio Bearer Setup messages into one table | A | 4.5.0 | 4.6.0 | T1-030040 | TEI |
| 34.108 | 177 | - | Rel-4 | Corrections to SB and SIB configurations in clause 6.1 as T1S030046rev1 | A | 4.5.0 | 4.6.0 | T1-030042 | TEI |
| 34.108 | 179 | - | Rel-4 | Correction to TS34.108 Rel-4 ; PAGING TYPE1 message (Packet in PS) | A | 4.5.0 | 4.6.0 | T1-030044 | TEI |
| 34.108 | 181 | - | Rel-4 | Clarification of authentication test algorithm and GSM cipher key | A | 4.5.0 | 4.6.0 | T1-030046 | TEI |
| 34.108 | 183 | - | Rel-4 | Addition of simulated network environment for inter-RAT test cases | A | 4.5.0 | 4.6.0 | T1-030048 | TEI |
| 34.108 | 185 | - | Rel-4 | Corrections to SIB1 to align with default values for LAC and RAC in 51.010-1. | A | 4.5.0 | 4.6.0 | T1-030050 | TEI |
| 34.108 | 187 | - | Rel-4 | Addition of default inter-RAT handover messages | A | 4.5.0 | 4.6.0 | T1-030052 | TEI |
| 34.108 | 189 | - | Rel-4 | Correction of activation time IEs in default messages | A | 4.5.0 | 4.6.0 | T1-030054 | TEI |
| 34.108 | 191 | - | Rel-4 | Correction to default SECURITY MODE COMMAND message | A | 4.5.0 | 4.6.0 | T1-030056 | TEI |
| 34.108 | 193 | - | Rel-4 | Addition of option for UL CM only in default reference CM patterns | A | 4.5.0 | 4.6.0 | T1-030058 | TEI |
| 34.108 | 197 | - | Rel-4 | Update of the RRC connection request messages in 34.108 Rel4 | A | 4.5.0 | 4.6.0 | T1-030063 | TEI |
| 34.108 | 204 | - | Rel-4 | Modification to Generic Registration Procedures | A | 4.5.0 | 4.6.0 | T1-030222 | TEI |
| 34.108 | 206 | - | Rel-4 | Update of default configurations to enable testing of low end UE | A | 4.5.0 | 4.6.0 | T1-030228 | TEI |

CRs related to reference RAB configurations Rel-4:

| Spec | CR | Rev | Release | Subject | Cat | Version Current | Version -New | Doc-2nd-Level | Workitem |
|--------|-----|-----|---------|----------------------------------------------------------------------------|-----|-----------------|--------------|---------------|----------|
| 34.108 | 173 | - | Rel-4 | RAB Removal from Rel 4 TS 34.108 as T1S030002rev1 | A | 4.5.0 | 4.6.0 | T1-030037 | TEI |
| 34.108 | 195 | - | Rel-4 | Introduction of a reference RB configuration for RMC for BTFD tests (Rel4) | A | 4.5.0 | 4.6.0 | T1-030060 | TEI |
| 34.108 | 198 | - | Rel-4 | Introduction of Conversational PS RABs in Rel 4 TS 34.108 as T1S030003rev1 | F | 4.5.0 | 4.6.0 | T1-030107 | TEI |

CRs related to TDD mode Rel-4:

| Spec | CR | Rev | Release | Subject | Cat | Version Current | Version -New | Doc-2nd-Level | Workitem |
|--------|-----|-----|---------|----------------------------------------------|-----|-----------------|--------------|---------------|----------|
| 34.108 | 200 | - | Rel-4 | Update of default parameters for 1 to 8 cell | A | 4.5.0 | 4.6.0 | T1-030208 | TEI |

| | | | | | | | | | |
|--------|-----|---|-------|----------------------------------------------------------------------------------------------------------------|---|-------|-------|-----------|-----|
| | | | | environments (TDD), clause 6.1.4, Rel 4 | | | | | |
| 34.108 | 202 | - | Rel-4 | Update of Multi-cell environment for default radio conditions (TDD), clause 6.1.6 (Inclusion of cell 4), Rel 4 | A | 4.5.0 | 4.6.0 | T1-030210 | TEI |

3GPP TSG-T1 Meeting #18
San Antonio, USA, 10th-14th Feb 2003

T1-030040

3GPP TSG-T1/SIG Meeting #27
San Antonio, USA, 10th-14th Feb 2003

T1S030190

| | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|------------------------------------------------|-------|---|------------------|------------------|--------------|---|--|--------------------|------------------------------------------------|--|--|--|--|--|--|--|--|--------------------------------------------|--|--|--|--|--|--|
| <small>CR-Form-v6.1</small> | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <h2 style="margin: 0;">CHANGE REQUEST</h2> | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table style="width: 100%; border: none;"> <tr> <td style="width: 15%; text-align: right;">⌘</td> <td style="width: 35%;">TS 34.108 CR 175</td> <td style="width: 10%; text-align: center;">⌘ rev</td> <td style="width: 10%; text-align: center;">-</td> <td style="width: 10%; text-align: center;">⌘</td> <td style="width: 20%; text-align: right;">Current version:</td> <td style="width: 10%; text-align: center;">4.5.0</td> <td style="width: 10%; text-align: right;">⌘</td> </tr> <tr> <td></td> <td>Spec Title:</td> <td colspan="5">User Equipment (UE) conformance specification;</td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td colspan="5">Part 1: Protocol conformance specification</td> <td></td> <td></td> </tr> </table> | ⌘ | TS 34.108 CR 175 | ⌘ rev | - | ⌘ | Current version: | 4.5.0 | ⌘ | | Spec Title: | User Equipment (UE) conformance specification; | | | | | | | | | Part 1: Protocol conformance specification | | | | | | |
| ⌘ | TS 34.108 CR 175 | ⌘ rev | - | ⌘ | Current version: | 4.5.0 | ⌘ | | | | | | | | | | | | | | | | | | | |
| | Spec Title: | User Equipment (UE) conformance specification; | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Part 1: Protocol conformance specification | | | | | | | | | | | | | | | | | | | | | | | | |

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

Proposed change affects: ⌘ (U)SIM ME/UE Radio Access Network Core Network

| | | | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Title: | ⌘ CR to TS34.108 Rel4 Combine all Radio Bearer Setup messages into one table | | |
| Source: | ⌘ Panasonic, Ericsson | | |
| Work item code: | ⌘ TEI Date: ⌘ 21/1/03 | | |
| Category: | <table style="width: 100%; border: none;"> <tr> <td style="width: 50%; vertical-align: top;"> ⌘ F Use <u>one</u> of the following categories: F (correction) A (corresponds to a correction in an earlier release) B (addition of feature), C (functional modification of feature) D (editorial modification) Detailed explanations of the above categories can be found in 3GPP TR 21.900. </td> <td style="width: 50%; vertical-align: top;"> Release: ⌘ REL4 Use <u>one</u> of the following releases: 2 (GSM Phase 2) R96 (Release 1996) R97 (Release 1997) R98 (Release 1998) R99 (Release 1999) REL-4 (Release 4) REL-5 (Release 5) </td> </tr> </table> | ⌘ F Use <u>one</u> of the following categories: F (correction) A (corresponds to a correction in an earlier release) B (addition of feature), C (functional modification of feature) D (editorial modification) Detailed explanations of the above categories can be found in 3GPP TR 21.900 . | Release: ⌘ REL4 Use <u>one</u> of the following releases: 2 (GSM Phase 2) R96 (Release 1996) R97 (Release 1997) R98 (Release 1998) R99 (Release 1999) REL-4 (Release 4) REL-5 (Release 5) |
| ⌘ F Use <u>one</u> of the following categories: F (correction) A (corresponds to a correction in an earlier release) B (addition of feature), C (functional modification of feature) D (editorial modification) Detailed explanations of the above categories can be found in 3GPP TR 21.900 . | Release: ⌘ REL4 Use <u>one</u> of the following releases: 2 (GSM Phase 2) R96 (Release 1996) R97 (Release 1997) R98 (Release 1998) R99 (Release 1999) REL-4 (Release 4) REL-5 (Release 5) | | |

| | |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Reason for change: ⌘ | <ol style="list-style-type: none"> 1. Currently, there are a few tables for RADIO BEARER SETUP messages. It will be more convenient if these message are merged in a table. 2. Editorial. For CS speech RAB, T314 timer should be used. 3. Editorial. RLC size and TFCS configuration in RRC CONNECTION SETUP message for transition to CELL_FACH state currently referred to the values provided in the DPCH combination table. 4. All frequency info in RADIO BEARER SETUP message should be referred to clause 5.1 in TS 34.108. <p>Revision to T1S030029</p> <p>Frequency Info IE normally shall be set to "Not Present" when the same frequency is applied after this reconfiguration.</p> <p>Missing CHOICE Logical Channel list IEs are added.</p> |
| Summary of change: ⌘ | <ol style="list-style-type: none"> 1. All RADIO BEARER SETUP messages are merged in a single table. 2. The re-establishment timer for CS speech RAB in RADIO BEARER SETUP message is set to useT314. 3. The reference for the RLC size and TFCS configuration in RRC CONNECTION SETUP message for transition to CELL_FACH state have been correct to clause 6.10.2.4.4.1. |

| | |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | <p>4. In all RADIO BEARER SETUP message, the frequency info shall be referred to clause 5.1 in TS 34.108 instead of "Not present".</p> <p>Revision to T1S030029</p> <p>Frequency Info IE shall be set to "Not Present" when the same frequency is applied.</p> <p>Missing CHOICE Logical Channel list IEs are added.</p> |
| Consequences if not approved: | ⌘ Wrong test condition may result in incorrect test results. |

| | | | | | | | | | | |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------|---|--------------------------|---------------------|--|--------------------------|--------------------|--|
| Clauses affected: | ⌘ | | | | | | | | | |
| Other specs affected: | <table border="0"> <tr> <td>⌘ <input type="checkbox"/></td> <td>Other core specifications</td> <td>⌘</td> </tr> <tr> <td><input type="checkbox"/></td> <td>Test specifications</td> <td></td> </tr> <tr> <td><input type="checkbox"/></td> <td>O&M Specifications</td> <td></td> </tr> </table> | ⌘ <input type="checkbox"/> | Other core specifications | ⌘ | <input type="checkbox"/> | Test specifications | | <input type="checkbox"/> | O&M Specifications | |
| ⌘ <input type="checkbox"/> | Other core specifications | ⌘ | | | | | | | | |
| <input type="checkbox"/> | Test specifications | | | | | | | | | |
| <input type="checkbox"/> | O&M Specifications | | | | | | | | | |
| Other comments: | ⌘ Affects Rel-4 | | | | | | | | | |

How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at: http://www.3gpp.org/3G_Specs/CRs.htm. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

Error! No text of specified style in document.

3

Error! No text of specified style in document.

<Start of Modification>

Contents of RADIO-BEARER-SETUP message: AM or UM (Speech in CS)

| Information Element | Value/remark |
|------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Message Type | Arbitrarily selects an integer between 0 and 3 |
| RRC transaction identifier | The presence of this IE is dependent on IXIT statements in TS 34.123-2. If integrity protection is indicated to be active, this IE is present with the values of the sub-IEs as stated below. Else, this IE and the sub-IEs are omitted. |
| Integrity check info | SS calculates the value of MAC-I for this message and writes to this IE. |
| ----- message authentication code | SS provides the value of this IE, from its internal counter. |
| ----- RRC message sequence number | Not Present |
| Integrity protection mode info | Not Present |
| Ciphering mode info | Not Present |
| Activation time | $(256 + CFN - (CFN \text{ MOD } 8 + 8)) \text{ MOD } 256$ |
| New U-RNTI | Not Present |
| New C-RNTI | Not Present |
| New DSCH-RNTI | Not Present |
| RRC State indicator | CELL_DCH |
| UTRAN DRX cycle length coefficient | Not Present |
| CN information info | Not Present |
| URA identity | Not Present |
| Signalling RB information to setup list | Not Present |
| RAB information for setup list | |
| - RAB information for setup | |
| ----- RAB info | |
| ----- RAB identity | 0000 0001B |
| ----- CN domain identity | CS domain |
| ----- NAS Synchronization Indicator | Not Present |
| ----- Re-establishment timer | Use T314 |
| ----- RB information to setup | |
| ----- RB identity | 40 |
| ----- PDCP info | Not Present |
| ----- CHOICE RLC info type | RLC info |
| ----- CHOICE Uplink RLC mode | TM RLC |
| ----- Transmission RLC discard | Not Present |
| ----- Segmentation indication | FALSE |
| ----- CHOICE Downlink RLC mode | TM RLC |
| ----- Segmentation indication | FALSE |
| ----- RB mapping info | |
| ----- Information for each multiplexing option | |
| ----- RLC logical channel mapping indicator | Not Present |
| ----- Number of uplink RLC logical channels | 4 |
| ----- Uplink transport channel type | DCH |
| ----- UL Transport channel identity | 4 |
| ----- Logical channel identity | Not Present |
| ----- CHOICE RLC size list | Configured |
| ----- MAC logical channel priority | 6 |
| ----- Downlink RLC logical channel info | |
| ----- Number of downlink RLC logical channels | 4 |
| ----- Downlink transport channel type | DCH |
| ----- DL DCH Transport channel identity | 6 |
| ----- DL DSCH Transport channel identity | Not Present |
| ----- Logical channel identity | Not Present |
| ----- RB identity | 44 |
| ----- PDCP info | Not Present |
| ----- CHOICE RLC info type | RLC info |
| ----- CHOICE Uplink RLC mode | TM RLC |
| ----- Transmission RLC discard | Not Present |
| ----- Segmentation indication | FALSE |
| ----- CHOICE Downlink RLC mode | TM RLC |
| ----- Segmentation indication | FALSE |
| ----- RB mapping info | |
| ----- Information for each multiplexing option | |
| ----- RLC logical channel mapping indicator | Not Present |
| ----- Number of uplink RLC logical channels | 4 |
| ----- Uplink transport channel type | DCH |
| ----- UL Transport channel identity | 2 |

| Information Element | Value/remark |
|-------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| Logical channel identity | Not Present |
| CHOICE RLC size list | Configured |
| MAC logical channel priority | 6 |
| Downlink RLC logical channel info | |
| Number of downlink RLC logical channels | 1 |
| Downlink transport channel type | DCH |
| DL DCH Transport channel identity | 7 |
| DL DSCH Transport channel identity | Not Present |
| Logical channel identity | Not Present |
| RB identity | 12 |
| PDCP info | Not Present |
| CHOICE RLC info type | RLC info |
| CHOICE Uplink RLC mode | TM RLC |
| Transmission RLC discard | Not Present |
| Segmentation indication | FALSE |
| CHOICE Downlink RLC mode | TM RLC |
| Segmentation indication | FALSE |
| RB mapping info | |
| Information for each multiplexing option | |
| RLC logical channel mapping indicator | Not Present |
| Number of uplink RLC logical channels | 1 |
| Uplink transport channel type | DCH |
| UL Transport channel identity | 3 |
| Logical channel identity | Not Present |
| CHOICE RLC size list | Configured |
| MAC logical channel priority | 6 |
| Downlink RLC logical channel info | |
| Number of downlink RLC logical channels | 1 |
| Downlink transport channel type | DCH |
| DL DCH Transport channel identity | 8 |
| DL DSCH Transport channel identity | Not Present |
| Logical channel identity | Not Present |
| RB information to be affected list | Not Present |
| Downlink counter synchronisation info | Not Present |
| UL Transport channel information for all transport channels | |
| PRACH TFCS | Not Present |
| CHOICE mode | FDD |
| TFC subset | Not Present |
| UL DCH TFCS | |
| CHOICE TFCI signalling | Normal |
| TFCI Field 1 information | |
| CHOICE TFCS representation | Complete reconfiguration |
| TFC complete reconfigure information | |
| CHOICE CTFC Size | |
| CTFC information | This IE is repeated for TFC numbers and reference to TS34.108 clause 6.10.2.4 |
| CTFC | Reference to TS34.108 clause 6.10.2.4 Parameter Set |
| Power offset information | |
| CHOICE Gain Factors | Computed Gain Factors(The last TFC is set to Signalled Gain Factors) |
| Gain factor β_c | 11 (below 64 kbps) 9 (higher than 64 kbps) (Not Present if the above is set to Computed Gain Factors) |
| Gain factor β_d | 15 (Not Present if the above is set to Computed Gain Factors) |
| Reference TFC ID | 0 |
| CHOICE mode | FDD |
| Power offset P-p-m | Not Present |
| Deleted TrCH information list | Not Present |
| Added or Reconfigured TrCH information list | 3 DCHs added, 1 DCH reconfigured |
| Added or Reconfigured UL TrCH information | |
| Uplink transport channel type | DCH |
| UL Transport channel identity | 4 |
| TFS | |

| Information Element | Value/remark |
|-----------------------------------------------------|-------------------------------------------------|
| CHOICE Transport channel type | Dedicated transport channels |
| Dynamic Transport format information | |
| RLC Size | Reference to TS34.108 clause 6.10 Parameter Set |
| Number of TBs and TTI List | (This IE is repeated for TFI number.) |
| Transmission Time Interval | Not Present |
| Number of Transport blocks | Reference to TS34.108 clause 6.10 Parameter Set |
| CHOICE Logical Channel list | All |
| Semi-static Transport Format information | |
| Transmission time interval | Reference to TS34.108 clause 6.10 Parameter Set |
| Type of channel coding | Reference to TS34.108 clause 6.10 Parameter Set |
| Coding Rate | Reference to TS34.108 clause 6.10 Parameter Set |
| Rate matching attribute | Reference to TS34.108 clause 6.10 Parameter Set |
| CRC size | Reference to TS34.108 clause 6.10 Parameter Set |
| Uplink transport channel type | DGH |
| UL Transport channel identity | 2 |
| TFS | |
| CHOICE Transport channel type | Dedicated transport channels |
| Dynamic Transport format information | |
| RLC Size | Reference to TS34.108 clause 6.10 Parameter Set |
| Number of TBs and TTI List | (This IE is repeated for TFI number.) |
| Transmission Time Interval | Not Present |
| Number of Transport blocks | Reference to TS34.108 clause 6.10 Parameter Set |
| Transmission Time Interval | Reference to TS34.108 clause 6.10 Parameter Set |
| Number of Transport blocks | (This IE is repeated for TFI number.) |
| CHOICE Logical Channel list | All |
| Semi-static Transport Format information | |
| Transmission time interval | Reference to TS34.108 clause 6.10 Parameter Set |
| Type of channel coding | Reference to TS34.108 clause 6.10 Parameter Set |
| Coding Rate | Reference to TS34.108 clause 6.10 Parameter Set |
| Rate matching attribute | Reference to TS34.108 clause 6.10 Parameter Set |
| CRC size | Reference to TS34.108 clause 6.10 Parameter Set |
| Uplink transport channel type | DGH |
| UL Transport channel identity | 3 |
| TFS | |
| CHOICE Transport channel type | Dedicated transport channels |
| Dynamic Transport format information | |
| RLC Size | Reference to TS34.108 clause 6.10 Parameter Set |
| Number of TBs and TTI List | (This IE is repeated for TFI number.) |
| Transmission Time Interval | Not Present |
| Number of Transport blocks | Reference to TS34.108 clause 6.10 Parameter Set |
| Transmission Time Interval | Reference to TS34.108 clause 6.10 Parameter Set |
| Number of Transport blocks | (This IE is repeated for TFI number.) |
| CHOICE Logical Channel list | All |
| Semi-static Transport Format information | |
| Transmission time interval | Reference to TS34.108 clause 6.10 Parameter Set |
| Type of channel coding | Reference to TS34.108 clause 6.10 Parameter Set |
| Coding Rate | Reference to TS34.108 clause 6.10 Parameter Set |
| Rate matching attribute | Reference to TS34.108 clause 6.10 Parameter Set |
| CRC size | Reference to TS34.108 clause 6.10 Parameter Set |
| Uplink transport channel type | DGH |
| UL Transport channel identity | 5 |
| TFS | |
| CHOICE Transport channel type | Dedicated transport channels |
| Dynamic Transport format information | |
| RLC Size | Reference to TS34.108 clause 6.10 Parameter Set |
| Number of TBs and TTI List | (This IE is repeated for TFI number.) |
| Transmission Time Interval | Not Present |
| Number of Transport blocks | Reference to TS34.108 clause 6.10 Parameter Set |
| Transmission Time Interval | Reference to TS34.108 clause 6.10 Parameter Set |
| Number of Transport blocks | (This IE is repeated for TFI number.) |
| CHOICE Logical Channel list | All |
| Semi-static Transport Format information | |
| Transmission time interval | Reference to TS34.108 clause 6.10 Parameter Set |
| Type of channel coding | Reference to TS34.108 clause 6.10 Parameter Set |
| Coding Rate | Reference to TS34.108 clause 6.10 Parameter Set |
| Rate matching attribute | Reference to TS34.108 clause 6.10 Parameter Set |
| CRC size | Reference to TS34.108 clause 6.10 Parameter Set |

| Information Element | Value/remark |
|-------------------------------------------------------------------|-------------------------------------------------|
| CHOICE mode | FDD |
| — CPCH set ID | Not Present |
| — Added or Reconfigured TrCH information for DRAC list | Not Present |
| DL Transport channel information common for all transport channel | |
| — SCCPCH TFCS | Not Present |
| — CHOICE mode | FDD |
| — CHOICE DL parameters | Same as UL |
| Deleted TrCH information list | Not Present |
| Added or Reconfigured TrCH information list | 3 DCHs |
| Added or Reconfigured DL TrCH information | |
| — Downlink transport channel type | DCH |
| — DL Transport channel identity | 6 |
| — CHOICE DL parameters | Same as UL |
| — Uplink transport channel type | DCH |
| — UL TrCH identity | 4 |
| — DCH quality target | |
| — BLER Quality value | -2.0 |
| — Downlink transport channel type | DCH |
| — DL Transport channel identity | 7 |
| — CHOICE DL parameters | Same as UL |
| — Uplink transport channel type | DCH |
| — UL TrCH identity | 2 |
| — DCH quality target | |
| — BLER Quality value | Not Present |
| — Downlink transport channel type | DCH |
| — DL Transport channel identity | 8 |
| — CHOICE DL parameters | Same as UL |
| — Uplink transport channel type | DCH |
| — UL TrCH identity | 3 |
| — DCH quality target | |
| — BLER Quality value | Not Present |
| — Downlink transport channel type | DCH |
| — DL Transport channel identity | 10 |
| — CHOICE DL parameters | Same as UL |
| — Uplink transport channel type | DCH |
| — UL TrCH identity | 5 |
| — DCH quality target | |
| — BLER Quality value | -2.0 |
| Frequency info | Not Present |
| Maximum allowed UL TX power | 33dBm |
| CHOICE channel requirement | Uplink DPCH info |
| — Uplink DPCH power control info | |
| — DPCCH power offset | -6dB |
| — PC Preamble | 1 frame |
| — SRB delay | 7 frames |
| — Power Control Algorithm | Algorithm1 |
| — TPC step size | 1dB |
| — Scrambling code type | Long |
| — Scrambling code number | 0 (0 to 16777215) |
| — Number of DPDCH | Not Present(1) |
| — spreading factor | Reference to TS34.108 clause 6.10 Parameter Set |
| — TFCI existence | Reference to TS34.108 clause 6.10 Parameter Set |
| — Number of FBI bit | Reference to TS34.108 clause 6.10 Parameter Set |
| — Puncturing Limit | Reference to TS34.108 clause 6.10 Parameter Set |
| CHOICE Mode | FDD |
| — Downlink PDSCH information | Not Present |
| Downlink information common for all radio links | |
| — Downlink DPCH info common for all RL | |
| — Timing indicator | Maintain |
| — CFN target SFN frame offset | Not Present |
| — Downlink DPCH power control information | |
| — DPC mode | 0 (single) |
| — CHOICE mode | FDD |
| — Power offset $P_{Pilot-DPDCH}$ | 0 |
| — DL rate matching restriction information | Not Present |

| Information Element | Value/remark |
|----------------------------------------------------------|------------------------------------------------------------------------------|
| Spreading factor | Reference to TS34.108 clause 6.10 Parameter Set |
| Fixed or Flexible Position | Reference to TS34.108 clause 6.10 Parameter Set |
| TFCI existence | Reference to TS34.108 clause 6.10 Parameter Set |
| CHOICE SF | Reference to TS34.108 clause 6.10 Parameter Set |
| DPCH compressed mode info | Not Present |
| TX Diversity mode | None |
| SSDT information | Not Present |
| Default DPCH Offset Value | Not Present |
| Downlink information for each radio link list | |
| Downlink information for each radio link | |
| Choice mode | FDD |
| Primary CPICH info | Reference to clause 6.1 "Default settings (FDD)" |
| Primary scrambling code | Not Present |
| PDSCH with SHO-DCH info | Not Present |
| PDSCH code mapping | Not Present |
| Downlink DPCH info for each RL | |
| Primary CPICH usage for channel estimation | Primary CPICH may be used |
| DPCH frame offset | Set to value Default DPCH Offset Value (as currently stored in SS) mod 38400 |
| Secondary CPICH info | Not Present |
| DL channelisation code | |
| Secondary scrambling code | 4 |
| Spreading factor | Reference to TS34.108 clause 6.10 Parameter Set |
| Code number | 0 |
| Scrambling code change | No change |
| TPC combination index | 0 |
| SSDT Cell Identity | Not Present |
| Closed loop timing adjustment mode | Not Present |
| SCCPCH information for FACH | Not Present |

Contents of RADIO-BEARER-SETUP message: AM or UM (Packet to CELL_DCH from CELL_DCH in PS)

| Information Element | Value/remark |
|--------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Message Type | Arbitrarily selects an integer between 0 and 3 |
| RRC transaction identifier | The presence of this IE is dependent on IXIT statements in TS 34.123-2. If integrity protection is indicated to be active, this IE is present with the values of the sub-IEs as stated below. Else, this IE and the sub-IEs are omitted. |
| Integrity check info | SS calculates the value of MAC-I for this message and writes to this IE. |
| - message authentication code | SS provides the value of this IE, from its internal counter. |
| - RRC message sequence number | Not Present |
| Integrity protection mode info | Not Present |
| Ciphering mode info | Not Present |
| Activation time | $(256 + CFN - (CFN \text{ MOD } 8 + 8)) \text{ MOD } 256$ |
| New U-RNTI | Not Present |
| New C-RNTI | Not Present |
| New DSCH-RNTI | Not Present |
| RRC State indicator | CELL_DCH |
| UTRAN DRX cycle length coefficient | Not Present |
| CN information info | Not Present |
| URA identity | Not Present |
| Signalling RB information to setup | Not Present |
| RAB information for setup | |
| - RAB info | |
| - RAB identity | 0000-0101B |
| - CN domain identity | PS domain |
| - NAS Synchronization Indicator | Not Present |
| - Re-establishment timer | Use T315 |
| - RB information to setup | |
| - RB identity | 20 |
| - PDCP info | |
| - Support for lossless SRNS relocation | FALSE |
| - Max PDCP SN window size | Not present |
| - PDCP PDU header | Absent |
| - Header compression information | Not present |
| - CHOICE RLC info type | RLC info |
| - CHOICE Uplink RLC mode | AM RLC |
| - Transmission RLC discard | |
| - SDU discard mode | No discard |
| - MAX_DAT | 15 |
| - Transmission window size | 128 |
| - Timer_RST | 500 |
| - Max_RST | 4 |
| - Polling info | |
| - Timer_poll_prohibit | 200 |
| - Timer_poll | 200 |
| - Poll_PDU | Not Present |
| - Poll_SDU | 1 |
| - Last transmission PDU poll | TRUE |
| - Last retransmission PDU poll | TRUE |
| - Poll_Windows | 99 |
| - Timer_poll_periodic | Not Present |
| - CHOICE Downlink RLC mode | AM RLC |
| - In-sequence delivery | TRUE |
| - Receiving window size | 128 |
| - Downlink RLC status info | |
| - Timer_status_prohibit | 200 |
| - Timer_EPC | Not Present |
| - Missing PDU indicator | TRUE |
| - Timer_STATUS_periodic | Not Present |
| - RB mapping info | |
| - Information for each multiplexing option | 2 RB Mux Options |
| - RLC logical channel mapping indicator | Not Present |
| - Number of uplink RLC logical channels | 1 |
| - Uplink transport channel type | DCH |
| - UL Transport channel identity | 4 |
| - Logical channel identity | Not Present |

| Information Element | Value/remark |
|------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| CHOICE RLC size list | Configured |
| MAC logical channel priority | 8 |
| Downlink RLC logical channel info | |
| Number of downlink RLC logical channels | 4 |
| Downlink transport channel type | DCH |
| DL DCH Transport channel identity | 6 |
| DL DSCH Transport channel identity | Not Present |
| Logical channel identity | Not Present |
| RLC logical channel mapping indicator | Not Present |
| Number of uplink RLC logical channels | 4 |
| Uplink transport channel type | RACH |
| UL Transport channel identity | Not Present |
| Logical channel identity | 7 |
| CHOICE RLC size list | Explicit List |
| RLC size index | Reference to TS34.108 clause 6 Parameter Set |
| MAC logical channel priority | 8 |
| Downlink RLC logical channel info | |
| Number of downlink RLC logical channels | 4 |
| Downlink transport channel type | FACH |
| DL DCH Transport channel identity | Not Present |
| DL DSCH Transport channel identity | Not Present |
| Logical channel identity | 7 |
| RB information to be affected list | Not Present |
| Downlink counter synchronisation info | Not Present |
| UL Transport channel information for all transport channels | |
| PRACH TFCS | Not Present |
| CHOICE mode | FDD |
| TFC subset | Not Present |
| UL DCH TFCS | |
| CHOICE TFCI signalling | Normal |
| TFCI Field 1 information | |
| CHOICE TFCS representation | Complete reconfiguration |
| TFC complete reconfigure information | |
| CHOICE CTFC Size | |
| CTFC information | This IE is repeated for TFC numbers and reference to TS34.108 clause 6.10.2.4 |
| CTFC | Reference to TS34.108 clause 6.10.2.4 Parameter Set |
| Power offset information | |
| CHOICE Gain Factors | Computed Gain Factors(The last TFC is set to Signalled Gain Factors) |
| Gain factor β_e | 11 (below 64 kbps) 9 (higher than 64 kbps) (Not Present if the above is set to Computed Gain Factors) |
| Gain factor β_d | 15 (Not Present if the above is set to Computed Gain Factors) |
| Reference TFC ID | 0 |
| CHOICE mode | FDD |
| Power offset P_{p-m} | Not Present |
| Deleted TrCH information list | Not Present |
| Added or Reconfigured TrCH information list | 1 DCH added, 1 DCH reconfigured |
| Added or Reconfigured UL TrCH information | |
| Uplink transport channel type | DCH |
| UL Transport channel identity | 4 |
| TFS | |
| CHOICE Transport channel type | Dedicated transport channels |
| Dynamic Transport format information | |
| RLC Size | Reference to TS34.108 clause 6.10 Parameter Set |
| Number of TBs and TTI List | (This IE is repeated for TFI number.) |
| Transmission Time Interval | Not Present |
| Number of Transport blocks | Reference to TS34.108 clause 6.10 Parameter Set |
| CHOICE Logical Channel list | All |
| Semi-static Transport Format information | |
| Transmission time interval | Reference to TS34.108 clause 6.10 Parameter Set |
| Type of channel coding | Reference to TS34.108 clause 6.10 Parameter Set |

| Information Element | Value/remark |
|------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|
| Coding Rate | Reference to TS34.108 clause 6.10 Parameter Set |
| Rate matching attribute | Reference to TS34.108 clause 6.10 Parameter Set |
| CRC size | Reference to TS34.108 clause 6.10 Parameter Set |
| Uplink transport channel type | DCH |
| UL Transport channel identity | 5 |
| TFS | |
| CHOICE Transport channel type | Dedicated transport channels |
| Dynamic Transport format information | |
| RLC Size | Reference to TS34.108 clause 6.10 Parameter Set |
| Number of TBs and TTI List | (This IE is repeated for TFI number.) |
| Transmission Time Interval | Not Present |
| Number of Transport blocks | Reference to TS34.108 clause 6.10 Parameter Set |
| Transmission Time Interval | Reference to TS34.108 clause 6.10 Parameter Set |
| Number of Transport blocks | (This IE is repeated for TFI number.) |
| CHOICE Logical Channel list | All |
| Semi-static Transport Format information | |
| Transmission time interval | Reference to TS34.108 clause 6.10 Parameter Set |
| Type of channel coding | Reference to TS34.108 clause 6.10 Parameter Set |
| Coding Rate | Reference to TS34.108 clause 6.10 Parameter Set |
| Rate matching attribute | Reference to TS34.108 clause 6.10 Parameter Set |
| CRC size | Reference to TS34.108 clause 6.10 Parameter Set |
| CHOICE mode | FDD |
| CPCH set ID | Not Present |
| Added or Reconfigured TrCH information for DRAC list | Not Present |
| DL Transport channel information common for all transport channel | |
| SCCPCH TFCS | Not Present |
| CHOICE mode | FDD |
| CHOICE DL parameters | Explicit |
| DL DCH TFCS | |
| CHOICE TFCI signalling | Normal |
| TFCI Field 1 information | |
| CHOICE TFCS representation | Complete reconfiguration |
| TFCS complete reconfigure | |
| CHOICE CTFC Size | |
| CTFC information | This IE is repeated for TFC numbers and reference to TS34.108 clause 6.10.2.4 |
| CTFC | Reference to TS34.108 clause 6.10.2.4 Parameter Set |
| Power offset information | Not present |
| Deleted TrCH information list | Not Present |
| Added or Reconfigured TrCH information list | |
| Added or Reconfigured DL TrCH information | |
| Downlink transport channel type | DCH |
| DL Transport channel identity | 6 |
| CHOICE DL parameters | Explicit |
| TFS | |
| CHOICE Transport channel type | Dedicated transport channels |
| Dynamic Transport format information | |
| RLC Size | Reference to TS34.108 clause 6.10 Parameter Set |
| Number of TBs and TTI List | (This IE is repeated for TFI number.) |
| Transmission Time Interval | Not Present |
| Number of Transport blocks | Reference to TS34.108 clause 6.10 Parameter Set |
| Semi-static Transport Format information | |
| Transmission time interval | Reference to TS34.108 clause 6.10 Parameter Set |
| Type of channel coding | Reference to TS34.108 clause 6.10 Parameter Set |
| Coding Rate | Reference to TS34.108 clause 6.10 Parameter Set |
| Rate matching attribute | Reference to TS34.108 clause 6.10 Parameter Set |
| CRC size | Reference to TS34.108 clause 6.10 Parameter Set |
| DCH quality target | |
| BLER Quality value | -2.0 |
| Downlink transport channel type | DCH |
| DL Transport channel identity | 10 |
| CHOICE DL parameters | Same as UL |
| Uplink transport channel type | DCH |
| UL TrCH identity | 5 |
| DCH quality target | |

| Information Element | Value/remark |
|-------------------------------------------------|------------------------------------------------------------------------------|
| BLER Quality value | -2.0 |
| Frequency info | Not Present |
| Maximum allowed UL TX power | 33dBm |
| CHOICE channel requirement | Uplink-DPCH info |
| Uplink-DPCH power control info | |
| DPCCH power offset | -6dB |
| PC Preamble | 1 frame |
| SRB delay | 7 frames |
| Power Control Algorithm | Algorithm1 |
| TPC step size | 1dB |
| Scrambling code type | Long |
| Scrambling code number | 0 (0 to 16777215) |
| Number of DPDCH | Not Present(1) |
| spreading factor | Reference to TS34.108 clause 6.10 Parameter Set |
| TFCI existence | Reference to TS34.108 clause 6.10 Parameter Set |
| Number of FBI bit | Reference to TS34.108 clause 6.10 Parameter Set |
| Puncturing Limit | Reference to TS34.108 clause 6.10 Parameter Set |
| CHOICE Mode | FDD |
| Downlink PDSCH information | Not Present |
| Downlink information common for all radio links | |
| Downlink DPCH info common for all RL | |
| Timing indicator | Maintain |
| CFN target SFN frame offset | Not Present |
| Downlink DPCH power control information | |
| DPC mode | 0 (single) |
| CHOICE mode | FDD |
| Power offset P _{Pilot-DPCH} | 0 |
| DL rate matching restriction information | Not Present |
| Spreading factor | Reference to TS34.108 clause 6.10 Parameter Set |
| Fixed or Flexible Position | Reference to TS34.108 clause 6.10 Parameter Set |
| TFCI existence | Reference to TS34.108 clause 6.10 Parameter Set |
| CHOICE SF | Reference to TS34.108 clause 6.10 Parameter Set |
| DPCH compressed mode info | Not Present |
| TX Diversity mode | None |
| SSDT information | Not Present |
| Default DPCH Offset Value | Not Present |
| Downlink information for each radio link list | |
| Downlink information for each radio link | |
| Choice mode | FDD |
| Primary CPICH info | Reference to clause 6.1 "Default settings (FDD)" |
| Primary scrambling code | Not Present |
| PDSCH with SHO DCH info | Not Present |
| PDSCH code mapping | Not Present |
| Downlink DPCH info for each RL | |
| Primary CPICH usage for channel estimation | Primary CPICH may be used |
| DPCH frame offset | Set to value Default DPCH Offset Value (as currently stored in SS) mod 38400 |
| Secondary CPICH info | Not Present |
| DL channelisation code | |
| Secondary scrambling code | 4 |
| Spreading factor | Reference to TS34.108 clause 6.10 Parameter Set |
| Code number | 0 |
| Scrambling code change | No change |
| TPC combination index | 0 |
| SSDT Cell Identity | Not Present |
| Closed loop timing adjustment mode | Not Present |
| SCCPCH information for FACH | Not Present |

Contents of RADIO BEARER SETUP message: AM or UM

| Information Element | Condition | Value/remark |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Message Type RRC transaction identifier Integrity check info - message authentication code - RRC message sequence number Integrity protection mode info Ciphering mode info | A1, A2 , A3 , A4, A5, A6, A7, A8 | Arbitrarily selects an integer between 0 and 3 The presence of this IE is dependent on IXIT statements in TS 34.123-2. If integrity protection is indicated to be active, this IE is present with the values of the sub IEs as stated below. Else, this IE and the sub-IEs are omitted. SS calculates the value of MAC-I for this message and writes to this IE. SS provides the value of this IE, from its internal counter. Not Present Not Present |
| Activation time | A1, A2 , A3 , A7, A8 | (256+CFN-(CFN MOD 8 + 8))MOD 256 |
| Activation time | A4, A5, A6 | Not Present |
| New U-RNTI | A1 , A2 , A3 , A4 , A5 , A6 , A7 , A8 | Not Present |
| New C-RNTI | A1, A2 , A3 , A4, A7, A8 | Not Present |
| New C-RNTI | A5, A6 | '1010 1010 1010 1010' |
| New DSCH-RNTI | A1, A2 , A3 , A4, A5, A6, A7, A8 | Not Present |
| RRC State indicator | A1, A2 , A3 , A4, A7 , A8 | CELL_DCH |
| RRC State indicator | A5, A6 | CELL_FACH |
| UTRAN DRX cycle length coefficient | A1, A2 , A3 , A4, A5, A6, A7, A8 | Not Present |
| CN information info | | Not Present |
| URA identity | | Not Present |
| Signalling RB information to setup | | Not Present |
| RAB information for setup - RAB info - RAB identity - CN domain identity - NAS Synchronization Indicator - Re-establishment timer - RB information to setup - RB identity - PDCP info - CHOICE RLC info type - CHOICE Uplink RLC mode - Transmission RLC discard - Segmentation indication - CHOICE Downlink RLC mode - Segmentation indication - RB mapping info - Information for each multiplexing option - RLC logical channel mapping indicator - Number of uplink RLC logical channels - Uplink transport channel type - UL Transport channel identity - Logical channel identity - CHOICE RLC size list - MAC logical channel priority - Downlink RLC logical channel info - Number of downlink RLC logical channels - Downlink transport channel type | A1, A7 | 0000 0001B CS domain Not Present useT314 10 Not Present RLC info TM RLC Not Present FALSE TM RLC FALSE Not Present 1 DCH 1 Not Present Configured 7 1 DCH |

| Information Element | Condition | Value/remark |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> - DL DCH Transport channel identity - DL DSCH Transport channel identity - Logical channel identity | | 6 Not Present Not Present |
| RAB information for setup <ul style="list-style-type: none"> - RAB info - RAB identity - CN domain identity - NAS Synchronization Indicator - Re-establishment timer - RB information to setup - RB identity - PDCP info - CHOICE RLC info type - CHOICE Uplink RLC mode - Transmission RLC discard - Segmentation indication - CHOICE Downlink RLC mode - Segmentation indication - RB mapping info - Information for each multiplexing option - RLC logical channel mapping indicator - Number of uplink RLC logical channels - Uplink transport channel type - UL Transport channel identity - Logical channel identity - CHOICE RLC size list - MAC logical channel priority - Downlink RLC logical channel info - Number of downlink RLC logical channels - Downlink transport channel type - DL DCH Transport channel identity - DL DSCH Transport channel identity - Logical channel identity - RB identity - PDCP info - CHOICE RLC info type - CHOICE Uplink RLC mode - Transmission RLC discard - Segmentation indication - CHOICE Downlink RLC mode - Segmentation indication - RB mapping info - Information for each multiplexing option - RLC logical channel mapping indicator - Number of uplink RLC logical channels - Uplink transport channel type - UL Transport channel identity - Logical channel identity - CHOICE RLC size list - MAC logical channel priority - Downlink RLC logical channel info - Number of downlink RLC logical channels - Downlink transport channel type - DL DCH Transport channel identity - DL DSCH Transport channel identity - Logical channel identity - RB identity - PDCP info - CHOICE RLC info type - CHOICE Uplink RLC mode - Transmission RLC discard - Segmentation indication - CHOICE Downlink RLC mode - Segmentation indication - RB mapping info - Information for each multiplexing option - RLC logical channel mapping indicator | A2, A8 | 0000 0001B CS domain Not Present useT315 useT314 10 Not Present RLC info TM RLC Not Present FALSE TM RLC FALSE Not Present 1 DCH 1 Not Present Configured 6 1 DCH 6 Not Present Not Present 11 Not Present RLC info TM RLC Not Present FALSE TM RLC FALSE Not Present 1 DCH 2 Not Present Configured 6 1 DCH 7 Not Present Not Present 12 Not Present RLC info TM RLC Not Present FALSE TM RLC FALSE Not Present |

| Information Element | Condition | Value/remark |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> - Number of uplink RLC logical channels - Uplink transport channel type - UL Transport channel identity - Logical channel identity - CHOICE RLC size list - MAC logical channel priority - Downlink RLC logical channel info - Number of downlink RLC logical channels - Downlink transport channel type - DL DCH Transport channel identity - DL DSCH Transport channel identity - Logical channel identity | | <ul style="list-style-type: none"> 1 DCH 3 Not Present Configured 6 1 DCH 8 Not Present Not Present |
| <p>RAB information for setup</p> <ul style="list-style-type: none"> - RAB info - RAB identity - CN domain identity - NAS Synchronization Indicator - Re-establishment timer - RB information to setup - RB identity - PDCP info - Support for lossless SRNS relocation - Max PDCP SN window size - PDCP PDU header - Header compression information - CHOICE RLC info type - CHOICE Uplink RLC mode - Transmission RLC discard - CHOICE SDU discard mode - MAX_DAT - Transmission window size - Timer_RST - Max_RST - Polling info - Timer_poll_prohibit - Timer_poll - Poll_PDU - Poll_SDU - Last transmission PDU poll - Last retransmission PDU poll - Poll_Windows - Timer_poll_periodic - CHOICE Downlink RLC mode - In-sequence delivery - Receiving window size - Downlink RLC status info - Timer_status_prohibit - Timer_EPC - Missing PDU indicator - Timer_STATUS_periodic - RB mapping info - Information for each multiplexing option - RLC logical channel mapping indicator - Number of uplink RLC logical channels - Uplink transport channel type - UL Transport channel identity - Logical channel identity - CHOICE RLC size list - MAC logical channel priority - Downlink RLC logical channel info - Number of downlink RLC logical channels - Downlink transport channel type - DL DCH Transport channel identity - DL DSCH Transport channel identity - Logical channel identity - RLC logical channel mapping indicator | <p>A3, A4, A5, A6</p> | <ul style="list-style-type: none"> (AM DTCH for PS domain) 0000 0101B PS domain Not Present useT315 20 FALSE Not present Absent Not present RLC info AM RLC No Discard 15 128 500 4 200 200 Not Present 1 TRUE TRUE 99 Not Present AM RLC TRUE 128 200 Not Present TRUE Not Present 2 RBMuxOptions Not Present 1 DCH 1 Not Present Configured 8 1 DCH 6 Not Present Not Present Not Present |

| Information Element | Condition | Value/remark |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> - Number of uplink RLC logical channels - Uplink transport channel type - UL Transport channel identity - Logical channel identity - CHOICE RLC size list <ul style="list-style-type: none"> - RLC size index - MAC logical channel priority - Downlink RLC logical channel info - Number of downlink RLC logical channels - Downlink transport channel type - DL DCH Transport channel identity - DL DSCH Transport channel identity - Logical channel identity | | 1 RACH Not Present 7 Explicit list Reference to TS34.108 clause 6 Parameter Set 8 1 FACH Not Present Not Present 7 |
| RB information to be affected | A1, A2 , A3 , A4, A5, A6, A7, A8 | Not Present |
| Downlink counter synchronisation info | A1, A2 , A3 , A4, A5, A6, A7, A8 | Not Present |
| UL Transport channel information for all transport channels <ul style="list-style-type: none"> - PRACH TFCS - CHOICE mode - TFC subset - UL DCH TFCS - CHOICE TFCI signalling - TFCI Field 1 information - CHOICE TFCS representation - TFCS complete reconfigure information - CHOICE CTFC Size - CTFC information - CTFC - Power offset information - CHOICE Gain Factors <ul style="list-style-type: none"> - Gain factor β_c - Gain factor β_d - Reference TFC ID - CHOICE mode - Power offset P_{p-m} | A1, A2 , A3 , A4, A5, A6, A7, A8 | Not Present FDD Not Present Normal Complete reconfiguration Number of bits used must be enough to cover all combinations of CTFC from TS34.108 clause 6.10.2.4 Parameter Set. This IE is repeated for TFC numbers and reference to TS34.108 clause 6.10.2.4 Parameter Set Reference to TS34.108 clause 6.10.2.4 Parameter Set Computed Gain Factors(The last TFC is set to Signalled Gain Factors) 11 (below 64 kbps) 9 (higher than 64 kbps) (Not Present if the CHOICE Gain Factors is set to Computed Gain Factors) 15 (Not Present if the CHOICE Gain Factors is set to Computed Gain Factors) 0 FDD Not Present |
| Deleted UL TrCH information | A1, A2 , A3 , A4, A5, A6, A7, A8 | Not Present |
| Added or Reconfigured UL TrCH information <ul style="list-style-type: none"> - Uplink transport channel type - UL Transport channel identity - TFS - CHOICE Transport channel type - Dynamic Transport format information - RLC Size - Number of TBs and TTI List - Transmission Time Interval - Number of Transport blocks | A1, A3 , A4 , A5 , A6 , A7 | 1 DCH added, 1 DCH reconfigured DCH 1 Dedicated transport channels Reference to TS34.108 clause 6.10 Parameter Set (This IE is repeated for TFI number.) Not Present Reference to TS34.108 clause 6.10 Parameter |

| Information Element | Condition | Value/remark |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> - CHOICE Logical Channel list - Semi-static Transport Format information - Transmission time interval - Type of channel coding - Coding Rate - Rate matching attribute - CRC size - Uplink transport channel type - UL Transport channel identity - TFS - CHOICE Transport channel type - Dynamic Transport format information - RLC Size - Number of TBs and TTI List - Transmission Time Interval - Number of Transport blocks - CHOICE Logical Channel list - Semi-static Transport Format information - Transmission time interval - Type of channel coding - Coding Rate - Rate matching attribute - CRC size | | <p>Set All</p> <p>Reference to TS34.108 clause 6.10 Parameter Set</p> <p>Reference to TS34.108 clause 6.10 Parameter Set</p> <p>Reference to TS34.108 clause 6.10 Parameter Set</p> <p>Reference to TS34.108 clause 6.10 Parameter Set</p> <p>Reference to TS34.108 clause 6.10 Parameter Set</p> <p>DCH 5</p> <p>Dedicated transport channels</p> <p>Reference to TS34.108 clause 6.10 Parameter Set (This IE is repeated for TFI number.)</p> <p>Not Present</p> <p>Reference to TS34.108 clause 6.10 Parameter Set</p> <p>All</p> <p>Reference to TS34.108 clause 6.10 Parameter Set</p> <p>Reference to TS34.108 clause 6.10 Parameter Set</p> <p>Reference to TS34.108 clause 6.10 Parameter Set</p> <p>Reference to TS34.108 clause 6.10 Parameter Set</p> <p>Reference to TS34.108 clause 6.10 Parameter Set</p> |
| <p>Added or Reconfigured UL TrCH information</p> <ul style="list-style-type: none"> Uplink transport channel type UL Transport channel identity TFS CHOICE Transport channel type Dynamic Transport format information RLC Size Number of TBs and TTI List Transmission Time Interval Number of Transport blocks CHOICE Logical Channel list Semi-static Transport Format information Transmission time interval Type of channel coding Coding Rate Rate matching attribute CRC size Uplink transport channel type UL Transport channel identity TFS CHOICE Transport channel type Dynamic Transport format information RLC Size | <p>A4,A5,A6,A7</p> | <p>2 TrCHs(DCH for DCCH and DCH for DTCH)</p> <p>DCH</p> <p>5</p> <p>Dedicated transport channels</p> <p>Reference to TS34.108 clause 6.10 Parameter Set (This IE is repeated for TFI number.)</p> <p>Not Present</p> <p>Reference to TS34.108 clause 6.10 Parameter Set</p> <p>All</p> <p>Reference to TS34.108 clause 6.10 Parameter Set</p> <p>Reference to TS34.108 clause 6.10 Parameter Set</p> <p>Reference to TS34.108 clause 6.10 Parameter Set</p> <p>Reference to TS34.108 clause 6.10 Parameter Set</p> <p>Reference to TS34.108 clause 6.10 Parameter Set</p> <p>DCH</p> <p>4</p> <p>Dedicated transport channels</p> <p>Reference to TS34.108 clause 6.10 Parameter Set</p> |

| Information Element | Condition | Value/remark |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> Number of TBs and TTI List Transmission Time Interval Number of Transport blocks CHOICE Logical Channel list Semi-static Transport Format information Transmission time interval Type of channel coding Coding Rate Rate matching attribute CRC size | | <p>Set (This IE is repeated for TFI number.) Not Present Reference to TS34.108 clause 6.10 Parameter Set Set All Reference to TS34.108 clause 6.10 Parameter Set Set Reference to TS34.108 clause 6.10 Parameter Set Set Reference to TS34.108 clause 6.10 Parameter Set Set Reference to TS34.108 clause 6.10 Parameter Set Set Reference to TS34.108 clause 6.10 Parameter Set Set</p> |
| <p>Added or Reconfigured UL TrCH information</p> <ul style="list-style-type: none"> - Uplink transport channel type - UL Transport channel identity - TFS - CHOICE Transport channel type - Dynamic Transport format information - RLC Size - Number of TBs and TTI List - Transmission Time Interval - Number of Transport blocks - CHOICE Logical Channel list - Semi-static Transport Format information - Transmission time interval - Type of channel coding - Coding Rate - Rate matching attribute - CRC size - Uplink transport channel type - UL Transport channel identity - TFS - CHOICE Transport channel type - Dynamic Transport format information - RLC Size - Number of TBs and TTI List - Transmission Time Interval - Number of Transport blocks - CHOICE Logical Channel list - Semi-static Transport Format information - Transmission time interval - Type of channel coding - Coding Rate - Rate matching attribute - CRC size - Uplink transport channel type - UL Transport channel identity | <p><u>A2</u>, A8</p> | <p>4 TrCHs(DCH for DCCH and 3DCHs for DTCH) DCH 5 Dedicated transport channels Reference to TS34.108 clause 6.10 Parameter Set Set (This IE is repeated for TFI number.) Not Present Reference to TS34.108 clause 6.10 Parameter Set Set All Reference to TS34.108 clause 6.10 Parameter Set Set Reference to TS34.108 clause 6.10 Parameter Set Set Reference to TS34.108 clause 6.10 Parameter Set Set Reference to TS34.108 clause 6.10 Parameter Set Set Reference to TS34.108 clause 6.10 Parameter Set Set DCH 1 Dedicated transport channels Reference to TS34.108 clause 6.10 Parameter Set Set (This IE is repeated for TFI number.) Not Present Reference to TS34.108 clause 6.10 Parameter Set Set All Reference to TS34.108 clause 6.10 Parameter Set Set Reference to TS34.108 clause 6.10 Parameter Set Set Reference to TS34.108 clause 6.10 Parameter Set Set Reference to TS34.108 clause 6.10 Parameter Set Set Reference to TS34.108 clause 6.10 Parameter Set Set DCH 2</p> |

| Information Element | Condition | Value/remark |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> - TFS - CHOICE Transport channel type - Dynamic Transport format information - RLC Size - Number of TBs and TTI List - Transmission Time Interval - Number of Transport blocks - CHOICE Logical Channel list - Semi-static Transport Format information - Transmission time interval - Type of channel coding - Coding Rate - Rate matching attribute - CRC size - Uplink transport channel type - UL Transport channel identity - TFS - CHOICE Transport channel type - Dynamic Transport format information - RLC Size - Number of TBs and TTI List - Transmission Time Interval - Number of Transport blocks - CHOICE Logical Channel list - Semi-static Transport Format information - Transmission time interval - Type of channel coding - Coding Rate - Rate matching attribute - CRC size | | <p>Dedicated transport channels</p> <p>Reference to TS34.108 clause 6.10 Parameter Set (This IE is repeated for TFI number.) Not Present Reference to TS34.108 clause 6.10 Parameter Set All</p> <p>Reference to TS34.108 clause 6.10 Parameter Set Reference to TS34.108 clause 6.10 Parameter Set Reference to TS34.108 clause 6.10 Parameter Set Reference to TS34.108 clause 6.10 Parameter Set Reference to TS34.108 clause 6.10 Parameter Set DCH 3</p> <p>Dedicated transport channels</p> <p>Reference to TS34.108 clause 6.10 Parameter Set (This IE is repeated for TFI number.) Not Present Reference to TS34.108 clause 6.10 Parameter Set All</p> <p>Reference to TS34.108 clause 6.10 Parameter Set Reference to TS34.108 clause 6.10 Parameter Set Reference to TS34.108 clause 6.10 Parameter Set Reference to TS34.108 clause 6.10 Parameter Set Reference to TS34.108 clause 6.10 Parameter Set</p> |
| <p>CHOICE <i>mode</i></p> <ul style="list-style-type: none"> - CPCH set ID - Added or Reconfigured TrCH information for DRAC list | <p>A1, A2, A3, A4, A5, A6, A7, A8</p> | <p>FDD</p> <p>Not Present Not Present</p> |
| <p>DL Transport channel information common for all transport channel</p> <ul style="list-style-type: none"> - SCCPCH TFCS - CHOICE mode - CHOICE DL parameters | <p>A1, A2, A7, A8</p> | <p>Not Present FDD SameasUL</p> |
| <p>DL Transport channel information common for all transport channel</p> <ul style="list-style-type: none"> - SCCPCH TFCS - CHOICE mode - CHOICE DL parameters - DL DCH TFCS - CHOICE TFCI Signalling - TFCI Field 1 Information - CHOICE TFCS representation - TFCS complete reconfigure - CHOICE CTFC Size | <p>A3, A4, A5, A6</p> | <p>Not Present FDD Explicit</p> <p>Normal</p> <p>Complete reconfiguration</p> <p>Number of bits used must be enough to cover</p> |

| Information Element | Condition | Value/remark |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> - CTFC information - CTFC - Power offset information | | all combinations of CTFC from clause TS34.108 clause 6.10.2.4 Parameter Set. This IE is repeated for TFC numbers and reference to TS34.108 clause 6.10.2.4 Reference to TS34.108 clause 6.10.2.4 Parameter Set Not Present |
| Deleted DL TrCH information | A1, A2 , A3 , A4, A5, A6, A7, A8 | Not Present |
| Added or Reconfigured DL TrCH information <ul style="list-style-type: none"> - Downlink transport channel type - DL Transport channel identity - CHOICE DL parameters - Uplink transport channel type - UL TrCH identity - DCH quality target - BLER Quality value - Downlink transport channel type - DL Transport channel identity - CHOICE DL parameters - Uplink transport channel type - UL TrCH identity - DCH quality target - BLER Quality value | A1 | 1 DCH added, 1 DCH reconfigured DCH 6 Same as UL DCH 1 -2.0 DCH 10 Same as UL DCH 5 -2.0 |
| Added or Reconfigured DL TrCH information <ul style="list-style-type: none"> - Downlink transport channel type - DL Transport channel identity - CHOICE DL parameters - Uplink transport channel type - UL TrCH identity - DCH quality target - BLER Quality value - Downlink transport channel type - DL Transport channel identity - CHOICE DL parameters - TFS - CHOICE Transport channel type - Dynamic transport format information - RLC Size - Number of TBs and TTI List - Dynamic transport format information - Transmission Time Interval - Number of Transport blocks - CHOICE Logical Channel list - Semi-static Transport Format information - Transmission time interval - Type of channel coding - Coding Rate - Rate matching attribute - CRC size - DCH quality target - BLER Quality value | A3 , A4, A5, A6, A7 | 2 TrCHs(DCH for DCCH and DCH for DTCH) DCH 10 Same as UL DCH 5 -2.0 DCH 6 Explicit Dedicated transport channel Reference to TS34.108 clause 6.10 Parameter Set (This IE is repeated for TFI number.) Not Present Reference to TS34.108 clause 6.10 Parameter Set All Reference to TS34.108 clause 6.10 Parameter Set Reference to TS34.108 clause 6.10 Parameter Set Reference to TS34.108 clause 6.10 Parameter Set Reference to TS34.108 clause 6.10 Parameter Set Reference to TS34.108 clause 6.10 Parameter Set -2.0 |
| Added or Reconfigured DL TrCH information <ul style="list-style-type: none"> - Downlink transport channel type - DL Transport channel identity - CHOICE DL parameters - Uplink transport channel type | A2 , A8 | 4 TrCHs(DCH for DCCH and 3DCHs for DTCH) DCH 10 Same as UL DCH |

| Information Element | Condition | Value/remark |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> - UL TrCH identity - DCH quality target - BLER Quality value - Downlink transport channel type - DL Transport channel identity - CHOICE DL parameters - TFS - CHOICE Transport channel type - Dynamic transport format information - RLC Size | | <p>5</p> <p>Not Present-2.0</p> <p>DCH</p> <p>6</p> <p>Explicit</p> <p>Dedicated transport channel</p> <p>Reference to TS34.108 clause 6.10 Parameter Set (This IE is repeated for TFI number.)</p> |
| <ul style="list-style-type: none"> - Number of TBs and TTI List - Dynamic transport format information - Transmission Time Interval - Number of Transport blocks | | <p>Not Present</p> <p>Reference to TS34.108 clause 6.10 Parameter Set</p> |
| <p><u>- CHOICE Logical Channel list</u></p> <ul style="list-style-type: none"> - Semi-static Transport Format information - Transmission time interval | | <p><u>All</u></p> <p>Reference to TS34.108 clause 6.10 Parameter Set</p> |
| <ul style="list-style-type: none"> - Type of channel coding | | <p>Reference to TS34.108 clause 6.10 Parameter Set</p> |
| <ul style="list-style-type: none"> - Coding Rate | | <p>Reference to TS34.108 clause 6.10 Parameter Set</p> |
| <ul style="list-style-type: none"> - Rate matching attribute | | <p>Reference to TS34.108 clause 6.10 Parameter Set</p> |
| <ul style="list-style-type: none"> - CRC size | | <p>Reference to TS34.108 clause 6.10 Parameter Set</p> |
| <ul style="list-style-type: none"> - DCH quality target - BLER Quality value - Downlink transport channel type - DL Transport channel identity - CHOICE DL parameters - TFS - CHOICE Transport channel type - Dynamic transport format information - RLC Size | | <p>-2.0Not Present</p> <p>DCH</p> <p>7</p> <p>Explicit</p> <p>Dedicated transport channel</p> <p>Reference to TS34.108 clause 6.10 Parameter Set (This IE is repeated for TFI number.)</p> |
| <ul style="list-style-type: none"> - Number of TBs and TTI List - Dynamic transport format information - Transmission Time Interval - Number of Transport blocks | | <p>Not Present</p> <p>Reference to TS34.108 clause 6.10 Parameter Set</p> |
| <p><u>- CHOICE Logical Channel list</u></p> <ul style="list-style-type: none"> - Semi-static Transport Format information - Transmission time interval | | <p><u>All</u></p> <p>Reference to TS34.108 clause 6.10 Parameter Set</p> |
| <ul style="list-style-type: none"> - Type of channel coding | | <p>Reference to TS34.108 clause 6.10 Parameter Set</p> |
| <ul style="list-style-type: none"> - Coding Rate | | <p>Reference to TS34.108 clause 6.10 Parameter Set</p> |
| <ul style="list-style-type: none"> - Rate matching attribute | | <p>Reference to TS34.108 clause 6.10 Parameter Set</p> |
| <ul style="list-style-type: none"> - CRC size | | <p>Reference to TS34.108 clause 6.10 Parameter Set</p> |
| <ul style="list-style-type: none"> - DCH quality target - BLER Quality value - Downlink transport channel type - DL Transport channel identity - CHOICE DL parameters - TFS - CHOICE Transport channel type - Dynamic transport format information - RLC Size | | <p>Not Present</p> <p>DCH</p> <p>8</p> <p>Explicit</p> <p>Dedicated transport channel</p> <p>Reference to TS34.108 clause 6.10 Parameter Set (This IE is repeated for TFI number.)</p> |
| <ul style="list-style-type: none"> - Number of TBs and TTI List - Dynamic transport format information | | <p>Reference to TS34.108 clause 6.10 Parameter Set (This IE is repeated for TFI number.)</p> |

| Information Element | Condition | Value/remark |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> - Transmission Time Interval - Number of Transport blocks - CHOICE Logical Channel list - Semi-static Transport Format information - Transmission time interval - Type of channel coding - Coding Rate - Rate matching attribute - CRC size - DCH quality target - BLER Quality value | | Not Present Reference to TS34.108 clause 6.10 Parameter Set All Reference to TS34.108 clause 6.10 Parameter Set Reference to TS34.108 clause 6.10 Parameter Set Reference to TS34.108 clause 6.10 Parameter Set Reference to TS34.108 clause 6.10 Parameter Set Reference to TS34.108 clause 6.10 Parameter Set Not Present |
| Frequency info | A2, A3 | Not present |
| Frequency info <ul style="list-style-type: none"> - UARFCN uplink (Nu) - UARFCN downlink (Nd) | A1, A2, A3 , A4, A5, A6, A7, A8 | Reference to clause 5.1 Test frequencies if frequency is different from the current frequency otherwise set to Not Present. Reference to clause 5.1 Test frequencies if frequency is different from the current frequency otherwise set to Not Present. |
| Maximum allowed UL TX power | A1, A2, A3 , A4, A7, A8 | 33dBm |
| Maximum allowed UL TX power | A5, A6 | Not Present |
| CHOICE channel requirement <ul style="list-style-type: none"> - Uplink DPCH power control info - DPCCH power offset - PC Preamble - SRB delay - Power Control Algorithm - TPC step size - Scrambling code type - Scrambling code number - Number of DPDCH - spreading factor - TFCI existence - Number of FBI bit - Puncturing Limit | A1, A2, A3 , A4, A7, A8 | Uplink DPCH info -6dB 1 frame 7 frames Algorithm1 1dB Long 0 (0 to 16777215) Not Present(1) Reference to TS34.108 clause 6.10 Parameter Set Reference to TS34.108 clause 6.10 Parameter Set Reference to TS34.108 clause 6.10 Parameter Set Reference to TS34.108 clause 6.10 Parameter Set |
| CHOICE channel requirement | A5,A6 | Not Present |
| CHOICE Mode | A1, A2, A3 , A4, A5, A6, A7, A8 | FDD |
| - Downlink PDSCH information | | Not Present |
| Downlink information common for all radio links <ul style="list-style-type: none"> - Downlink DPCH info common for all RL - Timing indicator - CFN-targetSFN frame offset - Downlink DPCH power control information - DPC mode - CHOICE mode - Power offset $P_{Pilot-DPDCH}$ - DL rate matching restriction information - Spreading factor - Fixed or Flexible Position | A1, A2, A3 | Maintain Not Present 0 (single) FDD 0 Not Present Reference to TS34.108 clause 6.10 Parameter Set Reference to TS34.108 clause 6.10 Parameter Set |

| Information Element | Condition | Value/remark |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> - TFCI existence - CHOICE SF - CHOICE mode - DPCH compressed mode info - TX Diversity mode - SSDT information - Default DPCH Offset Value | | Reference to TS34.108 clause 6.10 Parameter Set Reference to TS34.108 clause 6.10 Parameter Set FDD Not Present None Not Present Not Present |
| Downlink information common for all radio links <ul style="list-style-type: none"> - Downlink DPCH info common for all RL - Timing indicator - CFN-targetSFN frame offset - Downlink DPCH power control information - DPC mode - CHOICE mode <ul style="list-style-type: none"> - Power offset $P_{Pilot-DPCH}$ - DL rate matching restriction information - Spreading factor - Fixed or Flexible Position - TFCI existence - CHOICE SF - CHOICE mode - DPCH compressed mode info - TX Diversity mode - SSDT information - Default DPCH Offset Value | A4,A7,A8 | Initialise Not Present 0 (single) FDD 0 Not Present Reference to TS34.108 clause 6.10 Parameter Set Reference to TS34.108 clause 6.10 Parameter Set Reference to TS34.108 clause 6.10 Parameter Set Reference to TS34.108 clause 6.10 Parameter Set FDD Not Present None Not Present Arbitrary set to value 0..306688 by step of 512 |
| Downlink information common for all radio links | A5,A6 | Not Present |
| Downlink information for each radio link list <ul style="list-style-type: none"> - Downlink information for each radio link <ul style="list-style-type: none"> - Choice mode - Primary CPICH info - Primary scrambling code - PDSCH with SHO DCH info - PDSCH code mapping - Downlink DPCH info for each RL - Primary CPICH usage for channel estimation - DPCH frame offset - Secondary CPICH info - DL channelisation code - Secondary scrambling code - Spreading factor - Code number - Scrambling code change - TPC combination index - SSDT Cell Identity - Closed loop timing adjustment mode - SCCPCH information for FACH | A1, A2 , A3 , A4 , A7 , A8 | FDD Ref. to the Default setting in TS34.108 clause 6.1 (FDD) Not Present Not Present Primary CPICH may be used Set to value Default DPCH Offset Value (as currently stored in SS) mod 38400 Not Present 1 Reference to TS34.108 clause 6.10 Parameter Set 0 No change 0 Not Present Not Present Not Present |
| Downlink information for each radio link list - Downlink information for each radio link - Choice mode - Primary CPICH info - Primary scrambling code - PDSCH with SHO DCH info - PDSCH code mapping - Downlink DPCH info for each RL - Primary CPICH usage for channel estimation | A4,A7,A8 | FDD Ref. to the Default setting in TS34.108 clause 6.1 (FDD) Not Present Not Present Primary CPICH may be used |

| Information Element | Condition | Value/remark |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DPCH frame offset Secondary CPICH info DL channelisation code Secondary scrambling code Spreading factor Code number Scrambling code change TPC combination index SSDT Cell Identity Closed loop timing adjustment mode SCCPCH information for FACH | | Set to value : Default DPCH Offset Value mod 38400 Not Present 4 Reference to TS34.108 clause 6.10 Parameter Set 0 No change 0 Not Present Not Present Not Present |
| Downlink information for each radio link list - Downlink information for each radio link - Choice mode - Primary CPICH info - Primary scrambling code - PDSCH with SHO DCH info - PDSCH code mapping - Downlink DPCH info for each RL - SCCPCH information for FACH | A5 | FDD Ref. to the Default setting in TS34.108 clause 6.1 (FDD) Not Present Not Present Not present Not Present |
| Downlink information for each radio link list - Downlink information for each radio link - Choice mode - Primary CPICH info - Primary scrambling code - PDSCH with SHO DCH info - PDSCH code mapping - Downlink DPCH info for each RL - SCCPCH information for FACH | A6 | FDD Different from the Default setting in TS34.108 clause 6.1 (FDD) Not Present Not Present Not present Not Present |

| Condition | Explanation |
|----------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
| A1 | This IE need for "Non speech to CELL_DCH from CELL_DCH in CS" |
| A2 is defined in message "RADIO BEARER SETUP message: AM or UM (Speech in CS)". | This IE need for "Speech to CELL_DCH from CELL_DCH in CS" |
| A3 is defined in message "RADIO BEARER SETUP message: AM or UM (Packet to CELL_DCH from CELL_DCH in PS)". | This IE need for "Packet to CELL_DCH from CELL_DCH in PS" |
| A4 | This IE need for "Packet to CELL_DCH from CELL_FACH in PS" |
| A5 | This IE need for "Packet to CELL_FACH from CELL_DCH in PS" |
| A6 | This IE need for "Packet to CELL_FACH from CELL_FACH in PS" |
| A7 | This IE need for "Non speech to CELL_DCH from CELL_FACH in CS" |
| A8 | This IE need for "Speech to CELL_DCH from CELL_FACH in CS" |

<End of Modification>

<Start of Modification>

Contents of RRC CONNECTION SETUP message: UM (Transition to CELL_FACH)

| Information Element | Value/remark |
|----------------------------|--------------------------------------------------------------------------------------------------------|
| Message Type | |
| Initial UE identity | Select the same identity as in the IE "Initial UE Identity" in received RRC CONNECTION REQUEST message |
| RRC transaction identifier | Arbitrarily selects an integer between 0 and 3 |
| Activation time | Not Present (Now) |
| New U-RNTI | |

| Information Element | Value/remark |
|--------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| - SRNC identity | 0000 0000 0001B |
| - S-RNTI | 0000 0000 0000 0000 0001B |
| New C-RNTI | 0000 0000 0000 0001B |
| RRC state indicator | CELL_FACH |
| UTRAN DRX cycle length coefficient | 9 |
| Capability update requirement | Not Present |
| Signalling RB information to setup | (UM DCCH for RRC) |
| - RB identity | Not present |
| - CHOICE RLC info type | RLC info |
| - CHOICE Uplink RLC mode | UM RLC |
| - Transmission RLC discard | Not present |
| - SDU discard mode | Not present |
| - CHOICE Downlink RLC mode | UM RLC |
| - RB mapping info | |
| - Information for each multiplexing option | 2 RBMuxOptions |
| - RLC logical channel mapping indicator | Not Present |
| - Number of uplink RLC logical channels | 1 |
| - Uplink transport channel type | DCH |
| - UL Transport channel identity | 5 |
| - Logical channel identity | 1 |
| - CHOICE RLC size list | Configured |
| - MAC logical channel priority | 1 |
| - Downlink RLC logical channel info | |
| - Number of downlink RLC logical channels | 1 |
| - Downlink transport channel type | DCH |
| - DL DCH Transport channel identity | 10 |
| - DL DSCH Transport channel identity | Not Present |
| - Logical channel identity | 1 |
| - RLC logical channel mapping indicator | Not Present |
| - Number of uplink RLC logical channels | 1 |
| - Uplink transport channel type | RACH |
| - UL Transport channel identity | Not Present |
| - Logical channel identity | 1 |
| - CHOICE RLC size list | Explicit list |
| - RLC size index | According to TS34.108 clause 6.10.2.4.4.1 6-10-2-4-1-3 (standalone-13.6 kbps signalling radio bearer) |
| - MAC logical channel priority | 1 |
| - Downlink RLC logical channel info | |
| - Number of downlink RLC logical channels | 1 |
| - Downlink transport channel type | FACH |
| - DL DCH Transport channel identity | Not Present |
| - DL DSCH Transport channel identity | Not Present |
| - Logical channel identity | 1 |
| Signalling RB information to setup | (AM DCCH for RRC) |
| - RB identity | Not Present |
| - CHOICE RLC info type | RLC info |
| - CHOICE Uplink RLC mode | AM RLC |
| - Transmission RLC discard | |
| - SDU discard mode | No Discard |
| - MAX_DAT | 15 |
| - Transmission window size | 128 |
| - Timer_RST | 500 |
| - Max_RST | 1 |
| - Polling info | |
| - Timer_poll_prohibit | 200 |
| - Timer_poll | 200 |
| - Poll_PDU | Not Present |
| - Poll_SDU | 1 |
| - Last transmission PDU poll | TRUE |
| - Last retransmission PDU poll | TRUE |
| - Poll_Windows | 99 |
| - Timer_poll_periodic | Not Present |
| - CHOICE Downlink RLC mode | AM RLC |
| - In-sequence delivery | TRUE |
| - Receiving window size | 128 |
| - Downlink RLC status info | |
| - Timer_status_prohibit | 200 |

| Information Element | Value/remark |
|--------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| - Timer_EPC | Not Present |
| - Missing PDU indicator | TRUE |
| - Timer_STATUS_periodic | Not Present |
| - RB mapping info | |
| - Information for each multiplexing option | 2 RBMuxOptions |
| - RLC logical channel mapping indicator | Not Present |
| - Number of uplink RLC logical channels | 1 |
| - Uplink transport channel type | DCH |
| - UL Transport channel identity | 5 |
| - Logical channel identity | 2 |
| - CHOICE RLC size list | Configured |
| - MAC logical channel priority | 2 |
| - Downlink RLC logical channel info | |
| - Number of downlink RLC logical channels | 1 |
| - Downlink transport channel type | DCH |
| - DL DCH Transport channel identity | 10 |
| - DL DSCH Transport channel identity | Not Present |
| - Logical channel identity | 2 |
| - RLC logical channel mapping indicator | Not Present |
| - Number of uplink RLC logical channels | 1 |
| - Uplink transport channel type | RACH |
| - UL Transport channel identity | Not Present |
| - Logical channel identity | 2 |
| - CHOICE RLC size list | Explicit list |
| - RLC size index | According to TS34.108 clause 6.10.2.4.4.16-10.2.4.1.3 (standalone 13.6 kbps signalling radio bearer) |
| - MAC logical channel priority | 2 |
| - Downlink RLC logical channel info | |
| - Number of downlink RLC logical channels | 1 |
| - Downlink transport channel type | FACH |
| - DL DCH Transport channel identity | Not Present |
| - DL DSCH Transport channel identity | Not Present |
| - Logical channel identity | 2 |
| Signalling RB information to setup | (AM DCCH for NAS_DT High priority) |
| - RB identity | Not present |
| - CHOICE RLC info type | RLC info |
| - CHOICE Uplink RLC mode | AM RLC |
| - Transmission RLC discard | |
| - SDU discard mode | No Discard |
| - MAX_DAT | 15 |
| - Transmission window size | 128 |
| - Timer_RST | 500 |
| - Max_RST | 1 |
| - Polling info | |
| - Timer_poll_prohibit | 200 |
| - Timer_poll | 200 |
| - Poll_PDU | Not Present |
| - Poll_SDU | 1 |
| - Last transmission PDU poll | TRUE |
| - Last retransmission PDU poll | TRUE |
| - Poll_Windows | 99 |
| - Timer_poll_periodic | Not Present |
| - CHOICE Downlink RLC mode | AM RLC |
| - In-sequence delivery | TRUE |
| - Receiving window size | 128 |
| - Downlink RLC status info | |
| - Timer_status_prohibit | 200 |
| - Timer_EPC | Not Present |
| - Missing PDU indicator | TRUE |
| - Timer_STATUS_periodic | Not Present |
| - RB mapping info | |
| - Information for each multiplexing option | 2 RBMuxOptions |
| - RLC logical channel mapping indicator | Not Present |
| - Number of uplink RLC logical channels | 1 |
| - Uplink transport channel type | DCH |
| - UL Transport channel identity | 5 |
| - Logical channel identity | 3 |

| Information Element | Value/remark |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> - CHOICE RLC size list - MAC logical channel priority - Downlink RLC logical channel info - Number of downlink RLC logical channels - Downlink transport channel type - DL DCH Transport channel identity - DL DSCH Transport channel identity - Logical channel identity - RLC logical channel mapping indicator - Number of uplink RLC logical channels - Uplink transport channel type - UL DCH Transport channel identity - Logical channel identity - CHOICE RLC size list <ul style="list-style-type: none"> - RLC size index | Configured 3 1 DCH 10 Not Present 3 Not Present 1 RACH Not Present 3 Explicit list According to TS34.108 clause 6.10.2.4.4.1 6.10.2.4.1.3 (standalone 13.6 kbps signalling radio bearer) |
| <ul style="list-style-type: none"> - MAC logical channel priority - Downlink RLC logical channel info - Number of downlink RLC logical channels - Downlink transport channel type - DL DCH Transport channel identity - DL DSCH Transport channel identity - Logical channel identity | 3 1 FACH Not Present Not Present 3 |
| Signalling RB information to setup <ul style="list-style-type: none"> - RB identity - CHOICE RLC info type - CHOICE Uplink RLC mode - Transmission RLC discard <ul style="list-style-type: none"> - SDU discard mode - MAX_DAT - Transmission window size - Timer_RST - Max_RST - Polling info <ul style="list-style-type: none"> - Timer_poll_prohibit - Timer_poll - Poll_PDU - Poll_SDU - Last transmission PDU poll - Last retransmission PDU poll - Poll_Windows <ul style="list-style-type: none"> - Timer_poll_periodic - CHOICE Downlink RLC mode <ul style="list-style-type: none"> - In-sequence delivery - Receiving window size - Downlink RLC status info <ul style="list-style-type: none"> - Timer_status_prohibit - Timer_EPC - Missing PDU indicator - Timer_STATUS_periodic | (AM DCCH for NAS_DT Low priority) Not Present RLC info AM RLC No Discard 15 128 500 1 200 200 Not Present 1 TRUE TRUE 99 Not Present AM RLC TRUE 128 200 Not Present TRUE Not Present |
| <ul style="list-style-type: none"> - RB mapping info <ul style="list-style-type: none"> - Information for each multiplexing option - RLC logical channel mapping indicator - Number of uplink RLC logical channels - Uplink transport channel type - UL Transport channel identity - Logical channel identity - CHOICE RLC size list <ul style="list-style-type: none"> - MAC logical channel priority - Downlink RLC logical channel info <ul style="list-style-type: none"> - Number of downlink RLC logical channels - Downlink transport channel type - DL DCH Transport channel identity - DL DSCH Transport channel identity - Logical channel identity - RLC logical channel mapping indicator - Number of uplink RLC logical channels | 2 RBMuxOptions Not Present 1 DCH 5 4 Configured 4 1 DCH 10 Not Present 4 Not Present 1 |

| Information Element | Value/remark |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> - Uplink transport channel type - UL Transport channel identity - Logical channel identity - CHOICE RLC size list - RLC size index | RACH Not Present 4 Explicit list According to TS34.108 clause 6.10.2.4.4.1 6.10.2.4.1.3 (standalone 13.6 kbps signalling radio bearer) |
| <ul style="list-style-type: none"> - MAC logical channel priority - Downlink RLC logical channel info - Number of downlink RLC logical channels - Downlink transport channel type - DL DCH Transport channel identity - DL DSCH Transport channel identity - Logical channel identity | 4 1 FACH Not Present Not Present 4 |
| UL Transport channel information for all transport channels | |
| <ul style="list-style-type: none"> - PRACH TFCS - CHOICE Mode - TFC subset - UL DCH TFCS - CHOICE TFCI signalling - TFCI Field 1 information - CHOICE TFCS representation - TFCS complete reconfigure - CHOICE CTFC Size - CTFC information | Not Present FDD Not Present Normal Addition 2bit CTFC This IE is repeated for TFC numbers according to TS34.108 clause 6.10.2.4.1.3 (standalone 13.6 kbps signalling radio bearer) |
| <ul style="list-style-type: none"> - CTFC | According to TS34.108 clause 6.10.2.4.1.3 (standalone 13.6 kbps signalling radio bearer) |
| <ul style="list-style-type: none"> - Power offset information - CHOICE Gain Factors - Gain factor β_c - Gain factor β_d | Computed Gain Factors (The last TFC is set to Signalled Gain Factors) 11 (below 64 kbps) 9 (higher than 64 kbps) (Not Present if the above is set to Computed Gain Factors) 15 (Not Present if the above is set to Computed Gain Factors) |
| <ul style="list-style-type: none"> - Reference TFC ID - CHOICE mode - Power offset Pp-m | 0 FDD Not Present |
| Added or Reconfigured TrCH information list | TS 25.331 specifies that "Although this IE is not required when the IE "RRC state indicator" is set to "CELL_FACH", need is MP to align with ASN.1" |
| <ul style="list-style-type: none"> - Added or Reconfigured UL TrCH information - Uplink transport channel type - UL Transport channel identity - TFS | DCH 5 |

| Information Element | Value/remark |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> - CHOICE Transport channel type - Dynamic Transport format information - RLC Size | Delicated transport channels Value 16 results in an RLC size of 144 bits; OctetModeType1 ((8*sizeType1)+16). |
| <ul style="list-style-type: none"> - Number of TBs and TTI List - Transmission Time Interval - Number of Transport blocks - CHOICE Logical Channel List - Semi-static Transport Format information - Transmission time interval - Type of channel coding - Coding Rate - Rate matching attribute - CRC size | List with single entry Not Present 0 ALL 40 ms Convolutional 1/3 160 16 |
| DL Transport channel information common for all transport channel <ul style="list-style-type: none"> - SCCPCH TFCS - CHOICE mode - CHOICE DL parameters | Not Present FDD Same as UL |
| Added or Reconfigured TrCH information list | TS 25.331 specifies that "Although this IE is not required when the IE "RRC state indicator" is set to "CELL_FACH", need is MP to align with ASN.1" |
| <ul style="list-style-type: none"> - Added or Reconfigured DL TrCH information <ul style="list-style-type: none"> - Downlink transport channel type - DL Transport channel identity - CHOICE DL parameters - Uplink Transport channel type - UL TrCH identity - DCH quality target | DCH 10 Same as UL DCH 5 Not Present |
| Frequency info | Not present |
| Maximum allowed UL TX power | Not present |
| CHOICE channel requirement | Not Present |
| Downlink information common for all radio links | Not Present |
| Downlink information for each radio link list | Not present |

3GPP TSG-T1 Meeting #18
San Antonio, USA, 14th February 2003

Tdoc # T1-030042

3GPP TSG-T1 SIG Meeting #27
San Antonio, USA, 10th – 12th February 2003

Tdoc # T1S030150

CR-Form-v7

CHANGE REQUEST

⌘ 34.108 CR 177 ⌘ rev - ⌘ Current version: 4.5.0 ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

Proposed change affects: UICC apps ME Radio Access Network Core Network

| | | | |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Title: | ⌘ CR to 34.108 Rel-4: Corrections to SB and SIB configurations in clause 6.1 as T1S030046rev1 | | |
| Source: | ⌘ Nokia | | |
| Work item code: | ⌘ TEI | Date: | ⌘ 06/02/2003 |
| Category: | ⌘ F Use <u>one</u> of the following categories: F (correction) A (corresponds to a correction in an earlier release) B (addition of feature), C (functional modification of feature) D (editorial modification) Detailed explanations of the above categories can be found in 3GPP TR 21.900 . | Release: | ⌘ Rel-4 Use <u>one</u> of the following releases: 2 (GSM Phase 2) R96 (Release 1996) R97 (Release 1997) R98 (Release 1998) R99 (Release 1999) Rel-4 (Release 4) Rel-5 (Release 5) Rel-6 (Release 6) |

Reason for change: ⌘ Some corrections and modifications that have been made for system information blocks in clause 6.1 in change requests CR #067r1 (T1-010473), CR #089 (T1-020102) and CR #162 (T1-020799) must also be updated to SB1, SIB5 and SIB6 messages in clauses 6.1.1, 6.1.2 and 6.1.3.

Summary of change: ⌘ For SB1 (FDD):

- Missing SIB 18 scheduling is added in SB1(CR #067r1).
- SB1 correction: "Cell Value tag" for SIB7 must not be present (CR #067r1).

For SIB5 (FDD):

- "Reference TFC ID" is "0" for "Computed Gain Factor" added (CR #067r1).
- TFCS representation for PRACH and SCCPCH is changed to 'Complete' from 'Addition' (CR #089).
- 'CHOICE Logical Channel List' changed from 'All' to 'Configured' for PRACH in SIB5 (CR #089).
- IE "Power offset Pp-m" is set to "0 dBm" (CR #089).
- If IE "CHOICE Gain Factors" is set to "signalled gain factor", IE "Gain factor βc" shall be set to '11' (CR #089).
- Correction made to IE "CHOICE TFCI signalling", parameter should be "CHOICE TFCI signalling" and value "Normal" (TS 25.331, 10.3.5.20) (CR #162).

- Added missing "CHOICE mode FDD" (CR #162).
- Corrected name of IE "Primary CPICH TX power" (TS 25.331 10.3.6.55) (CR #162).
- IEs having value equal to default values as specified in TS 25.331 should not be present. Thus is IEs "TFCI existence", "Fixed or Flexible position" and "Timing offset" marked as "Not present" in the relevant places (CR #162).
- In addition, AICH transmission timing set in the same way for each SIB5. (Set to "0".)

For SIB6 (FDD):

- "Reference TFC ID" is "0" for "Computed Gain Factor" added (CR #067r1).
- TFCS representation for PRACH and SCCPCH is changed to 'Complete' from 'Addition' (CR #089).
- IE "PRACH system information list" in SIB6 has been marked as Not Present as the IE is optional and has the same values as for corresponding IE in SIB5. Similar modification made to "Secondary CCPCH system info" IE, where relevant (CR #162).
- Correction made to IE "CHOICE TFCI signalling", parameter should be "CHOICE TFCI signalling" and value "Normal" (TS 25.331, 10.3.5.20) (CR #162).
- Added missing "CHOICE mode FDD" (CR #162).
- IEs having value equal to default values as specified in TS 25.331 should not be present. Thus is IEs "TFCI existence", "Fixed or Flexible position" and "Timing offset" marked as "Not present" in the relevant places (CR #162).

Consequences if not approved: ☞ Incorrect SB1, SIB5 and SIB6 configurations in the specification.

Clauses affected: ☞ 6.1.1, 6.1.2 and 6.1.3

| | Y | N | | ☞ |
|------------------------------|---|---|---------------------------|---|
| Other specs affected: | | X | Other core specifications | |
| | | X | Test specifications | |
| | | X | O&M Specifications | |

Other comments: ☞

How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>.

Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ☞ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

6.1.1 SCCPCH configuration with Stand-alone SRB for PCCH in the first SCCPCH and Interactive/Background 32 kbps PS RAB + SRBs for CCCH/DCCH/BCCH in the second SCCPCH

Two SCCPCHs are used in this SYSTEM INFORMATION configuration. The first SCCPCH carries the PCH and the second SCCPCH carries the FACH for Interactive/Background 32 kbps PS RAB and the FACH for SRBs on CCCH/DCCH/BCCH.

This Reference System Configuration is the same as defined in chapter 6.1, except for the following SIBs.

Contents of System Information Block type 5 (FDD)

| | |
|------------------------------------------------------------|-------------------------------------------------------|
| - SIB6 indicator | TRUE |
| - PICH Power offset | -5 dB |
| - CHOICE Mode | FDD |
| - AICH Power offset | 5 dB |
| - Primary CCPCH info | Not Present |
| - PRACH system information list | |
| - PRACH system information | |
| - PRACH info | |
| - CHOICE mode | FDD |
| - Available Signature | '0000 0000 1111 1111'B |
| - Available SF | 64 |
| - Preamble scrambling code number | 0 |
| - Puncturing Limit | 1.00 |
| - Available Sub Channel number | '1111 1111 1111'B |
| - Transport Channel Identity | 15 |
| - RACH TFS | |
| - CHOICE Transport channel type | Common transport channels |
| - Dynamic Transport format information | |
| - RLC size | 168 |
| - Number of TB and TTI List | |
| - Number of Transport blocks | 1 |
| - CHOICE Mode | FDD |
| - CHOICE Logical Channel List | ConfiguredALL |
| - RLC size | 360 |
| - Number of TB and TTI List | |
| - Number of Transport blocks | 1 |
| - CHOICE Mode | FDD |
| - CHOICE Logical Channel List | ConfiguredALL |
| - Semi-static Transport Format information | |
| - Transmission time interval | 20 ms |
| - Type of channel coding | Convolutional |
| - Coding Rate | 1/2 |
| - Rate matching attribute | 150 |
| - CRC size | 16 |
| - RACH TFCS | |
| - CHOICE TFCI signalling Normal | Normal |
| - TFCI Field 1 information | |
| - CHOICE TFCS representation | Complete reconfiguration |
| - TFCS complete reconfiguration | |
| information | |
| - CHOICE CTFC Size | 2 bit |
| - CTFC information | 0 |
| - Power offset information | |
| - CHOICE Gain Factors | Computed Gain Factor, reference TFC id = 0 |
| - Reference TFC ID | 0 |
| - CHOICE Mode | FDD |
| - Power offset Pp-m | -50 dB |
| - CTFC information | 1 |
| - Power offset information | |
| - CHOICE Gain Factors | Signalled Gain Factor |
| - CHOICE mode | FDD |
| - Gain factor β_c | 11 |
| - Gain factor β_d | 15 |
| - Reference TFC ID | 0 |
| - CHOICE Mode | FDD |
| - Power offset Pp-m | -50 dB |
| - PRACH partitioning | |
| - Access Service Class | |
| - ASC Setting | Not Present |
| - ASC Setting | |
| - CHOICE mode | FDD |
| - Available signature Start Index | 0 (ASC#1) |
| - Available signature End Index | 7 (ASC#1) |
| - Assigned Sub-channel Number | '1111'B |
| - ASC Setting | Not Present |
| - ASC Setting | |

| | |
|------------------------------------------------------------|---------------------------------|
| - CHOICE mode | FDD |
| - Available signature Start Index | 0 (ASC#3) |
| - Available signature End Index | 7 (ASC#3) |
| - Assigned Sub-channel Number | '1111'B |
| - ASC Setting | Not Present |
| - ASC Setting | |
| - CHOICE mode | FDD |
| - Available signature Start Index | 0 (ASC#5) |
| - Available signature End Index | 7 (ASC#5) |
| - Assigned Sub-channel Number | '1111'B |
| - ASC Setting | Not Present |
| - ASC Setting | |
| - CHOICE mode | FDD |
| - Available signature Start Index | 0 (ASC#7) |
| - Available signature End Index | 7 (ASC#7) |
| - Assigned Sub-channel Number | '1111'B |
| - Persistence scaling factor | |
| - Persistence scaling factor | 0.9 (for ASC#2) |
| - Persistence scaling factor | 0.9 (for ASC#3) |
| - Persistence scaling factor | 0.9 (for ASC#4) |
| - Persistence scaling factor | 0.9 (for ASC#5) |
| - Persistence scaling factor | 0.9 (for ASC#6) |
| - Persistence scaling factor | 0.9 (for ASC#7) |
| - AC-to-ASC mapping table | |
| - AC-to-ASC mapping | 6 (AC0-9) |
| - AC-to-ASC mapping | 5 (AC10) |
| - AC-to-ASC mapping | 4 (AC11) |
| - AC-to-ASC mapping | 3 (AC12) |
| - AC-to-ASC mapping | 2 (AC13) |
| - AC-to-ASC mapping | 1 (AC14) |
| - AC-to-ASC mapping | 0 (AC15) |
| - CHOICE mode | <u>FDD</u> |
| - Primary CPICH DL -TX power | 31 |
| - Constant value | -10 |
| - PRACH power offset | |
| - Power Ramp Step | 3dB |
| - Preamble Retrans Max | 4 |
| - RACH transmission parameters | |
| - Mmax | 2 |
| - NB01min | 3 slot |
| - NB01max | 10 slot |
| - AICH info | |
| - Channelisation code | 3 |
| - STTD indicator | FALSE |
| - AICH transmission timing | <u>0</u> |
| - Secondary CCPCH system information | (For 2 SCCPCHs) |
| - Secondary CCPCH info | (SCCPCH for standalone PCH) |
| - CHOICE mode | <u>FDD</u> |
| - Secondary scrambling code | Not Present |
| - STTD indicator | FALSE |
| - Spreading factor | 128 |
| - Code number | 4 |
| - Pilot symbol existence | FALSE |
| - TFCI existence | FALSE |
| - Fixed or Flexible position | Fixed |
| - Timing offset | 30 |
| - TFCS | |
| - CHOICE TFCI signalling | <u>Normal</u> |
| - TFCI Field 1 information | |
| - CHOICE TFCS representation | Complete <u>reconfiguration</u> |
| - TFCS complete addition <u>reconfiguration</u> | |
| information | |
| - CHOICE CTFC Size | 2 bit |
| - CTFC information | 0 |
| - Power offset information | Not Present |
| - CTFC information | 1 |
| - Power offset information | Not Present |
| - FACH/PCH information | |
| - TFS | (PCH) |

| | |
|----------------------------------------------------------------------------|------------------------------------------------------------------------------|
| - CHOICE Transport channel type | Common transport channels |
| - Dynamic Transport format information | 240 |
| - RLC Size | 0 |
| - Number of TB and TTI List | 1 |
| - Number of Transport blocks | FDD |
| - CHOICE Mode | ALL |
| - CHOICE Logical Channel List | 10 ms |
| - Semi-static Transport Format information | Convolutional |
| - Transmission time interval | $\frac{1}{2}$ |
| - Type of channel coding | 230 |
| - Coding Rate | 16 bit |
| - Rate matching attribute | 12 (for PCH) |
| - CRC size | FALSE |
| - Transport Channel Identity | FDD |
| - CTCH indicator | 2 |
| - PICH info | 18 |
| - CHOICE mode | FALSE |
| - Channelisation code | (SCCPCH including two FACHs) |
| - Number of PI per frame | FDD |
| - STTD indicator | Not Present |
| - Secondary CCPCH info | FALSE |
| - CHOICE mode | 64 |
| - Secondary scrambling code | 1 |
| - STTD indicator | FALSE |
| - Spreading factor | Not Present |
| - Code number | Absence of this IE is equivalent to default value "TRUE" |
| - Pilot symbol existence | Not Present |
| - TFCI existence | Absence of this IE is equivalent to default value "Flexible" |
| - Fixed or Flexible position | Not Present |
| - Timing offset | Absence of this IE is equivalent to default value 0 |
| - TFCS | Normal |
| - CHOICE TFCI signalling Normal | Complete reconfiguration |
| - TFCI Field 1 information | 4 bit |
| - CHOICE TFCS representation | 0 |
| - TFCS complete addition reconfiguration | Not Present |
| information | 1 |
| - CHOICE CTFC Size | Not Present |
| - CTFC information | 2 |
| - Power offset information | Not Present |
| - CTFC information | 2 |
| - Power offset information | Not Present |
| - CTFC information | 3 |
| - Power offset information | Not Present |
| - CTFC information | 3 |
| - Power offset information | Not Present |
| - CTFC information | 4 |
| - Power offset information | Not Present |
| - FACH/PCH information | (FACH) |
| - TFS | Common transport channels |
| - CHOICE Transport channel type | 168 |
| - Dynamic Transport format information | 0 |
| - RLC Size | 1 |
| - Number of TB and TTI List | 2 |
| - Number of Transport blocks | FDD |
| - Number of Transport blocks | ALL |
| - Number of Transport blocks | 10 ms |
| - CHOICE Mode | Convolutional |
| - CHOICE Logical Channel List | $\frac{1}{2}$ |
| - Semi-static Transport Format information | 220 |
| - Transmission time interval | 16 bit |
| - Type of channel coding | |
| - Coding Rate | |
| - Rate matching attribute | |
| - CRC size | |

| | |
|--------------------------------------------|---------------------------|
| - Transport Channel Identity | 13 (for FACH) |
| - CTCH indicator | FALSE |
| - TFS | (FACH) |
| - CHOICE Transport channel type | Common transport channels |
| - Dynamic Transport format information | |
| - RLC Size | 360 |
| - Number of TB and TTI List | |
| - Number of Transport blocks | 0 |
| - Number of Transport blocks | 1 |
| - CHOICE Mode | FDD |
| - CHOICE Logical Channel List | ALL |
| - Semi-static Transport Format information | |
| - Transmission time interval | 10 ms |
| - Type of channel coding | Turbo |
| - Rate matching attribute | 130 |
| - CRC size | 16bit |
| - Transport Channel Identity | 14 (for FACH) |
| - CTCH indicator | FALSE |
| - CBS DRX Level 1 information | Not Present |

Contents of System Information Block type 5 (3.84 Mcps TDD)

<FFS>

Contents of System Information Block type 5 (1.28 Mcps TDD)

<FFS>

Contents of System Information Block type 6 in connected mode (FDD)

| | |
|-------------------------------------------------------|------------------------------------------|
| - PICH Power offset | -5 dB |
| - CHOICE Mode | FDD |
| - AICH Power offset | 5 dB |
| - Primary CCPCH info | Not Present |
| - PRACH system information list | <u>Not Present</u> |
| - PRACH system information | |
| - PRACH info | |
| - CHOICE mode | FDD |
| - Available Signature | '0000-0000-1111-1111'B |
| - Available SF | 64 |
| - Preamble scrambling code number | 0 |
| - Puncturing Limit | 1.0 |
| - Available Sub-Channel number | '1111-1111-1111'B |
| - Transport Channel Identity | 15 |
| - RACH TFS | |
| - CHOICE Transport channel type | Common transport channels |
| - Dynamic Transport format information | |
| - RLC size | 168 |
| - Number of TB and TTI List | |
| - Number of Transport blocks | 1 |
| - CHOICE Mode | FDD |
| - CHOICE Logical Channel List | ALL |
| - RLC size | 360 |
| - Number of TB and TTI List | |
| - Number of Transport blocks | 1 |
| - CHOICE Mode | FDD |
| - CHOICE Logical Channel List | ALL |
| - Semi-static Transport Format information | |
| - Transmission time interval | 20 ms |
| - Type of channel coding | Convolutional |
| - Coding Rate | 1/2 |
| - Rate matching attribute | 150 |
| - CRC size | 16 |
| - RACH TFCS | |
| - Normal | |
| - TFCI Field 1 information | |
| - CHOICE TFCS representation | Complete |
| - TFCS addition information | |
| - CHOICE CTFC Size | 2-bit |
| - CTFC information | 0 |
| - Power offset information | |
| - CHOICE Gain Factors | Computed Gain Factor, reference TFC id=0 |
| - Power offset Pp-m | -5 dB |
| - CTFC information | 1 |
| - Power offset information | |
| - CHOICE Gain Factors | Signalled Gain Factor |
| - Gain factor β_e | 10 |
| - Gain factor β_d | 15 |
| - Reference TFC ID | 0 |
| - Power offset Pp-m | -5dB |
| - PRACH partitioning | |
| - Access Service Class | |
| - ASC Setting | Not Present |
| - ASC Setting | |
| - CHOICE mode | FDD |
| - Available signature Start Index | 0 (ASC#1) |
| - Available signature End Index | 7 (ASC#1) |
| - Assigned Sub-channel Number | '1111'B |
| - ASC Setting | Not Present |
| - ASC Setting | |
| - CHOICE mode | FDD |
| - Available signature Start Index | 0 (ASC#3) |
| - Available signature End Index | 7 (ASC#3) |
| - Assigned Sub-channel Number | '1111'B |
| - ASC Setting | Not Present |
| - ASC Setting | |

| | |
|-----------------------------------------------------|-----------------------------|
| CHOICE mode | FDD |
| Available signature Start Index | 0 (ASC#5) |
| Available signature End Index | 7 (ASC#5) |
| Assigned Sub-channel Number | '1111'B |
| ASC Setting | Not Present |
| ASC Setting | |
| CHOICE mode | FDD |
| Available signature Start Index | 0 (ASC#7) |
| Available signature End Index | 7 (ASC#7) |
| Assigned Sub-channel Number | '1111'B |
| Persistence scaling factor | |
| Persistence scaling factor | 0.9 (for ASC#2) |
| Persistence scaling factor | 0.9 (for ASC#3) |
| Persistence scaling factor | 0.9 (for ASC#4) |
| Persistence scaling factor | 0.9 (for ASC#5) |
| Persistence scaling factor | 0.9 (for ASC#6) |
| Persistence scaling factor | 0.9 (for ASC#7) |
| AC-to-ASC mapping table | Not present |
| Primary CPICH-DL-TX power | 31 |
| Constant value | -10 |
| PRACH power offset | |
| Power Ramp Step | 3dB |
| Preamble Retrans Max | 4 |
| RACH transmission parameters | |
| Mmax | 2 |
| NB01min | 3 slot |
| NB01max | 10 slot |
| AICH info | |
| Channelisation code | 3 |
| STTD indicator | FALSE |
| AICH transmission timing | 4 |
| - Secondary CCPCH system information | Not Present (For 2-SCCPCHs) |
| Secondary CCPCH info | (SCCPCH for standalone PCH) |
| Secondary scrambling code | Not Present |
| STTD indicator | FALSE |
| Spreading factor | 128 |
| Code number | 4 |
| Pilot symbol existence | FALSE |
| TFCH existence | FALSE |
| Fixed or Flexible position | Fixed |
| Timing offset | 30 |
| TFCS | |
| Normal | |
| TFCH Field 1 information | |
| CHOICE TFCS representation | Complete |
| TFCS addition information | |
| CHOICE CTFC Size | 2-bit |
| CTFC information | 0 |
| Power offset information | Not Present |
| CTFC information | 1 |
| Power offset information | Not Present |
| FACH/PCH information | |
| TFS | (PCH) |
| CHOICE Transport channel type | Common transport channels |
| Dynamic Transport format information | |
| RLC Size | 240 |
| Number of TB and TTI List | |
| Number of Transport blocks | 0 |
| Number of Transport blocks | 1 |
| CHOICE Mode | FDD |
| CHOICE Logical Channel List | ALL |
| Semi-static Transport Format information | |
| Transmission time interval | 10 ms |
| Type of channel coding | Convolutional |
| Coding Rate | 1/2 |
| Rate matching attribute | 230 |
| CRC size | 16-bit |
| Transport Channel Identity | 12 (for PCH) |
| CTCH indicator | FALSE |

| | |
|--------------------------------------------|------------------------------|
| - PICH info | 2 |
| - Channelisation code | 18 |
| - Number of PI per frame | FALSE |
| - STTD indicator | (SCGPCH including two FACHs) |
| - Secondary CCPCH info | Not Present |
| - Secondary scrambling code | FALSE |
| - STTD indicator | 64 |
| - Spreading factor | 1 |
| - Code number | FALSE |
| - Pilot symbol existence | TRUE |
| - TFCI existence | Flexible |
| - Fixed or Flexible position | 0 |
| - Timing offset | |
| - TFCS | |
| - Normal | |
| - TFCI Field 1 information | |
| - CHOICE TFCS representation | Complete |
| - TFCS addition information | |
| - CHOICE CTFC Size | 4-bit |
| - CTFC information | 0 |
| - Power offset information | Not Present |
| - CTFC information | 1 |
| - Power offset information | Not Present |
| - CTFC information | 2 |
| - Power offset information | Not Present |
| - CTFC information | 3 |
| - Power offset information | Not Present |
| - CTFC information | 4 |
| - Power offset information | Not Present |
| - FACH/PCH information | |
| - TFS | (FACH) |
| - CHOICE Transport channel type | Common transport channels |
| - Dynamic Transport format information | |
| - RLC Size | 168 |
| - Number of TB and TTI List | |
| - Number of Transport blocks | 0 |
| - Number of Transport blocks | 1 |
| - Number of Transport blocks | 2 |
| - CHOICE Mode | FDD |
| - CHOICE Logical Channel List | ALL |
| - Semi-static Transport Format information | |
| - Transmission time interval | 10 ms |
| - Type of channel coding | Convolutional |
| - Coding Rate | 1/2 |
| - Rate matching attribute | 220 |
| - CRC size | 16-bit |
| - Transport Channel Identity | 13 (for FACH) |
| - CTCH indicator | FALSE |
| - TFS | (FACH) |
| - CHOICE Transport channel type | Common transport channels |
| - Dynamic Transport format information | |
| - RLC Size | 360 |
| - Number of TB and TTI List | |
| - Number of Transport blocks | 0 |
| - Number of Transport blocks | 1 |
| - CHOICE Mode | FDD |
| - CHOICE Logical Channel List | ALL |
| - Semi-static Transport Format information | |
| - Transmission time interval | 10 ms |
| - Type of channel coding | Turbo |
| - Rate matching attribute | 130 |
| - CRC size | 16bit |
| - Transport Channel Identity | 14 (for FACH) |
| - CTCH indicator | FALSE |
| - CBS DRX Level 1 information | Not Present |

Contents of System Information Block type 6 in connected mode (3.84 Mcps TDD)

<FFS>

Contents of System Information Block type 6 in connected mode (1.28 Mcps TDD)

<FFS>

6.1.2 SCCPCH configuration with Stand-alone SRB for PCCH in the first SCCPCH, RB for CTCH + SRBs for CCCH/BCCH in the second SCCPCH and Interactive/Background 32 kbps PS RAB + SRBs for CCCH/DCCH/BCCH in the third SCCPCH (FDD only)

Three SCCPCHs are used in this SYSTEM INFORMATION configuration. The first SCCPCH carries the PCH. The second SCCPCH carries the FACH for CTCH (Cell Broadcast Service) and the FACH for SRBs on CCCH/ BCCH for idle mode UEs. The third SCCPCH carries the FACH for Interactive/Background 32 kbps PS RAB and the FACH for SRBs on CCCH/ DCCH/ BCCH for connected mode UEs.

This Reference System Configuration is the same as defined in chapter 6.1, except for the following SIBs.

Contents of System Information Block type 5 (FDD)

| | |
|-------------------------------------------------------------------|-----------------------------------------------------|
| - SIB6 indicator | TRUE |
| - PICH Power offset | -5 dB |
| - CHOICE Mode | FDD |
| - AICH Power offset | 5 dB |
| - Primary CCPCH info | Not Present |
| - PRACH system information list | |
| - PRACH system information | |
| - PRACH info | |
| - CHOICE mode | FDD |
| - Available Signature | '0000 0000 1111 1111'B |
| - Available SF | 64 |
| - Preamble scrambling code number | 0 |
| - Puncturing Limit | 1.00 |
| - Available Sub Channel number | '1111 1111 1111'B |
| - Transport Channel Identity | 15 |
| - RACH TFS | |
| - CHOICE Transport channel type | Common transport channels |
| - Dynamic Transport format information | |
| - RLC size | 168 |
| - Number of TB and TTI List | |
| - Number of Transport blocks | 1 |
| - CHOICE Mode | FDD |
| - CHOICE Logical Channel List | <u>Configured</u> ALL |
| - RLC size | 360 |
| - Number of TB and TTI List | |
| - Number of Transport blocks | 1 |
| - CHOICE Mode | FDD |
| - CHOICE Logical Channel List | <u>Configured</u> ALL |
| - Semi-static Transport Format information | |
| - Transmission time interval | 20 ms |
| - Type of channel coding | Convolutional |
| - Coding Rate | 1/2 |
| - Rate matching attribute | 150 |
| - CRC size | 16 |
| - RACH TFCS | |
| - <u>CHOICE TFCI signalling</u> Normal | <u>Normal</u> |
| - TFCI Field 1 information | |
| - CHOICE TFCS representation | Complete <u>reconfiguration</u> |
| - TFCS complete <u>addition</u> <u>reconfiguration</u> | |
| information | |
| - CHOICE CTFC Size | 2 bit |
| - CTFC information | 0 |
| - Power offset information | |
| - CHOICE Gain Factors | Computed Gain Factor, reference TFC id=0 |
| - <u>Reference TFC ID</u> | <u>0</u> |
| - <u>CHOICE mode</u> | <u>FDD</u> |
| - Power offset Pp-m | -50 dB |
| - CTFC information | 1 |
| - Power offset information | |
| - CHOICE Gain Factors | Signalled Gain Factor |
| - <u>CHOICE mode</u> | <u>FDD</u> |
| - Gain factor β_c | <u>11</u> 0 |
| - Gain factor β_d | 15 |
| - Reference TFC ID | 0 |
| - <u>CHOICE Mode</u> | <u>FDD</u> |
| - Power offset Pp-m | -50 dB |
| - PRACH partitioning | |
| - Access Service Class | |
| - ASC Setting | Not Present |
| - ASC Setting | |
| - CHOICE mode | FDD |
| - Available signature Start Index | 0 (ASC#1) |
| - Available signature End Index | 7 (ASC#1) |
| - Assigned Sub-channel Number | '1111'B |
| - ASC Setting | Not Present |
| - ASC Setting | |

| | |
|------------------------------------------------------------------------|---------------------------------|
| - CHOICE mode | FDD |
| - Available signature Start Index | 0 (ASC#3) |
| - Available signature End Index | 7 (ASC#3) |
| - Assigned Sub-channel Number | '1111'B |
| - ASC Setting | Not Present |
| - ASC Setting | |
| - CHOICE mode | FDD |
| - Available signature Start Index | 0 (ASC#5) |
| - Available signature End Index | 7 (ASC#5) |
| - Assigned Sub-channel Number | '1111'B |
| - ASC Setting | Not Present |
| - ASC Setting | |
| - CHOICE mode | FDD |
| - Available signature Start Index | 0 (ASC#7) |
| - Available signature End Index | 7 (ASC#7) |
| - Assigned Sub-channel Number | '1111'B |
| - Persistence scaling factor | |
| - Persistence scaling factor | 0.9 (for ASC#2) |
| - Persistence scaling factor | 0.9 (for ASC#3) |
| - Persistence scaling factor | 0.9 (for ASC#4) |
| - Persistence scaling factor | 0.9 (for ASC#5) |
| - Persistence scaling factor | 0.9 (for ASC#6) |
| - Persistence scaling factor | 0.9 (for ASC#7) |
| - AC-to-ASC mapping table | |
| - AC-to-ASC mapping | 6 (AC0-9) |
| - AC-to-ASC mapping | 5 (AC10) |
| - AC-to-ASC mapping | 4 (AC11) |
| - AC-to-ASC mapping | 3 (AC12) |
| - AC-to-ASC mapping | 2 (AC13) |
| - AC-to-ASC mapping | 1 (AC14) |
| - AC-to-ASC mapping | 0 (AC15) |
| - CHOICE mode | <u>FDD</u> |
| - Primary CPICH DL -TX power | 31 |
| - Constant value | -10 |
| - PRACH power offset | |
| - Power Ramp Step | 3dB |
| - Preamble Retrans Max | 4 |
| - RACH transmission parameters | |
| - Mmax | 2 |
| - NB01min | 3 slot |
| - NB01max | 10 slot |
| - AICH info | |
| - Channelisation code | 3 |
| - STTD indicator | FALSE |
| - AICH transmission timing | 0 |
| - Secondary CCPCH system information | (For 2 SCCPCHs) |
| - Secondary CCPCH info | (SCCPCH for standalone PCH) |
| - CHOICE mode | <u>FDD</u> |
| - Secondary scrambling code | Not Present |
| - STTD indicator | FALSE |
| - Spreading factor | 128 |
| - Code number | 4 |
| - Pilot symbol existence | FALSE |
| - TFCI existence | FALSE |
| - Fixed or Flexible position | Fixed |
| - Timing offset | 30 |
| - TFCS | |
| - CHOICE TFCI signalling | <u>Normal</u> |
| - TFCI Field 1 information | |
| - CHOICE TFCS representation | Complete <u>reconfiguration</u> |
| - TFCS complete addition <u>reconfiguration</u> information | |
| - CHOICE CTFC Size | 2 bit |
| - CTFC information | 0 |
| - Power offset information | Not Present |
| - CTFC information | 1 |
| - Power offset information | Not Present |
| - FACH/PCH information | |
| - TFS | (PCH) |

| | |
|--------------------------------------------------------------------------------|------------------------------------------------------------------------------|
| - CHOICE Transport channel type | Common transport channels |
| - Dynamic Transport format information | |
| - RLC Size | 240 |
| - Number of TB and TTI List | |
| - Number of Transport blocks | 0 |
| - Number of Transport blocks | 1 |
| - CHOICE Mode | FDD |
| - CHOICE Logical Channel List | ALL |
| - Semi-static Transport Format information | |
| - Transmission time interval | 10 ms |
| - Type of channel coding | Convolutional |
| - Coding Rate | ½ |
| - Rate matching attribute | 230 |
| - CRC size | 16 bit |
| - Transport Channel Identity | 12 (for PCH) |
| - CTCH indicator | FALSE |
| - PICH info | |
| - CHOICE mode | FDD |
| - Channelisation code | 2 |
| - Number of PI per frame | 18 |
| - STTD indicator | FALSE |
| - Secondary CCPCH info | (SCCPCH including two FACHs) |
| - CHOICE mode | FDD |
| - Secondary scrambling code | Not Present |
| - STTD indicator | FALSE |
| - Spreading factor | 128 |
| - Code number | 5 |
| - Pilot symbol existence | FALSE |
| - TFCI existence | Not Present |
| | Absence of this IE is equivalent to default value "TRUE" |
| - Fixed or Flexible position | Not Present |
| | Absence of this IE is equivalent to default value "Flexible" |
| - Timing offset | Not Present |
| | Absence of this IE is equivalent to default value 0 |
| - TFCS | |
| - CHOICE TFCI signalling Normal | Normal |
| - TFCI Field 1 information | |
| - CHOICE TFCS representation | Complete reconfiguration |
| - TFCS complete addition reconfiguration | |
| information | |
| - CHOICE CTFC Size | 2 bit |
| - CTFC information | 0 |
| - Power offset information | Not Present |
| - CTFC information | 1 |
| - Power offset information | Not Present |
| - CTFC information | 2 |
| - Power offset information | Not Present |

| | |
|--------------------------------------------|---------------------------|
| - FACH/PCH information | |
| - TFS | (FACH) |
| - CHOICE Transport channel type | Common transport channels |
| - Dynamic Transport format information | |
| - RLC Size | 168 |
| - Number of TB and TTI List | |
| - Number of Transport blocks | 0 |
| - Number of Transport blocks | 1 |
| - CHOICE Mode | FDD |
| - CHOICE Logical Channel List | ALL |
| - Semi-static Transport Format information | |
| - Transmission time interval | 10 ms |
| - Type of channel coding | Convolutional |
| - Coding Rate | 1/3 |
| - Rate matching attribute | 220 |
| - CRC size | 16 bit |
| - Transport Channel Identity | 13 (for FACH) |
| - CTCH indicator | FALSE |
| - TFS | (FACH) |
| - CHOICE Transport channel type | Common transport channels |
| - Dynamic Transport format information | |
| - RLC Size | 168 |
| - Number of TB and TTI List | |
| - Number of Transport blocks | 0 |
| - Number of Transport blocks | 1 |
| - CHOICE Mode | FDD |
| - CHOICE Logical Channel List | ALL |
| - Semi-static Transport Format information | |
| - Transmission time interval | 10 ms |
| - Type of channel coding | Convolutional |
| - Coding Rate | 1/3 |
| - Rate matching attribute | 220 |
| - CRC size | 16bit |
| - Transport Channel Identity | 14 (for FACH) |
| - CTCH indicator | TRUE |
| - CBS DRX Level 1 information | |
| - Period of CTCH allocation (N) | 2 |
| - CBS frame offset (K) | 0 |

Contents of System Information Block type 6 in connected mode (FDD)

| | |
|-------------------------------------------------------|-----------------------------------------|
| - PICH Power offset | -5 dB |
| - CHOICE Mode | FDD |
| - AICH Power offset | 5 dB |
| - Primary CCPCH info | Not Present |
| - PRACH system information list | <u>Not Present</u> |
| - PRACH system information | |
| - PRACH info | |
| - CHOICE mode | FDD |
| - Available Signature | '0000-0000-1111-1111'B |
| - Available SF | 64 |
| - Preamble scrambling code number | 0 |
| - Puncturing Limit | 1.0 |
| - Available Sub-Channel number | '1111-1111-1111'B |
| - Transport Channel Identity | 15 |
| - RACH TFS | |
| - CHOICE Transport channel type | Common transport channels |
| - Dynamic Transport format information | |
| - RLC size | 168 |
| - Number of TB and TTI List | |
| - Number of Transport blocks | 1 |
| - CHOICE Mode | FDD |
| - CHOICE Logical Channel List | ALL |
| - RLC size | 360 |
| - Number of TB and TTI List | |
| - Number of Transport blocks | 1 |
| - CHOICE Mode | FDD |
| - CHOICE Logical Channel List | ALL |
| - Semi-static Transport Format information | |
| - Transmission time interval | 20 ms |
| - Type of channel coding | Convolutional |
| - Coding Rate | 1/2 |
| - Rate matching attribute | 150 |
| - CRC size | 16 |
| - RACH TFCS | |
| - Normal | |
| - TFCI Field 1 information | |
| - CHOICE TFCS representation | Complete |
| - TFCS addition information | |
| - CHOICE CTFC Size | 2-bit |
| - CTFC information | 0 |
| - Power offset information | |
| - CHOICE Gain Factors | Computed Gain Factor reference TFC id=0 |
| - Power offset Pp-m | -5 dB |
| - CTFC information | 1 |
| - Power offset information | |
| - CHOICE Gain Factors | Signalled Gain Factor |
| - Gain factor β_e | 10 |
| - Gain factor β_d | 15 |
| - Reference TFC ID | 0 |
| - Power offset Pp-m | -5dB |
| - PRACH partitioning | |
| - Access Service Class | |
| - ASC Setting | Not Present |
| - ASC Setting | |
| - CHOICE mode | FDD |
| - Available signature Start Index | 0 (ASC#1) |
| - Available signature End Index | 7 (ASC#1) |
| - Assigned Sub-channel Number | '1111'B |
| - ASC Setting | Not Present |
| - ASC Setting | |
| - CHOICE mode | FDD |
| - Available signature Start Index | 0 (ASC#3) |
| - Available signature End Index | 7 (ASC#3) |
| - Assigned Sub-channel Number | '1111'B |
| - ASC Setting | Not Present |
| - ASC Setting | |

| | |
|-----------------------------------------------------------------------|---------------------------------------------------------------------|
| CHOICE mode | FDD |
| Available signature Start Index | 0 (ASC#5) |
| Available signature End Index | 7 (ASC#5) |
| Assigned Sub-channel Number | '1111'B |
| ASC Setting | Not Present |
| ASC Setting | |
| CHOICE mode | FDD |
| Available signature Start Index | 0 (ASC#7) |
| Available signature End Index | 7 (ASC#7) |
| Assigned Sub-channel Number | '1111'B |
| Persistence scaling factor | |
| Persistence scaling factor | 0.9 (for ASC#2) |
| Persistence scaling factor | 0.9 (for ASC#3) |
| Persistence scaling factor | 0.9 (for ASC#4) |
| Persistence scaling factor | 0.9 (for ASC#5) |
| Persistence scaling factor | 0.9 (for ASC#6) |
| Persistence scaling factor | 0.9 (for ASC#7) |
| AC-to-ASC mapping table | Not present |
| Primary CPICH-DL-TX power | 31 |
| Constant value | -10 |
| PRACH power offset | |
| Power Ramp Step | 3dB |
| Preamble Retrans Max | 4 |
| RACH transmission parameters | |
| Mmax | 2 |
| NB01min | 3 slot |
| NB01max | 10 slot |
| AICH info | |
| Channelisation code | 3 |
| STTD indicator | FALSE |
| AICH transmission timing | 0 |
| - Secondary CCPCH system information | |
| - Secondary CCPCH info | (SCCPCH including two FACHs) |
| - CHOICE mode | <u>FDD</u> |
| - Secondary scrambling code | Not Present |
| - STTD indicator | FALSE |
| - Spreading factor | 64 |
| - Code number | 1 |
| - Pilot symbol existence | FALSE |
| - TFCI existence | <u>Not Present</u> |
| | <u>Absence of this IE is equivalent to default value "TRUE"</u> |
| - Fixed or Flexible position | <u>Not Present</u> |
| | <u>Absence of this IE is equivalent to default value "Flexible"</u> |
| - Timing offset | 90 |
| - TFCS | |
| - CHOICE TFCI signalling Normal | <u>Normal</u> |
| - TFCI Field 1 information | |
| - CHOICE TFCS representation | Complete <u>reconfiguration</u> |
| - TFCS complete addition <u>reconfiguration</u> | |
| information | |
| - CHOICE CTFC Size | 4 bit |
| - CTFC information | 0 |
| - Power offset information | Not Present |
| - CTFC information | 1 |
| - Power offset information | Not Present |
| - CTFC information | 2 |
| - Power offset information | Not Present |
| - CTFC information | 3 |
| - Power offset information | Not Present |
| - CTFC information | 4 |
| - Power offset information | Not Present |
| - FACH/PCH information | |
| - TFS | (FACH) |
| - CHOICE Transport channel type | Common transport channels |
| - Dynamic Transport format information | |
| - RLC Size | 168 |
| - Number of TB and TTI List | |
| - Number of Transport blocks | 0 |
| - Number of Transport blocks | 1 |

| | |
|--------------------------------------------|---------------------------|
| - Number of Transport blocks | 2 |
| - CHOICE Mode | FDD |
| - CHOICE Logical Channel List | ALL |
| - Semi-static Transport Format information | |
| - Transmission time interval | 10 ms |
| - Type of channel coding | Convolutional |
| - Coding Rate | 1/2 |
| - Rate matching attribute | 220 |
| - CRC size | 16 bit |
| - Transport Channel Identity | 16 (for FACH) |
| - CTCH indicator | FALSE |
| - TFS | (FACH) |
| - CHOICE Transport channel type | Common transport channels |
| - Dynamic Transport format information | |
| - RLC Size | 360 |
| - Number of TB and TTI List | |
| - Number of Transport blocks | 0 |
| - Number of Transport blocks | 1 |
| - CHOICE Mode | FDD |
| - CHOICE Logical Channel List | ALL |
| - Semi-static Transport Format information | |
| - Transmission time interval | 10 ms |
| - Type of channel coding | Turbo |
| - Rate matching attribute | 130 |
| - CRC size | 16bit |
| - Transport Channel Identity | 17 (for FACH) |
| - CTCH indicator | FALSE |
| - CBS DRX Level 1 information | Not Present |

6.1.3 SCCPCH configuration with Stand-alone SRB for PCCH in the first SCCPCH and Interactive/Background 32 kbps PS RAB + SRBs for CCCH/DCCH/BCCH in the second and third SCCPCHs

Three SCCPCHs are used in this SYSTEM INFORMATION configuration. The first SCCPCH carries the PCH and both the second and third SCCPCHs carry the FACH for Interactive/Background 32 kbps PS RAB and the FACH for SRBs on CCCH/ DCCH/ BCCH.

This Reference System Configuration is the same as defined in chapter 6.1, except for the following SIBs. (SIB6 is not used in this configuration.)

Contents of Scheduling Block 1 (FDD)

| | |
|-------------------------------------------------|-------------------------------------------------------|
| - References to other system information blocks | |
| - Scheduling information | |
| - CHOICE Value tag | Not present Cell Value tag |
| Cell Value tag | + |
| - SEG_COUNT | 1 |
| - SIB_REP | 16 |
| - SIB_POS | 4 |
| - SIB_POS offset info | Not Present use default |
| - SIB type SIBs only | System Information Type 7 |
| - Scheduling information | |
| - CHOICE Value tag | Cell Value tag |
| - Cell Value tag | 1 |
| - SEG_COUNT | 3 |
| - SIB_REP | 64 |
| - SIB_POS | 58 |
| - SIB_POS offset info | |
| - SIB_OFF | 2 |
| - SIB_OFF | 2 |
| - SIB type SIBs only | System Information Type 11 |
| - Scheduling information | |
| - CHOICE Value tag | Cell Value tag |
| - Cell Value tag | 1 |

| | |
|--------------------------|-----------------------------|
| - SEG_COUNT | 3 |
| - SIB_REP | 64 |
| - SIB_POS | 26 |
| - SIB_POS offset info | |
| - SIB_OFF | 2 |
| - SIB_OFF | 2 |
| - SIB type SIBs only | System Information Type 12 |
| - Scheduling information | |
| - CHOICE Value tag | PLMN Value tag |
| - PLMN Value tag | 1 |
| - SEG_COUNT | 1 |
| - SIB_REP | 64 |
| - SIB_POS | 36 |
| - SIB_POS offset info | Not Present |
| - SIB type SIBs only | System Information Type 186 |

Contents of System Information Block type 5 (FDD)

| | |
|------------------------------------------------------------|----------------------------------------------------|
| - SIB6 indicator | FALSE |
| - PICH Power offset | -5 dB |
| - CHOICE Mode | FDD |
| - AICH Power offset | 5 dB |
| - Primary CCPCH info | Not Present |
| - PRACH system information list | |
| - PRACH system information | |
| - PRACH info | |
| - CHOICE mode | FDD |
| - Available Signature | '0000 0000 1111 1111'B |
| - Available SF | 64 |
| - Preamble scrambling code number | 0 |
| - Puncturing Limit | 1.00 |
| - Available Sub Channel number | '1111 1111 1111'B |
| - Transport Channel Identity | 15 |
| - RACH TFS | |
| - CHOICE Transport channel type | Common transport channels |
| - Dynamic Transport format information | |
| - RLC size | 168 |
| - Number of TB and TTI List | |
| - Number of Transport blocks | 1 |
| - CHOICE Mode | FDD |
| - CHOICE Logical Channel List | ConfiguredALL |
| - RLC size | 360 |
| - Number of TB and TTI List | |
| - Number of Transport blocks | 1 |
| - CHOICE Mode | FDD |
| - CHOICE Logical Channel List | ConfiguredALL |
| - Semi-static Transport Format information | |
| - Transmission time interval | 20 ms |
| - Type of channel coding | Convolutional |
| - Coding Rate | 1/2 |
| - Rate matching attribute | 150 |
| - CRC size | 16 |
| - RACH TFCS | |
| - CHOICE TFCI signalling Normal | Normal |
| - TFCI Field 1 information | |
| - CHOICE TFCS representation | Complete reconfiguration |
| - TFCS complete reconfiguration | |
| information | |
| - CHOICE CTFC Size | 2 bit |
| - CTFC information | 0 |
| - Power offset information | |
| - CHOICE Gain Factors | Computed Gain Factor reference TFC id=0 |
| - Reference TFC ID | 0 |
| - CHOICE mode | FDD |
| - Power offset Pp-m | -50 dB |
| - CTFC information | 1 |
| - Power offset information | |
| - CHOICE Gain Factors | Signalled Gain Factor |
| - CHOICE mode | FDD |
| - Gain factor β_c | 11 |
| - Gain factor β_d | 15 |
| - Reference TFC ID | 0 |
| - CHOICE Mode | FDD |
| - Power offset Pp-m | -50 dB |
| - PRACH partitioning | |
| - Access Service Class | |
| - ASC Setting | Not Present |
| - ASC Setting | |
| - CHOICE mode | FDD |
| - Available signature Start Index | 0 (ASC#1) |
| - Available signature End Index | 7 (ASC#1) |
| - Assigned Sub-channel Number | '1111'B |
| - ASC Setting | Not Present |
| - ASC Setting | |

| | |
|------------------------------------------------------------------------|---------------------------------|
| - CHOICE mode | FDD |
| - Available signature Start Index | 0 (ASC#3) |
| - Available signature End Index | 7 (ASC#3) |
| - Assigned Sub-channel Number | '1111'B |
| - ASC Setting | Not Present |
| - ASC Setting | |
| - CHOICE mode | FDD |
| - Available signature Start Index | 0 (ASC#5) |
| - Available signature End Index | 7 (ASC#5) |
| - Assigned Sub-channel Number | '1111'B |
| - ASC Setting | Not Present |
| - ASC Setting | |
| - CHOICE mode | FDD |
| - Available signature Start Index | 0 (ASC#7) |
| - Available signature End Index | 7 (ASC#7) |
| - Assigned Sub-channel Number | '1111'B |
| - Persistence scaling factor | |
| - Persistence scaling factor | 0.9 (for ASC#2) |
| - Persistence scaling factor | 0.9 (for ASC#3) |
| - Persistence scaling factor | 0.9 (for ASC#4) |
| - Persistence scaling factor | 0.9 (for ASC#5) |
| - Persistence scaling factor | 0.9 (for ASC#6) |
| - Persistence scaling factor | 0.9 (for ASC#7) |
| - AC-to-ASC mapping table | |
| - AC-to-ASC mapping | 6 (AC0-9) |
| - AC-to-ASC mapping | 5 (AC10) |
| - AC-to-ASC mapping | 4 (AC11) |
| - AC-to-ASC mapping | 3 (AC12) |
| - AC-to-ASC mapping | 2 (AC13) |
| - AC-to-ASC mapping | 1 (AC14) |
| - AC-to-ASC mapping | 0 (AC15) |
| - CHOICE mode | <u>FDD</u> |
| - Primary CPICH DL -TX power | 31 |
| - Constant value | -10 |
| - PRACH power offset | |
| - Power Ramp Step | 3dB |
| - Preamble Retrans Max | 4 |
| - RACH transmission parameters | |
| - Mmax | 2 |
| - NB01min | 3 slot |
| - NB01max | 10 slot |
| - AICH info | |
| - Channelisation code | 3 |
| - STTD indicator | FALSE |
| - AICH transmission timing | 0 |
| - Secondary CCPCH system information | (For 3 SCCPCHs) |
| - Secondary CCPCH info | (SCCPCH for standalone PCH) |
| - CHOICE mode | <u>FDD</u> |
| - Secondary scrambling code | Not Present |
| - STTD indicator | FALSE |
| - Spreading factor | 128 |
| - Code number | 6 |
| - Pilot symbol existence | FALSE |
| - TFCI existence | FALSE |
| - Fixed or Flexible position | Fixed |
| - Timing offset | 30 |
| - TFCS | |
| - CHOICE TFCI signalling | <u>Normal</u> |
| - TFCI Field 1 information | |
| - CHOICE TFCS representation | Complete <u>reconfiguration</u> |
| - TFCS complete addition <u>reconfiguration</u> information | |
| - CHOICE CTFC Size | 2 bit |
| - CTFC information | 0 |
| - Power offset information | Not Present |
| - CTFC information | 1 |
| - Power offset information | Not Present |
| - FACH/PCH information | |
| - TFS | (PCH) |

| | |
|----------------------------------------------------------------------------|------------------------------------------------------------------------------|
| - CHOICE Transport channel type | Common transport channels |
| - Dynamic Transport format information | 240 |
| - RLC Size | 0 |
| - Number of TB and TTI List | 1 |
| - Number of Transport blocks | FDD |
| - CHOICE Mode | ALL |
| - CHOICE Logical Channel List | 10 ms |
| - Semi-static Transport Format information | Convolutional |
| - Transmission time interval | $\frac{1}{2}$ |
| - Type of channel coding | 230 |
| - Coding Rate | 16 bit |
| - Rate matching attribute | 12 (for PCH) |
| - CRC size | FALSE |
| - Transport Channel Identity | FDD |
| - CTCH indicator | 2 |
| - PICH info | 18 |
| - CHOICE mode | FALSE |
| - Channelisation code | (SCCPCH including two FACHs) |
| - Number of PI per frame | FDD |
| - STTD indicator | Not Present |
| - Secondary CCPCH info | FALSE |
| - CHOICE mode | 64 |
| - Secondary scrambling code | 1 |
| - STTD indicator | FALSE |
| - Spreading factor | Not Present |
| - Code number | Absence of this IE is equivalent to default value "TRUE" |
| - Pilot symbol existence | Not Present |
| - TFCI existence | Absence of this IE is equivalent to default value "Flexible" |
| - Fixed or Flexible position | Not Present |
| - Timing offset | Absence of this IE is equivalent to default value 0 |
| - TFCS | Normal |
| - CHOICE TFCI signalling Normal | Complete reconfiguration |
| - TFCI Field 1 information | 4 bit |
| - CHOICE TFCS representation | 0 |
| - TFCS complete addition reconfiguration | Not Present |
| information | 1 |
| - CHOICE CTFC Size | Not Present |
| - CTFC information | 2 |
| - Power offset information | Not Present |
| - CTFC information | 2 |
| - Power offset information | Not Present |
| - CTFC information | 3 |
| - Power offset information | Not Present |
| - CTFC information | 3 |
| - Power offset information | Not Present |
| - CTFC information | 4 |
| - Power offset information | Not Present |
| - FACH/PCH information | (FACH) |
| - TFS | Common transport channels |
| - CHOICE Transport channel type | 168 |
| - Dynamic Transport format information | 0 |
| - RLC Size | 1 |
| - Number of TB and TTI List | 1 |
| - Number of Transport blocks | 2 |
| - Number of Transport blocks | FDD |
| - Number of Transport blocks | ALL |
| - CHOICE Mode | 10 ms |
| - CHOICE Logical Channel List | Convolutional |
| - Semi-static Transport Format information | $\frac{1}{2}$ |
| - Transmission time interval | 220 |
| - Type of channel coding | 16 bit |
| - Coding Rate | |
| - Rate matching attribute | |
| - CRC size | |

| | |
|---------------------------------------------------|---------------------------------------------------------------------|
| - Transport Channel Identity | 13 (for FACH) |
| - CTCH indicator | FALSE |
| - TFS | (FACH) |
| - CHOICE Transport channel type | Common transport channels |
| - Dynamic Transport format information | |
| - RLC Size | 360 |
| - Number of TB and TTI List | |
| - Number of Transport blocks | 0 |
| - Number of Transport blocks | 1 |
| - CHOICE Mode | FDD |
| - CHOICE Logical Channel List | ALL |
| - Semi-static Transport Format information | |
| - Transmission time interval | 10 ms |
| - Type of channel coding | Turbo |
| - Rate matching attribute | 130 |
| - CRC size | 16bit |
| - Transport Channel Identity | 14 (for FACH) |
| - CTCH indicator | FALSE |
| - Secondary CCPCH info | (SCCPCH including two FACHs) |
| - <u>CHOICE mode</u> | <u>FDD</u> |
| - Secondary scrambling code | Not Present |
| - STTD indicator | FALSE |
| - Spreading factor | 64 |
| - Code number | 2 |
| - Pilot symbol existence | FALSE |
| - TFCI existence | <u>Not Present</u> |
| | <u>Absence of this IE is equivalent to default value "TRUE"</u> |
| - Fixed or Flexible position | <u>Not Present</u> |
| | <u>Absence of this IE is equivalent to default value "Flexible"</u> |
| - Timing offset | 90 |
| - TFCS | |
| - <u>CHOICE TFCI signalling</u> Normal | <u>Normal</u> |
| - TFCI Field 1 information | |
| - CHOICE TFCS representation | Complete <u>reconfiguration</u> |
| - TFCS complete <u>reconfiguration</u> | |
| information | |
| - CHOICE CTFC Size | 4 bit |
| - CTFC information | 0 |
| - Power offset information | Not Present |
| - CTFC information | 1 |
| - Power offset information | Not Present |
| - CTFC information | 2 |
| - Power offset information | Not Present |
| - CTFC information | 3 |
| - Power offset information | Not Present |
| - CTFC information | 4 |
| - Power offset information | Not Present |
| - FACH/PCH information | |
| - TFS | (FACH) |
| - CHOICE Transport channel type | Common transport channels |
| - Dynamic Transport format information | |
| - RLC Size | 168 |
| - Number of TB and TTI List | |
| - Number of Transport blocks | 0 |
| - Number of Transport blocks | 1 |
| - Number of Transport blocks | 2 |
| - CHOICE Mode | FDD |
| - CHOICE Logical Channel List | ALL |
| - Semi-static Transport Format information | |
| - Transmission time interval | 10 ms |
| - Type of channel coding | Convolutional |
| - Coding Rate | ½ |
| - Rate matching attribute | 220 |
| - CRC size | 16 bit |
| - Transport Channel Identity | 16 (for FACH) |
| - CTCH indicator | FALSE |
| - TFS | (FACH) |
| - CHOICE Transport channel type | Common transport channels |

| | |
|--------------------------------------------|---------------|
| - Dynamic Transport format information | |
| - RLC Size | 360 |
| - Number of TB and TTI List | |
| - Number of Transport blocks | 0 |
| - Number of Transport blocks | 1 |
| - CHOICE Mode | FDD |
| - CHOICE Logical Channel List | ALL |
| - Semi-static Transport Format information | |
| - Transmission time interval | 10 ms |
| - Type of channel coding | Turbo |
| - Rate matching attribute | 130 |
| - CRC size | 16bit |
| - Transport Channel Identity | 17 (for FACH) |
| - CTCH indicator | FALSE |
| - CBS DRX Level 1 information | Not Present |

Contents of System Information Block type 5 (3.84 Mcps TDD)

<FFS>

Contents of System Information Block type 5 (1.28 Mcps TDD)

<FFS>

3GPP TSG-T1 Meeting #18
 San Antonio, US, 10th- 14th February 2003
 3GPP TSG-T1/SIG Meeting #27
 San Antonio, US, 10th- 14th February 2003

Tdoc # T1-030044

Tdoc # T1S030198

CR-Form-v7

CHANGE REQUEST

34.108 CR 179 # rev **-** # Current version: **4.5.0**

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the # symbols.

Proposed change affects: UICC apps ME Radio Access Network Core Network

| | | |
|------------------------|---|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Title: | # | Correction to TS34.108 Rel-4 ; PAGING TYPE 1 message (Packet in PS) as T1030177, T1S030052 |
| Source: | # | Anite Telecoms, NTT DoCoMo |
| Work item code: | # | TEI |
| | | Date: # 11/02/2003 |
| Category: | # | F |
| | | <div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p><i>Use <u>one</u> of the following categories:</i></p> <p>F (correction) A (corresponds to a correction in an earlier release) B (addition of feature), C (functional modification of feature) D (editorial modification)</p> <p>Detailed explanations of the above categories can be found in 3GPP TR 21.900.</p> </div> <div style="width: 45%;"> <p><i>Use <u>one</u> of the following releases:</i></p> <p>2 (GSM Phase 2) R96 (Release 1996) R97 (Release 1997) R98 (Release 1998) R99 (Release 1999) Rel-4 (Release 4) Rel-5 (Release 5) Rel-6 (Release 6)</p> </div> </div> |

| | | |
|--------------------------------------|---|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Reason for change: | # | This document is revised from T1030177, T1S030052. The network shall initiate the paging procedure for PS services using P-TMSI. If it would initiate paging for PS establishment using IMSI, the UE shall couldn't establish PS domain, locally deactivate any active PDP contexts and detach from PS. |
| Summary of change: | # | Correction to the IE "UE indentity " of PAGING TYPE 1 message. |
| Consequences if not approved: | # | Correct UE can't establish a RRC connection a PS domain . |

| | | | | | | | | | | |
|------------------------------|---|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---|---|---|---|---|---|---|
| Clauses affected: | # | 9.1.1 | | | | | | | | |
| Other specs affected: | # | <table border="1" style="display: inline-table; border-collapse: collapse; text-align: center;"> <tr> <td style="width: 20px;">Y</td> <td style="width: 20px;">N</td> </tr> <tr> <td style="width: 20px;">#</td> <td style="width: 20px;">X</td> </tr> <tr> <td style="width: 20px;">X</td> <td style="width: 20px;">#</td> </tr> <tr> <td style="width: 20px;">#</td> <td style="width: 20px;">X</td> </tr> </table> Other core specifications # Test specifications # O&M Specifications # | Y | N | # | X | X | # | # | X |
| Y | N | | | | | | | | | |
| # | X | | | | | | | | | |
| X | # | | | | | | | | | |
| # | X | | | | | | | | | |
| | | TS34.123-1 | | | | | | | | |
| Other comments: | # | N/A | | | | | | | | |

How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

9.1.1 Default RRC Message Contents (FDD)

Contents of PAGING TYPE 1 message: TM (Packet in PS)

| Information Element | Value/remark |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Message Type Paging record list - Paging record - CHOICE Used paging identity - Paging cause - CN domain identity - CHOICE UE identity - P-TMSI IMSI (GSM-MAP) | CN identity Terminating Interactive Call PS domain Use P-TMSI allocated by SS at initial attach. Not present — use the default value Set to the same octet string as in the IMSI stored in the USIM card |
| BCCH modification info | Not Present |

3GPP TSG- T1 Meeting #18
 San Antonio, US, 10th – 14th February 2003

Tdoc # T1-030046

3GPP TSG- T1 SIG Meeting #25
 San Antonio, US, 10th – 14th February 2003

Tdoc # T1S030076

| |
|-------------------------------------------------------------------------|
| CR-Form-v7 |
| CHANGE REQUEST |
| ⌘ 34.108 CR 181 ⌘ rev - ⌘ Current version: 4.5.0 ⌘ |

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

Proposed change affects: UICC apps ME Radio Access Network Core Network

| | | | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Title: | ⌘ CR to 34.108 R99; Clarification of authentication test algorithm and GSM cipher key | | |
| Source: | ⌘ Ericsson | | |
| Work item code: | ⌘ TEI Date: ⌘ 28/01/2003 | | |
| Category: | <table style="width: 100%; border: none;"> <tr> <td style="width: 50%; vertical-align: top;"> ⌘ A Use <u>one</u> of the following categories: F (correction) A (corresponds to a correction in an earlier release) B (addition of feature), C (functional modification of feature) D (editorial modification) Detailed explanations of the above categories can be found in 3GPP TR 21.900. </td> <td style="width: 50%; vertical-align: top;"> Release: ⌘ Rel-4 Use <u>one</u> of the following releases: 2 (GSM Phase 2) R96 (Release 1996) R97 (Release 1997) R98 (Release 1998) R99 (Release 1999) Rel-4 (Release 4) Rel-5 (Release 5) Rel-6 (Release 6) </td> </tr> </table> | ⌘ A Use <u>one</u> of the following categories: F (correction) A (corresponds to a correction in an earlier release) B (addition of feature), C (functional modification of feature) D (editorial modification) Detailed explanations of the above categories can be found in 3GPP TR 21.900 . | Release: ⌘ Rel-4 Use <u>one</u> of the following releases: 2 (GSM Phase 2) R96 (Release 1996) R97 (Release 1997) R98 (Release 1998) R99 (Release 1999) Rel-4 (Release 4) Rel-5 (Release 5) Rel-6 (Release 6) |
| ⌘ A Use <u>one</u> of the following categories: F (correction) A (corresponds to a correction in an earlier release) B (addition of feature), C (functional modification of feature) D (editorial modification) Detailed explanations of the above categories can be found in 3GPP TR 21.900 . | Release: ⌘ Rel-4 Use <u>one</u> of the following releases: 2 (GSM Phase 2) R96 (Release 1996) R97 (Release 1997) R98 (Release 1998) R99 (Release 1999) Rel-4 (Release 4) Rel-5 (Release 5) Rel-6 (Release 6) | | |

| | |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Reason for change: | ⌘ Clarification needed to authentication test algorithm for the inter-RAT testing case. |
| Summary of change: | ⌘ <ol style="list-style-type: none"> 1. Clause 8.1.2: Added paragraph stating that for test USIM intended to be used for inter-RAT testing the GSM cipher key shall be derived from the UMTS cipher/integrity keys CK and IK according function c3 as defined in 33.102. 2. Clause 8.1.2.1: Added reference to GSM cipher key Kc and function c3 3. Clause 8.1.2.3.1: Added description for the authentication accept case for test USIM supporting derivation of GSM cipher key Kc. |
| Consequences if not approved: | ⌘ Authentication accept case using test USIM not described for the inter-RAT UTRA/GSM case. |

| | | | | | | | | | | |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|---|---------------------------|---|--|---|--|---|---------------------|
| Clauses affected: | ⌘ 8.1.2 | | | | | | | | | |
| Other specs affected: | <table style="border: none;"> <tr> <td style="border: 1px solid black; padding: 2px; text-align: center;">Y</td> <td style="border: 1px solid black; padding: 2px; text-align: center;">N</td> <td rowspan="3" style="padding-left: 10px;">Other core specifications</td> <td rowspan="3" style="padding-left: 20px;">⌘</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px; text-align: center;"> </td> <td style="border: 1px solid black; padding: 2px; text-align: center;">X</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px; text-align: center;"> </td> <td style="border: 1px solid black; padding: 2px; text-align: center;">X</td> <td style="padding-left: 10px;">Test specifications</td> </tr> </table> | Y | N | Other core specifications | ⌘ | | X | | X | Test specifications |
| Y | N | Other core specifications | ⌘ | | | | | | | |
| | X | | | | | | | | | |
| | X | | | Test specifications | | | | | | |

Other comments: ☹

How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ☹ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

8 Test USIM Parameters

8.1 Introduction

This clause defines default parameters for programming the elementary files of the test USIM. The requirements of this clause do not apply to the USIM/ME tests of 3GPP TS31.120 and 3GPP TS31.121.

8.1.1 Definitions

"Test USIM card":

A USIM card supporting the test algorithm for authentication, programmed with the parameters defined in this clause. The electrical, mechanical and environmental requirements of the test USIM card are specified in TS 31.101 and TS 31.102.

"Test USIM":

Either a test USIM card or the USIM simulator programmed with the parameters defined in this clause.

8.1.2 Definition of the test algorithm for authentication

In order to be able to easily test the UMTS authentication and key agreement procedure as specified in TS 33.102 [24] and TS 33.105 [26] along the whole system, the availability of a test algorithm for generation of authentication vector based on quintets is needed (in GSM triplets was used). Additionally, calculation of the parameters for re-synchronisation requests is needed. The definition of the test algorithm are the functions f1, f2, f3, f4, f5 and the corresponding functions for re-synchronization are f1* and f5*.

[For test USIM intended to be used for inter-RAT test cases then the test USIM shall support the conversion function c3 according to TS 33.102 \[24\] clause 6.8.1.2 to derive the GSM ciphering key Kc from the UMTS cipher/integrity keys CK and IK.](#)

The test algorithm defined in the present clause shall be implemented in test USIM cards as well in test USIM simulators and SS. The test algorithm may also, for test purposes, be implemented in AUC.

The following procedure employs bit wise modulo 2 addition ("XOR").

The following convention applies:

All data variables in the specification of this test algorithm are presented with the most significant substring on the left hand side and the least significant substring on the right hand side. A substring may be a bit, byte or other arbitrary length bitstring. Where a variable is broken down into a number of substrings, the leftmost (most significant) substring is numbered 0, the next most significant is numbered 1, and so on through to the least significant.

8.1.2.1 Authentication and key derivation in the test USIM and SS

The following steps describe sequence of operations for the functions f1, f2, f3, f4 and f5 to perform in the test USIM and SS, in order to obtain the XMAC/MAC, RES/XRES, CK, IK, [Kc](#) and AK respectively, to be used in the authentication and key agreement procedure.

Step 1:

XOR to the challenge **RAND**, a predefined number **K** (in which at least one bit is not zero, see 8.2), having the same bit length (128 bits) as **RAND**.

The result **XDOUT** of this is:

XDOUT[bits 0,1, . . . 126,127] = **K** [bits 0,1, . . . 126,127] XOR **RAND**[bits 0,1, . . . 126,127]

Step 2:

RES (test USIM), **XRES** (SS), **CK**, **IK** and **AK** are extracted from **XDOUT** this way:

$$\mathbf{RES}[\text{bits } 0,1, \dots, n-1, n] = \mathbf{f2}(\mathbf{XDOUT}, n) = \mathbf{XDOUT}[\text{bits } 0,1, \dots, n-1, n] \quad (\text{with } 30 < n < 128)$$

NOTE: Suggested length for RES is 128 bits (i.e. $n = 127$).

In SS and AUC, the XRES calculation is identical to RES.

$$\mathbf{CK}[\text{bits } 0,1, \dots, 126, 127] = \mathbf{f3}(\mathbf{XDOUT}) = \mathbf{XDOUT}[\text{bits } 8,9, \dots, 126, 127, 0,1, \dots, 6,7]$$

$$\mathbf{IK}[\text{bits } 0,1, \dots, 126, 127] = \mathbf{f4}(\mathbf{XDOUT}) = \mathbf{XDOUT}[\text{bits } 16,17, \dots, 126, 127, 0,1, \dots, 14,15]$$

$$\mathbf{AK}[\text{bits } 0,1, \dots, 46,47] = \mathbf{f4}(\mathbf{XDOUT}) = \mathbf{XDOUT}[\text{bits } 24,25, \dots, 70,71]$$

[For test USIM intended for inter-RAT testing the GSM ciphering key Kc shall be derived from the UMTS cipher/integrity keys:](#)

$$\mathbf{Kc}[\text{bits } 0,1, \dots, 62,63] = \mathbf{c3}(\mathbf{CK}, \mathbf{IK}), \text{ see TS 33.102 clause 6.8.1.2}$$

Step 3:

Concatenate **SQN** with **AMF** to obtain **CDOUT** like this:

$$\mathbf{CDOUT}[\text{bits } 0,1, \dots, 62,63] = \mathbf{SQN}[\text{bits } 0,1, \dots, 46,47] \parallel \mathbf{AMF}[\text{bits } 0,1, \dots, 14,15]$$

NOTE: For test USIM the $\mathbf{SQN} = \mathbf{SQN}_{\text{MS}} = \mathbf{SQN}_{\text{SS}}[\text{bits } 0,1, \dots, 46,47] = \mathbf{AUTN}[\text{bits } 0,1, \dots, 46,47] \text{ XOR } \mathbf{AK}[\text{bits } 0,1, \dots, 46,47]$ where AUTN is the received authentication token.

Step 4:

XMAC (test USIM) and **MAC** (SS) are calculated from **XDOUT** and **CDOUT** this way:

$$\mathbf{XMAC}[\text{bits } 0,1, \dots, 62, 63] = \mathbf{f1}(\mathbf{XDOUT}, \mathbf{CDOUT}) = \mathbf{XDOUT}[\text{bits } 0,1, \dots, 62,63] \text{ XOR } \mathbf{CDOUT}[\text{bits } 0,1, \dots, 62,63]$$

NOTE: In SS and AUC, the MAC calculation is identical to XMAC

Step 5:

The SS calculates the authentication token **AUTN**:

$$\mathbf{AUTN}[\text{bits } 0,1, \dots, 126, 127] = \mathbf{SQN} \oplus \mathbf{AK}[\text{bits } 0,1, \dots, 46,47] \parallel \mathbf{AMF}[\text{bits } 0,1, \dots, 14,15] \parallel \mathbf{MAC}[\text{bits } 0,1, \dots, 62, 63]$$

$$\text{Where } \mathbf{SQN} \oplus \mathbf{AK}[\text{bits } 0,1, \dots, 46,47] = \mathbf{SQN}[\text{bits } 0,1, \dots, 46,47] \text{ XOR } \mathbf{AK}[\text{bits } 0,1, \dots, 46,47]$$

8.1.2.2 Generation of re-synchronisation parameters in the USIM

For SS to be able to initiate an authentication re-synchronisation procedure a specific AMF value has been defined.

$$\mathbf{AMF}_{\text{RESYNCH}} = \mathbf{AMF}[\text{bits } 0,1, \dots, 14,15] = \text{"1111 1111 1111 1111"}$$

When the test USIM receives an authentication token (AUTN) having the value of AMF field equal to the $\mathbf{AMF}_{\text{RESYNCH}}$ value then the test USIM shall initiate the re-synchronisation procedure.

When the test USIM starts the re-synchronisation procedure, the MAC-S and AK have to be calculated using the functions $f1^*$ and $f5^*$, which in the test algorithm are identical to $f1$ and $f5$, respectively.

Step 1:

XOR to the challenge **RAND**, a predefined number **K** (in which at least one bit is not zero, see 8.2), having the same bit length (128 bits) as **RAND**.

The result **XDOUT** of this is:

$$\mathbf{XDOUT}[\text{bits } 0,1, \dots 126,127] = \mathbf{K}[\text{bits } 0,1, \dots 126,127] \text{ XOR } \mathbf{RAND}[\text{bits } 0,1, \dots 126,127]$$

Step 2:

AK is extracted from **XDOUT** this way:

$$\mathbf{AK}[\text{bits } 0,1, \dots 46,47] = \mathbf{f5}^*(\mathbf{XDOUT}) = \mathbf{XDOUT}[\text{bits } 24,25, \dots 70,71]$$

Step 3:

Concatenate **SQN_{MS}** with **AMF*** to obtain **CDOUT** like this:

$$\mathbf{CDOUT}[\text{bits } 0,1, \dots 62,63] = \mathbf{SQN}_{\text{MS}}[\text{bits } 0,1, \dots 46,47] \parallel \mathbf{AMF}^*[\text{bits } 0,1, \dots 14,15]$$

Where **AMF*** assumes a dummy value of all zeros

NOTE: For test USIM the $\mathbf{SQN}_{\text{MS}} = \mathbf{SQN}_{\text{SS}}[\text{bits } 0,1, \dots 46,47] = \mathbf{AUTN}[\text{bits } 0,1, \dots 46,47] \text{ XOR } \mathbf{AK}[\text{bits } 0,1, \dots 46,47]$ where AUTN is the received authentication token.

For SS and AUC the $\mathbf{SQN}_{\text{MS}} = \mathbf{AUTS}[\text{bits } 0,1, \dots 46,47] \text{ XOR } \mathbf{AK}[\text{bits } 0,1, \dots 46,47]$ where AUTS is the received re-synchronisation parameter.

Step 4:

MAC-S is calculated from **XDOUT** and **CDOUT** this way:

$$\mathbf{MAC-S}[\text{bits } 0,1, \dots 62, 63] = \mathbf{f1}^*(\mathbf{XDOUT}, \mathbf{CDOUT}) = \mathbf{XDOUT}[\text{bits } 0,1, \dots 62,63] \text{ XOR } \mathbf{CDOUT}[\text{bits } 0,1, \dots 62,63]$$

NOTE: In SS and AUC, the XMAC-S calculation is identical to MAC-S.

Step 5:

The test USIM calculates the re-synchronisation parameter **AUTS**:

$$\mathbf{AUTS}[\text{bits } 0,1, \dots 110,111] = \mathbf{SQN}_{\text{MS}} \oplus \mathbf{AK}[\text{bits } 0,1, \dots 46,47] \parallel \mathbf{MAC-S}[\text{bits } 0,1, \dots 62, 63]$$

$$\text{Where } \mathbf{SQN}_{\text{MS}} \oplus \mathbf{AK}[\text{bits } 0,1, \dots 46,47] = \mathbf{SQN}_{\text{MS}}[\text{bits } 0,1, \dots 46,47] \text{ XOR } \mathbf{AK}[\text{bits } 0,1, \dots 46,47]$$

8.1.2.3 Using the authentication test algorithm for UE conformance testing

8.1.2.3.1 Authentication accept case

The authentication accept case is illustrated in figure 8.1.2.3.1 [and](#) 8.1.2.3.2.

The SS calculates the authentication token AUTN according to the test algorithm as specified in clause 8.1.2.1 (step 1 to 5) using an AMF value different from the AMF_{RESYNCH} value.

The SS sends an authentication request, including RAND and AUTN parameters, to the ME/USIM.

Based on the received RAND parameter the test USIM calculates the RES, CK, IK, K_c and XMAC parameters according to clause 8.1.2.1 (step 1 to 4). The test USIM extracts the SQN_{MS} = SQN_{SS}, AMF and MAC parameters from the received authentication token AUTN.

The test USIM checks that XMAC = MAC and then return the RES, CK and IK parameters to the ME.

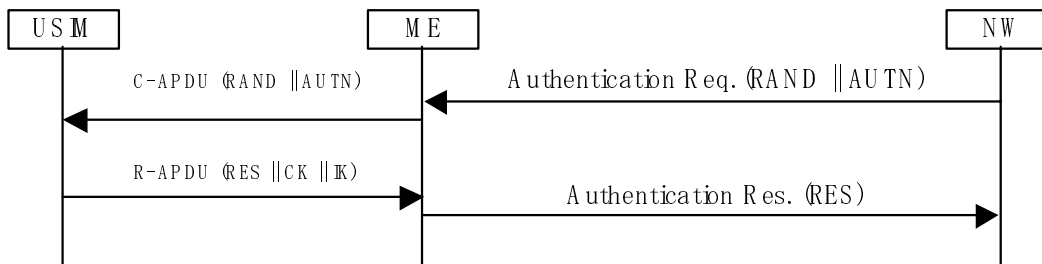


Figure 8.1.2.3.1: Network accepted by UE (USIM not supporting derivation of GSM cipher key Kc)

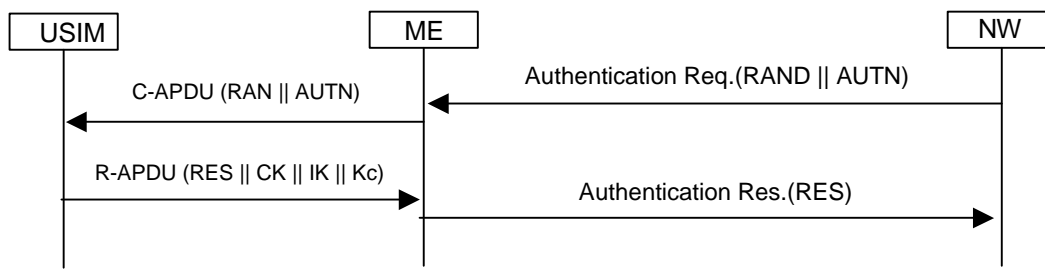


Figure 8.1.2.3.2: Network accepted by UE (USIM supporting derivation of GSM cipher key Kc)

8.1.2.3.2 MAC failure case

The MAC failure case is illustrated in figure 8.1.2.3.2.

The SS calculates the authentication token AUTN according to the test algorithm as specified in clause 8.1.2.1 (step 1 to 5) using an AMF value different from the $AMF_{RESYNCH}$ value and a MAC value different from what is calculated in clause 8.1.2.1 step 4.

The SS sends an authentication request, including RAND and AUTN parameters, to the ME/USIM.

Based on the received RAND parameter The test USIM calculates the RES, CK, IK, Kc and XMAC parameters according to clause 8.1.2.1 (step 1 to 4).

The test USIM extracts the $SQN_{MS} = SQN_{SS}$, AMF and MAC parameters from the received authentication token AUTN.

When the test USIM identifies that the calculated XMAC value is different from the MAC value received in AUTN then the USIM notifies the ME of the MAC failure and the ME sends an AUTENTICATION FAILURE message to the SS (cause "MAC failure").

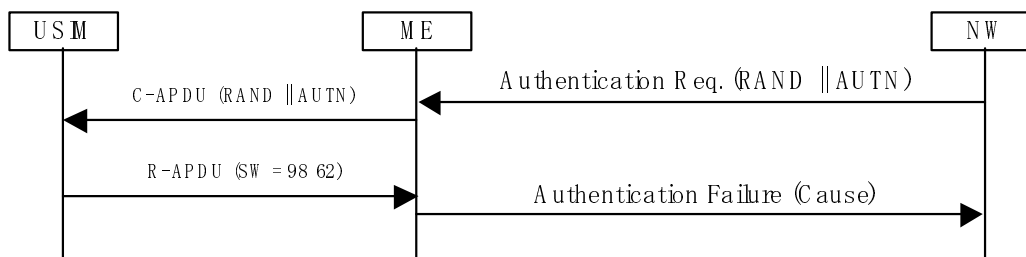


Figure 8.1.2.3.2: MAC failure cases

8.1.2.3.3 SQN failure case

The SQN failure case is illustrated in figure 8.1.2.3.3.

The SS calculates the authentication token AUTN according to the test algorithm as specified in clause 8.1.2.1 (step 1 to 5) using an AMF value equal to $AMF_{RESYNCH}$.

The SS sends an authentication request, including RAND and AUTN parameters, to the UE/USIM.

The test USIM extracts the $SQN_{MS} = SQN_{SS}$, AMF and MAC parameters from the received authentication token AUTN.

When the test USIM identifies that the AMF field is equal to the $AMF_{RESYNCH}$ value it calculates the re-synchronisation parameter AUTS as specified in clause 8.1.2.2 (step 1 to 5) and forward it to the ME.

The ME sends an AUTHENTICATION FAILURE message to the SS including the AUTS parameter.

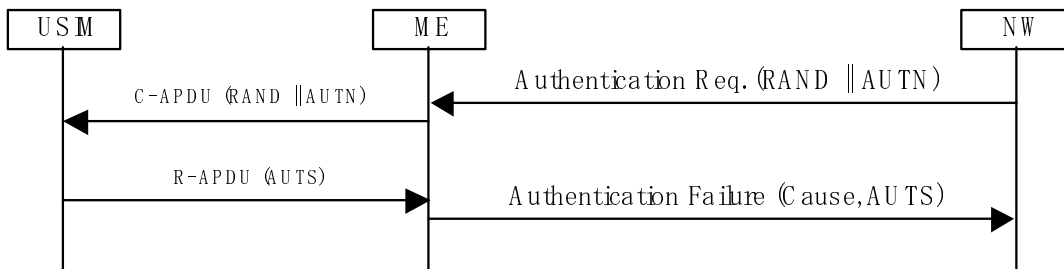


Figure 8.1.2.3.3: SQN failure case

3GPP TSG- T1 Meeting #18
San Antonio, US, 10th – 14th February 2003

Tdoc # T1-030048

3GPP TSG- T1 SIG Meeting #25
San Antonio, US, 10th – 14th February 2003

Tdoc # T1S030202

CR-Form-v7

CHANGE REQUEST

⌘ 34.108 CR 183 ⌘ rev - ⌘ Current version: 4.5.0 ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

Proposed change affects: UICC apps ME Radio Access Network Core Network

| | |
|------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Title: | ⌘ CR to 34.108 R4; Addition of simulated network environment for inter-RAT test cases |
| Source: | ⌘ Ericsson |
| Work item code: | ⌘ TEI Date: ⌘ 31/01/2003 |
| Category: | ⌘ A Release: ⌘ Rel-4 |
| Use <u>one</u> of the following categories: | |
| F (correction) | |
| A (corresponds to a correction in an earlier release) | |
| B (addition of feature), | |
| C (functional modification of feature) | |
| D (editorial modification) | |
| Detailed explanations of the above categories can be found in 3GPP TR 21.900 . | |
| Use <u>one</u> of the following releases: | |
| 2 (GSM Phase 2) | |
| R96 (Release 1996) | |
| R97 (Release 1997) | |
| R98 (Release 1998) | |
| R99 (Release 1999) | |
| Rel-4 (Release 4) | |
| Rel-5 (Release 5) | |
| Rel-6 (Release 6) | |

Reason for change: ⌘ Currently there is no simulated network environment defined in 34.108 for the inter-RAT UTRA/GSM case.

Summary of change: ⌘

1. Clause 2:
Added reference [31] 3GPP TS 51.010-1.
2. Clause 6.1:
Added information describing the cell numbering scheme used for intra-, inter-frequency and inter-RAT cell environment.
3. Clause 6.1.0b:
Added new SIB11 definition for Cell 1 and the FDD/GSM inter-RAT case.
4. Clause 6.1.4:
 - a. Added SIB11 content to Cell 1 to Cell 8 for the FDD/GSM inter-RAT case.
 - b. Added information for Cell 9 and Cell 10 (new GSM cells)
5. Clause 6.1.5:
 - a. Removed the word "only" from the title.
6. Clause 6.1.6:
 - a. Removed the word "only" in the title.
7. Added new clause 6.1.7 for GSM reference radio conditions to be used by inter-RAT test cases.

| | | | | | | | | | | | | |
|--------------------------------------|---|--------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|---|--|---|--|---|--|---|---------------------------|---|
| Consequences if not approved: | ⌘ | No default values for SIB11 and SIB12 will exist for the inter-RAT case. | | | | | | | | | | |
| Clauses affected: | ⌘ | 2, 6.1.0b, 6.1.4, 6.1.5, 6.1.6 and 6.1.7 (new) | | | | | | | | | | |
| Other specs affected: | ⌘ | <table border="1"> <tr> <td>Y</td> <td>N</td> </tr> <tr> <td></td> <td>X</td> </tr> <tr> <td></td> <td>X</td> </tr> <tr> <td></td> <td>X</td> </tr> </table> | Y | N | | X | | X | | X | Other core specifications | ⌘ |
| | | Y | N | | | | | | | | | |
| | | | X | | | | | | | | | |
| | X | | | | | | | | | | | |
| | X | | | | | | | | | | | |
| | | | Test specifications | | | | | | | | | |
| | | | O&M Specifications | | | | | | | | | |
| Other comments: | ⌘ | | | | | | | | | | | |

How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TS 34.123-1: "User Equipment (UE) conformance specification; Part 1: Protocol conformance specification".
- [2] 3GPP TS 34.121: "Terminal Conformance Specification; Radio transmission and reception (FDD)".
- [3] 3GPP TS 34.123-2: "User Equipment (UE) conformance specification; Part 2: Implementation Conformance Statement (ICS) proforma specification".
- [4] 3GPP TS 34.124: "ElectroMagnetic compatibility (EMC) requirements for Mobile terminals and ancillary equipment".
- [5] 3GPP TS 34.122: "Terminal Conformance Specification; Radio transmission and reception (TDD)".
- [6] 3GPP TS 34.109: "Terminal Logical Test Interface; Special conformance testing functions".
- [8] 3GPP TS 25.214: "Physical layer procedures (FDD)".
- [7] 3GPP TS 25.301 "Radio Interface Protocol Architecture".
- [9] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [10] 3GPP TR 25.990: "Vocabulary".
- [11] 3GPP TS 25.101: "UE Radio transmission and reception (FDD)".
- [12] 3GPP TS 25.102: "UTRA (UE) TDD; Radio transmission and reception".
- [13] 3GPP TS 25.211: "Physical Channels and mapping of Transport Channels onto Physical channels (FDD)".
- [14] 3GPP TS 25.212: "Multiplexing and Channel Coding (FDD)".
- [15] 3GPP TS 23.107: "Quality of Service (QoS) concept and architecture".
- [16] 3GPP TS 26.110: "Codec for Circuit Switched Multimedia Telephony Service; General Description".
- [17] 3GPP TS 29.007: "General requirements on interworking between the Public Land Mobile Network (PLMN) and the Integrated Services Digital Network (ISDN) or Public Switched Telephone Network (PSTN)".
- [18] 3GPP TR 23.910: "Circuit Switched Data Bearer Service".
- [19] Void.
- [20] 3GPP TS 25.104: "UTRA (BS) FDD; Radio Transmission and Reception".

- [21] 3GPP TS 25.105: "UTRA (BS) TDD; Radio Transmission and Reception".
- [22] 3GPP TS 31.101: "UICC-Terminal Interface; Physical and Logical Characteristics".
- [23] 3GPP TS 31.102: "Characteristics of the USIM Application".
- [24] 3GPP TS 33.102: "3G Security; Security Architecture".
- [25] 3GPP TS 33.103: "3G Security; Integration Guidelines".
- [26] 3GPP TS 33.105: "3G Security; Cryptographic Algorithm Requirements".
- [27] 3GPP TS 25.224: "Physical layer procedures (TDD)".
- [28] 3GPP TS 25.221: "Physical Channels and mapping of Transport Channels onto Physical channels (TDD)".
- [29] 3GPP TS 25.222: "Multiplexing and Channel Coding (TDD)".
- [30] 3GPP TS 25.133: "Requirements for support of radio resource management (FDD)".
- [31] [3GPP TS 51.010-1: "GSM/EDGE Radio Access Network; Digital cellular telecommunications system \(Phase 2+\); Mobile Station \(MS\) conformance specification; Part 1: Conformance specification"](#).

<End of modified section>

<Start of next modified section>

6 Reference System Configurations

This clause defines a number of Reference System Configurations which can be used for different tests.

6.1 Simulated network environments

The UE will eventually have to operate in either single mode networks (FDD or TDD), ~~and~~ dual mode networks (FDD+TDD), ~~or inter-RAT networks (FDD or TDD + GSM).~~

~~It is <ffs> whether a reference environment needs to be defined for multi-mode networks (eg: the environment could be created by combining two appropriate reference environments from the single mode cases).~~

The following tables list the default parameters for 1 to 8 cell environments for testing.

To simplify TTCN implementation the total number of simultaneous cells in intra-frequency, inter-frequency and inter-RAT cell information lists (SIB11) have been limited to 8 and a specific cell numbering scheme have been defined to associate cell identifiers with type of cell.

- Cell 1, Cell 2, Cell 3, Cell 7 and Cell 8 are associated with FDD/TDD cells using frequency f1;
- Cell 4, Cell 5 and Cell 6 are associated with FDD/TDD cells using frequency f2; and
- Cell 9 and Cell 10 are associated with GSM cells.

For FDD and TDD intra- and inter-frequency cell environment Cell 1 to Cell 8 are used.

For FDD/GSM inter-RAT cell environment Cell 1 to Cell 6, Cell 9 and Cell 10 are used.

In this clause, decimal values are normally used. However, sometimes a hexadecimal value, indicated by an "H", or a binary value, indicated by a "B" is used.

6.1.0a Default Master Information Block and Scheduling Block messages

6.1.0a.1 Grouping SIBs for testing

| Mandatory in 34.108 | Used in Idle Mode | MIB, SB1, (SB2), SIB1, SIB2, SIB3, SIB5, SIB7, SIB11 |
|---------------------------------------|------------------------|------------------------------------------------------|
| | Used in Connected Mode | SIB4, SIB6, SIB12 |
| Mandatory for FDD CPCH | | SIB8, SIB9 |
| Mandatory for FDD DRAC | | SIB10 |
| Mandatory for TDD | | SIB14, SIB17 |
| Mandatory for LCS | | SIB15, SIB15.1, SIB15.2, SIB15.3 |
| Mandatory for ANSI-41 system | | SIB13, SIB13.1, SIB13.2, SIB13.3, SIB13.4 |
| Mandatory for InterSys HO | | SIB16 |
| Mandatory for Cell reselection | | SIB18 |

6.1.0a.2 SIB configurations

Currently three SIB configurations are used, Configuration 1 is default for both UTRAN/FDD SYSTEM and UTRAN/FDD + GERAN SYSTEM, or both UTRAN/TDD SYSTEM and UTRAN/TDD + GERAN SYSTEM. Configuration 2 is for test cases which need two S_CCPCCH or two PRACH. Configuration 3 is for inter-RAT handover test cases.

| | |
|------------------------|-------------------------------------------------------------------------|
| Configuration 1 | MIB, SB1, SIB1, SIB2, SIB3, SIB4, SIB5, SIB6, SIB7, SIB11, SIB12, SIB18 |
| Configuration 2 | MIB, SB1, SIB1, SIB2, SIB3, SIB4, SIB5, SIB7, SIB11, SIB12, SIB18 |
| Configuration 3 | MIB, SB1, SIB1, SIB2, SIB3, SIB4, SIB5, SIB7, SIB11, SIB16, SIB18 |

6.1.0a.3 SIB default schedule

| Block Type | MIB | SB1 | SIB1 | SIB2 | SIB3 | SIB4 | SIB5 | SIB6 | SIB7 | SIB11 | SIB12 | SIB18 |
|-------------------|-----|-----|------|------|------|------|------|------|------|-------|-------|-------|
| SIB_REP | 8 | 16 | 64 | 64 | 64 | 64 | 64 | 64 | 16 | 64 | 64 | 64 |
| SEG_COUNT | 1 | 1 | 1 | 1 | 1 | 1 | 4 | 4 | 1 | 3 | 3 | 1 |

| | | | | | | | | |
|---------------------------|-----|-----|------|------|-----|------|------|------|
| Frame No / SIB_POS | 0 | 2 | 4 | 6 | 8 | 10 | 12 | 14 |
| Block Type | MIB | SB1 | SIB7 | SIB6 | MIB | SIB6 | SIB6 | SIB6 |

| | | | | | | | | |
|---------------------------|-----|-----|-----------|-----------|-----|-------|-------|-------|
| Frame No / SIB_POS | 16 | 18 | 20 | 22 | 24 | 26 | 28 | 30 |
| Block Type | MIB | SB1 | SIB7/SIB3 | SIB1/SIB2 | MIB | SIB12 | SIB12 | SIB12 |

| | | | | | | | | |
|---------------------------|-----|-----|------------|------|-----|------|------|------|
| Frame No / SIB_POS | 32 | 34 | 36 | 38 | 40 | 42 | 44 | 46 |
| Block Type | MIB | SB1 | SIB7/SIB18 | SIB5 | MIB | SIB5 | SIB5 | SIB5 |

| | | | | | | | | |
|---------------------------|-----|-----|-----------|----|-----|-------|-------|-------|
| Frame No / SIB_POS | 48 | 50 | 52 | 54 | 56 | 58 | 60 | 62 |
| Block Type | MIB | SB1 | SIB7/SIB4 | | MIB | SIB11 | SIB11 | SIB11 |

Contents of Master Information Block PLMN type is the case of GSM-MAP

| | |
|-----------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| - MIB value tag | 1 |
| - Supported PLMN types | GSM-MAP |
| - PLMN type | |
| - PLMN identity | Set to the same Mobile Country Codes stored in the test USIM card (TS 34.108 clause 8.3.2.2 EF IMSI(IMSI)). |
| - MCC digit | Set to the same Mobile Network Codes stored in the test USIM card (TS 34.108 clause 8.3.2.2 EF IMSI(IMSI)). |
| - MNC digit | Not Present |
| - ANSI-41 Core Network information | |
| - References to other system information blocks and scheduling blocks | |
| - References to other system information blocks | |
| - Scheduling information | |
| - CHOICE Value tag | Cell Value Tag |
| - Cell Value tag | 1 |
| - Scheduling | |
| - SEG_COUNT | 1 |
| - SIB_REP | 16 |
| - SIB_POS | 2 |
| - SIB_POS offset info | Not Present – use default |
| - SIB and SB type | Scheduling Block 1 |
| - Scheduling information | |
| - CHOICE Value tag | PLMN Value tag |
| - PLMN Value tag | 1 |
| - SEG_COUNT | 1 |
| - SIB_REP | 64 |
| - SIB_POS | 22 |
| - SIB_POS offset info | Not Present – use default |
| - SIB and SB type | System Information Type 1 |
| - Scheduling information | |
| - CHOICE Value tag | Cell Value tag |
| - Cell Value tag | 1 |
| - SEG_COUNT | 1 |
| - SIB_REP | 64 |
| - SIB_POS | 22 |
| - SIB_POS offset info | Not Present – use default |
| - SIB and SB type | System Information Type 2 |
| - Scheduling information | |
| - CHOICE Value tag | Cell Value tag |
| - Cell Value tag | 1 |
| - SEG_COUNT | 1 |
| - SIB_REP | 64 |

| | |
|--------------------------|---------------------------|
| - SIB_POS | 20 |
| - SIB_POS offset info | Not Present – use default |
| - SIB and SB type | System Information Type 3 |
| - Scheduling information | |
| - CHOICE Value tag | Cell Value tag |
| - Cell Value tag | 1 |
| - SEG_COUNT | 1 |
| - SIB_REP | 64 |
| - SIB_POS | 52 |
| - SIB_POS offset info | Not Present – use default |
| - SIB and SB type | System Information Type 4 |
| - Scheduling information | |
| - CHOICE Value tag | Cell Value tag |
| - Cell Value tag | 1 |
| - SEG_COUNT | 4 |
| - SIB_REP | 64 |
| - SIB_POS | 38 |
| - SIB_POS offset info | |
| - SIB_OFF | 4 |
| - SIB_OFF | 2 |
| - SIB_OFF | 2 |
| - SIB and SB type | System Information Type 5 |

Contents of Scheduling Block 1 (FDD and 1.28 Mcps TDD)

| | |
|-------------------------------------------------|----------------------------|
| - References to other system information blocks | |
| - Scheduling information | |
| - CHOICE Value tag | Cell Value tag |
| - Cell Value tag | 1 |
| - SEG_COUNT | 4 |
| - SIB_REP | 64 |
| - SIB_POS | 6 |
| - SIB_POS offset info | |
| - SIB_OFF | 4 |
| - SIB_OFF | 2 |
| - SIB_OFF | 2 |
| - SIB type SIBs only | System Information Type 6 |
| - Scheduling information | |
| - CHOICE Value tag | Not Present |
| - SEG_COUNT | 1 |
| - SIB_REP | 16 |
| - SIB_POS | 4 |
| - SIB_POS offset info | Not Present |
| - SIB type SIBs only | System Information Type 7 |
| - Scheduling information | |
| - CHOICE Value tag | Cell Value tag |
| - Cell Value tag | 1 |
| - SEG_COUNT | 3 |
| - SIB_REP | 64 |
| - SIB_POS | 58 |
| - SIB_POS offset info | |
| - SIB_OFF | 2 |
| - SIB_OFF | 2 |
| - SIB type SIBs only | System Information Type 11 |
| - Scheduling information | |
| - CHOICE Value tag | Cell Value tag |
| - Cell Value tag | 1 |
| - SEG_COUNT | 3 |
| - SIB_REP | 64 |
| - SIB_POS | 26 |
| - SIB_POS offset info | |
| - SIB_OFF | 2 |
| - SIB_OFF | 2 |
| - SIB type SIBs only | System Information Type 12 |
| - Scheduling information | |
| - CHOICE Value tag | PLMN Value tag |
| - PLMN Value tag | 1 |

| | |
|-----------------------|----------------------------|
| - SEG_COUNT | 1 |
| - SIB_REP | 64 |
| - SIB_POS | 36 |
| - SIB_POS offset info | Not Present |
| - SIB type SIBs only | System Information Type 18 |

Contents of Scheduling Block 1 (3.84 Mcps TDD)

| | |
|-------------------------------------------------|----------------------------|
| - References to other system information blocks | |
| - Scheduling information | |
| - CHOICE Value tag | Cell Value tag |
| - Cell Value tag | 1 |
| - SEG_COUNT | 4 |
| - SIB_REP | 128 |
| - SIB_POS | 3 |
| - SIB_POS offset info | |
| - SIB_OFF | 4 |
| - SIB_OFF | 2 |
| - SIB_OFF | 2 |
| - SIB type SIBs only | System Information Type 6 |
| - Scheduling information | |
| - CHOICE Value tag | Not Present |
| - SEG_COUNT | 1 |
| - SIB_REP | 16 |
| - SIB_POS | 2 |
| - SIB_POS offset info | Not Present |
| - SIB type SIBs only | System Information Type 7 |
| - Scheduling information | |
| - CHOICE Value tag | Cell Value tag |
| - Cell Value tag | 1 |
| - SEG_COUNT | 3 |
| - SIB_REP | 64 |
| - SIB_POS | 29 |
| - SIB_POS offset info | |
| - SIB_OFF | 2 |
| - SIB_OFF | 2 |
| - SIB type SIBs only | System Information Type 11 |
| - Scheduling information | |
| - CHOICE Value tag | Cell Value tag |
| - Cell Value tag | 1 |
| - SEG_COUNT | 3 |
| - SIB_REP | 64 |
| - SIB_POS | 13 |
| - SIB_POS offset info | |
| - SIB_OFF | 2 |
| - SIB_OFF | 2 |
| - SIB type SIBs only | System Information Type 12 |
| - Scheduling information | |
| - CHOICE Value tag | Cell Value tag |
| - Cell Value tag | 1 |
| - SEG_COUNT | 1 |
| - SIB_REP | 64 |
| - SIB_POS | 54 |
| - SIB_POS offset info | Not Present - use default |
| - SIB type SIBs only | System Information Type 14 |
| - Scheduling information | |
| - CHOICE Value tag | PLMN Value tag |
| - PLMN Value tag | 1 |
| - SEG_COUNT | 1 |
| - SIB_REP | 64 |
| - SIB_POS | 6 |
| - SIB_POS offset info | Not Present |
| - SIB type SIBs only | System Information Type 18 |

6.1.0a.4 SIB special schedules

6.1.0a.4.1 SIB schedule for two S-CCPCH or two PRACH

FFS

6.1.0a.4.2 SIB schedule for Inter-Rat Handover Test

FFS

6.1.0b Default System Information Block Messages

Contents of System Information Block type 1 (supported PLMN type is GSM-MAP)

| | |
|---------------------------------------------------|------------------------------------------------|
| - CN common GSM-MAP NAS system information | |
| - GSM-MAP NAS system information | 00 80H |
| - CN domain system information | |
| - CN domain identity | PS |
| - CHOICE CN Type | GSM-MAP |
| - CN domain specific NAS system information | |
| - GSM-MAP NAS system information | 00 00H |
| - CN domain specific DRX cycle length coefficient | 7 |
| - CN domain identity | CS |
| - CHOICE CN Type | GSM-MAP |
| - CN domain specific NAS system information | |
| - GSM-MAP NAS system information | 1E 01H |
| - CN domain specific DRX cycle length coefficient | 7 |
| - UE Timers and constants in idle mode | |
| -T300 | 4000 milliseconds |
| -N300 | 7 |
| -T312 | 10 seconds |
| - N312 | 1 |
| - UE Timers and constants in connected mode | |
| - T301 | Not Present (2000 milliseconds: default value) |
| - N301 | Not Present (2: default value) |
| - T302 | Not Present (4000 milliseconds: default value) |
| - N302 | Not Present (3: default value) |
| - T304 | Not Present (2000 milliseconds: default value) |
| - N304 | Not Present (2: default value) |
| - T305 | Not Present (30 minutes: default value) |
| - T307 | Not Present (30 seconds: default value) |
| - T308 | Not Present (160 milliseconds: default value) |
| - T309 | Not Present (5 seconds: default value) |
| - T310 | Not Present (160 milliseconds: default value) |
| - N310 | Not Present (4: default value) |
| - T311 | Not Present (2000 milliseconds: default value) |
| - T312 | Not Present (1 seconds: default value) |
| - N312 | Not Present (1: default value) |
| - T313 | Not Present (3 seconds: default value) |
| - N313 | Not Present (20: default value) |
| - T314 | Not Present (12 seconds: default value) |
| - T315 | Not Present (180 seconds: default value) |
| - N315 | Not Present (1: default value) |
| - T316 | Not Present (30 seconds: default value) |
| - T317 | Not Present (180 seconds: default value) |

Contents of System Information Block type 2

| | |
|---------------------|----------------------------------------|
| - URA identity list | <i>Only 1 URA identity broadcasted</i> |
| - URA identity | 0000 0000 0000 0001B |

Contents of System Information Block type 3 (FDD)

| | |
|--------------------------------------------------|-------------------------------------|
| - SIB4 indicator | TRUE |
| - Cell identity | 0000 0000 0000 0000 0000 0000 0001B |
| - Cell selection and re-selection info | |
| - Mapping info | Not Present |
| - Cell selection and reselection quality measure | CPICH RSCP |
| - CHOICE mode | FDD |
| - Sintrasearch | 16 dB |
| - Sintersearch | 16 dB |
| - SsearchHCS | Not Present |
| - RAT List | This parameter is configurable |
| - RAT identifier | GSM |
| - Ssearch,RAT | -32 dB |
| - SHCS,RAT | Not Present |
| - Slimit,SearchRAT | 0 |
| - Qqualmin | Reference to table 6.1.1 |
| - Qrxlevmin | Reference to table 6.1.1 |
| - Qhyst1s | 2 dB |
| - Qhyst2s | Not Present |
| - Treselections | 0 seconds |
| - HCS Serving cell information | Not Present |
| - Maximum allowed UL TX power | Reference to table 6.1.1 |
| - Cell Access Restriction | |
| - Cell barred | Not barred |
| - Intra-frequency cell re-selection indicator | Not present |
| - T _{barred} | Not present |
| - Cell Reserved for operator use | Not reserved |
| - Cell Reservation Extension | Not reserved |
| - Access Class Barred List | |
| - Access Class Barred0 | Not barred |
| - Access Class Barred1 | Not barred |
| - Access Class Barred2 | Not barred |
| - Access Class Barred3 | Not barred |
| - Access Class Barred4 | Not barred |
| - Access Class Barred5 | Not barred |
| - Access Class Barred6 | Not barred |
| - Access Class Barred7 | Not barred |
| - Access Class Barred8 | Not barred |
| - Access Class Barred9 | Not barred |
| - Access Class Barred10 | Not barred |
| - Access Class Barred11 | Not barred |
| - Access Class Barred12 | Not barred |
| - Access Class Barred13 | Not barred |
| - Access Class Barred14 | Not barred |
| - Access Class Barred15 | Not barred |

Contents of System Information Block type 3 (3.84 Mcps TDD and 1.28 Mcps TDD)

| | |
|--------------------------------------------------|-------------------------------------|
| - SIB4 Indicator | TRUE |
| - Cell identity | 0000 0000 0000 0000 0000 0000 0001B |
| - Cell selection and re-selection info | |
| - Mapping info | Not present |
| - Cell selection and reselection quality measure | (no data) |
| - CHOICE mode | TDD |
| - Sintrasearch | 10 dB |
| - Sintersearch | 10 dB |
| - SsearchHCS | Not present |
| - RAT List | This parameter is configurable |
| - RAT identifier | GSM |
| - Ssearch,RAT | -32 dB |
| - SHCS,RAT | Not present |
| - Slimit,ShearchRAT | Not Present |
| - Qrxlevmin | -103 dBm |
| - Qhyst1s | 0 dB |
| - Treselections | 0 seconds |
| - HCS Serving cell information | Not present |
| - Maximum allowed UL TX power | 30dBm |
| - Cell Access Restriction | |
| - Cell barred | Not barred |
| - Intra-frequency cell re-selection indicator | Not present |
| - T _{barred} | Not present |
| - Cell Reserved for operator use | Not reserved |
| - Cell Reservation Extension | Not reserved |
| - Access Class Barred List | |
| - Access Class Barred0 | Not barred |
| - Access Class Barred1 | Not barred |
| - Access Class Barred2 | Not barred |
| - Access Class Barred3 | Not barred |
| - Access Class Barred4 | Not barred |
| - Access Class Barred5 | Not barred |
| - Access Class Barred6 | Not barred |
| - Access Class Barred7 | Not barred |
| - Access Class Barred8 | Not barred |
| - Access Class Barred9 | Not barred |
| - Access Class Barred10 | Not barred |
| - Access Class Barred11 | Not barred |
| - Access Class Barred12 | Not barred |
| - Access Class Barred13 | Not barred |
| - Access Class Barred14 | Not barred |
| - Access Class Barred15 | Not barred |

Contents of System Information Block type 4 in connected mode (FDD)

| | |
|--------------------------------------------------|-------------------------------------|
| - Cell identity | 0000 0000 0000 0000 0000 0000 0001B |
| - Cell selection and re-selection info | |
| - Mapping Info | Not present |
| - Cell selection and reselection quality measure | CPICH RSCP |
| - CHOICE mode | FDD |
| - Sintrasearch | 16 dB |
| - Sintersearch | 16 dB |
| - SsearchHCS | Not present |
| - RAT List | This parameter is configurable |
| - RAT identifier | GSM |
| - Ssearch,RAT | -32 dB |
| - SHCS,RAT | Not Present |
| - S _{limit,SearchRAT} | 0 |
| - Qqualmin | Reference to table 6.1.1 |
| - Qrxlevmin | Reference to table 6.1.1 |
| - Qhyst1s | 2 dB |
| - Qhyst2s | Not Present |
| - Treselections | 0 seconds |
| - HCS Serving cell information | Not Present |
| - Maximum allowed UL TX power | Reference to table 6.1.1 |
| - Cell Access Restriction | |
| - Cell barred | Not barred |
| - Intra-frequency cell re-selection indicator | Not present |
| - T _{barred} | Not present |
| - Cell Reserved for operator use | Not reserved |
| - Cell Reservation Extension | Not reserved |
| - Access Class Barred List | Not present |

Contents of System Information Block type 4 in connected mode (similar to SIB type3)
(3.84 Mcps TDD and 1.28 Mcps TDD)

| | |
|--------------------------------------------------|-------------------------------------|
| - Cell identity | 0000 0000 0000 0000 0000 0000 0001B |
| - Cell selection and re-selection info | |
| - Mapping info | Not Present |
| - Cell selection and reselection quality measure | (no data) |
| - CHOICE mode | TDD |
| - Sintrasearch | 10 dB |
| - Sintersearch | 10 dB |
| - SsearchHCS | Not present |
| - RAT List | This parameter is configurable |
| - RAT identifier | GSM |
| - Ssearch,RAT | -32 dB |
| - SHCS,RAT | Not present |
| - S _{limit,SearchRAT} | Not Present |
| - Qrxlevmin | -103 dBm |
| - Qhyst1s | 0 dB |
| - Treselections | 0 seconds |
| - HCS Serving cell information | Not present |
| - Maximum allowed UL TX power | 30dBm |
| - Cell Access Restriction | |
| - Cell barred | Not barred |
| - Intra-frequency cell re-selection indicator | Not present |
| - T _{barred} | Not present |
| - Cell Reserved for operator use | Not reserved |
| - Cell Reservation Extension | Not reserved |
| - Access Class Barred List | Not present |

Contents of System Information Block type 5 (FDD)

| | |
|---------------------------------------------|---------------------------|
| - SIB6 indicator | TRUE |
| - PICH Power offset | -5 dB |
| - CHOICE Mode | FDD |
| - AICH Power offset | 5 dB |
| - Primary CCPCH info | Not present |
| - PRACH system information list | |
| - PRACH system information | |
| - PRACH info | |
| - CHOICE mode | FDD |
| - Available Signature | '0000 0000 1111 1111'B |
| - Available SF | 64 |
| - Preamble scrambling code number | 0 |
| - Puncturing Limit | 1.00 |
| - Available Sub Channel number | '1111 1111 1111'B |
| - Transport Channel Identity | 15 |
| - RACH TFS | |
| - CHOICE Transport channel type | Common transport channels |
| - Dynamic Transport format information | |
| - RLC size | 168 |
| - Number of TB and TTI List | |
| - Number of Transport blocks | 1 |
| - CHOICE Mode | FDD |
| - CHOICE Logical Channel List | Configured |
| - RLC size | 360 |
| - Number of TB and TTI List | |
| - Number of Transport blocks | 1 |
| - CHOICE Mode | FDD |
| - CHOICE Logical Channel List | Configured |
| - Semi-static Transport Format information | |
| - Transmission time interval | 20 ms |
| - Type of channel coding | Convolutional |
| - Coding Rate | 1/2 |
| - Rate matching attribute | 150 |
| - CRC size | 16 |
| - RACH TFCS | |
| - CHOICE TFCI signalling | Normal |
| - TFCI Field 1 information | |
| - CHOICE TFCS representation | Complete reconfiguration |
| - TFCS complete reconfiguration information | |
| - CHOICE CTFC Size | 2 bit |
| - CTFC information | 0 |
| - Power offset information | |
| - CHOICE Gain Factors | Computed Gain Factor |
| - Reference TFC ID | 0 |
| - CHOICE Mode | FDD |
| - Power offset Pp-m | 0 dB |
| - CTFC information | 1 |
| - Power offset information | |
| - CHOICE Gain Factors | Signalled Gain Factor |
| - CHOICE mode | FDD |
| - Gain factor β_c | 11 |
| - Gain factor β_d | 15 |
| - Reference TFC ID | 0 |
| - CHOICE Mode | FDD |
| - Power offset Pp-m | 0 dB |
| - PRACH partitioning | |
| - Access Service Class | |
| - ASC Setting | Not Present |
| - ASC Setting | |
| - CHOICE mode | FDD |
| - Available signature Start Index | 0 (ASC#1) |
| - Available signature End Index | 7 (ASC#1) |
| - Assigned Sub-channel Number | '1111'B |
| - ASC Setting | Not Present |
| - ASC Setting | |
| - CHOICE mode | FDD |

| | |
|---------------------------------------------|--------------------------------------------------------------|
| - Available signature Start Index | 0 (ASC#3) |
| - Available signature End Index | 7 (ASC#3) |
| - Assigned Sub-channel Number | '1111'B |
| - ASC Setting | Not Present |
| - ASC Setting | |
| - CHOICE mode | FDD |
| - Available signature Start Index | 0 (ASC#5) |
| - Available signature End Index | 7 (ASC#5) |
| - Assigned Sub-channel Number | '1111'B |
| - ASC Setting | Not Present |
| - ASC Setting | |
| - CHOICE mode | FDD |
| - Available signature Start Index | 0 (ASC#7) |
| - Available signature End Index | 7 (ASC#7) |
| - Assigned Sub-channel Number | '1111'B |
| - Persistence scaling factor | |
| - Persistence scaling factor | 0.9 (for ASC#2) |
| - Persistence scaling factor | 0.9 (for ASC#3) |
| - Persistence scaling factor | 0.9 (for ASC#4) |
| - Persistence scaling factor | 0.9 (for ASC#5) |
| - Persistence scaling factor | 0.9 (for ASC#6) |
| - Persistence scaling factor | 0.9 (for ASC#7) |
| - AC-to-ASC mapping table | |
| - AC-to-ASC mapping | 6 (AC0-9) |
| - AC-to-ASC mapping | 5 (AC10) |
| - AC-to-ASC mapping | 4 (AC11) |
| - AC-to-ASC mapping | 3 (AC12) |
| - AC-to-ASC mapping | 2 (AC13) |
| - AC-to-ASC mapping | 1 (AC14) |
| - AC-to-ASC mapping | 0 (AC15) |
| - CHOICE mode | FDD |
| - Primary CPICH TX power | 31 |
| - Constant value | -10 |
| - PRACH power offset | |
| - Power Ramp Step | 3dB |
| - Preamble Retrans Max | 4 |
| - RACH transmission parameters | |
| - Mmax | 2 |
| - NB01min | 3 slot |
| - NB01max | 10 slot |
| - AICH info | |
| - Channelisation code | 3 |
| - STTD indicator | FALSE |
| - AICH transmission timing | 0 |
| - Secondary CCPCH system information | |
| - Secondary CCPCH info | |
| - CHOICE mode | FDD |
| - Secondary scrambling code | Not Present |
| - STTD indicator | FALSE |
| - Spreading factor | 64 |
| - Code number | 1 |
| - Pilot symbol existence | FALSE |
| - TFCl existence | Not Present |
| - Fixed or Flexible position | Absence of this IE is equivalent to default value "TRUE" |
| | Not Present |
| | Absence of this IE is equivalent to default value "Flexible" |
| - Timing offset | Not Present |
| | Absence of this IE is equivalent to default value 0 |
| - TFCS | (This IE is repeated for TFC number for PCH and FACH.) |
| - CHOICE TFCl signalling | Normal |
| - TFCl Field 1 information | |
| - CHOICE TFCS representation | Complete reconfiguration |
| - TFCS complete reconfiguration information | |
| - CHOICE CTFC Size | 4 bit |
| - CTFC information | 0 |
| - Power offset information | Not Present |
| - CTFC information | 1 |
| - Power offset information | Not Present |
| - CTFC information | 2 |

| | |
|--------------------------------------------|---------------------------|
| - Power offset information | Not Present |
| - CTFC information | 3 |
| - Power offset information | Not Present |
| - CTFC information | 4 |
| - Power offset information | Not Present |
| - CTFC information | 5 |
| - Power offset information | Not Present |
| - CTFC information | 6 |
| - Power offset information | Not Present |
| - CTFC information | 8 |
| - Power offset information | Not Present |
| - FACH/PCH information | (PCH) |
| - TFS | Common transport channels |
| - CHOICE Transport channel type | Common transport channels |
| - Dynamic Transport format information | |
| - RLC Size | 240 |
| - Number of TB and TTI List | |
| - Number of Transport blocks | 0 |
| - Number of Transport blocks | 1 |
| - CHOICE Logical Channel List | ALL |
| - Semi-static Transport Format information | |
| - Transmission time interval | 10 ms |
| - Type of channel coding | Convolutional |
| - Coding Rate | 1/2 |
| - Rate matching attribute | 230 |
| - CRC size | 16 bit |
| - Transport Channel Identity | 12 (for PCH) |
| - CTCH indicator | FALSE |
| - TFS | (FACH) |
| - CHOICE Transport channel type | Common transport channels |
| - Dynamic Transport format information | |
| - RLC Size | 168 |
| - Number of TB and TTI List | |
| - Number of Transport blocks | 0 |
| - Number of Transport blocks | 1 |
| - Number of Transport blocks | 2 |
| - CHOICE Logical Channel List | ALL |
| - Semi-static Transport Format information | |
| - Transmission time interval | 10 ms |
| - Type of channel coding | Convolutional |
| - Coding Rate | 1/2 |
| - Rate matching attribute | 220 |
| - CRC size | 16 bit |
| - Transport Channel Identity | 13 (for FACH) |
| - CTCH indicator | FALSE |
| - TFS | (FACH) |
| - CHOICE Transport channel type | Common transport channels |
| - Dynamic Transport format information | |
| - RLC Size | 360 |
| - Number of TB and TTI List | |
| - Number of Transport blocks | 0 |
| - Number of Transport blocks | 1 |
| - CHOICE Logical Channel List | ALL |
| - Semi-static Transport Format information | |
| - Transmission time interval | 10 ms |
| - Type of channel coding | Turbo |
| - Rate matching attribute | 130 |
| - CRC size | 16bit |
| - Transport Channel Identity | 14 (for FACH) |
| - CTCH indicator | FALSE |
| - PICH info | |
| - CHOICE mode | FDD |
| - Channelisation code | 2 |
| - Number of PI per frame | 18 |
| - STTD indicator | FALSE |
| - CBS DRX Level 1 information | Not Present |

Contents of System Information Block type 5 (3.84 Mcps TDD)

| | |
|--------------------------------------------|-------------------------------------|
| - SIB6 indicator | TRUE |
| - PICH Power offset | -5 dB |
| - CHOICE Mode | TDD |
| - PUSCH system information | Not Present |
| - PDSCH system information | Not Present |
| - TDD open loop power control | |
| - Primary CCPCH Tx Power | 30 dbm |
| - CHOICE TDD option | 3.84 Mcps TDD /REL-4/ |
| - Alpha | (1/8) |
| - PRACH Constant Value | -10 |
| - DPCH Constant Value | -10 |
| - PUSCH Constant Value | -10 |
| - UE positioning related parameters | Not Present /REL-4/ |
| - Primary CCPCH info | |
| - CHOICE mode | TDD |
| - CHOICE TDD option | 3.84 Mcps TDD /REL-4/ |
| - CHOICE SyncCase | Sync Case 2 |
| - Timeslot | 0 |
| - Cell parameters ID | Not Present |
| - SCTD indicator | FALSE |
| - PRACH system information list | |
| - PRACH system information | |
| - PRACH info | |
| - CHOICE mode | TDD |
| - CHOICE TDD option | 3.84 Mcps TDD /REL-4/ |
| - Timeslot number | 14 |
| - PRACH Channelisation Code List | |
| - CHOICE SF | SF8 |
| - Channelisation Code List | |
| - Channelisation Code | 8/1 |
| - Channelisation Code | 8/2 |
| - Channelisation Code | 8/3 |
| - Channelisation Code | 8/4 |
| - PRACH Midamble | Direct |
| - PNBSCH allocation | Not Present /REL-4/ |
| - Transport Channel Identity | 15 |
| - RACH TFS | |
| - CHOICE Transport channel type | Common transport channels |
| - Dynamic Transport format information | |
| - RLC size | Reference clause 6.10 Parameter Set |
| - Number of TB and TTI List | Reference clause 6.10 Parameter Set |
| - Number of Transport blocks | Reference clause 6.10 Parameter Set |
| - CHOICE Mode | TDD |
| - Transmission Time Interval | Not Present |
| - CHOICE Logical Channel List | Configured |
| - Semi-static Transport Format information | |
| - Transmission time interval | Reference clause 6.10 Parameter Set |
| - Type of channel coding | Reference clause 6.10 Parameter Set |
| - Coding Rate | Reference clause 6.10 Parameter Set |
| - Rate matching attribute | Reference clause 6.10 Parameter Set |
| - CRC size | Reference clause 6.10 Parameter Set |
| - RACH TFCS | Not present |
| - PRACH partitioning | |
| - Access Service Class | |
| - ASC Settings | (ASC#0) |
| - CHOICE mode | TDD |
| - CHOICE TDD option | 3.84 Mcps TDD |
| - Available Channelisation codes indices | Not Present (Default all) |
| - CHOICE subchannel size | Size1 |
| - Available Subchannels | null |
| - ASC Settings | (ASC#1) |
| - CHOICE mode | TDD |
| - CHOICE TDD option | 3.84 Mcps TDD |
| - Available Channelisation codes indices | Not Present (Default all) |
| - CHOICE subchannel size | Size1 |
| - Available Subchannels | null |

| | |
|---------------------------------------------|-------------------------------------|
| - ASC Settings | (ASC#2) |
| - CHOICE mode | TDD |
| - CHOICE TDD option | 3.84 Mcps TDD |
| - Available Channelisation codes indices | Not Present (Default all) |
| - CHOICE subchannel size | Size1 |
| - Available Subchannels | null |
| - ASC Settings | (ASC#3) |
| - CHOICE mode | TDD |
| - CHOICE TDD option | 3.84 Mcps TDD |
| - Available Channelisation codes indices | Not Present (Default all) |
| - CHOICE subchannel size | Size1 |
| - Available Subchannels | null |
| - ASC Settings | (ASC#4) |
| - CHOICE mode | TDD |
| - CHOICE TDD option | 3.84 Mcps TDD |
| - Available Channelisation codes indices | Not Present (Default all) |
| - CHOICE subchannel size | Size1 |
| - Available Subchannels | null |
| - ASC Settings | (ASC#5) |
| - CHOICE mode | TDD |
| - CHOICE TDD option | 3.84 Mcps TDD |
| - Available Channelisation codes indices | Not Present (Default all) |
| - CHOICE subchannel size | Size1 |
| - Available Subchannels | null |
| - ASC Settings | (ASC#6) |
| - CHOICE mode | TDD |
| - CHOICE TDD option | 3.84 Mcps TDD |
| - Available Channelisation codes indices | Not Present (Default all) |
| - CHOICE subchannel size | Size1 |
| - Available Subchannels | null |
| - Persistence scaling factors | |
| - Access Service Class | |
| - Persistence scaling factor | 0.9 (for ASC#2) |
| - Persistence scaling factor | 0.9 (for ASC#3) |
| - Persistence scaling factor | 0.9 (for ASC#4) |
| - Persistence scaling factor | 0.9 (for ASC#5) |
| - Persistence scaling factor | 0.9 (for ASC#6) |
| - AC-to-ASC mapping | |
| - AC-to-ASC mapping table | |
| - AC-to-ASC mapping | 6 (AC0-9) |
| - AC-to-ASC mapping | 5 (AC10) |
| - AC-to-ASC mapping | 4 (AC11) |
| - AC-to-ASC mapping | 3 (AC12) |
| - AC-to-ASC mapping | 2 (AC13) |
| - AC-to-ASC mapping | 1 (AC14) |
| - AC-to-ASC mapping | 0 (AC15) |
| - CHOICE mode | TDD (no data) |
| - Secondary CCPCH system information | |
| - Secondary CCPCH system information | |
| - Secondary CCPCH info | |
| - CHOICE mode | TDD |
| - Offset | 0 |
| - Common timeslot info | |
| - 2 nd interleaving mode | Frame |
| - TFCI coding | Reference clause 6.10 Parameter Set |
| - Puncturing limit | Reference clause 6.10 Parameter Set |
| - Repetition period | Not Present (MD "1") |
| - Repetition length | Not present (empty) |
| - Individual timeslot info | |
| - CHOICE TDD option | 3.84 Mcps TDD |
| - Timeslot number | 1 |
| - TFCI existence | Reference clause 6.10 Parameter Set |
| - Midamble Shift and burst type | |
| - CHOICE TDD option | 3.84 Mcps TDD |
| - CHOICE Burst Type | Type 1 |
| - Midamble Allocation Mode | Default midamble |
| - Midamble configuration burst type 1 and 3 | 4 |
| - Midamble Shift | Not Present |
| - CHOICE TDD option | 3.84 Mcps TDD |

| | |
|--------------------------------------------|----------------------------------------------------------------------------------------|
| - no data | |
| - Code List | |
| - Channelisation Code | (This IE is repeated for Code number for PCH and FACH) |
| - TFCS | (This IE is repeated for TFC number for PCH and FACH.) |
| -CHOICE <i>TFCS signalling</i> | |
| - Normal | |
| - TFCS Field 1 information | |
| - CHOICE TFCS representation | Complete reconfiguration |
| - TFCS complete information | |
| - CHOICE CTFC Size | Number of bits used must be enough to cover all combinations of CTFC from clause 6.10. |
| - CTFC information | Reference clause 6.10 Parameter Set |
| - Power offset information | Not Present |
| - FACH/PCH information | |
| - TFS | (PCH) |
| - CHOICE Transport channel type | Common transport channels |
| - Dynamic Transport format information | |
| - RLC Size | Reference clause 6.10 Parameter Set |
| - Number of TB and TTI List | Reference clause 6.10 Parameter Set |
| - Number of Transport blocks | Reference clause 6.10 Parameter Set |
| - CHOICE Mode | TDD |
| - Transmission Time Interval | Reference clause 6.10 Parameter Set |
| - CHOICE Logical Channel List | ALL |
| - Semi-static Transport Format information | |
| - Transmission time interval | Reference clause 6.10 Parameter Set |
| - Type of channel coding | Reference clause 6.10 Parameter Set |
| - Coding Rate | Reference clause 6.10 Parameter Set |
| - Rate matching attribute | Reference clause 6.10 Parameter Set |
| - CRC size | Reference clause 6.10 Parameter Set |
| - Transport Channel Identity | 12 (for PCH) |
| - CTCH indicator | FALSE |
| - TFS | (FACH) |
| - CHOICE Transport channel type | Common transport channels |
| - Dynamic Transport format information | |
| - RLC Size | Reference clause 6.10 Parameter Set |
| - Number of TB and TTI List | Reference clause 6.10 Parameter Set |
| - Number of Transport blocks | Reference clause 6.10 Parameter Set |
| - CHOICE Mode | TDD |
| - Transmission Time Interval | Reference clause 6.10 Parameter Set |
| - CHOICE Logical Channel List | ALL |
| - Semi-static Transport Format information | |
| - Transmission time interval | Reference clause 6.10 Parameter Set |
| - Type of channel coding | Reference clause 6.10 Parameter Set |
| - Coding Rate | Reference clause 6.10 Parameter Set |
| - Rate matching attribute | Reference clause 6.10 Parameter Set |
| - CRC size | Reference clause 6.10 Parameter Set |
| - Transport Channel Identity | 13 (for FACH) |
| - CTCH indicator | FALSE |
| - TFS | (FACH) |
| - CHOICE Transport channel type | Common transport channels |
| - Dynamic Transport format information | |
| - RLC Size | Reference clause 6.10 Parameter Set |
| - Number of TB and TTI List | Reference clause 6.10 Parameter Set |
| - Number of Transport blocks | Reference clause 6.10 Parameter Set |
| - CHOICE Mode | TDD |
| - CHOICE Logical Channel List | ALL |
| - Semi-static Transport Format information | |
| - Transmission time interval | Reference clause 6.10 Parameter Set |
| - Type of channel coding | Reference clause 6.10 Parameter Set |
| - Coding Rate | Reference clause 6.10 Parameter Set |
| - Rate matching attribute | Reference clause 6.10 Parameter Set |
| - CRC size | Reference clause 6.10 Parameter Set |
| - Transport Channel Identity | 14 (for FACH) |
| - CTCH indicator | FALSE |
| - PICH info | |
| - CHOICE <i>mode</i> | TDD |
| - CHOICE TDD option | 3.84 Mcps TDD |

| | |
|---------------------------------|---------------|
| - Timeslot number | 0 |
| - Midamble shift and burst type | 3.84 Mcps TDD |
| - CHOICE <i>TDD option</i> | Type 1 |
| - CHOICE Burst Type | 0 |
| - Midamble Shift | 16/16 |
| - Channelisation code | 64/2 |
| - Repetition period/length | 0 |
| - Offset | 4 |
| - Paging indicator length | 4 |
| - N _{GAP} | 2 |
| - N _{PCH} | Not Present |
| - CBS DRX Level 1 information | |

Contents of System Information Block type 5 (1.28 Mcps TDD)

| | |
|--------------------------------------------|-------------------------------------|
| - SIB6 indicator | TRUE |
| - PICH Power offset | -5 dB |
| - CHOICE Mode | TDD |
| - PUSCH system information | Not Present |
| - PDSCH system information | Not Present |
| - TDD open loop power control | |
| - Primary CCPCH Tx Power | 30 dbm |
| - CHOICE TDD option | 1.28 Mcps TDD /REL-4/ |
| - no data | |
| - Primary CCPCH info | |
| - CHOICE mode | TDD |
| - CHOICE TDD option | 1.28 Mcps TDD /REL-4/ |
| - TSTD indicator | FALSE |
| - Cell parameters ID | Not Present |
| - Block SCTD indicator | FALSE |
| - PRACH system information list | |
| - PRACH system information | |
| - PRACH info | |
| - CHOICE mode | TDD |
| - CHOICE TDD option | 1.28 Mcps TDD /REL-4/ |
| - SYNC_UL info | |
| - SYNC_UL codes bitmap | "11111111" |
| - UL Target SIR | 10 dB |
| - Power Ramping Step | 3 dB |
| - Max SYNC_UL Transmissions | 8 |
| - Mmax | 32 |
| - PRACH definition | |
| - Timeslot number | |
| - CHOICE TDD option | 1.28 Mcps TDD /REL-4/ |
| - Timeslot number | 1 |
| - PRACH Channelisation Code List | |
| - Channelisation Code List | |
| - Channelisation Code | (8/1) |
| - Midamble Shift and burst type | |
| - CHOICE TDD option | 1.28 Mcps TDD /REL-4/ |
| - Midamble Allocation Mode | Default midamble |
| - Midamble configuration | 8 |
| - Midamble Shift | Not present |
| - FPACH info | |
| - Timeslot number | 6 |
| - Channelisation code | (16/16) |
| - Midamble Shift and burst type | |
| - CHOICE TDD option | 1.28 Mcps TDD /REL-4/ |
| - Midamble Allocation Mode | Common Midamble |
| - Midamble configuration | 8 |
| - Midamble Shift | Not present |
| - WT | 4 |
| - PNBSCH allocation | Not Present /REL-4/ |
| - Transport Channel Identity | 15 |
| - RACH TFS | |
| - CHOICE Transport channel type | Common transport channels |
| - Dynamic Transport format information | |
| - RLC size | Reference clause 6.10 Parameter Set |
| - Number of TB and TTI List | Reference clause 6.10 Parameter Set |
| - Number of Transport blocks | Reference clause 6.10 Parameter Set |
| - CHOICE Mode | TDD |
| - Transmission Time Interval | Not Present |
| - CHOICE Logical Channel List | Configured |
| - Semi-static Transport Format information | |
| - Transmission time interval | Reference clause 6.10 Parameter Set |
| - Type of channel coding | Reference clause 6.10 Parameter Set |
| - Coding Rate | Reference clause 6.10 Parameter Set |
| - Rate matching attribute | Reference clause 6.10 Parameter Set |
| - CRC size | Reference clause 6.10 Parameter Set |
| - RACH TFCS | Not present |
| - PRACH partitioning | |

| | |
|--------------------------------------|-------------------------------------|
| - Access Service Class | (ASC#0) |
| - ASC Settings | TDD |
| - CHOICE mode | 1.28 Mcps TDD |
| - CHOICE TDD option | "11111111" |
| - Available SYNC_UL codes indices | Size1 |
| - CHOICE subchannel size | Null |
| - Available Subchannels | (ASC#1) |
| - ASC Settings | TDD |
| - CHOICE mode | 1.28 Mcps TDD |
| - CHOICE TDD option | "11111111" |
| - Available SYNC_UL codes indices | Size1 |
| - CHOICE subchannel size | Null |
| - Available Subchannels | (ASC#2) |
| - ASC Settings | TDD |
| - CHOICE mode | 1.28 Mcps TDD |
| - CHOICE TDD option | "11111111" |
| - Available SYNC_UL codes indices | Size1 |
| - CHOICE subchannel size | Null |
| - Available Subchannels | (ASC#3) |
| - ASC Settings | TDD |
| - CHOICE mode | 1.28 Mcps TDD |
| - CHOICE TDD option | "11111111" |
| - Available SYNC_UL codes indices | Size1 |
| - CHOICE subchannel size | Null |
| - Available Subchannels | (ASC#4) |
| - ASC Settings | TDD |
| - CHOICE mode | 1.28 Mcps TDD |
| - CHOICE TDD option | "11111111" |
| - Available SYNC_UL codes indices | Size1 |
| - CHOICE subchannel size | Null |
| - Available Subchannels | (ASC#5) |
| - ASC Settings | TDD |
| - CHOICE mode | 1.28 Mcps TDD |
| - CHOICE TDD option | "11111111" |
| - Available SYNC_UL codes indices | Size1 |
| - CHOICE subchannel size | Null |
| - Available Subchannels | (ASC#6) |
| - ASC Settings | TDD |
| - CHOICE mode | 1.28 Mcps TDD |
| - CHOICE TDD option | "11111111" |
| - Available SYNC_UL codes indices | Size1 |
| - CHOICE subchannel size | Null |
| - Available Subchannels | |
| - Access Service Class | 0.9 (for ASC#2) |
| - Persistence scaling factor | 0.9 (for ASC#3) |
| - Persistence scaling factor | 0.9 (for ASC#4) |
| - Persistence scaling factor | 0.9 (for ASC#5) |
| - Persistence scaling factor | 0.9 (for ASC#6) |
| - AC-to-ASC mapping | |
| - AC-to-ASC mapping table | |
| - AC-to-ASC mapping | 6 (AC0-9) |
| - AC-to-ASC mapping | 5 (AC10) |
| - AC-to-ASC mapping | 4 (AC11) |
| - AC-to-ASC mapping | 3 (AC12) |
| - AC-to-ASC mapping | 2 (AC13) |
| - AC-to-ASC mapping | 1 (AC14) |
| - AC-to-ASC mapping | 0 (AC15) |
| - CHOICE mode | TDD (no data) |
| - Secondary CCPCH system information | |
| - Secondary CCPCH system information | |
| - Secondary CCPCH info | |
| - CHOICE mode | TDD |
| - Offset | 0 |
| - Common timeslot info | |
| - 2 nd interleaving mode | Frame |
| - TFCI coding | Reference clause 6.10 Parameter Set |
| - Puncturing limit | Reference clause 6.10 Parameter Set |
| - Repetition period | 1 |

| | |
|--------------------------------------------|----------------------------------------------------------------------------------------|
| - Repetition length | 0 |
| - Individual timeslot info | |
| - CHOICE <i>TDD option</i> | 1.28 Mcps TDD |
| - Timeslot number | 0 |
| - TFCI existence | Reference clause 6.10 Parameter Set |
| - Midamble Shift and burst type | |
| - CHOICE <i>TDD option</i> | 1.28 Mcps TDD |
| - Midamble Allocation Mode | Default midamble |
| - Midamble configuration | 4 |
| - Midamble Shift | Not Present |
| - CHOICE <i>TDD option</i> | 1.28 Mcps TDD |
| - Modulation | Reference clause 6.10 Parameter Set |
| - SS-TPC Symbols | Reference clause 6.10 Parameter Set |
| - Code List | |
| - Channelisation Code | Reference clause 6.10 Parameter Set |
| - TFCS | Reference clause 6.10 Parameter Set |
| - CHOICE TFCI <i>signalling</i> | |
| - Normal | |
| - TFCI Field 1 information | Addition |
| - CHOICE TFCS representation | |
| - TFCS addition information | Number of bits used must be enough to cover all combinations of CTFC from clause 6.10. |
| - CHOICE CTFC Size | Reference clause 6.10 Parameter Set |
| - CTFC information | Not Present |
| - Power offset information | |
| - FACH/PCH information | |
| - Transport Channel Identity | 12 (for PCH) |
| - TFS | (PCH) |
| - CHOICE Transport channel type | Common transport channels |
| - Dynamic Transport format information | (This IE is repeated for TFI number.) |
| - RLC Size | Reference clause 6.10 Parameter Set |
| - Number of TB and TTI List | Reference clause 6.10 Parameter Set |
| - Number of Transport blocks | Reference clause 6.10 Parameter Set |
| - CHOICE Mode | TDD |
| - Transmission Time Interval | Not Present |
| - CHOICE Logical Channel List | ALL |
| - Semi-static Transport Format information | |
| - Transmission time interval | Reference clause 6.10 Parameter Set |
| - Type of channel coding | Reference clause 6.10 Parameter Set |
| - Coding Rate | Reference clause 6.10 Parameter Set |
| - Rate matching attribute | Reference clause 6.10 Parameter Set |
| - CRC size | Reference clause 6.10 Parameter Set |
| - Transport Channel Identity | 13 (for FACH) |
| - TFS | (FACH) |
| - CHOICE Transport channel type | Common transport channels |
| - Dynamic Transport format information | (This IE is repeated for TFI number.) |
| - RLC Size | Reference clause 6.10 Parameter Set |
| - Number of TB and TTI List | Reference clause 6.10 Parameter Set |
| - Number of Transport blocks | Reference clause 6.10 Parameter Set |
| - CHOICE Mode | TDD |
| - Transmission Time Interval | Not Present |
| - CHOICE Logical Channel List | ALL |
| - Semi-static Transport Format information | |
| - Transmission time interval | Reference clause 6.10 Parameter Set |
| - Type of channel coding | Reference clause 6.10 Parameter Set |
| - Coding Rate | Reference clause 6.10 Parameter Set |
| - Rate matching attribute | Reference clause 6.10 Parameter Set |
| - CRC size | Reference clause 6.10 Parameter Set |
| - CTCH indicator | FALSE |
| - PICH info | |
| - CHOICE <i>mode</i> | TDD |
| - CHOICE <i>TDD option</i> | 1.28 Mcps TDD |
| - Timeslot number | 0 |
| - Midamble shift and burst type | |
| - Midamble Allocation Mode | Default midamble |
| - Midamble configuration | 8 |
| - Midamble Shift | Not Present |
| - Channelisation code list | |
| - Channelisation code | (16/1) |

| | |
|-------------------------------|-------------|
| - Channelisation code | (16/2) |
| - Repetition period/length | 64/2 |
| - Offset | 0 |
| - Paging indicator length | 4 |
| - N _{GAP} | 4 |
| - N _{PCH} | 2 |
| - CBS DRX Level 1 information | Not Present |

Contents of System Information Block type 6 in connected mode (FDD)

| | |
|---------------------------------|-------------|
| - PICH power offset | -5 dB |
| - CHOICE Mode | FDD |
| - AICH power offset | 5 dB |
| - Primary CCPCH info | Not Present |
| - PRACH system information list | Not present |
| - Secondary CCPCH system info | Not Present |
| - CBS DRX Level 1 information | Not Present |

Contents of System Information Block type 6 in connected mode (similar to SIB type 5) (3.84 Mcps TDD)

| | |
|--------------------------------------------|-------------------------------------|
| - PICH Power offset | -5 dB |
| - CHOICE Mode | TDD |
| - PUSCH system information | Not Present |
| - PDSCH system information | Not Present |
| - TDD open loop power control | |
| - Primary CCPCH Tx Power | 30 dbm |
| - CHOICE TDD option | 3.84 Mcps TDD /REL-4/ |
| - Alpha | (1/8) |
| - PRACH Constant Value | -10 |
| - DPCH Constant Value | -10 |
| - PUSCH Constant Value | -10 |
| - Primary CCPCH info | |
| - CHOICE mode | TDD |
| - CHOICE TDD option | 3.84 Mcps TDD /REL-4/ |
| - CHOICE SyncCase | Sync Case 2 |
| - Timeslot | 0 |
| - Cell parameters ID | Not Present |
| - SCTD indicator | FALSE |
| - PRACH system information list | |
| - PRACH system information | |
| - PRACH info | |
| - CHOICE mode | TDD |
| - CHOICE TDD option | 3.84 Mcps TDD /REL-4/ |
| - Timeslot number | 14 |
| - PRACH Channelisation Code List | |
| - CHOICE SF | SF8 |
| - Channelisation Code List | |
| - Channelisation Code | 8/1 |
| - Channelisation Code | 8/2 |
| - Channelisation Code | 8/3 |
| - Channelisation Code | 8/4 |
| - PRACH Midamble | Direct |
| - Transport Channel Identity | 15 |
| - RACH TFS | |
| - CHOICE Transport channel type | Common transport channels |
| - Dynamic Transport format information | |
| - RLC size | Reference clause 6.10 Parameter Set |
| - Number of TB and TTI List | Reference clause 6.10 Parameter Set |
| - Number of Transport blocks | Reference clause 6.10 Parameter Set |
| - CHOICE Mode | TDD |
| - Transmission Time Interval | Not Present |
| - CHOICE Logical Channel List | Configured |
| - Semi-static Transport Format information | |
| - Transmission time interval | Reference clause 6.10 Parameter Set |
| - Type of channel coding | Reference clause 6.10 Parameter Set |

| | |
|------------------------------------------|-------------------------------------|
| - Coding Rate | Reference clause 6.10 Parameter Set |
| - Rate matching attribute | Reference clause 6.10 Parameter Set |
| - CRC size | Reference clause 6.10 Parameter Set |
| - RACH TFCS | Not present |
| - PRACH partitioning | |
| - Access Service Class | |
| - ASC Settings | (ASC#0) |
| - CHOICE mode | TDD |
| - CHOICE TDD option | 3.84 Mcps TDD /REL-4/ |
| - Available Channelisation codes indices | Not Present (Default all) |
| - CHOICE subchannel size | Size1 |
| - Available Subchannels | null |
| - ASC Settings | (ASC#1) |
| - CHOICE mode | TDD |
| - CHOICE TDD option | 3.84 Mcps TDD /REL-4/ |
| - Available Channelisation codes indices | Not Present (Default all) |
| - CHOICE subchannel size | Size1 |
| - Available Subchannels | null |
| - ASC Settings | (ASC#2) |
| - CHOICE mode | TDD |
| - CHOICE TDD option | 3.84 Mcps TDD /REL-4/ |
| - Available Channelisation codes indices | Not Present (Default all) |
| - CHOICE subchannel size | Size1 |
| - Available Subchannels | null |
| - ASC Settings | (ASC#3) |
| - CHOICE mode | TDD |
| - CHOICE TDD option | 3.84 Mcps TDD /REL-4/ |
| - Available Channelisation codes indices | Not Present (Default all) |
| - CHOICE subchannel size | Size1 |
| - Available Subchannels | null |
| - ASC Settings | (ASC#4) |
| - CHOICE mode | TDD |
| - CHOICE TDD option | 3.84 Mcps TDD /REL-4/ |
| - Available Channelisation codes indices | Not Present (Default all) |
| - CHOICE subchannel size | Size1 |
| - Available Subchannels | null |
| - ASC Settings | (ASC#5) |
| - CHOICE mode | TDD |
| - Available Channelisation codes indices | Not Present (Default all) |
| - CHOICE subchannel size | Size1 |
| - Available Subchannels | null |
| - ASC Settings | (ASC#6) |
| - CHOICE mode | TDD |
| - CHOICE TDD option | 3.84 Mcps TDD /REL-4/ |
| - Available Channelisation codes indices | Not Present (Default all) |
| - CHOICE subchannel size | Size1 |
| - Available Subchannels | null |
| - Persistence scaling factors | |
| - Access Service Class | |
| - Persistence scaling factor | 0.9 (for ASC#2) |
| - Persistence scaling factor | 0.9 (for ASC#3) |
| - Persistence scaling factor | 0.9 (for ASC#4) |
| - Persistence scaling factor | 0.9 (for ASC#5) |
| - Persistence scaling factor | 0.9 (for ASC#6) |
| - AC-to-ASC mapping | Not Present |
| - CHOICE mode | TDD (no data) |
| - Secondary CCPCH system information | |
| - Secondary CCPCH system information | |
| - Secondary CCPCH info | |
| - CHOICE mode | TDD |
| - Offset | 0 |
| - Common timeslot info | |
| - 2 nd interleaving mode | Not Present (MD "Frame") |
| - TFCI coding | Reference clause 6.10 Parameter Set |
| - Puncturing limit | Reference clause 6.10 Parameter Set |
| - Repetition period | Not Present (MD "1") |
| - Repetition length | Not present |
| - Individual timeslot info | |
| - CHOICE TDD option | 3.84 Mcps TDD /REL-4/ |

| | |
|---------------------------------------------|----------------------------------------------------------------------------------------|
| - Timeslot number | 1 |
| - TFCI existence | Reference clause 6.10 Parameter Set |
| - Midamble Shift and burst type | Type 1 |
| - CHOICE Burst Type | Default midamble |
| - Midamble Allocation Mode | 4 |
| - Midamble configuration burst type 1 and 3 | Not Present |
| - Midamble Shift | |
| - Code List | Reference clause 6.10 Parameter Set |
| - Channelisation Code | (This IE is repeated for TFC number for PCH and FACH.) |
| - TFCS | |
| - Normal | Complete reconfiguration |
| - TFCI Field 1 information | |
| - CHOICE TFCS representation | Number of bits used must be enough to cover all combinations of CTFC from clause 6.10. |
| - TFCS complete reconfiguration information | Reference clause 6.10 Parameter Set |
| - CHOICE CTFC Size | Not Present |
| - CTFC information | |
| - Power offset information | |
| - FACH/PCH information | (PCH) |
| - TFS | Common transport channels |
| - CHOICE Transport channel type | |
| - Dynamic Transport format information | Reference clause 6.10 Parameter Set |
| - RLC Size | Reference clause 6.10 Parameter Set |
| - Number of TB and TTI List | Reference clause 6.10 Parameter Set |
| - Number of Transport blocks | TDD |
| - CHOICE Mode | Reference clause 6.10 Parameter Set |
| - Transmission Time Interval | ALL |
| - CHOICE Logical Channel List | |
| - Semi-static Transport Format information | Reference clause 6.10 Parameter Set |
| - Transmission time interval | Reference clause 6.10 Parameter Set |
| - Type of channel coding | Reference clause 6.10 Parameter Set |
| - Coding Rate | Reference clause 6.10 Parameter Set |
| - Rate matching attribute | Reference clause 6.10 Parameter Set |
| - CRC size | Reference clause 6.10 Parameter Set |
| - Transport Channel Identity | 12 (for PCH) |
| - CTCH indicator | FALSE |
| - TFS | (FACH) |
| - CHOICE Transport channel type | Common transport channels |
| - Dynamic Transport format information | |
| - RLC Size | Reference clause 6.10 Parameter Set |
| - Number of TB and TTI List | Reference clause 6.10 Parameter Set |
| - Number of Transport blocks | Reference clause 6.10 Parameter Set |
| - CHOICE Mode | TDD |
| - Transmission Time Interval | Reference clause 6.10 Parameter Set |
| - CHOICE Logical Channel List | ALL |
| - Semi-static Transport Format information | |
| - Transmission time interval | Reference clause 6.10 Parameter Set |
| - Type of channel coding | Reference clause 6.10 Parameter Set |
| - Coding Rate | Reference clause 6.10 Parameter Set |
| - Rate matching attribute | Reference clause 6.10 Parameter Set |
| - CRC size | Reference clause 6.10 Parameter Set |
| - Transport Channel Identity | 13 (for FACH) |
| - TFS | (FACH) |
| - CHOICE Transport channel type | Common transport channels |
| - Dynamic Transport format information | (This IE is repeated for TFI number.) |
| - RLC Size | Reference clause 6.10 Parameter Set |
| - Number of TB and TTI List | Reference clause 6.10 Parameter Set |
| - Number of Transport blocks | Reference clause 6.10 Parameter Set |
| - CHOICE Mode | TDD |
| - CHOICE Logical Channel List | ALL |
| - Semi-static Transport Format information | |
| - Transmission time interval | Reference clause 6.10 Parameter Set |
| - Type of channel coding | Reference clause 6.10 Parameter Set |
| - Coding Rate | Reference clause 6.10 Parameter Set |
| - Rate matching attribute | Reference clause 6.10 Parameter Set |
| - CRC size | Reference clause 6.10 Parameter Set |
| - Transport Channel Identity | 14 (for FACH) |
| - CTCH indicator | FALSE |
| - CTCH indicator | FALSE |

| | |
|---------------------------------|---------------|
| - PICH info | |
| - CHOICE <i>mode</i> | TDD |
| - CHOICE TDD option | 3.84 Mcps TDD |
| - Timeslot number | 0 |
| - Midamble shift and burst type | |
| - CHOICE Burst Type | Type 1 |
| - Midamble Shift | 0 |
| - Channelisation code | 16/16 |
| - Repetition period/length | 64/2 |
| - Offset | 0 |
| - Paging indicator length | 4 |
| - N _{GAP} | 4 |
| - N _{PCH} | 2 |
| - CBS DRX Level 1 information | Not Present |

Contents of System Information Block type6 In connected mode (similar to SIB type5) (1.28 Mcps TDD)

| | |
|--------------------------------------------|-------------------------------------|
| - SIB6 indicator | TRUE |
| - PICH Power offset | -5 dB |
| - CHOICE Mode | TDD |
| - PUSCH system information | Not Present |
| - PDSCH system information | Not Present |
| - TDD open loop power control | |
| - Primary CCPCH Tx Power | 30 dbm |
| - CHOICE TDD option | 1.28 Mcps TDD /REL-4/ |
| - no data | |
| - Primary CCPCH info | |
| - CHOICE mode | TDD |
| - CHOICE TDD option | 1.28 Mcps TDD /REL-4/ |
| - TSTD indicator | FALSE |
| - Cell parameters ID | Not Present |
| - Block SCTD indicator | FALSE |
| - PRACH system information list | |
| - PRACH system information | |
| - PRACH info | |
| - CHOICE mode | TDD |
| - CHOICE TDD option | 1.28 Mcps TDD /REL-4/ |
| - SYNC_UL info | |
| - SYNC_UL codes bitmap | "11111111" |
| - UL Target SIR | 10 dB |
| - Power Ramping Step | 3 dB |
| - Max SYNC_UL Transmissions | 8 |
| - Mmax | 32 |
| - PRACH definition | |
| - Timeslot number | |
| - CHOICE TDD option | 1.28 Mcps TDD /REL-4/ |
| - Timeslot number | 1 |
| - PRACH Channelisation Code List | |
| - Channelisation Code List | |
| - Channelisation Code | (8/1) |
| - Midamble Shift and burst type | |
| - CHOICE TDD option | 1.28 Mcps TDD /REL-4/ |
| - Midamble Allocation Mode | Default midamble |
| - Midamble configuration | 8 |
| - Midamble Shift | Not present |
| - FPACH info | |
| - Timeslot number | 6 |
| - Channelisation code | (16/16) |
| - Midamble Shift and burst type | |
| - CHOICE TDD option | 1.28 Mcps TDD /REL-4/ |
| - Midamble Allocation Mode | Common Midamble |
| - Midamble configuration | 8 |
| - Midamble Shift | Not present |
| - WT | 4 |
| - PNBSCH allocation | Not Present /REL-4/ |
| - Transport Channel Identity | 15 |
| - RACH TFS | |
| - CHOICE Transport channel type | Common transport channels |
| - Dynamic Transport format information | |
| - RLC size | Reference clause 6.10 Parameter Set |
| - Number of TB and TTI List | Reference clause 6.10 Parameter Set |
| - Number of Transport blocks | Reference clause 6.10 Parameter Set |
| - CHOICE Mode | TDD |
| - Transmission Time Interval | Not Present |
| - CHOICE Logical Channel List | Configured |
| - Semi-static Transport Format information | |
| - Transmission time interval | Reference clause 6.10 Parameter Set |
| - Type of channel coding | Reference clause 6.10 Parameter Set |
| - Coding Rate | Reference clause 6.10 Parameter Set |
| - Rate matching attribute | Reference clause 6.10 Parameter Set |
| - CRC size | Reference clause 6.10 Parameter Set |
| - RACH TFCS | Not present |
| - PRACH partitioning | |

| | |
|--------------------------------------|-------------------------------------|
| - Access Service Class | (ASC#0) |
| - ASC Settings | TDD |
| - CHOICE mode | 1.28 Mcps TDD |
| - CHOICE TDD option | "111111111" |
| - Available SYNC_UL codes indices | Size1 |
| - CHOICE subchannel size | Null |
| - Available Subchannels | (ASC#1) |
| - ASC Settings | TDD |
| - CHOICE mode | 1.28 Mcps TDD |
| - CHOICE TDD option | "111111111" |
| - Available SYNC_UL codes indices | Size1 |
| - CHOICE subchannel size | Null |
| - Available Subchannels | (ASC#2) |
| - ASC Settings | TDD |
| - CHOICE mode | 1.28 Mcps TDD |
| - CHOICE TDD option | "111111111" |
| - Available SYNC_UL codes indices | Size1 |
| - CHOICE subchannel size | Null |
| - Available Subchannels | (ASC#3) |
| - ASC Settings | TDD |
| - CHOICE mode | 1.28 Mcps TDD |
| - CHOICE TDD option | "111111111" |
| - Available SYNC_UL codes indices | Size1 |
| - CHOICE subchannel size | Null |
| - Available Subchannels | (ASC#4) |
| - ASC Settings | TDD |
| - CHOICE mode | 1.28 Mcps TDD |
| - CHOICE TDD option | "111111111" |
| - Available SYNC_UL codes indices | Size1 |
| - CHOICE subchannel size | Null |
| - Available Subchannels | (ASC#5) |
| - ASC Settings | TDD |
| - CHOICE mode | 1.28 Mcps TDD |
| - CHOICE TDD option | "111111111" |
| - Available SYNC_UL codes indices | Size1 |
| - CHOICE subchannel size | Null |
| - Available Subchannels | (ASC#6) |
| - ASC Settings | TDD |
| - CHOICE mode | 1.28 Mcps TDD |
| - CHOICE TDD option | "111111111" |
| - Available SYNC_UL codes indices | Size1 |
| - CHOICE subchannel size | Null |
| - Available Subchannels | |
| - Access Service Class | 0.9 (for ASC#2) |
| - Persistence scaling factor | 0.9 (for ASC#3) |
| - Persistence scaling factor | 0.9 (for ASC#4) |
| - Persistence scaling factor | 0.9 (for ASC#5) |
| - Persistence scaling factor | 0.9 (for ASC#6) |
| - AC-to-ASC mapping | Not Present |
| - CHOICE <i>mode</i> | TDD (no data) |
| - Secondary CCPCH system information | |
| - Secondary CCPCH system information | |
| - Secondary CCPCH info | TDD |
| - CHOICE <i>mode</i> | 0 |
| - Offset | |
| - Common timeslot info | Frame |
| - 2 nd interleaving mode | Reference clause 6.10 Parameter Set |
| - TFCI coding | Reference clause 6.10 Parameter Set |
| - Puncturing limit | 1 |
| - Repetition period | 0 |
| - Repetition length | |
| - Individual timeslot info | |
| - CHOICE <i>TDD option</i> | 1.28 Mcps TDD |
| - Timeslot number | 0 |
| - TFCI existence | Reference clause 6.10 Parameter Set |
| - Midamble Shift and burst type | |
| - CHOICE <i>TDD option</i> | 1.28 Mcps TDD |
| - Midamble Allocation Mode | Default midamble |

| | |
|---------------------------------------------|----------------------------------------------------------------------------------------|
| - Midamble configuration | 4 |
| - Midamble Shift | Not Present |
| - CHOICE <i>TDD option</i> | 1.28 Mcps TDD |
| - Modulation | Reference clause 6.10 Parameter Set |
| - SS-TPC Symbols | Reference clause 6.10 Parameter Set |
| - Code List | |
| - Channelisation Code | Reference clause 6.10 Parameter Set |
| - TFCS | Reference clause 6.10 Parameter Set |
| - Normal | |
| - TFCI Field 1 information | |
| - CHOICE TFCS representation | Complete reconfiguration |
| - TFCS complete reconfiguration information | |
| - CHOICE CTFC Size | Number of bits used must be enough to cover all combinations of CTFC from clause 6.10. |
| - CTFC information | Reference clause 6.10 Parameter Set |
| - Power offset information | Not Present |
| - FACH/PCH information | |
| - Transport Channel Identity | 12 (for PCH) |
| - TFS | (PCH) |
| - CHOICE Transport channel type | Common transport channels |
| - Dynamic Transport format information | |
| - RLC Size | Reference clause 6.10 Parameter Set |
| - Number of TB and TTI List | Reference clause 6.10 Parameter Set |
| - Number of Transport blocks | Reference clause 6.10 Parameter Set |
| - CHOICE Mode | TDD |
| - Transmission Time Interval | Not Present |
| - CHOICE Logical Channel List | ALL |
| - Semi-static Transport Format information | |
| - Transmission time interval | Reference clause 6.10 Parameter Set |
| - Type of channel coding | Reference clause 6.10 Parameter Set |
| - Coding Rate | Reference clause 6.10 Parameter Set |
| - Rate matching attribute | Reference clause 6.10 Parameter Set |
| - CRC size | Reference clause 6.10 Parameter Set |
| - Transport Channel Identity | 13 (for FACH) |
| - TFS | (FACH) |
| - CHOICE Transport channel type | Common transport channels |
| - Dynamic Transport format information | |
| - RLC Size | Reference clause 6.10 Parameter Set |
| - Number of TB and TTI List | Reference clause 6.10 Parameter Set |
| - Number of Transport blocks | Reference clause 6.10 Parameter Set |
| - CHOICE Mode | TDD |
| - Transmission Time Interval | Not Present |
| - CHOICE Logical Channel List | ALL |
| - Semi-static Transport Format information | |
| - Transmission time interval | Reference clause 6.10 Parameter Set |
| - Type of channel coding | Reference clause 6.10 Parameter Set |
| - Coding Rate | Reference clause 6.10 Parameter Set |
| - Rate matching attribute | Reference clause 6.10 Parameter Set |
| - CRC size | Reference clause 6.10 Parameter Set |
| - CTCH indicator | FALSE |
| - PICH info | |
| - CHOICE <i>mode</i> | TDD |
| - CHOICE TDD option | 1.28 Mcps TDD |
| - Timeslot number | 0 |
| - Midamble shift and burst type | |
| - Midamble Allocation Mode | Default midamble |
| - Midamble configuration | 8 |
| - Midamble Shift | Not Present |
| - Channelisation code list | |
| - Channelisation code | (16/1) |
| - Channelisation code | (16/2) |
| - Repetition period/length | 64/2 |
| - Offset | 0 |
| - Paging indicator length | 4 |
| - N_{GAP} | 4 |
| - N_{PCH} | 2 |
| - CBS DRX Level 1 information | Not Present |

Contents of System Information Block type 7 (FDD)

| | |
|---------------------------------------------------|--------------------------------------|
| CHOICE Mode | FDD |
| - UL interference | -100dBm |
| - PRACHs listed in system information block type5 | |
| - Dynamic persistence level | 2 |
| - PRACHs listed in system information block type6 | |
| - Dynamic persistence level | 2 |
| - Expiration Time Factor | Not Present – use default value of 1 |

Contents of System Information Block type 7 (TDD)

| | |
|-------------------------------------------------|--------------------------------------|
| CHOICE Mode | TDD |
| PRACHs listed in system information block type5 | |
| - Dynamic persistence level | 2 |
| PRACHs listed in system information block type6 | |
| - Dynamic persistence level | 2 |
| Expiration Time Factor | Not Present – use default value of 1 |

Contents of System Information Block type 8, 9 (only for FDD)

This information is used for static CPCH in the cell, so this is not present.

Contents of System Information Block type 10 (only for FDD)

This information is used for DRAC, so this is not present.

Contents of System Information Block type 11 (FDD)

This is the default message content of SIB 11 for cell 1.

See sub-clause 6.1.4 for the difference in message contents of System Information Block type 11 (FDD) for cell 2 to 8.

| | | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> - SIB12 indicator - FACH measurement occasion info - Measurement control system information - Use of HCS - Cell selection and reselection quality measure | <p>A1, A2</p> | <p>TRUE Not Present</p> <p>Not used CPICH RSCP</p> |
| <p>- Intra-frequency measurement system information</p> <ul style="list-style-type: none"> - Intra-frequency measurement identity - Intra-frequency cell info list - CHOICE intra-frequency cell removal - New intra-frequency cells - Intra-frequency cell id - Cell info - Cell individual offset - Reference time difference to cell - Read SFN indicator - CHOICE mode - Primary CPICH info - Primary scrambling code - Primary CPICH TX power - TX Diversity indicator - Cell Selection and Re-selection info - Intra-frequency cell id - Cell info - Cell individual offset - Reference time difference to cell - Read SFN indicator - CHOICE mode - Primary CPICH info - Primary scrambling code - Primary CPICH TX power - TX Diversity indicator - Cell Selection and Re-selection info - Intra-frequency cell id - Cell info | <p>A1, A2</p> | <p>Not Present Absence of this IE is equivalent to default value 1</p> <p>Not present (This IE shall be ignored by the UE for SIB11)</p> <p>1</p> <p>Not present Absence of this IE is equivalent to default value 0dB Not Present FALSE FDD</p> <p>Refer to clause titled "Default settings for cell No.1 (FDD)" in clause 6.1.4 Not Present FALSE Not Present (The IE shall be absent as this is the serving cell)</p> <p>2</p> <p>Not present Absence of this IE is equivalent to default value 0dB Not present TRUE FDD</p> <p>Refer to clause titled "Default settings for cell No.2 (FDD)" in clause 6.1.4 Not Present FALSE Not present For neighbouring cell, if HCS is not used and all the parameters in cell selection and re-selection info are Default value, this IE is absent.</p> <p>3</p> <p>Same content as specified for Intra-frequency cell id=2 with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.3 (FDD)" in clause 6.1.4</p> |
| <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info - Intra-frequency cell id - Cell info | <p>A1</p> | <p>7</p> <p>Same content as specified for Intra-frequency cell id=2 with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.7 (FDD)" in clause 6.1.4</p> <p>8</p> <p>Same content as specified for Intra-frequency cell id=2 with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.8 (FDD)" in clause 6.1.4</p> |
| <ul style="list-style-type: none"> - Cells for measurement | <p>A1, A2</p> | <p>Not Present</p> |
| <ul style="list-style-type: none"> - Intra-frequency measurement quantity - Filter coefficient - CHOICE mode - Measurement quantity - Intra-frequency reporting quantity for RACH Reporting - Maximum number of reported cells on RACH | <p>A1, A2</p> | <p>Not present Absence of this IE is equivalent to the default value 0 FDD CPICH RSCP Not Present</p> <p>Not Present</p> |

| | |
|--------------------------------------------------------|----------------------------------------------------------------------------|
| - Reporting information for state CELL_DCH | |
| - Intra-frequency reporting quantity | No report |
| - Reporting quantities for active set cells | FALSE |
| - SFN-SFN observed time difference type | |
| - Cell synchronisation information reporting indicator | TRUE |
| - Cell identity reporting indicator | FDD |
| - CHOICE mode | FALSE |
| - CPICH Ec/N0 reporting indicator | TRUE |
| - CPICH RSCP reporting indicator | FALSE |
| - Pathloss reporting indicator | |
| - Reporting quantities for monitored set cells | No report |
| - SFN-SFN observed time difference type | TRUE |
| - Cell synchronisation information reporting indicator | |
| - Cell identity reporting indicator | TRUE |
| - CHOICE mode | FDD |
| - CPICH Ec/N0 reporting indicator | FALSE |
| - CPICH RSCP reporting indicator | TRUE |
| - Pathloss reporting indicator | FALSE |
| - Reporting quantities for detected set cells | Not Present |
| - Measurement reporting mode | |
| - Measurement Report Transfer Mode | Acknowledged mode RLC |
| - Periodic Reporting/Event Trigger Reporting Mode | Event trigger |
| - CHOICE report criteria | Intra-frequency measurement reporting criteria |
| - Intra-frequency measurement reporting criteria | |
| - Parameters required for each event | 3 kinds |
| - Intra-frequency event identity | 1a |
| - Triggering condition 1 | Not Present |
| - Triggering condition 2 | Monitored set cells |
| - Reporting Range Constant | 5dB |
| - Cells forbidden to affect Reporting range | Not Present |
| - W | 1.0 |
| - Hysteresis | 0.0 |
| - Threshold Used Frequency | Not Present |
| - Reporting deactivation threshold | 2 |
| - Replacement activation threshold | Not Present |
| - Time to trigger | 640 |
| - Amount of reporting | 4 |
| - Reporting interval | 4000 |
| - Reporting cell status | |
| - CHOICE reported cell | Report cell within active set and/or monitored set cells on used frequency |
| - Maximum number of reported cells | 3 |
| - Intra-frequency event identity | 1b |
| - Triggering condition 1 | Active set cells |
| - Triggering condition 2 | Not Present |
| - Reporting Range Constant | 5dB |
| - Cells forbidden to affect Reporting range | Not Present |
| - W | 1.0 |
| - Hysteresis | 0.0 |
| - Threshold Used Frequency | Not Present |
| - Reporting deactivation threshold | Not Present |
| - Replacement activation threshold | Not Present |
| - Time to trigger | 640 |
| - Amount of reporting | Not Present |
| - Reporting interval | Not Present |
| - Reporting cell status | |
| - CHOICE reported cell | Report cell within active set and/or monitored set cells on used frequency |
| - Maximum number of reported cells | 3 |
| - Intra-frequency event identity | 1c |
| - Triggering condition 1 | Not Present |
| - Triggering condition 2 | Not Present |
| - Reporting Range Constant | Not Present |
| - Cells forbidden to affect Reporting range | Not Present |
| - W | Not Present |

| | | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> - Hysteresis - Threshold Used Frequency - Reporting deactivation threshold - Replacement activation threshold - Time to trigger - Amount of reporting - Reporting interval - Reporting cell status - CHOICE reported cell | | <p>0.0 Not Present Not Present 3 640 4 4000</p> <p>Report cell within active set and/or monitored set cells on used frequency 3</p> |
| <p>- Inter-frequency measurement system information</p> <ul style="list-style-type: none"> - Inter-frequency cell info list - CHOICE Inter-frequency cell removal <ul style="list-style-type: none"> - New inter-frequency cells - Inter frequency cell id - Frequency info - CHOICE mode - UARFCN uplink(Nu) <ul style="list-style-type: none"> - UARFCN downlink(Nd) - Cell info - Cell individual offset <ul style="list-style-type: none"> - Reference time difference to cell - Read SFN indicator - CHOICE mode - Primary CPICH info - Primary scrambling code <ul style="list-style-type: none"> - Primary CPICH Tx power - TX Diversity Indicator - Cell Selection and Re-selection Info <ul style="list-style-type: none"> - Inter frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info <ul style="list-style-type: none"> - Inter frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info <ul style="list-style-type: none"> - Cell for measurement | <p>A1, A2</p> | <p>Not present (This IE shall be ignored by the UE for SIB11)</p> <p>4</p> <p>FDD Not present Absence of this IE is equivalent to apply the default duplex distance defined for the operating frequency according to 25.101 Reference to table 6.1.2 for Cell 4</p> <p>Not present Absence of this IE is equivalent to default value 0dB Not present FALSE FDD</p> <p>Refer to clause titled "Default settings for cell No.4 (FDD)" in clause 6.1.4</p> <p>Not present FALSE Not present (same values as for serving cell applies)</p> <p>5 Not Present Absence of this IE is equivalent to value of the previous "frequency info" in the list. Same content as specified for Inter-frequency cell id=4 with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.5 (FDD)" in clause 6.1.4</p> <p>6 Not Present Absence of this IE is equivalent to value of the previous "frequency info" in the list. Same content as specified for Inter-frequency cell id=4 with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.6 (FDD)" in clause 6.1.4</p> <p>Not present</p> |
| <p>- Inter-RAT measurement system information</p> | <p>A1</p> | <p>Not Present</p> |
| <p><u>- Inter-RAT measurement system information</u></p> <p><u>- Inter-RAT cell info list</u></p> <p><u>- CHOICE <i>Inter-RAT cell removal</i></u></p> <p><u>- New inter-RAT cells</u></p> <p><u>- Inter-RAT cell id</u></p> <p><u>- CHOICE <i>Radio Access Technology</i></u></p> <p><u>- GSM</u></p> <p><u>- Cell individual offset</u></p> <p><u>- Cell selection and re-selection info</u></p> <p><u>- BSIC</u></p> | <p>A2</p> | <p>Not Present (This IE shall be ignored by the UE for SIB11)</p> <p>9 GSM</p> <p>0 Not Present</p> |

| | | |
|-----------------------------------------------------------------|------------------------|-------------------------------------------------------|
| - Base transceiver Station Identity Code (BSIC) | | Reference to table 6.1.10 for Cell 9 |
| - Band indicator | | According to PICS/PIXIT |
| - BCCH ARFCN | | Reference to table 6.1.10 for Cell 9 |
| - Inter-RAT cell id | | 10 |
| - CHOICE Radio Access Technology | | GSM |
| - GSM | | 0 |
| - Cell individual offset | | Not Present |
| - Cell selection and re-selection info | | |
| - BSIC | | |
| - Base transceiver Station Identity Code (BSIC) | | Reference to table 6.1.10 for Cell 10 |
| - Band indicator | | According to PICS/PIXITs |
| - BCCH ARFCN | | Reference to table 6.1.10 for Cell 10 |
| - Cell for measurement | | Not present |
| - Traffic volume measurement system information | A1, A2 | Not Present |

| Condition | Explanation |
|---------------------------|----------------------------------------------------|
| A1 | FDD cell environment |
| A2 | FDD/GSM inter-RAT cell environment |

Contents of System Information Block type 11 (3.84 Mcps and 1.28 Mcps TDD)

| | |
|---------------------------------------------------------|---------------------------------------------------------|
| - SIB 12 Indicator | TRUE |
| - FACH measurement occasion info | Not Present |
| - Measurement control system information | |
| - Use of HCS | Not used |
| - Cell selection and reselection quality measureCell | (no data) |
| - Intra-frequency measurement system information | |
| - Intra-frequency measurement identity | Not Present |
| - Intra-frequency cell info list | Absence of this IE is equivalent to default value 1 |
| - CHOICE intra-frequency cell removal | Not present |
| - New intra-frequency cells | (This IE shall be ignored by the UE for SIB11) |
| - Intra-frequency cell id | 1 |
| - Cell info | |
| - Cell individual offset | Not present |
| - Reference time difference to cell | Absence of this IE is equivalent to default value 0dB |
| - Read SFN Indicator | Not Present |
| - CHOICE mode | FALSE |
| - Primary CCPCH info | TDD |
| - Cell parameters ID | Reference clause 6.1 Default settings for cell |
| - Primary CCPCH TX power | Not Present |
| - Timeslot list | Not Present |
| - CHOICE TDD option | |
| - 3.84 Mcps TDD | |
| - Timeslot number | Not Present |
| - Burst type | Not Present |
| - 1.28 Mcps TDD | |
| - Timeslot number | Not Present |
| - Cell Selection and Re-selection info | Not Present |
| - Cell for measurement | (The IE shall be absent as this is the serving cell) |
| - Intra-frequency measurement quantity | Not Present |
| - Filter coefficient | Not present |
| - CHOICE mode | Absence of this IE is equivalent to the default value 0 |
| - Measurement quantity list | TDD |
| - Measurement quantity | |
| - Intra-frequency reporting quantity for RACH Reporting | P-CCPCH RSCP |
| | Not Present |

| | |
|--------------------------------------------------------|------------------------------------------------------------------------|
| - Maximum number of reported cells on RACH | Not Present |
| - Reporting information for state CELL_DCH | |
| - Intra-frequency reporting quantity | |
| - Reporting quantities for active set cells | |
| - Cell synchronisation information reporting indicator | TRUE |
| - Cell identity reporting indicator | TRUE |
| - CHOICE mode | TDD |
| - Timeslot ISCP reporting indicator | FALSE |
| - Proposed TSGN reporting required | FALSE |
| - P-CCPCH RSCP reporting indicator | TRUE |
| - Pathloss reporting indicator | FALSE |
| - Reporting quantities for monitored set cells | |
| - Cell synchronisation information reporting indicator | FALSE |
| - Cell identity reporting indicator | TRUE |
| - CHOICE mode | TDD |
| - Timeslot ISCP reporting indicator | FALSE |
| - Proposed TSGN reporting required | FALSE |
| - P-CCPCH RSCP reporting indicator | TRUE |
| - Pathloss reporting indicator | FALSE |
| - Reporting quantities for detected set cells | Not Present |
| - Measurement reporting mode | |
| - Measurement Report Transfer Mode | Acknowledged mode RLC |
| - Periodical Reporting / Event Trigger Reporting Mode | Event trigger |
| -CHOICE report criteria | |
| - Intra-frequency measurement reporting criteria | |
| - Parameters required for each event | |
| - Intra-frequency event identity | 1g |
| - Triggering condition1 | Not Present |
| - Triggering condition2 | Not Present |
| - Reporting Range | Not Present |
| - cells forbidden to affect reporting range | Not Present |
| - W(optional in case of 1a,1b) | Not Present |
| - Hysteresis | 0.0 |
| - Threshold used frequency | Not Present |
| - Reporting deactivation threshold | 3 |
| - Replacement activation threshold | Not Present |
| - Time to trigger | 640 |
| - Amount of reporting | 4 |
| - Reporting interval | 4000 |
| - Reporting cell status | |
| - CHOICE reported cells | Report cell within active set and/or monitored cells on used frequency |
| - Maximum number of reported cells | 3 |
| - Inter-frequency measurement system information | Not Present |
| - Inter-RAT measurement system information | Not Present |
| - Traffic volume measurement system information | Not Present |

Contents of System Information Block type 12 in connected mode (FDD)

This is the default message content of SIB 12 for cell 1.

See sub-clause 6.1.4 for the difference in message contents of System Information Block type 12 (FDD) for cell 2 to 8.

| | |
|--------------------------------------------------|-------------|
| - FACH measurement occasion info | Not Present |
| - Measurement control system information | |
| - Use of HCS | Not used |
| - Cell selection and reselection quality measure | CPICH RSCP |
| - Intra-frequency measurement system information | Not Present |
| - Inter-frequency measurement system information | Not Present |

| | |
|-------------------------------------------------|-------------|
| - Inter-RAT measurement system information | Not Present |
| - Traffic volume measurement system information | Not Present |

<End of modified section>

<Start of next modified section>

6.1.4 Default parameters for 1 to 8 cell environments

Default settings for cell No.1 (FDD):

| | |
|------------------------------|--------------------------------------------|
| Downlink input level | Reference clause 6.10 Parameter Set |
| Uplink output power | Minimum supported by the UE's power class. |
| PCCPCH/PCPICH carrier number | Reference clause 6.10 Parameter Set |
| Cell Channel Description | |
| - Primary CPICH info | |
| - Primary scrambling code | 100 |

Contents of System Information Block type 11 for cell No.1 (FDD)

See sub-clause 6.1.0b for contents of System Information Block type 11 (FDD) for cell 1.

Contents of System Information Block type 12 in connected mode for cell No.1 (FDD)

See sub-clause 6.1.0b for contents of System Information Block type 12 (FDD) for cell 1.

Default settings for cell No.1 (TDD):

| | |
|------------------------------|--------------------------------------------|
| Downlink input level | Reference clause 6.10 Parameter Set |
| Uplink output power | Minimum supported by the UE's power class. |
| PCCPCH/PCPICH carrier number | Reference clause 6.10 Parameter Set |
| Cell Channel Description | |
| - Primary CCPCH info | |
| - Cell parameters ID | 0 |

Cell No.2

The contents of SYSTEM INFORMATION BLOCK TYPE 1 to 16 messages for cell No.2 are identical to those of cell No.1 with the following exceptions:

| | |
|---------------|-------------------------------------|
| Cell identity | 0000 0000 0000 0000 0000 0000 0010B |
| URA identity | 0000 0000 0000 0001B |

Default settings for cell No.2 (FDD):

| | |
|------------------------------|--------------------------------------------|
| Downlink input level | Reference clause 6.10 Parameter Set |
| Uplink output power | Minimum supported by the UE's power class. |
| PCCPCH/PCPICH carrier number | Reference clause 6.10 Parameter Set |
| Cell Channel Description | |
| - Primary CPICH info | |
| - Primary scrambling code | 150 |

Contents of System Information Block type 11 for cell No.2 (FDD)

| | | |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>- Intra-frequency measurement system information</p> <p>....</p> <ul style="list-style-type: none"> - New intra-frequency cells - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info | <p>A1, A2</p> | <p>2</p> <p>Same content as specified for Intra-frequency cell id=1 (serving cell) in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.2 (FDD)" in clause 6.1.4</p> <p>1</p> <p>Same content as specified for Intra-frequency cell id=2 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.1 (FDD)" in clause 6.1.4</p> <p>3</p> <p>Same content as specified for Intra-frequency cell id=3 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> |
| <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <p>.....</p> | <p>A2</p> | <p>7</p> <p>Same content as specified for Intra-frequency cell id=7 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>8</p> <p>Same content as specified for Intra-frequency cell id=8 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> |
| <p>- Inter-frequency measurement system information</p> <p>.....</p> <ul style="list-style-type: none"> - New inter-frequency cells - Inter frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info <ul style="list-style-type: none"> - Inter frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info <ul style="list-style-type: none"> - Inter frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info <p>.....</p> | <p>A1, A2</p> | <p>4</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clasue 6.1.0b</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clasue 6.1.0b</p> <p>5</p> <p>Same content as specified for Inter-frequency cell id=5 in SIB11 for Cell 1 in sub-clasue 6.1.0b</p> <p>Same content as specified for Inter-frequency cell id=5 in SIB11 for Cell 1 in sub-clasue 6.1.0b</p> <p>6</p> <p>Same content as specified for Inter-frequency cell id=6 in SIB11 for Cell 1 in sub-clasue 6.1.0b</p> <p>Same content as specified for Inter-frequency cell id=6 in SIB11 for Cell 1 in sub-clasue 6.1.0b</p> |
| <p>- Inter-RAT cell info list</p> <p>....</p> <ul style="list-style-type: none"> - New inter-RAT cells - Inter-RAT cell id - CHOICE Radio Access Technology - GSM <ul style="list-style-type: none"> - Inter-RAT cell id - CHOICE Radio Access Technology | <p>A2</p> | <p>9</p> <p>GSM</p> <p>Same content as specified for inter-RAT cell id=9 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>10</p> <p>GSM</p> |

| | |
|---------------|------------------------------------------------------------------------------------------------|
| - GSM | Same content as specified for inter-RAT cell id=10 in SIB11 for Cell 1 in sub-clause 6.1.0b |
|---------------|------------------------------------------------------------------------------------------------|

| <u>Condition</u> | <u>Explanation</u> |
|------------------|------------------------------------|
| A1 | FDD cell environment |
| A2 | FDD/GSM inter-RAT cell environment |

Default settings for cell No.2 (TDD):

| | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Downlink input level Uplink output power PCCPCH/PCPICH carrier number Cell Channel Description - Primary CCPCH info - Cell parameters ID | Reference clause 6.10 Parameter Set Minimum supported by the UE's power class. Reference clause 6.10 Parameter Set 4 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|

Cell No.3

The contents of SYSTEM INFORMATION BLOCK TYPE 1 to 16 messages for cell No.3 are identical to those of cell No.1 with the following exceptions:

| | |
|---------------|-------------------------------------|
| Cell identity | 0000 0000 0000 0000 0000 0000 0011B |
| URA identity | 0000 0000 0000 0010B |

Default settings for cell No.3 (FDD):

| | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Downlink input level Uplink output power PCCPCH/PCPICH carrier number Cell Channel Description - Primary CPICH info - Primary scrambling code | Reference clause 6.10 Parameter Set Minimum supported by the UE's power class. Reference clause 6.10 Parameter Set 200 |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|

Contents of System Information Block type 11 for cell No.3 (FDD)

| | | |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>- Intra-frequency measurement system information</p> <p>....</p> <ul style="list-style-type: none"> - New intra-frequency cells - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info | <p>A1, A2</p> | <p>3 Same content as specified for Intra-frequency cell id=1 (serving cell) in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.3 (FDD)" in clause 6.1.4</p> <p>1 Same content as specified for Intra-frequency cell id=2 (neighbour cell) in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.1 (FDD)" in clause 6.1.4</p> <p>2 Same content as specified for Intra-frequency cell id=2 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> |
| <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <p>.....</p> | <p>A1</p> | <p>7 Same content as specified for Intra-frequency cell id=7 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>8 Same content as specified for Intra-frequency cell id=8 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> |
| <p>- Inter-frequency measurement system information</p> <p>.....</p> <ul style="list-style-type: none"> - New inter-frequency cells - Inter frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info <ul style="list-style-type: none"> - Inter frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info <ul style="list-style-type: none"> - Inter frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info <p>.....</p> | <p>A1, A2</p> | <p>4 Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>5 Not Present Absence of this IE is equivalent to value of the previous "frequency info" in the list. Same content as specified for Inter-frequency cell id=5 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>6 Not Present Absence of this IE is equivalent to value of the previous "frequency info" in the list. Same content as specified for Inter-frequency cell id=6 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> |
| <p>- Inter-RAT cell info list</p> <p>....</p> <ul style="list-style-type: none"> - New inter-RAT cells - Inter-RAT cell id - CHOICE Radio Access Technology - GSM <ul style="list-style-type: none"> - Inter-RAT cell id - CHOICE Radio Access Technology | <p>A2</p> | <p>9 GSM Same content as specified for inter-RAT cell id=9 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>10 GSM</p> |

| | |
|-----------------------|-------------------------------------------------------------------------------------------------------------|
| - GSM | Same content as specified for inter-RAT cell id=10 in SIB11 for Cell 1 in sub-clause 6.1.0b |
|-----------------------|-------------------------------------------------------------------------------------------------------------|

| Condition | Explanation |
|---------------------------|----------------------------------------------------|
| A1 | FDD cell environment |
| A2 | FDD/GSM inter-RAT cell environment |

Default settings for cell No.3 (TDD):

| | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Downlink input level Uplink output power PCCPCH/PCPICH carrier number Cell Channel Description - Primary CCPCH info - Cell parameters ID | Reference clause 6.10 Parameter Set Minimum supported by the UE's power class. Reference clause 6.10 Parameter Set 8 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|

Cell No.4

The contents of SYSTEM INFORMATION BLOCK TYPE 1 to 16 messages for cell No.4 are identical to those of cell No.1 with the following exceptions:

| | |
|---------------|-------------------------------------|
| Cell identity | 0000 0000 0000 0000 0000 0000 0100B |
| URA identity | 0000 0000 0000 0010B |

Default settings for cell No.4 (FDD):

| | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Downlink input level Uplink output power PCCPCH/PCPICH carrier number Cell Channel Description - Primary CPICH info - Primary scrambling code | Reference clause 6.10 Parameter Set Minimum supported by the UE's power class. Reference clause 6.10 Parameter Set 250 |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|

Contents of System Information Block type 11 for cell No.4 (FDD)

| | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>- Intra-frequency measurement system information</p> <p>....</p> <ul style="list-style-type: none"> - New intra-frequency cells - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <p>.....</p> | <p>A1, A2</p> | <p>4</p> <p>Same content as specified for Intra-frequency cell id=1 (serving cell) in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.4 (FDD)" in clause 6.1.4</p> <p>5</p> <p>Same content as specified for Intra-frequency cell id=2 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.5 (FDD)" in clause 6.1.4</p> <p>6</p> <p>Same content as specified for Intra-frequency cell id=2 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.6 (FDD)" in clause 6.1.4</p> |
| <p>- Inter-frequency measurement system information</p> <p>.....</p> <ul style="list-style-type: none"> - New inter-frequency cells - Inter-frequency cell id - Frequency info - UARFCN uplink(Nu) <ul style="list-style-type: none"> - UARFCN downlink(Nd) - Cell info <ul style="list-style-type: none"> - Inter-frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info <ul style="list-style-type: none"> - Inter-frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info | <p>A1, A2</p> | <p>1</p> <p>Not present</p> <p>Absence of this IE is equivalent to apply the default duplex distance defined for the operating frequency according to 25.101</p> <p>Reference to table 6.1.2 for Cell 1</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.1 (FDD)" in clause 6.1.4</p> <p>2</p> <p>Not Present</p> <p>Absence of this IE is equivalent to value of the previous "frequency info" in the list.</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.2 (FDD)" in clause 6.1.4</p> <p>3</p> <p>Not Present</p> <p>Absence of this IE is equivalent to value of the previous "frequency info" in the list.</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.3 (FDD)" in clause 6.1.4</p> |
| <ul style="list-style-type: none"> - Inter-frequency cell id - Frequency info | <p>A1</p> | <p>7</p> <p>Not Present</p> <p>Absence of this IE is equivalent to value of the previous "frequency info" in the list.</p> |

| | | |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> - Cell info - Inter-frequency cell id - Frequency info - Cell info | | <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.7 (FDD)" in clause 6.1.4</p> <p>8</p> <p>Not Present</p> <p>Absence of this IE is equivalent to value of the previous "frequency info" in the list.</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.8 (FDD)" in clause 6.1.4</p> |
| <p><u>- Inter-RAT cell info list</u></p> <p>----</p> <ul style="list-style-type: none"> - <u>New inter-RAT cells</u> - <u>Inter-RAT cell id</u> - <u>CHOICE Radio Access Technology</u> - <u>GSM</u> - <u>Inter-RAT cell id</u> - <u>CHOICE Radio Access Technology</u> - <u>GSM</u> <p>----</p> | <p><u>A2</u></p> | <p><u>9</u></p> <p><u>GSM</u></p> <p><u>Same content as specified for inter-RAT cell id=9 in SIB11 for Cell 1 in sub-clause 6.1.0b</u></p> <p><u>10</u></p> <p><u>GSM</u></p> <p><u>Same content as specified for inter-RAT cell id=10 in SIB11 for Cell 1 in sub-clause 6.1.0b</u></p> |

| <u>Condition</u> | <u>Explanation</u> |
|------------------|-------------------------------------------|
| <u>A1</u> | <u>FDD cell environment</u> |
| <u>A2</u> | <u>FDD/GSM inter-RAT cell environment</u> |

Default settings for cell No.4 (TDD):

| | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| Downlink input level Uplink output power PCCPCH/PCPICH carrier number Cell Channel Description <ul style="list-style-type: none"> - Primary CCPCH info - Cell parameters ID | Reference clause 6.10 Parameter Set Minimum supported by the UE's power class. Reference clause 6.10 Parameter Set 12 |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|

Cell No.5

The contents of SYSTEM INFORMATION BLOCK TYPE 1 to 16 messages for cell No.5 are identical to those of cell No.4 with the following exceptions:

| | |
|-------------------------------|-------------------------------------------------------------|
| Cell identity URA identity | 0000 0000 0000 0000 0000 0000 0101B 0000 0000 0000 0011B |
|-------------------------------|-------------------------------------------------------------|

Default settings for cell No.5 (FDD):

| | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Downlink input level Uplink output power PCCPCH/PCPICH carrier number Cell Channel Description <ul style="list-style-type: none"> - Primary CPICH info - Primary scrambling code | Reference clause 6.10 Parameter Set Minimum supported by the UE's power class. Reference clause 6.10 Parameter Set 300 |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|

Contents of System Information Block type 11 for cell No.5 (FDD)

| | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>- Intra-frequency measurement system information</p> <p>....</p> <ul style="list-style-type: none"> - New intra-frequency cells - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <p>.....</p> | <p>A1, A2</p> | <p>5</p> <p>Same content as specified for Intra-frequency cell id=1 (serving cell) in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.5 (FDD)" in clause 6.1.4</p> <p>4</p> <p>Same content as specified for Intra-frequency cell id=2 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.4 (FDD)" in clause 6.1.4</p> <p>6</p> <p>Same content as specified for Intra-frequency cell id=2 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.6 (FDD)" in clause 6.1.4</p> |
| <p>- Inter-frequency measurement system information</p> <p>.....</p> <ul style="list-style-type: none"> - New inter-frequency cells - Inter-frequency cell id - Frequency info - UARFCN uplink(Nu) <ul style="list-style-type: none"> - UARFCN downlink(Nd) - Cell info <ul style="list-style-type: none"> - Inter-frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info <ul style="list-style-type: none"> - Inter-frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info | <p>A1, A2</p> | <p>1</p> <p>Not present</p> <p>Absence of this IE is equivalent to apply the default duplex distance defined for the operating frequency according to 25.101</p> <p>Reference to table 6.1.2 for Cell 1</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.1 (FDD)" in clause 6.1.4</p> <p>2</p> <p>Not Present</p> <p>Absence of this IE is equivalent to value of the previous "frequency info" in the list.</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.2 (FDD)" in clause 6.1.4</p> <p>3</p> <p>Not Present</p> <p>Absence of this IE is equivalent to value of the previous "frequency info" in the list.</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.3 (FDD)" in clause 6.1.4</p> |
| <ul style="list-style-type: none"> - Inter-frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info | <p>A1</p> | <p>7</p> <p>Not Present</p> <p>Absence of this IE is equivalent to value of the previous "frequency info" in the list.</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.7 (FDD)" in clause 6.1.4</p> |

| | | |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> - Inter-frequency cell id - Frequency info - Cell info | | <p>8</p> <p>Not Present</p> <p>Absence of this IE is equivalent to value of the previous "frequency info" in the list.</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.8 (FDD)" in clause 6.1.4</p> |
| <p>.....</p> <p><u>- Inter-RAT cell info list</u></p> <p>....</p> <ul style="list-style-type: none"> - <u>New inter-RAT cells</u> - <u>Inter-RAT cell id</u> - <u>CHOICE <i>Radio Access Technology</i></u> - <u>GSM</u> - <u>Inter-RAT cell id</u> - <u>CHOICE <i>Radio Access Technology</i></u> - <u>GSM</u> <p>.....</p> | <p><u>A2</u></p> | <p>9</p> <p><u>GSM</u></p> <p><u>Same content as specified for inter-RAT cell id=9 in SIB11 for Cell 1 in sub-clause 6.1.0b</u></p> <p>10</p> <p><u>GSM</u></p> <p><u>Same content as specified for inter-RAT cell id=10 in SIB11 for Cell 1 in sub-clause 6.1.0b</u></p> |

| <u>Condition</u> | <u>Explanation</u> |
|------------------|------------------------------------|
| A1 | FDD cell environment |
| A2 | FDD/GSM inter-RAT cell environment |

Default settings for cell No.5 (TDD):

| | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Downlink input level Uplink output power PCCPCH/PCPICH carrier number Cell Channel Description <ul style="list-style-type: none"> - Primary CCPCH info - Cell parameters ID | Reference clause 6.10 Parameter Set Minimum supported by the UE's power class. Reference clause 6.10 Parameter Set 114 |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|

Cell No.6

The contents of SYSTEM INFORMATION BLOCK TYPE 1 to 16 messages for cell No.6 are identical to those of cell No.4 with the following exceptions:

| | |
|---------------|-------------------------------------|
| Cell identity | 0000 0000 0000 0000 0000 0000 0110B |
| URA identity | 0000 0000 0000 0011B |

Default settings for cell No.6 (FDD):

| | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Downlink input level Uplink output power PCCPCH/PCPICH carrier number Cell Channel Description <ul style="list-style-type: none"> - Primary CPICH info - Primary scrambling code | Reference clause 6.10 Parameter Set Minimum supported by the UE's power class. Reference clause 6.10 Parameter Set 350 |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|

Contents of System Information Block type 11 for cell No.6 (FDD)

| | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>- Intra-frequency measurement system information</p> <p>.....</p> <ul style="list-style-type: none"> - New intra-frequency cells - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <p>.....</p> | <p>A1, A2</p> | <p>6</p> <p>Same content as specified for Intra-frequency cell id=1 (serving cell) in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.6 (FDD)" in clause 6.1.4</p> <p>4</p> <p>Same content as specified for Intra-frequency cell id=2 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.4 (FDD)" in clause 6.1.4</p> <p>5</p> <p>Same content as specified for Intra-frequency cell id=2 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.5 (FDD)" in clause 6.1.4</p> |
| <p>- Inter-frequency measurement system information</p> <p>.....</p> <ul style="list-style-type: none"> - New inter-frequency cells - Inter-frequency cell id - Frequency info - UARFCN uplink(Nu) <ul style="list-style-type: none"> - UARFCN downlink(Nd) - Cell info <ul style="list-style-type: none"> - Inter-frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info <ul style="list-style-type: none"> - Inter-frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info | <p>A1, A2</p> | <p>1</p> <p>Not present</p> <p>Absence of this IE is equivalent to apply the default duplex distance defined for the operating frequency according to 25.101</p> <p>Reference to table 6.1.2 for Cell 1</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.1 (FDD)" in clause 6.1.4</p> <p>2</p> <p>Not Present</p> <p>Absence of this IE is equivalent to value of the previous "frequency info" in the list.</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.2 (FDD)" in clause 6.1.4</p> <p>3</p> <p>Not Present</p> <p>Absence of this IE is equivalent to value of the previous "frequency info" in the list.</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.3 (FDD)" in clause 6.1.4</p> |
| <ul style="list-style-type: none"> - Inter-frequency cell id - Frequency info | <p>A1</p> | <p>7</p> <p>Not Present</p> <p>Absence of this IE is equivalent to value of the previous "frequency info" in the list.</p> |

| | | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> - Cell info - Inter-frequency cell id - Frequency info - Cell info <p>.....</p> | | <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.7 (FDD)" in clause 6.1.4</p> <p>8</p> <p>Not Present</p> <p>Absence of this IE is equivalent to value of the previous "frequency info" in the list.</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.8 (FDD)" in clause 6.1.4</p> |
| <p><u>- Inter-RAT cell info list</u></p> <p>....</p> <ul style="list-style-type: none"> - <u>New inter-RAT cells</u> - <u>Inter-RAT cell id</u> - <u>CHOICE Radio Access Technology</u> - <u>GSM</u> <ul style="list-style-type: none"> - <u>Inter-RAT cell id</u> - <u>CHOICE Radio Access Technology</u> - <u>GSM</u> <p>....</p> | <p><u>A2</u></p> | <p><u>9</u></p> <p><u>GSM</u></p> <p><u>Same content as specified for inter-RAT cell id=9 in SIB11 for Cell 1 in sub-clause 6.1.0b</u></p> <p><u>10</u></p> <p><u>GSM</u></p> <p><u>Same content as specified for inter-RAT cell id=10 in SIB11 for Cell 1 in sub-clause 6.1.0b</u></p> |

| <u>Condition</u> | <u>Explanation</u> |
|------------------|-------------------------------------------|
| <u>A1</u> | <u>FDD cell environment</u> |
| <u>A2</u> | <u>FDD/GSM inter-RAT cell environment</u> |

Default settings for cell No.6 (TDD):

| | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Downlink input level Uplink output power PCCPCH/PCPICH carrier number Cell Channel Description <ul style="list-style-type: none"> - Primary CCPCH info - Cell parameters ID | Reference clause 6.10 Parameter Set Minimum supported by the UE's power class. Reference clause 6.10 Parameter Set 119 |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|

Cell No.7

The contents of SYSTEM INFORMATION BLOCK TYPE 1 to 16 messages for cell No.7 are identical to those of cell No.1 with the following exceptions:

| | |
|-------------------------------|-------------------------------------------------------------|
| Cell identity URA identity | 0000 0000 0000 0000 0000 0000 0111B 0000 0000 0000 0100B |
|-------------------------------|-------------------------------------------------------------|

Default settings for cell No.7 (FDD):

| | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Downlink input level Uplink output power PCCPCH/PCPICH carrier number Cell Channel Description <ul style="list-style-type: none"> - Primary CPICH info - Primary scrambling code | Reference clause 6.10 Parameter Set Minimum supported by the UE's power class. Reference clause 6.10 Parameter Set 400 |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|

Contents of System Information Block type 11 for cell No.7 (FDD)

| | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>- Intra-frequency measurement system information</p> <p>.....</p> <ul style="list-style-type: none"> - New intra-frequency cells - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <p>.....</p> <p>- Inter-frequency measurement system information</p> <p>.....</p> <ul style="list-style-type: none"> - New inter-frequency cells - Inter frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info <ul style="list-style-type: none"> - Inter frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info <ul style="list-style-type: none"> - Inter frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info <p>.....</p> | <p>7</p> <p>Same content as specified for Intra-frequency cell id=1 (serving cell) in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.7 (FDD)" in clause 6.1.4</p> <p>1</p> <p>Same content as specified for Intra-frequency cell id=2 (neighbour cell) in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.1 (FDD)" in clause 6.1.4</p> <p>2</p> <p>Same content as specified for Intra-frequency cell id=2 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>3</p> <p>Same content as specified for Intra-frequency cell id=3 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>8</p> <p>Same content as specified for Intra-frequency cell id=8 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>4</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>5</p> <p>Same content as specified for Inter-frequency cell id=5 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>Same content as specified for Inter-frequency cell id=5 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>6</p> <p>Same content as specified for Inter-frequency cell id=6 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>Same content as specified for Inter-frequency cell id=6 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Default settings for cell No.7 (TDD):

| | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Downlink input level</p> <p>Uplink output power</p> <p>PCCPCH/PCPICH carrier number</p> <p>Cell Channel Description</p> <ul style="list-style-type: none"> - Primary CCPCH info - Cell parameters ID | <p>Reference clause 6.10 Parameter Set</p> <p>Minimum supported by the UE's power class.</p> <p>Reference clause 6.10 Parameter Set</p> <p>123</p> |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|

Cell No.8

The contents of SYSTEM INFORMATION BLOCK TYPE 1 to 16 messages for cell No.8 are identical to those of cell No.1 with the following exceptions:

| | |
|---------------|-------------------------------------|
| Cell identity | 0000 0000 0000 0000 0000 0000 1000B |
| URA identity | 0000 0000 0000 0100B |

Default settings for cell No.8 (FDD):

| | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Downlink input level Uplink output power PCCPCH/PCPICH carrier number Cell Channel Description - Primary CPICH info - Primary scrambling code | Reference clause 6.10 Parameter Set Minimum supported by the UE's power class. Reference clause 6.10 Parameter Set 450 |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|

Contents of System Information Block type 11 for cell No.8 (FDD)

| | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| <p>- Intra-frequency measurement system information</p> <p>....</p> <ul style="list-style-type: none"> - New intra-frequency cells - Intra-frequency cell id - Cell info <p>8</p> <p>Same content as specified for Intra-frequency cell id=1 (serving cell) in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.8 (FDD)" in clause 6.1.4</p> <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <p>1</p> <p>Same content as specified for Intra-frequency cell id=2 (neighbour cell) in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.1 (FDD)" in clause 6.1.4</p> <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <p>2</p> <p>Same content as specified for Intra-frequency cell id=2 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <p>3</p> <p>Same content as specified for Intra-frequency cell id=3 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <p>7</p> <p>Same content as specified for Intra-frequency cell id=7 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>.....</p> <p>- Inter-frequency measurement system information</p> <p>.....</p> <ul style="list-style-type: none"> - New inter-frequency cells - Inter frequency cell id - Frequency info <p>4</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clasue 6.1.0b</p> <ul style="list-style-type: none"> - Cell info <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clasue 6.1.0b</p> <ul style="list-style-type: none"> - Inter frequency cell id - Frequency info <p>5</p> <p>Same content as specified for Inter-frequency cell id=5 in SIB11 for Cell 1 in sub-clasue 6.1.0b</p> <ul style="list-style-type: none"> - Cell info <p>Same content as specified for Inter-frequency cell id=5 in SIB11 for Cell 1 in sub-clasue 6.1.0b</p> <ul style="list-style-type: none"> - Inter frequency cell id - Frequency info <p>6</p> <p>Same content as specified for Inter-frequency cell id=6 in SIB11 for Cell 1 in sub-clasue 6.1.0b</p> <ul style="list-style-type: none"> - Cell info <p>Same content as specified for Inter-frequency cell id=6 in SIB11 for Cell 1 in sub-clasue 6.1.0b</p> <p>.....</p> | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|

Default settings for cell No.8 (TDD):

| | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Downlink input level Uplink output power PCCPCH/PCPICH carrier number Cell Channel Description - Primary CCPCH info - Cell parameters ID | Reference clause 6.10 Parameter Set Minimum supported by the UE's power class. Reference clause 6.10 Parameter Set 127 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|

[Cell No.9](#)

[Contents of System Information for cell No.9 \(GSM\)](#)

[See TS 51.010-1 \[31\], clause 10.1.2.](#)

[Default settings for cell No.9 \(GSM\):](#)

[See table 6.1.10](#)

[Cell No.10](#)

[Contents of System Information for cell No.10 \(GSM\)](#)

[See TS 51.010-1 \[31\], clause 10.1.2.](#)

[Default settings for cell No.10 \(GSM\):](#)

[See table 6.1.10](#)

6.1.5 Reference Radio Conditions for signalling test cases ~~only~~ (FDD)

The following transmission parameters shall be used for signalling test cases only unless otherwise stated in the description of the individual test case.

Table 6.1.3 are the default settings for a non-suitable cell which is configured and always present whereas Table 6.1.4 is for a cell that is switched off. Cells configured according to Table 6.1.3 are for test cases in which it is necessary to make a cell unsuitable, and then subsequently make it suitable. This could be achieved by switching the cell off and then reconfiguration as in Table 6.1.4, but this takes a lot of time to do.

Table 6.1.1: Default settings for a serving cell in a single cell environment

| Parameter | Unit | Cell 1 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--------------|
| Cell type | | Serving cell |
| UTRA RF Channel Number | | Channel 1 |
| Qqualmin | dB | -24 |
| Qrxlevmin | dBm | -81 |
| UE_TXPWR_MAX_RACH | dBm | 21 |
| CPICH Ec (see notes 1 and 2) | dBm/3.84 MHz | -60 |
| NOTE 1: The power level is specified in terms of CPICH_Ec instead of CPICH_RSCP as RSCP is a receiver measurement and only CPICH_Ec can be directly controlled by the SS. | | |
| NOTE 2: The cell fulfils TS 25.304, 5.2.3.1.2 and TS 25.133, 8.1.2.2.1. | | |

Table 6.1.2: Default settings for a serving cell and a suitable neighbour cell in a multi-cell environment

| Parameter | Unit | Cell 1 | Cell 2 | Cell 4 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--------------|-----------------------------------------|-----------------------------------------|
| Cell type | | Serving cell | Suitable neighbour intra-frequency cell | Suitable neighbour inter-frequency cell |
| UTRA RF Channel Number | | Channel 1 | Channel 1 | Channel 2 |
| Qqualmin | dB | -24 | -24 | |
| Qrxlevmin | dBm | -81 | -81 | |
| UE_TXPWR_MAX_RACH | dBm | 21 | 21 | |
| CPICH_Ec (see notes 1 and 2) | dBm/3.84 MHz | -60 | -70 | |
| NOTE 1: The power level is specified in terms of CPICH_Ec instead of CPICH_RSCP as RSCP is a receiver measurement and only CPICH_Ec can be directly controlled by the SS. | | | | |
| NOTE 2: Both cells fulfil TS 25.304, 5.2.3.1.2 and TS 25.133, 8.1.2.2.1. | | | | |

Table 6.1.3: Default settings for a non-suitable cell

| Parameter | Unit | Level |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-------|
| Qqualmin | dB | -24 |
| Qrxlevmin | dBm | -81 |
| UE_TXPWR_MAX_RACH | dBm | 21 |
| CPICH_Ec | dBm/3.84 MHz | -90 |
| NOTE 1: The power level is specified in terms of CPICH_Ec instead of CPICH_RSCP as RSCP is a receiver measurement and only CPICH_Ec can be directly controlled by the SS | | |
| NOTE 2: The cell is not suitable according to TS 25.304, 5.2.3.1.2 | | |

Table 6.1.4: Default settings for a non-suitable “Off” cell

| Parameter | Unit | Level |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--------|
| Qqualmin | dB | -24 |
| Qrxlevmin | dBm | -81 |
| UE_TXPWR_MAX_RACH | dBm | 21 |
| CPICH_Ec | dBm/3.84 MHz | ≤ -122 |
| NOTE 1: The power level is specified in terms of CPICH_Ec instead of CPICH_RSCP as RSCP is a receiver measurement and only CPICH_Ec can be directly controlled by the SS. | | |
| NOTE 2: The cell is not suitable according to TS 25.304, 5.2.3.1.2. | | |

Table 6.1.5: Default power levels of physical channels relative to CPICH_Ec

| Parameter | Unit | Level Idle mode (NOTE) | Level Connected mode |
|--------------------------------------------------------------------------------------|------|------------------------|----------------------|
| DPCH_Ec | dB | (NOTE) | -5 |
| PCCPCH_Ec | dB | | -2 |
| SCCPCH_Ec | dB | | -2 |
| AICH_Ec | dB | | -5 |
| SCH_Ec | dB | | -2 |
| PICH_Ec | dB | | -5 |
| NOTE: This shall be less than -122 dBm to ensure the channel is considered as “off”. | | | |

6.1.6 Reference Radio Conditions for signalling test cases ~~only~~ (TDD)

The following transmission parameters shall be used for signalling test cases only unless otherwise stated in the description of the individual test case.

Table 6.1.6: Default settings for a serving cell in a single cell environment

| Parameter | Unit | Cell 1 |
|------------------------------------------------------------|------|--------------|
| Cell type | | Serving cell |
| UTRA RF Channel Number | | Channel 1 |
| Qrxlevmin | dBm | -81 |
| UE_TXPWR_MAX_RACH | dBm | 21 |
| PCCPCH RSCP | dBm | -60 |
| NOTE: The cell fulfils TS 25.304, 5.2.3.1.2 and TS 25.123. | | |

Table 6.1.7: Default settings for a serving cell and a suitable neighbour cell in a multi-cell environment

| Parameter | Unit | Cell 1 | Cell 2 |
|-------------------------------------------------------------|------|--------------|-------------------------|
| Cell type | | Serving cell | Suitable neighbour cell |
| UTRA RF Channel Number | | Channel 1 | Channel 1 |
| Qrxlevmin | dBm | -81 | -81 |
| UE_TXPWR_MAX_RACH | dBm | 21 | 21 |
| PCCPCH RSCP | dBm | -60 | -70 |
| NOTE: Both cells fulfil TS 25.304, 5.2.3.1.2 and TS 25.123. | | | |

Table 6.1.8: Default settings for a non-suitable cell

| Parameter | Unit | Level |
|------------------------------------------------------------------|------|-------|
| Qrxlevmin | dBm | -81 |
| UE_TXPWR_MAX_RACH | dBm | 21 |
| PCCPCH RSCP | dBm | -91 |
| NOTE: The cell is not suitable according to TS 25.304, 5.2.3.1.2 | | |

Table 6.1.9: Default settings for a non-suitable "Off" cell

| Parameter | Unit | Level |
|-------------------------------------------------------------------|------|--------|
| Qrxlevmin | dBm | -81 |
| UE_TXPWR_MAX_RACH | dBm | 21 |
| PCCPCH RSCP | dBm | ≤ -110 |
| NOTE: The cell is not suitable according to TS 25.304, 5.2.3.1.2. | | |

6.1.7 Reference Radio Conditions for signalling test cases (GSM)

The following transmission parameters shall be used for signalling test cases only unless otherwise stated in the description of the individual test case.

Table 6.1.10: Default settings for a serving cell and a suitable neighbour cell in a multi-cell environment

| <u>Parameter</u> | <u>Unit</u> | <u>Cell 9</u> | <u>Cell 10</u> |
|----------------------------------------------------------------------------|-------------|-----------------------------------------------------------------------------------|--------------------------------|
| <u>Cell type</u> | | <u>Serving cell</u> | <u>Suitable neighbour cell</u> |
| <u>GSM RF Channel Number</u> | | <u>Channel 1</u> | <u>Channel 2</u> |
| <u>Base transceiver Station Identity Code (BSIC)</u> | | <u>BSIC1</u> | <u>BSIC2</u> |
| <u>Qrxlevmin</u> | <u>dBm</u> | <u>-81</u> | <u>-81</u> |
| <u>MS_TXPWR_MAX_CCH</u> | <u>dBm</u> | <u>According to maximum output power for the power class of the MS under test</u> | |
| <u>RF level</u> | <u>dBm</u> | <u>-48</u> | <u>-54</u> |
| <u>NOTE: Both cells fulfil TS 25.304, 5.2.6.1.4 and TS 25.133, 8.1.2.5</u> | | | |

Table 6.1.11: Default settings for a non-suitable cell

| <u>Parameter</u> | <u>Unit</u> | <u>Level</u> |
|---------------------------------------------------------------------------|-------------|-----------------------------------------------------------------------------------|
| <u>Qrxlevmin</u> | <u>dBm</u> | <u>-81</u> |
| <u>MS_TXPWR_MAX_CCH</u> | <u>dBm</u> | <u>According to maximum output power for the power class of the MS under test</u> |
| <u>RF level</u> | <u>dBm</u> | <u>-90</u> |
| <u>NOTE 1: The cell is not suitable according to TS 25.304, 5.2.6.1.4</u> | | |

<End of modified section>

3GPP TSG- T1 Meeting #18
 San Antonio, US, 10th – 14th February 2003

Tdoc # T1-030050

3GPP TSG- T1 SIG Meeting #26
 San Antonio, US, 10th – 14th February 2003

Tdoc # T1S030074

| | |
|-----------------------------------------|---------------------------------|
| CR-Form-v7 | |
| CHANGE REQUEST | |
| ⌘ 34.108 CR 185 ⌘ rev - ⌘ | Current version: 4.5.0 ⌘ |

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

Proposed change affects: UICC apps ME Radio Access Network Core Network

| | | | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Title: | ⌘ CR to 34.108 R4; Corrections to SIB1 to align with default values for LAC and RAC in 51.010-1. | | |
| Source: | ⌘ Ericsson | | |
| Work item code: | ⌘ TEI Date: ⌘ 22/01/2003 | | |
| Category: | <table style="width: 100%; border: none;"> <tr> <td style="width: 50%; vertical-align: top;"> ⌘ A Use <u>one</u> of the following categories: F (correction) A (corresponds to a correction in an earlier release) B (addition of feature), C (functional modification of feature) D (editorial modification) Detailed explanations of the above categories can be found in 3GPP TR 21.900. </td> <td style="width: 50%; vertical-align: top;"> Release: ⌘ Rel-4 Use <u>one</u> of the following releases: 2 (GSM Phase 2) R96 (Release 1996) R97 (Release 1997) R98 (Release 1998) R99 (Release 1999) Rel-4 (Release 4) Rel-5 (Release 5) Rel-6 (Release 6) </td> </tr> </table> | ⌘ A Use <u>one</u> of the following categories: F (correction) A (corresponds to a correction in an earlier release) B (addition of feature), C (functional modification of feature) D (editorial modification) Detailed explanations of the above categories can be found in 3GPP TR 21.900 . | Release: ⌘ Rel-4 Use <u>one</u> of the following releases: 2 (GSM Phase 2) R96 (Release 1996) R97 (Release 1997) R98 (Release 1998) R99 (Release 1999) Rel-4 (Release 4) Rel-5 (Release 5) Rel-6 (Release 6) |
| ⌘ A Use <u>one</u> of the following categories: F (correction) A (corresponds to a correction in an earlier release) B (addition of feature), C (functional modification of feature) D (editorial modification) Detailed explanations of the above categories can be found in 3GPP TR 21.900 . | Release: ⌘ Rel-4 Use <u>one</u> of the following releases: 2 (GSM Phase 2) R96 (Release 1996) R97 (Release 1997) R98 (Release 1998) R99 (Release 1999) Rel-4 (Release 4) Rel-5 (Release 5) Rel-6 (Release 6) | | |

| | |
|--------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Reason for change: | ⌘ Default values for LAC and RAC in SIB1 are not aligned with default values for LAC and RAC in 51.010-1 (reference 51.010-1 26.1.1 and 40.1.1). Having different default values will cause that the default values will not possible to use for the inter-RAT test cases. |
| Summary of change: | ⌘ SIB1: <ol style="list-style-type: none"> 1. For CN common GSM-MAP NAS system information and IE "GSM-MAP NAS system information" changed LAC from "0080H" to "0001H" 2. For CN domain specific GSM-MAP NAS system information and IE "GSM-MAP NAS system information" changed RAC from "00" to "05", i.e. IE "GSM-MAP NAS system information" is changed from "0000H" to "0500H" |
| Consequences if not approved: | ⌘ Default values for LAC and RAC in 34.108 not aligned with default values in 51.010-1 causing unnecessary complexity to inter-RAT test cases. |

| | | | | | |
|-------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---|-------------------------------------|--------------------------|
| Clauses affected: | ⌘ 6.1.0b | | | | |
| Other specs | ⌘ <table style="display: inline-table; border: 1px solid black; text-align: center; width: 30px; height: 20px;"> <tr><td>Y</td><td>N</td></tr> <tr><td><input checked="" type="checkbox"/></td><td><input type="checkbox"/></td></tr> </table> Other core specifications ⌘ | Y | N | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Y | N | | | | |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | | | | |

affected:

| | |
|-------------------------------------|---------------------|
| <input checked="" type="checkbox"/> | Test specifications |
| <input checked="" type="checkbox"/> | O&M Specifications |

Other comments: ☹

How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>.

Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ☹ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

6.1.0b Default System Information Block Messages

Contents of System Information Block type 1 (supported PLMN type is GSM-MAP)

| | |
|---------------------------------------------------|------------------------------------------------|
| - CN common GSM-MAP NAS system information | |
| - GSM-MAP NAS system information | 00 0180H |
| - CN domain system information | |
| - CN domain identity | PS |
| - CHOICE CN Type | GSM-MAP |
| - CN domain specific NAS system information | |
| - GSM-MAP NAS system information | 0905 00H |
| - CN domain specific DRX cycle length coefficient | 7 |
| - CN domain identity | CS |
| - CHOICE CN Type | GSM-MAP |
| - CN domain specific NAS system information | |
| - GSM-MAP NAS system information | 1E 01H |
| - CN domain specific DRX cycle length coefficient | 7 |
| - UE Timers and constants in idle mode | |
| -T300 | 4000 milliseconds |
| -N300 | 7 |
| -T312 | 10 seconds |
| - N312 | 1 |
| - UE Timers and constants in connected mode | |
| - T301 | Not Present (2000 milliseconds: default value) |
| - N301 | Not Present (2: default value) |
| - T302 | Not Present (4000 milliseconds: default value) |
| - N302 | Not Present (3: default value) |
| - T304 | Not Present (2000 milliseconds: default value) |
| - N304 | Not Present (2: default value) |
| - T305 | Not Present (30 minutes: default value) |
| - T307 | Not Present (30 seconds: default value) |
| - T308 | Not Present (160 milliseconds: default value) |
| - T309 | Not Present (5 seconds: default value) |
| - T310 | Not Present (160 milliseconds: default value) |
| - N310 | Not Present (4: default value) |
| - T311 | Not Present (2000 milliseconds: default value) |
| - T312 | Not Present (1 seconds: default value) |
| - N312 | Not Present (1: default value) |
| - T313 | Not Present (3 seconds: default value) |
| - N313 | Not Present (20: default value) |
| - T314 | Not Present (12 seconds: default value) |
| - T315 | Not Present (180 seconds: default value) |
| - N315 | Not Present (1: default value) |
| - T316 | Not Present (30 seconds: default value) |
| - T317 | Not Present (180 seconds: default value) |

3GPP TSG- T1 Meeting #18
 San Antonio, US, 10th – 14th February 2003

Tdoc # T1-030052

3GPP TSG-T1 SIG Meeting #27
 San Antonio, US, 10th – 14th February 2003

Tdoc # T1S030112

| | |
|----------------------------------------------------------------------------|-----------------------|
| CR-Form-v7 | CHANGE REQUEST |
| ⌘ TS 34.108 CR 187 ⌘ rev - ⌘ Current version: 4.5.0 ⌘ | |

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

Proposed change affects: UICC apps ME Radio Access Network Core Network

| | | | |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Title: | ⌘ CR to 34.108 REL-4; Addition of default inter-RAT handover messages | | |
| Source: | ⌘ Ericsson | | |
| Work item code: | ⌘ TEI | Date: | ⌘ 29/01/2003 |
| Category: | ⌘ A | Release: | ⌘ REL-4 |
| | Use <u>one</u> of the following categories: F (correction) A (corresponds to a correction in an earlier release) B (addition of feature), C (functional modification of feature) D (editorial modification) Detailed explanations of the above categories can be found in 3GPP TR 21.900 . | | Use <u>one</u> of the following releases: 2 (GSM Phase 2) R96 (Release 1996) R97 (Release 1997) R98 (Release 1998) R99 (Release 1999) Rel-4 (Release 4) Rel-5 (Release 5) Rel-6 (Release 6) |

| | |
|--------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Reason for change: | ⌘ Several test cases refer to messages included in another test case. In general, default messages have been defined to avoid dependancies between test cases. However, so far this has not been done for the inter RAT handover messages |
| Summary of change: | ⌘ The following new default messages have been added: <ol style="list-style-type: none"> 1. HANDOVER FROM UTRAN COMMAND A default message is introduced reflecting the message contents most commonly used in test cases for inter RAT handover 2. HANDOVER FROM UTRAN FAILURE A default message is introduced based on the common denominator of what is currently used in test cases for inter RAT handover failure |
| Consequences if not approved: | ⌘ Dependancies between test cases remain, which may result in errors |

| | | | | | | | | | | | |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---|--------------------------|-------------------------------------|-------------------------------------|--------------------------|--------------------------|-------------------------------------|------------------------------------------------------------------------|---------------|
| Clauses affected: | ⌘ 9.1.1 | | | | | | | | | | |
| Other specs affected: | <table border="1" style="display: inline-table; border-collapse: collapse; text-align: center;"> <tr> <td>Y</td> <td>N</td> </tr> <tr> <td><input type="checkbox"/></td> <td><input checked="" type="checkbox"/></td> </tr> <tr> <td><input checked="" type="checkbox"/></td> <td><input type="checkbox"/></td> </tr> <tr> <td><input type="checkbox"/></td> <td><input checked="" type="checkbox"/></td> </tr> </table> | Y | N | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | Other core specifications Test specifications O&M Specifications | ⌘ TS 34.123-1 |
| Y | N | | | | | | | | | | |
| <input type="checkbox"/> | <input checked="" type="checkbox"/> | | | | | | | | | | |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | | | | | | | | | | |
| <input type="checkbox"/> | <input checked="" type="checkbox"/> | | | | | | | | | | |

Other comments: ☹

How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ☹ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

9 Default Message Contents

9.1 Default Message Contents for Signalling

9.1.1 Default RRC Message Contents (FDD)

This clause contains the default values of common messages, which unless indicated otherwise in specific clauses of TS 34.123-1, shall be transmitted and checked by the system simulator.

In this clause, decimal values are normally used. However, sometimes a hexadecimal value, indicated by an "H", or a binary value, indicated by a "B" is used.

The necessary L3 messages are listed in alphabetic order, with the exception of the SYSTEM INFORMATION messages, where it is the information elements which are listed in alphabetic order (this is because some information elements occur in several SYSTEM INFORMATION types).

Default SYSTEM INFORMATION:

NOTE: SYSTEM INFORMATION BLOCK TYPE 1 (except for PLMN type "GSM-MAP"), SYSTEM INFORMATION BLOCK TYPE 8, SYSTEM INFORMATION BLOCK TYPE 9, SYSTEM INFORMATION BLOCK TYPE 10, SYSTEM INFORMATION BLOCK TYPE 14, SYSTEM INFORMATION BLOCK TYPE 15 and SYSTEM INFORMATION BLOCK TYPE 16 messages are not used.

< Skip until modified message >

Contents of DOWNLINK DIRECT TRANSFER message: AM

| Information Element | Value/remark |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Message Type | Arbitrarily selects an integer between 0 and 3 |
| RRC transaction identifier | The presence of this IE is dependent on IXIT statements in TS 34.123-2. If integrity protection is indicated to be active, this IE is present with the values of the sub IEs as stated below. Else, this IE and the sub-IEs are omitted. |
| Integrity check info | SS calculates the value of MAC-I for this message and writes to this IE. |
| - Message authentication code | SS provides the value of this IE, from its internal counter. |
| - RRC Message sequence number | CS domain or PS domain |
| CN domain identity | See Specific Message Content for each test case |
| NAS message | |

Contents of HANDOVER FROM UTRAN COMMAND-GSM message: AM

| <u>Information Element</u> | <u>Value/remark</u> |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <u>Message Type</u> <u>RRC transaction identifier</u> <u>Integrity check info</u> <u>- Message authentication code</u> <u>- RRC Message sequence number</u> <u>Activation time</u> <u>RAB Info</u> <u>- RAB identity</u> <u>- CN domain identity</u> <u>- NAS Synchronization Indicator</u> <u>- Re-establishment timer</u> <u>Inter-system message</u> <u>- System type</u> <u>- Frequency Band</u> <u>- CHOICE GSM message</u> <u>- Message</u> | <u>Arbitrarily selects one integer between 0 to 3</u> <u>The presence of this IE is dependent on IXIT statements in TS 34.123-2. If integrity protection is indicated to be active, this IE is present with the values of the sub IEs as stated below. Else, this IE and the sub-IEs are omitted. SS calculates the value of MAC-I for this message and writes to this IE.</u> <u>SS provides the value of this IE, from its internal counter. now</u> <u>0000 0001B</u> <u>CS domain</u> <u>Not present</u> <u>Use T315</u> <u>GSM</u> <u>Set to "GSM/ PCS 1900" if GSM/ PCS 1900 is used in this test. Otherwise set to "GSM/DCS 1800 Band"</u> <u>Single GSM message</u> <u>GSM HANDOVER COMMAND formatted as BIT STRING (1..512). The contents of the HANDOVER COMMAND see next table.</u> |

Contents of HANDOVER FROM UTRAN FAILURE message: AM

| <u>Information Element</u> | <u>Value/remark</u> |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <u>Message Type</u> <u>RRC transaction identifier</u> <u>Integrity check info</u> <u>- Message authentication code</u> <u>- RRC Message sequence number</u> <u>Inter-RAT handover failure</u> <u>-Inter-RAT handover failure cause</u> <u>Inter-system message</u> | <u>Checked to see if it matches the same value used in the corresponding downlink HANDOVER FROM UTRAN COMMAND –GSM message</u> <u>The presence of this IE is dependent on IXIT statements in TS 34.123-2. If integrity protection is indicated to be active, this IE shall be present with the values of the sub IEs as stated below. Else, this IE and the sub-IEs shall be absent.</u> <u>This IE is checked to see if it is present. The value is compared against the XMAC-I value computed by SS.</u> <u>This IE is checked to see if it is present. The value is used by SS to compute the XMAC-I value.</u> <u>physical channel failure</u> <u>Not Checked</u> |

Contents of INITIAL DIRECT TRANSFER message: AM

| Information Element | Value/remark |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Message Type | |
| Integrity check info - Message authentication code - RRC Message sequence number | The presence of this IE is dependent on IXIT statements in TS 34.123-2. If integrity protection is indicated to be active, this IE shall be present with the values of the sub IEs as stated below. Else, this IE and the sub-IEs shall be absent. This IE is checked to see if it is present. The value is compared against the XMAC-I value computed by SS. This IE is checked to see if it is present. The value is used by SS to compute the XMAC-I value. |
| CN domain identity | Checked to see if set to supported CN domain as specified in the IXIT statements. |
| Intra Domain NAS Node Selector - CHOICE version - CHOICE CN type - CHOICE Routing basis - Routing parameter - Entered parameter | R99 GSM-MAP Local (P)TMSI If the IE "CN domain identity" is equal to "CS domain", this bit string is set to to bits b14 through b23 of the TMSI. If the IE "CN domain identity" is equal to "PS domain", this bit string is set to to bits b14 through b23 of the P-TMSI. The TMSI/ P-TMSI bits are numbered from b0 to b31, with bit b0 being the least significant. |
| NAS message | FALSE |
| START | Set according to that indicated in specific message content for each test case |
| Measured results on RACH | Not checked |
| | Not checked |

...

3GPP TSG- T1 Meeting #18
San Antonio, US, 10th – 14th February 2003

Tdoc # T1-030054

3GPP TSG- T1 SIG Meeting #26
San Antonio, US, 10th – 14th February 2003

Tdoc # T1S030114

CR-Form-v7

CHANGE REQUEST

⌘ 34.108 CR 189 ⌘ rev - ⌘ Current version: 4.5.0 ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

Proposed change affects: UICC apps ME Radio Access Network Core Network

| | | | |
|------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|-------------------------------------------|----------------|
| Title: | ⌘ CR to 34.108 R4; Correction of activation time IEs in default messages | | |
| Source: | ⌘ Ericsson | | |
| Work item code: | ⌘ TEI | Date: | ⌘ 29/01/2003 |
| Category: | ⌘ A | Release: | ⌘ Rel-4 |
| Use <u>one</u> of the following categories: | | Use <u>one</u> of the following releases: | |
| F (correction) | | 2 | (GSM Phase 2) |
| A (corresponds to a correction in an earlier release) | | R96 | (Release 1996) |
| B (addition of feature), | | R97 | (Release 1997) |
| C (functional modification of feature) | | R98 | (Release 1998) |
| D (editorial modification) | | R99 | (Release 1999) |
| Detailed explanations of the above categories can be found in 3GPP TR 21.900 . | | Rel-4 | (Release 4) |
| | | Rel-5 | (Release 5) |
| | | Rel-6 | (Release 6) |

| | |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Reason for change: | ⌘ 1. The Value/remark for the IE 'COUNT-C activation time' is not correct (i.e. not in line with TS 25.331) for the following default messages in TS 34.108 section 9.1.1. PHYSICAL CHANNEL RECONFIGURATION COMPLETE RADIO BEARER SETUP COMPLETE RADIO BEARER RECONFIGURATION COMPLETE RADIO BEARER RELEASE COMPLETE TRANSPORT CHANNEL RECONFIGURATION COMPLETE UTRAN MOBILITY INFORMATION CONFIRM 2. The Value/remark for the IE 'Radio bearer uplink ciphering activation time' is not correct (i.e. not in line with TS 25.331) for the following default messages in TS 34.108 section 9.1.1. RADIO BEARER SETUP COMPLETE RADIO BEARER RELEASE COMPLETE The existing test cases have been considered and it is only the case with RADIO BEARER SETUP of an RLC-TM that is based on the Value/remark for IE 'COUNT-C activation time' in the default message. The other existing test cases implies that either the presence of these IEs is not of relevance or there is a specific message content information (see the Physical channel reconfiguration test case for hard handover to another frequency, section 8.2.6.37 in TS 23.123-1). |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

| | |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Summary of change: ⌘ | <ol style="list-style-type: none"> 1. The IE "COUNT-C activation time" is marked as "Not checked" for the following messages in clause 9.1.1: <ol style="list-style-type: none"> a. PHYSICAL CHANNEL RECONFIGURATION COMPLETE b. RADIO BEARER SETUP COMPLETE c. RADIO BEARER RECONFIGURATION COMPLETE d. RADIO BEARER RELEASE COMPLETE e. TRANSPORT CHANNEL RECONFIGURATION COMPLETE f. UTRAN MOBILITY INFORMATION CONFIRM 2. The IE "Radio bearer uplink ciphering activation time" is marked as "Not checked" in the following messages in clause 9.1.1: <ol style="list-style-type: none"> a. RADIO BEARER SETUP COMPLETE b. RADIO BEARER RELEASE COMPLETE 3. RADIO BEARER SETUP COMPLETE message: Changed the condition for when the IE "COUNT-C activation time" should be included |
| Consequences if not approved: ⌘ | Default messages not consistent with core specifications. |

| | | | | | | | | | | |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---|--|---|--|---|--|---|------------------------------------------------------------------------------|
| Clauses affected: ⌘ | 9.1.1 | | | | | | | | | |
| Other specs affected: ⌘ | <table border="1"> <tr> <td>Y</td> <td>N</td> </tr> <tr> <td></td> <td>X</td> </tr> <tr> <td></td> <td>X</td> </tr> <tr> <td></td> <td>X</td> </tr> </table> | Y | N | | X | | X | | X | Other core specifications ⌘ Test specifications ⌘ O&M Specifications ⌘ |
| Y | N | | | | | | | | | |
| | X | | | | | | | | | |
| | X | | | | | | | | | |
| | X | | | | | | | | | |
| Other comments: ⌘ | | | | | | | | | | |

How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

<Start of modified section within Clause 9.1.1>

Contents of PHYSICAL CHANNEL RECONFIGURATION COMPLETE message: AM

| Information Element | Value/remark |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Message Type RRC transaction identifier Integrity check info - Message authentication code - RRC Message sequence number Uplink integrity protection activation info CHOICE mode COUNT-C activation time Radio bearer uplink ciphering activation time info Uplink counter synchronisation info | Checked to see if it's set to identical value of the same IE in the downlink PHYSICAL CHANNEL RECONFIGURATION message The presence of this IE is dependent on IXIT statements in TS 34.123-2. If integrity protection is indicated to be active, this IE shall be present with the values of the sub IEs as stated below. Else, this IE and the sub-IEs shall be absent. This IE is checked to see if it is present. The value is compared against the XMAC-I value computed by SS. This IE is checked to see if it is present. The value is used by SS to compute the XMAC-I value. Not checked FDD Not checked The UE shall include this IE if the following two conditions are fulfilled: (a) The PHYSICAL CHANNEL RECONFIGURATION message did not contain the IE "Ciphering activation time for DPCH" and (b) The PHYSICAL CHANNEL RECONFIGURATION message established the first RB(s) mapped to RLC-TM for a CN domain or released the last RB(s) mapped to RLC-TM for a CN domain. Else, this IE is absent. Not checked Not checked |

<End of modified section>

<Start of next modified section>

Contents of RADIO BEARER SETUP COMPLETE message: AM

| | |
|----------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Message Type | Checked to see if the value is identical to the same IE in the downlink RADIO BEARER SETUP message. |
| RRC transaction identifier | |
| Integrity check info | The presence of this IE is dependent on IXIT statements in TS 34.123-2. If integrity protection is indicated to be active, this IE shall be present with the values of the sub IEs as stated below. Else, this IE and the sub-IEs shall be absent. |
| - Message authentication code | This IE is checked to see if it is present. The value is compared against the XMAC-I value computed by SS. |
| - RRC Message sequence number | This IE is checked to see if it is present. The value is used by SS to compute the XMAC-I value. |
| Uplink integrity protection activation info | Not checked. |
| CHOICE mode | FDD |
| START | Not checked |
| COUNT-C activation time | The UE shall include this IE if the following two conditions are fulfilled: (a) The RADIO BEARER SETUP message did not contain the IE "Ciphering activation time for DPCH" and (b) The RADIO BEARER SETUP message established the first RB(s) mapped to RLC-TM for a CN domain or released the last RB(s) mapped to RLC-TM for a CN domain . Else, this IE is absent. |
| Radio bearer uplink ciphering activation time info | Not checked If ciphering is not activated in RADIO BEARER SETUP message, this IE must be absent. Else, SS checks this IE for the presence of activation times of all ciphered uplink RLC-UM and RLC-AM RBs. |
| Uplink counter synchronisation info | Not checked |

<End of modified section>

<Start of next modified section>

Contents of RADIO BEARER RECONFIGURATION COMPLETE message: AM

| Information Element | Value/remark |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Message Type RRC transaction identifier Integrity check info - Message authentication code - RRC Message sequence number Uplink integrity protection activation info CHOICE mode COUNT-C activation time Radio bearer uplink ciphering activation time info Uplink counter synchronisation info | Checked to see if the value is identical to the same IE in the downlink RADIO BEARER RECONFIGURATION COMPLETE message The presence of this IE is dependent on IXIT statements in TS 34.123-2. If integrity protection is indicated to be active, this IE shall be present with the values of the sub IEs as stated below. Else, this IE and the sub-IEs shall be absent. This IE is checked to see if it is present. The value is compared against the XMAC-I value computed by SS. This IE is checked to see if it is present. The value is used by SS to compute the XMAC-I value. Not checked FDD Not checked The presence of this IE depends on the following 2 factors: (a) There exists RB(s) mapped to RLC-TM and (b) UE is transiting to CELL_DCH state after the reconfiguration procedure. Else, this IE is absent. |
| | Not checked Not checked |

<End of modified section>

<Start of next modified section>

Contents of RADIO BEARER RELEASE COMPLETE message: AM

| | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Message Type RRC transaction identifier</p> <p>Integrity check info</p> <ul style="list-style-type: none"> - Message authentication code - RRC Message sequence number <p>Uplink integrity protection activation info CHOICE mode COUNT-C activation time</p> <p>Radio bearer uplink ciphering activation time info</p> <p>Uplink counter synchronisation info</p> | <p>Checked to see the value is identical to the same IE in the downlink RADIO BEARER RELEASE message.</p> <p>The presence of this IE is dependent on IXIT statements in TS 34.123-2. If integrity protection is indicated to be active, this IE shall be present with the values of the sub IEs as stated below. Else, this IE and the sub-IEs shall be absent.</p> <p>This IE is checked to see if it is present. The value is compared against the XMAC-I value computed by SS.</p> <p>This IE is checked to see if it is present. The value is used by SS to compute the XMAC-I value.</p> <p>Not checked.</p> <p>FDD</p> <p>Not checkedThe UE shall include this IE if the following two conditions are fulfilled: (a) The RADIO BEARER RELEASE message did not contain the IE "Ciphering activation time for DPCH" and (b) The RADIO BEARER RELEASE message established the first RB(s) mapped to RLC-TM for a CN domain or released the last RB(s) mapped to RLC-TM for a CN domain. Else, this IE is absent.</p> <p>Not checkedIf ciphering is not activated in RADIO BEARER RELEASE message, this IE must be absent. Else, SS checks this IE for the presence of activation times of all ciphered uplink RLC-UM and RLC-AM RBs.</p> <p>Not checked</p> |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

<End of modified section>

<Start of next modified section>

Contents of TRANSPORT CHANNEL RECONFIGURATION COMPLETE message: AM

| Information Element | Value/remark |
|------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Message Type RRC transaction identifier | Checked to see if the value is identical to the same IE in the downlink TRANSPORT CHANNEL RECONFIGURATION message |
| Integrity check info - Message authentication code - RRC Message sequence number | The presence of this IE is dependent on IXIT statements in TS 34.123-2. If integrity protection is indicated to be active, this IE shall be present with the values of the sub IEs as stated below. Else, this IE and the sub-IEs shall be absent. This IE is checked to see if it is present. The value is compared against the XMAC-I value computed by SS. This IE is checked to see if it is present. The value is used by SS to compute the XMAC-I value. |
| Uplink integrity protection activation info CHOICE mode COUNT-C activation time | Not checked FDD Not checked The UE shall include this IE if the following two conditions are fulfilled: (a) The TRANSPORT CHANNEL RECONFIGURATION message did not contain the IE "Ciphering activation time for DPCH" and (b) The TRANSPORT CHANNEL RECONFIGURATION message established the first RB(s) mapped to RLC-TM for a CN domain or released the last RB(s) mapped to RLC-TM for a CN domain. Else, this IE is absent. |
| Radio bearer uplink ciphering activation time info | Not checked |
| Uplink counter synchronisation info | Not checked |

<End of modified section>

<Start of next modified section>

Contents of UTRAN MOBILITY INFORMATION CONFIRM message: AM

| Information Element | Value/remark |
|----------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Message Type | Checked to see if it matches the value of the same IE in downlink UTRAN MOBILITY INFORMATION message |
| RRC transaction identifier | |
| Integrity check info | The presence of this IE is dependent on IXIT statements in TS 34.123-2. If integrity protection is indicated to be active, this IE shall be present with the values of the sub IEs as stated below. Else, this IE and the sub-IEs shall be absent. |
| - Message authentication code | This IE is checked to see if it is present. The value is compared against the XMAC-I value computed by SS. |
| - RRC Message sequence number | This IE is checked to see if it is present. The value is used by SS to compute the XMAC-I value. |
| Uplink integrity protection activation info | Not checked |
| COUNT-C activation time | Not checked The presence of this IE depends on the following 2 factors: (a) There exists RB(s) mapped to RLC-TM, (b) UE is transiting to CELL_DCH state after the reconfiguration procedure. Else, this IE is absent. |
| Radio bearer uplink ciphering activation time info | Not checked |
| Uplink counter synchronisation info | Not checked |

<End of modified section>

3GPP TSG- T1 Meeting #18
San Antonio, US, 10th – 14th February 2003

Tdoc # T1-030056

3GPP TSG- T1 SIG Meeting #25
San Antonio, US, 10th – 14th February 2003

Tdoc # T1S030175

| | |
|---------------------------|--------------------------|
| CR-Form-v7 | |
| CHANGE REQUEST | |
| # 34.108 CR 191 # rev - # | Current version: 4.5.0 # |

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the # symbols.

Proposed change affects: UICC apps ME Radio Access Network Core Network

| | | | |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Title: | # CR to 34.108 R4; Correction to default SECURITY MODE COMMAND message | | |
| Source: | # Ericsson | | |
| Work item code: | # TEI | Date: | # 09/02/2003 |
| Category: | # A | Release: | # Rel-4 |
| | Use <u>one</u> of the following categories: F (correction) A (corresponds to a correction in an earlier release) B (addition of feature), C (functional modification of feature) D (editorial modification) Detailed explanations of the above categories can be found in 3GPP TR 21.900 . | | Use <u>one</u> of the following releases: 2 (GSM Phase 2) R96 (Release 1996) R97 (Release 1997) R98 (Release 1998) R99 (Release 1999) Rel-4 (Release 4) Rel-5 (Release 5) Rel-6 (Release 6) |

| | | | |
|--------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|
| Reason for change: | # Correction to default SECURITY MODE COMMAND message | | |
| Summary of change: | # Clause 9.1.1: | | |
| | <ul style="list-style-type: none"> Changed comment to the IE "Message authentication code". The value should not be arbitrary selected by the SS but instead be set to MAC-I (computed by the SS). | | |
| Consequences if not approved: | # Incorrect default message. | | |

| | | | | | | | | | | | |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---|---|---|---|---|---|---|------------------------------------------------------------------------------|--|
| Clauses affected: | # 9.1.1 | | | | | | | | | | |
| Other specs affected: | <table border="1" style="display: inline-table; border-collapse: collapse;"> <tr> <td style="text-align: center;">Y</td> <td style="text-align: center;">N</td> </tr> <tr> <td style="text-align: center;">#</td> <td style="text-align: center;">X</td> </tr> <tr> <td style="text-align: center;">#</td> <td style="text-align: center;">X</td> </tr> <tr> <td style="text-align: center;">#</td> <td style="text-align: center;">X</td> </tr> </table> | Y | N | # | X | # | X | # | X | Other core specifications # Test specifications # O&M Specifications # | |
| Y | N | | | | | | | | | | |
| # | X | | | | | | | | | | |
| # | X | | | | | | | | | | |
| # | X | | | | | | | | | | |
| Other comments: | # | | | | | | | | | | |

How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked # contain pop-up help information about the field that they are closest to.

- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

Contents of SECURITY MODE COMMAND message: AM

| Information Element | Value/remark |
|--------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Message Type | |
| RRC transaction identifier | Arbitrarily selects an integer between 0 and 3 |
| Integrity check info | |
| - Message authentication code | Set to an arbitrarily selected 32-bits integer <u>MAC-I value computed by the SS.</u> |
| - RRC Message Sequence Number | Set to an arbitrarily selected integer between 0 and 15 |
| Security capability | |
| - Ciphering algorithm capability | |
| - UEA0 | If the UE has indicated support for ciphering algorithm UEA0 in the IE "security capability" in the RRC CONNECTION SETUP COMPLETE message, this IE is set to TRUE. |
| - UEA1 | If the UE has indicated support for ciphering algorithm UEA1 in the IE "security capability" in the RRC CONNECTION SETUP COMPLETE message, this IE is set to TRUE. |
| - Spare | Spare 2-15 = FALSE |
| - Integrity protection algorithm capability | 000000000000010B (UIA1) |
| - UIA1 | TRUE |
| - Spare | Spare 0 and Spare 2-15 = FALSE |
| Ciphering mode info | This presence of this IE is dependent on IXIT statements in TS 34.123-2. If ciphering is indicated to be active, this IE present with the values of the sub IEs as stated below. Else, this IE is omitted. |
| - Ciphering mode command | Start/restart |
| - Ciphering algorithm | UEA0 or UEA1. The indicated algorithm must be one of the algorithms supported by the UE as indicated in the IE "security capability" in the RRC CONNECTION SETUP COMPLETE message. |
| - Ciphering activation time for DPCH | Not Present |
| - Radio bearer downlink ciphering activation time info | |
| - Radio bearer activation time | |
| - RB identity | 1 |
| - RLC sequence number | Current RLC SN+2 |
| - RB identity | 2 |
| - RLC sequence number | Current RLC SN+2 |
| - RB identity | 3 |
| - RLC sequence number | Current RLC SN + 2 |
| - RB identity | 4 |
| - RLC sequence number | Current RLC SN + 2 |
| Integrity protection mode info | The presence of this IE is dependent on IXIT statements in TS 34.123-32. If integrity protection is indicated to be active, this IE is present with the values of the sub IEs as stated below. Else, this IE and the sub-IEs are omitted. |
| - Integrity protection mode command | Start |
| - Downlink integrity protection activation info | Not Present |
| - Integrity protection algorithm | UIA1 |
| - Integrity protection initialisation number | SS selects an arbitrary 32 bits number for FRESH |
| CN domain identity | CS or PS |
| UE system specific security capability | Not Checked |

3GPP TSG- T1 Meeting #18
San Antonio, US, 10th – 14th February 2003

Tdoc # T1-030058

3GPP TSG- T1 SIG Meeting #25
San Antonio, US, 10th – 14th February 2003

Tdoc # T1S030146

| |
|-------------------------------------------------------------------------|
| CR-Form-v7 |
| CHANGE REQUEST |
| ⌘ 34.108 CR 193 ⌘ rev - ⌘ Current version: 4.5.0 ⌘ |

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

Proposed change affects: UICC apps ME Radio Access Network Core Network

| | | | |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Title: | ⌘ CR to 34.108 R4; Addition of option for UL CM only in default reference CM patterns | | |
| Source: | ⌘ Ericsson | | |
| Work item code: | ⌘ TEI | Date: | ⌘ 06/02/2003 |
| Category: | ⌘ A | Release: | ⌘ Rel-4 |
| | Use <u>one</u> of the following categories: F (correction) A (corresponds to a correction in an earlier release) B (addition of feature), C (functional modification of feature) D (editorial modification) Detailed explanations of the above categories can be found in 3GPP TR 21.900 . | | Use <u>one</u> of the following releases: 2 (GSM Phase 2) R96 (Release 1996) R97 (Release 1997) R98 (Release 1998) R99 (Release 1999) Rel-4 (Release 4) Rel-5 (Release 5) Rel-6 (Release 6) |

| | | | |
|--------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|--|--|
| Reason for change: | ⌘ Option for UL CM only is missing in default reference CM patterns | | |
| Summary of change: | ⌘ Tables 6.8.1, 6.8.2, 6.8.3, 6.8.4, 6.8.5, 6.8.6: <ul style="list-style-type: none"> • Added option for UL CM only case. | | |
| Consequences if not approved: | ⌘ CM pattern for UL CM only case not defined. | | |

| | | | | | | | | | | | |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---|--------------------------|-------------------------------------|--------------------------|-------------------------------------|--------------------------|-------------------------------------|------------------------------------------------------------------------|---|
| Clauses affected: | ⌘ 6.8 | | | | | | | | | | |
| Other specs affected: | <table border="1" style="display: inline-table; border-collapse: collapse; text-align: center;"> <tr> <td style="padding: 2px 5px;">Y</td> <td style="padding: 2px 5px;">N</td> </tr> <tr> <td style="padding: 2px 5px;"><input type="checkbox"/></td> <td style="padding: 2px 5px;"><input checked="" type="checkbox"/></td> </tr> <tr> <td style="padding: 2px 5px;"><input type="checkbox"/></td> <td style="padding: 2px 5px;"><input checked="" type="checkbox"/></td> </tr> <tr> <td style="padding: 2px 5px;"><input type="checkbox"/></td> <td style="padding: 2px 5px;"><input checked="" type="checkbox"/></td> </tr> </table> | Y | N | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | Other core specifications Test specifications O&M Specifications | ⌘ |
| Y | N | | | | | | | | | | |
| <input type="checkbox"/> | <input checked="" type="checkbox"/> | | | | | | | | | | |
| <input type="checkbox"/> | <input checked="" type="checkbox"/> | | | | | | | | | | |
| <input type="checkbox"/> | <input checked="" type="checkbox"/> | | | | | | | | | | |
| Other comments: | ⌘ | | | | | | | | | | |

How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.

- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

6.8 Compressed Mode Parameters

In this clause, Parameters for reference compressed mode patterns are defined which are used in signalling test cases such as inter frequency FDD measurement, inter frequency TDD measurement and inter RAT measurement in specified [1]. These parameters are defined in [30] for measurement performance tests.

Depending on UE capability, there are four methods constructed of three types using of compressed mode such as UL only, DL only and both UL and DL, and using without application of compressed for the above measurement purposes. As test requirement is the same even if the test methods are different, ICS/IXIT statement is applied to the test cases so that the test procedure and specific message contents specified in [1] can be distinguished.

6.8.1 Single compressed mode pattern

Configuration parameters in single compressed mode pattern for one type of measurement objects are described in the following sub-clauses.

6.8.1.1 Inter Frequency FDD measurement

The configuration parameters for an inter frequency FDD measurement is shown in table 6.8.1.

Table 6.8.1: Compressed mode parameters (Inter Frequency FDD measurement)

| Parameter | Value | Note |
|---------------------------------------------------|-------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| TGSN (Transmission Gap Starting Slot Number) | 4 | |
| TGL1 (Transmission Gap Length 1) | 7 | |
| TGL2 (Transmission Gap Length 2) | - | Only one gap in use. |
| TGD (Transmission Gap Distance) | 0 | |
| TGPL1 (Transmission Gap Pattern Length) | 3 | |
| TGPL2 (Transmission Gap Pattern Length) | - | Only one pattern in use. |
| TGCFN (Transmission Gap Connection Frame Number): | (Current CFN + (256 – TTI/10msec))mod 256 | |
| UL/DL compressed mode selection | DL DL, UL or DL & UL | 3 configurations possible. DL, UL or both DL and UL 2 configurations possible. DL & UL / DL |
| UL compressed mode method | SF/2 | |
| DL compressed mode method | SF/2 | |
| Scrambling code change | No | |
| RPP (Recovery period power control mode) | 0 | |
| ITP (Initial transmission power control mode) | 0 | |

6.8.1.2 Inter Frequency TDD measurement

The configuration parameters for an inter frequency TDD measurement is shown in table 6.8.2.

Table 6.8.2: Compressed mode parameters (Inter Frequency TDD measurement)

| Parameter | Value | Note |
|---------------------------------------------------|---------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| TGSN (Transmission Gap Starting Slot Number) | 10 | |
| TGL1 (Transmission Gap Length 1) | 10 | |
| TGL2 (Transmission Gap Length 2) | - | Only one gap in use. |
| TGD (Transmission Gap Distance) | 0 | |
| TGPL1 (Transmission Gap Pattern Length) | 11 | |
| TGPL2 (Transmission Gap Pattern Length) | - | Only one pattern in use. |
| TGCFN (Transmission Gap Connection Frame Number): | (Current CFN + (256 – TTI/10msec))mod 256 | |
| UL/DL compressed mode selection | DL, UL or DL & UL DL | 3 configurations possible. DL, UL or both DL and UL 2 configurations possible. DL & UL / DL |
| UL compressed mode method | SF/2 | |
| DL compressed mode method | Puncturing | |
| Scrambling code change | No | |
| RPP (Recovery period power control mode) | 0 | |
| ITP (Initial transmission power control mode) | 0 | |

6.8.1.3 Inter RAT measurement (GSM - Carrier RSSI)

The configuration parameters for an inter frequency RAT measurement (GSM – Carrier RSSI) is shown in table 6.8.3.

Table 6.8.3: Compressed mode parameters (Inter RAT measurement – GSM Carrier RSSI)

| Parameter | Value | Note |
|---------------------------------------------------|---------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| TGSN (Transmission Gap Starting Slot Number) | 4 | |
| TGL1 (Transmission Gap Length 1) | 7 | |
| TGL2 (Transmission Gap Length 2) | - | Only one gap in use. |
| TGD (Transmission Gap Distance) | 0 | |
| TGPL1 (Transmission Gap Pattern Length) | 12 | |
| TGPL2 (Transmission Gap Pattern Length) | - | Only one pattern in use. |
| TGCFN (Transmission Gap Connection Frame Number): | (Current CFN + (256 – TTI/10msec))mod 256 | |
| UL/DL compressed mode selection | DL, UL or DL & UL DL | 3 configurations possible. DL, UL or both DL and UL 2 configurations possible. DL & UL / DL |
| UL compressed mode method | SF/2 | |
| DL compressed mode method | SF/2 | |
| Scrambling code change | No | |
| RPP (Recovery period power control mode) | 0 | |
| ITP (Initial transmission power control mode) | 0 | |

6.8.1.4 Inter RAT measurement (GSM – Initial BSIC Identification)

The configuration parameters for an inter frequency RAT measurement (GSM – Initial BSIC Identification) is shown in table 6.8.4.

Table 6.8.4: Compressed mode parameters (Inter RAT measurement – GSM Initial BSIC Identification)

| Parameter | Value | Note |
|---------------------------------------------------|---------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| TGSN (Transmission Gap Starting Slot Number) | 4 | |
| TGL1 (Transmission Gap Length 1) | 7 | |
| TGL2 (Transmission Gap Length 2) | - | Only one gap in use. |
| TGD (Transmission Gap Distance) | 0 | |
| TGPL1 (Transmission Gap Pattern Length) | 8 | |
| TGPL2 (Transmission Gap Pattern Length) | - | Only one pattern in use. |
| TGCFN (Transmission Gap Connection Frame Number): | (Current CFN + (256 – TTI/10msec))mod 256 | |
| UL/DL compressed mode selection | DL, UL or DL & UL DL & UL or DL | 3 configurations possible. DL, UL or both DL and UL 2 configurations possible. DL & UL / DL |
| UL compressed mode method | SF/2 | |
| DL compressed mode method | SF/2 | |
| Scrambling code change | No | |
| RPP (Recovery period power control mode) | 0 | |
| ITP (Initial transmission power control mode) | 0 | |

6.8.1.5 Inter RAT measurement (GSM – BSIC re-confirmation)

The configuration parameters for an inter RAT measurement (GSM – BSIC re-confirmation) is shown in table 6.8.5.

Table 6.8.5: Compressed mode parameters (Inter RAT measurement – GSM BSIC re-confirmation)

| Parameter | Value | Note |
|---------------------------------------------------|---------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| TGSN (Transmission Gap Starting Slot Number) | 4 | |
| TGL1 (Transmission Gap Length 1) | 7 | |
| TGL2 (Transmission Gap Length 2) | - | Only one gap in use. |
| TGD (Transmission Gap Distance) | 0 | |
| TGPL1 (Transmission Gap Pattern Length) | 8 | |
| TGPL2 (Transmission Gap Pattern Length) | - | Only one pattern in use. |
| TGCFN (Transmission Gap Connection Frame Number): | (Current CFN + (256 – TTI/10msec))mod 256 | |
| UL/DL compressed mode selection | DL, UL or DL & UL DL & UL or DL | 3 configurations possible. DL, UL or both DL and UL 2 configurations possible. DL & UL / DL |
| UL compressed mode method | SF/2 | |
| DL compressed mode method | SF/2 | |
| Scrambling code change | No | |
| RPP (Recovery period power control mode) | 0 | |
| ITP (Initial transmission power control mode) | 0 | |

6.8.2 Multiple compressed mode patterns

Configuration parameters in multiple compressed mode patterns for several types of measurement objects are described in the following sub-clauses.

6.8.2.1 Inter RAT measurement GSM

The configuration parameters for an inter RAT measurement (GSM – Carrier RSSI, Initial BSIC Identification and BSIC Re-confirmation) is shown in table 6.8.6.

Table 6.8.6: Compressed mode parameters (Inter RAT measurement – GSM Carrier RSSI & Initial BSIC identification & BSIC re-confirmation)

| Parameter | GSM Carrier RSSI | GSM Initial BSIC identification | GSM BSIC re-confirmation | Note |
|---------------------------------------------------|-----------------------------------------------------------|-----------------------------------------------------------|-----------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| TGSN (Transmission Gap Starting Slot Number) | 4 | 4 | 4 | |
| TGL1 (Transmission Gap Length 1) | 7 | 7 | 7 | |
| TGL2 (Transmission Gap Length 2) | - | - | - | Only one gap in use. |
| TGD (Transmission Gap Distance) | 0 | 0 | 0 | |
| TGPL1 (Transmission Gap Pattern Length) | 12 | 8 | 8 | |
| TGPL2 (Transmission Gap Pattern Length) | - | - | - | Only one pattern in use. |
| TGCFN (Transmission Gap Connection Frame Number): | (Current CFN + (252 – TTI/10msec)) mod 256 | (Current CFN + (254 – TTI/10msec)) mod 256 | (Current CFN + (250 – TTI/10msec)) mod 256 | Defined by higher layers |
| UL/DL compressed mode selection | <u>DL, UL or DL & UL</u> DL & UL or DL | <u>DL, UL or DL & UL</u> DL & UL or DL | <u>DL, UL or DL & UL</u> DL & UL or DL | 3 configurations possible. <u>DL, UL or both DL and UL</u> configurations possible. DL & UL /DL |
| UL compressed mode method | SF/2 | SF/2 | SF/2 | |
| DL compressed mode method | SF/2 | SF/2 | SF/2 | |
| Scrambling code change | No | No | No | |
| RPP (Recovery period power control mode) | 0 | 0 | 0 | |
| ITP (Initial transmission power control mode) | 0 | 0 | 0 | |

CHANGE REQUEST

34.108 CR 197 # rev **-** # Current version: **4.5.0**

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the # symbols.

Proposed change affects: UICC apps# ME Radio Access Network Core Network

| | | | |
|------------------------|------------------------------------------------------------------------------------------------|---------------------------|-------------------------------------------|
| Title: | # CR to 34.108 Rel-4; Update of the RRC connection request messages | | |
| Source: | # T1 SIG | | |
| Work item code: | # | Date: | # 07/02/2003 |
| Category: | # F | Release: | # Rel-4 |
| | Use <u>one</u> of the following categories: | | Use <u>one</u> of the following releases: |
| | F (correction) | 2 (GSM Phase 2) | |
| | A (corresponds to a correction in an earlier release) | R96 (Release 1996) | |
| | B (addition of feature), | R97 (Release 1997) | |
| | C (functional modification of feature) | R98 (Release 1998) | |
| | D (editorial modification) | R99 (Release 1999) | |
| | Detailed explanations of the above categories can be found in 3GPP TR 21.900 . | | Rel-4 (Release 4) |
| | | | Rel-5 (Release 5) |
| | | | Rel-6 (Release 6) |

| | |
|--------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Reason for change: | # RAN2 has defined an additional optional IE for early mobile handling in the core specification TS5.331. This was approved in the CR 1759 in December 02. |
| Summary of change: | # Update of the specification according to the RAN CR 1759 |
| Consequences if not approved: | # Default messages not consistent with core specification TS25.331 |

| | | | |
|------------------------------|------------------------------|---|---|
| Clauses affected: | # 7.1.2.4.2, 9.1.1 and 9.1.2 | | |
| Other specs affected: | # | Y | N |
| | | # | X |
| | | # | X |
| | | # | X |
| Other comments: | # | | |

How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked # contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/>. For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.

- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

<Start of modified section within Clause 7.1.2.4.2>

7.1.2.4.2 RRC CONNECTION REQUEST

This message is sent by the UE to the SS using the TM-RLC SAP. It is sent on the CCCH Logical channel.

| Information Element | | | Value/Remark |
|--------------------------------------------------------------|-------------------------------|----------------|----------------------------------------------------------------------------------------------|
| Message Type | | | RRC CONNECTION REQUEST |
| UE information elements | | | |
| Initial UE identity | TMSI and LAI | TMSI (GSM-MAP) | As specified during Registration procedure |
| | | LAI (GSM-MAP) | As specified by default 1 cell environment |
| Initial UE capability | Maximum number of AM entities | | As declared in UE ICS |
| Establishment cause | | | As appropriate |
| Protocol error indicator | | | FALSE |
| >UE Specific Behaviour Information 1 idle | | | This IE will not be checked by default behaviour, but in specific test case. |
| Measurement information elements | | | |
| Measured results on RACH | | | Not checked |

<End of modified section>

<Start of next modified section 9.1.1>

Contents of RRC CONNECTION REQUEST message: TM

| Information Element | Value/remark |
|----------------------------------------------------------|----------------------------------------------------------------------------------------------|
| Message Type | |
| Initial UE identity | |
| - CHOICE UE id type | |
| - TMSI and LAI (GSM-MAP) | Set to the UE's TMSI and LAI. |
| Establishment cause | To be checked against requirement if specified |
| Protocol error indicator | FALSE |
| UE Specific Behaviour Information 1 idle | This IE will not be checked by default behaviour, but in specific test case. |
| Measured results on RACH | To be checked against requirement if specified |

<End of modified section>

<Start of next modified section 9.1.2>

Contents of RRC CONNECTION REQUEST message: TM

| Information Element | Value/remark |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Message Type Initial UE identity - CHOICE UE id type - IMSI (GSM-MAP) Establishment cause Protocol error indicator UE Specific Behaviour Information 1 idle Measured results on RACH | Set to the UE's IMSI (GSM-MAP) or TMSI. To be checked against requirement if specified FALSE This IE will not be checked by default behaviour, but in specific test case. Not checked |

<End of modified section>

| |
|-------------------------------------------------------------------------|
| CR-Form-v5.1 |
| CHANGE REQUEST |
| ⌘ 34.108 CR 204 ⌘ rev - ⌘ Current version: 4.5.0 ⌘ |

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

Proposed change affects: ⌘ (U)SIM ME/UE Radio Access Network Core Network

| | | | | | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--|--|
| Title: | ⌘ CR to 34.108 REL-4; Modification to Generic Registration Procedures (revision of T1S030123) | | | | |
| Source: | ⌘ Anite Telecoms | | | | |
| Work item code: | ⌘ TEI | Date: | ⌘ 31/1/2003 | | |
| Category: | ⌘ F | Release: | ⌘ REL-4 | | |
| Use <u>one</u> of the following categories: F (correction) A (corresponds to a correction in an earlier release) B (addition of feature), C (functional modification of feature) D (editorial modification) Detailed explanations of the above categories can be found in 3GPP TR 21.900 . | | Use <u>one</u> of the following releases: 2 (GSM Phase 2) R96 (Release 1996) R97 (Release 1997) R98 (Release 1998) R99 (Release 1999) REL-4 (Release 4) REL-5 (Release 5) | | | |

| | |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Reason for change: | ⌘ Defined Generic Registration procedures do not adequately describe the procedure to be used by a UE in Operation Mode A in a simulated network operating in Network Operation Mode II |
| Summary of change: | ⌘ Add description of parallel procedure to be used in this situation |
| Consequences if not approved: | ⌘ Test Cases covering this situation may not test UEs correctly |

| | |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Clauses affected: | ⌘ 7.2.2 |
| Other specs affected: | ⌘ <input type="checkbox"/> Other core specifications ⌘ <input type="checkbox"/> Test specifications ⌘ <input type="checkbox"/> O&M Specifications ⌘ |
| Other comments: | ⌘ |

How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be

downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.

- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

<<Start modified section>>

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TS 34.123-1: "User Equipment (UE) conformance specification; Part 1: Protocol conformance specification".
- [2] 3GPP TS 34.121: "Terminal Conformance Specification; Radio transmission and reception (FDD)".
- [3] 3GPP TS 34.123-2: "User Equipment (UE) conformance specification; Part 2: Implementation Conformance Statement (ICS) proforma specification".
- [4] 3GPP TS 34.124: "ElectroMagnetic compatibility (EMC) requirements for Mobile terminals and ancillary equipment".
- [5] 3GPP TS 34.122: "Terminal Conformance Specification; Radio transmission and reception (TDD)".
- [6] 3GPP TS 34.109: "Terminal Logical Test Interface; Special conformance testing functions".
- [8] 3GPP TS 25.214: "Physical layer procedures (FDD)".
- [7] 3GPP TS 25.301 "Radio Interface Protocol Architecture".
- [9] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [10] 3GPP TR 25.990: "Vocabulary".
- [11] 3GPP TS 25.101: "UE Radio transmission and reception (FDD)".
- [12] 3GPP TS 25.102: "UTRA (UE) TDD; Radio transmission and reception".
- [13] 3GPP TS 25.211: "Physical Channels and mapping of Transport Channels onto Physical channels (FDD)".
- [14] 3GPP TS 25.212: "Multiplexing and Channel Coding (FDD)".
- [15] 3GPP TS 23.107: "Quality of Service (QoS) concept and architecture".
- [16] 3GPP TS 26.110: "Codec for Circuit Switched Multimedia Telephony Service; General Description".
- [17] 3GPP TS 29.007: "General requirements on interworking between the Public Land Mobile Network (PLMN) and the Integrated Services Digital Network (ISDN) or Public Switched Telephone Network (PSTN)".
- [18] 3GPP TR 23.910: "Circuit Switched Data Bearer Service".
- [19] Void.
- [20] 3GPP TS 25.104: "UTRA (BS) FDD; Radio Transmission and Reception".

- [21] 3GPP TS 25.105: "UTRA (BS) TDD; Radio Transmission and Reception".
- [22] 3GPP TS 31.101: "UICC-Terminal Interface; Physical and Logical Characteristics".
- [23] 3GPP TS 31.102: "Characteristics of the USIM Application".
- [24] 3GPP TS 33.102: "3G Security; Security Architecture".
- [25] 3GPP TS 33.103: "3G Security; Integration Guidelines".
- [26] 3GPP TS 33.105: "3G Security; Cryptographic Algorithm Requirements".
- [27] 3GPP TS 25.224: "Physical layer procedures (TDD)".
- [28] 3GPP TS 25.221: "Physical Channels and mapping of Transport Channels onto Physical channels (TDD)".
- [29] 3GPP TS 25.222: "Multiplexing and Channel Coding (TDD)".
- [30] 3GPP TS 25.133: "Requirements for support of radio resource management (FDD)".
- [31] [3GPP TS 24.008: "Mobile radio interface layer 3 specification; Core Network Protocols; Stage 3"](#).

3 Definitions and abbreviations

<<End of modified section>>

<<Start modified section>>

7.2 Generic setup procedures

7.2.1 UE Test States for Generic setup procedures

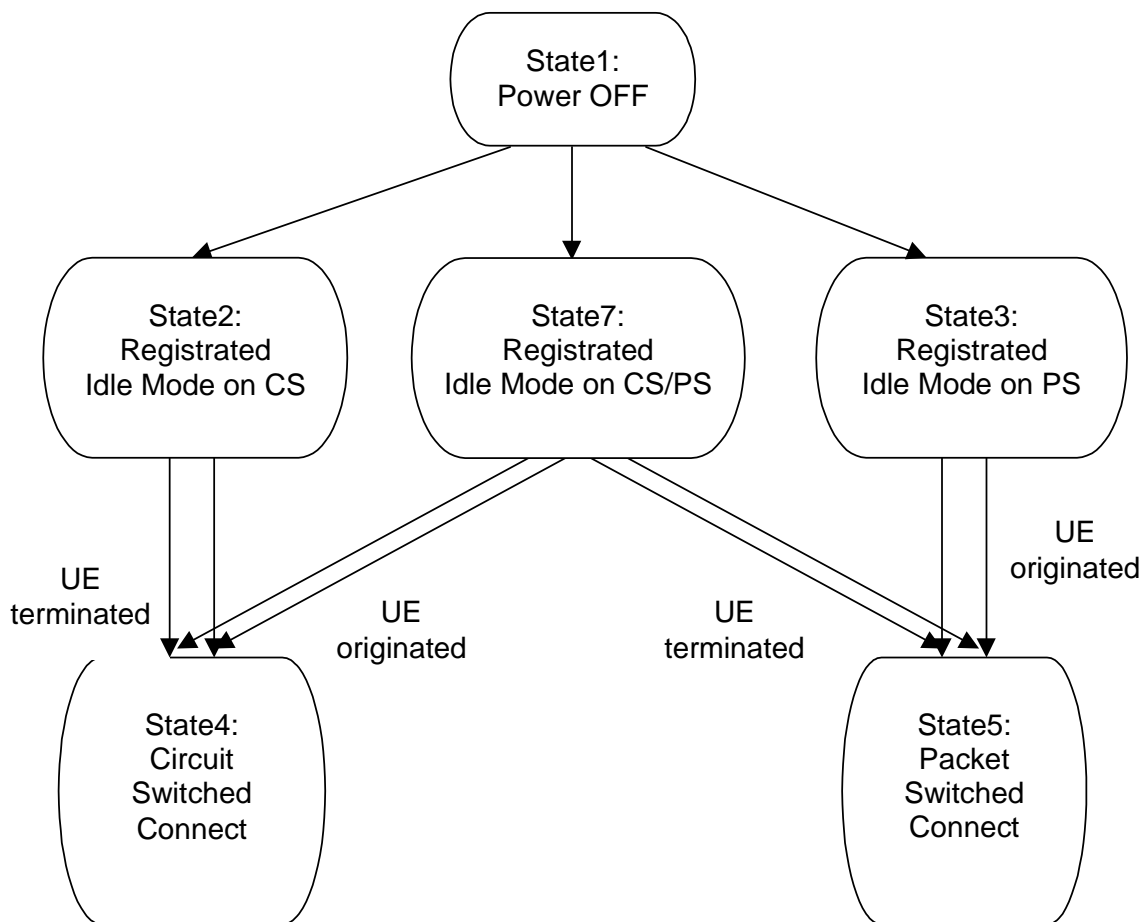


Figure 7.2.1.1: UE Test States for Generic setup procedures

In order that the UE can set up a call in UTRAN, there are a number of procedures to be undertaken in a hierarchical sequence to move between known states. The sequences are shown in figure 7.2.1.1 and the status of the relevant protocols in the UE in the different states are given in table 7.2.1.1.

Table 7.2.1.1: The UE states

| | | RRC | CC | MM | SM | GMM |
|--------|-------------------------------|-----------|--------|------------------------|----------|------------------------|
| State1 | Power OFF | ---- | null | detached | inactive | detached |
| State2 | Registered Idle Mode on CS | idle | null | idle | inactive | detached |
| State3 | Registered Idle Mode on PS | idle | null | detached | inactive | idle |
| State4 | Circuit Switched Connect | connected | active | connected | inactive | same as previous state |
| State5 | Packet Switched Connect | connected | null | same as previous state | active | connected |
| State7 | Registered Idle Mode on CS/PS | idle | null | idle | inactive | idle |

7.2.2 Registration of UE

[The default procedures required to achieve the changes of state between State 1, in clause 7.2.1, and States 2, 3 and 7 are illustrated in the following sections.](#)

The choice of which procedure to use given a UE supporting packet services is influenced by the Network Mode of Operation being simulated by the SS and by the Operation Mode of the UE, as described in [31] clause 1.7.2.2. Table 7.2.2 shows the appropriate clause number for each combination of these two modes of operation.

Table 7.2.2: Registration Procedures for UEs Supporting Packet Services

| Network Mode | | NMO I | NMO II |
|--------------|-------|---------|---------|
| UE Mode | PS/CS | 7.2.2.3 | 7.2.2.4 |
| | PS | 7.2.2.2 | 7.2.2.2 |

7.2.2.1 Registration on CS

7.2.2.1.1 Initial condition

System Simulator:

- 1 cell, default parameters.

User Equipment:

- The UE shall be operated under normal test conditions.
- The Test-USIM shall be inserted.

7.2.2.1.2 Definition of system information messages

The default system information messages are used.

7.2.2.1.3 Procedure

Registration of UE for SS shall be established under ideal radio conditions as defined in 5. Reference Test Conditions.

| Step | Direction | | Message | Comments |
|------|-----------|----|--------------------------------------|--------------|
| | UE | SS | | |
| 1 | <-- | | SYSTEM INFORMATION (BCCH) | NW Broadcast |
| 2 | --> | | RRC CONNECTION REQUEST (CCCH) | RRC |
| 3 | <-- | | RRC CONNECTION SETUP (CCCH) | RRC |
| 4 | --> | | RRC CONNECTION SETUP COMPLETE (DCCH) | RRC |
| 5 | --> | | LOCATION UPDATING REQUEST | MM |
| 6 | <-- | | AUTHENTICATION REQUEST | MM |
| 7 | --> | | AUTHENTICATION RESPONSE | MM |
| 8 | <-- | | SECURITY MODE COMMAND | RRC |
| 9 | --> | | SECURITY MODE COMPLETE | RRC |
| 10 | <-- | | LOCATION UPDATING ACCEPT | MM |
| 11 | --> | | TMSI REALLOCATION COMPLETE | MM |
| 12 | <-- | | RRC CONNECTION RELEASE | RRC |
| 13 | --> | | RRC CONNECTION RELEASE COMPLETE | RRC |

7.2.2.1.4 Specific message contents

All Specific message contents shall be referred to clause 9 "Default Message Contents of Layer3 Messages for Layer 3 Testing".

7.2.2.2 Registration on PS

7.2.2.2.1 Initial condition

System Simulator:

- 1 cell, default parameters.

User Equipment:

- The UE shall be operated under normal test conditions.
- The Test-USIM shall be inserted.

7.2.2.2.2 Definition of system information messages

The default system information messages are used.

7.2.2.2.3 Procedure

Registration of UE for SS shall be established under ideal radio conditions as defined in 5. Reference Test Conditions.

| Step | Direction | | Message | Comments |
|------|-----------|----|---------------------------------------|--------------|
| | UE | SS | | |
| 1 | <-- | | SYSTEM INFORMATION (BCCH) | NW Broadcast |
| 2 | --> | | RRC CONNECTION REQUEST (CCCH) | RRC |
| 3 | <-- | | RRC CONNECTION SETUP (CCCH) | RRC |
| 4 | --> | | RRC CONNECTION SETUP COMPLETE (DCCH) | RRC |
| 5 | --> | | ATTACH REQUEST | GMM |
| 6 | <-- | | AUTHENTICATION AND CIPHERING REQUEST | GMM |
| 7 | --> | | AUTHENTICATION AND CIPHERING RESPONSE | GMM |
| 8 | <-- | | SECURITY MODE COMMAND | RRC |
| 9 | --> | | SECURITY MODE COMPLETE | RRC |
| 10 | <-- | | ATTACH ACCEPT | GMM |
| 11 | --> | | ATTACH COMPLETE | GMM |
| 12 | <-- | | RRC CONNECTION RELEASE | RRC |
| 13 | --> | | RRC CONNECTION RELEASE COMPLETE | RRC |

7.2.2.2.4 Specific message contents

All Specific message contents shall be referred to clause 9 "Default Message Contents of Layer3 Messages for Layer 3 Testing".

7.2.2.3 Registration on CS / PS combined environment

7.2.2.3.1 Initial condition

System Simulator:

- 1 cell [operating in network operation mode I](#), default parameters.

User Equipment:

- The UE shall be operated under normal test conditions.
- The Test-USIM shall be inserted.

7.2.2.3.2 Definition of system information messages

The default system information messages are used.

7.2.2.3.3 Procedure

Registration of UE for SS shall be established under ideal radio conditions as defined in 5. Reference Test Conditions.

| Step | Direction | | Message | Comments |
|------|-----------|----|---------------------------------------|--------------|
| | UE | SS | | |
| 1 | <-- | | SYSTEM INFORMATION (BCCH) | NW Broadcast |
| 2 | --> | | RRC CONNECTION REQUEST (CCCH) | RRC |
| 3 | <-- | | RRC CONNECTION SETUP (CCCH) | RRC |
| 4 | --> | | RRC CONNECTION SETUP COMPLETE (DCCH) | RRC |
| 5 | --> | | ATTACH REQUEST | GMM |
| 6 | <-- | | AUTHENTICATION AND CIPHERING REQUEST | GMM |
| 7 | --> | | AUTHENTICATION AND CIPHERING RESPONSE | GMM |
| 8 | <-- | | SECURITY MODE COMMAND | RRC |
| 9 | --> | | SECURITY MODE COMPLETE | RRC |
| 10 | <-- | | ATTACH ACCEPT | GMM |
| 11 | --> | | ATTACH COMPLETE | GMM |
| 12 | <-- | | RRC CONNECTION RELEASE | RRC |
| 13 | --> | | RRC CONNECTION RELEASE COMPLETE | RRC |

7.2.2.3.4 Specific message contents

All Specific message contents shall be referred to clause 9 "Default Message Contents of Layer3 Messages for Layer 3 Testing".

7.2.2.4 Registration on CS / PS non-combined environment

7.2.2.4.1 Initial condition

System Simulator:

- 1 cell operating in network operation mode II, default parameters.

User Equipment:

- The UE set to Operation mode A
- The UE shall be operated under normal test conditions.
- The Test-USIM shall be inserted.

7.2.2.4.2 Definition of system information messages

The default system information messages are used.

7.2.2.4.3 Procedure

Registration of UE for SS shall be established under ideal radio conditions as defined in 5. Reference Test Conditions.

Registrations in the CS domain and in the PS domain shall execute independently. The separate procedures shall be as defined in clauses 7.2.2.1 and 7.2.2.2.

The separate registration procedures may occur sequentially or in parallel. If the procedures occur sequentially either the same RRC connection may be used for both, or alternatively a separate RRC connection may be used for each registration procedure.

7.2.2.4.4 Specific message contents

All Specific message contents shall be referred to clause 9 "Default Message Contents of Layer3 Messages for Layer 3 Testing".

7.2.3 Call setup

7.2.3.1 Generic call set up procedure for mobile terminating circuit switched calls

7.2.3.1.1 Initial conditions

System Simulator:

- 1 cell, default parameters.

User Equipment:

- The UE shall be operated under normal test conditions.
- The Test-USIM shall be inserted.

<<End of modified section>>

CHANGE REQUEST

34.108 CR 206 # rev **-** # Current version: **4.5.0**

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the # symbols.

Proposed change affects: UICC apps# ME Radio Access Network Core Network

| | | | |
|------------------------|------------------------------------------------------------------------------------------------|--------------------|-------------------------------------------|
| Title: | # CR to 34.108 R4; Update of default configurations to enable testing of low end UEs | | |
| Source: | # Ericsson | | |
| Work item code: | # TEI | Date: | # 14/02/2003 |
| Category: | # A | Release: | # Rel-4 |
| | Use <u>one</u> of the following categories: | | Use <u>one</u> of the following releases: |
| | F (correction) | | 2 (GSM Phase 2) |
| | A (corresponds to a correction in an earlier release) | R96 (Release 1996) | |
| | B (addition of feature), | R97 (Release 1997) | |
| | C (functional modification of feature) | R98 (Release 1998) | |
| | D (editorial modification) | R99 (Release 1999) | |
| | Detailed explanations of the above categories can be found in 3GPP TR 21.900 . | Rel-4 (Release 4) | |
| | | Rel-5 (Release 5) | |
| | | Rel-6 (Release 6) | |

| | |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Reason for change: | # The current configurations in 34.108 and 34.123-1 do not allow testing of all UE classes. This contribution proposes a modified configuration to allow testing of UEs with limited capabilities (10 kbyte UE memory and no TC support). |
| Summary of change: | # The following changes are proposed: <ol style="list-style-type: none"> 1. The default RLC window size for SRB 2,3,4 is changed from 128 to 32. 2. The Common Radio Bearer configurations used for RLC tests is modified: <ul style="list-style-type: none"> - The TFS for the UM tests with 7 bit Length indicators no longer includes more than 1 TB, thus remaining below the UE capability on 'Maximum sum of number of bits of all transport blocks being received at an arbitrary time instant' of the 32kbps UE class (640 bits). In addition the TTI is updated to 40ms in order to align to the existing UL/DL 8/8kbps RAB. - The PDU size for AM tests with 7bit Length indicators is changed from 320 to 128. This allows the current RLC window sizes to be used which limits the impact on the existing L2 test cases. - The RLC PDU size as well as the RLC window size for testing of 15 bit length indicators are unchanged. This implies that only UEs with >50 kbyte RLC buffer memory can be tested with 15 bit length indicators. If this is unacceptable, the RLC window size could potentially be decreased for RLC tests with 15 bit LIs. - The L1 parameters are modified since the current values seem incorrect. The values have been confirmed by RAN1 (in LS in T1-030132/R1- |

| | | |
|--------------------------------------|---|-----------------------------------------------------|
| | | 030199). |
| Consequences if not approved: | ⌘ | L2 testing can not be performed on lower UE classes |

| Clauses affected: | ⌘ | 6.11 and 9.1.1 | | | | | | | | |
|------------------------------|---|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---|--|---|--|---|--|---|
| Other specs affected: | ⌘ | <table border="1"> <thead> <tr> <th>Y</th> <th>N</th> </tr> </thead> <tbody> <tr> <td></td> <td>X</td> </tr> <tr> <td></td> <td>X</td> </tr> <tr> <td></td> <td>X</td> </tr> </tbody> </table> Other core specifications Test specifications O&M Specifications | Y | N | | X | | X | | X |
| Y | N | | | | | | | | | |
| | X | | | | | | | | | |
| | X | | | | | | | | | |
| | X | | | | | | | | | |
| Other comments: | ⌘ | | | | | | | | | |

How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

<Start of modified section>

6.11 Common Radio Bearer configurations for other test purposes

The common radio bearer configurations are used for functional testing of various UE functions. Only common configurations that are used by multiple test cases and are not covered by the reference radio bearer configurations in clause 6.10 are specified in the present clause. Radio bearer configurations only used by a single test case are specified in the actual test case itself.

NOTE If not specifically specified then the mid-value of the RM attribute value range as specified by the actual reference radio bearer configuration shall be applied for testing.

6.11.1 Unacknowledged Mode Radio Bearer configuration (7 bit Length Indicator)

This configuration is based on the Interactive or background / UL:864 DL 864 kbps / PS RAB + UL:3.4 DL 3.4 kbps SRBs for DCCH (see TS 34.108 clause 6.10.2.4.1.2 3a6) with the transport channels parameters of the RAB and TFCS defined as follows:

Transport channel parameters for the Uplink RAB

| Higher layer | RAB/Signalling RB | RAB | |
|--------------|-------------------------------------------------------------|-----------------------|-------|
| RLC | Logical channel type | DTCH | |
| | RLC mode | UM | |
| | Payload sizes, bit | 328 | |
| | Max data rate, bps | 8200 65600 | |
| | UMD PDU header, bit | 8 | |
| MAC | MAC header, bit | 0 | |
| | MAC multiplexing | N/A | |
| Layer 1 | TrCH type | DCH | |
| | TB sizes, bit | 336 | |
| | TFS | TF0, bits | 0x336 |
| | | TF1, bits | 1x336 |
| | TTI, ms | 2040 | |
| | Coding type | TC CC 1/3 | |
| | CRC, bit | 16 | |
| | Max number of bits/TTI after channel coding | 4236 1080 | |
| | Uplink: Max number of bits/radio frame before rate matching | 2118 270 | |
| RM attribute | 135-175 130-170 | | |

NOTE: This TFI is not applied to TFS for RLC test cases.

TFCS

| | |
|-----------|--------------------------------------------------------------------------------------|
| TFCS size | 4 |
| TFCS | (64-8 kbps RAB, DCCH)= (TF0, TF0), (TF1, TF0), (TF0, TF1), (TF1, TF1) |

Transport channel parameters for the Downlink RAB

| Higher layer | RAB/Signalling RB | RAB | |
|-------------------------------------------------------------------|---------------------------------------------|----------------------------|-------|
| RLC | Logical channel type | DTCH | |
| | RLC mode | UM | |
| | Payload sizes, bit | 328 | |
| | Max data rate, bps | 8200 65600 | |
| | UMD PDU header, bit | 8 | |
| MAC | MAC header, bit | 0 | |
| | MAC multiplexing | N/A | |
| Layer 1 | TrCH type | DCH | |
| | TB sizes, bit | 336 | |
| | TFS | TF0, bits | 0x336 |
| | | TF1, bits | 1x336 |
| | TTI, ms | 20 40 | |
| | Coding type | TC CC 1/3 | |
| | CRC, bit | 16 | |
| | Max number of bits/TTI after channel coding | 1080 4236 | |
| | RM attribute | 135-175 130-170 | |
| NOTE: — This TFI is not applied to TFS for RLC test cases. | | | |

TFCS

| | |
|-----------|--------------------------------------------------------------------------------------|
| TFCS size | 4 |
| TFCS | (64 8 kbps RAB, DCCH)= (TF0, TF0), (TF1, TF0), (TF0, TF1), (TF1, TF1) |

6.11.2 Unacknowledged Mode Radio Bearer configuration (15 bit Length Indicator)

This configuration is based on the Interactive or background / UL:64 DL 64 kbps / PS RAB + UL:3.4 DL 3.4 kbps SRBs for DCCH (see TS 34.108 clause 6.10.2.4.1.26) with the transport channels parameters of the RAB defined as followed:

Transport channel parameters for the Uplink RAB

| Higher layer | RAB/Signalling RB | RAB | |
|--------------|-------------------------------------------------------------|----------------------|--------|
| RLC | Logical channel type | DTCH | |
| | RLC mode | UM | |
| | Payload sizes, bit | 1336 | |
| | Max data rate, bps | 66800 | |
| | UMD PDU header, bit | 8 | |
| MAC | MAC header, bit | 0 | |
| | MAC multiplexing | N/A | |
| Layer 1 | TrCH type | DCH | |
| | TB sizes, bit | 1344 | |
| | TFS | TF0, bits | 0x1344 |
| | | TF1, bits | 1x1344 |
| | TTI, ms | 20 | |
| | Coding type | TC | |
| | CRC, bit | 16 | |
| | Max number of bits/TTI after channel coding | 4092 4236 | |
| | Uplink: Max number of bits/radio frame before rate matching | 2046 2118 | |
| RM attribute | 130-170 | | |

Transport channel parameters for the Downlink RAB

| Higher layer | RAB/Signalling RB | RAB | |
|--------------|---------------------------------------------|----------------------|--------|
| RLC | Logical channel type | DTCH | |
| | RLC mode | UM | |
| | Payload sizes, bit | 1336 | |
| | Max data rate, bps | 66800 | |
| | UMD PDU header, bit | 8 | |
| MAC | MAC header, bit | 0 | |
| | MAC multiplexing | N/A | |
| Layer 1 | TrCH type | DCH | |
| | TB sizes, bit | 1344 | |
| | TFS | TF0, bits | 0x1344 |
| | | TF1, bits | 1x1344 |
| | TTI, ms | 20 | |
| | Coding type | TC | |
| | CRC, bit | 16 | |
| | Max number of bits/TTI after channel coding | 4092 4236 | |
| | RM attribute | 130-170 | |

6.11.3 Acknowledged Mode Radio Bearer configuration (7 bit Length Indicator)

~~Transport channel parameters for the Uplink RAB~~

~~See clause 6.10.2.4.1.24.1. Note that TF2, TF3, and TF4 are not applied to the TFS for RLC tests, so the TFCS is defined as follows:~~

TFCS

| | |
|----------------------|--------------------------------------------------------------------------------------|
| TFCS size | 4 |
| TFCS | {(64 kbps RAB, DCCH)= (TF0, TF0), (TF1, TF0), (TF0, TF1), (TF1, TF1)} |

~~Transport channel parameters for the Downlink RAB~~

~~See clause 6.10.2.4.1.25.2. Note that TF2, TF3, and TF4 are not applied to the TFS for RLC tests, so TFCS is defined as follows.~~

TFCS

| | |
|------------------|------------------------------------------------------------------------|
| <u>TFCS size</u> | 4 |
| <u>TFCS</u> | (64 kbps RAB, DCCH)= (TF0, TF0), (TF1, TF0), (TF0, TF1), (TF1, TF1) |

Transport channel parameters for the Uplink RAB

| <u>Higher layer</u> | <u>RAB/Signalling RB</u> | <u>RAB</u> | |
|---------------------|--------------------------------------------------------------------|----------------|--------------|
| <u>RLC</u> | <u>Logical channel type</u> | <u>DTCH</u> | |
| | <u>RLC mode</u> | <u>AM</u> | |
| | <u>Payload sizes, bit</u> | <u>128</u> | |
| | <u>Max data rate, bps</u> | <u>6400</u> | |
| | <u>UMD PDU header, bit</u> | <u>16</u> | |
| <u>MAC</u> | <u>MAC header, bit</u> | <u>0</u> | |
| | <u>MAC multiplexing</u> | <u>N/A</u> | |
| <u>Layer 1</u> | <u>TrCH type</u> | <u>DCH</u> | |
| | <u>TB sizes, bit</u> | <u>144</u> | |
| | <u>TFS</u> | <u>0x144</u> | <u>0x144</u> |
| | | <u>1x144</u> | <u>1x144</u> |
| | <u>TTI, ms</u> | <u>20</u> | |
| | <u>Coding type</u> | <u>CC 1/3</u> | |
| | <u>CRC, bit</u> | <u>16</u> | |
| | <u>Max number of bits/TTI after channel coding</u> | <u>504</u> | |
| | <u>Uplink: Max number of bits/radio frame before rate matching</u> | <u>252</u> | |
| | <u>RM attribute</u> | <u>135-175</u> | |

TFCS

| | |
|------------------|----------------------------------------------------------------|
| <u>TFCS size</u> | 4 |
| <u>TFCS</u> | (RAB, DCCH)= (TF0, TF0), (TF1, TF0), (TF0, TF1), (TF1, TF1) |

Transport channel parameters for the Downlink RAB

| <u>Higher layer</u> | <u>RAB/Signalling RB</u> | <u>RAB</u> | |
|---------------------|----------------------------------------------------|----------------|--------------|
| <u>RLC</u> | <u>Logical channel type</u> | <u>DTCH</u> | |
| | <u>RLC mode</u> | <u>AM</u> | |
| | <u>Payload sizes, bit</u> | <u>128</u> | |
| | <u>Max data rate, bps</u> | <u>6400</u> | |
| | <u>UMD PDU header, bit</u> | <u>16</u> | |
| <u>MAC</u> | <u>MAC header, bit</u> | <u>0</u> | |
| | <u>MAC multiplexing</u> | <u>N/A</u> | |
| <u>Layer 1</u> | <u>TrCH type</u> | <u>DCH</u> | |
| | <u>TB sizes, bit</u> | <u>144</u> | |
| | <u>TFS</u> | <u>0x144</u> | <u>0x144</u> |
| | | <u>1x144</u> | <u>1x144</u> |
| | <u>TTI, ms</u> | <u>20</u> | |
| | <u>Coding type</u> | <u>CC 1/3</u> | |
| | <u>CRC, bit</u> | <u>16</u> | |
| | <u>Max number of bits/TTI after channel coding</u> | <u>504</u> | |
| | <u>RM attribute</u> | <u>135-175</u> | |

TFCS

| | |
|-----------|----------------------------------------------------------------|
| TFCS size | 4 |
| TFCS | (RAB, DCCH)= (TF0, TF0), (TF1, TF0), (TF0, TF1), (TF1, TF1) |

6.11.4 Acknowledged Mode Radio Bearer configuration (15 bit Length Indicator)

This configuration is based on the Interactive or background / UL:64 DL 64 kbps / PS RAB + UL:3.4 DL 3.4 kbps SRBs for DCCH (see TS 34.108 clause 6.10.2.4.1.26) with the transport channels parameters of the RAB defined as followed.

Transport channel parameters for the Uplink RAB

| Higher layer | RAB/Signalling RB | RAB | |
|--------------|-------------------------------------------------------------|----------------------|--------|
| RLC | Logical channel type | DTCH | |
| | RLC mode | AM | |
| | Payload sizes, bit | 1328 | |
| | Max data rate, bps | 66400 | |
| | AMD PDU header, bit | 16 | |
| MAC | MAC header, bit | 0 | |
| | MAC multiplexing | N/A | |
| Layer 1 | TrCH type | DCH | |
| | TB sizes, bit | 1344 | |
| | TFS | TF0, bits | 0x1344 |
| | | TF1, bits | 1x1344 |
| | TTI, ms | 20 | |
| | Coding type | TC | |
| | CRC, bit | 16 | |
| | Max number of bits/TTI after channel coding | 4092 4236 | |
| | Uplink: Max number of bits/radio frame before rate matching | 2046 2118 | |
| | RM attribute | 130-170 | |

Transport channel parameters for the Downlink RAB

| Higher layer | RAB/Signalling RB | RAB | |
|--------------|---------------------------------------------|----------------------|--------|
| RLC | Logical channel type | DTCH | |
| | RLC mode | AM | |
| | Payload sizes, bit | 1328 | |
| | Max data rate, bps | 66400 | |
| | AMD PDU header, bit | 16 | |
| MAC | MAC header, bit | 0 | |
| | MAC multiplexing | N/A | |
| Layer 1 | TrCH type | DCH | |
| | TB sizes, bit | 1344 | |
| | TFS | TF0, bits | 0x1344 |
| | | TF1, bits | 1x1344 |
| | TTI, ms | 20 | |
| | Coding type | TC | |
| | CRC, bit | 16 | |
| | Max number of bits/TTI after channel coding | 4092 4236 | |
| | RM attribute | 130-170 | |

<End of modified section>

<Start of next modified section>

9.1.1 Default RRC Message Contents (FDD)

<Skip until first modified default message>

Contents of RRC CONNECTION SETUP message: UM (Transition to CELL_DCH)

| Information Element | Value/remark |
|------------------------------------------------------|---------------------------------------------------------------------------------------------------------|
| Message Type | |
| Initial UE identity | Select the same identity as in the IE "Initial UE Identity" in received RRC CONNECTION REQUEST" message |
| RRC transaction identifier | Arbitrarily selects an integer between 0 and 3 |
| Activation time | Not Present(Now) |
| New U-RNTI | |
| - SRNC identity | 0000 0000 0001B |
| - S-RNTI | 0000 0000 0000 0000 0001B |
| New C-RNTI | Not present |
| RRC State Indicator | CELL_DCH |
| UTRAN DRX cycle length coefficient | 9 |
| Capability update requirement | |
| - UE radio access FDD capability update requirement | TRUE |
| - UE radio access TDD capability update requirement | FALSE |
| - System specific capability update requirement list | Gsm |
| Signalling RB information to setup | (UM DCCH for RRC) |
| - RB identity | Not Present |
| - CHOICE RLC info type | |
| - RLC info | |
| - CHOICE Uplink RLC mode | UM RLC |
| - Transmission RLC discard | Not Present |
| - CHOICE Downlink RLC mode | UM RLC |
| - RB mapping info | |
| - Information for each multiplexing option | 2 RBMuxOptions |
| - RLC logical channel mapping indicator | Not Present |
| - Number of RLC logical channels | 1 |
| - Uplink transport channel type | DCH |
| - UL Transport channel identity | 5 |
| - Logical channel identity | 1 |
| - CHOICE RLC size list | Configured |
| - MAC logical channel priority | 1 |
| - Downlink RLC logical channel info | |
| - Number of RLC logical channels | 1 |
| - Downlink transport channel type | DCH |
| - DL DCH Transport channel identity | 10 |
| - DL DSCH Transport channel identity | Not Present |
| - Logical channel identity | 1 |
| - RLC logical channel mapping indicator | Not Present |
| - Number of RLC logical channels | 1 |
| - Uplink transport channel type | RACH |
| - UL Transport channel identity | Not Present |
| - Logical channel identity | 1 |
| - CHOICE RLC size list | Explicit List |
| - RLC size index | According to TS34.108 clause 6.10.2.4.1.3 (standalone 13.6 kbps signalling radio bearer) |
| - MAC logical channel priority | 1 |
| - Downlink RLC logical channel info | |
| - Number of RLC logical channels | 1 |
| - Downlink transport channel type | FACH |
| - DL DCH Transport channel identity | Not Present |
| - DL DSCH Transport channel identity | Not Present |
| - Logical channel identity | 1 |
| Signalling RB information to setup | (AM DCCH for RRC) |
| - RB identity | Not Present |
| - CHOICE RLC info type | |

| Information Element | Value/remark |
|--------------------------------------------|------------------------------------------------------------------------------------------|
| - RLC info | AM RLC |
| - CHOICE Uplink RLC mode | AM RLC |
| - Transmission RLC discard | No discard |
| - SDU discard mode | 15 |
| - MAX_DAT | 12832 |
| - Transmission window size | 500 |
| - Timer_RST | 1 |
| - Max_RST | 1 |
| - Polling info | 200 |
| - Timer_poll_prohibit | 200 |
| - Timer_poll | Not Present |
| - Poll_PDU | 1 |
| - Poll_SDU | TRUE |
| - Last transmission PDU poll | TRUE |
| - Last retransmission PDU poll | 99 |
| - Poll_Window | Not Present |
| - Timer_poll_periodic | AM RLC |
| - CHOICE Downlink RLC mode | AM RLC |
| - In-sequence delivery | TRUE |
| - Receiving window size | 12832 |
| - Downlink RLC status info | 200 |
| - Timer_status_prohibit | Not Present |
| - Timer_EPC | TRUE |
| - Missing PDU indicator | TRUE |
| - Timer_STATUS_periodic | Not Present |
| - RB mapping info | 2 RBmuxOptions |
| - Information for each multiplexing option | Not Present |
| - RLC logical channel mapping indicator | Not Present |
| - Number of RLC logical channels | 1 |
| - Uplink transport channel type | DCH |
| - UL Transport channel identity | 5 |
| - Logical channel identity | 2 |
| - CHOICE RLC size list | Configure |
| - MAC logical channel priority | 2 |
| - Downlink RLC logical channel info | 1 |
| - Number of RLC logical channels | 1 |
| - Downlink transport channel type | DCH |
| - DL DCH Transport channel identity | 10 |
| - DL DSCH Transport channel identity | Not Present |
| - Logical channel identity | 2 |
| - RLC logical channel mapping indicator | Not Present |
| - Number of RLC logical channels | 1 |
| - Uplink transport channel type | RACH |
| - UL Transport channel identity | Not Present |
| - Logical channel identity | 2 |
| - CHOICE RLC size list | Explicit List |
| - RLC size index | According to TS34.108 clause 6.10.2.4.1.3 (standalone 13.6 kbps signalling radio bearer) |
| - MAC logical channel priority | 2 |
| - Downlink RLC logical channel info | 1 |
| - Number of RLC logical channels | 1 |
| - Downlink transport channel type | FACH |
| - DL DCH Transport channel identity | Not Present |
| - DL DSCH Transport channel identity | Not Present |
| - Logical channel identity | 2 |
| Signalling RB information to setup | (AM DCCH for NAS_DT High priority) |
| - RB identity | Not Present |
| - CHOICE RLC info type | AM RLC |
| - RLC info | AM RLC |
| - CHOICE Uplink RLC mode | AM RLC |
| - Transmission RLC discard | No discard |
| - SDU discard mode | 15 |
| - MAX_DAT | 12832 |
| - Transmission window size | 500 |
| - Timer_RST | 1 |
| - Max_RST | 1 |
| - Polling info | 200 |

| Information Element | Value/remark |
|--------------------------------------------|------------------------------------------------------------------------------------------|
| - Timer_poll_prohibit | 200 |
| - Timer_poll | 200 |
| - Poll_PDU | Not present |
| - Poll_SDU | 1 |
| - Last transmission PDU poll | TRUE |
| - Last retransmission PDU poll | TRUE |
| - Poll_Window | 99 |
| - Timer_poll_periodic | Not Present |
| - CHOICE Downlink RLC mode | AM RLC |
| - In-sequence delivery | TRUE |
| - Receiving window size | 42832 |
| - Downlink RLC status info | |
| - Timer_status_prohibit | 200 |
| - Timer_EPC | Not present |
| - Missing PDU indicator | TRUE |
| - Timer_STATUS_periodic | Not Present |
| - RB mapping info | |
| - Information for each multiplexing option | 2 RBMuxOptions |
| - RLC logical channel mapping indicator | Not Present |
| - Number of RLC logical channels | 1 |
| - Uplink transport channel type | DCH |
| - UL Transport channel identity | 5 |
| - Logical channel identity | 3 |
| - CHOICE RLC size list | Configured |
| - MAC logical channel priority | 3 |
| - Downlink RLC logical channel info | |
| - Number of RLC logical channels | 1 |
| - Downlink transport channel type | DCH |
| - DL DCH Transport channel identity | 10 |
| - DL DSCH Transport channel identity | Not Present |
| - Logical channel identity | 3 |
| - RLC logical channel mapping indicator | Not Present |
| - Number of RLC logical channels | 1 |
| - Uplink transport channel type | RACH |
| - UL Transport channel identity | Not Present |
| - Logical channel identity | 3 |
| - CHOICE RLC size list | Explicit List |
| - RLC size index | According to TS34.108 clause 6.10.2.4.1.3 (standalone 13.6 kbps signalling radio bearer) |
| - MAC logical channel priority | 3 |
| - Downlink RLC logical channel info | |
| - Number of RLC logical channels | 1 |
| - Downlink transport channel type | FACH |
| - DL DCH Transport channel identity | Not Present |
| - DL DSCH Transport channel identity | Not Present |
| - Logical channel identity | 3 |
| Signalling RB information to setup | (AM DCCH for NAS_DT Low priority) |
| - RB identity | Not Present |
| - CHOICE RLC info type | |
| - RLC info | |
| - CHOICE Uplink RLC mode | AM RLC |
| - Transmission RLC discard | |
| - SDU discard mode | No discard |
| - MAX_DAT | 15 |
| - Transmission window size | 42832 |
| - Timer_RST | 500 |
| - Max_RST | 1 |
| - Polling info | |
| - Timer_poll_prohibit | 200 |
| - Timer_poll | 200 |
| - Poll_PDU | Not present |
| - Poll_SDU | 1 |
| - Last transmission PDU poll | TRUE |
| - Last retransmission PDU poll | TRUE |
| - Poll_Window | 99 |
| - Timer_poll_periodic | Not Present |
| - CHOICE Downlink RLC mode | AM RLC |

| Information Element | Value/remark |
|-------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| - In-sequence delivery | TRUE |
| - Receiving window size | 42832 |
| - Downlink RLC status info | |
| - Timer_status_prohibit | 200 |
| - Timer_EPC | Not Present |
| - Missing PDU indicator | TRUE |
| - Timer_STATUS_periodic | Not Present |
| - RB mapping info | |
| - Information for each multiplexing option | 2 RBMuxOptions |
| - RLC logical channel mapping indicator | Not Present |
| - Number of RLC logical channels | 1 |
| - Uplink transport channel type | DCH |
| - UL Transport channel identity | 5 |
| - Logical channel identity | 4 |
| - CHOICE RLC size list | Configured |
| - MAC logical channel priority | 4 |
| - Downlink RLC logical channel info | |
| - Number of RLC logical channels | 1 |
| - Downlink transport channel type | DCH |
| - DL DCH Transport channel identity | 10 |
| - DL DSCH Transport channel identity | Not Present |
| - Logical channel identity | 4 |
| - RLC logical channel mapping indicator | Not Present |
| - Number of RLC logical channels | 1 |
| - Uplink transport channel type | RACH |
| - UL Transport channel identity | Not Present |
| - Logical channel identity | 4 |
| - CHOICE RLC size list | Explicit List |
| - RLC size index | According to TS34.108 clause 6.10.2.4.1.3 (standalone 13.6 kbps signalling radio bearer) |
| - MAC logical channel priority | 4 |
| - Downlink RLC logical channel info | |
| - Number of RLC logical channels | 1 |
| - Downlink transport channel type | FACH |
| - DL DCH Transport channel identity | Not Present |
| - DL DSCH Transport channel identity | Not Present |
| - Logical channel identity | 4 |
| UL Transport channel information for all transport channels | |
| - PRACH TFCS | Not Present |
| - CHOICE Mode | FDD |
| - TFC subset | Nor Present |
| - UL DCH TFCS | |
| - CHOICE TFCI signalling | Normal |
| - TFCI Field 1 information | |
| - CHOICE TFCS representation | Addition |
| - TFCS complete reconfigure | |
| - CHOICE CTFC Size | 2bit CTFC |
| - CTFC information | This IE is repeated for TFC numbers according to TS 34.108 clause 6.10.2.4.1.3 (standalone 13.6 kbps signalling radio bearer) |
| - CTFC | According to TS34.108 clause 6.10.2.4.1.3 (standalone 13.6 kbps signalling radio bearer) |
| - Power offset information | |
| - CHOICE Gain Factors | Computed Gain Factors(The last TFC is set to Signalled Gain Factors) |
| - Gain factor βc | 11 (below 64 kbps) 9 (higher than 64 kbps) (Not Present if the above is set to Computed Gain Factors) |
| - Gain factor βd | 15 (Not Present if the above is set to Computed Gain Factors) |
| - Reference TFC ID | 0 |
| - CHOICE mode | FDD |
| - Power offset Pp-m | Not Present |
| Added or Reconfigured UL TrCH information | |
| - Uplink transport channel type | DCH |
| - UL Transport channel identity | 5 |

| Information Element | Value/remark |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> - TFS - CHOICE Transport channel type - Dynamic Transport format information - RLC size - Number of TBs and TTI lists - Transmission Time Interval - Number of Transport blocks - CHOICE Logical channel list - Semi-static Transport Format information - Transmission time interval - Type of channel coding - Coding Rate - Rate matching attribute - CRC size | <p>Dedicated transport channels</p> <p>According to TS 34.108 clause 6.10.2.4.1.3 (standalone 13.6 kbps signalling radio bearer) (This IE is repeated for TFI number)</p> <p>According to TS 34.108 clause 6.10.2.4.1.3 (standalone 13.6 kbps signalling radio bearer)</p> <p>According to TS 34.108 clause 6.10.2.4.1.3 (standalone 13.6 kbps signalling radio bearer)</p> <p>All</p> <p>According to TS34.108 clause 6.10.2.4.1.3 (standalone 13.6 kbps signalling radio bearer)</p> <p>According to TS34.108 clause 6.10.2.4.1.3 (standalone 13.6 kbps signalling radio bearer)</p> <p>According to TS34.108 clause 6.10.2.4.1.3 (standalone 13.6 kbps signalling radio bearer)</p> <p>According to TS34.108 clause 6.10.2.4.1.3 (standalone 13.6 kbps signalling radio bearer)</p> <p>According to TS34.108 clause 6.10.2.4.1.3 (standalone 13.6 kbps signalling radio bearer)</p> |
| <p>DL Transport channel information common for all transport channel</p> <ul style="list-style-type: none"> - SCCPCH TFCS - CHOICE mode - CHOICE DL parameters | <p>Not Present</p> <p>FDD</p> <p>Same as UL</p> |
| <p>Added or Reconfigured DL TrCH information</p> <ul style="list-style-type: none"> - Downlink transport channel type - DL Transport channel identity - CHOICE DL parameters - Uplink transport channel type - UL TrCH Identity - DCH quality target - BLER Quality value | <p>DCH</p> <p>10</p> <p>Same as UL</p> <p>DCH</p> <p>5</p> <p>-2.0</p> |
| <p>Frequency info</p> | <p>Not Present</p> |
| <p>Maximum allowed UL TX power</p> | <p>Not Present</p> |
| <p>Uplink DPCH info</p> <ul style="list-style-type: none"> - Uplink DPCH power control info - DPCCH power offset - PC Preamble - SRB delay - Power Control Algorithm - TPC step size - Scrambling code type - Scrambling code number - Number of DPDCH - Spreading factor - TFCI existence - Number of FBI bit - Puncturing Limit | <p>-6dB</p> <p>1 frame</p> <p>7 frames</p> <p>Algorithm1</p> <p>1dB</p> <p>Long</p> <p>0 (0 to 16777215)</p> <p>Not Present(1)</p> <p>According to TS34.108 clause 6.10.2.4.1.3 (standalone 13.6 kbps signalling radio bearer)</p> <p>According to TS34.108 clause 6.10.2.4.1.3 (standalone 13.6 kbps signalling radio bearer)</p> <p>According to TS34.108 clause 6.10.2.4.1.3 (standalone 13.6 kbps signalling radio bearer)</p> <p>According to TS34.108 clause 6.10.2.4.1.3 (standalone 13.6 kbps signalling radio bearer)</p> |
| <p>Downlink information common for all radio links</p> <ul style="list-style-type: none"> - Downlink DPCH info common for all RL - Timing Indication - CFN-targetSFN frame offset - CHOICE mode - Downlink DPCH power control information - DPC mode - Power offset P_{Pilot-DPCH} - DL rate matching restriction information - Spreading factor - Fixed or Flexible Position | <p>Initialise</p> <p>Not Present</p> <p>FDD</p> <p>0 (single)</p> <p>0</p> <p>Not Present</p> <p>According to TS34.108 clause 6.10.2.4.1.3 (standalone 13.6 kbps signalling radio bearer)</p> <p>According to TS34.108 clause 6.10.2.4.1.3 (standalone 13.6 kbps signalling radio bearer)</p> |

| Information Element | Value/remark |
|------------------------------------------------|------------------------------------------------------------------------------------------|
| - TFCI existence | kbps signalling radio bearer) |
| - CHOICE SF | According to TS34.108 clause 6.10.2.4.1.3 (standalone 13.6 kbps signalling radio bearer) |
| - DPCH compressed mode info | According to TS34.108 clause 6.10.2.4.1.3 (standalone 13.6 kbps signalling radio bearer) |
| - TX Diversity mode | Not Present |
| - SSDT information | None |
| - Default DPCH Offset Value | Not Present |
| Downlink information for each radio links list | Arbitrary set to value 0..306688 by step of 512 |
| - Downlink information for each radio links | |
| - CHOICE mode | FDD |
| - Primary CPICH info | |
| - Primary scrambling code | Reference to clause 6.1 "Default settings (FDD)" |
| - PDSCH with SHO DCH info | Not Present |
| - PDSCH code mapping | Not Present |
| - Downlink DPCH info for each RL | |
| - Primary CPICH usage for channel estimation | Primary CPICH may be used |
| - DPCH frame offset | Set to value: Default DPCH Offset Value mod 38400 |
| - Secondary CPICH info | Not Present |
| - DL channelisation code | |
| - Secondary scrambling code | 1 |
| - Spreading factor | According to TS34.108 clause 6.10.2.4.1.3 (standalone 13.6 kbps signalling radio bearer) |
| - Code number | 0 |
| - Scrambling code change | Not Present |
| - TPC combination index | 0 |
| - SSDT Cell Identity | Not Present |
| - Closed loop timing adjustment mode | Not Present |
| - SCCPCH information for FACH | Not Present |

Contents of RRC CONNECTION SETUP message: UM (Transition to CELL_FACH)

| Information Element | Value/remark |
|--------------------------------------------|---------------------------------------------------------------------------------------------------------|
| Message Type | |
| Initial UE identity | Select the same identity as in the IE "Initial UE Identity" in received RRC CONNECTION REQUEST" message |
| RRC transaction identifier | Arbitrarily selects an integer between 0 and 3 |
| Activation time | Not Present (Now) |
| New U-RNTI | |
| - SRNC identity | 0000 0000 0001B |
| - S-RNTI | 0000 0000 0000 0000 0001B |
| New C-RNTI | 0000 0000 0000 0001B |
| RRC state indicator | CELL_FACH |
| UTRAN DRX cycle length coefficient | 9 |
| Capability update requirement | Not Present |
| Signalling RB information to setup | (UM DCCH for RRC) |
| - RB identity | Not present |
| - CHOICE RLC info type | RLC info |
| - CHOICE Uplink RLC mode | UM RLC |
| - Transmission RLC discard | Not present |
| - SDU discard mode | Not present |
| - CHOICE Downlink RLC mode | UM RLC |
| - RB mapping info | |
| - Information for each multiplexing option | 2 RBMuxOptions |
| - RLC logical channel mapping indicator | Not Present |
| - Number of uplink RLC logical channels | 1 |
| - Uplink transport channel type | DCH |
| - UL Transport channel identity | 5 |
| - Logical channel identity | 1 |
| - CHOICE RLC size list | Configured |
| - MAC logical channel priority | 1 |
| - Downlink RLC logical channel info | |
| - Number of downlink RLC logical channels | 1 |
| - Downlink transport channel type | DCH |

| Information Element | Value/remark |
|--------------------------------------------|------------------------------------------------------------------------------------------|
| - DL DCH Transport channel identity | 10 |
| - DL DSCH Transport channel identity | Not Present |
| - Logical channel identity | 1 |
| - RLC logical channel mapping indicator | Not Present |
| - Number of uplink RLC logical channels | 1 |
| - Uplink transport channel type | RACH |
| - UL Transport channel identity | Not Present |
| - Logical channel identity | 1 |
| - CHOICE RLC size list | Explicit list |
| - RLC size index | According to TS34.108 clause 6.10.2.4.1.3 (standalone 13.6 kbps signalling radio bearer) |
| - MAC logical channel priority | 1 |
| - Downlink RLC logical channel info | |
| - Number of downlink RLC logical channels | 1 |
| - Downlink transport channel type | FACH |
| - DL DCH Transport channel identity | Not Present |
| - DL DSCH Transport channel identity | Not Present |
| - Logical channel identity | 1 |
| Signalling RB information to setup | (AM DCCH for RRC) |
| - RB identity | Not Present |
| - CHOICE RLC info type | RLC info |
| - CHOICE Uplink RLC mode | AM RLC |
| - Transmission RLC discard | |
| - SDU discard mode | No Discard |
| - MAX_DAT | 15 |
| - Transmission window size | 428 32 |
| - Timer_RST | 500 |
| - Max_RST | 1 |
| - Polling info | |
| - Timer_poll_prohibit | 200 |
| - Timer_poll | 200 |
| - Poll_PDU | Not Present |
| - Poll_SDU | 1 |
| - Last transmission PDU poll | TRUE |
| - Last retransmission PDU poll | TRUE |
| - Poll_Windows | 99 |
| - Timer_poll_periodic | Not Present |
| - CHOICE Downlink RLC mode | AM RLC |
| - In-sequence delivery | TRUE |
| - Receiving window size | 428 32 |
| - Downlink RLC status info | |
| - Timer_status_prohibit | 200 |
| - Timer_EPC | Not Present |
| - Missing PDU indicator | TRUE |
| - Timer_STATUS_periodic | Not Present |
| - RB mapping info | |
| - Information for each multiplexing option | 2 RBMuxOptions |
| - RLC logical channel mapping indicator | Not Present |
| - Number of uplink RLC logical channels | 1 |
| - Uplink transport channel type | DCH |
| - UL Transport channel identity | 5 |
| - Logical channel identity | 2 |
| - CHOICE RLC size list | Configured |
| - MAC logical channel priority | 2 |
| - Downlink RLC logical channel info | |
| - Number of downlink RLC logical channels | 1 |
| - Downlink transport channel type | DCH |
| - DL DCH Transport channel identity | 10 |
| - DL DSCH Transport channel identity | Not Present |
| - Logical channel identity | 2 |
| - RLC logical channel mapping indicator | Not Present |
| - Number of uplink RLC logical channels | 1 |
| - Uplink transport channel type | RACH |
| - UL Transport channel identity | Not Present |
| - Logical channel identity | 2 |

| Information Element | Value/remark |
|----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> - CHOICE RLC size list - RLC size index | Explicit list According to TS34.108 clause 6.10.2.4.1.3 (standalone 13.6 kbps signalling radio bearer) |
| <ul style="list-style-type: none"> - MAC logical channel priority | 2 |
| <ul style="list-style-type: none"> - Downlink RLC logical channel info | 1 |
| <ul style="list-style-type: none"> - Number of downlink RLC logical channels | FACH |
| <ul style="list-style-type: none"> - Downlink transport channel type | Not Present |
| <ul style="list-style-type: none"> - DL DCH Transport channel identity | Not Present |
| <ul style="list-style-type: none"> - DL DSCH Transport channel identity | 2 |
| <ul style="list-style-type: none"> - Logical channel identity | (AM DCCH for NAS_DT High priority) |
| Signalling RB information to setup | Not present |
| <ul style="list-style-type: none"> - RB identity | RLC info |
| <ul style="list-style-type: none"> - CHOICE RLC info type | AM RLC |
| <ul style="list-style-type: none"> - CHOICE Uplink RLC mode | No Discard |
| <ul style="list-style-type: none"> - Transmission RLC discard | 15 |
| <ul style="list-style-type: none"> - SDU discard mode | 128 32 |
| <ul style="list-style-type: none"> - MAX_DAT | 500 |
| <ul style="list-style-type: none"> - Transmission window size | 1 |
| <ul style="list-style-type: none"> - Timer_RST | 200 |
| <ul style="list-style-type: none"> - Max_RST | 200 |
| <ul style="list-style-type: none"> - Polling info | Not Present |
| <ul style="list-style-type: none"> - Timer_poll_prohibit | 1 |
| <ul style="list-style-type: none"> - Timer_poll | TRUE |
| <ul style="list-style-type: none"> - Poll_PDU | TRUE |
| <ul style="list-style-type: none"> - Poll_SDU | 99 |
| <ul style="list-style-type: none"> - Last transmission PDU poll | Not Present |
| <ul style="list-style-type: none"> - Last retransmission PDU poll | TRUE |
| <ul style="list-style-type: none"> - Poll_Windows | 200 |
| <ul style="list-style-type: none"> - Timer_poll_periodic | Not Present |
| <ul style="list-style-type: none"> - CHOICE Downlink RLC mode | AM RLC |
| <ul style="list-style-type: none"> - In-sequence delivery | TRUE |
| <ul style="list-style-type: none"> - Receiving window size | 128 32 |
| <ul style="list-style-type: none"> - Downlink RLC status info | 200 |
| <ul style="list-style-type: none"> - Timer_status_prohibit | Not Present |
| <ul style="list-style-type: none"> - Timer_EPC | Not Present |
| <ul style="list-style-type: none"> - Missing PDU indicator | TRUE |
| <ul style="list-style-type: none"> - Timer_STATUS_periodic | Not Present |
| <ul style="list-style-type: none"> - RB mapping info | 2 RBMuxOptions |
| <ul style="list-style-type: none"> - Information for each multiplexing option | Not Present |
| <ul style="list-style-type: none"> - RLC logical channel mapping indicator | 1 |
| <ul style="list-style-type: none"> - Number of uplink RLC logical channels | DCH |
| <ul style="list-style-type: none"> - Uplink transport channel type | 5 |
| <ul style="list-style-type: none"> - UL Transport channel identity | 3 |
| <ul style="list-style-type: none"> - Logical channel identity | Configured |
| <ul style="list-style-type: none"> - CHOICE RLC size list | 3 |
| <ul style="list-style-type: none"> - MAC logical channel priority | 3 |
| <ul style="list-style-type: none"> - Downlink RLC logical channel info | 1 |
| <ul style="list-style-type: none"> - Number of downlink RLC logical channels | DCH |
| <ul style="list-style-type: none"> - Downlink transport channel type | 10 |
| <ul style="list-style-type: none"> - DL DCH Transport channel identity | Not Present |
| <ul style="list-style-type: none"> - DL DSCH Transport channel identity | Not Present |
| <ul style="list-style-type: none"> - Logical channel identity | 3 |
| <ul style="list-style-type: none"> - RLC logical channel mapping indicator | Not Present |
| <ul style="list-style-type: none"> - Number of uplink RLC logical channels | 1 |
| <ul style="list-style-type: none"> - Uplink transport channel type | RACH |
| <ul style="list-style-type: none"> - UL DCH Transport channel identity | Not Present |
| <ul style="list-style-type: none"> - Logical channel identity | 3 |
| <ul style="list-style-type: none"> - CHOICE RLC size list | Explicit list |
| <ul style="list-style-type: none"> - RLC size index | According to TS34.108 clause 6.10.2.4.1.3 (standalone 13.6 kbps signalling radio bearer) |
| <ul style="list-style-type: none"> - MAC logical channel priority | 3 |
| <ul style="list-style-type: none"> - Downlink RLC logical channel info | 1 |
| <ul style="list-style-type: none"> - Number of downlink RLC logical channels | FACH |
| <ul style="list-style-type: none"> - Downlink transport channel type | Not Present |
| <ul style="list-style-type: none"> - DL DCH Transport channel identity | Not Present |
| <ul style="list-style-type: none"> - DL DSCH Transport channel identity | Not Present |
| <ul style="list-style-type: none"> - Logical channel identity | 3 |

| Information Element | Value/remark |
|-------------------------------------------------------------|------------------------------------------------------------------------------------------|
| Signalling RB information to setup | (AM DCCH for NAS_DT Low priority) |
| - RB identity | Not Present |
| - CHOICE RLC info type | RLC info |
| - CHOICE Uplink RLC mode | AM RLC |
| - Transmission RLC discard | |
| - SDU discard mode | No Discard |
| - MAX_DAT | 15 |
| - Transmission window size | 128 32 |
| - Timer_RST | 500 |
| - Max_RST | 1 |
| - Polling info | |
| - Timer_poll_prohibit | 200 |
| - Timer_poll | 200 |
| - Poll_PDU | Not Present |
| - Poll_SDU | 1 |
| - Last transmission PDU poll | TRUE |
| - Last retransmission PDU poll | TRUE |
| - Poll_Windows | 99 |
| - Timer_poll_periodic | Not Present |
| - CHOICE Downlink RLC mode | AM RLC |
| - In-sequence delivery | TRUE |
| - Receiving window size | 128 32 |
| - Downlink RLC status info | |
| - Timer_status_prohibit | 200 |
| - Timer_EPC | Not Present |
| - Missing PDU indicator | TRUE |
| - Timer_STATUS_periodic | Not Present |
| - RB mapping info | |
| - Information for each multiplexing option | 2 RBMuxOptions |
| - RLC logical channel mapping indicator | Not Present |
| - Number of uplink RLC logical channels | 1 |
| - Uplink transport channel type | DCH |
| - UL Transport channel identity | 5 |
| - Logical channel identity | 4 |
| - CHOICE RLC size list | Configured |
| - MAC logical channel priority | 4 |
| - Downlink RLC logical channel info | |
| - Number of downlink RLC logical channels | 1 |
| - Downlink transport channel type | DCH |
| - DL DCH Transport channel identity | 10 |
| - DL DSCH Transport channel identity | Not Present |
| - Logical channel identity | 4 |
| - RLC logical channel mapping indicator | Not Present |
| - Number of uplink RLC logical channels | 1 |
| - Uplink transport channel type | RACH |
| - UL Transport channel identity | Not Present |
| - Logical channel identity | 4 |
| - CHOICE RLC size list | Explicit list |
| - RLC size index | According to TS34.108 clause 6.10.2.4.1.3 (standalone 13.6 kbps signalling radio bearer) |
| - MAC logical channel priority | 4 |
| - Downlink RLC logical channel info | |
| - Number of downlink RLC logical channels | 1 |
| - Downlink transport channel type | FACH |
| - DL DCH Transport channel identity | Not Present |
| - DL DSCH Transport channel identity | Not Present |
| - Logical channel identity | 4 |
| UL Transport channel information for all transport channels | |
| - PRACH TFCS | Not Present |
| - CHOICE Mode | FDD |
| - TFC subset | Not Present |
| - UL DCH TFCS | |
| - CHOICE TFCI signalling | Normal |
| - TFCI Field 1 information | |
| - CHOICE TFCS representation | Addition |
| - TFCS complete reconfigure | |

| Information Element | Value/remark |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> - CHOICE CTFC Size - CTFC information - CTFC - Power offset information - CHOICE Gain Factors - Gain factor β_c - Gain factor β_d - Reference TFC ID - CHOICE mode - Power offset Pp-m | <p>2bit CTFC</p> <p>This IE is repeated for TFC numbers according to TS34.108 clause 6.10.2.4.1.3 (standalone 13.6 kbps signalling radio bearer)</p> <p>According to TS34.108 clause 6.10.2.4.1.3 (standalone 13.6 kbps signalling radio bearer)</p> <p>Computed Gain Factors (The last TFC is set to Signalled Gain Factors)</p> <p>11 (below 64 kbps)</p> <p>9 (higher than 64 kbps)</p> <p>(Not Present if the above is set to Computed Gain Factors)</p> <p>15</p> <p>(Not Present if the above is set to Computed Gain Factors)</p> <p>0</p> <p>FDD</p> <p>Not Present</p> |
| <p>Added or Reconfigured TrCH information list</p> | <p>TS 25.331 specifies that "Although this IE is not required when the IE "RRC state indicator" is set to "CELL_FACH", need is MP to align with ASN.1"</p> |
| <ul style="list-style-type: none"> - Added or Reconfigured UL TrCH information <ul style="list-style-type: none"> - Uplink transport channel type - UL Transport channel identity - TFS - CHOICE Transport channel type - Dynamic Transport format information - RLC Size - Number of TBs and TTI List - Transmission Time Interval - Number of Transport blocks - CHOICE Logical Channel List - Semi-static Transport Format information <ul style="list-style-type: none"> - Transmission time interval - Type of channel coding - Coding Rate - Rate matching attribute - CRC size | <p>DCH</p> <p>5</p> <p>Delicated transport channels</p> <p>Value 16 results in an RLC size of 144 bits; OctetModeType1 ((8*sizeType1)+16).</p> <p>List with single entry</p> <p>Not Present</p> <p>0</p> <p>ALL</p> <p>40 ms</p> <p>Convolutional</p> <p>1/3</p> <p>160</p> <p>16</p> |
| <p>DL Transport channel information common for all transport channel</p> | <p>Not Present</p> |
| <ul style="list-style-type: none"> - SCCPCH TFCS - CHOICE mode - CHOICE DL parameters | <p>FDD</p> <p>Same as UL</p> |
| <p>Added or Reconfigured TrCH information list</p> | <p>TS 25.331 specifies that "Although this IE is not required when the IE "RRC state indicator" is set to "CELL_FACH", need is MP to align with ASN.1"</p> |
| <ul style="list-style-type: none"> - Added or Reconfigured DL TrCH information <ul style="list-style-type: none"> - Downlink transport channel type - DL Transport channel identity - CHOICE DL parameters - Uplink Transport channel type - UL TrCH identity - DCH quality target | <p>DCH</p> <p>10</p> <p>Same as UL</p> <p>DCH</p> <p>5</p> <p>Not Present</p> |
| <p>Frequency info</p> | <p>Not present</p> |
| <p>Maximum allowed UL TX power</p> | <p>Not present</p> |
| <p>CHOICE channel requirement</p> | <p>Not Present</p> |
| <p>Downlink information common for all radio links</p> | <p>Not Present</p> |
| <p>Downlink information for each radio link list</p> | <p>Not present</p> |

<End of modified section>

3GPP TSGT #18
 San Antonio 10-14 Feb 03
 3GPP TSG-T1 Sig SWG #27
 San Antonio 11-13 Feb 03

Tdoc T1-030037
Tdoc # T1S030020

CR-Form-v7

CHANGE REQUEST

34.108 CR 173 # rev # Current version: **4.5.0**

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the # symbols.

Proposed change affects: UICC apps# ME Radio Access Network Core Network

Title: # Removal of RAB Combinations from TS 34.108

Source: # Three (Hutchison 3G UK)

Work item code: # TEI **Date:** # 07/01/2003

Category: # **A** **Release:** # Rel-4

Use one of the following categories:

- F (correction)
- A (corresponds to a correction in an earlier release)
- B (addition of feature),
- C (functional modification of feature)
- D (editorial modification)

Detailed explanations of the above categories can be found in 3GPP [TR 21.900](#).

Use one of the following releases:

- 2 (GSM Phase 2)
- R96 (Release 1996)
- R97 (Release 1997)
- R98 (Release 1998)
- R99 (Release 1999)
- Rel-4 (Release 4)
- Rel-5 (Release 5)
- Rel-6 (Release 6)

Reason for change: # RAN 2 WG has identified a number of RAB combinations considered by many companies as not providing any useful additional test coverage, that is not already provided by other RAB combination test cases already captured in section 6.10.2. That being the case, the removal of the specified combinations will reduce the burden of effort on T1 and the test industry to provide test cases that are not needed. Also the scope of conformance testing is reduced slightly without impacting the quality of UEs being submitted for GCF certification. The key benefit of this is time saved could be spent on higher priority test cases.

Summary of change: # It is proposed to remove the following combinations of RABs and signalling RBs

1. Combinations on DPCH

| 6.10.2.2 | RAB and SRB |
|----------|---------------------------------------------------------------------------------------------|
| 18) | Streaming / unknown / UL:0 DL:64 kbps / CS UL:3.4 DL:3.4 kbps SRBs for DCCH |
| 19) | Streaming / unknown / UL:64 DL:0 kbps / CS + UL:3.4 DL:3.4 kbps SRBs for DCCH |
| 24) | Interactive or background / UL:64 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH |
| 36) | Interactive or background / UL:128 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH |
| 37) | Interactive or background / UL:384 DL:2048 kbps / PS RAB + |

| | |
|-----|---------------------------------------------------------------------------------------------------------------------------------------------------|
| | UL:3.4 DL:3.4 kbps SRBs for DCCH |
| 46) | Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Streaming / unknown / UL:0 DL:64 kbps / CS or PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH |
| 54) | Interactive or background / UL:64 DL:128 kbps / PS RAB + Streaming / unknown / UL:0 DL:64 kbps / CS + UL:3.4 DL:3.4 kbps SRBs for DCCH |

2. Combinations on DSCH and DPCH

| | |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| 6.10.2.2 | RAB and SRB |
| 1) | Interactive or background / UL:64 DL:256 kbps / PS RAB + UL:3.4 DL: 3.4 kbps SRBs for DCCH |
| 4) | Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:256 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH |

Consequences if not approved: ☞ The specified RABs will, by definition, be subjected to test case preparation although will probably not be used .

Clauses affected: ☞ Sect 6.10.2

| | | | | | | | | | | | | | | |
|------------------------------|---|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---|--|---|---|--|--|---|--|---------------------------|---|-----------|
| Other specs affected: | ☞ | <table border="1"> <tr> <td>Y</td> <td>N</td> </tr> <tr> <td></td> <td>X</td> </tr> <tr> <td>X</td> <td></td> </tr> <tr> <td></td> <td>X</td> <td></td> </tr> </table> | Y | N | | X | X | | | X | | Other core specifications | ☞ | TS 34.123 |
| | Y | N | | | | | | | | | | | | |
| | | X | | | | | | | | | | | | |
| X | | | | | | | | | | | | | | |
| | X | | | | | | | | | | | | | |
| | X | Test specifications | | | | | | | | | | | | |
| | X | O&M Specifications | | | | | | | | | | | | |

Other comments: ☞

How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ☞ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

<New section starts>

6.10.2 RAB and signalling RB for FDD

6.10.2.1 RABs and signalling RBs

In the following clauses, the typical parameter sets are presented for reference RABs, signalling RBs and important combinations of them. The data rate given for each RAB is the maximum data rate that can be supported by that RAB.

NOTE: The granularity for each RAB needs to be clarified.

Table 6.10.2.1.1: Prioritised RABs.

| # | Traffic class [15] | SSD [15] | Max. rate, kbps | CS/PS |
|-----|-------------------------------------------|--------------------|-----------------------------------------------------|---------------|
| 1 | Conversational | Speech | UL:12.2 DL:12.2 | CS |
| 1a | Conversational | Speech | UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) | CS |
| 2 | Conversational | Speech | UL:10.2 DL:10.2 | CS |
| 2a | Conversational | Speech | UL:(10.2, 6.7, 5.9, 4.75) DL:(10.2, 6.7, 5.9, 4.75) | CS |
| 3 | Conversational | Speech | UL:7.95 DL:7.95 | CS |
| 4 | Conversational | Speech | UL:7.4 DL:7.4 | CS |
| 4a | Conversational | Speech | UL:(7.4, 6.7, 5.9, 4.75) DL:(7.4, 6.7, 5.9, 4.75) | CS |
| 5 | Conversational | Speech | UL:6.7 DL:6.7 | CS |
| 6 | Conversational | Speech | UL:5.9 DL:5.9 | CS |
| 7 | Conversational | Speech | UL:5.15 DL:5.15 | CS |
| 8 | Conversational | Speech | UL:4.75 DL:4.75 | CS |
| 9 | Conversational | Unknown | UL:28.8 DL:28.8 | CS |
| 10 | Conversational | Unknown | UL:64 DL:64 | CS |
| 11 | Conversational | Unknown | UL:32 DL:32 | CS |
| 12 | Streaming | Unknown | UL:14.4 DL:14.4 | CS |
| 13 | Streaming | Unknown | UL:28.8 DL:28.8 | CS |
| 14 | Streaming | Unknown | UL:57.6 DL:57.6 | CS |
| 15 | Void Streaming | Unknown | UL:0 DL:64 | CS |
| 15a | Streaming | Unknown | UL:16 DL:64 | PS |
| 16 | Void Streaming | Unknown | UL:64 DL:0 | CS |
| 17 | Void | | | |
| 18 | Void | | | |
| 19 | Void | | | |
| 20 | Interactive or Background | N/A | UL:32 DL:8 | PS |
| 20a | Interactive or Background | N/A | UL:8 DL:8 | PS |
| 20b | Interactive or Background | N/A | UL:16 DL:16 | PS |
| 20c | Interactive or Background | N/A | UL:32 DL:32 | PS |
| 21 | Void Interactive or Background | N/A | UL:64 DL:8 | PS |
| 22 | Interactive or Background | N/A | UL:32 DL:64 | PS |
| 23 | Interactive or Background | N/A | UL:64 DL:64 | PS |
| 24 | Interactive or Background | N/A | UL:64 DL:128 | PS |
| 25 | Interactive or Background | N/A | UL:128 DL:128 | PS |
| 26 | Interactive or Background | N/A | UL:64 DL:384 | PS |
| 27 | Interactive or Background | N/A | UL:128 DL:384 | PS |
| 28 | Interactive or Background | N/A | UL:384 DL:384 | PS |
| 29 | Interactive or Background | N/A | UL:64 DL:2048 | PS |
| 30 | Interactive or Background | N/A | UL:128 DL:2048 | PS |
| 31 | Void Interactive or Background | N/A | UL:384 DL:2048 | PS |
| 32 | Interactive or Background | N/A | UL:64 DL:256 | PS |
| 33 | Interactive or Background | N/A | UL:0 DL:32 | PS |
| 34 | Interactive or Background | N/A | UL:32 DL: 0 | PS |
| 35 | Interactive or Background | N/A | UL:64 DL:144 | PS |
| 36 | Interactive or Background | N/A | UL:144 DL:144 | PS |

Table 6.10.2.1.2: Signalling RBs

| # | Maximum rate, kbps | Logical channel | PhyCh onto which SRBs are mapped |
|---|---------------------|-----------------|----------------------------------|
| 1 | UL:1.7 DL:1.7 | DCCH | DPCH |
| 2 | UL:3.4 DL:3.4 | DCCH | DPCH |
| 3 | UL:13.6 DL:13.6 | DCCH | DPCH |
| 4 | DL:27.2 (alt. 40.8) | DCCH | SCCPCH |
| 5 | UL:16.6 | CCCH | PRACH |
| 6 | DL:30.4 (alt. 45.6) | CCCH | SCCPCH |
| 7 | DL:33.2 (alt. 49.8) | BCCH: | SCCPCH |
| 8 | DL:24 (alt. 6.4) | PCCH | SCCPCH |

6.10.2.2 Combinations of RABs and Signalling RBs

In the present document, physical channel parameters for following combinations of RABs and signalling RBs on a CCTrCH are described.

NOTE: It is understood that for speech service the AMR mode may be operated asymmetrically for the uplink and downlink.

Combinations on DPCH

- 1) Stand-alone UL:1.7 DL:1.7 kbps SRBs for DCCH.
- 2) Stand-alone UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 3) Stand-alone UL:13.6 DL:13.6 kbps SRBs for DCCH.
- 4) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 4a) Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 5) Conversational / speech / UL:10.2 DL:10.2 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 5a) Conversational / speech / UL:(10.2, 6.7, 5.9, 4.75) DL:(10.2, 6.7, 5.9, 4.75) kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 6) Conversational / speech / UL:7.95 DL:7.95 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 7) Conversational / speech / UL:7.4 DL:7.4 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 7a) Conversational / speech / UL:(7.4, 6.7, 5.9, 4.75) DL:(7.4, 6.7, 5.9, 4.75) kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 8) Conversational / speech / UL:6.7 DL:6.7 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 9) Conversational / speech / UL:5.9 DL:5.9 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 10) Conversational / speech / UL:5.15 DL:5.15 kbps / CS RAB
+ UL:1.7 DL:1.7 kbps SRBs for DCCH.
- 11) Conversational / speech / UL:4.75 DL:4.75 kbps / CS RAB
+ UL:1.7 DL:1.7 kbps SRBs for DCCH.

- 12) Conversational / unknown / UL:28.8 DL:28.8 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 13) Conversational / unknown / UL:64 DL:64 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 14) Conversational / unknown / UL:32 DL:32 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 15) Streaming / unknown / UL:14.4/DL:14.4 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 16) Streaming / unknown / UL:28.8/DL:28.8 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 17) Streaming / unknown / UL:57.6/DL:57.6 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 18) ~~Void. Streaming / unknown / UL:0 DL:64 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.~~
- 19) ~~Void. Streaming / unknown / UL:64 DL:0 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.~~
- 20) Void.
- 21) Void.
- 22) Void.
- 23) Interactive or background / UL:32 DL:8 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 23a) Interactive or background / UL:8 DL:8 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 23b) Interactive or background / UL:16 DL:16 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 23c) Interactive or background / UL:32 DL:32 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 23d) Interactive or background / UL:32 DL:32 kbps / PS RAB (20 ms TTI)
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 24) ~~Void. Interactive or background / UL:64 DL:8 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.~~
- 25) Interactive or background / UL:32 DL: 64 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 26) Interactive or background / UL:64 DL: 64 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 27) Interactive or background / UL:64 DL:128 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 28) Interactive or background / UL:128 DL:128 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 29) Interactive or background / UL:64 DL:144 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 30) Interactive or background / UL:144 DL:144 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.

- 31) Interactive or background / UL:64 DL:256 kbps / PS RAB
+ UL:3.4 DL: 3.4 kbps SRBs for DCCH.
- 32) Interactive or background / UL:64 DL:384 kbps / PS RAB
+ UL:3.4 DL: 3.4 kbps SRBs for DCCH.
- 33) Interactive or background / UL:128 DL:384 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 34) Interactive or background / UL:384 DL:384 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 35) Interactive or background / UL:64 DL:2048 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 36) ~~Void. Interactive or background / UL:128 DL:2048 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.~~
- 37) ~~Void. Interactive or background / UL:384 DL:2048 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.~~
- 38) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:32 DL:8 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 38a) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:0 DL:0 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 38b) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:8 DL:8 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 38c) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:32 DL:32 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 38d) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:64 DL:64 kbps / PS RAB
+ Interactive or background / UL:64 DL:64 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 38e) Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB
+ Interactive or background / UL:0 DL:0 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 38f) Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB
+ Interactive or background / UL:8 DL:8 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 38g) Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB
+ Interactive or background / UL:16 DL:16 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 38h) Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB
+ Interactive or background / UL:32 DL:32 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 38i) Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB
+ Interactive or background / UL:64 DL:64 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 38j) Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB
+ Interactive or background / UL:64 DL:128 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.

- 39) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:32 DL:64 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 40) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:64 DL:64 kbps / PS RAB
+ UL:3.4 DL: 3.4 kbps SRBs for DCCH.
- 41) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:64 DL:128 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 42) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:64 DL:256 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 43) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:64 DL:384 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 44) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:128 DL:2048 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 45) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Streaming / unknown / UL:57.6 DL:57.6 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 46) ~~Void. Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Streaming / unknown / UL:0 DL:64 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.~~
- 47) Void.
- 48) Void.
- 49) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Conversational / unknown / UL:64 DL:64 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 49a) Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB
+ Conversational / unknown / UL:64 DL:64 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 50) Conversational / unknown / UL:64 DL:64 kbps / CS RAB
+ Conversational / unknown / UL:64 DL:64 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 51) Conversational / unknown / UL:64 DL:64 kbps / CS RAB
+ Interactive or background / UL:64 DL:64 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 51a) Conversational / unknown / UL:64 DL:64 kbps / CS RAB
+ Interactive or Background / UL:8 DL:8 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 51b) Conversational / unknown / UL:64 DL:64 kbps / CS RAB
+ Interactive or Background / UL:16 DL:64 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 52) Conversational / unknown / UL:64 DL:64 kbps / CS RAB
+ Interactive or background / UL:64 DL:128 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.

- 53) Conversational / unknown / UL:64 DL:64 kbps / CS RAB
+ Interactive or background / UL:128 DL:128 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 54) ~~Void. Interactive or /background / UL:64 kbps DL:128 kbps / PS RAB
+ Streaming / unknown / UL:0 DL:64 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.~~
- 55) Void.
- 56) Interactive or background / UL:8 DL:8 kbps / PS RAB
+ Interactive or background / UL:8 DL:8 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 57) Interactive or background / UL:64 DL:64 kbps / PS RAB
+ Interactive or background / UL:64 DL:64 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 58) Streaming / unknown / UL:16 DL:64 kbps / PS RAB
+ Interactive or background / UL:8 DL:8 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.

Combinations on DSCH and DPCH

- 1) ~~Void. Interactive or background / UL:64 DL:256 kbps / PS RAB
+ UL:3.4 DL: 3.4 kbps SRBs for DCCH.~~
- 2) Interactive or background / UL:64 DL:384 kbps / PS RAB
+ UL:3.4 DL: 3.4 kbps SRBs for DCCH.
- 3) Interactive or background / UL:64 DL:2048 kbps / PS RAB
+ UL:3.4 DL: 3.4 kbps SRBs for DCCH.
- 4) ~~Void. Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:64 DL:256 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.~~
- 5) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:64 DL:384 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 6) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:64 DL:2048 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.

<New section ends>

<New section starts>

6.10.2.4.1.18 ~~Void. Streaming / unknown / UL:0 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH~~

~~6.10.2.4.1.18.1 Uplink~~

~~6.10.2.4.1.18.1.1 Transport channel parameters~~

~~6.10.2.4.1.18.1.1.1 Transport channel parameters for Streaming / unknown / UL:0 kbps / CS RAB~~

~~N/A~~

~~6.10.2.4.1.18.1.1.2 Transport channel parameters for UL:3.4 kbps SRBs for DCCH~~

~~See clause 6.10.2.4.1.2.1.1.1.~~

6.10.2.4.1.18.1.1.3 — TFCS

See clause 6.10.2.4.1.2.1.1.2.

6.10.2.4.1.18.1.2 — Physical channel parameters

See clause 6.10.2.4.1.2.1.2.

6.10.2.4.1.18.2 — Downlink

6.10.2.4.1.18.2.1 — Transport channel parameters

6.10.2.4.1.18.2.1.1 — Transport channel parameters for Streaming / unknown / DL:64 kbps / CS-RAB

| Higher layer | RAB/Signalling-RB | RAB | |
|---------------------------------------------|----------------------|-----------|-------------------------|
| RLC | Logical channel type | DTCH | |
| | RLC mode | TM | |
| | Payload sizes, bit | 320 | |
| | Max data rate, bps | 64000 | |
| | TrD-PDU header, bit | 0 | |
| MAC | MAC header, bit | 0 | |
| | MAC multiplexing | N/A | |
| Layer 4 | TrCH type | DCH | |
| | TB sizes, bit | 320 | |
| | TFS | TF0, bits | 0x320 (alt. 1x0) (note) |
| | | TF1, bits | 1x320 |
| | | TF2, bits | 2x320 |
| | | TF3, bits | 4x320 |
| | | TF4, bits | 8x320 |
| | TTI, ms | 40 | |
| | Coding type | TC | |
| | CRC, bit | 16 | |
| Max number of bits/TTI after channel coding | 8076 | | |
| RM attribute | 125-165 | | |

NOTE: — Alternative 1x0 is used to have CRC present in all transport formats.

6.10.2.4.1.18.2.1.2 — Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See clause 6.10.2.4.1.2.2.1.1.

6.10.2.4.1.18.2.1.3 — TFCS

| | |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| TFCS size | 10 |
| TFCS | (64 kbps RAB, DCCH)= (TF0, TF0), (TF1, TF0), (TF2, TF0), (TF3, TF0), (TF4, TF0), (TF0, TF1), (TF1, TF1), (TF2, TF1), (TF3, TF1), (TF4, TF1) |

6.10.2.4.1.18.2.2 — Physical channel parameters

| DPCH Downlink | DTX position | Flexible |
|---------------|---------------------------|----------|
| | Spreading factor | 32 |
| DPCCH | Number of TFCI bits/slot | 8 |
| | Number of TPC bits/slot | 4 |
| | Number of Pilot bits/slot | 8 |
| DPDCH | Number of data bits/slot | 140 |
| | Number of data bits/frame | 2400 |

6.10.2.4.1.19 ~~Void. Streaming / unknown / UL:64 DL:0 kbps / CS-RAB + UL:3.4 DL:3.4 kbps-SRBs for DCCH~~

~~6.10.2.4.1.19.1 Uplink~~

~~6.10.2.4.1.19.1.1 Transport channel parameters~~

~~6.10.2.4.1.19.1.1.1 Transport channel parameters for Streaming / unknown / UL:64 kbps / CS-RAB~~

| | | | |
|--------------|-------------------------------------------------------------|-----------|-------|
| Higher layer | RAB/Signalling-RB | RAB | |
| RLC | Logical channel type | DTCH | |
| | RLC mode | TM | |
| | Payload sizes, bit | 320 | |
| | Max data rate, bps | 64000 | |
| | TrD-PDU header, bit | 0 | |
| MAC | MAC header, bit | 0 | |
| | MAC multiplexing | N/A | |
| Layer 1 | TrCH type | DCH | |
| | TB sizes, bit | 320 | |
| | TFS | TF0, bits | 0x320 |
| | | TF1, bits | 1x320 |
| | | TF2, bits | 2x320 |
| | | TF3, bits | 4x320 |
| | | TF4, bits | 8x320 |
| | TTI, ms | 40 | |
| | Coding type | TC | |
| | CRC, bit | 16 | |
| | Max number of bits/TTI after channel coding | 8076 | |
| | Uplink: Max number of bits/radio frame before rate matching | 2019 | |
| RM attribute | 125-165 | | |

~~6.10.2.4.1.19.1.1.2 Transport channel parameters for UL:3.4 kbps-SRBs for DCCH~~

~~See clause 6.10.2.4.1.2.1.1.1.~~

~~6.10.2.4.1.19.1.1.3 TFCS~~

| | |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| TFCS size | 10 |
| TFCS | (64 kbps-RAB, DCCH)= (TF0, TF0), (TF1, TF0), (TF2, TF0), (TF3, TF0), (TF4, TF0), (TF0, TF1), (TF1, TF1), (TF2, TF1), (TF3, TF1), (TF4, TF1) |

~~6.10.2.4.1.19.1.2 Physical channel parameters~~

| | | |
|-------------|-------------------------------------------|------|
| DPCH Uplink | Min spreading factor | 16 |
| | Max number of DPDCH data-bits/radio frame | 2400 |
| | Puncturing Limit | 4 |

~~6.10.2.4.1.19.2 Downlink~~

~~6.10.2.4.1.19.2.1 Transport channel parameters~~

~~6.10.2.4.1.19.2.1.1 Transport channel parameters for Streaming / unknown / DL:0 kbps / CS-RAB~~

~~N/A~~

~~6.10.2.4.1.19.2.1.2 — Transport channel parameters for DL:3.4 kbps SRBs for DCCH~~

~~See clause 6.10.2.4.1.2.2.1.1.~~

~~6.10.2.4.1.19.2.1.3 — TFCS~~

~~See clause 6.10.2.4.1.2.2.1.2.~~

~~6.10.2.4.1.19.2.2 — Physical channel parameters~~

~~See clause 6.10.2.4.1.2.2.2.~~

- 6.10.2.4.1.20 Void
- 6.10.2.4.1.21 Void
- 6.10.2.4.1.22 Void
- 6.10.2.4.1.23 Interactive or background / UL:32 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH
- 6.10.2.4.1.23.1 Uplink
- 6.10.2.4.1.23.1.1 Transport channel parameters
- 6.10.2.4.1.23.1.1.1 Transport channel parameters for Interactive or background / UL:32 kbps / PS RAB

| Higher Layer | RAB/Signalling RB | RAB | |
|--------------|-------------------------------------------------------------|------------------|------------------|
| RLC | Logical channel type | DTCH | |
| | RLC mode | AM | |
| | Payload sizes, bit | 320 | |
| | Max data rate, bps | 32000 | |
| | AMD PDU header, bit | 16 | |
| MAC | MAC header, bit | 0 | |
| | MAC multiplexing | N/A | |
| Layer 1 | TrCH type | DCH | |
| | TB sizes, bit | 336 | |
| | TFS | TF0, bits | 0x336 |
| | | TF1, bits | 1x336 |
| | | TF2, bits | 2x336 (alt. N/A) |
| | TTI, ms | 20 (alt. 10) | |
| | Coding type | TC (alt. CC 1/3) | |
| | CRC, bit | 16 | |
| | Max number of bits/TTI after channel coding | 2124 (alt. 1080) | |
| | Uplink: Max number of bits/radio frame before rate matching | 1062 (alt. 1080) | |
| RM attribute | 135-175 | | |

6.10.2.4.1.23.1.1.2 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See clause 6.10.2.4.1.2.1.1.1.

6.10.2.4.1.23.1.1.3 TFCS

| | |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| TFCS size | 6 (alt. 4) |
| TFCS | (32 kbps RAB, DCCH)= (TF0, TF0), (TF1, TF0), (TF2, TF0), (TF0, TF1), (TF1, TF1), (TF2, TF1) (alt. (TF0, TF0), (TF1, TF0), (TF0, TF1), (TF1, TF1)) |

6.10.2.4.1.23.1.2 Physical channel parameters

| | | |
|----------------|-------------------------------------------|------|
| DPCH Uplink | Min spreading factor | 32 |
| | Max number of DPDCH data bits/radio frame | 1200 |
| | Puncturing Limit | 0.88 |

6.10.2.4.1.23.2 Downlink

6.10.2.4.1.23.2.1 Transport channel parameters

6.10.2.4.1.23.2.1.1 Transport channel parameters for Interactive or background / DL:8 kbps / PS RAB

| Higher Layer | RAB/Signalling RB | RAB | |
|--------------|---------------------------------------------|------------------|-------|
| RLC | Logical channel type | DTCH | |
| | RLC mode | AM | |
| | Payload sizes, bit | 320 | |
| | Max data rate, bps | 8000 | |
| | AMD PDU header, bit | 16 | |
| MAC | MAC header, bit | 0 | |
| | MAC multiplexing | N/A | |
| Layer 1 | TrCH type | DCH | |
| | TB sizes, bit | 336 | |
| | TFS | TF0, bits | 0x336 |
| | | TF1, bits | 1x336 |
| | TTI, ms | 40 | |
| | Coding type | TC (alt. CC 1/3) | |
| | CRC, bit | 16 | |
| | Max number of bits/TTI after channel coding | 1068 (alt. 1080) | |
| RM attribute | 135-175 | | |

6.10.2.4.1.23.2.1.2 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See clause 6.10.2.4.1.2.2.1.1.

6.10.2.4.1.23.2.1.3 TFCS

| | |
|-----------|-------------------------------------------------------------------|
| TFCS size | 4 |
| TFCS | (8 kbps RAB, DCCH)=(TF0, TF0), (TF1, TF0), (TF0, TF1), (TF1, TF1) |

6.10.2.4.1.23.2.2 Physical channel parameters

| | | | |
|---------------------------|------------------|---------------------------|----------|
| DPCH Downlink | DTX position | | Flexible |
| | Spreading factor | | 128 |
| | DPCCH | Number of TFCI bits/slot | 2 |
| | | Number of TPC bits/slot | 2 |
| | | Number of Pilot bits/slot | 4 |
| | DPDCH | Number of data bits/slot | 32 |
| Number of data bits/frame | | 480 | |

6.10.2.4.1.23a Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

6.10.2.4.1.23a.1 Uplink

6.10.2.4.1.23a.1.1 Transport channel parameters

6.10.2.4.1.23a.1.1.1 Transport channel parameters for Interactive or background / UL:8 kbps / PS RAB

| Higher Layer | RAB/Signalling RB | RAB | |
|--------------|-------------------------------------------------------------|------------------|-------|
| RLC | Logical channel type | DTCH | |
| | RLC mode | AM | |
| | Payload sizes, bit | 320 | |
| | Max data rate, bps | 8000 | |
| | AMD PDU header, bit | 16 | |
| MAC | MAC header, bit | 0 | |
| | MAC multiplexing | N/A | |
| Layer 1 | TrCH type | DCH | |
| | TB sizes, bit | 336 | |
| | TFS | TF0, bits | 0x336 |
| | | TF1, bits | 1x336 |
| | TTI, ms | 40 | |
| | Coding type | CC 1/3 (alt. TC) | |
| | CRC, bit | 16 | |
| | Max number of bits/TTI after channel coding | 1080 (alt. 1068) | |
| | Uplink: Max number of bits/radio frame before rate matching | 270 (alt. 267) | |
| | RM attribute | 135-175 | |

6.10.2.4.1.23a.1.1.2 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See clause 6.10.2.4.1.2.1.1.1.

6.10.2.4.1.23a.1.1.3 TFCS

| | |
|-----------|-----------------------------------------------------------------------|
| TFCS size | 4 |
| TFCS | (8 kbps RAB, DCCH)= (TF0, TF0), (TF1, TF0), (TF0, TF1), (TF1, TF1) |

6.10.2.4.1.23a.1.2 Physical channel parameters

| | | |
|----------------|-------------------------------------------|-----|
| DPCH Uplink | Min spreading factor | 64 |
| | Max number of DPDCH data bits/radio frame | 600 |
| | Puncturing Limit | 1.0 |

6.10.2.4.1.23a.2 Downlink

6.10.2.4.1.23a.2.1 Transport channel parameters

6.10.2.4.1.23a.2.1.1 Transport channel parameters for Interactive or background / DL:8 kbps / PS RAB

| Higher Layer | RAB/Signalling RB | RAB | |
|--------------|---------------------------------------------|------------------|-------|
| RLC | Logical channel type | DTCH | |
| | RLC mode | AM | |
| | Payload sizes, bit | 320 | |
| | Max data rate, bps | 8000 | |
| | AMD PDU header, bit | 16 | |
| MAC | MAC header, bit | 0 | |
| | MAC multiplexing | N/A | |
| Layer 1 | TrCH type | DCH | |
| | TB sizes, bit | 336 | |
| | TFS | TF0, bits | 0x336 |
| | | TF1, bits | 1x336 |
| | TTI, ms | 40 | |
| | Coding type | CC 1/3 (alt. TC) | |
| | CRC, bit | 16 | |
| | Max number of bits/TTI after channel coding | 1080 (alt. 1068) | |
| | RM attribute | 135-175 | |

6.10.2.4.1.23a.2.1.2 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See clause 6.10.2.4.1.2.2.1.1.

6.10.2.4.1.23a.2.1.3 TFCS

| | |
|-----------|-------------------------------------------------------------------|
| TFCS size | 4 |
| TFCS | (8 kbps RAB, DCCH)=(TF0, TF0), (TF1, TF0), (TF0, TF1), (TF1, TF1) |

6.10.2.4.1.23a.2.2 Physical channel parameters

| | | | |
|------------------|------------------|---------------------------|----------|
| DPCH Downlink | DTX position | | Flexible |
| | Spreading factor | | 128 |
| | DPCCH | Number of TFCI bits/slot | 2 |
| | | Number of TPC bits/slot | 2 |
| | | Number of Pilot bits/slot | 4 |
| | DPDCH | Number of data bits/slot | 32 |
| | | Number of data bits/frame | 480 |

6.10.2.4.1.23b Interactive or background / UL:16 DL:16 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

6.10.2.4.1.23b.1 Uplink

6.10.2.4.1.23b.1.1 Transport channel parameters

6.10.2.4.1.23b.1.1.1 Transport channel parameters for Interactive or background / UL:16 kbps / PS RAB

| Higher Layer | RAB/Signalling RB | RAB | |
|--------------|-------------------------------------------------------------|-----------|-------|
| RLC | Logical channel type | DTCH | |
| | RLC mode | AM | |
| | Payload sizes, bit | 320 | |
| | Max data rate, bps | 16000 | |
| | AMD PDU header, bit | 16 | |
| MAC | MAC header, bit | 0 | |
| | MAC multiplexing | N/A | |
| Layer 1 | TrCH type | DCH | |
| | TB sizes, bit | 336 | |
| | TFS | TF0, bits | 0x336 |
| | | TF1, bits | 1x336 |
| | | TF2, bits | 2x336 |
| | TTI, ms | 40 | |
| | Coding type | TC | |
| | CRC, bit | 16 | |
| | Max number of bits/TTI after channel coding | 2124 | |
| | Uplink: Max number of bits/radio frame before rate matching | 531 | |
| RM attribute | 135-175 | | |

6.10.2.4.1.23b.1.1.2 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See clause 6.10.2.4.1.2.1.1.1.

6.10.2.4.1.23b.1.1.3 TFCS

| | |
|-----------|------------------------------------------------------------------------------------------------|
| TFCS size | 6 |
| TFCS | (16 kbps RAB, DCCH)= (TF0, TF0), (TF1, TF0), (TF2, TF0), (TF0, TF1), (TF1, TF1), (TF2, TF1) |

6.10.2.4.1.23b.1.2 Physical channel parameters

| | | |
|-------------|-------------------------------------------|------|
| DPCH Uplink | Min spreading factor | 32 |
| | Max number of DPDCH data bits/radio frame | 1200 |
| | Puncturing Limit | 1.0 |

6.10.2.4.1.23b.2 Downlink

6.10.2.4.1.23b.2.1 Transport channel parameters

6.10.2.4.1.23b.2.1.1 Transport channel parameters for Interactive or background / DL:16 kbps / PS RAB

| Higher Layer | RAB/Signalling RB | RAB | |
|--------------|---------------------------------------------|-----------|-------|
| RLC | Logical channel type | DTCH | |
| | RLC mode | AM | |
| | Payload sizes, bit | 320 | |
| | Max data rate, bps | 16000 | |
| | AMD PDU header, bit | 16 | |
| MAC | MAC header, bit | 0 | |
| | MAC multiplexing | N/A | |
| Layer 1 | TrCH type | DCH | |
| | TB sizes, bit | 336 | |
| | TFS | TF0, bits | 0x336 |
| | | TF1, bits | 1x336 |
| | | TF2, bits | 2x336 |
| | TTI, ms | 40 | |
| | Coding type | TC | |
| | CRC, bit | 16 | |
| | Max number of bits/TTI after channel coding | 2124 | |
| | RM attribute | 135-175 | |

6.10.2.4.1.23b.2.1.2 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See clause 6.10.2.4.1.2.2.1.1.

6.10.2.4.1.23b.2.1.3 TFCS

| | |
|-----------|------------------------------------------------------------------------------------------------|
| TFCS size | 6 |
| TFCS | (16 kbps RAB, DCCH)= (TF0, TF0), (TF1, TF0), (TF2, TF0), (TF0, TF1), (TF1, TF1), (TF2, TF1) |

6.10.2.4.1.23b.2.2 Physical channel parameters

| DPCH Downlink | DTX position | Flexible |
|---------------|---------------------------|----------|
| | Spreading factor | 128 |
| DPCCH | Number of TFCI bits/slot | 2 |
| | Number of TPC bits/slot | 2 |
| | Number of Pilot bits/slot | 4 |
| DPDCH | Number of data bits/slot | 32 |
| | Number of data bits/frame | 480 |

6.10.2.4.1.23c Interactive or background / UL:32 DL:32 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

6.10.2.4.1.23c.1 Uplink

6.10.2.4.1.23c.1.1 Transport channel parameters

6.10.2.4.1.23c.1.1.1 Transport channel parameters for Interactive or background / UL:32 kbps / PS RAB

| Higher Layer | RAB/Signalling RB | RAB | |
|-------------------------------------------------------------|---------------------------------------------|-----------|-------|
| RLC | Logical channel type | DTCH | |
| | RLC mode | AM | |
| | Payload sizes, bit | 320 | |
| | Max data rate, bps | 32000 | |
| | AMD PDU header, bit | 16 | |
| MAC | MAC header, bit | 0 | |
| | MAC multiplexing | N/A | |
| Layer 1 | TrCH type | DCH | |
| | TB sizes, bit | 336 | |
| | TFS | TF0, bits | 0x336 |
| | | TF1, bits | 1x336 |
| | | TF2, bits | 2x336 |
| | | TF3, bits | 3x336 |
| | | TF4, bits | 4x336 |
| | TTI, ms | 40 | |
| | Coding type | TC | |
| | CRC, bit | 16 | |
| | Max number of bits/TTI after channel coding | 4236 | |
| Uplink: Max number of bits/radio frame before rate matching | 1059 | | |
| RM attribute | 135-175 | | |

6.10.2.4.1.23c.1.1.2 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See clause 6.10.2.4.1.2.1.1.1.

6.10.2.4.1.23c.1.1.3 TFCS

| | |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------|
| TFCS size | 10 |
| TFCS | (32 kbps RAB, DCCH)= (TF0,TF0), (TF1,TF0), (TF2,TF0), (TF3,TF0), (TF4,TF0), (TF0,TF1), (TF1,TF1), (TF2,TF1), (TF3,TF1), (TF4,TF1) |

6.10.2.4.1.23c.1.2 Physical channel parameters

| | | |
|-------------|-------------------------------------------|------|
| DPCH Uplink | Min spreading factor | 32 |
| | Max number of DPDCH data bits/radio frame | 1200 |
| | Puncturing Limit | 0.88 |

6.10.2.4.1.23c.2 Downlink

6.10.2.4.1.23c.2.1 Transport channel parameters

6.10.2.4.1.23c.2.1.1 Transport channel parameters for Interactive or background / DL:32 kbps / PS RAB

| Higher Layer | RAB/Signalling RB | RAB | |
|--------------|---------------------------------------------|-----------|-------|
| RLC | Logical channel type | DTCH | |
| | RLC mode | AM | |
| | Payload sizes, bit | 320 | |
| | Max data rate, bps | 32000 | |
| | AMD PDU header, bit | 16 | |
| MAC | MAC header, bit | 0 | |
| | MAC multiplexing | N/A | |
| Layer 1 | TrCH type | DCH | |
| | TB sizes, bit | 336 | |
| | TFS | TF0, bits | 0x336 |
| | | TF1, bits | 1x336 |
| | | TF2, bits | 2x336 |
| | | TF3, bits | 3x336 |
| | | TF4, bits | 4x336 |
| | TTI, ms | 40 | |
| | Coding type | TC | |
| | CRC, bit | 16 | |
| | Max number of bits/TTI after channel coding | 4236 | |
| RM attribute | 135-175 | | |

6.10.2.4.1.23c.2.1.2 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See clause 6.10.2.4.1.2.2.1.1.

6.10.2.4.1.23c.2.1.3 TFCS

| | |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------|
| TFCS size | 10 |
| TFCS | (32 kbps RAB, DCCH)= (TF0,TF0), (TF1,TF0), (TF2,TF0), (TF3,TF0), (TF4,TF0), (TF0,TF1), (TF1,TF1), (TF2,TF1), (TF3,TF1), (TF4,TF1) |

6.10.2.4.1.23c.2.2 Physical channel parameters

| DPCH Downlink | DTX position | Flexible |
|---------------|---------------------------|----------|
| | Spreading factor | 64 |
| DPCCH | Number of TFCl bits/slot | 8 |
| | Number of TPC bits/slot | 4 |
| | Number of Pilot bits/slot | 8 |
| DPDCH | Number of data bits/slot | 60 |
| | Number of data bits/frame | 900 |

6.10.2.4.1.23d Interactive or background / UL:32 DL:32 kbps / PS RAB (20 ms TTI)+ UL:3.4 DL:3.4 kbps SRBs for DCCH

6.10.2.4.1.23d.1 Uplink

6.10.2.4.1.23d.1.1 Transport channel parameters

6.10.2.4.1.23d.1.1.1 Transport channel parameters for Interactive or background / UL:32 kbps / PS RAB

| Higher Layer | RAB/Signalling RB | RAB | |
|--------------|-------------------------------------------------------------|-----------|-------|
| RLC | Logical channel type | DTCH | |
| | RLC mode | AM | |
| | Payload sizes, bit | 320 | |
| | Max data rate, bps | 32000 | |
| | AMD PDU header, bit | 16 | |
| MAC | MAC header, bit | 0 | |
| | MAC multiplexing | N/A | |
| Layer 1 | TrCH type | DCH | |
| | TB sizes, bit | 336 | |
| | TFS | TF0, bits | 0x336 |
| | | TF1, bits | 1x336 |
| | | TF2, bits | 2x336 |
| | TTI, ms | 20 | |
| | Coding type | TC | |
| | CRC, bit | 16 | |
| | Max number of bits/TTI after channel coding | 2124 | |
| | Uplink: Max number of bits/radio frame before rate matching | 1062 | |
| RM attribute | 135-175 | | |

6.10.2.4.1.23d.1.1.2 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See clause 6.10.2.4.1.2.1.1.1.

6.10.2.4.1.23d.1.1.3 TFCS

| | |
|-----------|------------------------------------------------------------------------------------------|
| TFCS size | 6 |
| TFCS | (32 kbps RAB, DCCH)= (TF0,TF0), (TF1,TF0), (TF2,TF0), (TF0,TF1), (TF1,TF1), (TF2,TF1) |

6.10.2.4.1.23d.1.2 Physical channel parameters

| | | |
|-------------|-------------------------------------------|------|
| DPCH Uplink | Min spreading factor | 32 |
| | Max number of DPDCH data bits/radio frame | 1200 |
| | Puncturing Limit | 0.88 |

6.10.2.4.1.23d.2 Downlink

6.10.2.4.1.23d.2.1 Transport channel parameters

6.10.2.4.1.23d.2.1.1 Transport channel parameters for Interactive or background / DL:32 kbps / PS RAB

| Higher Layer | RAB/Signalling RB | RAB | |
|--------------|---------------------------------------------|-----------|-------|
| RLC | Logical channel type | DTCH | |
| | RLC mode | AM | |
| | Payload sizes, bit | 320 | |
| | Max data rate, bps | 32000 | |
| | AMD PDU header, bit | 16 | |
| MAC | MAC header, bit | 0 | |
| | MAC multiplexing | N/A | |
| Layer 1 | TrCH type | DCH | |
| | TB sizes, bit | 336 | |
| | TFS | TF0, bits | 0x336 |
| | | TF1, bits | 1x336 |
| | | TF2, bits | 2x336 |
| | TTI, ms | 20 | |
| | Coding type | TC | |
| | CRC, bit | 16 | |
| | Max number of bits/TTI after channel coding | 2124 | |
| | RM attribute | 135-175 | |

6.10.2.4.1.23d.2.1.2 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See clause 6.10.2.4.1.2.2.1.1.

6.10.2.4.1.23d.2.1.3 TFCS

| | |
|-----------|------------------------------------------------------------------------------------------|
| TFCS size | 6 |
| TFCS | (32 kbps RAB, DCCH)= (TF0,TF0), (TF1,TF0), (TF2,TF0), (TF0,TF1), (TF1,TF1), (TF2,TF1) |

6.10.2.4.1.23d.2.2 Physical channel parameters

| DPCH Downlink | DTX position | Flexible |
|---------------|---------------------------|----------|
| | Spreading factor | 64 |
| DPCCH | Number of TFCl bits/slot | 8 |
| | Number of TPC bits/slot | 4 |
| | Number of Pilot bits/slot | 8 |
| DPDCH | Number of data bits/slot | 60 |
| | Number of data bits/frame | 900 |

6.10.2.4.1.24 [Void. Interactive or background / UL:64 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH](#)

~~6.10.2.4.1.24.1 — Uplink~~

~~6.10.2.4.1.24.1.1 — Transport channel parameters~~

~~6.10.2.4.1.24.1.1.1 — Transport channel parameters for Interactive or background / UL:64 kbps / PS RAB~~

| Higher layer | RAB/Signalling RB | RAB | |
|--------------|-------------------------------------------------------------|-----------|-------|
| RLC | Logical channel type | DTCH | |
| | RLC mode | AM | |
| | Payload sizes, bit | 320 | |
| | Max data rate, bps | 64000 | |
| | AMD PDU header, bit | 16 | |
| MAC | MAC header, bit | 0 | |
| | MAC multiplexing | N/A | |
| Layer 1 | TrCH type | DCH | |
| | TB sizes, bit | 336 | |
| | TFS | TF0, bits | 0x336 |
| | | TF1, bits | 1x336 |
| | | TF2, bits | 2x336 |
| | | TF3, bits | 3x336 |
| | | TF4, bits | 4x336 |
| | TTI, ms | 20 | |
| | Coding type | TC | |
| | CRC, bit | 16 | |
| | Max number of bits/TTI after channel coding | 4236 | |
| | Uplink: Max number of bits/radio frame before rate matching | 2118 | |
| RM attribute | 130-170 | | |

~~6.10.2.4.1.24.1.1.2 — Transport channel parameters for UL:3.4 kbps SRBs for DCCH~~

~~See clause 6.10.2.4.1.2.1.1.1.~~

~~6.10.2.4.1.24.1.1.3 — TFCS~~

| | |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| TFCS size | 10 |
| TFCS | (64 kbps RAB, DCCH)= (TF0, TF0), (TF1, TF0), (TF2, TF0), (TF3, TF0), (TF4, TF0), (TF0, TF1), (TF1, TF1), (TF2, TF1), (TF3, TF1), (TF4, TF1) |

~~6.10.2.4.1.24.1.2 — Physical channel parameters~~

| | | |
|-------------|-------------------------------------------|------|
| DPCH Uplink | Min spreading factor | 16 |
| | Max number of DPDCH data bits/radio frame | 2400 |
| | Puncturing Limit | 0.96 |

~~6.10.2.4.1.24.2 — Downlink~~

~~See clause 6.10.2.4.1.23.2.~~

<New section ends>

<New section starts>

6.10.2.4.1.36 ~~Void. Interactive or background / UL:128 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH~~

~~6.10.2.4.1.36.1 Uplink~~

~~See clause 6.10.2.4.1.28.1.~~

~~6.10.2.4.1.36.2 Downlink~~

~~See clause 6.10.2.4.1.35.2.~~

6.10.2.4.1.37 ~~Void. Interactive or background / UL:384 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH~~

~~6.10.2.4.1.37.1 Uplink~~

~~See clause 6.10.2.4.1.34.1.~~

~~6.10.2.4.1.37.2 Downlink~~

~~See clause 6.10.2.4.1.35.2.~~

<New section ends>

<New section starts>

6.10.2.4.1.46 ~~Void. Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Streaming / unknown / UL:0 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH~~

~~6.10.2.4.1.46.1 Uplink~~

~~See clause 6.10.2.4.1.4.1.~~

~~6.10.2.4.1.46.2 Downlink~~

~~6.10.2.4.1.46.2.1 Transport channel parameters~~

~~6.10.2.4.1.46.2.1.1 Transport channel parameters for Conversational / speech / DL:12.2 kbps / CS RAB~~

~~See clause 6.10.2.4.1.4.2.1.1.~~

~~6.10.2.4.1.46.2.1.2 Transport channel parameters for Streaming / unknown / DL:64 kbps / CS RAB~~

~~See clause 6.10.2.4.1.18.2.1.1.~~

~~6.10.2.4.1.46.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH~~

~~See clause 6.10.2.4.1.2.2.1.1.~~

6.10.2.4.1.46.2.1.4 — TFCS

| | |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TFCS size | 30 |
| TFCS | (RAB subflow#1, RAB subflow#2, RAB subflow#3, 64 kbps RAB, DCCH)= (TF0, TF0, TF0, TF0, TF0), (TF1, TF0, TF0, TF0, TF0), (TF2, TF1, TF1, TF0, TF0), (TF0, TF0, TF0, TF1, TF0), (TF1, TF0, TF0, TF1, TF0), (TF2, TF1, TF1, TF1, TF0), (TF0, TF0, TF0, TF2, TF0), (TF1, TF0, TF0, TF2, TF0), (TF2, TF1, TF1, TF2, TF0), (TF0, TF0, TF0, TF3, TF0), (TF1, TF0, TF0, TF3, TF0), (TF2, TF1, TF1, TF3, TF0), (TF0, TF0, TF0, TF4, TF0), (TF1, TF0, TF0, TF4, TF0), (TF2, TF1, TF1, TF4, TF0), (TF0, TF0, TF0, TF0, TF1), (TF1, TF0, TF0, TF0, TF1), (TF2, TF1, TF1, TF0, TF1), (TF0, TF0, TF0, TF1, TF1), (TF1, TF0, TF0, TF1, TF1), (TF2, TF1, TF1, TF1, TF1), (TF0, TF0, TF0, TF2, TF1), (TF1, TF0, TF0, TF2, TF1), (TF2, TF1, TF1, TF2, TF1), (TF0, TF0, TF0, TF3, TF1), (TF1, TF0, TF0, TF3, TF1), (TF2, TF1, TF1, TF3, TF1), (TF0, TF0, TF0, TF4, TF1), (TF1, TF0, TF0, TF4, TF1), (TF2, TF1, TF1, TF4, TF1) |

6.10.2.4.1.46.2.2 — Physical channel parameters

| | | | |
|---------------------------|---------------------------|--------------------------|---|
| DPCH | DTX position | Flexible | |
| Downlink | Spreading factor | 32 | |
| | DPCCH | Number of TFCI bits/slot | 8 |
| | | Number of TPC bits/slot | 4 |
| Number of Pilot bits/slot | | 8 | |
| DPDCH | Number of data bits/slot | 140 | |
| | Number of data bits/frame | 2100 | |

6.10.2.4.1.47 Void

6.10.2.4.1.48 Void

<New section ends>

<New section starts>

6.10.2.4.1.54 [Void](#). [Interactive or background / UL:64 DL:128 kbps / PS-RAB + Streaming / unknown / UL:0 DL:64 kbps / CS-RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH](#)

6.10.2.4.1.54.1 — Uplink

See clause 6.10.2.4.1.24.1.

6.10.2.4.1.54.2 — Downlink

6.10.2.4.1.54.2.1 — Transport channel parameters

6.10.2.4.1.54.2.1.1 — Transport channel parameters for Interactive or background / DL:128 kbps / PS-RAB

See clause 6.10.2.4.1.27.2.1.1.

6.10.2.4.1.54.2.1.2 — Transport channel parameters for Streaming / unknown / DL:64 kbps / CS-RAB

See clause 6.10.2.4.1.18.2.1.1.

6.10.2.4.1.54.2.1.3 — Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See clause 6.10.2.4.1.2.2.1.1.

6.10.2.4.1.54.2.1.4 — TFCS

| | |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TFCS size | 50 |
| TFCS | (1/B 128 kbps RAB, Str. 64 kbps RAB, DCCH)= (TF0, TF0, TF0), (TF1, TF0, TF0), (TF2, TF0, TF0), (TF3, TF0, TF0), (TF4, TF0, TF0), (TF0, TF1, TF0), (TF1, TF1, TF0), (TF2, TF1, TF0), (TF3, TF1, TF0), (TF4, TF1, TF0), (TF0, TF2, TF0), (TF1, TF2, TF0), (TF2, TF2, TF0), (TF3, TF2, TF0), (TF4, TF2, TF0), (TF0, TF3, TF0), (TF1, TF3, TF0), (TF2, TF3, TF0), (TF3, TF3, TF0), (TF4, TF3, TF0), (TF0, TF4, TF0), (TF1, TF4, TF0), (TF2, TF4, TF0), (TF3, TF4, TF0), (TF4, TF4, TF0), (TF0, TF0, TF1), (TF1, TF0, TF1), (TF2, TF0, TF1), (TF3, TF0, TF1), (TF4, TF0, TF1), (TF0, TF1, TF1), (TF1, TF1, TF1), (TF2, TF1, TF1), (TF3, TF1, TF1), (TF4, TF1, TF1), (TF0, TF2, TF1), (TF1, TF2, TF1), (TF2, TF2, TF1), (TF3, TF2, TF1), (TF4, TF2, TF1), (TF0, TF3, TF1), (TF1, TF3, TF1), (TF2, TF3, TF1), (TF3, TF3, TF1), (TF4, TF3, TF1), (TF0, TF4, TF1), (TF1, TF4, TF1), (TF2, TF4, TF1), (TF3, TF4, TF1), (TF4, TF4, TF1) |

6.10.2.4.1.54.2.4 — Physical channel parameters

| | | | |
|------------------|------------------|---------------------------|----------|
| DPCH Downlink | DTX position | | Flexible |
| | Spreading factor | | 8 |
| | DPCCH | Number of TFCI bits/slot | 8 |
| | | Number of TPC bits/slot | 8 |
| | | Number of Pilot bits/slot | 16 |
| | DPDCH | Number of data bits/slot | 608 |
| | | Number of data bits/frame | 9120 |

6.10.2.4.1.55 Void

<New section ends>

<New section starts>

6.10.2.4.2 Combinations on PDSCH and DPCH

6.10.2.4.2.1 Void. Interactive or background / UL:64 DL:256 kbps / PS RAB + UL:3.4 DL: 3.4 kbps SRBs for DCCH

6.10.2.4.2.1.1 — Uplink

See clause 6.10.2.4.1.24.1.

6.10.2.4.2.1.2 — Downlink

6.10.2.4.2.1.2.1 — Transport channel parameters

6.10.2.4.2.1.2.1.1 — Transport channel parameters for Interactive or background / DL:256 kbps / PS RAB

| | | | |
|--------------|----------------------|--------------------------------------------------------|-------|
| Higher layer | RAB/Signalling RB | RAB | |
| RLC | Logical channel type | DTCH | |
| | RLC mode | AM | |
| | Payload sizes, bit | 320 | |
| | Max data rate, bps | 384000 | |
| | AMD PDU header, bit | 16 | |
| MAC | MAC header, bit | 18 | |
| | MAC multiplexing | Logical channel multiplexing on a frame by frame basis | |
| Layer 1 | TrCH type | DSCH | |
| | TB sizes, bit | 354 | |
| | TFS | TF0, bits | 0x354 |
| | | TF1, bits | 1x354 |

| | | |
|--------------|---------------------------------------------|-------------------|
| Higher layer | RAB/Signalling RB | RAB |
| | TF2, bits | 2x354 |
| | TF3, bits | 4x354 |
| | TF4, bits | 8x354 |
| | TF5, bits | N/A (alt. 12x354) |
| | TF6, bits | N/A (alt. 16x354) |
| | TTI, ms | 10(alt. 20) |
| | Coding type | TG |
| | CRC, bit | 16 |
| | Max number of bits/TTI after channel coding | 8892(alt. 17784) |
| | RM attribute | 135-175 |

6.10.2.4.2.1.2.1.2 — Transport channel parameters for DL:3.4 DL: 3.4 kbps SRBs for DCCH

See clause 6.10.2.4.1.2.2.1.1.

6.10.2.4.2.1.2.1.3 — TFCS

| | | |
|-------------------------------------|-----------|---------------------------------------------------------------------------------|
| PDSCH | TFCS size | 5 (alt.7) |
| | TFCS | 256 kbps RAB = TF0, TF1, TF2, TF3, TF4 (alt. TF0, TF1, TF2, TF3, TF4, TF5, TF6) |
| DPCH Downlink associated with PDSCH | TFCS size | 2 |
| | TFCS | SRBs for DCCH = TF0, TF1 |

6.10.2.4.2.1.2.2 — Physical channel parameters

| | | | |
|-------------------------------------|--------------------------|-----------------------------------------------------|----|
| PDSCH | RAB or SRB, TrCh | Interactive or background / 256 kbps / PS RAB, DSCH | |
| | DTX position | N/A (SingleTrCH) | |
| | Minimum spreading factor | 8 | |
| DPCH Downlink associated with PDSCH | RAB or SRB, TrCh | 3.4 kbps SRB for DCCH, DCH | |
| | DTX position | N/A (SingleTrCH) | |
| | Spreading factor | 256 | |
| | DPCCH | Number of TFCI bits/slot | 2 |
| | | Number of TPC bits/slot | 2 |
| | | Number of Pilot bits/slot | 4 |
| | DPDCH | Number of data bits/slot | 12 |
| Number of data bits/frame | | 180 | |

6.10.2.4.2.2 Interactive or background / UL:64 DL:384 kbps / PS RAB + UL:3.4 DL: 3.4 kbps SRBs for DCCH

6.10.2.4.2.2.1 Uplink

See clause 6.10.2.4.1.24.1.

6.10.2.4.2.2.2 Downlink

6.10.2.4.2.2.2.1 Transport channel parameters

6.10.2.4.2.2.2.1.1 Transport channel parameters for Interactive or background / DL:384 kbps / PS RAB

| Higher layer | RAB/Signalling RB | RAB | |
|---------------------------------------------|----------------------|--------------------------------------------------------|-------------------|
| RLC | Logical channel type | DTCH | |
| | RLC mode | AM | |
| | Payload sizes, bit | 320 | |
| | Max data rate, bps | 384000 | |
| | AMD PDU header, bit | 16 | |
| MAC | MAC header, bit | 18 | |
| | MAC multiplexing | Logical channel multiplexing on a frame by frame basis | |
| Layer 1 | TrCH type | DSCH | |
| | TB sizes, bit | 354 | |
| | TFS | TF0, bits | 0x354 |
| | | TF1, bits | 1x354 |
| | | TF2, bits | 2x354 |
| | | TF3, bits | 4 x354 |
| | | TF4, bits | 8 x354 |
| | | TF5, bits | 12 x354 |
| | | TF6, bits | N/A (alt. 16x354) |
| | | TF7, bits | N/A (alt. 20x354) |
| | TF8, bits | N/A (alt. 24x354) | |
| | TTI, ms | 10(alt. 20) | |
| | Coding type | TC | |
| | CRC, bit | 16 | |
| Max number of bits/TTI after channel coding | 13332(alt. 26664) | | |
| RM attribute | 110-150 | | |

6.10.2.4.2.2.2.1.2 Transport channel parameters for DL:3.4 DL: 3.4 kbps SRBs for DCCH

See clause 6.10.2.4.1.2.2.1.1.

6.10.2.4.2.2.2.1.3 TFCS

| | | |
|-------------------------------------|-----------|---------------------------------------------------------------------------------------------------|
| PDSCH | TFCS size | 6 (alt.9) |
| | TFCS | 384 kbps RAB = TF0, TF1, TF2, TF3, TF4, TF5 (alt. TF0, TF1, TF2, TF3, TF4, TF5, TF6, TF7, TF8) |
| DPCH Downlink associated with PDSCH | TFCS size | 2 |
| | TFCS | SRBs for DCCH = TF0, TF1 |

6.10.2.4.2.2.2 Physical channel parameters

| | | | |
|-------------------------------------------------|--------------------------|---------------------------|------------------------------------------------------------|
| PDSCH | RAB or SRB, TrCh | | Interactive or background / 384 kbps / PS RAB, DSCH |
| | DTX position | | N/A (SingleTrCH) |
| | Minimum spreading factor | | 8 |
| DPCH Downlink associated with PDSCH | RAB or SRB, TrCh | | 3.4 kbps SRB for DCCH, DCH |
| | DTX position | | N/A (SingleTrCH) |
| | Spreading factor | | 256 |
| | DPCCH | Number of TFCI bits/slot | 2 |
| | | Number of TPC bits/slot | 2 |
| | | Number of Pilot bits/slot | 4 |
| | DPDCH | Number of data bits/slot | 12 |
| Number of data bits/frame | | 180 | |

6.10.2.4.2.3 Interactive or background / UL:64 DL:2048 kbps / PS RAB + UL:3.4 DL: 3.4 kbps SRBs for DCCH

6.10.2.4.2.3.1 Uplink

See clause 6.10.2.4.1.24.1.

6.10.2.4.2.3.2 Downlink

6.10.2.4.2.3.2.1 Transport channel parameters

6.10.2.4.2.3.2.1.1 Transport channel parameters for Interactive or background / DL:2048 kbps / PS RAB

| | | | |
|--------------|----------------------|-------------------|--------------------------------------------------------|
| Higher layer | RAB/Signalling RB | | RAB |
| RLC | Logical channel type | | DTCH |
| | RLC mode | | AM |
| | Payload sizes, bit | | 640 |
| | Max data rate, bps | | 2048000 |
| | AMD PDU header, bit | | 16 |
| MAC | MAC header, bit | | 18 |
| | MAC multiplexing | | Logical channel multiplexing on a frame by frame basis |
| Layer 1 | TrCH type | | DSCH |
| | TB sizes, bit | | 674 |
| | TFS | TF0, bits | 0x674 |
| | | TF1, bits | 1x674 |
| | | TF2, bits | 2x674 |
| | | TF3, bits | 4 x674 |
| | | TF4, bits | 8 x674 |
| | | TF5, bits | 12x674 |
| | | TF6, bits | 16x674 |
| | | TF7, bits | 20x674 |
| | | TF8, bits | 24x674 |
| | | TF9, bits | 28x674 |
| | | TF10, bits | 32x674 |
| | | TF11, bits | N/A (alt. 36x674) |
| | | TF12, bits | N/A (alt. 40x674) |
| | | TF13, bits | N/A (alt. 44x674) |
| | | TF14, bits | N/A (alt. 48x674) |
| | | TF15, bits | N/A (alt. 52x674) |
| | | TF16, bits | N/A (alt. 56x674) |
| TF17, bits | | N/A (alt. 60x674) | |
| TF18, bits | N/A (alt. 64x674) | | |

| | | |
|--------------|---------------------------------------------|---------------------|
| Higher layer | RAB/Signalling RB | RAB |
| | TTI, ms | 10(alt. 20) |
| | Coding type | TC |
| | CRC, bit | 16 |
| | Max number of bits/TTI after channel coding | 66300 (alt. 132588) |
| | RM attribute | 130-170 |

6.10.2.4.2.3.2.1.2 Transport channel parameters for DL:3.4 DL: 3.4 kbps SRBs for DCCH

See clause 6.10.2.4.1.2.2.1.1

6.10.2.4.2.3.2.1.3 TFCS

| | | |
|-------------------------------------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PDSCH | TFCS size | 11 (alt.19) |
| | TFCS | 2048 kbps RAB = TF0, TF1, TF2, TF3, TF4, TF5, TF6, TF7, TF8, TF9, TF10 (alt. TF0, TF1, TF2, TF3, TF4, TF5, TF6, TF7, TF8, TF9, TF10, TF11, TF12, TF13, TF14, TF15, TF16, TF17, TF18) |
| DPCH Downlink associated with PDSCH | TFCS size | 2 |
| | TFCS | SRBs for DCCH = TF0, TF1 |

6.10.2.4.2.3.2.2 Physical channel parameters

| | | | | |
|-------------------------------------|--------------------------|---------------------------|-------------------------------------------------------------|----|
| PDSCH | RAB or SRB, TrCh | | Interactive or background / 2048 kbps / PS RAB, DSCH | |
| | DTX position | | N/A (SingleTrCH) | |
| | Minimum spreading factor | | 4 | |
| DPCH Downlink associated with PDSCH | RAB or SRB, TrCh | | 3.4 kbps SRB for DCCH, DCH | |
| | DTX position | | N/A (SingleTrCH) | |
| | Spreading factor | | 256 | |
| | DPCCH | Number of TFBI bits/slot | | 2 |
| | | Number of TPC bits/slot | | 2 |
| | | Number of Pilot bits/slot | | 4 |
| | DPDCH | Number of data bits/slot | | 12 |
| Number of data bits/frame | | 180 | | |

6.10.2.4.2.4 ~~Void. Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:256 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH~~

~~6.10.2.4.2.4.1 Uplink~~

~~See clause 6.10.2.4.1.4.0.1.~~

~~6.10.2.4.2.4.2 Downlink~~

~~6.10.2.4.2.4.2.1 Transport channel parameters~~

~~6.10.2.4.2.4.2.1.1 Transport channel parameters for Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB~~

~~See clause 6.10.2.4.1.4.2.1.1~~

6.10.2.4.2.4.2.1.2 — Transport channel parameters for Interactive or background / DL:256 kbps / PS-RAB

See clause 6.10.2.4.2.1.2.1.1

6.10.2.4.2.4.2.1.3 — Transport channel parameters for DL:3.4 DL: 3.4 kbps SRBs for DCCH

See clause 6.10.2.4.1.2.2.1.1.

6.10.2.4.2.4.2.1.4 — TFCS

| | | |
|-------------------------------------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PDSCH | TFCS size | 5 (alt.7) |
| | TFCS | 256 kbps RAB = TF0, TF1, TF2, TF3, TF4 (alt. TF0, TF1, TF2, TF3, TF4, TF5, TF6) |
| DPCH Downlink associated with PDSCH | TFCS size | 6 |
| | TFCS | (RAB subflow#1, RAB subflow#2, RAB subflow#3, DCCH) = (TF0, TF0, TF0, TF0), (TF1, TF0, TF0, TF0), (TF2, TF1, TF1, TF0), (TF0, TF0, TF0, TF1), (TF1, TF0, TF0, TF1), (TF2, TF1, TF1, TF1) |

6.10.2.4.2.4.2.4 — Physical channel parameters

| | | | |
|-------------------------------------|--------------------------|------------------------------------------------------------------------------------|----|
| PDSCH | RAB or SRB, TrCh | Interactive or background / 256 kbps / PS-RAB, DSCH | |
| | DTX position | N/A (SingleTrCH) | |
| | Minimum spreading factor | 4 | |
| DPCH Downlink associated with PDSCH | RAB or SRB, TrCh | Conversational / speech / 12.2 kbps / CS-RAB, DCH + 3.4 kbps SRBs for DCCH, DCH | |
| | DTX position | Fixed | |
| | Spreading factor | 128 | |
| | DPCCH | Number of TFCI bits/slot | 2 |
| | | Number of TPC bits/slot | 2 |
| | | Number of Pilot bits/slot | 4 |
| | DPDCH | Number of data bits/slot | 32 |
| Number of data bits/frame | | 480 | |

<New section ends>

CHANGE REQUEST⌘ **34.108 CR 195** ⌘ rev **-** ⌘ Current version: **4.5.0** ⌘For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.Proposed change affects: UICC apps ME Radio Access Network Core Network

| | | |
|------------------------|------------------------------------------------------------------------------------------------|-------------------------------------------|
| Title: | ⌘ Introduction of a Reference RB configuration of the RMC for BTFD test. | |
| Source: | ⌘ Rohde & Schwarz | |
| Work item code: | ⌘ TEI | Date: ⌘ 05/02/2003 |
| Category: | ⌘ A | Release: ⌘ Rel-4 |
| | Use <u>one</u> of the following categories: | Use <u>one</u> of the following releases: |
| | F (correction) | 2 (GSM Phase 2) |
| | A (corresponds to a correction in an earlier release) | R96 (Release 1996) |
| | B (addition of feature), | R97 (Release 1997) |
| | C (functional modification of feature) | R98 (Release 1998) |
| | D (editorial modification) | R99 (Release 1999) |
| | Detailed explanations of the above categories can be found in 3GPP TR 21.900 . | Rel-4 (Release 4) |
| | | Rel-5 (Release 5) |
| | | Rel-6 (Release 6) |

| | |
|--------------------------------------|---------------------------------------------------------------------------|
| Reason for change: | ⌘ RB reference configuration for the RMC is not defined for BTFD test. |
| Summary of change: | ⌘ A reference configuration for BTFD testing is added to section 9.2.1 |
| Consequences if not approved: | ⌘ Ambiguous results if different configurations are used in test systems. |

| | | | | | | |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|----------|--------------------------|-------------------------------------|-----------------------------|
| Clauses affected: | ⌘ 9.2.1 | | | | | |
| Other specs Affected: | <table border="1"> <tr> <td>Y</td> <td>N</td> </tr> <tr> <td><input type="checkbox"/></td> <td><input checked="" type="checkbox"/></td> </tr> </table> | Y | N | <input type="checkbox"/> | <input checked="" type="checkbox"/> | Other core specifications ⌘ |
| Y | N | | | | | |
| <input type="checkbox"/> | <input checked="" type="checkbox"/> | | | | | |
| | <input checked="" type="checkbox"/> | Test specifications | | | | |
| | <input checked="" type="checkbox"/> | O&M Specifications | | | | |
| Other comments: | ⌘ | | | | | |

How to create CRs using this form:Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be

downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.

- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

9.2 Default Message Contents for RF

This clause contains the default values of common messages for RF test. The parameters of the UL/DL reference measurement channel 12.2kbps, [the DL reference measurement channel for BTFD](#), UE test loop mode 1 without Dummy DCCH transmission and UE test loop mode 2 with Dummy DCCH transmission are set to default message contents.

9.2.1 Default Message Contents for RF (FDD)

[New Section](#)

Contents of RADIO BEARER SETUP message: BTFD RMC

| Information Element | Value/remark |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><u>Message Type</u> <u>RRC transaction identifier</u> <u>Integrity check info</u></p> <p><u> - message authentication code</u></p> <p><u> - RRC message sequence number</u></p> <p><u>Integrity protection mode info</u> <u>Ciphering mode info</u></p> <p><u> - Ciphering mode command</u> <u> - Ciphering algorithm</u> <u> - Ciphering activation time for DPCH</u> <u> - Radio bearer downlink ciphering activation time info</u></p> <p><u>Activation time</u> <u>New U-RNTI</u> <u>New C-RNTI</u> <u>RRC State indicator</u> <u>UTRAN DRX cycle length coefficient</u> <u>CN information info</u> <u>URA identity</u> <u>Signalling RB information to setup</u></p> | <p>Arbitrarily selects an integer between 0 and 3 The presence of this IE is dependent on IXIT statements in TS 34.123-2. If integrity protection is indicated to be active, this IE is present with the values of the sub IEs as stated below. Else, this IE and the sub-IEs are omitted. SS calculates the value of MAC-I for this message and writes to this IE. SS provides the value of this IE, from its internal counter. Not Present The presence of this IE is dependent on IXIT statements in TS 34.123-2. If ciphering is indicated to be active, this IE present with the values of the sub IEs as stated below. Else, this IE is omitted. Start/restart Use one of the supported ciphering algorithms Set by operator Not Present Set by operator Not Present Not Present CELL_DCH Not Present Not Present Not Present Not Present</p> |
| <p><u>RAB information for setup</u></p> <p><u> - RAB info</u> <u> - RAB identity</u> <u> - CN domain identity</u> <u> - NAS Synchronization Indicator</u> <u> - Re-establishment timer</u> <u> - RB information to setup</u> <u> - RB identity</u> <u> - PDCP info</u> <u> - CHOICE RLC info type</u> <u> - CHOICE Uplink RLC mode</u> <u> - Transmission RLC discard</u> <u> - Segmentation indication</u> <u> - CHOICE Downlink RLC mode</u> <u> - Segmentation indication</u> <u> - RB mapping info</u> <u> - Information for each multiplexing option</u> <u> - RLC logical channel mapping indicator</u> <u> - Number of uplink RLC logical channels</u> <u> - Uplink transport channel type</u> <u> - UL Transport channel identity</u> <u> - Logical channel identity</u> <u> - CHOICE RLC size list</u> <u> - MAC logical channel priority</u> <u> - Downlink RLC logical channel info</u> <u> - Number of downlink RLC logical channels</u> <u> - Downlink transport channel type</u> <u> - DL DCH Transport channel identity</u> <u> - DL DSCH Transport channel identity</u> <u> - Logical channel identity</u></p> | <p>0000 0001B CS domain Not Present UseT314</p> <p>10 Not Present RLC info TM RLC Not Present FALSE TM RLC FALSE</p> <p>Not Present 1 DCH 1 Not Present Configured 1 1 DCH 6 Not Present Not Present</p> |
| <p><u>RB information to be affected</u> <u>Downlink counter synchronisation info</u></p> | <p>Not Present Not Present</p> |
| <p></p> | <p>RMC for BTFD</p> |
| <p><u>UL Transport channel information for all transport channels</u></p> <p><u> - PRACH TFCS</u></p> | <p>Not Present</p> |

| <u>Information Element</u> | <u>Value/remark</u> |
|-----------------------------------------|--------------------------|
| - CHOICE mode | FDD |
| - TFC subset | Not Present |
| - UL DCH TFCS | |
| - CHOICE TFCI signalling | Normal |
| - TFCI Field 1 information | |
| - CHOICE TFCS representation | Complete reconfiguration |
| - TFCS complete reconfigure information | |
| - CHOICE CTFC Size | ctfc6Bit |
| - ctfc6Bit | 22 |
| - ctfc6 | 0 |
| -powerOffsetInformation(OP) | |
| -gainFactorInformation | ComputedGainFactors |
| - Reference TFC ID | 0 |
| - ctfc6 | 11 |
| -powerOffsetInformation(OP) | |
| -gainFactorInformation | ComputedGainFactors |
| - Reference TFC ID | 0 |
| - ctfc6 | 1 |
| -powerOffsetInformation(OP) | |
| -gainFactorInformation | ComputedGainFactors |
| - Reference TFC ID | 0 |
| - ctfc6 | 12 |
| -powerOffsetInformation(OP) | |
| -gainFactorInformation | SignalledGainFactors |
| -modeSpecificInfo | Fdd |
| -fdd | |
| - Gain factor βc | 8 |
| - Gain factor βd | 15 |
| - Reference TFC ID | 0 |
| - ctfc6 | 2 |
| -powerOffsetInformation(OP) | |
| -gainFactorInformation | ComputedGainFactors |
| - Reference TFC ID | 0 |
| - ctfc6 | 13 |
| -powerOffsetInformation(OP) | |
| -gainFactorInformation | ComputedGainFactors |
| - Reference TFC ID | 0 |
| - ctfc6 | 3 |
| -powerOffsetInformation(OP) | |
| -gainFactorInformation | ComputedGainFactors |
| - Reference TFC ID | 0 |
| - ctfc6 | 14 |
| -powerOffsetInformation(OP) | |
| -gainFactorInformation | ComputedGainFactors |
| - Reference TFC ID | 0 |
| - ctfc6 | 4 |
| -powerOffsetInformation(OP) | |
| -gainFactorInformation | ComputedGainFactors |
| - Reference TFC ID | 0 |
| - ctfc6 | 15 |
| -powerOffsetInformation(OP) | |
| -gainFactorInformation | ComputedGainFactors |
| - Reference TFC ID | 0 |
| - ctfc6 | 5 |
| -powerOffsetInformation(OP) | |
| -gainFactorInformation | ComputedGainFactors |
| - Reference TFC ID | 0 |
| - ctfc6 | 16 |
| -powerOffsetInformation(OP) | |
| -gainFactorInformation | ComputedGainFactors |
| - Reference TFC ID | 0 |
| - ctfc6 | 6 |
| -powerOffsetInformation(OP) | |
| -gainFactorInformation | ComputedGainFactors |

| <u>Information Element</u> | <u>Value/remark</u> |
|--------------------------------------------------|------------------------------|
| - Reference TFC ID | 0 |
| - ctfc6 | 17 |
| -powerOffsetInformation(OP) | |
| -gainFactorInformation | ComputedGainFactors |
| - Reference TFC ID | 0 |
| - ctfc6 | 7 |
| -powerOffsetInformation(OP) | |
| -gainFactorInformation | ComputedGainFactors |
| - Reference TFC ID | 0 |
| - ctfc6 | 18 |
| -powerOffsetInformation(OP) | |
| -gainFactorInformation | ComputedGainFactors |
| - Reference TFC ID | 0 |
| - ctfc6 | 8 |
| -powerOffsetInformation(OP) | |
| -gainFactorInformation | ComputedGainFactors |
| - Reference TFC ID | 0 |
| - ctfc6 | 19 |
| -powerOffsetInformation(OP) | |
| -gainFactorInformation | ComputedGainFactors |
| - Reference TFC ID | 0 |
| - ctfc6 | 9 |
| -powerOffsetInformation(OP) | |
| -gainFactorInformation | ComputedGainFactors |
| - Reference TFC ID | 0 |
| - ctfc6 | 20 |
| -powerOffsetInformation(OP) | |
| -gainFactorInformation | ComputedGainFactors |
| - Reference TFC ID | 0 |
| - ctfc6 | 10 |
| -powerOffsetInformation(OP) | |
| -gainFactorInformation | ComputedGainFactors |
| - Reference TFC ID | 0 |
| - ctfc6 | 21 |
| -powerOffsetInformation(OP) | |
| -gainFactorInformation | ComputedGainFactors |
| - Reference TFC ID | 0 |
| <u>Added or Reconfigured UL TrCH information</u> | |
| -ul-AddReconfTransChInfoList | 1 |
| - Uplink transport channel type | DCH |
| - UL Transport channel identity | 1 |
| - TFS | |
| - CHOICE Transport channel type | Dedicated transport channels |
| -DedicatedDynamicTF-Info | |
| RLC size | 256 |
| -numberOfTbSizeList | |
| -NumberOfTransportBlocks | Zero |
| -NumberOfTransportBlocks | One |
| - Choice Logical Channel List | ALL |
| RLC size | 216 |
| -numberOfTbSizeList | |
| -NumberOfTransportBlocks | One |
| RLC size | 171 |
| - Choice Logical Channel List | ALL |
| -numberOfTbSizeList | |
| -NumberOfTransportBlocks | One |
| - Choice Logical Channel List | ALL |
| RLC size | 160 |
| -numberOfTbSizeList | |
| -NumberOfTransportBlocks | One |
| - Choice Logical Channel List | ALL |
| RLC size | 146 |
| -numberOfTbSizeList | |
| -NumberOfTransportBlocks | one |

| <u>Information Element</u> | <u>Value/remark</u> |
|-------------------------------------------------------------------|--------------------------|
| - Choice Logical Channel List | ALL |
| RLC size | 130 |
| -numberOfTbSizeList | |
| -NumberOfTransportBlocks | one |
| - Choice Logical Channel List | ALL |
| RLC size | 115 |
| -numberOfTbSizeList | |
| -NumberOfTransportBlocks | one |
| - Choice Logical Channel List | ALL |
| RLC size | 107 |
| -numberOfTbSizeList | |
| -NumberOfTransportBlocks | one |
| - Choice Logical Channel List | ALL |
| RLC size | 51 |
| -numberOfTbSizeList | |
| -NumberOfTransportBlocks | one |
| - Choice Logical Channel List | ALL |
| RLC size | 12 |
| -numberOfTbSizeList | |
| -NumberOfTransportBlocks | one |
| - Choice Logical Channel List | ALL |
| -Semistatic Transport Format Information | |
| -Transmission Time interval | 20 ms |
| -channelCodingType | Convolutional |
| -convolutional | 1/3 |
| - Rate matching attribute | 256 |
| - CRC size | 0 |
| DL Transport channel information common for all transport channel | |
| - SCCPCH TFCS | Not Present |
| - CHOICE mode | FDD |
| - CHOICE DL parameters | Explicit |
| - DL DCH TFCS | |
| - CHOICE TFCS signalling | Normal |
| - TFCS Field 1 information | |
| - CHOICE TFCS representation | Complete reconfiguration |
| - TFCS complete reconfigure information | |
| - CHOICE CTFC Size | Ctfc6Bit |
| - ctfc6Bit | 20 |
| - ctfc6 | 9 |
| - ctfc6 | 19 |
| - ctfc6 | 10 |
| - ctfc6 | 1 |
| - ctfc6 | 11 |
| - ctfc6 | 2 |
| - ctfc6 | 12 |
| - ctfc6 | 3 |
| - ctfc6 | 13 |
| - ctfc6 | 4 |
| - ctfc6 | 14 |
| - ctfc6 | 5 |
| - ctfc6 | 15 |
| - ctfc6 | 6 |
| - ctfc6 | 16 |
| - ctfc6 | 7 |
| - ctfc6 | 17 |
| - ctfc6 | 8 |
| - ctfc6 | 18 |
| Deleted DL TrCH information | Not Present |
| Added or Reconfigured DL TrCH information | |
| -dl-AddReconfTransChInfoList(OP) | 1 |
| - Downlink transport channel type | DCH |

| <u>Information Element</u> | <u>Value/remark</u> |
|------------------------------------------|------------------------------|
| - DL Transport channel identity | 6 |
| - CHOICE DL parameters | Explicit |
| - TFS | |
| - CHOICE Transport channel type | Dedicated transport channels |
| -DedicatedDynamicTF-Info | |
| RLC size | 244 |
| -numberOfTbSizeList | |
| -NumberOfTransportBlocks | One |
| - Choice Logical Channel List | ALL |
| RLC size | 204 |
| -numberOfTbSizeList | |
| -NumberOfTransportBlocks | One |
| RLC size | 159 |
| - Choice Logical Channel List | ALL |
| -numberOfTbSizeList | |
| -NumberOfTransportBlocks | One |
| - Choice Logical Channel List | ALL |
| RLC size | 148 |
| -numberOfTbSizeList | |
| -NumberOfTransportBlocks | One |
| - Choice Logical Channel List | ALL |
| RLC size | 134 |
| -numberOfTbSizeList | |
| -NumberOfTransportBlocks | one |
| - Choice Logical Channel List | ALL |
| RLC size | 118 |
| -numberOfTbSizeList | |
| -NumberOfTransportBlocks | one |
| - Choice Logical Channel List | ALL |
| RLC size | 103 |
| -numberOfTbSizeList | |
| -NumberOfTransportBlocks | one |
| - Choice Logical Channel List | ALL |
| RLC size | 95 |
| -numberOfTbSizeList | |
| -NumberOfTransportBlocks | one |
| - Choice Logical Channel List | ALL |
| RLC size | 39 |
| -numberOfTbSizeList | |
| -NumberOfTransportBlocks | one |
| - Choice Logical Channel List | ALL |
| RLC size | 0 |
| -numberOfTbSizeList | |
| -NumberOfTransportBlocks | one |
| - Choice Logical Channel List | ALL |
| -Semistatic Transport Format Information | |
| -Transmission Time interval | 20 ms |
| -channelCodingType | Convolutional |
| -convolutional | 1/3 |
| - Rate matching attribute | 256 |
| - CRC size | 12 |
| - DCH quality target | |
| - BLER Quality value | -2.0 |
| - Transparent mode signalling info | Not Present |
| Frequency info | Not Present |
| Maximum allowed UL TX power | 33 dBm |
| CHOICE channel requirement | Uplink DPCH info |
| - Uplink DPCH power control info | |
| - DPCH power offset | 0 |
| - PC Preamble | 1 frame |
| - SRB delay | 7 frames |
| - Power Control Algorithm | Algorithm1 |

| <u>Information Element</u> | <u>Value/remark</u> |
|-------------------------------------------------|------------------------------------------------------------------------------|
| - TPC step size | 1dB |
| - Scrambling code type | Long |
| - Scrambling code number | 0 |
| - Number of DPDCH | 1 |
| - spreading factor | 64 |
| - TFCl existence | TRUE |
| - Number of FBI bit | Not Present(0) |
| - Puncturing Limit | 1 |
| CHOICE Mode | FDD |
| - Downlink PDSCH information | Not Present(0) |
| Downlink information common for all radio links | |
| - Downlink DPCH info common for all RL | FDD |
| - Timing indicator | Maintain |
| - CFN-targetSFN frame offset | Not Present |
| - Downlink DPCH power control information | |
| - DPC mode | 0 (single) |
| - CHOICE mode | FDD |
| - Power offset $P_{\text{Pilot-DPCH}}$ | 0 |
| - DL rate matching restriction information | Not Present |
| - Spreading factor | 128 |
| - Number of bits for Pilot bits(SF=128,256) | 4 |
| - Fixed or Flexible Position | Fixed |
| - TFCl existence | FALSE |
| - DPCH compressed mode info | Not Present |
| - TX Diversity mode | None |
| - SSDT information | Not Present |
| - Default DPCH Offset Value | Not Present |
| Downlink information for each radio link list | |
| - Primary CPICH info | Not Present |
| - Primary scrambling code | 100 |
| - PDSCH with SHO DCH info | Not Present |
| - PDSCH code mapping | Not Present |
| - Downlink DPCH info for each RL | |
| - Primary CPICH usage for channel estimation | Primary CPICH may be used |
| - DPCH frame offset | Set to value Default DPCH Offset Value (as currently stored in SS) mod 38400 |
| - Secondary CPICH info | Not Present |
| - DL channelisation code | |
| - Secondary scrambling code | 0 |
| - Spreading factor | 128 |
| - Code number | Set to value stored in SS |
| - Scrambling code change | No change |
| - TPC combination index | 0 |
| - SSDT Cell Identity | Not Present |
| - Closed loop timing adjustment mode | Not Present |
| - SCCPCH information for FACH | Not Present |

3GPP TSG T1#18
San Antonio 10 – 14 Feb 03

Tdoc T1-030107

3GPP TSG-T1 Sig SWG #27
San Antonio 11-13 Feb 03

Tdoc # T1S030021

| |
|----------------------------------------------------------------|
| CR-Form-v7 |
| CHANGE REQUEST |
| ⌘ 34.108 CR 198 ⌘ rev ⌘ Current version: 4.5.0 ⌘ |

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

Proposed change affects: UICC apps ME Radio Access Network Core Network

| | | | |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Title: | ⌘ Introduction of conversational PS RABs in Rel 4 TS 34.108 | | |
| Source: | ⌘ Three (Hutchison 3G UK) | | |
| Work item code: | ⌘ TEI | Date: | ⌘ 07/01/2003 |
| Category: | ⌘ F | Release: | ⌘ Rel-4 |
| | Use <u>one</u> of the following categories: F (correction) A (corresponds to a correction in an earlier release) B (addition of feature), C (functional modification of feature) D (editorial modification) Detailed explanations of the above categories can be found in 3GPP TR 21.900 . | | Use <u>one</u> of the following releases: 2 (GSM Phase 2) R96 (Release 1996) R97 (Release 1997) R98 (Release 1998) R99 (Release 1999) Rel-4 (Release 4) Rel-5 (Release 5) Rel-6 (Release 6) |

| | |
|--------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Reason for change: | ⌘ There is currently no Conversational PS RABs specified in the conformance and test specifications |
| Summary of change: | ⌘ It is proposed to add the following combination of RABs and signalling RBs <ul style="list-style-type: none"> • Conversational / unknown / UL:8 DL:8 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH |
| Consequences if not approved: | ⌘ Support of the proposed reference radio bearer is currently not included in the conformance and test specifications. Inclusion in 34.108 needed to ensure functionality. . |

| | | | | | | | | | | | |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---|--|---|---|--|--|---|---|-----------|
| Clauses affected: | ⌘ 6.10.2.1, 6.10.2.2, 6.10.2.4.1.61 | | | | | | | | | | |
| Other specs affected: | <table border="1" style="display: inline-table; border-collapse: collapse; text-align: center;"> <tr> <td style="width: 20px;">Y</td> <td style="width: 20px;">N</td> </tr> <tr> <td style="width: 20px;"> </td> <td style="width: 20px;">X</td> </tr> <tr> <td style="width: 20px;">X</td> <td style="width: 20px;"> </td> </tr> <tr> <td style="width: 20px;"> </td> <td style="width: 20px;">X</td> </tr> </table> Other core specifications Test specifications O&M Specifications | Y | N | | X | X | | | X | ⌘ | TS 34.123 |
| Y | N | | | | | | | | | | |
| | X | | | | | | | | | | |
| X | | | | | | | | | | | |
| | X | | | | | | | | | | |
| Other comments: | ⌘ | | | | | | | | | | |

How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>. Below is a brief summary:

3GPP TS 34.108 v4.4.0 (2002-09)

- 1) Fill out the above form. The symbols above marked ☒ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

<New section starts>

6.10.2 RAB and signalling RB for FDD

6.10.2.1 RABs and signalling RBs

In the following clauses, the typical parameter sets are presented for reference RABs, signalling RBs and important combinations of them. The data rate given for each RAB is the maximum data rate that can be supported by that RAB.

NOTE: The granularity for each RAB needs to be clarified.

Table 6.10.2.1.1: Prioritised RABs.

| # | Traffic class [15] | SSD [15] | Max. rate, kbps | CS/PS |
|-----|---------------------------|----------|-----------------------------------------------------|-------|
| 1 | Conversational | Speech | UL:12.2 DL:12.2 | CS |
| 1a | Conversational | Speech | UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) | CS |
| 2 | Conversational | Speech | UL:10.2 DL:10.2 | CS |
| 2a | Conversational | Speech | UL:(10.2, 6.7, 5.9, 4.75) DL:(10.2, 6.7, 5.9, 4.75) | CS |
| 3 | Conversational | Speech | UL:7.95 DL:7.95 | CS |
| 4 | Conversational | Speech | UL:7.4 DL:7.4 | CS |
| 4a | Conversational | Speech | UL:(7.4, 6.7, 5.9, 4.75) DL:(7.4, 6.7, 5.9, 4.75) | CS |
| 5 | Conversational | Speech | UL:6.7 DL:6.7 | CS |
| 6 | Conversational | Speech | UL:5.9 DL:5.9 | CS |
| 7 | Conversational | Speech | UL:5.15 DL:5.15 | CS |
| 8 | Conversational | Speech | UL:4.75 DL:4.75 | CS |
| 9 | Conversational | Unknown | UL:28.8 DL:28.8 | CS |
| 10 | Conversational | Unknown | UL:64 DL:64 | CS |
| 11 | Conversational | Unknown | UL:32 DL:32 | CS |
| 11a | Conversational | Unknown | UL:8 DL:8 | PS |
| 12 | Streaming | Unknown | UL:14.4 DL:14.4 | CS |
| 13 | Streaming | Unknown | UL:28.8 DL:28.8 | CS |
| 14 | Streaming | Unknown | UL:57.6 DL:57.6 | CS |
| 15 | Streaming | Unknown | UL:0 DL:64 | CS |
| 15a | Streaming | Unknown | UL:16 DL:64 | PS |
| 16 | Streaming | Unknown | UL:64 DL:0 | CS |
| 17 | Void | | | |
| 18 | Void | | | |
| 19 | Void | | | |
| 20 | Interactive or Background | N/A | UL:32 DL:8 | PS |
| 20a | Interactive or Background | N/A | UL:8 DL:8 | PS |
| 20b | Interactive or Background | N/A | UL:16 DL:16 | PS |
| 20c | Interactive or Background | N/A | UL:32 DL:32 | PS |
| 21 | Interactive or Background | N/A | UL:64 DL:8 | PS |
| 22 | Interactive or Background | N/A | UL:32 DL:64 | PS |
| 23 | Interactive or Background | N/A | UL:64 DL:64 | PS |
| 24 | Interactive or Background | N/A | UL:64 DL:128 | PS |
| 25 | Interactive or Background | N/A | UL:128 DL:128 | PS |
| 26 | Interactive or Background | N/A | UL:64 DL:384 | PS |
| 27 | Interactive or Background | N/A | UL:128 DL:384 | PS |
| 28 | Interactive or Background | N/A | UL:384 DL:384 | PS |
| 29 | Interactive or Background | N/A | UL:64 DL:2048 | PS |
| 30 | Interactive or Background | N/A | UL:128 DL:2048 | PS |
| 31 | Interactive or Background | N/A | UL:384 DL:2048 | PS |
| 32 | Interactive or Background | N/A | UL:64 DL:256 | PS |
| 33 | Interactive or Background | N/A | UL:0 DL:32 | PS |
| 34 | Interactive or Background | N/A | UL:32 DL: 0 | PS |
| 35 | Interactive or Background | N/A | UL:64 DL:144 | PS |
| 36 | Interactive or Background | N/A | UL:144 DL:144 | PS |

Table 6.10.2.1.2: Signalling RBs

| # | Maximum rate, kbps | Logical channel | PhyCh onto which SRBs are mapped |
|---|---------------------|-----------------|----------------------------------|
| 1 | UL:1.7 DL:1.7 | DCCH | DPCH |
| 2 | UL:3.4 DL:3.4 | DCCH | DPCH |
| 3 | UL:13.6 DL:13.6 | DCCH | DPCH |
| 4 | DL:27.2 (alt. 40.8) | DCCH | SCCPCH |
| 5 | UL:16.6 | CCCH | PRACH |
| 6 | DL:30.4 (alt. 45.6) | CCCH | SCCPCH |
| 7 | DL:33.2 (alt. 49.8) | BCCH: | SCCPCH |
| 8 | DL:24 (alt. 6.4) | PCCH | SCCPCH |

6.10.2.2 Combinations of RABs and Signalling RBs

In the present document, physical channel parameters for following combinations of RABs and signalling RBs on a CCTrCH are described.

NOTE: It is understood that for speech service the AMR mode may be operated asymmetrically for the uplink and downlink.

Combinations on DPCH

- 1) Stand-alone UL:1.7 DL:1.7 kbps SRBs for DCCH.
- 2) Stand-alone UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 3) Stand-alone UL:13.6 DL:13.6 kbps SRBs for DCCH.
- 4) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 4a) Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 5) Conversational / speech / UL:10.2 DL:10.2 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 5a) Conversational / speech / UL:(10.2, 6.7, 5.9, 4.75) DL:(10.2, 6.7, 5.9, 4.75) kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 6) Conversational / speech / UL:7.95 DL:7.95 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 7) Conversational / speech / UL:7.4 DL:7.4 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 7a) Conversational / speech / UL:(7.4, 6.7, 5.9, 4.75) DL:(7.4, 6.7, 5.9, 4.75) kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 8) Conversational / speech / UL:6.7 DL:6.7 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 9) Conversational / speech / UL:5.9 DL:5.9 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 10) Conversational / speech / UL:5.15 DL:5.15 kbps / CS RAB
+ UL:1.7 DL:1.7 kbps SRBs for DCCH.
- 11) Conversational / speech / UL:4.75 DL:4.75 kbps / CS RAB
+ UL:1.7 DL:1.7 kbps SRBs for DCCH.

- 12) Conversational / unknown / UL:28.8 DL:28.8 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 13) Conversational / unknown / UL:64 DL:64 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 14) Conversational / unknown / UL:32 DL:32 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 15) Streaming / unknown / UL:14.4/DL:14.4 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 16) Streaming / unknown / UL:28.8/DL:28.8 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 17) Streaming / unknown / UL:57.6/DL:57.6 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 18) Streaming / unknown / UL:0 DL:64 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 19) Streaming / unknown / UL:64 DL:0 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 20) Void.
- 21) Void.
- 22) Void.
- 23) Interactive or background / UL:32 DL:8 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 23a) Interactive or background / UL:8 DL:8 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 23b) Interactive or background / UL:16 DL:16 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 23c) Interactive or background / UL:32 DL:32 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 23d) Interactive or background / UL:32 DL:32 kbps / PS RAB (20 ms TTI)
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 24) Interactive or background / UL:64 DL:8 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 25) Interactive or background / UL:32 DL: 64 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 26) Interactive or background / UL:64 DL: 64 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 27) Interactive or background / UL:64 DL:128 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 28) Interactive or background / UL:128 DL:128 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 29) Interactive or background / UL:64 DL:144 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 30) Interactive or background / UL:144 DL:144 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.

- 31) Interactive or background / UL:64 DL:256 kbps / PS RAB
+ UL:3.4 DL: 3.4 kbps SRBs for DCCH.
- 32) Interactive or background / UL:64 DL:384 kbps / PS RAB
+ UL:3.4 DL: 3.4 kbps SRBs for DCCH.
- 33) Interactive or background / UL:128 DL:384 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 34) Interactive or background / UL:384 DL:384 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 35) Interactive or background / UL:64 DL:2048 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 36) Interactive or background / UL:128 DL:2048 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 37) Interactive or background / UL:384 DL:2048 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 38) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:32 DL:8 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 38a) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:0 DL:0 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 38b) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:8 DL:8 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 38c) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:32 DL:32 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 38d) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:64 DL:64 kbps / PS RAB
+ Interactive or background / UL:64 DL:64 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 38e) Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB
+ Interactive or background / UL:0 DL:0 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 38f) Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB
+ Interactive or background / UL:8 DL:8 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 38g) Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB
+ Interactive or background / UL:16 DL:16 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 38h) Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB
+ Interactive or background / UL:32 DL:32 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 38i) Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB
+ Interactive or background / UL:64 DL:64 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 38j) Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB
+ Interactive or background / UL:64 DL:128 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.

- 39) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:32 DL:64 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 40) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:64 DL:64 kbps / PS RAB
+ UL:3.4 DL: 3.4 kbps SRBs for DCCH.
- 41) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:64 DL:128 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 42) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:64 DL:256 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 43) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:64 DL:384 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 44) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:128 DL:2048 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 45) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Streaming / unknown / UL:57.6 DL:57.6 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 46) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Streaming / unknown / UL:0 DL:64 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 47) Void.
- 48) Void.
- 49) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Conversational / unknown / UL:64 DL:64 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 49a) Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB
+ Conversational / unknown / UL:64 DL:64 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 50) Conversational / unknown / UL:64 DL:64 kbps / CS RAB
+ Conversational / unknown / UL:64 DL:64 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 51) Conversational / unknown / UL:64 DL:64 kbps / CS RAB
+ Interactive or background / UL:64 DL:64 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 51a) Conversational / unknown / UL:64 DL:64 kbps / CS RAB
+ Interactive or Background / UL:8 DL:8 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 51b) Conversational / unknown / UL:64 DL:64 kbps / CS RAB
+ Interactive or Background / UL:16 DL:64 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 52) Conversational / unknown / UL:64 DL:64 kbps / CS RAB
+ Interactive or background / UL:64 DL:128 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.

- 53) Conversational / unknown / UL:64 DL:64 kbps / CS RAB
+ Interactive or background / UL:128 DL:128 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 54) Interactive or /background / UL:64 kbps DL:128 kbps / PS RAB
+ Streaming / unknown / UL:0 DL:64 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 55) Void.
- 56) Interactive or background / UL:8 DL:8 kbps / PS RAB
+ Interactive or background / UL:8 DL:8 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 57) Interactive or background / UL:64 DL:64 kbps / PS RAB
+ Interactive or background / UL:64 DL:64 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 58) Streaming / unknown / UL:16 DL:64 kbps / PS RAB
+ Interactive or background / UL:8 DL:8 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.

[59\) Reserved for future use](#)

[60\) Reserved for future use](#)

[61\) Conversational / unknown / UL:8 DL:8 kbps / PS RAB
+ Interactive or Background / UL:8 DL:8 kbps / PS RAB +
+ UL:3.4 DL:3.4 kbps SRBs for DCCH](#)

<New section ends>

<New section starts>

[6.10.2.4.1.59](#) Reserved for future use

[6.10.2.4.1.60](#) Reserved for future use

[6.10.2.4.1.61.](#) [Conversational / unknown / UL:8 DL:8 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH](#)

[6.10.2.4.1.61.1](#) [Uplink](#)

[6.10.2.4.1.61.1.1](#) [Transport channel parameters](#)

[6.10.2.4.1.61.1.1.1](#) [Transport channel parameters for Conversational / unknown / UL:8 kbps / PS RAB](#)

| | | | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|-----------------------------------------|----------------------------------------|
| Higher layer | RAB/Signalling RB | RAB | |
| RLC | Logical channel type | DTCH | |
| | RLC mode | UM | |
| | Payload sizes, bit | 320 | |
| | Max data rate, bps | 8000 | |
| | UMD PDU header, bit | 8 | |
| MAC | MAC header, bit | 0 | |
| | MAC multiplexing | N/A | |
| Layer 1 | TrCH type | DCH | |
| | TB sizes, bit | 328 (alt 0, 328) (note) | |
| | TFS | TF0, bits | 0x328 (alt 1x0) (note) |
| | | TF1, bits | 1x328 |
| | TTI, ms | 40 | |
| | Coding type | TC | |
| | CRC, bit | 16 | |
| | Max number of bits/TTI after channel coding | 1044 | |
| | Uplink: Max number of bits/radio frame before rate matching | 261 | |
| RM attribute | 135-175 | | |
| NOTE: In case of using this alternative, CRC parity bits are to be attached any time since number of TrBlks are 1 even if there is no data on the RAB (see clause 4.2.1.1 in TS 25.212). | | | |

[6.10.2.4.1.61.1.1.2](#) [Transport channel parameters for Interactive or Background / UL:8 kbps / PS RAB](#)

[See section 6.10.2.4.1.38b.1.1.2](#)

[6.10.2.4.1.61.1.1.3](#) [Transport channel parameters for UL:3.4 kbps SRBs for DCCH](#)

[See section 6.10.2.4.1.2.1.1.1](#)

[6.10.2.4.1.61.1.1.4](#) [TFCS](#)

| | |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TFCS size | 8 |
| TFCS | (8 kbps Conversational RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1) |

[6.10.2.4.1.61.1.2](#) [Physical channel parameters](#)

| | | |
|-----------------------------|-----------------------------------------------------------|----------------------|
| DPCH Uplink | Min spreading factor | 32 |
| | Max number of DPDCH data bits/radio frame | 1200 |
| | Puncturing Limit | 1.0 |

6.10.2.4.1.61.2 Downlink

6.10.2.4.1.61.2.1 Transport channel parameters

6.10.2.4.1.61.2.1.1 Transport channel parameters for Conversational / unknown / DL:8 kbps / PS RAB

| | | | |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|-------------------------|------------------------|
| Higher layer | RAB/Signalling RB | RAB | |
| RLC | Logical channel type | DTCH | |
| | RLC mode | UM | |
| | Payload sizes, bit | 320 | |
| | Max data rate, bps | 8000 | |
| | AMD PDU header, bit | 8 | |
| MAC | MAC header, bit | 0 | |
| | MAC multiplexing | N/A | |
| Layer 1 | TrCH type | DCH | |
| | TB sizes, bit | 328 (alt 0: 328) (note) | |
| | TFS | TF0, bits | 0x328 (alt 1x0) (note) |
| | | TF1, bits | 1x328 |
| | TTI, ms | 40 | |
| | Coding type | TC | |
| | CRC, bit | 16 | |
| | Max number of bits/TTI after channel coding | 1044 | |
| | RM attribute | 135-175 | |
| NOTE: In case of using this alternative, CRC parity bits are to be attached any time since number of TrBlks are 1 even if there is no data on the RAB (see clause 4.2.1.1 in TS 25.212). | | | |

6.10.2.4.1.61.2.1.2 Transport channel parameters for Interactive or Background / DL:8 kbps / PS RAB

See section 6.10.2.4.1.38b.2.1.2.

6.10.2.4.1.61.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See section 6.10.2.4.1.2.2.1.1

6.10.2.4.1.61.2.1.4 TFCS

| | |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TFCS size | 8 |
| TFCS | (8 kbps Conversational RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1) |

6.10.2.4.1.61.2.2 Physical channel parameters

| | | | |
|------------------|------------------|---------------------------|----------|
| DPCH Downlink | DTX position | | Flexible |
| | Spreading factor | | 64 |
| | DPCCH | Number of TFCI bits/slot | 8 |
| | | Number of TPC bits/slot | 4 |
| | | Number of Pilot bits/slot | 8 |
| | DPDCH | Number of data bits/slot | 60 |
| | | Number of data bits/frame | 900 |

<New sections ends>

CHANGE REQUEST

⌘ **34.108 CR 200** ⌘ rev **-** ⌘ Current version: **4.5.0** ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

Proposed change affects: ⌘ (U)SIM ME/UE Radio Access Network Core Network

| | | | |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Title: | ⌘ Update of default parameters for 1 to 8 cell environments (TDD), clause 6.1.4 | | |
| Source: | ⌘ Siemens AG | | |
| Work item code: | ⌘ | Date: | ⌘ 2 nd February 2003 |
| Category: | ⌘ A | Release: | ⌘ REL-4 |
| | Use <u>one</u> of the following categories: F (essential correction) A (corresponds to a correction in an earlier release) B (Addition of feature), C (Functional modification of feature) D (Editorial modification) | | Use <u>one</u> of the following releases: 2 (GSM Phase 2) R96 (Release 1996) R97 (Release 1997) R98 (Release 1998) R99 (Release 1999) REL-4 (Release 4) REL-5 (Release 5) |
| | Detailed explanations of the above categories can be found in 3GPP TR 21.900. | | |

| | |
|--------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Reason for change: | ⌘ Reflect the update of SIBs done for FDD mode in the parameters for 1 to 8 cell environments |
| Summary of change: | ⌘ <ul style="list-style-type: none"> - Contents of System Information Block type 11 for cells (TDD) included - References to clause 6.10 are corrected. Clause 6 is included to specify in only one reference 3.84 Mcps option and 1.28 Mcps option. |
| Consequences if not approved: | ⌘ Test cases included in TS34.123-1 do not work properly. |

| | | |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| Clauses affected: | ⌘ 6.1.4 | |
| Other specs affected: | <input type="checkbox"/> Other core specifications <input checked="" type="checkbox"/> Test specifications <input type="checkbox"/> O&M Specifications | ⌘ |
| Other comments: | ⌘ Reference: T1-020712 (CR approved at T1#17 meeting) | |

6.1.4 Default parameters for 1 to 8 cell environments

Default settings for cell No.1 (FDD):

| | |
|------------------------------|--------------------------------------------|
| Downlink input level | Reference clause 6.10 Parameter Set |
| Uplink output power | Minimum supported by the UE's power class. |
| PCCPCH/PCPICH carrier number | Reference clause 6.10 Parameter Set |
| Cell Channel Description | |
| - Primary CPICH info | |
| - Primary scrambling code | 100 |

Contents of System Information Block type 11 for cell No.1 (FDD)

See sub-clause 6.1.0b for contents of System Information Block type 11 (FDD) for cell 1.

Contents of System Information Block type 12 in connected mode for cell No.1 (FDD)

See sub-clause 6.1.0b for contents of System Information Block type 12 (FDD) for cell 1.

Default settings for cell No.1 (TDD):

| | |
|------------------------------|--------------------------------------------|
| Downlink input level | Reference clause 6.40 Parameter Set |
| Uplink output power | Minimum supported by the UE's power class. |
| PCCPCH/PCPICH carrier number | Reference clause 6.40 Parameter Set |
| Cell Channel Description | |
| - Primary CCPCH info | |
| - Cell parameters ID | 0 |

[Contents of System Information Block type 11 for cell No.1 \(TDD\)](#)

[See sub-clause 6.1.0b for contents of System Information Block type 11 \(TDD\) for cell 1.](#)

[Contents of System Information Block type 12 in connected mode for cell No.1 \(TDD\)](#)

[See sub-clause 6.1.0b for contents of System Information Block type 12 \(TDD\) for cell 1.](#)

Cell No.2

The contents of SYSTEM INFORMATION BLOCK TYPE 1 to 16 messages for cell No.2 are identical to those of cell No.1 with the following exceptions:

| | |
|---------------|-------------------------------------|
| Cell identity | 0000 0000 0000 0000 0000 0000 0010B |
| URA identity | 0000 0000 0000 0001B |

Default settings for cell No.2 (FDD):

| | |
|------------------------------|--------------------------------------------|
| Downlink input level | Reference clause 6.10 Parameter Set |
| Uplink output power | Minimum supported by the UE's power class. |
| PCCPCH/PCPICH carrier number | Reference clause 6.10 Parameter Set |
| Cell Channel Description | |
| - Primary CPICH info | |
| - Primary scrambling code | 150 |

Contents of System Information Block type 11 for cell No.2 (FDD)

| | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>- Intra-frequency measurement system information</p> <p>....</p> <ul style="list-style-type: none"> - New intra-frequency cells - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <p>.....</p> <p>- Inter-frequency measurement system information</p> <p>.....</p> <ul style="list-style-type: none"> - New inter-frequency cells - Inter frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info <ul style="list-style-type: none"> - Inter frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info <ul style="list-style-type: none"> - Inter frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info <p>.....</p> | <p>2</p> <p>Same content as specified for Intra-frequency cell id=1 (serving cell) in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.2 (FDD)" in clause 6.1.4</p> <p>1</p> <p>Same content as specified for Intra-frequency cell id=2 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.1 (FDD)" in clause 6.1.4</p> <p>3</p> <p>Same content as specified for Intra-frequency cell id=3 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>7</p> <p>Same content as specified for Intra-frequency cell id=7 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>8</p> <p>Same content as specified for Intra-frequency cell id=8 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>4</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clasue 6.1.0b</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clasue 6.1.0b</p> <p>5</p> <p>Same content as specified for Inter-frequency cell id=5 in SIB11 for Cell 1 in sub-clasue 6.1.0b</p> <p>Same content as specified for Inter-frequency cell id=5 in SIB11 for Cell 1 in sub-clasue 6.1.0b</p> <p>6</p> <p>Same content as specified for Inter-frequency cell id=6 in SIB11 for Cell 1 in sub-clasue 6.1.0b</p> <p>Same content as specified for Inter-frequency cell id=6 in SIB11 for Cell 1 in sub-clasue 6.1.0b</p> |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Default settings for cell No.2 (TDD):

| | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Downlink input level</p> <p>Uplink output power</p> <p>PCCPCH/PCPICH carrier number</p> <p>Cell Channel Description</p> <ul style="list-style-type: none"> - Primary CCPCH info - Cell parameters ID | <p>Reference clause 6.10-Parameter Set</p> <p>Minimum supported by the UE's power class.</p> <p>Reference clause 6.10-Parameter Set</p> <p>4</p> |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|

Contents of System Information Block type 11 for cell No.2 (TDD)

| | |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><u>- Intra-frequency measurement system information</u></p> <p>....</p> <ul style="list-style-type: none"> - <u>New intra-frequency cells</u> - <u>Intra-frequency cell id</u> - <u>Cell info</u> <ul style="list-style-type: none"> - <u>Intra-frequency cell id</u> - <u>Cell info</u> <ul style="list-style-type: none"> - <u>Intra-frequency cell id</u> - <u>Cell info</u> <ul style="list-style-type: none"> - <u>Intra-frequency cell id</u> - <u>Cell info</u> <ul style="list-style-type: none"> - <u>Intra-frequency cell id</u> - <u>Cell info</u> | <p><u>2</u></p> <p>Same content as specified for Intra-frequency cell id=1 (serving cell) in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.2 (TDD)" in clause 6.1.4</p> <p><u>1</u></p> <p>Same content as specified for Intra-frequency cell id=2 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.1 (TDD)" in clause 6.1.4</p> <p><u>3</u></p> <p>Same content as specified for Intra-frequency cell id=3 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p><u>7</u></p> <p>Same content as specified for Intra-frequency cell id=7 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p><u>8</u></p> <p>Same content as specified for Intra-frequency cell id=8 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> |
| <p>.....</p> <p><u>- Inter-frequency measurement system information</u></p> <p>.....</p> <ul style="list-style-type: none"> - <u>New inter-frequency cells</u> - <u>Inter frequency cell id</u> - <u>Frequency info</u> - <u>Cell info</u> <ul style="list-style-type: none"> - <u>Inter frequency cell id</u> - <u>Frequency info</u> - <u>Cell info</u> <ul style="list-style-type: none"> - <u>Inter frequency cell id</u> - <u>Frequency info</u> - <u>Cell info</u> | <p><u>4</u></p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clasue 6.1.0b</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clasue 6.1.0b</p> <p><u>5</u></p> <p>Same content as specified for Inter-frequency cell id=5 in SIB11 for Cell 1 in sub-clasue 6.1.0b</p> <p>Same content as specified for Inter-frequency cell id=5 in SIB11 for Cell 1 in sub-clasue 6.1.0b</p> <p><u>6</u></p> <p>Same content as specified for Inter-frequency cell id=6 in SIB11 for Cell 1 in sub-clasue 6.1.0b</p> <p>Same content as specified for Inter-frequency cell id=6 in SIB11 for Cell 1 in sub-clasue 6.1.0b</p> |

Cell No.3

The contents of SYSTEM INFORMATION BLOCK TYPE 1 to 16 messages for cell No.3 are identical to those of cell No.1 with the following exceptions:

| | |
|---------------|-------------------------------------|
| Cell identity | 0000 0000 0000 0000 0000 0000 0011B |
| URA identity | 0000 0000 0000 0010B |

Default settings for cell No.3 (FDD):

| | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Downlink input level Uplink output power PCCPCH/PCPICH carrier number Cell Channel Description <ul style="list-style-type: none"> - Primary CPICH info - Primary scrambling code | Reference clause 6.10 Parameter Set Minimum supported by the UE's power class. Reference clause 6.10 Parameter Set 200 |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|

Contents of System Information Block type 11 for cell No.3 (FDD)

| | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>- Intra-frequency measurement system information</p> <p>.....</p> <ul style="list-style-type: none"> - New intra-frequency cells - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <p>.....</p> <p>- Inter-frequency measurement system information</p> <p>.....</p> <ul style="list-style-type: none"> - New inter-frequency cells - Inter frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info <ul style="list-style-type: none"> - Inter frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info <ul style="list-style-type: none"> - Inter frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info <p>.....</p> | <p>3</p> <p>Same content as specified for Intra-frequency cell id=1 (serving cell) in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.3 (FDD)" in clause 6.1.4</p> <p>1</p> <p>Same content as specified for Intra-frequency cell id=2 (neighbour cell) in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.1 (FDD)" in clause 6.1.4</p> <p>2</p> <p>Same content as specified for Intra-frequency cell id=2 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>7</p> <p>Same content as specified for Intra-frequency cell id=7 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>8</p> <p>Same content as specified for Intra-frequency cell id=8 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>4</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clasue 6.1.0b</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clasue 6.1.0b</p> <p>5</p> <p>Not Present</p> <p>Absence of this IE is equivalent to value of the previous "frequency info" in the list.</p> <p>Same content as specified for Inter-frequency cell id=5 in SIB11 for Cell 1 in sub-clasue 6.1.0b</p> <p>6</p> <p>Not Present</p> <p>Absence of this IE is equivalent to value of the previous "frequency info" in the list.</p> <p>Same content as specified for Inter-frequency cell id=6 in SIB11 for Cell 1 in sub-clasue 6.1.0b</p> |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Default settings for cell No.3 (TDD):

| | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> Downlink input level Uplink output power PCCPCH/PCPICH carrier number Cell Channel Description <ul style="list-style-type: none"> - Primary CCPCH info - Cell parameters ID | <p>Reference clause 6.10 Parameter Set</p> <p>Minimum supported by the UE's power class.</p> <p>Reference clause 6.10 Parameter Set</p> <p>8</p> |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Contents of System Information Block type 11 for cell No.3 (TDD)

| | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><u>- Intra-frequency measurement system information</u></p> <p>----</p> <p><u>- New intra-frequency cells</u></p> <p><u>- Intra-frequency cell id</u></p> <p><u>- Cell info</u></p> <p><u>- Intra-frequency cell id</u></p> <p><u>- Cell info</u></p> <p><u>- Intra-frequency cell id</u></p> <p><u>- Cell info</u></p> <p><u>- Intra-frequency cell id</u></p> <p><u>- Cell info</u></p> <p><u>- Intra-frequency cell id</u></p> <p><u>- Cell info</u></p> | <p><u>3</u></p> <p>Same content as specified for Intra-frequency cell id=1 (serving cell) in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.3 (TDD)" in clause 6.1.4</p> <p><u>1</u></p> <p>Same content as specified for Intra-frequency cell id=2 (neighbour cell) in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.1 (TDD)" in clause 6.1.4</p> <p><u>2</u></p> <p>Same content as specified for Intra-frequency cell id=2 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p><u>7</u></p> <p>Same content as specified for Intra-frequency cell id=7 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p><u>8</u></p> <p>Same content as specified for Intra-frequency cell id=8 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> |
| <p>-----</p> <p><u>- Inter-frequency measurement system information</u></p> <p>-----</p> <p><u>- New inter-frequency cells</u></p> <p><u>- Inter frequency cell id</u></p> <p><u>- Frequency info</u></p> <p><u>- Cell info</u></p> <p><u>- Inter frequency cell id</u></p> <p><u>- Frequency info</u></p> <p><u>- Cell info</u></p> <p><u>- Inter frequency cell id</u></p> <p><u>- Frequency info</u></p> <p><u>- Cell info</u></p> | <p><u>4</u></p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p><u>5</u></p> <p><u>Not Present</u></p> <p>Absence of this IE is equivalent to value of the previous "frequency info" in the list.</p> <p>Same content as specified for Inter-frequency cell id=5 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p><u>6</u></p> <p><u>Not Present</u></p> <p>Absence of this IE is equivalent to value of the previous "frequency info" in the list.</p> <p>Same content as specified for Inter-frequency cell id=6 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> |

Cell No.4

The contents of SYSTEM INFORMATION BLOCK TYPE 1 to 16 messages for cell No.4 are identical to those of cell No.1 with the following exceptions:

| | |
|---------------|-------------------------------------|
| Cell identity | 0000 0000 0000 0000 0000 0000 0100B |
| URA identity | 0000 0000 0000 0010B |

Default settings for cell No.4 (FDD):

| | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Downlink input level Uplink output power PCCPCH/PCPICH carrier number Cell Channel Description - Primary CPICH info - Primary scrambling code | Reference clause 6.10 Parameter Set Minimum supported by the UE's power class. Reference clause 6.10 Parameter Set 250 |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|

Contents of System Information Block type 11 for cell No.4 (FDD)

| | |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>- Intra-frequency measurement system information</p> <p>....</p> <ul style="list-style-type: none"> - New intra-frequency cells - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info | <p>4</p> <p>Same content as specified for Intra-frequency cell id=1 (serving cell) in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.4 (FDD)" in clause 6.1.4</p> <p>5</p> <p>Same content as specified for Intra-frequency cell id=2 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.5 (FDD)" in clause 6.1.4</p> <p>6</p> <p>Same content as specified for Intra-frequency cell id=2 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.6 (FDD)" in clause 6.1.4</p> |
| <p>.....</p> <p>- Inter-frequency measurement system information</p> <p>.....</p> <ul style="list-style-type: none"> - New inter-frequency cells - Inter-frequency cell id - Frequency info - UARFCN uplink(Nu) <ul style="list-style-type: none"> - UARFCN downlink(Nd) - Cell info <ul style="list-style-type: none"> - Inter-frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info <ul style="list-style-type: none"> - Inter-frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info <ul style="list-style-type: none"> - Inter-frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info | <p>1</p> <p>Not present</p> <p>Absence of this IE is equivalent to apply the default duplex distance defined for the operating frequency according to 25.101</p> <p>Reference to table 6.1.2 for Cell 1</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.1 (FDD)" in clause 6.1.4</p> <p>2</p> <p>Not Present</p> <p>Absence of this IE is equivalent to value of the previous "frequency info" in the list.</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.2 (FDD)" in clause 6.1.4</p> <p>3</p> <p>Not Present</p> <p>Absence of this IE is equivalent to value of the previous "frequency info" in the list.</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.3 (FDD)" in clause 6.1.4</p> <p>7</p> <p>Not Present</p> <p>Absence of this IE is equivalent to value of the previous "frequency info" in the list.</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.7 (FDD)" in clause 6.1.4</p> |

| | |
|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| - Inter-frequency cell id - Frequency info | 8 Not Present Absence of this IE is equivalent to value of the previous "frequency info" in the list. |
| - Cell info | Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.8 (FDD)" in clause 6.1.4 |

Default settings for cell No.4 (TDD):

| | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Downlink input level Uplink output power PCCPCH/PCPICH carrier number Cell Channel Description - Primary CCPCH info - Cell parameters ID | Reference clause 6.10 Parameter Set Minimum supported by the UE's power class. Reference clause 6.10 Parameter Set 12 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|

Contents of System Information Block type 11 for cell No.4 (TDD)

- Intra-frequency measurement system information

- New intra-frequency cells
- Intra-frequency cell id
- Cell info

- Intra-frequency cell id
- Cell info

- Intra-frequency cell id
- Cell info

- Inter-frequency measurement system information

- New inter-frequency cells
- Inter-frequency cell id
- Frequency info
- UARFCN downlink(Nt)
- Cell info

- Inter-frequency cell id
- Frequency info

- Cell info

- Inter-frequency cell id
- Frequency info

- Cell info

- Inter-frequency cell id
- Frequency info

- Cell info

- Inter-frequency cell id
- Frequency info

4

Same content as specified for Intra-frequency cell id=1 (serving cell) in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.4 (TDD)" in clause 6.1.4

5

Same content as specified for Intra-frequency cell id=2 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.5 (TDD)" in clause 6.1.4

6

Same content as specified for Intra-frequency cell id=2 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.6 (FDD)" in clause 6.1.4

1

Reference to table 6.1.7 for Cell 1

Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.1 (TDD)" in clause 6.1.4

2

Not Present

Absence of this IE is equivalent to value of the previous "frequency info" in the list.

Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.2 (FDD)" in clause 6.1.4

3

Not Present

Absence of this IE is equivalent to value of the previous "frequency info" in the list.

Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.3 (TDD)" in clause 6.1.4

7

Not Present

Absence of this IE is equivalent to value of the previous "frequency info" in the list.

Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.7 (TDD)" in clause 6.1.4

8

Not Present

Absence of this IE is equivalent to value of the previous "frequency info" in the list.

| | |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| - Cell info | Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.8 (FDD)" in clause 6.1.4 |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Cell No.5

The contents of SYSTEM INFORMATION BLOCK TYPE 1 to 16 messages for cell No.5 are identical to those of cell No.4 with the following exceptions:

| | |
|---------------|-------------------------------------|
| Cell identity | 0000 0000 0000 0000 0000 0000 0101B |
| URA identity | 0000 0000 0000 0011B |

Default settings for cell No.5 (FDD):

| | |
|------------------------------|--------------------------------------------|
| Downlink input level | Reference clause 6.10 Parameter Set |
| Uplink output power | Minimum supported by the UE's power class. |
| PCCPCH/PCPICH carrier number | Reference clause 6.10 Parameter Set |
| Cell Channel Description | |
| - Primary CPICH info | |
| - Primary scrambling code | 300 |

Contents of System Information Block type 11 for cell No.5 (FDD)

| | |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>- Intra-frequency measurement system information</p> <p>....</p> <ul style="list-style-type: none"> - New intra-frequency cells - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info | <p>5</p> <p>Same content as specified for Intra-frequency cell id=1 (serving cell) in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.5 (FDD)" in clause 6.1.4</p> <p>4</p> <p>Same content as specified for Intra-frequency cell id=2 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.4 (FDD)" in clause 6.1.4</p> <p>6</p> <p>Same content as specified for Intra-frequency cell id=2 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.6 (FDD)" in clause 6.1.4</p> |
| <p>.....</p> <p>- Inter-frequency measurement system information</p> <p>.....</p> <ul style="list-style-type: none"> - New inter-frequency cells - Inter-frequency cell id - Frequency info - UARFCN uplink(Nu) <ul style="list-style-type: none"> - UARFCN downlink(Nd) - Cell info <ul style="list-style-type: none"> - Inter-frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info <ul style="list-style-type: none"> - Inter-frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info <ul style="list-style-type: none"> - Inter-frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info | <p>1</p> <p>Not present</p> <p>Absence of this IE is equivalent to apply the default duplex distance defined for the operating frequency according to 25.101</p> <p>Reference to table 6.1.2 for Cell 1</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.1 (FDD)" in clause 6.1.4</p> <p>2</p> <p>Not Present</p> <p>Absence of this IE is equivalent to value of the previous "frequency info" in the list.</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.2 (FDD)" in clause 6.1.4</p> <p>3</p> <p>Not Present</p> <p>Absence of this IE is equivalent to value of the previous "frequency info" in the list.</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.3 (FDD)" in clause 6.1.4</p> <p>7</p> <p>Not Present</p> <p>Absence of this IE is equivalent to value of the previous "frequency info" in the list.</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.7 (FDD)" in clause 6.1.4</p> |

Contents of System Information Block type 11 for cell No.5 (TDD)

- Intra-frequency measurement system information

- New intra-frequency cells
- Intra-frequency cell id
- Cell info

- Intra-frequency cell id
- Cell info

- Intra-frequency cell id
- Cell info

- Inter-frequency measurement system information

- New inter-frequency cells
- Inter-frequency cell id
- Frequency info
- UARFCN downlink(Nt)
- Cell info

- Inter-frequency cell id
- Frequency info

- Cell info

- Inter-frequency cell id
- Frequency info

- Cell info

- Inter-frequency cell id
- Frequency info

- Cell info

- Inter-frequency cell id
- Frequency info

5

Same content as specified for Intra-frequency cell id=1 (serving cell) in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.5 (TDD)" in clause 6.1.4

4

Same content as specified for Intra-frequency cell id=2 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.4 (TDD)" in clause 6.1.4

6

Same content as specified for Intra-frequency cell id=2 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.6 (TDD)" in clause 6.1.4

1

Reference to table 6.1.7 for Cell 1
Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.1 (FDD)" in clause 6.1.4

2

Not Present
Absence of this IE is equivalent to value of the previous "frequency info" in the list.

Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.2 (TDD)" in clause 6.1.4

3

Not Present
Absence of this IE is equivalent to value of the previous "frequency info" in the list.

Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.3 (TDD)" in clause 6.1.4

7

Not Present
Absence of this IE is equivalent to value of the previous "frequency info" in the list.

Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.7 (TDD)" in clause 6.1.4

8

Not Present
Absence of this IE is equivalent to value of the previous "frequency info" in the list.

| | |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| - Cell info | Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.8 (TDD)" in clause 6.1.4 |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Cell No.6

The contents of SYSTEM INFORMATION BLOCK TYPE 1 to 16 messages for cell No.6 are identical to those of cell No.4 with the following exceptions:

| | |
|---------------|-------------------------------------|
| Cell identity | 0000 0000 0000 0000 0000 0000 0110B |
| URA identity | 0000 0000 0000 0011B |

Default settings for cell No.6 (FDD):

| | |
|------------------------------|--------------------------------------------|
| Downlink input level | Reference clause 6.10 Parameter Set |
| Uplink output power | Minimum supported by the UE's power class. |
| PCCPCH/PCPICH carrier number | Reference clause 6.10 Parameter Set |
| Cell Channel Description | |
| - Primary CPICH info | |
| - Primary scrambling code | 350 |

Contents of System Information Block type 11 for cell No.6 (FDD)

| | |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>- Intra-frequency measurement system information</p> <p>....</p> <ul style="list-style-type: none"> - New intra-frequency cells - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info | <p>6</p> <p>Same content as specified for Intra-frequency cell id=1 (serving cell) in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.6 (FDD)" in clause 6.1.4</p> <p>4</p> <p>Same content as specified for Intra-frequency cell id=2 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.4 (FDD)" in clause 6.1.4</p> <p>5</p> <p>Same content as specified for Intra-frequency cell id=2 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.5 (FDD)" in clause 6.1.4</p> |
| <p>.....</p> <p>- Inter-frequency measurement system information</p> <p>.....</p> <ul style="list-style-type: none"> - New inter-frequency cells - Inter-frequency cell id - Frequency info - UARFCN uplink(Nu) <ul style="list-style-type: none"> - UARFCN downlink(Nd) - Cell info <ul style="list-style-type: none"> - Inter-frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info <ul style="list-style-type: none"> - Inter-frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info <ul style="list-style-type: none"> - Inter-frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info | <p>1</p> <p>Not present</p> <p>Absence of this IE is equivalent to apply the default duplex distance defined for the operating frequency according to 25.101</p> <p>Reference to table 6.1.2 for Cell 1</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.1 (FDD)" in clause 6.1.4</p> <p>2</p> <p>Not Present</p> <p>Absence of this IE is equivalent to value of the previous "frequency info" in the list.</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.2 (FDD)" in clause 6.1.4</p> <p>3</p> <p>Not Present</p> <p>Absence of this IE is equivalent to value of the previous "frequency info" in the list.</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.3 (FDD)" in clause 6.1.4</p> <p>7</p> <p>Not Present</p> <p>Absence of this IE is equivalent to value of the previous "frequency info" in the list.</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.7 (FDD)" in clause 6.1.4</p> |

| | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> - Inter-frequency cell id - Frequency info - Cell info | <p>8</p> <p>Not Present</p> <p>Absence of this IE is equivalent to value of the previous "frequency info" in the list.</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.8 (FDD)" in clause 6.1.4</p> |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Default settings for cell No.6 (TDD):

| | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> Downlink input level Uplink output power PCCPCH/PCPICH carrier number Cell Channel Description <ul style="list-style-type: none"> - Primary CCPCH info - Cell parameters ID | <p>Reference clause 6.10 Parameter Set</p> <p>Minimum supported by the UE's power class.</p> <p>Reference clause 6.10 Parameter Set</p> <p>119</p> |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Contents of System Information Block type 11 for cell No.6 (TDD)

| | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><u>- Intra-frequency measurement system information</u></p> <p>----</p> <p><u>- New intra-frequency cells</u></p> <p><u>- Intra-frequency cell id</u></p> <p><u>- Cell info</u></p> <p><u>- Intra-frequency cell id</u></p> <p><u>- Cell info</u></p> <p><u>- Intra-frequency cell id</u></p> <p><u>- Cell info</u></p> | <p>6</p> <p>Same content as specified for Intra-frequency cell id=1 (serving cell) in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.6 (TDD)" in clause 6.1.4</p> <p>4</p> <p>Same content as specified for Intra-frequency cell id=2 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.4 (TDD)" in clause 6.1.4</p> <p>5</p> <p>Same content as specified for Intra-frequency cell id=2 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.5 (TDD)" in clause 6.1.4</p> |
| <p>-----</p> <p><u>- Inter-frequency measurement system information</u></p> <p>-----</p> <p><u>- New inter-frequency cells</u></p> <p><u>- Inter-frequency cell id</u></p> <p><u>- Frequency info</u></p> <p><u>- UARFCN downlink(Nt)</u></p> <p><u>- Cell info</u></p> <p><u>- Inter-frequency cell id</u></p> <p><u>- Frequency info</u></p> <p><u>- Cell info</u></p> <p><u>- Inter-frequency cell id</u></p> <p><u>- Frequency info</u></p> <p><u>- Cell info</u></p> <p><u>- Inter-frequency cell id</u></p> <p><u>- Frequency info</u></p> <p><u>- Cell info</u></p> <p><u>- Inter-frequency cell id</u></p> <p><u>- Frequency info</u></p> | <p>1</p> <p>Reference to table 6.1.7 for Cell 1</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.1 (TDD)" in clause 6.1.4</p> <p>2</p> <p>Not Present</p> <p>Absence of this IE is equivalent to value of the previous "frequency info" in the list.</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.2 (TDD)" in clause 6.1.4</p> <p>3</p> <p>Not Present</p> <p>Absence of this IE is equivalent to value of the previous "frequency info" in the list.</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.3 (TDD)" in clause 6.1.4</p> <p>7</p> <p>Not Present</p> <p>Absence of this IE is equivalent to value of the previous "frequency info" in the list.</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.7 (TDD)" in clause 6.1.4</p> <p>8</p> <p>Not Present</p> <p>Absence of this IE is equivalent to value of the previous "frequency info" in the list.</p> |

| | |
|-------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>- Cell info</p> <p>.....</p> | <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.8 (TDD)" in clause 6.1.4</p> |
|-------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Cell No.7

The contents of SYSTEM INFORMATION BLOCK TYPE 1 to 16 messages for cell No.7 are identical to those of cell No.1 with the following exceptions:

| | |
|------------------------------------------|------------------------------------------------------------------------|
| <p>Cell identity</p> <p>URA identity</p> | <p>0000 0000 0000 0000 0000 0000 0111B</p> <p>0000 0000 0000 0100B</p> |
|------------------------------------------|------------------------------------------------------------------------|

Default settings for cell No.7 (FDD):

| | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Downlink input level</p> <p>Uplink output power</p> <p>PCCPCH/PCPICH carrier number</p> <p>Cell Channel Description</p> <ul style="list-style-type: none"> - Primary CPICH info - Primary scrambling code | <p>Reference clause 6.10 Parameter Set</p> <p>Minimum supported by the UE's power class.</p> <p>Reference clause 6.10 Parameter Set</p> <p>400</p> |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|

Contents of System Information Block type 11 for cell No.7 (FDD)

| | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>- Intra-frequency measurement system information</p> <p>.....</p> <ul style="list-style-type: none"> - New intra-frequency cells - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <p>.....</p> <p>- Inter-frequency measurement system information</p> <p>.....</p> <ul style="list-style-type: none"> - New inter-frequency cells - Inter frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info <ul style="list-style-type: none"> - Inter frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info <ul style="list-style-type: none"> - Inter frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info <p>.....</p> | <p>7</p> <p>Same content as specified for Intra-frequency cell id=1 (serving cell) in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.7 (FDD)" in clause 6.1.4</p> <p>1</p> <p>Same content as specified for Intra-frequency cell id=2 (neighbour cell) in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.1 (FDD)" in clause 6.1.4</p> <p>2</p> <p>Same content as specified for Intra-frequency cell id=2 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>3</p> <p>Same content as specified for Intra-frequency cell id=3 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>8</p> <p>Same content as specified for Intra-frequency cell id=8 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>4</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>5</p> <p>Same content as specified for Inter-frequency cell id=5 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>Same content as specified for Inter-frequency cell id=5 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>6</p> <p>Same content as specified for Inter-frequency cell id=6 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>Same content as specified for Inter-frequency cell id=6 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Default settings for cell No.7 (TDD):

| | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> Downlink input level Uplink output power PCCPCH/PCPICH carrier number Cell Channel Description <ul style="list-style-type: none"> - Primary CCPCH info - Cell parameters ID | <p>Reference clause 6.10-Parameter Set</p> <p>Minimum supported by the UE's power class.</p> <p>Reference clause 6.10-Parameter Set</p> <p>123</p> |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|

Contents of System Information Block type 11 for cell No.7 (TDD)

| | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><u>- Intra-frequency measurement system information</u></p> <p>....</p> <p>- <u>New intra-frequency cells</u></p> <p>- <u>Intra-frequency cell id</u></p> <p>- <u>Cell info</u></p> <p>- <u>Intra-frequency cell id</u></p> <p>- <u>Cell info</u></p> <p>- <u>Intra-frequency cell id</u></p> <p>- <u>Cell info</u></p> <p>- <u>Intra-frequency cell id</u></p> <p>- <u>Cell info</u></p> <p>- <u>Intra-frequency cell id</u></p> <p>- <u>Cell info</u></p> | <p><u>7</u></p> <p>Same content as specified for Intra-frequency cell id=1 (serving cell) in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.7 (TDD)" in clause 6.1.4</p> <p><u>1</u></p> <p>Same content as specified for Intra-frequency cell id=2 (neighbour cell) in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.1 (TDD)" in clause 6.1.4</p> <p><u>2</u></p> <p>Same content as specified for Intra-frequency cell id=2 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p><u>3</u></p> <p>Same content as specified for Intra-frequency cell id=3 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p><u>8</u></p> <p>Same content as specified for Intra-frequency cell id=8 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> |
| <p>.....</p> <p><u>- Inter-frequency measurement system information</u></p> <p>.....</p> <p>- <u>New inter-frequency cells</u></p> <p>- <u>Inter frequency cell id</u></p> <p>- <u>Frequency info</u></p> <p>- <u>Cell info</u></p> <p>- <u>Inter frequency cell id</u></p> <p>- <u>Frequency info</u></p> <p>- <u>Cell info</u></p> <p>- <u>Inter frequency cell id</u></p> <p>- <u>Frequency info</u></p> <p>- <u>Cell info</u></p> | <p><u>4</u></p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p><u>5</u></p> <p>Same content as specified for Inter-frequency cell id=5 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>Same content as specified for Inter-frequency cell id=5 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p><u>6</u></p> <p>Same content as specified for Inter-frequency cell id=6 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>Same content as specified for Inter-frequency cell id=6 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> |

Cell No.8

The contents of SYSTEM INFORMATION BLOCK TYPE 1 to 16 messages for cell No.8 are identical to those of cell No.1 with the following exceptions:

| | |
|---------------|-------------------------------------|
| Cell identity | 0000 0000 0000 0000 0000 0000 1000B |
| URA identity | 0000 0000 0000 0100B |

Default settings for cell No.8 (FDD):

| | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Downlink input level</p> <p>Uplink output power</p> <p>PCCPCH/PCPICH carrier number</p> <p>Cell Channel Description</p> <p>- Primary CPICH info</p> <p>- Primary scrambling code</p> | <p>Reference clause 6.10 Parameter Set</p> <p>Minimum supported by the UE's power class.</p> <p>Reference clause 6.10 Parameter Set</p> <p>450</p> |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|

Contents of System Information Block type 11 for cell No.8 (FDD)

| | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>- Intra-frequency measurement system information</p> <p>.....</p> <ul style="list-style-type: none"> - New intra-frequency cells - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <ul style="list-style-type: none"> - Intra-frequency cell id - Cell info <p>.....</p> <p>- Inter-frequency measurement system information</p> <p>.....</p> <ul style="list-style-type: none"> - New inter-frequency cells - Inter frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info <ul style="list-style-type: none"> - Inter frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info <ul style="list-style-type: none"> - Inter frequency cell id - Frequency info <ul style="list-style-type: none"> - Cell info <p>.....</p> | <p>8</p> <p>Same content as specified for Intra-frequency cell id=1 (serving cell) in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.8 (FDD)" in clause 6.1.4</p> <p>1</p> <p>Same content as specified for Intra-frequency cell id=2 (neighbour cell) in SIB11 for Cell 1 in sub-clause 6.1.0b with the exception that value for Primary scrambling code shall be according to clause titled "Default settings for cell No.1 (FDD)" in clause 6.1.4</p> <p>2</p> <p>Same content as specified for Intra-frequency cell id=2 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>3</p> <p>Same content as specified for Intra-frequency cell id=3 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>7</p> <p>Same content as specified for Intra-frequency cell id=7 in SIB11 for Cell 1 in sub-clause 6.1.0b</p> <p>4</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clasue 6.1.0b</p> <p>Same content as specified for Inter-frequency cell id=4 in SIB11 for Cell 1 in sub-clasue 6.1.0b</p> <p>5</p> <p>Same content as specified for Inter-frequency cell id=5 in SIB11 for Cell 1 in sub-clasue 6.1.0b</p> <p>Same content as specified for Inter-frequency cell id=5 in SIB11 for Cell 1 in sub-clasue 6.1.0b</p> <p>6</p> <p>Same content as specified for Inter-frequency cell id=6 in SIB11 for Cell 1 in sub-clasue 6.1.0b</p> <p>Same content as specified for Inter-frequency cell id=6 in SIB11 for Cell 1 in sub-clasue 6.1.0b</p> |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

CHANGE REQUEST

⌘ **34.108 CR 202** ⌘ rev **-** ⌘ Current version: **4.5.0** ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

Proposed change affects: ⌘ (U)SIM ME/UE Radio Access Network Core Network

| | |
|-------------------------------------------------------------------------------|-----------------------------------------------------------------------|
| Title: | ⌘ Update of Multi-cell environment for default radio conditions (TDD) |
| Source: | ⌘ Siemens AG |
| Work item code: | ⌘ Date: ⌘ 2 nd February 2003 |
| Category: | ⌘ A Release: ⌘ REL-4 |
| <i>Use one of the following categories:</i> | |
| F (essential correction) | |
| A (corresponds to a correction in an earlier release) | |
| B (Addition of feature), | |
| C (Functional modification of feature) | |
| D (Editorial modification) | |
| Detailed explanations of the above categories can be found in 3GPP TR 21.900. | |
| <i>Use one of the following releases:</i> | |
| 2 (GSM Phase 2) | |
| R96 (Release 1996) | |
| R97 (Release 1997) | |
| R98 (Release 1998) | |
| R99 (Release 1999) | |
| REL-4 (Release 4) | |
| REL-5 (Release 5) | |

| | |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Reason for change: | ⌘ Reflecting the update of SIBs done for FDD mode |
| Summary of change: | ⌘ Cell 4 is considered in table 6.1.7 (default settings for serving cell and suitable neighbour cell in multi-cell environment) The change is included to show both intra- and inter-frequency neighbour cells. |
| Consequences if not approved: | ⌘ Test cases included in TS34.123-1 do not work properly. |

| | |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Clauses affected: | ⌘ 6.1.6 |
| Other specs affected: | ⌘ <input type="checkbox"/> Other core specifications ⌘ <input checked="" type="checkbox"/> Test specifications <input type="checkbox"/> O&M Specifications |
| Other comments: | ⌘ Reference: T1-020712 (CR approved at T1#17 meeting) |

6.1.6 Reference Radio Conditions for signalling test cases only (TDD)

The following transmission parameters shall be used for signalling test cases only unless otherwise stated in the description of the individual test case.

Table 6.1.6: Default settings for a serving cell in a single cell environment

| Parameter | Unit | Cell 1 |
|------------------------------------------------------------|------|--------------|
| Cell type | | Serving cell |
| UTRA RF Channel Number | | Channel 1 |
| Qrxlevmin | dBm | -81 |
| UE_TXPWR_MAX_RACH | dBm | 21 |
| PCCPCH RSCP | dBm | -60 |
| NOTE: The cell fulfils TS 25.304, 5.2.3.1.2 and TS 25.123. | | |

Table 6.1.7: Default settings for a serving cell and a suitable neighbour cell in a multi-cell environment

| Parameter | Unit | Cell 1 | Cell 2 | Cell 4 |
|-------------------------------------------------------------|------|--------------|---------------------------------------------------------------|---------------------------------------------------------|
| Cell type | | Serving cell | Suitable neighbour intra-frequency cell | Suitable neighbour inter-frequency cell |
| UTRA RF Channel Number | | Channel 1 | Channel 1 | Channel 2 |
| Qrxlevmin | dBm | -81 | -81 | |
| UE_TXPWR_MAX_RACH | dBm | 21 | 21 | |
| PCCPCH RSCP | dBm | -60 | -70 | |
| NOTE: Both cells fulfil TS 25.304, 5.2.3.1.2 and TS 25.123. | | | | |

Table 6.1.8: Default settings for a non-suitable cell

| Parameter | Unit | Level |
|------------------------------------------------------------------|------|-------|
| Qrxlevmin | dBm | -81 |
| UE_TXPWR_MAX_RACH | dBm | 21 |
| PCCPCH RSCP | dBm | -91 |
| NOTE: The cell is not suitable according to TS 25.304, 5.2.3.1.2 | | |

Table 6.1.9: Default settings for a non-suitable "Off" cell

| Parameter | Unit | Level |
|-------------------------------------------------------------------|------|--------|
| Qrxlevmin | dBm | -81 |
| UE_TXPWR_MAX_RACH | dBm | 21 |
| PCCPCH RSCP | dBm | ≤ -110 |
| NOTE: The cell is not suitable according to TS 25.304, 5.2.3.1.2. | | |