

**Source:** T1  
**Title:** CR's to TS 34.121 v3.11.0 for approval  
**Agenda item:** 5.1.3  
**Document for:** Approval

---

This document contains 8 CRs to TS 34.121 v3.11.0. These CRs have been agreed by T1 and are put forward to TSG T for approval.

*CRs related to new RRM test cases:*

| Spec   | CR  | Rev | Release | Subject   | Cat | Version Current | Version -New | Doc-2nd-Level |
|--------|-----|-----|---------|---|-----|-----------------|--------------|---------------|
| 34.121 | 235 | -   | R99     | P-CCPCH RSCP test case for FDD to TDD handover                        | F   | 3.11.0          | 3.12.0       | T1-030171     |
| 34.121 | 236 | -   | R99     | Correct reporting of TDD inter-frequency neighbours in AWGN test case | F   | 3.11.0          | 3.12.0       | T1-030172     |

*CRs related to corrections to R99 test cases:*

| Spec   | CR  | Rev | Phase | Subject  | Cat | Version - Current | Version -New | Doc-2nd-Level |
|--------|-----|-----|-------|--|-----|-------------------|--------------|---------------|
| 34.121 | 237 | -   | R99   | Correction for minimum requirement of UE transmitted power test case                             | F   | 3.11.0            | 3.12.0       | T1-030173     |
| 34.121 | 238 | -   | R99   | Removal of 34.123-1 Annex A reference  | F   | 3.11.0            | 3.12.0       | T1-030174     |
| 34.121 | 239 | -   | R99   | Correction of UE parameter for Correct behaviour at Time-out test case                           | F   | 3.11.0            | 3.12.0       | T1-030175     |
| 34.121 | 240 | -   | R99   | Correction of Out-of-synchronisation handling of output power test case                          | F   | 3.11.0            | 3.12.0       | T1-030178     |
| 34.121 | 241 | -   | R99   | Removal of uplink dummy DCCH transmission function in UE   | F   | 3.11.0            | 3.12.0       | T1-030179     |
| 34.121 | 242 | -   | R99   | Correction for Combining of TPC commands from radio links of different radio link sets test case | F   | 3.11.0            | 3.12.0       | T1-030186     |

CR-Form-v7

## CHANGE REQUEST

# 34.121 CR 235 # rev - # Current version: 3.11.0 #

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the # symbols.

**Proposed change affects:** UICC apps  ME  Radio Access Network  Core Network

|                        |   |   |   |
|------------------------|---|---|---|
| <b>Title:</b>          | # | Introduction of P-CCPCH RSCP measurement performance requirements for UTRA FDD to TDD handover  |   |
| <b>Source:</b>         | # | T1-RF   |   |
| <b>Work item code:</b> | # |   | <b>Date:</b> # 13/01/2003   |
| <b>Category:</b>       | # | <b>F</b>  | <b>Release:</b> # R99   |
|                        |   | Use <u>one</u> of the following categories:<br><b>F</b> (correction)<br><b>A</b> (corresponds to a correction in an earlier release)<br><b>B</b> (addition of feature),<br><b>C</b> (functional modification of feature)<br><b>D</b> (editorial modification)<br>Detailed explanations of the above categories can be found in 3GPP <a href="#">TR 21.900</a> . | Use <u>one</u> of the following releases:<br>2 (GSM Phase 2)<br>R96 (Release 1996)<br>R97 (Release 1997)<br>R98 (Release 1998)<br>R99 (Release 1999)<br>Rel-4 (Release 4)<br>Rel-5 (Release 5)<br>Rel-6 (Release 6) |

|                                      |   |  |
|--------------------------------------|---|--|
| <b>Reason for change:</b>            | # | Performance requirements and test for the P-CCPCH RSCP measurement for the purpose of UTRA FDD to TDD handover evaluation are still missing from the current version of TS 34.121. |
| <b>Summary of change:</b>            | # | Introduction of P-CCPCH RSCP measurement performance requirements and test   |
| <b>Consequences if not approved:</b> | # | Missing performance requirements and test for the P-CCPCH RSCP measurement   |

|                              |   |   |   |   |   |   |   |   |   |   |
|------------------------------|---|---|---|---|---|---|---|---|---|---|
| <b>Clauses affected:</b>     | # | 8.7.8   |   |   |   |   |   |   |   |   |
| <b>Other specs affected:</b> | # | <table border="1" style="display: inline-table; vertical-align: middle;"> <tr> <td style="width: 20px; text-align: center;">Y</td> <td style="width: 20px; text-align: center;">N</td> </tr> <tr> <td style="text-align: center;">#</td> <td style="text-align: center;">X</td> </tr> </table> Other core specifications #<br><table border="1" style="display: inline-table; vertical-align: middle;"> <tr> <td style="width: 20px; text-align: center;">#</td> <td style="width: 20px; text-align: center;">X</td> </tr> </table> Test specifications #<br><table border="1" style="display: inline-table; vertical-align: middle;"> <tr> <td style="width: 20px; text-align: center;">#</td> <td style="width: 20px; text-align: center;">X</td> </tr> </table> O&M Specifications # | Y | N | # | X | # | X | # | X |
| Y                            | N |   |   |   |   |   |   |   |   |   |
| #                            | X |   |   |   |   |   |   |   |   |   |
| #                            | X |   |   |   |   |   |   |   |   |   |
| #                            | X |   |   |   |   |   |   |   |   |   |
| <b>Other comments:</b>       | # | -   |   |   |   |   |   |   |   |   |

## 8.7.8 P-CCPCH RSCP

~~Void~~

### 8.7.8.1 Absolute measurement accuracy

#### 8.7.8.1.1 Definition and applicability

The absolute accuracy of P-CCPCH RSCP is defined as the P-CCPCH RSCP measured in an UTRA TDD cell on one frequency compared to the actual P-CCPCH RSCP power of that cell on the same frequency.

The requirements and this test apply only to UE supporting both UTRA FDD and UTRA TDD.

#### 8.7.8.1.2 Minimum Requirements

The accuracy requirement in table 8.7.8.1.1 is valid under the following conditions:

P-CCPCH\_RSCP ≥ -102 dBm,

$$\left| \frac{I_o}{\hat{I}_{or}} \right|_{in \text{ dB}} - \left( \frac{P - CCPCH - E_c}{I_{or}} \right)_{in \text{ dB}} \leq 8dB$$

**Table 8.7.8.1.1: P-CCPCH RSCP inter frequency absolute accuracy**

| Parameter    | Unit | Accuracy [dB]     |                    | Conditions        |
|--------------|------|-------------------|--------------------|-------------------|
|              |      | Normal conditions | Extreme conditions | Io [dBm/3.84 MHz] |
| P-CCPCH_RSCP | dBm  | ± 6               | ± 9                | -94...-70         |
|              | dBm  | ± 8               | ± 11               | -70...-50         |

The normative reference for this requirement is TS 25.133 [2] clauses 9.1.11.1 and A.9.1.8.

#### 8.7.8.1.3 Test purpose

The purpose of this test is to verify that the P-CCPCH RSCP absolute measurement accuracy is within the specified limits.

#### 8.7.8.1.4 Method of test

##### 8.7.8.1.4.1 Initial conditions

Test environment: normal, TL/VL, TL/VH, TH/VL, TH/VH; see clauses G.2.1 and G.2.2.

Frequencies to be tested: mid range; see clause G.2.4.

In this case both cells are on different frequencies. Cell 1 is a UTRA FDD cell and cell 2 is a UTRA TDD cell. The second Beacon timeslot shall be provided for cell 2 in timeslot 8. Compressed mode as specified in TS 25.101 [1] section A.5, set 3 of table A.22, is applied. TGPRC and TGCFN shall be set to "Infinity" and "(Current CFN + (256 – TTI/10msec)) mod 256". P-CCPCH RSCP inter frequency absolute accuracy requirements are tested by using test parameters in Table 8.7.8.1.2.

**Table 8.7.8.1.2: P-CCPCH RSCP inter frequency tests parameters**

| Parameter  | Unit                 | Test 1           |                            | Test 2           |                            |
|--|----------------------|------------------|----------------------------|------------------|----------------------------|
|  |                      | Cell 1           | Cell 2                     | Cell 1           | Cell 2                     |
| <u>DL timeslot number</u>  |                      | n.a.             | <u>0</u>   <u>8</u>        | n.a.             | <u>0</u>   <u>8</u>        |
| <u>UTRA RF Channel number</u>  |                      | <u>Channel 2</u> | <u>Channel 1</u>           | <u>Channel 2</u> | <u>Channel 1</u>           |
| <u>CPICH Ec/lor</u>  | <u>dB</u>            | <u>-10</u>       | <u>n.a.</u>                | <u>-10</u>       | <u>n.a.</u>                |
| <u>P-CCPCH Ec/lor</u>  | <u>dB</u>            | <u>-12</u>       | <u>-3</u>   <u>n.a.</u>    | <u>-12</u>       | <u>-3</u>   <u>n.a.</u>    |
| <u>SCH Ec/lor</u>  | <u>dB</u>            | <u>-12</u>       | <u>-9</u>                  | <u>-12</u>       | <u>-9</u>                  |
| <u>SCH t<sub>offset</sub></u>  |                      | <u>n.a.</u>      | <u>5</u>                   | <u>n.a.</u>      | <u>5</u>                   |
| <u>PICH Ec/lor</u>   | <u>dB</u>            | <u>-15</u>       | <u>n.a.</u>   <u>-3</u>    | <u>-15</u>       | <u>n.a.</u>   <u>-3</u>    |
| <u>DPCH Ec/lor</u>   | <u>dB</u>            | <u>-15</u>       | <u>n.a.</u>                | <u>-15</u>       | <u>n.a.</u>                |
| <u>OCNS Ec/lor</u>   | <u>dB</u>            | <u>-1.11</u>     | <u>-3.12</u>               | <u>-1.11</u>     | <u>-3.12</u>               |
| <u>loc</u>   | <u>dBm/ 3.84 MHz</u> | <u>-60</u>       | <u>-57.7</u>               | <u>-84</u>       | <u>-84.7</u>               |
| <u>lor/loc</u>   | <u>dB</u>            | <u>9.54</u>      | <u>7</u>                   | <u>0</u>         | <u>3</u>                   |
| <u>P-CCPCH RSCP, Note 1</u>  | <u>dBm</u>           | <u>n.a.</u>      | <u>-53.7</u>   <u>n.a.</u> | <u>n.a.</u>      | <u>-84.7</u>   <u>n.a.</u> |
| <u>CPICH RSCP, Note 1</u>  | <u>dBm</u>           | <u>-60.46</u>    | <u>n.a.</u>                | <u>-94</u>       | <u>n.a.</u>                |
| <u>lo, Note 1</u>  | <u>dBm/3.84 MHz</u>  | <u>-50</u>       | <u>-50</u>                 | <u>-81</u>       | <u>-80</u>                 |
| <u>Propagation condition</u>   | <u>-</u>             | <u>AWGN</u>      |                            | <u>AWGN</u>      |                            |
| <u>Note 1: P-CCPCH RSCP, CPICH RSCP and lo levels have been calculated from other parameters for information purposes. They are not settable parameters themselves.</u>  |                      |                  |                            |                  |                            |
| <u>Note that the transmit energy per PN chip for the SCH is averaged over the 256 chip duration when the SCH is present in the time slot.</u>  |                      |                  |                            |                  |                            |
| <u>Tests shall be done sequentially. Test 1 shall be done first. After test 1 has been executed, test parameters for test 2 shall be set within 5 seconds so that the UE does not lose the Cell 2 in between the test.</u> |                      |                  |                            |                  |                            |

- 1) A call is set up according to the test procedure specified in TS 34.108 [3] clause 7.3.2.3. The RF parameters for Test 1 are set up according to table 8.7.8.1.2.

#### 8.7.8.1.4.2 Procedure

- 1) SS shall transmit the PHYSICAL CHANNEL RECONFIGURATION message.
- 2) UE shall transmit the PHYSICAL CHANNEL RECONFIGURATION COMPLETE message.
- 3) SS shall transmit the MEASUREMENT CONTROL message.
- 4) UE shall transmit periodically MEASUREMENT REPORT messages.
- 5) SS shall check P-CCPCH RSCP values of Cell 2 in the MEASUREMENT REPORT messages. P-CCPCH RSCP power level of Cell 2 reported by the UE shall be compared to the actually set P-CCPCH RSCP value of Cell 2 for each MEASUREMENT REPORT message.
- 6) SS shall count number of MEASUREMENT REPORT messages transmitted by UE. After 1000 MEASUREMENT REPORT messages have been received from UE, the RF parameters are set up according to table 8.7.8.1.2 for Test 2. While RF parameters are being set up, MEASUREMENT REPORT messages from UE are ignored. SS shall wait for additional 1s and ignore the MEASUREMENT REPORT messages during this period. Then, steps 4) and 5) above are repeated.
- 7) After further 1000 MEASUREMENT REPORT messages have been received from UE, the SS shall transmit RRC CONNECTION RELEASE message.
- 8) UE shall transmit RRC CONNECTION RELEASE COMPLETE message.

#### Specific Message Contents

All messages indicated above shall use the same content as described in the default message content in clause 9 of 34.108 [3] and in Annex I, with the following exceptions:

PHYSICAL CHANNEL RECONFIGURATION message for inter frequency measurement (Step 1):

| <u>Information Element</u>                                  | <u>Value/Remark</u>                       |
|---|---|
| <u>Message Type</u>   |   |
| <u>UE Information Elements</u>                              |   |
| -RRC transaction identifier                                 | 0   |
| -Integrity check info                                       | Not Present                               |
| -Integrity protection mode info                             | Not Present                               |
| -Ciphering mode info  | Not Present                               |
| -Activation time  | Not Present                               |
| -New U-RNTI   | Not Present                               |
| -New C-RNTI   | Not Present                               |
| -RRC State Indicator  | CELL_DCH                                  |
| -UTRAN DRX cycle length coefficient                         | Not Present                               |
| <u>CN Information Elements</u>                              |   |
| -CN information info  | Not Present                               |
| <u>UTRAN mobility information elements</u>                  |   |
| -URA identity   | Not Present                               |
| <u>RB information elements</u>                              |   |
| -Downlink counter synchronisation info                      | Not Present                               |
| <u>PhyCH information elements</u>                           |   |
| -Frequency info   | Not Present                               |
| <u>Uplink radio resources</u>                               |   |
| -Maximum allowed UL TX power                                | Not Present                               |
| -CHOICE channel requirement                                 | Not Present                               |
| <u>Downlink radio resources</u>                             |   |
| -CHOICE mode  | FDD                                       |
| -Downlink PDSCH information                                 | Not Present                               |
| -Downlink information common for all radio links            |   |
| -Downlink DPCH info common for all RL                       | Not Present                               |
| -CHOICE mode  | FDD                                       |
| -DPCH compressed mode info                                  |   |
| -Transmission gap pattern sequence                          |   |
| -TGPSI  | 1   |
| -TGPS Status Flag   | Activate                                  |
| -TGCFN  | (Current CFN + (256 – TTI/10msec))mod 256 |
| -Transmission gap pattern sequence configuration parameters |   |
| -TGMP   | TDD measurement                           |
| -TGPRC  | Infinity                                  |
| -TGSN   | 10  |
| -TGL1   | 10  |
| -TGL2   | Not Present                               |
| -TGD  | 0   |
| -TGPL1  | 11  |
| -TGPL2  | Not Present                               |
| -RPP  | Mode 0                                    |
| -ITP  | Mode 0                                    |
| -CHOICE UL/DL mode  | UL and DL                                 |
| -Downlink compressed mode method                            | Puncturing                                |
| -Uplink compressed mode method                              | SF/2                                      |
| -Downlink frame type  | A   |
| -DeltaSIR1  | 3.0                                       |
| -DeltaSIRafter1   | 3.0                                       |
| -DeltaSIR2  | Not Present                               |
| -DeltaSIRafter2   | Not Present                               |
| -N Identify abort   | Not Present                               |
| -T Reconfirm abort  | Not Present                               |
| -TX Diversity Mode  | Not Present                               |
| -SSDT information   | Not Present                               |
| -Default DPCH Offset Value                                  | Not Present                               |
| -Downlink information per radio link list                   |   |
| -Downlink information for each radio link                   |   |
| -Choice mode  | FDD                                       |
| -Primary CPICH info   |   |
| -Primary scrambling code                                    | 100                                       |

|   |   |
|---|---|
| <a href="#">-PDSCH with SHO DCH Info</a>                    | <a href="#">Not Present</a>   |
| <a href="#">-PDSCH code mapping</a>                         | <a href="#">Not Present</a>   |
| <a href="#">-Downlink DPCH info for each RL</a>             |   |
| <a href="#">-CHOICE mode</a>                                | <a href="#">FDD</a>   |
| <a href="#">-Primary CPICH usage for channel estimation</a> | <a href="#">Primary CPICH may be used</a>   |
| <a href="#">-DPCH frame offset</a>                          | <a href="#">Set to value Default DPCH Offset Value ( as currently stored in SS) mod 38400</a> |
| <a href="#">-Secondary CPICH info</a>                       | <a href="#">Not Present</a>   |
| <a href="#">-DL channelisation code</a>                     |   |
| <a href="#">-Secondary scrambling code</a>                  | <a href="#">Not Present</a>   |
| <a href="#">-Spreading factor</a>                           | <a href="#">128</a>   |
| <a href="#">-Code number</a>                                | <a href="#">0</a>   |
| <a href="#">-Scrambling code change</a>                     | <a href="#">No code change</a>  |
| <a href="#">-TPC combination index</a>                      | <a href="#">0</a>   |
| <a href="#">-SSDT Cell Identity</a>                         | <a href="#">Not Present</a>   |
| <a href="#">-Closed loop timing adjustment mode</a>         | <a href="#">Not Present</a>   |
| <a href="#">-SCCPCH Information for FACH</a>                | <a href="#">Not Present</a>   |

MEASUREMENT CONTROL message for inter frequency measurement (Step 3):

| <u>Information Element</u>  | <u>Value/Remark</u>   |
|---|---|
| <u>Message Type</u>   |   |
| <u>UE information elements</u><br>-RRC transaction identifier<br>-Integrity check info  | <u>0</u><br><u>Not Present</u>  |
| <u>Measurement Information elements</u><br>-Measurement Identity<br>-Measurement Command<br>-Measurement Reporting Mode<br>- Measurement Report Transfer Mode<br>- Periodical Reporting / Event Trigger Reporting Mode<br>-Additional measurement list<br>-CHOICE Measurement Type<br>-Inter-frequency measurement<br>-Inter-frequency cell info list<br>-CHOICE Inter-frequency cell removal<br>-New inter-frequency cells<br>-Cell for measurement<br>-Inter-frequency measurement quantity<br>-CHOICE reporting criteria<br>-Filter coefficient<br>-CHOICE mode<br>-Measurement quantity for frequency quality estimate<br>-Inter-frequency reporting quantity<br>-UTRA Carrier RSSI<br>-Frequency quality estimate<br>-Non frequency related cell reporting quantities<br>-SFN-SFN observed time difference reporting indicator<br>-Cell synchronisation information reporting indicator<br>-Cell Identity reporting indicator<br>-CHOICE mode<br>-Timeslot ISCP reporting indicator<br>-Proposed TGSN Reporting required<br>-Primary CCPCH RSCP reporting indicator<br>-Pathloss reporting indicator<br>-Reporting cell status<br>-CHOICE reported cell<br><br>-Maximum number of reported cells<br>-Measurement validity<br>-Inter-frequency set update<br>-CHOICE report criteria<br>-Amount of reporting<br>-Reporting interval | <u>2</u><br><u>Setup</u><br><u>Acknowledged mode RLC</u><br><u>Periodical reporting</u><br><u>Not Present</u><br><u>Inter-frequency measurement</u><br><u>Not Present</u><br><u>Cell 2 information is included.</u><br><u>Not Present</u><br><u>Inter-frequency reporting criteria</u><br><u>0</u><br><u>TDD</u><br><u>Primary CCPCH RSCP</u><br><u>FALSE</u><br><u>TRUE</u><br><u>No report</u><br><u>FALSE</u><br><u>FALSE</u><br><u>TDD</u><br><u>FALSE</u><br><u>FALSE</u><br><u>TRUE</u><br><u>FALSE</u><br><u>Report all active set cells + cells within monitored set on used frequency</u><br><u>Virtual/active set cells + 2</u><br><u>Not Present</u><br><u>Not Present</u><br><u>Periodical reporting criteria</u><br><u>Infinity</u><br><u>500 ms</u> |
| <u>Physical channel information elements</u><br>-DPCH compressed mode status info   | <u>Not Present</u>  |

8.7.8.1.5 Test requirements

The PCCPCH RSCP measurement accuracy shall meet the requirements in clause 8.7.8.1.2.

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test is defined in clause F.2 and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in clause F.4.

CR-Form-v7

## CHANGE REQUEST

# 34.121 CR 236 # rev - # Current version: 3.11.0 #

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the # symbols.

**Proposed change affects:** UICC apps  ME  Radio Access Network  Core Network

|                        |   |   |   |
|------------------------|---|---|---|
| <b>Title:</b>          | # | Addition of Correct reporting of TDD inter-frequency neighbours in AWGN propagation condition test case for UTRA FDD  |   |
| <b>Source:</b>         | # | T1-RF   |   |
| <b>Work item code:</b> | # |   | <b>Date:</b> # 13/01/2003   |
| <b>Category:</b>       | # | <b>F</b>  | <b>Release:</b> # R99   |
|                        |   | Use <u>one</u> of the following categories:<br><b>F</b> (correction)<br><b>A</b> (corresponds to a correction in an earlier release)<br><b>B</b> (addition of feature),<br><b>C</b> (functional modification of feature)<br><b>D</b> (editorial modification)<br>Detailed explanations of the above categories can be found in 3GPP <a href="#">TR 21.900</a> . | Use <u>one</u> of the following releases:<br>2 (GSM Phase 2)<br>R96 (Release 1996)<br>R97 (Release 1997)<br>R98 (Release 1998)<br>R99 (Release 1999)<br>Rel-4 (Release 4)<br>Rel-5 (Release 5)<br>Rel-6 (Release 6) |

|                                      |   |  |
|--------------------------------------|---|--|
| <b>Reason for change:</b>            | # | The test case for Correct reporting of TDD inter-frequency neighbours in AWGN propagation conditions is missing from the current version of TS 34.121. |
| <b>Summary of change:</b>            | # | Introduction of Correct reporting of TDD inter-frequency neighbours in AWGN propagation conditions test case.  |
| <b>Consequences if not approved:</b> | # | Inconsistency 34.121 and 25.133  |

|                              |   |   |   |   |   |   |   |   |   |   |
|------------------------------|---|---|---|---|---|---|---|---|---|---|
| <b>Clauses affected:</b>     | # | 8.6.3.1   |   |   |   |   |   |   |   |   |
| <b>Other specs affected:</b> | # | <table border="1" style="display: inline-table; vertical-align: middle;"> <tr> <td style="width: 20px; text-align: center;">Y</td> <td style="width: 20px; text-align: center;">N</td> </tr> <tr> <td style="text-align: center;">#</td> <td style="text-align: center;">X</td> </tr> <tr> <td style="text-align: center;">#</td> <td style="text-align: center;">X</td> </tr> <tr> <td style="text-align: center;">#</td> <td style="text-align: center;">X</td> </tr> </table> Other core specifications #<br>Test specifications #<br>O&M Specifications # | Y | N | # | X | # | X | # | X |
| Y                            | N |   |   |   |   |   |   |   |   |   |
| #                            | X |   |   |   |   |   |   |   |   |   |
| #                            | X |   |   |   |   |   |   |   |   |   |
| #                            | X |   |   |   |   |   |   |   |   |   |
| <b>Other comments:</b>       | # | -   |   |   |   |   |   |   |   |   |



## 8.6.3 TDD measurements

### 8.6.3.1 Correct reporting of TDD neighbours in AWGN propagation condition

Void

~~Void.~~

#### 8.6.3.1.1 Definition and applicability

In the event triggered reporting period the measurement reporting delay is defined as the time between any event that will trigger a measurement report until the UE starts to transmit over the Uu interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is twice the TTI of the uplink DCCH.

The requirements and this test apply to the combined FDD and TDD UE.

#### 8.6.3.1.2 Minimum requirement

When transmission gaps are scheduled for inter-frequency TDD measurements, the UE shall be able to identify a new detectable inter-frequency TDD cell belonging to the monitored set within

$$\underline{T_{\text{identify TDD inter}}} = \text{Max} \left\{ 5000, N_{\text{basic identify TDD inter}} \cdot \frac{T_{\text{Measurement Period TDD inter}}}{N_{\text{TDD inter}}} \cdot N_{\text{Freq}} \right\} \text{ms}$$

If the UE does not need compressed mode to perform inter-frequency TDD measurements, the UE shall be able to identify a new detectable inter-frequency TDD cell belonging to the monitored set within 5000 ms.

An inter-frequency TDD cell shall be considered detectable when P-CCPCH Ec/Io ≥ -8 dB and SCH Ec/Io ≥ -13 dB. When L3 filtering is used an additional delay can be expected.

When transmission gaps are scheduled for inter frequency TDD measurements the UE physical layer shall be capable of reporting measurements to higher layers with a measurement period as given by

$$\underline{T_{\text{measurement TDD inter}}} = \text{Max} \left\{ T_{\text{Measurement Period TDD inter}}, N_{\text{basic measurement TDD inter}} \cdot \frac{T_{\text{Measurement Period TDD inter}}}{N_{\text{TDD inter}}} \cdot N_{\text{Freq}} \right\} \text{ms}$$

If the UE does not need compressed mode to perform inter-frequency TDD measurements, the measurement period for inter-frequency TDD measurements shall be 480 ms.

The UE shall be capable of performing P-CCPCH RSCP measurements for  $X_{\text{basic measurement TDD inter}}$  inter-frequency TDD cells per TDD frequency of the monitored set and the UE physical layer shall be capable of reporting measurements to higher layers with the measurement period of  $T_{\text{measurement TDD inter}}$ .

where

$$\underline{X_{\text{basic measurement TDD inter}}} = 6 \text{ (cells)}$$

$T_{\text{Measurement Period TDD inter}} = 480$  ms. The time period used for calculating the measurement period  $T_{\text{measurement TDD inter}}$  for inter frequency P-CCPCH RSCP measurements.

$N_{\text{TDD inter}}$ : This is the smallest resulting integer number of transmission gap patterns in a transmission gap pattern sequence assigned to UE by UTRAN for inter frequency TDD measurements during the time period  $T_{\text{Measurement Period TDD inter}}$  with an arbitrarily chosen timing.

$N_{\text{basic identify TDD inter}} = 80$ . This is the number of transmission gap patterns in a transmission gap pattern sequence for inter-frequency TDD measurements during the time period used in the inter frequency TDD equation where the maximum allowed time for the UE to identify a new inter frequency TDD cell is defined.

$N_{\text{basic\_measurement\_TDD\_inter}} = 5$ . This is the number of transmission gap patterns in a transmission gap pattern sequence for inter-frequency TDD measurements during the time period  $T_{\text{Measurement\_Period\_TDD\_inter}}$  with an arbitrarily chosen timing that is used in the inter-frequency TDD equation for defining where the measurement period for inter frequency P-CCPCH RSCP measurements is defined.

$N_{\text{freq}}$ : This is the number of TDD frequencies indicated in the inter frequency measurement control information.

The normative reference for this requirement is TS 25.133 [2] clauses 8.1.2.4 and A.8.3.1

**8.6.3.1.3 Test purpose**

To verify that the UE meets the minimum requirement.

**8.6.3.1.4 Method of test**

**8.6.3.1.4.1 Initial conditions**

Test environment: normal; see clauses G.2.1 and G.2.2.

Frequencies to be tested: mid range; see clause G.2.4.

The test parameters are given in Table 8.6.3.1.1, 8.6.3.1.2 and 8.6.3.1.3. The test consists of 2 successive time periods, with a time duration T1 and T2. Two cells shall be present in the test, cell 1 being the UTRA FDD serving cell and cell 2 being a UTRA TDD neighbour cell on the unused frequency. All cells shall be synchronised, i.e. share the same frame and timeslot timing.

In the measurement control information it is indicated to the UE that event-triggered reporting with Event 2C shall be used. P-CCPCH RSCP of the best cell on the unused frequency shall be reported together with Event 2C reporting. The Measurement control message shall be sent to the UE such that the delay between the end of the last received TTI containing the message and the beginning of T1 is at least equal to the RRC procedure delay as defined in [9].

The TTI of the uplink DCCH shall be 20 ms.

**Table 8.6.3.1.1: General test parameters for Correct reporting of TDD inter-frequency neighbours in AWGN propagation condition**

| Parameter                    | Unit           | Value  | Comment   |
|------------------------------|----------------|--|---|
| DCH parameters               |                | DL Reference Measurement Channel 12.2 kbps                     | As specified in TS 34.121 Annex <del>CTS-25.101 section A.3.1</del>         |
| Power Control                |                | On   |   |
| Target quality value on DTCH | BLER           | 0.01   |   |
| Compressed mode              |                | A.22 set 3   | As specified in TS 34.121 Annex <del>CTS25.101 section A.5</del>            |
| Initial conditions           | Active cell    | Cell 1   | FDD cell  |
|                              | Neighbour cell | Cell 2   | TDD cell  |
| Final condition              | Active cell    | Cell 1   | FDD cell  |
| O                            | dB             | 0  | Cell individual offset. This value shall be used for all cells in the test. |
| Hysteresis                   | dB             | 0  | Hysteresis parameter for event 2C   |
| Time to Trigger              | ms             | 0  |   |
| Threshold non-used frequency | dBm            | -71  | Applicable for Event 2C   |
| Filter coefficient           |                | 0  |   |
| Monitored cell list size     |                | 6 FDD neighbours on Channel 1<br>6 TDD neighbours on Channel 2 |   |
| T1                           | S              | 15   |   |
| T2                           | S              | 10   |   |

**Table 8.6.3.1.2: Cell 1 specific parameters for Correct reporting of TDD inter-frequency neighbours in AWGN propagation condition**

| Parameter  | Unit         | Cell 1    |
|--|--------------|-----------|
|  |              | T1, T2    |
| UTRA RF Channel Number   |              | Channel 1 |
| CPICH Ec/lor   | dB           | -10       |
| P-CCPCH Ec/lor   | dB           | -12       |
| SCH Ec/lor   | dB           | -12       |
| PICH Ec/lor  | dB           | -15       |
| DPCH Ec/lor  | dB           | Note 1    |
| OCNS Ec/lor  | dB           | Note 2    |
| $\hat{I}_{or}/I_{oc}$  | dB           | 0         |
| $I_{oc}$   | dBm/3.84 MHz | -70       |
| CPICH Ec/lo  | dB           | -13       |
| Propagation Condition  |              | AWGN      |
| Note 1: The DPCH level is controlled by the power control loop   |              |           |
| Note 2: The power of the OCNS channel that is added shall make the total power from the cell to be equal to $I_{or}$ . |              |           |

**Table 8.6.3.1.3: Cell 2 specific parameters for Correct reporting of TDD inter-frequency neighbours in AWGN propagation condition**

| Parameter  | Unit         | Cell 2    |     |       |      |
|--|--------------|-----------|-----|-------|------|
|  |              | 0         |     | 8     |      |
| DL timeslot number   |              | T1        | T2  | T1    | T2   |
| UTRA RF Channel Number   |              | Channel 2 |     |       |      |
| P-CCPCH Ec/lor   | dB           | -3        |     | n.a.  |      |
| PICH Ec/lor  | dB           | n.a.      |     |       | -3   |
| SCH Ec/lor   | dB           |           |     | -9    |      |
| SCH $t_{offset}$   | dB           |           |     | 10    |      |
| OCNS Ec/lor  | dB           |           |     | -3.12 |      |
| P-CCPCH RSCP   | dBm          | -75       | -67 | n.a.  | n.a. |
| $\hat{I}_{or}/I_{oc}$  | dB           | -2        | 6   | -2    | 6    |
| $I_{oc}$   | dBm/3.84 MHz | -70       |     |       |      |
| Propagation Condition  |              | AWGN      |     |       |      |
| Note that the transmit energy per PN chip for the SCH is averaged over the 256 chip duration when the SCH is present in the time slot. |              |           |     |       |      |

**8.6.3.1.4.2 Procedure**

- 1) The RF parameters are set up according to T1.
- 2) The UE is switched on.
- 3) A call is set up according to the generic set-up procedure specified in TS 34.108 [3] subclause 7.3.2.3.
- 4) SS shall transmit a MEASUREMENT CONTROL message.
- 5) SS shall transmit a PHYSICAL CHANNEL RECONFIGURATION message.
- 6) UE shall transmit a PHYSICAL CHANNEL RECONFIGURATION COMPLETE message
- 7) After 10 seconds from the beginning of T1, the SS shall switch the power settings from T1 to T2.
- 8) UE shall transmit a MEASUREMENT REPORT message triggered by event 2c for cell 2. The measurement reporting delay from the beginning of T2 shall be less than 9.2 s. If the UE fails to report the event within the

required delay, then a failure is recorded. If the reporting delay for this event is within the required limit, the number of successful tests is increased by one.

9) After 10 seconds from the beginning of T3, the UE is switched off. Any timing information of cell 2 is deleted in the UE.

10) Repeat steps 1-9 [TBD] times.

#### Specific Message Contents

All messages indicated above shall use the same content as described in the default message content in clause 9 of 34.108 [3], with the following exceptions:

## MEASUREMENT CONTROL message (step 4):

| <u>Information Element/Group name</u>                       | <u>Value/Remark</u>   |
|---|---|
| <u>Message Type (10.2.17)</u>                               |   |
| <b><u>UE information elements</u></b>                       |   |
| -RRC transaction identifier                                 | 0   |
| -Integrity check info                                       | Not Present   |
| <b><u>Measurement Information elements</u></b>              |   |
| -Measurement Identity                                       | 1   |
| -Measurement Command (10.3.7.46)                            | Modify  |
| -Measurement Reporting Mode (10.3.7.49)                     | AM RLC  |
| -Measurement Report Transfer Mode                           | Event trigger   |
| -Periodical Reporting / Event Trigger Reporting Mode        | Not Present   |
| -Additional measurements list (10.3.7.1)                    | Not Present   |
| -CHOICE <i>Measurement type</i>                             | Inter-frequency measurement   |
| -Inter-frequency measurement (10.3.7.16)                    |   |
| -Inter-frequency measurement objects list (10.3.7.13)       |   |
| -CHOICE <i>inter-frequency cell removal</i>                 | No inter-frequency cells removed  |
| -New inter-frequency cells                                  | 1   |
| -Inter-frequency cell id                                    | 1   |
| -Frequency info (10.3.6.36)                                 |   |
| -CHOICE <i>mode</i>   | TDD   |
| -UARFCN(Nt)   | Same frequency as channel 2 in Table 8.6.2.4.1.2                          |
| -Cell info (10.3.7.2)                                       |   |
| -Cell individual offset                                     | Not Present   |
| -Reference time difference to cell                          | Not Present   |
| -Read SFN indicator   | False   |
| -CHOICE <i>mode</i>   | TDD   |
| -Primary CCPCH info (10.3.6.57)                             |   |
| -CHOICE <i>mode</i>   | TDD   |
| -CHOICE Sync case   | 2   |
| -Timeslot   | 0   |
| -cell parameters ID   | Set to cell parameters ID of cell 2                                       |
| -SCTD indicator   | FALSE   |
| -Primary CCPCH Tx power                                     | Set to Primary CCPCH Tx power of cell 2 as described in Table 8.6.2.4.1.2 |
| -Timeslot list  | Not Present   |
| -Cell selection and re-selection info                       | Not Present   |
| -Cell for measurement                                       | Not Present   |
| -Inter-frequency measurement quantity (10.3.7.18)           |   |
| -CHOICE <i>reporting criteria</i>                           | Inter-frequency reporting criteria  |
| -Filter coefficient (10.3.7.9)                              | 0   |
| -CHOICE <i>mode</i>   | TDD   |
| -Measurement quantity for frequency quality estimate        | Primary CCPCH RSCP  |
| -Inter-frequency reporting quantity (10.3.7.21)             |   |
| -UTRA carrier RSSI  |   |
| -Frequency quality estimate                                 |   |
| -Non frequency related cell reporting quantities (10.3.7.5) |   |
| -SFN-SFN observed time difference reporting indicator       | No report   |
| -Cell synchronisation information reporting indicator       | FALSE   |
| -Cell identity reporting indicator                          | FALSE   |
| -CHOICE <i>mode</i>   | TDD   |
| -Timeslot ISCP reporting indicator                          | FALSE   |
| -Proposed TGSN Reporting required                           | FALSE   |
| -Primary CCPCH RSCP reporting indicator                     | TRUE  |
| -Pathloss reporting indicator                               | FALSE   |
| -Reporting cell status (10.3.7.61)                          | Not Present   |
| -Measurement validity (10.3.7.51)                           | Not Present   |
| -CHOICE <i>report criteria</i>                              | Inter-frequency measurement reporting criteria                            |
| -Inter-frequency measurement reporting criteria (10.3.7.19) |   |
| -Parameters required for each event                         | 1   |
| -Intra-frequency event identity                             | Event 2C  |
| -Threshold used frequency                                   | Not Present   |
| -W Used frequency   | Not Present   |
| -Hysteresis   | 0 dB  |
| -Time to trigger  | 0 ms  |

| <u>Information Element/Group name</u>  | <u>Value/Remark</u>  |
|--|--|
| <u>-Reporting Cell Status (10.3..61)</u><br><u>-CHOICE reported cell</u><br><br><u>-Maximum number of reported cells</u><br><u>-Parameters required for each non-used frequenc</u><br><u>- Threshold non-used frequency</u><br><u>- W non-used frequency</u> | <u>Report cells within active and/or monitored set on used frequency or within virtual active and/or monitored set on non-used frequency</u><br><br><u>3</u><br><br><u>-71</u><br><u>1</u> |
| <u>Physical channel information elements</u><br><u>-DPCH compressed mode status info (10.3.6.34)</u>   | <u>Not Present</u>   |

PHYSICAL CHANNEL RECONFIGURATION message (Step 6)

| <u>Information Element</u>   | <u>Value/Remark</u>  |
|--|--|
| <u>Message Type</u>  |  |
| <u>UE Information Elements</u><br><u>-RRC transaction identifier</u><br><u>-Integrity check info</u><br><u>-Integrity protection mode info</u><br><u>-Ciphering mode info</u><br><u>-Activation time</u><br><u>-New U-RNTI</u><br><u>-New C-RNTI</u><br><u>-RRC State Indicator</u><br><u>-UTRAN DRX cycle length coefficient</u>  | <u>0</u><br><u>Not Present</u><br><u>Not Present</u><br><u>Not Present</u><br><u>Not Present</u><br><u>Not Present</u><br><u>Not Present</u><br><u>CELL_DCH</u><br><u>Not Present</u>  |
| <u>CN Information Elements</u><br><u>-CN Information info</u>  | <u>Not Present</u>   |
| <u>UTRAN mobility information elements</u><br><u>-URA identity</u>   | <u>Not Present</u>   |
| <u>RB information elements</u><br><u>-Downlink counter synchronisation info</u>  | <u>Not Present</u>   |
| <u>PhyCH information elements</u><br><u>-Frequency info</u>  | <u>Not Present</u>   |
| <u>Uplink radio resources</u><br><u>-Maximum allowed UL TX power</u>   | <u>Not Present</u>   |
| <u>Downlink radio resources</u><br><u>-CHOICE mode</u><br><u>-Downlink PDSCH information</u><br><u>-Downlink information common for all radio links</u><br><u>-Downlink DPCH info common for all RL</u><br><u>-CHOICE mode</u><br><u>-DPCH compressed mode info</u><br><u>-Transmission gap pattern sequence</u><br><u>-TGPSI</u><br><u>-TGPS Status Flag</u><br><u>-TGCFN</u><br><br><u>-Transmission gap pattern sequence configuration parameters</u><br><u>-TGMP</u><br><u>-TGPRC</u><br><u>-TGSN</u><br><u>-TGL1</u><br><u>-TGL2</u><br><u>-TGD</u><br><u>-TGPL1</u><br><u>-TGPL2</u><br><u>-RPP</u><br><u>-ITP</u><br><u>-CHOICE UL/DL mode</u><br><u>-Downlink compressed mode method</u><br><u>-Uplink compressed mode method</u><br><u>-Downlink frame type</u> | <u>FDD</u><br><u>Not Present</u><br><br><u>Not Present</u><br><u>FDD</u><br><br><u>1</u><br><u>Activate</u><br><u>(Current CFN + (256 – TTI/10msec))mod 256</u><br><br><u>TDD measurement</u><br><u>Not present</u><br><u>10</u><br><u>10</u><br><u>Not Present</u><br><u>0</u><br><u>11</u><br><u>Not Present</u><br><u>Mode 0</u><br><u>Mode 0</u><br><u>UL and DL</u><br><u>SF/2</u><br><u>puncturing</u><br><u>A</u> |

|   |   |
|---|---|
| <a href="#">-DeltaSIR1</a>                                  | <a href="#">3.0</a>   |
| <a href="#">-DeltaSIRafter1</a>                             | <a href="#">3.0</a>   |
| <a href="#">-DeltaSIR2</a>                                  | <a href="#">Not Present</a>   |
| <a href="#">-DeltaSIRafter2</a>                             | <a href="#">Not Present</a>   |
| <a href="#">-N Identify abort</a>                           | <a href="#">Not Present</a>   |
| <a href="#">-T Reconfirm abort</a>                          | <a href="#">Not Present</a>   |
| <a href="#">-TX Diversity Mode</a>                          | <a href="#">Not Present</a>   |
| <a href="#">-SSDT information</a>                           | <a href="#">Not Present</a>   |
| <a href="#">-Default DPCH Offset Value</a>                  | <a href="#">Not Present</a>   |
| <a href="#">-Downlink information per radio link list</a>   |   |
| <a href="#">- Downlink information for each radio link</a>  |   |
| <a href="#">-Choice mode</a>                                | <a href="#">FDD</a>   |
| <a href="#">-Primary CPICH info</a>                         |   |
| <a href="#">-Primary scrambling code</a>                    | <a href="#">100</a>   |
| <a href="#">-PDSCH with SHO DCH Info</a>                    | <a href="#">Not Present</a>   |
| <a href="#">-PDSCH code mapping</a>                         | <a href="#">Not Present</a>   |
| <a href="#">-Downlink DPCH info for each RL</a>             |   |
| <a href="#">-CHOICE mode</a>                                | <a href="#">FDD</a>   |
| <a href="#">-Primary CPICH usage for channel estimation</a> | <a href="#">Primary CPICH may be used</a>   |
| <a href="#">-DPCH frame offset</a>                          | <a href="#">Set to value Default DPCH Offset Value ( as currently stored in SS) mod 38400</a> |
| <a href="#">-Secondary CPICH info</a>                       | <a href="#">Not Present</a>   |
| <a href="#">-DL channelisation code</a>                     |   |
| <a href="#">-Secondary scrambling code</a>                  | <a href="#">Not Present</a>   |
| <a href="#">-Spreading factor</a>                           | <a href="#">128</a>   |
| <a href="#">-Code number</a>                                | <a href="#">0</a>   |
| <a href="#">-Scrambling code change</a>                     | <a href="#">No code change</a>  |
| <a href="#">-TPC combination index</a>                      | <a href="#">0</a>   |
| <a href="#">-SSDT Cell Identity</a>                         | <a href="#">Not Present</a>   |
| <a href="#">-Closed loop timing adjustment mode</a>         | <a href="#">Not Present</a>   |
| <a href="#">-SCCPCH Information for FACH</a>                | <a href="#">Not Present</a>   |

[MEASUREMENT REPORT message \(step 8\)](#)

| <a href="#">Information Element</a>                    | <a href="#">Value/remark</a>                              |
|--|---|
| <a href="#">Message Type (10.2.17)</a>                 |   |
| <a href="#">Integrity check info</a>                   | <a href="#">Not Present</a>                               |
| <a href="#">Measurement identity</a>                   | <a href="#">1</a>   |
| <a href="#">Measured Results (10.3.3.7.44)</a>         |   |
| <a href="#">-CHOICE Measurement</a>                    | <a href="#">Inter-frequency Measured results list</a>     |
| <a href="#">-Inter-frequency measured results</a>      | <a href="#">1</a>   |
| <a href="#">-Frequency info</a>                        |   |
| <a href="#">-CHOICE mode</a>                           | <a href="#">TDD</a>                                       |
| <a href="#">-UARFCN(Nt)</a>                            | <a href="#">Same frequency as channel 2</a>               |
| <a href="#">-UTRA carrier RSSI</a>                     | <a href="#">Not Present</a>                               |
| <a href="#">-Inter-frequency cell measured results</a> | <a href="#">1</a>   |
| <a href="#">-Cell measured results (10.3.7.3)</a>      |   |
| <a href="#">-Cell identity</a>                         | <a href="#">Not Present</a>                               |
| <a href="#">-SFN-SFN observed time difference</a>      | <a href="#">Not Present</a>                               |
| <a href="#">-Cell synchronisation info</a>             | <a href="#">Not Present</a>                               |
| <a href="#">-CHOICE mode</a>                           | <a href="#">TDD</a>                                       |
| <a href="#">-Cell parameters ID</a>                    | <a href="#">Set to cell parameters ID of Cell 2</a>       |
| <a href="#">-Proposed TGSN</a>                         | <a href="#">Not Present</a>                               |
| <a href="#">-Primary CCPCCH RSCP</a>                   | <a href="#">Checked that this IE is present</a>           |
| <a href="#">-Pathloss</a>                              | <a href="#">Not Present</a>                               |
| <a href="#">-Timeslot list</a>                         | <a href="#">Not Present</a>                               |
| <a href="#">Measured results on RACH</a>               | <a href="#">Not Present</a>                               |
| <a href="#">Additional measured results</a>            | <a href="#">Not Present</a>                               |
| <a href="#">Event results (10.3.7.7)</a>               |   |
| <a href="#">-CHOICE event result</a>                   | <a href="#">Inter-frequency measurement event results</a> |
| <a href="#">-Inter-frequency event identity</a>        | <a href="#">2C</a>  |
| <a href="#">-Inter-frequency cells</a>                 | <a href="#">1</a>   |
| <a href="#">-Frequency Info</a>                        |   |
| <a href="#">-CHOICE mode</a>                           | <a href="#">TDD</a>                                       |
| <a href="#">-UARFCN(Nt)</a>                            | <a href="#">Same frequency as channel 2</a>               |
| <a href="#">-CHOICE mode</a>                           | <a href="#">TDD</a>                                       |

|   |  |
|---|--|
| <ul style="list-style-type: none"> <li><u>-Primary CCPCH Info</u></li> <li><u>-CHOICE mode</u></li> <li><u>-CHOICE Sync Case</u></li> <li><u>-Cell Parameters ID</u></li> <li><u>-SCTD Indicator</u></li> </ul> | <ul style="list-style-type: none"> <li><u>TDD</u></li> <li><u>Not Present</u></li> <li><u>Set to cell parameters ID of Cell 2</u></li> <li><u>FALSE</u></li> </ul> |
|---|--|

#### 8.6.3.1.5 Test requirements

The UE shall send one Event 2C triggered measurement report for Cell 2 with a measurement reporting delay less than 9.2 s from the beginning of time period T2.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

For the test to pass, the total number of successful tests shall be more than 90% with a confidence level of [FFS]% of the cases.



## CHANGE REQUEST

# 34.121 CR 237 # rev - # Current version: 3.11.0 #

For [HELP](#) on using this form, see bottom of this page or look at the pop-up text over the # symbols.

**Proposed change affects:** UICC apps  ME  Radio Access Network  Core Network

|                        |   |                 |   |
|------------------------|---|-----------------|---|
| <b>Title:</b>          | # Correction for minimum requirement of UE transmitted power test case  |                 |   |
| <b>Source:</b>         | # T1/RF   |                 |   |
| <b>Work item code:</b> | #   | <b>Date:</b>    | # 12/02/2003  |
| <b>Category:</b>       | # <b>F</b>  | <b>Release:</b> | # R99   |
|                        | Use <u>one</u> of the following categories:<br><b>F</b> (correction)<br><b>A</b> (corresponds to a correction in an earlier release)<br><b>B</b> (addition of feature),<br><b>C</b> (functional modification of feature)<br><b>D</b> (editorial modification)<br>Detailed explanations of the above categories can be found in 3GPP <a href="#">TR 21.900</a> . |                 | Use <u>one</u> of the following releases:<br>2 (GSM Phase 2)<br>R96 (Release 1996)<br>R97 (Release 1997)<br>R98 (Release 1998)<br>R99 (Release 1999)<br>Rel-4 (Release 4)<br>Rel-5 (Release 5)<br>Rel-6 (Release 6) |

|                                      |  |
|--------------------------------------|--|
| <b>Reason for change:</b>            | # Minimum requirement of UE transmitted power was modified in 25.133 (25.133 CR 476, R4-021443). |
| <b>Summary of change:</b>            | # TS 34.121 clause 8.7.3C.2 "Minimum requirements" is modified according to 25.133 CR476.        |
| <b>Consequences if not approved:</b> | # TS 25.133 and TS 34.121 are inconsistent.  |

|                              |   |   |   |   |   |   |   |   |   |
|------------------------------|---|---|---|---|---|---|---|---|---|
| <b>Clauses affected:</b>     | # 8.7.3C.2  |   |   |   |   |   |   |   |   |
| <b>Other specs affected:</b> | <table style="display: inline-table; border-collapse: collapse;"> <tr> <td style="border: 1px solid black; padding: 2px;">Y</td> <td style="border: 1px solid black; padding: 2px;">N</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px;">#</td> <td style="border: 1px solid black; padding: 2px;">X</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px;">#</td> <td style="border: 1px solid black; padding: 2px;">X</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px;">#</td> <td style="border: 1px solid black; padding: 2px;">X</td> </tr> </table> Other core specifications #<br>Test specifications #<br>O&M Specifications # | Y | N | # | X | # | X | # | X |
| Y                            | N   |   |   |   |   |   |   |   |   |
| #                            | X   |   |   |   |   |   |   |   |   |
| #                            | X   |   |   |   |   |   |   |   |   |
| #                            | X   |   |   |   |   |   |   |   |   |
| <b>Other comments:</b>       | #   |   |   |   |   |   |   |   |   |

### How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked # contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.

- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

## 8.7.3C UE transmitted power

### 8.7.3C.1 Definition and applicability

The UE transmitted power absolute accuracy is defined as difference between the UE reported value and the UE transmitted power measured by test system. The reference point for the UE transmitted power shall be the antenna connector of the UE.

The requirements and this test apply to all types of UTRA for the FDD UE.

### 8.7.3C.2 Minimum requirements

The measurement period in CELL\_DCH state is 1 slot.

**Table 8.7.3C.2.1 UE transmitted power absolute accuracy**

| Parameter                               | Unit | Accuracy [dB]   |                 |
|---|------|-----------------|-----------------|
|   |      | PUEMAX<br>24dBm | PUEMAX<br>21dBm |
| UE transmitted power=PUEMAX             | dBm  | +1/-3           | ±2              |
| UE transmitted power=PUEMAX-1           | dBm  | +1.5/-3.5       | ±2.5            |
| UE transmitted power=PUEMAX-2           | dBm  | +2/-4           | ±3              |
| UE transmitted power=PUEMAX-3           | dBm  | +2.5/-4.5       | ±3.5            |
| PUEMAX-10≤UE transmitted power<PUEMAX-3 | dBm  | +3/-5           | ±4              |

NOTE 1: User equipment maximum output power, PUEMAX, is the maximum output power level without tolerance defined for the power class of the UE in TS 25.101 [1] section 6.2.1.

NOTE 2: UE transmitted power is the reported value.

For each empty slot created by compressed mode, no value shall be reported by the UE L1 for those slots~~shall respond with a value of -50 dBm.~~

The normative reference for this requirement is TS 25.133 [2] clause 9.1.6.

### 8.7.3C.3 Test purpose

The purpose of this test is to verify that for any reported value of UE Transmitted Power in the range PUEMAX to PUEMAX-10 that the actual UE mean power lies within the range specified in clause 8.7.3C.2.

### 8.7.3C.4 Method of test

#### 8.7.3C.4.1 Initial conditions

Test environment: normal, TL/VL, TL/VH, TH/VL, TH/VH; see clauses G.2.1 and G.2.2.

Frequencies to be tested: mid range; see clause G.2.4.

- 1) Connect SS to the UE antenna connector as shown in figure A.1.

The test parameters are given in Table 8.7.3C.4.1 and 8.7.3C.4.2 below. In the measurement control information it shall be indicated to the UE that periodic reporting of the UE transmitted power measurement shall be used.

**Table 8.7.3C.4.1: General test parameters for UE transmitted power**

| Parameter                    | Unit | Value                                      | Comment                      |
|------------------------------|------|--|------------------------------|
| DCH parameters               |      | DL Reference Measurement Channel 12.2 kbps | As specified in clause C.3.1 |
| Power Control                |      | On   |                              |
| Target quality value on DTCH | BLER | 0.01                                       |                              |

**Table 8.7.3C.4.2: Cell Specific parameters for UE transmitted power**

| Parameter   | Unit         | Cell 1 |
|---|--------------|--------|
| CPICH_Ec/I <sub>or</sub>  | dB           | -10    |
| PCCPCH_Ec/I <sub>or</sub>   | dB           | -12    |
| SCH_Ec/I <sub>or</sub>  | dB           | -12    |
| PICH_Ec/I <sub>or</sub>   | dB           | -15    |
| DPCH_Ec/I <sub>or</sub>   | dB           | Note 1 |
| OCNS  |              | Note 2 |
| $\hat{I}_{or}/I_{oc}$   | dB           | 0      |
| $I_{oc}$  | dBm/3.84 MHz | -70    |
| CPICH_Ec/I <sub>o</sub>   | dB           | -13    |
| Propagation Condition   |              | AWGN   |
| Note 1: The DPCH level is controlled by the power control loop  |              |        |
| Note 2: The power of the OCNS channel that is added shall make the total power from the cell to be equal to I <sub>or</sub> . |              |        |

#### 8.7.3C.4.2 Procedure

- 1) A call is set up according to the test procedure specified in TS 34.108 [3] subclause 7.3.2.3. The RF parameters are set up according to table 8.7.3C.4.1 and 8.7.3C.4.2. Set the UE power and Maximum allowed UL TX power to the maximum power for the UE power class.
- 2) SS shall send continuously during the entire test Up power control commands to the UE.
- 3) SS shall transmit the MEASUREMENT CONTROL message as defined in the specific message contents below.
- 4) Decode the UE Transmitted power reported by the UE in the next available MEASUREMENT REPORT message.
- 5) Measure the mean power of the UE over a period of one timeslot.
- 6) Steps 4 and 5 shall be repeated [100] times.
- 7) Decrease the Maximum allowed UL TX power by 1 dB. The SS shall transmit the PHYSICAL CHANNEL RECONFIGURATION message, as defined in the specific message contents below.
- 8) SS shall wait for the PHYSICAL CHANNEL RECONFIGURATION COMPLETE message from the UE.
- 9) Repeat from step 4) until the Maximum allowed UL TX Power reaches PUEMAX-11.

#### Specific Message Contents

All messages indicated above shall use the same content as described in default message content in clause 9 of 34.108 [3] and Annex A of 34.123-1 [21] with the following exceptions:

MEASUREMENT CONTROL message:

| Information Element   | Value/Remark   |
|---|--|
| Message Type  |  |
| UE information elements<br>-RRC transaction identifier<br>-Integrity check info   | 0<br>Not Present   |
| Measurement Information elements<br>-Measurement Identity<br>-Measurement Command<br>-CHOICE Measurement type<br>-UE Internal measurement quantity<br>-CHOICE mode<br>-Measurement quantity<br>-Filter coefficient<br>-UE Internal reporting quantity<br>-UE Transmitted power<br>-CHOICE mode<br>-UE Rx-Tx time difference<br>-CHOICE report criteria<br>-Amount of reporting<br>-Reporting interval<br>-Measurement Reporting Mode<br>-Measurement Report Transfer Mode<br>-Periodical Reporting / Event Trigger Reporting Mode | 1<br>Modify<br>UE Internal measurement<br><br>FDD<br>UE Transmitted power<br>0<br><br>TRUE<br>FDD<br>FALSE<br>Periodical reporting criteria<br>Infinity<br>250<br><br>AM RLC<br>Periodical reporting |
| Physical channel information elements<br>-DPCH compressed mode status info  | Not Present  |

## MEASUREMENT REPORT message:

| Information Element                | Value/remark   |
|------------------------------------|--|
| Message Type                       |  |
| Integrity check info               | The presence of this IE is dependent on IXIT statements in TS 34.123-2. If integrity protection is indicated to be active, this IE shall be present with the values of the sub IEs as stated below. Else, this IE and the sub-IEs shall be absent. |
| - Message authentication code      | This IE is checked to see if it is present. The value is compared against the XMAC-I value computed by SS.   |
| - RRC Message sequence number      | This IE is checked to see if it is present. The value is used by SS to compute the XMAC-I value.   |
| Measurement identity               | 1  |
| Measured Results                   |  |
| - Intra-frequency measured results |  |
| - Cell measured results            |  |
| - Cell Identity                    | Not present  |
| - SFN-SFN observed time difference | Checked that this IE is absent   |
| - Cell synchronisation information | Checked that this IE is absent   |
| - Primary CPICH info               |  |
| - Primary scrambling code          | 150  |
| - CPICH Ec/NO                      | Checked that this IE is absent   |
| - CPICH RSCP                       | Checked that this IE is present  |
| - Pathloss                         | Checked that this IE is absent   |
| Measured results on RACH           | Checked that this IE is absent   |
| Additional measured results        |  |
| - UE internal measured results     |  |
| - Choice mode                      | FDD  |
| - UE Transmitted power             | Checked that this IE is present  |
| - UE Rx-Tx report entries          | Checked that this IE is absent   |
| Event results                      | Checked that this IE is absent   |

## PHYSICAL CHANNEL RECONFIGURATION message:

| Information Element                              | Value/Remark  |
|--|---|
| Message Type                                     |   |
| UE Information Elements                          |   |
| -RRC transaction identifier                      | 0   |
| -Integrity check info                            | Not Present   |
| -Integrity protection mode info                  | Not Present   |
| -Ciphering mode info                             | Not Present   |
| -Activation time                                 | Not Present   |
| -New U-RNTI                                      | Not Present   |
| -New C-RNTI                                      | Not Present   |
| -RRC State Indicator                             | CELL_DCH  |
| -UTRAN DRX cycle length coefficient              | Not Present   |
| CN Information Elements                          |   |
| -CN Information info                             | Not Present   |
| UTRAN mobility information elements              |   |
| -URA identity                                    | Not Present   |
| RB information elements                          |   |
| -Downlink counter synchronisation info           | Not Present   |
| PhyCH information elements                       |   |
| -Frequency info                                  | Not Present   |
| Uplink radio resources                           |   |
| -Maximum allowed UL TX power                     | At the first time this value is set to PUEMAX-1. After the second time this value is decreased with 1 dB from previous value. |
| Downlink radio resources                         |   |
| -CHOICE mode                                     | FDD   |
| -Downlink PDSCH information                      | Not Present   |
| -Downlink information common for all radio links | Not Present   |
| -Downlink information per radio link list        | Not Present   |

### 8.7.3C.5 Test requirements

Compare each of the UE transmitted power reports against the following mean power measurement. At least 90% of the mean power measurements for any one value of reported UE transmitted power shall be within the range specified in table 8.7.3C.5.

NOTE It is not expected or required that the distribution of UE transmitted power reports is even for the 11 possible reported values.

**Table 8.7.3C.5 UE transmitted power test requirements**

| Parameter                      | Unit | Mean Power range [dB] |                 |
|--------------------------------|------|-----------------------|-----------------|
|                                |      | PUEMAX<br>24dBm       | PUEMAX<br>21dBm |
| UE transmitted power=PUEMAX    | dBm  | +1.7/-3.7             | ±2.7            |
| UE transmitted power=PUEMAX-1  | dBm  | +2.2/-4.2             | ±3.2            |
| UE transmitted power=PUEMAX-2  | dBm  | +2.7/-4.7             | ±3.7            |
| UE transmitted power=PUEMAX-3  | dBm  | +3.2/-5.2             | ±4.2            |
| UE transmitted power=PUEMAX-4  | dBm  | +3.7/-5.7             | ±4.7            |
| UE transmitted power=PUEMAX-5  | dBm  | +3.7/-5.7             | ±4.7            |
| UE transmitted power=PUEMAX-6  | dBm  | +3.7/-5.7             | ±4.7            |
| UE transmitted power=PUEMAX-7  | dBm  | +3.7/-5.7             | ±4.7            |
| UE transmitted power=PUEMAX-8  | dBm  | +3.7/-5.7             | ±4.7            |
| UE transmitted power=PUEMAX-9  | dBm  | +3.7/-5.7             | ±4.7            |
| UE transmitted power=PUEMAX-10 | dBm  | +3.7/-5.7             | ±4.7            |

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test is defined in clause F.2 and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in clause F.4.

## CHANGE REQUEST

# 34.121 CR 238 # rev - # Current version: 3.11.0 #

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the # symbols.

**Proposed change affects:** UICC apps#  ME  Radio Access Network  Core Network

|                        |   |                 |   |
|------------------------|---|-----------------|---|
| <b>Title:</b>          | # Removal of 34.123-1 Annex A reference   |                 |   |
| <b>Source:</b>         | # T1/RF   |                 |   |
| <b>Work item code:</b> | #   | <b>Date:</b>    | # 12/02/2003  |
| <b>Category:</b>       | # <b>F</b>  | <b>Release:</b> | # R99   |
|                        | Use <u>one</u> of the following categories:<br><b>F</b> (correction)<br><b>A</b> (corresponds to a correction in an earlier release)<br><b>B</b> (addition of feature),<br><b>C</b> (functional modification of feature)<br><b>D</b> (editorial modification)<br>Detailed explanations of the above categories can be found in 3GPP <a href="#">TR 21.900</a> . |                 | Use <u>one</u> of the following releases:<br>2 (GSM Phase 2)<br>R96 (Release 1996)<br>R97 (Release 1997)<br>R98 (Release 1998)<br>R99 (Release 1999)<br>Rel-4 (Release 4)<br>Rel-5 (Release 5)<br>Rel-6 (Release 6) |

|                                      |  |  |  |
|--------------------------------------|--|--|--|
| <b>Reason for change:</b>            | # Default RRC message contents in 34.123-1 Annex A have been removed (34.123-1 CR 207 (T1-020332)). The default message contents are provided in clause 9 of 3GPP TS 34.108. |  |  |
| <b>Summary of change:</b>            | # References to 34.123-1 Annex A are removed from 34.121 clause 8  |  |  |
| <b>Consequences if not approved:</b> | # 34.121 contains incorrect references   |  |  |

|                              |  |   |   |   |   |   |   |   |   |  |   |
|------------------------------|--|---|---|---|---|---|---|---|---|--|---|
| <b>Clauses affected:</b>     | # 8.3.3.4.1, 8.3.4.4.2, 8.6.1.1.4.2, 8.6.1.3.4.2, 8.7.3C.4.2, 8.7.6.1.4.2, Annex I   |   |   |   |   |   |   |   |   |  |   |
| <b>Other specs affected:</b> | <table border="1" style="display: inline-table; vertical-align: middle;"> <tr> <td style="width: 20px; text-align: center;">Y</td> <td style="width: 20px; text-align: center;">N</td> </tr> <tr> <td style="text-align: center;">#</td> <td style="text-align: center;">X</td> </tr> <tr> <td style="text-align: center;">#</td> <td style="text-align: center;">X</td> </tr> <tr> <td style="text-align: center;">#</td> <td style="text-align: center;">X</td> </tr> </table> | Y | N | # | X | # | X | # | X | Other core specifications<br>Test specifications<br>O&M Specifications | # |
| Y                            | N  |   |   |   |   |   |   |   |   |  |   |
| #                            | X  |   |   |   |   |   |   |   |   |  |   |
| #                            | X  |   |   |   |   |   |   |   |   |  |   |
| #                            | X  |   |   |   |   |   |   |   |   |  |   |
| <b>Other comments:</b>       | #  |   |   |   |   |   |   |   |   |  |   |

### How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked # contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.



- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

#### 8.3.3.4.1 Procedure

- 1) The RF parameters are set up according to T1.
- 2) The UE is switched on.
- 3) A call is set up according to the test procedure specified in TS 34.108 [3] subclause 7.3.4 with Compressed mode parameters as in Table 8.3.2.2.1.
- 4) SS shall transmit a MEASUREMENT CONTROL message.
- 5) After 5 seconds, the SS shall switch the power settings from T1 to T2
- 6) UE shall transmit a MEASUREMENT REPORT message triggered by event 2C
- 7) SS shall transmit a PHYSICAL CHANNEL RECONFIGURATION message with activation time at T3
- 8) After 10 seconds, the SS shall switch the power settings from T2 to T3
- 9) UE shall transmit a PHYSICAL CHANNEL RECONFIGURATION COMPLETE message on the UL DCCH of cell 2. If the UE transmits the UL DPCCH to cell 2 less than 70 ms from the beginning of time period T3 then the number of successful tests is increased by one.
- 10) After 5 seconds, the UE is switched off. Any timing information of cell 2 is deleted in the UE.
- 11) Repeat step 1-10 [TBD] times

#### Specific Message Contents

All messages indicated above shall use the same content as described in the default message content in clause 9 of 34.108 [3] ~~and in Annex A of 34.123-1 [21]~~, with the following exceptions:

#### 8.3.4.4.2 Procedure

- 1) The RF parameters for cell 1 are set up according to T1.
- 2) The UE is switched on
- 3) A call is set up according to the test procedure specified in TS 34.108 [3] subclause 7.3.4
- 4) The RF parameters for cell 2 are set up according to T1 and the SS configures a traffic channel
- 5) SS shall transmit a MEASUREMENT CONTROL message to cell 1
- 6) After 20 seconds, the SS shall switch the power settings from T1 to T2
- 7) UE shall transmit a MEASUREMENT REPORT message triggered by event 2C
- 8) SS shall transmit a HANDOVER FROM UTRAN COMMAND message with activation time at T3 and indicating the traffic channel of the target GSM cell to the UE through DCCH of the serving UTRAN cell.
- 9) After 5 seconds, the SS shall switch the power settings from T2 to T3
- 10) UE shall transmit a burst on the traffic channel of cell 2 implying that it has switched to the GSM cell. The UE sends a HANDOVER ACCESS message. If the UE transmits access bursts on the new DCCH of the target cell less than 40 ms from the beginning of time period T3, then the number of successful tests is increased by one.  
[Editor's note: TS 34.108, 7.3.4 shall specify the messages HANDOVER ACCESS, PHYSICAL INFORMATION, SABM, UA and HANDOVER COMPLETE]
- 11) After 5 seconds, the UE is switched off. Any timing information of cell 2 is deleted in the UE.
- 12) Repeat step 1-11 [TBD] times

#### Specific Message Contents

All messages indicated below shall use the same content as described in the default message content in clause 9 of 34.108 [3] ~~and in Annex A of 34.123-1 [21]~~, with the following exceptions:

#### 8.6.1.1.4.2 Procedure

1. The RF parameters are set up according to T1.
2. The UE is switched on.
3. A call is set up according to the test procedure specified in TS 34.108 [3] sub clause 7.3.2.3.
4. SS shall transmit a MEASUREMENT CONTROL message.
5. After 5 seconds from the beginning of T1, the SS shall switch the power settings from T1 to T2.
6. UE shall transmit a MEASUREMENT REPORT message triggered by event 1A. The measurement reporting delay from the beginning of T2 shall be less than 880 ms. If the UE fails to report the event within the required delay, then a failure is recorded. If the reporting delay for this event is within the required limit, the number of successful tests is increased by one.
7. After 5 seconds from the beginning of T2, the SS shall switch the power settings from T2 to T3.
8. UE shall transmit a MEASUREMENT REPORT message triggered by event 1B. The measurement reporting delay from the beginning of T3 shall be less than 280 ms. If the reporting delay for this event is within the required limit, the number of successful tests is increased by one.
9. After 5 seconds from the beginning of T3, the UE is switched off. Any timing information of cell 2 is deleted in the UE.
10. Repeat steps 1-9 [50] times.

#### Specific Message Contents

All messages indicated above shall use the same content as described in the default message content in clause 9 of 34.108 [3] ~~and in Annex A of 34.123-1 [21]~~, with the following exceptions:

#### 8.6.1.3.4.2 Procedure

- 1) The RF parameters are set up according to T1.
- 2) The UE is switched on.
- 3) A call is set up according to the test procedure specified in TS 34.108 [3] sub clause 7.3.2.3.
- 4) SS shall transmit a MEASUREMENT CONTROL message.
- 5) After 10 seconds from the beginning T1, the SS shall switch the power settings from T1 to T2.
- 6) UE shall transmit a MEASUREMENT REPORT message for Cell 2 triggered by event 1A. The measurement reporting delay from the beginning of T2 shall be less than 880 ms. If the UE fails to report the event within the required delay, then a failure is recorded. If the reporting delay for this event is within the required limit, the number of successful tests is increased by one.
- 7) After 10 seconds from the beginning T2, the SS shall switch the power settings from T2 to T3.
- 8) UE shall transmit a MEASUREMENT REPORT message for Cell 3 triggered by event 1A. The measurement reporting delay from the beginning of T3 shall be less than 280 ms. If the UE fails to report the event within the required delay, then a failure is recorded. If the reporting delay for this event is within the required limit, the number of successful tests is increased by one.
- 9) After 10 seconds from the beginning T3, the SS shall switch the power settings from T3 to T4.
- 10) UE shall transmit a MEASUREMENT REPORT message for Cell 2 triggered by event 1B. The measurement reporting delay from the beginning of T4 shall be less than 280 ms. If the reporting delay for this event is within the required limit, the number of successful tests is increased by one.
- 11) After 10 seconds, the UE is switched off.
- 12) Repeat steps 1-11 [50] times.

#### Specific Message Contents

All messages indicated above shall use the same content as described in the default message content in clause 9 of 34.108 [3] ~~and in Annex A of 34.123-1 [21]~~, with the following exceptions:

### 8.7.3C.4.2 Procedure

- 1) A call is set up according to the test procedure specified in TS 34.108 [3] subclause 7.3.2.3. The RF parameters are set up according to table 8.7.3C.4.1 and 8.7.3C.4.2. Set the UE power and Maximum allowed UL TX power to the maximum power for the UE power class.
- 2) SS shall send continuously during the entire test Up power control commands to the UE.
- 3) SS shall transmit the MEASUREMENT CONTROL message as defined in the specific message contents below.
- 4) Decode the UE Transmitted power reported by the UE in the next available MEASUREMENT REPORT message.
- 5) Measure the mean power of the UE over a period of one timeslot.
- 6) Steps 4 and 5 shall be repeated [100] times.
- 7) Decrease the Maximum allowed UL TX power by 1 dB. The SS shall transmit the PHYSICAL CHANNEL RECONFIGURATION message, as defined in the specific message contents below.
- 8) SS shall wait for the PHYSICAL CHANNEL RECONFIGURATION COMPLETE message from the UE.
- 9) Repeat from step 4) until the Maximum allowed UL TX Power reaches PUEMAX-11.

#### Specific Message Contents

All messages indicated above shall use the same content as described in default message content in clause 9 of 34.108 [3], ~~and Annex A of 34.123-1 [21]~~ with the following exceptions:

#### 8.7.6.1.4.2 Procedure

- 1) A call is set up according to the test procedure specified in TS 34.108 [3] subclause 7.3.2.3. The RF parameters are set up according to table 8.7.6.1.4 for Test 1.
- 2) SS shall transmit MEASUREMENT CONTROL message.
- 3) UE shall transmit periodically MEASUREMENT REPORT message.
- 4) SS shall check "UE Rx-Tx time difference type 1" value in MEASUREMENT REPORT message. The reported value shall be compared to actual UE Rx-Tx time difference value for each MEASUREMENT REPORT message. The comparison should be repeated 1000 times.
- 5) The RF parameters are set up according table 8.7.6.1.4 for Test 2. While RF parameters are being set up, MEASUREMENT REPORT messages from UE are ignored. SS shall wait for additional 1s and ignore the MEASUREMENT REPORT messages during this period.
- 6) Step 3) above shall be repeated.
- 7) The RF parameters are set up according table 8.7.6.1.4 for Test 3. While RF parameters are being set up, MEASUREMENT REPORT messages from UE are ignored. SS shall wait for additional 1s and ignore the MEASUREMENT REPORT messages during this period.
- 8) Step 3) above shall be repeated.
- 9) SS shall transmit RRC CONNECTION RELEASE message.

#### Specific Message Contents

All messages indicated above shall use the same content as described in default message content in clause 9 of 34.108 [3], ~~and Annex A of 34.123-1 [21]~~ with the following exceptions:

## Annex I (normative): Default Message Contents

This Annex contains the default values of common messages, other than those described in TS 34.108 ~~and TS 34.123-1~~. The messages are primarily concerning the RRM test cases in clause 8 and unless indicated otherwise in specific test cases, shall be transmitted and checked by the system simulator. The necessary messages are listed in alphabetical order.

In this Annex, decimal values are normally used. However, sometimes, a hexadecimal value, indicated by an "H", or a binary value, indicated by a "B" is used.

### Contents of MEASUREMENT REPORT message for Intra frequency test cases

| Information Element                     | Value/remark   |
|---|--|
| Message Type                            |  |
| Integrity check info                    | The presence of this IE is dependent on IXIT statements in TS 34.123-2. If integrity protection is indicated to be active, this IE shall be present with the values of the sub IEs as stated below. Else, this IE and the sub-IEs shall be absent. |
| - Message authentication code           | This IE is checked to see if it is present. The value is compared against the XMAC-I value computed by SS.   |
| - RRC Message sequence number           | This IE is checked to see if it is present. The value is used by SS to compute the XMAC-I value.   |
| Measurement identity                    | 1  |
| Measured Results                        |  |
| - Intra-frequency measured results list |  |
| - Cell measured results                 |  |
| - Cell Identity                         | Not present  |
| - SFN-SFN observed time difference      | Checked that this IE is present  |
| - Cell synchronisation information      |  |
| - Tm                                    | Checked that this IE is present  |
| - OFF                                   | Checked that this IE is present  |
| - CHOICE mode                           | FDD  |
| - Primary CPICH info                    | Checked that this IE is present  |
| - Primary scrambling code               | 150  |
| - CPICH Ec/N0                           | Checked that this IE is present  |
| - CPICH RSCP                            | Checked that this IE is present  |
| - Pathloss                              | Checked that this IE is present  |
| Measured results on RACH                | Checked that this IE is absent   |
| Additional measured results             | Checked that this IE is absent   |
| Event results                           | Checked that this IE is absent   |



## Contents of MEASUREMENT REPORT message for Inter frequency test cases

| Information Element                        | Value/remark   |
|--|--|
| Message Type                               |  |
| Integrity check info                       | The presence of this IE is dependent on IXIT statements in TS 34.123-2. If integrity protection is indicated to be active, this IE shall be present with the values of the sub IEs as stated below. Else, this IE and the sub-IEs shall be absent. |
| - Message authentication code              | This IE is checked to see if it is present. The value is compared against the XMAC-I value computed by SS.   |
| - RRC Message sequence number              | This IE is checked to see if it is present. The value is used by SS to compute the XMAC-I value.   |
| Measurement identity                       | 1  |
| Measured Results                           |  |
| - Inter-frequency measured results list    | Checked that this IE is present  |
| - UTRA Carrier RSSI                        | Not present  |
| - Inter-frequency cell measurement results | Checked that this IE is present  |
| - Cell measured results                    |  |
| - Cell Identity                            | Not present  |
| - SFN-SFN observed time difference         | Checked that this IE is present  |
| - Cell synchronisation information         |  |
| -Tm  | Checked that this IE is present  |
| - OFF                                      | Checked that this IE is present  |
| - CHOICE mode                              | FDD  |
| - Primary CPICH info                       | Checked that this IE is present  |
| - Primary scrambling code                  | 150  |
| - CPICH Ec/N0                              | Checked that this IE is present  |
| - CPICH RSCP                               | Checked that this IE is present  |
| - Pathloss                                 | Checked that this IE is present  |
| Measured results on RACH                   | Checked that this IE is absent   |
| Additional measured results                | Checked that this IE is absent   |
| Event results                              | Checked that this IE is absent   |

## Contents of MEASUREMENT REPORT message for inter – RAT test cases

| Information Element                    | Value/remark   |
|--|--|
| Message Type                           |  |
| Integrity check info                   | The presence of this IE is dependent on IXIT statements in TS 34.123-2. If integrity protection is indicated to be active, this IE shall be present with the values of the sub IEs as stated below. Else, this IE and the sub-IEs shall be absent. |
| - Message authentication code          | This IE is checked to see if it is present. The value is compared against the XMAC-I value computed by SS.   |
| - RRC Message sequence number          | This IE is checked to see if it is present. The value is used by SS to compute the XMAC-I value.   |
| Measurement identity                   | 1  |
| Measured Results                       |  |
| - Inter-RAT measured results list      | GSM  |
| - CHOICE system                        | Checked that this IE is present  |
| - Measured GSM cells                   | Checked that this IE is present  |
| - GSM carrier RSSI                     | Checked that this IE is present  |
| - Pathloss                             | Checked that this IE is present  |
| - Observed time difference to GSM cell | Checked that this IE is present  |
| Measured results on RACH               | Checked that this IE is absent   |
| Additional measured results            | Checked that this IE is absent   |
| Event results                          | Checked that this IE is absent   |

## CHANGE REQUEST

# **34.121 CR 239** # rev **-** # Current version: **3.11.0** #

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the # symbols.

**Proposed change affects:** UICC apps  ME  Radio Access Network  Core Network

|                        |  |                           |   |
|------------------------|--|---------------------------|---|
| <b>Title:</b>          | # Correction of UE parameter for Correct behaviour at Time-out test case                       |                           |   |
| <b>Source:</b>         | # T1/RF  |                           |   |
| <b>Work item code:</b> | #  | <b>Date:</b>              | # 12/02/2003                              |
| <b>Category:</b>       | # <b>F</b>   | <b>Release:</b>           | # <b>R99</b>                              |
|                        | Use <u>one</u> of the following categories:  |                           | Use <u>one</u> of the following releases: |
|                        | <b>F</b> (correction)  | <b>2</b> (GSM Phase 2)    |   |
|                        | <b>A</b> (corresponds to a correction in an earlier release)                                   | <b>R96</b> (Release 1996) |   |
|                        | <b>B</b> (addition of feature),  | <b>R97</b> (Release 1997) |   |
|                        | <b>C</b> (functional modification of feature)  | <b>R98</b> (Release 1998) |   |
|                        | <b>D</b> (editorial modification)  | <b>R99</b> (Release 1999) |   |
|                        | Detailed explanations of the above categories can be found in 3GPP <a href="#">TR 21.900</a> . |                           | <b>Rel-4</b> (Release 4)                  |
|                        |  |                           | <b>Rel-5</b> (Release 5)                  |
|                        |  |                           | <b>Rel-6</b> (Release 6)                  |

|                                      |  |
|--------------------------------------|--|
| <b>Reason for change:</b>            | # Maximum allowed UE TX power was changed from 0 dBm to 21 dBm in 25.133 (25.133 CR504), because it is probable that UE transmit power may reach 0 dBm limit defined by "Maximum allowed UL TX power" parameter before completing the preamble cycle.<br><br>T1R020293 (34.121 CR220) changed the "Maximum allowed UL TX power" parameter from 0 dB to 33 dB. The reasoning for this change is consistent with 25.133 change, but value of the parameter is different. |
| <b>Summary of change:</b>            | # Table 8.4.2.1.4: UE parameter "Maximum allowed UL TX power" is changed from 33 dBm to 21 dBm according to the 25.133 CR504.  |
| <b>Consequences if not approved:</b> | # TS 25.133 and TS 34.121 are inconsistent.  |

|                                     |   |                                     |                          |                          |                                     |                                     |
|-------------------------------------|---|-------------------------------------|--------------------------|--------------------------|-------------------------------------|-------------------------------------|
| <b>Clauses affected:</b>            | # 8.4.2   |                                     |                          |                          |                                     |                                     |
| <b>Other specs affected:</b>        | <table border="1" style="display: inline-table; border-collapse: collapse;"> <tr> <td style="width: 20px; text-align: center;">Y</td> <td style="width: 20px; text-align: center;">N</td> </tr> <tr> <td style="text-align: center;"><input type="checkbox"/></td> <td style="text-align: center;"><input checked="" type="checkbox"/></td> </tr> </table> Other core specifications # <table border="1" style="display: inline-table; border-collapse: collapse;"> <tr> <td style="width: 20px; text-align: center;"><input checked="" type="checkbox"/></td> </tr> </table> | Y                                   | N                        | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| Y                                   | N   |                                     |                          |                          |                                     |                                     |
| <input type="checkbox"/>            | <input checked="" type="checkbox"/>   |                                     |                          |                          |                                     |                                     |
| <input checked="" type="checkbox"/> |   |                                     |                          |                          |                                     |                                     |
|                                     | <table border="1" style="display: inline-table; border-collapse: collapse;"> <tr> <td style="width: 20px; text-align: center;"><input checked="" type="checkbox"/></td> </tr> </table> Test specifications # <table border="1" style="display: inline-table; border-collapse: collapse;"> <tr> <td style="width: 20px; text-align: center;"><input type="checkbox"/></td> </tr> </table>  | <input checked="" type="checkbox"/> | <input type="checkbox"/> |                          |                                     |                                     |
| <input checked="" type="checkbox"/> |   |                                     |                          |                          |                                     |                                     |
| <input type="checkbox"/>            |   |                                     |                          |                          |                                     |                                     |
|                                     | <table border="1" style="display: inline-table; border-collapse: collapse;"> <tr> <td style="width: 20px; text-align: center;"><input checked="" type="checkbox"/></td> </tr> </table> O&M Specifications # <table border="1" style="display: inline-table; border-collapse: collapse;"> <tr> <td style="width: 20px; text-align: center;"><input type="checkbox"/></td> </tr> </table>   | <input checked="" type="checkbox"/> | <input type="checkbox"/> |                          |                                     |                                     |
| <input checked="" type="checkbox"/> |   |                                     |                          |                          |                                     |                                     |
| <input type="checkbox"/>            |   |                                     |                          |                          |                                     |                                     |
| <b>Other comments:</b>              | # TS25.133 has to be corrected so that Maximum allowed UL TX power value 21 dBm applies only for Correct behaviour at Time-out test case, not all other Random Access test cases  |                                     |                          |                          |                                     |                                     |

### **How to create CRs using this form:**

Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>.

Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ☒ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

## 8.4.2 Random Access

### 8.4.2.1 Correct behaviour when receiving an ACK

#### 8.4.2.1.1 Definition and applicability

The random access procedure is used when establishing the layer 1 communication between the UE and UTRAN. The random access shall provide a fast access but without disturbing ongoing connections. The random access is specified in clause 6 of TS 25.214 [5] and the control of the RACH transmission is specified in clause 11.2 of TS 25.321. A random access transmit sequence is described in clause 6.7.2 of TS 25.303.

#### 8.4.2.1.2 Minimum Requirements

The UE shall have capability to calculate initial power according to the open loop algorithm and apply this power level at the first preamble and increase the power on additional preambles. The absolute power applied to the first preamble shall have an accuracy as specified in table 6.3 of TS 25.101 [1]. The relative power applied to additional preambles shall have an accuracy as specified in clause 6.5.2.1 of 25.101 [1].

The absolute power applied to the first preamble shall be -30 dBm with an accuracy as specified in clause 6.4.1.1 of TS 25.101 [1]. The accuracy is  $\pm 9$ dB in the case of normal condition or  $\pm 12$ dB in the case of extreme condition.

There are two relative powers, one is the power difference for preamble ramping and another is the power difference between last preamble part and message part. From the test parameter in the table 8.4.2.1.2, the test requirement of the power difference for all preamble ramping is 3dB (Power offset P<sub>0</sub>). The accuracy is  $\pm 2$  dB as specified in clause 6.5.2.1 of 25.101 [1]. The test requirement of the power difference between 10th preamble PRACH and message part is [3 dB] (note). The accuracy is [ $\pm 2$  dB] as specified in clause 6.5.2.1 of 25.101 [1].

NOTE: In order to calculate the power difference between 10th preamble PRACH and message part by using Power offset P<sub>p-m</sub> in the table 8.4.2.1.2, the gain factors of PRACH message part are needed. The gain factor  $\beta_d$  is set to 15. The [temporary] gain factor  $\beta_c$  is set to [15].

The UE shall stop transmitting preambles upon a ACK on the AICH has been received and then transmit a message. The UE shall transmit 10 preambles and 1 message.

The normative reference for this requirements is TS 25.133 [2] clauses 6.3.2 and A.6.2.2.1.

#### 8.4.2.1.3 Test purpose

The purpose of this test is to verify that the behaviour of the random access procedure is according to the requirements and that the PRACH power settings are within specified limits.

#### 8.4.2.1.4 Method of test

##### 8.4.2.1.4.1 Initial conditions

Test environment: normal, TL/VL, TL/VH, TH/VL, TH/VH; see clauses G.2.1 and G.2.2.

Frequencies to be tested: mid range; see clause G.2.4.

- 1) Connect the SS to the UE antenna connector as shown in figure A.1 in the case of the PRACH power measurement. And in the case of the function test of the random access procedure, connect the SS to the UE antenna connector as shown in figure A.8. A spectrum analyzer is set to 0 span mode.
- 2) A call is set up according to the Generic call setup procedure. The test parameters are set up according to table 8.4.2.1.1, table 8.4.2.1.2 and table 8.4.2.1.3. The PRACH procedure within the call setup is used for the test. It is necessary that an ACK on the AICH shall be transmitted after 10 preambles have been received by the SS

See TS 34.108 [3] for details regarding generic call setup procedure.

**Table 8.4.2.1.1: RF Parameters for Random Access test**

| Parameter  | Unit             | Cell 1    |
|--|------------------|-----------|
| UTRA RF Channel Number                             |                  | Channel 1 |
| CPICH_Ec/lor                                       | dB               | -10       |
| PCCPCH_Ec/lor                                      | dB               | -12       |
| SCH_Ec/lor   | dB               | -12       |
| Number of other transmitted Acquisition Indicators | -                | 0         |
| AICH_Ec/lor  | dB               | -10       |
| PICH_Ec/lor  | dB               | -15       |
| OCNS_Ec/lor when an AI is not transmitted          | dB               | -0,941    |
| OCNS_Ec/lor when an AI is transmitted              | dB               | -1,516    |
| $\hat{I}_{or}/I_{oc}$                              | dB               | 0         |
| $I_{oc}$   | dBm/3.<br>84 MHz | -70       |
| CPICH_Ec/lo  | dB               | -13       |
| Propagation Condition                              |                  | AWGN      |

The test parameters "System Information Block (SIB) type 5 (ASC #0)" defined in clause 6.1 of TS 34.108 [3], shall be used in all random access tests (see note). Crucial parameters for the test requirements are repeated in tables 8.4.2.1.2 and A.8.4.3.1.3 and these overrule the parameters defined in SIB type 5.

NOTE: A parameter of AC-to-ASC mapping(AC0-9) in SIB5 of clause 6.1 of TS 34.108 [3] shall be set to 0 in the case of all random access tests. The EFACC of Type A, which is specified in clause 8.3.2.15 of TS 34.108 [3], shall be selected.

**Table 8.4.2.1.2: UE parameters for Random Access test**

| Parameter   | Unit       | Value     |
|---|------------|-----------|
| Access Service Class (ASC#0)  |            |           |
| - Persistence value   | 0..1       | 1         |
| Maximum number of preamble ramping cycles ( $M_{max}$ ).  |            | 2         |
| Maximum number of preambles in one preamble ramping cycle (Preamble Retrans Max)                            |            | 12        |
| The backoff time $T_{B01}$<br>$N_{B01min}=N_{B01max}$   | ms<br>#TTI | N/A<br>10 |
| Power step when no acquisition indicator is received (Power offset P0)                                      | dB         | 3         |
| Power offset between the last transmitted preamble and the control part of the message (Power offset P p-m) | dB         | 0         |
| Maximum allowed UL TX power   | dBm        | 0         |

**Table 8.4.2.1.3: SS parameters for Random Access test**

| Parameter                                       | Unit | Value |
|---|------|-------|
| Primary CPICH DL TX power                       | dBm  | -8    |
| UL interference                                 | dBm  | -102  |
| SIR in open loop power control (Constant value) | dB   | 0     |
| AICH Power Offset                               | dB   | 0     |

#### 8.4.2.1.4.2 Procedure

- 1) Set the TX output level of the SS to obtain  $\hat{I}_{or}$  at the UE antenna connector.  $\hat{I}_{or}$  shall be according to table 8.4.2.1.1.
- 2) Measure the first PRACH preamble output power, the each power difference for preamble ramping and the power difference between 10<sup>th</sup> preamble PRACH and message part of the UE according to annex B.
- 3) Measure the number of the preamble part and the message part by using a spectrum analyzer.

#### 8.4.2.1.5 Test requirements

The absolute power and the relative power shall meet the requirements in the minimum requirements in clause 8.4.2.1.2. The accuracy of the first preamble as specified in clause 6.4.1.1 of TS 25.101 [1] shall not be verified in this test. It is verified under the section 5.4.1, Open loop power control.

The UE shall stop transmitting preambles upon a ACK on the AICH has been received and then transmit a message. The UE shall transmit 10 preambles and 1 message.

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test is defined in clause F.2 and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in clause F.4.

### 8.4.2.2 Correct behaviour when receiving an NACK

#### 8.4.2.2.1 Definition and applicability

The random access procedure is used when establishing the layer 1 communication between the UE and UTRAN. The random access shall provide a fast access but without disturbing ongoing connections. The random access is specified in clause 6 of TS 25.214 and the control of the RACH transmission is specified in clause 11.2 of TS 25.321. A random access transmit sequence is described in clause 6.7.2 of TS 25.303.

#### 8.4.2.2.2 Minimum Requirements

The UE shall stop transmitting preambles upon a NACK on the AICH has been received and then repeat the ramping procedure when the back off timer  $T_{B01}$  expires.

The UE shall transmit 10 preambles in the first ramping cycle and no transmission shall be done by the UE within 100 ms after the NACK has been transmitted by the SS. Then the UE shall start the second preamble ramping cycle.

The normative reference for this requirements is TS 25.133 [2] clauses 6.3.2 and A.6.2.2.2.

#### 8.4.2.2.3 Test purpose

The purpose of this test is to verify that the behaviour of the random access procedure is according to the requirements.

#### 8.4.2.2.4 Method of test

##### 8.4.2.2.4.1 Initial conditions

Test environment: normal, TL/VL, TL/VH, TH/VL, TH/VH; see clauses G.2.1 and G.2.2.

Frequencies to be tested: mid range; see clause G.2.4.

- 1) Connect the SS to the UE antenna connector as shown in figure A.8. A spectrum analyzer is set to 0 span mode.
- 2) A call is set up according to the Generic call setup procedure. The test parameters are set up according to table 8.4.2.1.1, table 8.4.2.1.2 and table 8.4.2.1.3. The PRACH procedure within the call setup is used for the test. It is necessary that a NACK on the AICH shall be transmitted after 10 preambles have been received by the SS.

See TS 34.108 [3] for details regarding generic call setup procedure.

#### 8.4.2.2.4.2 Procedure

- 1) Set the TX output level of the SS to obtain  $\hat{I}_{Or}$  at the UE antenna connector.  $\hat{I}_{Or}$  shall be according to table 8.4.2.1.1.
- 2) Measure the number of the preamble part and the time delay between 10th preamble in the first ramping cycle and first preamble in the second ramping cycle by using a spectrum analyzer.

#### 8.4.2.2.5 Test requirements

The UE shall stop transmitting preambles upon a NACK on the AICH has been received and then repeat the ramping procedure when the back off timer  $T_{B01}$  expires.

The UE shall transmit 10 preambles in the first ramping cycle and no transmission shall be done by the UE within 100 ms after the NACK has been transmitted by the SS. Then the UE shall start the second preamble ramping cycle.

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test is defined in clause F.2 and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in clause F.4.

### 8.4.2.3 Correct behaviour at Time-out

#### 8.4.2.3.1 Definition and applicability

The random access procedure is used when establishing the layer 1 communication between the UE and UTRAN. The random access shall provide a fast access but without disturbing ongoing connections. The random access is specified in clause 6 of TS 25.214 and the control of the RACH transmission is specified in clause 11.2 of TS 25.321. A random access transmit sequence is described in clause 6.7.2 of TS 25.303.

#### 8.4.2.3.2 Minimum Requirements

The UE shall stop transmit preambles when reaching the maximum number of preambles allowed in a cycle. The UE shall then repeat the ramping procedure until the maximum number of preamble ramping cycles are reached. No ACK/NACK shall be sent by SS during this test.

The UE shall transmit 2 preambles cycles, consisting of 12 preambles in each preamble cycle.

The normative reference for this requirements is TS 25.133 [2] clauses 6.3.2 and A.6.2.2.3.

#### 8.4.2.3.3 Test purpose

The purpose of this test is to verify that the behaviour of the random access procedure is according to the requirements.

#### 8.4.2.3.4 Method of test

##### 8.4.2.3.4.1 Initial conditions

Test environment: normal, TL/VL, TL/VH, TH/VL, TH/VH; see clauses G.2.1 and G.2.2.

Frequencies to be tested: mid range; see clause G.2.4.

- 1) Connect the SS to the UE antenna connector as shown in figure A.8. A spectrum analyzer is set to 0 span mode.
- 2) A call is set up according to the Generic call setup procedure. The test parameters are set up according to table 8.4.2.1.1, table 8.4.2.1.3 and table 8.4.2.1.4. The PRACH procedure within the call setup is used for the test. It is necessary that SS shall transmit no AICH.

See TS 34.108 [3] for details regarding generic call setup procedure.

**Table 8.4.2.1.4: UE parameters for correct behaviour at Time-out test**

| Parameter   | Unit       | Value            |
|---|------------|------------------|
| Access Service Class (ASC#0)<br>- Persistence value   | 0..1       | 1                |
| Maximum number of preamble ramping cycles ( $M_{max}$ ).  |            | 2                |
| Maximum number of preambles in one preamble ramping cycle (Preamble Retrans Max)  |            | 12               |
| The backoff time $T_{B01}$<br>$N_{B01min}=N_{B01max}$   | ms<br>#TTI | N/A<br>10        |
| Power step when no acquisition indicator is received (Power offset P0)  | dB         | 3                |
| Power offset between the last transmitted preamble and the control part of the message (Power offset P <sub>p-m</sub> ) | dB         | 0                |
| Maximum allowed UL TX power   | dBm        | <del>33</del> 21 |

#### 8.4.2.3.4.2 Procedure

- 1) Set the TX output level of the SS to obtain  $\hat{I}_{Or}$  at the UE antenna connector.  $\hat{I}_{Or}$  shall be according to table 8.4.2.1.1.
- 2) Measure the number of the preamble part by using a spectrum analyzer.

#### 8.4.2.3.5 Test requirements

The UE shall stop transmit preambles when reaching the maximum number of preambles allowed in a cycle. The UE shall then repeat the ramping procedure until the maximum number of preamble ramping cycles are reached. No ACK/NACK shall be sent by SS during this test.

The UE shall transmit 2 preambles cycles, consisting of 12 preambles in each preamble cycle.

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test is defined in clause F.2 and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in clause F.4.

### 8.4.2.4 Correct behaviour when reaching maximum transmit power

#### 8.4.2.4.1 Definition and applicability

The random access procedure is used when establishing the layer 1 communication between the UE and UTRAN. The random access shall provide a fast access but without disturbing ongoing connections. The random access is specified in clause 6 of TS 25.214 and the control of the RACH transmission is specified in clause 11.2 of TS 25.321. A random access transmit sequence is described in clause 6.7.2 of TS 25.303.



#### 8.4.2.4.2 Minimum Requirements

The UE shall not exceed the maximum allowed UL TX power configured by the SS. No ACK/NACK shall be sent by SS during this test.

The absolute power of any preambles belonging to the first or second preamble cycle shall not exceed 0 dBm with more than specified in section 6.5 of TS 25.133.

The normative reference for this requirements is TS 25.133 [2] clauses 6.3.2 and A.6.2.2.4.

#### 8.4.2.4.3 Test purpose

The purpose of this test is to verify that the PRACH power settings are within specified limits.

#### 8.4.2.4.4 Method of test

##### 8.4.2.4.4.1 Initial condition

Test environment: normal, TL/VL, TL/VH, TH/VL, TH/VH; see clauses G.2.1 and G.2.2.

Frequencies to be tested: mid range; see clause G.2.4.

- 1) Connect the SS to the UE antenna connector as shown in figure A.1.
- 2) A call is set up according to the Generic call setup procedure. The test parameters are set up according to table 8.4.2.1.1, table 8.4.2.1.2 and table 8.4.2.1.3. The PRACH procedure within the call setup is used for the test. It is necessary that SS shall transmit no AICH.

See TS 34.108 [3] for details regarding generic call setup procedure.

##### 8.4.2.4.4.2 Procedure

- 1) Set the TX output level of the SS to obtain  $\hat{I}_{or}$  at the UE antenna connector.  $\hat{I}_{or}$  shall be according to table 8.4.2.1.1.
- 2) Measure the all PRACH preamble output power of the UE according to annex B.

#### 8.4.2.4.5 Test requirements

The UE shall not exceed the maximum allowed UL TX power configured by the SS. No ACK/NACK shall be sent by SS during this test.

The absolute power of any preambles belonging to the first or second preamble cycle shall not exceed 0 dBm with more than the tolerance specified in section 6.5 of TS 25.133.

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test is defined in clause F.2 and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in clause F.4.

CR-Form-v7

## CHANGE REQUEST

№ **34.121 CR 240** № rev - № Current version: **3.11.0** №

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the № symbols.

**Proposed change affects:** UICC apps №  ME  Radio Access Network  Core Network

|                        |   |                 |   |
|------------------------|---|-----------------|---|
| <b>Title:</b>          | № Correction of Out-of-synchronisation handling of output power test case   |                 |   |
| <b>Source:</b>         | № T1/RF   |                 |   |
| <b>Work item code:</b> | №   | <b>Date:</b>    | № 12/02/2003  |
| <b>Category:</b>       | № <b>F</b>  | <b>Release:</b> | № R99   |
|                        | Use <u>one</u> of the following categories:<br><b>F</b> (correction)<br><b>A</b> (corresponds to a correction in an earlier release)<br><b>B</b> (addition of feature),<br><b>C</b> (functional modification of feature)<br><b>D</b> (editorial modification)<br>Detailed explanations of the above categories can be found in 3GPP <a href="#">TR 21.900</a> . |                 | Use <u>one</u> of the following releases:<br>2 (GSM Phase 2)<br>R96 (Release 1996)<br>R97 (Release 1997)<br>R98 (Release 1998)<br>R99 (Release 1999)<br>Rel-4 (Release 4)<br>Rel-5 (Release 5)<br>Rel-6 (Release 6) |

|                                      |  |  |  |
|--------------------------------------|--|--|--|
| <b>Reason for change:</b>            | № Table 5.4.4.1 contains numbered note, but Note 1 does not exist in this subclause. |  |  |
| <b>Summary of change:</b>            | № Reference to note 1 is replaced by reference to note in clause 5.4.4.3             |  |  |
| <b>Consequences if not approved:</b> | № Incorrect reference in table 5.4.4.1 might be misleading                           |  |  |

|                              |  |                     |   |   |  |   |  |   |  |                           |   |
|------------------------------|--|---------------------|---|---|--|---|--|---|--|---------------------------|---|
| <b>Clauses affected:</b>     | № 5.4.4  |                     |   |   |  |   |  |   |  |                           |   |
| <b>Other specs affected:</b> | <table border="1" style="display: inline-table; border-collapse: collapse;"> <tr> <td style="padding: 2px;">Y</td> <td style="padding: 2px;">N</td> </tr> <tr> <td style="text-align: center; padding: 2px;">X</td> <td style="padding: 2px;"></td> </tr> <tr> <td style="text-align: center; padding: 2px;">X</td> <td style="padding: 2px;"></td> </tr> <tr> <td style="text-align: center; padding: 2px;">X</td> <td style="padding: 2px;"></td> </tr> </table> | Y                   | N | X |  | X |  | X |  | Other core specifications | № |
|                              | Y  | N                   |   |   |  |   |  |   |  |                           |   |
|                              | X  |                     |   |   |  |   |  |   |  |                           |   |
| X                            |  |                     |   |   |  |   |  |   |  |                           |   |
| X                            |  |                     |   |   |  |   |  |   |  |                           |   |
|                              |  | Test specifications |   |   |  |   |  |   |  |                           |   |
|                              |  | O&M Specifications  |   |   |  |   |  |   |  |                           |   |
| <b>Other comments:</b>       | №  |                     |   |   |  |   |  |   |  |                           |   |

### How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked № contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/>. For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

## 5.4.4 Out-of-synchronisation handling of output power

### 5.4.4.1 Definition and applicability

The UE shall monitor the DPCCH quality in order to detect a loss of the signal on Layer 1, as specified in TS 25.214 [5]. The thresholds  $Q_{out}$  and  $Q_{in}$  specify at what DPCCH quality levels the UE shall shut its power off and when it shall turn its power on respectively. The thresholds are not defined explicitly, but are defined by the conditions under which the UE shall shut its transmitter off and turn it on, as stated in this clause.

The DPCCH quality shall be monitored in the UE and compared to the thresholds  $Q_{out}$  and  $Q_{in}$  for the purpose of monitoring synchronization. The threshold  $Q_{out}$  should correspond to a level of DPCCH quality where no reliable detection of the TPC commands transmitted on the downlink DPCCH can be made. This can be at a TPC command error ratio level of e.g. 30%. The threshold  $Q_{in}$  should correspond to a level of DPCCH quality where detection of the TPC commands transmitted on the downlink DPCCH is significantly more reliable than at  $Q_{out}$ . This can be at a TPC command error ratio level of e.g. 20%.

The requirements and this test apply to all types of UTRA for the FDD UE.

### 5.4.4.2 Minimum Requirements

When the UE estimates the DPCCH quality over the last 160 ms period to be worse than a threshold  $Q_{out}$ , the UE shall shut its transmitter off within 40 ms. The UE shall not turn its transmitter on again until the DPCCH quality exceeds an acceptable level  $Q_{in}$ . When the UE estimates the DPCCH quality over the last 160 ms period to be better than a threshold  $Q_{in}$ , the UE shall again turn its transmitter on within 40 ms.

The UE transmitter shall be considered "off" if the transmitted power is below the level defined in subclause 6.5.1 (Transmit off power). Otherwise the transmitter shall be considered as "on".

The normative reference for this requirement is TS 25.101 [1] clause 6.4.4.1.

The quality levels at the thresholds  $Q_{out}$  and  $Q_{in}$  correspond to different signal levels depending on the downlink conditions DCH parameters. For the conditions in table 5.4.4.1, a signal with the quality at the level  $Q_{out}$  can be generated by a  $DPCCH_{Ec}/I_{or}$  ratio of  $-25$  dB, and a signal with  $Q_{in}$  by a  $DPCCH_{Ec}/I_{or}$  ratio of  $-21$  dB. The DL reference measurement channel (12.2) kbps specified in subclause C.3.1 and with static propagation conditions. The downlink physical channels, other than those specified in table 5.4.4.1, are as specified in table E.3.3 of Annex E.


**Table 5.4.4.1: DCH parameters for test of Out-of-synch handling test case**

| Parameter                   | Value  | Unit           |
|-----------------------------|--|----------------|
| $\hat{I}_{or}/I_{oc}$       | -1   | dB             |
| $I_{oc}$                    | -60  | dBm / 3,84 MHz |
| $\frac{DPDCH_{Ec}}{I_{or}}$ | See Figure 5.4.4.1: Before point A -16,6<br>After point A Not defined.<br><a href="#">See note in clause 5.4.4.3</a> <sup>†)</sup> | dB             |
| $\frac{DPCCH_{Ec}}{I_{or}}$ | See table 5.4.4.2  | dB             |
| Information Data Rate       | 12,2   | kbps           |

**Table 5.4.4.2: Minimum Requirements for DPCCH\_Ec/Ior levels**

| Clause from figure 5.4.4.1 | DPCCH_Ec/Ior | Unit |
|----------------------------|--------------|------|
| Before A                   | -16,6        | dB   |
| A to B                     | -22,0        | dB   |
| B to D                     | -28,0        | dB   |
| D to E                     | -24,0        | dB   |
| After E                    | -18,0        | dB   |

Figure 5.4.4.1 shows an example scenario where the DPCCH\_Ec/Ior ratio varies from a level where the DPCH is demodulated under normal conditions, down to a level below  $Q_{out}$  where the UE shall shut its power off and then back up to a level above  $Q_{in}$  where the UE shall turn the power back on.

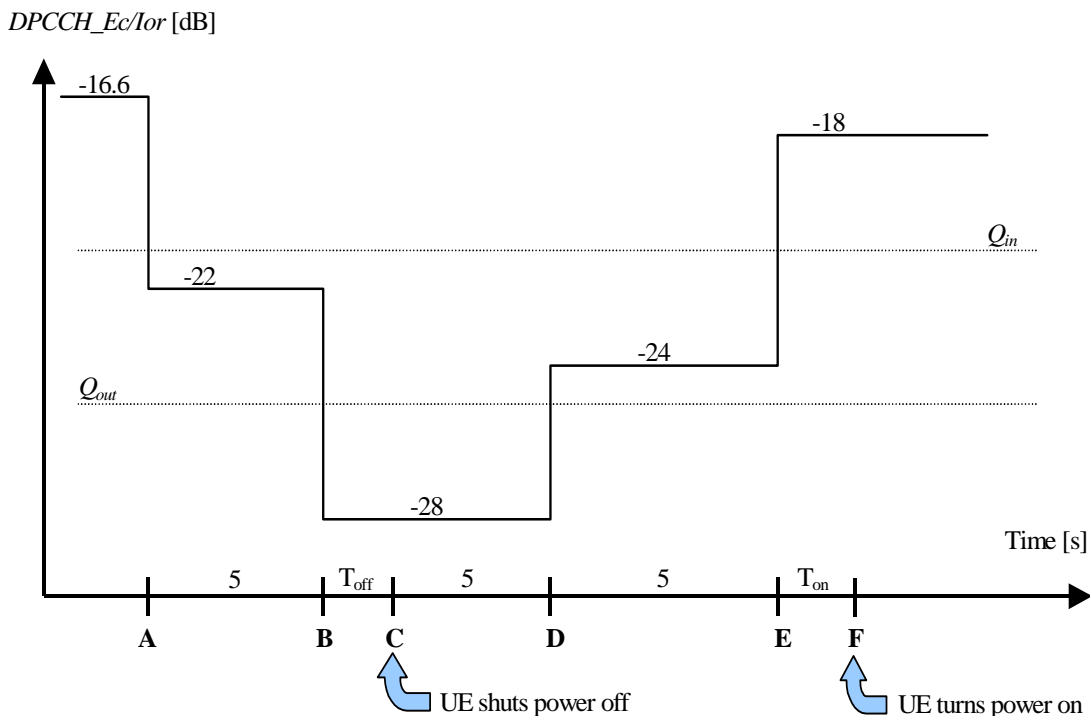

**Figure 5.4.4.1: Test case for out-of-synch handling in the UE.**

In this test case, the requirements for the UE are that:

1. The UE shall not shut its transmitter off before point B.
2. The UE shall shut its transmitter off before point C, which is  $T_{off} = 200$  ms after point B.
3. The UE shall not turn its transmitter on between points C and E.
4. The UE shall turn its transmitter on before point F, which is  $T_{on} = 200$  ms after point E.

The reference for this test case is TS 25.101 [1] clause 6.4.4.2.

### 5.4.4.3 Test purpose

To verify that the UE monitors the DPCCH quality and turns its transmitter on or off according to DPCCH level diagram specified in figure 5.4.4.1.

NOTE:  $DPDCH_{Ec/Ior}$  after point A is not defined in table 5.4.4.1. However it is assumed that DPDCH and DPCCH power level are same on DL 12,2 kbps reference measurement channel for testing. (PO1, PO2, and PO3 are zero.)

## CHANGE REQUEST

# **34.121 CR 241** # rev **-** # Current version: **3.11.0** #

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the # symbols.

**Proposed change affects:** UICC apps  ME  Radio Access Network  Core Network

|                        |   |                 |   |
|------------------------|---|-----------------|---|
| <b>Title:</b>          | # Removal of uplink dummy DCCH transmission function in UE  |                 |   |
| <b>Source:</b>         | # Rohde & Schwarz , Panasonic   |                 |   |
| <b>Work item code:</b> | # TEI   | <b>Date:</b>    | # 7 Feb 2003  |
| <b>Category:</b>       | # <b>F</b>  | <b>Release:</b> | # R99   |
|                        | <i>Use one of the following categories:</i><br><b>F</b> (correction)<br><b>A</b> (corresponds to a correction in an earlier release)<br><b>B</b> (addition of feature),<br><b>C</b> (functional modification of feature)<br><b>D</b> (editorial modification)<br>Detailed explanations of the above categories can be found in 3GPP <a href="#">TR 21.900</a> . |                 | <i>Use one of the following releases:</i><br>2 (GSM Phase 2)<br>R96 (Release 1996)<br>R97 (Release 1997)<br>R98 (Release 1998)<br>R99 (Release 1999)<br>Rel-4 (Release 4)<br>Rel-5 (Release 5)<br>Rel-6 (Release 6) |

|                           |  |
|---------------------------|--|
| <b>Reason for change:</b> | # 1) Removal of dummy DCCH transmission<br><br>In UE Tx conformance testing , the normal test condition is that the UE transmission power is set to the maximum power based on the control of the TPC command from the SS using reference measurement channel as defined in TS34.121.<br><br>The transmission data on radio access bearer from UE is sent back to SS continuously because SS continuously transmits data on radio access bearer and test control of UE is indicated to activate the loopback scheme.<br><br>Allocated TFCs are below for reference measurement channel.<br><br>(TFs of DCH for DCCH, TFs of DCH for DTCH)<br><br>TFC0 = ( non DCH for DCCH, non DCH for DTCH)<br><br>TFC1 = ( DCH for DCCH, non DCH for DTCH)<br><br>TFC2 = ( non DCH for DCCH, DCH for DTCH)<br><br>TFC3 = (DCH for DCCH, DCH for DTCH)<br><br>The purpose of the transmission of the dummy DCCH was to force the UE to use TFC3. However TFC3 can be blocked by MAC as TFC3 is not belonging to the minimum set of TFCs with the above configuration. Instead, the UE can use TFC2 continuously in order to keep maximum output power in UL .It is proposed to remove the dummy DCCH transmission, which is thought redundant now. |
|---------------------------|--|

2) Addition of AM for reference measurement channel

In order to achieve BLER measurement using RLC acknowledged mode, AM configuration is added into the current channel definition.

3) Alignment between DL and UL configuration.

The DL reference channel configuration is aligned with UL configuration.

4) Addition of TFCS definition

There are no TFCS definition and the TFCs that are belonging to minimum set of TFCs are not highlighted.

5) Addition of reference measurement channel configuration for BTFD

The UL and DL reference channel configuration for BTFD is aligned according to the above configuration

#### **Revision of T1R030007**

6) UE RLC configuration of DCH for AM DCCH

It is needed to define the RLC configuration for AM DCCHs to be highlighted as unexpected DCHs are not transmitted during the test in order to keep the transmission power as constant.

#### **Revision of T1R030053**

7) Reference measurement channel for BTFD performance requirements

It is needed that one DTCH only is configured simultaneously.

8) Operating RMCs exclusively with test loop 1 bears some drawbacks:

BLER tests by AckNack: Higher layer functionality and RF performance are mixed.

BER tests in "TM with no erroneous block delivery" are not possible.

Test loop 2 does not have drawbacks like this.

**Summary of change: ⌘** 1) It is proposed that uplink dummy DCCH function is removed.

2) AM configuration is added.

3) DL reference measurement channel configuration is modified so that detailed configuration can be found.

4) TFCS tables are added into each UL and DL channel configuration.

5) Configuration of reference measurement channel for BTFD is added.

#### **Revision of T1R030007**

6) The following sentences are added as Timer\_STATUS\_periodic should be not present in IE "Downlink RLC STAUS Info" in RRC CONNECTION SETUP message.

For the RLC configuration of AM DCCHs Timer\_STATUS\_Periodic shall not be set in RRC CONNECTION SETUP message used in test procedure for RF test as defined in TS34.108 clause 7.3. This is to prevent unexpected DCHs from being transmitted through such RLC entities when the timer has expired in order to sure that the required TFC from the minimum set of TFCs can continuously convey a DCH for DTCH during the test.

Reference to clause 9.5 of TS25.322

Timer\_Status\_Periodic.

This timer shall only be used when timer based status reporting is configured by upper layers.

This timer shall be started when the RLC entity is created. When the timer expires the transmission of a status report shall be triggered and the timer shall be restarted. This timer can be blocked by upper layers. The timer shall be restarted when upper layers indicate that it is no longer blocked.

**Revision of T1R030053**

7) Reference measurement channel for BTFD performance requirements

Table C.4.1.3, C.4.1.4, C.4.2.3, and C.4.2.4 are modified..

8) Loopback mode 1 is replaced by loopback mode 2 in annex c

**Consequences if not approved:**

⌘ Ambiguity is remained in test method since unnecessary function may be selected.

**Clauses affected:**

⌘ Clause C.2.1, C.2.2, C.2.3, C.2.4, C.2.5, C.3.1, C.3.2, C.3.3, C.3.4, C.4.1, C.4.2

**Other specs affected:**

|   |   |   |                           |            |
|---|---|---|---------------------------|------------|
|   | Y | N |                           |            |
| ⌘ | X |   | Other core specifications | ⌘ TS34.109 |
|   |   | X | Test specifications       |            |
|   |   | X | O&M Specifications        |            |

**Other comments:**

⌘

**How to create CRs using this form:**

Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

&lt; Start of modification &gt;

---

## Annex C (normative): Measurement channels

### C.1 General

The measurement channels in this annex are defined to derive the requirements in clauses 5, 6 and 7. The measurement channels represent example configuration of radio access bearers for different data rates.

The measurement channel for 12,2 kbps shall be supported by any UE both in up- and downlink. Support for other measurement channels is depending on the UE Radio Access capabilities.

---

### C.2 UL reference measurement channel

#### C.2.1 UL reference measurement channel (12,2 kbps)

The parameters for the 12,2 kbps UL reference measurement channel are specified in table C.2.1.1, [table C.2.1.2](#), [table C.2.1.3](#) and [table C.2.1.24](#). The channel coding for information is shown in figure C.2.1. When the UE test loop function is needed, the UE test loop mode [1-2](#) shall be used ~~and uplink dummy DCCH shall be disabled. The uplink dummy DCCH may be used in the UE transmitter tests in Section 5.~~

**Table C.2.1.1: UL reference measurement channel physical parameters (12,2 kbps)**

| Parameter               | Level  | Unit |
|-------------------------|--|------|
| Information bit rate    | 12,2   | kbps |
| DPDCH                   | 60   | kbps |
| DPCCH                   | 15   | kbps |
| DPCCH Slot Format #i    | 0  | -    |
| DPCCH/DPDCH power ratio | -5,46  | dB   |
| TFCI                    | On   | -    |
| Repetition              | 23   | %    |
| NOTE:                   | Slot Format #2 is used for closed loop tests in clause 7.6.2. Slot Format #2 and #5 are used for site selection diversity transmission tests in subclause 7.6.3. |      |



**Table C.2.1.2: UL reference measurement channel using RLC-TM for DTCH, transport channel parameters (12.2 kbps)**

| Higher Layer | RAB/Signalling RB   | RAB                | SRB                              |       |
|--------------|---|--------------------|----------------------------------|-------|
| RLC          | Logical channel type  | DTCH               | DCCH                             |       |
|              | RLC mode  | TM                 | UM/AM                            |       |
|              | Payload sizes, bit  | 244                | 88/80                            |       |
|              | Max data rate, bps  | 12200              | <u>2200/2000</u> <del>3400</del> |       |
|              | PDU header, bit   | N/A                | 8/16                             |       |
|              | TrD PDU header, bit   | 0                  | N/A                              |       |
| MAC          | MAC header, bit   | 0                  | 4                                |       |
|              | MAC multiplexing  | N/A                | Yes                              |       |
| Layer 1      | TrCH type   | DCH                | DCH                              |       |
|              | Transport Channel <del>Number</del> Identity                | 1                  | <u>2</u> <del>5</del>            |       |
|              | TB sizes, bit   | 244                | 100                              |       |
|              | TFS   | TF0, bits          | 0*244                            | 0*100 |
|              |   | TF1, bits          | 1*244                            | 1*100 |
|              | TTI, ms   | 20                 | 40                               |       |
|              | Coding type   | Convolution Coding | Convolution Coding               |       |
|              | Coding Rate   | 1/3                | 1/3                              |       |
|              | CRC, bit  | 16                 | 12                               |       |
|              | Max number of bits/TTI after channel coding                 | 804                | 360                              |       |
|              | Uplink: Max number of bits/radio frame before rate matching | 402                | 90                               |       |
|              | RM attribute  | 256                | 256                              |       |

**Table C.2.1.3: UL reference measurement channel using RLC-AM for DTCH, transport channel parameters (12.2 kbps)**

| Higher Layer | RAB/Signalling RB   | RAB                       | SRB                       |              |
|--------------|---|---------------------------|---------------------------|--------------|
| RLC          | Logical channel type  | <u>DTCH</u>               | <u>DCCH</u>               |              |
|              | RLC mode  | <u>AM</u>                 | <u>UM/AM</u>              |              |
|              | Payload sizes, bit  | <u>228</u>                | <u>88/80</u>              |              |
|              | Max data rate, bps  | <u>11400</u>              | <u>2200/2000</u>          |              |
|              | PDU header, bit   | <u>16</u>                 | <u>8/16</u>               |              |
|              | TrD PDU header, bit   | <u>N/A</u>                | <u>N/A</u>                |              |
| MAC          | MAC header, bit   | <u>0</u>                  | <u>4</u>                  |              |
|              | MAC multiplexing  | <u>N/A</u>                | <u>Yes</u>                |              |
| Layer 1      | TrCH type   | <u>DCH</u>                | <u>DCH</u>                |              |
|              | Transport Channel Identity                                  | <u>1</u>                  | <u>5</u>                  |              |
|              | TB sizes, bit   | <u>244</u>                | <u>100</u>                |              |
|              | TFS   | TF0, bits                 | <u>0*244</u>              | <u>0*100</u> |
|              |   | TF1, bits                 | <u>1*244</u>              | <u>1*100</u> |
|              | TTI, ms   | <u>20</u>                 | <u>40</u>                 |              |
|              | Coding type   | <u>Convolution Coding</u> | <u>Convolution Coding</u> |              |
|              | Coding Rate   | <u>1/3</u>                | <u>1/3</u>                |              |
|              | CRC, bit  | <u>16</u>                 | <u>12</u>                 |              |
|              | Max number of bits/TTI after channel coding                 | <u>804</u>                | <u>360</u>                |              |
|              | Uplink: Max number of bits/radio frame before rate matching | <u>402</u>                | <u>90</u>                 |              |
|              | RM attribute  | <u>256</u>                | <u>256</u>                |              |

**Table C.2.1.4: UL reference measurement channel, TFCS (12.2 kbps)**

|           |   |
|-----------|---|
| TFCS size | <u>4</u>  |
| TFCS      | <u>(DTCH, DCCH)≡ (TF0, TF0), (TF1, TF0), (TF0, TF1), (TF1, TF1)</u> |

Note: The TFCs except for (TF1, TF1) are belonging to minimum set of TFCs.

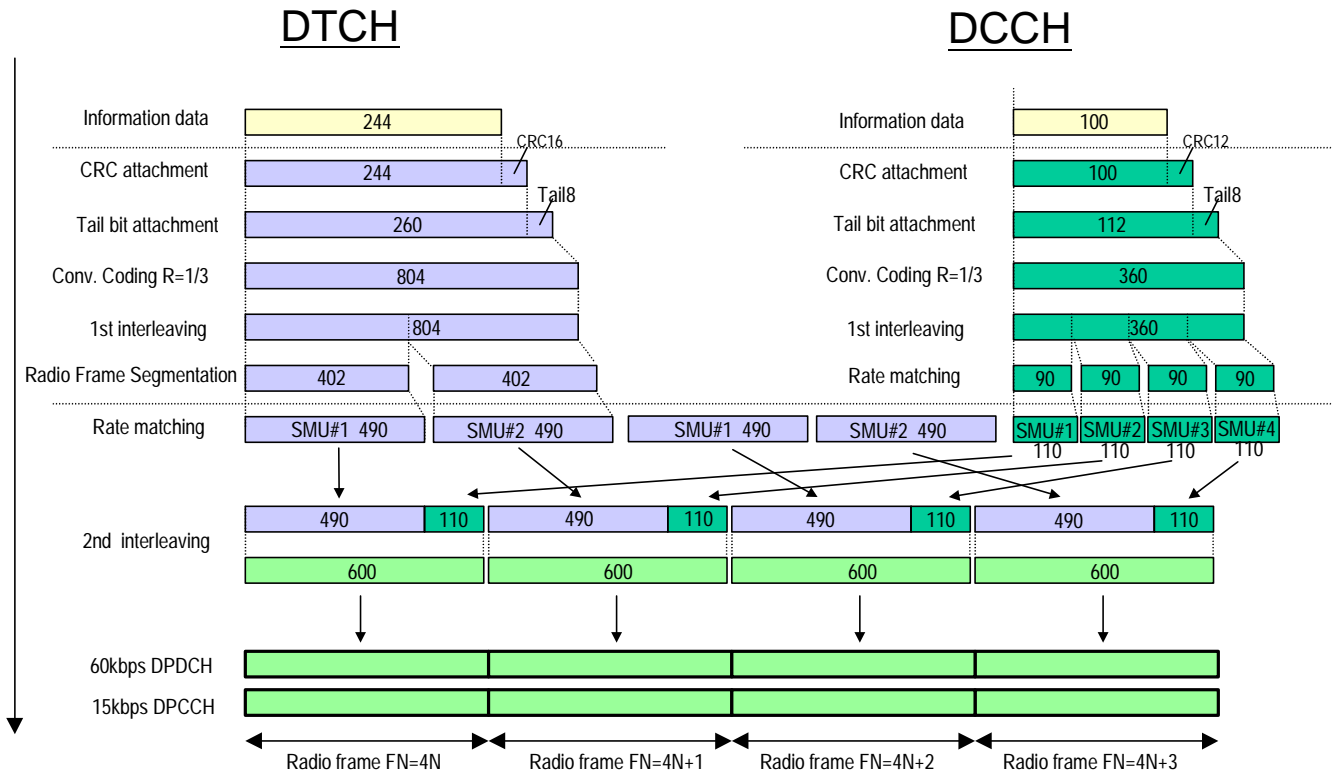


Figure C.2.1 (Informative): Channel coding of UL reference measurement channel (12,2 kbps)

## C.2.2 UL reference measurement channel (64 kbps)

The parameters for the 64 kbps UL reference measurement channel are specified in table C.2.2.1, table C.2.2.2, table C.2.2.3 and table C.2.2.4. The channel coding for information is shown in figure C.2.2. When the UE test loop function is needed, the UE test loop mode 1-2 shall be used ~~and uplink dummy DCCH shall be disabled~~. This measurement channel is not currently used in the present document but can be used for future requirements.

Table C.2.2.1: UL reference measurement channel (64 kbps)

| Parameter            | Level | Unit |
|----------------------|-------|------|
| Information bit rate | 64    | Kbps |
| DPDCH                | 240   | Kbps |
| DPCCH                | 15    | Kbps |
| DPCCH Slot Format #1 | 0     | -    |
| DPCCH/DPDCH          | -9,54 | DB   |
| TFCI                 | On    | -    |
| Repetition           | 18    | %    |

**Table C.2.2.2: UL reference measurement channel using RLC-TM for DTCH, transport channel parameters (64 kbps)**

| Higher Layer | RAB/Signalling RB   | RAB          | SRB                              |       |
|--------------|---|--------------|----------------------------------|-------|
| RLC          | Logical channel type  | DTCH         | DCCH                             |       |
|              | RLC mode  | TM           | UM/AM                            |       |
|              | Payload sizes, bit  | 1280         | 88/80                            |       |
|              | Max data rate, bps  | 64000        | <u>2200/2000</u> <del>3400</del> |       |
|              | PDU header, bit   | N/A          | 8/16                             |       |
|              | TrD PDU header, bit   | 0            | N/A                              |       |
| MAC          | MAC header, bit   | 0            | 4                                |       |
|              | MAC multiplexing  | N/A          | Yes                              |       |
| Layer 1      | TrCH type   | DCH          | DCH                              |       |
|              | Transport Channel <del>Identity</del> <u>Number</u>         | 1            | <del>2</del> <u>5</u>            |       |
|              | TB sizes, bit   | 1280         | 100                              |       |
|              | TFS   | TF0, bits    | 0*1280                           | 0*100 |
|              |   | TF1, bits    | 1*1280                           | 1*100 |
|              | TTI, ms   | 20           | 40                               |       |
|              | Coding type   | Turbo Coding | Convolution Coding               |       |
|              | Coding Rate   | N/A          | 1/3                              |       |
|              | CRC, bit  | 16           | 12                               |       |
|              | Max number of bits/TTI after channel coding                 | 3900         | 360                              |       |
|              | Uplink: Max number of bits/radio frame before rate matching | 1950         | 90                               |       |
|              | RM attribute  | 256          | 256                              |       |

**Table C.2.2.3: UL reference measurement channel using RLC-AM for DTCH, transport channel parameters (64 kbps)**

| Higher Layer | RAB/Signalling RB   | RAB                 | SRB                       |              |
|--------------|---|---------------------|---------------------------|--------------|
| RLC          | Logical channel type  | <u>DTCH</u>         | <u>DCCH</u>               |              |
|              | RLC mode  | <u>AM</u>           | <u>UM/AM</u>              |              |
|              | Payload sizes, bit  | <u>1264</u>         | <u>88/80</u>              |              |
|              | Max data rate, bps  | <u>63200</u>        | <u>2200/2000</u>          |              |
|              | PDU header, bit   | <u>16</u>           | <u>8/16</u>               |              |
|              | TrD PDU header, bit   | <u>N/A</u>          | <u>N/A</u>                |              |
| MAC          | MAC header, bit   | <u>0</u>            | <u>4</u>                  |              |
|              | MAC multiplexing  | <u>N/A</u>          | <u>Yes</u>                |              |
| Layer 1      | TrCH type   | <u>DCH</u>          | <u>DCH</u>                |              |
|              | Transport Channel Identity                                  | <u>1</u>            | <u>5</u>                  |              |
|              | TB sizes, bit   | <u>1280</u>         | <u>100</u>                |              |
|              | TFS   | TF0, bits           | <u>0*1280</u>             | <u>0*100</u> |
|              |   | TF1, bits           | <u>1*1280</u>             | <u>1*100</u> |
|              | TTI, ms   | <u>20</u>           | <u>40</u>                 |              |
|              | Coding type   | <u>Turbo Coding</u> | <u>Convolution Coding</u> |              |
|              | Coding Rate   | <u>N/A</u>          | <u>1/3</u>                |              |
|              | CRC, bit  | <u>16</u>           | <u>12</u>                 |              |
|              | Max number of bits/TTI after channel coding                 | <u>3900</u>         | <u>360</u>                |              |
|              | Uplink: Max number of bits/radio frame before rate matching | <u>1950</u>         | <u>90</u>                 |              |
|              | RM attribute  | <u>256</u>          | <u>256</u>                |              |

**Table C.2.2.4: UL reference measurement channel, TFCS (64 kbps)**

|           |   |
|-----------|---|
| TFCS size | <u>4</u>  |
| TFCS      | <u>(DTCH, DCCH)≡ (TF0, TF0), (TF1, TF0), (TF0, TF1), (TF1, TF1)</u> |

Note: The TFCs except for (TF1, TF1) are belonging to minimum set of TFCs.

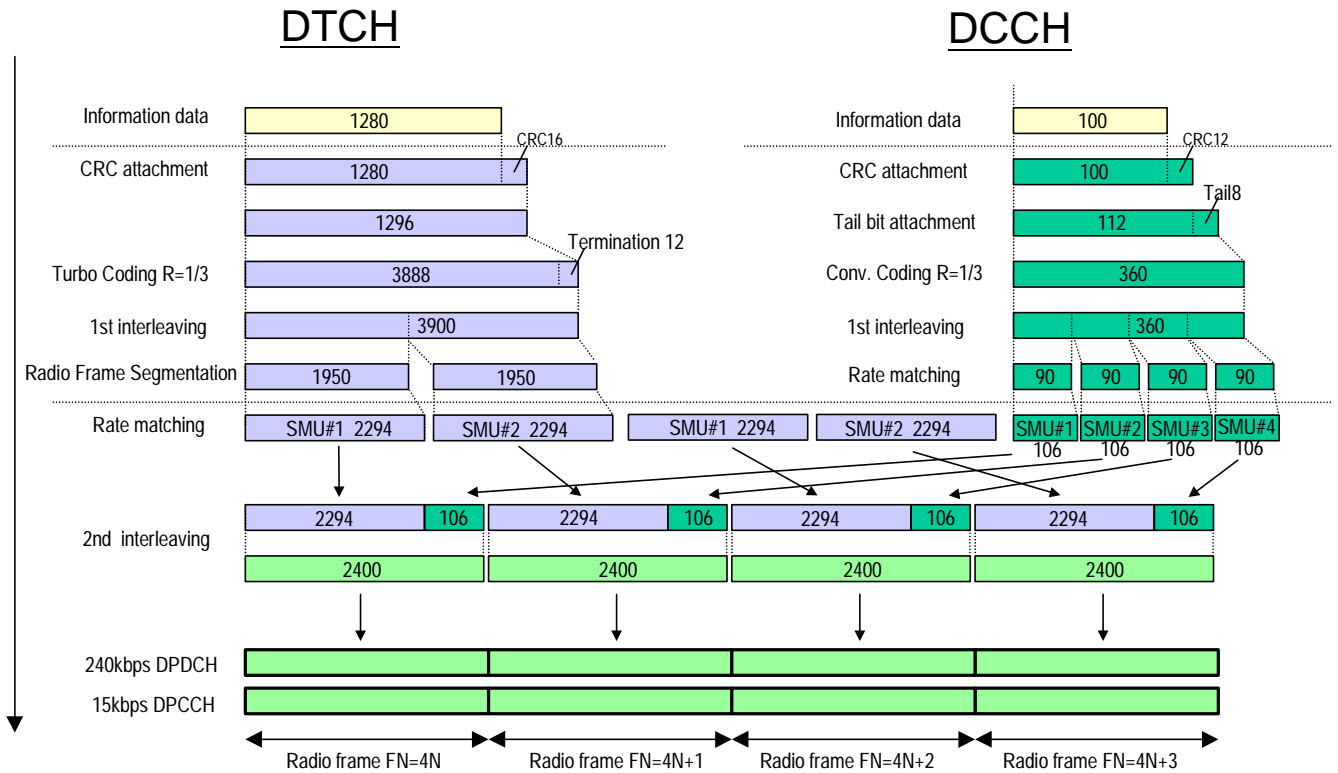


Figure C.2.2 (Informative): Channel coding of UL reference measurement channel (64 kbps)

### C.2.3 UL reference measurement channel (144 kbps)

The parameters for the 144 kbps UL reference measurement channel are specified in table C.2.3.1, [table C.2.3.2](#), [table C.2.3.3](#) and [table C.2.3.24](#). The channel coding for information is shown in figure C.2.3. When the UE test loop function is needed, the UE test loop mode [1-2](#) shall be used ~~and uplink dummy DCCH shall be disabled~~. This measurement channel is not currently used in the present document but can be used for future requirements.

Table C.2.3.1: UL reference measurement channel (144 kbps)

| Parameter               | Level  | Unit |
|-------------------------|--------|------|
| Information bit rate    | 144    | kbps |
| DPDCH                   | 480    | kbps |
| DPCCH                   | 15     | kbps |
| DPCCH Slot Format #i    | 0      | -    |
| DPCCH/DPDCH power ratio | -11,48 | dB   |
| TFCI                    | On     | -    |
| Repetition              | 8      | %    |

**Table C.2.3.2: UL reference measurement channel using RLC-TM for DTCH, transport channel parameters (144 kbps)**

| Higher Layer | RAB/Signalling RB   | RAB                  | SRB                       |       |
|--------------|---|----------------------|---------------------------|-------|
| RLC          | Logical channel type  | DTCH                 | DCCH                      |       |
|              | RLC mode  | TM                   | UM/AM                     |       |
|              | Payload sizes, bit  | <del>1280</del> 2880 | 88/80                     |       |
|              | Max data rate, bps  | 144000               | <del>2200/2000</del> 3400 |       |
|              | PDU header, bit   | N/A                  | 8/16                      |       |
|              | TrD PDU header, bit   | 0                    | N/A                       |       |
| MAC          | MAC header, bit   | 0                    | 4                         |       |
|              | MAC multiplexing  | N/A                  | Yes                       |       |
| Layer 1      | TrCH type   | DCH                  | DCH                       |       |
|              | Transport Channel <del>Number</del> Identity                | 1                    | <del>2</del> 5            |       |
|              | TB sizes, bit   | 2880                 | 100                       |       |
|              | TFS   | TF0, bits            | 0*2880                    | 0*100 |
|              |   | TF1, bits            | 1*2880                    | 1*100 |
|              | TTI, ms   | 20                   | 40                        |       |
|              | Coding type   | Turbo Coding         | Convolution Coding        |       |
|              | Coding Rate   | N/A                  | 1/3                       |       |
|              | CRC, bit  | 16                   | 12                        |       |
|              | Max number of bits/TTI after channel coding                 | 8700                 | 360                       |       |
|              | Uplink: Max number of bits/radio frame before rate matching | 4350                 | 90                        |       |
|              | RM attribute  | 256                  | 256                       |       |

**Table C.2.3.3: UL reference measurement channel using RLC-AM for DTCH, transport channel parameters (144 kbps)**

| Higher Layer | RAB/Signalling RB   | RAB          | SRB                |       |
|--------------|---|--------------|--------------------|-------|
| RLC          | Logical channel type  | DTCH         | DCCH               |       |
|              | RLC mode  | AM           | UM/AM              |       |
|              | Payload sizes, bit  | 2864         | 88/80              |       |
|              | Max data rate, bps  | 143200       | 2200/2000          |       |
|              | PDU header, bit   | 16           | 8/16               |       |
|              | TrD PDU header, bit   | N/A          | N/A                |       |
| MAC          | MAC header, bit   | 0            | 4                  |       |
|              | MAC multiplexing  | N/A          | Yes                |       |
| Layer 1      | TrCH type   | DCH          | DCH                |       |
|              | Transport Channel Identity                                  | 1            | 5                  |       |
|              | TB sizes, bit   | 2880         | 100                |       |
|              | TFS   | TF0, bits    | 0*2880             | 0*100 |
|              |   | TF1, bits    | 1*2880             | 1*100 |
|              | TTI, ms   | 20           | 40                 |       |
|              | Coding type   | Turbo Coding | Convolution Coding |       |
|              | Coding Rate   | N/A          | 1/3                |       |
|              | CRC, bit  | 16           | 12                 |       |
|              | Max number of bits/TTI after channel coding                 | 8700         | 360                |       |
|              | Uplink: Max number of bits/radio frame before rate matching | 4350         | 90                 |       |
|              | RM attribute  | 256          | 256                |       |

**Table C.2.3.4: UL reference measurement channel, TFCS (144 kbps)**

|           |   |
|-----------|---|
| TFCS size | 4   |
| TFCS      | (DTCH, DCCH)≡<br>(TF0, TF0), (TF1, TF0), (TF0, TF1), (TF1, TF1) |

Note: The TFCs except for (TF1, TF1) are belonging to minimum set of TFCs.

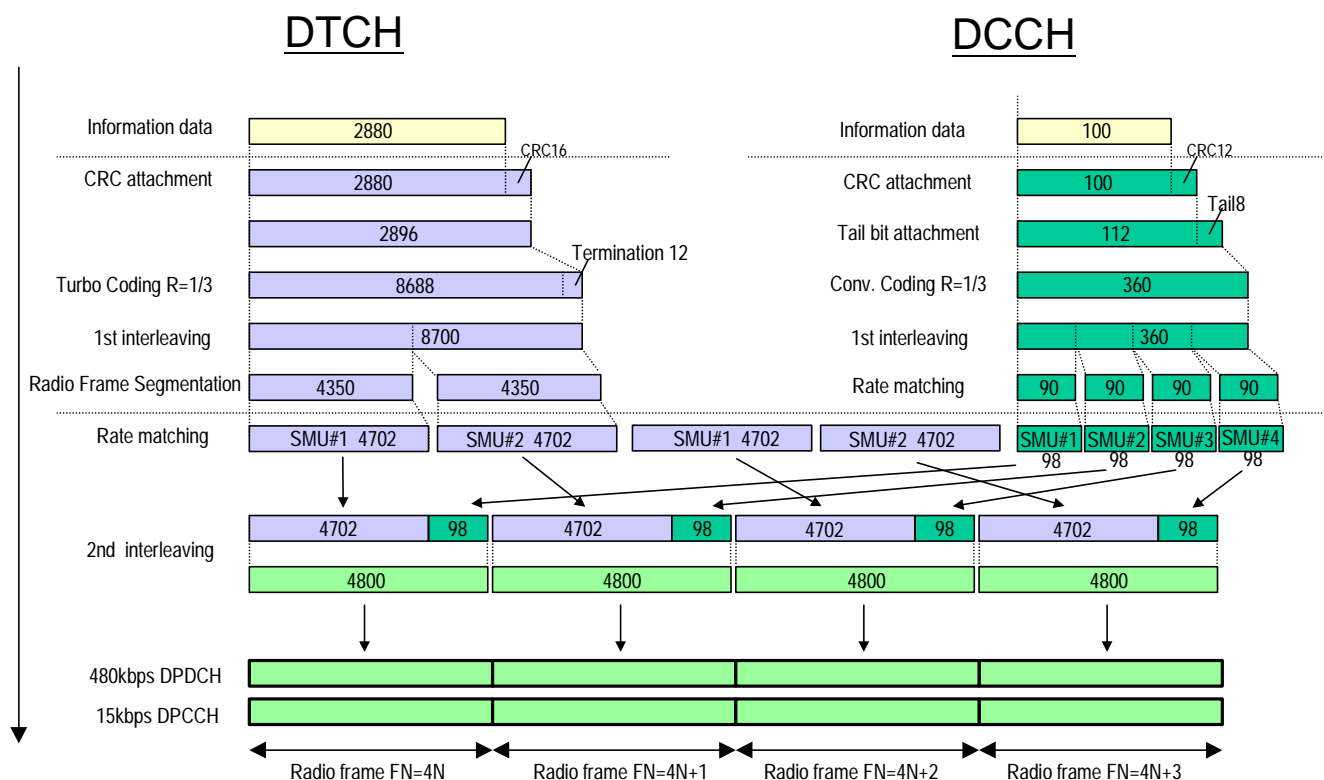


Figure C.2.3 (Informative): Channel coding of UL reference measurement channel (144 kbps)

## C.2.4 UL reference measurement channel (384 kbps)

The parameters for the 384 kbps UL reference measurement channel are specified in table C.2.4.1, table C.2.4.2, table C.2.4.3 and table C.2.4.24. The channel coding for information is shown in figure C.2.4. When the UE test loop function is needed, the UE test loop mode **+2** shall be used ~~and uplink dummy DCCH shall be disabled~~. This measurement channel is not currently used in the present document but can be used for future requirements.

Table C.2.4.1: UL reference measurement channel (384 kbps)

| Parameter               | Level  | Unit |
|-------------------------|--------|------|
| Information bit rate    | 384    | kbps |
| DPDCH                   | 960    | kbps |
| DPCCH                   | 15     | kbps |
| DPCCH Slot Format #i    | 0      | -    |
| DPCCH/DPDCH power ratio | -11,48 | dB   |
| TFCI                    | On     | -    |
| Puncturing              | 18     | %    |

**Table C.2.4.2: UL reference measurement channel using RLC-TM for DTCH, transport channel parameters (384 kbps)**

| Higher Layer | RAB/Signalling RB   | RAB          | SRB                              |       |
|--------------|---|--------------|----------------------------------|-------|
| RLC          | Logical channel type  | DTCH         | DCCH                             |       |
|              | RLC mode  | TM           | UM/AM                            |       |
|              | Payload sizes, bit  | 3840         | 88/80                            |       |
|              | Max data rate, bps  | 384000       | <u>2200/2000</u> <del>3400</del> |       |
|              | PDU header, bit   | N/A          | 8/16                             |       |
|              | TrD PDU header, bit   | 0            | N/A                              |       |
| MAC          | MAC header, bit   | 0            | 4                                |       |
|              | MAC multiplexing  | N/A          | Yes                              |       |
| Layer 1      | TrCH type   | DCH          | DCH                              |       |
|              | Transport Channel <del>Number</del> Identity                | 1            | <u>2</u> <del>5</del>            |       |
|              | TB sizes, bit   | 3840         | 100                              |       |
|              | TFS   | TF0, bits    | 0*3840                           | 0*100 |
|              |   | TF1, bits    | 1*3840                           | 1*100 |
|              | TTI, ms   | 10           | 40                               |       |
|              | Coding type   | Turbo Coding | Convolution Coding               |       |
|              | Coding Rate   | N/A          | 1/3                              |       |
|              | CRC, bit  | 16           | 12                               |       |
|              | Max number of bits/TTI after channel coding                 | 11580        | 360                              |       |
|              | Uplink: Max number of bits/radio frame before rate matching | 11580        | 90                               |       |
|              | RM attribute  | 256          | 256                              |       |

**Table C.2.4.3: UL reference measurement channel using RLC-AM for DTCH, transport channel parameters (384 kbps)**

| Higher Layer | RAB/Signalling RB   | RAB                 | SRB                       |              |
|--------------|---|---------------------|---------------------------|--------------|
| RLC          | Logical channel type  | <u>DTCH</u>         | <u>DCCH</u>               |              |
|              | RLC mode  | <u>AM</u>           | <u>UM/AM</u>              |              |
|              | Payload sizes, bit  | <u>3824</u>         | <u>88/80</u>              |              |
|              | Max data rate, bps  | <u>382400</u>       | <u>2200/2000</u>          |              |
|              | PDU header, bit   | <u>16</u>           | <u>8/16</u>               |              |
|              | TrD PDU header, bit   | <u>N/A</u>          | <u>N/A</u>                |              |
| MAC          | MAC header, bit   | <u>0</u>            | <u>4</u>                  |              |
|              | MAC multiplexing  | <u>N/A</u>          | <u>Yes</u>                |              |
| Layer 1      | TrCH type   | <u>DCH</u>          | <u>DCH</u>                |              |
|              | Transport Channel Identity                                  | <u>1</u>            | <u>5</u>                  |              |
|              | TB sizes, bit   | <u>3840</u>         | <u>100</u>                |              |
|              | TFS   | TF0, bits           | <u>0*3840</u>             | <u>0*100</u> |
|              |   | TF1, bits           | <u>1*3840</u>             | <u>1*100</u> |
|              | TTI, ms   | <u>10</u>           | <u>40</u>                 |              |
|              | Coding type   | <u>Turbo Coding</u> | <u>Convolution Coding</u> |              |
|              | Coding Rate   | <u>N/A</u>          | <u>1/3</u>                |              |
|              | CRC, bit  | <u>16</u>           | <u>12</u>                 |              |
|              | Max number of bits/TTI after channel coding                 | <u>11580</u>        | <u>360</u>                |              |
|              | Uplink: Max number of bits/radio frame before rate matching | <u>11580</u>        | <u>90</u>                 |              |
|              | RM attribute  | <u>256</u>          | <u>256</u>                |              |

**Table C.2.4.4: UL reference measurement channel, TFCS (384 kbps)**

|           |   |
|-----------|---|
| TFCS size | <u>4</u>  |
| TFCS      | <u>(DTCH, DCCH)≡ (TF0, TF0), (TF1, TF0), (TF0, TF1), (TF1, TF1)</u> |

Note: The TFCs except for (TF1, TF1) are belonging to minimum set of TFCs.

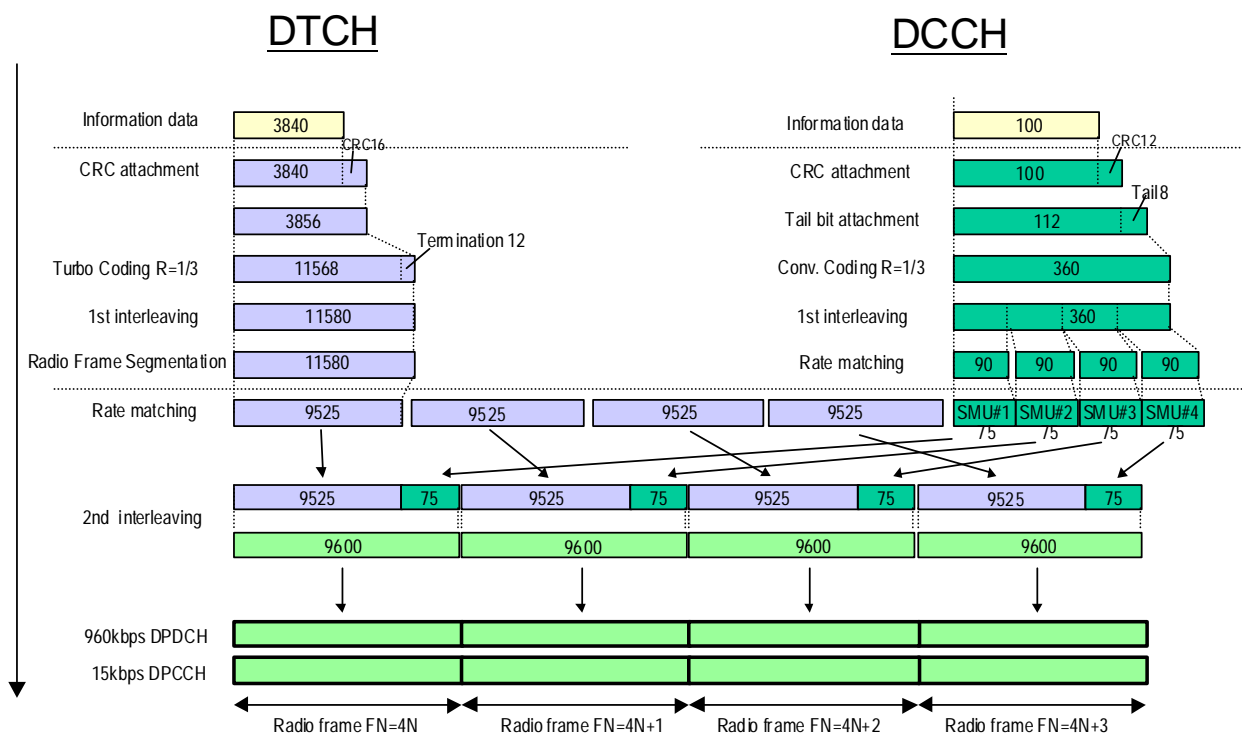


Figure C.2.4 (informative): Channel coding of UL reference measurement channel (384 kbps)

## C.2.5 UL reference measurement channel (768 kbps)

The parameters for the UL measurement channel for 768 kbps are specified in table C.2.5.1, [table C.2.5.2](#), [table C.2.5.3](#) and [table C.2.5.24](#). When the UE test loop function is needed, the UE test loop mode [1-2](#) shall be used ~~and uplink dummy DCCH shall be disabled~~.

Table C.2.5.1: UL reference measurement channel, physical parameters (768 kbps)

| Parameter               | Level  | Unit |
|-------------------------|--------|------|
| Information bit rate    | 2*384  | kbps |
| DPDCH <sub>1</sub>      | 960    | kbps |
| DPDCH <sub>2</sub>      | 960    | kbps |
| DPCCH                   | 15     | kbps |
| DPCCH Slot Format #i    | 0      | -    |
| DPCCH/DPDCH power ratio | -11.48 | dB   |
| TFCI                    | On     | -    |
| Puncturing              | 18     | %    |



**Table C.2.5.2: UL reference measurement channel using RLC-TM for DTCH, transport channel parameters (768 kbps)**

| Higher Layer | RAB/Signalling RB   | RAB                         | SRB                              |       |
|--------------|---|-----------------------------|----------------------------------|-------|
| RLC          | Logical channel type  | DTCH                        | DCCH                             |       |
|              | RLC mode  | TM                          | UM/AM                            |       |
|              | Payload sizes, bit  | <del>3840</del> <u>7680</u> | 88/80                            |       |
|              | Max data rate, bps  | 768000                      | <del>3400</del> <u>2200/2000</u> |       |
|              | PDU header, bit   | N/A                         | 8/16                             |       |
|              | TrD PDU header, bit   | 0                           | N/A                              |       |
| MAC          | MAC header, bit   | 0                           | 4                                |       |
|              | MAC multiplexing  | N/A                         | Yes                              |       |
| Layer 1      | TrCH type   | DCH                         | DCH                              |       |
|              | Transport Channel <del>Number</del> <u>Identity</u>         | 1                           | <del>2</del> <u>5</u>            |       |
|              | TB sizes, bit   | 3840                        | 100                              |       |
|              | TFS   | TF0, bits                   | 0*3840                           | 0*100 |
|              |   | TF1, bits                   | <del>4</del> <u>2</u> *3840      | 1*100 |
|              | TTI, ms   | 10                          | 40                               |       |
|              | Coding type   | Turbo Coding                | Convolution Coding               |       |
|              | Coding Rate   | N/A                         | 1/3                              |       |
|              | CRC, bit  | 16                          | 12                               |       |
|              | Max number of bits/TTI after channel coding                 | 23160                       | 360                              |       |
|              | Uplink: Max number of bits/radio frame before rate matching | 23160                       | 90                               |       |
|              | RM attribute  | 256                         | 256                              |       |

**Table C.2.5.3: UL reference measurement channel using RLC-AM for DTCH, transport channel parameters (768 kbps)**

| Higher Layer | RAB/Signalling RB   | RAB          | SRB                |       |
|--------------|---|--------------|--------------------|-------|
| RLC          | Logical channel type  | DTCH         | DCCH               |       |
|              | RLC mode  | TM           | UM/AM              |       |
|              | Payload sizes, bit  | 7664         | 88/80              |       |
|              | Max data rate, bps  | 766400       | 2200/2000          |       |
|              | PDU header, bit   | 16           | 8/16               |       |
|              | TrD PDU header, bit   | N/A          | N/A                |       |
| MAC          | MAC header, bit   | 0            | 4                  |       |
|              | MAC multiplexing  | N/A          | Yes                |       |
| Layer 1      | TrCH type   | DCH          | DCH                |       |
|              | Transport Channel <del>Identity</del> <u>Identity</u>       | 1            | 5                  |       |
|              | TB sizes, bit   | 3840         | 100                |       |
|              | TFS   | TF0, bits    | 0*3840             | 0*100 |
|              |   | TF1, bits    | 2*3840             | 1*100 |
|              | TTI, ms   | 10           | 40                 |       |
|              | Coding type   | Turbo Coding | Convolution Coding |       |
|              | Coding Rate   | N/A          | 1/3                |       |
|              | CRC, bit  | 16           | 12                 |       |
|              | Max number of bits/TTI after channel coding                 | 23160        | 360                |       |
|              | Uplink: Max number of bits/radio frame before rate matching | 23160        | 90                 |       |
|              | RM attribute  | 256          | 256                |       |

**Table C.2.5.4: UL reference measurement channel, TFCS (768 kbps)**

|           |   |
|-----------|---|
| TFCS size | 4   |
| TFCS      | (DTCH, DCCH)≡<br>(TF0, TF0), (TF1, TF0), (TF0, TF1), (TF1, TF1) |

Note: The TFCs except for (TF1, TF1) are belonging to minimum set of TFCs.

&lt; End of modification &gt;

&lt; Start of modification &gt;

## C.3 DL reference measurement channel

### C.3.1 DL reference measurement channel (12.2 kbps)

The parameters for the 12.2 kbps DL reference measurement channel are specified in table C.3.1.1, table C.3.1.2, table C.3.1.3 and table C.3.1.4. The channel coding is detailed in figure C.3.1. For the RLC configuration of AM DCCHs Timer STATUS\_Periodic shall not be set in RRC CONNECTION SETUP message used in test procedure for RF test as defined in TS34.108 clause 7.3. This is to prevent unexpected DCHs from being transmitted through such RLC entities when the timer has expired in order to ensure that the required TFC from the minimum set of TFCs can continuously convey a DCH for DTCH during the test.

**Table C.3.1.1: DL reference measurement channel (12.2 kbps)**

| Parameter                      | Level        | Unit     |
|--------------------------------|--------------|----------|
| Information bit rate           | 12.2         | kbps     |
| DPCH                           | 30           | ksps     |
| Slot Format # <u>l</u>         | 11           | -        |
| TFCI                           | On           |          |
| Power offsets PO1, PO2 and PO3 | 0            | dB       |
| <u>Puncturing</u>              | <u>44.7</u>  | <u>%</u> |
| <u>DTX position</u>            | <u>Fixed</u> | <u>-</u> |

**Table C.3.1.2: DL reference measurement channel using RLC-TM for DTCH, transport channel parameters (12.2 kbps)**

| Higher Layer | RAB/Signalling RB                           | RAB                | SRB                |       |
|--------------|---|--------------------|--------------------|-------|
| RLC          | Logical channel type                        | DTCH               | DCCH               |       |
|              | RLC mode                                    | TM                 | UM/AM              |       |
|              | Payload sizes, bit                          | 244                | 88/80              |       |
|              | Max data rate, bps                          | 12200              | 2200/2000          |       |
|              | PDU header, bit                             | N/A                | 8/16               |       |
|              | TrD PDU header, bit                         | 0                  | N/A                |       |
| MAC          | MAC header, bit                             | 0                  | 4                  |       |
|              | MAC multiplexing                            | N/A                | Yes                |       |
| Layer 1      | TrCH type                                   | DCH                | DCH                |       |
|              | Transport Channel Identity                  | 6                  | 10                 |       |
|              | TB sizes, bit                               | 244                | 100                |       |
|              | TFS   | TF0, bits          | 0*244              | 0*100 |
|              |   | TF1, bits          | 1*244              | 1*100 |
|              | TTI, ms                                     | 20                 | 40                 |       |
|              | Coding type                                 | Convolution Coding | Convolution Coding |       |
|              | Coding Rate                                 | 1/3                | 1/3                |       |
|              | CRC, bit                                    | 16                 | 12                 |       |
|              | Max number of bits/TTI after channel coding | 804                | 360                |       |
|              | RM attribute                                | 256                | 256                |       |

**Table C.3.1.3: DL reference measurement channel using RLC-AM for DTCH, transport channel parameters (12.2 kbps)**

| Higher Layer | RAB/Signalling RB                           | RAB                | SRB                |       |
|--------------|---|--------------------|--------------------|-------|
| RLC          | Logical channel type                        | DTCH               | DCCH               |       |
|              | RLC mode                                    | AM                 | UM/AM              |       |
|              | Payload sizes, bit                          | 228                | 88/80              |       |
|              | Max data rate, bps                          | 11400              | 2200/2000          |       |
|              | PDU header, bit                             | 16                 | 8/16               |       |
|              | TrD PDU header, bit                         | N/A                | N/A                |       |
| MAC          | MAC header, bit                             | 0                  | 4                  |       |
|              | MAC multiplexing                            | N/A                | Yes                |       |
| Layer 1      | TrCH type                                   | DCH                | DCH                |       |
|              | Transport Channel Identity                  | 6                  | 10                 |       |
|              | TB sizes, bit                               | 244                | 100                |       |
|              | TFS   | TF0, bits          | 0*244              | 0*100 |
|              |   | TF1, bits          | 1*244              | 1*100 |
|              | TTI, ms                                     | 20                 | 40                 |       |
|              | Coding type                                 | Convolution Coding | Convolution Coding |       |
|              | Coding Rate                                 | 1/3                | 1/3                |       |
|              | CRC, bit                                    | 16                 | 12                 |       |
|              | Max number of bits/TTI after channel coding | 804                | 360                |       |
|              | RM attribute                                | 256                | 256                |       |

**Table C.3.1.4: DL reference measurement channel, TFCS (12.2 kbps)**

|           |   |
|-----------|---|
| TFCS size | 4   |
| TFCS      | (DTCH, DCCH)=<br>(TF0, TF0), (TF1, TF0), (TF0, TF1), (TF1, TF1) |

| Parameter                       | DTCH               | DCCH               |
|---------------------------------|--------------------|--------------------|
| Transport Channel Number        | 1                  | 2                  |
| Transport Block Size            | 244                | 100                |
| Transport Block Set Size        | 244                | 100                |
| Transmission Time Interval      | 20 ms              | 40 ms              |
| Type of Error Protection        | Convolution Coding | Convolution Coding |
| Coding Rate                     | 1/3                | 1/3                |
| Rate Matching attribute         | 256                | 256                |
| Size of CRC                     | 16                 | 12                 |
| Position of TrCH in radio frame | fixed              | fixed              |

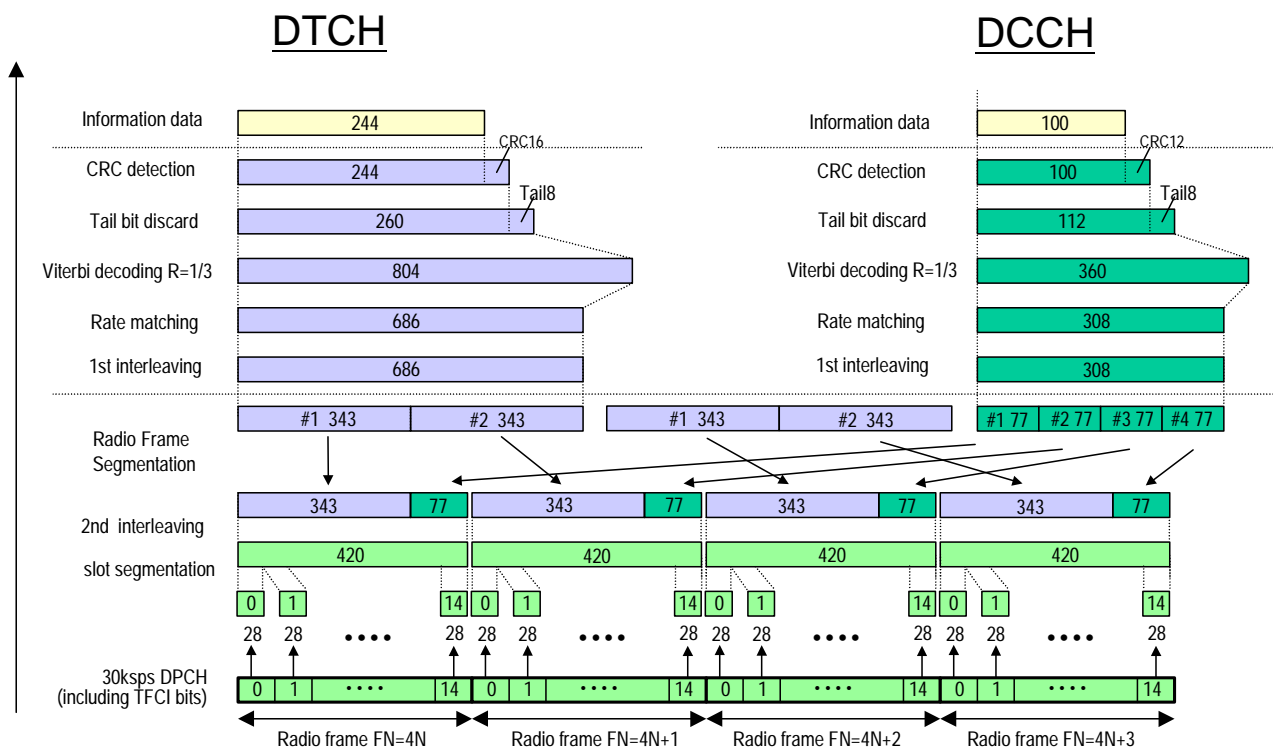


Figure C.3.1 (informative): Channel coding of DL reference measurement channel (12,2 kbps)

### C.3.2 DL reference measurement channel (64 kbps)

The parameters for the DL reference measurement channel for 64 kbps are specified in table C.3.32.1, table C 3.2.2, table 3.2.3 and table C.3.2.44. The channel coding is detailed in figure C.3.2. For the RLC configuration of AM DCCHs `Timer STATUS_Periodic` shall not be set in RRC CONNECTION SETUP message used in test procedure for RF test as defined in TS34.108 clause 7.3. This is to prevent unexpected DCHs from being transmitted through such RLC entities when the timer has expired in order to sure that the required TFC from the minimum set of TFCs can continuously convey a DCH for DTCH during the test.

Table C.3.32.1: DL reference measurement channel (64 kbps)

| Parameter                      | Level | Unit |
|--------------------------------|-------|------|
| Information bit rate           | 64    | kbps |
| DPCH                           | 120   | ksp  |
| Slot Format #i                 | 13    | -    |
| TFCI                           | On    | -    |
| Power offsets PO1, PO2 and PO3 | 0     | dB   |
| Repetition                     | 2-9   | %    |
| DTX position                   | Fixed | -    |

**Table C.3.2.24: DL reference measurement channel using RLC-TM for DTCH, transport channel parameters (64 kbps)**

| Higher Layer | RAB/Signalling RB                           | RAB          | SRB                |       |
|--------------|---|--------------|--------------------|-------|
| RLC          | Logical channel type                        | DTCH         | DCCH               |       |
|              | RLC mode                                    | TM           | UM/AM              |       |
|              | Payload sizes, bit                          | 1280         | 88/80              |       |
|              | Max data rate, bps                          | 64000        | 2200/2000          |       |
|              | PDU header, bit                             | N/A          | 8/16               |       |
|              | TrD PDU header, bit                         | 0            | N/A                |       |
| MAC          | MAC header, bit                             | 0            | 4                  |       |
|              | MAC multiplexing                            | N/A          | Yes                |       |
| Layer 1      | TrCH type                                   | DCH          | DCH                |       |
|              | Transport Channel Identity                  | 6            | 10                 |       |
|              | TB sizes, bit                               | 1280         | 100                |       |
|              | TFS   | TF0, bits    | 0*1280             | 0*100 |
|              |   | TF1, bits    | 1*1280             | 1*100 |
|              | TTI, ms                                     | 20           | 40                 |       |
|              | Coding type                                 | Turbo Coding | Convolution Coding |       |
|              | Coding Rate                                 | N/A          | 1/3                |       |
|              | CRC, bit                                    | 16           | 12                 |       |
|              | Max number of bits/TTI after channel coding | 3900         | 360                |       |
|              | RM attribute                                | 256          | 256                |       |

**Table C.3.2.3: DL reference measurement channel using RLC-AM for DTCH, transport channel parameters (64 kbps)**

| Higher Layer | RAB/Signalling RB                           | RAB          | SRB                |       |
|--------------|---|--------------|--------------------|-------|
| RLC          | Logical channel type                        | DTCH         | DCCH               |       |
|              | RLC mode                                    | AM           | UM/AM              |       |
|              | Payload sizes, bit                          | 1264         | 88/80              |       |
|              | Max data rate, bps                          | 63200        | 2200/2000          |       |
|              | PDU header, bit                             | 16           | 8/16               |       |
|              | TrD PDU header, bit                         | N/A          | N/A                |       |
| MAC          | MAC header, bit                             | 0            | 4                  |       |
|              | MAC multiplexing                            | N/A          | Yes                |       |
| Layer 1      | TrCH type                                   | DCH          | DCH                |       |
|              | Transport Channel Identity                  | 6            | 10                 |       |
|              | TB sizes, bit                               | 1280         | 100                |       |
|              | TFS   | TF0, bits    | 0*1280             | 0*100 |
|              |   | TF1, bits    | 1*1280             | 1*100 |
|              | TTI, ms                                     | 20           | 40                 |       |
|              | Coding type                                 | Turbo Coding | Convolution Coding |       |
|              | Coding Rate                                 | N/A          | 1/3                |       |
|              | CRC, bit                                    | 16           | 12                 |       |
|              | Max number of bits/TTI after channel coding | 3900         | 360                |       |
|              | RM attribute                                | 256          | 256                |       |

**Table C.3.2.4: DL reference measurement channel, TFCS (64 kbps)**

|           |   |
|-----------|---|
| TFCS size | 4   |
| TFCS      | (DTCH, DCCH)=<br>(TF0, TF0), (TF1, TF0), (TF0, TF1), (TF1, TF1) |

| Parameter                       | DTCH         | DCCH               |
|---------------------------------|--------------|--------------------|
| Transport Channel Number        | 1            | 2                  |
| Transport Block Size            | 1 280        | 100                |
| Transport Block Set Size        | 1 280        | 100                |
| Transmission Time Interval      | 20 ms        | 40 ms              |
| Type of Error Protection        | Turbo Coding | Convolution Coding |
| Coding Rate                     | 1/3          | 1/3                |
| Rate Matching attribute         | 256          | 256                |
| Size of CRC                     | 16           | 12                 |
| Position of TrCH in radio frame | fixed        | fixed              |

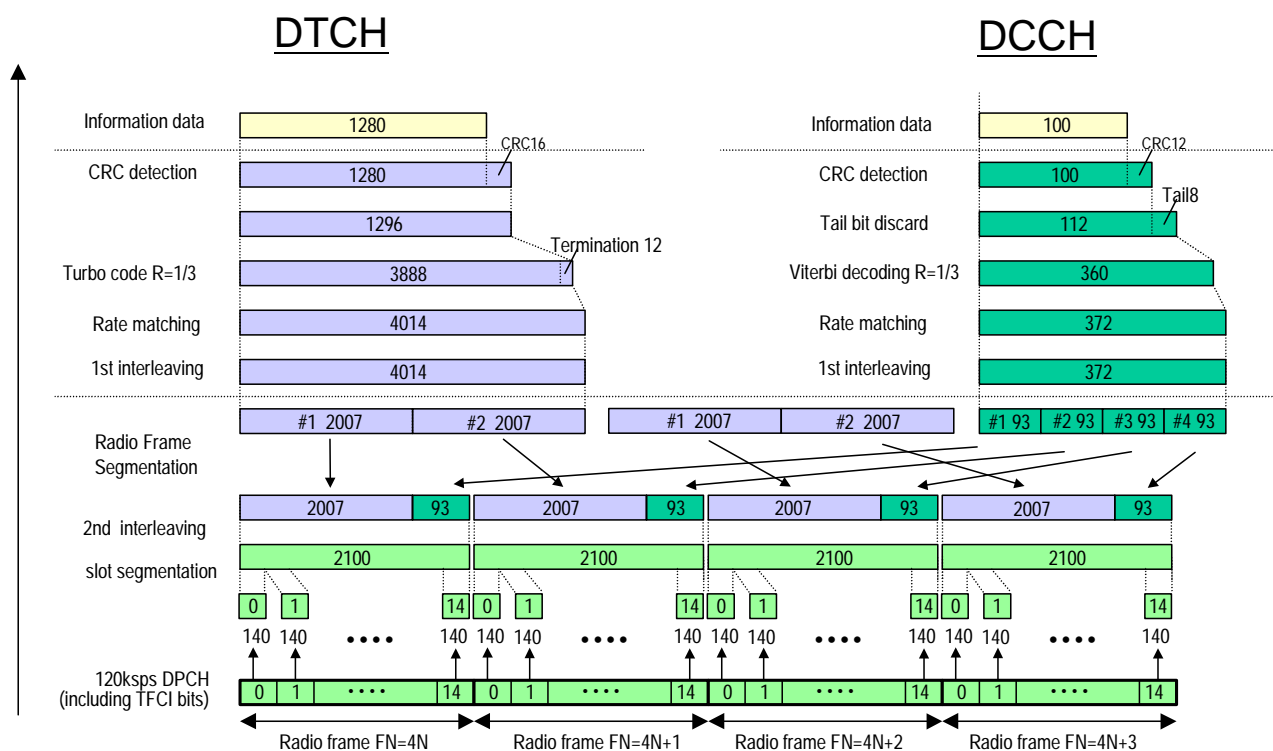


Figure C.3.2 (informative): Channel coding of DL reference measurement channel (64 kbps)

### C.3.3 DL reference measurement channel (144 kbps)

The parameters for the DL reference measurement channel for 144 kbps are specified in table C.3.3.15, table C.3.3.2, table C.3.3.3 and table C.3.3.64. The channel coding is detailed in figure C.3.3. For the RLC configuration of AM DCCHs Timer STATUS\_Periodic shall not be set in RRC CONNECTION SETUP message used in test procedure for RF test as defined in TS34.108 clause 7.3. This is to prevent unexpected DCHs from being transmitted through such RLC entities when the timer has expired in order to sure that the required TFC from the minimum set of TFCs can continuously convey a DCH for DTCH during the test.

Table C.3.3.15: DL reference measurement channel (144kbps)

| Parameter                      | Level | Unit |
|--------------------------------|-------|------|
| Information bit rate           | 144   | kbps |
| DPCH                           | 240   | ksps |
| Slot Format #i                 | 14    | -    |
| TFCI                           | On    |      |
| Power offsets PO1, PO2 and PO3 | 0     | dB   |
| Puncturing                     | 2.7   | %    |
| DTX position                   | Fixed | -    |

**Table C.3.3.26: DL reference measurement channel using RLC-TM for DTCH, transport channel parameters (144 kbps)**

| Higher Layer | RAB/Signalling RB                           | RAB          | SRB                |       |
|--------------|---|--------------|--------------------|-------|
| RLC          | Logical channel type                        | DTCH         | DCCH               |       |
|              | RLC mode                                    | TM           | UM/AM              |       |
|              | Payload sizes, bit                          | 2880         | 88/80              |       |
|              | Max data rate, bps                          | 144000       | 2200/2000          |       |
|              | PDU header, bit                             | N/A          | 8/16               |       |
|              | TrD PDU header, bit                         | 0            | N/A                |       |
| MAC          | MAC header, bit                             | 0            | 4                  |       |
|              | MAC multiplexing                            | N/A          | Yes                |       |
| Layer 1      | TrCH type                                   | DCH          | DCH                |       |
|              | Transport Channel Identity                  | 6            | 10                 |       |
|              | TB sizes, bit                               | 2880         | 100                |       |
|              | TFS   | TF0, bits    | 0*2880             | 0*100 |
|              |   | TF1, bits    | 1*2880             | 1*100 |
|              | TTI, ms                                     | 20           | 40                 |       |
|              | Coding type                                 | Turbo Coding | Convolution Coding |       |
|              | Coding Rate                                 | N/A          | 1/3                |       |
|              | CRC, bit                                    | 16           | 12                 |       |
|              | Max number of bits/TTI after channel coding | 8700         | 360                |       |
|              | RM attribute                                | 256          | 256                |       |


**Table C.3.3.3: DL reference measurement channel using RLC-AM for DTCH, transport channel parameters (144 kbps)**

| Higher Layer | RAB/Signalling RB                           | RAB          | SRB                |       |
|--------------|---|--------------|--------------------|-------|
| RLC          | Logical channel type                        | DTCH         | DCCH               |       |
|              | RLC mode                                    | AM           | UM/AM              |       |
|              | Payload sizes, bit                          | 2864         | 88/80              |       |
|              | Max data rate, bps                          | 143200       | 2200/2000          |       |
|              | PDU header, bit                             | 16           | 8/16               |       |
|              | TrD PDU header, bit                         | N/A          | N/A                |       |
| MAC          | MAC header, bit                             | 0            | 4                  |       |
|              | MAC multiplexing                            | N/A          | Yes                |       |
| Layer 1      | TrCH type                                   | DCH          | DCH                |       |
|              | Transport Channel Identity                  | 6            | 10                 |       |
|              | TB sizes, bit                               | 2880         | 100                |       |
|              | TFS   | TF0, bits    | 0*2880             | 0*100 |
|              |   | TF1, bits    | 1*2880             | 1*100 |
|              | TTI, ms                                     | 20           | 40                 |       |
|              | Coding type                                 | Turbo Coding | Convolution Coding |       |
|              | Coding Rate                                 | N/A          | 1/3                |       |
|              | CRC, bit                                    | 16           | 12                 |       |
|              | Max number of bits/TTI after channel coding | 8700         | 360                |       |
|              | RM attribute                                | 256          | 256                |       |

**Table C.3.3.4: DL reference measurement channel, TFCS (144 kbps)**

|           |   |
|-----------|---|
| TFCS size | 4   |
| TFCS      | (DTCH, DCCH)=<br>(TF0, TF0), (TF1, TF0), (TF0, TF1), (TF1, TF1) |

| Parameter                       | DTCH         | DCCH               |
|---------------------------------|--------------|--------------------|
| Transport Channel Number        | 1            | 2                  |
| Transport Block Size            | 2880         | 100                |
| Transport Block Set Size        | 2880         | 100                |
| Transmission Time Interval      | 20 ms        | 40 ms              |
| Type of Error Protection        | Turbo Coding | Convolution Coding |
| Coding Rate                     | 1/3          | 1/3                |
| Rate-Matching attribute         | 256          | 256                |
| Size of CRC                     | 16           | 12                 |
| Position of TrCH in radio frame | fixed        | fixed              |

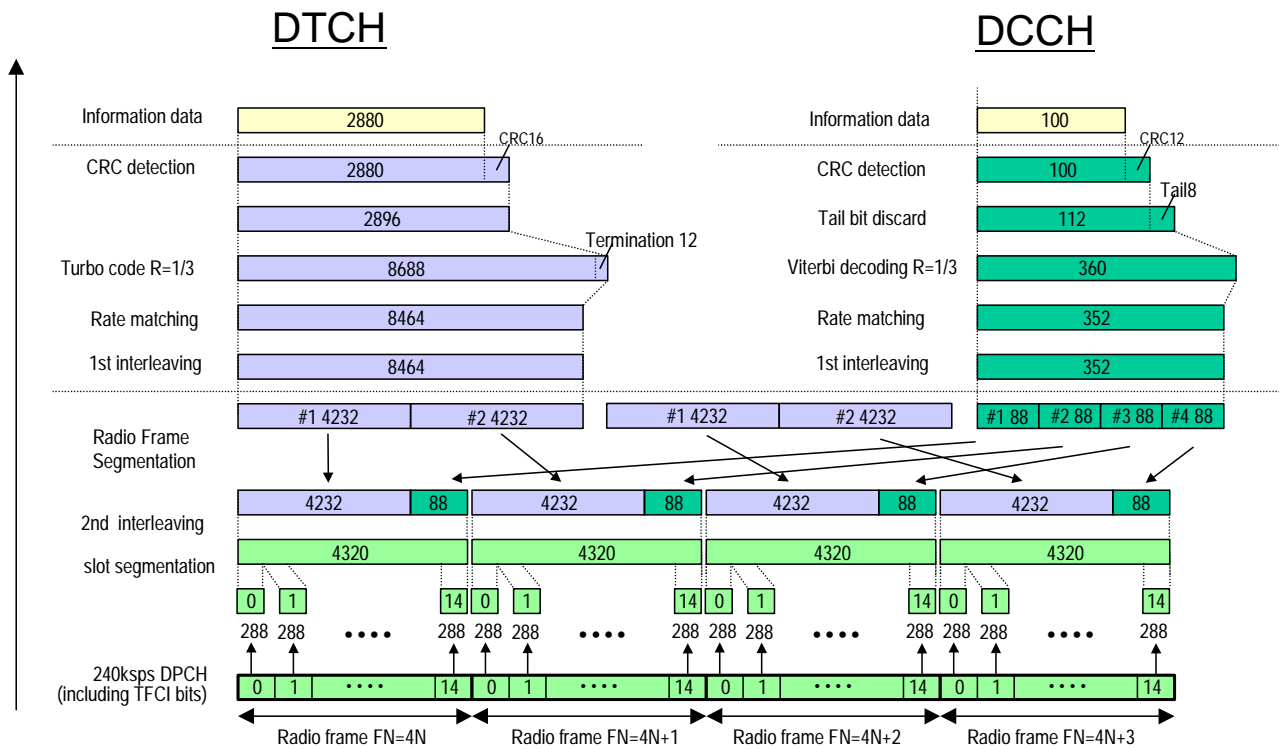

**Figure C.3.3 (informative): Channel coding of DL reference measurement channel (144 kbps)**



### C.3.4 DL reference measurement channel (384 kbps)

The parameters for the DL reference measurement channel for 384 kbps are specified in table C.3.4.1, [table C 3.4.2](#), [table C 3.4.3](#) and table C.3.4.24. The channel coding is shown for information in figure C3.4. [For the RLC configuration of AM DCCHs Timer STATUS\\_Periodic shall not be set in RRC CONNECTION SETUP message used in test procedure for RF test as defined in TS34.108 clause 7.3. This is to prevent unexpected DCHs from being transmitted through such RLC entities when the timer has expired in order to sure that the required TFC from the minimum set of TFCs can continuously convey a DCH for DTCH during the test.](#)

**Table C.3.4.1: DL reference measurement channel, physical parameters (384 kbps)**

| Parameter                      | Level                 | Unit              |
|--------------------------------|-----------------------|-------------------|
| Information bit rate           | 384                   | kbps              |
| DPCH                           | 480                   | ksps              |
| Slot Format #i                 | 15                    | -                 |
| TFCI                           | On                    | -                 |
| Power offsets PO1, PO2 and PO3 | 0                     | dB                |
| <a href="#">Puncturing</a>     | <a href="#">22</a>    | <a href="#">%</a> |
| <a href="#">DTX position</a>   | <a href="#">Fixed</a> | <a href="#">-</a> |

**Table C.3.4.2: DL reference measurement channel [using RLC-TM for DTCH](#), transport channel parameters (384 kbps)**

| Higher Layer            | <a href="#">RAB/Signalling RB</a>                           | <a href="#">RAB</a>          | <a href="#">SRB</a>                |                       |
|-------------------------|---|------------------------------|------------------------------------|-----------------------|
| <a href="#">RLC</a>     | <a href="#">Logical channel type</a>                        | <a href="#">DTCH</a>         | <a href="#">DCCH</a>               |                       |
|                         | <a href="#">RLC mode</a>                                    | <a href="#">TM</a>           | <a href="#">UM/AM</a>              |                       |
|                         | <a href="#">Payload sizes, bit</a>                          | <a href="#">3840</a>         | <a href="#">88/80</a>              |                       |
|                         | <a href="#">Max data rate, bps</a>                          | <a href="#">384000</a>       | <a href="#">2200/2000</a>          |                       |
|                         | <a href="#">PDU header, bit</a>                             | <a href="#">N/A</a>          | <a href="#">8/16</a>               |                       |
|                         | <a href="#">TrD PDU header, bit</a>                         | <a href="#">0</a>            | <a href="#">N/A</a>                |                       |
| <a href="#">MAC</a>     | <a href="#">MAC header, bit</a>                             | <a href="#">0</a>            | <a href="#">4</a>                  |                       |
|                         | <a href="#">MAC multiplexing</a>                            | <a href="#">N/A</a>          | <a href="#">Yes</a>                |                       |
| <a href="#">Layer 1</a> | <a href="#">TrCH type</a>                                   | <a href="#">DCH</a>          | <a href="#">DCH</a>                |                       |
|                         | <a href="#">Transport Channel Identity</a>                  | <a href="#">6</a>            | <a href="#">10</a>                 |                       |
|                         | <a href="#">TB sizes, bit</a>                               | <a href="#">3840</a>         | <a href="#">100</a>                |                       |
|                         | <a href="#">TFS</a>   | <a href="#">TF0, bits</a>    | <a href="#">0*3840</a>             | <a href="#">0*100</a> |
|                         |   | <a href="#">TF1, bits</a>    | <a href="#">1*3840</a>             | <a href="#">1*100</a> |
|                         | <a href="#">TTI, ms</a>                                     | <a href="#">10</a>           | <a href="#">40</a>                 |                       |
|                         | <a href="#">Coding type</a>                                 | <a href="#">Turbo Coding</a> | <a href="#">Convolution Coding</a> |                       |
|                         | <a href="#">Coding Rate</a>                                 | <a href="#">N/A</a>          | <a href="#">1/3</a>                |                       |
|                         | <a href="#">CRC, bit</a>                                    | <a href="#">16</a>           | <a href="#">12</a>                 |                       |
|                         | <a href="#">Max number of bits/TTI after channel coding</a> | <a href="#">11580</a>        | <a href="#">360</a>                |                       |
|                         | <a href="#">RM attribute</a>                                | <a href="#">256</a>          | <a href="#">256</a>                |                       |

**Table C.3.4.3: DL reference measurement channel using RLC-AM for DTCH, transport channel parameters (384 kbps)**

| Higher Layer | RAB/Signalling RB                           | RAB          | SRB                |       |
|--------------|---|--------------|--------------------|-------|
| RLC          | Logical channel type                        | DTCH         | DCCH               |       |
|              | RLC mode                                    | AM           | UM/AM              |       |
|              | Payload sizes, bit                          | 3824         | 88/80              |       |
|              | Max data rate, bps                          | 382400       | 2200/2000          |       |
|              | PDU header, bit                             | 16           | 8/16               |       |
|              | TrD PDU header, bit                         | N/A          | N/A                |       |
| MAC          | MAC header, bit                             | 0            | 4                  |       |
|              | MAC multiplexing                            | N/A          | Yes                |       |
| Layer 1      | TrCH type                                   | DCH          | DCH                |       |
|              | Transport Channel Identity                  | 6            | 10                 |       |
|              | TB sizes, bit                               | 3840         | 100                |       |
|              | TFS   | TF0, bits    | 0*3840             | 0*100 |
|              |   | TF1, bits    | 1*3840             | 1*100 |
|              | TTI, ms                                     | 10           | 40                 |       |
|              | Coding type                                 | Turbo Coding | Convolution Coding |       |
|              | Coding Rate                                 | N/A          | 1/3                |       |
|              | CRC, bit                                    | 16           | 12                 |       |
|              | Max number of bits/TTI after channel coding | 11580        | 360                |       |
|              | RM attribute                                | 256          | 256                |       |

**Table C.3.4.4: DL reference measurement channel, TFCS (384 kbps)**

|           |   |
|-----------|---|
| TFCS size | 4   |
| TFCS      | (DTCH, DCCH)=<br>(TF0, TF0), (TF1, TF0), (TF0, TF1), (TF1, TF1) |

| Parameter                       | DTCH         | DCCH               |
|---------------------------------|--------------|--------------------|
| Transport Channel Number        | 1            | 2                  |
| Transport Block Size            | 3-840        | 100                |
| Transport Block Set Size        | 3-840        | 100                |
| Transmission Time Interval      | 10 ms        | 40 ms              |
| Type of Error Protection        | Turbo Coding | Convolution Coding |
| Coding Rate                     | 1/3          | 1/3                |
| Rate Matching attribute         | 256          | 256                |
| Size of CRC                     | 16           | 12                 |
| Position of TrCH in radio frame | fixed        | Fixed              |

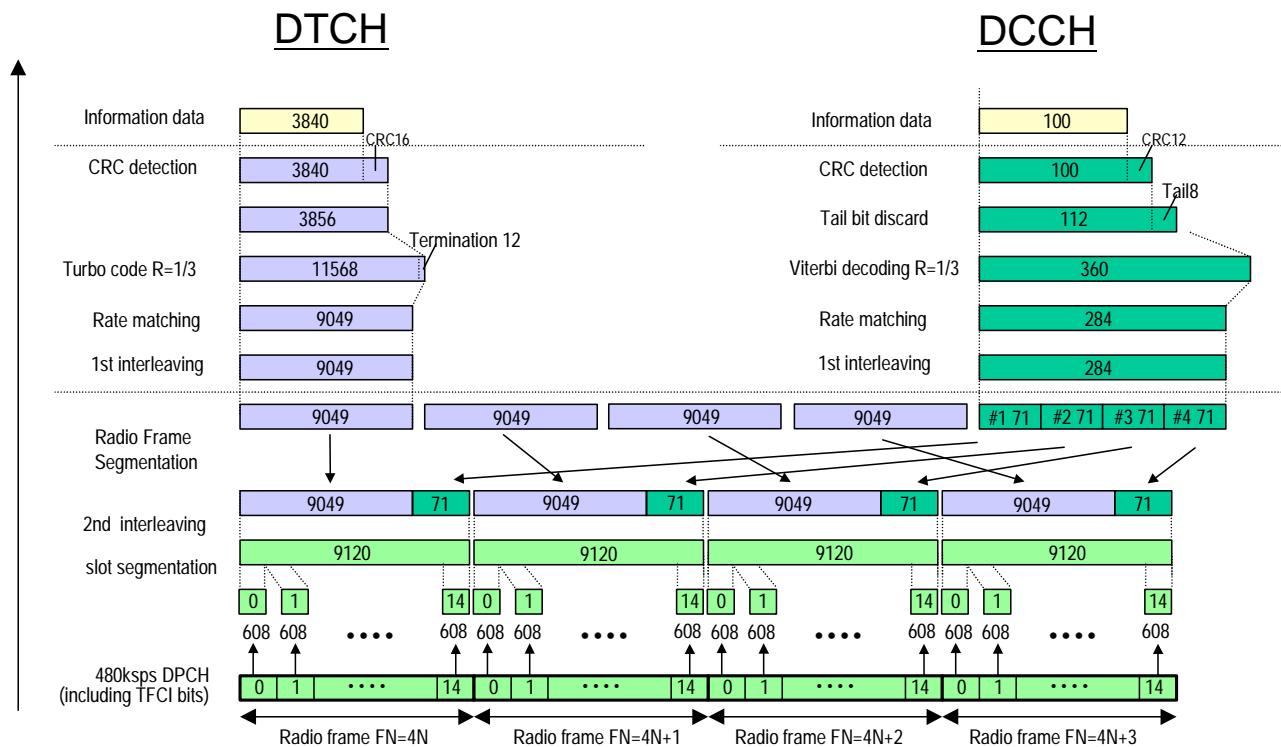


Figure C.3.4 (informative): Channel coding of DL reference measurement channel (384 kbps)

## C.4 Reference measurement channel for BTFD performance requirements

### C.4.1 UL reference measurement channel for BTFD performance requirements

The parameters for UL reference measurement channel for BTFD are specified in table C.4.1.1, [table C.4.1.2](#), [table C.4.1.3](#) [table C.4.2](#) and [table C.4.1.42-A](#).

Table C.4.1.1: UL reference measurement channel physical parameters for BTFD

| Parameter               | Level  | Unit |
|-------------------------|--|------|
| Information bit rate    | 12.8k, 10.8k, 8.55k, 8.0k, 7.3k, 6.5k, 5.75k, 5.35k, 2.55k | kbps |
| DPCCH                   | 15   | kbps |
| DPCCH Slot Format #1    | 0  | -    |
| DPCCH/DPDCH power ratio | -5.46 (12.8k - 7.3k)<br>-2.69 (6.5k - 2.55k)               | dB   |
| TFCI                    | On   | -    |
| Puncturing Limit        | 100  | %    |

**Table C.4.1.2: UL reference measurement channel, transport channel parameters for SRB**

| Higher Layer | RAB/Signalling RB   | SRB                |       |
|--------------|---|--------------------|-------|
| RLC          | Logical channel type  | DCCH               |       |
|              | RLC mode  | UM/AM              |       |
|              | Payload sizes, bit  | 88/80              |       |
|              | Max data rate, bps  | 2200/2000          |       |
|              | PDU header, bit   | 8/16               |       |
|              | TrD PDU header, bit   | N/A                |       |
| MAC          | MAC header, bit   | 4                  |       |
|              | MAC multiplexing  | Yes                |       |
| Layer 1      | TrCH type   | DCH                |       |
|              | Transport Channel Identity                                  | 10                 |       |
|              | TB sizes, bit   | 100                |       |
|              | TFS   | TF0, bits          | 0*100 |
|              |   | TF1, bits          | 1*100 |
|              | TTI, ms   | 40                 |       |
|              | Coding type   | Convolution Coding |       |
|              | Coding Rate   | 1/3                |       |
|              | CRC, bit  | 12                 |       |
|              | Max number of bits/TTI after channel coding                 | 360                |       |
|              | Uplink: Max number of bits/radio frame before rate matching | 90                 |       |
|              | RM attribute  | 256                |       |

**Table C.4.1.3: UL reference measurement channel using RLC-TM for DTCH, transport channel parameters**

| Higher Layer | RAB/Signalling RB          | 12.8k /10.8k/8.55k/8.0k/7.3k/6.5k/5.75k/5.35k/2.55k |       |
|--------------|----------------------------|---|-------|
| RLC          | Logical channel type       | DTCH  |       |
|              | RLC mode                   | TM  |       |
|              | Payload sizes, bit         | 256, 216, 171, 160, 146, 130, 115, 107, 51, 12      |       |
|              | Max data rate, bps         | 12200   |       |
|              | PDU header, bit            | N/A   |       |
|              | TrD PDU header, bit        | 0   |       |
| MAC          | MAC header, bit            | 0   |       |
|              | MAC multiplexing           | N/A   |       |
| Layer 1      | TrCH type                  | DCH   |       |
|              | Transport Channel Identity | 1   |       |
|              | TB sizes, bit              | 256, 216, 171, 160, 146, 130, 115, 107, 51, 12      |       |
|              | TFS                        | TF0 bit   | 0x256 |
|              |                            | TF1 bit   | 1x256 |
|              |                            | TF2 bit   | 1x216 |
|              |                            | TF3 bit   | 1x171 |
|              |                            | TF4 bit   | 1x160 |
|              |                            | TF5 bit   | 1x146 |
|              |                            | TF6 bit   | 1x130 |
|              |                            | TF7 bit   | 1x115 |
|              |                            | TF8 bit   | 1x107 |
|              |                            | TF9 bit   | 1x51  |
|              |                            | TF10 bit  | 1x12  |
|              | TTI, ms                    | 20  |       |
|              | Coding type                | CC  |       |
| Coding Rate  | 1/3                        |   |       |
| CRC, bit     | 0                          |   |       |
| RM attribute | 256                        |   |       |

**Table C.4.1.4: UL reference measurement channel, TFCS**

|           |   |
|-----------|---|
| TFCS size | 22  |
| TFCS      | (DTCH, DCCH)=<br>(TF0, TF0), (TF1, TF0), (TF2, TF0), (TF3, TF0), (TF4, TF0), (TF5, TF0), (TF6, TF0), (TF7, TF0),<br>(TF8, TF0), (TF9, TF0), (TF10, TF0), (TF0, TF1), (TF1, TF1), (TF2, TF1), (TF3, TF1), (TF4,<br>TF1), (TF5, TF1), (TF6, TF1), (TF7, TF1), (TF8, TF1), (TF9, TF1), (TF10, TF1) |

Note: The TFCs except for (TF1, TF1), (TF2, TF1), (TF3, TF1), (TF4, TF1), (TF5, TF1), (TF6, TF1), (TF7, TF1), (TF8, TF1), (TF9, TF1) and (TF10, TF1) are belonging to minimum set of TFCs.

| Parameter               | Level |       |       |       |       |       |       |       |       | Unit |
|-------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|
|                         | Rate1 | Rate2 | Rate3 | Rate4 | Rate5 | Rate6 | Rate7 | Rate8 | Rate9 |      |
| Information bit rate    | 12.8k | 10.8k | 8.55  | 8.0k  | 7.3k  | 6.5k  | 5.75k | 5.35k | 2.55k | kbps |
| DPCCH                   | 15    |       |       |       |       |       |       |       |       | kbps |
| DPCCH Slot Format #i    | 0     |       |       |       |       |       |       |       |       | -    |
| DPCCH/DPDCH power ratio | -5.46 | -5.46 | -5.46 | -5.46 | -5.46 | -2.69 | -2.69 | -2.69 | -2.69 | dB   |
| TFCI                    | On    |       |       |       |       |       |       |       |       | -    |

**Table C.4.2: UL reference measurement channel, transport channel parameters for BTFD**

| Parameters                 | DTCH               |       |       |       |       |       |       |       |       | DCCH               |
|----------------------------|--------------------|-------|-------|-------|-------|-------|-------|-------|-------|--------------------|
|                            | Rate1              | Rate2 | Rate3 | Rate4 | Rate5 | Rate6 | Rate7 | Rate8 | Rate9 |                    |
| Transport Channel Number   | 4                  |       |       |       |       |       |       |       |       | 2                  |
| Transport Block Size       | 256                | 216   | 171   | 160   | 146   | 130   | 115   | 107   | 51    | 100                |
| Transport Block Set Size   | 256                | 216   | 171   | 160   | 146   | 130   | 115   | 107   | 51    | 100                |
| Transmission Time Interval | 20 ms              |       |       |       |       |       |       |       |       | 40 ms              |
| Type of Error Protection   | Convolution Coding |       |       |       |       |       |       |       |       | Convolution Coding |
| Coding Rate                | 1/3                |       |       |       |       |       |       |       |       | 1/3                |
| Rate Matching Attribute    | 256                |       |       |       |       |       |       |       |       | 256                |
| Size of CRC                | 0                  |       |       |       |       |       |       |       |       | 12                 |

**Table C.4.2.A: Physical channel parameters**

|   |     |
|---|-----|
| Min spreading factor                      | 64  |
| Max number of DPDCH data bits/radio frame | 600 |
| Puncturing Limit                          | 4   |

## C.4.2 DL reference measurement channel for BTFD performance requirements

The parameters for DL reference measurement channel for BTFD are specified in table C.4.2.1, table C.4.2.2, table C.4.2.3, and table C.4.2.4. The channel coding for information is shown in figures C.4.1, C.4.2, and C.4.3. For the RLC configuration of AM DCCHs Timer STATUS\_Periodic shall not be set in RRC CONNECTION SETUP message used in test procedure for RF test as defined in TS34.108 clause 7.3. This is to prevent unexpected DCHs from being transmitted through such RLC entities when the timer has expired in order to sure that the required TFC from the minimum set of TFCs can continuously convey a DCH for DTCH during the test.

**Table C.4.2.1: DL reference measurement channel physical parameters for BTFD**

| Parameter                          | Rate 1 | Rate 2 | Rate 3 | Unit |
|------------------------------------|--------|--------|--------|------|
| Information bit rate               | 12,2   | 7,95   | 1,95   | kbps |
| DPCH                               | 30     |        |        | ksps |
| Slot Format #1                     | 8      |        |        | -    |
| TFCI                               | Off    |        |        | -    |
| Power offsets PO1, PO2 and PO3     | 0      |        |        | dB   |
| <del>Repetition</del> DTX position | Fixed  |        |        | %    |

**Table C.4.2.2: DL reference measurement channel, transport channel parameters for BTFDSRB**

| Higher Layer | RAB/Signalling RB   | SRB                |       |
|--------------|---|--------------------|-------|
| RLC          | Logical channel type  | DCCH               |       |
|              | RLC mode  | UM/AM              |       |
|              | Payload sizes, bit  | 88/80              |       |
|              | Max data rate, bps  | 2200/2000          |       |
|              | PDU header, bit   | 8/16               |       |
|              | TrD PDU header, bit   | N/A                |       |
| MAC          | MAC header, bit   | 4                  |       |
|              | MAC multiplexing  | Yes                |       |
| Layer 1      | TrCH type   | DCH                |       |
|              | Transport Channel Identity                                  | 20                 |       |
|              | TB sizes, bit   | 100                |       |
|              | TFS   | TF0, bits          | 0*100 |
|              |   | TF1, bits          | 1*100 |
|              | TTI, ms   | 40                 |       |
|              | Coding type   | Convolution Coding |       |
|              | Coding Rate   | 1/3                |       |
|              | CRC, bit  | 12                 |       |
|              | Max number of bits/TTI after channel coding                 | 360                |       |
|              | Uplink: Max number of bits/radio frame before rate matching | 90                 |       |
|              | RM attribute  | 256                |       |

**Table C.4.2.3: DL reference measurement channel using RLC-TM for DTCH, transport channel parameters**

|              |                            |   |              |
|--------------|----------------------------|---|--------------|
| Higher Layer | RAB/Signalling RB          | <u>12.2k/10.2k/7.95k/7.4k/6.7k/5.9k/5.15k/4.75k/1.95k</u> |              |
| RLC          | Logical channel type       | <u>DTCH</u>   |              |
|              | RLC mode                   | <u>TM</u>   |              |
|              | Payload sizes, bit         | <u>244, 204, 159, 148, 134, 118, 103, 95, 39</u>          |              |
|              | Max data rate, bps         | <u>12200</u>  |              |
|              | PDU header, bit            | <u>N/A</u>  |              |
|              | TrD PDU header, bit        | <u>0</u>  |              |
| MAC          | MAC header, bit            | <u>0</u>  |              |
|              | MAC multiplexing           | <u>N/A</u>  |              |
| Layer 1      | TrCH type                  | <u>DCH</u>  |              |
|              | Transport Channel Identity | <u>1</u>  |              |
|              | TB sizes, bit              | <u>244, 204, 159, 148, 134, 118, 103, 95, 39, 0</u>       |              |
|              | TFS                        | TF0 bit   | <u>1x0</u>   |
|              |                            | TF1 bit   | <u>1x244</u> |
|              |                            | TF2 bit   | <u>1x204</u> |
|              |                            | TF3 bit   | <u>1x159</u> |
|              |                            | TF4 bit   | <u>1x148</u> |
|              |                            | TF5 bit   | <u>1x134</u> |
|              |                            | TF6 bit   | <u>1x118</u> |
|              |                            | TF7 bit   | <u>1x103</u> |
|              |                            | TF8 bit   | <u>1x95</u>  |
|              | TF9 bit                    | <u>1x39</u>   |              |
|              | TTL, ms                    | <u>20</u>   |              |
|              | Coding type                | <u>CC</u>   |              |
| Coding Rate  | <u>1/3</u>                 |   |              |
| CRC, bit     | <u>0</u>                   |   |              |
| RM attribute | <u>256</u>                 |   |              |

**Table C.4.2.4: DL reference measurement channel, TFCS**

|           |  |
|-----------|--|
| TFCS size | <u>20</u>  |
| TFCS      | <u>(DTCH, DCCH)=<br/>(TF0, TF0), (TF1, TF0), (TF2, TF0), (TF3, TF0), (TF4, TF0), (TF5, TF0), (TF6, TF0), (TF7, TF0),<br/>(TF8, TF0), (TF9, TF0), (TF0, TF1), (TF1, TF1), (TF2, TF1), (TF3, TF1), (TF4, TF1), (TF5, TF1),<br/>(TF6, TF1), (TF7, TF1), (TF8, TF1), (TF9, TF1).</u> |

| Parameter                       | DTCH                      |            |           | DCCH                      |
|---------------------------------|---------------------------|------------|-----------|---------------------------|
|                                 | Rate-1                    | Rate-2     | Rate-3    |                           |
| Transport Channel Number        | <u>4</u>                  |            |           | <u>2</u>                  |
| Transport Block Size            | <u>244</u>                | <u>159</u> | <u>39</u> | <u>100</u>                |
| Transport Block Set Size        | <u>244</u>                | <u>159</u> | <u>39</u> | <u>100</u>                |
| Transmission Time Interval      | <u>20 ms</u>              |            |           | <u>40 ms</u>              |
| Type of Error Protection        | <u>Convolution Coding</u> |            |           | <u>Convolution Coding</u> |
| Coding Rate                     | <u>1/3</u>                |            |           | <u>1/3</u>                |
| Rate Matching attribute         | <u>256</u>                |            |           | <u>256</u>                |
| Size of CRC                     | <u>12</u>                 |            |           | <u>12</u>                 |
| Position of TrCH in radio frame | <u>fixed</u>              |            |           | <u>fixed</u>              |

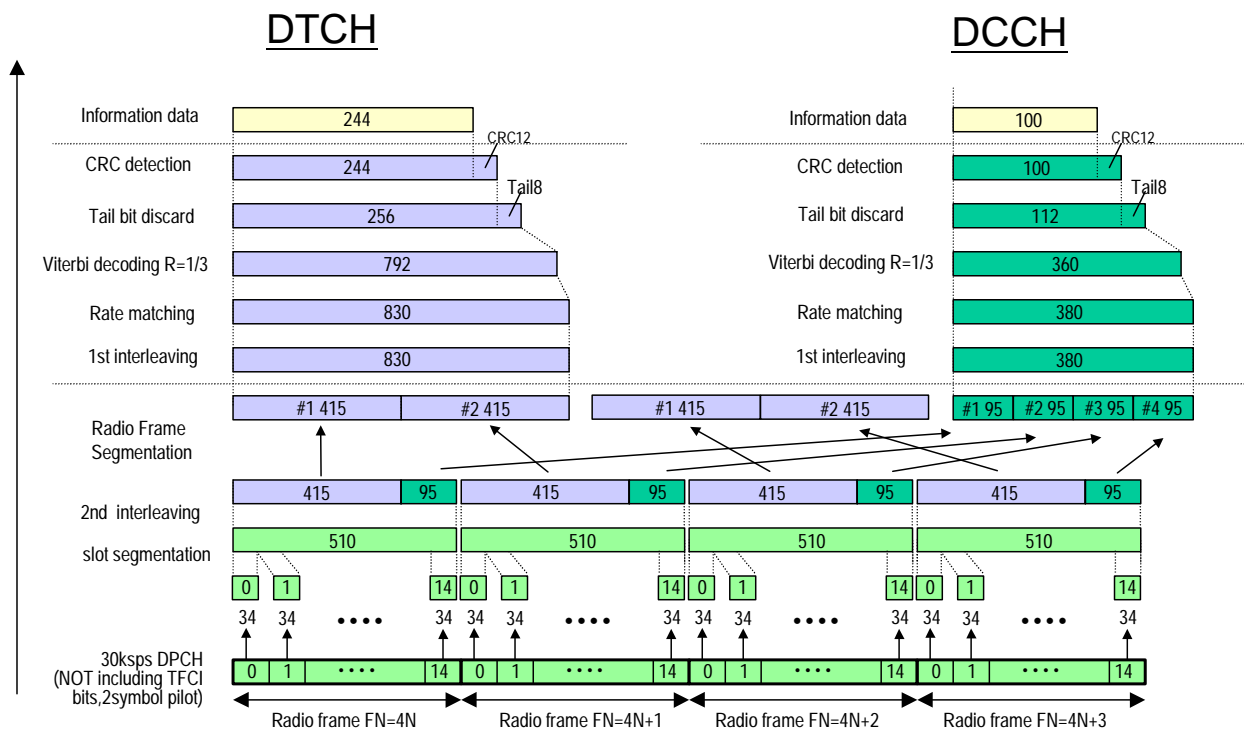


Figure C.4.1 (informative): Channel coding of DL reference measurement channel for BTFD (Rate 1)

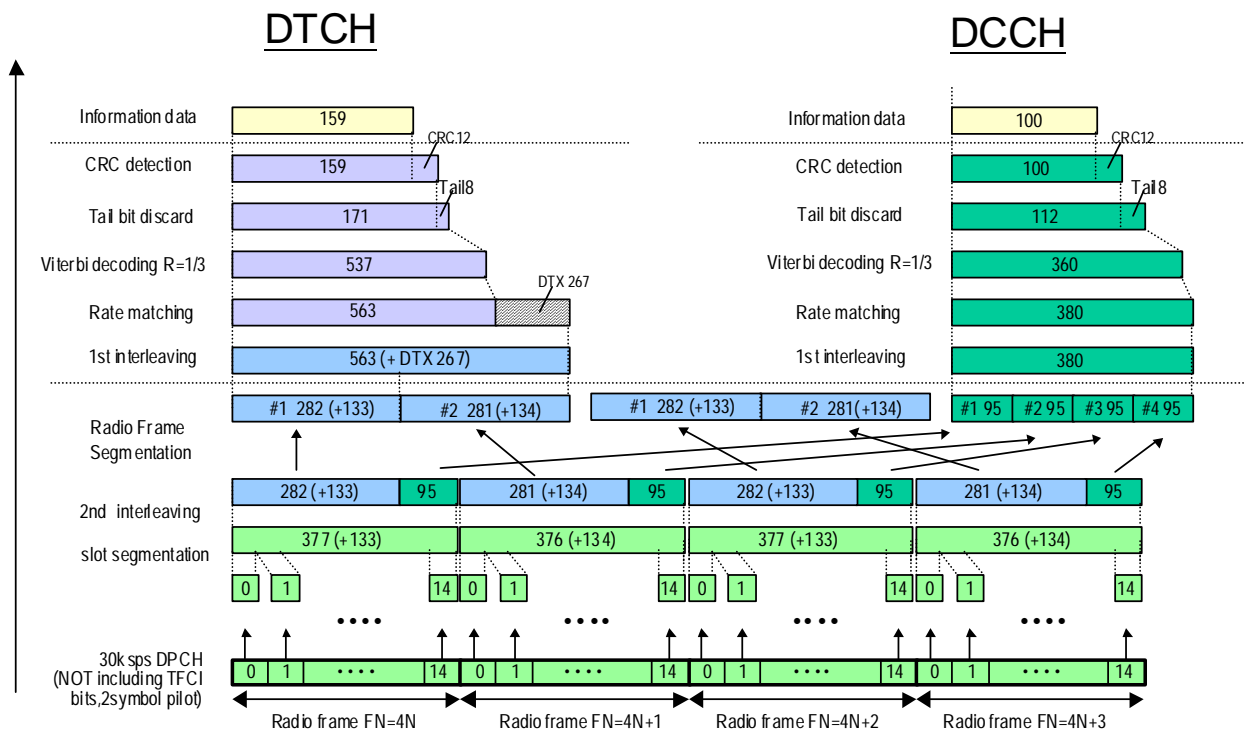


Figure C.4.2 (informative): Channel coding of DL reference measurement channel for BTFD (Rate 2)



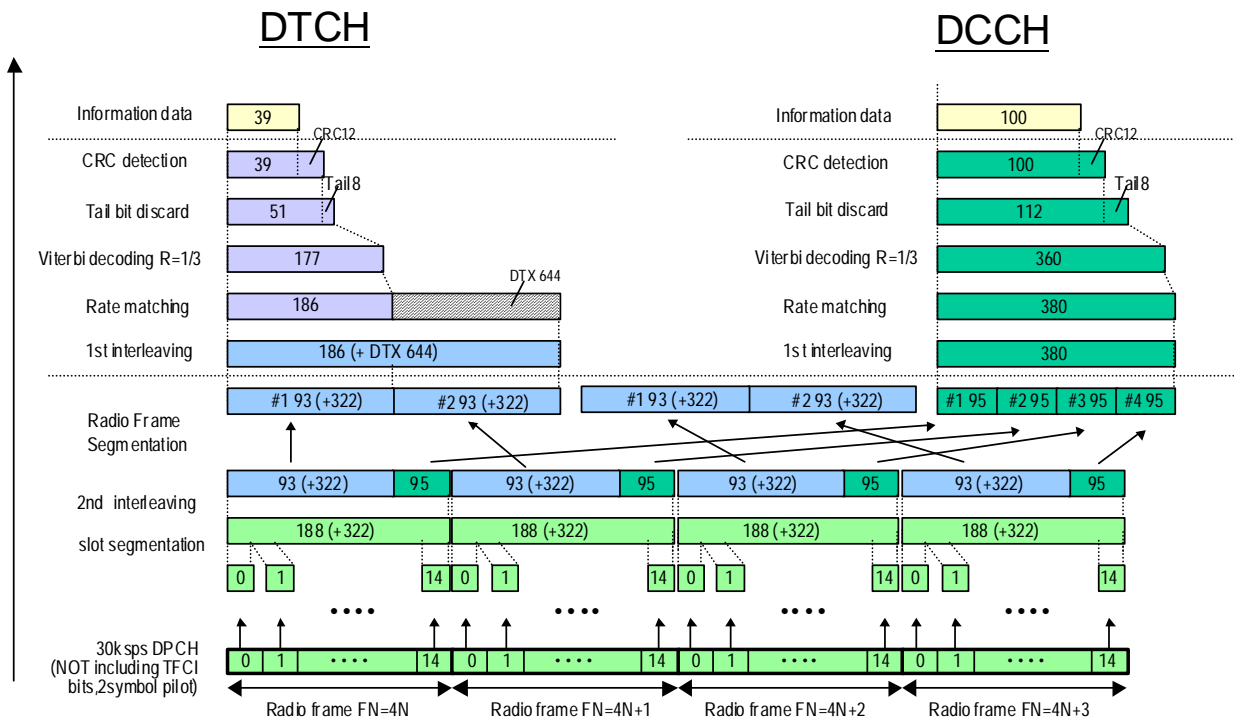


Figure C.4.3 (informative): Channel coding of DL reference measurement channel for BTFD (Rate 3)

< End of modification >

CR-Form-v7

## CHANGE REQUEST

⌘ **34.121 CR 242** ⌘ rev **-** ⌘ Current version: **3.11.0** ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

**Proposed change affects:** UICC apps  ME  Radio Access Network  Core Network

|                        |   |                 |   |  |  |
|------------------------|---|-----------------|---|--|--|
| <b>Title:</b>          | ⌘ 34.121 CR: Correction for Combining of TPC commands from radio links of different radio link sets test case |                 |   |  |  |
| <b>Source:</b>         | ⌘ T1/RF   |                 |   |  |  |
| <b>Work item code:</b> | ⌘   | <b>Date:</b>    | ⌘ 11/02/2003                              |  |  |
| <b>Category:</b>       | ⌘ <b>F</b>  | <b>Release:</b> | ⌘ R99                                     |  |  |
|                        | Use <u>one</u> of the following categories:   |                 | Use <u>one</u> of the following releases: |  |  |
|                        | <b>F</b> (correction)   |                 | 2 (GSM Phase 2)                           |  |  |
|                        | <b>A</b> (corresponds to a correction in an earlier release)  |                 | R96 (Release 1996)                        |  |  |
|                        | <b>B</b> (addition of feature),   |                 | R97 (Release 1997)                        |  |  |
|                        | <b>C</b> (functional modification of feature)   |                 | R98 (Release 1998)                        |  |  |
|                        | <b>D</b> (editorial modification)   |                 | R99 (Release 1999)                        |  |  |
|                        | Detailed explanations of the above categories can be found in 3GPP <a href="#">TR 21.900</a> .                |                 | Rel-4 (Release 4)                         |  |  |
|                        |   |                 | Rel-5 (Release 5)                         |  |  |
|                        |   |                 | Rel-6 (Release 6)                         |  |  |

|                                      |   |
|--------------------------------------|---|
| <b>Reason for change:</b>            | ⌘ Minimum requirement of TPC commands from radio links of different radio link sets test case has been changed (25.101 CR194).<br><br>Test tolerances and derivation of test requirements are not completed in 34.121 for test case 7.7.2.  |
| <b>Summary of change:</b>            | ⌘ Minimum requirements of test case 7.7.2 are modified according to 25.101. Test procedure is modified due to minimum requirement change. Theory of statistical testing of RRM delay performance is proposed to be applied in Combining of TPC commands test 1. Test tolerances are included in test parameters in test requirement clause. Annexes F.1.4, F.2.3 and F.4 are modified due to modifications of uncertainty and test tolerance values. Table F.6.2.8 is modified. |
| <b>Consequences if not approved:</b> | ⌘ Minimum requirements are not fully tested. Test tolerances are not implemented in the test case.  |

|                              |  |   |   |  |   |  |   |  |   |
|------------------------------|--|---|---|--|---|--|---|--|---|
| <b>Clauses affected:</b>     | ⌘ 7.7.2, Annex F.1.4, F.2.3, F.4, F.6.2.8  |   |   |  |   |  |   |  |   |
| <b>Other specs affected:</b> | <table border="1" style="display: inline-table; border-collapse: collapse;"> <tr> <td style="width: 20px; text-align: center;">Y</td> <td style="width: 20px; text-align: center;">N</td> </tr> <tr> <td style="text-align: center;"> </td> <td style="text-align: center;">X</td> </tr> <tr> <td style="text-align: center;"> </td> <td style="text-align: center;">X</td> </tr> <tr> <td style="text-align: center;"> </td> <td style="text-align: center;">X</td> </tr> </table> Other core specifications ⌘<br>Test specifications ⌘<br>O&M Specifications ⌘ | Y | N |  | X |  | X |  | X |
| Y                            | N  |   |   |  |   |  |   |  |   |
|                              | X  |   |   |  |   |  |   |  |   |
|                              | X  |   |   |  |   |  |   |  |   |
|                              | X  |   |   |  |   |  |   |  |   |
| <b>Other comments:</b>       | ⌘  |   |   |  |   |  |   |  |   |

### **How to create CRs using this form:**

Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>.

Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

## 7.7.2 Combining of TPC commands from radio links of different radio link sets

### 7.7.2.1 Definition and applicability

When a UE is in soft handover, multiple TPC commands may be received in each slot from different cells in the active set. In general, the TPC commands transmitted in the same slot in the different cells may be different and need to be combined to give TPC\_cmd as specified in TS 25.214 [5], in order to determine the required uplink power step.

The requirements and this test apply to all types of UTRA for the FDD UE.

### 7.7.2.2 Minimum requirements

Test parameters are specified in table 7.7.2.1. The delay profiles of the signals received from the different cells are the same but time-shifted by 10 chips.

For Test 1, the [sequence of](#) uplink power changes between adjacent slots shall be as shown in table 7.7.2.2 over the 4 consecutive slots [more than 99% of the time](#). Note that this case is without an additional noise source  $I_{oc}$ .

For Test 2, the Cell1 and Cell2 TPC patterns are repeated a number of times. If the transmitted power of a given slot is increased compared to the previous slot, then a variable "Transmitted power UP" is increased by one, otherwise a variable "Transmitted power DOWN" is increased by one. The requirements for "Transmitted power UP" and "Transmitted power DOWN" are shown in table 7.7.2.3.

**Table 7.7.2.1: Parameters for TPC command combining**

| Parameter                           | Test 1                                 | Test 2                   | Unit           |
|-------------------------------------|--|--------------------------|----------------|
| Phase reference                     | P-CPICH                                |                          | -              |
| DPCH_Ec/lor                         | -12                                    |                          | dB             |
| $\hat{I}_{or1}$ and $\hat{I}_{or2}$ | -60                                    |                          | dBm / 3,84 MHz |
| $I_{oc}$                            | -                                      | -60                      | dBm / 3,84 MHz |
| Power-Control-Algorithm             | Algorithm 1                            |                          | -              |
| Cell 1 TPC commands over 4 slots    | {0,0,1,1}                              |                          | -              |
| Cell 2 TPC commands over 4 slots    | {0,1,0,1}                              |                          | -              |
| Information Data Rate               | 12,2                                   |                          | Kbps           |
| Propagation condition               | Static without AWGN source<br>$I_{oc}$ | Multi-path fading case 3 | -              |

**Table 7.7.2.2: Requirements for Test 1**

| Test Number | Required power changes over the 4 consecutive slots |
|-------------|---|
| 1           | Down, Down, Down, Up                                |

**Table 7.7.2.3: Requirements for Test 2**

| Test Number | Ratio<br>(Transmitted power UP) /<br>(Total number of slots) | Ratio<br>(Transmitted power DOWN) /<br>(Total number of slots) |
|-------------|--|--|
| 2           | $\geq 0,25$  | $\geq 0,5$   |

The reference for this requirement is TS 25.101 [1] clause 8.7.2.1.

### 7.7.2.3 Test purpose

To verify that the combining of TPC commands received in soft handover results in TPC\_cmd being derived so as to meet the requirements stated in tables 7.7.2.2 and 7.7.2.3.

### 7.7.2.4 Method of test

#### 7.7.2.4.1 Initial conditions

Test environment: normal; see clauses G.2.1 and G.2.2.

Frequencies to be tested: mid range; see clause G.2.4.

- 1) Connect two SS's to the UE antenna connector as shown in figure A.13.
- 2) Set the test parameters as specified in table 7.7.2.4 for Test 1.
- 3) Set up a call according to the Generic Call Setup procedure.
- 4) Signal the uplink DPCH power control parameters to use Algorithm 1 and a step size of 1dB.
- 5) Enter the UE into loopback test mode and start the loopback test.

See TS 34.108 [3] and TS 34.109 [4] for details regarding the generic call setup procedure and loopback test.

#### 7.7.2.4.2 Procedures

- 1) Before proceeding with paragraph (2), set the output power of the UE, measured at the UE antenna connector, to be in the range  $-10 \pm 9$  dBm. This may be achieved by setting the downlink signal ( $\hat{I}_{or}$ ) to yield an appropriate open loop output power and/or by generating suitable downlink TPC commands from the SSs.
- 2) Send the following sequences of TPC commands in the downlink from each SS over a period of 5 timeslots:

|     | Downlink TPC commands |         |         |         |         |
|-----|-----------------------|---------|---------|---------|---------|
|     | Slot #0               | Slot #1 | Slot #2 | Slot #3 | Slot #4 |
| SS1 | 0                     | 0       | 0       | 1       | 1       |
| SS2 | 0                     | 0       | 1       | 0       | 1       |

~~3)~~ ~~3)~~ Measure the mean power at the UE antenna connector in timeslots # 0, 1, 2, 3 and 4, not including the 25  $\mu$ s transient periods at the start and end of each slot.

~~4)~~ 4) Repeat step 3) according to Annex F.6.2 Table F.6.2.8.

~~45)~~ End test 1 and disconnect UE.

~~56)~~ Connect two SS's and an AWGN source to the UE antenna connector as shown in figure A.11.

~~67)~~ Initialise variables "Transmitted power UP" and "Transmitted power DOWN" to zero.

~~78)~~ Set the test parameters as specified in table 7.7.2.4 for Test 2.

~~89)~~ Set up a call according to the Generic Call Setup procedure.

~~910)~~ Signal the uplink DPCH power control parameters to use Algorithm 1 and a step size of 1 dB.

~~1011)~~ Enter the UE into loopback test mode and start the loopback test.

~~112)~~ Perform the following steps a) to d) [15] times:

- a) Before proceeding with step b), set the output power of the UE, measured at the UE antenna connector, to be in the range  $-10 \pm 9$  dBm. This may be achieved by generating suitable downlink TPC commands from the SSs.
- b) Send the following sequences of TPC commands in the downlink from each SS over a period of 33 timeslots:

|     | Downlink TPC commands                                     |
|-----|---|
| SS1 | 1 0 0 1 1 0 0 1 1 0 0 1 1 0 0 1 1 0 0 1 1 0 0 1 1 0 0 1 1 |
| SS2 | 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 |

- c) Measure the mean power at the UE antenna connector in each timeslot, not including the 25  $\mu$ s transient periods at the start and end of each slot.
- d) For each timeslot from the 2nd timeslot to the 33rd timeslot inclusive:
- if the mean power in that timeslot is greater than or equal to the mean power in the previous timeslot plus 0,5 dB, increment "Transmitted power UP" by 1;
  - if the mean power in that timeslot is less than or equal to the mean power in the previous timeslot minus 0,5 dB, increment "Transmitted power DOWN" by 1.

### 7.7.2.5 Test requirements

Test parameters are specified in table 7.7.2.4. The delay profiles of the signals received from the different cells are the same but time-shifted by 10 chips.

**Table 7.7.2.4: Parameters for TPC command combining**

| Parameter                           | Test 1                     | Test 2                   | Unit           |
|-------------------------------------|----------------------------|--------------------------|----------------|
| Phase reference                     | P-CPICH                    |                          | -              |
| DPCH $E_c/I_{or}$                   | -11,9                      |                          | dB             |
| $\hat{I}_{or1}$ and $\hat{I}_{or2}$ | -60                        | -59.2                    | dBm / 3,84 MHz |
| $I_{oc}$                            | -                          | -60                      | dBm / 3,84 MHz |
| Power-Control-Algorithm             | Algorithm 1                |                          | -              |
| Cell 1 TPC commands over 4 slots    | {0,0,1,1}                  |                          | -              |
| Cell 2 TPC commands over 4 slots    | {0,1,0,1}                  |                          | -              |
| Information Data Rate               | 12,2                       |                          | Kbps           |
| Propagation condition               | Static without AWGN source | Multi-path fading case 3 | -              |
|                                     | $I_{oc}$                   |                          |                |

- 1) In Step ~~23~~ of clause 7.7.2.4.2, the mean power in slot #1 shall be less than or equal to the mean power in slot #0 minus 0,5 dB.
- 2) In Step ~~23~~ of clause 7.7.2.4.2, the mean power in slot #2 shall be less than or equal to the mean power in slot #1 minus 0,5 dB.
- 3) In Step ~~23~~ of clause 7.7.2.4.2, the mean power in slot #3 shall be less than or equal to the mean power in slot #2 minus 0,5 dB.
- 4) In Step ~~23~~ of clause 7.7.2.4.2, the mean power in slot #4 shall be greater than or equal to the mean power in slot #3 plus 0,5 dB.

5) The sequence of test requirements 1-4 shall be fulfilled more than 99% of the time.

~~5~~6) At the end of the test, "Transmitted power UP" shall be greater than or equal to [95] and "Transmitted power DOWN" shall be greater than or equal to [210].

NOTE 1: The test limits in requirements ~~(4)~~ and ~~(5)~~6) have been computed to give a confidence level of [99,7] % that a UE which follows the core requirements will pass. The number of timeslots has been chosen to get a good compromise between the test time and the risk of passing a bad UE.

NOTE 2: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test is defined in clause F.2 and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in clause F.4.

## F.1.4 Performance requirement

Table F.1.4: Maximum Test System Uncertainty for Performance Requirements

| Clause   | Maximum Test System Uncertainty   | Derivation of Test System Uncertainty  |
|--|---|--|
| 7.2 Demodulation in Static Propagation Condition                   | $\hat{I}_{or}/I_{oc}$ $\pm 0.3$ dB<br>$I_{oc}$ $\pm 1.0$ dB<br>$\frac{DPCH\_E_c}{I_{or}}$ $\pm 0.1$ dB  | <p>0.1 dB uncertainty in DPCH_Ec ratio</p> <p>0.3 dB uncertainty in <math>\hat{I}_{or}/I_{oc}</math> based on power meter measurement after the combiner</p> <p>Overall error is the sum of the <math>\hat{I}_{or}/I_{oc}</math> ratio error and the DPCH_Ec/Ior ratio but is not RSS for simplicity. The absolute error of the AWGN loc is not important for any tests in clause 7 but is specified as 1.0 dB.</p>      |
| 7.3 Demodulation of DCH in multipath Fading Propagation conditions | $\hat{I}_{or}/I_{oc}$ $\pm 0.56$ dB<br>$I_{oc}$ $\pm 1.0$ dB<br>$\frac{DPCH\_E_c}{I_{or}}$ $\pm 0.1$ dB | <p>Worst case gain uncertainty due to the fader from the calibrated static profile is <math>\pm 0.5</math> dB</p> <p>In addition the same <math>\pm 0.3</math> dB <math>\hat{I}_{or}/I_{oc}</math> ratio error as 7.2.</p> <p>These are uncorrelated so can be RSS.</p> <p>Overall error in <math>\hat{I}_{or}/I_{oc}</math> is <math>(0.5^2 + 0.3^2)^{0.5} = 0.6</math> dB</p>  |
| 7.4 Demodulation of DCH in Moving Propagation conditions           | $\hat{I}_{or}/I_{oc}$ $\pm 0.6$ dB<br>$I_{oc}$ $\pm 1.0$ dB<br>$\frac{DPCH\_E_c}{I_{or}}$ $\pm 0.1$ dB  | Same as 7.3  |
| 7.5 Demodulation of DCH in Birth-Death Propagation conditions      | $\hat{I}_{or}/I_{oc}$ $\pm 0.6$ dB<br>$I_{oc}$ $\pm 1.0$ dB<br>$\frac{DPCH\_E_c}{I_{or}}$ $\pm 0.1$ dB  | Same as 7.3  |
| 7.6.1 Demodulation of DCH in open loop Transmit diversity mode     | $\hat{I}_{or}/I_{oc}$ $\pm 0.8$ dB<br>$I_{oc}$ $\pm 1.0$ dB<br>$\frac{DPCH\_E_c}{I_{or}}$ $\pm 0.1$ dB  | <p>Worst case gain uncertainty due to the fader from the calibrated static profile is <math>\pm 0.5</math> dB per output</p> <p>In addition the same <math>\pm 0.3</math> dB <math>\hat{I}_{or}/I_{oc}</math> ratio error as 7.2.</p> <p>These are uncorrelated so can be RSS.</p> <p>Overall error in <math>\hat{I}_{or}/I_{oc}</math> is <math>(0.5^2 + 0.5^2 + 0.3^2)^{0.5} = 0.768</math> dB. Round up to 0.8 dB</p> |



| Clause   | Maximum Test System Uncertainty  | Derivation of Test System Uncertainty  |
|--|--|--|
| 7.6.2 Demodulation of DCH in closed loop Transmit diversity mode                       | $\hat{I}_{or}/I_{oc}$ ±0.8 dB<br>$I_{oc}$ ±1.0 dB<br>$\frac{DPCH - E_c}{I_{or}}$ ±0.1 dB   | Same as 7.6.1  |
| 7.6.3, Demodulation of DCH in site selection diversity Transmission power control mode | $\hat{I}_{or}/I_{oc}$ ±0.8 dB<br>$I_{oc}$ ±1.0 dB<br>$\frac{DPCH - E_c}{I_{or}}$ ±0.1 dB   | Same as 7.6.1  |
| 7.7.1 Demodulation in inter-cell soft Handover   | $\hat{I}_{or}/I_{oc}$ ±0.8 dB<br>$I_{oc}$ ±1.0 dB<br>$\frac{DPCH - E_c}{I_{or}}$ ±0.1 dB   | Same as 7.6.1  |
| 7.7.2 Combining of TPC commands Test 1   | <del><math>\hat{I}_{or}/I_{oc}</math>      ±1.0 dB</del><br><del><math>I_{oc}</math>                ±1.0 dB</del><br>$\frac{DPCH - E_c}{I_{or}}$ ±0.1 dB | <del>Have two <math>I_{or1}</math> and <math>I_{or2}</math>, and no AWGN. So error is only 0.3 dB</del><br><br>Test is looking for changes in power – need to allow for relaxation in criteria for power step of probably 0.1 dB to 0.4 dB |
| 7.7.2 Combining of TPC commands Test 2   | $\hat{I}_{or}/I_{oc}$ ±0.8 dB<br>$I_{oc}$ ±1.0 dB<br>$\frac{DPCH - E_c}{I_{or}}$ ±0.1 dB   | Same as 7.6.1  |
| 7.8.1 Power control in downlink constant BLER target                                   | $\hat{I}_{or}/I_{oc}$ ±0.6 dB<br>$I_{oc}$ ±1.0 dB<br>$\frac{DPCH - E_c}{I_{or}}$ ±0.1 dB   | Same as 7.3  |
| 7.8.2, Power control in downlink initial convergence                                   | $\hat{I}_{or}/I_{oc}$ ±0.6 dB<br>$I_{oc}$ ±1.0 dB<br>$\frac{DPCH - E_c}{I_{or}}$ ±0.1 dB   | Same as 7.3  |
| 7.8.3, Power control in downlink: wind up effects                                      | $\hat{I}_{or}/I_{oc}$ ±0.6 dB<br>$I_{oc}$ ±1.0 dB<br>$\frac{DPCH - E_c}{I_{or}}$ ±0.1 dB   | Same as 7.3  |
| 7.9 Downlink compressed mode   | $\hat{I}_{or}/I_{oc}$ ±0.6 dB<br>$I_{oc}$ ±1.0 dB<br>$\frac{DPCH - E_c}{I_{or}}$ ±0.1 dB   | Same as 7.3  |
| 7.10 Blind transport format detection Tests 1, 2, 3                                    | $\hat{I}_{or}/I_{oc}$ ±0.3 dB<br>$I_{oc}$ ±1.0 dB<br>$\frac{DPCH - E_c}{I_{or}}$ ±0.1 dB   | Same as 7.2  |

| Clause   | Maximum Test System Uncertainty   | Derivation of Test System Uncertainty |
|--|---|---------------------------------------|
| 7.10 Blind transport format detection<br>Tests 4, 5, 6 | $\hat{I}_{or}/I_{oc}$ $\pm 0.6$ dB<br>$I_{oc}$ $\pm 1.0$ dB<br>$\frac{DPCH - E_c}{I_{or}}$ $\pm 0.1$ dB | Same as 7.3                           |

## F.2.3 Performance requirements

**Table F.2.3: Test Tolerances for Performance Requirements.**

| Clause   | Test Tolerance  |
|--|---|
| 7.2 Demodulation in Static Propagation Condition                                       | 0.3 dB for $\hat{I}_{or}/I_{oc}$<br>0.1 dB for DPCH_Ec/lor                                  |
| 7.3 Demodulation of DCH in multipath Fading Propagation conditions                     | 0.6 dB for $\hat{I}_{or}/I_{oc}$<br>0.1 dB for DPCH_Ec/lor                                  |
| 7.4 Demodulation of DCH in Moving Propagation conditions                               | 0.6 dB for $\hat{I}_{or}/I_{oc}$<br>0.1 dB for DPCH_Ec/lor                                  |
| 7.5 Demodulation of DCH in Birth-Death Propagation conditions                          | 0.6 dB for $\hat{I}_{or}/I_{oc}$<br>0.1 dB for DPCH_Ec/lor                                  |
| 7.6.1 Demodulation of DCH in open loop Transmit diversity mode                         | 0.8 dB for $\hat{I}_{or}/I_{oc}$<br>0.1 dB for DPCH_Ec/lor                                  |
| 7.6.2 Demodulation of DCH in closed loop Transmit diversity mode                       | 0.8 dB for $\hat{I}_{or}/I_{oc}$<br>0.1 dB for DPCH_Ec/lor                                  |
| 7.6.3, Demodulation of DCH in site selection diversity Transmission power control mode | 0.8 dB for $\hat{I}_{or}/I_{oc}$<br>0.1 dB for DPCH_Ec/lor                                  |
| 7.7.1 Demodulation in inter-cell soft Handover conditions                              | 0.8 dB for $\hat{I}_{or}/I_{oc}$<br>0.1 dB for DPCH_Ec/lor                                  |
| 7.7.2 Combining of TPC commands Test 1   | <del>0.8</del> dB for <del>lor1, lor2</del> $\hat{I}_{or}/I_{oc}$<br>0.1 dB for DPCH_Ec/lor |
| 7.7.2 Combining of TPC commands Test 2   | <del>0.3</del> <u>0.8</u> dB for $\hat{I}_{or}/I_{oc}$<br>0.1 dB for DPCH_Ec/lor            |
| 7.8.1 Power control in downlink constant BLER target                                   | 0.6 dB for $\hat{I}_{or}/I_{oc}$<br>0.1 dB for DPCH_Ec/lor                                  |
| 7.8.2, Power control in downlink initial convergence                                   | 0.6 dB for $\hat{I}_{or}/I_{oc}$<br>0.1 dB for DPCH_Ec/lor                                  |
| 7.8.3, Power control in downlink: wind up effects                                      | 0.6 dB for $\hat{I}_{or}/I_{oc}$<br>0.1 dB for DPCH_Ec/lor                                  |
| 7.9 Downlink compressed mode   | 0.6 dB for $\hat{I}_{or}/I_{oc}$<br>0.1 dB for DPCH_Ec/lor                                  |
| 7.10 Blind transport format detection Tests 1, 2, 3                                    | 0.3 dB for $\hat{I}_{or}/I_{oc}$<br>0.1 dB for DPCH_Ec/lor                                  |
| 7.10 Blind transport format detection Tests 4, 5, 6                                    | 0.6 dB for $\hat{I}_{or}/I_{oc}$<br>0.1 dB for DPCH_Ec/lor                                  |

## F.4 Derivation of Test Requirements (This clause is informative)

The Test Requirements in the present document have been calculated by relaxing the Minimum Requirements of the core specification using the Test Tolerances defined in clause F.2. When the Test Tolerance is zero, the Test Requirement will be the same as the Minimum Requirement. When the Test Tolerance is non-zero, the Test Requirements will differ from the Minimum Requirements, and the formula used for this relaxation is given in table F.4.

Table F.4.1: Derivation of Test Requirements (Transmitter tests)

| Test  | Minimum Requirement in TS 25.101   | Test Tolerance (TT)                     | Test Requirement in TS 34.121  |
|---|--|---|--|
| 5.2 Maximum Output Power                    | Power class 1 (33 dBm)<br>Tolerance = +1/-3 dB<br>Power class 2 (27 dBm)<br>Tolerance = +1/-3 dB<br>Power class 3 (24 dBm)<br>Tolerance = +1/-3 dB<br>Power class 4 (21 dBm)<br>Tolerance = $\pm 2$ dB | 0.7 dB                                  | Formula: Upper Tolerance limit + TT<br>Lower Tolerance limit – TT<br>For power classes 1-3:<br>Upper Tolerance limit = +1.7 dB<br>Lower Tolerance limit = -3.7 dB<br>For power class 4:<br>Upper Tolerance limit = +2.7 dB<br>Lower Tolerance limit = -2.7 dB          |
| 5.3 Frequency Error                         | The UE modulated carrier frequency shall be accurate to within $\pm 0.1$ ppm compared to the carrier frequency received from the Node B.   | 10 Hz                                   | Formula: modulated carrier frequency error + TT<br><br>modulated carrier frequency error = $\pm(0.1$ ppm + 10 Hz).   |
| 5.4.1 Open loop power control in the uplink | Open loop power control tolerance $\pm 9$ dB (Normal)<br><br>Open loop power control tolerance $\pm 12$ dB (Normal)  | 1.0 dB                                  | Formula: Upper Tolerance limit + TT<br>Lower Tolerance limit – TT<br><br>For Normal conditions:<br>Upper Tolerance limit = +10 dB<br>Lower Tolerance limit = -10 dB<br><br>For Extreme conditions:<br>Upper Tolerance limit = +13 dB<br>Lower Tolerance limit = -13 dB |
| 5.4.2 Inner loop power control in uplink    | See table 5.4.2.1 and 5.4.2.2  | 0.25dB<br>0.15 dB<br>0.2 dB<br>[0.3 dB] | Formula: Upper Tolerance limit + TT<br>Lower Tolerance limit – TT  |
| 5.4.3 Minimum Output Power                  | UE minimum transmit power shall be less than –50 dBm   | 1.0 dB                                  | Formula:<br>UE minimum transmit power + TT<br>UE minimum transmit power = –49 dBm  |

| Test   | Minimum Requirement in TS 25.101  | Test Tolerance (TT)  | Test Requirement in TS 34.121   |
|--|---|--|---|
| 5.4.4 Out-of-synchronisation handling of output power: | $\frac{DPCCH_{-}E_c}{I_{or}}$ levels<br>AB: -22 dB<br>BD: -28 dB<br>DE: -24 dB<br>EF: -18 dB<br>transmit ON/OFF time<br>200ms<br><br>$\frac{DPDCH_{-}E_c}{I_{or}} = -16.6$ dB<br><br>$I_{oc} - 60$ dBm<br><br>$\hat{I}_{or}/I_{oc} = -1$ dB | 0.4 dB<br>for<br>$\frac{DPCCH_{-}E_c}{I_{or}}$<br><br>0 ms for<br>timing<br>measurement            | Formulas:<br>Ratio between A and B + TT<br>Ratio between B and D – TT<br>Ratio between D and E – TT<br>Ratio between E and F + TT<br>transmit ON/OFF time + TT timing<br><br>$\frac{DPDCH_{-}E_c}{I_{or}} = -16.6$ dB<br><br>$I_{oc} - 60$ dBm<br><br>$\hat{I}_{or}/I_{oc} = -1$ dB<br><br>$\frac{DPCCH_{-}E_c}{I_{or}}$ levels:<br>AB: -21.6 dB<br>BD: -28.4 dB<br>DE: -24.4 dB<br>EF: -17.6 dB<br><br>transmit ON/OFF time<br>200ms timing<br>Uncertainty of OFF power measurement<br>is handled by Transmit OFF power test<br>and uncertainty of ON power<br>measurement is handled by Minimum<br>output power test. |
| 5.5.1 Transmit OFF power (static case)                 | Transmit OFF power shall be less than -56 dBm   | 1.0 dB   | Formula: Transmit OFF power + TT<br>Transmit OFF power = -55dBm.  |
| 5.5.2 Transmit ON/OFF time mask (dynamic case)         | Transmit ON power shall be the<br>target value as defined in clause<br>5.5.2.2<br>Transmit OFF power shall be<br>less than -56 dBm  | On power<br>upper TT =<br>0.7 dB<br>On power<br>lower TT =<br>1.0 dB<br><br>Off power<br>TT [ ] dB | Formula for transmit ON power:<br>Transmit ON power target upper limit +<br>On power upper TT<br>Transmit ON power target lower limit -<br>On power lower TT<br><br>To calculate Transmit ON power target<br>value range take the nominal TX power<br>range from Table 5.5.2.3 then apply table<br>5.4.1.1 open limits then apply table 5.7.1<br>(only if there has been a transmission<br>gap) then cap the upper value using<br>table 5.2.1.<br><br>Formula for transmit OFF power:<br>Transmit OFF power + Off power TT<br><br>Transmit OFF power = [ ]dBm   |
| 5.6 Change of TFC: power control step size             | TFC step size = +5 to +9 dB   | 0.3 dB   | Formula: Upper Tolerance limit + TT<br>Lower Tolerance limit – TT<br><br>Upper limit = -4.7 dB<br>Lower limit = -9.3 dB   |
| 5.7 Power setting in uplink compressed mode            | Various   | TBD<br>(Subset of 5.4.2)   | TBD   |

| Test   | Minimum Requirement in TS 25.101   | Test Tolerance (TT) | Test Requirement in TS 34.121   |                             |                |
|--|--|---------------------|---|-----------------------------|----------------|
| 5.8 Occupied Bandwidth                             | The occupied channel bandwidth shall be less than 5 MHz based on a chip rate of 3.84 Mcps.                                   | 0 kHz               | Formula: occupied channel bandwidth: + TT<br>occupied channel bandwidth = 5.0 MHz   |                             |                |
| 5.9 Spectrum emission mask                         | Minimum requirement defined in TS25.101 Table 6.10.<br>The lower limit shall be -50 dBm / 3.84 MHz or which ever is higher.  | 1.5 dB              | Formula: Minimum requirement + TT<br>Lower limit + TT<br>Add 1.5 to Minimum requirement entries in TS25.101 Table 6.10.<br>Zero test tolerance is applied for Additional requirements for Band II due to FCC regulatory requirements.<br>The lower limit shall be -48.5 dBm / 3.84 MHz or which ever is higher. |                             |                |
| 5.10 Adjacent Channel Leakage Power Ratio (ACLR)   | If the adjacent channel power is greater than -50 dBm then the ACLR shall be higher than the values specified below.         | 0.0 dB              | Formula: Absolute power threshold + TT  |                             |                |
|  | Power Classes 3 and 4:<br>UE channel +5 MHz or -5 MHz, ACLR limit: 33 dB<br>UE channel +10 MHz or -10 MHz, ACLR limit: 43 dB | 0.8 dB              | Formula: ACLR limit - TT<br>Power Classes 3 and 4:<br>UE channel +5 MHz or -5 MHz, ACLR limit: 32.2 dB<br>UE channel +10 MHz or -10 MHz, ACLR limit: 42.2 dB  |                             |                |
| 5.11 Spurious Emissions                            |  |                     | Formula: Minimum Requirement+ TT<br>Add zero to all the values of Minimum Requirements in table 5.11.1a and 5.11.1b.  |                             |                |
|  | Frequency Band   | Minimum Requirement | Frequency Band  | Minimum Requirement         |                |
|  | 9 kHz ≤ f < 150 kHz  | -36dBm /1kHz        | 0 dB  | 9kHz ≤ f < 1GHz             | -36dBm /1kHz   |
|  | 150 kHz ≤ f < 30 MHz   | -36dBm /10kHz       | 0 dB  | 150 kHz ≤ f < 30 MHz        | -36dBm /10kHz  |
|  | 30 MHz ≤ f < 1000 MHz  | -36dBm /100kHz      | 0 dB  | 30 MHz ≤ f < 1000 MHz       | -36dBm /100kHz |
|  | 1 GHz ≤ f < 12.75 GHz  | -30dBm /1MHz        | 0 dB  | 1 GHz ≤ f < 2.2 GHz         | -30dBm /1MHz   |
|  |  |                     | 0 dB  | 2.2 GHz ≤ f < 4 GHz         | -30dBm /1MHz   |
|  |  |                     | 0 dB  | 4 GHz ≤ f < 12.75 GHz       | -30dBm /1MHz   |
|  | 1893.5 MHz < f < 1919.6 MHz  | -41dBm /300kHz      | 0 dB  | 1893.5 MHz < f < 1919.6 MHz | -41dBm /300kHz |
|  | 925 MHz ≤ f ≤ 935 MHz  | -67dBm /100kHz      | 0 dB  | 925 MHz ≤ f ≤ 935 MHz       | -67dBm /100kHz |
| 935 MHz < f ≤ 960 MHz                              | -79dBm /100kHz   | 0 dB                | 935 MHz < f ≤ 960 MHz   | -79dBm /100kHz              |                |
| 1805 MHz ≤ f ≤ 1880 MHz                            | -71dBm /100kHz   | 0 dB                | 1805 MHz ≤ f ≤ 1880 MHz   | -71dBm /100kHz              |                |
| 5.12 Transmit Intermodulation                      | Intermodulation Product<br>5MHz -31 dBc<br>10MHz -41 dBc<br>CW Interferer level = -40 dBc                                    | 0 dB                | Formula: CW interferer level – TT/2<br><br>Intermod Products limits remain unchanged.<br><br>CW interferer level = -40 dBc  |                             |                |
| 5.13.1 Transmit modulation: EVM                    | The measured EVM shall not exceed 17.5%.   | 0%                  | Formula: EVM limit + TT<br>EVM limit = 17.5 %   |                             |                |
| 5.13.2 Transmit modulation: peak code domain error | The measured Peak code domain error shall not exceed -15 dB.   | 1.0 dB              | Formula: Peak code domain error + TT<br>Peak code domain error = -14 dB   |                             |                |

Table F.4.2: Derivation of Test Requirements (Receiver tests)

| Test                                | Minimum Requirement in TS 25.101  | Test Tolerance (TT) | Test Requirement in TS 34.121   |  |
|-------------------------------------|---|---------------------|---|--|
| 6.2 Reference sensitivity level     | $\hat{I}_{or} = -106.7 \text{ dBm} / 3.84 \text{ MHz}$<br>DPCH_Ec = $-117 \text{ dBm} / 3.84 \text{ MHz}$<br>BER limit = 0.001  | 0.7 dB              | Formula: $\hat{I}_{or} + TT$<br>DPCH_Ec + TT<br>BER limit unchanged<br><br>$\hat{I}_{or} = -106 \text{ dBm} / 3.84 \text{ MHz}$<br>DPCH_Ec = $-116.3 \text{ dBm} / 3.84 \text{ MHz}$                        |  |
| 6.3 Maximum input level             | -25 dBm Ior<br>-19 dBc DPCH_Ec/Ior  | 0.7 dB              | Formula: Ior-TT<br><br>Ior = -25.7 dBm  |  |
| 6.4 Adjacent Channel Selectivity    | $\hat{I}_{or} = -92.7 \text{ dBm} / 3.84 \text{ MHz}$<br>DPCH_Ec = $-103 \text{ dBm} / 3.84 \text{ MHz}$<br>I <sub>oac</sub> (modulated) = -52 dBm/3.84 MHz<br>BER limit = 0.001  | 0 dB                | Formula: $\hat{I}_{or}$ unchanged<br>DPCH_Ec unchanged<br>I <sub>oac</sub> - TT<br>BER limit unchanged<br><br>I <sub>oac</sub> = -52 dBm/3.84 MHz   |  |
| 6.5 Blocking Characteristics        | See Table 6.5.3 and 6.5.4. in TS34.121<br>BER limit = 0.001   | 0 dB                | Formula:<br>I <sub>blocking</sub> (modulated) - TT (dBm/3.84MHz)<br>I <sub>blocking</sub> (CW) - TT (dBm)<br>BER limit unchanged  |  |
| 6.6 Spurious Response               | I <sub>blocking</sub> (CW) -44 dBm<br>F <sub>uw</sub> :<br>Spurious response frequencies<br>BER limit = 0.001   | 0 dB                | Formula: I <sub>blocking</sub> (CW) - TT (dBm)<br>F <sub>uw</sub> unchanged<br>BER limit unchanged<br><br>I <sub>blocking</sub> (CW) = -44 dBm  |  |
| 6.7 Intermodulation Characteristics | I <sub>ouw1</sub> (CW) -46 dBm<br>I <sub>ouw2</sub> (modulated) -46 dBm / 3.84 MHz<br>F <sub>w1</sub> (offset) 10 MHz<br>F <sub>w2</sub> (offset) 20 MHz<br>I <sub>or</sub> = -103.7 dBm/3.84 MHz<br>DPCH_Ec = -114 dBm/3.84<br><br>BER limit = 0.001 | 0 dB                | Formula: I <sub>or</sub> + TT<br>DPCH_Ec + TT<br>I <sub>ouw1</sub> level unchanged<br>I <sub>ouw2</sub> level unchanged<br>BER limit unchanged.<br><br>I <sub>or</sub> = -114 dBm<br><br>BER limit. = 0.001 |  |
| 6.8 Spurious Emissions              |   |                     | Formula: Maximum level + TT<br>Add zero to all the values of Maximum Level in table 6.8.1.  |  |
|                                     | Frequency Band  | Maximum level       | Frequency Band  | Maximum level                            |
|                                     | 9kHz ≤ f < 1GHz   | -57dBm /100kHz      | 0 dB  | 9kHz ≤ f < 1GHz<br>-57dBm /100kHz        |
|                                     | 1GHz ≤ f ≤ 12.75GHz   | -47dBm /1MHz        | 0 dB  | 1GHz ≤ f ≤ 2.2GHz<br>-47dBm /1MHz        |
|                                     |   |                     | 0 dB  | 2.2GHz < f ≤ 4GHz<br>-47dBm /1MHz        |
|                                     |   |                     | 0 dB  | 4GHz < f ≤ 12.75GHz<br>-47dBm /1MHz      |
|                                     | 1920MHz ≤ f ≤ 1980MHz   | -60dBm /3.84MHz     | 0 dB  | 1920MHz ≤ f ≤ 1980MHz<br>-60dBm /3.84MHz |
| 2110MHz ≤ f ≤ 2170MHz               | -60dBm /3.84MHz   | 0 dB                | 2110MHz ≤ f ≤ 2170MHz<br>-60dBm /3.84MHz  |  |



Table F.4.3: Derivation of Test Requirements (Performance tests)

| Test  | Minimum Requirement in TS 25.101   | Test Tolerance (TT)   | Test Requirement in TS 34.121  |
|---|--|---|--|
| 7.2 Demodulation of DPCH in static conditions                                   | $\frac{DPCH\_E_c}{I_{or}}$ -5.5 to -16.6 dB<br>$I_{oc} = -60$ dBm<br>$\hat{I}_{or}/I_{oc} = -1$ dB         | 0.1 dB for $\frac{DPCH\_E_c}{I_{or}}$<br>0.3 dB for $\hat{I}_{or}/I_{oc}$ | Formulas:<br>$\frac{DPCH\_E_c}{I_{or}} = \text{ratio} + TT$<br>$\hat{I}_{or}/I_{oc} = \text{ratio} + TT$<br>$I_{oc}$ unchanged<br>$\hat{I}_{or}/I_{oc} = -0.7$ dB<br>$\frac{DPCH\_E_c}{I_{or}}$ -5.4 to -16.5 dB:        |
| 7.3 Demodulation of DPCH in multi-path fading propagation conditions Tests 1-4  | $\frac{DPCH\_E_c}{I_{or}}$ -2.2 to -15.0<br>$I_{oc} = -60$ dBm<br>$\hat{I}_{or}/I_{oc} = 9$ dB to -3 dB    | 0.1 dB for $\frac{DPCH\_E_c}{I_{or}}$<br>0.6 dB for $\hat{I}_{or}/I_{oc}$ | Formulas:<br>$\frac{DPCH\_E_c}{I_{or}} = \text{ratio} + TT$<br>$\hat{I}_{or}/I_{oc} = \text{ratio} + TT$<br>$I_{oc}$ unchanged<br>$\hat{I}_{or}/I_{oc} = 9.6$ to -2.4 dB<br>$\frac{DPCH\_E_c}{I_{or}}$ -2.1 to -14.9 dB: |
| 7.3 Demodulation of DPCH in multi-path fading propagation conditions Tests 5-8  | $\frac{DPCH\_E_c}{I_{or}}$ -3.2 to -7.7 dB<br>$I_{oc} = -60$ dBm<br>$\hat{I}_{or}/I_{oc} = 6$ dB to -3 dB  | 0.1 dB for $\frac{DPCH\_E_c}{I_{or}}$<br>0.6 dB for $\hat{I}_{or}/I_{oc}$ | Formulas:<br>$\frac{DPCH\_E_c}{I_{or}} = \text{ratio} + TT$<br>$\hat{I}_{or}/I_{oc} = \text{ratio} + TT$<br>$I_{oc}$ unchanged<br>$\hat{I}_{or}/I_{oc} = 6.6$ to -2.4 dB<br>$\frac{DPCH\_E_c}{I_{or}}$ -3.1 to -7.6 dB:  |
| 7.3 Demodulation of DPCH in multi-path fading propagation conditions Tests 9-12 | $\frac{DPCH\_E_c}{I_{or}}$ -4.4 to -11.8 dB<br>$I_{oc} = -60$ dBm<br>$\hat{I}_{or}/I_{oc} = 6$ dB to -3 dB | 0.1 dB for $\frac{DPCH\_E_c}{I_{or}}$<br>0.6 dB for $\hat{I}_{or}/I_{oc}$ | Formulas:<br>$\frac{DPCH\_E_c}{I_{or}} = \text{ratio} + TT$<br>$\hat{I}_{or}/I_{oc} = \text{ratio} + TT$<br>$I_{oc}$ unchanged<br>$\hat{I}_{or}/I_{oc} = 6.6$ to -2.4 dB<br>$\frac{DPCH\_E_c}{I_{or}}$ -4.3 to -11.7 dB: |

| Test   | Minimum Requirement in TS 25.101   | Test Tolerance (TT)   | Test Requirement in TS 34.121  |
|--|--|---|--|
| 7.3 Demodulation of DPCH in multi-path fading propagation conditions Tests 13-16 | $\frac{DPCH\_E_c}{I_{or}} \text{ -2.2 to -15.0 dB}$ $I_{oc} = -60 \text{ dBm}$ $\hat{I}_{or}/I_{oc} = 9 \text{ dB}$      | 0.1 dB for $\frac{DPCH\_E_c}{I_{or}}$<br>0.6 dB for $\hat{I}_{or}/I_{oc}$ | Formulas:<br>$\frac{DPCH\_E_c}{I_{or}} = \text{ratio} + \text{TT}$ $\hat{I}_{or}/I_{oc} = \text{ratio} + \text{TT}$ $I_{oc} \text{ unchanged}$ $\hat{I}_{or}/I_{oc} = 9.6$ $\frac{DPCH\_E_c}{I_{or}} \text{ -2.1 to -14.9 dB:}$                            |
| 7.3 Demodulation of DPCH in multi-path fading propagation conditions Tests 17-20 | $\frac{DPCH\_E_c}{I_{or}} \text{ -1.4 to -8.8 dB}$ $I_{oc} = -60 \text{ dBm}$ $\hat{I}_{or}/I_{oc} = 6 \text{ to -3 dB}$ | 0.1 dB for $\frac{DPCH\_E_c}{I_{or}}$<br>0.6 dB for $\hat{I}_{or}/I_{oc}$ | Formulas:<br>$\frac{DPCH\_E_c}{I_{or}} = \text{ratio} + \text{TT}$ $\hat{I}_{or}/I_{oc} = \text{ratio} + \text{TT}$ $I_{oc} \text{ unchanged}$ $\hat{I}_{or}/I_{oc} = 6.6 \text{ to } -2.4 \text{ dB}$ $\frac{DPCH\_E_c}{I_{or}} \text{ -1.3 to -8.7 dB:}$ |
| 7.4 Demodulation of DPCH in moving propagation conditions                        | $\frac{DPCH\_E_c}{I_{or}} \text{ -10.9 to -14.5}$ $I_{oc} = -60 \text{ dBm}$ $\hat{I}_{or}/I_{oc} = -1 \text{ dB}$       | 0.1 dB for $\frac{DPCH\_E_c}{I_{or}}$<br>0.6 dB for $\hat{I}_{or}/I_{oc}$ | Formulas:<br>$\frac{DPCH\_E_c}{I_{or}} = \text{ratio} + \text{TT}$ $\hat{I}_{or}/I_{oc} = \text{ratio} + \text{TT}$ $I_{oc} \text{ unchanged}$ $\hat{I}_{or}/I_{oc} = -0.4 \text{ dB}$ $\frac{DPCH\_E_c}{I_{or}} \text{ -10.8 to -14.4 dB:}$               |
| 7.5 Demodulation of DPCH birth-death propagation conditions                      | $\frac{DPCH\_E_c}{I_{or}} \text{ -8.7 to -12.6 dB}$ $I_{oc} = -60 \text{ dBm}$ $\hat{I}_{or}/I_{oc} = -1 \text{ dB}$     | 0.1 dB for $\frac{DPCH\_E_c}{I_{or}}$<br>0.6 dB for $\hat{I}_{or}/I_{oc}$ | Formulas:<br>$\frac{DPCH\_E_c}{I_{or}} = \text{ratio} + \text{TT}$ $\hat{I}_{or}/I_{oc} = \text{ratio} + \text{TT}$ $I_{oc} \text{ unchanged}$ $\hat{I}_{or}/I_{oc} = -0.4 \text{ dB}$ $\frac{DPCH\_E_c}{I_{or}} \text{ -18.6 to -12.5 dB:}$               |

| Test   | Minimum Requirement in TS 25.101   | Test Tolerance (TT)   | Test Requirement in TS 34.121   |
|--|--|---|---|
| 7.6.1 Demodulation of DPCH in transmit diversity propagation conditions                | $\frac{DPCH\_E_c}{I_{or}} -16.8 \text{ dB}$ $I_{oc} = -60 \text{ dBm}$ $\hat{I}_{or}/I_{oc} = 9 \text{ dB}$  | 0.1 dB for $\frac{DPCH\_E_c}{I_{or}}$<br><br>0.8 dB for $\hat{I}_{or}/I_{oc}$ | Formulas:<br>$\frac{DPCH\_E_c}{I_{or}} = \text{ratio} + \text{TT}$ $\hat{I}_{or}/I_{oc} = \text{ratio} + \text{TT}$ $I_{oc} \text{ unchanged}$ $\hat{I}_{or}/I_{oc} = 9.8 \text{ dB}$ $\frac{DPCH\_E_c}{I_{or}} -16.7 \text{ dB:}$                                  |
| 7.6.2 Demodulation of DCH in closed loop Transmit diversity mode                       | $\frac{DPCH\_E_c}{I_{or}} -18 \text{ to } -18.3 \text{ dB}$ $I_{oc} = -60 \text{ dBm}$ $\hat{I}_{or}/I_{oc} = 9 \text{ dB}$                                  | 0.1 dB for $\frac{DPCH\_E_c}{I_{or}}$<br><br>0.8 dB for $\hat{I}_{or}/I_{oc}$ | Formulas:<br>$\frac{DPCH\_E_c}{I_{or}} = \text{ratio} + \text{TT}$ $\hat{I}_{or}/I_{oc} = \text{ratio} + \text{TT}$ $I_{oc} \text{ unchanged}$ $\hat{I}_{or}/I_{oc} = 9.8 \text{ dB}$ $\frac{DPCH\_E_c}{I_{or}} -17.9 \text{ to } -18.2 \text{ dB:}$                |
| 7.6.3, Demodulation of DCH in site selection diversity Transmission power control mode | $\frac{DPCH\_E_c}{I_{or}} -7.5 \text{ to } -9.2 \text{ dB}$ $I_{oc} = -60 \text{ dBm}$ $\hat{I}_{or}/I_{oc} = 0 \text{ to } -3 \text{ dB}$                   | 0.1 dB for $\frac{DPCH\_E_c}{I_{or}}$<br><br>0.8 dB for $\hat{I}_{or}/I_{oc}$ | Formulas:<br>$\frac{DPCH\_E_c}{I_{or}} = \text{ratio} + \text{TT}$ $\hat{I}_{or}/I_{oc} = \text{ratio} + \text{TT}$ $I_{oc} \text{ unchanged}$ $\hat{I}_{or}/I_{oc} = 0.8 \text{ to } -2.2 \text{ dB}$ $\frac{DPCH\_E_c}{I_{or}} -7.4 \text{ to } -9.1 \text{ dB:}$ |
| 7.7.1 Demodulation in inter-cell soft Handover   | $\frac{DPCH\_E_c}{I_{or}} -5.5 \text{ to } -15.2 \text{ dB}$ $I_{oc} = -60 \text{ dBm}$ $\hat{I}_{or}/I_{oc} = \text{lor2/loc} = 6 \text{ to } 0 \text{ dB}$ | 0.1 dB for $\frac{DPCH\_E_c}{I_{or}}$<br><br>0.8 dB for $\hat{I}_{or}/I_{oc}$ | Formulas:<br>$\frac{DPCH\_E_c}{I_{or}} = \text{ratio} + \text{TT}$ $\hat{I}_{or}/I_{oc} = \text{ratio} + \text{TT}$ $I_{oc} \text{ unchanged}$ $\hat{I}_{or}/I_{oc} = 6.8 \text{ to } 0.8 \text{ dB}$ $\frac{DPCH\_E_c}{I_{or}} -5.4 \text{ to } -15.4 \text{ dB:}$ |

| Test   | Minimum Requirement in TS 25.101   | Test Tolerance (TT)  | Test Requirement in TS 34.121   |
|--|--|--|---|
| 7.7.2 Combining of TPC commands Test 1               | $\frac{DPCH\_E_c}{I_{or}} \text{ -12 dB}$<br>$lor1 \text{ and } lor2 \text{ -60dBm}$   | $\frac{DPCH\_E_c}{I_{or}}$<br>0dB for lor1 and lor2            | Formulas: $\frac{DPCH\_E_c}{I_{or}} = \text{ratio} + TT$ <del>To be completed</del><br>$\frac{DPCH\_E_c}{I_{or}} = -11,9 \text{ dB:}$ $lor1 = -60\text{dBm}$ $lor2 = -60\text{dBm}$<br>The absolute levels of lor1 and lor2 are not important to this test. |
| 7.7.2 Combining of TPC commands Test 2               | $\frac{DPCH\_E_c}{I_{or}} \text{ -12 dB}$<br>$I_{oc} = -60 \text{ dBm}$<br>$\hat{I}_{or}/I_{oc} = 0 \text{ dB}$                      | $\frac{DPCH\_E_c}{I_{or}}$<br>0.8 dB for $\hat{I}_{or}/I_{oc}$ | Formulas: $\frac{DPCH\_E_c}{I_{or}} = \text{ratio} + TT$ $\hat{I}_{or}/I_{oc} = \text{ratio} + TT$ $I_{oc} \text{ unchanged}$ $\hat{I}_{or}/I_{oc} = 0.8 \text{ dB}$<br>$\frac{DPCH\_E_c}{I_{or}} \text{ -11,9 dB:}$ <del>To be completed</del>             |
| 7.8.1 Power control in downlink constant BLER target | $\frac{DPCH\_E_c}{I_{or}} \text{ -9 to -16 dB}$<br>$I_{oc} = -60 \text{ dBm}$<br>$\hat{I}_{or}/I_{oc} = 9 \text{ to } -1 \text{ dB}$ | $\frac{DPCH\_E_c}{I_{or}}$<br>0.6 dB for $\hat{I}_{or}/I_{oc}$ | Formulas: $\frac{DPCH\_E_c}{I_{or}} = \text{ratio} + TT$ $\hat{I}_{or}/I_{oc} = \text{ratio} + TT$ $I_{oc} \text{ unchanged}$ $\hat{I}_{or}/I_{oc} = 9.6 \text{ to } -0.4 \text{ dB}$<br>$\frac{DPCH\_E_c}{I_{or}} \text{ -8.9 to -15.9 dB:}$               |
| 7.8.2, Power control in downlink initial convergence | $\frac{DPCH\_E_c}{I_{or}} \text{ -8.1 to -18.9 dB}$<br>$I_{oc} = -60 \text{ dBm}$<br>$\hat{I}_{or}/I_{oc} = -1 \text{ dB}$           | $\frac{DPCH\_E_c}{I_{or}}$<br>0.6 dB for $\hat{I}_{or}/I_{oc}$ | Formulas: $\frac{DPCH\_E_c}{I_{or}} = \text{ratio} + TT$ $\hat{I}_{or}/I_{oc} = \text{ratio} + TT$ $I_{oc} \text{ unchanged}$ $\hat{I}_{or}/I_{oc} = -0.4 \text{ dB}$<br>$\frac{DPCH\_E_c}{I_{or}} \text{ -8.0 to -18.8 dB:}$                               |

| Test  | Minimum Requirement in TS 25.101   | Test Tolerance (TT)   | Test Requirement in TS 34.121   |
|---|--|---|---|
| 7.8.3, Power control in downlink: wind up effects   | $\frac{DPCH\_E_c}{I_{or}} -13.3 \text{ dB}$ $I_{oc} = -60 \text{ dBm}$ $\hat{I}_{or}/I_{oc} = 5 \text{ dB}$                      | 0.1 dB for $\frac{DPCH\_E_c}{I_{or}}$<br>0.6 dB for $\hat{I}_{or}/I_{oc}$ | Formulas:<br>$\frac{DPCH\_E_c}{I_{or}} = \text{ratio} + \text{TT}$ $\hat{I}_{or}/I_{oc} = \text{ratio} + \text{TT}$ $I_{oc} \text{ unchanged}$ $\hat{I}_{or}/I_{oc} = 5.6 \text{ dB}$ $\frac{DPCH\_E_c}{I_{or}} -13.2 \text{ dB:}$                    |
| 7.9 Downlink compressed mode                        | $\frac{DPCH\_E_c}{I_{or}}$ Test 1 -14.6 dB<br>Test 3 -15.2 dB<br>$I_{oc} = -60 \text{ dBm}$ $\hat{I}_{or}/I_{oc} = 9 \text{ dB}$ | 0.1 dB for $\frac{DPCH\_E_c}{I_{or}}$<br>0.6 dB for $\hat{I}_{or}/I_{oc}$ | Formulas:<br>$\frac{DPCH\_E_c}{I_{or}} = \text{ratio} + \text{TT}$ $\hat{I}_{or}/I_{oc} = \text{ratio} + \text{TT}$ $I_{oc} \text{ unchanged}$ $\hat{I}_{or}/I_{oc} = 9.6 \text{ dB}$ $\frac{DPCH\_E_c}{I_{or}}$ Test 1 -14.5 dB<br>Test 3 -15.1 dB:  |
| 7.10 Blind transport format detection Tests 1, 2, 3 | $\frac{DPCH\_E_c}{I_{or}} -17.7 \text{ to } -18.4 \text{ dB}$ $I_{oc} = -60 \text{ dBm}$ $\hat{I}_{or}/I_{oc} = -1 \text{ dB}$   | 0.1 dB for $\frac{DPCH\_E_c}{I_{or}}$<br>0.3 dB for $\hat{I}_{or}/I_{oc}$ | Formulas:<br>$\frac{DPCH\_E_c}{I_{or}} = \text{ratio} + \text{TT}$ $\hat{I}_{or}/I_{oc} = \text{ratio} + \text{TT}$ $I_{oc} \text{ unchanged}$ $\hat{I}_{or}/I_{oc} = -0.7 \text{ dB}$ $\frac{DPCH\_E_c}{I_{or}} -17.6 \text{ to } -18.3 \text{ dB:}$ |
| 7.10 Blind transport format detection Tests 4, 5, 6 | $\frac{DPCH\_E_c}{I_{or}} -13.0 \text{ to } -13.8 \text{ dB}$ $I_{oc} = -60 \text{ dBm}$ $\hat{I}_{or}/I_{oc} = -3 \text{ dB}$   | 0.1 dB for $\frac{DPCH\_E_c}{I_{or}}$<br>0.6 dB for $\hat{I}_{or}/I_{oc}$ | Formulas:<br>$\frac{DPCH\_E_c}{I_{or}} = \text{ratio} + \text{TT}$ $\hat{I}_{or}/I_{oc} = \text{ratio} + \text{TT}$ $I_{oc} \text{ unchanged}$ $\hat{I}_{or}/I_{oc} = -2.4 \text{ dB}$ $\frac{DPCH\_E_c}{I_{or}} -12.9 \text{ to } -13.7 \text{ dB:}$ |

Table F.4.4: Derivation of Test Requirements (RRM tests)

| Test                                       | Test Parameters in TS 25.133  | Test Tolerance (TT)  | Test Requirement in TS 34.121  |
|--|---|--|--|
| 8.2 Idle Mode Tasks                        |   |  |  |
| 8.2.2 Cell Re-Selection                    |   |  |  |
| 8.2.2.1 Scenario 1:<br>Single carrier case | $\frac{CPICH\_E_c}{I_{or}} = -10 \text{ dB}$ $I_{oc} = -70 \text{ dBm}$ $\text{lor/loc} = 7.3 \text{ dB}$ <p>Note: Parameters are valid for cell 1 at time T1 and cell 2 at time T2</p>   | 0.1 dB for $\frac{CPICH\_E_c}{I_{or}}$<br>0.3 dB for lor/loc | Formulas:<br>$\frac{CPICH\_E_c}{I_{or}} = \text{ratio} - TT$ $\text{lor/loc} = \text{ratio} - TT$<br>$I_{oc} \text{ unchanged}$ $\text{lor/loc} = 7 \text{ dB}$<br>$\frac{CPICH\_E_c}{I_{or}} -10.1 \text{ dB:}$                             |
|  | $\frac{CPICH\_E_c}{I_{or}} = -10 \text{ dB}$ $I_{oc} = -70 \text{ dBm}$ $\text{lor/loc} = 10.27 \text{ dB}$ <p>Note: Parameters are valid for cell 1 at time T2 and cell 2 at time T1</p> | 0.1 dB for $\frac{CPICH\_E_c}{I_{or}}$<br>0.3 dB for lor/loc | Formulas:<br>$\frac{CPICH\_E_c}{I_{or}} = \text{ratio} + TT$ $\text{lor/loc} = \text{ratio} + TT$<br>$\text{loc unchanged}$ $\text{lor/loc} = 10.57 \text{ dB}$<br>$\frac{CPICH\_E_c}{I_{or}} -9.9 \text{ dB:}$                              |
| 8.2.2.2 Scenario 2:<br>Multi carrier case  | $\frac{CPICH\_E_c}{I_{or}} = -10 \text{ dB}$ $I_{oc} = -70 \text{ dBm}$ $\text{lor/loc} = -3.4 \text{ dB}$ <p>Note: Parameters are valid for cell 1 at time T1 and cell 2 at time T2</p>  | 0.1 dB for $\frac{CPICH\_E_c}{I_{or}}$<br>0.3 dB for lor/loc | Formulas:<br>$\frac{CPICH\_E_c}{I_{or}} = \text{ratio} - TT$ $\text{lor/loc} = \text{ratio} - TT$<br>$\text{loc unchanged}$ $\text{loc ratio unchanged}$ $\text{lor/loc} = -3.7 \text{ dB}$<br>$\frac{CPICH\_E_c}{I_{or}} -10.1 \text{ dB:}$ |

| Test  | Test Parameters in TS 25.133  | Test Tolerance (TT)  | Test Requirement in TS 34.121  |
|---|---|--|--|
|   | $\frac{CPICH\_E_c}{I_{or}} = -10 \text{ dB}$ $I_{oc} = -70 \text{ dBm}$ <p>lor/loc = 2.2 dB</p> <p>Note: Parameters are valid for cell 1 at time T2 and cell 2 at time T1</p> | 0.1 dB for $\frac{CPICH\_E_c}{I_{or}}$<br>0.3 dB for lor/loc                             | Formulas:<br>$\frac{CPICH\_E_c}{I_{or}} = \text{ratio} + \text{TT}$ $\text{lor/loc} = \text{ratio} + \text{TT}$ <p>loc unchanged</p> <p>loc ratio unchanged</p> $\text{lor/loc} = 2.5 \text{ dB}$ $\frac{CPICH\_E_c}{I_{or}} -9.9 \text{ dB:}$   |
| 8.2.3 UTRAN to GSM Cell Re-Selection                | TBD   |  |  |
| 8.2.3.1 Scenario 1: Both UTRA and GSM level changed | $\frac{CPICH\_E_c}{I_{or}} = -10 \text{ dB}$ <p>lor/loc = 0 dB</p>  | 0.1 dB for $\frac{CPICH\_E_c}{I_{or}}$<br>0.3 dB for lor/loc<br><br>0.3 dB for loc/RXLEV | Formulas:<br>$\frac{CPICH\_E_c}{I_{or}} = \text{ratio} + \text{TT}$ $\text{lor/loc} = \text{ratio} + \text{TT}$ $(\text{loc/Rxlev})_{\text{test requirement}} = (\text{loc/Rxlev})_{\text{minimum requirement}} + \text{TT}$ <p>lor/loc = 0.3 dB</p> $\frac{CPICH\_E_c}{I_{or}} = -9.9 \text{ dB:}$  |
|   | $\frac{CPICH\_E_c}{I_{or}} = -10 \text{ dB}$ <p>lor/loc = -5 dB</p>   | 0.1 dB for $\frac{CPICH\_E_c}{I_{or}}$<br>0.3 dB for lor/loc<br><br>0.3 dB for loc/RXLEV | Formulas:<br>$\frac{CPICH\_E_c}{I_{or}} = \text{ratio} - \text{TT}$ $\text{lor/loc} = \text{ratio} - \text{TT}$ $(\text{loc/Rxlev})_{\text{test requirement}} = (\text{loc/Rxlev})_{\text{minimum requirement}} - \text{TT}$ <p>lor/loc = -5.3 dB</p> $\frac{CPICH\_E_c}{I_{or}} -10.1 \text{ dB:}$  |
| 8.2.3.2 Scenario 2: Only UTRA level changed         | $\frac{CPICH\_E_c}{I_{or}} = -10 \text{ dB}$ <p>lor/loc = 20 dB</p>   | 0.1 dB for $\frac{CPICH\_E_c}{I_{or}}$<br>0.3 dB for lor/loc<br><br>0.3 dB for loc/RXLEV | Formulas:<br>$\frac{CPICH\_E_c}{I_{or}} = \text{ratio} + \text{TT}$ $\text{lor/loc} = \text{ratio} + \text{TT}$ $(\text{loc/Rxlev})_{\text{test requirement}} = (\text{loc/Rxlev})_{\text{minimum requirement}} + \text{TT}$ <p>lor/loc = 20.3 dB</p> $\frac{CPICH\_E_c}{I_{or}} = -9.9 \text{ dB:}$ |

| Test  | Test Parameters in TS 25.133  | Test Tolerance (TT)  | Test Requirement in TS 34.121   |
|---|---|--|---|
|   | $\frac{CPICH\_E_c}{I_{or}} = -10 \text{ dB}$ <p>lor/loc = 20 dB</p>   | 0.1 dB for $\frac{CPICH\_E_c}{I_{or}}$<br>0.3 dB for lor/loc<br><br>0.3 dB for loc/RXLEV | Formulas:<br><br>$\frac{CPICH\_E_c}{I_{or}} = \text{ratio} + \text{TT}$ <p>lor/loc = ratio + TT</p> <p>(loc/Rxlev)<sub>test requirement</sub> =<br/>           (loc/Rxlev)<sub>minimum requirement</sub> + TT</p> <p>lor/loc = 20.3 dB</p> $\frac{CPICH\_E_c}{I_{or}} = -9.9 \text{ dB:}$ |
| 8.2.4 FDD/TDD cell re-selection                     | TBD   |  |   |
| 8.3 UTRAN Connected Mode Mobility                   | TBD   |  |   |
| 8.3.1 FDD/FDD Soft Handover                         | TBD   |  |   |
| 8.3.2 FDD/FDD Hard Handover                         | TBD   |  |   |
| 8.3.3 FDD/TDD Handover                              | TBD   |  |   |
| 8.3.4 Inter-system Handover form UTRAN FDD to GSM   | TBD   |  |   |
| 8.3.5 Cell Re-selection in CELL_FACH                |   |  |   |
| 8.3.5.1 One frequency present in the neighbour list | $\frac{CPICH\_E_c}{I_{or}} = -10 \text{ dB}$ <p><math>I_{oc} = -70 \text{ dBm}</math></p> <p>lor/loc = 7.3 dB</p> <p>Note: Parameters are valid for cell 1 at time T1 and cell 2 at time T2</p>   | 0.1 dB for $\frac{CPICH\_E_c}{I_{or}}$<br>0.3 dB for lor/loc                             | Formulas:<br><br>$\frac{CPICH\_E_c}{I_{or}} = \text{ratio} - \text{TT}$ <p>lor/loc = ratio - TT</p> <p><math>I_{oc}</math> unchanged</p> <p>lor/loc = 7 dB</p> $\frac{CPICH\_E_c}{I_{or}} -10.1 \text{ dB:}$  |
|   | $\frac{CPICH\_E_c}{I_{or}} = -10 \text{ dB}$ <p><math>I_{oc} = -70 \text{ dBm}</math></p> <p>lor/loc = 10.27 dB</p> <p>Note: Parameters are valid for cell 1 at time T2 and cell 2 at time T1</p> | 0.1 dB for $\frac{CPICH\_E_c}{I_{or}}$<br>0.3 dB for lor/loc                             | Formulas:<br><br>$\frac{CPICH\_E_c}{I_{or}} = \text{ratio} + \text{TT}$ <p>lor/loc = ratio + TT</p> <p>loc unchanged</p> <p>lor/loc = 10.57 dB</p> $\frac{CPICH\_E_c}{I_{or}} -9.9 \text{ dB:}$   |



| Test  | Test Parameters in TS 25.133  | Test Tolerance (TT)  | Test Requirement in TS 34.121  |
|---|---|--|--|
| 8.3.5.2 Two frequencies present in the neighbour list | $\frac{CPICH\_E_c}{I_{or}} = -10 \text{ dB}$<br>$I_{oc} = -70 \text{ dBm}$<br>lor/loc = -3.4 dB<br>Note: Parameters are valid for cell 1 at time T1 and cell 2 at time T2 | 0.1 dB for $\frac{CPICH\_E_c}{I_{or}}$<br>0.3 dB for lor/loc | Formulas:<br>$\frac{CPICH\_E_c}{I_{or}} = \text{ratio} - TT$<br>lor/loc = ratio - TT<br>loc unchanged<br>loc ratio unchanged<br>lor/loc = -3.7 dB<br>$\frac{CPICH\_E_c}{I_{or}} -10.1 \text{ dB:}$ |
|   | $\frac{CPICH\_E_c}{I_{or}} = -10 \text{ dB}$<br>$I_{oc} = -70 \text{ dBm}$<br>lor/loc = 2.2 dB<br>Note: Parameters are valid for cell 1 at time T2 and cell 2 at time T1  | 0.1 dB for $\frac{CPICH\_E_c}{I_{or}}$<br>0.3 dB for lor/loc | Formulas:<br>$\frac{CPICH\_E_c}{I_{or}} = \text{ratio} + TT$<br>lor/loc = ratio + TT<br>loc unchanged<br>loc ratio unchanged<br>lor/loc = 2.5 dB<br>$\frac{CPICH\_E_c}{I_{or}} -9.9 \text{ dB:}$   |
| 8.3.6 Cell Re-selection in CELL_PCH                   |   |  |  |
| 8.3.6.1 One frequency present in the neighbour list   | $\frac{CPICH\_E_c}{I_{or}} = -10 \text{ dB}$<br>$I_{oc} = -70 \text{ dBm}$<br>lor/loc = 7.3 dB<br>Note: Parameters are valid for cell 1 at time T1 and cell 2 at time T2  | 0.1 dB for $\frac{CPICH\_E_c}{I_{or}}$<br>0.3 dB for lor/loc | Formulas:<br>$\frac{CPICH\_E_c}{I_{or}} = \text{ratio} - TT$<br>lor/loc = ratio - TT<br>$I_{oc}$ unchanged<br>lor/loc = 7 dB<br>$\frac{CPICH\_E_c}{I_{or}} -10.1 \text{ dB:}$                      |

| Test  | Test Parameters in TS 25.133  | Test Tolerance (TT)  | Test Requirement in TS 34.121  |
|---|---|--|--|
|   | $\frac{CPICH\_E_c}{I_{or}} = -10 \text{ dB}$ $I_{oc} = -70 \text{ dBm}$ <p>lor/loc = 10.27 dB</p> <p>Note: Parameters are valid for cell 1 at time T2 and cell 2 at time T1</p> | 0.1 dB for $\frac{CPICH\_E_c}{I_{or}}$<br>0.3 dB for lor/loc | Formulas:<br>$\frac{CPICH\_E_c}{I_{or}} = \text{ratio} + \text{TT}$ <p>lor/loc = ratio + TT</p> <p>loc unchanged</p> <p>lor/loc = 10.57 dB</p> $\frac{CPICH\_E_c}{I_{or}} -9.9 \text{ dB:}$                            |
| 8.3.6.2 Two frequencies present in the neighbour list | $\frac{CPICH\_E_c}{I_{or}} = -10 \text{ dB}$ $I_{oc} = -70 \text{ dBm}$ <p>lor/loc = -3.4 dB</p> <p>Note: Parameters are valid for cell 1 at time T1 and cell 2 at time T2</p>  | 0.1 dB for $\frac{CPICH\_E_c}{I_{or}}$<br>0.3 dB for lor/loc | Formulas:<br>$\frac{CPICH\_E_c}{I_{or}} = \text{ratio} - \text{TT}$ <p>lor/loc = ratio - TT</p> <p>loc unchanged</p> <p>loc ratio unchanged</p> <p>lor/loc = -3.7 dB</p> $\frac{CPICH\_E_c}{I_{or}} -10.1 \text{ dB:}$ |
|   | $\frac{CPICH\_E_c}{I_{or}} = -10 \text{ dB}$ $I_{oc} = -70 \text{ dBm}$ <p>lor/loc = 2.2 dB</p> <p>Note: Parameters are valid for cell 1 at time T2 and cell 2 at time T1</p>   | 0.1 dB for $\frac{CPICH\_E_c}{I_{or}}$<br>0.3 dB for lor/loc | Formulas:<br>$\frac{CPICH\_E_c}{I_{or}} = \text{ratio} + \text{TT}$ <p>lor/loc = ratio + TT</p> <p>loc unchanged</p> <p>loc ratio unchanged</p> <p>lor/loc = 2.5 dB</p> $\frac{CPICH\_E_c}{I_{or}} -9.9 \text{ dB:}$   |
| 8.3.7 Cell Re-selection in URA_PCH                    |   |  |  |

| Test  | Test Parameters in TS 25.133   | Test Tolerance (TT)  | Test Requirement in TS 34.121   |
|---|--|--|---|
| 8.3.7.1 One frequency present in the neighbour list   | $\frac{CPICH\_E_c}{I_{or}} = -10 \text{ dB}$ $I_{oc} = -70 \text{ dBm}$ lor/loc = 7.3 dB<br><br>Note: Parameters are valid for cell 1 at time T1 and cell 2 at time T2   | 0.1 dB for $\frac{CPICH\_E_c}{I_{or}}$<br>0.3 dB for lor/loc | Formulas:<br><br>$\frac{CPICH\_E_c}{I_{or}} = \text{ratio} - TT$ lor/loc = ratio - TT<br><br>$I_{oc} \text{ unchanged}$ lor/loc = 7 dB<br><br>$\frac{CPICH\_E_c}{I_{or}} -10.1 \text{ dB:}$                         |
|   | $\frac{CPICH\_E_c}{I_{or}} = -10 \text{ dB}$ $I_{oc} = -70 \text{ dBm}$ lor/loc = 10.27 dB<br><br>Note: Parameters are valid for cell 1 at time T2 and cell 2 at time T1 | 0.1 dB for $\frac{CPICH\_E_c}{I_{or}}$<br>0.3 dB for lor/loc | Formulas:<br><br>$\frac{CPICH\_E_c}{I_{or}} = \text{ratio} + TT$ lor/loc = ratio + TT<br><br>loc unchanged<br><br>lor/loc = 10.57 dB<br><br>$\frac{CPICH\_E_c}{I_{or}} -9.9 \text{ dB:}$                            |
| 8.3.7.2 Two frequencies present in the neighbour list | $\frac{CPICH\_E_c}{I_{or}} = -10 \text{ dB}$ $I_{oc} = -70 \text{ dBm}$ lor/loc = -3.4 dB<br><br>Note: Parameters are valid for cell 1 at time T1 and cell 2 at time T2  | 0.1 dB for $\frac{CPICH\_E_c}{I_{or}}$<br>0.3 dB for lor/loc | Formulas:<br><br>$\frac{CPICH\_E_c}{I_{or}} = \text{ratio} - TT$ lor/loc = ratio - TT<br><br>loc unchanged<br><br>loc ratio unchanged<br><br>lor/loc = -3.7 dB<br><br>$\frac{CPICH\_E_c}{I_{or}} -10.1 \text{ dB:}$ |

| Test   | Test Parameters in TS 25.133  | Test Tolerance (TT)  | Test Requirement in TS 34.121  |
|--|---|--|--|
|  | $\frac{CPICH\_E_c}{I_{or}} = -10 \text{ dB}$ $I_{oc} = -70 \text{ dBm}$ $\text{lor/loc} = 2.2 \text{ dB}$ <p>Note: Parameters are valid for cell 1 at time T2 and cell 2 at time T1</p> | 0.1 dB for $\frac{CPICH\_E_c}{I_{or}}$<br>0.3 dB for lor/loc | Formulas:<br>$\frac{CPICH\_E_c}{I_{or}} = \text{ratio} + \text{TT}$ $\text{lor/loc} = \text{ratio} + \text{TT}$ <p>loc unchanged</p> <p>loc ratio unchanged</p> $\text{lor/loc} = 2.5 \text{ dB}$ $\frac{CPICH\_E_c}{I_{or}} -9.9 \text{ dB:}$ |
| 8.4 RRC Connection Control   | TBD   |  |  |
| 8.4.1 RRC Re-establishment delay   | TBD   |  |  |
| 8.4.2 Random Access  | TBD   |  |  |
| 8.5 Timing and Signalling Characteristics  | TBD   |  |  |
| 8.5.1 UE Transmit Timing   | TBD   |  |  |
| 8.6 UE Measurements Procedures   | TBD   |  |  |
| 8.6.1 FDD intra frequency measurements   | TBD   |  |  |
| 8.6.1.1 Event triggered reporting in AWGN propagation conditions                             | TBD   |  |  |
| 8.6.1.2 Event triggered reporting of multiple neighbours in AWGN propagation condition       | TBD   |  |  |
| 8.6.1.3 Event triggered reporting of two detectable neighbours in AWGN propagation condition | TBD   |  |  |
| 8.6.1.4 Correct reporting of neighbours in fading propagation condition                      | TBD   |  |  |
| 8.6.2 FDD inter frequency measurements   | TBD   |  |  |
| 8.6.2.1 Correct reporting of neighbours in AWGN propagation condition                        | TBD   |  |  |
| 8.6.2.2 Correct reporting of neighbours in Fading propagation condition                      | TBD   |  |  |
| 8.6.3 TDD measurements   | TBD   |  |  |
| 8.6.3.1 Correct reporting of TDD neighbours in AWGN propagation condition                    | TBD   |  |  |

| Test  | Test Parameters in TS 25.133  | Test Tolerance (TT)   | Test Requirement in TS 34.121  |
|---|---|---|--|
| 8.7 Measurements Performance Requirements     | TBD   |   |  |
| 8.7.1 CPICH RSCP                              | TBD   |   |  |
| 8.7.1.1 Intra frequency measurements accuracy | TBD   |   |  |
| 8.7.1.2 Inter frequency measurement accuracy  | TBD   |   |  |
| 8.7.2 CPICH Ec/Io                             | TBD   |   |  |
| 8.7.1.1 Intra frequency measurements accuracy | TBD   |   |  |
| 8.7.1.2 Inter frequency measurement accuracy  | TBD   |   |  |
| 8.7.3A UTRA Carrier RSSI                      | TBD   |   |  |
| 8.7.3B Transport channel BLER                 | TBD   |   |  |
| 8.7.3C UE Transmitted power                   | Accuracy upper limit<br>Accuracy lower limit<br>Depends on PUEMAX see table 8.7.3C.2.1  | 0.7 dB  | Formula: Upper accuracy limit + TT<br>Lower accuracy limit – TT<br>Add and subtract TT to all the values in table 8.7.3C.2.1.  |
| 8.7.4 SFN-CFN observed time difference        | TBD   |   |  |
| 8.7.5 SFN-SFN observed time difference        | TBD   |   |  |
| 8.7.6 UE Rx-Tx time difference                | $l_o - 10.9 \text{ dB} = l_{oc}$ ,<br>Test 1: $l_o = -94 \text{ dBm}$<br>Test2 : $l_o = -72 \text{ dBm}$<br>Test3 : $l_o = -50 \text{ dBm}$<br><br>Timing Accuracy $\pm 1.5$ chip | 1 dB for $l_{oc}$<br><br>0.3 dB for $l_{or}/l_{oc}$<br><br>[0.5 chip for timing accuracy] | Test 1: $l_o = -92.7 \text{ dBm}$ ,<br>$l_{oc} = -103.6 \text{ dBm}$<br><br>Formula:<br>$l_{oc} * (1 - TT_{l_{oc}} + (l_{or}/l_{oc} - TT_{l_{or}/l_{oc}})) \geq -94$<br><br>Test 2: unchanged (no critical RF parameters)<br><br>Test 3: $l_o = -51.3 \text{ dBm}$ , $l_{oc} = -62.2 \text{ dBm}$<br><br>Formula:<br>$l_{oc} * (1 + TT_{l_{oc}} + (l_{or}/l_{oc} + TT_{l_{or}/l_{oc}})) \leq -50$<br><br>Timing accuracy $[\pm 2.0]$ chip<br><br>Formulas:<br><br>Upper limit +TT<br><br>Lower limit –TT |
| 8.7.7 Observed time difference to GSM cell    | TBD   |   |  |
| 8.7.8 P-CCPCH RSCP                            | TBD   |   |  |

## F.6.2 Statistical testing of RRM delay performance

### F.6.2.1 Test Method

Each test is performed in the following manner:

- a) Setup the required test conditions.
- b) Measure the delay repeated times. Start each repetition after sufficient time, such that each delay test is independent from the previous one. The delay-times, measured, are simplified to:
  - a good delay, if the measured delay is  $\leq$  limit.
  - a bad delay, if the measured delay is  $>$  limit
- c) Record the number of delays (ns), tested, and the number of bad delays (ne)
- d) Stop the test at an early pass or an early fail event.
- e) Once the test is stopped, decide according to the pass fail decision rules ( subclause F.6.2.7)

### F.6.2.2 Bad Delay Ratio (ER)

The Bad Delay Ratio (ER) is defined as the ratio of bad delays (ne) to all delays (ns).  
(1-ER is the success ratio)

### F.6.2.3 Test Criteria

The test shall fulfil the following requirements:

- a) good pass fail decision
  - 1) to keep reasonably low the probability (risk) of passing a bad unit for each individual test;
  - 2) to have high probability of passing a good unit for each individual test;
- b) good balance between test-time and statistical significance
  - 3) to perform measurements with a high degree of statistical significance;
  - 4) to keep the test time as low as possible.

### F.6.2.4 Calculation assumptions

#### F.6.2.4.1 Statistical independence

It is arranged by test conditions, that bad delays are independent statistical events.

#### F.6.2.4.2 Applied formulas

The specified ER is 10% in most of the cases. This stipulates to use the binomial distribution to describe the RRM delay statistics. With the binomial distribution optimal results can be achieved. However the inverse cumulative operation for the binomial distribution is not supported by standard mathematical tools. The use of the Poisson or Chi Square Distribution requires  $ER \rightarrow 0$ . Using one of this distributions instead of the binomial distribution gives sub-optimal results in the conservative sense: a pass fail decision is done later than optimal and with a lower wrong decision risk than predefined.

The formulas, applied to describe the RRM delay statistics test, are based on the following experiment:

(1) After having observed a certain number of bad delays (**ne**) the number of all delays (**ns**) are counted to calculate ER. Provisions are made (note 1) such that the complementary experiment is valid as well:

(2) After a certain number of delays (**ns**) the number of bad delays (**ne**), occurred, are counted to calculate ER.

Experiment (1) stipulates to use the Chi Square Distribution with degree of freedom  $ne = 2 * dchisq(2 * NE, 2 * ne)$ .

Experiment (2) stipulates to use the Poisson Distribution:  $dpois(ne, NE)$

(NE: mean value of the distribution)

To determine the early stop conditions, the following inverse cumulative operation is applied:

$0.5 * qchisq(D, 2 * ne)$  for experiment (1) and (2)

D: wrong decision risk per test step

Note: Other inverse cumulative operations are available, however only this is suited for experiment (1) and (2).

#### F.6.2.4.3 Approximation of the distribution

The test procedure is as follows:

During a running measurement for a UE  $ns$  (Number of Delays) and  $ne$  (Number of bad delays) are accumulated and from this the preliminary ER is calculated. Then new samples up to the next bad delay are taken. The entire past and the new samples are basis for the next preliminary ER. Depending on the result at every step, the UE can pass, can fail or must continue the test.

As early pass- and early fail-UEs leave the statistical totality under consideration, the experimental conditions are changed every step resulting in a distribution that is truncated more and more towards the end of the entire test. Such a distribution can not any more be handled analytically. The unchanged distribution is used as an approximation to calculate the early fail and early pass bounds.

#### F.6.2.5 Definition of good pass fail decision.

This is defined by the probability of wrong decision  $F$  at the end of the test. The probability of a correct decision is  $1 - F$ .

The probability (risk) to fail a good DUT shall be  $\leq F$  according to the following definition: A DUT is failed, accepting a probability of  $\leq F$  that the DUT is still better than the specified bad delay ratio (Test requirement).

The probability (risk) to pass a bad DUT shall be  $\leq F$  according to the following definition: A DUT is passed, accepting a probability of  $\leq F$  that the DUT is still worse than  $M$  times the specified bad delay ratio. ( $M \geq 1$  is the bad DUT factor).

This definitions lead to an early pass and an early fail limit:

Early fail:  $er \geq erlim_{fail}$

$$erlim_{fail}(D, ne) = \frac{2 * ne}{qchisq(D, 2 * ne)}$$

(1)

For  $ne \geq [5]$

Early pass:  $er \leq erlim_{pass}$

$$erlim_{pass}(D, ne) = \frac{2 * ne * M}{qchisq(1 - D, 2 * ne)}$$

(2)

For  $ne \geq 1$

With

er (normalized ER): ER according to F.6.2.2 divided by specified ER

D: wrong decision probability for a test step . This is a numerically evaluated fraction of F, the wrong decision probability at the end of the test. see table F.6.2.6.1

ne: Number of bad delays

M: bad DUT factor see table F.6.2.6.1

qchisq: inverse cumulative chi squared distribution

### F.6.2.6 Good balance between test-time and statistical significance

Two independent test parameters are introduced into the test and shown in Table F.6.2.6.1. These are the obvious basis of test time and statistical significance. From them four dependent test parameters are derived.

**Table F.6.2.6 independent and dependent test parameters**

| Independent test parameters                     |       |               | Dependent test parameters                               |         |                                   |
|---|-------|---------------|---|---------|-----------------------------------|
| Test Parameter                                  | Value | Reference     | Test parameter  | Value   | Reference                         |
| Bad DUT factor M                                | [1.5] | Table F.6.1.8 | Early pass/fail condition                               | Curves  | Subclause F.6.2.5<br>Figure 6.2.9 |
| Final probability of wrong pass/fail decision F | [5%]  | Table F.6.2.8 | Target number of bad delays                             | [154]   | Table 6.2.8                       |
|   |       |               | Probability of wrong pass/fail decision per test step D | [0.6 %] |                                   |
|   |       |               | Test limit factor TL                                    | [1.236] | Table 6.2.8                       |

### F.6.2.7 Pass fail decision rules

The required confidence level 1-F (= correct decision probability) shall be achieved. This is fulfilled at an early pass or early fail event. Sum up the number of all delays (ns) and the number of bad delays from the beginning of the test and calculate:

$ER_1$  (including the artificial error at the beginning of the test (Note 1))and

$ER_0$  (excluding the artificial error at the beginning of the test (Note 1)).

If  $ER_0$  is on or above the early fail limit, fail the DUT.

If  $ER_1$  is on or below the early pass limit, pass the DUT.

Otherwise continue the test



F.6.2.8 Test conditions for RRM delay tests [and Combining of TPC commands test 1](#)Table F.6.2.8: Test conditions for a single RRM delay tests [and Combining of TPC commands test 1](#)

| Type of test   | Test requirement Delay (s)     | Test requirement (ER= <a href="#">1-success ratio</a> ) | Testlimit(ER) = Test requirement (ER)x TL TL | Target number of bad delays | Prob that good unit will fail = Prob that bad unit will pass [%] | Bad unit factor M     |
|--|--------------------------------|---|--|-----------------------------|--|-----------------------|
| <del>A.4.2</del> <a href="#">8.2.2</a> Cell reselection  | 8                              | 0.1   | [1.236]                                      | [154]                       | [5]  | [1.5]                 |
| <del>A.4.3</del> <a href="#">18.2.3.1</a> UTRAN to GSM cell reselection, scenario 1  | 27.9                           | 0.1   | [1.236]                                      | [154]                       | [5]  | [1.5]                 |
| <del>A.4.3</del> <a href="#">8.2.3.2</a> UTRAN to GSM cell reselection, scenario 2   | 9.6                            | 0.1   | [1.236]                                      | [154]                       | [5]  | [1.5]                 |
| <del>A.4.4</del> <a href="#">8.2.4</a> FDD/TDD Cell reselection  | 8                              | 0.1   | [1.236]                                      | [154]                       | [5]  | [1.5]                 |
| <del>A.5.1</del> <a href="#">8.3.1</a> FDD/FDD Soft handover   | 50+10*KC +100*OC ms            | 0.1   | [1.236]                                      | [154]                       | [5]  | [1.5]                 |
| <del>A.5.2</del> <a href="#">8.3.2</a> FDD FDD Hard Handover<br><del>A.5.2</del> <a href="#">18.3.2.1</a> Handover to intra frequency cell   | 70 ms                          | 0.1   | [1.236]                                      | [154]                       | [5]  | [1.5]                 |
| <del>A.5.2.2</del> <a href="#">8.3.2.2</a> Handover to interfrequency cell   | 100ms                          | 0.1   | [1.236]                                      | [154]                       | [5]  | [1.5]                 |
| <a href="#">7.7.2</a> Combining of TPC commands Test 1<br>Note: The theory of statistical testing of RRM delay performance in clause F.6.2 is applied for test case 7.7.2 Combining of TPC commands Test 1. The success ratio for delay is replaced by the success ratio for power control sequence. | <a href="#">Not applicable</a> | <a href="#">0.01</a>                                    | <a href="#">[1.236]</a>                      | <a href="#">[154]</a>       | <a href="#">[5]</a>  | <a href="#">[1.5]</a> |