

**TSG-RAN Meeting #7
 Madrid, Spain, 13 - 15 March 2000**

TSGRP#7(00)0100

Title: Agreed CRs to TS 25.423

Source: TSG-RAN WG3

Agenda item: 6.4.3

Tdoc_Num	Specification	CR_Num	Revision_Num	CR_Subject	CR_Category	WG_Status	Cur_Ver_Num	New_Ver_Num
R3-000738	25.423	061	1	Proposed changes to RNSAP ASN.1 descriptions for private messages	F	agreed	3.0.0	3.1.0
R3-000744	25.423	062	1	CR to 25.423: Editorial changes to RNSAP for better readability the level of indentation has been indicated by arrows.	F	agreed	3.0.0	3.1.0
R3-000945	25.423	019	1	RL-Failure/Restoration procedure text update	F	agreed	3.0.0	3.1.0
R3-000791	25.423	057	1	Problem with piggybacking RADIO LINK SETUP REQUEST message on SCCP: CR message	F	agreed	3.0.0	3.1.0

R3-000860	25.423	003	2	Editorial update of RNSAP	D	agreed	3.0.0	3.1.0
R3-000863	25.423	050	2	UL and DL UARFCN (RNSAP)	F	agreed	3.0.0	3.1.0
R3-000793	25.423	060	1	Clarification on the C-RNTI parameter in UL signalling transfer procedure	F	agreed	3.0.0	3.1.0
R3-000779	25.423	043	1	Replacement of the mean bit rate parameter with the 'TrCh Source Statistics Descriptor'	F	agreed	3.0.0	3.1.0
R3-000903	25.423	064	1	Power Ramping [RNSAP]	C	agreed	3.0.0	3.1.0
R3-000789	25.423	055	1	Addition of exception to Error Indication	C	agreed	3.0.0	3.1.0
R3-000786	25.423	053	1	Addition of "Cell Individual Offset" IE to Neighbouring Cell Information	F	agreed	3.0.0	3.1.0
R3-000780	25.423	037	1	TDD Neighbor Cell Power	C	agreed	3.0.0	3.1.0
R3-000748	25.423	039	1	Clarification on the "RLC Mode" parameter	F	agreed	3.0.0	3.1.0
R3-000891	25.423	001	1	Changes for CPCH	C	agreed	3.0.0	3.1.0
R3-000822	25.423	051	1	Some Editorial modifications to RNSAP	D	agreed	3.0.0	3.1.0

R3-000900	25.423	063	2	Editorial modifications of RNSAP version 3.0.0	D	agreed	3.0.0	3.1.0
R3-000818	25.423	034	1	Removal of Sync Case 3	F	agreed	3.0.0	3.1.0
R3-000857	25.423	045	2	Support of infinite PD in compressed mode (RNSAP)	B	agreed	3.0.0	3.1.0
R3-000853	25.423	058	2	Maximum allowed UL Tx Power in a cell	F	agreed	3.0.0	3.1.0
R3-000815	25.423	040	1	Clarification on the DL power control procedure and message	F	agreed	3.0.0	3.1.0

9.3 Message and Information element abstract syntax (with ASN.1)

This chapter is for the time being only **INFORMATIVE**.

In case of misalignment with the tabular format of the messages in chapter 9.1 the ASN.1 needs to be aligned with the tabular format.

The setting of the criticality field and the level on which criticality is set for the IEs and sequences of IEs is still to be decided upon.

9.3.1 Usage of ~~Protocol-Private Extension-Message~~ Mechanism for non-standard use

The ~~protocol-extension-private message~~ mechanism for non-standard use may be used:

- for special operator (and/or vendor) specific features considered not to be part of the basic functionality, i.e. the functionality required for a complete and high-quality specification in order to guarantee multivendor inter-operability.
- by vendors for research purposes, e.g. to implement and evaluate new algorithms/features before such features are proposed for standardisation.

The ~~extension-private message~~ mechanism shall not be used for basic functionality. Such functionality shall be standardised.

9.3.2 Elementary Procedure Definitions

```
-- *****
--
-- Elementary Procedure definitions
--
-- *****

RNSAP-PDU-Descriptions -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

-- *****
--
-- IE parameter types from other modules.
--
-- *****

IMPORTS
    Criticality,
    ProcedureID,
    TransactionID
FROM RNSAP-CommonDataTypes

    CommonTransportChannelResourcesFailure,
    CommonTransportChannelResourcesRequest,
    CommonTransportChannelResourcesReleaseRequest,
```

CommonTransportChannelResourcesResponseFDD,
 CommonTransportChannelResourcesResponseTDD,
 CompressedModeCancel,
 CompressedModeCommit,
 CompressedModeFailure,
 CompressedModePrepare,
 CompressedModeReady,
 DedicatedMeasurementFailureIndication,
 DedicatedMeasurementInitiationFailure,
 DedicatedMeasurementInitiationRequest,
 DedicatedMeasurementInitiationResponse,
 DedicatedMeasurementReport,
 DedicatedMeasurementTerminationRequest,
 DL-PowerControlRequest,
 DownlinkSignallingTransferRequest,
 ErrorIndication,
 PagingRequest,
 PhysicalChannelReconfigurationCommand,
 PhysicalChannelReconfigurationFailure,
 PhysicalChannelReconfigurationRequestFDD,
 PhysicalChannelReconfigurationRequestTDD,
 PrivateMessage,
 RadioLinkAdditionFailureFDD,
 RadioLinkAdditionFailureTDD,
 RadioLinkAdditionRequestFDD,
 RadioLinkAdditionRequestTDD,
 RadioLinkAdditionResponseFDD,
 RadioLinkAdditionResponseTDD,
 RadioLinkDeletionRequest,
 RadioLinkDeletionResponse,
 RadioLinkFailureIndication,
 RadioLinkReconfigurationCancel,
 RadioLinkReconfigurationCommit,
 RadioLinkReconfigurationFailure,
 RadioLinkReconfigurationPrepareFDD,
 RadioLinkReconfigurationPrepareTDD,
 RadioLinkReconfigurationReadyFDD,
 RadioLinkReconfigurationReadyTDD,
 RadioLinkReconfigurationRequestFDD,
 RadioLinkReconfigurationRequestTDD,
 RadioLinkReconfigurationResponseFDD,
 RadioLinkReconfigurationResponseTDD,
 RadioLinkRestoreIndication,
 RadioLinkSetupFailureFDD,
 RadioLinkSetupFailureTDD,
 RadioLinkSetupRequestFDD,
 RadioLinkSetupRequestTDD,
 RadioLinkSetupResponseFDD,
 RadioLinkSetupResponseTDD,
 RelocationCommit,
 UplinkSignallingTransferIndication

FROM RNSAP-PDU-Contents

id-commonTransportChannelResourcesInitiationFDD,
 id-commonTransportChannelResourcesInitiationTDD,
 id-commonTransportChannelResourcesRelease,

```

    id-compressedModeCancellationFDD,
    id-compressedModeCommitFDD,
    id-compressedModePrepareFDD,
    id-downlinkPowerControl,
    id-downlinkSignallingTransfer,
    id-errorIndication,
    id-measurementFailure,
    id-measurementInitiation,
    id-measurementReporting,
    id-measurementTermination,
    id-pagingRequest,
    id-physicalChannelReconfiguration,
    id-privateMessage,
    id-radioLinkAddition,
    id-radioLinkDeletion,
    id-radioLinkFailure,
    id-radioLinkRestoration,
    id-radioLinkSetup,
    id-srnsRelocationCommit,
    id-synchronisedRadioLinkReconfigurationCancellation,
    id-synchronisedRadioLinkReconfigurationCommit,
    id-synchronisedRadioLinkReconfigurationPrepare,
    id-unsynchronisedRadioLinkReconfiguration,
    id-uplinkSignallingTransfer
FROM RNSAP-Constants;

-- *****
--
-- Interface Elementary Procedure Class
--
-- *****

RNSAP-ELEMENTARY-PROCEDURE ::= CLASS {
    &InitiatingMessage          ,
    &SuccessfulOutcome          OPTIONAL,
    &UnsuccessfulOutcome        OPTIONAL,
    &Outcome                    OPTIONAL,
    &procedureID                ProcedureID  UNIQUE,
    &criticality                Criticality  DEFAULT ignore
}
WITH SYNTAX {
    INITIATING MESSAGE          &InitiatingMessage
    [SUCCESSFUL OUTCOME         &SuccessfulOutcome]
    [UNSUCCESSFUL OUTCOME       &UnsuccessfulOutcome]
    [OUTCOME                    &Outcome]
    PROCEDURE ID                &procedureID
    [CRITICALITY                &criticality]
}

-- *****
--
-- Interface PDU Definition
--
-- *****

RNSAP-PDU ::= CHOICE {

```

```

    initiatingMessage  InitiatingMessage,
    succesfulOutcome   SuccessfulOutcome,
    unsuccessfullOutcome UnsuccessfulOutcome,
    outcome            Outcome,
    ...
}

InitiatingMessage ::= SEQUENCE {
    procedureID RNSAP-ELEMENTARY-PROCEDURE.&procedureID      ({RNSAP-ELEMENTARY-PROCEDURES}),
    criticality RNSAP-ELEMENTARY-PROCEDURE.&criticality      ({RNSAP-ELEMENTARY-PROCEDURES}{@procedureID}),
    transactionID TransactionID,
    value       RNSAP-ELEMENTARY-PROCEDURE.&InitiatingMessage ({RNSAP-ELEMENTARY-PROCEDURES}{@procedureID})
}

SuccessfulOutcome ::= SEQUENCE {
    procedureID RNSAP-ELEMENTARY-PROCEDURE.&procedureID      ({RNSAP-ELEMENTARY-PROCEDURES}),
    criticality RNSAP-ELEMENTARY-PROCEDURE.&criticality      ({RNSAP-ELEMENTARY-PROCEDURES}{@procedureID}),
    transactionID TransactionID,
    value       RNSAP-ELEMENTARY-PROCEDURE.&SuccessfulOutcome ({RNSAP-ELEMENTARY-PROCEDURES}{@procedureID})
}

UnsuccessfulOutcome ::= SEQUENCE {
    procedureID RNSAP-ELEMENTARY-PROCEDURE.&procedureID      ({RNSAP-ELEMENTARY-PROCEDURES}),
    criticality RNSAP-ELEMENTARY-PROCEDURE.&criticality      ({RNSAP-ELEMENTARY-PROCEDURES}{@procedureID}),
    transactionID TransactionID,
    value       RNSAP-ELEMENTARY-PROCEDURE.&UnsuccessfulOutcome ({RNSAP-ELEMENTARY-PROCEDURES}{@procedureID})
}

Outcome ::= SEQUENCE {
    procedureID RNSAP-ELEMENTARY-PROCEDURE.&procedureID      ({RNSAP-ELEMENTARY-PROCEDURES}),
    criticality RNSAP-ELEMENTARY-PROCEDURE.&criticality      ({RNSAP-ELEMENTARY-PROCEDURES}{@procedureID}),
    transactionID TransactionID,
    value       RNSAP-ELEMENTARY-PROCEDURE.&Outcome          ({RNSAP-ELEMENTARY-PROCEDURES}{@procedureID})
}

-- *****
--
-- Interface Elementary Procedure List
--
-- *****

RNSAP-ELEMENTARY-PROCEDURES RNSAP-ELEMENTARY-PROCEDURE ::= {
    RNSAP-ELEMENTARY-PROCEDURES-CLASS-1 |
    RNSAP-ELEMENTARY-PROCEDURES-CLASS-2 |
    RNSAP-ELEMENTARY-PROCEDURES-CLASS-3 |
    ...
}

RNSAP-ELEMENTARY-PROCEDURES-CLASS-1 RNSAP-ELEMENTARY-PROCEDURE ::= {
    radioLinkSetupFDD |
    radioLinkSetupTDD |
    radioLinkAdditionFDD |
    radioLinkAdditionTDD |
    radioLinkDeletion |
    synchronisedRadioLinkReconfigurationPreparationFDD |
    synchronisedRadioLinkReconfigurationPreparationTDD |

```



```

    unSynchronisedRadioLinkReconfigurationFDD      |
    unSynchronisedRadioLinkReconfigurationTDD     |
    physicalChannelReconfigurationFDD             |
    physicalChannelReconfigurationTDD             |
    measurementInitiation                         |
    compressedModePreparationFDD                  |
    commonTransportChannelResourcesInitiationFDD  |
    commonTransportChannelResourcesInitiationTDD  |
    ...
}

RNSAP-ELEMENTARY-PROCEDURES-CLASS-2 RNSAP-ELEMENTARY-PROCEDURE ::= {
    uplinkSignallingTransfer                      |
    downlinkSignallingTransfer                    |
    srnsRelocationCommit                         |
    paging                                        |
    synchronisedRadioLinkReconfigurationCommit   |
    synchronisedRadioLinkReconfigurationCancellation |
    radioLinkFailure                             |
    radioLinkRestoration                         |
    measurementReporting                         |
    measurementTermination                       |
    measurementFailure                           |
    downlinkPowerControlFDD                      |
    compressedModeCommitFDD                     |
    compressedModeCancellationFDD               |
    commonTransportChannelResourcesRelease       |
    errorIndication                              |
    privateMessage                               |
    ...
}

RNSAP-ELEMENTARY-PROCEDURES-CLASS-3 RNSAP-ELEMENTARY-PROCEDURE ::= {
    privateMessage
}

-- *****
--
-- Interface Elementary Procedures
--
-- *****

radioLinkSetupFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE  RadioLinkSetupRequestFDD
    SUCCESSFUL OUTCOME  RadioLinkSetupResponseFDD
    UNSUCCESSFUL OUTCOME RadioLinkSetupFailureFDD
    PROCEDURE ID        { procedureCode id-radioLinkSetup, ddMode fdd }
    CRITICALITY         ignore
}

radioLinkSetupTDD RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE  RadioLinkSetupRequestTDD
    SUCCESSFUL OUTCOME  RadioLinkSetupResponseTDD
    UNSUCCESSFUL OUTCOME RadioLinkSetupFailureTDD
    PROCEDURE ID        { procedureCode id-radioLinkSetup, ddMode tdd }
}

```

```

    CRITICALITY    ignore
}

radioLinkAdditionFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE  RadioLinkAdditionRequestFDD
    SUCCESSFUL OUTCOME  RadioLinkAdditionResponseFDD
    UNSUCCESSFUL OUTCOME  RadioLinkAdditionFailureFDD
    PROCEDURE ID        { procedureCode id-radioLinkAddition , ddMode fdd }
    CRITICALITY         ignore
}

radioLinkAdditionTDD RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE  RadioLinkAdditionRequestTDD
    SUCCESSFUL OUTCOME  RadioLinkAdditionResponseTDD
    UNSUCCESSFUL OUTCOME  RadioLinkAdditionFailureTDD
    PROCEDURE ID        { procedureCode id-radioLinkAddition , ddMode tdd }
    CRITICALITY         ignore
}

radioLinkDeletion RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE  RadioLinkDeletionRequest
    SUCCESSFUL OUTCOME  RadioLinkDeletionResponse
    PROCEDURE ID        { procedureCode id-radioLinkDeletion, ddMode common }
    CRITICALITY         ignore
}

synchronisedRadioLinkReconfigurationPreparationFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE  RadioLinkReconfigurationPrepareFDD
    SUCCESSFUL OUTCOME  RadioLinkReconfigurationReadyFDD
    UNSUCCESSFUL OUTCOME  RadioLinkReconfigurationFailure
    PROCEDURE ID        { procedureCode id-synchronisedRadioLinkReconfigurationPrepare, ddMode fdd }
    CRITICALITY         ignore
}

synchronisedRadioLinkReconfigurationPreparationTDD RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE  RadioLinkReconfigurationPrepareTDD
    SUCCESSFUL OUTCOME  RadioLinkReconfigurationReadyTDD
    UNSUCCESSFUL OUTCOME  RadioLinkReconfigurationFailure
    PROCEDURE ID        { procedureCode id-synchronisedRadioLinkReconfigurationPrepare, ddMode tdd }
    CRITICALITY         ignore
}

unSynchronisedRadioLinkReconfigurationFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE  RadioLinkReconfigurationRequestFDD
    SUCCESSFUL OUTCOME  RadioLinkReconfigurationResponseFDD
    UNSUCCESSFUL OUTCOME  RadioLinkReconfigurationFailure
    PROCEDURE ID        { procedureCode id-unSynchronisedRadioLinkReconfiguration, ddMode fdd }
    CRITICALITY         ignore
}

unSynchronisedRadioLinkReconfigurationTDD RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE  RadioLinkReconfigurationRequestTDD
    SUCCESSFUL OUTCOME  RadioLinkReconfigurationResponseTDD
    UNSUCCESSFUL OUTCOME  RadioLinkReconfigurationFailure
    PROCEDURE ID        { procedureCode id-unSynchronisedRadioLinkReconfiguration, ddMode tdd }
    CRITICALITY         ignore
}

```

```

}

physicalChannelReconfigurationFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  PhysicalChannelReconfigurationRequestFDD
  SUCCESSFUL OUTCOME  PhysicalChannelReconfigurationCommand
  UNSUCCESSFUL OUTCOME PhysicalChannelReconfigurationFailure
  PROCEDURE ID        { procedureCode id-physicalChannelReconfiguration, ddMode fdd }
  CRITICALITY         ignore
}

physicalChannelReconfigurationTDD RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  PhysicalChannelReconfigurationRequestTDD
  SUCCESSFUL OUTCOME  PhysicalChannelReconfigurationCommand
  UNSUCCESSFUL OUTCOME PhysicalChannelReconfigurationFailure
  PROCEDURE ID        { procedureCode id-physicalChannelReconfiguration, ddMode tdd }
  CRITICALITY         ignore
}

measurementInitiation RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  DedicatedMeasurementInitiationRequest
  SUCCESSFUL OUTCOME  DedicatedMeasurementInitiationResponse
  UNSUCCESSFUL OUTCOME DedicatedMeasurementInitiationFailure
  PROCEDURE ID        { procedureCode id-measurementInitiation, ddMode common }
  CRITICALITY         ignore
}

compressedModePreparationFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  CompressedModePrepare
  SUCCESSFUL OUTCOME  CompressedModeReady
  UNSUCCESSFUL OUTCOME CompressedModeFailure
  PROCEDURE ID        { procedureCode id-compressedModePrepareFDD, ddMode fdd }
  CRITICALITY         ignore
}

commonTransportChannelResourcesInitiationFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  CommonTransportChannelResourcesRequest
  SUCCESSFUL OUTCOME  CommonTransportChannelResourcesResponseFDD
  UNSUCCESSFUL OUTCOME CommonTransportChannelResourcesFailure
  PROCEDURE ID        { procedureCode id-commonTransportChannelResourcesInitiationFDD, ddMode common }
  CRITICALITY         ignore
}

commonTransportChannelResourcesInitiationTDD RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  CommonTransportChannelResourcesRequest
  SUCCESSFUL OUTCOME  CommonTransportChannelResourcesResponseTDD
  UNSUCCESSFUL OUTCOME CommonTransportChannelResourcesFailure
  PROCEDURE ID        { procedureCode id-commonTransportChannelResourcesInitiationTDD, ddMode common }
  CRITICALITY         ignore
}

uplinkSignallingTransfer RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  UplinkSignallingTransferIndication
  PROCEDURE ID        { procedureCode id-uplinkSignallingTransfer, ddMode common }
  CRITICALITY         ignore
}

```

```

downlinkSignallingTransfer RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE DownlinkSignallingTransferRequest
  PROCEDURE ID       { procedureCode id-downlinkSignallingTransfer, ddMode common }
  CRITICALITY        ignore
}

srnsRelocationCommit RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE RelocationCommit
  PROCEDURE ID       { procedureCode id-srnsRelocationCommit, ddMode common }
  CRITICALITY        ignore
}

paging RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE PagingRequest
  PROCEDURE ID       { procedureCode id-pagingRequest, ddMode common }
  CRITICALITY        ignore
}

synchronisedRadioLinkReconfigurationCommit RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE RadioLinkReconfigurationCommit
  PROCEDURE ID       { procedureCode id-synchronisedRadioLinkReconfigurationCommit, ddMode common }
  CRITICALITY        ignore
}

synchronisedRadioLinkReconfigurationCancellation RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE RadioLinkReconfigurationCancel
  PROCEDURE ID       { procedureCode id-synchronisedRadioLinkReconfigurationCancellation, ddMode common }
  CRITICALITY        ignore
}

radioLinkFailure RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE RadioLinkFailureIndication
  PROCEDURE ID       { procedureCode id-radioLinkFailure, ddMode common }
  CRITICALITY        ignore
}

radioLinkRestoration RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE RadioLinkRestoreIndication
  PROCEDURE ID       { procedureCode id-radioLinkRestoration, ddMode common }
  CRITICALITY        ignore
}

measurementReporting RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE DedicatedMeasurementReport
  PROCEDURE ID       { procedureCode id-measurementReporting, ddMode common }
  CRITICALITY        ignore
}

measurementTermination RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE DedicatedMeasurementTerminationRequest
  PROCEDURE ID       { procedureCode id-measurementTermination, ddMode common }
  CRITICALITY        ignore
}

measurementFailure RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE DedicatedMeasurementFailureIndication

```

```

    PROCEDURE ID      { procedureCode id-measurementFailure, ddMode common }
    CRITICALITY      ignore
}

downlinkPowerControlFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE DL-PowerControlRequest
    PROCEDURE ID      { procedureCode id-downlinkPowerControl, ddMode fdd }
    CRITICALITY      ignore
}

compressedModeCommitFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE CompressedModeCommit
    PROCEDURE ID      { procedureCode id-compressedModeCommitFDD, ddMode fdd }
    CRITICALITY      ignore
}

compressedModeCancellationFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE CompressedModeCancel
    PROCEDURE ID      { procedureCode id-compressedModeCancellationFDD, ddMode fdd }
    CRITICALITY      ignore
}

commonTransportChannelResourcesRelease RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE CommonTransportChannelResourcesReleaseRequest
    PROCEDURE ID      { procedureCode id-commonTransportChannelResourcesRelease, ddMode common }
    CRITICALITY      ignore
}

errorIndication RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE ErrorIndication
    PROCEDURE ID      { procedureCode id-errorIndication, ddMode common }
    CRITICALITY      ignore
}

privateMessage RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE PrivateMessage
    OUTCOME PrivateMessage
    PROCEDURE ID      { procedureCode id-privateMessage, ddMode common }
    CRITICALITY      ignore
}

END

```

9.3.3 PDU Definitions

```

-- *****
--
-- PDU definitions for RNSAP.
--
-- *****

RNSAP-PDU-Contents -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

```

```
-- *****  
--  
-- IE parameter types from other modules.  
--  
-- *****
```

IMPORTS

```
AllocationRetentionPriority,  
AllowedQueuingTime,  
BLER,  
BindingID,  
BurstType,  
C-ID,  
C-RNTI,  
CCTrCH-ID,  
CFN,  
CN-CS-DomainIdentifier,  
CN-PS-DomainIdentifier,  
CPICH-EcIo,  
CPICH-Power,  
Cause,  
CellParameterID,  
ChipOffset,  
CompressedModeMethod,  
CriticalityDiagnostics,  
D-FieldLength,  
D-RNTI,  
D-RNTI-ReleaseIndication,  
DCH-CombinationInd,  
DCH-ID,  
DL-ChannelisationCode,  
DL-DPCCH-SlotFormat,  
DL-DPCH-SlotNumber,  
DL-EbNo,  
DL-EbNoTarget,  
DL-FrameType,  
DL-Power,  
DL-ScramblingCode,  
DPCH-ID,  
DRX-Parameter,  
DedicatedMeasurementValue,  
DiversityControlField,  
DiversityMode,  
FACH-DataFrameSize,  
FACH-InitialWindowSize,  
FACH-PriorityIndicator,  
FDD-DL-ChannelisationCodeNumber,  
FDD-S-CCPCH-Offset,  
FrameHandlingPriority,  
FrameOffset,  
GapPeriod,  
GapPositionMode,  
L3-Information,  
MAC-c-SDU-Length,  
MaxNrOfUL-DPCHs,
```

MeanBitRate,
MeasurementCharacteristics,
MeasurementID,
MidambleShift,
MinUL-ChannelisationCodeLength,
MultipleURAsIndicator,
MultiplexingPosition,
Offset,
PD,
PSCH-PCCPCH-TimeSlot,
PSCH-TimeSlot,
PayloadCRC-PresenceIndicator,
PilotBitsUsedIndicator,
PowerControlMode,
PowerOffset,
PowerResumeMode,
PrimaryCCPCH-RSCP,
PrimaryCPICH-EcNo,
PrimaryCPICH-Power,
PrimaryScramblingCode,
PropagationDelay,
PunctureLimit,
RANAP-RelocationInformation,
RL-ID,
RLC-Mode,
RNC-ID,
RepetitionLength,
RepetitionPeriod,
ReportCharacteristics,
S-FieldLength,
S-RNTI,
SAI,
SN,
SRNC-ID,
SSDT-CellID,
SSDT-CellID-Length,
SSDT-Indication,
SSDT-SupportIndicator,
ScaledUL-InterferenceLevel,
ScramblingCode,
ScramblingCodeChange,
SecondaryCCPCH-SlotFormat,
SyncCase,
TDD-ChannelisationCode,
TDD-PhysicalChannelOffset,
TFCI-Coding,
TFCI-Presence,
TFCI-SignallingMode,
TGD,
TGL,
TPC-StepSize,
TimeSlot,
ToAWE,
ToAWS,
TransportBearerID,
TransportBearerRequestIndicator,

```

TransportFormatCombinationSet,
TransportFormatSet,
TransportLayerAddress,
UARFCN,
UC-ID,
UL-DL-CompressedModeSelection,
UL-DPCCH-SlotFormat,
UL-EbNo,
UL-EbNoTarget,
UL-FP-Mode,
UL-ScramblingCode,
URA-ID
FROM RNSAP-IEs

```

```

PrivateExtensionContainer{},
PrivateIE-Container{},
ProtocolExtensionContainer{ },
ProtocolIE-ContainerList{ },
ProtocolIE-ContainerPair{ },
ProtocolIE-ContainerPairList{ },
ProtocolIE-Container{ },
RNSAP-PRIVATE-EXTENSIONIES,
RNSAP-PROTOCOL-EXTENSION,
RNSAP-PROTOCOL-IES,
RNSAP-PROTOCOL-IES-PAIR
FROM RNSAP-Containers

```

```

maxNoOfDL-Codes,
maxNrOfCCTrCHs,
maxNrOfDCHs,
maxNrOfDL-Codes,
maxNrOfDPCHs,
maxNrOfFACH-FD-Size,
maxNrOfFDD-Neighbours,
maxNrOfMACcSDU-Length,
maxNrOfTDD-Neighbours,
maxNrOfRLs,
maxNrOfSCCPCHs,
maxRNCinURA,

id-AllowedQueuingTime,
id-BindingID,
id-C-ID,
id-C-RNTI,
id-CCTrCH-ID,
id-CFN,
id-CN-CS-DomainIdentifier,
id-CN-PS-DomainIdentifier,
id-Cause,
id-CompressedModeMethod,
id-CriticalityDiagnostics,
id-D-RNTI,
id-D-RNTI-ReleaseIndication,
id-DCH-AddItem,
id-DCH-AddItem-RL-ReconfPrepFDD,
id-DCH-AddItem-RL-ReconfPrepTDD,

```


id-DCH-AddItem-RL-ReconfReadyFDD,
id-DCH-AddItem-RL-ReconfRqstFDD,
id-DCH-AddItem-RL-ReconfRqstTDD,
id-DCH-AddList-RL-ReconfPrepFDD,
id-DCH-AddList-RL-ReconfPrepTDD,
id-DCH-AddList-RL-ReconfRqstFDD,
id-DCH-AddList-RL-ReconfRqstTDD,
id-DCH-DeleteItem-RL-ReconfPrepFDD,
id-DCH-DeleteItem-RL-ReconfPrepTDD,
id-DCH-DeleteItem-RL-ReconfRqstFDD,
id-DCH-DeleteItem-RL-ReconfRqstTDD,
id-DCH-DeleteList-RL-ReconfPrepFDD,
id-DCH-DeleteList-RL-ReconfPrepTDD,
id-DCH-DeleteList-RL-ReconfRqstFDD,
id-DCH-DeleteList-RL-ReconfRqstTDD,
id-DCH-Information-RL-SetupReqFDD,
id-DCH-InformationItem-RL-SetupReqFDD,
id-DCH-InformationItem-RL-SetupReqTDD,
id-DCH-InformationList-RL-SetupReqTDD,
id-DCH-ModifyItem,
id-DCH-ModifyItem-RL-ReconfPrepFDD,
id-DCH-ModifyItem-RL-ReconfPrepTDD,
id-DCH-ModifyItem-RL-ReconfReadyFDD,
id-DCH-ModifyItem-RL-ReconfRqstFDD,
id-DCH-ModifyItem-RL-ReconfRqstTDD,
id-DCH-ModifyList-RL-ReconfPrepFDD,
id-DCH-ModifyList-RL-ReconfPrepTDD,
id-DCH-ModifyList-RL-ReconfRqstFDD,
id-DCH-ModifyList-RL-ReconfRqstTDD,
id-DL-CCTrCH-Information-RL-ReconfPrepTDD,
id-DL-CCTrCH-Information-RL-ReconfRqstTDD,
id-DL-CCTrCH-InformationList-RL-ReconfPrepTDD,
id-DL-CCTrCH-InformationList-RL-ReconfRqstTDD,
id-DL-CCTrChInformationItem-RL-SetupReqTDD,
id-DL-CCTrChInformationList-RL-SetupReqTDD,
id-DL-CodeInformation-PhyChReconfRqstFDD,
id-DL-DPCH-Information,
id-DL-DPCH-Information-RL-SetupReqFDD,
id-DL-DPCH-InformationList-PhyChReconfRqstTDD,
id-DL-DPCH-InformationList-RL-ReconfReadyTDD,
id-DL-EbNoTarget,
id-DL-FrameType,
id-DL-MeanBitRate,
id-DL-ReferencePowerInformation-DL-PC-Rqst,
id-DRX-Parameter,
id-DedicatedMeasurementObjectType-DM-Rprt,
id-DedicatedMeasurementObjectType-DM-Rqst,
id-DedicatedMeasurementObjectType-DM-Rspns,
id-FACH-InfoForOptionalGroupS-CCPCH,
id-FACH-InfoForOptionalS-CCPCH,
id-FACH-InfoForS-CCPCH-CoupledToPRACH,
id-GapPositionMode,
id-L3-Information,
id-MeasurementCharacteristics,
id-MeasurementID,
id-MultipleURAsIndicator,

id-PD,
id-PagingArea-PagingRqst,
id-PowerControlMode,
id-PowerResumeMode,
id-ProcedureScope-DL-PC-Rqst,
id-RANAP-RelocationInformation,
id-RL-Information-PhyChReconfRqstFDD,
id-RL-Information-PhyChReconfRqstTDD,
id-RL-Information-RL-AdditionRqstFDD,
id-RL-Information-RL-AdditionRqstTDD,
id-RL-Information-RL-DeletionRqst,
id-RL-Information-RL-FailureInd,
id-RL-Information-RL-ReconfPrepFDD,
id-RL-Information-RL-RestoreInd,
id-RL-Information-RL-SetupReqFDD,
id-RL-Information-RL-SetupReqTDD,
id-RL-InformationItem-DM-Rprt,
id-RL-InformationItem-DM-Rqst,
id-RL-InformationItem-DM-Rspns,
id-RL-InformationItem-RL-SetupReqFDD,
id-RL-InformationList-RL-AdditionRqstFDD,
id-RL-InformationList-RL-DeletionRqst,
id-RL-InformationList-RL-FailureInd,
id-RL-InformationList-RL-ReconfPrepFDD,
id-RL-InformationList-RL-RestoreInd,
id-RL-InformationResponse-RL-AdditionRspTDD,
id-RL-InformationResponse-RL-ReconfReadyTDD,
id-RL-InformationResponse-RL-SetupRspTDD,
id-RL-InformationResponseItem-RL-AdditionRspFDD,
id-RL-InformationResponseItem-RL-ReconfReadyFDD,
id-RL-InformationResponseItem-RL-SetupRspFDD,
id-RL-InformationResponseList-RL-AdditionRspFDD,
id-RL-InformationResponseList-RL-ReconfReadyFDD,
id-RL-InformationResponseList-RL-SetupRspFDD,
id-RL-ReconfigurationFailure-RL-ReconfFail,
id-RL-ReconfigurationFailureList-RL-ReconfFail,
id-RNCsWithCellsInTheAccessedURA-List-UL-ST-Ind,
id-ReportCharacteristics,
id-S-RNTI,
id-SAI,
id-SN,
id-SRNC-ID,
id-ScramblingCodeChange,
id-SuccessfulRL-InformationResponse-RL-AdditionFailureFDD,
id-SuccessfulRL-InformationResponse-RL-SetupFailureFDD,
id-SuccessfulRL-InformationResponseList-RL-AdditionFailureFDD,
id-SuccessfulRL-InformationResponseList-RL-SetupFailureFDD,
id-TGD,
id-TGL,
id-TGP1,
id-TGP2,
id-TransportBearerID,
id-TransportBearerRequestIndicator,
id-TransportLayerAddress,
id-UC-ID,
id-UL-CCTrCH-Information-RL-ReconfPrepTDD,

```

id-UL-CCTrCH-Information-RL-ReconfRqstTDD,
id-UL-CCTrCH-InformationList-RL-ReconfPrepTDD,
id-UL-CCTrCH-InformationList-RL-ReconfRqstTDD,
id-UL-CCTrChInformationItem-RL-SetupReqTDD,
id-UL-CCTrChInformationList-RL-SetupReqTDD,
id-UL-DL-CompressedModeSelection,
id-UL-DPCH-Information,
id-UL-DPCH-Information-RL-SetupReqFDD,
id-UL-DPCH-InformationList-PhyChReconfRqstTDD,
id-UL-DPCH-InformationList-RL-ReconfReadyTDD,
id-UL-DeltaEbNo,
id-UL-DeltaEbNoAfter,
id-UL-EbNoTarget,
id-UL-MeanBitRate,
id-URA-ID,
id-UnsuccessfulRL-InformationResponse,
id-UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD,
id-UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD,
id-UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD,
id-UnsuccessfulRL-InformationResponseList-RL-AdditionFailureFDD,
id-UnsuccessfulRL-InformationResponseList-RL-SetupFailureFDD
FROM RNSAP-Constants;

-- *****
--
-- Common Container List
--
-- *****

DCH-IE-ContainerList      { RNSAP-PROTOCOL-IES : IEsSetParam } ::= ProtocolIE-ContainerList { 1, maxNrOfDCHs, { IEsSetParam } }
RL-IE-ContainerList      { RNSAP-PROTOCOL-IES : IEsSetParam } ::= ProtocolIE-ContainerList { 1, maxNrOfRLs, { IEsSetParam } }
CCTrCH-IE-ContainerList  { RNSAP-PROTOCOL-IES : IEsSetParam } ::= ProtocolIE-ContainerList { 1, maxNrOfCCTrCHs, { IEsSetParam } }
DL-Code-IE-ContainerList { RNSAP-PROTOCOL-IES : IEsSetParam } ::= ProtocolIE-ContainerList { 1, maxNrOfDL-Codes, { IEsSetParam } }

-- *****
--
-- RADIO LINK SETUP REQUEST FDD
--
-- *****

RadioLinkSetupRequestFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkSetupRequestFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkSetupRequestFDD-Extensions}} OPTIONAL,
    ...
}

RadioLinkSetupRequestFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-S-RNTI          CRITICALITY ignore TYPE S-RNTI          PRESENCE mandatory } |
    { ID id-D-RNTI          CRITICALITY ignore TYPE D-RNTI          PRESENCE optional } |
    { ID id-AllowedQueuingTime CRITICALITY ignore TYPE AllowedQueuingTime PRESENCE optional } |
    { ID id-UL-DPCH-Information-RL-SetupReqFDD CRITICALITY ignore TYPE UL-DPCH-Information-RL-SetupReqFDD PRESENCE mandatory } |
    { ID id-DL-DPCH-Information-RL-SetupReqFDD CRITICALITY ignore TYPE DL-DPCH-Information-RL-SetupReqFDD PRESENCE mandatory } |
    { ID id-DCH-Information-RL-SetupReqFDD CRITICALITY ignore TYPE DCH-InformationList-RL-SetupReqFDD PRESENCE mandatory } |
    { ID id-RL-Information-RL-SetupReqFDD CRITICALITY ignore TYPE RL-InformationList-RL-SetupReqFDD PRESENCE mandatory },
    ...
}

```

```

UL-DPCH-Information-RL-SetupReqFDD ::= SEQUENCE {
    ul-ScramblingCode          UL-ScramblingCode,
    minUL-ChannelisationCodeLength  MinUL-ChannelisationCodeLength,
    maxNrOfUL-DPCHs          MaxNrOfUL-DPCHs          OPTIONAL
    -- This IE is present only if minUL-ChannelisationCodeLength equals to 4 -- ,
    ul-PunctureLimit          PunctureLimit,
    ul-TransportFormatCombinationSet  TransportFormatCombinationSet,
    ul-DPCCH-SlotFormat        UL-DPCCH-SlotFormat,
    ul-EbNoTarget              UL-EbNoTarget          OPTIONAL,
    diversityMode              DiversityMode,
    d-FieldLength              D-FieldLength          OPTIONAL
    -- This IE is present only if Feed Back mode diversity is activated -- ,
    sSDT-CellIdLength          SSDT-CellID-Length     OPTIONAL,
    s-FieldLength              S-FieldLength          OPTIONAL,
    ul-meanBitRate              MeanBitRate            OPTIONAL,
    iE-Extensions              ProtocolExtensionContainer { {UL-DPCH-Information-RL-SetupReqFDD-ExtIEs} } OPTIONAL,
    ...
}

UL-DPCH-Information-RL-SetupReqFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DL-DPCH-Information-RL-SetupReqFDD ::= SEQUENCE {
    transportFormatCombinationSet  TransportFormatCombinationSet,
    dl-DPCH-SlotNumber             DL-DPCH-SlotNumber,
    tFCI-SignallingMode            TFCI-SignallingMode,
    tFCI-Presence                  TFCI-Presence      OPTIONAL
    -- This IE is present if Slot Format is from 12 to 16 --,
    multiplexingPosition           MultiplexingPosition,
    powerOffsetInformation          SEQUENCE {
        po1-ForTFCI-Bits           PowerOffset,
        po2-ForTPC-Bits            PowerOffset,
        po3-ForPilotBits           PowerOffset,
        ...
    },
    dl-TPC-StepSize                TPC-StepSize,
    meanBitRate                    MeanBitRate        OPTIONAL,
    iE-Extensions                  ProtocolExtensionContainer { {DL-DPCH-Information-RL-SetupReqFDD-ExtIEs} } OPTIONAL,
    ...
}

DL-DPCH-Information-RL-SetupReqFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-InformationList-RL-SetupReqFDD ::= DCH-IE-ContainerList { {DCH-InformationItemIEs-RL-SetupReqFDD} }

DCH-InformationItemIEs-RL-SetupReqFDD RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-InformationItem-RL-SetupReqFDD CRITICALITY ignore TYPE DCH-InformationItem-RL-SetupReqFDD PRESENCE mandatory },
    ...
}

DCH-InformationItem-RL-SetupReqFDD ::= SEQUENCE {
    dch-ID                          DCH-ID,

```

```

    dCH-CombinationInd          DCH-CombinationInd          OPTIONAL,
    rLC-Mode                    RLC-Mode,
    ul-transportFormatSet       TransportFormatSet,
    dl-transportFormatSet       TransportFormatSet,
    ul-BLER                      BLER,
    dl-BLER                      BLER,
    allocationRetentionPriority  AllocationRetentionPriority,
    frameHandlingPriority        FrameHandlingPriority,
    payloadCRC-PresenceIndicator PayloadCRC-PresenceIndicator,
    ul-FP-Mode                  UL-FP-Mode,
    toAWS                        ToAWS,
    toAWE                        ToAWE,
    iE-Extensions               ProtocolExtensionContainer { {DCH-InformationItem-RL-SetupReqFDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-InformationItem-RL-SetupReqFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RL-InformationList-RL-SetupReqFDD          ::= RL-IE-ContainerList { {RL-InformationItemIEs-RL-SetupReqFDD} }

RL-InformationItemIEs-RL-SetupReqFDD RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationItem-RL-SetupReqFDD    CRITICALITY ignore    TYPE RL-InformationItem-RL-SetupReqFDD    PRESENCE mandatory    },
    ...
}

RL-InformationItem-RL-SetupReqFDD ::= SEQUENCE {
    rL-ID          RL-ID,
    uC-ID          C-ID,
    frameOffset    FrameOffset,
    chipOffset     ChipOffset,
    propagationDelay    PropagationDelay          OPTIONAL,
    diversityControlField    DiversityControlField    OPTIONAL
    -- This IE is present only if the RL is not the first one in the RL-InformationList-RL-SetupReqFDD --,
    dl-InitialTX-Power    DL-Power          OPTIONAL
    -- Initial DL transmission power --,
    cPICH-EcIo          CPICH-EcIo          OPTIONAL,
    sSDT-CellID        SSDT-CellID          OPTIONAL,
    iE-Extensions      ProtocolExtensionContainer { {RL-InformationItem-RL-SetupReqFDD-ExtIEs} } OPTIONAL,
    ...
}

RL-InformationItem-RL-SetupReqFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkSetupRequestFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK SETUP REQUEST TDD
--
-- *****

```

```

RadioLinkSetupRequestTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkSetupRequestTDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkSetupRequestTDD-Extensions}}
    ...
}

RadioLinkSetupRequestTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-S-RNTI          CRITICALITY ignore TYPE S-RNTI          PRESENCE mandatory } |
    { ID id-D-RNTI          CRITICALITY ignore TYPE D-RNTI          PRESENCE optional   } |
    { ID id-AllowedQueuingTime CRITICALITY ignore TYPE AllowedQueuingTime PRESENCE optional   } |
    { ID id-UL-MeanBitRate   CRITICALITY ignore TYPE MeanBitRate   PRESENCE optional   } |
    { ID id-DL-MeanBitRate   CRITICALITY ignore TYPE MeanBitRate   PRESENCE optional   } |
    { ID id-UL-CCTrChInformationList-RL-SetupReqTDD CRITICALITY ignore TYPE UL-CCTrChInformationList-RL-SetupReqTDD PRESENCE mandatory } |
    { ID id-DL-CCTrChInformationList-RL-SetupReqTDD CRITICALITY ignore TYPE DL-CCTrChInformationList-RL-SetupReqTDD PRESENCE mandatory } |
    { ID id-DCH-InformationList-RL-SetupReqTDD CRITICALITY ignore TYPE DCH-InformationList-RL-SetupReqTDD PRESENCE mandatory } |
    { ID id-RL-Information-RL-SetupReqTDD CRITICALITY ignore TYPE RL-Information-RL-SetupReqTDD PRESENCE mandatory },
    ...
}

UL-CCTrChInformationList-RL-SetupReqTDD ::= CCTrCH-IE-ContainerList { {UL-CCTrChInformationItemIEs-RL-SetupReqTDD} }

UL-CCTrChInformationItemIEs-RL-SetupReqTDD RNSAP-PROTOCOL-IES ::= {
    { ID id-UL-CCTrChInformationItem-RL-SetupReqTDD CRITICALITY ignore TYPE UL-CCTrChInformationItem-RL-SetupReqTDD PRESENCE mandatory },
    ...
}

UL-CCTrChInformationItem-RL-SetupReqTDD ::= SEQUENCE {
    cCTrCH-ID          CCTrCH-ID,
    ul-TFCS            TransportFormatCombinationSet,
    tFCI-Coding        TFCI-Coding,
    ul-PunctureLimit   PunctureLimit,
    iE-Extensions      ProtocolExtensionContainer { {UL-CCTrChInformationItem-RL-SetupReqTDD-ExtIEs} } OPTIONAL,
    ...
}

UL-CCTrChInformationItem-RL-SetupReqTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DL-CCTrChInformationList-RL-SetupReqTDD ::= CCTrCH-IE-ContainerList { {DL-CCTrChInformationItemIEs-RL-SetupReqTDD} }

DL-CCTrChInformationItemIEs-RL-SetupReqTDD RNSAP-PROTOCOL-IES ::= {
    { ID id-DL-CCTrChInformationItem-RL-SetupReqTDD CRITICALITY ignore TYPE DL-CCTrChInformationItem-RL-SetupReqTDD PRESENCE mandatory },
    ...
}

DL-CCTrChInformationItem-RL-SetupReqTDD ::= SEQUENCE {
    cCTrCH-ID          CCTrCH-ID,
    dl-TFCS            TransportFormatCombinationSet,
    tFCI-Coding        TFCI-Coding,
    dl-PunctureLimit   PunctureLimit,
    iE-Extensions      ProtocolExtensionContainer { {DL-CCTrChInformationItem-RL-SetupReqTDD-ExtIEs} } OPTIONAL,
    ...
}

```

```

DL-CCTrChInformationItem-RL-SetupReqTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-InformationList-RL-SetupReqTDD ::= DCH-IE-ContainerList { {DCH-InformationItemIEs-RL-SetupReqTDD} }

DCH-InformationItemIEs-RL-SetupReqTDD RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-InformationItem-RL-SetupReqTDD CRITICALITY ignore TYPE DCH-InformationItem-RL-SetupReqTDD PRESENCE mandatory },
    ...
}

DCH-InformationItem-RL-SetupReqTDD ::= SEQUENCE {
    dCH-ID DCH-ID,
    ul-cCTrCH-ID CCTrCH-ID, -- UL CCTrCH in which the DCH is mapped
    dl-cCTrCH-ID CCTrCH-ID, -- DL CCTrCH in which the DCH is mapped
    dCH-CombinationInd DCH-CombinationInd OPTIONAL,
    rLC-Mode RLC-Mode,
    ul-transportFormatSet TransportFormatSet,
    dl-transportFormatSet TransportFormatSet,
    ul-BLER BLER,
    dl-BLER BLER,
    allocationRetentionPriority AllocationRetentionPriority,
    frameHandlingPriority FrameHandlingPriority,
    payloadCRC-PresenceIndicator PayloadCRC-PresenceIndicator,
    ul-FP-Mode UL-FP-Mode,
    toAWS ToAWS,
    toAWE ToAWE,
    iE-Extensions ProtocolExtensionContainer { {DCH-InformationItem-RL-SetupReqTDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-InformationItem-RL-SetupReqTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RL-Information-RL-SetupReqTDD ::= SEQUENCE {
    rL-ID RL-ID,
    c-ID C-ID,
    frameOffset FrameOffset,
    primaryCCPCH-RSCP PrimaryCCPCH-RSCP OPTIONAL,
    iE-Extensions ProtocolExtensionContainer { {RL-Information-RL-SetupReqTDD-ExtIEs} } OPTIONAL,
    ...
}

RL-Information-RL-SetupReqTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkSetupRequestTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK SETUP RESPONSE FDD
--

```

```

-- *****
RadioLinkSetupResponseFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkSetupResponseFDD-IEs}},
    protocolExtensions  ProtocolExtensionContainer {{RadioLinkSetupResponseFDD-Extensions}}
    ...
}

RadioLinkSetupResponseFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI          CRITICALITY ignore TYPE D-RNTI          PRESENCE optional } |
    { ID id-CN-PS-DomainIdentifier CRITICALITY ignore TYPE CN-PS-DomainIdentifier PRESENCE optional } |
    { ID id-CN-CS-DomainIdentifier CRITICALITY ignore TYPE CN-CS-DomainIdentifier PRESENCE optional } |
    { ID id-RL-InformationResponseList-RL-SetupRspFDD
      CRITICALITY ignore TYPE RL-InformationResponseList-RL-SetupRspFDD
      PRESENCE mandatory } |
    { ID id-UL-EbNoTarget    CRITICALITY ignore TYPE UL-EbNoTarget    PRESENCE optional } |
    { ID id-DL-EbNoTarget    CRITICALITY ignore TYPE DL-EbNoTarget    PRESENCE optional } |
    { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
    ...
}

RL-InformationResponseList-RL-SetupRspFDD ::= RL-IE-ContainerList { {RL-InformationResponseItemIEs-RL-SetupRspFDD} }

RL-InformationResponseItemIEs-RL-SetupRspFDD RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationResponseItem-RL-SetupRspFDD
      CRITICALITY ignore TYPE RL-InformationResponseItem-RL-SetupRspFDD PRESENCE mandatory },
    ...
}

RL-InformationResponseItem-RL-SetupRspFDD ::= SEQUENCE {
    rL-ID          RL-ID,
    sAI            SAI,
    ul-InterferenceLevel ScaledUL-InterferenceLevel,
    dl-CodeInformation DL-CodeInformationList-RL-SetupRspFDD,
    sSDT-SupportIndicator SSdT-SupportIndicator,
    maxUL-EbNo      UL-EbNo,
    minUL-EbNo      UL-EbNo,
    neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-SetupRsp OPTIONAL,
    neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-SetupRsp OPTIONAL,
    iE-Extensions  ProtocolExtensionContainer { {RL-InformationResponseItem-RL-SetupRspFDD-ExtIEs} } OPTIONAL,
    ...
}

RL-InformationResponseItem-RL-SetupRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CodeInformationList-RL-SetupRspFDD ::= SEQUENCE (SIZE (1..maxNoOfDL-Codes)) OF DL-CodeInformationItem-RL-SetupRspFDD

DL-CodeInformationItem-RL-SetupRspFDD ::= SEQUENCE {
    dl-ScramblingCode DL-ScramblingCode,
    fDD-DL-ChannelisationCodeNumber FDD-DL-ChannelisationCodeNumber,
    -- ** NOTE: How many alternatives are there, 2 or 3? **
    diversityIndication CHOICE {
        combining SEQUENCE {

```



```

        rL-ID                RL-ID
    },
    nonCombiningOrIENotPresent SEQUENCE {
        dCH-InformationResponse-RL-SetupRspFDD DCH-InformationResponseList-RL-SetupRspFDD OPTIONAL
    }
}
OPTIONAL
-- This IE is present only if the RL is not the first on in the RL Information -- ,
iE-Extensions ProtocolExtensionContainer { {DL-CodeInformationItem-RL-SetupRspFDD-ExtIEs} } OPTIONAL,
...
}

DL-CodeInformationItem-RL-SetupRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DCH-InformationResponseList-RL-SetupRspFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-InformationResponseItem-RL-SetupRspFDD

DCH-InformationResponseItem-RL-SetupRspFDD ::= SEQUENCE {
    dCH-ID                DCH-ID,
    bindingID             BindingID,
    transportLayerAddress TransportLayerAddress,
    iE-Extensions         ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-SetupRspFDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-InformationResponseItem-RL-SetupRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Both FDD and TDD messages use these definitions **
NeighbouringFDD-CellInformationList-RL-SetupRsp ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours)) OF
    NeighbouringFDD-CellInformationItem-RL-SetupRsp

NeighbouringFDD-CellInformationItem-RL-SetupRsp ::= SEQUENCE {
    uC-ID                C-ID,
    cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,
    cN-CS-DomainIdentifier CN-CS-DomainIdentifier OPTIONAL,
    uARFCN               UARFCN,
    frameOffset          FrameOffset OPTIONAL,
    primaryScramblingCode PrimaryScramblingCode,
    primaryCPICH-Power   PrimaryCPICH-Power OPTIONAL,
    iE-Extensions         ProtocolExtensionContainer { {NeighbouringFDD-CellInformationItem-RL-SetupRsp-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringFDD-CellInformationItem-RL-SetupRsp-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringTDD-CellInformationList-RL-SetupRsp ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours)) OF
    NeighbouringTDD-CellInformationItem-RL-SetupRsp

NeighbouringTDD-CellInformationItem-RL-SetupRsp ::= SEQUENCE {
    c-ID                C-ID,
    cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,

```

```

    cN-CS-DomainIdentifier          CN-CS-DomainIdentifier  OPTIONAL,
    uARFCN                          UARFCN,
    frameOffset                      FrameOffset          OPTIONAL,
    cellParameterID                 CellParameterID,
    syncCase                         SyncCase,
    timeSlot                         TimeSlot           OPTIONAL
    -- This IE is present only if SyncCase is Case1 -- ,
    pSCH-TimeSlot                   PSCH-TimeSlot         OPTIONAL
    -- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
    ul-EbNo                          UL-EbNo           OPTIONAL,
    dl-EbNo                          DL-EbNo           OPTIONAL,
    iE-Extensions                    ProtocolExtensionContainer { {NeighbouringTDD-CellInformationItem-RL-SetupRsp-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringTDD-CellInformationItem-RL-SetupRsp-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkSetupResponseFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK SETUP RESPONSE TDD
--
-- *****

RadioLinkSetupResponseTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container      {{RadioLinkSetupResponseTDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkSetupResponseTDD-Extensions}}          OPTIONAL,
    ...
}

RadioLinkSetupResponseTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI          CRITICALITY ignore TYPE D-RNTI          PRESENCE optional } |
    { ID id-CN-PS-DomainIdentifier CRITICALITY ignore TYPE CN-PS-DomainIdentifier PRESENCE optional } |
    { ID id-CN-CS-DomainIdentifier CRITICALITY ignore TYPE CN-CS-DomainIdentifier PRESENCE optional } |
    { ID id-RL-InformationResponse-RL-SetupRspTDD CRITICALITY ignore TYPE RL-InformationResponse-RL-SetupRspTDD PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
    ...
}

RL-InformationResponse-RL-SetupRspTDD ::= SEQUENCE {
    rL-ID          RL-ID,
    SAI            SAI,
    ul-InterferenceLevel ScaledUL-InterferenceLevel,
    maxUL-EbNo    UL-EbNo,
    minUL-EbNo    UL-EbNo,
    ul-EbNoTarget UL-EbNo          OPTIONAL,
    dl-EbNoTarget DL-EbNo          OPTIONAL,
    ul-CCTrCHInformation UL-CCTrCHInformationList-RL-SetupRspTDD,
    dl-CCTrCHInformation DL-CCTrCHInformationList-RL-SetupRspTDD,
    dCH-InformationResponse DCH-InformationResponseList-RL-SetupRspTDD,
    neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-SetupRsp OPTIONAL,

```

```

    neighbouringTDD-CellInformation      NeighbouringTDD-CellInformationList-RL-SetupRsp OPTIONAL,
    iE-Extensions                       ProtocolExtensionContainer { {RL-InformationResponse-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

RL-InformationResponse-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
UL-CCTrCHInformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF UL-CCTrCHInformationItem-RL-SetupRspTDD

UL-CCTrCHInformationItem-RL-SetupRspTDD ::= SEQUENCE {
    cCTrCH-ID                          CCTrCH-ID,
    ul-DPCH-Information                UL-DPCH-InformationList-RL-SetupRspTDD,
    iE-Extensions                       ProtocolExtensionContainer { {UL-CCTrCHInformationItem-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

UL-CCTrCHInformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
UL-DPCH-InformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF UL-DPCH-InformationItem-RL-SetupRspTDD

-- **NOTE: UL-DPCH-InformationItem-RL-SetupRspTDD and DL-DPCH-InformationItem-RL-SetupRspTDD
-- are currently similar. Combine them? **
UL-DPCH-InformationItem-RL-SetupRspTDD ::= SEQUENCE {
    dPCH-ID                            DPCH-ID,
    tDD-ChannelisationCode              TDD-ChannelisationCode,
    burstType                           BurstType,
    midambleShift                        MidambleShift,
    timeSlot                             TimeSlot,
    tDD-PhysicalChannelOffset            TDD-PhysicalChannelOffset,
    repetitionPeriod                    RepetitionPeriod,
    repetitionLength                     RepetitionLength,
    tFCI-Presence                        TFCI-Presence,
    iE-Extensions                       ProtocolExtensionContainer { {UL-DPCH-InformationItem-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

UL-DPCH-InformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CCTrCHInformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF DL-CCTrCHInformationItem-RL-SetupRspTDD

DL-CCTrCHInformationItem-RL-SetupRspTDD ::= SEQUENCE {
    cCTrCH-ID                          CCTrCH-ID,
    dl-DPCH-Information                DL-DPCH-InformationList-RL-SetupRspTDD,
    iE-Extensions                       ProtocolExtensionContainer { {DL-CCTrCHInformationItem-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

```

```

DL-CCTrCHInformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-DPCH-InformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF DL-DPCH-InformationItem-RL-SetupRspTDD

DL-DPCH-InformationItem-RL-SetupRspTDD ::= SEQUENCE {
    dPCH-ID                DPCH-ID,
    tDD-ChannelisationCode TDD-ChannelisationCode,
    burstType              BurstType,
    midambleShift          MidambleShift,
    timeSlot               TimeSlot,
    tDD-PhysicalChannelOffset TDD-PhysicalChannelOffset,
    repetitionPeriod       RepetitionPeriod,
    repetitionLength       RepetitionLength,
    tFCI-Presence          TFCI-Presence,
    iE-Extensions          ProtocolExtensionContainer { {DL-DPCH-InformationItem-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-DPCH-InformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-InformationResponseList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-InformationResponseItem-RL-SetupRspTDD

DCH-InformationResponseItem-RL-SetupRspTDD ::= SEQUENCE {
    dCH-ID                DCH-ID,
    bindingID             BindingID,
    transportLayerAddress TransportLayerAddress,
    iE-Extensions          ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-InformationResponseItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkSetupResponseTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK SETUP FAILURE FDD
--
-- *****

RadioLinkSetupFailureFDD ::= SEQUENCE {
    protocolIEs           ProtocolIE-Container      {{RadioLinkSetupFailureFDD-IEs}},
    protocolExtensions    ProtocolExtensionContainer {{RadioLinkSetupFailureFDD-Extensions}}
    ...
}

RadioLinkSetupFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {

```

```

{ ID id-D-RNTI                CRITICALITY ignore TYPE D-RNTI                PRESENCE mandatory } |
{ ID id-CN-PS-DomainIdentifier CRITICALITY ignore TYPE CN-PS-DomainIdentifier PRESENCE mandatory } |
{ ID id-CN-CS-DomainIdentifier CRITICALITY ignore TYPE CN-CS-DomainIdentifier PRESENCE mandatory } |
{ ID id-UnsuccessfulRL-InformationResponseList-RL-SetupFailureFDD
  CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponseList-RL-SetupFailureFDD
  PRESENCE mandatory } |
{ ID id-SuccessfulRL-InformationResponseList-RL-SetupFailureFDD
  CRITICALITY ignore TYPE SuccessfulRL-InformationResponseList-RL-SetupFailureFDD
  PRESENCE mandatory } |
{ ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
...
}

UnsuccessfulRL-InformationResponseList-RL-SetupFailureFDD ::= RL-IE-ContainerList { {UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD-IEs} }

UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD
    CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD
    PRESENCE mandatory },
  ...
}

UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD ::= SEQUENCE {
  rL-ID                RL-ID,
  cause                Cause,
  iE-Extensions        ProtocolExtensionContainer { {UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
  ...
}

UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

SuccessfulRL-InformationResponseList-RL-SetupFailureFDD ::= RL-IE-ContainerList { {SuccessfulRL-InformationResponse-RL-SetupFailureFDD-IEs} }

SuccessfulRL-InformationResponse-RL-SetupFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-SuccessfulRL-InformationResponse-RL-SetupFailureFDD
    CRITICALITY ignore TYPE SuccessfulRL-InformationResponse-RL-SetupFailureFDD
    PRESENCE mandatory },
  ...
}

SuccessfulRL-InformationResponse-RL-SetupFailureFDD ::= SEQUENCE {
  rL-ID                RL-ID,
  SAI                  SAI,
  ul-InterferenceLevel ScaledUL-InterferenceLevel,
  dl-CodeInformation   DL-CodeInformationList-RL-SetupFailureFDD,
  sSDT-SupportIndicator SSDT-SupportIndicator,
  neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-SetupFailureFDD OPTIONAL,
  neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-SetupFailureFDD OPTIONAL,
  ul-EbNoTarget        UL-EbNo,
  maxUL-EbNo           UL-EbNo,
  minUL-EbNo           UL-EbNo,
  dl-EbNoTarget        DL-EbNo,
  iE-Extensions        ProtocolExtensionContainer { {SuccessfulRL-InformationResponse-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
  ...
}

```

```

}
-- ** NOTE: Shall this be made as an IE container? **
DL-CodeInformationList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNoOfDL-Codes)) OF DL-CodeInformationItem-RL-SetupFailureFDD

SuccessfulRL-InformationResponse-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DL-CodeInformationItem-RL-SetupFailureFDD ::= SEQUENCE {
  dl-ScramblingCode          DL-ScramblingCode,
  fdd-DL-ChannelisationCodeNumber  FDD-DL-ChannelisationCodeNumber,
  -- ** NOTE: How many alternatives are there, 2 or 3? **
  diversityIndication        CHOICE {
    combining                  SEQUENCE {
      rL-ID                    RL-ID
    },
    nonCombiningOrIENotPresent SEQUENCE {
      dch-InformationResponse-RL-SetupFailureFDD  DCH-InformationResponseList-RL-SetupFailureFDD OPTIONAL
    }
  } OPTIONAL
  -- This IE is present only if the RL is not the first on in the RL Information -- ,
  iE-Extensions              ProtocolExtensionContainer { {DL-CodeInformationItem-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
  ...
}

DL-CodeInformationItem-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ** NOTE: Shall this be made as an IE container? **
DCH-InformationResponseList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-InformationResponseItem-RL-SetupFailureFDD

DCH-InformationResponseItem-RL-SetupFailureFDD ::= SEQUENCE {
  dch-ID          DCH-ID,
  bindingID       BindingID,
  transportLayerAddress  TransportLayerAddress,
  iE-Extensions   ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
  ...
}

DCH-InformationResponseItem-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

NeighbouringFDD-CellInformationList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours)) OF
  NeighbouringFDD-CellInformationItem-RL-SetupFailureFDD

NeighbouringFDD-CellInformationItem-RL-SetupFailureFDD ::= SEQUENCE {
  uC-ID          C-ID,
  cN-PS-DomainIdentifier  CN-PS-DomainIdentifier  OPTIONAL,
  cN-CS-DomainIdentifier  CN-CS-DomainIdentifier  OPTIONAL,
  uARFCN          UARFCN,
  frameOffset     FrameOffset  OPTIONAL,
  primaryScramblingCode  PrimaryScramblingCode,
  primaryCPICH-Power    PrimaryCPICH-Power  OPTIONAL,
  iE-Extensions        ProtocolExtensionContainer { {NeighbouringFDD-CellInformationItem-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
}

```

```

}
...
}
NeighbouringFDD-CellInformationItem-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}
NeighbouringTDD-CellInformationList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours)) OF
NeighbouringTDD-CellInformationItem-RL-SetupFailureFDD
NeighbouringTDD-CellInformationItem-RL-SetupFailureFDD ::= SEQUENCE {
uC-ID C-ID,
cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,
cN-CS-DomainIdentifier CN-CS-DomainIdentifier OPTIONAL,
uARFCN UARFCN,
frameOffset FrameOffset OPTIONAL,
cellParameterID CellParameterID,
syncCase SyncCase,
timeSlot TimeSlot,
pSCH-TimeSlot PSCH-TimeSlot OPTIONAL
-- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
iE-Extensions ProtocolExtensionContainer { {NeighbouringTDD-CellInformationItem-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
...
}
NeighbouringTDD-CellInformationItem-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}
RadioLinkSetupFailureFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
...
}
-- *****
--
-- RADIO LINK SETUP FAILURE TDD
--
-- *****
RadioLinkSetupFailureTDD ::= SEQUENCE {
protocolIEs ProtocolIE-Container {{RadioLinkSetupFailureTDD-IEs}},
protocolExtensions ProtocolExtensionContainer {{RadioLinkSetupFailureTDD-Extensions}} OPTIONAL,
...
}
RadioLinkSetupFailureTDD-IEs RNSAP-PROTOCOL-IES ::= {
{ ID id-UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD
CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD
PRESENCE mandatory } |
{ ID id-CriticalityDiagnostics
CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
...
}
UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD ::= SEQUENCE {
rL-ID RL-ID,
cause Cause,

```

```

    iE-Extensions          ProtocolExtensionContainer { {UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD-ExtIEs} } OPTIONAL,
    ...
}

UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkSetupFailureTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK ADDITION REQUEST FDD
--
-- *****

RadioLinkAdditionRequestFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkAdditionRequestFDD-IEs}},
    protocolExtensions  ProtocolExtensionContainer {{RadioLinkAdditionRequestFDD-Extensions}}          OPTIONAL,
    ...
}

RadioLinkAdditionRequestFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UL-EbNoTarget          CRITICALITY ignore TYPE UL-EbNo          PRESENCE mandatory } |
    { ID id-RL-InformationList-RL-AdditionRqstFDD CRITICALITY ignore TYPE RL-InformationList-RL-AdditionRqstFDD PRESENCE mandatory },
    ...
}

RL-InformationList-RL-AdditionRqstFDD ::= RL-IE-ContainerList { {RL-Information-RL-AdditionRqstFDD-IEs} }

RL-Information-RL-AdditionRqstFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-Information-RL-AdditionRqstFDD CRITICALITY ignore TYPE RL-Information-RL-AdditionRqstFDD PRESENCE mandatory },
    ...
}

RL-Information-RL-AdditionRqstFDD ::= SEQUENCE {
    rL-ID          RL-ID,
    c-ID          C-ID,
    frameOffset   FrameOffset,
    chipOffset    ChipOffset,
    diversityControlField DiversityControlField,
    primaryCPICH-EcNo PrimaryCPICH-EcNo          OPTIONAL,
    sSDT-CellID   SSDT-CellID          OPTIONAL,
    iE-Extensions ProtocolExtensionContainer { {RL-Information-RL-AdditionRqstFDD-ExtIEs} } OPTIONAL,
    ...
}

RL-Information-RL-AdditionRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkAdditionRequestFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```



```

-- *****
--
-- RADIO LINK ADDITION REQUEST TDD
--
-- *****

RadioLinkAdditionRequestTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container      {{RadioLinkAdditionRequestTDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkAdditionRequestTDD-Extensions}}          OPTIONAL,
    ...
}

RadioLinkAdditionRequestTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-Information-RL-AdditionRqstTDD   CRITICALITY ignore   TYPE RL-Information-RL-AdditionRqstTDD   PRESENCE mandatory   },
    ...
}

RL-Information-RL-AdditionRqstTDD ::= SEQUENCE {
    rL-ID                RL-ID,
    c-ID                 C-ID,
    frameOffset          FrameOffset,
    chipOffset           ChipOffset,
    diversityControlField DiversityControlField,
    primaryCCPCH-RSCP    PrimaryCCPCH-RSCP,
    iE-Extensions        ProtocolExtensionContainer { {RL-Information-RL-AdditionRqstTDD-ExtIEs} } OPTIONAL,
    ...
}

RL-Information-RL-AdditionRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkAdditionRequestTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK ADDITION RESPONSE FDD
--
-- *****

RadioLinkAdditionResponseFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container      {{RadioLinkAdditionResponseFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkAdditionResponseFDD-Extensions}}          OPTIONAL,
    ...
}

RadioLinkAdditionResponseFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI        CRITICALITY ignore   TYPE D-RNTI        PRESENCE optional   } |
    { ID id-RL-InformationResponseList-RL-AdditionRspFDD
      CRITICALITY ignore   TYPE RL-InformationResponseList-RL-AdditionRspFDD
      PRESENCE mandatory   } |
    { ID id-CriticalityDiagnostics          CRITICALITY ignore   TYPE CriticalityDiagnostics          PRESENCE optional   },
    ...
}

```

```

}
RL-InformationResponseList-RL-AdditionRspFDD ::= RL-IE-ContainerList { {RL-InformationResponseItemIEs-RL-AdditionRspFDD} }
RL-InformationResponseItemIEs-RL-AdditionRspFDD RNSAP-PROTOCOL-IES ::= {
  { ID id-RL-InformationResponseItem-RL-AdditionRspFDD
    CRITICALITY ignore TYPE RL-InformationResponseItem-RL-AdditionRspFDD PRESENCE mandatory },
  ...
}
RL-InformationResponseItem-RL-AdditionRspFDD ::= SEQUENCE {
  rL-ID RL-ID,
  SAI SAI,
  ul-InterferenceLevel ScaledUL-InterferenceLevel,
  dl-CodeInformation DL-CodeInformationList-RL-AdditionRspFDD,
  sSDT-SupportIndicator SSDT-SupportIndicator,
  maxUL-EbNo UL-EbNo,
  minUL-EbNo UL-EbNo,
  neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-SetupRsp OPTIONAL,
  neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-SetupRsp OPTIONAL,
  iE-Extensions ProtocolExtensionContainer { {RL-InformationResponseItem-RL-AdditionRspFDD-ExtIEs} } OPTIONAL,
  ...
}
RL-InformationResponseItem-RL-AdditionRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}
-- ** NOTE: Shall this be made as an IE container? **
DL-CodeInformationList-RL-AdditionRspFDD ::= SEQUENCE (SIZE (1..maxNoOfDL-Codes)) OF DL-CodeInformationItem-RL-AdditionRspFDD
DL-CodeInformationItem-RL-AdditionRspFDD ::= SEQUENCE {
  dl-ScramblingCode DL-ScramblingCode,
  fDD-DL-ChannelisationCodeNumber FDD-DL-ChannelisationCodeNumber,
  -- ** NOTE: How many alternatives are there, 2 or 3? **
  diversityIndication CHOICE {
    combining SEQUENCE {
      rL-ID RL-ID
    },
    nonCombiningOrIENotPresent SEQUENCE {
      dCH-InformationResponse-RL-AdditionRspFDD DCH-InformationResponseList-RL-AdditionRspFDD OPTIONAL
    }
  } OPTIONAL
  -- This IE is present only if the RL is not the first on in the RL Information -- ,
  iE-Extensions ProtocolExtensionContainer { {DL-CodeInformationItem-RL-AdditionRspFDD-ExtIEs} } OPTIONAL,
  ...
}
DL-CodeInformationItem-RL-AdditionRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}
-- ** NOTE: Shall this be made as an IE container? **
DCH-InformationResponseList-RL-AdditionRspFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-InformationResponseItem-RL-AdditionRspFDD
DCH-InformationResponseItem-RL-AdditionRspFDD ::= SEQUENCE {

```

```

    dCH-ID                DCH-ID,
    bindingID              BindingID,
    transportLayerAddress TransportLayerAddress,
    iE-Extensions          ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-AdditionRspFDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-InformationResponseItem-RL-AdditionRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Both FDD and TDD messages use these definitions **
NeighbouringFDD-CellInformationList-RL-AdditionRsp ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours)) OF
    NeighbouringFDD-CellInformationItem-RL-AdditionRsp

NeighbouringFDD-CellInformationItem-RL-AdditionRsp ::= SEQUENCE {
    uC-ID                C-ID,
    cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,
    cN-CS-DomainIdentifier CN-CS-DomainIdentifier OPTIONAL,
    uARFCN                UARFCN,
    frameOffset           FrameOffset OPTIONAL,
    primaryScramblingCode PrimaryScramblingCode,
    primaryCPICH-Power    PrimaryCPICH-Power OPTIONAL,
    iE-Extensions          ProtocolExtensionContainer { {NeighbouringFDD-CellInformationItem-RL-AdditionRsp-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringFDD-CellInformationItem-RL-AdditionRsp-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringTDD-CellInformationList-RL-AdditionRsp ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours)) OF
    NeighbouringTDD-CellInformationItem-RL-AdditionRsp

NeighbouringTDD-CellInformationItem-RL-AdditionRsp ::= SEQUENCE {
    uC-ID                C-ID,
    cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,
    cN-CS-DomainIdentifier CN-CS-DomainIdentifier OPTIONAL,
    uARFCN                UARFCN,
    frameOffset           FrameOffset OPTIONAL,
    cellParameterID       CellParameterID,
    syncCase               SyncCase,
    timeSlot               TimeSlot,
    pSCH-TimeSlot          PSCH-TimeSlot OPTIONAL
    -- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
    iE-Extensions          ProtocolExtensionContainer { {NeighbouringTDD-CellInformationItem-RL-AdditionRsp-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringTDD-CellInformationItem-RL-AdditionRsp-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkAdditionResponseFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

```

-- *****
--
-- RADIO LINK ADDITION RESPONSE TDD
--
-- *****

RadioLinkAdditionResponseTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container          {{RadioLinkAdditionResponseTDD-IEs}},
    protocolExtensions  ProtocolExtensionContainer    {{RadioLinkAdditionResponseTDD-Extensions}}      OPTIONAL,
    ...
}

RadioLinkAdditionResponseTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI          CRITICALITY ignore TYPE D-RNTI          PRESENCE optional } |
    { ID id-RL-InformationResponse-RL-AdditionRspTDD
      CRITICALITY ignore TYPE RL-InformationResponse-RL-AdditionRspTDD PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics
      CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
    ...
}

RL-InformationResponse-RL-AdditionRspTDD ::= SEQUENCE {
    rL-ID          RL-ID,
    SAI            SAI,
    ul-InterferenceLevel          ScaledUL-InterferenceLevel,
    ul-CCTrCHInformation          UL-CCTrCHInformationList-RL-AdditionRspTDD,
    dl-CCTrCHInformation          DL-CCTrCHInformationList-RL-AdditionRspTDD,
    diversityIndication          CHOICE {
        combining          SEQUENCE {
            rL-ID          RL-ID
        },
        nonCombiningOrIENotPresent          SEQUENCE {
            dCH-InformationResponse-RL-AdditionRspFDD          DCH-InformationResponseList-RL-AdditionRspFDD OPTIONAL
        }
    } OPTIONAL,
    maxUL-EbNo          UL-EbNo,
    minUL-EbNo          UL-EbNo,
    neighbouringFDD-CellInformation          NeighbouringFDD-CellInformationList-RL-AdditionRspTDD OPTIONAL,
    neighbouringTDD-CellInformation          NeighbouringTDD-CellInformationList-RL-AdditionRspTDD OPTIONAL,
    iE-Extensions          ProtocolExtensionContainer { {RL-InformationResponse-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

RL-InformationResponse-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
UL-CCTrCHInformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF UL-CCTrCHInformationItem-RL-AdditionRspTDD

UL-CCTrCHInformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    cCCTrCH-ID          CCTrCH-ID,
    ul-DPCH-Information          UL-DPCH-InformationList-RL-AdditionRspTDD,
    iE-Extensions          ProtocolExtensionContainer { {UL-CCTrCHInformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

```

```

UL-CCTrCHInformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
UL-DPCH-InformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF UL-DPCH-InformationItem-RL-AdditionRspTDD

UL-DPCH-InformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    dPCH-ID                DPCH-ID,
    tDD-ChannelisationCode TDD-ChannelisationCode,
    burstType              BurstType,
    midambleShift          MidambleShift,
    timeSlot                TimeSlot,
    offset                  Offset,
    tDD-PhysicalChannelOffset TDD-PhysicalChannelOffset,
    repetitionPeriod        RepetitionPeriod,
    repetitionLength        RepetitionLength,
    tFCI-Presence           TFCI-Presence,
    iE-Extensions           ProtocolExtensionContainer { {UL-DPCH-InformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

UL-DPCH-InformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CCTrCHInformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF DL-CCTrCHInformationItem-RL-AdditionRspTDD

DL-CCTrCHInformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    cCTrCH-ID                CCTrCH-ID,
    dl-DPCH-Information        DL-DPCH-InformationList-RL-AdditionRspTDD,
    iE-Extensions              ProtocolExtensionContainer { {DL-CCTrCHInformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CCTrCHInformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-DPCH-InformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF DL-DPCH-InformationItem-RL-AdditionRspTDD

DL-DPCH-InformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    dPCH-ID                DPCH-ID,
    tDD-ChannelisationCode TDD-ChannelisationCode,
    burstType              BurstType,
    midambleShift          MidambleShift,
    timeSlot                TimeSlot,
    tDD-PhysicalChannelOffset TDD-PhysicalChannelOffset,
    repetitionPeriod        RepetitionPeriod,
    repetitionLength        RepetitionLength,
    tFCI-Presence           TFCI-Presence,
    iE-Extensions           ProtocolExtensionContainer { {DL-DPCH-InformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

```

```

}
DL-DPCH-InformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}
NeighbouringFDD-CellInformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours)) OF
  NeighbouringFDD-CellInformationItem-RL-AdditionRspTDD
NeighbouringFDD-CellInformationItem-RL-AdditionRspTDD ::= SEQUENCE {
  uC-ID C-ID,
  cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,
  cN-CS-DomainIdentifier CN-CS-DomainIdentifier OPTIONAL,
  uARFCN UARFCN,
  frameOffset FrameOffset OPTIONAL,
  primaryScramblingCode PrimaryScramblingCode,
  primaryCPICH-Power PrimaryCPICH-Power OPTIONAL,
  iE-Extensions ProtocolExtensionContainer { {NeighbouringFDD-CellInformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
  ...
}
NeighbouringFDD-CellInformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}
NeighbouringTDD-CellInformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours)) OF
  NeighbouringTDD-CellInformationItem-RL-AdditionRspTDD
NeighbouringTDD-CellInformationItem-RL-AdditionRspTDD ::= SEQUENCE {
  uC-ID C-ID,
  cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,
  cN-CS-DomainIdentifier CN-CS-DomainIdentifier OPTIONAL,
  uARFCN UARFCN,
  frameOffset FrameOffset OPTIONAL,
  cellParameterID CellParameterID,
  syncCase SyncCase,
  timeSlot TimeSlot,
  pSCH-TimeSlot PSCH-TimeSlot OPTIONAL
  -- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
  iE-Extensions ProtocolExtensionContainer { {NeighbouringTDD-CellInformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
  ...
}
NeighbouringTDD-CellInformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}
RadioLinkAdditionResponseTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}
-- *****
--
-- RADIO LINK ADDITION FAILURE FDD
--
-- *****

```

```

RadioLinkAdditionFailureFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkAdditionFailureFDD-IEs}},
    protocolExtensions  ProtocolExtensionContainer {{RadioLinkAdditionFailureFDD-Extensions}}
    ...
}

RadioLinkAdditionFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UnsuccessfulRL-InformationResponseList-RL-AdditionFailureFDD
      CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponseList-RL-AdditionFailureFDD
      PRESENCE mandatory } |
    { ID id-SuccessfulRL-InformationResponseList-RL-AdditionFailureFDD
      CRITICALITY ignore TYPE SuccessfulRL-InformationResponseList-RL-AdditionFailureFDD
      PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics          CRITICALITY ignore TYPE CriticalityDiagnostics          PRESENCE optional },
    ...
}

UnsuccessfulRL-InformationResponseList-RL-AdditionFailureFDD ::= RL-IE-ContainerList { {UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD-IEs} }

UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD
      CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD
      PRESENCE mandatory },
    ...
}

UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD ::= SEQUENCE {
    rL-ID          RL-ID,
    cause          Cause,
    iE-Extensions ProtocolExtensionContainer { {UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

SuccessfulRL-InformationResponseList-RL-AdditionFailureFDD ::= RL-IE-ContainerList { {SuccessfulRL-InformationResponse-RL-AdditionFailureFDD-IEs} }

SuccessfulRL-InformationResponse-RL-AdditionFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-SuccessfulRL-InformationResponse-RL-AdditionFailureFDD
      CRITICALITY ignore TYPE SuccessfulRL-InformationResponse-RL-AdditionFailureFDD
      PRESENCE mandatory },
    ...
}

SuccessfulRL-InformationResponse-RL-AdditionFailureFDD ::= SEQUENCE {
    rL-ID          RL-ID,
    SAI            SAI,
    ul-InterferenceLevel ScaledUL-InterferenceLevel,
    dl-CodeInformation DL-CodeInformationList-RL-AdditionFailureFDD,
    sSDT-SupportIndicator SSDT-SupportIndicator,
    maxUL-EbNo      UL-EbNo,
}

```

```

    minUL-EbNo                UL-EbNo,
    neighbouringFDD-CellInformation    NeighbouringFDD-CellInformationList-RL-AdditionFailureFDD OPTIONAL,
    neighbouringTDD-CellInformation    NeighbouringTDD-CellInformationList-RL-AdditionFailureFDD OPTIONAL,
    iE-Extensions                ProtocolExtensionContainer { {SuccessfulRL-InformationResponse-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

SuccessfulRL-InformationResponse-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CodeInformationList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNoOfDL-Codes)) OF DL-CodeInformationItem-RL-AdditionFailureFDD

DL-CodeInformationItem-RL-AdditionFailureFDD ::= SEQUENCE {
    dl-ScramblingCode                DL-ScramblingCode,
    dl-ChannelisationCode            DL-ChannelisationCode,
    diversityIndication              CHOICE {
        combining                    SEQUENCE {
            rL-ID                    RL-ID
        },
        nonCombiningOrIENotPresent    SEQUENCE {
            dCH-InformationResponse-RL-AdditionFailureFDD    DCH-InformationResponseList-RL-AdditionFailureFDD OPTIONAL
        }
    } OPTIONAL
    -- This IE is present only if the RL is not the first on in the RL Information -- ,
    iE-Extensions                    ProtocolExtensionContainer { {DL-CodeInformationItem-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CodeInformationItem-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DCH-InformationResponseList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-InformationResponseItem-RL-AdditionFailureFDD

DCH-InformationResponseItem-RL-AdditionFailureFDD ::= SEQUENCE {
    dCH-ID                            DCH-ID,
    bindingID                          BindingID,
    transportLayerAddress                TransportLayerAddress,
    iE-Extensions                    ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-InformationResponseItem-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringFDD-CellInformationList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours)) OF
    NeighbouringFDD-CellInformationItem-RL-AdditionFailureFDD

NeighbouringFDD-CellInformationItem-RL-AdditionFailureFDD ::= SEQUENCE {
    uC-ID                            C-ID,
    cN-PS-DomainIdentifier            CN-PS-DomainIdentifier    OPTIONAL,
    cN-CS-DomainIdentifier            CN-CS-DomainIdentifier    OPTIONAL,
}

```



```

    uARFCN                UARFCN,
    frameOffset           FrameOffset          OPTIONAL,
    primaryScramblingCode PrimaryScramblingCode,
    cPICH-Power           CPICH-Power          OPTIONAL,
    iE-Extensions         ProtocolExtensionContainer { {NeighbouringFDD-CellInformationItem-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringFDD-CellInformationItem-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringTDD-CellInformationList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours)) OF
    NeighbouringTDD-CellInformationItem-RL-AdditionFailureFDD

NeighbouringTDD-CellInformationItem-RL-AdditionFailureFDD ::= SEQUENCE {
    uC-ID                C-ID,
    cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,
    cN-CS-DomainIdentifier CN-CS-DomainIdentifier OPTIONAL,
    uARFCN                UARFCN,
    frameOffset           FrameOffset          OPTIONAL,
    cellParameterID      CellParameterID,
    syncCase              SyncCase,
    timeSlot              TimeSlot,
    pSCH-TimeSlot         PSCH-TimeSlot        OPTIONAL
    -- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
    iE-Extensions         ProtocolExtensionContainer { {NeighbouringTDD-CellInformationItem-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringTDD-CellInformationItem-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkAdditionFailureFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK ADDITION FAILURE TDD
--
-- *****

RadioLinkAdditionFailureTDD ::= SEQUENCE {
    protocolIEs           ProtocolIE-Container    {{RadioLinkAdditionFailureTDD-IEs}},
    protocolExtensions    ProtocolExtensionContainer {{RadioLinkAdditionFailureTDD-Extensions}}
    ...
}

RadioLinkAdditionFailureTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UnsuccessfulRL-InformationResponse CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponse PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
    ...
}

```

```

UnsuccessfulRL-InformationResponse ::= SEQUENCE {
    rL-ID          RL-ID,
    cause          Cause,
    iE-Extensions ProtocolExtensionContainer { {UnsuccessfulRL-InformationResponse-ExtIEs} } OPTIONAL,
    ...
}

UnsuccessfulRL-InformationResponse-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkAdditionFailureTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK DELETION REQUEST
--
-- *****

RadioLinkDeletionRequest ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkDeletionRequest-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkDeletionRequest-Extensions}}          OPTIONAL,
    ...
}

RadioLinkDeletionRequest-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationList-RL-DeletionRqst CRITICALITY ignore TYPE RL-InformationList-RL-DeletionRqst PRESENCE mandatory },
    ...
}

RL-InformationList-RL-DeletionRqst ::= RL-IE-ContainerList { {RL-Information-RL-DeletionRqst-IEs} }

RL-Information-RL-DeletionRqst-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-Information-RL-DeletionRqst CRITICALITY ignore TYPE RL-Information-RL-DeletionRqst PRESENCE mandatory },
    ...
}

RL-Information-RL-DeletionRqst ::= SEQUENCE {
    rL-ID          RL-ID,
    iE-Extensions ProtocolExtensionContainer { {RL-Information-RL-DeletionRqst-ExtIEs} } OPTIONAL,
    ...
}

RL-Information-RL-DeletionRqst-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkDeletionRequest-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK DELETION RESPONSE

```

```

--
-- *****
RadioLinkDeletionResponse ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkDeletionResponse-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkDeletionResponse-Extensions}}
    ...
}

RadioLinkDeletionResponse-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-CriticalityDiagnostics          CRITICALITY ignore TYPE CriticalityDiagnostics          PRESENCE optional },
    ...
}

RadioLinkDeletionResponse-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK RECONFIGURATION PREPARE FDD
--
-- *****

RadioLinkReconfigurationPrepareFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkReconfigurationPrepareFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkReconfigurationPrepareFDD-Extensions}}
    ...
}

RadioLinkReconfigurationPrepareFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-AllowedQueuingTime          CRITICALITY ignore TYPE AllowedQueuingTime          PRESENCE mandatory } |
    { ID id-UL-DPCH-Information          CRITICALITY ignore TYPE UL-DPCH-Information          PRESENCE optional } |
    { ID id-DL-DPCH-Information          CRITICALITY ignore TYPE DL-DPCH-Information          PRESENCE optional } |
    { ID id-DCH-ModifyList-RL-ReconfPrepFDD CRITICALITY ignore TYPE DCH-ModifyList-RL-ReconfPrepFDD PRESENCE optional } |
    { ID id-DCH-AddList-RL-ReconfPrepFDD CRITICALITY ignore TYPE DCH-AddList-RL-ReconfPrepFDD PRESENCE optional } |
    { ID id-DCH-DeleteList-RL-ReconfPrepFDD CRITICALITY ignore TYPE DCH-DeleteList-RL-ReconfPrepFDD PRESENCE optional } |
    { ID id-RL-InformationList-RL-ReconfPrepFDD CRITICALITY ignore TYPE RL-InformationList-RL-ReconfPrepFDD PRESENCE mandatory },
    ...
}

UL-DPCH-Information ::= SEQUENCE {
    ul-ScramblingCode          UL-ScramblingCode          OPTIONAL,
    minUL-ChannelisationCodeLength MinUL-ChannelisationCodeLength OPTIONAL,
    maxNrOfUL-DPDCHs          MaxNrOfUL-DPDCHs          OPTIONAL
    -- This IE is present only if minUL-ChannelisationCodeLength equals to 4 --,
    ul-PunctureLimit          PunctureLimit          OPTIONAL,
    tFCS                      TransportFormatCombinationSet OPTIONAL,
    ul-DPCCH-SlotFormat        UL-DPCCH-SlotFormat        OPTIONAL,
    sSDT-CellIDLength          SSDT-CellID-Length          OPTIONAL,
    s-FieldLength              S-FieldLength          OPTIONAL,
    meanBitRate                MeanBitRate          OPTIONAL,
    iE-Extensions              ProtocolExtensionContainer { {UL-DPCH-Information-ExtIEs} } OPTIONAL,
    ...
}

```

```

UL-DPCH-Information-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DL-DPCH-Information ::= SEQUENCE {
  tFCS                               TransportFormatCombinationSet  OPTIONAL,
  dl-DPCCH-SlotFormat                DL-DPCCH-SlotFormat          OPTIONAL,
  tFCI-SignallingMode                TFCI-SignallingMode        OPTIONAL,
  tFCI-Presence                       TFCI-Presence              OPTIONAL,
  -- This IE is present if Slot Format is from 12 to 16 --,
  multiplexingPosition                MultiplexingPosition        OPTIONAL,
  meanBitRate                         MeanBitRate                  OPTIONAL,
  iE-Extensions                       ProtocolExtensionContainer { {DL-DPCH-Information-ExtIEs} } OPTIONAL,
  ...
}

DL-DPCH-Information-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DCH-ModifyList-RL-ReconfPrepFDD      ::= DCH-IE-ContainerList { {DCH-Modify-RL-ReconfPrepFDD-IEs} }

DCH-Modify-RL-ReconfPrepFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-DCH-ModifyItem-RL-ReconfPrepFDD    CRITICALITY ignore  TYPE DCH-ModifyItem-RL-ReconfPrepFDD    PRESENCE mandatory },
  ...
}

DCH-ModifyItem-RL-ReconfPrepFDD ::= SEQUENCE {
  dCH-ID                               DCH-ID,
  ul-TransportformatSet                TransportFormatSet          OPTIONAL,
  dl-TransportformatSet                TransportFormatSet          OPTIONAL,
  allocationRetentionPriority           AllocationRetentionPriority  OPTIONAL,
  frameHandlingPriority                 FrameHandlingPriority        OPTIONAL,
  ul-FP-Mode                           UL-FP-Mode                  OPTIONAL,
  toAWS                                 ToAWS                       OPTIONAL,
  toAWE                                 ToAWE                       OPTIONAL,
  iE-Extensions                       ProtocolExtensionContainer { {DCH-ModifyItem-RL-ReconfPrepFDD-ExtIEs} } OPTIONAL,
  ...
}

DCH-ModifyItem-RL-ReconfPrepFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DCH-AddList-RL-ReconfPrepFDD         ::= DCH-IE-ContainerList { {DCH-Add-RL-ReconfPrepFDD-IEs} }

DCH-Add-RL-ReconfPrepFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-DCH-AddItem-RL-ReconfPrepFDD      CRITICALITY ignore  TYPE DCH-AddItem-RL-ReconfPrepFDD      PRESENCE mandatory },
  ...
}

DCH-AddItem-RL-ReconfPrepFDD ::= SEQUENCE {
  dCH-ID                               DCH-ID,
  rLC-Mode                             RLC-Mode,
  dCH-CombinationInd                   DCH-CombinationInd         OPTIONAL,
  ul-TransportformatSet                TransportFormatSet,

```

```

dl-TransportformatSet          TransportFormatSet,
ul-BLER                        BLER,
dl-BLER                        BLER,
allocationRetentionPriority    AllocationRetentionPriority,
frameHandlingPriority          FrameHandlingPriority,
payloadCRC-PresenceIndicator  PayloadCRC-PresenceIndicator,
ul-FP-Mode                    UL-FP-Mode,
toAWS                          ToAWS,
toAWE                          ToAWE,
iE-Extensions                  ProtocolExtensionContainer { {DCH-AddItem-RL-ReconfPrepFDD-ExtIEs} } OPTIONAL,
...
}

DCH-AddItem-RL-ReconfPrepFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

DCH-DeleteList-RL-ReconfPrepFDD      ::= DCH-IE-ContainerList { {DCH-Delete-RL-ReconfPrepFDD-IEs} }

DCH-Delete-RL-ReconfPrepFDD-IEs RNSAP-PROTOCOL-IES ::= {
{ ID id-DCH-DeleteItem-RL-ReconfPrepFDD      CRITICALITY ignore TYPE DCH-DeleteItem-RL-ReconfPrepFDD      PRESENCE mandatory },
...
}

DCH-DeleteItem-RL-ReconfPrepFDD ::= SEQUENCE {
dCH-ID          DCH-ID,
iE-Extensions  ProtocolExtensionContainer { {DCH-DeleteItem-RL-ReconfPrepFDD-ExtIEs} } OPTIONAL,
...
}

DCH-DeleteItem-RL-ReconfPrepFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

RL-InformationList-RL-ReconfPrepFDD      ::= RL-IE-ContainerList { {RL-Information-RL-ReconfPrepFDD-IEs} }

RL-Information-RL-ReconfPrepFDD-IEs RNSAP-PROTOCOL-IES ::= {
{ ID id-RL-Information-RL-ReconfPrepFDD      CRITICALITY ignore TYPE RL-Information-RL-ReconfPrepFDD      PRESENCE mandatory },
...
}

RL-Information-RL-ReconfPrepFDD ::= SEQUENCE {
rL-ID          RL-ID,
sSDT-Indication          SSdT-Indication          OPTIONAL,
sSDT-CellIdentity       SSdT-CellID              OPTIONAL
-- The IE may be present if the sSDT-Indication is set to 'sSDT-active-in-the-UE' --,
iE-Extensions          ProtocolExtensionContainer { {RL-Information-RL-ReconfPrepFDD-ExtIEs} } OPTIONAL,
...
}

RL-Information-RL-ReconfPrepFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

RadioLinkReconfigurationPrepareFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
...
}

```

```

}
-- *****
--
-- RADIO LINK RECONFIGURATION PREPARE TDD
--
-- *****

RadioLinkReconfigurationPrepareTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkReconfigurationPrepareTDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkReconfigurationPrepareTDD-Extensions}}
    ...
}

RadioLinkReconfigurationPrepareTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-AllowedQueuingTime          CRITICALITY ignore TYPE AllowedQueuingTime          PRESENCE optional } |
    { ID id-UL-MeanBitRate               CRITICALITY ignore TYPE MeanBitRate             PRESENCE optional } |
    { ID id-DL-MeanBitRate               CRITICALITY ignore TYPE MeanBitRate             PRESENCE optional } |
    { ID id-UL-CCTrCH-InformationList-RL-ReconfPrepTDD
      CRITICALITY ignore TYPE UL-CCTrCH-InformationList-RL-ReconfPrepTDD PRESENCE mandatory } |
    { ID id-DL-CCTrCH-InformationList-RL-ReconfPrepTDD
      CRITICALITY ignore TYPE DL-CCTrCH-InformationList-RL-ReconfPrepTDD PRESENCE mandatory } |
    { ID id-DCH-ModifyList-RL-ReconfPrepTDD
      CRITICALITY ignore TYPE DCH-ModifyList-RL-ReconfPrepTDD PRESENCE mandatory } |
    { ID id-DCH-AddList-RL-ReconfPrepTDD
      CRITICALITY ignore TYPE DCH-AddList-RL-ReconfPrepTDD PRESENCE mandatory } |
    { ID id-DCH-DeleteList-RL-ReconfPrepTDD
      CRITICALITY ignore TYPE DCH-DeleteList-RL-ReconfPrepTDD PRESENCE mandatory } ,
    ...
}

UL-CCTrCH-InformationList-RL-ReconfPrepTDD ::= CCTrCH-IE-ContainerList { {UL-CCTrCH-Information-RL-ReconfPrepTDD-IEs} }

UL-CCTrCH-Information-RL-ReconfPrepTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UL-CCTrCH-Information-RL-ReconfPrepTDD CRITICALITY ignore TYPE UL-CCTrCH-Information-RL-ReconfPrepTDDPRESENCE mandatory } ,
    ...
}

UL-CCTrCH-Information-RL-ReconfPrepTDD ::= SEQUENCE {
    cCTrCH-ID          CCTrCH-ID,
    tFCS               TransportFormatCombinationSet OPTIONAL,
    tFCI-Coding        TFCI-Coding OPTIONAL,
    punctureLimit      PunctureLimit OPTIONAL,
    iE-Extensions      ProtocolExtensionContainer { {UL-CCTrCH-Information-RL-ReconfPrepTDD-ExtIEs} } OPTIONAL,
    ...
}

UL-CCTrCH-Information-RL-ReconfPrepTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DL-CCTrCH-InformationList-RL-ReconfPrepTDD ::= CCTrCH-IE-ContainerList { {DL-CCTrCH-Information-RL-ReconfPrepTDD-IEs} }

DL-CCTrCH-Information-RL-ReconfPrepTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DL-CCTrCH-Information-RL-ReconfPrepTDD CRITICALITY ignore TYPE DL-CCTrCH-Information-RL-ReconfPrepTDDPRESENCE mandatory } ,
    ...
}

DL-CCTrCH-Information-RL-ReconfPrepTDD ::= SEQUENCE {

```

```

    cCTrCH-ID          CCTrCH-ID,
    tFCS               TransportFormatCombinationSet OPTIONAL,
    tFCI-Coding        TFCI-Coding OPTIONAL,
    punctureLimit      PunctureLimit OPTIONAL,
    iE-Extensions      ProtocolExtensionContainer { {DL-CCTrCH-Information-RL-ReconfPrepTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CCTrCH-Information-RL-ReconfPrepTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-ModifyList-RL-ReconfPrepTDD ::= DCH-IE-ContainerList { {DCH-Modify-RL-ReconfPrepTDD-IEs} }

DCH-Modify-RL-ReconfPrepTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-ModifyItem-RL-ReconfPrepTDD CRITICALITY ignore TYPE DCH-ModifyItem-RL-ReconfPrepTDD PRESENCE mandatory },
    ...
}

DCH-ModifyItem-RL-ReconfPrepTDD ::= SEQUENCE {
    dCH-ID          DCH-ID,
    ul-CCTrCH-ID    CCTrCH-ID OPTIONAL,
    dl-CCTrCH-ID    CCTrCH-ID OPTIONAL,
    ul-TransportformatSet TransportFormatSet OPTIONAL,
    dl-TransportformatSet TransportFormatSet OPTIONAL,
    allocationRetentionPriority AllocationRetentionPriority OPTIONAL,
    frameHandlingPriority FrameHandlingPriority OPTIONAL,
    ul-FP-Mode      UL-FP-Mode OPTIONAL,
    toAWS           ToAWS OPTIONAL,
    toAWE           ToAWE OPTIONAL,
    iE-Extensions   ProtocolExtensionContainer { {DCH-ModifyItem-RL-ReconfPrepTDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-ModifyItem-RL-ReconfPrepTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-AddList-RL-ReconfPrepTDD ::= DCH-IE-ContainerList { {DCH-Add-RL-ReconfPrepTDD-IEs} }

DCH-Add-RL-ReconfPrepTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-AddItem-RL-ReconfPrepTDD CRITICALITY ignore TYPE DCH-AddItem-RL-ReconfPrepTDD PRESENCE mandatory },
    ...
}

DCH-AddItem-RL-ReconfPrepTDD ::= SEQUENCE {
    dCH-ID          DCH-ID,
    rLC-Mode        RLC-Mode,
    ul-CCTrCH-ID    CCTrCH-ID,
    dl-CCTrCH-ID    CCTrCH-ID,
    dCH-CombinationInd DCH-CombinationInd OPTIONAL,
    ul-TransportformatSet TransportFormatSet,
    dl-TransportformatSet TransportFormatSet,
    ul-BLER         BLER,
    dl-BLER         BLER,
    allocationRetentionPriority AllocationRetentionPriority,

```

```

    frameHandlingPriority          FrameHandlingPriority,
    payloadCRC-PresenceIndicator   PayloadCRC-PresenceIndicator,
    ul-FP-Mode                     UL-FP-Mode,
    toAWS                           ToAWS,
    toAWE                           ToAWE,
    iE-Extensions                   ProtocolExtensionContainer { {DCH-AddItem-RL-ReconfPrepTDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-AddItem-RL-ReconfPrepTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-DeleteList-RL-ReconfPrepTDD ::= DCH-IE-ContainerList { {DCH-Delete-RL-ReconfPrepTDD-IEs} }

DCH-Delete-RL-ReconfPrepTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-DeleteItem-RL-ReconfPrepTDD      CRITICALITY ignore  TYPE DCH-DeleteItem-RL-ReconfPrepTDD      PRESENCE mandatory },
    ...
}

DCH-DeleteItem-RL-ReconfPrepTDD ::= SEQUENCE {
    dCH-ID                DCH-ID,
    iE-Extensions         ProtocolExtensionContainer { {DCH-DeleteItem-RL-ReconfPrepTDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-DeleteItem-RL-ReconfPrepTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkReconfigurationPrepareTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK RECONFIGURATION READY FDD
--
-- *****

RadioLinkReconfigurationReadyFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container      {{RadioLinkReconfigurationReadyFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkReconfigurationReadyFDD-Extensions}}
    ...
}

RadioLinkReconfigurationReadyFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationResponseList-RL-ReconfReadyFDD
      CRITICALITY ignore  TYPE RL-InformationResponseList-RL-ReconfReadyFDD
      PRESENCE optional  } |
    { ID id-CriticalityDiagnostics
      CRITICALITY ignore  TYPE CriticalityDiagnostics
      PRESENCE optional  },
    ...
}

RL-InformationResponseList-RL-ReconfReadyFDD ::= RL-IE-ContainerList { {RL-InformationResponse-RL-ReconfReadyFDD-IEs} }

```



```

RL-InformationResponse-RL-ReconfReadyFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-RL-InformationResponseItem-RL-ReconfReadyFDD
    CRITICALITY ignore TYPE RL-InformationResponseItem-RL-ReconfReadyFDD
    PRESENCE mandatory },
  ...
}

RL-InformationResponseItem-RL-ReconfReadyFDD ::= SEQUENCE {
  rL-ID RL-ID,
  max-UL-EbNo UL-EbNo,
  min-UL-EbNo UL-EbNo,
  dCHsToBeAdded DCH-AddList-RL-ReconfReadyFDD OPTIONAL,
  dCHsToBeModified DCH-ModifyList-RL-ReconfReadyFDD OPTIONAL,
  iE-Extensions ProtocolExtensionContainer { {RL-InformationResponseItem-RL-ReconfReadyFDD-ExtIEs} } OPTIONAL,
  ...
}

RL-InformationResponseItem-RL-ReconfReadyFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DCH-AddList-RL-ReconfReadyFDD ::= DCH-IE-ContainerList { {DCH-Add-RL-ReconfReadyFDD-IEs} }

DCH-Add-RL-ReconfReadyFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-DCH-AddItem-RL-ReconfReadyFDD CRITICALITY ignore TYPE DCH-AddItem-RL-ReconfReadyFDD PRESENCE mandatory },
  ...
}

DCH-AddItem-RL-ReconfReadyFDD ::= SEQUENCE {
  dCH-ID DCH-ID,
  bindingID BindingID,
  transportLayerAddress TransportLayerAddress,
  iE-Extensions ProtocolExtensionContainer { {DCH-AddItem-RL-ReconfReadyFDD-ExtIEs} } OPTIONAL,
  ...
}

DCH-AddItem-RL-ReconfReadyFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DCH-ModifyList-RL-ReconfReadyFDD ::= DCH-IE-ContainerList { {DCH-Modify-RL-ReconfReadyFDD-IEs} }

DCH-Modify-RL-ReconfReadyFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-DCH-ModifyItem-RL-ReconfReadyFDD CRITICALITY ignore TYPE DCH-ModifyItem-RL-ReconfReadyFDD PRESENCE mandatory },
  ...
}

DCH-ModifyItem-RL-ReconfReadyFDD ::= SEQUENCE {
  dCH-ID DCH-ID,
  bindingID BindingID,
  transportLayerAddress TransportLayerAddress,
  iE-Extensions ProtocolExtensionContainer { {DCH-ModifyItem-RL-ReconfReadyFDD-ExtIEs} } OPTIONAL,
  ...
}

DCH-ModifyItem-RL-ReconfReadyFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {

```

```

}
...
RadioLinkReconfigurationReadyFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}
-- *****
--
-- RADIO LINK RECONFIGURATION READY TDD
--
-- *****

RadioLinkReconfigurationReadyTDD ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container    {{RadioLinkReconfigurationReadyTDD-IEs}},
  protocolExtensions   ProtocolExtensionContainer {{RadioLinkReconfigurationReadyTDD-Extensions}}
  ...
}

RadioLinkReconfigurationReadyTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-RL-InformationResponse-RL-ReconfReadyTDD
    CRITICALITY ignore TYPE RL-InformationResponse-RL-ReconfReadyTDD PRESENCE optional } |
  { ID id-CriticalityDiagnostics
    CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
  ...
}

RL-InformationResponse-RL-ReconfReadyTDD ::= SEQUENCE {
  rL-ID          RL-ID,
  max-UL-EbNo    UL-EbNo,
  min-UL-EbNo    UL-EbNo,
  ul-CCTrCH-Information
  UL-CCTrCH-InformationList-RL-ReconfReadyTDD OPTIONAL,
  dl-CCTrCH-Information
  DL-CCTrCH-InformationList-RL-ReconfReadyTDD OPTIONAL,
  dCHsToBeAdded  DCH-AddList-RL-ReconfReadyTDD OPTIONAL,
  dCHsToBeModified
  DCH-ModifyList-RL-ReconfReadyTDD OPTIONAL,
  iE-Extensions  ProtocolExtensionContainer { {RL-InformationResponse-RL-ReconfReadyTDD-ExtIEs} } OPTIONAL,
  ...
}

RL-InformationResponse-RL-ReconfReadyTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

UL-CCTrCH-InformationList-RL-ReconfReadyTDD ::= CCTrCH-IE-ContainerList { {UL-CCTrCH-InformationList-RL-ReconfReadyTDD-IEs} }

UL-CCTrCH-InformationList-RL-ReconfReadyTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-CCTrCH-ID
    CRITICALITY ignore TYPE CCTrCH-ID PRESENCE mandatory } |
  { ID id-UL-DPCH-InformationList-RL-ReconfReadyTDD
    CRITICALITY ignore TYPE UL-DPCH-InformationList-RL-ReconfReadyTDD
    PRESENCE mandatory },
  ...
}

UL-DPCH-InformationList-RL-ReconfReadyTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF
  SEQUENCE {
    dPCH-ID          DPCH-ID,
    tDD-ChannelisationCode
    TDD-ChannelisationCode OPTIONAL,

```

```

burstType          BurstType          OPTIONAL,
midambleShift      MidambleShift      OPTIONAL,
timeSlot           TimeSlot           OPTIONAL,
tDD-PhysicalChannelOffset  TDD-PhysicalChannelOffset  OPTIONAL,
repetitionPeriod   RepetitionPeriod   OPTIONAL,
repetitionLength   RepetitionLength   OPTIONAL,
tFCI-Presence      TFCI-Presence      OPTIONAL,
iE-Extensions      ProtocolExtensionContainer { {UL-DPCH-InformationList-RL-ReconfReadyTDD-ExtIEs} } OPTIONAL,
...
}

UL-DPCH-InformationList-RL-ReconfReadyTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

DL-CCTrCH-InformationList-RL-ReconfReadyTDD ::= CCTrCH-IE-ContainerList { {DL-CCTrCH-InformationList-RL-ReconfReadyTDD-IEs} }

DL-CCTrCH-InformationList-RL-ReconfReadyTDD-IEs RNSAP-PROTOCOL-IES ::= {
{ ID id-CCTrCH-ID          CRITICALITY ignore  TYPE CCTrCH-ID          PRESENCE mandatory } |
{ ID id-DL-DPCH-InformationList-RL-ReconfReadyTDD
CRITICALITY ignore  TYPE DL-DPCH-InformationList-RL-ReconfReadyTDD
PRESENCE mandatory },
...
}

DL-DPCH-InformationList-RL-ReconfReadyTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF
SEQUENCE {
dPCH-ID          DPCH-ID,
tDD-ChannelisationCode  TDD-ChannelisationCode  OPTIONAL,
burstType        BurstType          OPTIONAL,
midambleShift    MidambleShift      OPTIONAL,
timeSlot         TimeSlot           OPTIONAL,
tDD-PhysicalChannelOffset  TDD-PhysicalChannelOffset  OPTIONAL,
repetitionPeriod   RepetitionPeriod   OPTIONAL,
repetitionLength   RepetitionLength   OPTIONAL,
tFCI-Presence      TFCI-Presence      OPTIONAL,
iE-Extensions      ProtocolExtensionContainer { {DL-DPCH-InformationList-RL-ReconfReadyTDD-ExtIEs} } OPTIONAL,
...
}

DL-DPCH-InformationList-RL-ReconfReadyTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

DCH-AddList-RL-ReconfReadyTDD ::= DCH-IE-ContainerList { {DCH-Add-RL-ReconfReadyTDD-IEs} }

DCH-Add-RL-ReconfReadyTDD-IEs RNSAP-PROTOCOL-IES ::= {
{ ID id-DCH-AddItem          CRITICALITY ignore  TYPE DCH-AddItem-RL-ReconfReadyTDD          PRESENCE mandatory },
...
}

DCH-AddItem-RL-ReconfReadyTDD ::= SEQUENCE {
dCH-ID          DCH-ID,
bindingID       BindingID,
transportLayerAddress  TransportLayerAddress,
iE-Extensions   ProtocolExtensionContainer { {DCH-AddItem-RL-ReconfReadyTDD-ExtIEs} } OPTIONAL,

```

```

}
...
DCH-AddItem-RL-ReconfReadyTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

DCH-ModifyList-RL-ReconfReadyTDD ::= DCH-IE-ContainerList { {DCH-Modify-RL-ReconfReadyTDD-IEs} }

DCH-Modify-RL-ReconfReadyTDD-IEs RNSAP-PROTOCOL-IES ::= {
{ ID id-DCH-ModifyItem CRITICALITY ignore TYPE DCH-ModifyItem-RL-ReconfReadyTDD PRESENCE mandatory },
...
}

DCH-ModifyItem-RL-ReconfReadyTDD ::= SEQUENCE {
dCH-ID DCH-ID,
bindingID BindingID,
transportLayerAddress TransportLayerAddress,
iE-Extensions ProtocolExtensionContainer { {DCH-ModifyItem-RL-ReconfReadyTDD-ExtIEs} } OPTIONAL,
...
}

DCH-ModifyItem-RL-ReconfReadyTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

RadioLinkReconfigurationReadyTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- *****
--
-- RADIO LINK RECONFIGURATION COMMIT
--
-- *****

RadioLinkReconfigurationCommit ::= SEQUENCE {
protocolIEs ProtocolIE-Container {{RadioLinkReconfigurationCommit-IEs}},
protocolExtensions ProtocolExtensionContainer {{RadioLinkReconfigurationCommit-Extensions}} OPTIONAL,
...
}

RadioLinkReconfigurationCommit-IEs RNSAP-PROTOCOL-IES ::= {
{ ID id-CFN CRITICALITY ignore TYPE CFN PRESENCE mandatory },
...
}

RadioLinkReconfigurationCommit-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- *****
--
-- RADIO LINK RECONFIGURATION FAILURE
--
-- *****

```

```

RadioLinkReconfigurationFailure ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkReconfigurationFailure-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkReconfigurationFailure-Extensions}}
    ...
}

RadioLinkReconfigurationFailure-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-Cause          CRITICALITY ignore  TYPE Cause          PRESENCE mandatory } |
    { ID id-RL-ReconfigurationFailureList-RL-ReconfFail
      CRITICALITY ignore  TYPE RL-ReconfigurationFailureList-RL-ReconfFail
      PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics          CRITICALITY ignore  TYPE CriticalityDiagnostics          PRESENCE optional },
    ...
}

RL-ReconfigurationFailureList-RL-ReconfFail ::= RL-IE-ContainerList { {RL-ReconfigurationFailure-RL-ReconfFail-IEs} }

RL-ReconfigurationFailure-RL-ReconfFail-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-ReconfigurationFailure-RL-ReconfFail CRITICALITY ignore  TYPE RL-ReconfigurationFailure-RL-ReconfFail PRESENCE mandatory },
    ...
}

RL-ReconfigurationFailure-RL-ReconfFail ::= SEQUENCE {
    rL-ID          RL-ID,
    cause          Cause,
    iE-Extensions ProtocolExtensionContainer { {RL-ReconfigurationFailure-RL-ReconfFail-ExtIEs} } OPTIONAL,
    ...
}

RL-ReconfigurationFailure-RL-ReconfFail-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkReconfigurationFailure-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK RECONFIGURATION CANCEL
--
-- *****

RadioLinkReconfigurationCancel ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkReconfigurationCancel-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkReconfigurationCancel-Extensions}}
    ...
}

RadioLinkReconfigurationCancel-IEs RNSAP-PROTOCOL-IES ::= {
    ...
}

RadioLinkReconfigurationCancel-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

```

}
-- *****
--
-- RADIO LINK RECONFIGURATION REQUEST FDD
--
-- *****

RadioLinkReconfigurationRequestFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkReconfigurationRequestFDD-IEs}},
    protocolExtensions  ProtocolExtensionContainer {{RadioLinkReconfigurationRequestFDD-Extensions}}
    ...
}

RadioLinkReconfigurationRequestFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-AllowedQueuingTime          CRITICALITY ignore TYPE AllowedQueuingTime          PRESENCE mandatory } |
    { ID id-UL-DPCH-Information          CRITICALITY ignore TYPE UL-DPCH-Information-RL-ReconfRqstFDD PRESENCE optional } |
    { ID id-DL-DPCH-Information          CRITICALITY ignore TYPE DL-DPCH-Information-RL-ReconfRqstFDD PRESENCE optional } |
    { ID id-DCH-ModifyList-RL-ReconfRqstFDD CRITICALITY ignore TYPE DCH-ModifyList-RL-ReconfRqstFDD PRESENCE mandatory } |
    { ID id-DCH-AddList-RL-ReconfRqstFDD CRITICALITY ignore TYPE DCH-AddList-RL-ReconfRqstFDD PRESENCE mandatory } |
    { ID id-DCH-DeleteList-RL-ReconfRqstFDD CRITICALITY ignore TYPE DCH-DeleteList-RL-ReconfRqstFDD PRESENCE mandatory } ,
    ...
}

UL-DPCH-Information-RL-ReconfRqstFDD ::= SEQUENCE {
    tFCS          TransportFormatCombinationSet OPTIONAL,
    meanBitRate   MeanBitRate OPTIONAL,
    iE-Extensions ProtocolExtensionContainer { {UL-DPCH-Information-RL-ReconfRqstFDD-ExtIEs} } OPTIONAL,
    ...
}

UL-DPCH-Information-RL-ReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DL-DPCH-Information-RL-ReconfRqstFDD ::= SEQUENCE {
    tFCS          TransportFormatCombinationSet OPTIONAL,
    tFCI-SignallingMode TFCI-SignallingMode OPTIONAL,
    meanBitRate   MeanBitRate OPTIONAL,
    iE-Extensions ProtocolExtensionContainer { {DL-DPCH-Information-RL-ReconfRqstFDD-ExtIEs} } OPTIONAL,
    ...
}

DL-DPCH-Information-RL-ReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-ModifyList-RL-ReconfRqstFDD ::= DCH-IE-ContainerList { {DCH-Modify-RL-ReconfRqstFDD-IEs} }

DCH-Modify-RL-ReconfRqstFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-ModifyItem-RL-ReconfRqstFDD CRITICALITY ignore TYPE DCH-ModifyItem-RL-ReconfRqstFDD PRESENCE mandatory } ,
    ...
}

DCH-ModifyItem-RL-ReconfRqstFDD ::= SEQUENCE {
    dCH-ID          DCH-ID,

```

```

    ul-TransportformatSet      TransportFormatSet OPTIONAL,
    dl-TransportformatSet      TransportFormatSet OPTIONAL,
    allocationRetentionPriority AllocationRetentionPriority OPTIONAL,
    frameHandlingPriority      FrameHandlingPriority  OPTIONAL,
    ul-FP-Mode                 UL-FP-Mode           OPTIONAL,
    toAWS                      ToAWS               OPTIONAL,
    toAWE                      ToAWE               OPTIONAL,
    iE-Extensions              ProtocolExtensionContainer { {DCH-ModifyItem-RL-ReconfRqstFDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-ModifyItem-RL-ReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-AddList-RL-ReconfRqstFDD           ::= DCH-IE-ContainerList { {DCH-Add-RL-ReconfRqstFDD-IEs} }

DCH-Add-RL-ReconfRqstFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-AddItem-RL-ReconfRqstFDD      CRITICALITY ignore TYPE DCH-AddItem-RL-ReconfRqstFDD      PRESENCE mandatory },
    ...
}

DCH-AddItem-RL-ReconfRqstFDD ::= SEQUENCE {
    dCH-ID                DCH-ID,
    rLC-Mode              RLC-Mode,
    dCH-CombinationInd    DCH-CombinationInd OPTIONAL,
    ul-TransportformatSet TransportFormatSet,
    dl-TransportformatSet TransportFormatSet,
    allocationRetentionPriority AllocationRetentionPriority,
    frameHandlingPriority FrameHandlingPriority,
    payloadCRC-PresenceIndicator PayloadCRC-PresenceIndicator,
    ul-FP-Mode            UL-FP-Mode,
    toAWS                 ToAWS,
    toAWE                 ToAWE,
    iE-Extensions        ProtocolExtensionContainer { {DCH-AddItem-RL-ReconfRqstFDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-AddItem-RL-ReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-DeleteList-RL-ReconfRqstFDD           ::= DCH-IE-ContainerList { {DCH-Delete-RL-ReconfRqstFDD-IEs} }

DCH-Delete-RL-ReconfRqstFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-DeleteItem-RL-ReconfRqstFDD      CRITICALITY ignore TYPE DCH-DeleteItem-RL-ReconfRqstFDD      PRESENCE mandatory },
    ...
}

DCH-DeleteItem-RL-ReconfRqstFDD ::= SEQUENCE {
    dCH-ID                DCH-ID,
    iE-Extensions        ProtocolExtensionContainer { {DCH-DeleteItem-RL-ReconfRqstFDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-DeleteItem-RL-ReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {

```

```

}
...
RadioLinkReconfigurationRequestFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
--
-- RADIO LINK RECONFIGURATION REQUEST TDD
--
-- *****

RadioLinkReconfigurationRequestTDD ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container    {{RadioLinkReconfigurationRequestTDD-IEs}},
  protocolExtensions  ProtocolExtensionContainer {{RadioLinkReconfigurationRequestTDD-Extensions}}
  ...
}

RadioLinkReconfigurationRequestTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-AllowedQueuingTime          CRITICALITY ignore  TYPE AllowedQueuingTime          PRESENCE optional } |
  { ID id-UL-MeanBitRate               CRITICALITY ignore  TYPE MeanBitRate                PRESENCE optional } |
  { ID id-DL-MeanBitRate               CRITICALITY ignore  TYPE MeanBitRate                PRESENCE optional } |
  { ID id-UL-CCTrCH-InformationList-RL-ReconfRqstTDD
    CRITICALITY ignore  TYPE UL-CCTrCH-InformationList-RL-ReconfRqstTDD PRESENCE mandatory } |
  { ID id-DL-CCTrCH-InformationList-RL-ReconfRqstTDD
    CRITICALITY ignore  TYPE DL-CCTrCH-InformationList-RL-ReconfRqstTDD PRESENCE mandatory } |
  { ID id-DCH-ModifyList-RL-ReconfRqstTDD CRITICALITY ignore  TYPE DCH-ModifyList-RL-ReconfRqstTDD PRESENCE mandatory } |
  { ID id-DCH-AddList-RL-ReconfRqstTDD   CRITICALITY ignore  TYPE DCH-AddList-RL-ReconfRqstTDD   PRESENCE mandatory } |
  { ID id-DCH-DeleteList-RL-ReconfRqstTDD CRITICALITY ignore  TYPE DCH-DeleteList-RL-ReconfRqstTDD PRESENCE mandatory } ,
  ...
}

UL-CCTrCH-InformationList-RL-ReconfRqstTDD ::= CCTrCH-IE-ContainerList { {UL-CCTrCH-Information-RL-ReconfRqstTDD-IEs} }

UL-CCTrCH-Information-RL-ReconfRqstTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-UL-CCTrCH-Information-RL-ReconfRqstTDD CRITICALITY ignore  TYPE UL-CCTrCH-Information-RL-ReconfRqstTDDPRESENCE mandatory },
  ...
}

UL-CCTrCH-Information-RL-ReconfRqstTDD ::= SEQUENCE {
  cCTrCH-ID          CCTrCH-ID,
  tFCS              TransportFormatCombinationSet,
  iE-Extensions     ProtocolExtensionContainer { {UL-CCTrCH-Information-RL-ReconfRqstTDD-ExtIEs} } OPTIONAL,
  ...
}

UL-CCTrCH-Information-RL-ReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DL-CCTrCH-InformationList-RL-ReconfRqstTDD ::= CCTrCH-IE-ContainerList { {DL-CCTrCH-Information-RL-ReconfRqstTDD-IEs} }

DL-CCTrCH-Information-RL-ReconfRqstTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-DL-CCTrCH-Information-RL-ReconfRqstTDD CRITICALITY ignore  TYPE DL-CCTrCH-Information-RL-ReconfRqstTDDPRESENCE mandatory },
  ...
}

```



```

}

DL-CCTrCH-Information-RL-ReconfRqstTDD ::= SEQUENCE {
    cCTrCH-ID          CCTrCH-ID,
    tFCS               TransportFormatCombinationSet,
    iE-Extensions     ProtocolExtensionContainer { {DL-CCTrCH-Information-RL-ReconfRqstTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CCTrCH-Information-RL-ReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-ModifyList-RL-ReconfRqstTDD          ::= DCH-IE-ContainerList { {DCH-Modify-RL-ReconfRqstTDD-IEs} }

DCH-Modify-RL-ReconfRqstTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-ModifyItem-RL-ReconfRqstTDD          CRITICALITY ignore TYPE DCH-ModifyItem-RL-ReconfRqstTDD          PRESENCE mandatory },
    ...
}

DCH-ModifyItem-RL-ReconfRqstTDD ::= SEQUENCE {
    dCH-ID          DCH-ID,
    ul-CCTrCH-ID   CCTrCH-ID          OPTIONAL,
    dl-CCTrCH-ID   CCTrCH-ID          OPTIONAL,
    ul-TransportformatSet      TransportFormatSet OPTIONAL,
    dl-TransportformatSet      TransportFormatSet OPTIONAL,
    allocationRetentionPriority AllocationRetentionPriority OPTIONAL,
    frameHandlingPriority      FrameHandlingPriority OPTIONAL,
    ul-FP-Mode              UL-FP-Mode          OPTIONAL,
    toAWS                   ToAWS              OPTIONAL,
    toAWE                    ToAWE              OPTIONAL,
    iE-Extensions          ProtocolExtensionContainer { {DCH-ModifyItem-RL-ReconfRqstTDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-ModifyItem-RL-ReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-AddList-RL-ReconfRqstTDD          ::= DCH-IE-ContainerList { {DCH-Add-RL-ReconfRqstTDD-IEs} }

DCH-Add-RL-ReconfRqstTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-AddItem-RL-ReconfRqstTDD          CRITICALITY ignore TYPE DCH-AddItem-RL-ReconfRqstTDD          PRESENCE mandatory },
    ...
}

DCH-AddItem-RL-ReconfRqstTDD ::= SEQUENCE {
    dCH-ID          DCH-ID,
    rLC-Mode        RLC-Mode,
    ul-CCTrCH-ID   CCTrCH-ID,
    dl-CCTrCH-ID   CCTrCH-ID,
    dCH-CombinationInd      DCH-CombinationInd OPTIONAL,
    ul-TransportformatSet      TransportFormatSet,
    dl-TransportformatSet      TransportFormatSet,
    allocationRetentionPriority AllocationRetentionPriority,
    frameHandlingPriority      FrameHandlingPriority,

```

```

    ul-FP-Mode          UL-FP-Mode,
    toAWS               ToAWS,
    toAWE               ToAWE,
    iE-Extensions      ProtocolExtensionContainer { {DCH-AddItem-RL-ReconfRqstTDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-AddItem-RL-ReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-DeleteList-RL-ReconfRqstTDD ::= DCH-IE-ContainerList { {DCH-Delete-RL-ReconfRqstTDD-IEs} }

DCH-Delete-RL-ReconfRqstTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-DeleteItem-RL-ReconfRqstTDD      CRITICALITY ignore TYPE DCH-DeleteItem-RL-ReconfRqstTDD      PRESENCE mandatory },
    ...
}

DCH-DeleteItem-RL-ReconfRqstTDD ::= SEQUENCE {
    dCH-ID          DCH-ID,
    iE-Extensions  ProtocolExtensionContainer { {DCH-DeleteItem-RL-ReconfRqstTDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-DeleteItem-RL-ReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkReconfigurationRequestTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK RECONFIGURATION RESPONSE FDD
--
-- *****

RadioLinkReconfigurationResponseFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkReconfigurationResponseFDD-IEs}},
    protocolExtensions  ProtocolExtensionContainer {{RadioLinkReconfigurationResponseFDD-Extensions}}
    ...
}

RadioLinkReconfigurationResponseFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-CriticalityDiagnostics      CRITICALITY ignore TYPE CriticalityDiagnostics      PRESENCE optional },
    ...
}

RadioLinkReconfigurationResponseFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK RECONFIGURATION RESPONSE TDD

```

```

--
-- *****
RadioLinkReconfigurationResponseTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkReconfigurationResponseTDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkReconfigurationResponseTDD-Extensions}}
    ...
}
RadioLinkReconfigurationResponseTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-CriticalityDiagnostics          CRITICALITY ignore TYPE CriticalityDiagnostics          PRESENCE optional },
    ...
}
RadioLinkReconfigurationResponseTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}
-- *****
--
-- RADIO LINK FAILURE INDICATION
--
-- *****
RadioLinkFailureIndication ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkFailureIndication-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkFailureIndication-Extensions}}
    ...
}
RadioLinkFailureIndication-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationList-RL-FailureInd          CRITICALITY ignore TYPE RL-InformationList-RL-FailureInd          PRESENCE mandatory },
    ...
}
RL-InformationList-RL-FailureInd          ::= RL-IE-ContainerList { {RL-Information-RL-FailureInd-IEs} }
RL-Information-RL-FailureInd-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-Information-RL-FailureInd          CRITICALITY ignore TYPE RL-Information-RL-FailureInd          PRESENCE mandatory },
    ...
}
RL-Information-RL-FailureInd ::= SEQUENCE {
    rL-ID          RL-ID,
    cause          Cause,
    iE-Extensions ProtocolExtensionContainer { {RL-Information-RL-FailureInd-ExtIEs} } OPTIONAL,
    ...
}
RL-Information-RL-FailureInd-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}
RadioLinkFailureIndication-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

```

}
-- *****
--
-- RADIO LINK RESTORE INDICATION
--
-- *****

RadioLinkRestoreIndication ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkRestoreIndication-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkRestoreIndication-Extensions}}    OPTIONAL,
    ...
}

RadioLinkRestoreIndication-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationList-RL-RestoreInd    CRITICALITY ignore    TYPE RL-InformationList-RL-RestoreInd    PRESENCE mandatory    },
    ...
}

RL-InformationList-RL-RestoreInd          ::= RL-IE-ContainerList { {RL-Information-RL-RestoreInd-IEs} }

RL-Information-RL-RestoreInd-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-Information-RL-RestoreInd    CRITICALITY ignore    TYPE RL-Information-RL-RestoreInd    PRESENCE mandatory    },
    ...
}

RL-Information-RL-RestoreInd ::= SEQUENCE {
    rL-ID          RL-ID,
    iE-Extensions   ProtocolExtensionContainer { {RL-Information-RL-RestoreInd-ExtIEs} } OPTIONAL,
    ...
}

RL-Information-RL-RestoreInd-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkRestoreIndication-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- DOWNLINK POWER CONTROL REQUEST
--
-- *****

DL-PowerControlRequest ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{DL-PowerControlRequest-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{DL-PowerControlRequest-Extensions}}    OPTIONAL,
    ...
}

DL-PowerControlRequest-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-ProcedureScope-DL-PC-Rqst    CRITICALITY ignore    TYPE ProcedureScope-DL-PC-Rqst    PRESENCE mandatory    },
    ...
}

```

```

ProcedureScope-DL-PC-Rqst ::= CHOICE {
    allRLs                DL-Power,
    individualRLs         DL-ReferencePowerInformationList-DL-PC-Rqst,
    ...
}

DL-ReferencePowerInformationList-DL-PC-Rqst ::= RL-IE-ContainerList { {DL-ReferencePowerInformation-DL-PC-Rqst-IEs} }

DL-ReferencePowerInformation-DL-PC-Rqst-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DL-ReferencePowerInformation-DL-PC-Rqst CRITICALITY ignore TYPE DL-ReferencePowerInformation-DL-PC-Rqst PRESENCE mandatory },
    ...
}

DL-ReferencePowerInformation-DL-PC-Rqst ::= SEQUENCE {
    rL-ID                RL-ID,
    dl-Power              DL-Power,
    iE-Extensions         ProtocolExtensionContainer { {DL-ReferencePowerInformation-DL-PC-Rqst-ExtIEs} } OPTIONAL,
    ...
}

DL-ReferencePowerInformation-DL-PC-Rqst-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DL-PowerControlRequest-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- PHYSICAL CHANNEL RECONFIGURATION REQUEST FDD
--
-- *****

PhysicalChannelReconfigurationRequestFDD ::= SEQUENCE {
    protocolIEs           ProtocolIE-Container      {{PhysicalChannelReconfigurationRequestFDD-IEs}},
    protocolExtensions    ProtocolExtensionContainer {{PhysicalChannelReconfigurationRequestFDD-Extensions}}
OPTIONAL,
    ...
}

PhysicalChannelReconfigurationRequestFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-Information-PhyChReconfRqstFDD CRITICALITY ignore TYPE RL-Information-PhyChReconfRqstFDD PRESENCE mandatory },
    ...
}

RL-Information-PhyChReconfRqstFDD ::= SEQUENCE {
    rL-ID                RL-ID,
    dl-CodeInformations  DL-CodeInformationList-PhyChReconfRqstFDD,
    iE-Extensions         ProtocolExtensionContainer { {RL-Information-PhyChReconfRqstFDD-ExtIEs} } OPTIONAL,
    ...
}

RL-Information-PhyChReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

```

}
DL-CodeInformationList-PhyChReconfRqstFDD ::= DL-Code-IE-ContainerList { {DL-CodeInformation-PhyChReconfRqstFDD-IEs} }
DL-CodeInformation-PhyChReconfRqstFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-DL-CodeInformation-PhyChReconfRqstFDD CRITICALITY ignore TYPE DL-CodeInformation-PhyChReconfRqstFDD PRESENCE mandatory },
  ...
}
DL-CodeInformation-PhyChReconfRqstFDD ::= SEQUENCE {
  dl-scramblingCode DL-ScramblingCode,
  fDD-DL-ChannelisationCodeNumber FDD-DL-ChannelisationCodeNumber,
  iE-Extensions ProtocolExtensionContainer { {DL-CodeInformation-PhyChReconfRqstFDD-ExtIEs} } OPTIONAL,
  ...
}
DL-CodeInformation-PhyChReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}
PhysicalChannelReconfigurationRequestFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}
-- *****
--
-- PHYSICAL CHANNEL RECONFIGURATION REQUEST TDD
--
-- *****
PhysicalChannelReconfigurationRequestTDD ::= SEQUENCE {
  protocolIEs ProtocolIE-Container {{PhysicalChannelReconfigurationRequestTDD-IEs}},
  protocolExtensions ProtocolExtensionContainer {{PhysicalChannelReconfigurationRequestTDD-Extensions}}
OPTIONAL,
  ...
}
PhysicalChannelReconfigurationRequestTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-RL-Information-PhyChReconfRqstTDD CRITICALITY ignore TYPE RL-Information-PhyChReconfRqstTDD PRESENCE mandatory },
  ...
}
RL-Information-PhyChReconfRqstTDD ::= SEQUENCE {
  rL-ID RL-ID,
  ul-CCTrCH-Information UL-CCTrCH-InformationList-PhyChReconfRqstTDD,
  dl-CCTrCH-Information DL-CCTrCH-InformationList-PhyChReconfRqstTDD,
  iE-Extensions ProtocolExtensionContainer { {RL-Information-PhyChReconfRqstTDD-ExtIEs} } OPTIONAL,
  ...
}
RL-Information-PhyChReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}
UL-CCTrCH-InformationList-PhyChReconfRqstTDD ::= CCTrCH-IE-ContainerList { {UL-CCTrCH-InformationList-PhyChReconfRqstTDD-IEs} }

```

```

UL-CCTrCH-InformationList-PhyChReconfRqstTDD-IES RNSAP-PROTOCOL-IES ::= {
  { ID id-CCTrCH-ID          CRITICALITY ignore  TYPE CCTrCH-ID          PRESENCE mandatory } |
  { ID id-UL-DPCH-InformationList-PhyChReconfRqstTDD
    CRITICALITY ignore  TYPE UL-DPCH-InformationList-PhyChReconfRqstTDD
    PRESENCE mandatory },
  ...
}

-- List items have same criticality as parent
UL-DPCH-InformationList-PhyChReconfRqstTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF
SEQUENCE {
  dpch-ID          DPCH-ID,
  tdd-ChannelisationCode  TDD-ChannelisationCode          OPTIONAL,
  burstType        BurstType          OPTIONAL,
  midambleShift    MidambleShift      OPTIONAL,
  timeSlot         TimeSlot           OPTIONAL,
  tdd-PhysicalChannelOffset  TDD-PhysicalChannelOffset    OPTIONAL,
  repetitionPeriod RepetitionPeriod   OPTIONAL,
  repetitionLength RepetitionLength   OPTIONAL,
  tFCI-Presence    TFCI-Presence      OPTIONAL,
  iE-Extensions    ProtocolExtensionContainer { {UL-DPCH-InformationList-PhyChReconfRqstTDD-ExtIEs} } OPTIONAL,
  ...
}

UL-DPCH-InformationList-PhyChReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DL-CCTrCH-InformationList-PhyChReconfRqstTDD ::= CCTrCH-IE-ContainerList { {DL-CCTrCH-InformationList-PhyChReconfRqstTDD-IEs} }

DL-CCTrCH-InformationList-PhyChReconfRqstTDD-IES RNSAP-PROTOCOL-IES ::= {
  { ID id-CCTrCH-ID          CRITICALITY ignore  TYPE CCTrCH-ID          PRESENCE mandatory } |
  { ID id-DL-DPCH-InformationList-PhyChReconfRqstTDD
    CRITICALITY ignore  TYPE DL-DPCH-InformationList-PhyChReconfRqstTDD
    PRESENCE mandatory },
  ...
}

-- List items have same criticality as parent
DL-DPCH-InformationList-PhyChReconfRqstTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF
SEQUENCE {
  dpch-ID          DPCH-ID,
  tdd-ChannelisationCode  TDD-ChannelisationCode          OPTIONAL,
  burstType        BurstType          OPTIONAL,
  midambleShift    MidambleShift      OPTIONAL,
  timeSlot         TimeSlot           OPTIONAL,
  tdd-PhysicalChannelOffset  TDD-PhysicalChannelOffset    OPTIONAL,
  repetitionPeriod RepetitionPeriod   OPTIONAL,
  repetitionLength RepetitionLength   OPTIONAL,
  tFCI-Presence    TFCI-Presence      OPTIONAL,
  iE-Extensions    ProtocolExtensionContainer { {DL-DPCH-InformationList-PhyChReconfRqstTDD-ExtIEs} } OPTIONAL,
  ...
}

DL-DPCH-InformationList-PhyChReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

```

```

}
PhysicalChannelReconfigurationRequestTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}
-- *****
--
-- PHYSICAL CHANNEL RECONFIGURATION COMMAND
--
-- *****

PhysicalChannelReconfigurationCommand ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container    {{PhysicalChannelReconfigurationCommand-IEs}},
  protocolExtensions  ProtocolExtensionContainer {{PhysicalChannelReconfigurationCommand-Extensions}}
  ...
}
OPTIONAL,

PhysicalChannelReconfigurationCommand-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-CFN          CRITICALITY ignore  TYPE CFN          PRESENCE mandatory } |
  { ID id-CriticalityDiagnostics CRITICALITY ignore  TYPE CriticalityDiagnostics PRESENCE optional },
  ...
}

PhysicalChannelReconfigurationCommand-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
--
-- PHYSICAL CHANNEL RECONFIGURATION FAILURE
--
-- *****

PhysicalChannelReconfigurationFailure ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container    {{PhysicalChannelReconfigurationFailure-IEs}},
  protocolExtensions  ProtocolExtensionContainer {{PhysicalChannelReconfigurationFailure-Extensions}}
  ...
}
OPTIONAL,

PhysicalChannelReconfigurationFailure-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-Cause          CRITICALITY ignore  TYPE Cause          PRESENCE mandatory } |
  { ID id-CriticalityDiagnostics CRITICALITY ignore  TYPE CriticalityDiagnostics PRESENCE optional },
  ...
}

PhysicalChannelReconfigurationFailure-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
--
-- UPLINK SIGNALLING TRANSFER INDICATION
--
-- *****

```



```

UplinkSignallingTransferIndication ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{UplinkSignallingTransferIndication-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{UplinkSignallingTransferIndication-Extensions}}
    ...
}

UplinkSignallingTransferIndication-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UC-ID          CRITICALITY ignore TYPE UC-ID          PRESENCE mandatory } |
    { ID id-SAI            CRITICALITY ignore TYPE SAI           PRESENCE mandatory } |
    { ID id-C-RNTI        CRITICALITY ignore TYPE C-RNTI        PRESENCE mandatory } |
    { ID id-S-RNTI        CRITICALITY ignore TYPE S-RNTI        PRESENCE mandatory } |
    { ID id-D-RNTI        CRITICALITY ignore TYPE D-RNTI        PRESENCE optional   } |
    { ID id-L3-Information CRITICALITY ignore TYPE L3-Information PRESENCE mandatory } |
    { ID id-CN-PS-DomainIdentifier CRITICALITY ignore TYPE CN-PS-DomainIdentifier PRESENCE optional } |
    { ID id-CN-CS-DomainIdentifier CRITICALITY ignore TYPE CN-CS-DomainIdentifier PRESENCE optional } |
    { ID id-URA-ID        CRITICALITY ignore TYPE URA-ID        PRESENCE mandatory } |
    { ID id-MultipleURAsIndicator CRITICALITY ignore TYPE MultipleURAsIndicator PRESENCE mandatory } |
    { ID id-RNCsWithCellsInTheAccessedURA-List-UL-ST-Ind
      CRITICALITY ignore TYPE RNCsWithCellsInTheAccessedURA-List-UL-ST-Ind
      PRESENCE mandatory },
    ...
}

-- All RNC-IDs share same criticality!
RNCsWithCellsInTheAccessedURA-List-UL-ST-Ind ::= SEQUENCE (SIZE (1..maxRNCinURA)) OF
    SEQUENCE {
        rNC-ID          RNC-ID,
        iE-Extensions   ProtocolExtensionContainer { {RNCsWithCellsInTheAccessedURA-List-UL-ST-Ind-ExtIEs} } OPTIONAL,
        ...
    }

RNCsWithCellsInTheAccessedURA-List-UL-ST-Ind-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

UplinkSignallingTransferIndication-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- DOWNLINK SIGNALLING TRANSFER REQUEST
--
-- *****

DownlinkSignallingTransferRequest ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{DownlinkSignallingTransferRequest-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{DownlinkSignallingTransferRequest-Extensions}}
    ...
}

DownlinkSignallingTransferRequest-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-C-ID          CRITICALITY ignore TYPE C-ID          PRESENCE mandatory } |
    { ID id-D-RNTI        CRITICALITY ignore TYPE D-RNTI        PRESENCE mandatory } |
    { ID id-L3-Information CRITICALITY ignore TYPE L3-Information PRESENCE mandatory } |
    { ID id-D-RNTI-ReleaseIndication CRITICALITY ignore TYPE D-RNTI-ReleaseIndication PRESENCE mandatory },
}

```

```

}
...
DownlinkSignallingTransferRequest-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- *****
--
-- RELOCATION COMMIT
--
-- *****

RelocationCommit ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RelocationCommit-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RelocationCommit-Extensions}}           OPTIONAL,
    ...
}

RelocationCommit-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI          CRITICALITY ignore TYPE D-RNTI          PRESENCE mandatory } |
    { ID id-RANAP-RelocationInformation CRITICALITY ignore TYPE RANAP-RelocationInformation PRESENCE mandatory },
    ...
}

RelocationCommit-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- *****
--
-- PAGING REQUEST
--
-- *****

PagingRequest ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{PagingRequest-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{PagingRequest-Extensions}}           OPTIONAL,
    ...
}

PagingRequest-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-PagingArea-PagingRqst          CRITICALITY ignore TYPE PagingArea-PagingRqst          PRESENCE mandatory } |
    { ID id-SRNC-ID          CRITICALITY ignore TYPE SRNC-ID          PRESENCE mandatory } |
    { ID id-S-RNTI          CRITICALITY ignore TYPE S-RNTI          PRESENCE mandatory } |
    { ID id-DRX-Parameter          CRITICALITY ignore TYPE DRX-Parameter          PRESENCE mandatory },
    ...
}

PagingArea-PagingRqst ::= CHOICE {
    uRA          URA-ID,
    cell          C-ID,
    ...
}

PagingRequest-Extensions RNSAP-PROTOCOL-EXTENSION ::= {

```

```

}
...
}
-- *****
--
-- DEDICATED MEASUREMENT INITIATION REQUEST
--
-- *****

DedicatedMeasurementInitiationRequest ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{DedicatedMeasurementInitiationRequest-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{DedicatedMeasurementInitiationRequest-Extensions}}
    ...
}

DedicatedMeasurementInitiationRequest-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-MeasurementID          CRITICALITY ignore TYPE MeasurementID          PRESENCE mandatory } |
    { ID id-DedicatedMeasurementObjectType-DM-Rqst CRITICALITY ignore TYPE DedicatedMeasurementObjectType-DM-Rqst PRESENCE mandatory } |
    { ID id-MeasurementCharacteristics CRITICALITY ignore TYPE MeasurementCharacteristics PRESENCE mandatory } |
    { ID id-ReportCharacteristics CRITICALITY ignore TYPE ReportCharacteristics PRESENCE mandatory },
    ...
}

DedicatedMeasurementObjectType-DM-Rqst ::= CHOICE {
    rLs          RL-InformationList-DM-Rqst,
    ...
}

RL-InformationList-DM-Rqst ::= RL-IE-ContainerList { {RL-Information-DM-Rqst-IEs} }

RL-Information-DM-Rqst-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationItem-DM-Rqst CRITICALITY ignore TYPE RL-InformationItem-DM-Rqst PRESENCE mandatory },
    ...
}

RL-InformationItem-DM-Rqst ::= SEQUENCE {
    rL-ID          RL-ID,
    dPCH-ID        DPCH-ID OPTIONAL,
    iE-Extensions ProtocolExtensionContainer { {RL-InformationItem-DM-Rqst-ExtIEs} } OPTIONAL,
    ...
}

RL-InformationItem-DM-Rqst-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DedicatedMeasurementInitiationRequest-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- DEDICATED MEASUREMENT INITIATION RESPONSE
--
-- *****

```

```

DedicatedMeasurementInitiationResponse ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container      {{DedicatedMeasurementInitiationResponse-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{DedicatedMeasurementInitiationResponse-Extensions}}
    ...
}

DedicatedMeasurementInitiationResponse-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-MeasurementID          CRITICALITY ignore TYPE MeasurementID          PRESENCE mandatory } |
    { ID id-DedicatedMeasurementObjectType-DM-Rspns CRITICALITY ignore TYPE DedicatedMeasurementObjectType-DM-Rspns PRESENCE mandatory } |
    { ID id-CFN                    CRITICALITY ignore TYPE CFN                    PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
    ...
}

DedicatedMeasurementObjectType-DM-Rspns ::= CHOICE {
    rLs          RL-InformationList-DM-Rspns,
    allRL        AllRL-Information-DM-Rspns,
    ...
}

RL-InformationList-DM-Rspns ::= RL-IE-ContainerList { {RL-Information-DM-Rspns-IEs} }

RL-Information-DM-Rspns-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationItem-DM-Rspns CRITICALITY ignore TYPE RL-InformationItem-DM-Rspns PRESENCE mandatory },
    ...
}

RL-InformationItem-DM-Rspns ::= SEQUENCE {
    rL-ID          RL-ID,
    dPCH-ID        DPCH-ID          OPTIONAL,
    dedicatedMeasurementValue DedicatedMeasurementValue,
    iE-Extensions ProtocolExtensionContainer { {RL-InformationItem-DM-Rspns-ExtIEs} } OPTIONAL,
    ...
}

RL-InformationItem-DM-Rspns-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

AllRL-Information-DM-Rspns ::= SEQUENCE {
    dedicatedMeasurementValue DedicatedMeasurementValue,
    iE-Extensions             ProtocolExtensionContainer { {AllRL-Information-DM-Rspns-ExtIEs} } OPTIONAL,
    ...
}

AllRL-Information-DM-Rspns-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DedicatedMeasurementInitiationResponse-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- DEDICATED MEASUREMENT INITIATION FAILURE

```

```

--
-- *****
DedicatedMeasurementInitiationFailure ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{DedicatedMeasurementInitiationFailure-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{DedicatedMeasurementInitiationFailure-Extensions}}
    ...
}
DedicatedMeasurementInitiationFailure-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-MeasurementID          CRITICALITY ignore TYPE MeasurementID          PRESENCE mandatory } |
    { ID id-Cause                  CRITICALITY ignore TYPE Cause                  PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
    ...
}
DedicatedMeasurementInitiationFailure-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}
-- *****
--
-- DEDICATED MEASUREMENT REPORT
--
-- *****
DedicatedMeasurementReport ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{DedicatedMeasurementReport-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{DedicatedMeasurementReport-Extensions}}
    ...
}
DedicatedMeasurementReport-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-MeasurementID          CRITICALITY ignore TYPE MeasurementID          PRESENCE mandatory } |
    { ID id-DedicatedMeasurementObjectType-DM-Rprt CRITICALITY ignore TYPE DedicatedMeasurementObjectType-DM-Rprt PRESENCE mandatory } |
    { ID id-CFN                    CRITICALITY ignore TYPE CFN                    PRESENCE optional },
    ...
}
DedicatedMeasurementObjectType-DM-Rprt ::= CHOICE {
    rLs          RL-InformationList-DM-Rprt,
    allRL        AllRL-Information-DM-Rprt,
    ...
}
RL-InformationList-DM-Rprt ::= RL-IE-ContainerList { {RL-Information-DM-Rprt-IEs} }
RL-Information-DM-Rprt-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationItem-DM-Rprt CRITICALITY ignore TYPE RL-InformationItem-DM-Rprt PRESENCE mandatory },
    ...
}
RL-InformationItem-DM-Rprt ::= SEQUENCE {
    rL-ID          RL-ID,
    dPCH-ID        DPCH-ID          OPTIONAL,
    dedicatedMeasurementValue DedicatedMeasurementValue,
}

```

```

    iE-Extensions          ProtocolExtensionContainer { {RL-InformationItem-DM-Rprt-ExtIEs} } OPTIONAL,
    ...
}

RL-InformationItem-DM-Rprt-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

AllRL-Information-DM-Rprt ::= SEQUENCE {
    dedicatedMeasurementValue      DedicatedMeasurementValue,
    iE-Extensions                  ProtocolExtensionContainer { {AllRL-Information-DM-Rprt-ExtIEs} } OPTIONAL,
    ...
}

AllRL-Information-DM-Rprt-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DedicatedMeasurementReport-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- DEDICATED MEASUREMENT TERMINATION REQUEST
--
-- *****

DedicatedMeasurementTerminationRequest ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container      {{DedicatedMeasurementTerminationRequest-IEs}},
    protocolExtensions  ProtocolExtensionContainer {{DedicatedMeasurementTerminationRequest-Extensions}}
    ...
}

DedicatedMeasurementTerminationRequest-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-MeasurementID          CRITICALITY ignore  TYPE MeasurementID          PRESENCE mandatory },
    ...
}

DedicatedMeasurementTerminationRequest-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- DEDICATED MEASUREMENT FAILURE INDICATION
--
-- *****

DedicatedMeasurementFailureIndication ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container      {{DedicatedMeasurementFailureIndication-IEs}},
    protocolExtensions  ProtocolExtensionContainer {{DedicatedMeasurementFailureIndication-Extensions}}
    ...
}

DedicatedMeasurementFailureIndication-IEs RNSAP-PROTOCOL-IES ::= {

```

```

    { ID id-MeasurementID          CRITICALITY ignore TYPE MeasurementID          PRESENCE mandatory } |
    { ID id-Cause                  CRITICALITY ignore TYPE Cause                  PRESENCE mandatory },
    ...
}

DedicatedMeasurementFailureIndication-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- COMMON TRANSPORT CHANNEL RESOURCES RELEASE REQUEST
--
-- *****

CommonTransportChannelResourcesReleaseRequest ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{CommonTransportChannelResourcesReleaseRequest-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CommonTransportChannelResourcesReleaseRequest-Extensions}}
OPTIONAL,
    ...
}

CommonTransportChannelResourcesReleaseRequest-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI          CRITICALITY ignore TYPE D-RNTI          PRESENCE mandatory } |
    { ID id-C-RNTI          CRITICALITY ignore TYPE C-RNTI          PRESENCE optional },
    ...
}

CommonTransportChannelResourcesReleaseRequest-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- COMMON TRANSPORT CHANNEL RESOURCES REQUEST
--
-- *****

CommonTransportChannelResourcesRequest ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{CommonTransportChannelResourcesRequest-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CommonTransportChannelResourcesRequest-Extensions}}
OPTIONAL,
    ...
}

CommonTransportChannelResourcesRequest-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI          CRITICALITY ignore TYPE D-RNTI          PRESENCE mandatory } |
    { ID id-TransportBearerRequestIndicator CRITICALITY ignore TYPE TransportBearerRequestIndicator PRESENCE mandatory } |
    { ID id-TransportBearerID CRITICALITY ignore TYPE TransportBearerID PRESENCE mandatory },
    ...
}

CommonTransportChannelResourcesRequest-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****

```

```

--
-- COMMON TRANSPORT CHANNEL RESOURCES RESPONSE FDD
--
-- *****
CommonTransportChannelResourcesResponseFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{CommonTransportChannelResourcesResponseFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CommonTransportChannelResourcesResponseFDD-Extensions}} OPTIONAL,
    ...
}

CommonTransportChannelResourcesResponseFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-S-RNTI          CRITICALITY ignore TYPE S-RNTI          PRESENCE mandatory } |
    { ID id-FACH-InfoForS-CCPCH-CoupledToPRACH CRITICALITY ignore TYPE FACH-InfoForS-CCPCH-CoupledToPRACH PRESENCE mandatory } |
    { ID id-FACH-InfoForOptionalS-CCPCH       CRITICALITY ignore TYPE FACH-InfoForOptionalS-CCPCH       PRESENCE optional } |
    { ID id-TransportLayerAddress             CRITICALITY ignore TYPE TransportLayerAddress             PRESENCE optional } |
    { ID id-BindingID                         CRITICALITY ignore TYPE BindingID                         PRESENCE optional } |
    { ID id-CriticalityDiagnostics            CRITICALITY ignore TYPE CriticalityDiagnostics            PRESENCE optional },
    ...
}

FACH-InfoForS-CCPCH-CoupledToPRACH ::= SEQUENCE {
    priorityIndicatorAndInitialWindowSizeList PriorityIndicatorAndInitialWindowSizeList,
    iE-Extensions                          ProtocolExtensionContainer { {FACH-InfoForS-CCPCH-CoupledToPRACH-ExtIEs} } OPTIONAL,
    ...
}

FACH-InfoForS-CCPCH-CoupledToPRACH-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

PriorityIndicatorAndInitialWindowSizeList ::= SEQUENCE (SIZE (1..16)) OF
SEQUENCE {
    fACH-PriorityIndicator          FACH-PriorityIndicator,
    mAC-c-SDU-Lengths              MAC-c-SDU-LengthList,
    fACH-InitialWindowSize         FACH-InitialWindowSize,
    iE-Extensions                  ProtocolExtensionContainer { {PriorityIndicatorAndInitialWindowSizeList-ExtIEs} } OPTIONAL,
    ...
}

PriorityIndicatorAndInitialWindowSizeList-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

MAC-c-SDU-LengthList ::= SEQUENCE (SIZE (1..maxNrOfMACcSDU-Length)) OF
SEQUENCE {
    mAC-c-SDU-Length              MAC-c-SDU-Length,
    iE-Extensions                  ProtocolExtensionContainer { {MAC-c-SDU-LengthList-ExtIEs} } OPTIONAL,
    ...
}

MAC-c-SDU-LengthList-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

FACH-InfoForOptionals-CCPCH ::= SEQUENCE {

```



```

fDD-S-CCPCH-Offset          FDD-S-CCPCH-Offset,
dl-ScramblingCode           DL-ScramblingCode,
fDD-DL-ChannelisationCodeNumber  FDD-DL-ChannelisationCodeNumber,
dl-TFCS                     TransportFormatCombinationSet,
secondaryCCPCHs             SecondaryCCPCH-List,
pilotBitsUsedIndicator      PilotBitsUsedIndicator,
multiplexingPosition        MultiplexingPosition,
sSDT-Indication             SSDT-Indication,
priorityIndicatorAndInitialWindowSizeList  PriorityIndicatorAndInitialWindowSizeList,
fACH-DataFrameSize         FACH-DataFrameSize,
fACH-InitialWindowSize     FACH-InitialWindowSize,
iE-Extensions               ProtocolExtensionContainer { {FACH-InfoForOptionalsS-CCPCH-ExtIEs} } OPTIONAL,
...
}

FACH-InfoForOptionalsS-CCPCH-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

SecondaryCCPCH-List ::= SEQUENCE (SIZE (1..maxNrOfSCCPCHs)) OF
SEQUENCE {
    tDD-ChannelisationCode      TDD-ChannelisationCode,
    timeSlot                    TimeSlot,
    burstType                   BurstType,
    midambleShift               MidambleShift,
    offset                      Offset,
    repetitionPeriod            RepetitionPeriod,
    repetitionLength            RepetitionLength,
    iE-Extensions               ProtocolExtensionContainer { {SecondaryCCPCH-List-ExtIEs} } OPTIONAL,
    ...
}

SecondaryCCPCH-List-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

CommonTransportChannelResourcesResponseFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- *****
--
-- COMMON TRANSPORT CHANNEL RESOURCES RESPONSE TDD
--
-- *****

CommonTransportChannelResourcesResponseTDD ::= SEQUENCE {
    protocolIEs                 ProtocolIE-Container      {{CommonTransportChannelResourcesResponseTDD-IEs}},
    protocolExtensions          ProtocolExtensionContainer {{CommonTransportChannelResourcesResponseTDD-Extensions}}    OPTIONAL,
    ...
}

CommonTransportChannelResourcesResponseTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-S-RNTI                CRITICALITY ignore TYPE S-RNTI                PRESENCE mandatory } |
    { ID id-FACH-InfoForS-CCPCH-CoupledToPRACH  CRITICALITY ignore TYPE FACH-InfoForS-CCPCH-CoupledToPRACH  PRESENCE optional } |
    { ID id-FACH-InfoForOptionalGroupS-CCPCH    CRITICALITY ignore TYPE FACH-InfoForOptionalGroupOfS-CCPCH    PRESENCE optional } |

```

```

    { ID id-TransportLayerAddress          CRITICALITY ignore TYPE TransportLayerAddress          PRESENCE optional } |
    { ID id-BindingID                      CRITICALITY ignore TYPE BindingID                PRESENCE optional } |
    { ID id-CriticalityDiagnostics          CRITICALITY ignore TYPE CriticalityDiagnostics          PRESENCE optional },
    ...
}

FACH-InfoForOptionalGroupOfS-CCPCH ::= SEQUENCE {
    dl-TFCS                               TransportFormatCombinationSet,
    secondaryCCPCHs                       SecondaryCCPCH-TDD-List,
    iE-Extensions                          ProtocolExtensionContainer { {FACH-InfoForOptionalGroupOfS-CCPCH-ExtIEs} } OPTIONAL,
    ...
}

FACH-InfoForOptionalGroupOfS-CCPCH-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

SecondaryCCPCH-TDD-List ::= SEQUENCE (SIZE (1..maxNrOfSCCPCHs)) OF
SEQUENCE {
    tDD-ChannelisationCode                TDD-ChannelisationCode,
    timeSlot                              TimeSlot,
    burstType                             BurstType,
    midambleShift                         MidambleShift,
    tDD-PhysicalChannelOffset             TDD-PhysicalChannelOffset,
    repetitionPeriod                     RepetitionPeriod,
    repetitionLength                     RepetitionLength,
    sSDT-Indication                       SSDT-Indication,
    priorityIndicatorAndInitialWindowSizeList PriorityIndicatorAndInitialWindowSizeList,
    iE-Extensions                          ProtocolExtensionContainer { {SecondaryCCPCH-TDD-List-ExtIEs} } OPTIONAL,
    ...
}

SecondaryCCPCH-TDD-List-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

CommonTransportChannelResourcesResponseTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- COMMON TRANSPORT CHANNEL RESOURCES FAILURE
--
-- *****

CommonTransportChannelResourcesFailure ::= SEQUENCE {
    protocolIEs                          ProtocolIE-Container      {{CommonTransportChannelResourcesFailure-IEs}},
    protocolExtensions                    ProtocolExtensionContainer {{CommonTransportChannelResourcesFailure-Extensions}}      OPTIONAL,
    ...
}

CommonTransportChannelResourcesFailure-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-S-RNTI                        CRITICALITY ignore TYPE S-RNTI                PRESENCE mandatory } |
    { ID id-Cause                          CRITICALITY ignore TYPE Cause                  PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics          CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
}

```

```

}
...
}
CommonTransportChannelResourcesFailure-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}
-- *****
--
-- COMPRESSED MODE PREPARE
--
-- *****

CompressedModePrepare ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container    {{CompressedModePrepare-IEs}},
  protocolExtensions  ProtocolExtensionContainer {{CompressedModePrepare-Extensions}}
  ...
}

CompressedModePrepare-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-TGP1          CRITICALITY ignore  TYPE GapPeriod          PRESENCE mandatory } |
  { ID id-TGP2          CRITICALITY ignore  TYPE GapPeriod          PRESENCE optional } |
  { ID id-TGL           CRITICALITY ignore  TYPE TGL                PRESENCE mandatory } |
  { ID id-TGD           CRITICALITY ignore  TYPE TGD                PRESENCE mandatory } |
  { ID id-PD            CRITICALITY ignore  TYPE PD                 PRESENCE mandatory } |
  { ID id-UL-DL-CompressedModeSelection CRITICALITY ignore  TYPE UL-DL-CompressedModeSelection PRESENCE mandatory } |
  { ID id-CompressedModeMethod CRITICALITY ignore  TYPE CompressedModeMethod PRESENCE mandatory } |
  { ID id-GapPositionMode CRITICALITY ignore  TYPE GapPositionMode PRESENCE mandatory } |
  { ID id-SN            CRITICALITY ignore  TYPE SN                 PRESENCE conditional } |
  -- This IE is present only if "GapPositionMode" equals to "flexible" --
  { ID id-DL-FrameType CRITICALITY ignore  TYPE DL-FrameType PRESENCE mandatory } |
  { ID id-ScramblingCodeChange CRITICALITY ignore  TYPE ScramblingCodeChange PRESENCE conditional } |
  -- This IE is present only if "CompressedModeMethod" equals to "SF/2" --
  { ID id-PowerControlMode CRITICALITY ignore  TYPE PowerControlMode PRESENCE mandatory } |
  { ID id-PowerResumeMode CRITICALITY ignore  TYPE PowerResumeMode PRESENCE mandatory } |
  { ID id-UL-DeltaEbNo CRITICALITY ignore  TYPE UL-EbNo PRESENCE mandatory } |
  { ID id-UL-DeltaEbNoAfter CRITICALITY ignore  TYPE UL-EbNo PRESENCE mandatory },
  ...
}

CompressedModePrepare-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}
-- *****
--
-- COMPRESSED MODE READY
--
-- *****

CompressedModeReady ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container    {{CompressedModeReady-IEs}},
  protocolExtensions  ProtocolExtensionContainer {{CompressedModeReady-Extensions}}
  ...
}

```

```

CompressedModeReady-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-CriticalityDiagnostics          CRITICALITY ignore  TYPE CriticalityDiagnostics          PRESENCE optional },
  ...
}

CompressedModeReady-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
--
-- COMPRESSED MODE FAILURE
--
-- *****

CompressedModeFailure ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container          {{CompressedModeFailure-IEs}},
  protocolExtensions   ProtocolExtensionContainer    {{CompressedModeFailure-Extensions}}          OPTIONAL,
  ...
}

CompressedModeFailure-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-Cause          CRITICALITY ignore  TYPE Cause          PRESENCE mandatory } |
  { ID id-CriticalityDiagnostics          CRITICALITY ignore  TYPE CriticalityDiagnostics          PRESENCE optional },
  ...
}

CompressedModeFailure-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
--
-- COMPRESSED MODE COMMIT
--
-- *****

CompressedModeCommit ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container          {{CompressedModeCommit-IEs}},
  protocolExtensions   ProtocolExtensionContainer    {{CompressedModeCommit-Extensions}}          OPTIONAL,
  ...
}

CompressedModeCommit-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-CFN          CRITICALITY ignore  TYPE CFN          PRESENCE mandatory },
  ...
}

CompressedModeCommit-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
--
-- COMPRESSED MODE CANCEL
--
-- *****

```

```

-- *****
CompressedModeCancel ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{CompressedModeCancel-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CompressedModeCancel-Extensions}}
    ...
}
CompressedModeCancel-IEs RNSAP-PROTOCOL-IES ::= {
    ...
}
CompressedModeCancel-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}
-- *****
--
-- ERROR INDICATION
--
-- *****

ErrorIndication ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{ErrorIndication-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{ErrorIndication-Extensions}}
    ...
}
ErrorIndication-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-Cause          CRITICALITY ignore TYPE Cause          PRESENCE conditional } |
    -- At least either of Cause IE or Criticality IE shall be present --
    { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE conditional } |
    -- At least either of Cause IE or Criticality IE shall be present --
    ...
}
ErrorIndication-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}
-- *****
--
-- PRIVATE MESSAGE
--
-- *****

PrivateMessage ::= SEQUENCE {
    privateExtensionsprivateIEs          PrivateExtensionContainerPrivateIE-Container    {{PrivateExtensionsPrivateMessage-IEs}},
    ...
}
PrivateExtensionsPrivateMessage-IEs RNSAP-PRIVATE-EXTENSION-IES ::= {
    ...
}
END

```

9.3.4 Information Element Definitions

```

-- *****
--
-- Information Element Definitions
--
-- *****

RNSAP-IEs -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

IMPORTS
    maxNrOfErrors,
    maxRateMatching,
    maxNrOfTFCs,
    maxNrOfTFs,
    maxTTI-Count
FROM RNSAP-Constants

    Criticality,
    ProcedureCode,
    ProtocolIE-ID,
    TransactionID,
    TriggeringMessage
FROM RNSAP-CommonDataTypes

    ProtocolExtensionContainer{},
    RNSAP-PROTOCOL-EXTENSION
FROM RNSAP-Containers;

-- A

AllocationRetentionPriority ::= FrameHandlingPriority

AllowedQueuingTime ::= INTEGER (0..60)
-- seconds

-- B

-- ** NOTE: Size in tabular 1.4,... **
BindingID ::= OCTET STRING (SIZE (1..MAX))

BLER ::= INTEGER (-63..0)
-- Step 0.1 (Range -6.3..0). It is the Log10 of the BLER

BurstType ::= ENUMERATED {
    type1 (1),
    type2 (2)
}

-- C

```

```
Cause ::= CHOICE {
    radioNetwork          CauseRadioNetwork,
    transmissionNetwork  CauseTransmissionNetwork,
    protocol              CauseProtocol,
    misc                  CauseMisc,
    ...
}

CauseMisc ::= ENUMERATED {
    control-processing-overload,
    hardware-failure,
    om-intervention,
    not-enough-user-plane-processing-resources,
    unspecified,
    ...
}

CauseProtocol ::= ENUMERATED {
    transaction-not-allowed,
    transfer-syntax-error,
    abstract-syntax-error-reject,
    abstract-syntax-error-ignore-and-notify,
    unspecified,
    ...
}

CauseRadioNetwork ::= ENUMERATED {
    unknown-C-ID,
    cell-not-available,
    power-level-not-supported,
    ul-scrambling-code-already-in-use,
    dl-radio-resources-not-available,
    ul-radio-resources-not-available,
    measurement-not-supported-for-the-object,
    macrodiversity-combining-not-possible,
    reconfiguration-not-allowed,
    Synchronisation-failure,
    unspecified,
    ...
}

CauseTransmissionNetwork ::= ENUMERATED {
    transmission-link-failure,
    transmission-port-not-available,
    unspecified,
    ...
}

C-ID                ::= INTEGER (0..65535)

CCTrCH-ID           ::= INTEGER (0..15)

CellParameterID     ::= INTEGER (0..127)

CFN                  ::= INTEGER (0..255)
```

```

ChannelCodingType ::= ENUMERATED {
    no-coding,
    convolutional-coding,
    turbo-coding--,
    -- ...
}

-- ** TODO **
ChipOffset          ::= INTEGER

CodingRate ::= ENUMERATED {
    half,
    third--,
    -- ...
}

CompressedModeMethod ::= ENUMERATED {
    none,
    puncturing,
    SF2,
    gating
}

CPICH-EcIo          ::= INTEGER

CRC-Size            ::= INTEGER (0| 8| 12| 16| 24)

CriticalityDiagnostics ::= SEQUENCE {
    procedureCode      ProcedureCode          OPTIONAL,
    triggeringMessage   TriggeringMessage     OPTIONAL,
    criticalityResponse Criticality           OPTIONAL,
    transactionID      TransactionID         OPTIONAL,
    iEsCriticalityResponses CriticalityDiagnostics-IE-List OPTIONAL,
    iE-Extensions      ProtocolExtensionContainer { {CriticalityDiagnostics-ExtIEs} } OPTIONAL,
    ...
}

CriticalityDiagnostics-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

CriticalityDiagnostics-IE-List ::= SEQUENCE (SIZE (1..maxNrOfErrors)) OF
SEQUENCE {
    criticalityResponse Criticality,
    iE-ID               ProtocolIE-ID,
    iE-Extensions      ProtocolExtensionContainer { {CriticalityDiagnostics-IE-List-ExtIEs} } OPTIONAL,
    ...
}

CriticalityDiagnostics-IE-List-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** TODO **
CTFC          ::= INTEGER

```



```

-- See formula (must be resolved)

CN-CS-DomainIdentifier ::= SEQUENCE {
    pLMN-ID          PLMN-ID,
    iE-Extensions    ProtocolExtensionContainer { {CN-CS-DomainIdentifier-ExtIEs} } OPTIONAL,
    LAC              LAC
}

CN-CS-DomainIdentifier-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

CN-PS-DomainIdentifier ::= SEQUENCE {
    pLMN-ID          PLMN-ID,
    LAC              LAC,
    iE-Extensions    ProtocolExtensionContainer { {CN-PS-DomainIdentifier-ExtIEs} } OPTIONAL,
    rAC              RAC
}

CN-PS-DomainIdentifier-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- **TODO**
CPICH-Power          ::= INTEGER

C-RNTI                ::= INTEGER (0..65535)

-- D

DCH-CombinationInd   ::= INTEGER (0..255)

DCH-ID                ::= INTEGER (0..255)

DedicatedMeasurementObjectType ::= ENUMERATED {
    r1,
    all-r1,
    ...
}
-- ** OR:
-- DedicatedMeasurementObjectType ::= INTEGER {
--   rL(0),
--   allRL(1)
-- } (0..255)
-- **

DedicatedMeasurementType ::= ENUMERATED {
    sir,
    sir-error,
    transmitted-code-power,
    rSCP,
    ...
}
-- timeslotTSCP is used by TDD only

-- ** OR:

```

```

-- DedicatedMeasurementType ::= INTEGER {
--   sIR(0),
--   sIR-Error(1),
--   transmittedCodePower(2),
--   rSCP(3)
-- } (0..255)
-- **

-- ** NOTE: Extensibility added **
-- **TODO**

DedicatedMeasurementValue ::= SEQUENCE {
    sIR-Value          ScaledSIR-Value          OPTIONAL,
    sIR-ErrorValue     ScaledSIR-ErrorValue     OPTIONAL,
    transmittedCodePowerValue ScaledTransmittedCodePowerValue OPTIONAL, -- Relative to CPICH
    rSCP               TBD                     OPTIONAL, -- TDD only
    iE-Extensions      ProtocolExtensionContainer { {DedicatedMeasurementValue-ExtIEs} } OPTIONAL,
    ...
}

DedicatedMeasurementValue-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** TODO **
DiversityControlField ::= INTEGER

-- ** TODO **
DiversityMode ::= INTEGER

-- ** TODO **
DL-ChannelisationCode ::= INTEGER

-- ** TODO **
DL-DPCCH-SlotFormat ::= INTEGER

-- ** TODO **
DL-DPCH-SlotNumber ::= INTEGER

DL-EbNo ::= ScaledUL-EbNo

DL-EbNoTarget ::= ScaledUL-EbNo

-- ** TODO **
DL-Power ::= INTEGER

D-RNTI ::= INTEGER (0..1048576)
-- ** OR:
-- D-RNTI ::= BIT STRING (SIZE (20))
-- **

D-RNTI-ReleaseIndication ::= ENUMERATED {
    not-release-D-RNTI,
    release-D-RNTI
}

```

```

-- ** TODO **
DL-ScramblingCode          ::= INTEGER

DL-FrameType ::= ENUMERATED {
    typeA,
    typeB,
    ...
}

DPCH-ID                    ::= INTEGER (0..239)

-- **TODO**
DRX-Parameter              ::= TBD

-- **TODO**
DSCH-TransportFormatCombinationSet ::= INTEGER

-- **TODO**
DSCH-TFS                   ::= INTEGER

-- **TODO**
D-FieldLength              ::= INTEGER

-- E

EventA ::= SEQUENCE {
    measurementThreshold      MeasurementThreshold,
    measurementHysteresisTime ScaledMeasurementHysteresisTime OPTIONAL,
    iE-Extensions             ProtocolExtensionContainer { {EventA-ExtIEs} } OPTIONAL,
    ...
}

EventA-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

EventB ::= SEQUENCE {
    measurementThreshold      MeasurementThreshold,
    measurementHysteresisTime ScaledMeasurementHysteresisTime OPTIONAL,
    iE-Extensions             ProtocolExtensionContainer { {EventB-ExtIEs} } OPTIONAL,
    ...
}

EventC ::= SEQUENCE {
    measurementIncreaseThreshold MeasurementIncreaseThreshold,
    measurementChangeTime       ScaledMeasurementChangeTime,
    ...
}

EventB-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

EventD ::= SEQUENCE {
    measurementDecreaseThreshold MeasurementDecreaseThreshold,
    measurementChangeTime       ScaledMeasurementChangeTime,

```

```

    iE-Extensions          ProtocolExtensionContainer { {EventD-ExtIEs} } OPTIONAL,
    ...
}

EventD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

EventE ::= SEQUENCE {
    measurementThreshold1      MeasurementThreshold,
    measurementThreshold2      MeasurementThreshold OPTIONAL,
    measurementHysteresisTime  ScaledMeasurementHysteresisTime OPTIONAL,
    reportPeriodicity          ReportPeriodicity OPTIONAL,
    iE-Extensions              ProtocolExtensionContainer { {EventE-ExtIEs} } OPTIONAL,
    ...
}

EventE-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

EventF ::= SEQUENCE {
    measurementThreshold1      MeasurementThreshold,
    measurementThreshold2      MeasurementThreshold OPTIONAL,
    measurementHysteresisTime  ScaledMeasurementHysteresisTime OPTIONAL,
    reportPeriodicity          ReportPeriodicity OPTIONAL,
    iE-Extensions              ProtocolExtensionContainer { {EventF-ExtIEs} } OPTIONAL,
    ...
}

EventF-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- F

FACH-DataFrameSize          ::= INTEGER (1..5000)
-- Size of data frame in number of bits

FACH-InitialWindowSize      ::= INTEGER { unlimited(255) } (0..255)
-- Number of FACH data frames.
-- 255 = Unlimited number of FACH data frames

-- ** TODO **
FACH-InfoForOptionals-CCPCH ::= INTEGER

-- ** TODO **
FACH-InfoForS-CCPCH-CoupledToPRACH ::= INTEGER

-- ** TODO **
FDD-DL-ChannelisationCodeNumber ::= INTEGER

-- ** TODO **
FDD-FL-ChannelisationCodeNumber ::= INTEGER

-- ** TODO **

```

```

FDD-S-CCPCH-Offset      ::= INTEGER

FACH-PriorityIndicator   ::= INTEGER { lowest(0), highest(15) } (0..15)

FrameHandlingPriority    ::= INTEGER { lowest(0), highest(15) } (0..15)

FrameOffset              ::= INTEGER (0..255)
-- Frames

-- G

GapPositionMode ::= ENUMERATED {
    fixed,
    flexible
}

GapPeriod               ::= INTEGER (0..255)

-- H
-- I

-- **TODO**
InitialDL-TX-Power     ::= INTEGER

-- J
-- K
-- L

LAC                     ::= OCTET STRING (SIZE (2)) --(EXCEPT ('0000'H|'FFFF'H))

-- ** TODO **
L3-Information         ::= INTEGER

-- M

-- ** TODO **
MaxNrOfUL-DPCHs       ::= INTEGER

MAC-c-SDU-Length       ::= INTEGER (1..5000)

-- **TODO**
MACd-MACsh-TransportFormatSet ::= INTEGER

-- **NOTE: extensibility**
MeasurementCharacteristics ::= SEQUENCE {
    measurementFrequency    TBD,
    averagingDuration       TBD,
    iE-Extensions           ProtocolExtensionContainer { {MeasurementCharacteristics-ExtIEs} } OPTIONAL,
    ...
}

MeasurementCharacteristics-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** TODO **

```

```
MeanBitRate          ::= INTEGER

MeasurementID        ::= INTEGER (0..1048576)
-- **OR:
-- MeasurementID     ::= BIT STRING (SIZE (20))
-- **

MultipleURAsIndicator ::= ENUMERATED {
    single-URA-exists,
    multiple-URAs-exist
}

-- ** TODO **
MCC-Digit            ::= OCTET STRING (SIZE (3))
-- FFS
-- Reference: 24.008

-- ** TODO **
MNC-Digit            ::= OCTET STRING (SIZE (3))
-- FFS
-- Reference: 24.008

ScaledMeasurementChangeTime ::= INTEGER (1..1000)
-- MeasurementChangeTime = ScaledMeasurementChangeTime * 10
-- Unit is ms

-- ** TODO **
MeasurementDecreaseThreshold ::= INTEGER

ScaledMeasurementHysteresisTime ::= INTEGER (1..1000)
-- MeasurementHysteresisTime = ScaledMeasurementHysteresisTime * 10
-- Unit is ms

-- ** TODO **
MeasurementIncreaseThreshold ::= INTEGER

-- ** TODO **
MeasurementThreshold ::= INTEGER

MidambleShift        ::= INTEGER (0..15)

MinUL-ChannelisationCodeLength ::= INTEGER

MultiplexingPosition ::= ENUMERATED {
    fixed,
    flexible
}

-- N

NrOfTransportBlocks  ::= INTEGER (0..4095)

-- O

Offset               ::= INTEGER (0..63)
```

```

-- P
PD ::= INTEGER (0..2047, ...)

PayloadCRC-PresenceIndicator ::= ENUMERATED {
    crc-not-included,
    crc-included--
}
-- ...

PSCH-TimeSlot ::= INTEGER (0..6)

Periodic ::= SEQUENCE {
    reportPeriodicity ReportPeriodicity,
    iE-Extensions ProtocolExtensionContainer { {Periodic-ExtIEs} } OPTIONAL,
    ...
}

Periodic-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** TODO **
PilotBitsUsedIndicator ::= INTEGER

-- ** TODO **
PLMN-ID ::= SEQUENCE {
    mCC-digit MCC-Digit,
    iE-Extensions ProtocolExtensionContainer { {PLMN-ID-ExtIEs} } OPTIONAL,
    mNC-digit MNC-Digit
}
-- FFS

PLMN-ID-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

PowerControlMode ::= ENUMERATED {
    v0,
    v1,
    ...
}

PowerOffset ::= INTEGER (0..24)

PowerResumeMode ::= ENUMERATED {
    v0,
    v1,
    ...
}

-- ** TODO **
PrimaryCPICH-Power ::= INTEGER

PrimaryCPICH-EcNo ::= INTEGER (-30..30)

```

```

-- ** TODO **
PrimaryCCPCH-RSCP          ::= INTEGER

PrimaryScramblingCode      ::= ScramblingCode

PropagationDelay           ::= INTEGER (0..255)

SyncCase ::= ENUMERATED {
    case1,
    case2,
    case3-- ,
    ...
}

-- ** TODO **
PSCH-CCPCH-TimeSlot       ::= TimeSlot

-- ** TODO **
PSCH-PCCPCH-TimeSlot      ::= TimeSlot

-- ** TODO **
P-CPICH-Power             ::= INTEGER

PunctureLimit             ::= INTEGER (0..100)
-- Unit is %

-- Q
-- R

-- ** TODO **
RAC                       ::= INTEGER

-- ** TODO **
-- OCTET STRING?
RANAP-RelocationInformation ::= BIT STRING

RateMatchingAttribute      ::= INTEGER (1..maxRateMatching)

RepetitionLength           ::= INTEGER (1..63)

RepetitionPeriod ::= ENUMERATED {
    v1,
    v2,
    v4,
    v8,
    v16,
    v32,
    v64-- ,
    ...
}

-- This is changed from the tabular format because it seems that
-- this is what is wanted.
ReportCharacteristics ::= CHOICE {
    onDemand          NULL,
    periodic          Periodic,

```



```

    eventA          EventA,
    eventB          EventB,
    eventC          EventC,
    eventD          EventD,
    eventE          EventE,
    eventF          EventF-- ,
--   ...
}

-- Changed
ReportPeriodicity ::= CHOICE {
    msec          INTEGER (1..1000),
    min           INTEGER (1..60)
}

RLC-Mode ::= ENUMERATED {
    acknowledged-mode,
    unacknowledged-mode,
    transparent-mode
}

RL-ID          ::= INTEGER (0..31)
RNC-ID         ::= INTEGER (0..4095)

-- S

-- Changed BIT STRING -> OCTET STRING
SAC            ::= OCTET STRING (SIZE (2))

SAI ::= SEQUENCE {
    pLMN-ID      PLMN-ID,
    lAC          LAC,
    sAC          SAC,
    iE-Extensions ProtocolExtensionContainer { {SAI-ExtIEs} } OPTIONAL
}

SAI-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** TODO **
ScramblingCode          ::= INTEGER

ScramblingCodeChange ::= ENUMERATED {
    no-code-change,
    code-change
}

ScaledSIR-ErrorValue          ::= INTEGER (-100..100)
-- ScaledSIR-ErrorValue = SIR-ErrorValue * 10
-- If SIR-ErrorValue <= -10 ScaledSIR-ErrorValue shall be set to -100
-- If SIR-ErrorValue >= 10 ScaledSIR-ErrorValue shall be set to 100
-- SIR-ErrorValue step 0.1 dB

ScaledSIR-Value          ::= INTEGER (-100..200)

```

```
-- ScaledSIR-Value = SIR-Value * 10
-- SIR-Value step 0.1 dB

ScaledTransmittedCodePowerValue ::= INTEGER (-350..150)
-- ScaledTransmittedCodePowerValue = TransmittedCodePowerValue * 10
-- TransmittedCodePowerValue step 0.1 dB

-- ** TODO **
SharedChannelType ::= INTEGER

-- ** TODO **
SecondaryCCPCH-SlotFormat ::= INTEGER

SN ::= TimeSlot

SpreadingFactorOfChannelisationCode ::= ENUMERATED {
    v256,
    v128,
    v64,
    v32,
    v16,
    v8,
    v4,
    v2,
    v1
}

-- Changed
S-FieldLength ::= INTEGER (1..2)

S-RNTI ::= INTEGER (0..1048575)
-- From 0 to 2^20-1

-- ** TODO **
SRNC-ID ::= INTEGER

SSDT-CellID ::= ENUMERATED {
    a,
    b,
    c,
    d,
    e,
    f,
    g,
    h
}

SSDT-CellID-Length ::= ENUMERATED {
    short,
    medium,
    long
}

SSDT-Indication ::= ENUMERATED {
    sSDT-active-in-the-UE,
    sSDT-not-active-in-the-UE
}
```

```
}
SSDT-SupportIndicator ::= ENUMERATED {
    sSDT-not-supported,
    sSDT-supported
}

-- T

-- ** TODO **
TBD ::= NULL
-- Remove this type

TDD-ChannelisationCode ::= INTEGER (1..31)
TDD-PhysicalChannelOffset ::= INTEGER (0..63)

TFCI-Coding ::= ENUMERATED {
    v4,
    v8,
    v16,
    v32
}

TFCI-Presence ::= ENUMERATED {
    not-present,
    present
}

TFCI-SignallingMode ::= ENUMERATED {
    normal,
    split
}

-- ** TODO **
TimeReference ::= INTEGER
-- TimeReference ::= INTEGER (0..255)

TimeSlot ::= INTEGER (0..14)

ToAWE ::= INTEGER (0..2559)

ToAWS ::= INTEGER (0..1279)

TPC-StepSize ::= ENUMERATED {
    half,
    one
}

TGD ::= INTEGER (0..255)

TGL ::= INTEGER (3| 4| 7| 10| 14)

TransmissionTimeInterval ::= ENUMERATED {
    msec-10,
    msec-20,
```

```

    msec-40,
    msec-80--,
-- ...
}

TransportBearerID ::= INTEGER (0..4095)

-- Compare title and IE name in table TransportBearerRequestIndicator vs.
-- FACH-PriorityIndicator
TransportBearerRequestIndicator ::= INTEGER { lowest (0), highest (15) } (0..15)

TransportBlockSize ::= INTEGER (1..5000)
-- Unit is bits

TransportFormatCombinationSet ::= SEQUENCE (SIZE (1..maxNrOfTFCs)) OF
SEQUENCE {
    cTFC                CTFC,
    iE-Extensions       ProtocolExtensionContainer { {TransportFormatCombinationSet-ExtIEs} } OPTIONAL,
    ...
}

TransportFormatCombinationSet-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

TransportFormatSet ::= SEQUENCE {
    dynamicParts         TransportFormatSet-DynamicPartList,
    semi-staticPart     TransportFormatSet-Semi-staticPart,
    iE-Extensions       ProtocolExtensionContainer { {TransportFormatSet-ExtIEs} } OPTIONAL,
    ...
}

TransportFormatSet-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

TransportFormatSet-DynamicPartList ::= SEQUENCE (SIZE (1..maxNrOfTFs)) OF
SEQUENCE {
    nrOfTransportBlocks  NrOfTransportBlocks,
    transportBlockSize  TransportBlockSize OPTIONAL
    -- This IE is only present if nrOfTransportBlocks is greater than 0 --,
    mode                TransportFormatSet-ModeDP,
    iE-Extensions       ProtocolExtensionContainer { {TransportFormatSet-DynamicPartList-ExtIEs} } OPTIONAL,
    ...
}

TransportFormatSet-DynamicPartList-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

TransportFormatSet-ModeDP ::= CHOICE {
    tdd                TransmissionTimeIntervalList,
    -- This IE is mandatory if not defined as semistatic parameter, otherwise it is absent --
    ...
}

```

```

TransmissionTimeIntervallList ::= SEQUENCE (SIZE (1..maxTTI-Count)) OF
  SEQUENCE {
    transmissionTimeInterval      TransmissionTimeInterval,
    iE-Extensions                 ProtocolExtensionContainer { {TransmissionTimeIntervallList-ExtIEs} } OPTIONAL,
    ...
  }

TransmissionTimeIntervallList-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

TransportFormatSet-Semi-staticPart ::= SEQUENCE {
  transmissionTime      TransmissionTimeInterval,
  channelCoding         ChannelCodingType,
  codingRate            CodingRate OPTIONAL
  -- This IE is only present if channelCoding is 'convolutional' or 'turbo' --,
  rateMatchingAttribute RateMatchingAttribute,
  CRC-Size              CRC-Size,
  mode                  TransportFormatSet-ModeSSP OPTIONAL,
  iE-Extensions        ProtocolExtensionContainer { {TransportFormatSet-Semi-staticPart-ExtIEs} } OPTIONAL,
  ...
}

TransportFormatSet-Semi-staticPart-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

TransportFormatSet-ModeSSP ::= CHOICE {
  tdd      SecondInterleavingMode,
  ...
}

SecondInterleavingMode ::= ENUMERATED {
  frame-related,
  timeslot-related,
  ...
}

-- TransportLayerAddress      ::= BIT STRING (1..160, ...)
TransportLayerAddress        ::= OCTET STRING (SIZE (1..20, ...))

-- U

UARFCN                       ::= INTEGER (0..698, ...)

UL-DL-CompressedModeSelection ::= ENUMERATED {
  ul-only,
  dl-only,
  both
}

UL-DeltaEbNo                 ::= INTEGER (-60..100)

UL-DeltaEbNoAfter            ::= INTEGER (-60..100)

-- ** TODO **

```

```

UL-EbNo                ::= INTEGER

-- ** TODO **
UL-EbNoTarget          ::= INTEGER

UC-ID ::= SEQUENCE {
    rNC-ID              RNC-ID,
    c-ID                C-ID,
    iE-Extensions       ProtocolExtensionContainer { {UC-ID-ExtIEs} } OPTIONAL,
    ...
}

UC-ID-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

UL-DPCCH-SlotFormat    ::= INTEGER (0..5)

ScaledUL-EbNo          ::= INTEGER (0..255)
-- Ul-EbNo = ScaledUL-EbNo / 10

UL-FP-Mode ::= ENUMERATED {
    normal,
    silent--,
    -- ...
}

ScaledUL-InterferenceLevel ::= INTEGER (-1280..-600)
-- UL-InterferenceLevel = UL-InterferenceLevel / 10

-- Relation to the ScramblingCode??
UL-ScramblingCode ::= SEQUENCE {
    ul-ScramblingCodeNumber      UL-ScramblingCodeNumber,
    ul-ScramblingCodeLength      UL-ScramblingCodeLength,
    iE-Extensions                ProtocolExtensionContainer { {UL-ScramblingCode-ExtIEs} } OPTIONAL
}

UL-ScramblingCode-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

UL-ScramblingCodeLength ::= ENUMERATED {
    short,
    long
}

UL-ScramblingCodeNumber ::= INTEGER (0..16777215)

URA-ID                ::= INTEGER (0..65535)

-- V
-- W
-- X
-- Y
-- Z

```

END

9.3.5 Common Definitions

```
-- *****
--
-- Common definitions
--
-- *****

RNSAP-CommonDataTypes -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

Criticality      ::= ENUMERATED { reject, ignore, notify }

Presence        ::= ENUMERATED { optional, conditional, mandatory }

| PrivateExtensionIDPrivateIE-ID ::= CHOICE {
  local          INTEGER (0..65535),
  global         OBJECT IDENTIFIER
}

ProcedureCode   ::= INTEGER (0..255)

ProcedureID ::= SEQUENCE {
  procedureCode  ProcedureCode,
  ddMode        ENUMERATED { tdd, fdd, common }
}

ProtocolExtensionID ::= INTEGER (0..65535)

ProtocolIE-ID   ::= INTEGER (0..65535)

TransactionID   ::= INTEGER (0..65535)

TriggeringMessage ::= ENUMERATED { initiating-message, successful-outcome, unsuccessful-outcome, outcome }

END
```

9.3.6 Constant Definitions

```
-- *****
--
-- Constant definitions
--
-- *****

RNSAP-Constants -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN
```

```

-- *****
--
-- Elementary Procedures
--
-- *****

id-commonTransportChannelResourcesInitiationFDD          INTEGER ::= 0
id-commonTransportChannelResourcesInitiationTDD          INTEGER ::= 1
id-commonTransportChannelResourcesRelease                INTEGER ::= 2
id-compressedModeCancellationFDD                        INTEGER ::= 3
id-compressedModeCommitFDD                             INTEGER ::= 4
id-compressedModePrepareFDD                            INTEGER ::= 5
id-downlinkPowerControl                                INTEGER ::= 6
id-downlinkSignallingTransfer                           INTEGER ::= 7
id-errorIndication                                     INTEGER ::= 8
id-measurementFailure                                  INTEGER ::= 9
id-measurementInitiation                               INTEGER ::= 10
id-measurementReporting                                 INTEGER ::= 11
id-measurementTermination                              INTEGER ::= 12
id-pagingRequest                                       INTEGER ::= 13
id-physicalChannelReconfiguration                       INTEGER ::= 14
id-privateMessage                                       INTEGER ::= 15
id-radioLinkAddition                                   INTEGER ::= 16
id-radioLinkDeletion                                   INTEGER ::= 17
id-radioLinkFailure                                    INTEGER ::= 18
id-radioLinkRestoration                                INTEGER ::= 19
id-radioLinkSetup                                       INTEGER ::= 20
id-srnsRelocationCommit                                INTEGER ::= 21
id-synchronisedRadioLinkReconfigurationCancellation     INTEGER ::= 22
id-synchronisedRadioLinkReconfigurationCommit           INTEGER ::= 23
id-synchronisedRadioLinkReconfigurationPrepare         INTEGER ::= 24
id-unSynchronisedRadioLinkReconfiguration              INTEGER ::= 25
id-uplinkSignallingTransfer                             INTEGER ::= 26

-- *****
--
-- Extension constants
--
-- *****

maxPrivateExtensions_maxPrivateIEs                     INTEGER ::= 65535
maxProtocolExtensions                                  INTEGER ::= 65535
maxProtocolIEs                                         INTEGER ::= 65535

-- *****
--
-- Lists
--
-- *****

maxRateMatching                                         INTEGER ::= 10
maxNrOfTFCs                                             INTEGER ::= 10
maxNrOfTFs                                              INTEGER ::= 10

maxNoOfDL-Codes                                         INTEGER ::= 10
maxNrOfCCTrCHs                                         INTEGER ::= 10

```



```

maxNrOfDCHs                INTEGER ::= 10
maxNrOfDL-Codes            INTEGER ::= 10
maxNrOfDPCHs              INTEGER ::= 10
maxNrOfErrors              INTEGER ::= 10
maxNrOfFACH-FD-Size       INTEGER ::= 10
maxNrOfFDD-Neighbours     INTEGER ::= 10
maxNrOfMACcSDU-Length     INTEGER ::= 10
maxNrOfTDD-Neighbours     INTEGER ::= 10
maxNrOfRLs                INTEGER ::= 10
maxNrOfSCCPCHs           INTEGER ::= 10
maxRNCinURA              INTEGER ::= 10
maxTTI-Count              INTEGER ::= 10

-- *****
--
-- IEs
--
-- *****

id-AllowedQueuingTime      INTEGER ::= 0
id-BindingID              INTEGER ::= 1
id-C-ID                   INTEGER ::= 2
id-C-RNTI                  INTEGER ::= 3
id-CCTrCH-ID              INTEGER ::= 4
id-CFN                     INTEGER ::= 5
id-CN-CS-DomainIdentifier  INTEGER ::= 6
id-CN-PS-DomainIdentifier  INTEGER ::= 7
id-Cause                   INTEGER ::= 8
id-CompressedModeMethod    INTEGER ::= 9
id-D-RNTI                  INTEGER ::= 10
id-D-RNTI-ReleaseIndication INTEGER ::= 11
id-DCH-AddItem            INTEGER ::= 12
id-DCH-AddItem-RL-ReconfPrepFDD  INTEGER ::= 13
id-DCH-AddItem-RL-ReconfPrepTDD  INTEGER ::= 14
id-DCH-AddItem-RL-ReconfReadyFDD  INTEGER ::= 15
id-DCH-AddItem-RL-ReconfRqstFDD  INTEGER ::= 16
id-DCH-AddItem-RL-ReconfRqstTDD  INTEGER ::= 17
id-DCH-AddList-RL-ReconfPrepFDD  INTEGER ::= 18
id-DCH-AddList-RL-ReconfPrepTDD  INTEGER ::= 19
id-DCH-AddList-RL-ReconfRqstFDD  INTEGER ::= 20
id-DCH-AddList-RL-ReconfRqstTDD  INTEGER ::= 21
id-DCH-DeleteItem-RL-ReconfPrepFDD  INTEGER ::= 22
id-DCH-DeleteItem-RL-ReconfPrepTDD  INTEGER ::= 23
id-DCH-DeleteItem-RL-ReconfRqstFDD  INTEGER ::= 24
id-DCH-DeleteItem-RL-ReconfRqstTDD  INTEGER ::= 25
id-DCH-DeleteList-RL-ReconfPrepFDD  INTEGER ::= 26
id-DCH-DeleteList-RL-ReconfPrepTDD  INTEGER ::= 27
id-DCH-DeleteList-RL-ReconfRqstFDD  INTEGER ::= 28
id-DCH-DeleteList-RL-ReconfRqstTDD  INTEGER ::= 29
id-DCH-Information-RL-SetupReqFDD  INTEGER ::= 30
id-DCH-InformationItem-RL-SetupReqFDD  INTEGER ::= 31
id-DCH-InformationItem-RL-SetupReqTDD  INTEGER ::= 32
id-DCH-InformationList-RL-SetupReqTDD  INTEGER ::= 33
id-DCH-ModifyItem        INTEGER ::= 34
id-DCH-ModifyItem-RL-ReconfPrepFDD  INTEGER ::= 35
id-DCH-ModifyItem-RL-ReconfPrepTDD  INTEGER ::= 36

```

id-DCH-ModifyItem-RL-ReconfReadyFDD	INTEGER ::= 37
id-DCH-ModifyItem-RL-ReconfRqstFDD	INTEGER ::= 38
id-DCH-ModifyItem-RL-ReconfRqstTDD	INTEGER ::= 39
id-DCH-ModifyList-RL-ReconfPrepFDD	INTEGER ::= 40
id-DCH-ModifyList-RL-ReconfPrepTDD	INTEGER ::= 41
id-DCH-ModifyList-RL-ReconfRqstFDD	INTEGER ::= 42
id-DCH-ModifyList-RL-ReconfRqstTDD	INTEGER ::= 43
id-DL-CCTrCH-Information-RL-ReconfPrepTDD	INTEGER ::= 44
id-DL-CCTrCH-Information-RL-ReconfRqstTDD	INTEGER ::= 45
id-DL-CCTrCH-InformationList-RL-ReconfPrepTDD	INTEGER ::= 46
id-DL-CCTrCH-InformationList-RL-ReconfRqstTDD	INTEGER ::= 47
id-DL-CCTrChInformationItem-RL-SetupReqTDD	INTEGER ::= 48
id-DL-CCTrChInformationList-RL-SetupReqTDD	INTEGER ::= 49
id-DL-CodeInformation-PhyChReconfRqstFDD	INTEGER ::= 50
id-DL-DPCH-Information	INTEGER ::= 51
id-DL-DPCH-Information-RL-SetupReqFDD	INTEGER ::= 52
id-DL-DPCH-InformationList-PhyChReconfRqstTDD	INTEGER ::= 53
id-DL-DPCH-InformationList-RL-ReconfReadyTDD	INTEGER ::= 54
id-DL-EbNoTarget	INTEGER ::= 55
id-DL-FrameType	INTEGER ::= 56
id-DL-MeanBitRate	INTEGER ::= 57
id-DL-ReferencePowerInformation-DL-PC-Rqst	INTEGER ::= 58
id-DRX-Parameter	INTEGER ::= 59
id-DedicatedMeasurementObjectType-DM-Rprt	INTEGER ::= 60
id-DedicatedMeasurementObjectType-DM-Rqst	INTEGER ::= 61
id-DedicatedMeasurementObjectType-DM-Rspns	INTEGER ::= 62
id-FACH-InfoForOptionalGroupS-CCPCH	INTEGER ::= 63
id-FACH-InfoForOptionals-CCPCH	INTEGER ::= 64
id-FACH-InfoForS-CCPCH-CoupledToPRACH	INTEGER ::= 65
id-GapPositionMode	INTEGER ::= 66
id-L3-Information	INTEGER ::= 67
id-MeasurementCharacteristics	INTEGER ::= 68
id-MeasurementID	INTEGER ::= 69
id-MultipleURAsIndicator	INTEGER ::= 70
id-PD	INTEGER ::= 71
id-PagingArea-PagingRqst	INTEGER ::= 72
id-PowerControlMode	INTEGER ::= 73
id-PowerResumeMode	INTEGER ::= 74
id-ProcedureScope-DL-PC-Rqst	INTEGER ::= 75
id-RANAP-RelocationInformation	INTEGER ::= 76
id-RL-Information-PhyChReconfRqstFDD	INTEGER ::= 77
id-RL-Information-PhyChReconfRqstTDD	INTEGER ::= 78
id-RL-Information-RL-AdditionRqstFDD	INTEGER ::= 79
id-RL-Information-RL-AdditionRqstTDD	INTEGER ::= 80
id-RL-Information-RL-DeletionRqst	INTEGER ::= 81
id-RL-Information-RL-FailureInd	INTEGER ::= 82
id-RL-Information-RL-ReconfPrepFDD	INTEGER ::= 83
id-RL-Information-RL-RestoreInd	INTEGER ::= 84
id-RL-Information-RL-SetupReqFDD	INTEGER ::= 85
id-RL-Information-RL-SetupReqTDD	INTEGER ::= 86
id-RL-InformationItem-DM-Rprt	INTEGER ::= 87
id-RL-InformationItem-DM-Rqst	INTEGER ::= 88
id-RL-InformationItem-DM-Rspns	INTEGER ::= 89
id-RL-InformationItem-RL-SetupReqFDD	INTEGER ::= 90
id-RL-InformationList-RL-AdditionRqstFDD	INTEGER ::= 91
id-RL-InformationList-RL-DeletionRqst	INTEGER ::= 92

id-RL-InformationList-RL-FailureInd	INTEGER ::= 93
id-RL-InformationList-RL-ReconfPrepFDD	INTEGER ::= 94
id-RL-InformationList-RL-RestoreInd	INTEGER ::= 95
id-RL-InformationResponse-RL-AdditionRspTDD	INTEGER ::= 96
id-RL-InformationResponse-RL-ReconfReadyTDD	INTEGER ::= 97
id-RL-InformationResponse-RL-SetupRspTDD	INTEGER ::= 98
id-RL-InformationResponseItem-RL-AdditionRspFDD	INTEGER ::= 99
id-RL-InformationResponseItem-RL-ReconfReadyFDD	INTEGER ::= 100
id-RL-InformationResponseItem-RL-SetupRspFDD	INTEGER ::= 101
id-RL-InformationResponseList-RL-AdditionRspFDD	INTEGER ::= 102
id-RL-InformationResponseList-RL-ReconfReadyFDD	INTEGER ::= 103
id-RL-InformationResponseList-RL-SetupRspFDD	INTEGER ::= 104
id-RL-ReconfigurationFailure-RL-ReconfFail	INTEGER ::= 105
id-RL-ReconfigurationFailureList-RL-ReconfFail	INTEGER ::= 106
id-RNCsWithCellsInTheAccessedURA-List-UL-ST-Ind	INTEGER ::= 107
id-ReportCharacteristics	INTEGER ::= 108
id-S-RNTI	INTEGER ::= 109
id-SAI	INTEGER ::= 110
id-SN	INTEGER ::= 111
id-SRNC-ID	INTEGER ::= 112
id-ScramblingCodeChange	INTEGER ::= 113
id-SuccessfulRL-InformationResponse-RL-AdditionFailureFDD	INTEGER ::= 114
id-SuccessfulRL-InformationResponse-RL-SetupFailureFDD	INTEGER ::= 115
id-SuccessfulRL-InformationResponseList-RL-AdditionFailureFDD	INTEGER ::= 116
id-SuccessfulRL-InformationResponseList-RL-SetupFailureFDD	INTEGER ::= 117
id-TGD	INTEGER ::= 118
id-TGL	INTEGER ::= 119
id-TGP1	INTEGER ::= 120
id-TGP2	INTEGER ::= 121
id-TransportBearerID	INTEGER ::= 122
id-TransportBearerRequestIndicator	INTEGER ::= 123
id-TransportLayerAddress	INTEGER ::= 124
id-UC-ID	INTEGER ::= 125
id-UL-CCTrCH-Information-RL-ReconfPrepTDD	INTEGER ::= 126
id-UL-CCTrCH-Information-RL-ReconfRqstTDD	INTEGER ::= 127
id-UL-CCTrCH-InformationList-RL-ReconfPrepTDD	INTEGER ::= 128
id-UL-CCTrCH-InformationList-RL-ReconfRqstTDD	INTEGER ::= 129
id-UL-CCTrChInformationItem-RL-SetupReqTDD	INTEGER ::= 130
id-UL-CCTrChInformationList-RL-SetupReqTDD	INTEGER ::= 131
id-UL-DL-CompressedModeSelection	INTEGER ::= 132
id-UL-DPCH-Information	INTEGER ::= 133
id-UL-DPCH-Information-RL-SetupReqFDD	INTEGER ::= 134
id-UL-DPCH-InformationList-PhyChReconfRqstTDD	INTEGER ::= 135
id-UL-DPCH-InformationList-RL-ReconfReadyTDD	INTEGER ::= 136
id-UL-DeltaEbNo	INTEGER ::= 137
id-UL-DeltaEbNoAfter	INTEGER ::= 138
id-UL-EbNoTarget	INTEGER ::= 139
id-UL-MeanBitRate	INTEGER ::= 140
id-URA-ID	INTEGER ::= 141
id-UnsuccessfulRL-InformationResponse	INTEGER ::= 142
id-UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD	INTEGER ::= 143
id-UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD	INTEGER ::= 144
id-UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD	INTEGER ::= 145
id-UnsuccessfulRL-InformationResponseList-RL-AdditionFailureFDD	INTEGER ::= 146
id-UnsuccessfulRL-InformationResponseList-RL-SetupFailureFDD	INTEGER ::= 147
id-CriticalityDiagnostics	INTEGER ::= 148

END

9.3.7 Container Definitions

```

-- *****
--
-- Container definitions
--
-- *****

RNSAP-Containers -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

-- *****
--
-- IE parameter types from other modules.
--
-- *****

IMPORTS
    Criticality,
    Presence,
    PrivateExtensionIDPrivateIE-ID,
    ProtocolExtensionID,
    ProtocolIE-ID
FROM RNSAP-CommonDataTypes

    maxPrivateExtensionsmaxPrivateIEs,
    maxProtocolExtensions,
    maxProtocolIEs
FROM RNSAP-Constants;

-- *****
--
-- Class Definition for Protocol IEs
--
-- *****

RNSAP-PROTOCOL-IES ::= CLASS {
    &id          ProtocolIE-ID          UNIQUE,
    &criticality Criticality,
    &Value,
    &presence    Presence
}
WITH SYNTAX {
    ID          &id
    CRITICALITY &criticality
    TYPE        &Value
    PRESENCE    &presence
}

-- *****

```

```

--
-- Class Definition for Protocol IEs
--
-- *****
RNSAP-PROTOCOL-IES-PAIR ::= CLASS {
    &id          ProtocolIE-ID          UNIQUE,
    &firstCriticality  Criticality,
    &FirstValue,
    &secondCriticality  Criticality,
    &SecondValue,
    &presence          Presence
}
WITH SYNTAX {
    ID          &id
    FIRST CRITICALITY  &firstCriticality
    FIRST TYPE      &FirstValue
    SECOND CRITICALITY  &secondCriticality
    SECOND TYPE      &SecondValue
    PRESENCE        &presence
}
-- *****
--
-- Class Definition for Protocol Extensions
--
-- *****
RNSAP-PROTOCOL-EXTENSION ::= CLASS {
    &id          ProtocolExtensionID    UNIQUE,
    &criticality  Criticality,
    &Extension
}
WITH SYNTAX {
    ID          &id
    CRITICALITY  &criticality
    EXTENSION    &Extension
}
-- *****
--
| -- Class Definition for Private ExtensionsIEs
--
-- *****
| RNSAP-PRIVATE-EXTENSION-IES ::= CLASS {
|     &id          PrivateExtensionIDPrivateIE-ID,
|     &criticality  Criticality,
|     &ExtensionValue
| }
| WITH SYNTAX {
|     ID          &id
|     CRITICALITY  &criticality
|     EXTENSIONTYPE      &ExtensionValue
| }

```

```

-- *****
--
-- Container for Protocol IEs
--
-- *****

ProtocolIE-Container {RNSAP-PROTOCOL-IES : IEsSetParam} ::=
  SEQUENCE (SIZE (0..maxProtocolIEs)) OF
    ProtocolIE-Field {{IEsSetParam}}

ProtocolIE-Field {RNSAP-PROTOCOL-IES : IEsSetParam} ::= SEQUENCE {
  id          RNSAP-PROTOCOL-IES.&id          ({IEsSetParam}),
  criticality RNSAP-PROTOCOL-IES.&criticality ({IEsSetParam}@id}),
  value       RNSAP-PROTOCOL-IES.&Value      ({IEsSetParam}@id)}
}

-- *****
--
-- Container for Protocol IE Pairs
--
-- *****

ProtocolIE-ContainerPair {RNSAP-PROTOCOL-IES-PAIR : IEsSetParam} ::=
  SEQUENCE (SIZE (0..maxProtocolIEs)) OF
    ProtocolIE-FieldPair {{IEsSetParam}}

ProtocolIE-FieldPair {RNSAP-PROTOCOL-IES-PAIR : IEsSetParam} ::= SEQUENCE {
  id          RNSAP-PROTOCOL-IES-PAIR.&id          ({IEsSetParam}),
  firstCriticality RNSAP-PROTOCOL-IES-PAIR.&firstCriticality ({IEsSetParam}@id}),
  firstValue      RNSAP-PROTOCOL-IES-PAIR.&FirstValue      ({IEsSetParam}@id}),
  secondCriticality RNSAP-PROTOCOL-IES-PAIR.&secondCriticality ({IEsSetParam}@id}),
  secondValue     RNSAP-PROTOCOL-IES-PAIR.&SecondValue     ({IEsSetParam}@id)}
}

-- *****
--
-- Container Lists for Protocol IE Containers
--
-- *****

ProtocolIE-ContainerList {INTEGER : lowerBound, INTEGER : upperBound, RNSAP-PROTOCOL-IES : IEsSetParam} ::=
  SEQUENCE (SIZE (lowerBound..upperBound)) OF
    ProtocolIE-Container {{IEsSetParam}}

ProtocolIE-ContainerPairList {INTEGER : lowerBound, INTEGER : upperBound, RNSAP-PROTOCOL-IES-PAIR : IEsSetParam} ::=
  SEQUENCE (SIZE (lowerBound..upperBound)) OF
    ProtocolIE-ContainerPair {{IEsSetParam}}

-- *****
--
-- Container for Protocol Extensions
--
-- *****

ProtocolExtensionContainer {RNSAP-PROTOCOL-EXTENSION : ExtensionSetParam} ::=
  SEQUENCE (SIZE (1..maxProtocolExtensions)) OF

```

```

ProtocolExtensionField {{ExtensionSetParam}}

ProtocolExtensionField {RNSAP-PROTOCOL-EXTENSION : ExtensionSetParam} ::= SEQUENCE {
  id          RNSAP-PROTOCOL-EXTENSION.&id          ({ExtensionSetParam}),
  criticality RNSAP-PROTOCOL-EXTENSION.&criticality  ({ExtensionSetParam}{@id}),
  extensionValue RNSAP-PROTOCOL-EXTENSION.&ExtensionValue  ({ExtensionSetParam}{@id})
}

-- *****
--
-- Container for Private ExtensionsIES
--
-- *****

PrivateExtensionContainer-PrivateIE-Container {RNSAP-PRIVATE-EXTENSION-IES : ExtensionSetParamIESSetParam} ::=
  SEQUENCE (SIZE (1..maxPrivateExtensionsmaxPrivateIES)) OF
  PrivateExtensionField-PrivateIE-Field {{ExtensionSetParamIESSetParam}}

PrivateExtensionField-PrivateIE-Field {RNSAP-PRIVATE-EXTENSION-IES : ExtensionSetParamIESSetParam} ::= SEQUENCE {
  id          RNSAP-PRIVATE-EXTENSIONIES.&id          ({ExtensionSetParamIESSetParam}),
  criticality RNSAP-PRIVATE-EXTENSIONIES.&criticality  ({ExtensionSetParamIESSetParam}{@id}),
  extensionValuevalue RNSAP-PRIVATE-EXTENSIONIES.&ExtensionValue  ({ExtensionSetParamIESSetParam}{@id})
}

END

```

CHANGE REQUEST		Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.
25.423	CR 062 r1	Current Version: 3.0.0
GSM (AA.BB) or 3G (AA.BBB) specification number ↑	↑ CR number as allocated by MCC support team	
For submission to: TSG-RAN#7 <small>list expected approval meeting # here ↑</small>	for approval for information <input checked="" type="checkbox"/>	strategic <input type="checkbox"/> non-strategic <input type="checkbox"/> <small>(for SMG use only)</small>

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: ftp://ftp.3gpp.org/Information/CR-Form-v2.doc

Proposed change affects: (U)SIM ME UTRAN / Radio Core Network
(at least one should be marked with an X)

Source: RAN WG3 **Date:** 22 Feb 2000

Subject: Editorial changes to RNSAP

Work item:

Category:	F Correction <input type="checkbox"/> A Corresponds to a correction in an earlier release <input type="checkbox"/> B Addition of feature <input type="checkbox"/> C Functional modification of feature <input type="checkbox"/> D Editorial modification <input checked="" type="checkbox"/>	Release:	Phase 2 <input type="checkbox"/> Release 96 <input type="checkbox"/> Release 97 <input type="checkbox"/> Release 98 <input type="checkbox"/> Release 99 <input checked="" type="checkbox"/> Release 00 <input type="checkbox"/>
------------------	--	-----------------	--

(only one category shall be marked with an X)

Reason for change: Editorial changes to RNSAP for better readability. The level of indentation has been indicated by arrows.

Clauses affected: 9.1, 9.2

Other specs affected:	Other 3G core specifications <input type="checkbox"/> Other GSM core specifications <input type="checkbox"/> MS test specifications <input type="checkbox"/> BSS test specifications <input type="checkbox"/> O&M specifications <input type="checkbox"/>	→ List of CRs: → List of CRs: → List of CRs: → List of CRs: → List of CRs:	
------------------------------	---	--	--

Other comments:



<----- double-click here for help and instructions on how to create a CR.

9 Elements for RNSAP Communication

9.1 Message Functional Definition and Content

9.1.1 General

This chapter defines the structure of the messages required for the RNSAP protocols.

For each message there is, a table listing the signalling elements in their order of appearance in the transmitted message.

All the RNSAP messages are listed in the following table:

Message name	Reference
RADIO LINK SETUP REQUEST	9.1.3
RADIO LINK SETUP RESPONSE	9.1.4
RADIO LINK SETUP FAILURE	9.1.5
RADIO LINK ADDITION REQUEST	9.1.6
RADIO LINK ADDITION RESPONSE	9.1.7
RADIO LINK ADDITION FAILURE	9.1.8
RADIO LINK DELETION REQUEST	9.1.9
RADIO LINK DELETION RESPONSE	9.1.10
RADIO LINK RECONFIGURATION PREPARE	9.1.11
RADIO LINK RECONFIGURATION READY	9.1.12
RADIO LINK RECONFIGURATION COMMIT	9.1.13
RADIO LINK RECONFIGURATION FAILURE	9.1.14
RADIO LINK RECONFIGURATION CANCEL	9.1.15
RADIO LINK RECONFIGURATION REQUEST	9.1.16
RADIO LINK RECONFIGURATION RESPONSE	9.1.17
RADIO LINK FAILURE INDICATION	9.1.18
RADIO LINK RESTORE INDICATION	9.1.19
DL POWER CONTROL REQUEST	9.1.20
PHYSICAL CHANNELRECONFIGURATION REQUEST	9.1.21
PHYSICAL CHANNELRECONFIGURATION COMMAND	9.1.22
PHYSICAL CHANNELRECONFIGURATION FAILURE	9.1.23
UPLINK SIGNALLING TRANSFER INDICATION	9.1.24
DOWNLINK SIGNALLING TRANSFER REQUEST	9.1.25
RELOCATION COMMIT	9.1.26
PAGING REQUEST	9.1.27
DEDICATED MEASUREMENT INITIATION REQUEST	9.1.28
DEDICATED MEASUREMENT INITIATION RESPONSE	9.1.29
DEDICATED MEASUREMENT INITIATION FAILURE	9.1.30
DEDICATED MEASUREMENT REPORT	9.1.31
DEDICATED MEASUREMENT TERMINATION REQUEST	9.1.32
DEDICATED MEASUREMENT FAILURE INDICATION	9.1.33
COMMON TRANSPORT CHANNEL RESOURCES RELEASE REQUEST	9.1.34
COMMON TRANSPORT CHANNEL RESOURCES REQUEST	9.1.35
COMMON TRANSPORT CHANNEL RESOURCES RESPONSE	9.1.36
COMMON TRANSPORT CHANNEL RESOURCES FAILURE	9.1.37
COMPRESSED MODE PREPARE	9.1.38
COMPRESSED MODE READY	9.1.39
COMPRESSED MODE FAILURE	9.1.40
COMPRESSED MODE COMMIT	9.1.41
COMPRESSED MODE CANCEL	9.1.42
ERROR INDICATION	9.1.43

9.1.2 Message Contents

An information element can be of the following *types*:

M	The information element is mandatory, i.e. always present in the message
O	The information element is optional, i.e. may or may not be present in the message independently on the presence or value of other information elements in the same message
C#	The presence of the information element is conditional to the presence or to the value of another information element, as reported in the correspondent note below the message description.

In case of an information element group, the group is preceded by a name for the info group (in bold). It is also indicated whether the group is mandatory, optional or conditional. Each group may be also repeated within one message. The presence field of the information elements inside one group defines if the information element is mandatory, optional or conditional if the group is present.

9.1.3 RADIO LINK SETUP REQUEST

9.1.3.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
S-RNTI	M			
D-RNTI	O			
Allowed Queuing time	O			
UL DPCH Information		1		
>UL Scrambling Code	M			
>Min UL Channelisation Code Length	M			
>Max Number of UL DPDCHs	C – CodeLen			
>Puncture Limit	M			For the UL.
>UL Transport Format Combination Set	M			
>UL DPCH Slot Format	M			
>UL Eb/No Target	O			
>Diversity mode	M			
>D Field Length	C-FB			
>SSDT Cell ID Length	O			
>S Field Length	O			
>Mean Bit Rate	O			For the UL.
DL DPCH Information		1		
>Transport Format Combination Set	M			
>DL DPCH Slot Format	M			
>TFCI Signalling Mode	M			
>TFCI Presence	C- SlotFormat			
>Multiplexing Position	M			
> Power Offset Information		1		
>>PO1	M		Power Offset	Power offset for the TFCI bits.
>>PO2	M		Power Offset	Power offset for the TPC bits.
>>PO3	M		Power Offset	Power offset for the pilot bits.
>>TPC Downlink Step Size	M			
>>Mean Bit Rate	O			For the DL.
DCH Information		1..<maxnoofDCHs >		
>DCH ID	M			
>DCH Combination Ind	O			
>RLC Mode	M			
>Transport Format Set	M			For the UL.
>Transport Format Set	M			For the DL.
>BLER	M			For the UL.
>BLER	M			For the DL.
>Allocation/Retention Priority	M			
>Frame Handling Priority	M			
>Payload CRC Presence Indicator	M			
>UL FP Mode	M			
>ToAWS	M			
>ToAWE	M			
RL Information		1...<maxnoofRLs >		
>RL ID	M			
>C-ID	M			

>Frame Offset	M			
>Chip Offset	M			
>Propagation Delay	O			
>Diversity Control Field	C – NotFirstRL			
>Initial DL TX Power	O		DL Power	
>Primary CPICH Ec/Io	O			
>SSDT Cell ID	O			

Condition	Explanation
CodeLen	This IE is present only "f "Min UL Channelisation Code len"th" equals to 4
FB	This IE is present only if Feed Back mode diversity is activated.
SlotFormat	This IE is only present if the DL DPCH Slot Format is equal to any of the values 12 to 16.
NotFirstRL	This IE is present only if the RL is not the first one in the RL Information .

Range bound	Explanation
MaxnoofDCHs	Maximum no. of DCHs for one UE.
MaxnoofRLs	Maximum no. of RLs for one UE.

9.1.3.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
S-RNTI	M			
D-RNTI	O			
Allowed Queuing time	O			
Mean Bit Rate	O			For the UL.
Mean Bit Rate	O			For the DL.
UL CCTrCH Information		<i>1..<maxnoofCCTrCHs></i>		
>CCTrCH ID	M			
>TFCS	M			For the UL.
>TFCI Coding	M			
>Puncture Limit	M			
DL CCTrCH Information		<i>1..<maxnoofCCTrCHs></i>		
>CCTrCH ID	M			
>TFCS	M			For the DL.
>TFCI Coding	M			
>Puncture Limit	M			
DCH Information		<i>1..<maxnoofDCHs></i>		
>DCH ID	M			
>CCTrCH ID	M			UL CCTrCH in which the DCH is mapped
>CCTrCH ID	M			DL CCTrCH in which the DCH is mapped
>DCH Combination Ind	O			
>RLC Mode	M			
>Transport Format Set	M			For the UL.
>Transport Format Set	M			For the DL.
>BLER	M			For the UL.
>BLER	M			For the DL.
>Allocation/Retention Priority	M			
>Frame Handling Priority	M			
>Payload CRC Presence Indicator	M			
>UL FP Mode	M			
>ToAWS	M			
>ToAWE	M			
RL Information		<i>1</i>		
>RL ID	M			
>C-ID	M			
>Frame Offset	M			
>Primary CCPCH RSCP	O			

Range bound	Explanation
MaxnoofDCHs	Maximum no. of DCHs for one UE.
MaxnoofCCTrCHs	Maximum no. of CCTrCH for one UE.

9.1.4 RADIO LINK SETUP RESPONSE

9.1.4.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
D-RNTI	O			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
RL Information Response		1..<maxnoofRLs>		
>RL ID	M			
>SAI	M			
>UL Interference Level	M			
> DL Code Information		1.. <maxnoofDLCode s		
>>DL Scrambling Code	M			
>>FDD DL Channelisation Code Number	M			
>Diversity Indication	C- NotFirstRL			
>CHOICE <i>diversity Indication</i>				
>>Combining				
>>>RL ID	M			Reference RL ID for the combining
>>Non Combining or IE not present				"IE not present" is equivalent to "First RL".
>>> DCH Information Response		0..<maxnoofDCHs>		Only one DCH per set of co-ordinated DCHs shall be included
>>>>DCH ID	M			
>>>>Binding ID	M			
>>>>Transport Layer Address	M			
>SSDT Support Indicator	M			
>Maximum Uplink Eb/No	M		Uplink Eb/No	
>Minimum Uplink Eb/No	M		Uplink Eb/No	
> Neighbouring FDD Cell Information		0..<maxnoofFDDn eighbours>		
>>UC-Id	M			
>>CN PS Domain Identifier	O			
>>CN CS Domain Identifier	O			
>>UARFCN	M			
>>Frame Offset	O			
>>Primary Scrambling Code	M			
>>Primary CPICH Power	O			
> Neighbouring TDD Cell Information	O	0..<maxnoofTDDn eighbours>		
>>UC-Id	M			
>>CN PS Domain Identifier	O			
>>CN CS Domain Identifier	O			
>>UARFCN	M			
>>Frame Offset	O			
>>Cell Parameter ID	M			
>>Sync Case	M			

>>Time Slot	C-Case1			
>>PSCH Time Slot	C-Case2&3			
Uplink Eb/No Target	O		Uplink Eb/No	
Downlink Eb/No Target	O			
Criticality Diagnostics	O			

Condition	Explanation
IfComb	This IE is present if the 'Diversity Indication' IE indicates 'combining' in the Node B.
IfNotComb	This IE is present if the 'Diversity Indication' IE indicates 'non combining' in the Node B.
NotFirstRL	The IE is present only if the RL is not the first RL in the RL Information
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range bound	Explanation
MaxnoofRLs	Maximum no. of RLs for one UE.
MaxnoofDCHs	Maximum no. of DCHs for one UE.
MaxnoofFDDneighbours	Maximum number of neighbouring FDD cell for one cell.
MaxnoofTDDneighbours	Maximum number of neighbouring TDD cell for one cell.

9.1.4.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
D-RNTI	O			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
RL Information Response		1		
>RL ID	M			
>SAI	M			
>UL Interference Level	M			
>Maximum Uplink Eb/No	M		Uplink Eb/No	
>Minimum Uplink Eb/No	M		Uplink Eb/No	
>Uplink Eb/No Target	O		Uplink Eb/No	
>Downlink Eb/No Target	O			
>>UL CCTrCH Information		1..<maxnoofCCTr CHs>		
>>>CCTrCH ID	M			
>>>UL DPCH Information		1..<MaxnoofDPC Hs>		
>>>>DPCH ID	M			
>>>>TDD Channelisation Code	M			
>>>>Burst Type	M			
>>>>Midamble Shift	M			
>>>>Time Slot	M			
>>>>TDD Physical Channel Offset	M			
>>>>Repetition Period	M			
>>>>Repetition Length	M			
>>>>TFCI Presence	M			
>>DL CCTrCH Information		1..<maxnoofCCTr CHs>		
>>>CCTrCH ID	M			
>>>DL DPCH Information		1..<MaxnoofDPC Hs>		
>>>>DPCH ID	M			
>>>>TDD Channelisation Code	M			
>>>>Burst Type	M			
>>>>Midamble Shift	M			
>>>>Time Slot	M			
>>>>TDD Physical Channel Offset	M			
>>>>Repetition Period	M			
>>>>Repetition Length	M			
>>>>TFCI Presence	M			
>>DCH Information Response		1..<maxnoofDCHs >		Only one DCH per set of co-ordinated DCHs shall be included.
>>>DCH ID	M			
>>>Binding ID	M			
>>>Transport Layer Address	M			
>>Neighbouring FDD Cell Information	O	0..<maxnoofFDDn eighbours>		
>>>UC-Id	M			
>>>CN PS Domain Identifier	O			
>>>CN CS Domain Identifier	O			

>>UARFCN	M			
>>Frame Offset	O			
>>Primary Scrambling Code	M			
>>Primary CPICH Power	O			
>Neighbouring TDD Cell Information	O	<i>0..<maxnoofTDDn eighbours></i>		
>>UC-Id	M			
>>CN PS Domain Identifier	O			
>>CN CS Domain Identifier	O			
>>UARFCN	M			
>>Frame Offset	O			
>>Cell Parameter ID	M			
>>Sync Case	M			
>>Time Slot	C-Case1			
>>PSCH Time Slot	C-Case2&3			
Criticality Diagnostics	O			

Condition	Explanation
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range bound	Explanation
MaxnoofDPCHs	Maximum no. of DPCHs for one CCTrCH.
MaxnoofDCHs	Maximum no. of DCHs for one UE.
MaxnoofFDDneighbours	Maximum number of neighbouring FDD cell for one cell
MaxnoofTDDneighbours	Maximum number of neighbouring TDD cell for one cell
MaxnoofCCTrCHs	Maximum no. of CCTrCH for one UE.

9.1.5 RADIO LINK SETUP FAILURE

9.1.5.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
D-RNTI	O			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
Unsuccessful RL Information Response		1...<maxnoofRLs>		
>RL ID	M			
>Cause	M			
Successful RL Information Response		0..<maxnoofRLs-1>		
>RL ID	M			
>SAI	M			
>UL Interference Level	M			
>> DL Code Information		1..<maxnoofDLCodes>		
>>>DL Scrambling Code	M			
>>>FDD DL Channelisation Code Number	M			
>>Diversity Indication	M			
>>CHOICE <i>diversity Indication</i>				
>>>Combining				
>>>>RL ID	M			Reference RL ID for the combining
>>>>Non Combining or IE not present				"IE not present" is equivalent to "First RL".
>>>>> DCH Information Response		0..<maxnoofDCHs>		Only one DCH per set of co-ordinated DCHs shall be included.
>>>>>>DCH ID	M			
>>>>>>Binding ID	M			
>>>>>>Transport Layer Address	M			
>>SSDT Support Indicator	M			
>> Neighbouring FDD Cell Information	O			
>>>UC-Id	M			
>>>CN PS Domain Identifier	O			
>>>CN CS Domain Identifier	O			
>>>UARFCN	M			
>>>Frame Offset	O			
>>>Primary Scrambling Code	M			
>>>Primary CPICH Power	O			
>> Neighbouring TDD Cell Information	O			
>>>UC-Id	M			
>>>CN PS Domain Identifier	O			
>>>CN CS Domain Identifier	O			
>>>UARFCN	M			
>>>Frame Offset	O			
>>>Cell Parameter ID	M			
>>>Sync Case	M			
>>>Time Slot	C-Case3			

>>PSCH Time Slot	C-Case2&3			
Uplink Eb/No Target	O		Uplink Eb/No	
Maximum Uplink Eb/No	M		Uplink Eb/No	
Minimum Uplink Eb/No	M		Uplink Eb/No	
Downlink Eb/No Target	O			
Criticality Diagnostics	O			

Condition	Explanation
IfComb	This IE is present if the 'Diversity Indication' IE indicates 'combining' in the Node B.
IfNotComb	This IE is present if the 'Diversity Indication' IE indicates 'non combining' in the Node B.
NotFirstRL	The IE is present only if the RL is not the first RL in the RL Information
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range bound	Explanation
MaxnoofRLs	Maximum no. of RLs for one UE.
MaxnoofDCHs	Maximum no. of DCHs for one UE.

9.1.5.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
Unsuccessful RL Information Response		1		
>RL ID	M			
>Cause	M			
Criticality Diagnostics	O			

9.1.6 RADIO LINK ADDITION REQUEST

9.1.6.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
Uplink Eb/No Target	M		Uplink Eb/No	
RL Information		1..<maxnoofRLs-1>		
>RL ID	M			
>C-Id	M			
>Frame Offset	M			
>Chip Offset	M			
>Diversity Control Field	M			
>Primary CPICH Ec/Io	O			
>SSDT Cell Identity	O			

Range bound	Explanation
MaxnoofRLs	Maximum number of radio links for one UE

9.1.6.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
RL Information		1		
>RL ID	M			
>C-Id	M			
>Frame Offset	M			
>Diversity Control Field	M			
>Primary CCPCH RSCP	O			

9.1.7 RADIO LINK ADDITION RESPONSE

9.1.7.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
RL Information Response		1..<maxnoofRLs-1>		
>RL ID	M			
>SAI	M			
>UL Interference Level	M			
> DL Code Information		1..<maxnoofDLCodes>		
>>DL Scrambling Code	M			
>>DL Channelisation Code	M			
>Diversity Indication	M			
>CHOICE <i>diversity indication</i>				
>>Combining				
>>>RL ID	M			Reference RL-Id
>>Non combining				
>>> DCH Information Response		1..<maxnoofDCHs>		Only one DCH per set of co-ordinated DCHs shall be included.
>>>>DCH ID	M			
>>>>Binding ID	M			
>>>>Transport Layer Address	M			
>SSDT Support Indicator	M			
>Minimum Uplink Eb/No	M		Uplink Eb/No	
>Maximum Uplink Eb/No	M		Uplink Eb/No	
> Neighbouring FDD Cell Information		0..<maxnoofFDD Neighbours>		
>>UC-Id	M			
>>CN PS Domain Identifier	O			
>>CN CS Domain Identifier	O			
>>UARFCN	M			
>>Frame Offset	O			
>>Primary Scrambling Code	M			
>>Primary CPICH Power	O			
> Neighbouring TDD Cell Information		0..<maxnoofTDD Neighbours>		
>>UC-Id	M			
>>CN PS Domain Identifier	O			
>>CN CS Domain Identifier	O			
>>UARFCN	M			
>>Frame Offset	O			
>>Cell Parameter ID	M			
>>Sync Case	M			
>>Time Slot	C-Case1			
>>PSCH Time Slot	C-Case2&3			
Criticality Diagnostics	O			

Condition	Explanation
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range bound	Explanation
MaxnoofDCHs	Maximum number of dedicated channels on one RL
MaxnoofRLs	Maximum number of radio links for one UE
MaxnoofFDDNeighbours	Maximum number of neighbouring FDD cells for one cell
MaxnoofTDDNeighbours	Maximum number of neighbouring TDD cells for one cell
MaxnoofDLCodes	Maximum number of DL code information

9.1.7.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
RL Information Response		1		
>RL ID	M			
>SAI	M			
>UL Interference Level	M			
>UL CCTrCH Information		1..<maxnoof CCTrCHs>		
>>CCTrCH ID	M			
>>UL DPCH Information		1..<maxnoOfDPC Hs>		
>>>DPCH ID	M			
>>>TDD Channelisation Code	M			
>>>Burst Type	M			
>>>Midamble Shift	M			
>>>Time Slot	M			
>>>TDD Physical Channel Offset	M			
>>>Repetition Period	M			
>>>Repetition Length	M			
>>>TFCI Presence	M			
>DL CCTrCH Information		1..<maxnoof CCTrCHs>		
>>CCTrCH ID	M			
>>DL DPCH Information		1..<maxnoOfDPC Hs>		
>>>DPCH ID	M			
>>>TDD Channelisation Code	M			
>>>Burst Type	M			
>>>Midamble Shift	M			
>>>Time Slot	M			
>>>TDD Physical Channel Offset	M			
>>>Repetition Period	M			
>>>Repetition Length	M			
>>>TFCI Presence	M			
>Diversity Indication	M			
>CHOICE <i>diversity indication</i>				
>>Combining				
>>>RL ID	M			Reference RL
>>Non combining				
>>>DCH Information Response		1..<maxnoofDCHs >		Only one DCH per set of co-ordinated DCHs shall be included.
>>>>DCH ID	M			
>>>>Binding ID	M			
>>>>Transport Layer Address	M			
>Minimum Uplink Eb/No	M		Uplink Eb/No	
>Maximum Uplink Eb/No	M		Uplink Eb/No	
>Neighbouring FDD Cell Information		0..<maxnoofFDD Neighbours>		
>>UC-Id	M			
>>CN PS Domain Identifier	O			
>>CN CS Domain Identifier	O			

>>UARFCN	M			
>>Frame Offset	O			
>>Primary Scrambling Code	M			
>>Primary CPICH Power	O			
>>Neighbouring TDD Cell Information		<i>0..<maxnoofTDD Neighbours></i>		
>>UC-Id	M			
>>CN PS Domain Identifier	O			
>>CN CS Domain Identifier	O			
>>UARFCN	M			
>>Frame Offset	O			
>>Cell Parameter ID	M			
>>Sync Case	M			
>>Time Slot	C-Case1			
>>PSCH Time Slot	C-Case2&3			
Criticality Diagnostics	O			

Condition	Explanation
Case1	This IE is present only if Sync Case = Case1
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range Bound	Explanation
MaxnoofDCHs	Maximum number of dedicated channels on one RL
MaxnoofFDDNeighbours	Maximum number of neighbouring FDD cells for one cell
MaxnoofTDDNeighbours	Maximum number of neighbouring TDD cells for one cell
MaxnoofDLCodes	Maximum number of DL code information
MaxnoOfDPCHs	Maximum number of DPCH in one CCTrCH
MaxnoofCCTrCHs	no. of CCTrCH for one UE.

9.1.8 RADIO LINK ADDITION FAILURE

9.1.8.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
Unsuccessful RL Information Response		1..<maxnoofRLs-1>		
>RL ID	M			
>Cause	M			
Successful RL Information Response		1..<maxnoofRLs-2>		
>RL ID	M			
>SAI	M			
>UL Interference Level	M			
>>DL Code Information		1..<maxnoofDLCodes>		
>>>DL scrambling code	M			
>>>DL channelisation code	M			
>Diversity Indication	M			
>CHOICE diversity indication				
>>Combining				
>>>RL ID	M			Reference RL-Id
>>Non combining				
>>>DCH Information Response		1..<maxnoofDCHs>		Only one DCH per set of co-ordinated DCHs shall be included.
>>>>DCH ID	M			
>>>>Binding ID	M			
>>>>Transport Layer Address	M			
>SSDT Support Indicator	M			
>Minimum Uplink Eb/No	M		Uplink Eb/No	
>Maximum Uplink Eb/No	M		Uplink Eb/No	
>Neighbouring FDD Cell Information		0..<maxnoofFDD Neighbours>		
>>>UC-Id	M			
>>>CN PS Domain Identifier	O			
>>>CN CS Domain Identifier	O			
>>>UARFCN	M			
>>>Frame Offset	O			
>>>Primary Scrambling Code	M			
>>>Primary CPICH Power	O			
>Neighbouring TDD Cell Information		0..<maxnoofTDD Neighbours>		
>>>UC-Id	M			
>>>CN PS Domain Identifier	O			
>>>CN CS Domain Identifier	O			
>>>UARFCN	M			
>>>Frame Offset	O			
>>>Cell Parameter ID	M			
>>>Sync Case	M			
>>>Time Slot	C-Case1			
>>>PSCH Time Slot	C-			

	Case2&3			
Criticality Diagnostics	O			

Condition	Explanation
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range bound	Explanation
MaxnoofDCHs	Maximum number of dedicated channels on one RL
MaxnoofRLs	Maximum number of radio links for one UE
MaxnoofFDDNeighbours	Maximum number of neighbouring FDD cells for one cell
MaxnoofTDDNeighbours	Maximum number of neighbouring TDD cells for one cell
MaxnoofDLCodes	Maximum number of DL code information

9.1.8.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
Unsuccessful RL Information Response		1		
>RL ID	M			
>Cause	M			
Criticality Diagnostics	O			

9.1.9 RADIO LINK DELETION REQUEST

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
RL Information		1..<maxnoofRLs>		
>RL ID	M			

Range bound	Explanation
MaxnoofRLs	Maximum number of radio links for one UE

9.1.10 RADIO LINK DELETION RESPONSE

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
Criticality Diagnostics	O			

9.1.11 RADIO LINK RECONFIGURATION PREPARE

9.1.11.1 FDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			
Allowed Queuing Time	O			
UL DPCH Information		0..1		
>UL Scrambling code	O			
>Min UL Channelisation Code Length	O			
>Max Number of UL DPCHs	C – CodeLen			
>Puncture Limit	O			For the UL.
>TFCS	O			TFCS for the UL.
>UL DPCH Slot Format	O			
>SSDT Cell Identity Length	O			
>S-Field Length	O			
>Mean Bit Rate	O			For the UL.
DL DPCH Information		0..1		
>TFCS	O			TFCS for the DL.
>DL DPCH Slot Format	O			
>TFCI Signalling Mode	O			
>TFCI Presence	C- SlotFormat			
>MultiplexingPosition	O			
>Mean Bit Rate	O			For the DL.
DCHs to Modify		0..<maxnoofDCHs>		
>DCH ID	M			
>Transport Format Set	O			For the UL.
>Transport Format Set	O			For the DL.
>Allocation/Retention Priority	O			
>Frame Handling Priority	O			
>UL FP Mode	O			
>ToAWS	O			
>ToAWE	O			
DCHs to Add		0..<maxnoofDCHs>		
>DCH ID	M			
>DCH Combination Indicator	O			
>RLC Mode	M			
>Transport Format Set	M			For the UL.
>Transport Format Set	M			For the DL.
>BLER	M			For the UL.
>BLER	M			For the DL.
>Allocation/Retention Priority	M			
>Frame Handling Priority	M			
>Payload CRC Presence Indicator	M			
>UL FP Mode	M			
>ToAWS	M			
>ToAWE	M			
DCHs to Delete		0..<maxnoofDCHs>		
>DCH ID	M			
RL Information		0..<maxnoofRLs>		
>RL ID	M			

≥SSDT Indication	O			
≥SSDT Cell Identity	C - SSDTIndON			

Condition	Explanation
SSDTIndON	The IE may be present if the SSDT Indication is set to 'SSDT Active in the UE'.
CodeLen	This IE is present only if "Min UL Channelisation Code length" equals to 4.
SlotFormat	This IE is only present if the DL DPCH Slot Format is equal to any of the values 12 to 16.

Range bound	Explanation
MaxnoofDCHs	Maximum number of DCHs for a UE.
MaxnoofRLs	Maximum number of RLs for a UE.

9.1.11.2 TDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			
Allowed Queuing Time	O			
Mean Bit Rate	O			For the UL
Mean Bit Rate	O			For the DL
UL CCH Information		0..<maxnoofCCHs>		
>CCH ID	M			
>TFCS	O			For the UL.
>TFCI Coding	O			
>Puncture Limit	O			
DL CCH Information		0..<maxnoofCCHs>		
>CCH ID	M			
>TFCS	O			For the DL.
>TFCI Coding	O			
>Puncture Limit	O			
DCHs to Modify		0..<maxnoofDCHs>		
>DCH ID	M			
>CCH Id	O			UL CCH in which the DCH is mapped.
>CCH Id	O			DL CCH in which the DCH is mapped
>Transport Format Set	O			For the UL.
>Transport Format Set	O			For the DL.
>Allocation/Retention Priority	O			
>Frame Handling Priority	O			
>UL FP Mode	O			
>ToAWS	O			
>ToAWE	O			
DCHs to Add		0..<maxnoofDCHs>		
>DCH ID	M			
>CCH Id	M			UL CCH in which the DCH is mapped.
>CCH Id	M			DL CCH in which the DCH is mapped
>DCH Combination Indicator	O			
>RLC Mode	M			
>Transport Format Set	M			For the UL.
>Transport Format Set	M			For the DL.
>BLER	M			For the UL.
>BLER	M			For the DL.
>Allocation/Retention Priority	M			
>Frame Handling Priority	M			
>Payload CRC Presence Indicator	M			
>UL FP Mode	M			
>ToAWS	M			
>ToAWE	M			
DCHs to Delete		0..<maxnoofDCHs>		
>DCH ID	M			

Range bound	Explanation
MaxnoofDCHs	Maximum number of DCHs for a UE.
MaxnoofCCTrCHs	Maximum number of CCTrCHs for a UE.

9.1.12 RADIO LINK RECONFIGURATION READY

9.1.12.1 FDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			
RL Information Response		<i>0..<maxnoofRLs></i>		
≥RL ID	M			
≥Maximum Uplink Eb/No	O		Uplink Eb/No	
≥Minimum Uplink Eb/No	O		Uplink Eb/No	
≥Downlink Code Information		<i>0..<maxnoofDLCodes></i>		
≥≥DL Scrambling Code	M			
≥≥DL Channelisation Code	M			
≥DCH to be Added		<i>0..<maxnoofDCHs></i>		Only one DCH per set of coordinated DCHs shall be included. The IE group shall be included only once per DCH per set of combined RLs.
≥≥DCH ID	M			
≥≥Binding ID	M			
≥≥Transport Layer Address	M			
≥DCH to be Modified		<i>0..<maxnoofDCHs></i>		Only one DCH per set of coordinated DCHs shall be included. The IE group shall be included only once per DCH per set of combined RLs.
≥≥DCH ID	M			
≥≥Binding ID	M			
≥≥Transport Layer Address	M			
Criticality Diagnostics	O			

Range bound	Explanation
MaxnoofDCHs	Maximum number of DCHs.
MaxnoofRLs	Maximum number of RLs for a UE.
MaxnoofDLCodes	Maximum number of Downlink Channelisation Codes.

9.1.12.2 TDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			
RL Information Response		0..1		
>RL ID	M			
>Maximum Uplink Eb/No	O		Uplink Eb/No	
>Minimum Uplink Eb/No	O		Uplink Eb/No	
>UL CCTrCH Information		0..<maxnoofCCTr CHs>		
>>CCTrCH ID	M			
>>UL DPCH Information		1..<maxnoofDPC Hs>		
>>>DPCH ID	M			
>>>TDD Channelisation Code	O			
>>>Burst Type	O			
>>>Midamble Shift	O			
>>>Time Slot	O			
>>>TDD Physical Channel Offset	O			
>>>Repetition Period	O			
>>>Repetition Length	O			
>>>TFCI Presence	O			
>DL CCTrCH Information		0..<maxnoofCCTr CHs>		
>>CCTrCH ID	M			
>>DL DPCH Information		1..<maxnoofDPC Hs>		
>>>DPCH ID	M			
>>>TDD Channelisation Code	O			
>>>Burst Type	O			
>>>Midamble Shift	O			
>>>Time Slot	O			
>>>TDD Physical Channel Offset	O			
>>> Repetition Period	O			
>>>Repetition Length	O			
>>>TFCI Presence	O			
>DCH to be Added		0..<maxnoofDCHs >		Only one DCH per set of coordinated DCHs shall be included. The IE group shall be included only once per DCH per set of combined RLs.
>>DCH ID	M			
>>Binding ID	M			
>>Transport Layer Address	M			
>DCH to be Modified		0..<maxnoofDCHs >		Only one DCH per set of coordinated DCHs shall be included. The IE group shall be included only once per DCH per set of combined RLs.
>>DCH ID	M			
>>Binding ID	M			
>>Transport Layer	M			

Address				
Criticality Diagnostics	O			

Range bound	Explanation
MaxnoofDCHs	Maximum number of DCHs for a UE.
MaxnoofCCTrCHs	Maximum number of CCTrCHs for a UE.
Maxnoof DPCHs	Maximum number of DPCHs in one CCTrCH.

9.1.13 RADIO LINK RECONFIGURATION COMMIT

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			
CFN	M			

9.1.14 RADIO LINK RECONFIGURATION FAILURE

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			
Cause	M			
RLs Causing Reconfiguration Failure		<i>0..<maxnoofRLs></i>		
≥RL ID	M			
≥Cause	M			
Criticality Diagnostics	O			

Range bound	Explanation
MaxnoofRLs	Maximum number of RLs for a UE.

9.1.15 RADIO LINK RECONFIGURATION CANCEL

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			

9.1.16 RADIO LINK RECONFIGURATION REQUEST

9.1.16.1 FDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			
Allowed Queuing Time	O			
UL DPCH Information		0..1		
>TFCS	O			TFCS for the UL.
>Mean Bit Rate	O			
DL DPCH Information		0..1		
>TFCS	O			TFCS for the DL.
>TFCI Signalling Mode	O			
>Mean Bit Rate	O			
DCHs to Modify		0..<maxnoofDCHs >		
>DCH ID	M			
>Transport Format Set	O			For the UL.
>Transport Format Set	O			For the DL.
>Allocation/Retention Priority	O			
>Frame Handling Priority	O			
>UL FP Mode	O			
>ToAWS	O			
>ToAWE	O			
DCHs to add		0..<maxnoofDCHs >		
>DCH ID	M			
>DCH Combination Ind	O			
>RLC Mode	M			
>Transport Format Set	M			For the UL.
>Transport Format Set	M			For the DL.
>Allocation/Retention Priority	M			
>Frame Handling Priority	M			
>Payload CRC Presence Indicator	M			
>UL FP mode	M			
>ToAWS	M			
>ToAWE	M			
DCHs to Delete		0..<maxnoofDCHs >		
>DCH ID	M			

Range Bound	Explanation
MaxnoofDCHs	Maximum number of DCHs for a UE.

9.1.16.2 TDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			
Allowed Queuing Time	O			
Mean Bit Rate	O			For the UL
Mean Bit Rate	O			For the DL
UL CCTrCH Information		<i>0..<maxnoofCCTrCHs></i>		
>CCTrCH ID	M			
>TFCS	M			
DL CCTrCH Information		<i>0..<maxnoofCCTrCHs></i>		
>CCTrCH ID	M			
>TFCS	M			
DCHs to Modify		<i>0..<maxnoofDCHs></i>		
>DCH ID	M			
>CCTrCH ID	O			UL CCTrCH in which the DCH is mapped.
>CCTrCH ID	O			DL CCTrCH in which the DCH is mapped
>Transport Format Set	O			For the UL.
>Transport Format Set	O			For the DL.
>Allocation/Retention Priority	O			
>Frame Handling Priority	O			
>UL FP Mode	O			
>ToAWS	O			
>ToAWE	O			
DCHs to Add		<i>0..<maxnoofDCHs></i>		
>DCH ID	M			
>RLC Mode	M			
>CCTrCH ID	M			UL CCTrCH in which the DCH is mapped.
>CCTrCH ID	M			DL CCTrCH in which the DCH is mapped
>DCH Combination Ind	O			
>Transport Format Set	M			For the UL.
>Transport Format Set	M			For the DL.
>Allocation/Retention Priority	M			
>Frame Handling Priority	M			
>Payload CRC Presence Indicator	M			
>UL FP Mode	M			
>ToAWS	M			
>ToAWE	M			
DCHs to Delete		<i>0..<maxnoofDCHs></i>		
>DCH ID	M			

Range Bound	Explanation
MaxnoofDCHs	Maximum number of DCHs for a UE.
MaxnoofCCTrCHs	Maximum number of CCTrCHs for a UE.

9.1.17 RADIO LINK RECONFIGURATION RESPONSE

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			
RL Information Response		<i>0..<maxnoofRLs></i>		
≥RL ID	M			
≥Maximum Uplink Eb/No	O		Uplink Eb/No	
≥Minimum Uplink Eb/No	O		Uplink Eb/No	
≥DCH to be Added		<i>0..<maxnoofDCHs></i>		Only one DCH per set of coordinated DCHs shall be included. The IE group shall be included only once per DCH per set of combined RLs.
≥≥DCH ID	M			
≥≥Binding ID	M			
≥≥Transport Layer Address	M			
≥DCH to be Modified		<i>0..<maxnoofDCHs></i>		Only one DCH per set of coordinated DCHs shall be included. The IE group shall be included only once per DCH per set of combined RLs.
≥≥DCH ID	M			
≥≥Binding ID	M			
≥≥Transport Layer Address	M			
Criticality Diagnostics	O			

Range Bound	Explanation
MaxnoofDCHs	Maximum number of DCHs for a UE.
MaxnoofRLs	Maximum number of RLs for a UE.

9.1.18 RADIO LINK FAILURE INDICATION

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
RL Information	M	<i>1 .. <MaxnoofRLs></i>		
≥RL ID	M			
≥Cause	M			

Range bound	Explanation
MaxnoofRLs	Maximum no. of RLs for one UE.

9.1.19 RADIO LINK RESTORE INDICATION

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
RL Information		1.. <MaxnoofRLs>		
>RL ID	M			

Range bound	Explanation
MaxnoofRLs	Maximum no. of RLs for one UE.

9.1.20 DL POWER CONTROL REQUEST [FDD]

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
CHOICE <i>procedure scope</i>				
>"ALL RL"				
>>DL Reference Power	M			
>"Individual RLs"				
>>DL Reference Power Information		1..<maxnoofRLs>		
>>>RL ID	M			
>>>DL Reference Power	M		DL Power	The SRNS requested downlink power to be used by the downlink inner loop power control to eliminate the power drifting problem.

Range Bound	Explanation
MaxnoofRLs	Maximum number of RLs for one UE.

9.1.21 PHYSICAL CHANNEL RECONFIGURATION REQUEST

9.1.21.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
RL Information		1		
>RL ID	M			
>DL Code Information		1.. <maxnoofDLCode s>		
>>DL Scrambling Code	M			
>>FDD DL Channelisation Code Number	M			

Range bound	Explanation
MaxnoofDLcodes	Maximum number of DL codes for one UE

9.1.21.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
RL Information		1		
>RL ID	M			
>>UL CTrCH Information		1..<maxnoofCCTrCHs>		
>>>CCTrCH ID	M			
>>>UL DPCH Information		1..<MaxnoofDPC Hs>		
>>>>DPCH ID	M			
>>>>TDD Channelisation Code	O			
>>>>Burst Type	O			
>>>>Midamble Shift	O			
>>>>Time Slot	O			
>>>>TDD Physical Channel Offset	O			
>>>>Repetition Period	O			
>>>>Repetition Length	O			
>>>>TFCI Presence	O			
>>>DL CTrCH Information		1..<maxnoofCCTrCHs>		
>>>>CCTrCH ID	M			
>>>>DL DPCH Information		1..<MaxnoofDPC Hs>		
>>>>>DPCH ID	M			
>>>>>TDD Channelisation Code	O			
>>>>>Burst Type	O			
>>>>>Midamble Shift	O			
>>>>>Time Slot	O			
>>>>>TDD Physical Channel Offset	O			
>>>>>Repetition Period	O			
>>>>>Repetition Length	O			
>>>>>TFCI Presence	O			

Range bound	Explanation
MaxnoofDPCHs	Maximum no. of DPCHs for one CCTrCH.
MaxnoofCCTrCHs	Maximum number of CCTrCHs for a UE.

9.1.22 PHYSICAL CHANNEL RECONFIGURATION COMMAND

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
CFN	M			
Criticality Diagnostics	O			

9.1.23 PHYSICAL CHANNEL RECONFIGURATION FAILURE

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
Cause	M			
Criticality Diagnostics	O			

9.1.24 UPLINK SIGNALLING TRANSFER INDICATION

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
UC-ID	M			
SAI	M			
C-RNTI	M			
S-RNTI	M			
D-RNTI	O			
L3 Information	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
URA ID	M			
Multiple URAs Indicator	M			
RNCs with Cells in the Accessed URA		0 .. <MaxRNCinURA-1>		
>RNC-Id	M			

Range bound	Explanation
MaxRNCinURA	Maximum number of RNC in one URA

9.1.25 DOWNLINK SIGNALLING TRANSFER REQUEST

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
C-Id	M			
D-RNTI	M			
L3 Information	M			
D-RNTI Release Indication	M			

9.1.26 RELOCATION COMMIT

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
D-RNTI	O			
RANAP Relocation Information	O			

9.1.27 PAGING REQUEST

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
CHOICE <i>paging area</i>				
>"URA"				
>>URA-Id	M			
>"Cell"				
>>C-Id	M			
SRNC-Id	M		RNC-Id	
S-RNTI	M			
DRX Parameter	M			

9.1.28 DEDICATED MEASUREMENT INITIATION REQUEST

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction Id	M			
Measurement Id	M			
Dedicated Measurement Object Type	M			
CHOICE <i>Dedicated Measurement Object Type</i>				
>"RL"				
>>RL Information		1..<maxnoofRLs>		
>>>RL-id	M			
>>>DPCH Id	O			
Dedicated Measurement Type	M			
Measurement Characteristics	M			
Report Characteristics	M			

Range bound	Explanation
MaxnoofRLs	Maximum number of individual RLs a measurement can be started on.

9.1.29 DEDICATED MEASUREMENT INITIATION RESPONSE

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction Id	M			Are both transaction id and Measurement id needed ?
Measurement Id	M			
CHOICE <i>Dedicated Measurement Object Type</i>				Dedicated Measurement Object Type the measurement was initiated with
>"RL"				
>>RL Information		1..<maxnoofRLs>		
>>>RL-id	M			
>>>DPCH Id	O			
>>>Dedicated Measurement Value	M			
>"ALLRL"				
>>Dedicated Measurement Value	M			
CFN	O			Dedicated Measurement Time Reference
Criticality Diagnostics	O			

Range bound	Explanation
MaxnoofRLs	Maximum number of individual RLs the measurement can be started on.

9.1.30 DEDICATED MEASUREMENT INITIATION FAILURE

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction Id	M			
Measurement Id	M			
Cause	M			
Criticality Diagnostics	O			

9.1.31 DEDICATED MEASUREMENT REPORT

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction Id	M			
Measurement Id	M			
CHOICE <i>Dedicated Measurement Object Type</i>				Dedicated Measurement Object Type the measurement was initiated with
>"RL"				
>>RL Information		1..<maxnoofRLs>		
>>>RL-id	M			
>>>DPCH Id	O			
>>>Dedicated Measurement Value	M			
>"ALLRL"				
>>Dedicated Measurement Value	M			
CFN	O			Dedicated Measurement Time Reference

Range bound	Explanation
MaxnoofRLs	Maximum number of individual RLs the measurement can be started on.

9.1.32 DEDICATED MEASUREMENT TERMINATION REQUEST

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction Id	M			
Measurement Id	M			

9.1.33 DEDICATED MEASUREMENT FAILURE INDICATION

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction Id	M			
Measurement Id	M			
Cause	M			

9.1.34 COMMON TRANSPORT CHANNEL RESOURCES RELEASE REQUEST

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
D-RNTI	M			
C-RNTI	O			Release of an individual C-RNTI.

9.1.35 COMMON TRANSPORT CHANNEL RESOURCES REQUEST

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
D-RNTI	M			
Transport Bearer Request Indicator	M			Request a new transport bearer or to use an existing bearer for the user plane.
Transport Bearer ID	M			Indicates the lur transport bearer to be used for the user plane.

9.1.36 COMMON TRANSPORT CHANNEL RESOURCES RESPONSE

9.1.36.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
S-RNTI	M			
FACH Info for S-CCPCH coupled to PRACH				
≥Priority Indicator & Initial Window Size		1..16		Provide Information for each priority class used
>>FACH Priority Indicator	M			
≥MAC-c SDU Length		1..<MaxNbMACcSDULength>		
>>>MAC-c SDU Length	M			
>>FACH Initial Window Size	M			
FACH Info for optional S-CCPCH	O			
≥FDD S-CCPCH Offset	M			Corresponds to: $\tau_{S-CCPCH,k}$, see ref. [Error! Reference source not found.]
≥DL Scrambling Code	M			
≥FDD DL Channelisation Code Number	M			
≥TFCS	M			For the DL.
≥Secondary CCPCH Slot Format	M			
≥Pilot Bits Used Indicator	M			
≥MultiplexingPosition	M			
≥STTD Indicator	M			
≥Priority Indicator & Initial Window Size		1..16		Provide Information for each priority class used
>>FACH Priority Indicator	M			
≥Data Frame Size		1..<MaxNbMACcSDULength>		
>>>MAC-c SDU Length	M			
>>FACH Initial Window Size	M			
Transport Layer Address	O			
Binding Identity	O			
Criticality Diagnostics	O			

Range Bound	Explanation
MaxNbMACcSDULength	Maximum number of different MAC-c SDU Lengths.

9.1.36.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
S-RNTI	M			
FACH Info for S-CCPCHs coupled to PRACH		0..1		
>>Priority Indicator & Initial Window Size		1..16		Provide Information for each priority class used
>>>FACH Priority Indicator	M			
>>>MAC-c SDU Length		1..<MaxNbMACcSDU Length>		
>>>>MAC-c SDU Length	M			
>>>FACH Initial Window Size	M			
FACH Info for optional group of S-CCPCHs		0..1		
>>TFCS	M			For DL CCTrCH supporting several Secondary CCPCHs
>>Secondary CCPCH	M	1..<MaxnoofSCCPCHs>		
>>>TDD Channelisation Code	M			
>>>Time Slot	M			
>>>Burst Type	M			
>>>Midamble shift	M			
>>>TDD Physical Channel Offset	M			
>>>Repetition Period	M			
>>>Repetition Length	M			
>>>STTD Indicator	M			
>>>Priority Indicator & Initial Window Size		1..16		Provide Information for each priority class used
>>>>FACH Priority Indicator	M			
>>>>Data Frame Size		1..<MaxNbMACcSDU Length>		
>>>>>MAC-c SDU Length	M			
>>>>>FACH Initial Window Size	M			
>>>Transport Layer Address	O			
>>>Binding Identity	O			
Criticality Diagnostics	O			

Range Bound	Explanation
MaxNbMACcSDULength	Maximum number of different MAC-c SDU Lengths.
MaxnoofSCCPCHs	TBD

9.1.37 COMMON TRANSPORT CHANNEL RESOURCES FAILURE

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
S-RNTI	M			
Cause	M			
Criticality Diagnostics	O			

9.1.38 COMPRESSED MODE PREPARE [FDD]

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type				
Transaction ID				
TGP1	M		Gap Period	Applies only to the first and all the subsequent odd gaps if TGP2 is present, see ref. [Error! Bookmark not defined.].
TGP2	O		Gap Period	
TGL	M			
TGD	M			
PD	M			
UL/DL Compressed Mode Selection	M			
Compressed Mode Method	M			
Gap Position Mode	M			
SN	C-Flex			
Downlink Frame Type	M			
Scrambling Code Change	C-SF/2			
Power Control Mode	M			
Power Resume Mode	M			
Uplink Delta Eb/No	M			
Uplink Delta Eb/No After	M			

Condition	Explanation
Flex	This IE is present only if "Gap position Mode" equals to 'flexible'.
SF/2	This IE is present only if Compressed Mode Method equals to SF/2

9.1.39 COMPRESSED MODE READY [FDD]

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
Criticality Diagnostics	O			

9.1.40 COMPRESSED MODE FAILURE [FDD]

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
Cause	M			
Criticality Diagnostics	O			

9.1.41 COMPRESSED MODE COMMIT [FDD]

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
CFN	M			

9.1.42 COMPRESSED MODE CANCEL [FDD]

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			

9.1.43 ERROR INDICATION

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction Id	M			
Cause	C_ifalone			
Criticality Diagnostics	C_ifalone			

Condition	Explanation
C_ifalone	At least either of Cause IE or Criticality Diagnostics IE shall be present.

9.2 Information Element Functional Definition and Contents

9.2.1 Common Parameters

This chapter contains parameters that are common to FDD and TDD.

9.2.1.1 Allocation/Retention Priority

This parameter indicates the priority level in the allocation and retention of DCH resources in DRNS.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
9.2.1.1 Allocation/Retention Priority			Frame Handling Priority	

9.2.1.2 Allowed Queuing Time

This parameter specifies the maximum queuing time that is allowed in the DRNS. The default value is no queuing.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Allowed Queuing Time			INTEGER(0..60)	Seconds

9.2.1.3 Binding ID

The Binding ID is the identifier of a user data stream. It is allocated at the DRNS and it is unique for each transport bearer under establishment to/from the DRNS. The length of this parameter is variable.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Binding ID			Octetstring (1..4,...)	

9.2.1.4 BLER

This Block Error Rate defines the radio interface Transport Block Error Rate that shall be guaranteed to the DCH by the SRNC.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
BLER			INTEGER (-63..0)	Step 0.1. (Range -6.3...0). It is the Log10 of the BLER

9.2.1.5 Cause

The purpose of the cause information element is to indicate the reason for a particular event for the whole protocol.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Cause Group	M		ENUMERATED (Radio Network Layer, Transport Layer, Protocol, Misc)	
<i>CHOICE cause group</i>				
<i>>Radio Network Layer</i>				
<i>>>Radio Network Layer Cause</i>	M		ENUMERATED (Unknown C-ID, Cell not Available, Power Level not Supported, UL Scrambling Code Already in Use, DL Radio Resources not Available, UL Radio Resources not Available, Measurement not Supported For The Object, Macrodiversity Combining Not Possible, Reconfiguration not Allowed, Requested Configuration not Supported Synchronisation Failure, Unspecified)	
<i>>Transport Layer</i>				
<i>>>Transport Layer Cause</i>	M		ENUMERATED (Transport link failure, Transmission port not available, Unspecified)	
<i>>Protocol</i>				
<i>>>Protocol Cause</i>			ENUMERATED (Transaction not Allowed, Transfer Syntax Error, Abstract Syntax Error (Reject), Abstract Syntax Error (Ignore and Notify), Message not Compatible with Receiver State, Semantic Error, Unspecified)	
<i>>Misc</i>				
<i>>>Miscellaneous Cause</i>	M		ENUMERATED (Control Processing Overload Hardware Failure, O&M Intervention, Not enough User Plane Processing Resources, Unspecified)	

9.2.1.6 Cell Identifier (C-Id)

The C-ID (Cell Identifier) is the identifier of a cell in one RNS.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
C-ID			INTEGER (0...65535)	

9.2.1.7 Cell Parameter ID

The Cell Parameter ID identifies unambiguously the Code Groups, Scrambling Codes, Midambles and Toffset (see table 9 of ref. [Error! Reference source not found.]).

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Cell Parameter ID			INTEGER (0...127)	

9.2.1.8 CFN

Connection Frame Number for the radio connection, see ref. [Error! Reference source not found.].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
CFN			INTEGER (0... 255)	

9.2.1.9 CN CS Domain Identifier

Identification of the CN node in the CS Domain.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
CN PS Domain Identifier				
≥PLMN Id	M		OCTET STRING (3)	<ul style="list-style-type: none"> - digits 0 to 9, two digits per octet, - each digit encoded 0000 to 1001, - 1111 used as filler - bit 4 to 1 of octet n encoding digit 2n-1 - bit 8 to 5 of octet n encoding digit 2n <p>-The PLMN-ID consists of 3 digits from MCC followed by either</p> <ul style="list-style-type: none"> -a filler plus 2 digits from MNC (in case of 2 digit MNC) or -3 digits from MNC (in case of a 3 digit MNC).
≥LAC	M		OCTET STRING (3)	0000 and FFFE not allowed

9.2.1.10 CN PS Domain Identifier

Identification of the CN Node in the PS Domain.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
CN PS Domain Identifier				
≥PLMN Id	M		OCTET STRING (3)	<ul style="list-style-type: none"> - digits 0 to 9, two digits per octet, - each digit encoded 0000 to 1001, - 1111 used as filler - bit 4 to 1 of octet n encoding digit 2n-1 - bit 8 to 5 of octet n encoding digit 2n <p>-The PLMN-ID consists of 3 digits from MCC followed by either</p> <ul style="list-style-type: none"> -a filler plus 2 digits from MNC (in case of 2 digit MNC) or -3 digits from MNC (in case of a 3 digit MNC).
≥LAC	M		OCTET STRING (2)	0000 and FFFE not allowed
≥RAC	M		OCTET STRING (1)	

9.2.1.11 Criticality Diagnostics

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Criticality Diagnostics				
≥Procedure Code	O		INTEGER (0..255)	Procedure code is to be used if Criticality diagnostics is part of Error Indication procedure, and not within the response message of the same operation that caused the error
≥Triggering Message	O		ENUMERATED (initiating message, successful outcome, unsuccessful outcome, outcome)	The Triggering Message is used only if the Criticality diagnostics is part of Error Indication except when the procedure code is not understood.
≥Criticality Response	O		ENUMERATED (reject, ignore, notify)	This Criticality response IE is used for reporting the Criticality of the Triggering message
≥Transaction Id	O		INTEGER (0..255)	
Information Element Criticality Diagnostics		<i>1..<maxnoof errors></i>		
≥Criticality Response	M		ENUMERATED (reject, ignore, notify)	The Criticality response IE is used for reporting the criticality of the triggering IE. The value 'Ignore' shall never be used.
≥IE Id	M		INTEGER (0..65535)	The IE Id of the not understood IE as defined in the ASN.1 part of the specification.

Range bound	Explanation
maxnooferrors	Maximum no. of IE errors allowed to be reported with a single message. The value for maxnooferrors is 256.

9.2.1.12 C-RNTI

C-RNTI (Cell RNTI) is the UE identifier in the CRNC to be used over the radio interface. It is unique in the cell.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
C-RNTI			INTEGER(0..65535)	

9.2.1.13 DCH Combination Indicator

The DCH Combination Indicator is used to indicate the multiplexing of more than one DCH on transport bearer. The value should be unique for each group of coordinated DCH's per request message.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DCH Combination Ind			INTEGER (0..255)	

9.2.1.14 DCH ID

The DCH ID is the identifier of an active dedicated transport channel. It is unique for each active DCH among the active DCHs simultaneously allocated for the same UE.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DCH ID			INTEGER (0..255)	

9.2.1.15 Dedicated Measurement Object Type

The Dedicated Measurement Object type indicates the type of object that the measurement is to be performed on.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Dedicated Measurement Object Type			ENUMERATED (RL,ALLRL, ...)	

9.2.1.16 Dedicated Measurement Type

The Dedicated Measurement Type identifies the type of measurement that shall be performed.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Dedicated Measurement Type			ENUMERATED (SIR, SIR Error, Transmitted Code Power, RSCP,...)	RSCP is used by TDD only.

NOTE: For definitions of the measurement types refer to ref. [Error! Bookmark not defined.] and [Error! Reference source not found.].

9.2.1.17 Dedicated Measurement Value

The Dedicated Measurement Value shall be the most recent value for this measurement, for which the reporting criteria were met.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Dedicated measurement Value				
≥SIR value	O		Enumerated(-10 .. 20), step 0.1 dB	
≥SIR error Value	O		Enumerated (-10 .. 10), step 0.1 dB	If SIRerror<=-10, SIR error Value shall be set to -10 If SIRerror=>10, SIR error Value shall be set to 10
≥Transmitted Code Power Value	O		Enumerated (-35 .. 15), step 0.1 dB	Relative to CPICH
≥RSCP	O		TBD	TDD only.

<Editors Note: Some adjustment of the ranges for these measurements might be needed as they await a decision on range for this measurement in TSG RAN WG1>

9.2.1.18 Downlink Eb/No Target

It is the Target Downlink Eb/No that shall be used as initial value by the UE.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Downlink Eb/No Target			Uplink Eb/No	

9.2.1.19 D-RNTI

D-RNTI is the UE context identifier in the DRNC.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
D-RNTI			Integer(0..2 ²⁰ -1)	

9.2.1.20 D-RNTI Release Indication

The D-RNTI Release Indication indicates whether or not a CRNC shall release the D-RNTI allocated for a particular UE.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
D-RNTI Release Indication			ENUMERATED (Release D-RNTI, not Release D-RNTI)	

9.2.1.21 DRX Parameter

[Editor's note: This parameter needs to be defined. Contributions are invited.]

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DRX Parameter			TBD	

9.2.1.22 FACH Initial Window Size

Indicates the initial number of MAC-c SDUs that may be transmitted before an acknowledgement is received from the DRNC.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
FACH Initial Window Size			INTEGER (0..255)	Number of frames MAC-c SDUs. 255 = Unlimited number of FACH data frames.

9.2.1.23 FACH Priority Indicator

Indicates the relative priority of the FACH data frame. Used by the DRNC when scheduling FACH traffic.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
FACH Priority Indicator			INTEGER (0..15)	Relative priority of the FACH data frame: 0=Lowest Priority ... 15=Highest Priority

9.2.1.24 Frame Handling Priority

This parameter indicates the priority level to be used during the lifetime of the DCH/DSCH for temporary restriction of the allocated resources due overload reason.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Frame Handling Priority			INTEGER (0..15)	0=Lowest Priority, ... 15=Highest Priority

9.2.1.25 Frame Offset

Frame Offset is the required offset between the dedicated channel downlink transmission frames (CFN, Connection Frame Number) and the broadcast channel frame offset (Cell Frame Number). The Frame_offset is used in the translation between Connection Frame Number (CFN) on Iub/Iur and least significant 8 bits of SFN (System Frame Number) on Uu. The Frame Offset is UE and cell specific.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Frame Offset			INTEGER (0..255)	Frames

9.2.1.26 MAC-c SDU Length

Indicates the MAC-c SDU Length. There may be multiple data frame sizes per priority class.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
MAC-c SDU Length			INTEGER (1..5000)	Size of the MAC-c SDU in number of bits.

9.2.1.27 Mean Bit Rate

It is the mean user data rate that is expected to be carried by the transport channels of one radio link.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Mean Bit Rate			INTEGER (1...2000)	Kbit/seconds

9.2.1.28 Measurement Characteristics

The Measurement Characteristics indicates how the measurement shall be performed.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Measurement Characteristics				
≥Measurement Frequency	M		TBD	
≥Averaging Duration	M		TBD	

Editors Note: The exact definition and structure of this information element awaits decisions in TSG RAN WG2.

9.2.1.29 Measurement ID

The Measurement ID uniquely identifies any measurement on dedicated resources requested over RNSAP.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Measurement ID			Integer(0 .. 2 ²⁰ -1)	

9.2.1.30 Message Type

The Message Type uniquely identifies the message being sent.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type			ENUMERATED (RL Setup Request, RL Setup Response, RL Setup Failure, RL Addition Request, RL Addition Response, RL Addition Failure, RL Deletion Request, RL Deletion Response, RL Reconfiguration Prepare, RL Reconfiguration Ready, RL Reconfiguration Commit, RL Reconfiguration Failure, RL Reconfiguration Cancel, RL Reconfiguration Request, RL Reconfiguration Response, RL Failure Indication, RL Restore Indication, DL Power Control Request, Physical Channel Reconfiguration Request, Physical Channel Reconfiguration Command, Physical Channel Reconfiguration Failure, UL Signalling Transfer Indication, DL Signalling Transfer Request, Relocation Commit, Paging Request, Dedicated Measurement Initiation Request, Dedicated Measurement Initiation Response, Dedicated Measurement Initiation Failure, Dedicated Measurement Report, Dedicated Measurement Termination Request, Dedicated Measurement Failure Indication, Common Transport Channel Resources Release Request, Common Transport Channel Resources Request, Common Transport Channel Resources Response, Common Transport Channel Resources Failure, Compressed Mode Prepare, Compressed Mode Ready, Compressed Mode Failure, Compressed Mode Commit, Compressed Mode Cancel, Error Indication, ...)	Future extensions shall be possible

9.2.1.31 Multiple URAs Indicator

The Multiple URAs Indicator indicates whether the accessed cell has multiple URAs.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Multiple URAs Indicator			Enumerated (Multiple URAs exist, Single URA Exists)	

9.2.1.32 Payload CRC Present Indicator

This parameter indicates whether FP payload 16 bit CRC is used or not.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Payload CRC Presence Indicator			ENUMERATED (CRC Included, CRC not included)	

9.2.1.33 Primary CPICH Power

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Primary CPICH power			ENUMERATED (-15..40)	Unit dBm Granularity 0.1 dB.

9.2.1.34 Primary Scrambling Code

The Primary scrambling code to be used in the cell.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Primary Scrambling Code			INTEGER (0 .. 511)	

9.2.1.35 PSCH Time Slot

The PSCH Time Slot is only applicable if the value of *Sync Case* IE is Case 2 or 3.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
PSCHTime Slot			INTEGER(0..6)	

9.2.1.36 Puncture Limit

The maximum amount of puncturing for a transport channel in rate matching.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Puncture Limit			INTEGER (0..100)	%

9.2.1.37 RANAP Relocation Information

This parameter is transparent to the RNSAP. The parameter contains information for the Relocation procedure as defined in [Error! Reference source not found.].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
RANAP Relocation Information			Bit String	The contents is defined in ref. [Error! Reference source not found.].

9.2.1.38 Report Characteristics

The report characteristics, defines how the reporting shall be performed.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Report characteristics				
≥Report characteristics type			ENUMERATED (On Demand, Periodic, Event A, Event B, Event C, Event D, Event E, Event F)	
≥Periodic Report Information				
≥≥Report Periodicity	M		ENUMERATED (10ms...1min) step 10ms, (1min...1hr) step 1min	The frequency with which the Node B shall send measurement reports. First working assumption!
≥Event A				
≥≥Measurement Threshold	M		TBD	The threshold for which the Node B shall trigger a measurement report.
≥≥Measurement Hysteresis Time	O		ENUMERATED (10ms...1min) step 10ms,...	
≥Event B				
≥≥Measurement Threshold	M		TBD	The threshold for which the Node B shall trigger a measurement report.
≥≥Measurement Hysteresis Time	O		ENUMERATED (10ms...1min) step 10ms,...	
≥Event C				
≥≥Measurement Increase Threshold	M		TBD	
≥≥Measurement Change Time	M		ENUMERATED (10ms...1min) step 10ms,...	The time the measurement entity shall rise on (in ms), in order to trigger a measurement report.
≥Event D				
≥≥Measurement Decrease Threshold	M		TBD	
≥≥Measurement Change Time	M		ENUMERATED (10ms...1min) step 10ms,...	The time the measurement entity shall fall (in ms), in order to trigger a measurement report.
≥Event E				
≥≥Measurement Threshold 1	M		TBD	
≥≥Measurement Threshold 2	O		TBD	
≥≥Measurement	O		ENUMERATED	The hysteresis time in ms

Hysteresis Time			ED (10ms...1min) step 10ms,...	
>>Report Periodicity	O		ENUMERATED (10ms...1min) step 10ms, (1min...1hr) step 1min	The frequency with which the Node B shall send measurement reports.
>Event F	C – Event F			
>>Measurement Threshold 1	M		TBD	
>>Measurement Threshold 2	O		TBD	
>>Measurement Hysteresis Time	O		ENUMERATED (10ms...1min) step 10ms,...	The hysteresis time in ms
>>Report Periodicity	O		ENUMERATED (10ms...1min) step 10ms, (1min...1hr) step 1min	The frequency with which the Node B shall send measurement reports.

Editors note: Encoding of threshold TBD.

Condition	Explanation
C-Periodic	Valid if <i>Report Characteristics Type</i> IE indicates "periodic"
C-Event A	Valid if <i>Report Characteristics Type</i> IE indicates "Event A"
C-Event B	Valid if <i>Report Characteristics Type</i> IE indicates "Event B"
C-Event C	Valid if <i>Report Characteristics Type</i> IE indicates "Event C"
C-Event D	Valid if <i>Report Characteristics Type</i> IE indicates "Event D"
C-Event E	Valid if <i>Report Characteristics Type</i> IE indicates "Event E"
C-Event F	Valid if <i>Report Characteristics Type</i> IE indicates "Event F"

9.2.1.39 RL ID

The RL ID is the unique identifier for one RL associated with a UE.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
RL ID			INTEGER (0..31)	

9.2.1.40 RLC Mode

This parameter defines the RLC mode of the logical channels multiplexed on the transport channel.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
RLC Mode			ENUMERATED(Acknowledged Mode, Unacknowledged Mode, Transparent Mode)	

9.2.1.41 RNC-Id

This is the identifier of one RNC in UTRAN.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
≥RNC Id			INTEGER (0..4095)	

9.2.1.42 Service Area Identifier (SAI)

This information element is used to uniquely identify an area consisting of one or more cells belonging to the same Location Area. Such an area is called a Service Area and can be used for indicating the location of a UE to the CN.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SAI				
≥PLMN Id	M		OCTET STRING (3)	<ul style="list-style-type: none"> - digits 0 to 9, two digits per octet, - each digit encoded 0000 to 1001, - 1111 used as filler - bit 4 to 1 of octet n encoding digit 2n-1 - bit 8 to 5 of octet n encoding digit 2n <p>-The PLMN-ID consists of 3 digits from MCC followed by either</p> <ul style="list-style-type: none"> -a filler plus 2 digits from MNC (in case of 2 digit MNC) or -3 digits from MNC (in case of a 3 digit MNC).
≥LAC	M		OCTET STRING (2)	0000 and FFFE not allowed
≥SAC	M		OCTET STRING (2)	

9.2.1.43 S-RNTI

S-RNTI is the UE context identifier in the SRNC.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
S-RNTI			Integer(0..2 ²⁰ -1)	

9.2.1.44 Sync Case

The PSCH and PCCPCH in a TDD cell are mapped on one or two downlink slots per frame. There are three cases of Sync Case as follows:

- Case 1) PSCH and PCCPCH allocated in a single TS#k
- Case 2) PSCH in two TS and PCCPCH in the same two TS: TS#k and TS#k+8
- Case 3) PSCH in two TS, TS#k and TS#k+8, and the PCCPCH in TS#i, pointed by PSCH.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Sync Case			ENUMERATED (Case1, Case2, Case3)	

9.2.1.45 TFCI Presence

The TFCI Presence parameter indicates whether the TFCI shall be included.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TFCI presence			ENUMERATED (Present, not present)	

9.2.1.46 Time Slot

The Time Slot represents the time interval assigned to a Physical Channel referred to the start of a Radio Frame.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Time Slot			INTEGER (0..14)	

9.2.1.47 ToAWE

ToAWE is the window endpoint. DL data frames are expected to be received before this window endpoint. ToAWE is defined with a positive value relative Latest Time of Arrival (LToA). A data frame arriving after ToAWE gives a Timing Adjustment Control frame response.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
ToAWE			INTEGER (0..2559)	msec.

9.2.1.48 ToAWS

ToAWS is the window startpoint. DL data frames are expected to be received after this window startpoint. ToAWS is defined with a positive value relative Time of Arrival Window Endpoint (ToAWE). A data frame arriving before ToAWS gives a Timing Adjustment Control frame response.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
ToAWS			INTEGER (0..1279)	msec.

9.2.1.49 Transaction ID

The Transaction ID is used to associate all the messages belonging to the same pending procedure of the same RNSAP procedure type (e.g. Radio Link Addition), i.e. the Request-, Response-, Confirm-type of messages have the same Transaction ID. The messages belonging to different pending procedures have different Transaction IDs.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Transaction ID			INTEGER (0..255)	Since the scope is not clear, the range of this parameter is to be considered a working assumption

9.2.1.50 Transport Bearer ID

The Transport Bearer ID uniquely identifies an Iur transport bearer.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Transport Bearer ID			INTEGER (0..4095)	

9.2.1.51 Transport Bearer Request Indicator

Indicates whether an Iur transport bearer needs to be established for carrying the FACH data stream(s), or whether an existing transport bearer will be used.

IE/Group Name	Presence	Mult	IE type and reference	Semantics description
Transport Bearer Request Indicator			ENUMERATED(Bearer Requested, Bearer not Requested)	

9.2.1.52 Transport Layer Address

Transport Layer Address defines the transport address of the DRNS. For details on the Transport Address used see **[Error! Reference source not found.]**.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Transport Layer Address			Bit string(1... 160, ...)	

9.2.1.53 Transport Format Combination Set

The Transport Format Combination Set is defined as a set of Transport Format Combinations on a Coded Composite Transport Channel. It is the allowed Transport Format Combinations of the corresponding Transport Channels. The DL Transport Format Combination Set is applicable for DL Transport Channels.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TFCs		1 to <maxnoofTFCs>		The first instance of the parameter corresponds to TFC zero, the second to 1 and so on.
≥CTFC	M		INTEGER(0..MaxCTFC-1)	Integer number calculated according to ref. [Error! Reference source not found.] .

Range bound	Explanation
<i>MaxnoofTFCs</i>	The maximum number of Transport Format Combinations (1024).
<i>MaxCTFC</i>	Maximum number of the CTFC value is calculated according to the following: $\sum_{i=1}^I (L_i - 1)P_i$ with the notation according to ref. [Error! Reference source not found.] .

9.2.1.54 Transport Format Set

The Transport Format Set is defined as the set of Transport Formats associated to a Transport Channel, e.g. DCH.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Transport Format Set				
≥Dynamic Transport Format Information		1..<maxTFcount>		
>>Number of Transport blocks	M		INTEGER (0..4095)	
>>Transport Block Size	C – Blocks		INTEGER (1..5000)	Bits
>CHOICE mode				
>>TDD				
>>>Transmission time interval	C-TTIdynamic	1..<maxTTIcount>	Enumerated(10, 20, 40, 80)	
>Semi-static Transport Format Information				
≥Transmission time interval	C-TTIsemistatic		ENUMERATED (10, 20, 40, 80)	msec
≥Type of channel coding	M		ENUMERATED (No coding, Convolutional, Turbo)	
≥Coding Rate	C – Coding		ENUMERATED (1/2, 1/3)	
≥Rate matching attribute	M		INTEGER (1..maxRM)	
≥CRC size	M		ENUMERATED (0, 8, 12, 16, 24)	
>CHOICE mode				
>>TDD				
>>>2 nd interleaving mode	M		Enumerated (Frame related, Timeslot related)	

Condition	Explanation
Blocks	This IE is only present if "Number of Transport Blocks" is greater than 0.
Coding	This IE is only present if IE "Type of channel coding" is "Convolutional" or "Turbo"
TTIdynamic	This IE is mandatory if not defined as semistatic parameter. Otherwise it is absent.
TTIsemistatic	This IE is mandatory if not defined as dynamic parameter. Otherwise it is absent.

Range bound	Explanation
MaxTFcount	The maximum number of different transport formats that can be included in the Transport format set for one transport channel is 32.
MaxRM	The maximum number that could be set as rate matching attribute for a transport channel is 256.
MaxTTIcount	The amount of different TTI that are possible for that transport format is 4.

9.2.1.55 UARFCN

The UTRAN Absolute Radio Frequency Channel Number defines the carrier.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UARFCN			INTEGER (0..698, ...)	Corresponds to: 1885.2MHz..2024.8MHz see ref. [Error! Reference source not found.].

9.2.1.56 UL FP Mode

This parameter defines if normal or silent mode of the Frame Protocol shall be used for the UL.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UL FP mode			ENUMERAT ED(Normal, Silent)	

9.2.1.57 Uplink Eb/No

The UL Eb/No indicates a received UL Eb/No.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Uplink Eb/No			INTEGER (0..255)	Resolution is 0.1 dB, range 0- 25.5 dB.

9.2.1.58 UL Interference Level

The parameter indicates the UL Interference Level in a cell. The UL Interference Level is used by the UE to calculate its initial UL power for the cell.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UL Interference Level			ENUMERAT ED (-128..-60)	Unit: dBm, Step size=0.1 dB

9.2.1.59 URA ID

IE/Group Name	Presence	Range	IE type and reference	Semantics description
URA ID			INTEGER (0..65 535)	

9.2.1.60 UTRAN Cell Identifier (UC-Id)

The UC-ID (UTRAN Cell identifier) is the identifier of a cell in one UTRAN.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UC-ID		1		
≥RNC-ID	M		INTEGER (0...4095)	
≥C-ID	M		C-ID	

9.2.1.61 L3 Information

This parameter contains the Layer 3 Information from a Uu message as received from the UE over the Uu interface or the Layer 3 Information for a Uu message to be sent to a UE by the CRNC, as defined in ref. **[Error! Reference source not found.]**.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
L3 Information			Bit String	The content is defined in ref. [Error! Reference source not found.] .

9.2.2 FDD Specific Parameters

This chapter contains parameters that are specific to FDD.

9.2.2.1 Chip Offset

The Chip Offset is defined as the radio timing offset inside a radio frame. The Chip Offset is used as offset for the DL DPCH relative to the Primary CPICH timing.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Chip Offset			INTEGER (0..38399)	Chips

9.2.2.2 Compressed Mode Method

Defines the method for generating the downlink compressed mode gap, as described in ref. **[Error! Reference source not found.]**.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Compressed Mode Method			ENUMERATED (None, Puncturing, SF/2, Gating)	None = restore the normal mode

9.2.2.3 D-Field Length

Defines the D Field size of the UL DPCH slot.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
D Field Length			ENUMERATED (1, 2)	

9.2.2.4 Diversity Control Field

The Diversity Control Field indicates if the current RL may, must or must not be combined with the already existing RLs.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Diversity Control Field			ENUMERATED (May, Must, Must not)	

9.2.2.5 Diversity Indication

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Diversity Indication			ENUMERATED (Combined, Not Combined)	

Define the diversity mode to be applied.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Diversity Mode			ENUMERATED (None, STTD, Closed loop mode 1, Closed loop mode2)	

9.2.2.7 DL DPCH Slot Format

Indicates the slot format used in DPCH in DL, according to ref. [**Error! Reference source not found.**].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DL DPCH Slot Format			INTEGER (0..16)	

9.2.2.8 DL Scrambling Code

DL Scrambling code to be used by the RL. One cell may have multiple DL Scrambling codes available.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DL Scrambling Code			INTEGER (0..15)	0= Primary scrambling code of the cell 1...15= Secondary scrambling code

9.2.2.9 Downlink Frame Type

This parameter defines if frame type 'A' or 'B' shall be used in downlink compressed mode. This is defined in [**Error! Reference source not found.**].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Downlink Frame Type			ENUMERATED (TypeA, TypeB)	

9.2.2.10 FDD DL Channelisation Code Number

The DL Channelisation Code Number indicates the DL Channelisation Code number for a specific DL physical channel.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
FDD DL Channelisation Code Number	M		INTEGER(0..255)	The maximum value is equal to the DL spreading factor -1

The Diversity Indication indicates if the RL has been or has not been combined with another RL.

9.2.2.6 Diversity Mode

9.2.2.11 Gap Position Mode

The gap position can be fixed or adjustable, as defined in ref. [Error! Reference source not found.].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Gap Position Mode			ENUMERATED (Fixed, Flexible)	

9.2.2.12 Gap Period (TGP)

Gap Period is the period of repetition of a set of consecutive frames containing up to 2 transmission gaps.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Gap Period			INTEGER(0..255)	Frames

9.2.2.13 Gap Starting Slot Number (SN)

It defines the slot number when the transmission gap starts.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SN			Time Slot	

9.2.2.14 Max Number of UL DPDCHs

This parameter is an UE Radio Access Capability parameter which is needed in rate matching algorithm.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Max Number of UL DPDCHs			INTEGER (1..6)	

9.2.2.15 Min UL Channelisation Code Length

Minimum UL channelisation code length (spreading factor) of a DPDCH which is supported by UE. Needed by rate matching algorithm.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Min UL Channelisation Code Length			ENUMERATED(4,8,16,32,64,128,256)	

9.2.2.16 Multiplexing Position

Multiplexing Position specifies whether fixed or flexible positions of transport channels shall be used in the physical channel.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Multiplexing Position			ENUMERATED(Fixed, Flexible)	

9.2.2.17 Pattern Duration (PD)

Pattern duration is the total time of then compressed mode pattern (all consecutive TGP) expressed in number of frames.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
PD			INTEGER(0..2047, ...)	Frames

9.2.2.18 Power Control Mode (PCM)

Power Control Mode specifies the uplink power mode applied during recovery period after each transmission gap in compressed mode. PCM can take 2 values (0 or 1). The different power control modes are described in ref. [**Error! Reference source not found.**].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Power Control Mode			ENUMERATED (0, 1,..)	

9.2.2.19 Power Offset

This IE defines a power offset respect the Downlink transmission power of a DPCH.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Power Offset			INTEGER (0...24)	Step 0.25 dB, range 0-6 dB

9.2.2.20 Power Resume Mode (PRM)

Power Resume Mode selects the uplink power control method to calculate the initial transmit power after the gap. PRM can take two values (0 or 1) and is described in ref. [**Error! Reference source not found.**].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Power Resume Mode			ENUMERATED (0, 1,..)	Described in ref. [Error! Reference source not found.].

9.2.2.21 Primary CPICH Ec/No

Energy per chip divided by the power density per band measured on the Primary CPICH by the terminal.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Primary CPICH Ec/No			INTEGER (-30...+30)	dB, step 1 dB

9.2.2.22 Propagation Delay (PD)

Propagation delay is the one-way propagation delay of the radio signal from the MS to the Node B.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Propagation Delay			INTEGER (0..255)	Chips. Step size is 3 chips. 0=0 chips, 1=3 chips, ...

9.2.2.23 S-Field Length

The UE uses the S Field of the UL DPCCH slot to send the SSST Cell ID to the network.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
S Field Length			ENUMERATED (1, 2)	

9.2.2.24 Scrambling Code Change

This parameter indicates whether the alternative scrambling code is used for compressed mode method 'SF/2'.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Scrambling Code Change			ENUMERATED (Change, No change)	

9.2.2.25 Slot Number (SN)

It defines the slot number when the transmission gap starts.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SN			Time Slot	

9.2.2.26 SSST Cell Identity

The SSST Cell ID is a temporary ID for SSST assigned to a cell.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SSST Cell Identity			ENUMERATED (a, b..., h)	

9.2.2.27 SSST Cell Identity Length

The SSST Cell ID Length parameter shows the length of the SSST Cell ID.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Cell ID Length			ENUMERATED (Short, Medium, Long)	

9.2.2.28 SSST Indication

The SSST Indication indicates whether SSST is in use by the UE or not.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SSDT Indication			ENUMERATED(SSDT Active in the UE, SSDT not Active in the UE)	

9.2.2.29 SSDT Support Indicator

The SSDT Support Indicator indicates whether a RL supports SSDT or not.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SSDT Support Indicator			ENUMERATED (SSDT Supported, SSDT not supported).	

9.2.2.30 TFCI Signalling Mode

This parameter indicates if the normal or split mode is used for the TFCI.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TFCI Signalling Mode			ENUMERATED (Normal, Split)	

9.2.2.31 TPC Downlink Step Size

This parameter indicates step size for the DL power adjustment.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TPC Downlink step size			ENUMERATED (0.5, 1)	

9.2.2.32 Transmission Gap Distance (TGD)

Transmission Gap Distance is the duration of transmission between two consecutive transmission gaps within a transmission gap period, expressed in number of frames. In case there is only one transmission gap in the transmission gap period, this parameter shall be set to zero.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TGD			INTEGER(0..255)	Frames

9.2.2.33 Transmit Gap Length (TGL)

Transmission Gap Length is the duration of no transmission, expressed in number of slots.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TGL			INTEGER (3,4,7,10,14)	Slot

9.2.2.34 UL/DL Compressed Mode Selection

This parameter specifies whether compressed mode is used in UL only, DL only or both UL and DL

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UL/DL Compressed Mode Selection			ENUMERATED (in UL only, DL only or both UL and DL)	

9.2.2.35 UL DPCCH Slot Format

Indicates the slot format used in DPCCH in UL, according to ref. [Error! Reference source not found.].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UL DPCCH Slot Format			INTEGER (0..5)	

9.2.2.36 UL Scrambling Code

The UL Scrambling Code is the scrambling code used by UE. Every UE has its specific UL Scrambling Code.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UL scrambling code				
≥UL Scrambling Code Number	M		INTEGER (0.. $2^{24}-1$)	
≥UL Scrambling Code Length	M		ENUMERATED (Short, Long)	

9.2.2.37 Uplink Delta Eb/No

The delta in uplink Eb/No that shall be added to the Eb/No target used during compressed mode frames.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Uplink Delta Eb/No			Enumerated (-6..+10dB)	Step 0.1 dB.

9.2.2.38 Uplink Delta Eb/No After

The delta in uplink Eb/No target that shall be added to the Eb/No target used one frame after the compressed mode frames.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Uplink Delta Eb/No after			Enumerated (-6..+10dB)	Step 0.1 dB.

9.2.3 TDD Specific Parameters

This chapter contains parameters that are specific to TDD.

9.2.3.1 Burst Type

Defines the burst type of the physical channel, see ref. **[Error! Reference source not found.]**.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Burst Type			ENUMERATED (Type1, Type2)	

9.2.3.2 CCTrCH ID

The CCTrCH ID identifies unambiguously a CCTrCH inside a Radio Link.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
CCTrCH ID			INTEGER (0..15)	

9.2.3.3 DPCH ID

The DPCH ID identifies unambiguously a DPCH inside a Radio Link.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DPCH ID			INTEGER (0..239)	

9.2.3.4 Midamble Shift

Different bursts transmitted simultaneously, using the same midamble code shall use different Midamble Shifts.

The 256 chip midamble supports 3 different time shifts, the 512 chips midamble may support 8 or even 16 time shifts.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Midamble Shift			INTEGER (0..15)	

9.2.3.5 Primary CCPCH RSCP

Received Signal Code Power is the received power on PCCPCH of the target cell after despreading. The reference point for the RSCP is the antenna connector at the UE, see ref. **[Error! Reference source not found.]**.

9.2.3.6 Repetition Length

The Repetition Length represents the number of consecutive Radio Frames inside a Repetition Period in which the same Time Slot is assigned to the same Physical Channel.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Repetition Length			INTEGER(1..63)	

9.2.3.7 Repetition Period

The Repetition Period represents the number of consecutive Radio Frames after which the same assignment scheme of Time Slots to a Physical Channel is repeated. This means that if the Time Slot K is assigned to a physical channel in the Radio Frame J , it is assigned to the same physical channel also in all the Radio Frames $J+n*Repetition\ Period$ (where n is an integer).

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Repetition Period			ENUMERATED (1,2,4,8,16,32,64)	

9.2.3.8 TDD Channelisation Code

The Channelisation Code Number indicates which Channelisation Code is used for a given Physical Channel. In TDD the Channelisation Code is an Orthogonal Variable Spreading Factor code, that can have a spreading factor of 1, 2, 4, 8 or 16.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TDD Channelisation Code			ENUMERATED ((1/1), (2/1), (2/2), (4/1),...(4/4), (8/1), (8/8), (16/1)... (16/16))	

9.2.3.9 TDD Physical Channel Offset

The TDD Physical Channel Offset represents the phase information for the allocation of a physical channel. (SFN mod Repetition Period = TDD Physical Channel Offset).

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TDD Physical Channel Offset			INTEGER (0..63)	

9.2.3.10 TFCI Coding

The TFCI Coding describes how the TFCI bits are coded. By default 1 TFCI bit is coded with 4 bits, 2 TFCI bits are coded with 8 bits, 3-5 TFCI bits are coded with 16 bits and 6-10 TFCI bits are coded with 32 bits.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TFCI Coding	M		Enumerated (4, 8, 16, 32)	

8.3.9 Radio Link Failure

8.3.9.1 General

This procedure is started by the DRNS when one or more radio links are no longer available.

This procedure shall use the signalling bearer connection for the relevant UE context.

The DRNC may initiate the Radio Link Failure procedure at any time after establishing a Radio Link.

8.3.9.2 Successful Operation

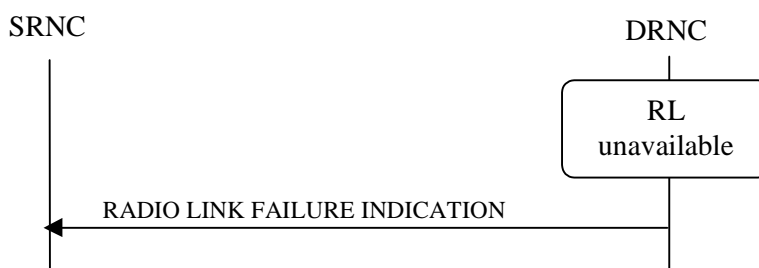


Figure 1: RL Failure procedure, Successful Operation

When DRNC detects that a one or more Radio Links are no longer available, it shall send the RL FAILURE INDICATION message to the SRNC. The message indicates the failed radio links with the most appropriate cause values defined in the *Cause IE*.

When the RL Failure procedure is used to notify ~~the non-achievement or~~ loss of UL synchronisation: the message shall be sent when indicated by the UL sync detection algorithm defined in [TS25.214 and TS25.224]. ~~when the UL synchronisation of the radio link is not achieved after any of the procedures RL Setup or RL Addition. The message shall also be sent if the UL synchronisation it is lost during an active connection.~~

Typical cause values are:

Radio Network Layer Causes:

- Synchronisation Failure

Miscellaneous Causes:

- Control Processing Overload
- HW Failure
- O&M Intervention

8.3.9.3 Abnormal Conditions

-

8.3.10 Radio Link Restoration

8.3.10.1 General

This procedure is used to notify establishment of and re-establishment of UL synchronisation. ~~after that the RL Failure procedure has been used to notify the loss of the synchronisation.~~

This procedure shall use the signalling bearer connection for the relevant UE context.

The DRNC may initiate the Radio Link Restoration procedure after establishing a Radio Link.

8.3.10.2 Successful Operation

**Figure 2: RL Restoration procedure, Successful Operation**

~~If the UL synchronisation is re-established, the DRNC shall send the RADIO LINK RESTORE INDICATION message to the SRNC when indicated by the UL sync detection algorithm defined in [TS25.214 and TS25.224]. The message shall be sent only if the RL Failure procedure has been previously used to notify the loss of UL synchronisation of the same Radio Link(s), and it shall not be sent if a RL Deletion procedure have been activated in the DRNC after the RL Failure has been sent.~~

8.3.10.3 Abnormal Conditions

-

<h2 style="margin: 0;">CHANGE REQUEST</h2>				Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.	
25.423 CR 057r1		Current Version: 3.0.0			
GSM (AA.BB) or 3G (AA.BBB) specification number ↑		↑ CR number as allocated by MCC support team			
For submission to: TSG RAN #7 <small>list expected approval meeting # here ↑</small>		for approval <input checked="" type="checkbox"/>		strategic <input type="checkbox"/> (for SMG use only)	
		for information <input type="checkbox"/>		non-strategic <input type="checkbox"/>	

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: ftp://ftp.3gpp.org/Information/CR-Form-v2.doc

Proposed change affects: (U)SIM ME UTRAN / Radio Core Network
(at least one should be marked with an X)

Source: RAN-WG3 **Date:** 28 February 2000

Subject: Problem with piggybacking RADIO LINK SETUP REQUEST message on SCCP: CR message

Work item:

Category: <small>(only one category shall be marked with an X)</small>	F Correction <input checked="" type="checkbox"/> A Corresponds to a correction in an earlier release <input type="checkbox"/> B Addition of feature <input type="checkbox"/> C Functional modification of feature <input type="checkbox"/> D Editorial modification <input type="checkbox"/>	Release:	Phase 2 <input type="checkbox"/> Release 96 <input type="checkbox"/> Release 97 <input type="checkbox"/> Release 98 <input type="checkbox"/> Release 99 <input checked="" type="checkbox"/> Release 00 <input type="checkbox"/>
--	--	-----------------	--

Reason for change: In R3, it is assumed that the RADIO LINK SETUP REQUEST message is always included in the SCCP: CR message according to the description in TS25.420 section 4.5.1.3.

On the other hand, according to Q.713, the SCCP specification, it is specified that the SCCP: CR message can only piggyback up to 130oct. of user data, as quoted below.

4.2 Connection request (CR)
 The CR message contains:
 – two pointers;
 – the parameters indicated in Table 3.

ijdTable 3/Q.713 – Message type: Connection request

Parameter	
Reference	
Type (F V O)	
Length (octets)	
Message type code	
2.1	
F	
1	
Source local reference	
3.3	
F	
3	

Protocol class

3.6

F

1

Called party address

3.4

V

3 minimum

Credit

3.10

O

3

Calling party address

3.5

O

4 minimum

Data

3.16

O

3-130

Hop counter

3.18

O

3

Importance

3.19

O

3

End of optional parameters

3.1

O

1

Since the length of RADIO LINK SETUP REQUEST message is sometimes expected to exceed 130oct., there shall be an alternative that the RADIO LINK SETUP REQUEST message is not piggybacked on SCCP: CR message

Clauses affected:

8.3.1 Radio Link Setup

Other specs affected:

Other 3G core specifications

→ List of CRs:

Other GSM core specifications

→ List of CRs:

MS test specifications

→ List of CRs:

BSS test specifications

→ List of CRs:

O&M specifications

→ List of CRs:

Other

comments:



help.doc

<----- double-click here for help and instructions on how to create a CR.

8.3.1 Radio Link Setup

8.3.1.1 General

This procedure is used for establishing the necessary resources in the DRNS for one or more radio links.

~~This procedure shall use the connection-oriented service of the signalling bearer~~ shall be established in conjunction with this procedure.

8.3.1.2 Successful Operation

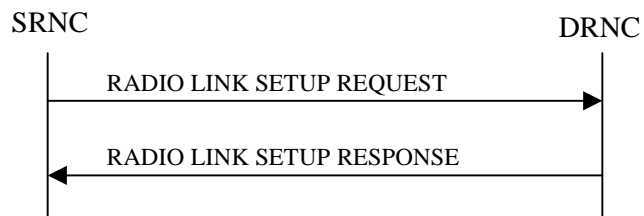


Figure 15: Radio Link Setup procedure: Successful Operation

When the SRNC makes an algorithmic decision to add the first cell or set of cells from a DRNS to the active set of a specific RRC connection, the RADIO LINK SETUP REQUEST message is sent to the corresponding DRNC to request setup of the radio link(s).

~~The message is also used to establish the connection-oriented service of the signalling bearer in the DRNC.~~ The message includes the S-RNTI associated to the UE, and, if the UE context is already present in the DRNC, the corresponding D-RNTI.

[FDD - The Diversity Control Field indicates for each RL except for the first RL whether the DRNS shall combine the RL with any of the other RLs or not on the Iur. If the *Diversity Control Field* IE is set to "May" (be combined with another RL), then the DRNS shall decide for any of the alternatives. When an RL is to be combined the DRNS shall choose which RL(s) to combine it with.]

If the RADIO LINK SETUP REQUEST message includes the *Allowed Queuing Time* IE the DRNS may queue the request before providing a response to the SRNC.

If the *Initial DL TX Power* IE and *UL Eb/No Target* IE [FDD] are present in the message, the DRNS shall use the indicated DL TX Power and UL Eb/No Target [FDD] as initial value.

If the *Primary CPICH Eb/No* IE [FDD] or the *Primary CCPCH RSCP* IE [TDD] is present, the DRNC should use them when deciding the Initial DL TX Power.

If the RADIO LINK SETUP REQUEST message includes the *DCH Combination Indicator* IE for a DCH, the DRNS shall treat all DCHs with the same value of this IE as a set of co-ordinated DCHs. The included *RLC Mode* IE of the DCH may be used by the DRNS to optimise the power control.

The *Allocation/Retention Priority* IE defines the priority level that should be used by the DRNS to prioritise the allocation and the retention of the resources used by the DCH. The *Frame Handling Priority* IE defines the priority level that should be used by the DRNS to prioritise the discard/delay of the data frames of the DCH.

The DRNS shall use the included *UL DCH FP Mode* IE for a DCH as the new DCH FP Mode in the Uplink of the user plane for this DCH.

The DRNS shall use the included *ToAWS* IE for a DCH as the new Time of Arrival Window Start Point in the user plane for this DCH.

The DRNS shall use the included *ToAWE* IE for a DCH as the new Time of Arrival Window End Point in the user plane for this DCH.

[FDD - If the RADIO LINK SETUP REQUEST message includes the *SSDT Cell Identity* IE, the DRNS may activate SSDT using the *SSDT Cell Identity* IE and *SSDT Cell Identity Length* IE.]

At the reception of the RADIO LINK SETUP REQUEST message, DRNS allocates requested type of channelisation codes and other physical channel resources for each RL and assigns a binding identifier and a transport layer address for each DCH or set of co-ordinated DCHs. This information shall be sent to the SRNS in the message RADIO LINK SETUP RESPONSE when all the RLs have been successfully setup.

If the *Initial DL TX Power* and the *UL Eb/No Target* IEs are not present in the RADIO LINK SETUP REQUEST message, then DRNC shall include the suggested initial UL Eb/No Target and the DL Eb/No Target in the RADIO LINK SETUP RESPONSE message.

In the case of combining one or more RLs the DRNC shall indicate in the RADIO LINK SETUP RESPONSE message with the Diversity Indication that the RL is combined with another RL. In this case the Reference RL ID shall be included to indicate with which RL the combination is performed. The Reference RL ID shall be included for all but one of the combined RLs, for which the *Transport Layer Address* IE and the *Binding ID* IE shall be included.

In the case of not combining an RL with another RL, the DRNC shall indicate in the RADIO LINK SETUP RESPONSE message with the Diversity Indication that no combining is done. In this case the DRNC shall include both the *Transport Layer Address* IE and the *Binding ID* IE for the transport bearer to be established for each DCH of the RL in the RADIO LINK SETUP RESPONSE message.

In case of a set of co-ordinated DCHs requiring a new transport bearer on Iur the *Binding Identifier* IE and the *Transport Layer Address* IE shall be included only for one of the DCH in the set of co-ordinated DCHs.

[FDD - Irrespective of SSDT activation, the DRNS shall include in the RADIO LINK SETUP RESPONSE message an indication concerning the capability to support SSDT on this RL. Only if the RADIO LINK SETUP REQUEST message requested SSDT activation and the RADIO LINK SETUP RESPONSE message indicates that the SSDT capability is supported for this RL, SSDT is activated in the DRNS.]

The DRNS shall also provide the SRNC with the UTRAN Cell Identifier (UC-Id) and information of the neighbouring cells to the cell(s) where the radio link(s) are added.

If a neighbouring cell is controlled by another RNC, the DRNC shall report also the node identifications (i.e. RNC, CN domain nodes) of the RNC controlling the neighbouring cell.

If there was no UE context for this UE in the DRNS before the RADIO LINK SETUP REQUEST message was received the DRNC shall include the node identifications of the CN Domain nodes that the RNC is connected to (using LAC and RAC of the current cell), and the D-RNTI in the RADIO LINK SETUP RESPONSE message.

8.3.1.3 Unsuccessful Operation

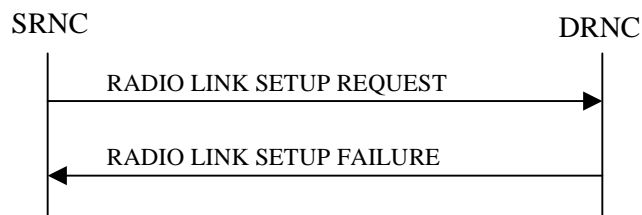


Figure 26: Radio Link Setup procedure: Unsuccessful Operation

In unsuccessful case (i.e. one or more RLs can not be setup) the RADIO LINK SETUP FAILURE message shall be sent to the SRNC, indicating the reason for failure. If some radio links were established successfully, the DRNC shall indicate this in the RADIO LINK SETUP FAILURE message in the same way as in the RADIO LINK SETUP RESPONSE message.

Typical cause values are:

Radio Network Layer Causes:

- UL Scrambling Code Already in Use
- DL Radio Resources not Available
- UL Radio Resources not Available
- Unknown C-ID

- Macrodiversity Combining not Possible
- Requested Configuration not Supported
- Cell not Available
- Power Level not Supported

Transport Layer Causes:

- Transport Link Failure

Protocol Causes:

- Transaction not Allowed

Miscellaneous Causes:

- Control Processing Overload
- HW Failure
- Not enough User Plane Processing Resources

8.3.1.4 Abnormal Conditions

If the DRNC receives either an S-RNTI or a D-RNTI which already has RL(s) established the DRNC shall send the RADIO LINK SETUP FAILURE message to the SRNC, indicating the reason for failure.

CHANGE REQUEST

Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.

25.423 CR 3r2

Current Version: **3.0.0**

GSM (AA.BB) or 3G (AA.BBB) specification number ↑

↑ CR number as allocated by MCC support team

For submission to: **TSG RAN #7**

list expected approval meeting # here
↑

for approval

for information

Strategic

non-strategic

(for SMG use only)

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: <ftp://ftp.3gpp.org/Information/CR-Form-v2.doc>

Proposed change affects:

(at least one should be marked with an X)

(U)SIM

ME

UTRAN / Radio

Core Network

Source:

RAN-WG3

Date:

24-28 Jan. 2000

Subject:

Editorial Improvements of RNSAP version 3.0.0

Work item:

Category:

(only one category shall be marked with an X)

F Correction

A Corresponds to a correction in an earlier release

B Addition of feature

C Functional modification of feature

D Editorial modification

<input type="checkbox"/>
<input type="checkbox"/>
<input type="checkbox"/>
<input type="checkbox"/>
<input checked="" type="checkbox"/>

Release:

Phase 2

Release 96

Release 97

Release 98

Release 99

Release 00

<input type="checkbox"/>
<input type="checkbox"/>
<input type="checkbox"/>
<input type="checkbox"/>
<input checked="" type="checkbox"/>
<input type="checkbox"/>

Reason for change:

The current version of RNSAP contains some editorial deficiencies and incorrect descriptions that need to be corrected.

CR-3 r0:

Editorial modifications shown with revision marks.

CR-3 r1:

Additional editorial modifications shown with revision marks and yellow shading.

CR-3 r2 (current revision):

Additional editorial modifications shown with revision marks and green shading. Text without revision marks that is marked with green corresponds to rejection of changes in previous revisions of the CR.

Clauses affected:

2, 3.3, 5.2, 6, 7, 8.1, 8.2.1, 8.2.2, 8.2.3, 8.3.1, **8.3.2**, 8.3.4, 8.3.7, 8.3.8, 8.3.11, 8.3.15, 8.4.2, 9.1.2, **9.1.3**, 9.1.4, **9.1.6.1**, 9.1.7.2, 9.1.11.1, 9.1.18, 9.1.19, 9.1.19.2, 9.1.36.1, 9.1.38, 9.2.1.7, 9.2.1.8, 9.2.1.11, 9.2.1.16, 9.2.1.38, 9.2.1.53, 9.2.1.55, 9.2.1.57, 9.2.1.61, 9.2.2.2, 9.2.2.7, 9.2.2.9, 9.2.2.11, 9.2.2.16, 9.2.2.18, 9.2.2.20, 9.2.2.22, 9.2.2.35, 9.2.3.1, 9.2.3.5, **9.3.3**, **9.3.4**, 9.4, and **10**.

Other specs affected:

Other 3G core specifications

Other GSM core specifications

MS test specifications

<input type="checkbox"/>
<input type="checkbox"/>
<input type="checkbox"/>

→ List of CRs:

→ List of CRs:

→ List of CRs:

--

BSS test specifications
O&M specifications

→ List of CRs:
→ List of CRs:

**Other
comments:**

--

3GPP

3G TS 25.423 V3.0.0 (2000-01)

Technical Specification

3rd Generation Partnership Project; Technical Specification Group Radio Access Network; UTRAN Iur Interface RNSAP Signalling (3G TS 25.423 version 3.0.0 Release 1999)



The present document has been developed within the 3rd Generation Partnership Project (3GPP™) and may be further elaborated for the purposes of 3GPP.

The present document has not been subject to any approval process by the 3GPP Organisational Partners and shall not be implemented. This Specification is provided for future development work within 3GPP only. The Organisational Partners accept no liability for any use of this Specification. Specifications and reports for implementation of the 3GPP™ system should be obtained via the 3GPP Organisational Partners' Publications Offices.

Reference

3TS/TSGR-0325423U

Keywords

3GPP

Postal address

3GPP support office address

650 Route des Lucioles - Sophia Antipolis
Valbonne - FRANCE
Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Internet

<http://www.3gpp.org>

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© 2000, 3GPP Organizational Partners (ARIB, CWTS, ETSI, T1, TTA, TTC).
All rights reserved.

Contents

Foreword	11
1 Scope.....	12
2 References.....	12
3 Definitions, symbols and abbreviations	13
3.1 Definitions	13
3.2 Symbols	13
3.3 Abbreviations.....	13
4 General.....	14
4.1 Procedure Specification Principles	14
4.2 Forwards and Backwards Compatibility.....	14
4.3 Source Signalling Address Handling	14
5 RNSAP Services	15
5.1 RNSAP Procedure Modules	15
5.2 Parallel Transactions.....	15
6 Services Expected from Signalling Transport	15
7 Functions of RNSAP	15
8 RNSAP Procedures.....	17
8.1 Elementary Procedures	17
8.2 Basic Mobility Procedures.....	18
8.2.1 Uplink SignallingTransfer.....	18
8.2.1.1 General	18
8.2.1.2 Successful Operation	18
8.2.1.3 Abnormal Conditions	19
8.2.2 Downlink SignallingTransfer.....	19
8.2.2.1 General	19
8.2.2.2 Successful Operation	19
8.2.2.3 Abnormal Conditions	19
8.2.3 Relocation Commit	20
8.2.3.1 General	20
8.2.3.2 Successful Operation	20
8.2.4 Paging.....	20
8.2.4.1 General	20
8.2.4.2 Successful Operation	20
8.2.4.3 Abnormal Conditions	21
8.3 DCH procedures	21
8.3.1 Radio Link Setup.....	21
8.3.1.1 General	21
8.3.1.2 Successful Operation	21
8.3.1.3 Unsuccessful Operation.....	22
8.3.1.4 Abnormal Conditions	23
8.3.2 Radio Link Addition.....	23
8.3.2.1 General	23
8.3.2.2 Successful Operation	23
8.3.2.3 Unsuccessful Operation.....	25
8.3.2.4 Abnormal Conditions	25
8.3.3 Radio Link Deletion.....	25
8.3.3.1 General	25
8.3.3.2 Successful Operation	26
8.3.3.3 Unsuccessful Operation.....	26
8.3.3.4 Abnormal Conditions	26
8.3.4 Synchronised Radio Link Reconfiguration Preparation.....	26
8.3.4.1 General	26

8.3.4.2	Successful Operation	26
8.3.4.3	Unsuccessful Operation	29
8.3.4.4	Abnormal Conditions	29
8.3.5	Synchronised Radio Link Reconfiguration Commit	30
8.3.5.1	General	30
8.3.5.2	Successful Operation	30
8.3.5.3	Abnormal Conditions	30
8.3.6	Synchronised Radio Link Reconfiguration Cancellation	30
8.3.6.1	General	30
8.3.6.2	Successful Operation	30
8.3.6.3	Abnormal Conditions	30
8.3.7	Unsynchronised Radio Link Reconfiguration	31
8.3.7.1	General	31
8.3.7.2	Successful Operation	31
8.3.7.3	Unsuccessful Operation	33
8.3.7.4	Abnormal Conditions	33
8.3.8	Physical Channel Reconfiguration	33
8.3.8.1	General	33
8.3.8.2	Successful Operation	34
8.3.8.3	Unsuccessful Operation	34
8.3.8.4	Abnormal Conditions	34
8.3.9	Radio Link Failure	34
8.3.9.1	General	34
8.3.9.2	Successful Operation	35
8.3.9.3	Abnormal Conditions	35
8.3.10	Radio Link Restoration	35
8.3.10.1	General	35
8.3.10.2	Successful Operation	36
8.3.10.3	Abnormal Conditions	36
8.3.11	Measurement Initiation	36
8.3.11.1	General	36
8.3.11.2	Successful Operation	36
8.3.11.3	Unsuccessful Operation	38
8.3.11.4	Abnormal Conditions	38
8.3.12	Measurements Reporting	38
8.3.12.1	General	38
8.3.12.2	Successful Operation	38
8.3.12.3	Abnormal Conditions	39
8.3.13	Measurement Termination	39
8.3.13.1	General	39
8.3.13.2	Successful Operation	39
8.3.13.3	Abnormal Conditions	39
8.3.14	Measurement Failure	39
8.3.14.1	General	39
8.3.14.2	Successful Operation	39
8.3.14.3	Abnormal Conditions	40
8.3.15	Down Link Power Control [FDD]	40
8.3.15.1	General	40
8.3.15.2	Successful Operation	40
8.3.15.3	Abnormal Conditions	40
8.3.16	Compressed Mode Preparation [FDD]	41
8.3.16.1	General	41
8.3.16.2	Successful Operation	41
8.3.16.3	Unsuccessful Operation	41
8.3.16.4	Abnormal Conditions	41
8.3.17	Compressed Mode Commit [FDD]	42
8.3.17.1	General	42
8.3.17.2	Successful Operation	42
8.3.17.3	Abnormal Conditions	42
8.3.18	Compressed Mode Cancellation [FDD]	42
8.3.18.1	General	42
8.3.18.2	Successful Operation	42

8.3.18.3	Abnormal Conditions	42
8.4	Common Transport Channel Procedures	43
8.4.1	Common Transport Channel Resources Initialisation.....	43
8.4.1.1	General	43
8.4.1.2	Successful Operation	43
8.4.1.3	Unsuccessful Operation.....	43
8.4.1.4	Abnormal Conditions	44
8.4.2	Common Transport Channel Resources Release.....	44
8.4.2.1	General	44
8.4.2.2	Successful Operation	44
8.4.2.3	Abnormal Conditions	44
8.5	Global Procedures.....	44
8.5.1	Error Indication	44
8.5.1.1	General	44
8.5.1.2	Successful Operation	45
8.5.1.3	Abnormal Conditions	45
9	Elements for RNSAP Communication	45
9.1	Message Functional Definition and Content.....	45
9.1.1	General	45
9.1.2	Message Contents.....	46
9.1.3	RADIO LINK SETUP REQUEST	48
9.1.3.1	FDD Message	48
9.1.3.2	TDD Message.....	50
9.1.4	RADIO LINK SETUP RESPONSE.....	51
9.1.4.1	FDD Message	51
9.1.4.2	TDD Message.....	53
9.1.5	RADIO LINK SETUP FAILURE.....	55
9.1.5.1	FDD Message	55
9.1.5.2	TDD Message.....	56
9.1.6	RADIO LINK ADDITION REQUEST	56
9.1.6.1	FDD Message	56
9.1.6.2	TDD Message.....	57
9.1.7	RADIO LINK ADDITION RESPONSE	58
9.1.7.1	FDD Message	58
9.1.7.2	TDD Message.....	60
9.1.8	RADIO LINK ADDITION FAILURE	62
9.1.8.1	FDD Message	62
9.1.8.2	TDD Message.....	63
9.1.9	RADIO LINK DELETION REQUEST.....	63
9.1.10	RADIO LINK DELETION RESPONSE	63
9.1.11	RADIO LINK RECONFIGURATION PREPARE	64
9.1.11.1	FDD Message	64
9.1.11.2	TDD Message.....	66
9.1.12	RADIO LINK RECONFIGURATION READY	67
9.1.12.1	FDD Message	67
9.1.12.2	TDD Message.....	68
9.1.13	RADIO LINK RECONFIGURATION COMMIT	69
9.1.14	RADIO LINK RECONFIGURATION FAILURE	69
9.1.15	RADIO LINK RECONFIGURATION CANCEL.....	69
9.1.16	RADIO LINK RECONFIGURATION REQUEST	70
9.1.16.1	FDD Message	70
9.1.16.2	TDD Message.....	71
9.1.17	RADIO LINK RECONFIGURATION RESPONSE.....	72
9.1.18	RADIO LINK FAILURE INDICATION	72
9.1.19	RADIO LINK RESTORE INDICATION.....	73
9.1.20	DL POWER CONTROL REQUEST [FDD].....	73
9.1.21	PHYSICAL CHANNEL RECONFIGURATION REQUEST.....	73
9.1.21.1	FDD Message	73
9.1.21.2	TDD Message.....	74
9.1.22	PHYSICAL CHANNEL RECONFIGURATION COMMAND	74
9.1.23	PHYSICAL CHANNEL RECONFIGURATION FAILURE.....	75

9.1.24	UPLINK SIGNALLING TRANSFER INDICATION	75
9.1.25	DOWNLINK SIGNALLING TRANSFER REQUEST	75
9.1.26	RELOCATION COMMIT	75
9.1.27	PAGING REQUEST	76
9.1.28	DEDICATED MEASUREMENT INITIATION REQUEST	76
9.1.29	DEDICATED MEASUREMENT INITIATION RESPONSE	77
9.1.30	DEDICATED MEASUREMENT INITIATION FAILURE	77
9.1.31	DEDICATED MEASUREMENT REPORT	78
9.1.32	DEDICATED MEASUREMENT TERMINATION REQUEST	78
9.1.33	DEDICATED MEASUREMENT FAILURE INDICATION	78
9.1.34	COMMON TRANSPORT CHANNEL RESOURCES RELEASE REQUEST	78
9.1.35	COMMON TRANSPORT CHANNEL RESOURCES REQUEST	79
9.1.36	COMMON TRANSPORT CHANNEL RESOURCES RESPONSE	80
9.1.36.1	FDD Message	80
9.1.36.2	TDD Message	81
9.1.37	COMMON TRANSPORT CHANNEL RESOURCES FAILURE	82
9.1.38	COMPRESSED MODE PREPARE [FDD]	82
9.1.39	COMPRESSED MODE READY [FDD]	82
9.1.40	COMPRESSED MODE FAILURE [FDD]	83
9.1.41	COMPRESSED MODE COMMIT [FDD]	83
9.1.42	COMPRESSED MODE CANCEL [FDD]	83
9.1.43	ERROR INDICATION	83
9.2	Information Element Functional Definition and Contents	83
9.2.1	Common Parameters	83
9.2.1.1	Allocation/Retention Priority	83
9.2.1.2	Allowed Queuing Time	84
9.2.1.3	Binding ID	84
9.2.1.4	BLER	84
9.2.1.5	Cause	84
9.2.1.6	Cell Identifier (C-Id)	85
9.2.1.7	Cell Parameter ID	85
9.2.1.8	CFN	86
9.2.1.9	CN CS Domain Identifier	86
9.2.1.10	CN PS Domain Identifier	86
9.2.1.11	Criticality Diagnostics	87
9.2.1.12	C-RNTI	88
9.2.1.13	DCH Combination Indicator	88
9.2.1.14	DCH ID	88
9.2.1.15	Dedicated Measurement Object Type	88
9.2.1.16	Dedicated Measurement Type	88
9.2.1.17	Dedicated Measurement Value	89
9.2.1.18	Downlink Eb/No Target	89
9.2.1.19	D-RNTI	89
9.2.1.20	D-RNTI Release Indication	89
9.2.1.21	DRX Parameter	89
9.2.1.22	FACH Initial Window Size	90
9.2.1.23	FACH Priority Indicator	90
9.2.1.24	Frame Handling Priority	90
9.2.1.25	Frame Offset	90
9.2.1.26	MAC-c SDU Length	90
9.2.1.27	Mean Bit Rate	91
9.2.1.28	Measurement Characteristics	91
9.2.1.29	Measurement ID	91
9.2.1.30	Message Type	91
9.2.1.31	Multiple URAs Indicator	92
9.2.1.32	Payload CRC Present Indicator	92
9.2.1.33	Primary CPICH Power	93
9.2.1.34	Primary Scrambling Code	93
9.2.1.35	PSCH Time Slot	93
9.2.1.36	Puncture Limit	93
9.2.1.37	RANAP Relocation Information	93
9.2.1.38	Report Characteristics	93

9.2.1.39	RL ID.....	95
9.2.1.40	RLC Mode.....	95
9.2.1.41	RNC-Id.....	96
9.2.1.42	Service Area Identifier (SAI).....	96
9.2.1.43	S-RNTI.....	96
9.2.1.44	Sync Case.....	97
9.2.1.45	TFCI Presence.....	97
9.2.1.46	Time Slot.....	97
9.2.1.47	ToAWE.....	97
9.2.1.48	ToAWS.....	97
9.2.1.49	Transaction ID.....	98
9.2.1.50	Transport Bearer ID.....	98
9.2.1.51	Transport Bearer Request Indicator.....	98
9.2.1.52	Transport Layer Address.....	98
9.2.1.53	Transport Format Combination Set.....	98
9.2.1.54	Transport Format Set.....	99
9.2.1.55	UARFCN.....	100
9.2.1.56	UL FP Mode.....	100
9.2.1.57	Uplink Eb/No.....	100
9.2.1.58	UL Interference Level.....	100
9.2.1.59	URA ID.....	101
9.2.1.60	UTRAN Cell Identifier (UC-Id).....	101
9.2.1.61	L3 Information.....	101
9.2.2	FDD Specific Parameters.....	101
9.2.2.1	Chip Offset.....	101
9.2.2.2	Compressed Mode Method.....	101
9.2.2.3	D-Field Length.....	102
9.2.2.4	Diversity Control Field.....	102
9.2.2.5	Diversity Indication.....	102
9.2.2.6	Diversity Mode.....	102
9.2.2.7	DL DPCH Slot Format.....	102
9.2.2.8	DL Scrambling Code.....	103
9.2.2.9	Downlink Frame Type.....	103
9.2.2.10	FDD DL Channelisation Code Number.....	103
9.2.2.11	Gap Position Mode.....	103
9.2.2.12	Gap Period (TGP).....	103
9.2.2.13	Gap Starting Slot Number (SN).....	103
9.2.2.14	Max Number of UL DPDCHs.....	104
9.2.2.15	Min UL Channelisation Code Length.....	104
9.2.2.16	Multiplexing Position.....	104
9.2.2.17	Pattern Duration (PD).....	104
9.2.2.18	Power Control Mode (PCM).....	104
9.2.2.19	Power Offset.....	105
9.2.2.20	Power Resume Mode (PRM).....	105
9.2.2.21	Primary CPICH Ec/No.....	105
9.2.2.22	Propagation Delay (PD).....	105
9.2.2.23	S-Field Length.....	105
9.2.2.24	Scrambling Code Change.....	105
9.2.2.25	Slot Number (SN).....	106
9.2.2.26	SSDT Cell Identity.....	106
9.2.2.27	SSDT Cell Identity Length.....	106
9.2.2.28	SSDT Indication.....	106
9.2.2.29	SSDT Support Indicator.....	106
9.2.2.30	TFCI Signalling Mode.....	106
9.2.2.31	TPC Downlink Step Size.....	107
9.2.2.32	Transmission Gap Distance (TGD).....	107
9.2.2.33	Transmit Gap Length (TGL).....	107
9.2.2.34	UL/DL Compressed Mode Selection.....	107
9.2.2.35	UL DPCCCH Slot Format.....	107
9.2.2.36	UL Scrambling Code.....	108
9.2.2.37	Uplink Delta Eb/No.....	108
9.2.2.38	Uplink Delta Eb/No After.....	108

9.2.3	TDD Specific Parameters	108
9.2.3.1	Burst Type	108
9.2.3.2	CCTrCH ID	108
9.2.3.3	DPCH ID	108
9.2.3.4	Midamble Shift	109
9.2.3.5	Primary CCPCH RSCP	109
9.2.3.6	Repetition Length	109
9.2.3.7	Repetition Period	109
9.2.3.8	TDD Channelisation Code	109
9.2.3.9	TDD Physical Channel Offset	110
9.2.3.10	TFCI Coding	110
9.3	Message and Information element abstract syntax (with ASN.1)	111
9.3.1	Usage of Protocol Extension Mechanism for non-standard use	111
9.3.2	Elementary Procedure Definitions	111
9.3.3	PDU Definitions	120
9.3.4	Information Element Definitions	191
9.3.5	Common Definitions	209
9.3.6	Constant Definitions	210
9.3.7	Container Definitions	215
9.4	Message Transfer Syntax	219
9.5	Timers	219
10	Handling of Unknown, Unforeseen and Erroneous Protocol Data	219
10.1	General	219
10.2	Transfer Syntax Error	219
10.3	Abstract Syntax Error	219
10.3.1	General	219
10.3.2	Handling of the Criticality Information at Reception	220
10.3.2.1	Procedure Code	220
10.3.2.2	IEs other than the Procedure Code	220
10.3.3	Logical Error Handling	220
	Annex A (informative): Change history	222
	History	223

Foreword

This Technical Specification has been produced by the 3GPP.

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of this TS, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 Indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The present document specifies the radio network layer signalling procedures between RNCs in UTRAN.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

- [1] 3G TS 25.413: "UTRAN Iu Interface RANAP Signalling".
- [2] 3G TS 25.426: "UTRAN Iur and Iub Interface Data Transport & Transport Layer Signalling for DCH Data Streams".
- [3] 3G TS 25.427: "UTRAN Iur and Iub Interface User Plane Protocols for DCH Data Streams"..
- [4] 3G TS xx.yyy: "Specification containing different Identifiers for UMTS (to be identified)".
- [5] 3G TS 25.104: "UTRA (BS) FDD; Radio transmission and Reception"
- [6] 3G TS 25.105: "UTRA (BS) TDD; Radio Transmission and Reception".
- [7] 3G TS 25.211: "Physical Channels and Mapping of Transport Channels onto Physical Channels (FDD)".
- [8] 3G TS 25.212: "Multiplexing and Channel Coding (FDD)".
- [9] UMTS 25.214, Physical Layer Procedures (FDD)".
- [10] 3G TS 25.215: "Physical Layer – Measurements (FDD)".
- [11] 3G TS 25.221: "Physical Channels and Mapping of Transport Channels onto Physical Channels (TDD)".
- [12] 3G TS 25.223: "Spreading and Modulation (TDD)".
- [13] 3G TS 25.225: "Physical Layer – Measurements (TDD)".
- [14] 3G TS 25.331: "RRC Protocol Specification".
- [15] 3G TS 25.402: "Synchronisation in UTRAN, Stage 2".
- [16] X.680 (12/94): "Information technology - Abstract Syntax Notation One (ASN.1): Specification of basic notation".
- [17] X.681 (12/94): "Information technology - Abstract Syntax Notation One (ASN.1): Information object specification".
- [18] X.691 (12/94), Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)".

[Editor's note: The dating of reference [18] needs to be verified. It has been included from the ITU-T list of recommendations in force. The dating of the reference is FFS.]

[Editor's note: The reference [4] needs to be identified. Until then the description of the parameters CN PS Domain Identifier, CN CS Domain Identifier, and CRNC ID contains more information than otherwise may be needed.]

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply.

Elementary Procedure: The RNSAP protocol consists of Elementary Procedures (EPs). An Elementary Procedure is a unit of interaction between two RNCs. An EP consists of an initiating message and possibly a response message. Two kinds of EPs are used:

- **Class 1:** Elementary Procedures with response (success or failure).
- **Class 2:** Elementary Procedures without response.

For Class 1 EPs, the types of responses can be as follows:

Successful

- A signalling message explicitly indicates that the elementary procedure successfully completed with the receipt of the response.

Unsuccessful

- A signalling message explicitly indicates that the EP failed.
- On time supervision expiry (i.e. absence of expected response). Whether or not any Class 1 procedure will have a timer on RNSAP is FFS. To be sorted out when discussing the details of the error cases.

Class 2 EPs are considered always successful.

3.2 Symbols

No special symbols are defined in this document.

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ASN.1	Abstract Syntax Notation One
ATM	Asynchronous Transfer Mode
BCCH	Broadcast Control Channel
BLER	Block Error Rate
CCCH	Common Control Channel
CCPCH	Common Control Physical Channel
CCTrCH	Coded Composite Transport Channel
CFN	Connection Frame Number
CN	Core Network
CRNC	Controlling RNC
CPICH	Common Pilot Channel
DCH	Dedicated Channel
DL	Downlink
DPCCH	Dedicated Physical Control Channel
DPCH	Dedicated Physical Channel
DRNC	Drift RNC
DRNS	Drift RNS

DRX	Discontinuous Reception
DSCH	Downlink Shared Channel
<u>EP</u>	<u>Elementary Procedure</u>
<u>FACH</u>	<u>Forward Access Channel</u>
<u>FDD</u>	<u>Frequency Division Duplex</u>
<u>FN</u>	<u>Frame Number</u>
FP	Frame Protocol
<u>IE</u>	<u>Information Element</u>
MAC	Medium Access Control
PDU	Protocol Data Unit
PSCH	Physical Synchronisation Channel
RAB	Radio Access Bearer
RL	Radio Link
RLC	Radio Link Control
RNS	Radio Network Subsystem
RNSAP	Radio Network Subsystem Application Part
RNTI	Radio Network Temporary Identifier
RRC	Radio Resource Control
RSCP	Received Signal Code Power
<u>SDU</u>	<u>Signalling Data Unit</u>
SFN	System Frame Number
SRNC	Serving RNC
SRNS	Serving RNS
SSDT	Site Selection Diversity Transmit
<u>TDD</u>	<u>Time Division Duplex</u>
TFCI	Transport Format Combination Indicator
TFCS	Transport Format Combination Set
TFS	Transport Format Set
UARFCN	<u>UMTS-UTRA</u> Absolute Radio Frequency Channel Number
UE	User Equipment
UL	Uplink
URA	UTRAN Registration Area
UTRAN	UMTS Terrestrial Radio Access Network

4 General

4.1 Procedure Specification Principles

The principle for specifying the procedure logic is to specify the functional behaviour of the CRNC exactly and completely. The SRNC functional behaviour is left unspecified. The EP Physical Channel Reconfiguration is an exception from this principle.

4.2 Forwards and Backwards Compatibility

The forwards and backwards compatibility of the protocol is assured by a mechanism where all current and future messages, and IEs or groups of related IEs, include Id and criticality fields that are coded in a standard format that will not be changed in the future. These parts can always be decoded regardless of the standard version.

4.3 Source Signalling Address Handling

The sender of an RNSAP messages shall include the Source Signalling Address, i.e. the Signalling Address of the sending node.

5 RNSAP Services

The RNSAP offers the following services:

5.1 RNSAP Procedure Modules

The Iur interface RNSAP procedures are divided into four modules as follows:

1. RNSAP Basic Mobility Procedures
2. RNSAP DCH Procedures
3. RNSAP Common Transport Channel Procedures
4. RNSAP Global Procedures

The Basic Procedures module contains procedures used to handle the mobility within UTRAN.

The DCH Procedures module contains procedures that are used to handle DCHs between two RNSs. If procedures from this module are not used in a specific Iur, then the usage of DCH traffic between corresponding RNSs is not possible.

The Common Transport Channel Procedures module contains procedures that are used to control common transport channel data streams over Iur interface.

The Global Procedures module contains procedures that are not related to a specific UE. The procedures in this module are in contrast to the above modules involving two peer CRNCs.

5.2 Parallel Transactions

Unless explicitly indicated in the procedure [description specification](#), at any instance in time one protocol peer shall have initiated maximum one ongoing RNSAP DCH procedure related to a certain UE.

6 Services Expected from Signalling Transport

The [Signalling-signalling](#) transport shall provide two different service modes for the RNSAP.

1. Connection oriented data transfer service. This service is supported by a signalling connection between two RNCs. It shall be possible to dynamically establish and release signalling connections based on the need. Each active UE shall have its own signalling connection. The signalling connection shall provide in sequence delivery of RNSAP messages. RNSAP shall be notified if the signalling connection breaks.
2. Connectionless data transfer service. RNSAP shall be notified in case a RNSAP message did not reach the intended peer RNSAP entity.

7 Functions of RNSAP

The RNSAP protocol has the following functions:

- Radio Link Management. This function allows the SRNC to manage radio links using dedicated resources in a DRNS.
- Physical Channel Reconfiguration. This function allows the DRNC to reallocate the physical channel resources for a Radio Link.
- Radio Link Supervision. This function allows the DRNC to report failures and restorations of a Radio Link.
- Compressed Mode Control [FDD]. This function allows the SRNC to control the usage of compressed mode within a DRNS

- Measurements on Dedicated Resources. This function allows the SRNC to initiate measurements on dedicated resources in the DRNS. The function also allows the DRNC to report the result of the measurements.
- DL Power Drifting Correction [FDD]. This function allows the SRNC to adjust the DL power level of one or more Radio Links in order to avoid DL power drifting between the Radio Links.
- CCCH Signalling Transfer. This function allows the SRNC and DRNC to pass information between the UE and the SRNC on a CCCH controlled by the DRNS.
- Paging. This function allows the SRNC to page a UE in a URA or a cell in the DRNS.
- Common Transport Channel Resources Management. This function allows the SRNC to utilise Common Transport Channel Resources within the DRNS (excluding DSCH resources for FDD).
- Relocation Execution. This function allows the SRNC to finalise a Relocation previously prepared via other interfaces.
- Reporting of ~~general~~ General error ~~Error situations~~ Situations. This function allows reporting of general error situations, for which function specific error messages have not been defined.

The mapping between the above functions and RNSAP elementary procedures is shown in the table 1:

Table 1: Mapping between functions and RNSAP elementary procedures

Function	Elementary Procedure(s)
Radio Link Management	a) Radio Link Setup b) Radio Link Addition c) Radio Link Deletion d) Unsynchronised Radio Link Reconfiguration e) Synchronised Radio Link Reconfiguration Preparation f) Synchronised Radio Link Reconfiguration Commit g) Synchronised Radio Link Reconfiguration Cancellation
Physical Channel Reconfiguration	Physical Channel Reconfiguration
Radio Link Supervision	a) Radio Link Failure b) Radio Link Restoration
Compressed Mode Control [FDD]	a) Compressed Mode Preparation b) Compressed Mode Commit c) Compressed Mode Cancellation
Measurements on Dedicated Resources	a) Measurement Initiation b) Measurement Reporting c) Measurement Termination d) Measurement Failure
DL Power Drifting Correction [FDD]	Downlink Link Power Control
CCCH Signalling Transfer	a) Uplink Signalling Transfer b) Downlink Signalling Transfer
Paging	Paging
Common Transport Channel Resources Management	a) Common Transport Channel Resources Initiation b) Common Transport Channel Resources Release
Relocation Execution	Relocation Commit
Reporting of <u>General Error</u> Situations	Error Indication

~~These functions are implemented by one or several RNSAP elementary procedures described in the following section.~~

8 RNSAP Procedures

8.1 Elementary Procedures

In the following tables, all EPs are divided into Class 1 and Class 2 EPs:

Table 2: Class 1

Elementary Procedure	Initiating Message	Successful Outcome	Unsuccessful Outcome	
		Response message	Response message	Timer
Radio Link Setup	RADIO LINK SETUP REQUEST	RADIO LINK SETUP RESPONSE	RADIO LINK SETUP FAILURE	
Radio Link Addition	RADIO LINK ADDITION REQUEST	RADIO LINK ADDITION RESPONSE	RADIO LINK ADDITION FAILURE	
Radio Link Deletion	RADIO LINK DELETION REQUEST	RADIO LINK DELETION RESPONSE		
Synchronised Radio Link Reconfiguration Preparation	RADIO LINK RECONFIGURATION PREPARE	RADIO LINK RECONFIGURATION READY	RADIO LINK RECONFIGURATION FAILURE	
Unsynchronised Radio Link Reconfiguration	RADIO LINK RECONFIGURATION REQUEST	RADIO LINK RECONFIGURATION RESPONSE	RADIO LINK RECONFIGURATION FAILURE	
Physical Channel Reconfiguration	PHYSICAL CHANNEL RECONFIGURATION REQUEST	PHYSICAL CHANNEL RECONFIGURATION COMMAND	PHYSICAL CHANNEL RECONFIGURATION FAILURE	
Measurement Initiation	DEDICATED MEASUREMENT INITIATION REQUEST	DEDICATED MEASUREMENT INITIATION RESPONSE	DEDICATED MEASUREMENT INITIATION FAILURE	
Compressed Mode Preparation [FDD]	COMPRESSED MODE PREPARE	COMPRESSED MODE READY	COMPRESSED MODE FAILURE	
Common Transport Channel Resources Initiation	COMMON TRANSPORT CHANNEL RESOURCES REQUEST	COMMON TRANSPORT CHANNEL RESOURCES RESPONSE	COMMON TRANSPORT CHANNEL RESOURCES FAILURE	

The need for Timers will be defined on a per procedure basis. The content of this column is thus FFS.

Table 3: Class 2

Elementary Procedure	Initiating Message
Uplink Signalling Transfer	UPLINK SIGNALLING TRANSFER INDICATION
Downlink Signalling Transfer	DOWNLINK SIGNALLING TRANSFER REQUEST
SRNS Relocation Commit	SRNS RELOCATION COMMIT
Paging	PAGING REQUEST
Synchronised Radio Link Reconfiguration Commit	RADIO LINK RECONFIGURATION COMMIT
Synchronised Radio Link Reconfiguration Cancellation	RADIO LINK RECONFIGURATION CANCEL
Radio Link Failure	RADIO LINK FAILURE INDICATION
Radio Link Restoration	RADIO LINK RESTORE INDICATION
Measurement Reporting	DEDICATED MEASUREMENT REPORT
Measurement Termination	DEDICATED MEASUREMENT TERMINATION REQUEST
Measurement Failure	DEDICATED MEASUREMENT FAILURE INDICATION
Downlink Power Control [FDD]	DL POWER CONTROL REQUEST
Compressed Mode Commit [FDD]	COMPRESSED MODE COMMIT
Compressed Mode Cancellation [FDD]	COMPRESSED MODE CANCEL
Common Transport Channel Resources Release	COMMON TRANSPORT CHANNEL RESOURCES RELEASE REQUEST
Error Indication	ERROR INDICATION

8.2 Basic Mobility Procedures

8.2.1 Uplink Signalling Transfer

8.2.1.1 General

The procedure is used by the SRNC to request to the DRNC the transfer of a Uu message. When used, the procedure is in response to a received Uplink Signalling Transfer procedure.

This procedure shall use the connectionless mode of the signalling bearer.

8.2.1.2 Successful Operation

When the CRNC receives an Uu message where the UE addressing information is [the S-RNTI](#) and SRNC-ID, and the SRNC ID identifies another RNC than the CRNC, the CRNC shall send the UPLINK SIGNALLING TRANSFER [INDICATION](#) message to the SRNC identified by the SRNC-ID received from the UE.

The CRNC shall include in the message the URA Identity of the URA where the Uu message was received, an indication on whether or not the accessed cell belongs to multiple URAs, and the RNC Identity of all other RNCs that are having at least one cell within the URA where the Uu message was received.

If the message received from the UE was the first message from that UE in the CRNC, the CRNC shall include the D-RNTI and the identifiers for the CN CS Domain and CN PS Domain that the CRNC is connected to in the UPLINK SIGNALLING TRANSFER INDICATION message. These CN Domain Identifiers shall be based on the LAC and RAC respectively of the cell where the message was received from the UE.

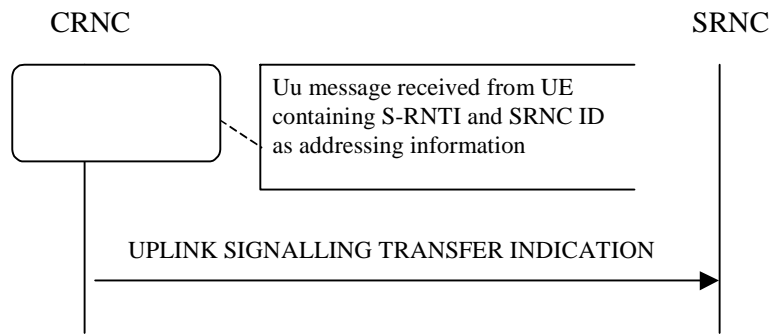


Figure 1: Uplink Signalling Transfer procedure, Successful Operation.

8.2.1.3 Abnormal Conditions

-

8.2.2 Downlink Signalling Transfer

8.2.2.1 General

The procedure is used by the SRNC to request to the DRNC the transfer of a Uu message. When used, the procedure is in response to a received Uplink Signalling Transfer procedure.

This procedure shall use the connectionless mode of the signalling bearer.

8.2.2.2 Successful Operation

The procedure consists of the DOWNLINK SIGNALLING TRANSFER REQUEST message sent by the SRNC to the DRNC.

The message contains the Cell Identifier (C-Id) contained in the received UPLINK SIGNALLING TRANSFER [INDICATION](#) message and the D-RNTI.

At the reception of the message, the DRNC shall send the L3 Information to the UE identified by the D-RNTI.

If the [D-RNTI Release Indication IE](#) ~~D-RNTI release indication parameters indicates is set to 'release'~~ "Release D-RNTI", the D-RNTI and thus the UE Context and any DRNS resource allocated to the UE Context shall be released at the reception of the [UPLINK SIGNALLING TRANSFER INDICATION](#) message.



Figure 2: Downlink Signalling Transfer procedure, Successful Operation

8.2.2.3 Abnormal Conditions

If the user identified by the D-RNTI is not camping in the cell identified by the [C-Id IE](#) ~~C-Id~~ in the [UPLINK SIGNALLING TRANSFER INDICATION](#) ~~RNSAP~~ message, the message shall be ignored.

If the D-RNTI is allocated to one UE context whose status does not allow the sending of the L3 information from the DRNC, then the [UPLINK SIGNALLING TRANSFER INDICATION](#) message shall be ignored.

8.2.3 Relocation Commit

8.2.3.1 General

The [Relocation Commit](#) ~~RELOCATION COMMIT~~ procedure is used by target RNC to execute the Relocation. This procedure supports the Relocation procedures described in [1].

This procedure shall use the signalling bearer mode specified below.

8.2.3.2 Successful Operation

The source RNC sends the RELOCATION COMMIT message to the target RNC to request the target RNC to proceed with the Relocation. When the UE is utilising one or more radio links in the DRNC the message shall be sent using the connection oriented service of the signalling bearer and no further identification of the UE context in the DRNC is required. If on the other hand, the UE is not utilising any radio link the message shall be sent using the connectionless service of the signalling bearer and the *D-RNTI* IE shall be included in the message to identify the UE context in the DRNC.

At reception of the RELOCATION COMMIT message from the source RNC the target RNC finalises the Relocation. If the message contains the transparent *RANAP Relocation Information* IE the target RNC shall use this information when finalising the Relocation.



Figure 3: Relocation Commit procedure, Successful Operation

8.2.3.3 Abnormal Conditions

=

8.2.4 Paging

8.2.4.1 General

This procedure is used by the SRNC to indicate to a CRNC that a UE shall be paged in a cell or URA that is under the control of the CRNC.

This procedure shall use the connectionless mode of the signalling bearer.

8.2.4.2 Successful Operation



Figure 4: Paging procedure, Successful Operation

The procedure is initiated with a PAGING REQUEST message sent from the SRNC to the CRNC.

If the message contains the *C-Id* IE, the CRNC shall page in the indicated cell. Alternatively, if the message contains the *URA-Id* IE, the CRNC shall page in all cells that it controls in the indicated URA.

[Editor's note: If the *DRX parameter IE* is required, and any explanation is required for how to react to it, then this should be included here.]

8.2.4.3 Abnormal Conditions

-

8.3 DCH procedures

8.3.1 Radio Link Setup

8.3.1.1 General

This procedure is used for establishing the necessary resources in the DRNS for one or more radio links.

This procedure shall use the connection-oriented service of the signalling bearer.

8.3.1.2 Successful Operation

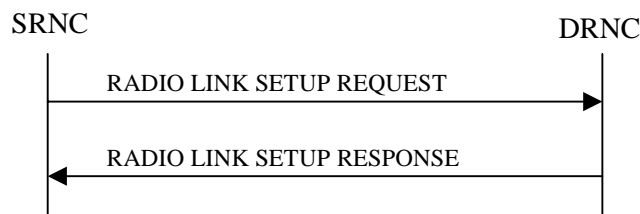


Figure 5: Radio Link Setup procedure: Successful Operation

When the SRNC makes an algorithmic decision to add the first cell or set of cells from a DRNS to the active set of a specific RRC connection, the RADIO LINK SETUP REQUEST message is sent to the corresponding DRNC to request setup of the radio link(s).

The message is also used to establish the connection-oriented service of the signalling bearer in the DRNC. The message includes the S-RNTI associated to the UE, and, if the UE context is already present in the DRNC, the corresponding D-RNTI.

[FDD - The Diversity Control Field indicates for each RL except for the first RL whether the DRNS shall combine the RL with any of the other RLs or not on the Iur. If the *Diversity Control Field IE* is set to "May" (be combined with another RL), then the DRNS shall decide for any of the alternatives. When an RL is to be combined the DRNS shall choose which RL(s) to combine it with.]

If the RADIO LINK SETUP REQUEST message includes the *Allowed Queuing Time IE* the DRNS may queue the request before providing a response to the SRNC.

[FDD - If the *Initial DL TX Power IE* and *Uplink Eb/No Target IE* [FDD] are present in the message, the DRNS shall use the indicated DL TX Power and Uplink Eb/No Target [FDD] as initial value.]

If the *Primary CPICH Eb/No IE* [FDD] or the *Primary CCPCH RSCP IE* [TDD] is present, the DRNC should use them when deciding the Initial DL TX Power.

If the RADIO LINK SETUP REQUEST message includes the *DCH Combination Indicator IE* for a DCH, the DRNS shall treat all DCHs with the same value of this IE as a set of co-ordinated DCHs. The included *RLC Mode IE* of the DCH may be used by the DRNS to optimise the power control.

The *Allocation/Retention Priority IE* defines the priority level that should be used by the DRNS to prioritise the allocation and the retention of the resources used by the DCH. The *Frame Handling Priority IE* defines the priority level that should be used by the DRNS to prioritise the discard/delay of the data frames of the DCH.

The DRNS shall use the included *UL DCH FP Mode* IE for a DCH as the new DCH FP Mode in the Uplink of the user plane for this DCH.

The DRNS shall use the included *ToAWS* IE for a DCH as the new Time of Arrival Window Start Point in the user plane for this DCH.

The DRNS shall use the included *ToAWE* IE for a DCH as the new Time of Arrival Window End Point in the user plane for this DCH.

[FDD - If the RADIO LINK SETUP REQUEST message includes the *SSDT Cell Identity* IE, the DRNS may activate SSDT using the *SSDT Cell Identity* IE and *SSDT Cell Identity Length* IE.]

At the reception of the RADIO LINK SETUP REQUEST message, DRNS allocates requested type of channelisation codes and other physical channel resources for each RL and assigns a binding identifier and a transport layer address for each DCH or set of co-ordinated DCHs. This information shall be sent to the SRNS in the message RADIO LINK SETUP RESPONSE when all the RLs have been successfully setup.

If the *Initial DL TX Power* and the *Uplink Eb/No Target* IEs are not present in the RADIO LINK SETUP REQUEST message, then DRNC shall include the suggested initial *Uplink and Downlink Eb/No Targets* and the *DL Eb/No Target* in the RADIO LINK SETUP RESPONSE message.

In the case of combining one or more RLs the DRNC shall indicate in the RADIO LINK SETUP RESPONSE message with the Diversity Indication that the RL is combined with another RL. In this case the Reference RL ID shall be included to indicate with which RL the combination is performed. The Reference RL ID shall be included for all but one of the combined RLs, for which the *Transport Layer Address* IE and the *Binding ID* IE shall be included.

In the case of not combining an RL with another RL, the DRNC shall indicate in the RADIO LINK SETUP RESPONSE message with the *Diversity Indication IE Diversity Indication* that no combining is ~~done~~performed. In this case the DRNC shall include both the *Transport Layer Address* IE and the *Binding ID* IE for the transport bearer to be established for each DCH of the RL in the RADIO LINK SETUP RESPONSE message.

In case of a set of co-ordinated DCHs requiring a new transport bearer on Iur the *Binding Identifier* IE and the *Transport Layer Address* IE shall be included only for one of the DCH in the set of co-ordinated DCHs.

[FDD - Irrespective of SSDT activation, the DRNS shall include in the RADIO LINK SETUP RESPONSE message an indication concerning the capability to support SSDT on this RL. Only if the RADIO LINK SETUP REQUEST message requested SSDT activation and the RADIO LINK SETUP RESPONSE message indicates that the SSDT capability is supported for this RL, SSDT is activated in the DRNS.]

The DRNS shall also provide the SRNC with the UTRAN Cell Identifier (UC-Id) and information of the neighbouring cells to the cell(s) where the radio link(s) are added.

If a neighbouring cell is controlled by another RNC, the DRNC shall report also the node identifications (i.e. RNC, CN domain nodes) of the RNC controlling the neighbouring cell.

If there was no UE context for this UE in the DRNS before the RADIO LINK SETUP REQUEST message was received the DRNC shall include the node identifications of the CN Domain nodes that the RNC is connected to (using LAC and RAC of the current cell), and the D-RNTI in the RADIO LINK SETUP RESPONSE message.

8.3.1.3 Unsuccessful Operation

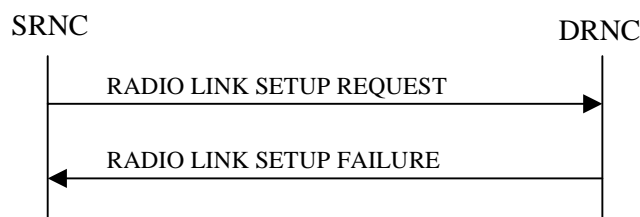


Figure 6: Radio Link Setup procedure: Unsuccessful Operation

In unsuccessful case (i.e. one or more RLs can not be setup) the RADIO LINK SETUP FAILURE message shall be sent to the SRNC, indicating the reason for failure. If some radio links were established successfully, the DRNC shall

indicate this in the RADIO LINK SETUP FAILURE message in the same way as in the RADIO LINK SETUP RESPONSE message.

Typical cause values are:

Radio Network Layer Causes:

- UL Scrambling Code Already in Use
- DL Radio Resources not Available
- UL Radio Resources not Available
- Unknown C-ID
- Macrodiversity Combining not Possible
- Requested Configuration not Supported
- Cell not Available
- Power Level not Supported

Transport Layer Causes:

- Transport Link Failure

Protocol Causes:

- Transaction not Allowed

Miscellaneous Causes:

- Control Processing Overload
- HW Failure
- Not enough User Plane Processing Resources

8.3.1.4 Abnormal Conditions

If the DRNC receives either an S-RNTI or a D-RNTI which already has RL(s) established the DRNC shall send the RADIO LINK SETUP FAILURE message to the SRNC, indicating the reason for failure.

8.3.2 Radio Link Addition

8.3.2.1 General

This procedure is used for establishing the necessary resources in the DRNS for one or more additional RLs towards a UE when there is already at least one RL established to the concerning UE via this DRNS.

This procedure shall use the signalling bearer connection for the relevant UE context.

8.3.2.2 Successful Operation

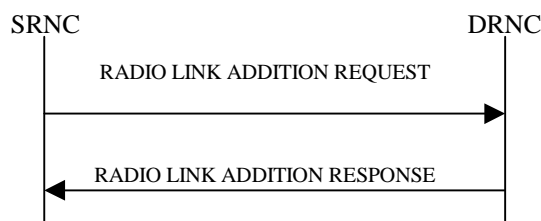


Figure 7: Radio Link Addition procedure: Successful Operation

The procedure is initiated with a RADIO LINK ADDITION REQUEST message sent from the SRNC to the DRNC.

Upon reception, the DRNS shall reserve the necessary resources and configure the new RL(s) according to the parameters given in the message. Unless specified below, the meaning of parameters is specified in other specifications.

[FDD - The Diversity Control Field indicates for each RL whether the DRNS shall combine the new RL with existing RL(s) or not on the Iur. If the *Diversity Control Field* IE is set to "May" (be combined with another RL), then the DRNS shall decide for any of the alternatives. When a new RL is to be combined the DRNS shall choose which RL(s) to combine it with.]

| If the *Primary CCPCH Ec/No* IE [FDD] or the *Primary CCPCH RSCP* IE [TDD] measured by the UE is included in the RADIO LINK ADDITION REQUEST message, the DRNS shall use this in the calculation of the Initial DL TX Power. If the *Primary CCPCH Ec/No* IE is not present, the DRNS sets the Initial DL TX Power accordingly to the power used by the existing RLs.

| [FDD - The DRNS shall use the provided *Uplink* Eb/No Target value as the current target for the inner-loop power control.]

[FDD - If the RADIO LINK ADDITION REQUEST message contains an *SSDT Cell Identity* IE, SSDT may be activated for the concerned new RL, with the indicated SSDT Cell Identity used for that RL.]

The DRNS shall activate any feedback mode diversity according to the received settings.

If all requested RLs are successfully added, the DRNC shall respond with a RADIO LINK ADDITION RESPONSE message.

In the case of combining an RL with existing RL(s) the DRNC shall indicate in the RADIO LINK ADDITION RESPONSE message with the Diversity Indication that the RL is combined. In this case the Reference RL ID shall be included to indicate one of the existing RLs that the new RL is combined with.

In the case of not combining an RL with existing RL(s), the DRNC shall indicate in the RADIO LINK ADDITION RESPONSE message with the Diversity Indication that no combining is done. In this case the DRNC shall include both the Transport Layer Address and the binding ID for the transport bearer to be established for each DCH of the RL in the RADIO LINK ADDITION RESPONSE message.

In case of co-ordinated DCH, the binding ID and the transport address shall be included for only one of the co-ordinated DCHs.

[FDD - Irrespective of SSDT activation, the DRNS shall include in the RADIO LINK ADDITION RESPONSE message an indication concerning the capability to support SSDT on this RL. Only if the RADIO LINK ADDITION REQUEST message requested SSDT activation and the RADIO LINK ADDITION RESPONSE message indicates that the SSDT capability is supported for this RL, SSDT is activated in the DRNS.]

For any cell neighbouring of a cell in which a RL was added, the DRNC shall provide in the RADIO LINK ADDITION RESPONSE message the UTRAN Cell Identifier (UC-Id), the Frequency Number, the Primary Scrambling Code and the node identification of CN nodes connected to the RNC controlling the neighbouring cell if the neighbouring cell is not controlled by the DRNC. In addition, if the information is available, the DRNC shall also provide the CPICH Power level and Frame Offset of the neighbouring cell.

The DRNC shall also provide the configured uplink Maximum Eb/No and UL Minimum Eb/No for every new RL to the SRNC in the RADIO LINK ADDITION RESPONSE message. These values are taken into consideration by DRNS admission control and shall be used by the SRNC as limits for the UL inner-loop power control target.

| The DRNC shall also provide the selected scrambling- and channelisation codes of the new RLs in order to enable the SRNC to inform the UE about the selected codes.

After sending of the RADIO LINK ADDITION RESPONSE message the DRNS shall continuously attempt to obtain UL synchronisation and start reception on the new RL. The DRNS shall start transmission on the new RL after synchronisation is achieved in the Iur user plane as specified in ref. [3].

8.3.2.3 Unsuccessful Operation

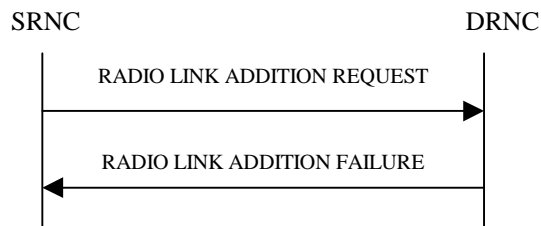


Figure 8: Radio Link Addition procedure: Unsuccessful Operation

If the establishment of at least one RL is unsuccessful, the DRNC shall send a RADIO LINK ADDITION FAILURE as response.

If some RL(s) were established successfully, the DRNC shall indicate this in the RADIO LINK ADDITION FAILURE message in the same way as in the RADIO LINK ADDITION RESPONSE message.

Typical cause values are:

Radio Network Layer Causes:

- DL Radio Resources not Available
- UL Radio Resources not Available
- Unknown C-ID
- Macrodiversity Combining not Possible
- Cell not Available
- Power Level not Supported

Transport Layer Causes:

- Transport Link Failure

Miscellaneous Causes:

- Control Processing Overload
- HW Failure
- Not enough User Plane Processing Resources

8.3.2.4 Abnormal Conditions

-

8.3.3 Radio Link Deletion

8.3.3.1 General

The Radio Link Deletion procedure is used to release the resources in a DRNS for one or more established radio links towards a UE.

This procedure shall use the signalling bearer connection for the relevant UE context.

8.3.3.2 Successful Operation

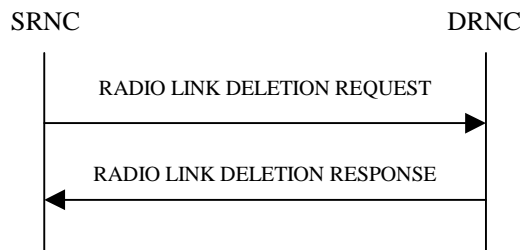


Figure 9: Radio Link Deletion procedure, Successful Operation

The procedure is initiated with a RADIO LINK DELETION REQUEST message sent from the SRNC to the DRNC.

Upon receipt of this message, the DRNS shall delete the radio link(s) identified in the message and release all associated resources and respond to the SRNC with a RADIO LINK DELETION RESPONSE message.

If the radio link(s) to be deleted represent the last radio link(s) for the UE in the DRNS then the DRNC shall also release the UE context, unless the UE is using common resources in the DRNS.

8.3.3.3 Unsuccessful Operation

-

8.3.3.4 Abnormal Conditions

-

8.3.4 Synchronised Radio Link Reconfiguration Preparation

8.3.4.1 General

The Synchronised Radio Link Reconfiguration Preparation procedure is used to prepare a new configuration of all Radio Links related to one UE-UTRAN connection within a DRNS.

This procedure shall use the signalling bearer connection for the relevant UE context.

8.3.4.2 Successful Operation

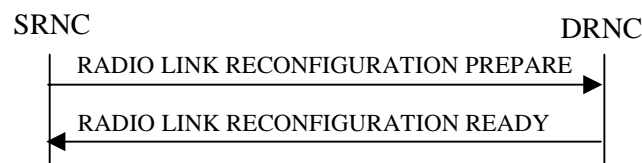


Figure 10: Synchronised Radio Link Reconfiguration Preparation procedure, Successful Operation

The Synchronised Radio Link Reconfiguration Preparation procedure is initiated by the SRNC by sending the RADIO LINK RECONFIGURATION PREPARE message to the DRNC.

Upon reception, the DRNS shall reserve necessary resources for the new configuration of the Radio Link(s) according to the parameters given in the message. Unless specified below, the meaning of parameters is specified in other specifications.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *Allowed Queuing Time* IE the DRNS may queue the request before providing a response to the SRNC.

DCH Modification :

If the RADIO LINK RECONFIGURATION PREPARE message includes the *Allocation/Retention Priority* IE for a DCH to be modified, the DRNS should use this information when reserving resources for this DCH in the new configuration.

[Editor's note: The priority handling in the DRNS has not been discussed in RAN WG3. Neither has the possibilities for pre-emption (not retaining a resource) of DCHs/RLs. The handling of the *Allocation/Retention Priority* IE is thus not clear and is regarded as FFS.]

If the RADIO LINK RECONFIGURATION PREPARE message includes the *Frame Handling Priority* IE for a DCH to be modified, the DRNS should store this information for this DCH in the new configuration. The received Frame Handling Priority should be used when prioritising between different frames in the downlink on the radio interface in congestion situations within the DRNS once the new configuration has been activated.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *Transport Format Set* (~~UL~~) IE for the UL of a DCH to be modified, the DRNS shall apply the new Transport Format Set in the Uplink of this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *Transport Format Set* (~~DL~~) IE for the DL of a DCH to be modified, the DRNS shall apply the new Transport Format Set in the Downlink of this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *UL DCH-FP Mode* IE for a DCH to be modified, the DRNS shall apply the new ~~DCH-FP~~ Mode in the Uplink of the user plane for this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes on the *ToAWS* IE for a DCH to be modified, the DRNS shall apply the new ToAWS in the user plane for this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes on the *ToAWE* IE for a DCH to be modified, the DRNS shall apply the new ToAWE in the user plane for this DCH in the new configuration.

DCH Addition:

If the RADIO LINK RECONFIGURATION PREPARE message includes any DCH to be added to the Radio Link(s), the DRNS shall reserve necessary resources for the new configuration of the Radio Link(s) according to the parameters given in the message and include these DCH in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *DCH Combination Indicator* IE for a DCH to be added, the DRNS shall

1. treat all DCHs with the same value of this IE as a set of co-ordinated DCHs and
2. include this DCH in the new configuration only if it can include all DCHs with the same value of the *DCH Combination Indicator* IE in the new configuration

The DRNS should use the *Allocation/Retention Priority* IE received for a DCH to be added when reserving resources for this DCH in the new configuration.

[Editor's note: The priority handling in the DRNS has not been discussed in RAN WG3. Neither has the possibilities for pre-emption (not retaining a resource) of DCHs/RLs. The handling of the *Allocation/Retention Priority* IE is thus not clear and is regarded as FFS.]

The DRNS should store the *Frame Handling Priority* IE received for a DCH to be added in the new configuration. The received Frame Handling Priority should be used when prioritising between different frames in the downlink on the radio interface in congestion situations within the DRNS once the new configuration has been activated.

The DRNS may use the included *RLC Mode* IE to optimise the power control.

The DRNS shall use the included *UL DCH-FP Mode* IE for a DCH to be added as the new ~~DCH-FP~~ Mode in the Uplink of the user plane for this DCH in the new configuration.

The DRNS shall use the included *ToAWS* IE for a DCH to be added as the new Time of Arrival Window Start Point in the user plane for this DCH in the new configuration.

The DRNS shall use the included *ToAWE* IE for a DCH to be added as the new Time of Arrival Window End Point in the user plane for this DCH in the new configuration.

DCH Deletion:

If the RADIO LINK RECONFIGURATION PREPARE message includes any DCH to be deleted from the Radio Link(s), the DRNS shall not include this DCH in the new configuration.

If all of the DCHs belonging to a set of co-ordinated DCHs are requested to be deleted, the DRNS shall not include this set of co-ordinated DCHs in the new configuration

Physical Channel Modification:

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes the *Uplink Scrambling Code* IE, the DRNS shall apply this Uplink Scrambling Code to the new configuration.]

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes one or more *Uplink Channelisation Code* IEs, the DRNS shall apply the new Uplink Channelisation Code(s) in the new configuration.

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes one or more *Spreading Factor of Channelisation Code (DL)* IE, for each *Spreading Factor of Channelisation Code (DL)* IE the DRNS shall allocate one new Downlink Channelisation Code per Radio Link and apply the new Downlink Channelisation Code(s) to the new configuration. Each Downlink Channelisation Code allocated for the new configuration shall be included as a *Channelisation Code (DL)* IE in the RADIO LINK RECONFIGURATION READY message when sent to the SRNC.]

| The DRNS shall use the *TFCS* (~~DL~~) IE for the UL when reserving resources for the uplink of the new configuration. The DRNS shall apply the new TFCS in the Uplink of [TDD – the CCTrCH of] the new configuration.

| The DRNS shall use the *TFCS* (~~UL~~) IE for the DL when reserving resources for the downlink of the new configuration. The DRNS shall apply the new TFCS in the Downlink of [TDD – the CCTrCH of] the new configuration.

| If the RADIO LINK RECONFIGURATION PREPARE message includes the *Mean Bit Rate* (~~UL~~) IE for the UL, the DRNS should use this information when reserving resources for the Uplink of the new configuration.

| If the RADIO LINK RECONFIGURATION PREPARE message includes the *Mean Bit Rate* (~~DL~~) IE for the DL, the DRNS should use this information when reserving resources for the Downlink of the new configuration.

[Editor's note: There is presently no clear definition of the *Mean Bit Rate* IEs. The handling of these IEs is thus regarded as FFS.]

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes on the *UL DPCCCH Structure* IE, group the DRNS shall apply the new Uplink DPCCCH Structure to the new configuration.]

SSDT Activation/Deactivation:

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes the *SSDT Indication* IE set to "SSDT Active in the UE", the DRNS may activate SSDT using the *SSDT Cell Identity* IE and *SSDT Cell Identity Length* IE in the new configuration.]

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes the *SSDT Indication* IE set to "SSDT not Active in the UE", the DRNS shall deactivate SSDT in the new configuration.]

If the requested modifications are allowed by the DRNS, and the DRNS has successfully reserved the required resources for the new configuration of the Radio Link(s) it shall respond to the SRNC with the RADIO LINK RECONFIGURATION READY message.

The DRNS decides the maximum and minimum Eb/No for the uplink of the Radio Link(s) and shall return this in the *Maximum Uplink Eb/No* IE and *Minimum Uplink Eb/No* IE for each Radio Link in the RADIO LINK RECONFIGURATION READY message.

[TDD – The DRNC shall include all the IEs corresponding to the new physical channel parameters for the DL DPCH and/or the UL DPCH to be reconfigured in the RADIO LINK RECONFIGURATION READY message.]

[Editor's note: Which information in the RL RECONFIGURATION PREPARE message triggers the DRNC to include any of the following *Optional TDD* information?:

- a) DL DPCH Group
- b) UL DPCH Group
- c) TDD Physical Channel Offset, *Repetition Length*, and TFCI Presence IEs as part of the DL DPCH Group
- d) TDD Physical Channel Offset, *Repetition Length*, and TFCI Presence IEs as part of the UL DPCH Group.]

In case of a set of co-ordinated DCHs requiring a new transport bearer on Iur the *DCH to be Added* IE group or the *DCH to be Modified* IE group shall be included only for one of the DCHs in the set of co-ordinated DCHs.

In case of a Radio Link being combined with another Radio Link within the DRNS the *DCH to be Added* IE group and the *DCH to be Modified* IE group shall be included only for one of the combined Radio Links.

8.3.4.3 Unsuccessful Operation

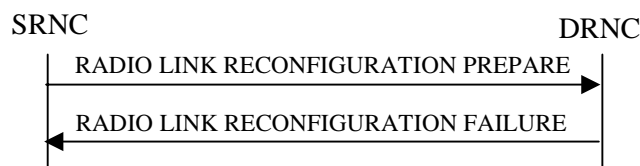


Figure 11: Synchronised Radio Link Reconfiguration Preparation procedure, Unsuccessful Operation

If the DRNS cannot reserve the necessary resources for all the new DCHs of ~~one~~ a set of co-ordinated DCHs requested to be added, it shall regard the Synchronised Radio Link Reconfiguration procedure as having failed.

- If the requested Synchronised Radio Link Reconfiguration procedure fails for one or more RLs the DRNC shall send the RADIO LINK RECONFIGURATION FAILURE message to the SRNC, indicating the reason for failure.

In which cases to include only the *Cause* IE on message level and in which cases the *Cause* IE also shall be included for a specific RL is FFS.

Typical cause values are:

Radio Network Layer Causes:

- UL Scrambling Code Already in Use
- DL Radio Resources not Available
- UL Radio Resources not Available
- Requested Configuration not Supported

Protocol Causes:

- Transaction not Allowed

Miscellaneous Causes:

- Control Processing Overload
- Not enough User Plane Processing Resources

8.3.4.4 Abnormal Conditions

If only a subset of all the DCHs belonging to a set of co-ordinated DCHs is requested to be deleted, the DRNS shall regard the Synchronised Radio Link Reconfiguration Preparation procedure as having failed and the DRNC shall send the RADIO LINK RECONFIGURATION FAILURE message to the SRNC.

8.3.5 Synchronised Radio Link Reconfiguration Commit

8.3.5.1 General

This procedure is used to order the DRNS to switch to the new configuration for the Radio Link(s) within the DRNS, previously prepared by the Synchronised Radio Link Preparation procedure.

This procedure shall use the signalling bearer connection for the relevant UE context.

8.3.5.2 Successful Operation



Figure 12: Synchronised Radio Link Reconfiguration Commit procedure, Successful Operation

The DRNS shall switch to the new configuration previously prepared by the Synchronised RL Reconfiguration procedure at the CFN requested by the SRNC when receiving the RADIO LINK RECONFIGURATION COMMIT message from the SRNC.

8.3.5.3 Abnormal Conditions

8.3.6 Synchronised Radio Link Reconfiguration Cancellation

8.3.6.1 General

This procedure is used to order the DRNS to release the new configuration for the Radio Link(s) within the DRNS, previously prepared by the Synchronised Radio Link Preparation procedure.

This procedure shall use the signalling bearer connection for the relevant UE context.

8.3.6.2 Successful Operation



Figure 13: Synchronised Radio Link Reconfiguration Cancellation procedure, Successful Operation

The DRNS shall release the new configuration previously prepared by the Synchronised RL Reconfiguration Preparation procedure and continue using the old configuration when receiving the RADIO LINK RECONFIGURATION CANCEL message from the SRNC.

8.3.6.3 Abnormal Conditions

If the DRNS receives the RADIO LINK RECONFIGURATION CANCEL message from the SRNC when there is no new configuration for the Radio Link(s) within the DRNS, previously prepared by the Synchronised Radio Link Preparation procedure, the message shall be ignored.

8.3.7 Unsynchronised Radio Link Reconfiguration

8.3.7.1 General

The Unsynchronised Radio Link Reconfiguration procedure is used to reconfigure Radio Link(s) related to one UE-UTRAN connection within a DRNS.

The procedure is used when there is no need to synchronise the time of the switching from the old to the new radio link configuration in the cells used by the UE-UTRAN connection within the DRNS.

This procedure shall use the signalling bearer connection for the relevant UE context.

8.3.7.2 Successful Operation

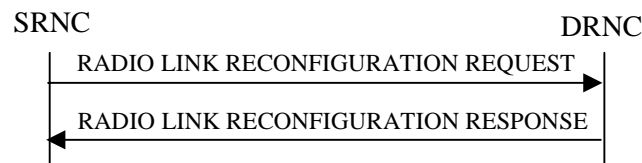


Figure 14: Unsynchronised Radio Link Reconfiguration procedure, Successful Operation

The Unsynchronised Radio Link Reconfiguration procedure is initiated by the SRNC by sending the RADIO LINK RECONFIGURATION REQUEST message to the DRNC.

Upon reception, the DRNS shall modify the configuration of the Radio Link(s) according to the parameters given in the message. Unless specified below, the meaning of parameters is specified in other specifications.

If the RADIO LINK RECONFIGURATION REQUEST message includes the *Allowed Queuing Time* IE the DRNS may queue the request before providing a response to the SRNC.

DCH Modification:

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *Allocation/Retention Priority* IE for a DCH to be modified, the DRNS should use this information when reserving resources for this DCH in the new configuration.

[Editor's note: The priority handling in the DRNS has not been discussed in RAN WG3. Neither has the possibilities for pre-emption (not retaining a resource) of DCHs/RLs. The handling of the *Allocation/Retention Priority* IE is thus not clear and is regarded as FFS.]

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *Frame Handling Priority* IE for a DCH to be modified, the DRNS should store this information for this DCH in the new configuration. The received Frame Handling Priority should be used when prioritising between different frames in the downlink on the radio interface in congestion situations within the DRNS once the new configuration has been activated.

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *Transport Format Set (UL)* IE for the UL of a DCH to be modified, the DRNS shall apply the new Transport Format Set in the Uplink of this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *Transport Format Set (DL)* IE for the DL of a DCH to be modified, the DRNS shall apply the new Transport Format Set in the Downlink of this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *UL DCH-FP Mode* IE for a DCH to be modified, the DRNS shall apply the new DCH-FP Mode in the Uplink of the user plane for this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *ToAWS* IE for a DCH to be modified, the DRNS shall apply the new ToAWS in the user plane for this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *ToAWE* IE for a DCH to be modified, the DRNS shall apply the new ToAWE in the user plane for this DCH in the new configuration.

DCH Addition:

If the RADIO LINK RECONFIGURATION REQUEST message includes any DCH to be added to the Radio Link(s), the DRNS shall reserve necessary resources for the new configuration of the Radio Link(s) according to the parameters given in the message and include these DCH in the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes the *DCH Combination Indicator* IE for a DCH to be added, the DRNS shall.

1. treat all DCHs with the same value of this IE as a set of co-ordinated DCHs and
 2. include this DCH in the new configuration only if it can include all DCHs with the same value of the *DCH Combination Indicator* IE in the new configuration
- The DRNS should use the *Allocation/Retention Priority* IE received for a DCH to be added when allocating resources for this DCH in the new configuration.

[Editor's note: The priority handling in the DRNS has not been discussed in RAN WG3. Neither has the possibilities for pre-emption (not retaining a resource) of DCHs/RLs. The handling of the *Allocation/Retention Priority* IE is thus not clear and is regarded as FFS.]

The DRNS should store the *Frame Handling Priority* IE received for a DCH to be added in the new configuration. The received Frame Handling Priority should be used when prioritising between different frames in the downlink on the radio interface in congestion situations within the DRNS once the new configuration has been activated.

If the RADIO LINK RECONFIGURATION REQUEST message includes the *RLC Mode* IE, the DRNS may use this information to optimise the power control.

The DRNS shall use the included *UL DCH-FP Mode* IE for a DCH to be added as the new *DCH-FP Mode* in the Uplink of the user plane for this DCH in the new configuration.

The DRNS shall use the included *ToAWS* IE for a DCH to be added as the new Time of Arrival Window Start Point in the user plane for this DCH in the new configuration.

The DRNS shall use the included *ToAWE* IE for a DCH to be added as the new Time of Arrival Window End Point in the user plane for this DCH in the new configuration.

DCH Deletion:

If the RADIO LINK RECONFIGURATION REQUEST message includes any DCH to be deleted from the Radio Link(s), the DRNS shall not include this DCH in the new configuration.

If all of the DCHs belonging to a set of co-ordinated DCHs are requested to be deleted, the DRNS shall not include this set of co-ordinated DCHs in the new configuration

Physical Channel Modification:

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *TFCS* ~~(UL)~~ IE for the UL, the DRNS shall apply the new TFCS in the Uplink of [TDD – the CCTrCH of] the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *TFCS* ~~(DL)~~ IE for the DL, the DRNS shall apply the new TFCS in the Downlink of [TDD – the CCTrCH of] the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *Mean Bit Rate* ~~(UL)~~ IE for the UL, the DRNS should use this information when reserving resources for the Uplink of the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *Mean Bit Rate* ~~(DL)~~ IE for the DL, the DRNS should use this information when reserving resources for the Downlink of the new configuration.

[Editor's note: There is presently no clear definition of the *Mean Bit Rate* IEs. The handling of these IEs is thus regarded as FFS.]

If the requested modifications are allowed by the DRNS, the DRNS has successfully allocated the required resources, and changed to the new configuration it shall respond to the SRNC with the RADIO LINK RECONFIGURATION RESPONSE message.

The DRNS decides the maximum and minimum Eb/No for the uplink of the Radio Link(s) and shall return this in the IEs *Maximum Uplink Eb/No* and *Minimum Uplink Eb/No* for each Radio Link in the RADIO LINK RECONFIGURATION RESPONSE message.

In case of a set of co-ordinated DCHs requiring a new transport bearer on Iur the *DCH to be Added* IE group or the *DCH to be Modified* IE group shall be included only for one of the DCH in the set of co-ordinated DCHs.

In case of a Radio Link being combined with another Radio Link within the DRNS the *DCH to be Added* IE group and the *DCH to be Modified* IE group shall be included only for one of the combined Radio Links.

8.3.7.3 Unsuccessful Operation

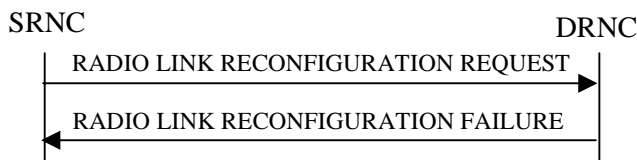


Figure 15: Unsynchronised Radio Link Reconfiguration procedure, Unsuccessful Operation

If the DRNS cannot allocate the necessary resources for all the new DCHs of a set of co-ordinated DCHs requested to be added it shall regard the ~~Synchronised~~ Unsynchronised Radio Link Reconfiguration procedure as having failed.

If the requested Unsynchronised Radio Link Reconfiguration procedure fails for one or more Radio Link(s) the DRNC shall send the RADIO LINK RECONFIGURATION FAILURE message to the SRNC, indicating the reason for failure.

Typical cause values are:

Radio Network Layer Causes:

- UL Scrambling Code Already in Use
- DL Radio Resources not Available
- UL Radio Resources not Available
- Requested Configuration not Supported

Protocol Causes:

- Transaction not Allowed

Miscellaneous Causes:

- Control Processing Overload
- Not enough User Plane Processing Resources

8.3.7.4 Abnormal Conditions

If only a subset of all the DCHs belonging to a set of co-ordinated DCHs is requested to be deleted, the ~~the~~ DRNS shall regard the ~~Synchronised~~ Unsynchronised Radio Link Reconfiguration procedure as having failed and the DRNC shall send the RADIO LINK RECONFIGURATION FAILURE message to the SRNC.

8.3.8 Physical Channel Reconfiguration

8.3.8.1 General

Physical Channel Reconfiguration procedure is used by the DRNC to request to SRNC the reconfiguration of one of its physical channels.

This procedure shall use the signalling bearer connection for the relevant UE context.

8.3.8.2 Successful Operation

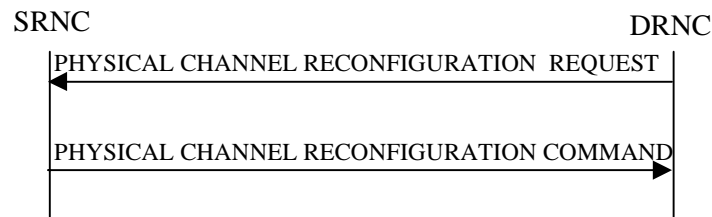


Figure 16: Physical Channel Reconfiguration procedure, Successful Operation

When the DRNC detects the need to modify one of its physical channels, it sends a PHYSICAL CHANNEL RECONFIGURATION REQUEST to the SRNC.

The message contains the new value of the physical channel parameter(s) that shall be reconfigured and in which radio link.

Upon reception of the PHYSICAL CHANNEL RECONFIGURATION REQUEST, the SRNC decides appropriate execution time for the change. It informs the UE and responds with the PHYSICAL CHANNEL RECONFIGURATION COMMAND to the DRNC that includes the CFN indicating the execution time. ~~The message is sent over the dedicated signalling connection.~~

At the ~~specified time~~CFN, the DRNS shall switch to the new configuration that has been requested, and release the resources related to the old physical channel configuration.

8.3.8.3 Unsuccessful Operation

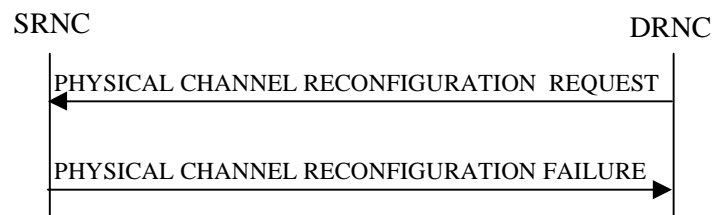


Figure 17: Physical Channel Reconfiguration procedure, Unsuccessful Operation

If the SRNC can not accept the reconfiguration request it will send the PHYSICAL CHANNEL RECONFIGURATION FAILURE message to the DRNC, that included the cause for the failure.

Typical cause values are:

Radio Network Layer Causes:

- Reconfiguration not Allowed

8.3.8.4 Abnormal Conditions

If the DRNC receives any of the messages RADIO LINK RECONFIGURATION PREPARE, RADIO LINK RECONFIGURATION REQUEST, or RADIO LINK DELETION REQUEST while waiting for the PHYSICAL CHANNEL RECONFIGURATION COMMAND message, this shall be regarded as a Physical Channel Reconfiguration failure. These messages thus override the DRNC request for physical channel reconfiguration.

8.3.9 Radio Link Failure

8.3.9.1 General

This procedure is started by the DRNS when one or more radio links are no longer available.

This procedure shall use the signalling bearer connection for the relevant UE context.

The DRNC may initiate the Radio Link Failure procedure at any time after establishing a Radio Link.

8.3.9.2 Successful Operation

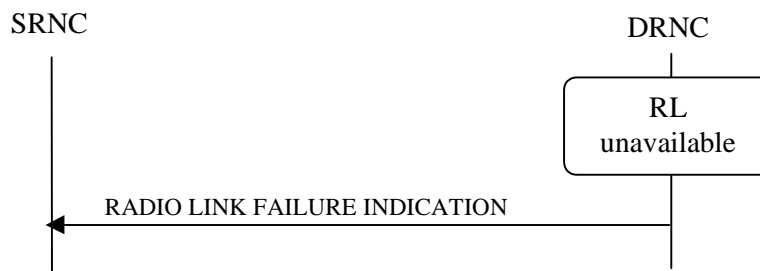


Figure 18: RL Failure procedure, Successful Operation

When DRNC detects that a one or more Radio Links are no longer available, it shall send the RL FAILURE INDICATION message to the SRNC. The message indicates the failed radio links with the most appropriate cause values defined in the *Cause IE*.

When the RL Failure procedure is used to notify the non achievement or loss of UL synchronisation: the message shall be sent when the UL synchronisation of the radio link is not achieved after any of the procedures RL Setup or RL Addition. The message shall also be sent if the UL synchronisation it is lost during an active connection.

Typical cause values are:

Radio Network Layer Causes:

- Synchronisation Failure

Miscellaneous Causes:

- Control Processing Overload
- HW Failure
- O&M Intervention

8.3.9.3 Abnormal Conditions

-

8.3.10 Radio Link Restoration

8.3.10.1 General

This procedure is used to notify of re-establishment of UL synchronisation after that the RL Failure procedure has been used to notify the loss of the synchronisation.

This procedure shall use the signalling bearer connection for the relevant UE context.

The DRNC may initiate the Radio Link Restoration procedure after establishing a Radio Link.

8.3.10.2 Successful Operation



Figure 19: RL Restoration procedure, Successful Operation

If the UL synchronisation is re-established, the DRNC shall send the RADIO LINK RESTORE INDICATION message to the SRNC. The message shall be sent only if the RL Failure procedure has been previously used to notify the loss of UL synchronisation of the same Radio Link(s), and it shall not be sent if a RL Deletion procedure have been activated in the DRNC after the RL Failure has been sent.

8.3.10.3 Abnormal Conditions

-

8.3.11 Measurement Initiation

[Editor's note: According to TSGR#5 (99)564, the following measurements shall also be considered:

- * Time of Arrival
- * Frequency Offset
- * Round Trip Time
- * RX Timing Deviation

Whether these measurements shall be dedicated or common measurements have so far not been considered by TSG RAN WG3 and are thus not incorporated.]

8.3.11.1 General

This procedure is used by an SRNS to request the initiation of measurements in a DRNS.

This procedure shall use the signalling bearer connection for the relevant UE context.

8.3.11.2 Successful Operation

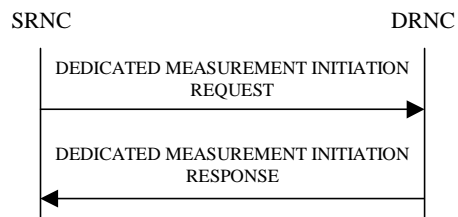


Figure 20: Measurement Initiation procedure, Successful Operation

The procedure is initiated with a DEDICATED MEASUREMENT INITIATION REQUEST message sent from the SRNC to the DRNC.

Upon reception, the DRNC shall initiate the requested measurement according to the parameters given in the request. Unless specified below, the meaning of the parameters are given in other specifications.

If no RL Information is provided in the *Dedicated Measurement Object* IE, the measurement reports shall give the aggregated result for all radio links within the requested UE Context. If RL Information is provided in the request, the measurement request shall apply for the requested radio links individually.

The *Report Characteristics* IE indicates how the reporting of the measurement shall be performed.

If the *Report Characteristics* IE is set to indicate 'On-Demand', the DRNS shall report the measurement result immediately.

If the *Report Characteristics* IE is set to indicate 'Periodic', the DRNS shall periodically initiate a Measurement Report procedure for this measurement, with the requested report periodicity~~frequency~~.

If the *Report Characteristics* IE is set to indicate 'Event A', the DRNS shall initiate a Measurement Reporting procedure when the measured entity rises above the requested threshold and stays there for the requested hysteresis time. If no hysteresis time is given, the DRNC shall use the value zero for the hysteresis time.

If the *Report Characteristics* IE is set to indicate 'Event B', the DRNS shall initiate a Measurement Reporting procedure when the measured entity falls below the requested threshold and stays there for the requested hysteresis time. If no hysteresis time is given, the DRNC shall use the value zero for the hysteresis time.

If the *Report Characteristics* IE is set to indicate 'Event C', the DRNS shall initiate a Measurement Reporting procedure when the measured entity rises more than the requested threshold within the requested time.

If the *Report Characteristics* IE is set to indicate 'Event D', the DRNS shall initiate a Measurement Reporting procedure when the measured entity falls more than the requested threshold within the requested time.

If the *Report Characteristics* IE is set to indicate 'Event E', the DRNS shall initiate a Measurement Reporting procedure when the measured entity rises above the 'Measurement Threshold 1' and stays there for the 'Measurement Hysteresis Time' (Report A). The DRNS shall also initiate a Measurement Reporting procedure when the measured entity falls below the 'Measurement Threshold 2' and stays there for the 'Measurement Hysteresis Time' (Report B). If the *Report Periodicity* ~~Frequency~~ IE is provided, the DRNS shall initiate Measurement Reporting procedures periodically, with the requested frequency, between Report A and Report B. If 'Measurement Threshold 2' is not present, the DRNS shall use 'Measurement Threshold 1' instead. If no 'Measurement Hysteresis Time' is provided, the DRNC shall use the value zero as hysteresis times for both Report A and Report B.

If the *Report Characteristics* IE is set to indicate 'Event F', the DRNS shall initiate a Measurement Reporting procedure when the measured entity falls below the 'Measurement Threshold 1' and stays there for the 'Measurement Hysteresis Time' (Report A). The DRNS shall also initiate a Measurement Reporting procedure when the measured entity rises above the 'Measurement Threshold 2' and stays there for the 'Measurement Hysteresis Time' (Report B). If the *Report Periodicity* ~~Frequency~~ IE is provided, the DRNS shall initiate Measurement Reporting procedures periodically, with the requested frequency, between Report A and Report B. If 'Measurement Threshold 2' is not present, the DRNS shall use 'Measurement Threshold 1' instead. If no 'Measurement Hysteresis Time' is provided, the DRNC shall use the value zero as hysteresis times for both Report A and Report B.

If at the start of the measurement, the reporting criteria are fulfilled for any of Event A, Event B, Event E or Event F, the DRNS shall initiate a Measurement Reporting procedure immediately, and then continue with the measurements as specified in the DEDICATED MEASUREMENT INITIATION REQUEST message~~in normal operation~~.

If the DRNS was able to initiate the measurement requested by the SRNS it shall respond with the DEDICATED MEASUREMENT INITIATION RESPONSE message ~~using the connection-oriented service of the signalling bearer~~. The message shall include the same Measurement Id that was used in the measurement request.

Only in the case when the *Report Characteristics* IE is set to indicate "On-Demand", the DEDICATED MEASUREMENT INITIATION RESPONSE message shall contain the measurement result. In this case also the *Dedicated Measurement Object* IE shall be included if it was included in the request message.

8.3.11.3 Unsuccessful Operation

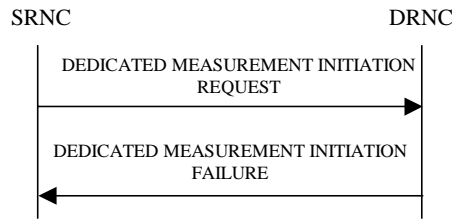


Figure 21: Measurement Initiation procedure, Unsuccessful Operation

If the requested measurement can not be initiated, the DRNC shall send a DEDICATED MEASUREMENT INITIATION FAILURE message ~~using the connection oriented service of the signalling bearer~~. The message shall include the same Measurement Id that was used in the DEDICATED MEASUREMENT INITIATION REQUEST message measurement request and the Cause IE set to an appropriate value.

Typical cause values are:

Radio Network Layer Causes:

- Measurement not Supported For The Object

Miscellaneous Causes:

- Control Processing Overload
- HW Failure

8.3.11.4 Abnormal Conditions

-

8.3.12 Measurements Reporting

8.3.12.1 General

This procedure is used by the DRNS to report results of measurements requested by the SRNS with the Measurement Initiation procedure.

This procedure shall use the signalling bearer connection for the relevant UE context.

The DRNC may initiate the Measurement Reporting procedure at any time after establishing a Radio Link.

8.3.12.2 Successful Operation



Figure 22: Measurement Reporting procedure, Successful Operation

If the requested measurement reporting criteria are met, the DRNS shall initiate a Measurement Reporting procedure. Unless specified below, the meaning of the parameters are given in other specifications.

The *Dedicated Measurement Id* IE shall be set to the Dedicated Measurement Id provided by the SRNS when initiating the measurement with the Measurement Initiation procedure.

8.3.12.3 Abnormal Conditions

-

8.3.13 Measurement Termination

8.3.13.1 General

This procedure is used by the SRNS to terminate a measurement previously requested by the Measurement Initiation procedure.

This procedure shall use the signalling bearer connection for the relevant UE context.

8.3.13.2 Successful Operation



Figure 23: Measurement Termination procedure, Successful Operation

This procedure is initiated with a DEDICATED MEASUREMENT TERMINATION REQUEST message, sent from the SRNC to the DRNC.

Upon reception, the DRNS shall terminate reporting of measurements corresponding to the [received](#) Dedicated Measurement Id.

8.3.13.3 Abnormal Conditions

-

8.3.14 Measurement Failure

8.3.14.1 General

This procedure is used by the DRNS to notify the SRNS that a measurement previously requested by the Measurement Initiation procedure can no longer be reported.

This procedure shall use the signalling bearer connection for the relevant UE context.

The DRNC may initiate the Measurement Failure procedure at any time after establishing a Radio Link.

8.3.14.2 Successful Operation

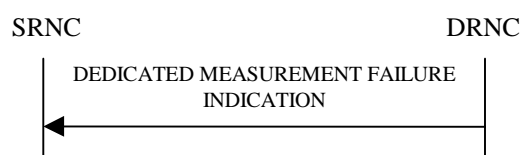


Figure 24: Measurement Failure procedure, Successful Operation

This procedure is initiated with a DEDICATED MEASUREMENT FAILURE INDICATION message, sent from the DRNC to the SRNC, to inform the SRNC that a previously requested measurement no longer can be reported.

Typical cause values are:

Miscellaneous Causes:

- Control Processing Overload
- HW Failure
- O&M Intervention

8.3.14.3 Abnormal Conditions

-

8.3.15 Downlink Link Power Control [FDD]

8.3.15.1 General

The purpose of this procedure is to balance the DL transmission powers of the radio links for one UE.

This procedure shall use the signalling bearer connection for the relevant UE context.

The Downlink Link Power Control procedure may be initiated by the SRNC at any time after establishing a Radio Link. If the SRNC has initiated deletion of the last Radio Link in this DRNS the Downlink Link Power Control procedure shall not be initiated.

8.3.15.2 Successful Operation



Figure 25: Downlink Link Power Control procedure, Successful Operation

The Downlink Link Power Control procedure is initiated by the SRNC sending a DL POWER CONTROL REQUEST message to the DRNC.

If the message contains the *DL Reference Power* IE, the DRNC shall perform the power balancing (see below) for all radio links for the UE context.

Alternatively, if the message contains the *DL Reference Power Information* IE, the DRNC shall perform the power balancing (see below) for all radio links addressed in the message.

The DRNS performs the power balancing by using the received desired DL Reference Power as a reference for adjusting the applied DL power.

[Editor's note: The exact mechanism is FFS.]

8.3.15.3 Abnormal Conditions

If the DRNC receives the DL POWER CONTROL REQUEST message after a request to delete the last radio link in the DRNC has been received, the DRNC shall ignore the message.

8.3.16 Compressed Mode Preparation [FDD]

8.3.16.1 General

The Compressed Mode Preparation procedure is used to prepare the compressed mode in the DRNS for one UE-UTRAN connection.

This procedure shall use the signalling bearer connection for the relevant UE context.

8.3.16.2 Successful Operation

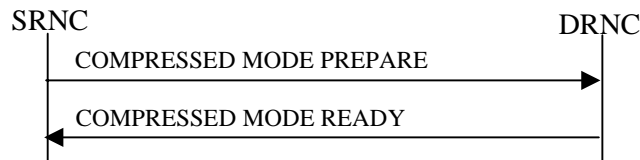


Figure 26: Compressed Mode Preparation procedure, Successful Operation

The Compressed Mode Preparation procedure is initiated by the SRNC by sending the COMPRESSED MODE PREPARE message to the DRNC.

If the proposed modifications are allowed by the DRNS and the DRNC has successfully initialised the required resources, the DRNC shall respond to the SRNC with COMPRESSED MODE READY message.

If the *Compressed Mode Method* IE is set to 'None', the DRNS shall terminate the compressed mode even if the COMPRESSED MODE PREPARE message was received before the end of the compressed mode period.

8.3.16.3 Unsuccessful Operation

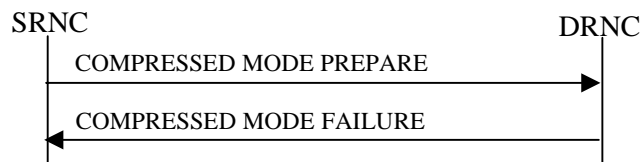


Figure 27: Compressed Mode Preparation procedure, unsuccessful case

If the requested reconfiguration fails for one or more RLS the DRNC shall abort the procedure and send the COMPRESSED MODE FAILURE message to the SRNC, indicating the reason for failure.

Typical cause values are:

Radio Network Layer Causes:

- Requested Configuration not Supported

Miscellaneous Causes:

- Not enough User Plane Processing Resources

8.3.16.4 Abnormal Conditions

-

8.3.17 Compressed Mode Commit [FDD]

8.3.17.1 General

The Compressed Mode Commit procedure is used to activate the compressed mode in the DRNS for one UE-UTRAN connection. This procedure shall use the signalling bearer connection for the relevant UE context.

8.3.17.2 Successful Operation



Figure 28: Compressed Mode Commit procedure, Successful Operation

The DRNS shall initiate the compressed mode in accordance with the settings prepared by the Compressed Mode Preparation procedure at the CFN requested by the SRNC when receiving the COMPRESSED MODE COMMIT message from the SRNC.

8.3.17.3 Abnormal Conditions

-

8.3.18 Compressed Mode Cancellation [FDD]

8.3.18.1 General

The Compressed Mode Cancellation procedure is used to cancel the compressed mode in the DRNS for one UE-UTRAN connection.

This procedure shall use the signalling bearer connection for the relevant UE context.

8.3.18.2 Successful Operation

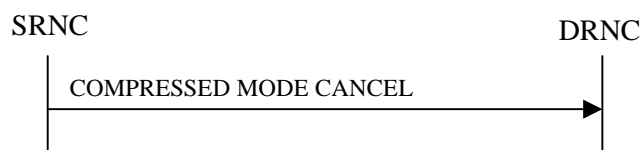


Figure 29: Compressed Mode Cancellation procedure, Successful Operation

The DRNS shall abort the compressed mode if it receives the COMPRESSED MODE CANCEL message.

8.3.18.3 Abnormal Conditions

-

8.4 Common Transport Channel Procedures

8.4.1 Common Transport Channel Resources Initialisation

8.4.1.1 General

The Common Transport Channel Resources Initialisation procedure is used by the SRNC for the initialisation of the Common Transport Channel user plane towards the DRNC and/or for the initialisation of the UE context in the DRNC.

This procedure shall use the connectionless mode of the signalling bearer.

8.4.1.2 Successful Operation

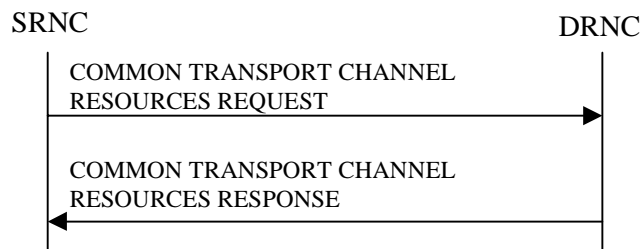


Figure 30: Common Transport Channel Resources Initialisation procedure, Successful Operation

The SRNC initiates the procedure by sending the message COMMON TRANSPORT CHANNEL RESOURCES REQUEST to the DRNC.

Upon reception of the COMMON TRANSPORT CHANNEL RESOURCES REQUEST message, the DRNC shall respond by sending a COMMON TRANSPORT CHANNEL RESOURCES RESPONSE message to the SRNC.

If the value of the *Transport Bearer Request Indicator* IE is set to "Bearer Requested", the DRNC shall store the received *Transport Bearer ID* IE and include the *Binding Identity* and *Transport Layer Address* IEs in the COMMON TRANSPORT CHANNEL RESOURCES RESPONSE message.

If the value of the *Transport Bearer Request Indicator* IE is set to "Bearer not Requested", the DRNC shall use the transport bearer for the indicated by the *Transport Bearer ID* IE.

The DRNC shall include the *FACH Priority Indicator* IE and *FACH Initial Window Size* IE for each priority class that the DRNC has determined shall be used. The DRNC may include several *MAC-c SDU Length* IEs for each priority class.

If there exists multiple Secondary CCPCHs in the cell where the UE is located, the DRNC may include in the COMMON TRANSPORT CHANNEL RESOURCES RESPONSE message the *FACH Info for optional S-CCPCH* IE group to be used by the UE which is different from the Secondary CCPCH used by the UE at reception of the COMMON TRANSPORT CHANNEL RESOURCES REQUEST message. If the DRNC includes the *FACH Info for optional S-CCPCH* IE group, then it shall also include the *FACH Priority Indicator* IE and *FACH Initial Window Size* IE for each priority class for the new Secondary CCPCH.

8.4.1.3 Unsuccessful Operation

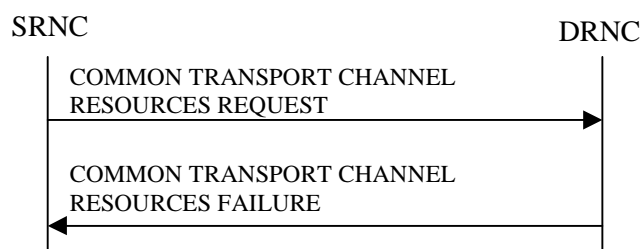


Figure 31: Common Transport Channel Resources Initialisation procedure, Unsuccessful Operation

If the *Transport Bearer Request Indicator* IE is set to "Bearer Requested" and the DRNC is not able to provide a Transport Bearer, the DRNC shall respond to the SRNC with the COMMON TRANSPORT CHANNEL RESOURCES FAILURE message, indicating the cause of the failure.

8.4.1.4 Abnormal Conditions

If the DRNC receives the COMMON TRANSPORT CHANNEL RESOURCES REQUEST message for an unknown D-RNTI it shall respond to the SRNC with the COMMON TRANSPORT CHANNEL RESOURCES FAILURE message, indicating the cause of the failure.

8.4.2 Common Transport Channel Resources Release

8.4.2.1 General

This procedure is used by the SRNC to request release of Common Transport Channel Resources for a given UE in the DRNS. The SRNC uses this procedure either to release the UE context from the DRNC (and thus both the D-RNTI and the C-RNTI) or to release only the C-RNTI.

This procedure shall use the connectionless mode of the signalling bearer.

8.4.2.2 Successful Operation



Figure 32: Common Transport Channel Resources Release procedure, Successful Operation

The SRNC initiates the Common Transport Channel Resources Release procedure by sending the message COMMON TRANSPORT CHANNEL RESOURCES RELEASE REQUEST to the DRNC. The SRNC may include the *C-RNTI IE* in the message to request the release of an individual C-RNTI.

At the reception of the message, if the *C-RNTI IE* is not present in the message, the DRNC shall release the whole UE context identified by the D-RNTI.

If the *C-RNTI IE* is included in the message, the DRNC shall release only the indicated C-RNTI.

8.4.2.3 Abnormal Conditions

If the DRNC receives the COMMON TRANSPORT CHANNEL RESOURCES RELEASE REQUEST messages for an unknown D-RNTI the message shall be ignored.

If the D-RNTI is known but the C-RNTI does not exist for that D-RNTI (UE context) the message shall be ignored.

8.5 Global Procedures

8.5.1 Error Indication

8.5.1.1 General

The Error Indication procedure is initiated by a node to report detected errors in one incoming message, provided they cannot be reported by an appropriate failure message.

This procedure shall use the signalling bearer mode specified below.

8.5.1.2 Successful Operation

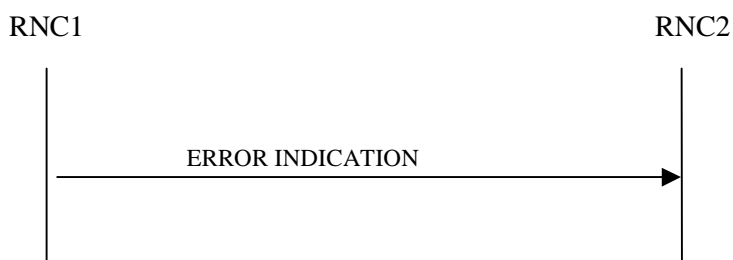


Figure 33: Error Indication procedure, Successful Operation

When the conditions defined in chapter 10 are fulfilled, the Error Indication procedure is initiated by an ERROR INDICATION message sent from the receiving node. This message shall use the same mode of the signalling bearer and the same signalling bearer connection (if connection oriented) as the message that triggers the procedure.

Typical cause values for the ERROR INDICATION message are:

Protocol Causes:

- Transfer Syntax Error
- Abstract Syntax Error ('Reject)
- Abstract Syntax Error (Ignore and Notify)
- Message not Compatible with Receiver State
- Unspecified

8.5.1.3 Abnormal Conditions

-

9 Elements for RNSAP Communication

9.1 Message Functional Definition and Content

9.1.1 General

This chapter defines the structure of the messages required for the RNSAP protocols.

For each message there is, a table listing the signalling elements in their order of appearance in the transmitted message.

All the RNSAP messages are listed in the following table:

Message name	Reference
RADIO LINK SETUP REQUEST	9.1.3
RADIO LINK SETUP RESPONSE	9.1.4
RADIO LINK SETUP FAILURE	9.1.5
RADIO LINK ADDITION REQUEST	9.1.6
RADIO LINK ADDITION RESPONSE	9.1.7
RADIO LINK ADDITION FAILURE	9.1.8
RADIO LINK DELETION REQUEST	9.1.9
RADIO LINK DELETION RESPONSE	9.1.10
RADIO LINK RECONFIGURATION PREPARE	9.1.11
RADIO LINK RECONFIGURATION READY	9.1.12
RADIO LINK RECONFIGURATION COMMIT	9.1.13
RADIO LINK RECONFIGURATION FAILURE	9.1.14
RADIO LINK RECONFIGURATION CANCEL	9.1.15
RADIO LINK RECONFIGURATION REQUEST	9.1.16
RADIO LINK RECONFIGURATION RESPONSE	9.1.17
RADIO LINK FAILURE INDICATION	9.1.18
RADIO LINK RESTORE INDICATION	9.1.19
DL POWER CONTROL REQUEST	9.1.20
PHYSICAL CHANNELRECONFIGURATION REQUEST	9.1.21
PHYSICAL CHANNELRECONFIGURATION COMMAND	9.1.22
PHYSICAL CHANNELRECONFIGURATION FAILURE	9.1.23
UPLINK SIGNALLING TRANSFER INDICATION	9.1.24
DOWNLINK SIGNALLING TRANSFER REQUEST	9.1.25
RELOCATION COMMIT	9.1.26
PAGING REQUEST	9.1.27
DEDICATED MEASUREMENT INITIATION REQUEST	9.1.28
DEDICATED MEASUREMENT INITIATION RESPONSE	9.1.29
DEDICATED MEASUREMENT INITIATION FAILURE	9.1.30
DEDICATED MEASUREMENT REPORT	9.1.31
DEDICATED MEASUREMENT TERMINATION REQUEST	9.1.32
DEDICATED MEASUREMENT FAILURE INDICATION	9.1.33
COMMON TRANSPORT CHANNEL RESOURCES RELEASE REQUEST	9.1.34
COMMON TRANSPORT CHANNEL RESOURCES REQUEST	9.1.35
COMMON TRANSPORT CHANNEL RESOURCES RESPONSE	9.1.36
COMMON TRANSPORT CHANNEL RESOURCES FAILURE	9.1.37
COMPRESSED MODE PREPARE	9.1.38
COMPRESSED MODE READY	9.1.39
COMPRESSED MODE FAILURE	9.1.40
COMPRESSED MODE COMMIT	9.1.41
COMPRESSED MODE CANCEL	9.1.42
ERROR INDICATION	9.1.43

9.1.2 Message Contents

An information element can be of the following *types*:

M	The information element is mandatory, i.e. always present in the message
O	The information element is optional, i.e. may or may not be present in the message independently on the presence or value of other information elements in the same message
C#	The presence of the information element is conditional to the presence or to the value of another information element, as reported in the table correspondent note below the message description <u>containing the explanation of the condition</u> .

In case of an information element group, the group is preceded by a name for the info group (in bold). It is also indicated how many times a group may be repeated in the message and whether the group is ~~mandatory, optional or~~ conditional. Each group may be also repeated within one message. The presence field of the information elements inside one group defines if the information element is mandatory, optional or conditional if the group is present.

9.1.3 RADIO LINK SETUP REQUEST

9.1.3.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
S-RNTI	M			
D-RNTI	O			
Allowed Queuing time	O			
UL DPCH Information		1		
UL Scrambling Code	M			
Min UL Channelisation Code Length	M			
Max Number of UL DPDCHs	C – CodeLen			
Puncture Limit	M			For the UL.
UL Transport Format Combination Set	M			
UL DPCCH Slot Format	M			
Uplink Eb/No Target	O		Uplink Eb/No	
Diversity mode	M			
D Field Length	C-FB			
SSDT Cell ID Length	O			
S Field Length	O			
Mean Bit Rate	O			For the UL.
DL DPCH Information		1		
Transport Format Combination Set	M			
DL DPCH Slot Format	M			
TFCI Signalling Mode	M			
TFCI Presence	C- SlotFormat			
Multiplexing Position	M			
Power Offset Information		1		
PO1	M		Power Offset	Power offset for the TFCI bits.
PO2	M		Power Offset	Power offset for the TPC bits.
PO3	M		Power Offset	Power offset for the pilot bits.
TPC Downlink Step Size	M			
Mean Bit Rate	O			For the DL.
DCH Information		1..<maxnoofDCHs >		
DCH ID	M			
DCH Combination Ind	O			
RLC Mode	M			
Transport Format Set	M			For the UL.
Transport Format Set	M			For the DL.
BLER	M			For the UL.
BLER	M			For the DL.
Allocation/Retention Priority	M			
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP Mode	M			
ToAWS	M			
ToAWE	M			

RL Information		$1 \dots \text{maxnoofRLs}$ >		
RL ID	M			
C-ID	M			
Frame Offset	M			
Chip Offset	M			
Propagation Delay	O			
Diversity Control Field	C – NotFirstRL			
Initial DL TX Power	O		DL Power	
Primary CPICH Ec/IoNo	O			
SSDT Cell ID	O			

Condition	Explanation
CodeLen	This IE is present only if "Min UL Channelisation Code length" equals to 4
FB	This IE is present only if Feed Back mode diversity is activated.
SlotFormat	This IE is only present if the DL DPCH Slot Format is equal to any of the values 12 to 16.
NotFirstRL	This IE is present only if the RL is not the first one in the RL Information .

Range bound	Explanation
MaxnoofDCHs	Maximum number of DCHs for one UE.
MaxnoofRLs	Maximum number of RLs for one UE.

9.1.3.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
S-RNTI	M			
D-RNTI	O			
Allowed Queuing time	O			
Mean Bit Rate	O			For the UL.
Mean Bit Rate	O			For the DL.
UL CCTrCH Information		1..<maxnoofCCTrCHs>		
CCTrCH ID	M			
TFCS	M			For the UL.
TFCI Coding	M			
Puncture Limit	M			
DL CCTrCH Information		1..<maxnoofCCTrCHs>		
CCTrCH ID	M			
TFCS	M			For the DL.
TFCI Coding	M			
Puncture Limit	M			
DCH Information		1..<maxnoofDCHs>		
DCH ID	M			
CCTrCH ID	M			UL CCTrCH in which the DCH is mapped
CCTrCH ID	M			DL CCTrCH in which the DCH is mapped
DCH Combination Ind	O			
RLC Mode	M			
Transport Format Set	M			For the UL.
Transport Format Set	M			For the DL.
BLER	M			For the UL.
BLER	M			For the DL.
Allocation/Retention Priority	M			
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP Mode	M			
ToAWS	M			
ToAWE	M			
RL Information		1		
RL ID	M			
C-ID	M			
Frame Offset	M			
Primary CCPCH RSCP	O			

Range bound	Explanation
MaxnoofDCHs	Maximum <u>number</u> no. of DCHs for one UE.
MaxnoofCCTrCHs	Maximum <u>number</u> no. of CCTrCH for one UE.

9.1.4 RADIO LINK SETUP RESPONSE

9.1.4.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
D-RNTI	O			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
RL Information Response		1..<maxnoofRLs>		
RL ID	M			
SAI	M			
UL Interference Level	M			
DL Code Information		1..<maxnoofDL Codes>		
DL Scrambling Code	M			
FDD DL Channelisation Code Number	M			
Diversity Indication	C-NotFirstRL			
CHOICE <i>diversity Indication Combining</i>				
RL ID	M			Reference RL ID for the combining
<i>Non Combining or IE not present</i>				"IE not present" is equivalent to "First RL".
DCH Information Response		0..<maxnoofDCHs>		Only one DCH per set of co-ordinated DCHs shall be included
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
SSDT Support Indicator	M			
Maximum Uplink Eb/No	M		Uplink Eb/No	
Minimum Uplink Eb/No	M		Uplink Eb/No	
Neighbouring FDD Cell Information		0..<maxnoofFDDn eighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
Neighbouring TDD Cell Information	O	0..<maxnoofTDDn eighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case1			
PSCH Time Slot	C-Case2&3			
Uplink Eb/No Target	O		Uplink Eb/No	

Downlink Eb/No Target	O			
Criticality Diagnostics	O			

Condition	Explanation
IfComb	This IE is present if the 'Diversity Indication' IE indicates 'combining' in the Node-BDRNS .
IfNotComb	This IE is present if the 'Diversity Indication' IE indicates 'non combining' in the Node-BDRNS .
NotFirstRL	The IE is present only if the RL is not the first RL in the RL Information
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range bound	Explanation
MaxnoofRLs	Maximum number of RLs for one UE.
MaxnoofDCHs	Maximum number of DCHs for one UE.
MaxnoofFDDneighbours	Maximum number of neighbouring FDD cell for one cell.
MaxnoofTDDneighbours	Maximum number of neighbouring TDD cell for one cell.

9.1.4.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
D-RNTI	O			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
RL Information Response		1		
RL ID	M			
SAI	M			
UL Interference Level	M			
Maximum Uplink Eb/No	M		Uplink Eb/No	
Minimum Uplink Eb/No	M		Uplink Eb/No	
Uplink Eb/No Target	O		Uplink Eb/No	
Downlink Eb/No Target	O			
UL CCTrCH Information		1..<maxnoofCCTrCHs>		
CCTrCH ID	M			
UL DPCH Information		1..<MaxnoofDPC Hs>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
DL CCTrCH Information		1..<maxnoofCCTrCHs>		
CCTrCH ID	M			
DL DPCH Information		1..<MaxnoofDPC Hs>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
DCH Information Response		1..<maxnoofDCHs >		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
Neighbouring FDD Cell Information	O	0..<maxnoofFDDneighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			

Primary Scrambling Code	M			
Primary CPICH Power	O			
Neighbouring TDD Cell Information	O	<i>0..<maxnoofTDDneighbours></i>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case1			
PSCH Time Slot	C-Case2&3			
Criticality Diagnostics	O			

Condition	Explanation
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range bound	Explanation
MaxnoofDPCHs	Maximum number of DPCHs for one CTrCH.
MaxnoofDCHs	Maximum number of DCHs for one UE.
MaxnoofFDDneighbours	Maximum number of neighbouring FDD cell for one cell
MaxnoofTDDneighbours	Maximum number of neighbouring TDD cell for one cell
MaxnoofCTrCHs	Maximum number of CTrCH for one UE.

9.1.5 RADIO LINK SETUP FAILURE

9.1.5.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
D-RNTI	O			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
Unsuccessful RL Information Response		1...<maxnoofRLs>		
RL ID	M			
Cause	M			
Successful RL Information Response		0..<maxnoofRLs-1>		
RL ID	M			
SAI	M			
UL Interference Level	M			
DL Code Information		1..<maxnoofDLCode s>		
DL Scrambling Code	M			
FDD DL Channelisation Code Number	M			
Diversity Indication	M			
CHOICE <i>diversity Indication Combining</i>				
RL ID	M			Reference RL ID for the combining
<i>Non Combining or IE not present</i>				"IE not present" is equivalent to "First RL".
DCH Information Response		0..<maxnoofDCHs>		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
SSDT Support Indicator	M			
Neighbouring FDD Cell Information	O			
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
Neighbouring TDD Cell Information	O			
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case3			
PSCH Time Slot	C-Case2&3			
Uplink Eb/No Target	O		Uplink Eb/No	
Maximum Uplink Eb/No	M		Uplink	

			Eb/No	
Minimum Uplink Eb/No	M		Uplink Eb/No	
Downlink Eb/No Target	O			
Criticality Diagnostics	O			

Condition	Explanation
IfComb	This IE is present if the 'Diversity Indication' IE indicates 'combining' in the Node-BDRNS .
IfNotComb	This IE is present if the 'Diversity Indication' IE indicates 'non combining' in the Node-BDRNS .
NotFirstRL	The IE is present only if the RL is not the first RL in the RL Information
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range bound	Explanation
MaxnoofRLs	Maximum number of RLs for one UE.
MaxnoofDCHs	Maximum number of DCHs for one UE.

9.1.5.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
Unsuccessful RL Information Response		1		
RL ID	M			
Cause	M			
Criticality Diagnostics	O			

9.1.6 RADIO LINK ADDITION REQUEST

9.1.6.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
Uplink Eb/No Target	M		Uplink Eb/No	
RL Information		1..<maxnoofRLs-1>		
RL ID	M			
C-Id	M			
Frame Offset	M			
Chip Offset	M			
Diversity Control Field	M			
Primary CPICH Ec/IeNo	O			
SSDT Cell Identity	O			

Range bound	Explanation
MaxnoofRLs	Maximum number of radio links for one UE

9.1.6.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
RL Information		1		
RL ID	M			
C-Id	M			
Frame Offset	M			
Diversity Control Field	M			
Primary CCPCH RSCP	O			

9.1.7 RADIO LINK ADDITION RESPONSE

9.1.7.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
RL Information Response		1..<maxnoofRLs-1>		
RL ID	M			
SAI	M			
UL Interference Level	M			
DL Code Information		1..<maxnoofDLCodes>		
DL Scrambling Code	M			
DL Channelisation Code	M			
Diversity Indication	M			
CHOICE <i>diversity indication</i>				
<i>Combining</i>				
RL ID	M			Reference RL-Id
<i>Non combining</i>				
DCH Information Response		1..<maxnoofDCHs>		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
SSDT Support Indicator	M			
Minimum Uplink Eb/No	M		Uplink Eb/No	
Maximum Uplink Eb/No	M		Uplink Eb/No	
Neighbouring FDD Cell Information		0..<maxnoofFDD Neighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
Neighbouring TDD Cell Information		0..<maxnoofTDD Neighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case1			
PSCH Time Slot	C-Case2&3			
Criticality Diagnostics	O			

Condition	Explanation
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range bound	Explanation
MaxnoofDCHs	Maximum number of dedicated channels on one RL
MaxnoofRLs	Maximum number of radio links for one UE
MaxnoofFDDNeighbours	Maximum number of neighbouring FDD cells for one cell
MaxnoofTDDNeighbours	Maximum number of neighbouring TDD cells for one cell
MaxnoofDLCodes	Maximum number of DL code information

9.1.7.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
RL Information Response		1		
RL ID	M			
SAI	M			
UL Interference Level	M			
UL CTrCH Information		1..<maxnoof CTrCHs>		
CCTrCH ID	M			
UL DPCH Information		1..<maxnoOfDPC Hs>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
DL CTrCH Information		1..<maxnoof CTrCHs>		
CCTrCH ID	M			
DL DPCH information		1..<maxnoOfDPC Hs>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
Diversity Indication	M			
CHOICE <i>diversity indication</i>				
<i>Combining</i>				
RL ID	M			Reference RL
<i>Non combining</i>				
DCH Information Response		1..<maxnoofDCHs >		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
Minimum Uplink Eb/No	M		Uplink Eb/No	
Maximum Uplink Eb/No	M		Uplink Eb/No	
Neighbouring FDD Cell Information		0..<maxnoofFDD Neighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			

Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
Neighbouring TDD Cell Information		<i>0..<maxnoofTDD Neighbours></i>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case1			
PSCH Time Slot	C-Case2&3			
Criticality Diagnostics	O			

Condition	Explanation
Case1	This IE is present only if Sync Case = Case1
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range Bound	Explanation
MaxnoofDCHs	Maximum number of dedicated channels on one RL
MaxnoofFDDNeighbours	Maximum number of neighbouring FDD cells for one cell
MaxnoofTDDNeighbours	Maximum number of neighbouring TDD cells for one cell
MaxnoofDLCodes	Maximum number of DL code information
MaxnoOfDPCHs	Maximum number of DPCH in one CCTrCH
MaxnoofCCTrCHs	Number no. of -CCTrCH for one UE.

9.1.8 RADIO LINK ADDITION FAILURE

9.1.8.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
Unsuccessful RL Information Response		1..<maxnoofRLs-1>		
RL ID	M			
Cause	M			
Successful RL Information Response		1..<maxnoofRLs-2>		
RL ID	M			
SAI	M			
UL Interference Level	M			
DL Code Information		1..<maxnoofDLCodes>		
DL scrambling code	M			
DL channelisation code	M			
Diversity Indication	M			
CHOICE <i>diversity indication</i>				
<i>Combining</i>				
RL ID	M			Reference RL-Id
<i>Non combining</i>				
DCH Information Response		1..<maxnoofDCHs>		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
SSDT Support Indicator	M			
Minimum Uplink Eb/No	M		Uplink Eb/No	
Maximum Uplink Eb/No	M		Uplink Eb/No	
Neighbouring FDD Cell Information		0..<maxnoofFDD Neighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
Neighbouring TDD Cell Information		0..<maxnoofTDD Neighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case1			
PSCH Time Slot	C-Case2&3			
Criticality Diagnostics	O			

Condition	Explanation
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range bound	Explanation
MaxnoofDCHs	Maximum number of dedicated channels on one RL
MaxnoofRLs	Maximum number of radio links for one UE
MaxnoofFDDNeighbours	Maximum number of neighbouring FDD cells for one cell
MaxnoofTDDNeighbours	Maximum number of neighbouring TDD cells for one cell
MaxnoofDLCodes	Maximum number of DL code information

9.1.8.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
Unsuccessful RL Information Response		1		
RL ID	M			
Cause	M			
Criticality Diagnostics	O			

9.1.9 RADIO LINK DELETION REQUEST

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
RL Information		1..<maxnoofRLs>		
RL ID	M			

Range bound	Explanation
MaxnoofRLs	Maximum number of radio links for one UE

9.1.10 RADIO LINK DELETION RESPONSE

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
Criticality Diagnostics	O			

9.1.11 RADIO LINK RECONFIGURATION PREPARE

9.1.11.1 FDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			
Allowed Queuing Time	O			
UL DPCH Information		0..1		
UL Scrambling code	O			
Min UL Channelisation Code Length	O			
Max Number of UL DPDCHs	C – CodeLen			
Puncture Limit	O			For the UL.
TFCS	O			TFCS for the UL.
UL DPCCCH Slot Format	O			
SSDT Cell Identity Length	O			
S-Field Length	O			
Mean Bit Rate	O			For the UL.
DL DPCH Information		0..1		
TFCS	O			TFCS for the DL.
DL DPCH Slot Format	O			
TFCI Signalling Mode	O			
TFCI Presence	C- SlotFormat			
Multiplexing_Position	O			
Mean Bit Rate	O			For the DL.
DCHs to Modify		0..<maxnoofDCHs >		
DCH ID	M			
Transport Format Set	O			For the UL.
Transport Format Set	O			For the DL.
Allocation/Retention Priority	O			
Frame Handling Priority	O			
UL FP Mode	O			
ToAWS	O			
ToAWE	O			
DCHs to Add		0..<maxnoofDCHs >		
DCH ID	M			
DCH Combination Indicator	O			
RLC Mode	M			
Transport Format Set	M			For the UL.
Transport Format Set	M			For the DL.
BLER	M			For the UL.
BLER	M			For the DL.
Allocation/Retention Priority	M			
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP Mode	M			
ToAWS	M			
ToAWE	M			
DCHs to Delete		0..<maxnoofDCHs >		
DCH ID	M			
RL Information		0..<maxnoofRLs>		
RL ID	M			

SSDT Indication	O			
SSDT Cell Identity	C - SSDTIndON			

Condition	Explanation
SSDTIndON	The IE may be present if the SSDT Indication is set to 'SSDT Active in the UE'.
CodeLen	This IE is present only if "Min UL Channelisation Code length" equals to 4.
SlotFormat	This IE is only present if the DL DPCH Slot Format is equal to any of the values 12 to 16.

Range bound	Explanation
MaxnoofDCHs	Maximum number of DCHs for a UE.
MaxnoofRLs	Maximum number of RLs for a UE.

9.1.11.2 TDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			
Allowed Queuing Time	O			
Mean Bit Rate	O			For the UL
Mean Bit Rate	O			For the DL
UL CCTrCH Information		<i>0..<maxnoofCCTrCHs></i>		
CCTrCH ID	M			
TFCS	O			For the UL.
TFCI Coding	O			
Puncture Limit	O			
DL CCTrCH Information		<i>0..<maxnoofCCTrCHs></i>		
CCTrCH ID	M			
TFCS	O			For the DL.
TFCI Coding	O			
Puncture Limit	O			
DCHs to Modify		<i>0..<maxnoofDCHs></i>		
DCH ID	M			
CCTrCH Id	O			UL CCTrCH in which the DCH is mapped.
CCTrCH Id	O			DL CCTrCH in which the DCH is mapped
Transport Format Set	O			For the UL.
Transport Format Set	O			For the DL.
Allocation/Retention Priority	O			
Frame Handling Priority	O			
UL FP Mode	O			
ToAWS	O			
ToAWE	O			
DCHs to Add		<i>0..<maxnoofDCHs></i>		
DCH ID	M			
CCTrCH Id	M			UL CCTrCH in which the DCH is mapped.
CCTrCH Id	M			DL CCTrCH in which the DCH is mapped
DCH Combination Indicator	O			
RLC Mode	M			
Transport Format Set	M			For the UL.
Transport Format Set	M			For the DL.
BLER	M			For the UL.
BLER	M			For the DL.
Allocation/Retention Priority	M			
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP Mode	M			
ToAWS	M			
ToAWE	M			
DCHs to Delete		<i>0..<maxnoofDCHs></i>		
DCH ID	M			

Range bound	Explanation
MaxnoofDCHs	Maximum number of DCHs for a UE.
MaxnoofCCTrCHs	Maximum number of CCTrCHs for a UE.

9.1.12 RADIO LINK RECONFIGURATION READY

9.1.12.1 FDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			
RL Information Response		<i>0..<maxnoofRLs></i>		
RL ID	M			
Maximum Uplink Eb/No	O		Uplink Eb/No	
Minimum Uplink Eb/No	O		Uplink Eb/No	
Downlink Code Information		<i>0..<maxnoofDLCodes></i>		
DL Scrambling Code	M			
DL Channelisation Code	M			
DCH to be Added		<i>0..<maxnoofDCHs></i>		Only one DCH per set of coordinated DCHs shall be included. The IE group shall be included only once per DCH per set of combined RLs.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
DCH to be Modified		<i>0..<maxnoofDCHs></i>		Only one DCH per set of coordinated DCHs shall be included. The IE group shall be included only once per DCH per set of combined RLs.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
Criticality Diagnostics	O			

Range bound	Explanation
MaxnoofDCHs	Maximum number of DCHs.
MaxnoofRLs	Maximum number of RLs for a UE.
MaxnoofDLCodes	Maximum number of Downlink Channelisation Codes.

9.1.12.2 TDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			
RL Information Response		0..1		
RL ID	M			
Maximum Uplink Eb/No	O		Uplink Eb/No	
Minimum Uplink Eb/No	O		Uplink Eb/No	
UL CCTrCH Information		0..<maxnoofCCTrCHs>		
CCTrCH ID	M			
UL DPCH Information		1..<maxnoofDPC Hs>		
DPCH ID	M			
TDD Channelisation Code	O			
Burst Type	O			
Midamble Shift	O			
Time Slot	O			
TDD Physical Channel Offset	O			
Repetition Period	O			
Repetition Length	O			
TFCI Presence	O			
DL CCTrCH Information		0..<maxnoofCCTrCHs>		
CCTrCH ID	M			
DL DPCH Information		1..<maxnoofDPC Hs>		
DPCH ID	M			
TDD Channelisation Code	O			
Burst Type	O			
Midamble Shift	O			
Time Slot	O			
TDD Physical Channel Offset	O			
Repetition Period	O			
Repetition Length	O			
TFCI Presence	O			
DCH to be Added		0..<maxnoofDCHs >		Only one DCH per set of coordinated DCHs shall be included. The IE group shall be included only once per DCH per set of combined RLs.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
DCH to be Modified		0..<maxnoofDCHs >		Only one DCH per set of coordinated DCHs shall be included. The IE group shall be included only once per DCH per set of combined RLs.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			

Criticality Diagnostics	O			
-------------------------	---	--	--	--

Range bound	Explanation
MaxnoofDCHs	Maximum number of DCHs for a UE.
MaxnoofCCTrCHs	Maximum number of CCTrCHs for a UE.
Maxnoof DPCHs	Maximum number of DPCHs in one CCTrCH.

9.1.13 RADIO LINK RECONFIGURATION COMMIT

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			
CFN	M			

9.1.14 RADIO LINK RECONFIGURATION FAILURE

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			
Cause	M			
RLs Causing Reconfiguration Failure		<i>0..<maxnoofRLs></i>		
RL ID	M			
Cause	M			
Criticality Diagnostics	O			

Range bound	Explanation
MaxnoofRLs	Maximum number of RLs for a UE.

9.1.15 RADIO LINK RECONFIGURATION CANCEL

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			

9.1.16 RADIO LINK RECONFIGURATION REQUEST

9.1.16.1 FDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			
Allowed Queuing Time	O			
UL DPCH Information		0..1		
TFCS	O			TFCS for the UL.
Mean Bit Rate	O			
DL DPCH Information		0..1		
TFCS	O			TFCS for the DL.
TFCI Signalling Mode	O			
Mean Bit Rate	O			
DCHs to Modify		0..<maxnoofDCHs >		
DCH ID	M			
Transport Format Set	O			For the UL.
Transport Format Set	O			For the DL.
Allocation/Retention Priority	O			
Frame Handling Priority	O			
UL FP Mode	O			
ToAWS	O			
ToAWE	O			
DCHs to add		0..<maxnoofDCHs >		
DCH ID	M			
DCH Combination Ind	O			
RLC Mode	M			
Transport Format Set	M			For the UL.
Transport Format Set	M			For the DL.
Allocation/Retention Priority	M			
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP mode	M			
ToAWS	M			
ToAWE	M			
DCHs to Delete		0..<maxnoofDCHs >		
DCH ID	M			

Range Bound	Explanation
MaxnoofDCHs	Maximum number of DCHs for a UE.

9.1.16.2 TDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			
Allowed Queuing Time	O			
Mean Bit Rate	O			For the UL
Mean Bit Rate	O			For the DL
UL CCTrCH Information		<i>0..<maxnoofCCTrCHs></i>		
CCTrCH ID	M			
TFCS	M			
DL CCTrCH Information		<i>0..<maxnoofCCTrCHs></i>		
CCTrCH ID	M			
TFCS	M			
DCHs to Modify		<i>0..<maxnoofDCHs></i>		
DCH ID	M			
CCTrCH ID	O			UL CCTrCH in which the DCH is mapped.
CCTrCH ID	O			DL CCTrCH in which the DCH is mapped
Transport Format Set	O			For the UL.
Transport Format Set	O			For the DL.
Allocation/Retention Priority	O			
Frame Handling Priority	O			
UL FP Mode	O			
ToAWS	O			
ToAWE	O			
DCHs to Add		<i>0..<maxnoofDCHs></i>		
DCH ID	M			
RLC Mode	M			
CCTrCH ID	M			UL CCTrCH in which the DCH is mapped.
CCTrCH ID	M			DL CCTrCH in which the DCH is mapped
DCH Combination Ind	O			
Transport Format Set	M			For the UL.
Transport Format Set	M			For the DL.
Allocation/Retention Priority	M			
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP Mode	M			
ToAWS	M			
ToAWE	M			
DCHs to Delete		<i>0..<maxnoofDCHs></i>		
DCH ID	M			

Range Bound	Explanation
MaxnoofDCHs	Maximum number of DCHs for a UE.
MaxnoofCCTrCHs	Maximum number of CCTrCHs for a UE.

9.1.17 RADIO LINK RECONFIGURATION RESPONSE

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			
RL Information Response		<i>0..<maxnoofRLs></i>		
RL ID	M			
Maximum Uplink Eb/No	O		Uplink Eb/No	
Minimum Uplink Eb/No	O		Uplink Eb/No	
DCH to be Added		<i>0..<maxnoofDCHs></i>		Only one DCH per set of coordinated DCHs shall be included. The IE group shall be included only once per DCH per set of combined RLs.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
DCH to be Modified		<i>0..<maxnoofDCHs></i>		Only one DCH per set of coordinated DCHs shall be included. The IE group shall be included only once per DCH per set of combined RLs.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
Criticality Diagnostics	O			

Range Bound	Explanation
MaxnoofDCHs	Maximum number of DCHs for a UE.
MaxnoofRLs	Maximum number of RLs for a UE.

9.1.18 RADIO LINK FAILURE INDICATION

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
RL Information	M	<i>1 .. <MaxnoofRLs></i>		
RL ID	M			
Cause	M			

Range bound	Explanation
MaxnoofRLs	Maximum number of RLs for one UE.

9.1.19 RADIO LINK RESTORE INDICATION

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
RL Information		1 .. <MaxnoofRLs>		
RL ID	M			

Range bound	Explanation
MaxnoofRLs	Maximum no number of RLs for one UE.

9.1.20 DL POWER CONTROL REQUEST [FDD]

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
<i>CHOICE procedure scope</i>				
"ALL RL"				
DL Reference Power	M			
"Individual RLs"				
DL Reference Power Information		1..<maxnoofRLs>		
RL ID	M			
DL Reference Power	M		DL Power	The SRNS requested downlink power to be used by the downlink inner loop power control to eliminate the power drifting problem.

Range Bound	Explanation
MaxnoofRLs	Maximum number of RLs for one UE.

9.1.21 PHYSICAL CHANNEL RECONFIGURATION REQUEST

9.1.21.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
RL Information		1		
RL ID	M			
DL Code Information		1 .. <maxnoofDLCode s>		
DL Scrambling Code	M			
FDD DL Channelisation Code Number	M			

Range bound	Explanation
MaxnoofDLcodes	Maximum number of DL codes for one UE

9.1.21.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
RL Information		1		
RL ID	M			
UL CCTrCH Information		1..<maxnoofCCTrCHs>		
CCTrCH ID	M			
UL DPCH Information		1..<MaxnoofDPC Hs>		
DPCH ID	M			
TDD Channelisation Code	O			
Burst Type	O			
Midamble Shift	O			
Time Slot	O			
TDD Physical Channel Offset	O			
Repetition Period	O			
Repetition Length	O			
TFCI Presence	O			
DL CCTrCH Information		1..<maxnoofCCTrCHs>		
CCTrCH ID	M			
DL DPCH Information		1..<MaxnoofDPC Hs>		
DPCH ID	M			
TDD Channelisation Code	O			
Burst Type	O			
Midamble Shift	O			
Time Slot	O			
TDD Physical Channel Offset	O			
Repetition Period	O			
Repetition Length	O			
TFCI Presence	O			

Range bound	Explanation
MaxnoofDPCHs	Maximum number no. of DPCHs for one CCTrCH.
MaxnoofCCTrCHs	Maximum number of CCTrCHs for a UE.

9.1.22 PHYSICAL CHANNEL RECONFIGURATION COMMAND

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
CFN	M			
Criticality Diagnostics	O			

9.1.23 PHYSICAL CHANNEL RECONFIGURATION FAILURE

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
Cause	M			
Criticality Diagnostics	O			

9.1.24 UPLINK SIGNALLING TRANSFER INDICATION

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
UC-ID	M			
SAI	M			
C-RNTI	M			
S-RNTI	M			
D-RNTI	O			
L3 Information	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
URA ID	M			
Multiple URAs Indicator	M			
RNCs with Cells in the Accessed URA		0 .. <MaxRNCinURA-1>		
RNC-Id	M			

Range bound	Explanation
MaxRNCinURA	Maximum number of RNC in one URA

9.1.25 DOWNLINK SIGNALLING TRANSFER REQUEST

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
C-Id	M			
D-RNTI	M			
L3 Information	M			
D-RNTI Release Indication	M			

9.1.26 RELOCATION COMMIT

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
D-RNTI	O			
RANAP Relocation Information	O			

9.1.27 PAGING REQUEST

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
CHOICE <i>paging area</i>				
"URA"				
URA-Id	M			
"Cell"				
C-Id	M			
SRNC-Id	M		RNC-Id	
S-RNTI	M			
DRX Parameter	M			

9.1.28 DEDICATED MEASUREMENT INITIATION REQUEST

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction Id	M			
Measurement Id	M			
Dedicated Measurement Object Type	M			
CHOICE <i>Dedicated Measurement Object Type</i>				
"RL"				
RL Information		<i>1..<maxnoofRLs></i>		
RL-id	M			
DPCH Id	O			
Dedicated Measurement Type	M			
Measurement Characteristics	M			
Report Characteristics	M			

Range bound	Explanation
MaxnoofRLs	Maximum number of individual RLs a measurement can be started on.

9.1.29 DEDICATED MEASUREMENT INITIATION RESPONSE

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction Id	M			Are both transaction id and Measurement id needed ?
Measurement Id	M			
CHOICE <i>Dedicated Measurement Object Type</i>				Dedicated Measurement Object Type the measurement was initiated with
"RL"				
RL Information		1..<maxnoofRLs>		
RL-id	M			
DPCH Id	O			
Dedicated Measurement Value	M			
"ALLRL"				
Dedicated Measurement Value	M			
CFN	O			Dedicated Measurement Time Reference
Criticality Diagnostics	O			

Range bound	Explanation
MaxnoofRLs	Maximum number of individual RLs the measurement can be started on.

9.1.30 DEDICATED MEASUREMENT INITIATION FAILURE

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction Id	M			
Measurement Id	M			
Cause	M			
Criticality Diagnostics	O			

9.1.31 DEDICATED MEASUREMENT REPORT

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction Id	M			
Measurement Id	M			
CHOICE <i>Dedicated Measurement Object Type</i>				Dedicated Measurement Object Type the measurement was initiated with
"RL"				
RL Information		1..<maxnoofRLs>		
RL-Id	M			
DPCH Id	O			
Dedicated Measurement Value	M			
"ALLRL"				
Dedicated Measurement Value	M			
CFN	O			Dedicated Measurement Time Reference

Range bound	Explanation
MaxnoofRLs	Maximum number of individual RLs the measurement can be started on.

9.1.32 DEDICATED MEASUREMENT TERMINATION REQUEST

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction Id	M			
Measurement Id	M			

9.1.33 DEDICATED MEASUREMENT FAILURE INDICATION

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction Id	M			
Measurement Id	M			
Cause	M			

9.1.34 COMMON TRANSPORT CHANNEL RESOURCES RELEASE REQUEST

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
D-RNTI	M			
C-RNTI	O			Release of an individual C-RNTI.

9.1.35 COMMON TRANSPORT CHANNEL RESOURCES REQUEST

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
D-RNTI	M			
Transport Bearer Request Indicator	M			Request a new transport bearer or to use an existing bearer for the user plane.
Transport Bearer ID	M			Indicates the lur transport bearer to be used for the user plane.

9.1.36 COMMON TRANSPORT CHANNEL RESOURCES RESPONSE

9.1.36.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
S-RNTI	M			
FACH Info for S-CCPCH coupled to PRACH				
Priority Indicator & Initial Window Size		1..16		Provide Information for each priority class used
FACH Priority Indicator	M			
MAC-c SDU Length		1..<MaxNbMACcSDULength>		
MAC-c SDU Length	M			
FACH Initial Window Size	M			
FACH Info for optional S-CCPCH	O			
FDD S-CCPCH Offset	M			Corresponds to: $\tau_{S-CCPCH,k}$, see ref. [7]
DL Scrambling Code	M			
FDD DL Channelisation Code Number	M			
TFCS	M			For the DL.
Secondary CCPCH Slot Format	M			
Pilot Bits Used Indicator	M			
MultiplexingPosition	M			
STTD Indicator	M			
Priority Indicator & Initial Window Size		1..16		Provide Information for each priority class used
FACH Priority Indicator	M			
Data Frame Size		1..<MaxNbMACcSDULength>		
.....MAC-c SDU Length	M			
FACH Initial Window Size	M			
Transport Layer Address	O			
Binding Identity	O			
Criticality Diagnostics	O			

Range Bound	Explanation
MaxNbMACcSDULength	Maximum number of different MAC-c SDU Lengths.

9.1.36.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
S-RNTI	M			
FACH Info for S-CCPCHs coupled to PRACH		0 .. 1		
Priority Indicator & Initial Window Size		1 .. 16		Provide Information for each priority class used
FACH Priority Indicator	M			
MAC-c SDU Length		1..<MaxNbMACcSDU Length>		
MAC-c SDU Length	M			
FACH Initial Window Size	M			
FACH Info for optional group of S-CCPCHs		0 .. 1		
TFCS	M			For DL CCTrCH supporting several Secondary CCPCHs
Secondary CCPCH	M	1..<MaxnoofSCCPCHs>		
TDD Channelisation Code	M			
Time Slot	M			
Burst Type	M			
Midamble shift	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
STTD Indicator	M			
Priority Indicator & Initial Window Size		1..16		Provide Information for each priority class used
FACH Priority Indicator	M			
Data Frame Size		1..<MaxNbMACcSDU Length>		
.....MAC-c SDU Length	M			
FACH Initial Window Size	M			
Transport Layer Address	O			
Binding Identity	O			
Criticality Diagnostics	O			

Range Bound	Explanation
MaxNbMACcSDULength	Maximum number of different MAC-c SDU Lengths.
MaxnoofSCCPCHs	TBD

9.1.37 COMMON TRANSPORT CHANNEL RESOURCES FAILURE

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
S-RNTI	M			
Cause	M			
Criticality Diagnostics	O			

9.1.38 COMPRESSED MODE PREPARE [FDD]

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type				
Transaction ID				
TGP1	M		Gap Period	Applies only to the first and all the subsequent odd gaps if TGP2 is present, see ref. [10].
TGP2	O		Gap Period	
TGL	M			
TGD	M			
PD	M			
UL/DL Compressed Mode Selection	M			
Compressed Mode Method	M			
Gap Position Mode	M			
SN	C-Flex			
Downlink Frame Type	M			
Scrambling Code Change	C-SF/2			
Power Control Mode	M			
Power Resume Mode	M			
Uplink Delta Eb/No	M			
Uplink Delta Eb/No After	M			

Condition	Explanation
Flex	This IE is present only if "Gap position Mode" equals to 'flexible'.
SF/2	This IE is present only if Compressed Mode Method equals to SF/2

9.1.39 COMPRESSED MODE READY [FDD]

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
Criticality Diagnostics	O			

9.1.40 COMPRESSED MODE FAILURE [FDD]

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
Cause	M			
Criticality Diagnostics	O			

9.1.41 COMPRESSED MODE COMMIT [FDD]

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
CFN	M			

9.1.42 COMPRESSED MODE CANCEL [FDD]

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			

9.1.43 ERROR INDICATION

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction Id	M			
Cause	C_ifalone			
Criticality Diagnostics	C_ifalone			

Condition	Explanation
C_ifalone	At least either of Cause IE or Criticality Diagnostics IE shall be present.

9.2 Information Element Functional Definition and Contents

9.2.1 Common Parameters

This chapter contains parameters that are common to FDD and TDD.

9.2.1.1 Allocation/Retention Priority

This parameter indicates the priority level in the allocation and retention of DCH resources in DRNS.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
9.2.1.1 Allocation/Retention Priority			Frame Handling Priority	

9.2.1.2 Allowed Queuing Time

This parameter specifies the maximum queuing time that is allowed in the DRNS. The default value is no queuing.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Allowed Queuing Time			INTEGER(0..60)	Seconds

9.2.1.3 Binding ID

The Binding ID is the identifier of a user data stream. It is allocated at the DRNS and it is unique for each transport bearer under establishment to/from the DRNS. The length of this parameter is variable.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Binding ID			Octetstring (1..4,...)	

9.2.1.4 BLER

This Block Error Rate defines the radio interface Transport Block Error Rate that shall be guaranteed to the DCH by the SRNC.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
BLER			INTEGER (-63..0)	Step 0.1. (Range -6.3...0). It is the Log10 of the BLER

9.2.1.5 Cause

The purpose of the cause information element is to indicate the reason for a particular event for the whole protocol.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Cause Group	M		ENUMERATED (Radio Network Layer, Transport Layer, Protocol, Misc)	
<i>CHOICE cause group</i>				
<i>Radio Network Layer</i>				
Radio Network Layer Cause	M		ENUMERATED (Unknown C-ID, Cell not Available, Power Level not Supported, UL Scrambling Code Already in Use, DL Radio Resources not Available, UL Radio Resources not Available, Measurement not Supported For The Object, Macrodiversity Combining Not Possible, Reconfiguration not Allowed, Requested Configuration not Supported Synchronisation Failure, Unspecified)	
<i>Transport Layer</i>				
Transport Layer Cause	M		ENUMERATED (Transport link failure, Transmission port not available, Unspecified)	
<i>Protocol</i>				
Protocol Cause			ENUMERATED (Transaction not Allowed, Transfer Syntax Error, Abstract Syntax Error (Reject), Abstract Syntax Error (Ignore and Notify), Message not Compatible with Receiver State, Semantic Error, Unspecified)	
<i>Misc</i>				
Miscellaneous Cause	M		ENUMERATED (Control Processing Overload Hardware Failure, O&M Intervention, Not enough User Plane Processing Resources, Unspecified)	

9.2.1.6 Cell Identifier (C-Id)

The C-ID (Cell Identifier) is the identifier of a cell in one RNS.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
C-ID			INTEGER (0...65535)	

9.2.1.7 Cell Parameter ID

The Cell Parameter ID identifies unambiguously the Code Groups, Scrambling Codes, Midambles and Toffset (see table 9 of ref. [12]).

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Cell Parameter ID			INTEGER (0...127)	

9.2.1.8 CFN

Connection Frame Number for the radio connection, see ref. [15].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
CFN			INTEGER (0... 255)	

9.2.1.9 CN CS Domain Identifier

Identification of the CN node in the CS Domain.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
CN PS Domain Identifier				
PLMN Id	M		OCTET STRING (3)	<ul style="list-style-type: none"> - digits 0 to 9, two digits per octet, - each digit encoded 0000 to 1001, - 1111 used as filler - bit 4 to 1 of octet n encoding digit 2n-1 - bit 8 to 5 of octet n encoding digit 2n <p>-The PLMN-ID consists of 3 digits from MCC followed by either</p> <ul style="list-style-type: none"> -a filler plus 2 digits from MNC (in case of 2 digit MNC) or -3 digits from MNC (in case of a 3 digit MNC).
LAC	M		OCTET STRING (3)	0000 and FFFE not allowed

9.2.1.10 CN PS Domain Identifier

Identification of the CN Node in the PS Domain.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
CN PS Domain Identifier				
PLMN Id	M		OCTET STRING (3)	<ul style="list-style-type: none"> - digits 0 to 9, two digits per octet, - each digit encoded 0000 to 1001, - 1111 used as filler - bit 4 to 1 of octet n encoding digit 2n-1 - bit 8 to 5 of octet n encoding digit 2n <p>-The PLMN-ID consists of 3 digits from MCC followed by either</p> <ul style="list-style-type: none"> -a filler plus 2 digits from MNC (in case of 2 digit MNC) or -3 digits from MNC (in case of a 3 digit MNC).
LAC	M		OCTET STRING (2)	0000 and FFFE not allowed
RAC	M		OCTET STRING (1)	

9.2.1.11 Criticality Diagnostics

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Criticality Diagnostics				
Procedure Code	O		INTEGER (0..255)	Procedure code is to be used if Criticality diagnostics is part of Error Indication procedure, and not within the response message of the same operation that caused the error
Triggering Message	O		ENUMERATED (initiating message, successful outcome, unsuccessful outcome)	The Triggering Message is used only if the Criticality diagnostics is part of Error Indication except when the procedure code is not understood.
Criticality Response	O		ENUMERATED (reject, ignore, notify)	This Criticality response IE is used for reporting the Criticality of the Triggering message
Transaction Id	O		INTEGER (0..255)	
Information Element Criticality Diagnostics		<i>1..<maxnoof errors></i>		
Criticality Response	M		ENUMERATED (reject, ignore, notify)	The Criticality response IE is used for reporting the criticality of the triggering IE. The value 'Ignore' shall never be used.
IE Id	M		INTEGER (0..65535)	The IE Id of the not understood IE as defined in the ASN.1 part of the specification.

Range bound	Explanation
maxnooferrors	Maximum number of IE errors allowed to be reported with a single message. The value for maxnooferrors is 256.

9.2.1.12 C-RNTI

C-RNTI (Cell RNTI) is the UE identifier in the CRNC to be used over the radio interface. It is unique in the cell.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
C-RNTI			INTEGER(0..65535)	

9.2.1.13 DCH Combination Indicator

The DCH Combination Indicator is used to indicate the multiplexing of more than one DCH on transport bearer. The value should be unique for each group of coordinated DCH's per request message.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DCH Combination Ind			INTEGER (0..255)	

9.2.1.14 DCH ID

The DCH ID is the identifier of an active dedicated transport channel. It is unique for each active DCH among the active DCHs simultaneously allocated for the same UE.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DCH ID			INTEGER (0..255)	

9.2.1.15 Dedicated Measurement Object Type

The Dedicated Measurement Object type indicates the type of object that the measurement is to be performed on.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Dedicated Measurement Object Type			ENUMERATED (RL,ALLRL, ...)	

9.2.1.16 Dedicated Measurement Type

The Dedicated Measurement Type identifies the type of measurement that shall be performed.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Dedicated Measurement Type			ENUMERATED (SIR, SIR Error, Transmitted Code Power, RSCP,...)	RSCP is used by TDD only.

NOTE: For definitions of the measurement types refer to ref. [10] and [13].

9.2.1.17 Dedicated Measurement Value

The Dedicated Measurement Value shall be the most recent value for this measurement, for which the reporting criteria were met.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Dedicated measurement Value				
SIR value	O		Enumerated(-10 .. 20), step 0.1 dB	
SIR error Value	O		Enumerated (-10 .. 10), step 0.1 dB	If SIRerror<=-10, SIR error Value shall be set to -10 If SIRerror=>10, SIR error Value shall be set to 10
Transmitted Code Power Value	O		Enumerated (-35 .. 15), step 0.1 dB	Relative to CPICH
RSCP	O		TBD	TDD only.

<Editors Note: Some adjustment of the ranges for these measurements might be needed as they await a decision on range for this measurement in TSG RAN WG1>

9.2.1.18 Downlink Eb/No Target

It is the Target Downlink Eb/No that shall be used as initial value by the UE.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Downlink Eb/No Target			Uplink Eb/No	

9.2.1.19 D-RNTI

D-RNTI is the UE context identifier in the DRNC.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
D-RNTI			Integer(0..2 ²⁰ -1)	

9.2.1.20 D-RNTI Release Indication

The D-RNTI Release Indication indicates whether or not a CRNC shall release the D-RNTI allocated for a particular UE.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
D-RNTI Release Indication			ENUMERATED (Release D-RNTI, not Release D-RNTI)	

9.2.1.21 DRX Parameter

[Editor's note: This parameter needs to be defined. Contributions are invited.]

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DRX Parameter			TBD	

9.2.1.22 FACH Initial Window Size

Indicates the initial number of MAC-c SDUs that may be transmitted before an acknowledgement is received from the DRNC.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
FACH Initial Window Size			INTEGER (0..255)	Number of frames MAC-c SDUs. 255 = Unlimited number of FACH data frames.

9.2.1.23 FACH Priority Indicator

Indicates the relative priority of the FACH data frame. Used by the DRNC when scheduling FACH traffic.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
FACH Priority Indicator			INTEGER (0..15)	Relative priority of the FACH data frame: 0=Lowest Priority ... 15=Highest Priority

9.2.1.24 Frame Handling Priority

This parameter indicates the priority level to be used during the lifetime of the DCH/DSCH for temporary restriction of the allocated resources due overload reason.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Frame Handling Priority			INTEGER (0..15)	0=Lowest Priority, ... 15=Highest Priority

9.2.1.25 Frame Offset

Frame Offset is the required offset between the dedicated channel downlink transmission frames (CFN, Connection Frame Number) and the broadcast channel frame offset (Cell Frame Number). The Frame_offset is used in the translation between Connection Frame Number (CFN) on Iub/Iur and least significant 8 bits of SFN (System Frame Number) on Uu. The Frame Offset is UE and cell specific.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Frame Offset			INTEGER (0..255)	Frames

9.2.1.26 MAC-c SDU Length

Indicates the MAC-c SDU Length. There may be multiple data frame sizes per priority class.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
MAC-c SDU Length			INTEGER (1..5000)	Size of the MAC-c SDU in number of bits.

9.2.1.27 Mean Bit Rate

It is the mean user data rate that is expected to be carried by the transport channels of one radio link.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Mean Bit Rate			INTEGER (1...2000)	Kbit/seconds

9.2.1.28 Measurement Characteristics

The Measurement Characteristics indicates how the measurement shall be performed.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Measurement Characteristics				
Measurement Frequency	M		TBD	
Averaging Duration	M		TBD	

Editors Note: The exact definition and structure of this information element awaits decisions in TSG RAN WG2.

9.2.1.29 Measurement ID

The Measurement ID uniquely identifies any measurement on dedicated resources requested over RNSAP.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Measurement ID			Integer(0 .. 2 ²⁰ -1)	

9.2.1.30 Message Type

The Message Type uniquely identifies the message being sent.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type			ENUMERATED (RL Setup Request, RL Setup Response, RL Setup Failure, RL Addition Request, RL Addition Response, RL Addition Failure, RL Deletion Request, RL Deletion Response, RL Reconfiguration Prepare, RL Reconfiguration Ready, RL Reconfiguration Commit, RL Reconfiguration Failure, RL Reconfiguration Cancel, RL Reconfiguration Request, RL Reconfiguration Response, RL Failure Indication, RL Restore Indication, DL Power Control Request, Physical Channel Reconfiguration Request, Physical Channel Reconfiguration Command, Physical Channel Reconfiguration Failure, UL Signalling Transfer Indication, DL Signalling Transfer Request, Relocation Commit, Paging Request, Dedicated Measurement Initiation Request, Dedicated Measurement Initiation Response, Dedicated Measurement Initiation Failure, Dedicated Measurement Report, Dedicated Measurement Termination Request, Dedicated Measurement Failure Indication, Common Transport Channel Resources Release Request, Common Transport Channel Resources Request, Common Transport Channel Resources Response, Common Transport Channel Resources Failure, Compressed Mode Prepare, Compressed Mode Ready, Compressed Mode Failure, Compressed Mode Commit, Compressed Mode Cancel, Error Indication, ...)	Future extensions shall be possible

9.2.1.31 Multiple URAs Indicator

The Multiple URAs Indicator indicates whether the accessed cell has multiple URAs.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Multiple URAs Indicator			Enumerated (Multiple URAs exist, Single URA Exists)	

9.2.1.32 Payload CRC Present Indicator

This parameter indicates whether FP payload 16 bit CRC is used or not.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Payload CRC Presence Indicator			ENUMERATED (CRC Included, CRC not included)	

9.2.1.33 Primary CPICH Power

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Primary CPICH power			ENUMERATED (-15..40)	Unit dBm Granularity 0.1 dB.

9.2.1.34 Primary Scrambling Code

The Primary scrambling code to be used in the cell.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Primary Scrambling Code			INTEGER (0 .. 511)	

9.2.1.35 PSCH Time Slot

The PSCH Time Slot is only applicable if the value of *Sync Case* IE is Case 2 or 3.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
PSCHTime Slot			INTEGER(0..6)	

9.2.1.36 Puncture Limit

The maximum amount of puncturing for a transport channel in rate matching.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Puncture Limit			INTEGER (0..100)	%

9.2.1.37 RANAP Relocation Information

This parameter is transparent to the RNSAP. The parameter contains information for the Relocation procedure as defined in [1].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
RANAP Relocation Information			Bit String	The contents is defined in ref. [1].

9.2.1.38 Report Characteristics

The report characteristics, defines how the reporting shall be performed.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Report characteristics				
Report characteristics type			ENUMERATED (On Demand, Periodic, Event A, Event B, Event C, Event D, Event E, Event F)	
Periodic Report Information	C – Periodic			
Report Periodicity	M		ENUMERATED (10ms...1min) step 10ms, (1min...1hr) step 1min	The periodicity frequency with which the Node-BDRNS shall send measurement reports. First working assumption!
Event A	C – Event A			
Measurement Threshold	M		TBD	The threshold for which the Node-BDRNS shall trigger a measurement report.
Measurement Hysteresis Time	O		ENUMERATED (10ms...1min) step 10ms,...	
Event B	C – Event B			
Measurement Threshold	M		TBD	The threshold for which the Node-BDRNS shall trigger a measurement report.
Measurement Hysteresis Time	O		ENUMERATED (10ms...1min) step 10ms,...	
Event C	C – Event C			
Measurement Increase Threshold	M		TBD	
Measurement Change Time	M		ENUMERATED (10ms...1min) step 10ms,...	The time within which the measurement entity shall rise on (in ms) , in order to trigger a measurement report.
Event D	C – Event D			
Measurement Decrease Threshold	M		TBD	
Measurement Change Time	M		ENUMERATED (10ms...1min) step 10ms,...	The time within which the measurement entity shall fall (in ms) , in order to trigger a measurement report.
Event E	C – Event E			
Measurement Threshold 1	M		TBD	
Measurement Threshold 2	O		TBD	

Measurement Hysteresis Time	O		ENUMERATED (10ms...1min) step 10ms,...	The hysteresis time in ms
Report Periodicity	O		ENUMERATED (10ms...1min) step 10ms, (1min...1hr) step 1min	The periodicity frequency with which the Node-BDRNS shall send measurement reports.
Event F	C – Event F			
Measurement Threshold 1	M		TBD	
Measurement Threshold 2	O		TBD	
Measurement Hysteresis Time	O		ENUMERATED (10ms...1min) step 10ms,...	The hysteresis time in ms
Report Periodicity	O		ENUMERATED (10ms...1min) step 10ms, (1min...1hr) step 1min	The periodicity frequency with which the Node-BDRNS shall send measurement reports.

Editors note: Encoding of threshold TBD.

Condition	Explanation
C-Periodic	Valid if <i>Report Characteristics Type</i> IE indicates "periodic"
C-Event A	Valid if <i>Report Characteristics Type</i> IE indicates "Event A"
C-Event B	Valid if <i>Report Characteristics Type</i> IE indicates "Event B"
C-Event C	Valid if <i>Report Characteristics Type</i> IE indicates "Event C"
C-Event D	Valid if <i>Report Characteristics Type</i> IE indicates "Event D"
C-Event E	Valid if <i>Report Characteristics Type</i> IE indicates "Event E"
C-Event F	Valid if <i>Report Characteristics Type</i> IE indicates "Event F"

9.2.1.39 RL ID

The RL ID is the unique identifier for one RL associated with a UE.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
RL ID			INTEGER (0..31)	

9.2.1.40 RLC Mode

This parameter defines the RLC mode of the logical channels multiplexed on the transport channel.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
RLC Mode			ENUMERATED(Acknowledged Mode, Unacknowledged Mode, Transparent Mode)	

9.2.1.41 RNC-Id

This is the identifier of one RNC in UTRAN.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
RNC Id			INTEGER (0..4095)	

9.2.1.42 Service Area Identifier (SAI)

This information element is used to uniquely identify an area consisting of one or more cells belonging to the same Location Area. Such an area is called a Service Area and can be used for indicating the location of a UE to the CN.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SAI				
PLMN Id	M		OCTET STRING (3)	<ul style="list-style-type: none"> - digits 0 to 9, two digits per octet, - each digit encoded 0000 to 1001, - 1111 used as filler - bit 4 to 1 of octet n encoding digit 2n-1 - bit 8 to 5 of octet n encoding digit 2n <p>-The PLMN-ID consists of 3 digits from MCC followed by either</p> <ul style="list-style-type: none"> -a filler plus 2 digits from MNC (in case of 2 digit MNC) or -3 digits from MNC (in case of a 3 digit MNC).
LAC	M		OCTET STRING (2)	0000 and FFFE not allowed
SAC	M		OCTET STRING (2)	

9.2.1.43 S-RNTI

S-RNTI is the UE context identifier in the SRNC.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
S-RNTI			Integer(0..2 ²⁰ -1)	

9.2.1.44 Sync Case

The PSCH and PCCPCH in a TDD cell are mapped on one or two downlink slots per frame. There are three cases of Sync Case as follows:

- Case 1) PSCH and PCCPCH allocated in a single TS#k
- Case 2) PSCH in two TS and PCCPCH in the same two TS: TS#k and TS#k+8
- Case 3) PSCH in two TS, TS#k and TS#k+8, and the PCCPCH in TS#i, pointed by PSCH.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Sync Case			ENUMERATED (Case1, Case2, Case3)	

9.2.1.45 TFCI Presence

The TFCI Presence parameter indicates whether the TFCI shall be included.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TFCI presence			ENUMERATED (Present, not present)	

9.2.1.46 Time Slot

The Time Slot represents the time interval assigned to a Physical Channel referred to the start of a Radio Frame.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Time Slot			INTEGER (0..14)	

9.2.1.47 ToAWE

ToAWE is the window endpoint. DL data frames are expected to be received before this window endpoint. ToAWE is defined with a positive value relative Latest Time of Arrival (LToA). A data frame arriving after ToAWS gives a Timing Adjustment Control frame response.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
ToAWE			INTEGER (0..2559)	msec.

9.2.1.48 ToAWS

ToAWS is the window startpoint. DL data frames are expected to be received after this window startpoint. ToAWS is defined with a positive value relative Time of Arrival Window Endpoint (ToAWE). A data frame arriving before ToAWS gives a Timing Adjustment Control frame response.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
ToAWS			INTEGER (0..1279)	msec.

9.2.1.49 Transaction ID

The Transaction ID is used to associate all the messages belonging to the same pending procedure of the same RNSAP procedure type (e.g. Radio Link Addition), i.e. the Request-, Response-, Confirm-type of messages have the same Transaction ID. The messages belonging to different pending procedures have different Transaction IDs.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Transaction ID			INTEGER (0..255)	Since the scope is not clear, the range of this parameter is to be considered a working assumption

9.2.1.50 Transport Bearer ID

The Transport Bearer ID uniquely identifies an Iur transport bearer.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Transport Bearer ID			INTEGER (0..4095)	

9.2.1.51 Transport Bearer Request Indicator

Indicates whether an Iur transport bearer needs to be established for carrying the FACH data stream(s), or whether an existing transport bearer will be used.

IE/Group Name	Presence	Mult	IE type and reference	Semantics description
Transport Bearer Request Indicator			ENUMERATED(Bearer Requested, Bearer not Requested)	

9.2.1.52 Transport Layer Address

Transport Layer Address defines the transport address of the DRNS. For details on the Transport Address used see [2].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Transport Layer Address			Bit string(1...160, ...)	

9.2.1.53 Transport Format Combination Set

The Transport Format Combination Set is defined as a set of Transport Format Combinations on a Coded Composite Transport Channel. It is the allowed Transport Format Combinations of the corresponding Transport Channels. The DL Transport Format Combination Set is applicable for DL Transport Channels.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TFCS		1 to <maxnoofTFCs>		The first instance of the parameter corresponds to TFC zero, the second to 1 and so on.
CTFC	M		INTEGER(0..MaxCTFC-1)	Integer number calculated according to ref. [14].

Range bound	Explanation
<i>MaxnoofTFCs</i>	The maximum number of Transport Format Combinations (1024).
<i>MaxCTFC</i>	Maximum number of the CTFC value is calculated according to the following: $\sum_{i=1}^I (L_i - 1)P_i$ with the notation according to ref. [14].

9.2.1.54 Transport Format Set

The Transport Format Set is defined as the set of Transport Formats associated to a Transport Channel, e.g. DCH.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Transport Format Set				
Dynamic Transport Format Information		1..<maxTFcount>		
Number of Transport blocks	M		INTEGER (0..4095)	
Transport Block Size	C – Blocks		INTEGER (1..5000)	Bits
CHOICE mode				
<i>TDD</i>				
Transmission time interval	C-TTIdynamic	1..<maxTTIcount>	Enumerated(10, 20, 40, 80)	
Semi-static Transport Format Information				
Transmission time interval	C-TTIsemistatic		ENUMERATED (10, 20, 40, 80)	msec
Type of channel coding	M		ENUMERATED (No coding, Convolutional, Turbo)	
Coding Rate	C – Coding		ENUMERATED (1/2, 1/3)	
Rate matching attribute	M		INTEGER (1..maxRM)	
CRC size	M		ENUMERATED (0, 8, 12, 16, 24)	
CHOICE mode				
<i>TDD</i>				
2 nd interleaving mode	M		Enumerated (Frame related, Timeslot related)	

Condition	Explanation
Blocks	This IE is only present if "Number of Transport Blocks" is greater than 0.
Coding	This IE is only present if IE "Type of channel coding" is "Convolutional" or "Turbo"
TTIdynamic	This IE is mandatory if not defined as semistatic parameter. Otherwise it is absent.
TTIsemistatic	This IE is mandatory if not defined as dynamic parameter. Otherwise it is absent.

Range bound	Explanation
<i>MaxTFcount</i>	The maximum number of different transport formats that can be included in the Transport format set for one transport channel is 32.
<i>MaxRM</i>	The maximum number that could be set as rate matching attribute for a transport channel is 256.
<i>MaxTTIcount</i>	The amount of different TTI that are possible for that transport format is 4.

9.2.1.55 UARFCN

The UTRAN Absolute Radio Frequency Channel Number defines the carrier.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UARFCN			INTEGER (0..698, ...)	Corresponds to: 1885.2MHz..2024.8MHz For FDD range see ref. [5]. For TDD range see ref. [6].

9.2.1.56 UL FP Mode

This parameter defines if normal or silent mode of the Frame Protocol shall be used for the UL.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UL FP mode			ENUMERATED(Normal, Silent)	

9.2.1.57 Uplink Eb/No

The Uplink Eb/No indicates a received Uplink Eb/No.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Uplink Eb/No			INTEGER (0..255)	Resolution is 0.1 dB, range 0-25.5 dB.

9.2.1.58 UL Interference Level

The parameter indicates the UL Interference Level in a cell. The UL Interference Level is used by the UE to calculate its initial UL power for the cell.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UL Interference Level			ENUMERATED ED (-128..-60)	Unit: dBm, Step size=0.1 dB

9.2.1.59 URA ID

IE/Group Name	Presence	Range	IE type and reference	Semantics description
URA ID			INTEGER (0..65 535)	

9.2.1.60 UTRAN Cell Identifier (UC-Id)

The UC-ID (UTRAN Cell identifier) is the identifier of a cell in one UTRAN.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UC-ID		1		
RNC-ID	M		INTEGER (0...4095)	
C-ID	M		C-ID	

9.2.1.61 L3 Information

This parameter contains the Layer 3 Information from a Uu message as received from the UE over the Uu interface or the Layer 3 Information for a Uu message to be sent to a UE by the CRNC, as defined in ref. [14].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
L3 Information			Bit String	The content is defined in ref. [14].

9.2.2 FDD Specific Parameters

This chapter contains parameters that are specific to FDD.

9.2.2.1 Chip Offset

The Chip Offset is defined as the radio timing offset inside a radio frame. The Chip Offset is used as offset for the DL DPCCH relative to the Primary CPICH timing.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Chip Offset			INTEGER (0..38399)	Chips

9.2.2.2 Compressed Mode Method

Defines the method for generating the downlink compressed mode gap, as described in ref. [8].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Compressed Mode Method			ENUMERATED (None, Puncturing, SF/2, Gating Higher Layer Scheduling)	None = restore the normal mode

9.2.2.3 D-Field Length

Defines the D Field size of the UL DPCCH slot.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
D Field Length			ENUMERATED (1, 2)	

9.2.2.4 Diversity Control Field

The Diversity Control Field indicates if the current RL may, must or must not be combined with the already existing RLs.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Diversity Control Field			ENUMERATED (May, Must, Must not)	

9.2.2.5 Diversity Indication

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Diversity Indication			ENUMERATED (Combined, Not Combined)	

Define the diversity mode to be applied.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Diversity Mode			ENUMERATED (None, STTD, Closed loop mode 1, Closed loop mode2)	

9.2.2.7 DL DPCH Slot Format

Indicates the slot format used in DPCH in DL, according to ref. [7].

The Diversity Indication indicates if the RL has been or has not been combined with another RL.

9.2.2.6 Diversity Mode

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DL DPCH Slot Format			INTEGER (0..16)	

9.2.2.8 DL Scrambling Code

DL Scrambling code to be used by the RL. One cell may have multiple DL Scrambling codes available.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DL Scrambling Code			INTEGER (0..15)	0= Primary scrambling code of the cell 1...15= Secondary scrambling code

9.2.2.9 Downlink Frame Type

This parameter defines if frame type 'A' or 'B' shall be used in downlink compressed mode. This is defined in [8].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Downlink Frame Type			ENUMERATED (TypeA, TypeB)	

9.2.2.10 FDD DL Channelisation Code Number

The DL Channelisation Code Number indicates the DL Channelisation Code number for a specific DL physical channel.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
FDD DL Channelisation Code Number	M		INTEGER(0..255)	The maximum value is equal to the DL spreading factor –1

9.2.2.11 Gap Position Mode

The gap position can be fixed or adjustable, as defined in ref. [8].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Gap Position Mode			ENUMERATED (Fixed, Flexible)	

9.2.2.12 Gap Period (TGP)

Gap Period is the period of repetition of a set of consecutive frames containing up to 2 transmission gaps.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Gap Period			INTEGER(0..255)	Frames

9.2.2.13 Gap Starting Slot Number (SN)

It defines the slot number when the transmission gap starts.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SN			Time Slot	

9.2.2.14 Max Number of UL DPDCHs

This parameter is an UE Radio Access Capability parameter which is needed in rate matching algorithm.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Max Number of UL DPDCHs			INTEGER (1..6)	

9.2.2.15 Min UL Channelisation Code Length

Minimum UL channelisation code length (spreading factor) of a DPDCH which is supported by UE. Needed by rate matching algorithm.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Min UL Channelisation Code Length			ENUMERATED(4,8,16,32,64,128,256)	

9.2.2.16 Multiplexing Position

Multiplexing Position specifies whether fixed or flexible positions of transport channels shall be used in the physical channel.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Multiplexing Position Position			ENUMERATED(Fixed, Flexible)	

9.2.2.17 Pattern Duration (PD)

Pattern duration is the total time of the compressed mode pattern (all consecutive TGPs) expressed in number of frames.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
PD			INTEGER(0..2047, ...)	Frames

9.2.2.18 Power Control Mode (PCM)

Power Control Mode specifies the uplink power mode applied during recovery period after each transmission gap in compressed mode. PCM can take 2 values (0 or 1). The different power control modes are described in ref. [9].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Power Control Mode			ENUMERATED(0, 1,..)	

9.2.2.19 Power Offset

This IE defines a power offset respect the Downlink transmission power of a DPCH.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Power Offset			INTEGER (0...24)	Step 0.25 dB, range 0-6 dB

9.2.2.20 Power Resume Mode (PRM)

Power Resume Mode selects the uplink power control method to calculate the initial transmit power after the gap. PRM can take two values (0 or 1) and is described in ref. [9].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Power Resume Mode			ENUMERATED (0, 1,..)	Described in ref. [9].

9.2.2.21 Primary CPICH Ec/No

Energy per chip divided by the power density per band measured on the Primary CPICH by the terminal.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Primary CPICH Ec/No			INTEGER (-30...+30)	dB, step 1 dB

9.2.2.22 Propagation Delay (PD)

Propagation delay is the one-way propagation delay of the radio signal from the [MS-UE](#) to the Node B.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Propagation Delay			INTEGER (0..255)	Chips. Step size is 3 chips. 0=0 chips, 1=3 chips, ...

9.2.2.23 S-Field Length

The UE uses the S Field of the UL DPCH slot to send the SSID Cell ID to the network.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
S Field Length			ENUMERATED (1, 2)	

9.2.2.24 Scrambling Code Change

This parameter indicates whether the alternative scrambling code is used for compressed mode method 'SF/2'.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Scrambling Code Change			ENUMERATED (Change, No change)	

9.2.2.25 Slot Number (SN)

It defines the slot number when the transmission gap starts.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SN			Time Slot	

9.2.2.26 SSdT Cell Identity

The SSdT Cell ID is a temporary ID for SSdT assigned to a cell.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SSdT Cell Identity			ENUMERATED (a, b.., h)	

9.2.2.27 SSdT Cell Identity Length

The SSdT Cell ID Length parameter shows the length of the SSdT Cell ID.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Cell ID Length			ENUMERATED (Short, Medium, Long)	

9.2.2.28 SSdT Indication

The SSdT Indication indicates whether SSdT is in use by the UE or not.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SSdT Indication			ENUMERATED (SSdT Active in the UE, SSdT not Active in the UE)	

9.2.2.29 SSdT Support Indicator

The SSdT Support Indicator indicates whether a RL supports SSdT or not.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SSdT Support Indicator			ENUMERATED (SSdT Supported, SSdT not supported).	

9.2.2.30 TFCI Signalling Mode

This parameter indicates if the normal or split mode is used for the TFCI.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TFCI Signalling Mode			ENUMERATED (Normal, Split)	

9.2.2.31 TPC Downlink Step Size

This parameter indicates step size for the DL power adjustment.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TPC Downlink step size			ENUMERATED (0.5, 1)	

9.2.2.32 Transmission Gap Distance (TGD)

Transmission Gap Distance is the duration of transmission between two consecutive transmission gaps within a transmission gap period, expressed in number of frames. In case there is only one transmission gap in the transmission gap period, this parameter shall be set to zero.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TGD			INTEGER(0..255)	Frames

9.2.2.33 Transmit Gap Length (TGL)

Transmission Gap Length is the duration of no transmission, expressed in number of slots.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TGL			INTEGER (3,4,7,10,14)	Slot

9.2.2.34 UL/DL Compressed Mode Selection

This parameter specifies whether compressed mode is used in UL only, DL only or both UL and DL

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UL/DL Compressed Mode Selection			ENUMERATED (in UL only, DL only or both UL and DL)	

9.2.2.35 UL DPCCH Slot Format

Indicates the slot format used in DPCCH in UL, according to ref. [7].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UL DPCCH Slot Format			INTEGER (0..5)	

9.2.2.36 UL Scrambling Code

The UL Scrambling Code is the scrambling code used by UE. Every UE has its specific UL Scrambling Code.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UL scrambling code				
UL Scrambling Code Number	M		INTEGER (0.. $2^{24}-1$)	
UL Scrambling Code Length	M		ENUMERATED (Short, Long)	

9.2.2.37 Uplink Delta Eb/No

The delta in uplink Eb/No that shall be added to the Eb/No target used during compressed mode frames.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Uplink Delta Eb/No			Enumerated (-6..+10dB)	Step 0.1 dB.

9.2.2.38 Uplink Delta Eb/No After

The delta in uplink Eb/No target that shall be added to the Eb/No target used one frame after the compressed mode frames.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Uplink Delta Eb/No after			Enumerated (-6..+10dB)	Step 0.1 dB.

9.2.3 TDD Specific Parameters

This chapter contains parameters that are specific to TDD.

9.2.3.1 Burst Type

Defines the burst type of the physical channel, see ref. [11].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Burst Type			ENUMERATED (Type1, Type2)	

9.2.3.2 CCTrCH ID

The CCTrCH ID identifies unambiguously a CCTrCH inside a Radio Link.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
CCTrCH ID			INTEGER (0..15)	

9.2.3.3 DPCH ID

The DPCH ID identifies unambiguously a DPCH inside a Radio Link.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DPCH ID			INTEGER (0..239)	

9.2.3.4 Midamble Shift

Different bursts transmitted simultaneously, using the same midamble code shall use different Midamble Shifts.

The 256 chip midamble supports 3 different time shifts, the 512 chips midamble may support 8 or even 16 time shifts.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Midamble Shift			INTEGER (0..15)	

9.2.3.5 Primary CCPCH RSCP

Received Signal Code Power is the received power on PCCPCH of the target cell after despreading. The reference point for the RSCP is the antenna connector at the UE, see ref. [13].

9.2.3.6 Repetition Length

The Repetition Length represents the number of consecutive Radio Frames inside a Repetition Period in which the same Time Slot is assigned to the same Physical Channel.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Repetition Length			INTEGER(1..63)	

9.2.3.7 Repetition Period

The Repetition Period represents the number of consecutive Radio Frames after which the same assignment scheme of Time Slots to a Physical Channel is repeated. This means that if the Time Slot K is assigned to a physical channel in the Radio Frame J , it is assigned to the same physical channel also in all the Radio Frames $J+n*Repetition\ Period$ (where n is an integer).

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Repetition Period			ENUMERATED (1,2,4,8,16,32,64)	

9.2.3.8 TDD Channelisation Code

The Channelisation Code Number indicates which Channelisation Code is used for a given Physical Channel. In TDD the Channelisation Code is an Orthogonal Variable Spreading Factor code, that can have a spreading factor of 1, 2, 4, 8 or 16.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TDD Channelisation Code			ENUMERATED ((1/1), (2/1), (2/2), (4/1),... (4/4), (8/1), (8/8), (16/1)... (16/16))	

9.2.3.9 TDD Physical Channel Offset

The TDD Physical Channel Offset represents the phase information for the allocation of a physical channel. (SFN mod Repetition Period = TDD Physical Channel Offset).

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TDD Physical Channel Offset			INTEGER (0..63)	

9.2.3.10 TFCI Coding

The TFCI Coding describes how the TFCI bits are coded. By default 1 TFCI bit is coded with 4 bits, 2 TFCI bits are coded with 8 bits, 3-5 TFCI bits are coded with 16 bits and 6-10 TFCI bits are coded with 32 bits.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TFCI Coding	M		Enumerated (4, 8, 16, 32)	

9.3 Message and Information element abstract syntax (with ASN.1)

This chapter is for the time being only **INFORMATIVE**.

In case of misalignment with the tabular format of the messages in chapter 9.1 the ASN.1 needs to be aligned with the tabular format.

The setting of the criticality field and the level on which criticality is set for the IEs and sequences of IEs is still to be decided upon.

9.3.1 Usage of Protocol Extension Mechanism for non-standard use

The protocol extension mechanism for non-standard use may be used:

- for special operator (and/or vendor) specific features considered not to be part of the basic functionality, i.e. the functionality required for a complete and high-quality specification in order to guarantee multivendor inter-operability.
- by vendors for research purposes, e.g. to implement and evaluate new algorithms/features before such features are proposed for standardisation.

The extension mechanism shall not be used for basic functionality. Such functionality shall be standardised.

9.3.2 Elementary Procedure Definitions

```
-- *****
--
-- Elementary Procedure definitions
--
-- *****

RNSAP-PDU-Descriptions -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

-- *****
--
-- IE parameter types from other modules.
--
-- *****

IMPORTS
    Criticality,
    ProcedureID,
    TransactionID
FROM RNSAP-CommonDataTypes
```

CommonTransportChannelResourcesFailure,
CommonTransportChannelResourcesRequest,
CommonTransportChannelResourcesReleaseRequest,
CommonTransportChannelResourcesResponseFDD,
CommonTransportChannelResourcesResponseTDD,
CompressedModeCancel,
CompressedModeCommit,
CompressedModeFailure,
CompressedModePrepare,
CompressedModeReady,
DedicatedMeasurementFailureIndication,
DedicatedMeasurementInitiationFailure,
DedicatedMeasurementInitiationRequest,
DedicatedMeasurementInitiationResponse,
DedicatedMeasurementReport,
DedicatedMeasurementTerminationRequest,
DL-PowerControlRequest,
DownlinkSignallingTransferRequest,
ErrorIndication,
PagingRequest,
PhysicalChannelReconfigurationCommand,
PhysicalChannelReconfigurationFailure,
PhysicalChannelReconfigurationRequestFDD,
PhysicalChannelReconfigurationRequestTDD,
PrivateMessage,
RadioLinkAdditionFailureFDD,
RadioLinkAdditionFailureTDD,
RadioLinkAdditionRequestFDD,
RadioLinkAdditionRequestTDD,
RadioLinkAdditionResponseFDD,
RadioLinkAdditionResponseTDD,
RadioLinkDeletionRequest,
RadioLinkDeletionResponse,
RadioLinkFailureIndication,
RadioLinkReconfigurationCancel,
RadioLinkReconfigurationCommit,
RadioLinkReconfigurationFailure,
RadioLinkReconfigurationPrepareFDD,
RadioLinkReconfigurationPrepareTDD,
RadioLinkReconfigurationReadyFDD,
RadioLinkReconfigurationReadyTDD,
RadioLinkReconfigurationRequestFDD,
RadioLinkReconfigurationRequestTDD,
RadioLinkReconfigurationResponseFDD,
RadioLinkReconfigurationResponseTDD,
RadioLinkRestoreIndication,
RadioLinkSetupFailureFDD,
RadioLinkSetupFailureTDD,
RadioLinkSetupRequestFDD,
RadioLinkSetupRequestTDD,
RadioLinkSetupResponseFDD,

```

RadioLinkSetupResponseTDD,
RelocationCommit,
UplinkSignallingTransferIndication
FROM RNSAP-PDU-Contents

id-commonTransportChannelResourcesInitiationFDD,
id-commonTransportChannelResourcesInitiationTDD,
id-commonTransportChannelResourcesRelease,
id-compressedModeCancellationFDD,
id-compressedModeCommitFDD,
id-compressedModePrepareFDD,
id-downlinkPowerControl,
id-downlinkSignallingTransfer,
id-errorIndication,
id-measurementFailure,
id-measurementInitiation,
id-measurementReporting,
id-measurementTermination,
id-pagingRequest,
id-physicalChannelReconfiguration,
id-privateMessage,
id-radioLinkAddition,
id-radioLinkDeletion,
id-radioLinkFailure,
id-radioLinkRestoration,
id-radioLinkSetup,
id-srnsRelocationCommit,
id-synchronisedRadioLinkReconfigurationCancellation,
id-synchronisedRadioLinkReconfigurationCommit,
id-synchronisedRadioLinkReconfigurationPrepare,
id-unsynchronisedRadioLinkReconfiguration,
id-uplinkSignallingTransfer
FROM RNSAP-Constants;

-- *****
--
-- Interface Elementary Procedure Class
--
-- *****

RNSAP-ELEMENTARY-PROCEDURE ::= CLASS {
    &InitiatingMessage          ,
    &SuccessfulOutcome          OPTIONAL,
    &UnsuccessfulOutcome        OPTIONAL,
    &Outcome                    OPTIONAL,
    &procedureID                ProcedureID    UNIQUE,
    &criticality                 Criticality   DEFAULT ignore
}
WITH SYNTAX {
    INITIATING MESSAGE          &InitiatingMessage
    [SUCCESSFUL OUTCOME        &SuccessfulOutcome]

```

```

    [UNSUCCESSFUL OUTCOME      &UnsuccessfulOutcome]
    [OUTCOME                   &Outcome]
    PROCEDURE ID               &procedureID
    [CRITICALITY               &criticality]
}

-- *****
--
-- Interface PDU Definition
--
-- *****

RNSAP-PDU ::= CHOICE {
    initiatingMessage    InitiatingMessage,
    succesfulOutcome     SuccessfulOutcome,
    unsuccessfulOutcome  UnsuccessfulOutcome,
    outcome              Outcome,
    ...
}

InitiatingMessage ::= SEQUENCE {
    procedureID RNSAP-ELEMENTARY-PROCEDURE.&procedureID      ( {RNSAP-ELEMENTARY-PROCEDURES} ),
    criticality RNSAP-ELEMENTARY-PROCEDURE.&criticality      ( {RNSAP-ELEMENTARY-PROCEDURES} {@procedureID} ),
    transactionID TransactionID,
    value       RNSAP-ELEMENTARY-PROCEDURE.&InitiatingMessage ( {RNSAP-ELEMENTARY-PROCEDURES} {@procedureID} )
}

SuccessfulOutcome ::= SEQUENCE {
    procedureID RNSAP-ELEMENTARY-PROCEDURE.&procedureID      ( {RNSAP-ELEMENTARY-PROCEDURES} ),
    criticality RNSAP-ELEMENTARY-PROCEDURE.&criticality      ( {RNSAP-ELEMENTARY-PROCEDURES} {@procedureID} ),
    transactionID TransactionID,
    value       RNSAP-ELEMENTARY-PROCEDURE.&SuccessfulOutcome ( {RNSAP-ELEMENTARY-PROCEDURES} {@procedureID} )
}

UnsuccessfulOutcome ::= SEQUENCE {
    procedureID RNSAP-ELEMENTARY-PROCEDURE.&procedureID      ( {RNSAP-ELEMENTARY-PROCEDURES} ),
    criticality RNSAP-ELEMENTARY-PROCEDURE.&criticality      ( {RNSAP-ELEMENTARY-PROCEDURES} {@procedureID} ),
    transactionID TransactionID,
    value       RNSAP-ELEMENTARY-PROCEDURE.&UnsuccessfulOutcome ( {RNSAP-ELEMENTARY-PROCEDURES} {@procedureID} )
}

Outcome ::= SEQUENCE {
    procedureID RNSAP-ELEMENTARY-PROCEDURE.&procedureID      ( {RNSAP-ELEMENTARY-PROCEDURES} ),
    criticality RNSAP-ELEMENTARY-PROCEDURE.&criticality      ( {RNSAP-ELEMENTARY-PROCEDURES} {@procedureID} ),
    transactionID TransactionID,
    value       RNSAP-ELEMENTARY-PROCEDURE.&Outcome          ( {RNSAP-ELEMENTARY-PROCEDURES} {@procedureID} )
}

-- *****
--
-- Interface Elementary Procedure List

```

```

--
-- *****
RNSAP-ELEMENTARY-PROCEDURES RNSAP-ELEMENTARY-PROCEDURE ::= {
    RNSAP-ELEMENTARY-PROCEDURES-CLASS-1      |
    RNSAP-ELEMENTARY-PROCEDURES-CLASS-2      |
    RNSAP-ELEMENTARY-PROCEDURES-CLASS-3      |
    ...
}

RNSAP-ELEMENTARY-PROCEDURES-CLASS-1 RNSAP-ELEMENTARY-PROCEDURE ::= {
    radioLinkSetupFDD          |
    radioLinkSetupTDD         |
    radioLinkAdditionFDD      |
    radioLinkAdditionTDD     |
    radioLinkDeletion         |
    synchronisedRadioLinkReconfigurationPreparationFDD |
    synchronisedRadioLinkReconfigurationPreparationTDD |
    unSynchronisedRadioLinkReconfigurationFDD |
    unSynchronisedRadioLinkReconfigurationTDD |
    physicalChannelReconfigurationFDD |
    physicalChannelReconfigurationTDD |
    measurementInitiation     |
    compressedModePreparationFDD |
    commonTransportChannelResourcesInitiationFDD |
    commonTransportChannelResourcesInitiationTDD |
    ...
}

RNSAP-ELEMENTARY-PROCEDURES-CLASS-2 RNSAP-ELEMENTARY-PROCEDURE ::= {
    uplinkSignallingTransfer |
    downlinkSignallingTransfer |
    srnsRelocationCommit    |
    paging                  |
    synchronisedRadioLinkReconfigurationCommit |
    synchronisedRadioLinkReconfigurationCancellation |
    radioLinkFailure        |
    radioLinkRestoration     |
    measurementReporting     |
    measurementTermination   |
    measurementFailure       |
    downlinkPowerControlFDD  |
    compressedModeCommitFDD |
    compressedModeCancellationFDD |
    commonTransportChannelResourcesRelease |
    errorIndication          |
    privateMessage           |
    ...
}

RNSAP-ELEMENTARY-PROCEDURES-CLASS-3 RNSAP-ELEMENTARY-PROCEDURE ::= {

```

```

}
...
}
-- *****
--
-- Interface Elementary Procedures
--
-- *****

radioLinkSetupFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE  RadioLinkSetupRequestFDD
    SUCCESSFUL OUTCOME  RadioLinkSetupResponseFDD
    UNSUCCESSFUL OUTCOME RadioLinkSetupFailureFDD
    PROCEDURE ID        { procedureCode id-radioLinkSetup, ddMode fdd }
    CRITICALITY         ignore
}

radioLinkSetupTDD RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE  RadioLinkSetupRequestTDD
    SUCCESSFUL OUTCOME  RadioLinkSetupResponseTDD
    UNSUCCESSFUL OUTCOME RadioLinkSetupFailureTDD
    PROCEDURE ID        { procedureCode id-radioLinkSetup, ddMode tdd }
    CRITICALITY         ignore
}

radioLinkAdditionFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE  RadioLinkAdditionRequestFDD
    SUCCESSFUL OUTCOME  RadioLinkAdditionResponseFDD
    UNSUCCESSFUL OUTCOME RadioLinkAdditionFailureFDD
    PROCEDURE ID        { procedureCode id-radioLinkAddition , ddMode fdd }
    CRITICALITY         ignore
}

radioLinkAdditionTDD RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE  RadioLinkAdditionRequestTDD
    SUCCESSFUL OUTCOME  RadioLinkAdditionResponseTDD
    UNSUCCESSFUL OUTCOME RadioLinkAdditionFailureTDD
    PROCEDURE ID        { procedureCode id-radioLinkAddition , ddMode tdd }
    CRITICALITY         ignore
}

radioLinkDeletion RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE  RadioLinkDeletionRequest
    SUCCESSFUL OUTCOME  RadioLinkDeletionResponse
    PROCEDURE ID        { procedureCode id-radioLinkDeletion, ddMode common }
    CRITICALITY         ignore
}

synchronisedRadioLinkReconfigurationPreparationFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE  RadioLinkReconfigurationPrepareFDD
    SUCCESSFUL OUTCOME  RadioLinkReconfigurationReadyFDD
}

```

```

UNSUCCESSFUL OUTCOME    RadioLinkReconfigurationFailure
PROCEDURE ID            { procedureCode id-synchronisedRadioLinkReconfigurationPrepare, ddMode fdd }
CRITICALITY            ignore
}

synchronisedRadioLinkReconfigurationPreparationTDD RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE    RadioLinkReconfigurationPrepareTDD
  SUCCESSFUL OUTCOME    RadioLinkReconfigurationReadyTDD
  UNSUCCESSFUL OUTCOME  RadioLinkReconfigurationFailure
  PROCEDURE ID          { procedureCode id-synchronisedRadioLinkReconfigurationPrepare, ddMode tdd }
  CRITICALITY          ignore
}

unSynchronisedRadioLinkReconfigurationFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE    RadioLinkReconfigurationRequestFDD
  SUCCESSFUL OUTCOME    RadioLinkReconfigurationResponseFDD
  UNSUCCESSFUL OUTCOME  RadioLinkReconfigurationFailure
  PROCEDURE ID          { procedureCode id-unSynchronisedRadioLinkReconfiguration, ddMode fdd }
  CRITICALITY          ignore
}

unSynchronisedRadioLinkReconfigurationTDD RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE    RadioLinkReconfigurationRequestTDD
  SUCCESSFUL OUTCOME    RadioLinkReconfigurationResponseTDD
  UNSUCCESSFUL OUTCOME  RadioLinkReconfigurationFailure
  PROCEDURE ID          { procedureCode id-unSynchronisedRadioLinkReconfiguration, ddMode tdd }
  CRITICALITY          ignore
}

physicalChannelReconfigurationFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE    PhysicalChannelReconfigurationRequestFDD
  SUCCESSFUL OUTCOME    PhysicalChannelReconfigurationCommand
  UNSUCCESSFUL OUTCOME  PhysicalChannelReconfigurationFailure
  PROCEDURE ID          { procedureCode id-physicalChannelReconfiguration, ddMode fdd }
  CRITICALITY          ignore
}

physicalChannelReconfigurationTDD RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE    PhysicalChannelReconfigurationRequestTDD
  SUCCESSFUL OUTCOME    PhysicalChannelReconfigurationCommand
  UNSUCCESSFUL OUTCOME  PhysicalChannelReconfigurationFailure
  PROCEDURE ID          { procedureCode id-physicalChannelReconfiguration, ddMode tdd }
  CRITICALITY          ignore
}

measurementInitiation RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE    DedicatedMeasurementInitiationRequest
  SUCCESSFUL OUTCOME    DedicatedMeasurementInitiationResponse
  UNSUCCESSFUL OUTCOME  DedicatedMeasurementInitiationFailure
  PROCEDURE ID          { procedureCode id-measurementInitiation, ddMode common }
  CRITICALITY          ignore
}

```

```
}

compressedModePreparationFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE    CompressedModePrepare
    SUCCESSFUL OUTCOME    CompressedModeReady
    UNSUCCESSFUL OUTCOME  CompressedModeFailure
    PROCEDURE ID          { procedureCode id-compressedModePrepareFDD, ddMode fdd }
    CRITICALITY           ignore
}

commonTransportChannelResourcesInitiationFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE    CommonTransportChannelResourcesRequest
    SUCCESSFUL OUTCOME    CommonTransportChannelResourcesResponseFDD
    UNSUCCESSFUL OUTCOME  CommonTransportChannelResourcesFailure
    PROCEDURE ID          { procedureCode id-commonTransportChannelResourcesInitiationFDD, ddMode common }
    CRITICALITY           ignore
}

commonTransportChannelResourcesInitiationTDD RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE    CommonTransportChannelResourcesRequest
    SUCCESSFUL OUTCOME    CommonTransportChannelResourcesResponseTDD
    UNSUCCESSFUL OUTCOME  CommonTransportChannelResourcesFailure
    PROCEDURE ID          { procedureCode id-commonTransportChannelResourcesInitiationTDD, ddMode common }
    CRITICALITY           ignore
}

uplinkSignallingTransfer RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE    UplinkSignallingTransferIndication
    PROCEDURE ID          { procedureCode id-uplinkSignallingTransfer, ddMode common }
    CRITICALITY           ignore
}

downlinkSignallingTransfer RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE    DownlinkSignallingTransferRequest
    PROCEDURE ID          { procedureCode id-downlinkSignallingTransfer, ddMode common }
    CRITICALITY           ignore
}

srnsRelocationCommit RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE    RelocationCommit
    PROCEDURE ID          { procedureCode id-srnsRelocationCommit, ddMode common }
    CRITICALITY           ignore
}

paging RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE    PagingRequest
    PROCEDURE ID          { procedureCode id-pagingRequest, ddMode common }
    CRITICALITY           ignore
}

synchronisedRadioLinkReconfigurationCommit RNSAP-ELEMENTARY-PROCEDURE ::= {
```



```
INITIATING MESSAGE RadioLinkReconfigurationCommit
PROCEDURE ID       { procedureCode id-synchronisedRadioLinkReconfigurationCommit, ddMode common }
CRITICALITY       ignore
}

synchronisedRadioLinkReconfigurationCancellation RNSAP-ELEMENTARY-PROCEDURE ::= {
INITIATING MESSAGE RadioLinkReconfigurationCancel
PROCEDURE ID       { procedureCode id-synchronisedRadioLinkReconfigurationCancellation, ddMode common }
CRITICALITY       ignore
}

radioLinkFailure RNSAP-ELEMENTARY-PROCEDURE ::= {
INITIATING MESSAGE RadioLinkFailureIndication
PROCEDURE ID       { procedureCode id-radioLinkFailure, ddMode common }
CRITICALITY       ignore
}

radioLinkRestoration RNSAP-ELEMENTARY-PROCEDURE ::= {
INITIATING MESSAGE RadioLinkRestoreIndication
PROCEDURE ID       { procedureCode id-radioLinkRestoration, ddMode common }
CRITICALITY       ignore
}

measurementReporting RNSAP-ELEMENTARY-PROCEDURE ::= {
INITIATING MESSAGE DedicatedMeasurementReport
PROCEDURE ID       { procedureCode id-measurementReporting, ddMode common }
CRITICALITY       ignore
}

measurementTermination RNSAP-ELEMENTARY-PROCEDURE ::= {
INITIATING MESSAGE DedicatedMeasurementTerminationRequest
PROCEDURE ID       { procedureCode id-measurementTermination, ddMode common }
CRITICALITY       ignore
}

measurementFailure RNSAP-ELEMENTARY-PROCEDURE ::= {
INITIATING MESSAGE DedicatedMeasurementFailureIndication
PROCEDURE ID       { procedureCode id-measurementFailure, ddMode common }
CRITICALITY       ignore
}

downlinkPowerControlFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
INITIATING MESSAGE DL-PowerControlRequest
PROCEDURE ID       { procedureCode id-downlinkPowerControl, ddMode fdd }
CRITICALITY       ignore
}

compressedModeCommitFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
INITIATING MESSAGE CompressedModeCommit
PROCEDURE ID       { procedureCode id-compressedModeCommitFDD, ddMode fdd }
CRITICALITY       ignore
}
```

```

}

compressedModeCancellationFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE  CompressedModeCancel
    PROCEDURE ID        { procedureCode id-compressedModeCancellationFDD, ddMode fdd }
    CRITICALITY         ignore
}

commonTransportChannelResourcesRelease RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE  CommonTransportChannelResourcesReleaseRequest
    PROCEDURE ID        { procedureCode id-commonTransportChannelResourcesRelease, ddMode common }
    CRITICALITY         ignore
}

errorIndication RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE  ErrorIndication
    PROCEDURE ID        { procedureCode id-errorIndication, ddMode common }
    CRITICALITY         ignore
}

privateMessage RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE  PrivateMessage
    PROCEDURE ID        { procedureCode id-privateMessage, ddMode common }
    CRITICALITY         ignore
}

END

```

9.3.3 PDU Definitions

```

-- *****
--
-- PDU definitions for RNSAP.
--
-- *****

RNSAP-PDU-Contents -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

-- *****
--
-- IE parameter types from other modules.
--
-- *****

IMPORTS
    AllocationRetentionPriority,
    AllowedQueuingTime,
    BLER,

```

BindingID,
BurstType,
C-ID,
C-RNTI,
CCTrCH-ID,
CFN,
CN-CS-DomainIdentifier,
CN-PS-DomainIdentifier,
~~CPICH-EcIo,~~
CPICH-Power,
Cause,
CellParameterID,
ChipOffset,
CompressedModeMethod,
CriticalityDiagnostics,
D-FieldLength,
D-RNTI,
D-RNTI-ReleaseIndication,
DCH-CombinationInd,
DCH-ID,
DL-ChannelisationCode,
DL-DPCCH-SlotFormat,
DL-DPCH-SlotNumber,
DL-EbNo,
DL-EbNoTarget,
DL-FrameType,
DL-Power,
DL-ScramblingCode,
DPCH-ID,
DRX-Parameter,
DedicatedMeasurementValue,
DiversityControlField,
DiversityMode,
FACH-DataFrameSize,
FACH-InitialWindowSize,
FACH-PriorityIndicator,
FDD-DL-ChannelisationCodeNumber,
FDD-S-CCPCH-Offset,
FrameHandlingPriority,
FrameOffset,
GapPeriod,
GapPositionMode,
L3-Information,
MAC-c-SDU-Length,
MaxNrOfUL-DPCHs,
MeanBitRate,
MeasurementCharacteristics,
MeasurementID,
MidambleShift,
MinUL-ChannelisationCodeLength,
MultipleURAsIndicator,

MultiplexingPosition,
Offset,
PD,
PSCH-PCCPCH-TimeSlot,
PSCH-TimeSlot,
PayloadCRC-PresenceIndicator,
PilotBitsUsedIndicator,
PowerControlMode,
PowerOffset,
PowerResumeMode,
PrimaryCCPCH-RSCP,
PrimaryCPICH-EcNo,
PrimaryCPICH-Power,
PrimaryScramblingCode,
PropagationDelay,
PunctureLimit,
RANAP-RelocationInformation,
RL-ID,
RLC-Mode,
RNC-ID,
RepetitionLength,
RepetitionPeriod,
ReportCharacteristics,
S-FieldLength,
S-RNTI,
SAI,
SN,
SRNC-ID,
SSDT-CellID,
SSDT-CellID-Length,
SSDT-Indication,
SSDT-SupportIndicator,
ScaledUL-InterferenceLevel,
ScramblingCode,
ScramblingCodeChange,
SecondaryCCPCH-SlotFormat,
SyncCase,
TDD-ChannelisationCode,
TDD-PhysicalChannelOffset,
TFCI-Coding,
TFCI-Presence,
TFCI-SignallingMode,
TGD,
TGL,
TPC-StepSize,
TimeSlot,
ToAWE,
ToAWS,
TransportBearerID,
TransportBearerRequestIndicator,
TransportFormatCombinationSet,

```
TransportFormatSet,  
TransportLayerAddress,  
UARFCN,  
UC-ID,  
UL-DL-CompressedModeSelection,  
UL-DPCCH-SlotFormat,  
UL-EbNo,  
UL-EbNoTarget,  
UL-FP-Mode,  
UL-ScramblingCode,  
URA-ID  
FROM RNSAP-IEs
```

```
PrivateExtensionContainer{},  
ProtocolExtensionContainer{},  
ProtocolIE-ContainerList{},  
ProtocolIE-ContainerPair{},  
ProtocolIE-ContainerPairList{},  
ProtocolIE-Container{},  
RNSAP-PRIVATE-EXTENSION,  
RNSAP-PROTOCOL-EXTENSION,  
RNSAP-PROTOCOL-IES,  
RNSAP-PROTOCOL-IES-PAIR  
FROM RNSAP-Containers
```

```
maxNoOfDL-Codes,  
maxNrOfCCTrCHs,  
maxNrOfDCHs,  
maxNrOfDL-Codes,  
maxNrOfDPCHs,  
maxNrOfFACH-FD-Size,  
maxNrOfFDD-Neighbours,  
maxNrOfMACcSDU-Length,  
maxNrOfTDD-Neighbours,  
maxNrOfRLs,  
maxNrOfSCCPCHs,  
maxRNCinURA,
```

```
id-AllowedQueuingTime,  
id-BindingID,  
id-C-ID,  
id-C-RNTI,  
id-CCTrCH-ID,  
id-CFN,  
id-CN-CS-DomainIdentifier,  
id-CN-PS-DomainIdentifier,  
id-Cause,  
id-CompressedModeMethod,  
id-CriticalityDiagnostics,  
id-D-RNTI,  
id-D-RNTI-ReleaseIndication,
```

id-DCH-AddItem,
id-DCH-AddItem-RL-ReconfPrepFDD,
id-DCH-AddItem-RL-ReconfPrepTDD,
id-DCH-AddItem-RL-ReconfReadyFDD,
id-DCH-AddItem-RL-ReconfRqstFDD,
id-DCH-AddItem-RL-ReconfRqstTDD,
id-DCH-AddList-RL-ReconfPrepFDD,
id-DCH-AddList-RL-ReconfPrepTDD,
id-DCH-AddList-RL-ReconfRqstFDD,
id-DCH-AddList-RL-ReconfRqstTDD,
id-DCH-DeleteItem-RL-ReconfPrepFDD,
id-DCH-DeleteItem-RL-ReconfPrepTDD,
id-DCH-DeleteItem-RL-ReconfRqstFDD,
id-DCH-DeleteItem-RL-ReconfRqstTDD,
id-DCH-DeleteList-RL-ReconfPrepFDD,
id-DCH-DeleteList-RL-ReconfPrepTDD,
id-DCH-DeleteList-RL-ReconfRqstFDD,
id-DCH-DeleteList-RL-ReconfRqstTDD,
id-DCH-Information-RL-SetupReqFDD,
id-DCH-InformationItem-RL-SetupReqFDD,
id-DCH-InformationItem-RL-SetupReqTDD,
id-DCH-InformationList-RL-SetupReqTDD,
id-DCH-ModifyItem,
id-DCH-ModifyItem-RL-ReconfPrepFDD,
id-DCH-ModifyItem-RL-ReconfPrepTDD,
id-DCH-ModifyItem-RL-ReconfReadyFDD,
id-DCH-ModifyItem-RL-ReconfRqstFDD,
id-DCH-ModifyItem-RL-ReconfRqstTDD,
id-DCH-ModifyList-RL-ReconfPrepFDD,
id-DCH-ModifyList-RL-ReconfPrepTDD,
id-DCH-ModifyList-RL-ReconfRqstFDD,
id-DCH-ModifyList-RL-ReconfRqstTDD,
id-DL-CCTrCH-Information-RL-ReconfPrepTDD,
id-DL-CCTrCH-Information-RL-ReconfRqstTDD,
id-DL-CCTrCH-InformationList-RL-ReconfPrepTDD,
id-DL-CCTrCH-InformationList-RL-ReconfRqstTDD,
id-DL-CCTrChInformationItem-RL-SetupReqTDD,
id-DL-CCTrChInformationList-RL-SetupReqTDD,
id-DL-CodeInformation-PhyChReconfRqstFDD,
id-DL-DPCH-Information,
id-DL-DPCH-Information-RL-SetupReqFDD,
id-DL-DPCH-InformationList-PhyChReconfRqstTDD,
id-DL-DPCH-InformationList-RL-ReconfReadyTDD,
id-DL-EbNoTarget,
id-DL-FrameType,
id-DL-MeanBitRate,
id-DL-ReferencePowerInformation-DL-PC-Rqst,
id-DRX-Parameter,
id-DedicatedMeasurementObjectType-DM-Rprt,
id-DedicatedMeasurementObjectType-DM-Rqst,
id-DedicatedMeasurementObjectType-DM-Rspns,

id-FACH-InfoForOptionalGroupS-CCPCH,
id-FACH-InfoForOptionals-CCPCH,
id-FACH-InfoForS-CCPCH-CoupledToPRACH,
id-GapPositionMode,
id-L3-Information,
id-MeasurementCharacteristics,
id-MeasurementID,
id-MultipleURAsIndicator,
id-PD,
id-PagingArea-PagingRqst,
id-PowerControlMode,
id-PowerResumeMode,
id-ProcedureScope-DL-PC-Rqst,
id-RANAP-RelocationInformation,
id-RL-Information-PhyChReconfRqstFDD,
id-RL-Information-PhyChReconfRqstTDD,
id-RL-Information-RL-AdditionRqstFDD,
id-RL-Information-RL-AdditionRqstTDD,
id-RL-Information-RL-DeletionRqst,
id-RL-Information-RL-FailureInd,
id-RL-Information-RL-ReconfPrepFDD,
id-RL-Information-RL-RestoreInd,
id-RL-Information-RL-SetupReqFDD,
id-RL-Information-RL-SetupReqTDD,
id-RL-InformationItem-DM-Rprt,
id-RL-InformationItem-DM-Rqst,
id-RL-InformationItem-DM-Rspns,
id-RL-InformationItem-RL-SetupReqFDD,
id-RL-InformationList-RL-AdditionRqstFDD,
id-RL-InformationList-RL-DeletionRqst,
id-RL-InformationList-RL-FailureInd,
id-RL-InformationList-RL-ReconfPrepFDD,
id-RL-InformationList-RL-RestoreInd,
id-RL-InformationResponse-RL-AdditionRspTDD,
id-RL-InformationResponse-RL-ReconfReadyTDD,
id-RL-InformationResponse-RL-SetupRspTDD,
id-RL-InformationResponseItem-RL-AdditionRspFDD,
id-RL-InformationResponseItem-RL-ReconfReadyFDD,
id-RL-InformationResponseItem-RL-SetupRspFDD,
id-RL-InformationResponseList-RL-AdditionRspFDD,
id-RL-InformationResponseList-RL-ReconfReadyFDD,
id-RL-InformationResponseList-RL-SetupRspFDD,
id-RL-ReconfigurationFailure-RL-ReconfFail,
id-RL-ReconfigurationFailureList-RL-ReconfFail,
id-RNCsWithCellsInTheAccessedURA-List-UL-ST-Ind,
id-ReportCharacteristics,
id-S-RNTI,
id-SAI,
id-SN,
id-SRNC-ID,
id-ScramblingCodeChange,

```

id-SuccessfulRL-InformationResponse-RL-AdditionFailureFDD,
id-SuccessfulRL-InformationResponse-RL-SetupFailureFDD,
id-SuccessfulRL-InformationResponseList-RL-AdditionFailureFDD,
id-SuccessfulRL-InformationResponseList-RL-SetupFailureFDD,
id-TGD,
id-TGL,
id-TGP1,
id-TGP2,
id-TransportBearerID,
id-TransportBearerRequestIndicator,
id-TransportLayerAddress,
id-UC-ID,
id-UL-CCTrCH-Information-RL-ReconfPrepTDD,
id-UL-CCTrCH-Information-RL-ReconfRqstTDD,
id-UL-CCTrCH-InformationList-RL-ReconfPrepTDD,
id-UL-CCTrCH-InformationList-RL-ReconfRqstTDD,
id-UL-CCTrChInformationItem-RL-SetupReqTDD,
id-UL-CCTrChInformationList-RL-SetupReqTDD,
id-UL-DL-CompressedModeSelection,
id-UL-DPCH-Information,
id-UL-DPCH-Information-RL-SetupReqFDD,
id-UL-DPCH-InformationList-PhyChReconfRqstTDD,
id-UL-DPCH-InformationList-RL-ReconfReadyTDD,
id-UL-DeltaEbNo,
id-UL-DeltaEbNoAfter,
id-UL-EbNoTarget,
id-UL-MeanBitRate,
id-URA-ID,
id-UnsuccessfulRL-InformationResponse,
id-UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD,
id-UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD,
id-UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD,
id-UnsuccessfulRL-InformationResponseList-RL-AdditionFailureFDD,
id-UnsuccessfulRL-InformationResponseList-RL-SetupFailureFDD
FROM RNSAP-Constants;

```

```

-- *****
--
-- Common Container List
--
-- *****

```

```

DCH-IE-ContainerList { RNSAP-PROTOCOL-IES : IEsSetParam } ::= ProtocolIE-ContainerList { 1, maxNrOfDCHs, { IEsSetParam } }
RL-IE-ContainerList { RNSAP-PROTOCOL-IES : IEsSetParam } ::= ProtocolIE-ContainerList { 1, maxNrOfRLs, { IEsSetParam } }
CCTrCH-IE-ContainerList { RNSAP-PROTOCOL-IES : IEsSetParam } ::= ProtocolIE-ContainerList { 1, maxNrOfCCTrCHs, { IEsSetParam } }
DL-Code-IE-ContainerList { RNSAP-PROTOCOL-IES : IEsSetParam } ::= ProtocolIE-ContainerList { 1, maxNrOfDL-Codes, { IEsSetParam } }

```

```

-- *****
--
-- RADIO LINK SETUP REQUEST FDD
--

```


-- *****

```

RadioLinkSetupRequestFDD ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container    {{RadioLinkSetupRequestFDD-IEs}},
    protocolExtensions         ProtocolExtensionContainer {{RadioLinkSetupRequestFDD-Extensions}}    OPTIONAL,
    ...
}

RadioLinkSetupRequestFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-S-RNTI                CRITICALITY ignore TYPE S-RNTI                PRESENCE mandatory } |
    { ID id-D-RNTI                CRITICALITY ignore TYPE D-RNTI                PRESENCE optional  } |
    { ID id-AllowedQueuingTime     CRITICALITY ignore TYPE AllowedQueuingTime     PRESENCE optional  } |
    { ID id-UL-DPCH-Information-RL-SetupReqFDD CRITICALITY ignore TYPE UL-DPCH-Information-RL-SetupReqFDD PRESENCE mandatory } |
    { ID id-DL-DPCH-Information-RL-SetupReqFDD CRITICALITY ignore TYPE DL-DPCH-Information-RL-SetupReqFDD PRESENCE mandatory } |
    { ID id-DCH-Information-RL-SetupReqFDD     CRITICALITY ignore TYPE DCH-InformationList-RL-SetupReqFDD PRESENCE mandatory } |
    { ID id-RL-Information-RL-SetupReqFDD      CRITICALITY ignore TYPE RL-InformationList-RL-SetupReqFDD PRESENCE mandatory },
    ...
}

UL-DPCH-Information-RL-SetupReqFDD ::= SEQUENCE {
    ul-ScramblingCode                UL-ScramblingCode,
    minUL-ChannelisationCodeLength   MinUL-ChannelisationCodeLength,
    maxNrOfUL-DPCHs                  MaxNrOfUL-DPCHs    OPTIONAL
    -- This IE is present only if minUL-ChannelisationCodeLength equals to 4 -- ,
    ul-PunctureLimit                 PunctureLimit,
    ul-TransportFormatCombinationSet TransportFormatCombinationSet,
    ul-DPCCH-SlotFormat              UL-DPCCH-SlotFormat,
    ul-EbNoTarget                     UL-EbNoTarget     OPTIONAL,
    diversityMode                     DiversityMode,
    d-FieldLength                     D-FieldLength    OPTIONAL
    -- This IE is present only if Feed Back mode diversity is activated -- ,
    sSDT-CellIdLength                SSDT-CellIdLength OPTIONAL,
    s-FieldLength                     S-FieldLength    OPTIONAL,
    ul-meanBitRate                    MeanBitRate     OPTIONAL,
    iE-Extensions                     ProtocolExtensionContainer { {UL-DPCH-Information-RL-SetupReqFDD-ExtIEs} } OPTIONAL,
    ...
}

UL-DPCH-Information-RL-SetupReqFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DL-DPCH-Information-RL-SetupReqFDD ::= SEQUENCE {
    transportFormatCombinationSet     TransportFormatCombinationSet,
    dl-DPCH-SlotNumber                DL-DPCH-SlotNumber,
    tFCI-SignallingMode               TFCI-SignallingMode,
    tFCI-Presence                      TFCI-Presence    OPTIONAL
    -- This IE is present if Slot Format is from 12 to 16 -- ,
    multiplexingPosition              MultiplexingPosition,
    powerOffsetInformation             SEQUENCE {
        p01-ForTFCI-Bits              PowerOffset,

```

```

        po2-ForTPC-Bits          PowerOffset,
        po3-ForPilotBits        PowerOffset,
        ...
    },
    dl-TPC-StepSize              TPC-StepSize,
    meanBitRate                  MeanBitRate      OPTIONAL,
    iE-Extensions                ProtocolExtensionContainer { {DL-DPCH-Information-RL-SetupReqFDD-ExtIEs} } OPTIONAL,
    ...
}

DL-DPCH-Information-RL-SetupReqFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-InformationList-RL-SetupReqFDD ::= DCH-IE-ContainerList { {DCH-InformationItemIEs-RL-SetupReqFDD} }

DCH-InformationItemIEs-RL-SetupReqFDD RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-InformationItem-RL-SetupReqFDD CRITICALITY ignore TYPE DCH-InformationItem-RL-SetupReqFDD PRESENCE mandatory },
    ...
}

DCH-InformationItem-RL-SetupReqFDD ::= SEQUENCE {
    dCH-ID                      DCH-ID,
    dCH-CombinationInd          DCH-CombinationInd      OPTIONAL,
    rLC-Mode                    RLC-Mode,
    ul-transportFormatSet       TransportFormatSet,
    dl-transportFormatSet       TransportFormatSet,
    ul-BLER                     BLER,
    dl-BLER                     BLER,
    allocationRetentionPriority AllocationRetentionPriority,
    frameHandlingPriority        FrameHandlingPriority,
    payloadCRC-PresenceIndicator PayloadCRC-PresenceIndicator,
    ul-FP-Mode                  UL-FP-Mode,
    toAWS                       ToAWS,
    toAWE                       ToAWE,
    iE-Extensions                ProtocolExtensionContainer { {DCH-InformationItem-RL-SetupReqFDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-InformationItem-RL-SetupReqFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RL-InformationList-RL-SetupReqFDD ::= RL-IE-ContainerList { {RL-InformationItemIEs-RL-SetupReqFDD} }

RL-InformationItemIEs-RL-SetupReqFDD RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationItem-RL-SetupReqFDD CRITICALITY ignore TYPE RL-InformationItem-RL-SetupReqFDD PRESENCE mandatory },
    ...
}

RL-InformationItem-RL-SetupReqFDD ::= SEQUENCE {

```

```

rL-ID                RL-ID,
uC-ID                C-ID,
frameOffset          FrameOffset,
chipOffset           ChipOffset,
propagationDelay     PropagationDelay OPTIONAL,
diversityControlField DiversityControlField OPTIONAL
-- This IE is present only if the RL is not the first one in the RL-InformationList-RL-SetupReqFDD --,
dl-InitialTX-Power   DL-Power OPTIONAL
-- Initial DL transmission power --,
primaryeCPICH-EcIo   PrimaryCPICH-EcIo OPTIONAL,
sSDT-CellID          SSDT-CellID OPTIONAL,
iE-Extensions        ProtocolExtensionContainer { {RL-InformationItem-RL-SetupReqFDD-ExtIEs} } OPTIONAL,
...
}

RL-InformationItem-RL-SetupReqFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

RadioLinkSetupRequestFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- *****
--
-- RADIO LINK SETUP REQUEST TDD
--
-- *****

RadioLinkSetupRequestTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkSetupRequestTDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkSetupRequestTDD-Extensions}} OPTIONAL,
    ...
}

RadioLinkSetupRequestTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-S-RNTI          CRITICALITY ignore TYPE S-RNTI          PRESENCE mandatory } |
    { ID id-D-RNTI          CRITICALITY ignore TYPE D-RNTI          PRESENCE optional } |
    { ID id-AllowedQueuingTime CRITICALITY ignore TYPE AllowedQueuingTime PRESENCE optional } |
    { ID id-UL-MeanBitRate   CRITICALITY ignore TYPE MeanBitRate   PRESENCE optional } |
    { ID id-DL-MeanBitRate   CRITICALITY ignore TYPE MeanBitRate   PRESENCE optional } |
    { ID id-UL-CCTrChInformationList-RL-SetupReqTDD CRITICALITY ignore TYPE UL-CCTrChInformationList-RL-SetupReqTDD PRESENCE mandatory } |
    { ID id-DL-CCTrChInformationList-RL-SetupReqTDD CRITICALITY ignore TYPE DL-CCTrChInformationList-RL-SetupReqTDD PRESENCE mandatory } |
    { ID id-DCH-InformationList-RL-SetupReqTDD CRITICALITY ignore TYPE DCH-InformationList-RL-SetupReqTDD PRESENCE mandatory } |
    { ID id-RL-Information-RL-SetupReqTDD CRITICALITY ignore TYPE RL-Information-RL-SetupReqTDD PRESENCE mandatory },
    ...
}

UL-CCTrChInformationList-RL-SetupReqTDD ::= CCTrCH-IE-ContainerList { {UL-CCTrChInformationItemIEs-RL-SetupReqTDD} }

UL-CCTrChInformationItemIEs-RL-SetupReqTDD RNSAP-PROTOCOL-IES ::= {

```

```

    { ID id-UL-CCTrChInformationItem-RL-SetupReqTDD CRITICALITY ignore TYPE UL-CCTrChInformationItem-RL-SetupReqTDD PRESENCE mandatory },
    ...
}

UL-CCTrChInformationItem-RL-SetupReqTDD ::= SEQUENCE {
    cCTrCH-ID          CCTrCH-ID,
    ul-TFCS            TransportFormatCombinationSet,
    tFCI-Coding        TFCI-Coding,
    ul-PunctureLimit   PunctureLimit,
    iE-Extensions      ProtocolExtensionContainer { {UL-CCTrChInformationItem-RL-SetupReqTDD-ExtIEs} } OPTIONAL,
    ...
}

UL-CCTrChInformationItem-RL-SetupReqTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DL-CCTrChInformationList-RL-SetupReqTDD ::= CCTrCH-IE-ContainerList { {DL-CCTrChInformationItemIEs-RL-SetupReqTDD} }

DL-CCTrChInformationItemIEs-RL-SetupReqTDD RNSAP-PROTOCOL-IES ::= {
    { ID id-DL-CCTrChInformationItem-RL-SetupReqTDD CRITICALITY ignore TYPE DL-CCTrChInformationItem-RL-SetupReqTDD PRESENCE mandatory },
    ...
}

DL-CCTrChInformationItem-RL-SetupReqTDD ::= SEQUENCE {
    cCTrCH-ID          CCTrCH-ID,
    dl-TFCS            TransportFormatCombinationSet,
    tFCI-Coding        TFCI-Coding,
    dl-PunctureLimit   PunctureLimit,
    iE-Extensions      ProtocolExtensionContainer { {DL-CCTrChInformationItem-RL-SetupReqTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CCTrChInformationItem-RL-SetupReqTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-InformationList-RL-SetupReqTDD ::= DCH-IE-ContainerList { {DCH-InformationItemIEs-RL-SetupReqTDD} }

DCH-InformationItemIEs-RL-SetupReqTDD RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-InformationItem-RL-SetupReqTDD CRITICALITY ignore TYPE DCH-InformationItem-RL-SetupReqTDD PRESENCE mandatory },
    ...
}

DCH-InformationItem-RL-SetupReqTDD ::= SEQUENCE {
    dCH-ID            DCH-ID,
    ul-cCTrCH-ID      CCTrCH-ID, -- UL CCTrCH in which the DCH is mapped
    dl-cCTrCH-ID      CCTrCH-ID, -- DL CCTrCH in which the DCH is mapped
    dCH-CombinationInd DCH-CombinationInd OPTIONAL,
    rLC-Mode          RLC-Mode,
    ul-transportFormatSet TransportFormatSet,

```

```

dl-transportFormatSet      TransportFormatSet,
ul-BLER                    BLER,
dl-BLER                    BLER,
allocationRetentionPriority AllocationRetentionPriority,
frameHandlingPriority      FrameHandlingPriority,
payloadCRC-PresenceIndicator PayloadCRC-PresenceIndicator,
ul-FP-Mode                UL-FP-Mode,
toAWS                     ToAWS,
toAWE                     ToAWE,
iE-Extensions             ProtocolExtensionContainer { {DCH-InformationItem-RL-SetupReqTDD-ExtIEs} } OPTIONAL,
...
}

DCH-InformationItem-RL-SetupReqTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

RL-Information-RL-SetupReqTDD ::= SEQUENCE {
rL-ID                      RL-ID,
c-ID                      C-ID,
frameOffset               FrameOffset,
primaryCCPCH-RSCP        PrimaryCCPCH-RSCP      OPTIONAL,
iE-Extensions            ProtocolExtensionContainer { {RL-Information-RL-SetupReqTDD-ExtIEs} } OPTIONAL,
...
}

RL-Information-RL-SetupReqTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

RadioLinkSetupRequestTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- *****
--
-- RADIO LINK SETUP RESPONSE FDD
--
-- *****

RadioLinkSetupResponseFDD ::= SEQUENCE {
protocolIEs                ProtocolIE-Container      {{RadioLinkSetupResponseFDD-IEs}},
protocolExtensions        ProtocolExtensionContainer {{RadioLinkSetupResponseFDD-Extensions}}
...
}

RadioLinkSetupResponseFDD-IEs RNSAP-PROTOCOL-IES ::= {
{ ID id-D-RNTI              CRITICALITY ignore TYPE D-RNTI PRESENCE optional } |
{ ID id-CN-PS-DomainIdentifier CRITICALITY ignore TYPE CN-PS-DomainIdentifier PRESENCE optional } |
{ ID id-CN-CS-DomainIdentifier CRITICALITY ignore TYPE CN-CS-DomainIdentifier PRESENCE optional } |
{ ID id-RL-InformationResponseList-RL-SetupRspFDD

```

```

                CRITICALITY ignore TYPE RL-InformationResponseList-RL-SetupRspFDD
                                PRESENCE mandatory } |
    { ID id-UL-EbNoTarget          CRITICALITY ignore TYPE UL-EbNoTarget          PRESENCE optional } |
    { ID id-DL-EbNoTarget          CRITICALITY ignore TYPE DL-EbNoTarget          PRESENCE optional } |
    { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
    ...
}

RL-InformationResponseList-RL-SetupRspFDD ::= RL-IE-ContainerList { {RL-InformationResponseItemIEs-RL-SetupRspFDD} }

RL-InformationResponseItemIEs-RL-SetupRspFDD RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationResponseItem-RL-SetupRspFDD
        CRITICALITY ignore TYPE RL-InformationResponseItem-RL-SetupRspFDD PRESENCE mandatory },
    ...
}

RL-InformationResponseItem-RL-SetupRspFDD ::= SEQUENCE {
    rL-ID                RL-ID,
    sAI                  SAI,
    ul-InterferenceLevel ScaledUL-InterferenceLevel,
    dl-CodeInformation   DL-CodeInformationList-RL-SetupRspFDD,
    sSDT-SupportIndicator SSDT-SupportIndicator,
    maxUL-EbNo           UL-EbNo,
    minUL-EbNo           UL-EbNo,
    neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-SetupRsp OPTIONAL,
    neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-SetupRsp OPTIONAL,
    iE-Extensions        ProtocolExtensionContainer { {RL-InformationResponseItem-RL-SetupRspFDD-ExtIEs} } OPTIONAL,
    ...
}

RL-InformationResponseItem-RL-SetupRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CodeInformationList-RL-SetupRspFDD ::= SEQUENCE (SIZE (1..maxNoOfDL-Codes)) OF DL-CodeInformationItem-RL-SetupRspFDD

DL-CodeInformationItem-RL-SetupRspFDD ::= SEQUENCE {
    dl-ScramblingCode      DL-ScramblingCode,
    fDD-DL-ChannelisationCodeNumber FDD-DL-ChannelisationCodeNumber,
    -- ** NOTE: How many alternatives are there, 2 or 3? **
    diversityIndication    CHOICE {
        combining          SEQUENCE {
            rL-ID          RL-ID
        },
        nonCombiningOrIENotPresent SEQUENCE {
            dCH-InformationResponse-RL-SetupRspFDD DCH-InformationResponseList-RL-SetupRspFDD OPTIONAL
        }
    }
}
OPTIONAL
-- This IE is present only if the RL is not the first on in the RL Information -- ,
iE-Extensions            ProtocolExtensionContainer { {DL-CodeInformationItem-RL-SetupRspFDD-ExtIEs} } OPTIONAL,

```

```

}
...
}
DL-CodeInformationItem-RL-SetupRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}
-- ** NOTE: Shall this be made as an IE container? **
DCH-InformationResponseList-RL-SetupRspFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-InformationResponseItem-RL-SetupRspFDD

DCH-InformationResponseItem-RL-SetupRspFDD ::= SEQUENCE {
dCH-ID DCH-ID,
bindingID BindingID,
transportLayerAddress TransportLayerAddress,
iE-Extensions ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-SetupRspFDD-ExtIEs} } OPTIONAL,
...
}

DCH-InformationResponseItem-RL-SetupRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- ** NOTE: Both FDD and TDD messages use these definitions **
NeighbouringFDD-CellInformationList-RL-SetupRsp ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours)) OF
NeighbouringFDD-CellInformationItem-RL-SetupRsp

NeighbouringFDD-CellInformationItem-RL-SetupRsp ::= SEQUENCE {
uC-ID C-ID,
cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,
cN-CS-DomainIdentifier CN-CS-DomainIdentifier OPTIONAL,
uARFCN UARFCN,
frameOffset FrameOffset OPTIONAL,
primaryScramblingCode PrimaryScramblingCode,
primaryCPICH-Power PrimaryCPICH-Power OPTIONAL,
iE-Extensions ProtocolExtensionContainer { {NeighbouringFDD-CellInformationItem-RL-SetupRsp-ExtIEs} } OPTIONAL,
...
}

NeighbouringFDD-CellInformationItem-RL-SetupRsp-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

NeighbouringTDD-CellInformationList-RL-SetupRsp ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours)) OF
NeighbouringTDD-CellInformationItem-RL-SetupRsp

NeighbouringTDD-CellInformationItem-RL-SetupRsp ::= SEQUENCE {
c-ID C-ID,
cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,
cN-CS-DomainIdentifier CN-CS-DomainIdentifier OPTIONAL,
uARFCN UARFCN,
frameOffset FrameOffset OPTIONAL,

```

```

cellParameterID          CellParameterID,
syncCase                  SyncCase,
timeSlot                  TimeSlot          OPTIONAL
-- This IE is present only if SyncCase is Case1 -- ,
pSCH-TimeSlot            PSCH-TimeSlot      OPTIONAL
-- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
ul-EbNo                  UL-EbNo           OPTIONAL,
dl-EbNo                  DL-EbNo           OPTIONAL,
iE-Extensions            ProtocolExtensionContainer { {NeighbouringTDD-CellInformationItem-RL-SetupRsp-ExtIEs} } OPTIONAL,
...
}

NeighbouringTDD-CellInformationItem-RL-SetupRsp-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

RadioLinkSetupResponseFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- *****
--
-- RADIO LINK SETUP RESPONSE TDD
--
-- *****

RadioLinkSetupResponseTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkSetupResponseTDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkSetupResponseTDD-Extensions}}          OPTIONAL,
    ...
}

RadioLinkSetupResponseTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI          CRITICALITY ignore TYPE D-RNTI          PRESENCE optional } |
    { ID id-CN-PS-DomainIdentifier CRITICALITY ignore TYPE CN-PS-DomainIdentifier PRESENCE optional } |
    { ID id-CN-CS-DomainIdentifier CRITICALITY ignore TYPE CN-CS-DomainIdentifier PRESENCE optional } |
    { ID id-RL-InformationResponse-RL-SetupRspTDD CRITICALITY ignore TYPE RL-InformationResponse-RL-SetupRspTDD PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
    ...
}

RL-InformationResponse-RL-SetupRspTDD ::= SEQUENCE {
    rL-ID          RL-ID,
    sAI            SAI,
    ul-InterferenceLevel ScaledUL-InterferenceLevel,
    maxUL-EbNo     UL-EbNo,
    minUL-EbNo     UL-EbNo,
    ul-EbNoTarget  UL-EbNo          OPTIONAL,
    dl-EbNoTarget  DL-EbNo          OPTIONAL,
    ul-CCTrCHInformation UL-CCTrCHInformationList-RL-SetupRspTDD,
    dl-CCTrCHInformation DL-CCTrCHInformationList-RL-SetupRspTDD,

```



```

dCH-InformationResponse          DCH-InformationResponseList-RL-SetupRspTDD,
neighbouringFDD-CellInformation  NeighbouringFDD-CellInformationList-RL-SetupRsp OPTIONAL,
neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-SetupRsp OPTIONAL,
iE-Extensions                    ProtocolExtensionContainer { {RL-InformationResponse-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
...
}

RL-InformationResponse-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- ** NOTE: Shall this be made as an IE container? **
UL-CCTrCHInformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF UL-CCTrCHInformationItem-RL-SetupRspTDD

UL-CCTrCHInformationItem-RL-SetupRspTDD ::= SEQUENCE {
  cCTrCH-ID          CCTrCH-ID,
  ul-DPCH-Information  UL-DPCH-InformationList-RL-SetupRspTDD,
  iE-Extensions       ProtocolExtensionContainer { {UL-CCTrCHInformationItem-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
  ...
}

UL-CCTrCHInformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- ** NOTE: Shall this be made as an IE container? **
UL-DPCH-InformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF UL-DPCH-InformationItem-RL-SetupRspTDD

-- **NOTE: UL-DPCH-InformationItem-RL-SetupRspTDD and DL-DPCH-InformationItem-RL-SetupRspTDD
-- are currently similar. Combine them? **
UL-DPCH-InformationItem-RL-SetupRspTDD ::= SEQUENCE {
  dPCH-ID          DPCH-ID,
  tDD-ChannelisationCode  TDD-ChannelisationCode,
  burstType         BurstType,
  midambleShift     MidambleShift,
  timeSlot          TimeSlot,
  tDD-PhysicalChannelOffset  TDD-PhysicalChannelOffset,
  repetitionPeriod  RepetitionPeriod,
  repetitionLength  RepetitionLength,
  tFCI-Presence     TFCI-Presence,
  iE-Extensions     ProtocolExtensionContainer { {UL-DPCH-InformationItem-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
  ...
}

UL-DPCH-InformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CCTrCHInformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF DL-CCTrCHInformationItem-RL-SetupRspTDD

```

```

DL-CCTrCHInformationItem-RL-SetupRspTDD ::= SEQUENCE {
    cCTrCH-ID                CCTrCH-ID,
    dl-DPCH-Information      DL-DPCH-InformationList-RL-SetupRspTDD,
    iE-Extensions            ProtocolExtensionContainer { {DL-CCTrCHInformationItem-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CCTrCHInformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-DPCH-InformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF DL-DPCH-InformationItem-RL-SetupRspTDD

DL-DPCH-InformationItem-RL-SetupRspTDD ::= SEQUENCE {
    dPCH-ID                DPCH-ID,
    tDD-ChannelisationCode TDD-ChannelisationCode,
    burstType              BurstType,
    midambleShift          MidambleShift,
    timeSlot               TimeSlot,
    tDD-PhysicalChannelOffset TDD-PhysicalChannelOffset,
    repetitionPeriod       RepetitionPeriod,
    repetitionLength       RepetitionLength,
    tFCI-Presence          TFCI-Presence,
    iE-Extensions          ProtocolExtensionContainer { {DL-DPCH-InformationItem-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-DPCH-InformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-InformationResponseList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-InformationResponseItem-RL-SetupRspTDD

DCH-InformationResponseItem-RL-SetupRspTDD ::= SEQUENCE {
    dCH-ID                DCH-ID,
    bindingID             BindingID,
    transportLayerAddress TransportLayerAddress,
    iE-Extensions          ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-InformationResponseItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkSetupResponseTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****

```

```

--
-- RADIO LINK SETUP FAILURE FDD
--
-- *****

RadioLinkSetupFailureFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkSetupFailureFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkSetupFailureFDD-Extensions}}      OPTIONAL,
    ...
}

RadioLinkSetupFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI          CRITICALITY ignore TYPE D-RNTI          PRESENCE mandatory } |
    { ID id-CN-PS-DomainIdentifier CRITICALITY ignore TYPE CN-PS-DomainIdentifier PRESENCE mandatory } |
    { ID id-CN-CS-DomainIdentifier CRITICALITY ignore TYPE CN-CS-DomainIdentifier PRESENCE mandatory } |
    { ID id-UnsuccessfulRL-InformationResponseList-RL-SetupFailureFDD
      CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponseList-RL-SetupFailureFDD
      PRESENCE mandatory } |
    { ID id-SuccessfulRL-InformationResponseList-RL-SetupFailureFDD
      CRITICALITY ignore TYPE SuccessfulRL-InformationResponseList-RL-SetupFailureFDD
      PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
    ...
}

UnsuccessfulRL-InformationResponseList-RL-SetupFailureFDD ::= RL-IE-ContainerList { {UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD-IEs} }

UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD
      CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD
      PRESENCE mandatory },
    ...
}

UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD ::= SEQUENCE {
    rL-ID          RL-ID,
    cause          Cause,
    iE-Extensions ProtocolExtensionContainer { {UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

SuccessfulRL-InformationResponseList-RL-SetupFailureFDD ::= RL-IE-ContainerList { {SuccessfulRL-InformationResponse-RL-SetupFailureFDD-IEs} }

SuccessfulRL-InformationResponse-RL-SetupFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-SuccessfulRL-InformationResponse-RL-SetupFailureFDD
      CRITICALITY ignore TYPE SuccessfulRL-InformationResponse-RL-SetupFailureFDD
      PRESENCE mandatory },

```

```

}
...
SuccessfulRL-InformationResponse-RL-SetupFailureFDD ::= SEQUENCE {
  rL-ID                RL-ID,
  SAI                  SAI,
  ul-InterferenceLevel ScaledUL-InterferenceLevel,
  dl-CodeInformation   DL-CodeInformationList-RL-SetupFailureFDD,
  sSDT-SupportIndicator SSDT-SupportIndicator,
  neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-SetupFailureFDD OPTIONAL,
  neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-SetupFailureFDD OPTIONAL,
  ul-EbNoTarget        UL-EbNo,
  maxUL-EbNo           UL-EbNo,
  minUL-EbNo           UL-EbNo,
  dl-EbNoTarget        DL-EbNo,
  iE-Extensions        ProtocolExtensionContainer { {SuccessfulRL-InformationResponse-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
  ...
}
-- ** NOTE: Shall this be made as an IE container? **
DL-CodeInformationList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNoOfDL-Codes)) OF DL-CodeInformationItem-RL-SetupFailureFDD

SuccessfulRL-InformationResponse-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DL-CodeInformationItem-RL-SetupFailureFDD ::= SEQUENCE {
  dl-ScramblingCode      DL-ScramblingCode,
  fDD-DL-ChannelisationCodeNumber FDD-DL-ChannelisationCodeNumber,
  -- ** NOTE: How many alternatives are there, 2 or 3? **
  diversityIndication    CHOICE {
    combining             SEQUENCE {
      rL-ID              RL-ID
    },
    nonCombiningOrIENotPresent SEQUENCE {
      dCH-InformationResponse-RL-SetupFailureFDD DCH-InformationResponseList-RL-SetupFailureFDD OPTIONAL
    }
  }
  OPTIONAL
  -- This IE is present only if the RL is not the first on in the RL Information -- ,
  iE-Extensions          ProtocolExtensionContainer { {DL-CodeInformationItem-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
  ...
}

DL-CodeInformationItem-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ** NOTE: Shall this be made as an IE container? **
DCH-InformationResponseList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-InformationResponseItem-RL-SetupFailureFDD

DCH-InformationResponseItem-RL-SetupFailureFDD ::= SEQUENCE {
  dCH-ID                DCH-ID,

```

```

bindingID          BindingID,
transportLayerAddress TransportLayerAddress,
iE-Extensions      ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
...
}

DCH-InformationResponseItem-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

NeighbouringFDD-CellInformationList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours)) OF
  NeighbouringFDD-CellInformationItem-RL-SetupFailureFDD

NeighbouringFDD-CellInformationItem-RL-SetupFailureFDD ::= SEQUENCE {
  uC-ID          C-ID,
  cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,
  cN-CS-DomainIdentifier CN-CS-DomainIdentifier OPTIONAL,
  uARFCN        UARFCN,
  frameOffset   FrameOffset OPTIONAL,
  primaryScramblingCode PrimaryScramblingCode,
  primaryCPICH-Power PrimaryCPICH-Power OPTIONAL,
  iE-Extensions ProtocolExtensionContainer { {NeighbouringFDD-CellInformationItem-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
  ...
}

NeighbouringFDD-CellInformationItem-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

NeighbouringTDD-CellInformationList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours)) OF
  NeighbouringTDD-CellInformationItem-RL-SetupFailureFDD

NeighbouringTDD-CellInformationItem-RL-SetupFailureFDD ::= SEQUENCE {
  uC-ID          C-ID,
  cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,
  cN-CS-DomainIdentifier CN-CS-DomainIdentifier OPTIONAL,
  uARFCN        UARFCN,
  frameOffset   FrameOffset OPTIONAL,
  cellParameterID CellParameterID,
  syncCase      SyncCase,
  timeSlot      TimeSlot,
  pSCH-TimeSlot PSCH-TimeSlot OPTIONAL
  -- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
  iE-Extensions ProtocolExtensionContainer { {NeighbouringTDD-CellInformationItem-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
  ...
}

NeighbouringTDD-CellInformationItem-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

```

```

RadioLinkSetupFailureFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK SETUP FAILURE TDD
--
-- *****

RadioLinkSetupFailureTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkSetupFailureTDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkSetupFailureTDD-Extensions}}    OPTIONAL,
    ...
}

RadioLinkSetupFailureTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD
      CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD
      PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics          CRITICALITY ignore TYPE CriticalityDiagnostics          PRESENCE optional },
    ...
}

UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD ::= SEQUENCE {
    rL-ID          RL-ID,
    cause          Cause,
    iE-Extensions ProtocolExtensionContainer { {UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD-ExtIEs} } OPTIONAL,
    ...
}

UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkSetupFailureTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK ADDITION REQUEST FDD
--
-- *****

RadioLinkAdditionRequestFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkAdditionRequestFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkAdditionRequestFDD-Extensions}}    OPTIONAL,
    ...
}

```

```

RadioLinkAdditionRequestFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-UL-EbNoTarget          CRITICALITY ignore TYPE UL-EbNo          PRESENCE mandatory } |
  { ID id-RL-InformationList-RL-AdditionRqstFDD  CRITICALITY ignore TYPE RL-InformationList-RL-AdditionRqstFDD PRESENCE mandatory },
  ...
}

RL-InformationList-RL-AdditionRqstFDD ::= RL-IE-ContainerList { {RL-Information-RL-AdditionRqstFDD-IEs} }

RL-Information-RL-AdditionRqstFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-RL-Information-RL-AdditionRqstFDD  CRITICALITY ignore TYPE RL-Information-RL-AdditionRqstFDD  PRESENCE mandatory },
  ...
}

RL-Information-RL-AdditionRqstFDD ::= SEQUENCE {
  rL-ID          RL-ID,
  c-ID          C-ID,
  frameOffset   FrameOffset,
  chipOffset    ChipOffset,
  diversityControlField DiversityControlField,
  primaryCPICH-EcNo PrimaryCPICH-EcNo OPTIONAL,
  sSDT-CellID   SSDT-CellID OPTIONAL,
  iE-Extensions ProtocolExtensionContainer { {RL-Information-RL-AdditionRqstFDD-ExtIEs} } OPTIONAL,
  ...
}

RL-Information-RL-AdditionRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

RadioLinkAdditionRequestFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
--
-- RADIO LINK ADDITION REQUEST TDD
--
-- *****

RadioLinkAdditionRequestTDD ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container {{RadioLinkAdditionRequestTDD-IEs}},
  protocolExtensions   ProtocolExtensionContainer {{RadioLinkAdditionRequestTDD-Extensions}} OPTIONAL,
  ...
}

RadioLinkAdditionRequestTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-RL-Information-RL-AdditionRqstTDD  CRITICALITY ignore TYPE RL-Information-RL-AdditionRqstTDD  PRESENCE mandatory },
  ...
}

RL-Information-RL-AdditionRqstTDD ::= SEQUENCE {

```

```

rL-ID                RL-ID,
c-ID                 C-ID,
frameOffset          FrameOffset,
chipOffset           ChipOffset,
diversityControlField DiversityControlField,
primaryCCPCH-RSCP    PrimaryCCPCH-RSCP,
iE-Extensions        ProtocolExtensionContainer { {RL-Information-RL-AdditionRqstTDD-ExtIEs} } OPTIONAL,
...
}

RL-Information-RL-AdditionRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

RadioLinkAdditionRequestTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- *****
--
-- RADIO LINK ADDITION RESPONSE FDD
--
-- *****

RadioLinkAdditionResponseFDD ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container    {{RadioLinkAdditionResponseFDD-IEs}},
  protocolExtensions   ProtocolExtensionContainer {{RadioLinkAdditionResponseFDD-Extensions}}
  ...
}

RadioLinkAdditionResponseFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-D-RNTI          CRITICALITY ignore TYPE D-RNTI          PRESENCE optional } |
  { ID id-RL-InformationResponseList-RL-AdditionRspFDD
    CRITICALITY ignore TYPE RL-InformationResponseList-RL-AdditionRspFDD
    PRESENCE mandatory } |
  { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
  ...
}

RL-InformationResponseList-RL-AdditionRspFDD ::= RL-IE-ContainerList { {RL-InformationResponseItemIEs-RL-AdditionRspFDD} }

RL-InformationResponseItemIEs-RL-AdditionRspFDD RNSAP-PROTOCOL-IES ::= {
  { ID id-RL-InformationResponseItem-RL-AdditionRspFDD
    CRITICALITY ignore TYPE RL-InformationResponseItem-RL-AdditionRspFDD PRESENCE mandatory },
  ...
}

RL-InformationResponseItem-RL-AdditionRspFDD ::= SEQUENCE {
  rL-ID                RL-ID,
  sAI                  SAI,
  ul-InterferenceLevel ScaledUL-InterferenceLevel,

```



```

dl-CodeInformation          DL-CodeInformationList-RL-AdditionRspFDD,
sSDT-SupportIndicator      SSdT-SupportIndicator,
maxUL-EbNo                 UL-EbNo,
minUL-EbNo                 UL-EbNo,
neighbouringFDD-CellInformation      NeighbouringFDD-CellInformationList-RL-SetupRsp OPTIONAL,
neighbouringTDD-CellInformation      NeighbouringTDD-CellInformationList-RL-SetupRsp OPTIONAL,
IE-Extensions              ProtocolExtensionContainer { {RL-InformationResponseItem-RL-AdditionRspFDD-ExtIEs} } OPTIONAL,
...
}

RL-InformationResponseItem-RL-AdditionRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CodeInformationList-RL-AdditionRspFDD ::= SEQUENCE (SIZE (1..maxNoOfDL-Codes)) OF DL-CodeInformationItem-RL-AdditionRspFDD

DL-CodeInformationItem-RL-AdditionRspFDD ::= SEQUENCE {
dl-ScramblingCode          DL-ScramblingCode,
fDD-DL-ChannelisationCodeNumber      FDD-DL-ChannelisationCodeNumber,
-- ** NOTE: How many alternatives are there, 2 or 3? **
diversityIndication        CHOICE {
    combining                SEQUENCE {
        rL-ID                RL-ID
    },
    nonCombiningOrIENotPresent      SEQUENCE {
        dCH-InformationResponse-RL-AdditionRspFDD      DCH-InformationResponseList-RL-AdditionRspFDD OPTIONAL
    }
} OPTIONAL
-- This IE is present only if the RL is not the first on in the RL Information -- ,
IE-Extensions              ProtocolExtensionContainer { {DL-CodeInformationItem-RL-AdditionRspFDD-ExtIEs} } OPTIONAL,
...
}

DL-CodeInformationItem-RL-AdditionRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- ** NOTE: Shall this be made as an IE container? **
DCH-InformationResponseList-RL-AdditionRspFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-InformationResponseItem-RL-AdditionRspFDD

DCH-InformationResponseItem-RL-AdditionRspFDD ::= SEQUENCE {
dCH-ID                     DCH-ID,
bindingID                  BindingID,
transportLayerAddress      TransportLayerAddress,
IE-Extensions              ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-AdditionRspFDD-ExtIEs} } OPTIONAL,
...
}

DCH-InformationResponseItem-RL-AdditionRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

```

```

}

-- ** NOTE: Both FDD and TDD messages use these definitions **
NeighbouringFDD-CellInformationList-RL-AdditionRsp ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours)) OF
  NeighbouringFDD-CellInformationItem-RL-AdditionRsp

NeighbouringFDD-CellInformationItem-RL-AdditionRsp ::= SEQUENCE {
  uC-ID                C-ID,
  cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,
  cN-CS-DomainIdentifier CN-CS-DomainIdentifier OPTIONAL,
  uARFCN              UARFCN,
  frameOffset         FrameOffset OPTIONAL,
  primaryScramblingCode PrimaryScramblingCode,
  primaryCPICH-Power PrimaryCPICH-Power OPTIONAL,
  iE-Extensions       ProtocolExtensionContainer { {NeighbouringFDD-CellInformationItem-RL-AdditionRsp-ExtIEs} } OPTIONAL,
  ...
}

NeighbouringFDD-CellInformationItem-RL-AdditionRsp-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

NeighbouringTDD-CellInformationList-RL-AdditionRsp ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours)) OF
  NeighbouringTDD-CellInformationItem-RL-AdditionRsp

NeighbouringTDD-CellInformationItem-RL-AdditionRsp ::= SEQUENCE {
  uC-ID                C-ID,
  cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,
  cN-CS-DomainIdentifier CN-CS-DomainIdentifier OPTIONAL,
  uARFCN              UARFCN,
  frameOffset         FrameOffset OPTIONAL,
  cellParameterID     CellParameterID,
  syncCase            SyncCase,
  timeSlot            TimeSlot,
  pSCH-TimeSlot       PSCH-TimeSlot OPTIONAL
  -- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
  iE-Extensions       ProtocolExtensionContainer { {NeighbouringTDD-CellInformationItem-RL-AdditionRsp-ExtIEs} } OPTIONAL,
  ...
}

NeighbouringTDD-CellInformationItem-RL-AdditionRsp-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

RadioLinkAdditionResponseFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
--
-- RADIO LINK ADDITION RESPONSE TDD

```

```

--
-- *****
RadioLinkAdditionResponseTDD ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container    {{RadioLinkAdditionResponseTDD-IEs}},
    protocolExtensions         ProtocolExtensionContainer {{RadioLinkAdditionResponseTDD-Extensions}}
    ...
}

RadioLinkAdditionResponseTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI                CRITICALITY ignore TYPE D-RNTI                PRESENCE optional } |
    { ID id-RL-InformationResponse-RL-AdditionRspTDD
      CRITICALITY ignore TYPE RL-InformationResponse-RL-AdditionRspTDD PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
    ...
}

RL-InformationResponse-RL-AdditionRspTDD ::= SEQUENCE {
    rL-ID                RL-ID,
    sAI                  SAI,
    ul-InterferenceLevel ScaledUL-InterferenceLevel,
    ul-CCTrCHInformation UL-CCTrCHInformationList-RL-AdditionRspTDD,
    dl-CCTrCHInformation DL-CCTrCHInformationList-RL-AdditionRspTDD,
    diversityIndication CHOICE {
        combining        SEQUENCE {
            rL-ID        RL-ID
        },
        nonCombiningOrIENotPresent SEQUENCE {
            dCH-InformationResponse-RL-AdditionRspFDD DCH-InformationResponseList-RL-AdditionRspFDD OPTIONAL
        }
    },
    maxUL-EbNo          UL-EbNo,
    minUL-EbNo          UL-EbNo,
    neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-AdditionRspTDD OPTIONAL,
    neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-AdditionRspTDD OPTIONAL,
    iE-Extensions       ProtocolExtensionContainer { {RL-InformationResponse-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

RL-InformationResponse-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
UL-CCTrCHInformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF UL-CCTrCHInformationItem-RL-AdditionRspTDD

UL-CCTrCHInformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    cCTrCH-ID          CCTrCH-ID,
    ul-DPCH-Information UL-DPCH-InformationList-RL-AdditionRspTDD,
    iE-Extensions       ProtocolExtensionContainer { {UL-CCTrCHInformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

```

```

}

UL-CCTrCHInformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
UL-DPCH-InformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF UL-DPCH-InformationItem-RL-AdditionRspTDD

UL-DPCH-InformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    dPCH-ID                DPCH-ID,
    tDD-ChannelisationCode TDD-ChannelisationCode,
    burstType              BurstType,
    midambleShift          MidambleShift,
    timeSlot                TimeSlot,
    offset                  Offset,
    tDD-PhysicalChannelOffset TDD-PhysicalChannelOffset,
    repetitionPeriod        RepetitionPeriod,
    repetitionLength        RepetitionLength,
    tFCI-Presence           TFCI-Presence,
    iE-Extensions           ProtocolExtensionContainer { {UL-DPCH-InformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

UL-DPCH-InformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CCTrCHInformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF DL-CCTrCHInformationItem-RL-AdditionRspTDD

DL-CCTrCHInformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    cCCTrCH-ID            CCTrCH-ID,
    dl-DPCH-Information    DL-DPCH-InformationList-RL-AdditionRspTDD,
    iE-Extensions          ProtocolExtensionContainer { {DL-CCTrCHInformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CCTrCHInformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-DPCH-InformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF DL-DPCH-InformationItem-RL-AdditionRspTDD

DL-DPCH-InformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    dPCH-ID                DPCH-ID,
    tDD-ChannelisationCode TDD-ChannelisationCode,
    burstType              BurstType,
    midambleShift          MidambleShift,
    timeSlot                TimeSlot,

```

```

    tDD-PhysicalChannelOffset      TDD-PhysicalChannelOffset,
    repetitionPeriod               RepetitionPeriod,
    repetitionLength               RepetitionLength,
    tFCI-Presence                 TFCI-Presence,
    iE-Extensions                 ProtocolExtensionContainer { {DL-DPCH-InformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-DPCH-InformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringFDD-CellInformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours)) OF
    NeighbouringFDD-CellInformationItem-RL-AdditionRspTDD

NeighbouringFDD-CellInformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    uC-ID                          C-ID,
    cN-PS-DomainIdentifier          CN-PS-DomainIdentifier    OPTIONAL,
    cN-CS-DomainIdentifier          CN-CS-DomainIdentifier    OPTIONAL,
    uARFCN                          UARFCN,
    frameOffset                     FrameOffset            OPTIONAL,
    primaryScramblingCode           PrimaryScramblingCode,
    primaryCPICH-Power              PrimaryCPICH-Power      OPTIONAL,
    iE-Extensions                 ProtocolExtensionContainer { {NeighbouringFDD-CellInformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringFDD-CellInformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringTDD-CellInformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours)) OF
    NeighbouringTDD-CellInformationItem-RL-AdditionRspTDD

NeighbouringTDD-CellInformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    uC-ID                          C-ID,
    cN-PS-DomainIdentifier          CN-PS-DomainIdentifier    OPTIONAL,
    cN-CS-DomainIdentifier          CN-CS-DomainIdentifier    OPTIONAL,
    uARFCN                          UARFCN,
    frameOffset                     FrameOffset            OPTIONAL,
    cellParameterID                CellParameterID,
    syncCase                        SyncCase,
    timeSlot                       TimeSlot,
    pSCH-TimeSlot                  PSCH-TimeSlot          OPTIONAL
    -- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
    iE-Extensions                 ProtocolExtensionContainer { {NeighbouringTDD-CellInformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringTDD-CellInformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

```

}

RadioLinkAdditionResponseTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
--
-- RADIO LINK ADDITION FAILURE FDD
--
-- *****

RadioLinkAdditionFailureFDD ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container    {{RadioLinkAdditionFailureFDD-IEs}},
  protocolExtensions  ProtocolExtensionContainer {{RadioLinkAdditionFailureFDD-Extensions}} OPTIONAL,
  ...
}

RadioLinkAdditionFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-UnsuccessfulRL-InformationResponseList-RL-AdditionFailureFDD
    CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponseList-RL-AdditionFailureFDD
    PRESENCE mandatory } |
  { ID id-SuccessfulRL-InformationResponseList-RL-AdditionFailureFDD
    CRITICALITY ignore TYPE SuccessfulRL-InformationResponseList-RL-AdditionFailureFDD
    PRESENCE mandatory } |
  { ID id-CriticalityDiagnostics          CRITICALITY ignore TYPE CriticalityDiagnostics          PRESENCE optional },
  ...
}

UnsuccessfulRL-InformationResponseList-RL-AdditionFailureFDD ::= RL-IE-ContainerList { {UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD-IEs} }

UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD
    CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD
    PRESENCE mandatory },
  ...
}

UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD ::= SEQUENCE {
  rL-ID          RL-ID,
  cause          Cause,
  iE-Extensions ProtocolExtensionContainer { {UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
  ...
}

UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

SuccessfulRL-InformationResponseList-RL-AdditionFailureFDD ::= RL-IE-ContainerList { {SuccessfulRL-InformationResponse-RL-AdditionFailureFDD-IEs} }

```

```

SuccessfulRL-InformationResponse-RL-AdditionFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-SuccessfulRL-InformationResponse-RL-AdditionFailureFDD
    CRITICALITY ignore TYPE SuccessfulRL-InformationResponse-RL-AdditionFailureFDD
    PRESENCE mandatory },
  ...
}

SuccessfulRL-InformationResponse-RL-AdditionFailureFDD ::= SEQUENCE {
  rL-ID RL-ID,
  sAI SAI,
  ul-InterferenceLevel ScaledUL-InterferenceLevel,
  dl-CodeInformation DL-CodeInformationList-RL-AdditionFailureFDD,
  sSDT-SupportIndicator SSDT-SupportIndicator,
  maxUL-EbNo UL-EbNo,
  minUL-EbNo UL-EbNo,
  neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-AdditionFailureFDD OPTIONAL,
  neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-AdditionFailureFDD OPTIONAL,
  iE-Extensions ProtocolExtensionContainer { {SuccessfulRL-InformationResponse-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
  ...
}

SuccessfulRL-InformationResponse-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CodeInformationList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNoOfDL-Codes)) OF DL-CodeInformationItem-RL-AdditionFailureFDD

DL-CodeInformationItem-RL-AdditionFailureFDD ::= SEQUENCE {
  dl-ScramblingCode DL-ScramblingCode,
  dl-ChannelisationCode DL-ChannelisationCode,
  diversityIndication CHOICE {
    combining SEQUENCE {
      rL-ID RL-ID
    },
    nonCombiningOrIENotPresent SEQUENCE {
      dCH-InformationResponse-RL-AdditionFailureFDD DCH-InformationResponseList-RL-AdditionFailureFDD OPTIONAL
    }
  } OPTIONAL
  -- This IE is present only if the RL is not the first on in the RL Information -- ,
  iE-Extensions ProtocolExtensionContainer { {DL-CodeInformationItem-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
  ...
}

DL-CodeInformationItem-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ** NOTE: Shall this be made as an IE container? **
DCH-InformationResponseList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-InformationResponseItem-RL-AdditionFailureFDD

```

```

DCH-InformationResponseItem-RL-AdditionFailureFDD ::= SEQUENCE {
    dCH-ID                DCH-ID,
    bindingID              BindingID,
    transportLayerAddress TransportLayerAddress,
    IE-Extensions          ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-InformationResponseItem-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringFDD-CellInformationList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours)) OF
    NeighbouringFDD-CellInformationItem-RL-AdditionFailureFDD

NeighbouringFDD-CellInformationItem-RL-AdditionFailureFDD ::= SEQUENCE {
    uC-ID                C-ID,
    cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,
    cN-CS-DomainIdentifier CN-CS-DomainIdentifier OPTIONAL,
    uARFCN                UARFCN,
    frameOffset           FrameOffset OPTIONAL,
    primaryScramblingCode PrimaryScramblingCode,
    cPICH-Power           CPICH-Power OPTIONAL,
    IE-Extensions          ProtocolExtensionContainer { {NeighbouringFDD-CellInformationItem-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringFDD-CellInformationItem-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringTDD-CellInformationList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours)) OF
    NeighbouringTDD-CellInformationItem-RL-AdditionFailureFDD

NeighbouringTDD-CellInformationItem-RL-AdditionFailureFDD ::= SEQUENCE {
    uC-ID                C-ID,
    cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,
    cN-CS-DomainIdentifier CN-CS-DomainIdentifier OPTIONAL,
    uARFCN                UARFCN,
    frameOffset           FrameOffset OPTIONAL,
    cellParameterID       CellParameterID,
    syncCase              SyncCase,
    timeSlot              TimeSlot,
    pSCH-TimeSlot         PSCH-TimeSlot OPTIONAL
    -- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
    IE-Extensions          ProtocolExtensionContainer { {NeighbouringTDD-CellInformationItem-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringTDD-CellInformationItem-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```



```

}

RadioLinkAdditionFailureFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK ADDITION FAILURE TDD
--
-- *****

RadioLinkAdditionFailureTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkAdditionFailureTDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkAdditionFailureTDD-Extensions}}          OPTIONAL,
    ...
}

RadioLinkAdditionFailureTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UnsuccessfulRL-InformationResponse CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponse PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics          CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
    ...
}

UnsuccessfulRL-InformationResponse ::= SEQUENCE {
    rL-ID          RL-ID,
    cause          Cause,
    iE-Extensions ProtocolExtensionContainer { {UnsuccessfulRL-InformationResponse-ExtIEs} } OPTIONAL,
    ...
}

UnsuccessfulRL-InformationResponse-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkAdditionFailureTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK DELETION REQUEST
--
-- *****

RadioLinkDeletionRequest ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkDeletionRequest-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkDeletionRequest-Extensions}}          OPTIONAL,
    ...
}

```

```

RadioLinkDeletionRequest-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-RL-InformationList-RL-DeletionRqst CRITICALITY ignore TYPE RL-InformationList-RL-DeletionRqst PRESENCE mandatory },
  ...
}

RL-InformationList-RL-DeletionRqst ::= RL-IE-ContainerList { {RL-Information-RL-DeletionRqst-IEs} }

RL-Information-RL-DeletionRqst-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-RL-Information-RL-DeletionRqst CRITICALITY ignore TYPE RL-Information-RL-DeletionRqst PRESENCE mandatory },
  ...
}

RL-Information-RL-DeletionRqst ::= SEQUENCE {
  rL-ID RL-ID,
  iE-Extensions ProtocolExtensionContainer { {RL-Information-RL-DeletionRqst-ExtIEs} } OPTIONAL,
  ...
}

RL-Information-RL-DeletionRqst-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

RadioLinkDeletionRequest-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
--
-- RADIO LINK DELETION RESPONSE
--
-- *****

RadioLinkDeletionResponse ::= SEQUENCE {
  protocolIEs ProtocolIE-Container {{RadioLinkDeletionResponse-IEs}},
  protocolExtensions ProtocolExtensionContainer {{RadioLinkDeletionResponse-Extensions}} OPTIONAL,
  ...
}

RadioLinkDeletionResponse-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
  ...
}

RadioLinkDeletionResponse-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
--
-- RADIO LINK RECONFIGURATION PREPARE FDD
--

```

-- *****

```
RadioLinkReconfigurationPrepareFDD ::= SEQUENCE {
  protocolIEs                ProtocolIE-Container    {{RadioLinkReconfigurationPrepareFDD-IEs}},
  protocolExtensions        ProtocolExtensionContainer {{RadioLinkReconfigurationPrepareFDD-Extensions}}
  ...
}
```

```
RadioLinkReconfigurationPrepareFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-AllowedQueuingTime          CRITICALITY ignore TYPE AllowedQueuingTime          PRESENCE mandatory } |
  { ID id-UL-DPCH-Information          CRITICALITY ignore TYPE UL-DPCH-Information          PRESENCE optional } |
  { ID id-DL-DPCH-Information          CRITICALITY ignore TYPE DL-DPCH-Information          PRESENCE optional } |
  { ID id-DCH-ModifyList-RL-ReconfPrepFDD CRITICALITY ignore TYPE DCH-ModifyList-RL-ReconfPrepFDD PRESENCE optional } |
  { ID id-DCH-AddList-RL-ReconfPrepFDD CRITICALITY ignore TYPE DCH-AddList-RL-ReconfPrepFDD PRESENCE optional } |
  { ID id-DCH-DeleteList-RL-ReconfPrepFDD CRITICALITY ignore TYPE DCH-DeleteList-RL-ReconfPrepFDD PRESENCE optional } |
  { ID id-RL-InformationList-RL-ReconfPrepFDD CRITICALITY ignore TYPE RL-InformationList-RL-ReconfPrepFDD PRESENCE mandatory },
  ...
}
```

```
UL-DPCH-Information ::= SEQUENCE {
  ul-ScramblingCode          UL-ScramblingCode          OPTIONAL,
  minUL-ChannelisationCodeLength MinUL-ChannelisationCodeLength OPTIONAL,
  maxNrOfUL-DPDCHs          MaxNrOfUL-DPDCHs          OPTIONAL
  -- This IE is present only if minUL-ChannelisationCodeLength equals to 4 --,
  ul-PunctureLimit          PunctureLimit              OPTIONAL,
  tFCS                      TransportFormatCombinationSet OPTIONAL,
  ul-DPCCH-SlotFormat        UL-DPCCH-SlotFormat        OPTIONAL,
  sSDT-CellIDLength          SSDT-CellID-Length          OPTIONAL,
  s-FieldLength              S-FieldLength              OPTIONAL,
  meanBitRate                MeanBitRate                OPTIONAL,
  iE-Extensions              ProtocolExtensionContainer { {UL-DPCH-Information-ExtIEs} } OPTIONAL,
  ...
}
```

```
UL-DPCH-Information-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}
```

```
DL-DPCH-Information ::= SEQUENCE {
  tFCS                      TransportFormatCombinationSet OPTIONAL,
  dl-DPCCH-SlotFormat        DL-DPCCH-SlotFormat        OPTIONAL,
  tFCI-SignallingMode        TFCI-SignallingMode        OPTIONAL,
  tFCI-Presence              TFCI-Presence              OPTIONAL
  -- This IE is present if Slot Format is from 12 to 16 --,
  multiplexingPosition        MultiplexingPosition        OPTIONAL,
  meanBitRate                MeanBitRate                OPTIONAL,
  iE-Extensions              ProtocolExtensionContainer { {DL-DPCH-Information-ExtIEs} } OPTIONAL,
  ...
}
```

```
DL-DPCH-Information-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
```

```

}
...
DCH-ModifyList-RL-ReconfPrepFDD ::= DCH-IE-ContainerList { {DCH-Modify-RL-ReconfPrepFDD-IEs} }

DCH-Modify-RL-ReconfPrepFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-DCH-ModifyItem-RL-ReconfPrepFDD    CRITICALITY ignore  TYPE DCH-ModifyItem-RL-ReconfPrepFDD    PRESENCE mandatory  },
  ...
}

DCH-ModifyItem-RL-ReconfPrepFDD ::= SEQUENCE {
  dCH-ID                DCH-ID,
  ul-TransportformatSet TransportFormatSet    OPTIONAL,
  dl-TransportformatSet TransportFormatSet    OPTIONAL,
  allocationRetentionPriority AllocationRetentionPriority  OPTIONAL,
  frameHandlingPriority  FrameHandlingPriority    OPTIONAL,
  ul-FP-Mode             UL-FP-Mode             OPTIONAL,
  toAWS                  ToAWS                  OPTIONAL,
  toAWE                  ToAWE                  OPTIONAL,
  iE-Extensions          ProtocolExtensionContainer { {DCH-ModifyItem-RL-ReconfPrepFDD-ExtIEs} } OPTIONAL,
  ...
}

DCH-ModifyItem-RL-ReconfPrepFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DCH-AddList-RL-ReconfPrepFDD ::= DCH-IE-ContainerList { {DCH-Add-RL-ReconfPrepFDD-IEs} }

DCH-Add-RL-ReconfPrepFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-DCH-AddItem-RL-ReconfPrepFDD    CRITICALITY ignore  TYPE DCH-AddItem-RL-ReconfPrepFDD    PRESENCE mandatory  },
  ...
}

DCH-AddItem-RL-ReconfPrepFDD ::= SEQUENCE {
  dCH-ID                DCH-ID,
  rLC-Mode              RLC-Mode,
  dCH-CombinationInd    DCH-CombinationInd    OPTIONAL,
  ul-TransportformatSet TransportFormatSet,
  dl-TransportformatSet TransportFormatSet,
  ul-BLER               BLER,
  dl-BLER               BLER,
  allocationRetentionPriority AllocationRetentionPriority,
  frameHandlingPriority  FrameHandlingPriority,
  payloadCRC-PresenceIndicator PayloadCRC-PresenceIndicator,
  ul-FP-Mode            UL-FP-Mode,
  toAWS                 ToAWS,
  toAWE                 ToAWE,
  iE-Extensions          ProtocolExtensionContainer { {DCH-AddItem-RL-ReconfPrepFDD-ExtIEs} } OPTIONAL,
  ...
}

```

```

DCH-AddItem-RL-ReconfPrepFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-DeleteList-RL-ReconfPrepFDD ::= DCH-IE-ContainerList { {DCH-Delete-RL-ReconfPrepFDD-IEs} }

DCH-Delete-RL-ReconfPrepFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-DeleteItem-RL-ReconfPrepFDD CRITICALITY ignore TYPE DCH-DeleteItem-RL-ReconfPrepFDD PRESENCE mandatory },
    ...
}

DCH-DeleteItem-RL-ReconfPrepFDD ::= SEQUENCE {
    dCH-ID DCH-ID,
    iE-Extensions ProtocolExtensionContainer { {DCH-DeleteItem-RL-ReconfPrepFDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-DeleteItem-RL-ReconfPrepFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RL-InformationList-RL-ReconfPrepFDD ::= RL-IE-ContainerList { {RL-Information-RL-ReconfPrepFDD-IEs} }

RL-Information-RL-ReconfPrepFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-Information-RL-ReconfPrepFDD CRITICALITY ignore TYPE RL-Information-RL-ReconfPrepFDD PRESENCE mandatory },
    ...
}

RL-Information-RL-ReconfPrepFDD ::= SEQUENCE {
    rL-ID RL-ID,
    sSDT-Indication SSdT-Indication OPTIONAL,
    sSDT-CellIdentity SSdT-CellID OPTIONAL
    -- The IE may be present if the sSDT-Indication is set to 'sSDT-active-in-the-UE' --,
    iE-Extensions ProtocolExtensionContainer { {RL-Information-RL-ReconfPrepFDD-ExtIEs} } OPTIONAL,
    ...
}

RL-Information-RL-ReconfPrepFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkReconfigurationPrepareFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK RECONFIGURATION PREPARE TDD
--
-- *****

```

```

RadioLinkReconfigurationPrepareTDD ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container    {{RadioLinkReconfigurationPrepareTDD-IEs}},
    protocolExtensions         ProtocolExtensionContainer {{RadioLinkReconfigurationPrepareTDD-Extensions}}
    ...
}

RadioLinkReconfigurationPrepareTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-AllowedQueuingTime          CRITICALITY ignore  TYPE AllowedQueuingTime          PRESENCE optional } |
    { ID id-UL-MeanBitRate              CRITICALITY ignore  TYPE MeanBitRate              PRESENCE optional } |
    { ID id-DL-MeanBitRate              CRITICALITY ignore  TYPE MeanBitRate              PRESENCE optional } |
    { ID id-UL-CCTrCH-InformationList-RL-ReconfPrepTDD
      CRITICALITY ignore  TYPE UL-CCTrCH-InformationList-RL-ReconfPrepTDD PRESENCE mandatory } |
    { ID id-DL-CCTrCH-InformationList-RL-ReconfPrepTDD
      CRITICALITY ignore  TYPE DL-CCTrCH-InformationList-RL-ReconfPrepTDD PRESENCE mandatory } |
    { ID id-DCH-ModifyList-RL-ReconfPrepTDD CRITICALITY ignore  TYPE DCH-ModifyList-RL-ReconfPrepTDD PRESENCE mandatory } |
    { ID id-DCH-AddList-RL-ReconfPrepTDD   CRITICALITY ignore  TYPE DCH-AddList-RL-ReconfPrepTDD PRESENCE mandatory } |
    { ID id-DCH-DeleteList-RL-ReconfPrepTDD CRITICALITY ignore  TYPE DCH-DeleteList-RL-ReconfPrepTDD PRESENCE mandatory },
    ...
}

UL-CCTrCH-InformationList-RL-ReconfPrepTDD ::= CCTrCH-IE-ContainerList { {UL-CCTrCH-Information-RL-ReconfPrepTDD-IEs} }

UL-CCTrCH-Information-RL-ReconfPrepTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UL-CCTrCH-Information-RL-ReconfPrepTDD CRITICALITY ignore  TYPE UL-CCTrCH-Information-RL-ReconfPrepTDD PRESENCE mandatory },
    ...
}

UL-CCTrCH-Information-RL-ReconfPrepTDD ::= SEQUENCE {
    cCtTrCH-ID                CCTrCH-ID,
    tFCS                      TransportFormatCombinationSet OPTIONAL,
    tFCI-Coding                TFCI-Coding OPTIONAL,
    punctureLimit             PunctureLimit OPTIONAL,
    iE-Extensions             ProtocolExtensionContainer { {UL-CCTrCH-Information-RL-ReconfPrepTDD-ExtIEs} } OPTIONAL,
    ...
}

UL-CCTrCH-Information-RL-ReconfPrepTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DL-CCTrCH-InformationList-RL-ReconfPrepTDD ::= CCTrCH-IE-ContainerList { {DL-CCTrCH-Information-RL-ReconfPrepTDD-IEs} }

DL-CCTrCH-Information-RL-ReconfPrepTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DL-CCTrCH-Information-RL-ReconfPrepTDD CRITICALITY ignore  TYPE DL-CCTrCH-Information-RL-ReconfPrepTDD PRESENCE mandatory },
    ...
}

DL-CCTrCH-Information-RL-ReconfPrepTDD ::= SEQUENCE {
    cCtTrCH-ID                CCTrCH-ID,
    tFCS                      TransportFormatCombinationSet OPTIONAL,

```

```

    tFCI-Coding          TFCI-Coding          OPTIONAL,
    punctureLimit        PunctureLimit        OPTIONAL,
    iE-Extensions        ProtocolExtensionContainer { {DL-CCTrCH-Information-RL-ReconfPrepTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CCTrCH-Information-RL-ReconfPrepTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-ModifyList-RL-ReconfPrepTDD ::= DCH-IE-ContainerList { {DCH-Modify-RL-ReconfPrepTDD-IEs} }

DCH-Modify-RL-ReconfPrepTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-ModifyItem-RL-ReconfPrepTDD    CRITICALITY ignore    TYPE DCH-ModifyItem-RL-ReconfPrepTDD    PRESENCE mandatory    },
    ...
}

DCH-ModifyItem-RL-ReconfPrepTDD ::= SEQUENCE {
    dCH-ID                DCH-ID,
    ul-CCTrCH-ID          CCTrCH-ID          OPTIONAL,
    dl-CCTrCH-ID          CCTrCH-ID          OPTIONAL,
    ul-TransportformatSet TransportFormatSet OPTIONAL,
    dl-TransportformatSet TransportFormatSet OPTIONAL,
    allocationRetentionPriority AllocationRetentionPriority OPTIONAL,
    frameHandlingPriority FrameHandlingPriority OPTIONAL,
    ul-FP-Mode            UL-FP-Mode          OPTIONAL,
    toAWS                 ToAWS            OPTIONAL,
    toAWE                 ToAWE            OPTIONAL,
    iE-Extensions        ProtocolExtensionContainer { {DCH-ModifyItem-RL-ReconfPrepTDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-ModifyItem-RL-ReconfPrepTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-AddList-RL-ReconfPrepTDD ::= DCH-IE-ContainerList { {DCH-Add-RL-ReconfPrepTDD-IEs} }

DCH-Add-RL-ReconfPrepTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-AddItem-RL-ReconfPrepTDD    CRITICALITY ignore    TYPE DCH-AddItem-RL-ReconfPrepTDD    PRESENCE mandatory    },
    ...
}

DCH-AddItem-RL-ReconfPrepTDD ::= SEQUENCE {
    dCH-ID                DCH-ID,
    rLC-Mode              RLC-Mode,
    ul-CCTrCH-ID          CCTrCH-ID,
    dl-CCTrCH-ID          CCTrCH-ID,
    dCH-CombinationInd    DCH-CombinationInd OPTIONAL,
    ul-TransportformatSet TransportFormatSet,
    dl-TransportformatSet TransportFormatSet,

```

```

    ul-BLER                BLER,
    dl-BLER                BLER,
    allocationRetentionPriority  AllocationRetentionPriority,
    frameHandlingPriority    FrameHandlingPriority,
    payloadCRC-PresenceIndicator PayloadCRC-PresenceIndicator,
    ul-FP-Mode              UL-FP-Mode,
    toAWS                   ToAWS,
    toAWE                   ToAWE,
    iE-Extensions           ProtocolExtensionContainer { {DCH-AddItem-RL-ReconfPrepTDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-AddItem-RL-ReconfPrepTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-DeleteList-RL-ReconfPrepTDD ::= DCH-IE-ContainerList { {DCH-Delete-RL-ReconfPrepTDD-IEs} }

DCH-Delete-RL-ReconfPrepTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-DeleteItem-RL-ReconfPrepTDD    CRITICALITY ignore    TYPE DCH-DeleteItem-RL-ReconfPrepTDD    PRESENCE mandatory    },
    ...
}

DCH-DeleteItem-RL-ReconfPrepTDD ::= SEQUENCE {
    dCH-ID                DCH-ID,
    iE-Extensions         ProtocolExtensionContainer { {DCH-DeleteItem-RL-ReconfPrepTDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-DeleteItem-RL-ReconfPrepTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkReconfigurationPrepareTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK RECONFIGURATION READY FDD
--
-- *****

RadioLinkReconfigurationReadyFDD ::= SEQUENCE {
    protocolIEs           ProtocolIE-Container    {{RadioLinkReconfigurationReadyFDD-IEs}},
    protocolExtensions    ProtocolExtensionContainer {{RadioLinkReconfigurationReadyFDD-Extensions}}
    ...
}

RadioLinkReconfigurationReadyFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationResponseList-RL-ReconfReadyFDD

```



```

                CRITICALITY ignore TYPE RL-InformationResponseList-RL-ReconfReadyFDD
                PRESENCE optional } |
    { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
    ...
}

RL-InformationResponseList-RL-ReconfReadyFDD ::= RL-IE-ContainerList { {RL-InformationResponse-RL-ReconfReadyFDD-IEs} }

RL-InformationResponse-RL-ReconfReadyFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationResponseItem-RL-ReconfReadyFDD
        CRITICALITY ignore TYPE RL-InformationResponseItem-RL-ReconfReadyFDD
        PRESENCE mandatory },
    ...
}

RL-InformationResponseItem-RL-ReconfReadyFDD ::= SEQUENCE {
    rL-ID RL-ID,
    max-UL-EbNo UL-EbNo,
    min-UL-EbNo UL-EbNo,
    dCHsToBeAdded DCH-AddList-RL-ReconfReadyFDD OPTIONAL,
    dCHsToBeModified DCH-ModifyList-RL-ReconfReadyFDD OPTIONAL,
    iE-Extensions ProtocolExtensionContainer { {RL-InformationResponseItem-RL-ReconfReadyFDD-ExtIEs} } OPTIONAL,
    ...
}

RL-InformationResponseItem-RL-ReconfReadyFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-AddList-RL-ReconfReadyFDD ::= DCH-IE-ContainerList { {DCH-Add-RL-ReconfReadyFDD-IEs} }

DCH-Add-RL-ReconfReadyFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-AddItem-RL-ReconfReadyFDD CRITICALITY ignore TYPE DCH-AddItem-RL-ReconfReadyFDD PRESENCE mandatory },
    ...
}

DCH-AddItem-RL-ReconfReadyFDD ::= SEQUENCE {
    dCH-ID DCH-ID,
    bindingID BindingID,
    transportLayerAddress TransportLayerAddress,
    iE-Extensions ProtocolExtensionContainer { {DCH-AddItem-RL-ReconfReadyFDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-AddItem-RL-ReconfReadyFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-ModifyList-RL-ReconfReadyFDD ::= DCH-IE-ContainerList { {DCH-Modify-RL-ReconfReadyFDD-IEs} }

DCH-Modify-RL-ReconfReadyFDD-IEs RNSAP-PROTOCOL-IES ::= {

```

```

    { ID id-DCH-ModifyItem-RL-ReconfReadyFDD      CRITICALITY ignore  TYPE DCH-ModifyItem-RL-ReconfReadyFDD      PRESENCE mandatory  },
    ...
}

DCH-ModifyItem-RL-ReconfReadyFDD ::= SEQUENCE {
    dCH-ID                DCH-ID,
    bindingID             BindingID,
    transportLayerAddress TransportLayerAddress,
    iE-Extensions         ProtocolExtensionContainer { {DCH-ModifyItem-RL-ReconfReadyFDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-ModifyItem-RL-ReconfReadyFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkReconfigurationReadyFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK RECONFIGURATION READY TDD
--
-- *****

RadioLinkReconfigurationReadyTDD ::= SEQUENCE {
    protocolIEs           ProtocolIE-Container    {{RadioLinkReconfigurationReadyTDD-IEs}},
    protocolExtensions    ProtocolExtensionContainer {{RadioLinkReconfigurationReadyTDD-Extensions}}      OPTIONAL,
    ...
}

RadioLinkReconfigurationReadyTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationResponse-RL-ReconfReadyTDD
      CRITICALITY ignore  TYPE RL-InformationResponse-RL-ReconfReadyTDD  PRESENCE optional } |
    { ID id-CriticalityDiagnostics          CRITICALITY ignore  TYPE CriticalityDiagnostics          PRESENCE optional },
    ...
}

RL-InformationResponse-RL-ReconfReadyTDD ::= SEQUENCE {
    rL-ID                RL-ID,
    max-UL-EbNo          UL-EbNo,
    min-UL-EbNo          UL-EbNo,
    ul-CCTrCH-Information UL-CCTrCH-InformationList-RL-ReconfReadyTDD  OPTIONAL,
    dl-CCTrCH-Information DL-CCTrCH-InformationList-RL-ReconfReadyTDD  OPTIONAL,
    dCHsToBeAdded        DCH-AddList-RL-ReconfReadyTDD  OPTIONAL,
    dCHsToBeModified     DCH-ModifyList-RL-ReconfReadyTDD  OPTIONAL,
    iE-Extensions         ProtocolExtensionContainer { {RL-InformationResponse-RL-ReconfReadyTDD-ExtIEs} } OPTIONAL,
    ...
}

```

```

RL-InformationResponse-RL-ReconfReadyTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

UL-CCTrCH-InformationList-RL-ReconfReadyTDD ::= CCTrCH-IE-ContainerList { {UL-CCTrCH-InformationList-RL-ReconfReadyTDD-IEs} }

UL-CCTrCH-InformationList-RL-ReconfReadyTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-CCTrCH-ID          CRITICALITY ignore TYPE CCTrCH-ID          PRESENCE mandatory } |
    { ID id-UL-DPCH-InformationList-RL-ReconfReadyTDD
      CRITICALITY ignore TYPE UL-DPCH-InformationList-RL-ReconfReadyTDD
      PRESENCE mandatory },
    ...
}

UL-DPCH-InformationList-RL-ReconfReadyTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF
SEQUENCE {
    dPCH-ID                DPCH-ID,
    tDD-ChannelisationCode TDD-ChannelisationCode OPTIONAL,
    burstType              BurstType OPTIONAL,
    midambleShift          MidambleShift OPTIONAL,
    timeSlot               TimeSlot OPTIONAL,
    tDD-PhysicalChannelOffset TDD-PhysicalChannelOffset OPTIONAL,
    repetitionPeriod       RepetitionPeriod OPTIONAL,
    repetitionLength       RepetitionLength OPTIONAL,
    tFCI-Presence          TFCI-Presence OPTIONAL,
    iE-Extensions          ProtocolExtensionContainer { {UL-DPCH-InformationList-RL-ReconfReadyTDD-ExtIEs} } OPTIONAL,
    ...
}

UL-DPCH-InformationList-RL-ReconfReadyTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DL-CCTrCH-InformationList-RL-ReconfReadyTDD ::= CCTrCH-IE-ContainerList { {DL-CCTrCH-InformationList-RL-ReconfReadyTDD-IEs} }

DL-CCTrCH-InformationList-RL-ReconfReadyTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-CCTrCH-ID          CRITICALITY ignore TYPE CCTrCH-ID          PRESENCE mandatory } |
    { ID id-DL-DPCH-InformationList-RL-ReconfReadyTDD
      CRITICALITY ignore TYPE DL-DPCH-InformationList-RL-ReconfReadyTDD
      PRESENCE mandatory },
    ...
}

DL-DPCH-InformationList-RL-ReconfReadyTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF
SEQUENCE {
    dPCH-ID                DPCH-ID,
    tDD-ChannelisationCode TDD-ChannelisationCode OPTIONAL,
    burstType              BurstType OPTIONAL,
    midambleShift          MidambleShift OPTIONAL,
    timeSlot               TimeSlot OPTIONAL,
    tDD-PhysicalChannelOffset TDD-PhysicalChannelOffset OPTIONAL,

```

```

    repetitionPeriod      RepetitionPeriod      OPTIONAL,
    repetitionLength      RepetitionLength      OPTIONAL,
    tFCI-Presence         TFCI-Presence         OPTIONAL,
    iE-Extensions         ProtocolExtensionContainer { {DL-DPCH-InformationList-RL-ReconfReadyTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-DPCH-InformationList-RL-ReconfReadyTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-AddList-RL-ReconfReadyTDD ::= DCH-IE-ContainerList { {DCH-Add-RL-ReconfReadyTDD-IEs} }

DCH-Add-RL-ReconfReadyTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-AddItem          CRITICALITY ignore TYPE DCH-AddItem-RL-ReconfReadyTDD PRESENCE mandatory },
    ...
}

DCH-AddItem-RL-ReconfReadyTDD ::= SEQUENCE {
    dCH-ID                      DCH-ID,
    bindingID                   BindingID,
    transportLayerAddress       TransportLayerAddress,
    iE-Extensions               ProtocolExtensionContainer { {DCH-AddItem-RL-ReconfReadyTDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-AddItem-RL-ReconfReadyTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-ModifyList-RL-ReconfReadyTDD ::= DCH-IE-ContainerList { {DCH-Modify-RL-ReconfReadyTDD-IEs} }

DCH-Modify-RL-ReconfReadyTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-ModifyItem      CRITICALITY ignore TYPE DCH-ModifyItem-RL-ReconfReadyTDD PRESENCE mandatory },
    ...
}

DCH-ModifyItem-RL-ReconfReadyTDD ::= SEQUENCE {
    dCH-ID                      DCH-ID,
    bindingID                   BindingID,
    transportLayerAddress       TransportLayerAddress,
    iE-Extensions               ProtocolExtensionContainer { {DCH-ModifyItem-RL-ReconfReadyTDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-ModifyItem-RL-ReconfReadyTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkReconfigurationReadyTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

```

}

-- *****
--
-- RADIO LINK RECONFIGURATION COMMIT
--
-- *****

RadioLinkReconfigurationCommit ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container          {{RadioLinkReconfigurationCommit-IEs}},
    protocolExtensions  ProtocolExtensionContainer    {{RadioLinkReconfigurationCommit-Extensions}}
    ...
}

RadioLinkReconfigurationCommit-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-CFN          CRITICALITY ignore  TYPE CFN          PRESENCE mandatory },
    ...
}

RadioLinkReconfigurationCommit-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK RECONFIGURATION FAILURE
--
-- *****

RadioLinkReconfigurationFailure ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container          {{RadioLinkReconfigurationFailure-IEs}},
    protocolExtensions  ProtocolExtensionContainer    {{RadioLinkReconfigurationFailure-Extensions}}
    ...
}

RadioLinkReconfigurationFailure-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-Cause          CRITICALITY ignore  TYPE Cause          PRESENCE mandatory } |
    { ID id-RL-ReconfigurationFailureList-RL-ReconfFail
      CRITICALITY ignore  TYPE RL-ReconfigurationFailureList-RL-ReconfFail
      PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics          CRITICALITY ignore  TYPE CriticalityDiagnostics          PRESENCE optional },
    ...
}

RL-ReconfigurationFailureList-RL-ReconfFail ::= RL-IE-ContainerList { {RL-ReconfigurationFailure-RL-ReconfFail-IEs} }

RL-ReconfigurationFailure-RL-ReconfFail-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-ReconfigurationFailure-RL-ReconfFail CRITICALITY ignore  TYPE RL-ReconfigurationFailure-RL-ReconfFail PRESENCE mandatory },
    ...
}

```

```

RL-ReconfigurationFailure-RL-ReconfFail ::= SEQUENCE {
    rL-ID          RL-ID,
    cause          Cause,
    iE-Extensions ProtocolExtensionContainer { {RL-ReconfigurationFailure-RL-ReconfFail-ExtIEs} } OPTIONAL,
    ...
}

RL-ReconfigurationFailure-RL-ReconfFail-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkReconfigurationFailure-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK RECONFIGURATION CANCEL
--
-- *****

RadioLinkReconfigurationCancel ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkReconfigurationCancel-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkReconfigurationCancel-Extensions}}
    ...
}

RadioLinkReconfigurationCancel-IEs RNSAP-PROTOCOL-IES ::= {
    ...
}

RadioLinkReconfigurationCancel-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK RECONFIGURATION REQUEST FDD
--
-- *****

RadioLinkReconfigurationRequestFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkReconfigurationRequestFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkReconfigurationRequestFDD-Extensions}}
    ...
}

RadioLinkReconfigurationRequestFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-AllowedQueuingTime          CRITICALITY ignore TYPE AllowedQueuingTime          PRESENCE mandatory } |
    { ID id-UL-DPCH-Information          CRITICALITY ignore TYPE UL-DPCH-Information-RL-ReconfRqstFDD PRESENCE optional } |
    { ID id-DL-DPCH-Information          CRITICALITY ignore TYPE DL-DPCH-Information-RL-ReconfRqstFDD PRESENCE optional } |

```

```

{ ID id-DCH-ModifyList-RL-ReconfRqstFDD      CRITICALITY ignore TYPE DCH-ModifyList-RL-ReconfRqstFDD      PRESENCE mandatory } |
{ ID id-DCH-AddList-RL-ReconfRqstFDD         CRITICALITY ignore TYPE DCH-AddList-RL-ReconfRqstFDD         PRESENCE mandatory } |
{ ID id-DCH-DeleteList-RL-ReconfRqstFDD      CRITICALITY ignore TYPE DCH-DeleteList-RL-ReconfRqstFDD      PRESENCE mandatory },
...
}

UL-DPCH-Information-RL-ReconfRqstFDD ::= SEQUENCE {
    tFCS                TransportFormatCombinationSet    OPTIONAL,
    meanBitRate          MeanBitRate                    OPTIONAL,
    iE-Extensions        ProtocolExtensionContainer { {UL-DPCH-Information-RL-ReconfRqstFDD-ExtIEs} } OPTIONAL,
    ...
}

UL-DPCH-Information-RL-ReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DL-DPCH-Information-RL-ReconfRqstFDD ::= SEQUENCE {
    tFCS                TransportFormatCombinationSet    OPTIONAL,
    tFCI-SignallingMode TFCI-SignallingMode              OPTIONAL,
    meanBitRate          MeanBitRate                    OPTIONAL,
    iE-Extensions        ProtocolExtensionContainer { {DL-DPCH-Information-RL-ReconfRqstFDD-ExtIEs} } OPTIONAL,
    ...
}

DL-DPCH-Information-RL-ReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-ModifyList-RL-ReconfRqstFDD          ::= DCH-IE-ContainerList { {DCH-Modify-RL-ReconfRqstFDD-IEs} }

DCH-Modify-RL-ReconfRqstFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-ModifyItem-RL-ReconfRqstFDD      CRITICALITY ignore TYPE DCH-ModifyItem-RL-ReconfRqstFDD      PRESENCE mandatory },
    ...
}

DCH-ModifyItem-RL-ReconfRqstFDD ::= SEQUENCE {
    dCH-ID                DCH-ID,
    ul-TransportformatSet TransportFormatSet            OPTIONAL,
    dl-TransportformatSet TransportFormatSet            OPTIONAL,
    allocationRetentionPriority AllocationRetentionPriority OPTIONAL,
    frameHandlingPriority FrameHandlingPriority          OPTIONAL,
    ul-FP-Mode            UL-FP-Mode                    OPTIONAL,
    toAWS                 ToAWS                        OPTIONAL,
    toAWE                 ToAWE                        OPTIONAL,
    iE-Extensions        ProtocolExtensionContainer { {DCH-ModifyItem-RL-ReconfRqstFDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-ModifyItem-RL-ReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

```

}

DCH-AddList-RL-ReconfRqstFDD ::= DCH-IE-ContainerList { {DCH-Add-RL-ReconfRqstFDD-IEs} }

DCH-Add-RL-ReconfRqstFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-DCH-AddItem-RL-ReconfRqstFDD      CRITICALITY ignore  TYPE DCH-AddItem-RL-ReconfRqstFDD      PRESENCE mandatory  },
  ...
}

DCH-AddItem-RL-ReconfRqstFDD ::= SEQUENCE {
  dCH-ID                DCH-ID,
  rLC-Mode              RLC-Mode,
  dCH-CombinationInd    DCH-CombinationInd OPTIONAL,
  ul-TransportformatSet TransportFormatSet,
  dl-TransportformatSet TransportFormatSet,
  allocationRetentionPriority AllocationRetentionPriority,
  frameHandlingPriority FrameHandlingPriority,
  payloadCRC-PresenceIndicator PayloadCRC-PresenceIndicator,
  ul-FP-Mode            UL-FP-Mode,
  toAWS                 ToAWS,
  toAWE                 ToAWE,
  iE-Extensions         ProtocolExtensionContainer { {DCH-AddItem-RL-ReconfRqstFDD-ExtIEs} } OPTIONAL,
  ...
}

DCH-AddItem-RL-ReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DCH-DeleteList-RL-ReconfRqstFDD ::= DCH-IE-ContainerList { {DCH-Delete-RL-ReconfRqstFDD-IEs} }

DCH-Delete-RL-ReconfRqstFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-DCH-DeleteItem-RL-ReconfRqstFDD    CRITICALITY ignore  TYPE DCH-DeleteItem-RL-ReconfRqstFDD    PRESENCE mandatory  },
  ...
}

DCH-DeleteItem-RL-ReconfRqstFDD ::= SEQUENCE {
  dCH-ID                DCH-ID,
  iE-Extensions         ProtocolExtensionContainer { {DCH-DeleteItem-RL-ReconfRqstFDD-ExtIEs} } OPTIONAL,
  ...
}

DCH-DeleteItem-RL-ReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

RadioLinkReconfigurationRequestFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****

```



```

--
-- RADIO LINK RECONFIGURATION REQUEST TDD
--
-- *****

RadioLinkReconfigurationRequestTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkReconfigurationRequestTDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkReconfigurationRequestTDD-Extensions}} OPTIONAL,
    ...
}

RadioLinkReconfigurationRequestTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-AllowedQueuingTime          CRITICALITY ignore TYPE AllowedQueuingTime          PRESENCE optional } |
    { ID id-UL-MeanBitRate              CRITICALITY ignore TYPE MeanBitRate              PRESENCE optional } |
    { ID id-DL-MeanBitRate              CRITICALITY ignore TYPE MeanBitRate              PRESENCE optional } |
    { ID id-UL-CCTrCH-InformationList-RL-ReconfRqstTDD
      CRITICALITY ignore TYPE UL-CCTrCH-InformationList-RL-ReconfRqstTDD PRESENCE mandatory } |
    { ID id-DL-CCTrCH-InformationList-RL-ReconfRqstTDD
      CRITICALITY ignore TYPE DL-CCTrCH-InformationList-RL-ReconfRqstTDD PRESENCE mandatory } |
    { ID id-DCH-ModifyList-RL-ReconfRqstTDD CRITICALITY ignore TYPE DCH-ModifyList-RL-ReconfRqstTDD PRESENCE mandatory } |
    { ID id-DCH-AddList-RL-ReconfRqstTDD   CRITICALITY ignore TYPE DCH-AddList-RL-ReconfRqstTDD PRESENCE mandatory } |
    { ID id-DCH-DeleteList-RL-ReconfRqstTDD CRITICALITY ignore TYPE DCH-DeleteList-RL-ReconfRqstTDD PRESENCE mandatory },
    ...
}

UL-CCTrCH-InformationList-RL-ReconfRqstTDD ::= CCTrCH-IE-ContainerList { {UL-CCTrCH-Information-RL-ReconfRqstTDD-IEs} }

UL-CCTrCH-Information-RL-ReconfRqstTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UL-CCTrCH-Information-RL-ReconfRqstTDD CRITICALITY ignore TYPE UL-CCTrCH-Information-RL-ReconfRqstTDD PRESENCE mandatory },
    ...
}

UL-CCTrCH-Information-RL-ReconfRqstTDD ::= SEQUENCE {
    cCTrCH-ID          CCTrCH-ID,
    tFCS              TransportFormatCombinationSet,
    iE-Extensions     ProtocolExtensionContainer { {UL-CCTrCH-Information-RL-ReconfRqstTDD-ExtIEs} } OPTIONAL,
    ...
}

UL-CCTrCH-Information-RL-ReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DL-CCTrCH-InformationList-RL-ReconfRqstTDD ::= CCTrCH-IE-ContainerList { {DL-CCTrCH-Information-RL-ReconfRqstTDD-IEs} }

DL-CCTrCH-Information-RL-ReconfRqstTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DL-CCTrCH-Information-RL-ReconfRqstTDD CRITICALITY ignore TYPE DL-CCTrCH-Information-RL-ReconfRqstTDD PRESENCE mandatory },
    ...
}

DL-CCTrCH-Information-RL-ReconfRqstTDD ::= SEQUENCE {

```

```

cCTrCH-ID          CCTrCH-ID,
tFCS               TransportFormatCombinationSet,
iE-Extensions      ProtocolExtensionContainer { {DL-CCTrCH-Information-RL-ReconfRqstTDD-ExtIEs} } OPTIONAL,
...
}

DL-CCTrCH-Information-RL-ReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

DCH-ModifyList-RL-ReconfRqstTDD ::= DCH-IE-ContainerList { {DCH-Modify-RL-ReconfRqstTDD-IEs} }

DCH-Modify-RL-ReconfRqstTDD-IEs RNSAP-PROTOCOL-IES ::= {
{ ID id-DCH-ModifyItem-RL-ReconfRqstTDD    CRITICALITY ignore   TYPE DCH-ModifyItem-RL-ReconfRqstTDD    PRESENCE mandatory },
...
}

DCH-ModifyItem-RL-ReconfRqstTDD ::= SEQUENCE {
dCH-ID          DCH-ID,
ul-CCTrCH-ID    CCTrCH-ID    OPTIONAL,
dl-CCTrCH-ID    CCTrCH-ID    OPTIONAL,
ul-TransportformatSet    TransportFormatSet    OPTIONAL,
dl-TransportformatSet    TransportFormatSet    OPTIONAL,
allocationRetentionPriority    AllocationRetentionPriority    OPTIONAL,
frameHandlingPriority    FrameHandlingPriority    OPTIONAL,
ul-FP-Mode      UL-FP-Mode    OPTIONAL,
toAWS           ToAWS         OPTIONAL,
toAWE           ToAWE         OPTIONAL,
iE-Extensions   ProtocolExtensionContainer { {DCH-ModifyItem-RL-ReconfRqstTDD-ExtIEs} } OPTIONAL,
...
}

DCH-ModifyItem-RL-ReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

DCH-AddList-RL-ReconfRqstTDD ::= DCH-IE-ContainerList { {DCH-Add-RL-ReconfRqstTDD-IEs} }

DCH-Add-RL-ReconfRqstTDD-IEs RNSAP-PROTOCOL-IES ::= {
{ ID id-DCH-AddItem-RL-ReconfRqstTDD    CRITICALITY ignore   TYPE DCH-AddItem-RL-ReconfRqstTDD    PRESENCE mandatory },
...
}

DCH-AddItem-RL-ReconfRqstTDD ::= SEQUENCE {
dCH-ID          DCH-ID,
rLC-Mode        RLC-Mode,
ul-CCTrCH-ID    CCTrCH-ID,
dl-CCTrCH-ID    CCTrCH-ID,
dCH-CombinationInd    DCH-CombinationInd    OPTIONAL,
ul-TransportformatSet    TransportFormatSet,
dl-TransportformatSet    TransportFormatSet,

```

```

allocationRetentionPriority      AllocationRetentionPriority,
frameHandlingPriority            FrameHandlingPriority,
ul-FP-Mode                      UL-FP-Mode,
toAWS                           ToAWS,
toAWE                           ToAWE,
iE-Extensions                   ProtocolExtensionContainer { {DCH-AddItem-RL-ReconfRqstTDD-ExtIEs} } OPTIONAL,
...
}

DCH-AddItem-RL-ReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

DCH-DeleteList-RL-ReconfRqstTDD      ::= DCH-IE-ContainerList { {DCH-Delete-RL-ReconfRqstTDD-IEs} }

DCH-Delete-RL-ReconfRqstTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-DCH-DeleteItem-RL-ReconfRqstTDD      CRITICALITY ignore  TYPE DCH-DeleteItem-RL-ReconfRqstTDD      PRESENCE mandatory  },
  ...
}

DCH-DeleteItem-RL-ReconfRqstTDD ::= SEQUENCE {
  dCH-ID                DCH-ID,
  iE-Extensions         ProtocolExtensionContainer { {DCH-DeleteItem-RL-ReconfRqstTDD-ExtIEs} } OPTIONAL,
  ...
}

DCH-DeleteItem-RL-ReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

RadioLinkReconfigurationRequestTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- *****
--
-- RADIO LINK RECONFIGURATION RESPONSE FDD
--
-- *****

RadioLinkReconfigurationResponseFDD ::= SEQUENCE {
  protocolIEs           ProtocolIE-Container      {{RadioLinkReconfigurationResponseFDD-IEs}},
  protocolExtensions    ProtocolExtensionContainer {{RadioLinkReconfigurationResponseFDD-Extensions}}
  ...
}

RadioLinkReconfigurationResponseFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-CriticalityDiagnostics      CRITICALITY ignore  TYPE CriticalityDiagnostics      PRESENCE optional },
  ...
}

```

```

RadioLinkReconfigurationResponseFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK RECONFIGURATION RESPONSE TDD
--
-- *****

RadioLinkReconfigurationResponseTDD ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container    {{RadioLinkReconfigurationResponseTDD-IEs}},
    protocolExtensions         ProtocolExtensionContainer {{RadioLinkReconfigurationResponseTDD-Extensions}}      OPTIONAL,
    ...
}

RadioLinkReconfigurationResponseTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-CriticalityDiagnostics          CRITICALITY ignore  TYPE CriticalityDiagnostics          PRESENCE optional },
    ...
}

RadioLinkReconfigurationResponseTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK FAILURE INDICATION
--
-- *****

RadioLinkFailureIndication ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container    {{RadioLinkFailureIndication-IEs}},
    protocolExtensions         ProtocolExtensionContainer {{RadioLinkFailureIndication-Extensions}}      OPTIONAL,
    ...
}

RadioLinkFailureIndication-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationList-RL-FailureInd  CRITICALITY ignore  TYPE RL-InformationList-RL-FailureInd  PRESENCE mandatory },
    ...
}

RL-InformationList-RL-FailureInd          ::= RL-IE-ContainerList { {RL-Information-RL-FailureInd-IEs} }

RL-Information-RL-FailureInd-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-Information-RL-FailureInd      CRITICALITY ignore  TYPE RL-Information-RL-FailureInd      PRESENCE mandatory },
    ...
}

RL-Information-RL-FailureInd ::= SEQUENCE {
    rL-ID                RL-ID,

```

```

    cause          Cause,
    iE-Extensions  ProtocolExtensionContainer { {RL-Information-RL-FailureInd-ExtIEs} } OPTIONAL,
    ...
}

RL-Information-RL-FailureInd-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkFailureIndication-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK RESTORE INDICATION
--
-- *****

RadioLinkRestoreIndication ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkRestoreIndication-IEs}},
    protocolExtensions  ProtocolExtensionContainer {{RadioLinkRestoreIndication-Extensions}} OPTIONAL,
    ...
}

RadioLinkRestoreIndication-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationList-RL-RestoreInd    CRITICALITY ignore    TYPE RL-InformationList-RL-RestoreInd    PRESENCE mandatory },
    ...
}

RL-InformationList-RL-RestoreInd ::= RL-IE-ContainerList { {RL-Information-RL-RestoreInd-IEs} }

RL-Information-RL-RestoreInd-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-Information-RL-RestoreInd        CRITICALITY ignore    TYPE RL-Information-RL-RestoreInd        PRESENCE mandatory },
    ...
}

RL-Information-RL-RestoreInd ::= SEQUENCE {
    rL-ID          RL-ID,
    iE-Extensions  ProtocolExtensionContainer { {RL-Information-RL-RestoreInd-ExtIEs} } OPTIONAL,
    ...
}

RL-Information-RL-RestoreInd-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkRestoreIndication-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

```

-- *****
--
-- DOWNLINK POWER CONTROL REQUEST
--
-- *****

DL-PowerControlRequest ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{DL-PowerControlRequest-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{DL-PowerControlRequest-Extensions}} OPTIONAL,
    ...
}

DL-PowerControlRequest-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-ProcedureScope-DL-PC-Rqst          CRITICALITY ignore TYPE ProcedureScope-DL-PC-Rqst          PRESENCE mandatory },
    ...
}

ProcedureScope-DL-PC-Rqst ::= CHOICE {
    allRLs                DL-Power,
    individualRLs         DL-ReferencePowerInformationList-DL-PC-Rqst,
    ...
}

DL-ReferencePowerInformationList-DL-PC-Rqst ::= RL-IE-ContainerList { {DL-ReferencePowerInformation-DL-PC-Rqst-IEs} }

DL-ReferencePowerInformation-DL-PC-Rqst-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DL-ReferencePowerInformation-DL-PC-Rqst CRITICALITY ignore TYPE DL-ReferencePowerInformation-DL-PC-Rqst PRESENCE mandatory },
    ...
}

DL-ReferencePowerInformation-DL-PC-Rqst ::= SEQUENCE {
    rL-ID                RL-ID,
    dl-Power              DL-Power,
    iE-Extensions        ProtocolExtensionContainer { {DL-ReferencePowerInformation-DL-PC-Rqst-ExtIEs} } OPTIONAL,
    ...
}

DL-ReferencePowerInformation-DL-PC-Rqst-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DL-PowerControlRequest-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- PHYSICAL CHANNEL RECONFIGURATION REQUEST FDD
--
-- *****

```

```

PhysicalChannelReconfigurationRequestFDD ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container    {{PhysicalChannelReconfigurationRequestFDD-IEs}},
    protocolExtensions         ProtocolExtensionContainer {{PhysicalChannelReconfigurationRequestFDD-Extensions}}
    ...
}

PhysicalChannelReconfigurationRequestFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-Information-PhyChReconfRqstFDD    CRITICALITY ignore    TYPE RL-Information-PhyChReconfRqstFDD    PRESENCE mandatory    },
    ...
}

RL-Information-PhyChReconfRqstFDD ::= SEQUENCE {
    rL-ID                      RL-ID,
    dl-CodeInformations         DL-CodeInformationList-PhyChReconfRqstFDD,
    iE-Extensions               ProtocolExtensionContainer { {RL-Information-PhyChReconfRqstFDD-ExtIEs} } OPTIONAL,
    ...
}

RL-Information-PhyChReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DL-CodeInformationList-PhyChReconfRqstFDD ::= DL-Code-IE-ContainerList { {DL-CodeInformation-PhyChReconfRqstFDD-IEs} }

DL-CodeInformation-PhyChReconfRqstFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DL-CodeInformation-PhyChReconfRqstFDD    CRITICALITY ignore    TYPE DL-CodeInformation-PhyChReconfRqstFDD    PRESENCE mandatory    },
    ...
}

DL-CodeInformation-PhyChReconfRqstFDD ::= SEQUENCE {
    dl-scramblingCode          DL-ScramblingCode,
    fDD-DL-ChannelisationCodeNumber    FDD-DL-ChannelisationCodeNumber,
    iE-Extensions               ProtocolExtensionContainer { {DL-CodeInformation-PhyChReconfRqstFDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CodeInformation-PhyChReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

PhysicalChannelReconfigurationRequestFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- PHYSICAL CHANNEL RECONFIGURATION REQUEST TDD
--
-- *****

```

```

PhysicalChannelReconfigurationRequestTDD ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container    {{PhysicalChannelReconfigurationRequestTDD-IEs}},
    protocolExtensions         ProtocolExtensionContainer {{PhysicalChannelReconfigurationRequestTDD-Extensions}}
    ...
}

PhysicalChannelReconfigurationRequestTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-Information-PhyChReconfRqstTDD    CRITICALITY ignore    TYPE RL-Information-PhyChReconfRqstTDD    PRESENCE mandatory    },
    ...
}

RL-Information-PhyChReconfRqstTDD ::= SEQUENCE {
    rL-ID                RL-ID,
    ul-CCTrCH-Information                UL-CCTrCH-InformationList-PhyChReconfRqstTDD,
    dl-CCTrCH-Information                DL-CCTrCH-InformationList-PhyChReconfRqstTDD,
    iE-Extensions                ProtocolExtensionContainer { {RL-Information-PhyChReconfRqstTDD-ExtIEs} } OPTIONAL,
    ...
}

RL-Information-PhyChReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

UL-CCTrCH-InformationList-PhyChReconfRqstTDD ::= CCTrCH-IE-ContainerList { {UL-CCTrCH-InformationList-PhyChReconfRqstTDD-IEs} }

UL-CCTrCH-InformationList-PhyChReconfRqstTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-CCTrCH-ID                CRITICALITY ignore    TYPE CCTrCH-ID                PRESENCE mandatory } |
    { ID id-UL-DPCH-InformationList-PhyChReconfRqstTDD
      CRITICALITY ignore    TYPE UL-DPCH-InformationList-PhyChReconfRqstTDD
      PRESENCE mandatory },
    ...
}

-- List items have same criticality as parent
UL-DPCH-InformationList-PhyChReconfRqstTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF
SEQUENCE {
    dPCH-ID                DPCH-ID,
    tDD-ChannelisationCode                TDD-ChannelisationCode                OPTIONAL,
    burstType                BurstType                OPTIONAL,
    midambleShift                MidambleShift                OPTIONAL,
    timeSlot                TimeSlot                OPTIONAL,
    tDD-PhysicalChannelOffset                TDD-PhysicalChannelOffset                OPTIONAL,
    repetitionPeriod                RepetitionPeriod                OPTIONAL,
    repetitionLength                RepetitionLength                OPTIONAL,
    tFCI-Presence                TFCI-Presence                OPTIONAL,
    iE-Extensions                ProtocolExtensionContainer { {UL-DPCH-InformationList-PhyChReconfRqstTDD-ExtIEs} } OPTIONAL,
    ...
}

UL-DPCH-InformationList-PhyChReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```



```

}

DL-CCTrCH-InformationList-PhyChReconfRgstTDD ::= CCTrCH-IE-ContainerList { {DL-CCTrCH-InformationList-PhyChReconfRgstTDD-IEs} }

DL-CCTrCH-InformationList-PhyChReconfRgstTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-CCTrCH-ID          CRITICALITY ignore TYPE CCTrCH-ID          PRESENCE mandatory } |
  { ID id-DL-DPCH-InformationList-PhyChReconfRgstTDD
    CRITICALITY ignore TYPE DL-DPCH-InformationList-PhyChReconfRgstTDD
    PRESENCE mandatory },
  ...
}

-- List items have same criticality as parent
DL-DPCH-InformationList-PhyChReconfRgstTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF
SEQUENCE {
  dPCH-ID                DPCH-ID,
  tDD-ChannelisationCode TDD-ChannelisationCode OPTIONAL,
  burstType              BurstType OPTIONAL,
  midambleShift          MidambleShift OPTIONAL,
  timeSlot               TimeSlot OPTIONAL,
  tDD-PhysicalChannelOffset TDD-PhysicalChannelOffset OPTIONAL,
  repetitionPeriod       RepetitionPeriod OPTIONAL,
  repetitionLength        RepetitionLength OPTIONAL,
  tFCI-Presence          TFCI-Presence OPTIONAL,
  iE-Extensions          ProtocolExtensionContainer { {DL-DPCH-InformationList-PhyChReconfRgstTDD-ExtIEs} } OPTIONAL,
  ...
}

DL-DPCH-InformationList-PhyChReconfRgstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

PhysicalChannelReconfigurationRequestTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
--
-- PHYSICAL CHANNEL RECONFIGURATION COMMAND
--
-- *****

PhysicalChannelReconfigurationCommand ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container {{PhysicalChannelReconfigurationCommand-IEs}},
  protocolExtensions   ProtocolExtensionContainer {{PhysicalChannelReconfigurationCommand-Extensions}}
  ...
}

PhysicalChannelReconfigurationCommand-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-CFN          CRITICALITY ignore TYPE CFN          PRESENCE mandatory } |
  { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },

```

```

}
...
}
PhysicalChannelReconfigurationCommand-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}
-- *****
--
-- PHYSICAL CHANNEL RECONFIGURATION FAILURE
--
-- *****

PhysicalChannelReconfigurationFailure ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container    {{PhysicalChannelReconfigurationFailure-IEs}},
  protocolExtensions  ProtocolExtensionContainer {{PhysicalChannelReconfigurationFailure-Extensions}}
  ...
}
OPTIONAL,

PhysicalChannelReconfigurationFailure-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-Cause          CRITICALITY ignore TYPE Cause          PRESENCE mandatory } |
  { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
  ...
}

PhysicalChannelReconfigurationFailure-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}
-- *****
--
-- UPLINK SIGNALLING TRANSFER INDICATION
--
-- *****

UplinkSignallingTransferIndication ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container    {{UplinkSignallingTransferIndication-IEs}},
  protocolExtensions  ProtocolExtensionContainer {{UplinkSignallingTransferIndication-Extensions}}
  ...
}
OPTIONAL,

UplinkSignallingTransferIndication-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-UC-ID          CRITICALITY ignore TYPE UC-ID          PRESENCE mandatory } |
  { ID id-SAI            CRITICALITY ignore TYPE SAI            PRESENCE mandatory } |
  { ID id-C-RNTI        CRITICALITY ignore TYPE C-RNTI        PRESENCE mandatory } |
  { ID id-S-RNTI        CRITICALITY ignore TYPE S-RNTI        PRESENCE mandatory } |
  { ID id-D-RNTI        CRITICALITY ignore TYPE D-RNTI        PRESENCE optional } |
  { ID id-L3-Information CRITICALITY ignore TYPE L3-Information PRESENCE mandatory } |
  { ID id-CN-PS-DomainIdentifier CRITICALITY ignore TYPE CN-PS-DomainIdentifier PRESENCE optional } |
  { ID id-CN-CS-DomainIdentifier CRITICALITY ignore TYPE CN-CS-DomainIdentifier PRESENCE optional } |
  { ID id-URA-ID       CRITICALITY ignore TYPE URA-ID       PRESENCE mandatory } |

```

```

    { ID id-MultipleURAsIndicator          CRITICALITY ignore  TYPE MultipleURAsIndicator          PRESENCE mandatory } |
    { ID id-RNCsWithCellsInTheAccessedURA-List-UL-ST-Ind
      CRITICALITY ignore  TYPE RNCsWithCellsInTheAccessedURA-List-UL-ST-Ind
      PRESENCE mandatory },
  ...
}

-- All RNC-IDs share same criticality!
RNCsWithCellsInTheAccessedURA-List-UL-ST-Ind ::= SEQUENCE (SIZE (1..maxRNCinURA)) OF
  SEQUENCE {
    rNC-ID          RNC-ID,
    iE-Extensions   ProtocolExtensionContainer { {RNCsWithCellsInTheAccessedURA-List-UL-ST-Ind-ExtIEs} } OPTIONAL,
    ...
  }

RNCsWithCellsInTheAccessedURA-List-UL-ST-Ind-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

UplinkSignallingTransferIndication-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
--
-- DOWNLINK SIGNALLING TRANSFER REQUEST
--
-- *****

DownlinkSignallingTransferRequest ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container   {{DownlinkSignallingTransferRequest-IEs}},
  protocolExtensions   ProtocolExtensionContainer {{DownlinkSignallingTransferRequest-Extensions}}
  ...
}

DownlinkSignallingTransferRequest-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-C-ID          CRITICALITY ignore  TYPE C-ID          PRESENCE mandatory } |
  { ID id-D-RNTI        CRITICALITY ignore  TYPE D-RNTI        PRESENCE mandatory } |
  { ID id-L3-Information CRITICALITY ignore  TYPE L3-Information PRESENCE mandatory } |
  { ID id-D-RNTI-ReleaseIndication CRITICALITY ignore  TYPE D-RNTI-ReleaseIndication PRESENCE mandatory },
  ...
}

DownlinkSignallingTransferRequest-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
--
-- RELOCATION COMMIT
--

```

```

-- *****
RelocationCommit ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RelocationCommit-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RelocationCommit-Extensions}}
    ...
}

RelocationCommit-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI          CRITICALITY ignore TYPE D-RNTI          PRESENCE mandatory } |
    { ID id-RANAP-RelocationInformation CRITICALITY ignore TYPE RANAP-RelocationInformation PRESENCE mandatory },
    ...
}

RelocationCommit-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- PAGING REQUEST
--
-- *****

PagingRequest ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{PagingRequest-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{PagingRequest-Extensions}}
    ...
}

PagingRequest-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-PagingArea-PagingRqst          CRITICALITY ignore TYPE PagingArea-PagingRqst          PRESENCE mandatory } |
    { ID id-SRNC-ID                        CRITICALITY ignore TYPE SRNC-ID                        PRESENCE mandatory } |
    { ID id-S-RNTI                          CRITICALITY ignore TYPE S-RNTI                          PRESENCE mandatory } |
    { ID id-DRX-Parameter                   CRITICALITY ignore TYPE DRX-Parameter                   PRESENCE mandatory },
    ...
}

PagingArea-PagingRqst ::= CHOICE {
    uRA          URA-ID,
    cell         C-ID,
    ...
}

PagingRequest-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- DEDICATED MEASUREMENT INITIATION REQUEST

```

```

--
-- *****
DedicatedMeasurementInitiationRequest ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container    {{DedicatedMeasurementInitiationRequest-IEs}},
    protocolExtensions          ProtocolExtensionContainer {{DedicatedMeasurementInitiationRequest-Extensions}}
    ...
}

DedicatedMeasurementInitiationRequest-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-MeasurementID                CRITICALITY ignore TYPE MeasurementID                PRESENCE mandatory } |
    { ID id-DedicatedMeasurementObjectType-DM-Rqst CRITICALITY ignore TYPE DedicatedMeasurementObjectType-DM-Rqst PRESENCE mandatory } |
    { ID id-MeasurementCharacteristics          CRITICALITY ignore TYPE MeasurementCharacteristics          PRESENCE mandatory } |
    { ID id-ReportCharacteristics              CRITICALITY ignore TYPE ReportCharacteristics              PRESENCE mandatory },
    ...
}

DedicatedMeasurementObjectType-DM-Rqst ::= CHOICE {
    rLs                RL-InformationList-DM-Rqst,
    ...
}

RL-InformationList-DM-Rqst                ::= RL-IE-ContainerList { {RL-Information-DM-Rqst-IEs} }

RL-Information-DM-Rqst-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationItem-DM-Rqst          CRITICALITY ignore TYPE RL-InformationItem-DM-Rqst          PRESENCE mandatory },
    ...
}

RL-InformationItem-DM-Rqst ::= SEQUENCE {
    rL-ID                RL-ID,
    dPCH-ID              DPCH-ID    OPTIONAL,
    iE-Extensions          ProtocolExtensionContainer { {RL-InformationItem-DM-Rqst-ExtIEs} } OPTIONAL,
    ...
}

RL-InformationItem-DM-Rqst-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DedicatedMeasurementInitiationRequest-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- DEDICATED MEASUREMENT INITIATION RESPONSE
--
-- *****

DedicatedMeasurementInitiationResponse ::= SEQUENCE {

```

```

    protocolIEs                ProtocolIE-Container    {{DedicatedMeasurementInitiationResponse-IEs}},
    protocolExtensions          ProtocolExtensionContainer {{DedicatedMeasurementInitiationResponse-Extensions}}
    ...
}

DedicatedMeasurementInitiationResponse-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-MeasurementID          CRITICALITY ignore TYPE MeasurementID          PRESENCE mandatory } |
  { ID id-DedicatedMeasurementObjectType-DM-Rspns CRITICALITY ignore TYPE DedicatedMeasurementObjectType-DM-Rspns PRESENCE mandatory } |
  { ID id-CFN                    CRITICALITY ignore TYPE CFN                    PRESENCE mandatory } |
  { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
  ...
}

DedicatedMeasurementObjectType-DM-Rspns ::= CHOICE {
  rLs                RL-InformationList-DM-Rspns,
  allRL              AllRL-Information-DM-Rspns,
  ...
}

RL-InformationList-DM-Rspns ::= RL-IE-ContainerList { {RL-Information-DM-Rspns-IEs} }

RL-Information-DM-Rspns-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-RL-InformationItem-DM-Rspns CRITICALITY ignore TYPE RL-InformationItem-DM-Rspns PRESENCE mandatory },
  ...
}

RL-InformationItem-DM-Rspns ::= SEQUENCE {
  rL-ID                RL-ID,
  dPCH-ID              DPCH-ID OPTIONAL,
  dedicatedMeasurementValue DedicatedMeasurementValue,
  iE-Extensions        ProtocolExtensionContainer { {RL-InformationItem-DM-Rspns-ExtIEs} } OPTIONAL,
  ...
}

RL-InformationItem-DM-Rspns-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

AllRL-Information-DM-Rspns ::= SEQUENCE {
  dedicatedMeasurementValue DedicatedMeasurementValue,
  iE-Extensions              ProtocolExtensionContainer { {AllRL-Information-DM-Rspns-ExtIEs} } OPTIONAL,
  ...
}

AllRL-Information-DM-Rspns-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DedicatedMeasurementInitiationResponse-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

```

```

-- *****
--
-- DEDICATED MEASUREMENT INITIATION FAILURE
--
-- *****

DedicatedMeasurementInitiationFailure ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{DedicatedMeasurementInitiationFailure-IEs}},
    protocolExtensions  ProtocolExtensionContainer {{DedicatedMeasurementInitiationFailure-Extensions}}
    ...
}

DedicatedMeasurementInitiationFailure-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-MeasurementID          CRITICALITY ignore TYPE MeasurementID          PRESENCE mandatory } |
    { ID id-Cause                  CRITICALITY ignore TYPE Cause                  PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
    ...
}

DedicatedMeasurementInitiationFailure-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- DEDICATED MEASUREMENT REPORT
--
-- *****

DedicatedMeasurementReport ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{DedicatedMeasurementReport-IEs}},
    protocolExtensions  ProtocolExtensionContainer {{DedicatedMeasurementReport-Extensions}}
    ...
}

DedicatedMeasurementReport-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-MeasurementID          CRITICALITY ignore TYPE MeasurementID          PRESENCE mandatory } |
    { ID id-DedicatedMeasurementObjectType-DM-Rprt CRITICALITY ignore TYPE DedicatedMeasurementObjectType-DM-Rprt PRESENCE mandatory } |
    { ID id-CFN                    CRITICALITY ignore TYPE CFN                    PRESENCE optional },
    ...
}

DedicatedMeasurementObjectType-DM-Rprt ::= CHOICE {
    rLs          RL-InformationList-DM-Rprt,
    allRL       AllRL-Information-DM-Rprt,
    ...
}

RL-InformationList-DM-Rprt ::= RL-IE-ContainerList { {RL-Information-DM-Rprt-IEs} }

```

```

RL-Information-DM-Rprt-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-RL-InformationItem-DM-Rprt          CRITICALITY ignore  TYPE RL-InformationItem-DM-Rprt          PRESENCE mandatory  },
  ...
}

RL-InformationItem-DM-Rprt ::= SEQUENCE {
  rL-ID          RL-ID,
  dPCH-ID        DPCH-ID          OPTIONAL,
  dedicatedMeasurementValue  DedicatedMeasurementValue,
  iE-Extensions  ProtocolExtensionContainer { {RL-InformationItem-DM-Rprt-ExtIEs} } OPTIONAL,
  ...
}

RL-InformationItem-DM-Rprt-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

AllRL-Information-DM-Rprt ::= SEQUENCE {
  dedicatedMeasurementValue  DedicatedMeasurementValue,
  iE-Extensions  ProtocolExtensionContainer { {AllRL-Information-DM-Rprt-ExtIEs} } OPTIONAL,
  ...
}

AllRL-Information-DM-Rprt-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DedicatedMeasurementReport-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
--
-- DEDICATED MEASUREMENT TERMINATION REQUEST
--
-- *****

DedicatedMeasurementTerminationRequest ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container  {{DedicatedMeasurementTerminationRequest-IEs}},
  protocolExtensions  ProtocolExtensionContainer {{DedicatedMeasurementTerminationRequest-Extensions}}
  ...
}

DedicatedMeasurementTerminationRequest-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-MeasurementID          CRITICALITY ignore  TYPE MeasurementID          PRESENCE mandatory  },
  ...
}

DedicatedMeasurementTerminationRequest-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

```



```

-- *****
--
-- DEDICATED MEASUREMENT FAILURE INDICATION
--
-- *****

DedicatedMeasurementFailureIndication ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{DedicatedMeasurementFailureIndication-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{DedicatedMeasurementFailureIndication-Extensions}}
    ...
}

DedicatedMeasurementFailureIndication-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-MeasurementID          CRITICALITY ignore TYPE MeasurementID          PRESENCE mandatory } |
    { ID id-Cause                  CRITICALITY ignore TYPE Cause                  PRESENCE mandatory },
    ...
}

DedicatedMeasurementFailureIndication-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- COMMON TRANSPORT CHANNEL RESOURCES RELEASE REQUEST
--
-- *****

CommonTransportChannelResourcesReleaseRequest ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{CommonTransportChannelResourcesReleaseRequest-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CommonTransportChannelResourcesReleaseRequest-Extensions}}
    ...
}

CommonTransportChannelResourcesReleaseRequest-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI              CRITICALITY ignore TYPE D-RNTI              PRESENCE mandatory } |
    { ID id-C-RNTI              CRITICALITY ignore TYPE C-RNTI              PRESENCE optional },
    ...
}

CommonTransportChannelResourcesReleaseRequest-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- COMMON TRANSPORT CHANNEL RESOURCES REQUEST
--
-- *****

```

```

CommonTransportChannelResourcesRequest ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container      {{CommonTransportChannelResourcesRequest-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CommonTransportChannelResourcesRequest-Extensions}}
    ...
}

CommonTransportChannelResourcesRequest-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI          CRITICALITY ignore TYPE D-RNTI          PRESENCE mandatory } |
    { ID id-TransportBearerRequestIndicator CRITICALITY ignore TYPE TransportBearerRequestIndicator PRESENCE mandatory } |
    { ID id-TransportBearerID          CRITICALITY ignore TYPE TransportBearerID          PRESENCE mandatory },
    ...
}

CommonTransportChannelResourcesRequest-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- COMMON TRANSPORT CHANNEL RESOURCES RESPONSE FDD
--
-- *****

CommonTransportChannelResourcesResponseFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container      {{CommonTransportChannelResourcesResponseFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CommonTransportChannelResourcesResponseFDD-Extensions}}
    ...
}

CommonTransportChannelResourcesResponseFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-S-RNTI          CRITICALITY ignore TYPE S-RNTI          PRESENCE mandatory } |
    { ID id-FACH-InfoForS-CCPCH-CoupledToPRACH CRITICALITY ignore TYPE FACH-InfoForS-CCPCH-CoupledToPRACH PRESENCE mandatory } |
    { ID id-FACH-InfoForOptionals-CCPCH          CRITICALITY ignore TYPE FACH-InfoForOptionals-CCPCH          PRESENCE optional } |
    { ID id-TransportLayerAddress          CRITICALITY ignore TYPE TransportLayerAddress          PRESENCE optional } |
    { ID id-BindingID          CRITICALITY ignore TYPE BindingID          PRESENCE optional } |
    { ID id-CriticalityDiagnostics          CRITICALITY ignore TYPE CriticalityDiagnostics          PRESENCE optional },
    ...
}

FACH-InfoForS-CCPCH-CoupledToPRACH ::= SEQUENCE {
    priorityIndicatorAndInitialWindowSizes PriorityIndicatorAndInitialWindowSizeList,
    IE-Extensions          ProtocolExtensionContainer { {FACH-InfoForS-CCPCH-CoupledToPRACH-ExtIEs} } OPTIONAL,
    ...
}

FACH-InfoForS-CCPCH-CoupledToPRACH-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

PriorityIndicatorAndInitialWindowSizeList ::= SEQUENCE (SIZE (1..16)) OF
    SEQUENCE {

```

```

    fACH-PriorityIndicator          FACH-PriorityIndicator,
    mAC-c-SDU-Lengths              MAC-c-SDU-LengthList,
    fACH-InitialWindowSize          FACH-InitialWindowSize,
    iE-Extensions                  ProtocolExtensionContainer { {PriorityIndicatorAndInitialWindowSizeList-ExtIEs} } OPTIONAL,
    ...
}

PriorityIndicatorAndInitialWindowSizeList-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

MAC-c-SDU-LengthList ::= SEQUENCE (SIZE (1..maxNrOfMACcSDU-Length)) OF
SEQUENCE {
    mAC-c-SDU-Length              MAC-c-SDU-Length,
    iE-Extensions                ProtocolExtensionContainer { {MAC-c-SDU-LengthList-ExtIEs} } OPTIONAL,
    ...
}

MAC-c-SDU-LengthList-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

FACH-InfoForOptionals-CCPCH ::= SEQUENCE {
    fDD-S-CCPCH-Offset            FDD-S-CCPCH-Offset,
    dl-ScramblingCode             DL-ScramblingCode,
    fDD-DL-ChannelisationCodeNumber FDD-DL-ChannelisationCodeNumber,
    dl-TFCS                       TransportFormatCombinationSet,
    secondaryCCPCHs               SecondaryCCPCH-List,
    pilotBitsUsedIndicator        PilotBitsUsedIndicator,
    multiplexingPosition          MultiplexingPosition,
    sSDT-Indication               SSdT-Indication,
    priorityIndicatorAndInitialWindowSizeList PriorityIndicatorAndInitialWindowSizeList,
    fACH-DataFrameSize            FACH-DataFrameSize,
    fACH-InitialWindowSize        FACH-InitialWindowSize,
    iE-Extensions                ProtocolExtensionContainer { {FACH-InfoForOptionals-CCPCH-ExtIEs} } OPTIONAL,
    ...
}

FACH-InfoForOptionals-CCPCH-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

SecondaryCCPCH-List ::= SEQUENCE (SIZE (1..maxNrOfSCCPCHs)) OF
SEQUENCE {
    tDD-ChannelisationCode        TDD-ChannelisationCode,
    timeSlot                      TimeSlot,
    burstType                     BurstType,
    midambleShift                 MidambleShift,
    offset                        Offset,
    repetitionPeriod              RepetitionPeriod,
    repetitionLength              RepetitionLength,

```

```

    iE-Extensions          ProtocolExtensionContainer { {SecondaryCCPCH-List-ExtIEs} } OPTIONAL,
    ...
}

SecondaryCCPCH-List-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

CommonTransportChannelResourcesResponseFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- COMMON TRANSPORT CHANNEL RESOURCES RESPONSE TDD
--
-- *****

CommonTransportChannelResourcesResponseTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{CommonTransportChannelResourcesResponseTDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CommonTransportChannelResourcesResponseTDD-Extensions}}    OPTIONAL,
    ...
}

CommonTransportChannelResourcesResponseTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-S-RNTI          CRITICALITY ignore TYPE S-RNTI          PRESENCE mandatory } |
    { ID id-FACH-InfoForS-CCPCH-CoupledToPRACH CRITICALITY ignore TYPE FACH-InfoForS-CCPCH-CoupledToPRACH PRESENCE optional } |
    { ID id-FACH-InfoForOptionalGroupS-CCPCH CRITICALITY ignore TYPE FACH-InfoForOptionalGroupOfS-CCPCH PRESENCE optional } |
    { ID id-TransportLayerAddress CRITICALITY ignore TYPE TransportLayerAddress PRESENCE optional } |
    { ID id-BindingID          CRITICALITY ignore TYPE BindingID          PRESENCE optional } |
    { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
    ...
}

FACH-InfoForOptionalGroupOfS-CCPCH ::= SEQUENCE {
    dl-TFCS          TransportFormatCombinationSet,
    secondaryCCPCHs SecondaryCCPCH-TDD-List,
    iE-Extensions   ProtocolExtensionContainer { {FACH-InfoForOptionalGroupOfS-CCPCH-ExtIEs} } OPTIONAL,
    ...
}

FACH-InfoForOptionalGroupOfS-CCPCH-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

SecondaryCCPCH-TDD-List ::= SEQUENCE (SIZE (1..maxNrOfSCCPCHs)) OF
SEQUENCE {
    tDD-ChannelisationCode          TDD-ChannelisationCode,
    timeSlot                        TimeSlot,
    burstType                        BurstType,
    midambleShift                    MidambleShift,
}

```

```

    tDD-PhysicalChannelOffset      TDD-PhysicalChannelOffset,
    repetitionPeriod              RepetitionPeriod,
    repetitionLength               RepetitionLength,
    sSDT-Indication                SSDT-Indication,
    priorityIndicatorAndInitialWindowSizeModeList PriorityIndicatorAndInitialWindowSizeModeList,
    iE-Extensions                 ProtocolExtensionContainer { {SecondaryCCPCH-TDD-List-ExtIEs} } OPTIONAL,
    ...
}

SecondaryCCPCH-TDD-List-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

CommonTransportChannelResourcesResponseTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- COMMON TRANSPORT CHANNEL RESOURCES FAILURE
--
-- *****

CommonTransportChannelResourcesFailure ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container    {{CommonTransportChannelResourcesFailure-IEs}},
    protocolExtensions         ProtocolExtensionContainer {{CommonTransportChannelResourcesFailure-Extensions}}
    ...
}

CommonTransportChannelResourcesFailure-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-S-RNTI              CRITICALITY ignore TYPE S-RNTI          PRESENCE mandatory } |
    { ID id-Cause                CRITICALITY ignore TYPE Cause          PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
    ...
}

CommonTransportChannelResourcesFailure-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- COMPRESSED MODE PREPARE
--
-- *****

CompressedModePrepare ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container    {{CompressedModePrepare-IEs}},
    protocolExtensions         ProtocolExtensionContainer {{CompressedModePrepare-Extensions}}
    ...
}

```

```

CompressedModePrepare-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-TGP1          CRITICALITY ignore TYPE GapPeriod          PRESENCE mandatory } |
  { ID id-TGP2          CRITICALITY ignore TYPE GapPeriod          PRESENCE optional  } |
  { ID id-TGL           CRITICALITY ignore TYPE TGL                PRESENCE mandatory } |
  { ID id-TGD           CRITICALITY ignore TYPE TGD                PRESENCE mandatory } |
  { ID id-PD            CRITICALITY ignore TYPE PD                 PRESENCE mandatory } |
  { ID id-UL-DL-CompressedModeSelection CRITICALITY ignore TYPE UL-DL-CompressedModeSelection PRESENCE mandatory } |
  { ID id-CompressedModeMethod CRITICALITY ignore TYPE CompressedModeMethod PRESENCE mandatory } |
  { ID id-GapPositionMode CRITICALITY ignore TYPE GapPositionMode PRESENCE mandatory } |
  { ID id-SN            CRITICALITY ignore TYPE SN                 PRESENCE conditional
  -- This IE is present only if "GapPositionMode" equals to "flexible" --
  } |
  { ID id-DL-FrameType CRITICALITY ignore TYPE DL-FrameType       PRESENCE mandatory } |
  { ID id-ScramblingCodeChange CRITICALITY ignore TYPE ScramblingCodeChange PRESENCE conditional
  -- This IE is present only if "CompressedModeMethod" equals to "SF/2" --
  } |
  { ID id-PowerControlMode CRITICALITY ignore TYPE PowerControlMode PRESENCE mandatory } |
  { ID id-PowerResumeMode CRITICALITY ignore TYPE PowerResumeMode PRESENCE mandatory } |
  { ID id-UL-DeltaEbNo CRITICALITY ignore TYPE UL-EbNo            PRESENCE mandatory } |
  { ID id-UL-DeltaEbNoAfter CRITICALITY ignore TYPE UL-EbNo      PRESENCE mandatory },
  ...
}

```

```

CompressedModePrepare-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

```

```

-- *****
--
-- COMPRESSED MODE READY
--
-- *****

```

```

CompressedModeReady ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container    {{{CompressedModeReady-IEs}}},
  protocolExtensions  ProtocolExtensionContainer {{{CompressedModeReady-Extensions}}}
  ...
  OPTIONAL,
}

```

```

CompressedModeReady-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
  ...
}

```

```

CompressedModeReady-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

```

```

-- *****
--
-- COMPRESSED MODE FAILURE
--

```

```

-- *****
CompressedModeFailure ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{CompressedModeFailure-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CompressedModeFailure-Extensions}}
    ...
}
OPTIONAL,

CompressedModeFailure-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-Cause          CRITICALITY ignore TYPE Cause          PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
    ...
}

CompressedModeFailure-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- COMPRESSED MODE COMMIT
--
-- *****

CompressedModeCommit ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{CompressedModeCommit-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CompressedModeCommit-Extensions}}
    ...
}
OPTIONAL,

CompressedModeCommit-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-CFN           CRITICALITY ignore TYPE CFN             PRESENCE mandatory },
    ...
}

CompressedModeCommit-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- COMPRESSED MODE CANCEL
--
-- *****

CompressedModeCancel ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{CompressedModeCancel-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CompressedModeCancel-Extensions}}
    ...
}
OPTIONAL,

```

```

CompressedModeCancel-IEs RNSAP-PROTOCOL-IES ::= {
    ...
}

CompressedModeCancel-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- ERROR INDICATION
--
-- *****

ErrorIndication ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{ErrorIndication-IEs}},
    protocolExtensions  ProtocolExtensionContainer {{ErrorIndication-Extensions}}    OPTIONAL,
    ...
}

ErrorIndication-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-Cause          CRITICALITY ignore TYPE Cause          PRESENCE conditional
      -- At least either of Cause IE or Criticality IE shall be present -- } |
    { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE conditional
      -- At least either of Cause IE or Criticality IE shall be present -- },
    ...
}

ErrorIndication-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- PRIVATE MESSAGE
--
-- *****

PrivateMessage ::= SEQUENCE {
    privateExtensions  PrivateExtensionContainer {{PrivateExtensions}},
    ...
}

PrivateExtensions RNSAP-PRIVATE-EXTENSION ::= {
    ...
}

END

```


9.3.4 Information Element Definitions

```

-- *****
--
-- Information Element Definitions
--
-- *****

RNSAP-IEs -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

IMPORTS
    maxNrOfErrors,
    maxRateMatching,
    maxNrOfTFCs,
    maxNrOfTFS,
    maxTTI-Count
FROM RNSAP-Constants

    Criticality,
    ProcedureCode,
    ProtocolIE-ID,
    TransactionID,
    TriggeringMessage
FROM RNSAP-CommonDataTypes

    ProtocolExtensionContainer{},
    RNSAP-PROTOCOL-EXTENSION
FROM RNSAP-Containers;

-- A

AllocationRetentionPriority ::= FrameHandlingPriority

AllowedQueuingTime ::= INTEGER (0..60)
-- seconds

-- B

-- ** NOTE: Size in tabular 1..4,... **
BindingID ::= OCTET STRING (SIZE (1..MAX))

BLER ::= INTEGER (-63..0)
-- Step 0.1 (Range -6.3..0). It is the Log10 of the BLER

BurstType ::= ENUMERATED {
    type1 (1),
    type2 (2)
}

```

```
}  
  
-- C  
  
Cause ::= CHOICE {  
    radioNetwork          CauseRadioNetwork,  
    transmissionNetwork  CauseTransmissionNetwork,  
    protocol              CauseProtocol,  
    misc                  CauseMisc,  
    ...  
}  
  
CauseMisc ::= ENUMERATED {  
    control-processing-overload,  
    hardware-failure,  
    om-intervention,  
    not-enough-user-plane-processing-resources,  
    unspecified,  
    ...  
}  
  
CauseProtocol ::= ENUMERATED {  
    transaction-not-allowed,  
    transfer-syntax-error,  
    abstract-syntax-error-reject,  
    abstract-syntax-error-ignore-and-notify,  
    unspecified,  
    ...  
}  
  
CauseRadioNetwork ::= ENUMERATED {  
    unknown-C-ID,  
    cell-not-available,  
    power-level-not-supported,  
    ul-scrambling-code-already-in-use,  
    dl-radio-resources-not-available,  
    ul-radio-resources-not-available,  
    measurement-not-supported-for-the-object,  
    macrodiversity-combining-not-possible,  
    reconfiguration-not-allowed,  
    Synchronisation-failure,  
    unspecified,  
    ...  
}  
  
CauseTransmissionNetwork ::= ENUMERATED {  
    transmission-link-failure,  
    transmission-port-not-available,  
    unspecified,  
    ...  
}
```

```

C-ID ::= INTEGER (0..65535)

CCTrCH-ID ::= INTEGER (0..15)

CellParameterID ::= INTEGER (0..127)

CFN ::= INTEGER (0..255)

ChannelCodingType ::= ENUMERATED {
    no-coding,
    convolutional-coding,
    turbo-coding--,
    -- ...
}

-- ** TODO **
ChipOffset ::= INTEGER

CodingRate ::= ENUMERATED {
    half,
    third--,
    -- ...
}

CompressedModeMethod ::= ENUMERATED {
    none,
    puncturing,
    half-sF2SF,
    higher-Layer-Schedulinggating
}

CPICH-EcIo ::= INTEGER

CRC-Size ::= INTEGER (0| 8| 12| 16| 24)

CriticalityDiagnostics ::= SEQUENCE {
    procedureCode ProcedureCode OPTIONAL,
    triggeringMessage TriggeringMessage OPTIONAL,
    criticalityResponse Criticality OPTIONAL,
    transactionID TransactionID OPTIONAL,
    iEsCriticalityResponses CriticalityDiagnostics-IE-List OPTIONAL,
    iE-Extensions ProtocolExtensionContainer { {CriticalityDiagnostics-ExtIEs} } OPTIONAL,
    ...
}

CriticalityDiagnostics-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

CriticalityDiagnostics-IE-List ::= SEQUENCE (SIZE (1..maxNrOfErrors)) OF

```

```

SEQUENCE {
    criticalityResponse    Criticality,
    iE-ID                 ProtocolIE-ID,
    iE-Extensions         ProtocolExtensionContainer { {CriticalityDiagnostics-IE-List-ExtIEs} } OPTIONAL,
    ...
}

CriticalityDiagnostics-IE-List-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** TODO **
CTFC ::= INTEGER
-- See formula (must be resolved)

CN-CS-DomainIdentifier ::= SEQUENCE {
    pLMN-ID             PLMN-ID,
    iE-Extensions       ProtocolExtensionContainer { {CN-CS-DomainIdentifier-ExtIEs} } OPTIONAL,
    LAC                 LAC
}

CN-CS-DomainIdentifier-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

CN-PS-DomainIdentifier ::= SEQUENCE {
    pLMN-ID             PLMN-ID,
    LAC                 LAC,
    iE-Extensions       ProtocolExtensionContainer { {CN-PS-DomainIdentifier-ExtIEs} } OPTIONAL,
    rAC                 RAC
}

CN-PS-DomainIdentifier-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- **TODO**
CPICH-Power ::= INTEGER

C-RNTI ::= INTEGER (0..65535)

-- D

DCH-CombinationInd ::= INTEGER (0..255)

DCH-ID ::= INTEGER (0..255)

DedicatedMeasurementObjectType ::= ENUMERATED {
    rl,
    all-rl,
    ...
}

```

```

}
-- ** OR:
-- DedicatedMeasurementObjectType ::= INTEGER {
--   rL(0),
--   allRL(1)
-- } (0..255)
-- **

DedicatedMeasurementType ::= ENUMERATED {
  sir,
  sir-error,
  transmitted-code-power,
  rSCP,
  ...
}
-- timeslotTSCP is used by TDD only

-- ** OR:
-- DedicatedMeasurementType ::= INTEGER {
--   sIR(0),
--   sIR-Error(1),
--   transmittedCodePower(2),
--   rSCP(3)
-- } (0..255)
-- **

-- ** NOTE: Extensibility added **
-- **TODO**

DedicatedMeasurementValue ::= SEQUENCE {
  sIR-Value          ScaledSIR-Value          OPTIONAL,
  sIR-ErrorValue    ScaledSIR-ErrorValue    OPTIONAL,
  transmittedCodePowerValue ScaledTransmittedCodePowerValue OPTIONAL, -- Relative to CPICH
  rSCP              TBD                     OPTIONAL, -- TDD only
  iE-Extensions    ProtocolExtensionContainer { {DedicatedMeasurementValue-ExtIEs} } OPTIONAL,
  ...
}

DedicatedMeasurementValue-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ** TODO **
DiversityControlField ::= INTEGER

-- ** TODO **
DiversityMode ::= INTEGER

-- ** TODO **
DL-ChannelisationCode ::= INTEGER

```

```
-- ** TODO **
DL-DPCCH-SlotFormat      ::= INTEGER

-- ** TODO **
DL-DPCH-SlotNumber      ::= INTEGER

DL-EbNo                  ::= ScaledUL-EbNo

DL-EbNoTarget           ::= ScaledUL-EbNo

-- ** TODO **
DL-Power                 ::= INTEGER

D-RNTI                   ::= INTEGER (0..1048576)
-- ** OR:
-- D-RNTI                 ::= BIT STRING (SIZE (20))
-- **

D-RNTI-ReleaseIndication ::= ENUMERATED {
    not-release-D-RNTI,
    release-D-RNTI
}

-- ** TODO **
DL-ScramblingCode       ::= INTEGER

DL-FrameType ::= ENUMERATED {
    typeA,
    typeB,
    ...
}

DPCH-ID                  ::= INTEGER (0..239)

-- **TODO**
DRX-Parameter           ::= TBD

-- **TODO**
DSCH-TransportFormatCombinationSet ::= INTEGER

-- **TODO**
DSCH-TFS                ::= INTEGER

-- **TODO**
D-FieldLength           ::= INTEGER

-- E

EventA ::= SEQUENCE {
    measurementTreshold      MeasurementThreshold,
    measurementHysteresisTime ScaledMeasurementHysteresisTime OPTIONAL,
```

```
iE-Extensions          ProtocolExtensionContainer { {EventA-ExtIEs} } OPTIONAL,
...
}

EventA-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

EventB ::= SEQUENCE {
  measurementThreshold      MeasurementThreshold,
  measurementHysteresisTime ScaledMeasurementHysteresisTime OPTIONAL,
  iE-Extensions            ProtocolExtensionContainer { {EventB-ExtIEs} } OPTIONAL,
  ...
}

EventC ::= SEQUENCE {
  measurementIncreaseThreshold      MeasurementIncreaseThreshold,
  measurementChangeTime             ScaledMeasurementChangeTime,
  ...
}

EventB-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

EventD ::= SEQUENCE {
  measurementDecreaseThreshold      MeasurementDecreaseThreshold,
  measurementChangeTime             ScaledMeasurementChangeTime,
  iE-Extensions                    ProtocolExtensionContainer { {EventD-ExtIEs} } OPTIONAL,
  ...
}

EventD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

EventE ::= SEQUENCE {
  measurementThreshold1      MeasurementThreshold,
  measurementThreshold2      MeasurementThreshold OPTIONAL,
  measurementHysteresisTime  ScaledMeasurementHysteresisTime OPTIONAL,
  reportPeriodicity          ReportPeriodicity OPTIONAL,
  iE-Extensions              ProtocolExtensionContainer { {EventE-ExtIEs} } OPTIONAL,
  ...
}

EventE-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

EventF ::= SEQUENCE {
  measurementThreshold1      MeasurementThreshold,
```

```
measurementThreshold2      MeasurementThreshold      OPTIONAL,
measurementHysteresisTime  ScaledMeasurementHysteresisTime  OPTIONAL,
reportPeriodicity         ReportPeriodicity          OPTIONAL,
iE-Extensions             ProtocolExtensionContainer { {EventF-ExtIEs} } OPTIONAL,
...
}

EventF-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- F

FACH-DataFrameSize        ::= INTEGER (1..5000)
-- Size of data frame in number of bits

FACH-InitialWindowSize    ::= INTEGER { unlimited(255) } (0..255)
-- Number of FACH data frames.
-- 255 = Unlimited number of FACH data frames

-- ** TODO **
FACH-InfoForOptionalS-CCPCH ::= INTEGER

-- ** TODO **
FACH-InfoForS-CCPCH-CoupledToPRACH ::= INTEGER

-- ** TODO **
FDD-DL-ChannelisationCodeNumber ::= INTEGER

-- ** TODO **
FDD-FL-ChannelisationCodeNumber ::= INTEGER

-- ** TODO **
FDD-S-CCPCH-Offset        ::= INTEGER

FACH-PriorityIndicator     ::= INTEGER { lowest(0), highest(15) } (0..15)
FrameHandlingPriority      ::= INTEGER { lowest(0), highest(15) } (0..15)

FrameOffset               ::= INTEGER (0..255)
-- Frames

-- G

GapPositionMode ::= ENUMERATED {
    fixed,
    flexible
}

GapPeriod                ::= INTEGER (0..255)
```



```
-- H
-- I

-- **TODO**
InitialDL-TX-Power      ::= INTEGER

-- J
-- K
-- L

LAC                    ::= OCTET STRING (SIZE (2)) --(EXCEPT ('0000'H|'FFFF'H))

-- ** TODO **
L3-Information         ::= INTEGER

-- M

-- ** TODO **
MaxNrOfUL-DPCHs       ::= INTEGER

MAC-c-SDU-Length      ::= INTEGER (1..5000)

-- **TODO**
MACd-MACsh-TransportFormatSet ::= INTEGER

-- **NOTE: extensibility**
MeasurementCharacteristics ::= SEQUENCE {
  measurementFrequency      TBD,
  averagingDuration         TBD,
  IE-Extensions             ProtocolExtensionContainer { {MeasurementCharacteristics-ExtIEs} } OPTIONAL,
  ...
}

MeasurementCharacteristics-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ** TODO **
MeanBitRate            ::= INTEGER

MeasurementID          ::= INTEGER (0..1048576)
-- **OR:
-- MeasurementID       ::= BIT STRING (SIZE (20))
-- **

MultipleURAsIndicator ::= ENUMERATED {
  single-URA-exists,
  multiple-URAs-exist
}

-- ** TODO **
```

```
MCC-Digit          ::= OCTET STRING (SIZE (3))
-- FFS
-- Reference: 24.008

-- ** TODO **
MNC-Digit          ::= OCTET STRING (SIZE (3))
-- FFS
-- Reference: 24.008

ScaledMeasurementChangeTime ::= INTEGER (1..1000)
-- MeasurementChangeTime = ScaledMeasurementChangeTime * 10
-- Unit is ms

-- ** TODO **
MeasurementDecreaseThreshold ::= INTEGER

ScaledMeasurementHysteresisTime ::= INTEGER (1..1000)
-- MeasurementHysteresisTime = ScaledMeasurementHysteresisTime * 10
-- Unit is ms

-- ** TODO **
MeasurementIncreaseThreshold ::= INTEGER

-- ** TODO **
MeasurementThreshold ::= INTEGER

MidambleShift      ::= INTEGER (0..15)

MinUL-ChannelisationCodeLength ::= INTEGER

MultiplexingPosition ::= ENUMERATED {
    fixed,
    flexible
}

-- N
NrOfTransportBlocks ::= INTEGER (0..4095)

-- O
Offset              ::= INTEGER (0..63)

-- P
PD                  ::= INTEGER (0..2047, ...)

PayloadCRC-PresenceIndicator ::= ENUMERATED {
    crc-not-included,
    crc-included--,
    ...
}
```

```
}

PSCH-TimeSlot                ::= INTEGER (0..6)

Periodic ::= SEQUENCE {
    reportPeriodicity          ReportPeriodicity,
    iE-Extensions              ProtocolExtensionContainer { {Periodic-ExtIEs} } OPTIONAL,
    ...
}

Periodic-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** TODO **
PilotBitsUsedIndicator       ::= INTEGER

-- ** TODO **
PLMN-ID ::= SEQUENCE {
    mCC-digit                 MCC-Digit,
    iE-Extensions             ProtocolExtensionContainer { {PLMN-ID-ExtIEs} } OPTIONAL,
    mNC-digit                 MNC-Digit
}
-- FFS

PLMN-ID-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

PowerControlMode ::= ENUMERATED {
    v0,
    v1,
    ...
}

PowerOffset                  ::= INTEGER (0..24)

PowerResumeMode ::= ENUMERATED {
    v0,
    v1,
    ...
}

-- ** TODO **
PrimaryCPICH-Power           ::= INTEGER

PrimaryCPICH-EcNo            ::= INTEGER (-30..30)

-- ** TODO **
PrimaryCCPCH-RSCP            ::= INTEGER
```

```
PrimaryScramblingCode      ::= ScramblingCode

PropagationDelay           ::= INTEGER (0..255)

SyncCase ::= ENUMERATED {
    case1,
    case2,
    case3--,
-- ...
}

-- ** TODO **
PSCH-CCPCH-TimeSlot       ::= TimeSlot

-- ** TODO **
PSCH-PCCPCH-TimeSlot     ::= TimeSlot

-- ** TODO **
P-CPICH-Power             ::= INTEGER

PunctureLimit             ::= INTEGER (0..100)
-- Unit is %

-- Q
-- R

-- ** TODO **
RAC                       ::= INTEGER

-- ** TODO **
-- OCTET STRING?
RANAP-RelocationInformation ::= BIT STRING

RateMatchingAttribute     ::= INTEGER (1..maxRateMatching)

RepetitionLength          ::= INTEGER (1..63)

RepetitionPeriod ::= ENUMERATED {
    v1,
    v2,
    v4,
    v8,
    v16,
    v32,
    v64--,
-- ...
}

-- This is changed from the tabular format because it seems that
-- this is what is wanted.
ReportCharacteristics ::= CHOICE {
```

```

    onDemand          NULL,
    periodic          Periodic,
    eventA            EventA,
    eventB            EventB,
    eventC            EventC,
    eventD            EventD,
    eventE            EventE,
    eventF            EventF--,
--   ...
}

-- Changed
ReportPeriodicity ::= CHOICE {
    msec             INTEGER (1..1000),
    min              INTEGER (1..60)
}

RLC-Mode ::= ENUMERATED {
    acknowledged-mode,
    unacknowledged-mode,
    transparent-mode
}

RL-ID          ::= INTEGER (0..31)

RNC-ID         ::= INTEGER (0..4095)

-- S

-- Changed BIT STRING -> OCTET STRING
SAC            ::= OCTET STRING (SIZE (2))

SAI ::= SEQUENCE {
    pLMN-ID      PLMN-ID,
    LAC          LAC,
    sAC          SAC,
    iE-Extensions ProtocolExtensionContainer { {SAI-ExtIEs} } OPTIONAL
}

SAI-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** TODO **
ScramblingCode          ::= INTEGER

ScramblingCodeChange ::= ENUMERATED {
    no-code-change,
    code-change
}

```

```
ScaledSIR-ErrorValue ::= INTEGER (-100..100)
-- ScaledSIR-ErrorValue = SIR-ErrorValue * 10
-- If SIR-ErrorValue <= -10 ScaledSIR-ErrorValue shall be set to -100
-- If SIR-ErrorValue >= 10 ScaledSIR-ErrorValue shall be set to 100
-- SIR-ErrorValue step 0.1 dB

ScaledSIR-Value ::= INTEGER (-100..200)
-- ScaledSIR-Value = SIR-Value * 10
-- SIR-Value step 0.1 dB

ScaledTransmittedCodePowerValue ::= INTEGER (-350..150)
-- ScaledTransmittedCodePowerValue = TransmittedCodePowerValue * 10
-- TransmittedCodePowerValue step 0.1 dB

-- ** TODO **
SharedChannelType ::= INTEGER

-- ** TODO **
SecondaryCCPCH-SlotFormat ::= INTEGER

SN ::= TimeSlot

SpreadingFactorOfChannelisationCode ::= ENUMERATED {
    v256,
    v128,
    v64,
    v32,
    v16,
    v8,
    v4,
    v2,
    v1
}

-- Changed
S-FieldLength ::= INTEGER (1..2)

S-RNTI ::= INTEGER (0..1048575)
-- From 0 to 2^20-1

-- ** TODO **
SRNC-ID ::= INTEGER

SSDT-CellID ::= ENUMERATED {
    a,
    b,
    c,
    d,
    e,
    f,
    g,
```

```
    h
  }

SSDT-CellID-Length ::= ENUMERATED {
    short,
    medium,
    long
}

SSDT-Indication ::= ENUMERATED {
    sSDT-active-in-the-UE,
    sSDT-not-active-in-the-UE
}

SSDT-SupportIndicator ::= ENUMERATED {
    sSDT-not-supported,
    sSDT-supported
}

-- T

-- ** TODO **
TBD ::= NULL
-- Remove this type

TDD-ChannelisationCode ::= INTEGER (1..31)

TDD-PhysicalChannelOffset ::= INTEGER (0..63)

TFCI-Coding ::= ENUMERATED {
    v4,
    v8,
    v16,
    v32
}

TFCI-Presence ::= ENUMERATED {
    not-present,
    present
}

TFCI-SignallingMode ::= ENUMERATED {
    normal,
    split
}

-- ** TODO **
TimeReference ::= INTEGER
-- TimeReference ::= INTEGER (0..255)

TimeSlot ::= INTEGER (0..14)
```

```

ToAWE ::= INTEGER (0..2559)

ToAWS ::= INTEGER (0..1279)

TPC-StepSize ::= ENUMERATED {
    half,
    one
}

TGD ::= INTEGER (0..255)

TGL ::= INTEGER (3| 4| 7| 10| 14)

TransmissionTimeInterval ::= ENUMERATED {
    msec-10,
    msec-20,
    msec-40,
    msec-80--,
    -- ...
}

TransportBearerID ::= INTEGER (0..4095)

-- Compare title and IE name in table TransportBearerRequestIndicator vs.
-- FACH-PriorityIndicator
TransportBearerRequestIndicator ::= INTEGER { lowest (0), highest (15) } (0..15)

TransportBlockSize ::= INTEGER (1..5000)
-- Unit is bits

TransportFormatCombinationSet ::= SEQUENCE (SIZE (1..maxNrOfTFCs)) OF
    SEQUENCE {
        cTFC CTFC,
        iE-Extensions ProtocolExtensionContainer { {TransportFormatCombinationSet-ExtIEs} } OPTIONAL,
        ...
    }

TransportFormatCombinationSet-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

TransportFormatSet ::= SEQUENCE {
    dynamicParts TransportFormatSet-DynamicPartList,
    semi-staticPart TransportFormatSet-Semi-staticPart,
    iE-Extensions ProtocolExtensionContainer { {TransportFormatSet-ExtIEs} } OPTIONAL,
    ...
}

TransportFormatSet-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```



```

}

TransportFormatSet-DynamicPartList ::= SEQUENCE (SIZE (1..maxNrOfTFs)) OF
SEQUENCE {
    nrOfTransportBlocks      NrOfTransportBlocks,
    transportBlockSize      TransportBlockSize OPTIONAL
    -- This IE is only present if nrOfTransportBlocks is greater than 0 --,
    mode                    TransportFormatSet-ModeDP,
    iE-Extensions          ProtocolExtensionContainer { {TransportFormatSet-DynamicPartList-ExtIEs} } OPTIONAL,
    ...
}

TransportFormatSet-DynamicPartList-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

TransportFormatSet-ModeDP ::= CHOICE {
    tdd                    TransmissionTimeIntervallList,
    -- This IE is mandatory if not defined as semistatic parameter, otherwise it is absent --
    ...
}

TransmissionTimeIntervallList ::= SEQUENCE (SIZE (1..maxTTI-Count)) OF
SEQUENCE {
    transmissionTimeInterval TransmissionTimeInterval,
    iE-Extensions          ProtocolExtensionContainer { {TransmissionTimeIntervallList-ExtIEs} } OPTIONAL,
    ...
}

TransmissionTimeIntervallList-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

TransportFormatSet-Semi-staticPart ::= SEQUENCE {
    transmissionTime      TransmissionTimeInterval,
    channelCoding         ChannelCodingType,
    codingRate           CodingRate OPTIONAL
    -- This IE is only present if channelCoding is 'convolutional' or 'turbo' --,
    rateMatcingAttribute RateMatchingAttribute,
    cRC-Size             CRC-Size,
    mode                 TransportFormatSet-ModeSSP OPTIONAL,
    iE-Extensions       ProtocolExtensionContainer { {TransportFormatSet-Semi-staticPart-ExtIEs} } OPTIONAL,
    ...
}

TransportFormatSet-Semi-staticPart-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

TransportFormatSet-ModeSSP ::= CHOICE {
    tdd                    SecondInterleavingMode,

```

```
    ...
}

SecondInterleavingMode ::= ENUMERATED {
    frame-related,
    timeslot-related,
    ...
}

-- TransportLayerAddress          ::= BIT STRING (1..160, ...)
TransportLayerAddress            ::= OCTET STRING (SIZE (1..20, ...))

-- U

UARFCN                          ::= INTEGER (0..698, ...)

UL-DL-CompressedModeSelection ::= ENUMERATED {
    ul-only,
    dl-only,
    both
}

UL-DeltaEbNo                    ::= INTEGER (-60..100)

UL-DeltaEbNoAfter              ::= INTEGER (-60..100)

-- ** TODO **
UL-EbNo                        ::= INTEGER

-- ** TODO **
UL-EbNoTarget                  ::= INTEGER

UC-ID ::= SEQUENCE {
    rNC-ID          RNC-ID,
    c-ID            C-ID,
    iE-Extensions  ProtocolExtensionContainer { {UC-ID-ExtIEs} } OPTIONAL,
    ...
}

UC-ID-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

UL-DPCCH-SlotFormat            ::= INTEGER (0..5)

ScaledUL-EbNo                  ::= INTEGER (0..255)
-- UL-EbNo = ScaledUL-EbNo / 10

UL-FP-Mode ::= ENUMERATED {
    normal,
    silent--,

```

```

-- ...
}

ScaledUL-InterferenceLevel ::= INTEGER (-1280..-600)
-- UL-InterferenceLevel = UL-InterferenceLevel / 10

-- Relation to the ScramblingCode??
UL-ScramblingCode ::= SEQUENCE {
    ul-ScramblingCodeNumber    UL-ScramblingCodeNumber,
    ul-ScramblingCodeLength    UL-ScramblingCodeLength,
    iE-Extensions              ProtocolExtensionContainer { {UL-ScramblingCode-ExtIEs} } OPTIONAL
}

UL-ScramblingCode-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

UL-ScramblingCodeLength ::= ENUMERATED {
    short,
    long
}

UL-ScramblingCodeNumber ::= INTEGER (0..16777215)

URA-ID ::= INTEGER (0..65535)

-- V
-- W
-- X
-- Y
-- Z

END

```

9.3.5 Common Definitions

```

-- *****
--
-- Common definitions
--
-- *****

RNSAP-CommonDataTypes -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

Criticality ::= ENUMERATED { reject, ignore, notify }

Presence ::= ENUMERATED { optional, conditional, mandatory }

```

```

PrivateExtensionID ::= CHOICE {
    local          INTEGER (0..65535),
    global         OBJECT IDENTIFIER
}

ProcedureCode      ::= INTEGER (0..255)

ProcedureID ::= SEQUENCE {
    procedureCode   ProcedureCode,
    ddMode          ENUMERATED { tdd, fdd, common }
}

ProtocolExtensionID ::= INTEGER (0..65535)

ProtocolIE-ID      ::= INTEGER (0..65535)

TransactionID      ::= INTEGER (0..65535)

TriggeringMessage  ::= ENUMERATED { initiating-message, successful-outcome, unsuccessful-outcome, outcome }

END

```

9.3.6 Constant Definitions

```

-- *****
--
-- Constant definitions
--
-- *****

RNSAP-Constants -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

-- *****
--
-- Elementary Procedures
--
-- *****

id-commonTransportChannelResourcesInitiationFDD          INTEGER ::= 0
id-commonTransportChannelResourcesInitiationTDD          INTEGER ::= 1
id-commonTransportChannelResourcesRelease                INTEGER ::= 2
id-compressedModeCancellationFDD                        INTEGER ::= 3
id-compressedModeCommitFDD                              INTEGER ::= 4
id-compressedModePrepareFDD                             INTEGER ::= 5
id-downlinkPowerControl                                 INTEGER ::= 6
id-downlinkSignallingTransfer                            INTEGER ::= 7
id-errorIndication                                       INTEGER ::= 8

```

```

id-measurementFailure                INTEGER ::= 9
id-measurementInitiation              INTEGER ::= 10
id-measurementReporting               INTEGER ::= 11
id-measurementTermination             INTEGER ::= 12
id-pagingRequest                     INTEGER ::= 13
id-physicalChannelReconfiguration    INTEGER ::= 14
id-privateMessage                     INTEGER ::= 15
id-radioLinkAddition                 INTEGER ::= 16
id-radioLinkDeletion                 INTEGER ::= 17
id-radioLinkFailure                  INTEGER ::= 18
id-radioLinkRestoration               INTEGER ::= 19
id-radioLinkSetup                     INTEGER ::= 20
id-srnsRelocationCommit              INTEGER ::= 21
id-synchronisedRadioLinkReconfigurationCancellation  INTEGER ::= 22
id-synchronisedRadioLinkReconfigurationCommit        INTEGER ::= 23
id-synchronisedRadioLinkReconfigurationPrepare       INTEGER ::= 24
id-unSynchronisedRadioLinkReconfiguration           INTEGER ::= 25
id-uplinkSignallingTransfer              INTEGER ::= 26

-- *****
--
-- Extension constants
--
-- *****

maxPrivateExtensions                INTEGER ::= 65535
maxProtocolExtensions               INTEGER ::= 65535
maxProtocolIEs                      INTEGER ::= 65535

-- *****
--
-- Lists
--
-- *****

maxRateMatching                     INTEGER ::= 10
maxNrOfTFCs                         INTEGER ::= 10
maxNrOfTFS                           INTEGER ::= 10

maxNoOfDL-Codes                     INTEGER ::= 10
maxNrOfCCTrCHs                      INTEGER ::= 10
maxNrOfDCHs                          INTEGER ::= 10
maxNrOfDL-Codes                      INTEGER ::= 10
maxNrOfDPCHs                         INTEGER ::= 10
maxNrOfErrors                         INTEGER ::= 10
maxNrOfFACH-FD-Size                  INTEGER ::= 10
maxNrOfFDD-Neighbours                INTEGER ::= 10
maxNrOfMACcSDU-Length                INTEGER ::= 10
maxNrOfTDD-Neighbours                INTEGER ::= 10
maxNrOfRLs                           INTEGER ::= 10
maxNrOfSCCPCHs                       INTEGER ::= 10

```

```

maxRNCinURA                INTEGER ::= 10
maxTTI-Count                 INTEGER ::= 10

-- *****
--
-- IEs
--
-- *****

id-AllowedQueuingTime       INTEGER ::= 0
id-BindingID                INTEGER ::= 1
id-C-ID                     INTEGER ::= 2
id-C-RNTI                   INTEGER ::= 3
id-CCTrCH-ID                INTEGER ::= 4
id-CFN                      INTEGER ::= 5
id-CN-CS-DomainIdentifier   INTEGER ::= 6
id-CN-PS-DomainIdentifier   INTEGER ::= 7
id-Cause                    INTEGER ::= 8
id-CompressedModeMethod     INTEGER ::= 9
id-D-RNTI                   INTEGER ::= 10
id-D-RNTI-ReleaseIndication INTEGER ::= 11
id-DCH-AddItem              INTEGER ::= 12
id-DCH-AddItem-RL-ReconfPrepFDD  INTEGER ::= 13
id-DCH-AddItem-RL-ReconfPrepTDD  INTEGER ::= 14
id-DCH-AddItem-RL-ReconfReadyFDD  INTEGER ::= 15
id-DCH-AddItem-RL-ReconfRqstFDD  INTEGER ::= 16
id-DCH-AddItem-RL-ReconfRqstTDD  INTEGER ::= 17
id-DCH-AddList-RL-ReconfPrepFDD  INTEGER ::= 18
id-DCH-AddList-RL-ReconfPrepTDD  INTEGER ::= 19
id-DCH-AddList-RL-ReconfRqstFDD  INTEGER ::= 20
id-DCH-AddList-RL-ReconfRqstTDD  INTEGER ::= 21
id-DCH-DeleteItem-RL-ReconfPrepFDD  INTEGER ::= 22
id-DCH-DeleteItem-RL-ReconfPrepTDD  INTEGER ::= 23
id-DCH-DeleteItem-RL-ReconfRqstFDD  INTEGER ::= 24
id-DCH-DeleteItem-RL-ReconfRqstTDD  INTEGER ::= 25
id-DCH-DeleteList-RL-ReconfPrepFDD  INTEGER ::= 26
id-DCH-DeleteList-RL-ReconfPrepTDD  INTEGER ::= 27
id-DCH-DeleteList-RL-ReconfRqstFDD  INTEGER ::= 28
id-DCH-DeleteList-RL-ReconfRqstTDD  INTEGER ::= 29
id-DCH-Information-RL-SetupReqFDD  INTEGER ::= 30
id-DCH-InformationItem-RL-SetupReqFDD  INTEGER ::= 31
id-DCH-InformationItem-RL-SetupReqTDD  INTEGER ::= 32
id-DCH-InformationList-RL-SetupReqTDD  INTEGER ::= 33
id-DCH-ModifyItem          INTEGER ::= 34
id-DCH-ModifyItem-RL-ReconfPrepFDD  INTEGER ::= 35
id-DCH-ModifyItem-RL-ReconfPrepTDD  INTEGER ::= 36
id-DCH-ModifyItem-RL-ReconfReadyFDD  INTEGER ::= 37
id-DCH-ModifyItem-RL-ReconfRqstFDD  INTEGER ::= 38
id-DCH-ModifyItem-RL-ReconfRqstTDD  INTEGER ::= 39
id-DCH-ModifyList-RL-ReconfPrepFDD  INTEGER ::= 40
id-DCH-ModifyList-RL-ReconfPrepTDD  INTEGER ::= 41

```

id-DCH-ModifyList-RL-ReconfRqstFDD	INTEGER ::= 42
id-DCH-ModifyList-RL-ReconfRqstTDD	INTEGER ::= 43
id-DL-CCTrCH-Information-RL-ReconfPrepTDD	INTEGER ::= 44
id-DL-CCTrCH-Information-RL-ReconfRqstTDD	INTEGER ::= 45
id-DL-CCTrCH-InformationList-RL-ReconfPrepTDD	INTEGER ::= 46
id-DL-CCTrCH-InformationList-RL-ReconfRqstTDD	INTEGER ::= 47
id-DL-CCTrChInformationItem-RL-SetupReqTDD	INTEGER ::= 48
id-DL-CCTrChInformationList-RL-SetupReqTDD	INTEGER ::= 49
id-DL-CodeInformation-PhyChReconfRqstFDD	INTEGER ::= 50
id-DL-DPCH-Information	INTEGER ::= 51
id-DL-DPCH-Information-RL-SetupReqFDD	INTEGER ::= 52
id-DL-DPCH-InformationList-PhyChReconfRqstTDD	INTEGER ::= 53
id-DL-DPCH-InformationList-RL-ReconfReadyTDD	INTEGER ::= 54
id-DL-EbNoTarget	INTEGER ::= 55
id-DL-FrameType	INTEGER ::= 56
id-DL-MeanBitRate	INTEGER ::= 57
id-DL-ReferencePowerInformation-DL-PC-Rqst	INTEGER ::= 58
id-DRX-Parameter	INTEGER ::= 59
id-DedicatedMeasurementObjectType-DM-Rprt	INTEGER ::= 60
id-DedicatedMeasurementObjectType-DM-Rqst	INTEGER ::= 61
id-DedicatedMeasurementObjectType-DM-Rspns	INTEGER ::= 62
id-FACH-InfoForOptionalGroupS-CCPCH	INTEGER ::= 63
id-FACH-InfoForOptionals-CCPCH	INTEGER ::= 64
id-FACH-InfoForS-CCPCH-CoupledToPRACH	INTEGER ::= 65
id-GapPositionMode	INTEGER ::= 66
id-L3-Information	INTEGER ::= 67
id-MeasurementCharacteristics	INTEGER ::= 68
id-MeasurementID	INTEGER ::= 69
id-MultipleURAsIndicator	INTEGER ::= 70
id-PD	INTEGER ::= 71
id-PagingArea-PagingRqst	INTEGER ::= 72
id-PowerControlMode	INTEGER ::= 73
id-PowerResumeMode	INTEGER ::= 74
id-ProcedureScope-DL-PC-Rqst	INTEGER ::= 75
id-RANAP-RelocationInformation	INTEGER ::= 76
id-RL-Information-PhyChReconfRqstFDD	INTEGER ::= 77
id-RL-Information-PhyChReconfRqstTDD	INTEGER ::= 78
id-RL-Information-RL-AdditionRqstFDD	INTEGER ::= 79
id-RL-Information-RL-AdditionRqstTDD	INTEGER ::= 80
id-RL-Information-RL-DeletionRqst	INTEGER ::= 81
id-RL-Information-RL-FailureInd	INTEGER ::= 82
id-RL-Information-RL-ReconfPrepFDD	INTEGER ::= 83
id-RL-Information-RL-RestoreInd	INTEGER ::= 84
id-RL-Information-RL-SetupReqFDD	INTEGER ::= 85
id-RL-Information-RL-SetupReqTDD	INTEGER ::= 86
id-RL-InformationItem-DM-Rprt	INTEGER ::= 87
id-RL-InformationItem-DM-Rqst	INTEGER ::= 88
id-RL-InformationItem-DM-Rspns	INTEGER ::= 89
id-RL-InformationItem-RL-SetupReqFDD	INTEGER ::= 90
id-RL-InformationList-RL-AdditionRqstFDD	INTEGER ::= 91
id-RL-InformationList-RL-DeletionRqst	INTEGER ::= 92

id-RL-InformationList-RL-FailureInd	INTEGER ::= 93
id-RL-InformationList-RL-ReconfPrepFDD	INTEGER ::= 94
id-RL-InformationList-RL-RestoreInd	INTEGER ::= 95
id-RL-InformationResponse-RL-AdditionRspTDD	INTEGER ::= 96
id-RL-InformationResponse-RL-ReconfReadyTDD	INTEGER ::= 97
id-RL-InformationResponse-RL-SetupRspTDD	INTEGER ::= 98
id-RL-InformationResponseItem-RL-AdditionRspFDD	INTEGER ::= 99
id-RL-InformationResponseItem-RL-ReconfReadyFDD	INTEGER ::= 100
id-RL-InformationResponseItem-RL-SetupRspFDD	INTEGER ::= 101
id-RL-InformationResponseList-RL-AdditionRspFDD	INTEGER ::= 102
id-RL-InformationResponseList-RL-ReconfReadyFDD	INTEGER ::= 103
id-RL-InformationResponseList-RL-SetupRspFDD	INTEGER ::= 104
id-RL-ReconfigurationFailure-RL-ReconfFail	INTEGER ::= 105
id-RL-ReconfigurationFailureList-RL-ReconfFail	INTEGER ::= 106
id-RNCsWithCellsInTheAccessedURA-List-UL-ST-Ind	INTEGER ::= 107
id-ReportCharacteristics	INTEGER ::= 108
id-S-RNTI	INTEGER ::= 109
id-SAI	INTEGER ::= 110
id-SN	INTEGER ::= 111
id-SRNC-ID	INTEGER ::= 112
id-ScramblingCodeChange	INTEGER ::= 113
id-SuccessfulRL-InformationResponse-RL-AdditionFailureFDD	INTEGER ::= 114
id-SuccessfulRL-InformationResponse-RL-SetupFailureFDD	INTEGER ::= 115
id-SuccessfulRL-InformationResponseList-RL-AdditionFailureFDD	INTEGER ::= 116
id-SuccessfulRL-InformationResponseList-RL-SetupFailureFDD	INTEGER ::= 117
id-TGD	INTEGER ::= 118
id-TGL	INTEGER ::= 119
id-TGP1	INTEGER ::= 120
id-TGP2	INTEGER ::= 121
id-TransportBearerID	INTEGER ::= 122
id-TransportBearerRequestIndicator	INTEGER ::= 123
id-TransportLayerAddress	INTEGER ::= 124
id-UC-ID	INTEGER ::= 125
id-UL-CCTrCH-Information-RL-ReconfPrepTDD	INTEGER ::= 126
id-UL-CCTrCH-Information-RL-ReconfRqstTDD	INTEGER ::= 127
id-UL-CCTrCH-InformationList-RL-ReconfPrepTDD	INTEGER ::= 128
id-UL-CCTrCH-InformationList-RL-ReconfRqstTDD	INTEGER ::= 129
id-UL-CCTrChInformationItem-RL-SetupReqTDD	INTEGER ::= 130
id-UL-CCTrChInformationList-RL-SetupReqTDD	INTEGER ::= 131
id-UL-DL-CompressedModeSelection	INTEGER ::= 132
id-UL-DPCH-Information	INTEGER ::= 133
id-UL-DPCH-Information-RL-SetupReqFDD	INTEGER ::= 134
id-UL-DPCH-InformationList-PhyChReconfRqstTDD	INTEGER ::= 135
id-UL-DPCH-InformationList-RL-ReconfReadyTDD	INTEGER ::= 136
id-UL-DeltaEbNo	INTEGER ::= 137
id-UL-DeltaEbNoAfter	INTEGER ::= 138
id-UL-EbNoTarget	INTEGER ::= 139
id-UL-MeanBitRate	INTEGER ::= 140
id-URA-ID	INTEGER ::= 141
id-UnsuccessfulRL-InformationResponse	INTEGER ::= 142
id-UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD	INTEGER ::= 143


```

id-UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD      INTEGER ::= 144
id-UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD      INTEGER ::= 145
id-UnsuccessfulRL-InformationResponseList-RL-AdditionFailureFDD  INTEGER ::= 146
id-UnsuccessfulRL-InformationResponseList-RL-SetupFailureFDD   INTEGER ::= 147
id-CriticalityDiagnostics                                     INTEGER ::= 148

```

END

9.3.7 Container Definitions

```

-- *****
--
-- Container definitions
--
-- *****

RNSAP-Containers -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

-- *****
--
-- IE parameter types from other modules.
--
-- *****

IMPORTS
    Criticality,
    Presence,
    PrivateExtensionID,
    ProtocolExtensionID,
    ProtocolIE-ID
FROM RNSAP-CommonDataTypes

    maxPrivateExtensions,
    maxProtocolExtensions,
    maxProtocolIEs
FROM RNSAP-Constants;

-- *****
--
-- Class Definition for Protocol IEs
--
-- *****

RNSAP-PROTOCOL-IES ::= CLASS {
    &id          ProtocolIE-ID          UNIQUE,
    &criticality Criticality,
    &Value,
    &presence    Presence

```

```

}
WITH SYNTAX {
    ID                &id
    CRITICALITY       &criticality
    TYPE              &Value
    PRESENCE          &presence
}

-- *****
--
-- Class Definition for Protocol IEs
--
-- *****

RNSAP-PROTOCOL-IES-PAIR ::= CLASS {
    &id                ProtocolIE-ID                UNIQUE,
    &firstCriticality  Criticality,
    &FirstValue,
    &secondCriticality Criticality,
    &SecondValue,
    &presence          Presence
}
WITH SYNTAX {
    ID                &id
    FIRST CRITICALITY &firstCriticality
    FIRST TYPE        &FirstValue
    SECOND CRITICALITY &secondCriticality
    SECOND TYPE       &SecondValue
    PRESENCE          &presence
}

-- *****
--
-- Class Definition for Protocol Extensions
--
-- *****

RNSAP-PROTOCOL-EXTENSION ::= CLASS {
    &id                ProtocolExtensionID          UNIQUE,
    &criticality       Criticality,
    &Extension
}
WITH SYNTAX {
    ID                &id
    CRITICALITY       &criticality
    EXTENSION         &Extension
}

-- *****
--
-- Class Definition for Private Extensions

```

```

--
-- *****
RNSAP-PRIVATE-EXTENSION ::= CLASS {
    &id          PrivateExtensionID,
    &criticality Criticality,
    &Extension
}
WITH SYNTAX {
    ID          &id
    CRITICALITY &criticality
    EXTENSION  &Extension
}
-- *****
--
-- Container for Protocol IEs
--
-- *****

ProtocolIE-Container {RNSAP-PROTOCOL-IES : IEsSetParam} ::=
    SEQUENCE (SIZE (0..maxProtocolIEs)) OF
    ProtocolIE-Field {{IEsSetParam}}

ProtocolIE-Field {RNSAP-PROTOCOL-IES : IEsSetParam} ::= SEQUENCE {
    id          RNSAP-PROTOCOL-IES.&id          ({IEsSetParam}),
    criticality RNSAP-PROTOCOL-IES.&criticality  ({IEsSetParam}@id}),
    value      RNSAP-PROTOCOL-IES.&Value       ({IEsSetParam}@id)}
}
-- *****
--
-- Container for Protocol IE Pairs
--
-- *****

ProtocolIE-ContainerPair {RNSAP-PROTOCOL-IES-PAIR : IEsSetParam} ::=
    SEQUENCE (SIZE (0..maxProtocolIEs)) OF
    ProtocolIE-FieldPair {{IEsSetParam}}

ProtocolIE-FieldPair {RNSAP-PROTOCOL-IES-PAIR : IEsSetParam} ::= SEQUENCE {
    id          RNSAP-PROTOCOL-IES-PAIR.&id          ({IEsSetParam}),
    firstCriticality RNSAP-PROTOCOL-IES-PAIR.&firstCriticality  ({IEsSetParam}@id}),
    firstValue     RNSAP-PROTOCOL-IES-PAIR.&FirstValue          ({IEsSetParam}@id}),
    secondCriticality RNSAP-PROTOCOL-IES-PAIR.&secondCriticality ({IEsSetParam}@id}),
    secondValue    RNSAP-PROTOCOL-IES-PAIR.&SecondValue        ({IEsSetParam}@id)}
}
-- *****
--
-- Container Lists for Protocol IE Containers

```

```

--
-- *****
ProtocolIE-ContainerList {INTEGER : lowerBound, INTEGER : upperBound, RNSAP-PROTOCOL-IES : IESiParam} ::=
  SEQUENCE (SIZE (lowerBound..upperBound)) OF
    ProtocolIE-Container {{IESiParam}}

ProtocolIE-ContainerPairList {INTEGER : lowerBound, INTEGER : upperBound, RNSAP-PROTOCOL-IES-PAIR : IESiParam} ::=
  SEQUENCE (SIZE (lowerBound..upperBound)) OF
    ProtocolIE-ContainerPair {{IESiParam}}

-- *****
--
-- Container for Protocol Extensions
--
-- *****

ProtocolExtensionContainer {RNSAP-PROTOCOL-EXTENSION : ExtensionSetParam} ::=
  SEQUENCE (SIZE (1..maxProtocolExtensions)) OF
    ProtocolExtensionField {{ExtensionSetParam}}

ProtocolExtensionField {RNSAP-PROTOCOL-EXTENSION : ExtensionSetParam} ::= SEQUENCE {
  id                RNSAP-PROTOCOL-EXTENSION.&id                ({ExtensionSetParam}),
  criticality       RNSAP-PROTOCOL-EXTENSION.&criticality       ({ExtensionSetParam}@id}),
  extensionValue    RNSAP-PROTOCOL-EXTENSION.&Extension         ({ExtensionSetParam}@id)}
}

-- *****
--
-- Container for Private Extensions
--
-- *****

PrivateExtensionContainer {RNSAP-PRIVATE-EXTENSION : ExtensionSetParam} ::=
  SEQUENCE (SIZE (1..maxPrivateExtensions)) OF
    PrivateExtensionField {{ExtensionSetParam}}

PrivateExtensionField {RNSAP-PRIVATE-EXTENSION : ExtensionSetParam} ::= SEQUENCE {
  id                RNSAP-PRIVATE-EXTENSION.&id                ({ExtensionSetParam}),
  criticality       RNSAP-PRIVATE-EXTENSION.&criticality       ({ExtensionSetParam}@id}),
  extensionValue    RNSAP-PRIVATE-EXTENSION.&Extension         ({ExtensionSetParam}@id)}
}

END

```

9.4 Message Transfer Syntax

RNSAP shall use the ASN.1 Packed Encoding Rules (PER) Aligned Variant as transfer syntax as specified in ref. [18].

[Editor's note: The dating of reference [18] needs to be verified. It has been included from the ITU-T list of recommendations in force. The dating of the reference is FFS.]

9.5 Timers

-

10 Handling of Unknown, Unforeseen and Erroneous Protocol Data

10.1 General

Protocol Error cases can be divided into two classes:

1. Transfer Syntax error
2. Abstract Syntax error

10.2 Transfer Syntax Error

A Transfer Syntax Error occurs when the receiver is not able to decode the received message i.e. the transfer syntax can not be opened. If Transfer Syntax Error occurs, the receiver should initiate Error Indication procedure with appropriate cause value for the protocol error.

10.3 Abstract Syntax Error

10.3.1 General

In the RANSAP messages there is criticality information set for individual IEs and/or sequences of IEs. This criticality information instructs the receiver how to act when receiving an IE that is not comprehended. An IE shall be regarded as not comprehended if the receiving node either cannot decode the IE or does not comprehend the function represented by the IE value. The case of the not comprehended IE is an Abstract Syntax Error.

If an Abstract Syntax Error occurs, the receiver shall read the remaining message and shall then for each detected Abstract Syntax Error act according to the Criticality Information for the IE or sequences of IEs due to which Abstract Syntax Error occurred in accordance with chapter 10.3.2.

The receiving node shall take different actions depending on the value of the Criticality Information. The three possible values of the Criticality Information are:

1. Reject IE
2. Ignore IE and Notify Sender
3. Ignore IE

10.3.2 Handling of the Criticality Information at Reception

10.3.2.1 Procedure Code

The receiving node shall treat the different types of criticality information of the *Procedure Code* according to the following:

Reject IE:

- If a message is received with a *Procedure Code* marked with "*Reject IE*" which the receiving node does not comprehend, the receiving node shall reject the procedure using the Error Indication procedure.

Ignore IE and Notify Sender:

- If a message is received with a *Procedure Code* marked with "*Ignore IE and Notify Sender*" which the receiving node does not comprehend, the receiving node shall ignore the procedure and initiate the Error Indication procedure.

Ignore IE:

- If a message is received with a *Procedure Code* marked with "*Ignore IE*" which the receiving node does not comprehend, the receiving node shall ignore the procedure.

10.3.2.2 IEs other than the Procedure Code

The receiving node shall treat the different types of criticality information of an IE other than the *Procedure Code* according to the following:

Reject IE:

- If a message *initiating* a procedure is received containing one or more IEs marked with "*Reject IE*" which the receiving node does not comprehend; none of the functional requests of the message shall be executed. The receiving node shall reject the procedure and report the rejection of one or more IEs using the message normally used to report unsuccessful outcome of the procedure.
- If a message *initiating* a procedure that does not have a message to report unsuccessful outcome is received containing one or more IEs marked with "*Reject IE*" which the receiving node does not comprehend, the receiving node shall initiate the Error Indication procedure.
- If a *response* message is received containing one or more IEs marked with "*Reject IE*", the receiving node shall initiate local error handling.

Ignore IE and Notify Sender:

- If a message *initiating* a procedure is received containing one or more IEs marked with "*Ignore IE and Notify Sender*" which the receiving node does not comprehend, the receiving node shall continue with the procedure using the understood IEs and report that one or more IEs have been ignored in the response message of the procedure.
- If a *response* message is received containing one or more IEs marked with "*Ignore IE and Notify Sender*" which the receiving node does not comprehend, the receiving node shall ignore the IE and initiate the Error Indication procedure.

Ignore IE:

- If a message *initiating* a procedure is received containing one or more IEs marked with "*Ignore IE*" which the receiving node does not comprehend, the receiving node shall continue with the procedure using the understood IEs.

10.3.3 Logical Error Handling

Logical error situations occur when a message is comprehended correctly, but the information contained within the message is not valid (i.e. semantic error), or describes a procedure which is not compatible with the state of the receiver.

In these conditions, the following behaviour shall be performed as defined by the class of the elementary procedure, irrespective of the criticality of the IEs containing the erroneous values.

Class 1:

Where the logical error occurs in a request message of a class 1 procedure, and the procedure has a failure message, the failure message shall be sent with an appropriate cause value. Typical cause values are:

Protocol Causes:

1. Semantic Error
2. Message not Compatible with Receiver State

Where the logical error is contained in a request message of a class 1 procedure, and the procedure does not have a failure message, the Error Indication procedure shall be initiated with an appropriate cause value.

Where the logical error exists in a response message of a class 1 procedure, local error handling shall be initiated.

Class 2:

Where the logical error occurs in a message of a class 2 procedure, the Error Indication procedure shall be initiated with an appropriate cause value.

Annex A (informative): Change history

Change history					
TSG RAN#	Version	CR	Tdoc RAN	New Version	Subject/Comment
RAN_06	-	-	RP-99755	3.0.0	Approved at TSG RAN #6 and placed under Change Control
<p>Rapporteur for TS25.423 is:</p> <p>Göran Rune RAN-WG3 Radio Systems AB</p> <p>Tel.: +46 13 284200 Fax : +46 13 277373 Email : goran.rune@era.RAN-WG3.se</p>					

History

Document history		

3GPP-RAN-WG3 Meeting #10
Sophia Antipolis, 28 February- 3 March 2000

e.g. for 3GPP use the format TP-99xxx
 or for SMG, use the format P-99-xxx

CHANGE REQUEST		Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.	
25.423 CR 050r2		Current Version: 3.0.0	
GSM (AA.BB) or 3G (AA.BBB) specification number ↑		↑ CR number as allocated by MCC support team	
For submission to: TSG RAN#7 <small>list expected approval meeting # here ↑</small>	for approval <input checked="" type="checkbox"/>	strategic <input type="checkbox"/>	(for SMG use only)
	for information <input type="checkbox"/>	non-strategic <input type="checkbox"/>	

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: <ftp://ftp.3gpp.org/Information/CR-Form-v2.doc>

Proposed change affects: (U)SIM ME UTRAN / Radio Core Network
(at least one should be marked with an X)

Source: RAN-WG3 **Date:** 28th February 2000

Subject: Uplink and downlink UARFCN (RNSAP)

Work item:

Category:	F Correction <input checked="" type="checkbox"/> A Corresponds to a correction in an earlier release <input type="checkbox"/> B Addition of feature <input type="checkbox"/> C Functional modification of feature <input type="checkbox"/> D Editorial modification <input type="checkbox"/>	Release:	Phase 2 <input type="checkbox"/> Release 96 <input type="checkbox"/> Release 97 <input type="checkbox"/> Release 98 <input type="checkbox"/> Release 99 <input checked="" type="checkbox"/> Release 00 <input type="checkbox"/>
------------------	--	-----------------	--

(only one category Shall be marked With an X)

Reason for change: The definition of UARFCN in RNSAP was entirely based on TDD. The modification is proposed to separate UARFCN for FDD case, as defined in TS25.104. Also, the previous value range of UARFCN was based on version 3.0.0 of TS25.105. The value range of UARFCN was modified to be consistent with version 3.1.0 of TS25.104 and TS25.105.
 For Clarification, Nu, Nd, and Nt have been added to the semantic description columns in the UARFCN rows in tabular tables.

Clauses affected: 2. Reference
 9.1.4 RADIO LINK SETUP RESPONSE
 9.1.5 RADIO LINK SETUP FAILURE
 9.1.7 RADIO LINK ADDITION RESPONSE
 9.1.8 RADIO LINK ADDITION FAILURE
 9.2.1.55 UARFCN
 9.3.3 PDU Definitions

Other specs Affected:	Other 3G core specifications <input type="checkbox"/> Other GSM core specifications <input type="checkbox"/> MS test specifications <input type="checkbox"/> BSS test specifications <input type="checkbox"/> O&M specifications <input type="checkbox"/>	→ List of CRs: → List of CRs: → List of CRs: → List of CRs: → List of CRs:
------------------------------	---	--

Other comments:



help.doc

<----- double-click here for help and instructions on how to create a CR.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.

For a specific reference, subsequent revisions do not apply.

For a non-specific reference, the latest version applies.

- [1] 3G TS 25.413: "UTRAN Iu Interface RANAP Signalling".
- [2] 3G TS 25.426: "UTRAN Iur and Iub Interface Data Transport & Transport Layer Signalling for DCH Data Streams".
- [3] 3G TS 25.427: "UTRAN Iur and Iub Interface User Plane Protocols for DCH Data Streams"..
- [4] 3G TS xx.yyy: "Specification containing different Identifiers for UMTS (to be identified)".
- [5] 3G TS 25.105: "UTRA (BS) TDD; Radio Transmission and Reception".
- [6] 3G TS 25.211: "Physical Channels and Mapping of Transport Channels onto Physical Channels (FDD)".
- [7] 3G TS 25.212: "Multiplexing and Channel Coding (FDD)".
- [8] UMTS 25.214, Physical Layer Procedures (FDD)".
- [9] 3G TS 25.215: "Physical Layer – Measurements (FDD)".
- [10] 3G TS 25.221: "Physical Channels and Mapping of Transport Channels onto Physical Channels (TDD)".
- [11] 3G TS 25.223: "Spreading and Modulation (TDD)".
- [12] 3G TS 25.225: "Physical Layer – Measurements (TDD)".
- [13] 3G TS 25.331: "RRC Protocol Specification".
- [14] 3G TS 25.402: "Synchronisation in UTRAN, Stage 2".
- [15] X.680 (12/94): "Information technology - Abstract Syntax Notation One (ASN.1): Specification of basic notation".
- [16] X.681 (12/94): "Information technology - Abstract Syntax Notation One (ASN.1): Information object specification".
- [17] X.691 (12/94), Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)".
- [18] 3G TS 25.104: "UTRA (BS) FDD; Radio Transmission and Reception".

[Editor's note: The dating of reference [17] needs to be verified. It has been included from the ITU-T list of recommendations in force. The dating of the reference is FFS.]

[Editor's note: The reference [4] needs to be identified. Until then the description of the parameters CN PS Domain Identifier, CN CS Domain Identifier, and CRNC ID contains more information than otherwise may be needed.]

9.1.4 RADIO LINK SETUP RESPONSE

9.1.4.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
D-RNTI	O			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
RL Information Response		1..<maxnoofRLs>		
RL ID	M			
SAI	M			
UL Interference Level	M			
DL Code Information		1.. <maxnoofDL Codes		
DL Scrambling Code	M			
FDD DL Channelisation Code Number	M			
Diversity Indication	C- NotFirstRL			
CHOICE <i>diversity Indication Combining</i>				
RL ID	M			Reference RL ID for the combining
<i>Non Combining or IE not present</i>				"IE not present" is equivalent to "First RL".
DCH Information Response		0..<maxnoofDCHs>		Only one DCH per set of co-ordinated DCHs shall be included
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
SSDT Support Indicator	M			
Maximum Uplink Eb/No	M		Uplink Eb/No	
Minimum Uplink Eb/No	M		Uplink Eb/No	
Neighbouring FDD Cell Information		0..<maxnoofFDDneighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			Corresponds to Nu [TS25.104]
UARFCN	M			Corresponds to Nd [TS25.104]
Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
Neighbouring TDD Cell Information		0..<maxnoofTDDneighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			Corresponds to Nt [TS25.105]
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case1			
PSCH Time Slot	C-Case2&3			
Uplink Eb/No Target	O		Uplink	

			Eb/No	
Downlink Eb/No Target	O			
Criticality Diagnostics	O			

Condition	Explanation
IfComb	This IE is present if the 'Diversity Indication' IE indicates 'combining' in the Node B.
IfNotComb	This IE is present if the 'Diversity Indication' IE indicates 'non combining' in the Node B.
NotFirstRL	The IE is present only if the RL is not the first RL in the RL Information
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range bound	Explanation
MaxnoofRLs	Maximum no. of RLs for one UE.
MaxnoofDCHs	Maximum no. of DCHs for one UE.
MaxnoofFDDneighbours	Maximum number of neighbouring FDD cell for one cell.
MaxnoofTDDneighbours	Maximum number of neighbouring TDD cell for one cell.

9.1.4.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
D-RNTI	O			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
RL Information Response		1		
RL ID	M			
SAI	M			
UL Interference Level	M			
Maximum Uplink Eb/No	M		Uplink Eb/No	
Minimum Uplink Eb/No	M		Uplink Eb/No	
Uplink Eb/No Target	O		Uplink Eb/No	
Downlink Eb/No Target	O			
UL CCTrCH Information		1..<maxnoofCCTrCHs>		
CCTrCH ID	M			
UL DPCH Information		1..<MaxnoofDPC Hs>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
DL CCTrCH Information		1..<maxnoofCCTrCHs>		
CCTrCH ID	M			
DL DPCH Information		1..<MaxnoofDPC Hs>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
DCH Information Response		1..<maxnoofDCHs>		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
Neighbouring FDD Cell Information	O	0..<maxnoofFDDneighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			Corresponds to Nu [TS25.104]
UARFCN	M			Corresponds to Nd [TS25.104]
Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			

Neighbouring TDD Cell Information	O	<i>0..<maxnoofTDDneighbours></i>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			<u>Corresponds to Nt [TS25.105]</u>
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case1			
PSCH Time Slot	C-Case2&3			
Criticality Diagnostics	O			

Condition	Explanation
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range bound	Explanation
MaxnoofDPCHs	Maximum no. of DPCHs for one CCTrCH.
MaxnoofDCHs	Maximum no. of DCHs for one UE.
MaxnoofFDDneighbours	Maximum number of neighbouring FDD cell for one cell
MaxnoofTDDneighbours	Maximum number of neighbouring TDD cell for one cell
MaxnoofCCTrCHs	Maximum no. of CCTrCH for one UE.

9.1.5 RADIO LINK SETUP FAILURE

9.1.5.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
D-RNTI	O			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
Unsuccessful RL Information Response		1...<maxnoofRLs>		
RL ID	M			
Cause	M			
Successful RL Information Response		0..<maxnoofRLs-1>		
RL ID	M			
SAI	M			
UL Interference Level	M			
DL Code Information		1..<maxnoofDL Codes>		
DL Scrambling Code	M			
FDD DL Channelisation Code Number	M			
Diversity Indication	M			
CHOICE <i>diversity Indication Combining</i>				
RL ID	M			Reference RL ID for the combining
<i>Non Combining or IE not present</i>				"IE not present" is equivalent to "First RL".
DCH Information Response		0..<maxnoofDCHs>		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
SSDT Support Indicator	M			
Neighbouring FDD Cell Information	O			
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			Corresponds to Nu [TS25.104]
UARFCN	M			Corresponds to Nd [TS25.104]
Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
Neighbouring TDD Cell Information	O			
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			Corresponds to Nt [TS25.105]
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case3			
PSCH Time Slot	C-Case2&3			
Uplink Eb/No Target	O		Uplink Eb/No	
Maximum Uplink Eb/No	M		Uplink Eb/No	
Minimum Uplink Eb/No	M		Uplink	

			Eb/No	
Downlink Eb/No Target	O			
Criticality Diagnostics	O			

Condition	Explanation
IfComb	This IE is present if the 'Diversity Indication' IE indicates 'combining' in the Node B.
IfNotComb	This IE is present if the 'Diversity Indication' IE indicates 'non combining' in the Node B.
NotFirstRL	The IE is present only if the RL is not the first RL in the RL Information
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range bound	Explanation
MaxnoofRLs	Maximum no. of RLs for one UE.
MaxnoofDCHs	Maximum no. of DCHs for one UE.

9.1.7 RADIO LINK ADDITION RESPONSE

9.1.7.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
RL Information Response		1..<maxnoofRLs-1>		
RL ID	M			
SAI	M			
UL Interference Level	M			
DL Code Information		1..<maxnoofDLCodes>		
DL Scrambling Code	M			
DL Channelisation Code	M			
Diversity Indication	M			
CHOICE <i>diversity indication</i>				
<i>Combining</i>				
RL ID	M			Reference RL-Id
<i>Non combining</i>				
DCH Information Response		1..<maxnoofDCHs>		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
SSDT Support Indicator	M			
Minimum Uplink Eb/No	M		Uplink Eb/No	
Maximum Uplink Eb/No	M		Uplink Eb/No	
Neighbouring FDD Cell Information		0..<maxnoofFDD Neighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			Corresponds to Nu [TS25.104]
UARFCN	M			Corresponds to Nd [TS25.104]
Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
Neighbouring TDD Cell Information		0..<maxnoofTDD Neighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			Corresponds to Nt [TS25.105]
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case1			
PSCH Time Slot	C-Case2&3			
Criticality Diagnostics	O			

Condition	Explanation
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range bound	Explanation
MaxnoofDCHs	Maximum number of dedicated channels on one RL
MaxnoofRLs	Maximum number of radio links for one UE
MaxnoofFDDNeighbours	Maximum number of neighbouring FDD cells for one cell
MaxnoofTDDNeighbours	Maximum number of neighbouring TDD cells for one cell
MaxnoofDLCodes	Maximum number of DL code information

9.1.7.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
RL Information Response		1		
RL ID	M			
SAI	M			
UL Interference Level	M			
UL CCH Information		1..<maxnoof CCHs>		
CCH ID	M			
UL DPCH Information		1..<maxnoOfDPCHs>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
DL CCH Information		1..<maxnoof CCHs>		
CCH ID	M			
DL DPCH information		1..<maxnoOfDPCHs>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
Diversity Indication	M			
CHOICE <i>diversity indication</i>				
<i>Combining</i>				
RL ID	M			Reference RL
<i>Non combining</i>				
DCH Information Response		1..<maxnoofDCHs >		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
Minimum Uplink Eb/No	M		Uplink Eb/No	
Maximum Uplink Eb/No	M		Uplink Eb/No	
Neighbouring FDD Cell Information		0..<maxnoofFDD Neighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			Corresponds to Nu [TS25.104]
UARFCN	M			Corresponds to Nd [TS25.104]

Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
Neighbouring TDD Cell Information		<i>0..<maxnoofTDD Neighbours></i>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			Corresponds to Nt [TS25.105]
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case1			
PSCH Time Slot	C-Case2&3			
Criticality Diagnostics	O			

Condition	Explanation
Case1	This IE is present only if Sync Case = Case1
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range Bound	Explanation
MaxnoofDCHs	Maximum number of dedicated channels on one RL
MaxnoofFDDNeighbours	Maximum number of neighbouring FDD cells for one cell
MaxnoofTDDNeighbours	Maximum number of neighbouring TDD cells for one cell
MaxnoofDLCodes	Maximum number of DL code information
MaxnoOfDPCHs	Maximum number of DPCH in one CCTrCH
MaxnoofCCTrCHs	no. of CCTrCH for one UE.

9.1.8 RADIO LINK ADDITION FAILURE

9.1.8.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
Unsuccessful RL Information Response		1..<maxnoofRLs-1>		
RL ID	M			
Cause	M			
Successful RL Information Response		1..<maxnoofRLs-2>		
RL ID	M			
SAI	M			
UL Interference Level	M			
DL Code Information		1..<maxnoofDLCodes>		
DL scrambling code	M			
DL channelisation code	M			
Diversity Indication	M			
CHOICE <i>diversity indication</i>				
<i>Combining</i>				
RL ID	M			Reference RL-Id
<i>Non combining</i>				
DCH Information Response		1..<maxnoofDCHs>		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
SSDT Support Indicator	M			
Minimum Uplink Eb/No	M		Uplink Eb/No	
Maximum Uplink Eb/No	M		Uplink Eb/No	
Neighbouring FDD Cell Information		0..<maxnoofFDD Neighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			Corresponds to Nu [TS25.104]
UARFCN	M			Corresponds to Nd [TS25.104]
Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
Neighbouring TDD Cell Information		0..<maxnoofTDD Neighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			Corresponds to Nt [TS25.105]
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case1			
PSCH Time Slot	C-Case2&3			
Criticality Diagnostics	O			

Condition	Explanation
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range bound	Explanation
MaxnoofDCHs	Maximum number of dedicated channels on one RL
MaxnoofRLs	Maximum number of radio links for one UE
MaxnoofFDDNeighbours	Maximum number of neighbouring FDD cells for one cell
MaxnoofTDDNeighbours	Maximum number of neighbouring TDD cells for one cell
MaxnoofDLCodes	Maximum number of DL code information

9.2.1.55 UARFCN

The UTRAN Absolute Radio Frequency Channel Number defines the carrier.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UARFCN			INTEGER (0.. 608 1638 3, ...)	Corresponds to: 1885.20.0MHz..2024. 83276.6MHz see ref. [5]25.104, 25.105.

9.3.3 PDU Definitions

--- partly omitted ---

```

-- *****
--
-- RADIO LINK SETUP RESPONSE FDD
--
-- *****

RadioLinkSetupResponseFDD ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container        {{RadioLinkSetupResponseFDD-IEs}},
    protocolExtensions         ProtocolExtensionContainer  {{RadioLinkSetupResponseFDD-
Extensions}}
    Extensions}
    OPTIONAL,
    ...
}

RadioLinkSetupResponseFDD-IEs RNSAP-PROTOCOL-IES ::= {
    optional { ID id-D-RNTI                CRITICALITY ignore TYPE D-RNTI                PRESENCE
    { ID id-CN-PS-DomainIdentifier         CRITICALITY ignore TYPE CN-PS-DomainIdentifier
    PRESENCE optional } |
    { ID id-CN-CS-DomainIdentifier         CRITICALITY ignore TYPE CN-CS-DomainIdentifier
    PRESENCE optional } |
    { ID id-RL-InformationResponseList-RL-SetupRspFDD
    CRITICALITY ignore TYPE RL-InformationResponseList-RL-SetupRspFDD
    PRESENCE mandatory } |
    { ID id-UL-EbNoTarget                  CRITICALITY ignore TYPE UL-EbNoTarget
    PRESENCE optional } |
    { ID id-DL-EbNoTarget                  CRITICALITY ignore TYPE DL-EbNoTarget
    PRESENCE optional } |
    { ID id-CriticalityDiagnostics         CRITICALITY ignore TYPE CriticalityDiagnostics
    PRESENCE optional },
    ...
}

RL-InformationResponseList-RL-SetupRspFDD ::= RL-IE-ContainerList { {RL-
InformationResponseItemIEs-RL-SetupRspFDD} }

RL-InformationResponseItemIEs-RL-SetupRspFDD RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationResponseItem-RL-SetupRspFDD
    CRITICALITY ignore TYPE RL-InformationResponseItem-RL-SetupRspFDD
    PRESENCE mandatory },

```



```

}
...
}
RL-InformationResponseItem-RL-SetupRspFDD ::= SEQUENCE {
    rL-ID                RL-ID,
    SAI                  SAI,
    ul-InterferenceLevel ScaledUL-InterferenceLevel,
    dl-CodeInformation   DL-CodeInformationList-RL-SetupRspFDD,
    sSDT-SupportIndicator SSDT-SupportIndicator,
    maxUL-EbNo          UL-EbNo,
    minUL-EbNo          UL-EbNo,
    neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-SetupRsp
OPTIONAL,
    neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-SetupRsp
OPTIONAL,
    iE-Extensions       ProtocolExtensionContainer { {RL-InformationResponseItem-RL-
SetupRspFDD-ExtIEs} } OPTIONAL,
    ...
}

RL-InformationResponseItem-RL-SetupRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CodeInformationList-RL-SetupRspFDD ::= SEQUENCE (SIZE (1..maxNoOfDL-Codes)) OF DL-
CodeInformationItem-RL-SetupRspFDD

DL-CodeInformationItem-RL-SetupRspFDD ::= SEQUENCE {
    dl-ScramblingCode      DL-ScramblingCode,
    fDD-DL-ChannelisationCodeNumber FDD-DL-ChannelisationCodeNumber,
    -- ** NOTE: How many alternatives are there, 2 or 3? **
    diversityIndication    CHOICE {
        combining          SEQUENCE {
            rL-ID          RL-ID
        },
        nonCombiningOrIENotPresent SEQUENCE {
            dCH-InformationResponse-RL-SetupRspFDD DCH-InformationResponseList-RL-SetupRspFDD
        }
    }
OPTIONAL
}
-- This IE is present only if the RL is not the first on in the RL Information -- ,
iE-Extensions           ProtocolExtensionContainer { {DL-CodeInformationItem-RL-
SetupRspFDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CodeInformationItem-RL-SetupRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DCH-InformationResponseList-RL-SetupRspFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-
InformationResponseItem-RL-SetupRspFDD

DCH-InformationResponseItem-RL-SetupRspFDD ::= SEQUENCE {
    dCH-ID                DCH-ID,
    bindingID              BindingID,
    transportLayerAddress  TransportLayerAddress,
    iE-Extensions         ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-
SetupRspFDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-InformationResponseItem-RL-SetupRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Both FDD and TDD messages use these definitions **
NeighbouringFDD-CellInformationList-RL-SetupRsp ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours)) OF
NeighbouringFDD-CellInformationItem-RL-SetupRsp

NeighbouringFDD-CellInformationItem-RL-SetupRsp ::= SEQUENCE {
    uC-ID                C-ID,
    cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,
    cN-CS-DomainIdentifier CN-CS-DomainIdentifier OPTIONAL,
    uARFCN_Nu            UARFCN,
    uARFCN_Nd            UARFCN,
    frameOffset          FrameOffset OPTIONAL,
    primaryScramblingCode PrimaryScramblingCode,
    primaryCPICH-Power   PrimaryCPICH-Power OPTIONAL,
    iE-Extensions       ProtocolExtensionContainer { {NeighbouringFDD-
CellInformationItem-RL-SetupRsp-ExtIEs} } OPTIONAL,
    ...
}

```

```

NeighbouringFDD-CellInformationItem-RL-SetupRsp-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringTDD-CellInformationList-RL-SetupRsp ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours)) OF
    NeighbouringTDD-CellInformationItem-RL-SetupRsp

NeighbouringTDD-CellInformationItem-RL-SetupRsp ::= SEQUENCE {
    c-ID                               C-ID,
    cN-PS-DomainIdentifier             CN-PS-DomainIdentifier OPTIONAL,
    cN-CS-DomainIdentifier             CN-CS-DomainIdentifier OPTIONAL,
    uARFCN_Nt                         UARFCN,
    uARFCN_Nd                         UARFCN,
    frameOffset                       FrameOffset OPTIONAL,
    cellParameterID                   CellParameterID,
    syncCase                           SyncCase,
    timeSlot                           TimeSlot OPTIONAL
    -- This IE is present only if SyncCase is Case1 -- ,
    pSCH-TimeSlot                     PSCH-TimeSlot OPTIONAL
    -- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
    ul-EbNo                            UL-EbNo OPTIONAL,
    dl-EbNo                            DL-EbNo OPTIONAL,
    iE-Extensions                     ProtocolExtensionContainer { {NeighbouringTDD-
CellInformationItem-RL-SetupRsp-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringTDD-CellInformationItem-RL-SetupRsp-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkSetupResponseFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK SETUP RESPONSE TDD
--
-- *****

RadioLinkSetupResponseTDD ::= SEQUENCE {
    protocolIEs                       ProtocolIE-Container      {{RadioLinkSetupResponseTDD-IEs}},
    protocolExtensions                 ProtocolExtensionContainer {{RadioLinkSetupResponseTDD-
Extensions}}
    OPTIONAL,
    ...
}

RadioLinkSetupResponseTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI                     CRITICALITY ignore   TYPE D-RNTI                PRESENCE
optional } |
    { ID id-CN-PS-DomainIdentifier     CRITICALITY ignore   TYPE CN-PS-DomainIdentifier
PRESENCE optional } |
    { ID id-CN-CS-DomainIdentifier     CRITICALITY ignore   TYPE CN-CS-DomainIdentifier
PRESENCE optional } |
    { ID id-RL-InformationResponse-RL-SetupRspTDD CRITICALITY ignore   TYPE RL-
InformationResponse-RL-SetupRspTDD PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics     CRITICALITY ignore   TYPE CriticalityDiagnostics
PRESENCE optional },
    ...
}

RL-InformationResponse-RL-SetupRspTDD ::= SEQUENCE {
    rL-ID                               RL-ID,
    sAI                                  SAI,
    ul-InterferenceLevel                ScaledUL-InterferenceLevel,
    maxUL-EbNo                          UL-EbNo,
    minUL-EbNo                          UL-EbNo,
    ul-EbNoTarget                       UL-EbNo OPTIONAL,
    dl-EbNoTarget                       DL-EbNo OPTIONAL,
    ul-CCTrCHInformation                UL-CCTrCHInformationList-RL-SetupRspTDD,
    dl-CCTrCHInformation                DL-CCTrCHInformationList-RL-SetupRspTDD,
    dCH-InformationResponse              DCH-InformationResponseList-RL-SetupRspTDD,
    neighbouringFDD-CellInformation     NeighbouringFDD-CellInformationList-RL-SetupRsp
OPTIONAL,
    neighbouringTDD-CellInformation     NeighbouringTDD-CellInformationList-RL-SetupRsp
OPTIONAL,
    iE-Extensions                       ProtocolExtensionContainer { {RL-InformationResponse-RL-
SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

RL-InformationResponse-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

```

-- ** NOTE: Shall this be made as an IE container? **
UL-CCTrCHInformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF UL-
CCTrCHInformationItem-RL-SetupRspTDD

UL-CCTrCHInformationItem-RL-SetupRspTDD ::= SEQUENCE {
    cCTrCH-ID          CCTrCH-ID,
    ul-DPCH-Information  UL-DPCH-InformationList-RL-SetupRspTDD,
    iE-Extensions       ProtocolExtensionContainer { {UL-CCTrCHInformationItem-RL-
SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

UL-CCTrCHInformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
UL-DPCH-InformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF UL-DPCH-
InformationItem-RL-SetupRspTDD

-- **NOTE: UL-DPCH-InformationItem-RL-SetupRspTDD and DL-DPCH-InformationItem-RL-SetupRspTDD
-- are currently similar. Combine them? **
UL-DPCH-InformationItem-RL-SetupRspTDD ::= SEQUENCE {
    dPCH-ID          DPCH-ID,
    tDD-ChannelisationCode  TDD-ChannelisationCode,
    burstType          BurstType,
    midambleShift      MidambleShift,
    timeSlot           TimeSlot,
    tDD-PhysicalChannelOffset  TDD-PhysicalChannelOffset,
    repetitionPeriod   RepetitionPeriod,
    repetitionLength   RepetitionLength,
    tFCI-Presence      TFCI-Presence,
    iE-Extensions      ProtocolExtensionContainer { {UL-DPCH-InformationItem-RL-
SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

UL-DPCH-InformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CCTrCHInformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF DL-
CCTrCHInformationItem-RL-SetupRspTDD

DL-CCTrCHInformationItem-RL-SetupRspTDD ::= SEQUENCE {
    cCTrCH-ID          CCTrCH-ID,
    dl-DPCH-Information  DL-DPCH-InformationList-RL-SetupRspTDD,
    iE-Extensions       ProtocolExtensionContainer { {DL-CCTrCHInformationItem-RL-
SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CCTrCHInformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-DPCH-InformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF DL-DPCH-
InformationItem-RL-SetupRspTDD

DL-DPCH-InformationItem-RL-SetupRspTDD ::= SEQUENCE {
    dPCH-ID          DPCH-ID,
    tDD-ChannelisationCode  TDD-ChannelisationCode,
    burstType          BurstType,
    midambleShift      MidambleShift,
    timeSlot           TimeSlot,
    tDD-PhysicalChannelOffset  TDD-PhysicalChannelOffset,
    repetitionPeriod   RepetitionPeriod,
    repetitionLength   RepetitionLength,
    tFCI-Presence      TFCI-Presence,
    iE-Extensions      ProtocolExtensionContainer { {DL-DPCH-InformationItem-RL-
SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-DPCH-InformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-InformationResponseList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-
InformationResponseItem-RL-SetupRspTDD

DCH-InformationResponseItem-RL-SetupRspTDD ::= SEQUENCE {
    dCH-ID          DCH-ID,
    bindingID       BindingID,

```

```

transportLayerAddress      TransportLayerAddress,
iE-Extensions              ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-
SetupRspTDD-ExtIEs} } OPTIONAL,
...
}

DCH-InformationResponseItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

RadioLinkSetupResponseTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- *****
--
-- RADIO LINK SETUP FAILURE FDD
--
-- *****

RadioLinkSetupFailureFDD ::= SEQUENCE {
    protocolIEs              ProtocolIE-Container      {{RadioLinkSetupFailureFDD-IEs}},
    protocolExtensions       ProtocolExtensionContainer {{RadioLinkSetupFailureFDD-
Extensions}}
    OPTIONAL,
    ...
}

RadioLinkSetupFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI              CRITICALITY ignore   TYPE D-RNTI              PRESENCE
mandatory } |
    { ID id-CN-PS-DomainIdentifier CRITICALITY ignore   TYPE CN-PS-DomainIdentifier
PRESENCE mandatory } |
    { ID id-CN-CS-DomainIdentifier CRITICALITY ignore   TYPE CN-CS-DomainIdentifier
PRESENCE mandatory } |
    { ID id-UnsuccessfulRL-InformationResponseList-RL-SetupFailureFDD
CRITICALITY ignore   TYPE UnsuccessfulRL-InformationResponseList-RL-
SetupFailureFDD
PRESENCE mandatory } |
    { ID id-SuccessfulRL-InformationResponseList-RL-SetupFailureFDD
CRITICALITY ignore   TYPE SuccessfulRL-InformationResponseList-RL-
SetupFailureFDD
PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics CRITICALITY ignore   TYPE CriticalityDiagnostics
PRESENCE optional },
    ...
}

UnsuccessfulRL-InformationResponseList-RL-SetupFailureFDD ::= RL-IE-ContainerList {
{UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD-IEs} }

UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD
CRITICALITY ignore   TYPE UnsuccessfulRL-InformationResponse-RL-
SetupFailureFDD
PRESENCE mandatory },
    ...
}

UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD ::= SEQUENCE {
    rL-ID                      RL-ID,
    cause                       Cause,
    iE-Extensions              ProtocolExtensionContainer { {UnsuccessfulRL-
InformationResponse-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

SuccessfulRL-InformationResponseList-RL-SetupFailureFDD ::= RL-IE-ContainerList { {SuccessfulRL-
InformationResponse-RL-SetupFailureFDD-IEs} }

SuccessfulRL-InformationResponse-RL-SetupFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-SuccessfulRL-InformationResponse-RL-SetupFailureFDD
CRITICALITY ignore   TYPE SuccessfulRL-InformationResponse-RL-
SetupFailureFDD
PRESENCE mandatory },
    ...
}

SuccessfulRL-InformationResponse-RL-SetupFailureFDD ::= SEQUENCE {
    rL-ID                      RL-ID,
    sAI                        SAI,
    ul-InterferenceLevel       ScaledUL-InterferenceLevel,
    dl-CodeInformation          DL-CodeInformationList-RL-SetupFailureFDD,

```

```

sSDT-SupportIndicator          SSdT-SupportIndicator,
neighbouringFDD-CellInformation  NeighbouringFDD-CellInformationList-RL-SetupFailureFDD
OPTIONAL,
neighbouringTDD-CellInformation  NeighbouringTDD-CellInformationList-RL-SetupFailureFDD
OPTIONAL,
ul-EbNoTarget                  UL-EbNo,
maxUL-EbNo                      UL-EbNo,
minUL-EbNo                      UL-EbNo,
dl-EbNoTarget                  DL-EbNo,
iE-Extensions                  ProtocolExtensionContainer { {SuccessfulRL-InformationResponse-
RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
...
}
-- ** NOTE: Shall this be made as an IE container? **
DL-CodeInformationList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNoOfDL-Codes)) OF DL-
CodeInformationItem-RL-SetupFailureFDD

SuccessfulRL-InformationResponse-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

DL-CodeInformationItem-RL-SetupFailureFDD ::= SEQUENCE {
dl-ScramblingCode              DL-ScramblingCode,
fDD-DL-ChannelisationCodeNumber  FDD-DL-ChannelisationCodeNumber,
-- ** NOTE: How many alternatives are there, 2 or 3? **
diversityIndication            CHOICE {
combining                       SEQUENCE {
rL-ID                           RL-ID
},
nonCombiningOrIENotPresent      SEQUENCE {
dCH-InformationResponse-RL-SetupFailureFDD  DCH-InformationResponseList-RL-
SetupFailureFDD OPTIONAL
}
},
OPTIONAL
-- This IE is present only if the RL is not the first on in the RL Information -- ,
iE-Extensions                  ProtocolExtensionContainer { {DL-CodeInformationItem-RL-
SetupFailureFDD-ExtIEs} } OPTIONAL,
...
}

DL-CodeInformationItem-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- ** NOTE: Shall this be made as an IE container? **
DCH-InformationResponseList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-
InformationResponseItem-RL-SetupFailureFDD

DCH-InformationResponseItem-RL-SetupFailureFDD ::= SEQUENCE {
dCH-ID                          DCH-ID,
bindingID                       BindingID,
transportLayerAddress            TransportLayerAddress,
iE-Extensions                  ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-
SetupFailureFDD-ExtIEs} } OPTIONAL,
...
}

DCH-InformationResponseItem-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

NeighbouringFDD-CellInformationList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfFDD-
Neighbours)) OF
NeighbouringFDD-CellInformationItem-RL-SetupFailureFDD

NeighbouringFDD-CellInformationItem-RL-SetupFailureFDD ::= SEQUENCE {
uC-ID                            C-ID,
cN-PS-DomainIdentifier            CN-PS-DomainIdentifier  OPTIONAL,
cN-CS-DomainIdentifier            CN-CS-DomainIdentifier  OPTIONAL,
uARFCN_Nu                        UARFCN,
uARFCN_Nd                        UARFCN,
frameOffset                      FrameOffset  OPTIONAL,
primaryScramblingCode            PrimaryScramblingCode,
primaryCPICH-Power               PrimaryCPICH-Power  OPTIONAL,
iE-Extensions                  ProtocolExtensionContainer { {NeighbouringFDD-
CellInformationItem-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
...
}

NeighbouringFDD-CellInformationItem-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

NeighbouringTDD-CellInformationList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfTDD-
Neighbours)) OF
NeighbouringTDD-CellInformationItem-RL-SetupFailureFDD

```

```

NeighbouringTDD-CellInformationItem-RL-SetupFailureFDD ::= SEQUENCE {
    uC-ID                               C-ID,
    cN-PS-DomainIdentifier               CN-PS-DomainIdentifier   OPTIONAL,
    cN-CS-DomainIdentifier               CN-CS-DomainIdentifier   OPTIONAL,
    uARFCN_Nu                            UARFCN,
    uARFCN_Nd                            UARFCN,
    frameOffset                          FrameOffset           OPTIONAL,
    cellParameterID                      CellParameterID,
    syncCase                              SyncCase,
    timeSlot                              TimeSlot,
    pSCH-TimeSlot                         PSCH-TimeSlot         OPTIONAL
    -- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
    iE-Extensions                        ProtocolExtensionContainer { {NeighbouringTDD-
CellInformationItem-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringTDD-CellInformationItem-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkSetupFailureFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

--- partly omitted ---

```

-- *****
--
-- RADIO LINK ADDITION RESPONSE FDD
--
-- *****

RadioLinkAdditionResponseFDD ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container        {{RadioLinkAdditionResponseFDD-
IEs}},
    protocolExtensions         ProtocolExtensionContainer {{RadioLinkAdditionResponseFDD-
Extensions}}
    ...
}

RadioLinkAdditionResponseFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI              CRITICALITY ignore TYPE D-RNTI                      PRESENCE
optional } |
    { ID id-RL-InformationResponseList-RL-AdditionRspFDD
CRITICALITY ignore TYPE RL-InformationResponseList-RL-AdditionRspFDD
PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics
PRESENCE optional },
    ...
}

RL-InformationResponseList-RL-AdditionRspFDD ::= RL-IE-ContainerList { {RL-
InformationResponseItemIEs-RL-AdditionRspFDD} }

RL-InformationResponseItemIEs-RL-AdditionRspFDD RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationResponseItem-RL-AdditionRspFDD
CRITICALITY ignore TYPE RL-InformationResponseItem-RL-AdditionRspFDD
PRESENCE mandatory },
    ...
}

RL-InformationResponseItem-RL-AdditionRspFDD ::= SEQUENCE {
    rL-ID                        RL-ID,
    sAI                          SAI,
    ul-InterferenceLevel         ScaledUL-InterferenceLevel,
    dl-CodeInformation           DL-CodeInformationList-RL-AdditionRspFDD,
    sSDT-SupportIndicator        SSDT-SupportIndicator,
    maxUL-EbNo                  UL-EbNo,
    minUL-EbNo                  UL-EbNo,
    neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-SetupRsp
OPTIONAL,
    neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-SetupRsp
OPTIONAL,
    iE-Extensions               ProtocolExtensionContainer { {RL-InformationResponseItem-RL-
AdditionRspFDD-ExtIEs} } OPTIONAL,
    ...
}

```

```

}

RL-InformationResponseItem-RL-AdditionRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CodeInformationList-RL-AdditionRspFDD ::= SEQUENCE (SIZE (1..maxNoOfDL-Codes)) OF DL-
CodeInformationItem-RL-AdditionRspFDD

DL-CodeInformationItem-RL-AdditionRspFDD ::= SEQUENCE {
    dl-ScramblingCode          DL-ScramblingCode,
    fdd-DL-ChannelisationCodeNumber  FDD-DL-ChannelisationCodeNumber,
    -- ** NOTE: How many alternatives are there, 2 or 3? **
    diversityIndication        CHOICE {
        combining              SEQUENCE {
            rL-ID              RL-ID
        },
        nonCombiningOrIENotPresent  SEQUENCE {
            dch-InformationResponse-RL-AdditionRspFDD  DCH-InformationResponseList-RL-
            AdditionRspFDD  OPTIONAL
        }
    },
    -- This IE is present only if the RL is not the first on in the RL Information -- ,
    iE-Extensions              ProtocolExtensionContainer { {DL-CodeInformationItem-RL-
    AdditionRspFDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CodeInformationItem-RL-AdditionRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DCH-InformationResponseList-RL-AdditionRspFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-
InformationResponseItem-RL-AdditionRspFDD

DCH-InformationResponseItem-RL-AdditionRspFDD ::= SEQUENCE {
    dch-ID                      DCH-ID,
    bindingID                   BindingID,
    transportLayerAddress        TransportLayerAddress,
    iE-Extensions              ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-
    AdditionRspFDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-InformationResponseItem-RL-AdditionRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Both FDD and TDD messages use these definitions **
NeighbouringFDD-CellInformationList-RL-AdditionRsp ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours))
OF
    NeighbouringFDD-CellInformationItem-RL-AdditionRsp

NeighbouringFDD-CellInformationItem-RL-AdditionRsp ::= SEQUENCE {
    uC-ID                        C-ID,
    cN-PS-DomainIdentifier        CN-PS-DomainIdentifier  OPTIONAL,
    cN-CS-DomainIdentifier        CN-CS-DomainIdentifier  OPTIONAL,
    uARFCN_Nu                     UARFCN,
    uARFCN_Nd                     UARFCN,
    frameOffset                   FrameOffset  OPTIONAL,
    primaryScramblingCode          PrimaryScramblingCode,
    primaryCPICH-Power            PrimaryCPICH-Power  OPTIONAL,
    iE-Extensions              ProtocolExtensionContainer { {NeighbouringFDD-
    CellInformationItem-RL-AdditionRsp-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringFDD-CellInformationItem-RL-AdditionRsp-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringTDD-CellInformationList-RL-AdditionRsp ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours))
OF
    NeighbouringTDD-CellInformationItem-RL-AdditionRsp

NeighbouringTDD-CellInformationItem-RL-AdditionRsp ::= SEQUENCE {
    uC-ID                        C-ID,
    cN-PS-DomainIdentifier        CN-PS-DomainIdentifier  OPTIONAL,
    cN-CS-DomainIdentifier        CN-CS-DomainIdentifier  OPTIONAL,
    uARFCN_Nt                     UARFCN,
    frameOffset                   FrameOffset  OPTIONAL,
    cellParameterID              CellParameterID,
    syncCase                      SyncCase,
    timeSlot                      TimeSlot,

```

```

    pSCH-TimeSlot          PSCH-TimeSlot          OPTIONAL
    -- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
    iE-Extensions          ProtocolExtensionContainer { {NeighbouringTDD-
CellInformationItem-RL-AdditionRsp-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringTDD-CellInformationItem-RL-AdditionRsp-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkAdditionResponseFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK ADDITION RESPONSE TDD
--
-- *****

RadioLinkAdditionResponseTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container          {{RadioLinkAdditionResponseTDD-
IEs}},
    protocolExtensions  ProtocolExtensionContainer {{RadioLinkAdditionResponseTDD-
Extensions}}
    ...
}

RadioLinkAdditionResponseTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI          CRITICALITY ignore TYPE D-RNTI          PRESENCE
optional } |
    { ID id-RL-InformationResponse-RL-AdditionRspTDD
          CRITICALITY ignore TYPE RL-InformationResponse-RL-AdditionRspTDD
PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics          CRITICALITY ignore TYPE CriticalityDiagnostics
PRESENCE optional },
    ...
}

RL-InformationResponse-RL-AdditionRspTDD ::= SEQUENCE {
    rL-ID          RL-ID,
    SAI          SAI,
    ul-InterferenceLevel          ScaledUL-InterferenceLevel,
    ul-CCTrCHInformation          UL-CCTrCHInformationList-RL-AdditionRspTDD,
    dl-CCTrCHInformation          DL-CCTrCHInformationList-RL-AdditionRspTDD,
    diversityIndication          CHOICE {
        combining          SEQUENCE {
            rL-ID          RL-ID
        },
        nonCombiningOrIENotPresent          SEQUENCE {
            dCH-InformationResponse-RL-AdditionRspFDD          DCH-InformationResponseList-RL-
AdditionRspFDD OPTIONAL
        }
    },
    maxUL-EbNo          UL-EbNo,
    minUL-EbNo          UL-EbNo,
    neighbouringFDD-CellInformation          NeighbouringFDD-CellInformationList-RL-AdditionRspTDD
OPTIONAL,
    neighbouringTDD-CellInformation          NeighbouringTDD-CellInformationList-RL-AdditionRspTDD
OPTIONAL,
    iE-Extensions          ProtocolExtensionContainer { {RL-InformationResponse-RL-
AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

RL-InformationResponse-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
UL-CCTrCHInformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF UL-
CCTrCHInformationItem-RL-AdditionRspTDD

UL-CCTrCHInformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    cCTrCH-ID          CCTrCH-ID,
    ul-DPCH-Information          UL-DPCH-InformationList-RL-AdditionRspTDD,
    iE-Extensions          ProtocolExtensionContainer { {UL-CCTrCHInformationItem-RL-
AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

UL-CCTrCHInformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```



```

-- ** NOTE: Shall this be made as an IE container? **
UL-DPCH-InformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF UL-DPCH-
InformationItem-RL-AdditionRspTDD

UL-DPCH-InformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    dPCH-ID                DPCH-ID,
    tDD-ChannelisationCode TDD-ChannelisationCode,
    burstType              BurstType,
    midambleShift          MidambleShift,
    timeSlot               TimeSlot,
    offset                 Offset,
    tDD-PhysicalChannelOffset TDD-PhysicalChannelOffset,
    repetitionPeriod       RepetitionPeriod,
    repetitionLength       RepetitionLength,
    tFCI-Presence          TFCI-Presence,
    iE-Extensions          ProtocolExtensionContainer { {UL-DPCH-InformationItem-RL-
AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

UL-DPCH-InformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CCTrCHInformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF DL-
CCTrCHInformationItem-RL-AdditionRspTDD

DL-CCTrCHInformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    cCTrCH-ID              CCTrCH-ID,
    dl-DPCH-Information    DL-DPCH-InformationList-RL-AdditionRspTDD,
    iE-Extensions          ProtocolExtensionContainer { {DL-CCTrCHInformationItem-RL-
AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CCTrCHInformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-DPCH-InformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF DL-DPCH-
InformationItem-RL-AdditionRspTDD

DL-DPCH-InformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    dPCH-ID                DPCH-ID,
    tDD-ChannelisationCode TDD-ChannelisationCode,
    burstType              BurstType,
    midambleShift          MidambleShift,
    timeSlot               TimeSlot,
    tDD-PhysicalChannelOffset TDD-PhysicalChannelOffset,
    repetitionPeriod       RepetitionPeriod,
    repetitionLength       RepetitionLength,
    tFCI-Presence          TFCI-Presence,
    iE-Extensions          ProtocolExtensionContainer { {DL-DPCH-InformationItem-RL-
AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-DPCH-InformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringFDD-CellInformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfFDD-
Neighbours)) OF
    NeighbouringFDD-CellInformationItem-RL-AdditionRspTDD

NeighbouringFDD-CellInformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    uC-ID                C-ID,
    cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,
    cN-CS-DomainIdentifier CN-CS-DomainIdentifier OPTIONAL,
    uARFCN_Nu            UARFCN,
    uARFCN_Nd            UARFCN,
    frameOffset          FrameOffset OPTIONAL,
    primaryScramblingCode PrimaryScramblingCode,
    primaryCPICH-Power   PrimaryCPICH-Power OPTIONAL,
    iE-Extensions        ProtocolExtensionContainer { {NeighbouringFDD-
CellInformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringFDD-CellInformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

```

NeighbouringTDD-CellInformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfTDD-
Neighbours)) OF
    NeighbouringTDD-CellInformationItem-RL-AdditionRspTDD

NeighbouringTDD-CellInformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    uC-ID                               C-ID,
    cN-PS-DomainIdentifier                CN-PS-DomainIdentifier    OPTIONAL,
    cN-CS-DomainIdentifier                CN-CS-DomainIdentifier    OPTIONAL,
    uARFCN_Nt                             UARFCN,
    frameOffset                           FrameOffset            OPTIONAL,
    cellParameterID                       CellParameterID,
    syncCase                               SyncCase,
    timeSlot                               TimeSlot,
    pSCH-TimeSlot                         PSCH-TimeSlot          OPTIONAL
    -- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
    iE-Extensions                         ProtocolExtensionContainer { {NeighbouringTDD-
CellInformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringTDD-CellInformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkAdditionResponseTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK ADDITION FAILURE FDD
--
-- *****

RadioLinkAdditionFailureFDD ::= SEQUENCE {
    protocolIEs                         ProtocolIE-Container    {{RadioLinkAdditionFailureFDD-IEs}},
    protocolExtensions                   ProtocolExtensionContainer {{RadioLinkAdditionFailureFDD-
Extensions}}
    OPTIONAL,
    ...
}

RadioLinkAdditionFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UnsuccessfulRL-InformationResponseList-RL-AdditionFailureFDD
    CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponseList-RL-
AdditionFailureFDD
    PRESENCE mandatory } |
    { ID id-SuccessfulRL-InformationResponseList-RL-AdditionFailureFDD
    CRITICALITY ignore TYPE SuccessfulRL-InformationResponseList-RL-
AdditionFailureFDD
    PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics        CRITICALITY ignore TYPE CriticalityDiagnostics
    PRESENCE optional },
    ...
}

UnsuccessfulRL-InformationResponseList-RL-AdditionFailureFDD ::= RL-IE-ContainerList {
{UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD-IEs} }

UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD
    CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponse-RL-
AdditionFailureFDD
    PRESENCE mandatory },
    ...
}

UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD ::= SEQUENCE {
    rL-ID                               RL-ID,
    cause                               Cause,
    iE-Extensions                       ProtocolExtensionContainer { {UnsuccessfulRL-
InformationResponse-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

SuccessfulRL-InformationResponseList-RL-AdditionFailureFDD ::= RL-IE-ContainerList { {SuccessfulRL-
InformationResponse-RL-AdditionFailureFDD-IEs} }

SuccessfulRL-InformationResponse-RL-AdditionFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-SuccessfulRL-InformationResponse-RL-AdditionFailureFDD
    CRITICALITY ignore TYPE SuccessfulRL-InformationResponse-RL-
AdditionFailureFDD
    PRESENCE mandatory },

```

```

}
...
SuccessfulRL-InformationResponse-RL-AdditionFailureFDD ::= SEQUENCE {
    rL-ID                RL-ID,
    sAI                  SAI,
    ul-InterferenceLevel ScaledUL-InterferenceLevel,
    dl-CodeInformation   DL-CodeInformationList-RL-AdditionFailureFDD,
    sSDT-SupportIndicator SSDT-SupportIndicator,
    maxUL-EbNo          UL-EbNo,
    minUL-EbNo          UL-EbNo,
    neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-
AdditionFailureFDD OPTIONAL,
    neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-
AdditionFailureFDD OPTIONAL,
    iE-Extensions       ProtocolExtensionContainer { {SuccessfulRL-InformationResponse-
RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

SuccessfulRL-InformationResponse-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CodeInformationList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNoOfDL-Codes)) OF DL-
CodeInformationItem-RL-AdditionFailureFDD

DL-CodeInformationItem-RL-AdditionFailureFDD ::= SEQUENCE {
    dl-ScramblingCode      DL-ScramblingCode,
    dl-ChannelisationCode  DL-ChannelisationCode,
    diversityIndication    CHOICE {
        combining          SEQUENCE {
            rL-ID          RL-ID
        },
        nonCombiningOrIENotPresent SEQUENCE {
            dCH-InformationResponse-RL-AdditionFailureFDD DCH-InformationResponseList-RL-
AdditionFailureFDD OPTIONAL
        }
    },
    iE-Extensions         ProtocolExtensionContainer { {DL-CodeInformationItem-RL-
AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CodeInformationItem-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DCH-InformationResponseList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-
InformationResponseItem-RL-AdditionFailureFDD

DCH-InformationResponseItem-RL-AdditionFailureFDD ::= SEQUENCE {
    dCH-ID                DCH-ID,
    bindingID             BindingID,
    transportLayerAddress TransportLayerAddress,
    iE-Extensions         ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-
AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-InformationResponseItem-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringFDD-CellInformationList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfFDD-
Neighbours)) OF
    NeighbouringFDD-CellInformationItem-RL-AdditionFailureFDD

NeighbouringFDD-CellInformationItem-RL-AdditionFailureFDD ::= SEQUENCE {
    uC-ID                C-ID,
    cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,
    cN-CS-DomainIdentifier CN-CS-DomainIdentifier OPTIONAL,
    uARFCN_Nu            UARFCN,
    uARFCN_Nd            UARFCN,
    frameOffset          FrameOffset OPTIONAL,
    primaryScramblingCode PrimaryScramblingCode,
    cPICH-Power          CPICH-Power OPTIONAL,
    iE-Extensions         ProtocolExtensionContainer { {NeighbouringFDD-
CellInformationItem-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringFDD-CellInformationItem-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {

```

```

}
...
}
NeighbouringTDD-CellInformationList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfTDD-
Neighbours)) OF
  NeighbouringTDD-CellInformationItem-RL-AdditionFailureFDD

NeighbouringTDD-CellInformationItem-RL-AdditionFailureFDD ::= SEQUENCE {
  uC-ID                               C-ID,
  cN-PS-DomainIdentifier              CN-PS-DomainIdentifier   OPTIONAL,
  cN-CS-DomainIdentifier              CN-CS-DomainIdentifier   OPTIONAL,
  uARFCN_Nt                          UARFCN,
  frameOffset                         FrameOffset           OPTIONAL,
  cellParameterID                    CellParameterID,
  syncCase                            SyncCase,
  timeSlot                            TimeSlot,
  pSCH-TimeSlot                      PSCH-TimeSlot         OPTIONAL
  -- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
  iE-Extensions                      ProtocolExtensionContainer { {NeighbouringTDD-
CellInformationItem-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
  ...
}

NeighbouringTDD-CellInformationItem-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

RadioLinkAdditionFailureFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

```

--- partly omitted ---

CHANGE REQUEST

Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.

25.423 CR 060r1

Current Version: **3.0.0**

GSM (AA.BB) or 3G (AA.BBB) specification number ↑

↑ CR number as allocated by MCC support team

For submission to: **RAN#7**
list expected approval meeting # here ↑

for approval
for information

strategic
non-strategic (for SMG use only)

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: <ftp://ftp.3gpp.org/Information/CR-Form-v2.doc>

Proposed change affects:
(at least one should be marked with an X)

(U)SIM ME UTRAN / Radio Core Network

Source: **R-WG3** **Date:**

Subject: **Clarification on the C-RNTI parameter in UL Signalling Transfer procedure**

Work item:

Category:
(only one category shall be marked with an X)

F Correction	<input checked="" type="checkbox"/>	Release: Phase 2	<input type="checkbox"/>
A Corresponds to a correction in an earlier release	<input type="checkbox"/>	Release 96	<input type="checkbox"/>
B Addition of feature	<input type="checkbox"/>	Release 97	<input type="checkbox"/>
C Functional modification of feature	<input type="checkbox"/>	Release 98	<input type="checkbox"/>
D Editorial modification	<input type="checkbox"/>	Release 99	<input checked="" type="checkbox"/>
		Release 00	<input type="checkbox"/>

Reason for change: **The use of the C-RNTI parameter is not clearly defined in 25.423, especially related to the allocation and release of the identifier. This shall be clarified in the description of the Uplink Signalling Transfer procedure and C-RNTI parameter.**

Clauses affected: **8.2.1.2, 9.2.1.12**

Other specs affected:

Other 3G core specifications	<input type="checkbox"/>	→ List of CRs:	
Other GSM core specifications	<input type="checkbox"/>	→ List of CRs:	
MS test specifications	<input type="checkbox"/>	→ List of CRs:	
BSS test specifications	<input type="checkbox"/>	→ List of CRs:	
O&M specifications	<input type="checkbox"/>	→ List of CRs:	

Other comments:

8.2.1.2 Successful Operation

When the DERNC receives an Uu message where the UE addressing information is S-RNTI and SRNC-ID, ~~and the SRNC-ID identifies another RNC than the CRNC, the CDRNC shall send the UPLINK SIGNALLING TRANSFER INDICATION message to the SRNC identified by the SRNC-ID received from the UE.~~

The DERNC shall include in the message the URA Identity of the URA where the Uu message was received, an indication on whether or not the accessed cell belongs to multiple URAs, and the RNC Identity of all other RNCs that are having at least one cell within the URA where the Uu message was received.

The DRNC shall include in the message the C-RNTI that it allocates to identify the UE in the radio interface. When DRNC allocates a new C-RNTI to the UE, it releases the old one.

If the message received from the UE was the first message from that UE in the DERNC, the DERNC shall include the D-RNTI and the identifiers for the CN CS Domain and CN PS Domain that the DERNC is connected to in the UPLINK SIGNALLING TRANSFER INDICATION message. These CN Domain Identifiers shall be based on the LAC and RAC respectively of the cell where the message was received from the UE.

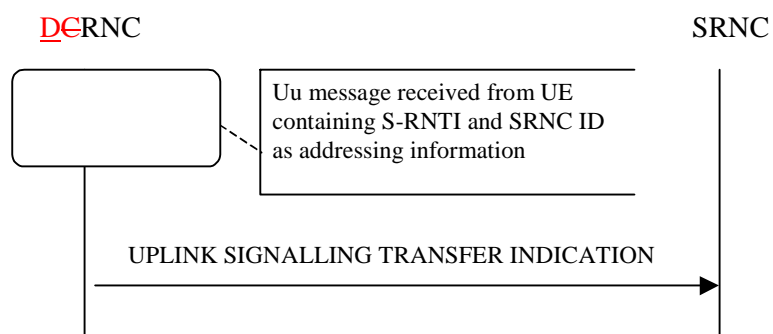


Figure 1: Uplink Signalling Transfer procedure, Successful Operation.

9.2.1.12 C-RNTI

C-RNTI (Cell RNTI) is the UE identifier allocated by ~~in~~ the CDRNS to be used over the radio interface. It is unique in the cell. One UE context has one unique C-RNTI value allocated in the DRNS.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
C-RNTI			INTEGER(0..65535)	

CHANGE REQUEST

Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.

25.423 CR 043r1

Current Version: **3.0.0**

GSM (AA.BB) or 3G (AA.BBB) specification number ↑

↑ CR number as allocated by MCC support team

For submission to: **RAN#7**
list expected approval meeting # here ↑

for approval
for information

strategic
non-strategic (for SMG use only)

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: ftp://ftp.3gpp.org/Information/CR-Form-v2.doc

Proposed change affects:
(at least one should be marked with an X)

(U)SIM ME UTRAN / Radio Core Network

Source: R-WG3 **Date:**

Subject: Replacement of the mean bit rate parameter with the 'TrCh Source Statistics Descriptor'

Work item:

Category:
(only one category shall be marked with an X)

F Correction
A Corresponds to a correction in an earlier release
B Addition of feature
C Functional modification of feature
D Editorial modification

Release: Phase 2
Release 96
Release 97
Release 98
Release 99
Release 00

Reason for change:

The Mean bit rate parameter (expected mean bit rate in one RL, used for Admission control reason in the DRNS) has been introduced in WG3#8. In WG3#9 it has been noted that the definition and use of the Mean Bit Rate parameter is not completed. From the current description, the following issues are not clear:

- How Mean bit rate is estimated from the RAB parameters.
- How AC may use the mean bit rate information without knowing which Eb/No is used for the transmission (the BLER is specified per transport channel).

Time after this discussion, SA2 introduced a new RAB parameters, Source Statistics Descriptor, that is intended to be used for the resource reservation in UTRAN (Ref. 23.107). source statistics descriptor has currently two values: 'speech' and 'unknown'. Since the radio resource reservation are performed in the DRNS, this parameter shall be mapped into a correspondent Transport channel parameter (TrCh source statistics Descriptor) and included in the relevant RNSAP messages to replace the mean bit rate parameter. The additional value RRC is also introduced in order to identify the transport channel with RRC signalling.

Clauses affected: 8.3.4.2, 8.3.7.2, 9.1.3, 9.1.11, 9.1.17, 9.2.1.27, 9.3.3, 9.3.4, 9.3.6

Other specs affected:

Other 3G core specifications → List of CRs:
Other GSM core specifications → List of CRs:
MS test specifications → List of CRs:
BSS test specifications → List of CRs:
O&M specifications → List of CRs:

Other comments:

8.3.4.2 Successful Operation

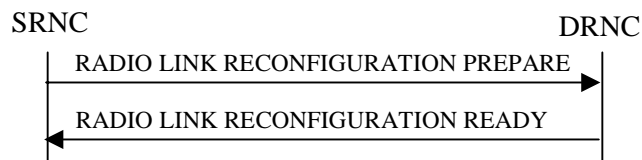


Figure 1: Synchronised Radio Link Reconfiguration Preparation procedure, Successful Operation

The Synchronised Radio Link Reconfiguration Preparation procedure is initiated by the SRNC by sending the RADIO LINK RECONFIGURATION PREPARE message to the DRNC.

Upon reception, the DRNS shall reserve necessary resources for the new configuration of the Radio Link(s) according to the parameters given in the message. Unless specified below, the meaning of parameters is specified in other specifications.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *Allowed Queuing Time* IE the DRNS may queue the request before providing a response to the SRNC.

DCH Modification :

If the RADIO LINK RECONFIGURATION PREPARE message includes the *Allocation/Retention Priority* IE for a DCH to be modified, the DRNS should use this information when reserving resources for this DCH in the new configuration.

[Editor's note: The priority handling in the DRNS has not been discussed in RAN WG3. Neither has the possibilities for pre-emption (not retaining a resource) of DCHs/RLs. The handling of the *Allocation/Retention Priority* IE is thus not clear and is regarded as FFS.]

If the RADIO LINK RECONFIGURATION PREPARE message includes the *Frame Handling Priority* IE for a DCH to be modified, the DRNS should store this information for this DCH in the new configuration. The received Frame Handling Priority should be used when prioritising between different frames in the downlink on the radio interface in congestion situations within the DRNS once the new configuration has been activated.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *Transport Format Set (UL)* IE for a DCH to be modified, the DRNS shall apply the new Transport Format Set in the Uplink of this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *Transport Format Set (DL)* IE for a DCH to be modified, the DRNS shall apply the new Transport Format Set in the Downlink of this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *UL DCH FP Mode* IE for a DCH to be modified, the DRNS shall apply the new DCH FP Mode in the Uplink of the user plane for this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes on the *ToAWS* IE for a DCH to be modified, the DRNS shall apply the new ToAWS in the user plane for this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes on the *ToAWE* IE for a DCH to be modified, the DRNS shall apply the new ToAWE in the user plane for this DCH in the new configuration.

DCH Addition:

If the RADIO LINK RECONFIGURATION PREPARE message includes any DCH to be added to the Radio Link(s), the DRNS shall reserve necessary resources for the new configuration of the Radio Link(s) according to the parameters given in the message and include these DCH in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *DCH Combination Indicator* IE for a DCH to be added, the DRNS shall

1. treat all DCHs with the same value of this IE as a set of co-ordinated DCHs and

2. include this DCH in the new configuration only if it can include all DCHs with the same value of the *DCH Combination Indicator* IE in the new configuration

The DRNS should use the *Allocation/Retention Priority* IE received for a DCH to be added when reserving resources for this DCH in the new configuration.

[Editor's note: The priority handling in the DRNS has not been discussed in RAN WG3. Neither has the possibilities for pre-emption (not retaining a resource) of DCHs/RLs. The handling of the *Allocation/Retention Priority* IE is thus not clear and is regarded as FFS.]

The DRNS should store the *Frame Handling Priority* IE received for a DCH to be added in the new configuration. The received Frame Handling Priority should be used when prioritising between different frames in the downlink on the radio interface in congestion situations within the DRNS once the new configuration has been activated.

The DRNS may use the included *RLC Mode* IE to optimise the power control.

The DRNS shall use the included *UL DCH FP Mode* IE for a DCH to be added as the new DCH FP Mode in the Uplink of the user plane for this DCH in the new configuration.

The DRNS shall use the included *ToAWS* IE for a DCH to be added as the new Time of Arrival Window Start Point in the user plane for this DCH in the new configuration.

The DRNS shall use the included *ToAWE* IE for a DCH to be added as the new Time of Arrival Window End Point in the user plane for this DCH in the new configuration.

DCH Deletion:

If the RADIO LINK RECONFIGURATION PREPARE message includes any DCH to be deleted from the Radio Link(s), the DRNS shall not include this DCH in the new configuration.

If all of the DCHs belonging to a set of co-ordinated DCHs are requested to be deleted, the DRNS shall not include this set of co-ordinated DCHs in the new configuration

Physical Channel Modification:

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes the *Uplink Scrambling Code* IE, the DRNS shall apply this Uplink Scrambling Code to the new configuration.]

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes one or more *Uplink Channelisation Code* IEs, the DRNS shall apply the new Uplink Channelisation Code(s) in the new configuration.

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes one or more *Spreading Factor of Channelisation Code (DL)* IE, for each *Spreading Factor of Channelisation Code (DL)* IE the DRNS shall allocate one new Downlink Channelisation Code per Radio Link and apply the new Downlink Channelisation Code(s) to the new configuration. Each Downlink Channelisation Code allocated for the new configuration shall be included as a *Channelisation Code (DL)* IE in the RADIO LINK RECONFIGURATION READY message when sent to the SRNC.]

The DRNS shall use the *TFCS (UL)* IE when reserving resources for the uplink of the new configuration. The DRNS shall apply the new TFCS in the Uplink of [TDD – the CCTrCH of] the new configuration.

The DRNS shall use the *TFCS (DL)* IE when reserving resources for the downlink of the new configuration. The DRNS shall apply the new TFCS in the Downlink of [TDD – the CCTrCH of] the new configuration.

~~If the RADIO LINK RECONFIGURATION PREPARE message includes the *Mean Bit Rate (UL)* IE, the DRNS should use this information when reserving resources for the Uplink of the new configuration.~~

~~If the RADIO LINK RECONFIGURATION PREPARE message includes the *Mean Bit Rate (DL)* IE, the DRNS should use this information when reserving resources for the Downlink of the new configuration.~~

[Editor's note: There is presently no clear definition of the *Mean Bit Rate* IEs. The handling of these IEs is thus regarded as FFS.]

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes on the *UL DPCCH Structure* IE, group the DRNS shall apply the new Uplink DPCCH Structure to the new configuration.]

SSDT Activation/Deactivation:

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes the *SSDT Indication* IE set to "SSDT Active in the UE", the DRNS may activate SSDT using the *SSDT Cell Identity* IE and *SSDT Cell Identity Length* IE in the new configuration.]

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes the SSDT Indication IE set to "SSDT not Active in the UE", the DRNS shall deactivate SSDT in the new configuration.]

If the requested modifications are allowed by the DRNS, and the DRNS has successfully reserved the required resources for the new configuration of the Radio Link(s) it shall respond to the SRNC with the RADIO LINK RECONFIGURATION READY message.

The DRNS decides the maximum and minimum Eb/No for the uplink of the Radio Link(s) and shall return this in the *Maximum Uplink Eb/No* IE and *Minimum Uplink Eb/No* IE for each Radio Link in the RADIO LINK RECONFIGURATION READY message.

[TDD – The DRNC shall include all the IEs corresponding to the new physical channel parameters for the DL DPCH and/or the UL DPCH to be reconfigured in the RADIO LINK RECONFIGURATION READY message.]

[Editor's note: Which information in the RL RECONFIGURATION PREPARE message triggers the DRNC to include any of the following *Optional* TDD information?:

- a) DL DPCH Group
- b) UL DPCH Group
- c) TDD Physical Channel Offset, *Repetition* Length, and TFCI Presence IEs as part of the DL DPCH Group
- d) TDD Physical Channel Offset, *Repetition* Length, and TFCI Presence IEs as part of the UL DPCH Group.]

In case of a set of co-ordinated DCHs requiring a new transport bearer on Iur the *DCH to be Added* IE group or the *DCH to be Modified* IE group shall be included only for one of the DCHs in the set of co-ordinated DCHs.

In case of a Radio Link being combined with another Radio Link within the DRNS the *DCH to be Added* IE group and the *DCH to be Modified* IE group shall be included only for one of the combined Radio Links.

8.3.7.2 Successful Operation

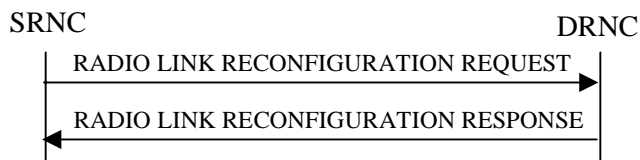


Figure 2: Unsynchronised Radio Link Reconfiguration procedure, Successful Operation

The Unsynchronised Radio Link Reconfiguration procedure is initiated by the SRNC by sending the RADIO LINK RECONFIGURATION REQUEST message to the DRNC.

Upon reception, the DRNS shall modify the configuration of the Radio Link(s) according to the parameters given in the message. Unless specified below, the meaning of parameters is specified in other specifications.

If the RADIO LINK RECONFIGURATION REQUEST message includes the *Allowed Queuing Time* IE the DRNS may queue the request before providing a response to the SRNC.

DCH Modification:

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *Allocation/Retention Priority* IE for a DCH to be modified, the DRNS should use this information when reserving resources for this DCH in the new configuration.

[Editor's note: The priority handling in the DRNS has not been discussed in RAN WG3. Neither has the possibilities for pre-emption (not retaining a resource) of DCHs/RLs. The handling of the *Allocation/Retention Priority* IE is thus not clear and is regarded as FFS.]

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *Frame Handling Priority* IE for a DCH to be modified, the DRNS should store this information for this DCH in the new configuration. The received Frame Handling Priority should be used when prioritising between different frames in the downlink on the radio interface in congestion situations within the DRNS once the new configuration has been activated.

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *Transport Format Set (UL)* IE for a DCH to be modified, the DRNS shall apply the new Transport Format Set in the Uplink of this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *Transport Format Set (DL)* IE for a DCH to be modified, the DRNS shall apply the new Transport Format Set in the Downlink of this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *UL DCH FP Mode* IE for a DCH to be modified, the DRNS shall apply the new DCH FP Mode in the Uplink of the user plane for this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *ToAWS* IE for a DCH to be modified, the DRNS shall apply the new ToAWS in the user plane for this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *ToAWE* IE for a DCH to be modified, the DRNS shall apply the new ToAWE in the user plane for this DCH in the new configuration.

DCH Addition:

If the RADIO LINK RECONFIGURATION REQUEST message includes any DCH to be added to the Radio Link(s), the DRNS shall reserve necessary resources for the new configuration of the Radio Link(s) according to the parameters given in the message and include these DCH in the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes the *DCH Combination Indicator* IE for a DCH to be added, the DRNS shall.

1. treat all DCHs with the same value of this IE as a set of co-ordinated DCHs and
2. include this DCH in the new configuration only if it can include all DCHs with the same value of the *DCH Combination Indicator* IE in the new configuration

- The DRNS should use the *Allocation/Retention Priority* IE received for a DCH to be added when allocating resources for this DCH in the new configuration.

[Editor's note: The priority handling in the DRNS has not been discussed in RAN WG3. Neither has the possibilities for pre-emption (not retaining a resource) of DCHs/RLs. The handling of the *Allocation/Retention Priority* IE is thus not clear and is regarded as FFS.]

The DRNS should store the *Frame Handling Priority* IE received for a DCH to be added in the new configuration. The received Frame Handling Priority should be used when prioritising between different frames in the downlink on the radio interface in congestion situations within the DRNS once the new configuration has been activated.

If the RADIO LINK RECONFIGURATION REQUEST message includes the *RLC Mode* IE, the DRNS may use this information to optimise the power control.

The DRNS shall use the included *UL DCH FP Mode* IE for a DCH to be added as the new DCH FP Mode in the Uplink of the user plane for this DCH in the new configuration.

The DRNS shall use the included *ToAWS* IE for a DCH to be added as the new Time of Arrival Window Start Point in the user plane for this DCH in the new configuration.

The DRNS shall use the included *ToAWE* IE for a DCH to be added as the new Time of Arrival Window End Point in the user plane for this DCH in the new configuration.

DCH Deletion:

If the RADIO LINK RECONFIGURATION REQUEST message includes any DCH to be deleted from the Radio Link(s), the DRNS shall not include this DCH in the new configuration.

If all of the DCHs belonging to a set of co-ordinated DCHs are requested to be deleted, the DRNS shall not include this set of co-ordinated DCHs in the new configuration

Physical Channel Modification:

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *TFCS (UL)* IE, the DRNS shall apply the new TFCS in the Uplink of [TDD – the CCTrCH of] the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *TFCS (DL)* IE, the DRNS shall apply the new TFCS in the Downlink of [TDD – the CCTrCH of] the new configuration.

~~If the RADIO LINK RECONFIGURATION REQUEST message includes on the *Mean Bit Rate (UL)* IE, the DRNS should use this information when reserving resources for the Uplink of the new configuration.~~

~~If the RADIO LINK RECONFIGURATION REQUEST message includes on the *Mean Bit Rate (DL)* IE, the DRNS should use this information when reserving resources for the Downlink of the new configuration.~~

[Editor's note: There is presently no clear definition of the *Mean Bit Rate* IEs. The handling of these IEs is thus regarded as FFS.]

If the requested modifications are allowed by the DRNS, the DRNS has successfully allocated the required resources, and changed to the new configuration it shall respond to the SRNC with the RADIO LINK RECONFIGURATION RESPONSE message.

The DRNS decides the maximum and minimum Eb/No for the uplink of the Radio Link(s) and shall return this in the IEs *Maximum Uplink Eb/No* and *Minimum Uplink Eb/No* for each Radio Link in the RADIO LINK RECONFIGURATION RESPONSE message.

In case of a set of co-ordinated DCHs requiring a new transport bearer on Iur the *DCH to be Added* IE group or the *DCH to be Modified* IE group shall be included only for one of the DCH in the set of co-ordinated DCHs.

In case of a Radio Link being combined with another Radio Link within the DRNS the *DCH to be Added* IE group and the *DCH to be Modified* IE group shall be included only for one of the combined Radio Links.

9.1.3 RADIO LINK SETUP REQUEST

9.1.3.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
S-RNTI	M			
D-RNTI	O			
Allowed Queuing time	O			
UL DPCH Information		1		
UL Scrambling Code	M			
Min UL Channelisation Code Length	M			
Max Number of UL DPDCHs	C – CodeLen			
Puncture Limit	M			For the UL.
UL Transport Format Combination Set	M			
UL DPCCH Slot Format	M			
UL Eb/No Target	O			
Diversity mode	M			
D Field Length	C-FB			
SSDT Cell ID Length	O			
S Field Length	O			
Mean Bit Rate	O			For the UL.
DL DPCH Information		1		
Transport Format Combination Set	M			
DL DPCH Slot Format	M			
TFCI Signalling Mode	M			
TFCI Presence	C- SlotFormat			
Multiplexing Position	M			
Power Offset Information		1		
PO1	M		Power Offset	Power offset for the TFCI bits.
PO2	M		Power Offset	Power offset for the TPC bits.
PO3	M		Power Offset	Power offset for the pilot bits.
TPC Downlink Step Size	M			
Mean Bit Rate	O			For the DL.
DCH Information		1..<maxnoofDCHs >		
DCH ID	M			
DCH Combination Ind	O			
RLC Mode	M			
Tr Ch Source Statistics Descriptor	M			
Transport Format Set	M			For the UL.
Transport Format Set	M			For the DL.
BLER	M			For the UL.
BLER	M			For the DL.
Allocation/Retention Priority	M			
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP Mode	M			
ToAWS	M			
ToAWE	M			
RL Information		1...<maxnoofRLs		

		>		
RL ID	M			
C-ID	M			
Frame Offset	M			
Chip Offset	M			
Propagation Delay	O			
Diversity Control Field	C – NotFirstRL			
Initial DL TX Power	O		DL Power	
Primary CPICH Ec/Io	O			
SSDT Cell ID	O			

Condition	Explanation
CodeLen	This IE is present only if "Min UL Channelisation Code len" equals to 4
FB	This IE is present only if Feed Back mode diversity is activated.
SlotFormat	This IE is only present if the DL DPCH Slot Format is equal to any of the values 12 to 16.
NotFirstRL	This IE is present only if the RL is not the first one in the RL Information .

Range bound	Explanation
MaxnoofDCHs	Maximum no. of DCHs for one UE.
MaxnoofRLs	Maximum no. of RLs for one UE.

9.1.3.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
S-RNTI	M			
D-RNTI	O			
Allowed Queuing time	O			
Mean Bit Rate	Ø			For the UL.
Mean Bit Rate	Ø			For the DL.
UL CCH Information		1..<maxnoofCCHs>		
CCH ID	M			
TFCS	M			For the UL.
TFCI Coding	M			
Puncture Limit	M			
DL CCH Information		1..<maxnoofCCHs>		
CCH ID	M			
TFCS	M			For the DL.
TFCI Coding	M			
Puncture Limit	M			
DCH Information		1..<maxnoofDCHs>		
DCH ID	M			
CCH ID	M			UL CCH in which the DCH is mapped
CCH ID	M			DL CCH in which the DCH is mapped
DCH Combination Ind	O			
RLC Mode	M			
Tr Ch Source Statistics Descriptor	M			
Transport Format Set	M			For the UL.
Transport Format Set	M			For the DL.
BLER	M			For the UL.
BLER	M			For the DL.
Allocation/Retention Priority	M			
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP Mode	M			
ToAWS	M			
ToAWE	M			
RL Information		1		
RL ID	M			
C-ID	M			
Frame Offset	M			
Primary CCPCH RSCP	O			

Range bound	Explanation
MaxnoofDCHs	Maximum no. of DCHs for one UE.
MaxnoofCCHs	Maximum no. of CCH for one UE.

9.1.11 RADIO LINK RECONFIGURATION PREPARE

9.1.11.1 FDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			
Allowed Queuing Time	O			
UL DPCH Information		0..1		
UL Scrambling code	O			
Min UL Channelisation Code Length	O			
Max Number of UL DPDCHs	C – CodeLen			
Puncture Limit	O			For the UL.
TFCS	O			TFCS for the UL.
UL DPCH Slot Format	O			
SSDT Cell Identity Length	O			
S-Field Length	O			
– Mean Bit Rate	Ø			For the UL.
DL DPCH Information		0..1		
TFCS	O			TFCS for the DL.
DL DPCH Slot Format	O			
TFCI Signalling Mode	O			
TFCI Presence	C- SlotFormat			
MultiplexingPosition	O			
– Mean Bit Rate	Ø			For the DL.
DCHs to Modify		0..<maxnoofDCHs >		
DCH ID	M			
Transport Format Set	O			For the UL.
Transport Format Set	O			For the DL.
Allocation/Retention Priority	O			
Frame Handling Priority	O			
UL FP Mode	O			
ToAWS	O			
ToAWE	O			
DCHs to Add		0..<maxnoofDCHs >		
DCH ID	M			
DCH Combination Indicator	O			
RLC Mode	M			
Tr Ch Source Statistics Descriptor	M			
Transport Format Set	M			For the UL.
Transport Format Set	M			For the DL.
BLER	M			For the UL.
BLER	M			For the DL.
Allocation/Retention Priority	M			
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP Mode	M			
ToAWS	M			
ToAWE	M			
DCHs to Delete		0..<maxnoofDCHs >		
DCH ID	M			
RL Information		0..<maxnoofRLs >		
RL ID	M			

SSDT Indication	O			
SSDT Cell Identity	C - SSDTIndON			

Condition	Explanation
SSDTIndON	The IE may be present if the SSDT Indication is set to 'SSDT Active in the UE'.
CodeLen	This IE is present only if "Min UL Channelisation Code length" equals to 4.
SlotFormat	This IE is only present if the DL DPCH Slot Format is equal to any of the values 12 to 16.

Range bound	Explanation
MaxnoofDCHs	Maximum number of DCHs for a UE.
MaxnoofRLs	Maximum number of RLs for a UE.

9.1.11.2 TDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			
Allowed Queuing Time	O			
Mean Bit Rate	Ø			For the UL
Mean Bit Rate	Ø			For the DL
UL CCH Information		0..<maxnoofCCHs>		
CCH ID	M			
TFCS	O			For the UL.
TFCI Coding	O			
Puncture Limit	O			
DL CCH Information		0..<maxnoofCCHs>		
CCH ID	M			
TFCS	O			For the DL.
TFCI Coding	O			
Puncture Limit	O			
DCHs to Modify		0..<maxnoofDCHs>		
DCH ID	M			
CCH Id	O			UL CCH in which the DCH is mapped.
CCH Id	O			DL CCH in which the DCH is mapped
Transport Format Set	O			For the UL.
Transport Format Set	O			For the DL.
Allocation/Retention Priority	O			
Frame Handling Priority	O			
UL FP Mode	O			
ToAWS	O			
ToAWE	O			
DCHs to Add		0..<maxnoofDCHs>		
DCH ID	M			
CCH Id	M			UL CCH in which the DCH is mapped.
CCH Id	M			DL CCH in which the DCH is mapped
DCH Combination Indicator	O			
RLC Mode	M			
<u>Tr Ch Source Statistics Descriptor</u>	<u>M</u>			
Transport Format Set	M			For the UL.
Transport Format Set	M			For the DL.
BLER	M			For the UL.
BLER	M			For the DL.
Allocation/Retention Priority	M			
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP Mode	M			
ToAWS	M			
ToAWE	M			
DCHs to Delete		0..<maxnoofDCHs>		
DCH ID	M			

Range bound	Explanation
MaxnoofDCHs	Maximum number of DCHs for a UE.
MaxnoofCCTrCHs	Maximum number of CCTrCHs for a UE.

9.1.16 RADIO LINK RECONFIGURATION REQUEST

9.1.16.1 FDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			
Allowed Queuing Time	O			
UL DPCH Information		0..1		
TFCS	O			TFCS for the UL.
Mean Bit Rate	O			
DL DPCH Information		0..1		
TFCS	O			TFCS for the DL.
TFCI Signalling Mode	O			
Mean Bit Rate	O			
DCHs to Modify		0..<maxnoofDCHs >		
DCH ID	M			
Transport Format Set	O			For the UL.
Transport Format Set	O			For the DL.
Allocation/Retention Priority	O			
Frame Handling Priority	O			
UL FP Mode	O			
ToAWS	O			
ToAWE	O			
DCHs to add		0..<maxnoofDCHs >		
DCH ID	M			
DCH Combination Ind	O			
RLC Mode	M			
<u>Tr Ch Source Statistics Descriptor</u>	<u>M</u>			
Transport Format Set	M			For the UL.
Transport Format Set	M			For the DL.
Allocation/Retention Priority	M			
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP mode	M			
ToAWS	M			
ToAWE	M			
DCHs to Delete		0..<maxnoofDCHs >		
DCH ID	M			

Range Bound	Explanation
MaxnoofDCHs	Maximum number of DCHs for a UE.

9.1.16.2 TDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			
Allowed Queuing Time	O			
Mean Bit Rate	O			For the UL
Mean Bit Rate	O			For the DL
UL CCTrCH Information		<i>0..<maxnoofCCTrCHs></i>		
CCTrCH ID	M			
TFCS	M			
DL CCTrCH Information		<i>0..<maxnoofCCTrCHs></i>		
CCTrCH ID	M			
TFCS	M			
DCHs to Modify		<i>0..<maxnoofDCHs></i>		
DCH ID	M			
CCTrCH ID	O			UL CCTrCH in which the DCH is mapped.
CCTrCH ID	O			DL CCTrCH in which the DCH is mapped
Transport Format Set	O			For the UL.
Transport Format Set	O			For the DL.
Allocation/Retention Priority	O			
Frame Handling Priority	O			
UL FP Mode	O			
ToAWS	O			
ToAWE	O			
DCHs to Add		<i>0..<maxnoofDCHs></i>		
DCH ID	M			
RLC Mode	M			
<u>Tr Ch Source Statistics Descriptor</u>	<u>M</u>			
CCTrCH ID	M			UL CCTrCH in which the DCH is mapped.
CCTrCH ID	M			DL CCTrCH in which the DCH is mapped
DCH Combination Ind	O			
Transport Format Set	M			For the UL.
Transport Format Set	M			For the DL.
Allocation/Retention Priority	M			
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP Mode	M			
ToAWS	M			
ToAWE	M			
DCHs to Delete		<i>0..<maxnoofDCHs></i>		
DCH ID	M			

Range Bound	Explanation
MaxnoofDCHs	Maximum number of DCHs for a UE.
MaxnoofCCTrCHs	Maximum number of CCTrCHs for a UE.

9.2.1.27 Mean Bit Rate TrCh Source Statistics Descriptor

It is the mean user data rate that is expected to be carried by the transport channels of one radio link. Defines the statistics of the data transmitted in the transport channel. This information may be used in reserving resources in the DRNS.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
<u>Mean Bit Rate TrCh Source Statistics Descriptor</u>			INTEGER (1...2000)EN <u>UMERATED</u> (speech, RRC, unknown, ...)	Kbit/seconds' <u>Speech</u> ' = Statistics of the data corresponds to speech. 'RRC' = Statistics of the data corresponds to RRC signalling 'Unknown' = The statistics of the data is unknown

9.3.3 PDU Definitions

```

-- *****
--
-- PDU definitions for RNSAP.
--
-- *****

RNSAP-PDU-Contents -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

-- *****
--
-- IE parameter types from other modules.
--
-- *****

IMPORTS
    AllocationRetentionPriority,
    AllowedQueuingTime,
    BLER,
    BindingID,
    BurstType,
    C-ID,
    C-RNTI,
    CCTrCH-ID,
    CFN,
    CN-CS-DomainIdentifier,
    CN-PS-DomainIdentifier,
    CPICH-EcIo,
    CPICH-Power,
    Cause,
    CellParameterID,
    ChipOffset,
    CompressedModeMethod,
    CriticalityDiagnostics,
    D-FieldLength,
    D-RNTI,
    D-RNTI-ReleaseIndication,
    DCH-CombinationInd,
    DCH-ID,
    DL-ChannelisationCode,
    DL-DPCCH-SlotFormat,
    DL-DPCH-SlotNumber,
    DL-EbNo,
    DL-EbNoTarget,
    DL-FrameType,
    DL-Power,
    DL-ScramblingCode,
    DPCH-ID,
    DRX-Parameter,
    DedicatedMeasurementValue,

```


DiversityControlField,
DiversityMode,
FACH-DataFrameSize,
FACH-InitialWindowSize,
FACH-PriorityIndicator,
FDD-DL-ChannelisationCodeNumber,
FDD-S-CCPCH-Offset,
FrameHandlingPriority,
FrameOffset,
GapPeriod,
GapPositionMode,
L3-Information,
MAC-c-SDU-Length,
MaxNrOfUL-DPCHs,
| ——— ~~MeanBitRate,~~
MeasurementCharacteristics,
MeasurementID,
MidambleShift,
MinUL-ChannelisationCodeLength,
MultipleURAsIndicator,
MultiplexingPosition,
Offset,
PD,
PSCH-PCCPCH-TimeSlot,
PSCH-TimeSlot,
PayloadCRC-PresenceIndicator,
PilotBitsUsedIndicator,
PowerControlMode,
PowerOffset,
PowerResumeMode,
PrimaryCCPCH-RSCP,
PrimaryCPICH-EcNo,
PrimaryCPICH-Power,
PrimaryScramblingCode,
PropagationDelay,
PunctureLimit,
RANAP-RelocationInformation,
RL-ID,
RLC-Mode,
RNC-ID,
RepetitionLength,
RepetitionPeriod,
ReportCharacteristics,
S-FieldLength,
S-RNTI,
SAI,
SN,
SRNC-ID,
SSDT-CellID,
SSDT-CellID-Length,
SSDT-Indication,
SSDT-SupportIndicator,
ScaledUL-InterferenceLevel,
ScramblingCode,
ScramblingCodeChange,
SecondaryCCPCH-SlotFormat,

```

SyncCase,
TDD-ChannelisationCode,
TDD-PhysicalChannelOffset,
TFCI-Coding,
TFCI-Presence,
TFCI-SignallingMode,
TGD,
TGL,
TPC-StepSize,
TimeSlot,
ToAWE,
ToAWS,
TransportBearerID,
TransportBearerRequestIndicator,
TransportFormatCombinationSet,
TransportFormatSet,
TransportLayerAddress,
TrCh-SrcStatisticsDescr,
UARFCN,
UC-ID,
UL-DL-CompressedModeSelection,
UL-DPCCH-SlotFormat,
UL-EbNo,
UL-EbNoTarget,
UL-FP-Mode,
UL-ScramblingCode,
URA-ID
FROM RNSAP-IEs

PrivateExtensionContainer{},
ProtocolExtensionContainer{},
ProtocolIE-ContainerList{},
ProtocolIE-ContainerPair{},
ProtocolIE-ContainerPairList{},
ProtocolIE-Container{},
RNSAP-PRIVATE-EXTENSION,
RNSAP-PROTOCOL-EXTENSION,
RNSAP-PROTOCOL-IES,
RNSAP-PROTOCOL-IES-PAIR
FROM RNSAP-Containers

maxNoOfDL-Codes,
maxNrOfCCTrCHs,
maxNrOfDCHs,
maxNrOfDL-Codes,
maxNrOfDPCHs,
maxNrOfFACH-FD-Size,
maxNrOfFDD-Neighbours,
maxNrOfMACcSDU-Length,
maxNrOfTDD-Neighbours,
maxNrOfRLs,
maxNrOfSCCPCHs,
maxRNCinURA,

id-AllowedQueuingTime,
id-BindingID,

```

id-C-ID,
id-C-RNTI,
id-CCTrCH-ID,
id-CFN,
id-CN-CS-DomainIdentifier,
id-CN-PS-DomainIdentifier,
id-Cause,
id-CompressedModeMethod,
id-CriticalityDiagnostics,
id-D-RNTI,
id-D-RNTI-ReleaseIndication,
id-DCH-AddItem,
id-DCH-AddItem-RL-ReconfPrepFDD,
id-DCH-AddItem-RL-ReconfPrepTDD,
id-DCH-AddItem-RL-ReconfReadyFDD,
id-DCH-AddItem-RL-ReconfRqstFDD,
id-DCH-AddItem-RL-ReconfRqstTDD,
id-DCH-AddList-RL-ReconfPrepFDD,
id-DCH-AddList-RL-ReconfPrepTDD,
id-DCH-AddList-RL-ReconfRqstFDD,
id-DCH-AddList-RL-ReconfRqstTDD,
id-DCH-DeleteItem-RL-ReconfPrepFDD,
id-DCH-DeleteItem-RL-ReconfPrepTDD,
id-DCH-DeleteItem-RL-ReconfRqstFDD,
id-DCH-DeleteItem-RL-ReconfRqstTDD,
id-DCH-DeleteList-RL-ReconfPrepFDD,
id-DCH-DeleteList-RL-ReconfPrepTDD,
id-DCH-DeleteList-RL-ReconfRqstFDD,
id-DCH-DeleteList-RL-ReconfRqstTDD,
id-DCH-Information-RL-SetupReqFDD,
id-DCH-InformationItem-RL-SetupReqFDD,
id-DCH-InformationItem-RL-SetupReqTDD,
id-DCH-InformationList-RL-SetupReqTDD,
id-DCH-ModifyItem,
id-DCH-ModifyItem-RL-ReconfPrepFDD,
id-DCH-ModifyItem-RL-ReconfPrepTDD,
id-DCH-ModifyItem-RL-ReconfReadyFDD,
id-DCH-ModifyItem-RL-ReconfRqstFDD,
id-DCH-ModifyItem-RL-ReconfRqstTDD,
id-DCH-ModifyList-RL-ReconfPrepFDD,
id-DCH-ModifyList-RL-ReconfPrepTDD,
id-DCH-ModifyList-RL-ReconfRqstFDD,
id-DCH-ModifyList-RL-ReconfRqstTDD,
id-DL-CCTrCH-Information-RL-ReconfPrepTDD,
id-DL-CCTrCH-Information-RL-ReconfRqstTDD,
id-DL-CCTrCH-InformationList-RL-ReconfPrepTDD,
id-DL-CCTrCH-InformationList-RL-ReconfRqstTDD,
id-DL-CCTrChInformationItem-RL-SetupReqTDD,
id-DL-CCTrChInformationList-RL-SetupReqTDD,
id-DL-CodeInformation-PhyChReconfRqstFDD,
id-DL-DPCH-Information,
id-DL-DPCH-Information-RL-SetupReqFDD,
id-DL-DPCH-InformationList-PhyChReconfRqstTDD,
id-DL-DPCH-InformationList-RL-ReconfReadyTDD,
id-DL-EbNoTarget,
id-DL-FrameType,

~~id-DL-MeanBitRate,~~
 id-DL-ReferencePowerInformation-DL-PC-Rqst,
 id-DRX-Parameter,
 id-DedicatedMeasurementObjectType-DM-Rprt,
 id-DedicatedMeasurementObjectType-DM-Rqst,
 id-DedicatedMeasurementObjectType-DM-Rspns,
 id-FACH-InfoForOptionalGroupS-CCPCH,
 id-FACH-InfoForOptionals-CCPCH,
 id-FACH-InfoForS-CCPCH-CoupledToPRACH,
 id-GapPositionMode,
 id-L3-Information,
 id-MeasurementCharacteristics,
 id-MeasurementID,
 id-MultipleURAsIndicator,
 id-PD,
 id-PagingArea-PagingRqst,
 id-PowerControlMode,
 id-PowerResumeMode,
 id-ProcedureScope-DL-PC-Rqst,
 id-RANAP-RelocationInformation,
 id-RL-Information-PhyChReconfRqstFDD,
 id-RL-Information-PhyChReconfRqstTDD,
 id-RL-Information-RL-AdditionRqstFDD,
 id-RL-Information-RL-AdditionRqstTDD,
 id-RL-Information-RL-DeletionRqst,
 id-RL-Information-RL-FailureInd,
 id-RL-Information-RL-ReconfPrepFDD,
 id-RL-Information-RL-RestoreInd,
 id-RL-Information-RL-SetupReqFDD,
 id-RL-Information-RL-SetupReqTDD,
 id-RL-InformationItem-DM-Rprt,
 id-RL-InformationItem-DM-Rqst,
 id-RL-InformationItem-DM-Rspns,
 id-RL-InformationItem-RL-SetupReqFDD,
 id-RL-InformationList-RL-AdditionRqstFDD,
 id-RL-InformationList-RL-DeletionRqst,
 id-RL-InformationList-RL-FailureInd,
 id-RL-InformationList-RL-ReconfPrepFDD,
 id-RL-InformationList-RL-RestoreInd,
 id-RL-InformationResponse-RL-AdditionRspTDD,
 id-RL-InformationResponse-RL-ReconfReadyTDD,
 id-RL-InformationResponse-RL-SetupRspTDD,
 id-RL-InformationResponseItem-RL-AdditionRspFDD,
 id-RL-InformationResponseItem-RL-ReconfReadyFDD,
 id-RL-InformationResponseItem-RL-SetupRspFDD,
 id-RL-InformationResponseList-RL-AdditionRspFDD,
 id-RL-InformationResponseList-RL-ReconfReadyFDD,
 id-RL-InformationResponseList-RL-SetupRspFDD,
 id-RL-ReconfigurationFailure-RL-ReconfFail,
 id-RL-ReconfigurationFailureList-RL-ReconfFail,
 id-RNCsWithCellsInTheAccessedURA-List-UL-ST-Ind,
 id-ReportCharacteristics,
 id-S-RNTI,
 id-SAI,
 id-SN,
 id-SRNC-ID,

```

id-ScramblingCodeChange,
id-SuccessfulRL-InformationResponse-RL-AdditionFailureFDD,
id-SuccessfulRL-InformationResponse-RL-SetupFailureFDD,
id-SuccessfulRL-InformationResponseList-RL-AdditionFailureFDD,
id-SuccessfulRL-InformationResponseList-RL-SetupFailureFDD,
id-TGD,
id-TGL,
id-TGP1,
id-TGP2,
id-TransportBearerID,
id-TransportBearerRequestIndicator,
id-TransportLayerAddress,
id-UC-ID,
id-UL-CCTrCH-Information-RL-ReconfPrepTDD,
id-UL-CCTrCH-Information-RL-ReconfRqstTDD,
id-UL-CCTrCH-InformationList-RL-ReconfPrepTDD,
id-UL-CCTrCH-InformationList-RL-ReconfRqstTDD,
id-UL-CCTrChInformationItem-RL-SetupReqTDD,
id-UL-CCTrChInformationList-RL-SetupReqTDD,
id-UL-DL-CompressedModeSelection,
id-UL-DPCH-Information,
id-UL-DPCH-Information-RL-SetupReqFDD,
id-UL-DPCH-InformationList-PhyChReconfRqstTDD,
id-UL-DPCH-InformationList-RL-ReconfReadyTDD,
id-UL-DeltaEbNo,
id-UL-DeltaEbNoAfter,
id-UL-EbNoTarget,
id-UL-MeanBitRate,
id-URA-ID,
id-UnsuccessfulRL-InformationResponse,
id-UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD,
id-UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD,
id-UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD,
id-UnsuccessfulRL-InformationResponseList-RL-AdditionFailureFDD,
id-UnsuccessfulRL-InformationResponseList-RL-SetupFailureFDD
FROM RNSAP-Constants;

```

```
-- *****
```

```
--
```

```
-- Common Container List
```

```
--
```

```
-- *****
```

```

DCH-IE-ContainerList      { RNSAP-PROTOCOL-IES : IEsSetParam } ::= ProtocolIE-ContainerList { 1, maxNrOfDCHs, { IEsSetParam } }
RL-IE-ContainerList      { RNSAP-PROTOCOL-IES : IEsSetParam } ::= ProtocolIE-ContainerList { 1, maxNrOfRLs, { IEsSetParam } }
CCTrCH-IE-ContainerList  { RNSAP-PROTOCOL-IES : IEsSetParam } ::= ProtocolIE-ContainerList { 1, maxNrOfCCTrCHs, { IEsSetParam } }
DL-Code-IE-ContainerList { RNSAP-PROTOCOL-IES : IEsSetParam } ::= ProtocolIE-ContainerList { 1, maxNrOfDL-Codes, { IEsSetParam } }

```

```
-- *****
```

```
--
```

```
-- RADIO LINK SETUP REQUEST FDD
```

```
--
```

```
-- *****
```

```

RadioLinkSetupRequestFDD ::= SEQUENCE {
    protocolIES          ProtocolIE-Container    {{RadioLinkSetupRequestFDD-IEs}},

```

```

    protocolExtensions          ProtocolExtensionContainer {{RadioLinkSetupRequestFDD-Extensions}}          OPTIONAL,
    ...
}

RadioLinkSetupRequestFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-S-RNTI          CRITICALITY ignore TYPE S-RNTI          PRESENCE mandatory } |
  { ID id-D-RNTI          CRITICALITY ignore TYPE D-RNTI          PRESENCE optional   } |
  { ID id-AllowedQueuingTime CRITICALITY ignore TYPE AllowedQueuingTime PRESENCE optional   } |
  { ID id-UL-DPCH-Information-RL-SetupReqFDD CRITICALITY ignore TYPE UL-DPCH-Information-RL-SetupReqFDD PRESENCE mandatory } |
  { ID id-DL-DPCH-Information-RL-SetupReqFDD CRITICALITY ignore TYPE DL-DPCH-Information-RL-SetupReqFDD PRESENCE mandatory } |
  { ID id-DCH-Information-RL-SetupReqFDD CRITICALITY ignore TYPE DCH-InformationList-RL-SetupReqFDD PRESENCE mandatory } |
  { ID id-RL-Information-RL-SetupReqFDD CRITICALITY ignore TYPE RL-InformationList-RL-SetupReqFDD PRESENCE mandatory },
  ...
}

UL-DPCH-Information-RL-SetupReqFDD ::= SEQUENCE {
  ul-ScramblingCode          UL-ScramblingCode,
  minUL-ChannelisationCodeLength MinUL-ChannelisationCodeLength,
  maxNrOfUL-DPCHs            MaxNrOfUL-DPCHs          OPTIONAL
  -- This IE is present only if minUL-ChannelisationCodeLength equals to 4 -- ,
  ul-PunctureLimit          PunctureLimit,
  ul-TransportFormatCombinationSet TransportFormatCombinationSet,
  ul-DPCCH-SlotFormat       UL-DPCCH-SlotFormat,
  ul-EbNoTarget             UL-EbNoTarget             OPTIONAL,
  diversityMode             DiversityMode,
  d-FieldLength             D-FieldLength           OPTIONAL
  -- This IE is present only if Feed Back mode diversity is activated -- ,
  sSDT-CellIdLength         SSDT-CellID-Length      OPTIONAL,
  s-FieldLength             S-FieldLength           OPTIONAL,
  ul-meanBitRate          MeanBitRate          OPTIONAL,
  iE-Extensions            ProtocolExtensionContainer { {UL-DPCH-Information-RL-SetupReqFDD-ExtIEs} } OPTIONAL,
  ...
}

UL-DPCH-Information-RL-SetupReqFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DL-DPCH-Information-RL-SetupReqFDD ::= SEQUENCE {
  transportFormatCombinationSet TransportFormatCombinationSet,
  dl-DPCH-SlotNumber           DL-DPCH-SlotNumber,
  tFCI-SignallingMode          TFCI-SignallingMode,
  tFCI-Presence                TFCI-Presence          OPTIONAL
  -- This IE is present if Slot Format is from 12 to 16 --,
  multiplexingPosition         MultiplexingPosition,
  powerOffsetInformation       SEQUENCE {
    po1-ForTFCI-Bits           PowerOffset,
    po2-ForTPC-Bits           PowerOffset,
    po3-ForPilotBits           PowerOffset,
    ...
  },
  dl-TPC-StepSize              TPC-StepSize,
  meanBitRate            MeanBitRate            OPTIONAL,
  iE-Extensions                ProtocolExtensionContainer { {DL-DPCH-Information-RL-SetupReqFDD-ExtIEs} } OPTIONAL,
  ...
}

```

```

DL-DPCH-Information-RL-SetupReqFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DCH-InformationList-RL-SetupReqFDD ::= DCH-IE-ContainerList { {DCH-InformationItemIEs-RL-SetupReqFDD} }

DCH-InformationItemIEs-RL-SetupReqFDD RNSAP-PROTOCOL-IES ::= {
  { ID id-DCH-InformationItem-RL-SetupReqFDD CRITICALITY ignore TYPE DCH-InformationItem-RL-SetupReqFDD PRESENCE mandatory },
  ...
}

DCH-InformationItem-RL-SetupReqFDD ::= SEQUENCE {
  dCH-ID DCH-ID,
  dCH-CombinationInd DCH-CombinationInd OPTIONAL,
  rLC-Mode RLC-Mode,
  trCh-SrcStatisticsDescr TrCh-SrcStatisticsDescr,
  ul-transportFormatSet TransportFormatSet,
  dl-transportFormatSet TransportFormatSet,
  ul-BLER BLER,
  dl-BLER BLER,
  allocationRetentionPriority AllocationRetentionPriority,
  frameHandlingPriority FrameHandlingPriority,
  payloadCRC-PresenceIndicator PayloadCRC-PresenceIndicator,
  ul-FP-Mode UL-FP-Mode,
  toAWS ToAWS,
  toAWE ToAWE,
  iE-Extensions ProtocolExtensionContainer { {DCH-InformationItem-RL-SetupReqFDD-ExtIEs} } OPTIONAL,
  ...
}

DCH-InformationItem-RL-SetupReqFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

RL-InformationList-RL-SetupReqFDD ::= RL-IE-ContainerList { {RL-InformationItemIEs-RL-SetupReqFDD} }

RL-InformationItemIEs-RL-SetupReqFDD RNSAP-PROTOCOL-IES ::= {
  { ID id-RL-InformationItem-RL-SetupReqFDD CRITICALITY ignore TYPE RL-InformationItem-RL-SetupReqFDD PRESENCE mandatory },
  ...
}

RL-InformationItem-RL-SetupReqFDD ::= SEQUENCE {
  rL-ID RL-ID,
  uC-ID C-ID,
  frameOffset FrameOffset,
  chipOffset ChipOffset,
  propagationDelay PropagationDelay OPTIONAL,
  diversityControlField DiversityControlField OPTIONAL
  -- This IE is present only if the RL is not the first one in the RL-InformationList-RL-SetupReqFDD --,
  dl-InitialTX-Power DL-Power OPTIONAL
  -- Initial DL transmission power --,
  cPICH-EcIo CPICH-EcIo OPTIONAL,
  sSDT-CellID SSdT-CellID OPTIONAL,
  iE-Extensions ProtocolExtensionContainer { {RL-InformationItem-RL-SetupReqFDD-ExtIEs} } OPTIONAL,
  ...
}

```

```

}
RL-InformationItem-RL-SetupReqFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}
RadioLinkSetupRequestFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}
-- *****
--
-- RADIO LINK SETUP REQUEST TDD
--
-- *****

RadioLinkSetupRequestTDD ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container    {{RadioLinkSetupRequestTDD-IEs}},
  protocolExtensions   ProtocolExtensionContainer {{RadioLinkSetupRequestTDD-Extensions}} OPTIONAL,
  ...
}

RadioLinkSetupRequestTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-S-RNTI          CRITICALITY ignore TYPE S-RNTI          PRESENCE mandatory } |
  { ID id-D-RNTI          CRITICALITY ignore TYPE D-RNTI          PRESENCE optional   } |
  { ID id-AllowedQueuingTime CRITICALITY ignore TYPE AllowedQueuingTime PRESENCE optional   } |
  { ID id-UL-MeanBitRate   CRITICALITY ignore TYPE MeanBitRate     PRESENCE optional   } |
  { ID id-DL-MeanBitRate   CRITICALITY ignore TYPE MeanBitRate     PRESENCE optional   } |
  { ID id-UL-CCTrChInformationList-RL-SetupReqTDD CRITICALITY ignore TYPE UL-CCTrChInformationList-RL-SetupReqTDD PRESENCE mandatory } |
  { ID id-DL-CCTrChInformationList-RL-SetupReqTDD CRITICALITY ignore TYPE DL-CCTrChInformationList-RL-SetupReqTDD PRESENCE mandatory } |
  { ID id-DCH-InformationList-RL-SetupReqTDD CRITICALITY ignore TYPE DCH-InformationList-RL-SetupReqTDD PRESENCE mandatory } |
  { ID id-RL-Information-RL-SetupReqTDD CRITICALITY ignore TYPE RL-Information-RL-SetupReqTDD PRESENCE mandatory } |
  ...
}

UL-CCTrChInformationList-RL-SetupReqTDD ::= CCTrCH-IE-ContainerList { {UL-CCTrChInformationItemIEs-RL-SetupReqTDD} }

UL-CCTrChInformationItemIEs-RL-SetupReqTDD RNSAP-PROTOCOL-IES ::= {
  { ID id-UL-CCTrChInformationItem-RL-SetupReqTDD CRITICALITY ignore TYPE UL-CCTrChInformationItem-RL-SetupReqTDD PRESENCE mandatory },
  ...
}

UL-CCTrChInformationItem-RL-SetupReqTDD ::= SEQUENCE {
  cCTrCH-ID          CCTrCH-ID,
  ul-TFCS            TransportFormatCombinationSet,
  tFCI-Coding        TFCI-Coding,
  ul-PunctureLimit   PunctureLimit,
  iE-Extensions      ProtocolExtensionContainer { {UL-CCTrChInformationItem-RL-SetupReqTDD-ExtIEs} } OPTIONAL,
  ...
}

UL-CCTrChInformationItem-RL-SetupReqTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DL-CCTrChInformationList-RL-SetupReqTDD ::= CCTrCH-IE-ContainerList { {DL-CCTrChInformationItemIEs-RL-SetupReqTDD} }

```



```

DL-CCTrChInformationItemIEs-RL-SetupReqTDD RNSAP-PROTOCOL-IES ::= {
  { ID id-DL-CCTrChInformationItem-RL-SetupReqTDD CRITICALITY ignore TYPE DL-CCTrChInformationItem-RL-SetupReqTDD PRESENCE mandatory },
  ...
}

DL-CCTrChInformationItem-RL-SetupReqTDD ::= SEQUENCE {
  cCTrCH-ID          CCTrCH-ID,
  dl-TFCS            TransportFormatCombinationSet,
  tFCI-Coding       TFCI-Coding,
  dl-PunctureLimit  PunctureLimit,
  iE-Extensions     ProtocolExtensionContainer { {DL-CCTrChInformationItem-RL-SetupReqTDD-ExtIEs} } OPTIONAL,
  ...
}

DL-CCTrChInformationItem-RL-SetupReqTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DCH-InformationList-RL-SetupReqTDD ::= DCH-IE-ContainerList { {DCH-InformationItemIEs-RL-SetupReqTDD} }

DCH-InformationItemIEs-RL-SetupReqTDD RNSAP-PROTOCOL-IES ::= {
  { ID id-DCH-InformationItem-RL-SetupReqTDD CRITICALITY ignore TYPE DCH-InformationItem-RL-SetupReqTDD PRESENCE mandatory },
  ...
}

DCH-InformationItem-RL-SetupReqTDD ::= SEQUENCE {
  dCH-ID          DCH-ID,
  ul-cCTrCH-ID   CCTrCH-ID, -- UL CCTrCH in which the DCH is mapped
  dl-cCTrCH-ID   CCTrCH-ID, -- DL CCTrCH in which the DCH is mapped
  dCH-CombinationInd DCH-CombinationInd OPTIONAL,
  rLC-Mode       RLC-Mode,
  trCh-SrcStatisticsDescr TrCh-SrcStatisticsDescr,
  ul-transportFormatSet TransportFormatSet,
  dl-transportFormatSet TransportFormatSet,
  ul-BLER        BLER,
  dl-BLER        BLER,
  allocationRetentionPriority AllocationRetentionPriority,
  frameHandlingPriority FrameHandlingPriority,
  payloadCRC-PresenceIndicator PayloadCRC-PresenceIndicator,
  ul-FP-Mode     UL-FP-Mode,
  toAWS          ToAWS,
  toAWE          ToAWE,
  iE-Extensions  ProtocolExtensionContainer { {DCH-InformationItem-RL-SetupReqTDD-ExtIEs} } OPTIONAL,
  ...
}

DCH-InformationItem-RL-SetupReqTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

RL-Information-RL-SetupReqTDD ::= SEQUENCE {
  rL-ID          RL-ID,
  c-ID          C-ID,
  frameOffset   FrameOffset,
  primaryCCPCH-RSCP PrimaryCCPCH-RSCP OPTIONAL,

```

```
    iE-Extensions          ProtocolExtensionContainer { {RL-Information-RL-SetupReqTDD-ExtIEs} } OPTIONAL,
  ...
}

RL-Information-RL-SetupReqTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

RadioLinkSetupRequestTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}
```

```

-- *****
--
-- RADIO LINK RECONFIGURATION PREPARE FDD
--
-- *****

RadioLinkReconfigurationPrepareFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container      {{{RadioLinkReconfigurationPrepareFDD-IEs}}},
    protocolExtensions   ProtocolExtensionContainer {{{RadioLinkReconfigurationPrepareFDD-Extensions}}} OPTIONAL,
    ...
}

RadioLinkReconfigurationPrepareFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-AllowedQueuingTime          CRITICALITY ignore TYPE AllowedQueuingTime          PRESENCE mandatory } |
    { ID id-UL-DPCH-Information          CRITICALITY ignore TYPE UL-DPCH-Information          PRESENCE optional } |
    { ID id-DL-DPCH-Information          CRITICALITY ignore TYPE DL-DPCH-Information          PRESENCE optional } |
    { ID id-DCH-ModifyList-RL-ReconfPrepFDD CRITICALITY ignore TYPE DCH-ModifyList-RL-ReconfPrepFDD PRESENCE optional } |
    { ID id-DCH-AddList-RL-ReconfPrepFDD CRITICALITY ignore TYPE DCH-AddList-RL-ReconfPrepFDD PRESENCE optional } |
    { ID id-DCH-DeleteList-RL-ReconfPrepFDD CRITICALITY ignore TYPE DCH-DeleteList-RL-ReconfPrepFDD PRESENCE optional } |
    { ID id-RL-InformationList-RL-ReconfPrepFDD CRITICALITY ignore TYPE RL-InformationList-RL-ReconfPrepFDD PRESENCE mandatory } |
    ...
}

UL-DPCH-Information ::= SEQUENCE {
    ul-ScramblingCode          UL-ScramblingCode          OPTIONAL,
    minUL-ChannelisationCodeLength MinUL-ChannelisationCodeLength OPTIONAL,
    maxNrOfUL-DPDCHs          MaxNrOfUL-DPDCHs          OPTIONAL
    -- This IE is present only if minUL-ChannelisationCodeLength equals to 4 --,
    ul-PunctureLimit          PunctureLimit          OPTIONAL,
    tFCS                      TransportFormatCombinationSet OPTIONAL,
    ul-DPCCH-SlotFormat        UL-DPCCH-SlotFormat        OPTIONAL,
    sSDT-CellIDLength          SSDT-CellID-Length          OPTIONAL,
    s-FieldLength              S-FieldLength          OPTIONAL,
    meanBitRate          MeanBitRate          OPTIONAL,
    iE-Extensions              ProtocolExtensionContainer { {UL-DPCH-Information-ExtIEs} } OPTIONAL,
    ...
}

UL-DPCH-Information-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DL-DPCH-Information ::= SEQUENCE {
    tFCS                      TransportFormatCombinationSet OPTIONAL,
    dl-DPCCH-SlotFormat        DL-DPCCH-SlotFormat        OPTIONAL,
    tFCI-SignallingMode        TFCI-SignallingMode        OPTIONAL,
    tFCI-Presence              TFCI-Presence              OPTIONAL
    -- This IE is present if Slot Format is from 12 to 16 --,
    multiplexingPosition        MultiplexingPosition        OPTIONAL,
    meanBitRate          MeanBitRate          OPTIONAL,
    iE-Extensions              ProtocolExtensionContainer { {DL-DPCH-Information-ExtIEs} } OPTIONAL,
    ...
}

DL-DPCH-Information-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {

```

```

}
...
DCH-ModifyList-RL-ReconfPrepFDD ::= DCH-IE-ContainerList { {DCH-Modify-RL-ReconfPrepFDD-IEs} }

DCH-Modify-RL-ReconfPrepFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-DCH-ModifyItem-RL-ReconfPrepFDD    CRITICALITY ignore  TYPE DCH-ModifyItem-RL-ReconfPrepFDD    PRESENCE mandatory    },
  ...
}

DCH-ModifyItem-RL-ReconfPrepFDD ::= SEQUENCE {
  dCH-ID                DCH-ID,
  ul-TransportformatSet TransportFormatSet    OPTIONAL,
  dl-TransportformatSet TransportFormatSet    OPTIONAL,
  allocationRetentionPriority AllocationRetentionPriority  OPTIONAL,
  frameHandlingPriority  FrameHandlingPriority  OPTIONAL,
  ul-FP-Mode            UL-FP-Mode            OPTIONAL,
  toAWS                 ToAWS                 OPTIONAL,
  toAWE                 ToAWE                 OPTIONAL,
  iE-Extensions        ProtocolExtensionContainer { {DCH-ModifyItem-RL-ReconfPrepFDD-ExtIEs} } OPTIONAL,
  ...
}

DCH-ModifyItem-RL-ReconfPrepFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DCH-AddList-RL-ReconfPrepFDD ::= DCH-IE-ContainerList { {DCH-Add-RL-ReconfPrepFDD-IEs} }

DCH-Add-RL-ReconfPrepFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-DCH-AddItem-RL-ReconfPrepFDD    CRITICALITY ignore  TYPE DCH-AddItem-RL-ReconfPrepFDD    PRESENCE mandatory    },
  ...
}

DCH-AddItem-RL-ReconfPrepFDD ::= SEQUENCE {
  dCH-ID                DCH-ID,
  dCH-CombinationInd    DCH-CombinationInd    OPTIONAL,
  rLC-Mode              RLC-Mode,
  trCh-SrcStatisticsDescr TrCh-SrcStatisticsDescr,
  dCH-CombinationInd    DCH-CombinationInd    OPTIONAL,
  ul-TransportformatSet TransportFormatSet,
  dl-TransportformatSet TransportFormatSet,
  ul-BLER              BLER,
  dl-BLER              BLER,
  allocationRetentionPriority AllocationRetentionPriority,
  frameHandlingPriority FrameHandlingPriority,
  payloadCRC-PresenceIndicator PayloadCRC-PresenceIndicator,
  ul-FP-Mode            UL-FP-Mode,
  toAWS                 ToAWS,
  toAWE                 ToAWE,
  iE-Extensions        ProtocolExtensionContainer { {DCH-AddItem-RL-ReconfPrepFDD-ExtIEs} } OPTIONAL,
  ...
}

DCH-AddItem-RL-ReconfPrepFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

```

```

}
DCH-DeleteList-RL-ReconfPrepFDD ::= DCH-IE-ContainerList { {DCH-Delete-RL-ReconfPrepFDD-IEs} }
DCH-Delete-RL-ReconfPrepFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-DCH-DeleteItem-RL-ReconfPrepFDD CRITICALITY ignore TYPE DCH-DeleteItem-RL-ReconfPrepFDD PRESENCE mandatory },
  ...
}
DCH-DeleteItem-RL-ReconfPrepFDD ::= SEQUENCE {
  dCH-ID DCH-ID,
  iE-Extensions ProtocolExtensionContainer { {DCH-DeleteItem-RL-ReconfPrepFDD-ExtIEs} } OPTIONAL,
  ...
}
DCH-DeleteItem-RL-ReconfPrepFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}
RL-InformationList-RL-ReconfPrepFDD ::= RL-IE-ContainerList { {RL-Information-RL-ReconfPrepFDD-IEs} }
RL-Information-RL-ReconfPrepFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-RL-Information-RL-ReconfPrepFDD CRITICALITY ignore TYPE RL-Information-RL-ReconfPrepFDD PRESENCE mandatory },
  ...
}
RL-Information-RL-ReconfPrepFDD ::= SEQUENCE {
  rL-ID RL-ID,
  sSDT-Indication SSdT-Indication OPTIONAL,
  sSDT-CellIdentity SSdT-CellID OPTIONAL
  -- The IE may be present if the sSDT-Indication is set to 'sSDT-active-in-the-UE' --,
  iE-Extensions ProtocolExtensionContainer { {RL-Information-RL-ReconfPrepFDD-ExtIEs} } OPTIONAL,
  ...
}
RL-Information-RL-ReconfPrepFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}
RadioLinkReconfigurationPrepareFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}
-- *****
--
-- RADIO LINK RECONFIGURATION PREPARE TDD
--
-- *****
RadioLinkReconfigurationPrepareTDD ::= SEQUENCE {
  protocolIEs ProtocolIE-Container {{RadioLinkReconfigurationPrepareTDD-IEs}},
  protocolExtensions ProtocolExtensionContainer {{RadioLinkReconfigurationPrepareTDD-Extensions}} OPTIONAL,
  ...
}
RadioLinkReconfigurationPrepareTDD-IEs RNSAP-PROTOCOL-IES ::= {

```

```

{ ID id-AllowedQueuingTime          CRITICALITY ignore TYPE AllowedQueuingTime          PRESENCE optional } |
{ ID id-UL-MeanBitRate              CRITICALITY ignore TYPE MeanBitRate              PRESENCE optional } |
{ ID id-DL-MeanBitRate              CRITICALITY ignore TYPE MeanBitRate              PRESENCE optional } |
{ ID id-UL-CCTrCH-InformationList-RL-ReconfPrepTDD
  CRITICALITY ignore TYPE UL-CCTrCH-InformationList-RL-ReconfPrepTDD PRESENCE mandatory } |
{ ID id-DL-CCTrCH-InformationList-RL-ReconfPrepTDD
  CRITICALITY ignore TYPE DL-CCTrCH-InformationList-RL-ReconfPrepTDD PRESENCE mandatory } |
{ ID id-DCH-ModifyList-RL-ReconfPrepTDD CRITICALITY ignore TYPE DCH-ModifyList-RL-ReconfPrepTDD PRESENCE mandatory } |
{ ID id-DCH-AddList-RL-ReconfPrepTDD   CRITICALITY ignore TYPE DCH-AddList-RL-ReconfPrepTDD   PRESENCE mandatory } |
{ ID id-DCH-DeleteList-RL-ReconfPrepTDD CRITICALITY ignore TYPE DCH-DeleteList-RL-ReconfPrepTDD PRESENCE mandatory } |
...
}

UL-CCTrCH-InformationList-RL-ReconfPrepTDD ::= CCTrCH-IE-ContainerList { {UL-CCTrCH-Information-RL-ReconfPrepTDD-IEs} }

UL-CCTrCH-Information-RL-ReconfPrepTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-UL-CCTrCH-Information-RL-ReconfPrepTDD CRITICALITY ignore TYPE UL-CCTrCH-Information-RL-ReconfPrepTDD PRESENCE mandatory },
  ...
}

UL-CCTrCH-Information-RL-ReconfPrepTDD ::= SEQUENCE {
  cCTrCH-ID          CCTrCH-ID,
  tFCS               TransportFormatCombinationSet OPTIONAL,
  tFCI-Coding        TFCI-Coding OPTIONAL,
  punctureLimit      PunctureLimit OPTIONAL,
  iE-Extensions      ProtocolExtensionContainer { {UL-CCTrCH-Information-RL-ReconfPrepTDD-ExtIEs} } OPTIONAL,
  ...
}

UL-CCTrCH-Information-RL-ReconfPrepTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DL-CCTrCH-InformationList-RL-ReconfPrepTDD ::= CCTrCH-IE-ContainerList { {DL-CCTrCH-Information-RL-ReconfPrepTDD-IEs} }

DL-CCTrCH-Information-RL-ReconfPrepTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-DL-CCTrCH-Information-RL-ReconfPrepTDD CRITICALITY ignore TYPE DL-CCTrCH-Information-RL-ReconfPrepTDD PRESENCE mandatory },
  ...
}

DL-CCTrCH-Information-RL-ReconfPrepTDD ::= SEQUENCE {
  cCTrCH-ID          CCTrCH-ID,
  tFCS               TransportFormatCombinationSet OPTIONAL,
  tFCI-Coding        TFCI-Coding OPTIONAL,
  punctureLimit      PunctureLimit OPTIONAL,
  iE-Extensions      ProtocolExtensionContainer { {DL-CCTrCH-Information-RL-ReconfPrepTDD-ExtIEs} } OPTIONAL,
  ...
}

DL-CCTrCH-Information-RL-ReconfPrepTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DCH-ModifyList-RL-ReconfPrepTDD ::= DCH-IE-ContainerList { {DCH-Modify-RL-ReconfPrepTDD-IEs} }

DCH-Modify-RL-ReconfPrepTDD-IEs RNSAP-PROTOCOL-IES ::= {

```

```

    { ID id-DCH-ModifyItem-RL-ReconfPrepTDD      CRITICALITY ignore  TYPE DCH-ModifyItem-RL-ReconfPrepTDD      PRESENCE mandatory      },
    ...
}

DCH-ModifyItem-RL-ReconfPrepTDD ::= SEQUENCE {
    dCH-ID                DCH-ID,
    ul-CCTrCH-ID          CCTrCH-ID      OPTIONAL,
    dl-CCTrCH-ID          CCTrCH-ID      OPTIONAL,
    ul-TransportformatSet TransportFormatSet OPTIONAL,
    dl-TransportformatSet TransportFormatSet OPTIONAL,
    allocationRetentionPriority AllocationRetentionPriority OPTIONAL,
    frameHandlingPriority FrameHandlingPriority OPTIONAL,
    ul-FP-Mode            UL-FP-Mode     OPTIONAL,
    toAWS                 ToAWS         OPTIONAL,
    toAWE                 ToAWE         OPTIONAL,
    iE-Extensions        ProtocolExtensionContainer { {DCH-ModifyItem-RL-ReconfPrepTDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-ModifyItem-RL-ReconfPrepTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-AddList-RL-ReconfPrepTDD          ::= DCH-IE-ContainerList { {DCH-Add-RL-ReconfPrepTDD-IEs} }

DCH-Add-RL-ReconfPrepTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-AddItem-RL-ReconfPrepTDD      CRITICALITY ignore  TYPE DCH-AddItem-RL-ReconfPrepTDD      PRESENCE mandatory      },
    ...
}

DCH-AddItem-RL-ReconfPrepTDD ::= SEQUENCE {

    dCH-ID                DCH-ID,
    rLC-Mode              RLC-Mode,
    ul-CCTrCH-ID          CCTrCH-ID,
    dl-CCTrCH-ID          CCTrCH-ID,
    dCH-CombinationInd    DCH-CombinationInd  OPTIONAL,
    rLC-Mode              RLC-Mode,
    trCh-SrcStatisticsDescr TrCh-SrcStatisticsDescr,
    ul-TransportformatSet TransportFormatSet,
    dl-TransportformatSet TransportFormatSet,
    ul-BLER               BLER,
    dl-BLER               BLER,
    allocationRetentionPriority AllocationRetentionPriority,
    frameHandlingPriority FrameHandlingPriority,
    payloadCRC-PresenceIndicator PayloadCRC-PresenceIndicator,
    ul-FP-Mode            UL-FP-Mode,
    toAWS                 ToAWS,
    toAWE                 ToAWE,
    iE-Extensions        ProtocolExtensionContainer { {DCH-AddItem-RL-ReconfPrepTDD-ExtIEs} } OPTIONAL,
    ...

}

DCH-AddItem-RL-ReconfPrepTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

```

DCH-DeleteList-RL-ReconfPrepTDD ::= DCH-IE-ContainerList { {DCH-Delete-RL-ReconfPrepTDD-IEs} }

DCH-Delete-RL-ReconfPrepTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-DCH-DeleteItem-RL-ReconfPrepTDD CRITICALITY ignore TYPE DCH-DeleteItem-RL-ReconfPrepTDD PRESENCE mandatory },
  ...
}

DCH-DeleteItem-RL-ReconfPrepTDD ::= SEQUENCE {
  dCH-ID DCH-ID,
  iE-Extensions ProtocolExtensionContainer { {DCH-DeleteItem-RL-ReconfPrepTDD-ExtIEs} } OPTIONAL,
  ...
}

DCH-DeleteItem-RL-ReconfPrepTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

RadioLinkReconfigurationPrepareTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

```



```

-- *****
--
-- RADIO LINK RECONFIGURATION REQUEST FDD
--
-- *****

RadioLinkReconfigurationRequestFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkReconfigurationRequestFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkReconfigurationRequestFDD-Extensions}}
    ...
}

RadioLinkReconfigurationRequestFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-AllowedQueuingTime          CRITICALITY ignore TYPE AllowedQueuingTime          PRESENCE mandatory } |
    { ID id-UL-DPCH-Information          CRITICALITY ignore TYPE UL-DPCH-Information-RL-ReconfRqstFDD PRESENCE optional } |
    { ID id-DL-DPCH-Information          CRITICALITY ignore TYPE DL-DPCH-Information-RL-ReconfRqstFDD PRESENCE optional } |
    { ID id-DCH-ModifyList-RL-ReconfRqstFDD CRITICALITY ignore TYPE DCH-ModifyList-RL-ReconfRqstFDD PRESENCE mandatory } |
    { ID id-DCH-AddList-RL-ReconfRqstFDD CRITICALITY ignore TYPE DCH-AddList-RL-ReconfRqstFDD PRESENCE mandatory } |
    { ID id-DCH-DeleteList-RL-ReconfRqstFDD CRITICALITY ignore TYPE DCH-DeleteList-RL-ReconfRqstFDD PRESENCE mandatory }
    ...
}

UL-DPCH-Information-RL-ReconfRqstFDD ::= SEQUENCE {
    tFCS          TransportFormatCombinationSet OPTIONAL,
    meanBitRate MeanBitRate OPTIONAL,
    iE-Extensions ProtocolExtensionContainer { {UL-DPCH-Information-RL-ReconfRqstFDD-ExtIEs} } OPTIONAL,
    ...
}

UL-DPCH-Information-RL-ReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DL-DPCH-Information-RL-ReconfRqstFDD ::= SEQUENCE {
    tFCS          TransportFormatCombinationSet OPTIONAL,
    tFCI-SignallingMode TFCI-SignallingMode OPTIONAL,
    meanBitRate MeanBitRate OPTIONAL,
    iE-Extensions ProtocolExtensionContainer { {DL-DPCH-Information-RL-ReconfRqstFDD-ExtIEs} } OPTIONAL,
    ...
}

DL-DPCH-Information-RL-ReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-ModifyList-RL-ReconfRqstFDD ::= DCH-IE-ContainerList { {DCH-Modify-RL-ReconfRqstFDD-IEs} }

DCH-Modify-RL-ReconfRqstFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-ModifyItem-RL-ReconfRqstFDD CRITICALITY ignore TYPE DCH-ModifyItem-RL-ReconfRqstFDD PRESENCE mandatory }
    ...
}

DCH-ModifyItem-RL-ReconfRqstFDD ::= SEQUENCE {
    dCH-ID          DCH-ID,
    ul-TransportformatSet TransportFormatSet OPTIONAL,

```

```

dl-TransportformatSet      TransportFormatSet OPTIONAL,
allocationRetentionPriority AllocationRetentionPriority OPTIONAL,
frameHandlingPriority      FrameHandlingPriority   OPTIONAL,
ul-FP-Mode                 UL-FP-Mode            OPTIONAL,
toAWS                      ToAWS                OPTIONAL,
toAWE                      ToAWE                OPTIONAL,
iE-Extensions              ProtocolExtensionContainer { {DCH-ModifyItem-RL-ReconfRqstFDD-ExtIEs} } OPTIONAL,
...
}

DCH-ModifyItem-RL-ReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

DCH-AddList-RL-ReconfRqstFDD ::= DCH-IE-ContainerList { {DCH-Add-RL-ReconfRqstFDD-IEs} }

DCH-Add-RL-ReconfRqstFDD-IEs RNSAP-PROTOCOL-IES ::= {
{ ID id-DCH-AddItem-RL-ReconfRqstFDD CRITICALITY ignore TYPE DCH-AddItem-RL-ReconfRqstFDD PRESENCE mandatory },
...
}

DCH-AddItem-RL-ReconfRqstFDD ::= SEQUENCE {
dCH-ID DCH-ID,
dCH-CombinationInd DCH-CombinationInd OPTIONAL,
rLC-Mode RLC-Mode,
trCh-SrcStatisticsDescr TrCh-SrcStatisticsDescr,
dCH-CombinationInd DCH-CombinationInd OPTIONAL,
ul-TransportformatSet TransportFormatSet,
dl-TransportformatSet TransportFormatSet,
allocationRetentionPriority AllocationRetentionPriority,
frameHandlingPriority FrameHandlingPriority,
payloadCRC-PresenceIndicator PayloadCRC-PresenceIndicator,
ul-FP-Mode UL-FP-Mode,
toAWS ToAWS,
toAWE ToAWE,
iE-Extensions ProtocolExtensionContainer { {DCH-AddItem-RL-ReconfRqstFDD-ExtIEs} } OPTIONAL,
...
}

DCH-AddItem-RL-ReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

DCH-DeleteList-RL-ReconfRqstFDD ::= DCH-IE-ContainerList { {DCH-Delete-RL-ReconfRqstFDD-IEs} }

DCH-Delete-RL-ReconfRqstFDD-IEs RNSAP-PROTOCOL-IES ::= {
{ ID id-DCH-DeleteItem-RL-ReconfRqstFDD CRITICALITY ignore TYPE DCH-DeleteItem-RL-ReconfRqstFDD PRESENCE mandatory },
...
}

DCH-DeleteItem-RL-ReconfRqstFDD ::= SEQUENCE {
dCH-ID DCH-ID,
iE-Extensions ProtocolExtensionContainer { {DCH-DeleteItem-RL-ReconfRqstFDD-ExtIEs} } OPTIONAL,
...
}

```

```

DCH-DeleteItem-RL-ReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

RadioLinkReconfigurationRequestFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
--
-- RADIO LINK RECONFIGURATION REQUEST TDD
--
-- *****

RadioLinkReconfigurationRequestTDD ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container      {{{RadioLinkReconfigurationRequestTDD-IEs}}},
  protocolExtensions   ProtocolExtensionContainer {{{RadioLinkReconfigurationRequestTDD-Extensions}}}      OPTIONAL,
  ...
}

RadioLinkReconfigurationRequestTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-AllowedQueuingTime          CRITICALITY ignore TYPE AllowedQueuingTime          PRESENCE optional          } |
  { ID id-UL-MeanBitRate                CRITICALITY ignore TYPE MeanBitRate                PRESENCE optional          } |
  { ID id-DL-MeanBitRate                CRITICALITY ignore TYPE MeanBitRate                PRESENCE optional          } |
  { ID id-UL-CCTrCH-InformationList-RL-ReconfRqstTDD
    CRITICALITY ignore TYPE UL-CCTrCH-InformationList-RL-ReconfRqstTDD PRESENCE mandatory          } |
  { ID id-DL-CCTrCH-InformationList-RL-ReconfRqstTDD
    CRITICALITY ignore TYPE DL-CCTrCH-InformationList-RL-ReconfRqstTDD PRESENCE mandatory          } |
  { ID id-DCH-ModifyList-RL-ReconfRqstTDD CRITICALITY ignore TYPE DCH-ModifyList-RL-ReconfRqstTDD PRESENCE mandatory          } |
  { ID id-DCH-AddList-RL-ReconfRqstTDD   CRITICALITY ignore TYPE DCH-AddList-RL-ReconfRqstTDD PRESENCE mandatory          } |
  { ID id-DCH-DeleteList-RL-ReconfRqstTDD CRITICALITY ignore TYPE DCH-DeleteList-RL-ReconfRqstTDD PRESENCE mandatory          },
  ...
}

UL-CCTrCH-InformationList-RL-ReconfRqstTDD ::= CCTrCH-IE-ContainerList { {UL-CCTrCH-Information-RL-ReconfRqstTDD-IEs} }

UL-CCTrCH-Information-RL-ReconfRqstTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-UL-CCTrCH-Information-RL-ReconfRqstTDD CRITICALITY ignore TYPE UL-CCTrCH-Information-RL-ReconfRqstTDD PRESENCE mandatory          },
  ...
}

UL-CCTrCH-Information-RL-ReconfRqstTDD ::= SEQUENCE {
  cCtTrCH-ID          CCTrCH-ID,
  tFCS                TransportFormatCombinationSet,
  iE-Extensions       ProtocolExtensionContainer { {UL-CCTrCH-Information-RL-ReconfRqstTDD-ExtIEs} } OPTIONAL,
  ...
}

UL-CCTrCH-Information-RL-ReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DL-CCTrCH-InformationList-RL-ReconfRqstTDD ::= CCTrCH-IE-ContainerList { {DL-CCTrCH-Information-RL-ReconfRqstTDD-IEs} }

DL-CCTrCH-Information-RL-ReconfRqstTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-DL-CCTrCH-Information-RL-ReconfRqstTDD CRITICALITY ignore TYPE DL-CCTrCH-Information-RL-ReconfRqstTDD PRESENCE mandatory          },

```

```

}
...
DL-CCTrCH-Information-RL-ReconfRqstTDD ::= SEQUENCE {
    cCTrCH-ID          CCTrCH-ID,
    tFCS              TransportFormatCombinationSet,
    iE-Extensions     ProtocolExtensionContainer { {DL-CCTrCH-Information-RL-ReconfRqstTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CCTrCH-Information-RL-ReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-ModifyList-RL-ReconfRqstTDD          ::= DCH-IE-ContainerList { {DCH-Modify-RL-ReconfRqstTDD-IEs} }

DCH-Modify-RL-ReconfRqstTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-ModifyItem-RL-ReconfRqstTDD    CRITICALITY ignore    TYPE DCH-ModifyItem-RL-ReconfRqstTDD          PRESENCE mandatory    },
    ...
}

DCH-ModifyItem-RL-ReconfRqstTDD ::= SEQUENCE {
    dCH-ID          DCH-ID,
    ul-CCTrCH-ID   CCTrCH-ID          OPTIONAL,
    dl-CCTrCH-ID   CCTrCH-ID          OPTIONAL,
    ul-TransportformatSet    TransportFormatSet    OPTIONAL,
    dl-TransportformatSet    TransportFormatSet    OPTIONAL,
    allocationRetentionPriority    AllocationRetentionPriority    OPTIONAL,
    frameHandlingPriority      FrameHandlingPriority    OPTIONAL,
    ul-FP-Mode                 UL-FP-Mode            OPTIONAL,
    toAWS                      ToAWS                OPTIONAL,
    toAWE                      ToAWE                OPTIONAL,
    iE-Extensions             ProtocolExtensionContainer { {DCH-ModifyItem-RL-ReconfRqstTDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-ModifyItem-RL-ReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-AddList-RL-ReconfRqstTDD          ::= DCH-IE-ContainerList { {DCH-Add-RL-ReconfRqstTDD-IEs} }

DCH-Add-RL-ReconfRqstTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-AddItem-RL-ReconfRqstTDD    CRITICALITY ignore    TYPE DCH-AddItem-RL-ReconfRqstTDD          PRESENCE mandatory    },
    ...
}

DCH-AddItem-RL-ReconfRqstTDD ::= SEQUENCE {
    dCH-ID          DCH-ID,
    rLC-Mode        RLC-Mode,
    trCh-SrcStatisticsDescr    TrCh-SrcStatisticsDescr,
    ul-CCTrCH-ID   CCTrCH-ID,
    dl-CCTrCH-ID   CCTrCH-ID,
    dCH-CombinationInd    DCH-CombinationInd    OPTIONAL,
    ul-TransportformatSet    TransportFormatSet,
    dl-TransportformatSet    TransportFormatSet,

```

```

allocationRetentionPriority      AllocationRetentionPriority,
frameHandlingPriority            FrameHandlingPriority,
ul-FP-Mode                      UL-FP-Mode,
toAWS                           ToAWS,
toAWE                           ToAWE,
iE-Extensions                   ProtocolExtensionContainer { {DCH-AddItem-RL-ReconfRqstTDD-ExtIEs} } OPTIONAL,
...
}

DCH-AddItem-RL-ReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

DCH-DeleteList-RL-ReconfRqstTDD      ::= DCH-IE-ContainerList { {DCH-Delete-RL-ReconfRqstTDD-IEs} }

DCH-Delete-RL-ReconfRqstTDD-IEs RNSAP-PROTOCOL-IES ::= {
{ ID id-DCH-DeleteItem-RL-ReconfRqstTDD      CRITICALITY ignore  TYPE DCH-DeleteItem-RL-ReconfRqstTDD      PRESENCE mandatory      },
...
}

DCH-DeleteItem-RL-ReconfRqstTDD ::= SEQUENCE {
dCH-ID                                DCH-ID,
iE-Extensions                         ProtocolExtensionContainer { {DCH-DeleteItem-RL-ReconfRqstTDD-ExtIEs} } OPTIONAL,
...
}

DCH-DeleteItem-RL-ReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

RadioLinkReconfigurationRequestTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
...
}

```

9.3.4 Information Element Definitions

```

-- *****
--
-- Information Element Definitions
--
-- *****

-- **NOTE: extensibility**
MeasurementCharacteristics ::= SEQUENCE {
    measurementFrequency      TBD,
    averagingDuration         TBD,
    iE-Extensions             ProtocolExtensionContainer { {MeasurementCharacteristics-ExtIEs} } OPTIONAL,
    ...
}

MeasurementCharacteristics-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** TODO **
MeanBitRate ::= INTEGER

MeasurementID ::= INTEGER (0..1048576)
-- **OR:
-- MeasurementID ::= BIT STRING (SIZE (20))
-- **

MultipleURAsIndicator ::= ENUMERATED {
    single-URA-exists,
    multiple-URAs-exist
}

-- ** TODO **
MCC-Digit ::= OCTET STRING (SIZE (3))
-- FFS
-- Reference: 24.008

-- ** TODO **
MNC-Digit ::= OCTET STRING (SIZE (3))
-- FFS
-- Reference: 24.008

```

```

SecondInterleavingMode ::= ENUMERATED {
    frame-related,
    timeslot-related,
    ...
}

-- TransportLayerAddress          ::= BIT STRING (1..160, ...)
TransportLayerAddress           ::= OCTET STRING (SIZE (1..20, ...))

--
TrCh-SrcStatisticsDescr        ::= ENUMERATED {
    speech,
    RRC,
    unknown,
    ...
}

```

9.3.5 Common Definitions

```

-- *****
--
-- Common definitions
--
-- *****

RNSAP-CommonDataTypes -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

Criticality      ::= ENUMERATED { reject, ignore, notify }

Presence         ::= ENUMERATED { optional, conditional, mandatory }

PrivateExtensionID ::= CHOICE {
    local          INTEGER (0..65535),
    global         OBJECT IDENTIFIER
}

ProcedureCode    ::= INTEGER (0..255)

ProcedureID ::= SEQUENCE {
    procedureCode ProcedureCode,
    ddMode        ENUMERATED { tdd, fdd, common }
}

ProtocolExtensionID ::= INTEGER (0..65535)

ProtocolIE-ID     ::= INTEGER (0..65535)

```



```

-- Extension constants
--
-- *****

maxPrivateExtensions          INTEGER ::= 65535
maxProtocolExtensions        INTEGER ::= 65535
maxProtocolIEs               INTEGER ::= 65535

-- *****

-- Lists
--
-- *****

maxRateMatching              INTEGER ::= 10
maxNrOfTFCs                  INTEGER ::= 10
maxNrOfTFs                   INTEGER ::= 10

maxNoOfDL-Codes              INTEGER ::= 10
maxNrOfCCTrCHs               INTEGER ::= 10
maxNrOfDCHs                  INTEGER ::= 10
maxNrOfDL-Codes              INTEGER ::= 10
maxNrOfDPCHs                 INTEGER ::= 10
maxNrOfErrors                INTEGER ::= 10
maxNrOfFACH-FD-Size          INTEGER ::= 10
maxNrOfFDD-Neighbours        INTEGER ::= 10
maxNrOfMACcSDU-Length        INTEGER ::= 10
maxNrOfTDD-Neighbours        INTEGER ::= 10
maxNrOfRRLs                  INTEGER ::= 10
maxNrOfSCCPCHs               INTEGER ::= 10
maxRNCinURA                 INTEGER ::= 10
maxTTI-Count                 INTEGER ::= 10

-- *****

-- IEs
--
-- *****

id-AllowedQueuingTime        INTEGER ::= 0
id-BindingID                 INTEGER ::= 1
id-C-ID                      INTEGER ::= 2
id-C-RNTI                    INTEGER ::= 3
id-CCTrCH-ID                 INTEGER ::= 4
id-CFN                       INTEGER ::= 5
id-CN-CS-DomainIdentifier    INTEGER ::= 6
id-CN-PS-DomainIdentifier    INTEGER ::= 7
id-Cause                     INTEGER ::= 8
id-CompressedModeMethod      INTEGER ::= 9
id-D-RNTI                    INTEGER ::= 10
id-D-RNTI-ReleaseIndication  INTEGER ::= 11
id-DCH-AddItem               INTEGER ::= 12
id-DCH-AddItem-RL-ReconfPrepFDD  INTEGER ::= 13
id-DCH-AddItem-RL-ReconfPrepTDD  INTEGER ::= 14
id-DCH-AddItem-RL-ReconfReadyFDD  INTEGER ::= 15
id-DCH-AddItem-RL-ReconfRqstFDD  INTEGER ::= 16

```

```

id-DCH-AddItem-RL-ReconfRqstTDD          INTEGER ::= 17
id-DCH-AddList-RL-ReconfPrepFDD          INTEGER ::= 18
id-DCH-AddList-RL-ReconfPrepTDD          INTEGER ::= 19
id-DCH-AddList-RL-ReconfRqstFDD          INTEGER ::= 20
id-DCH-AddList-RL-ReconfRqstTDD          INTEGER ::= 21
id-DCH-DeleteItem-RL-ReconfPrepFDD        INTEGER ::= 22
id-DCH-DeleteItem-RL-ReconfPrepTDD        INTEGER ::= 23
id-DCH-DeleteItem-RL-ReconfRqstFDD        INTEGER ::= 24
id-DCH-DeleteItem-RL-ReconfRqstTDD        INTEGER ::= 25
id-DCH-DeleteList-RL-ReconfPrepFDD        INTEGER ::= 26
id-DCH-DeleteList-RL-ReconfPrepTDD        INTEGER ::= 27
id-DCH-DeleteList-RL-ReconfRqstFDD        INTEGER ::= 28
id-DCH-DeleteList-RL-ReconfRqstTDD        INTEGER ::= 29
id-DCH-Information-RL-SetupReqFDD         INTEGER ::= 30
id-DCH-InformationItem-RL-SetupReqFDD     INTEGER ::= 31
id-DCH-InformationItem-RL-SetupReqTDD     INTEGER ::= 32
id-DCH-InformationList-RL-SetupReqTDD     INTEGER ::= 33
id-DCH-ModifyItem                        INTEGER ::= 34
id-DCH-ModifyItem-RL-ReconfPrepFDD        INTEGER ::= 35
id-DCH-ModifyItem-RL-ReconfPrepTDD        INTEGER ::= 36
id-DCH-ModifyItem-RL-ReconfReadyFDD       INTEGER ::= 37
id-DCH-ModifyItem-RL-ReconfRqstFDD        INTEGER ::= 38
id-DCH-ModifyItem-RL-ReconfRqstTDD        INTEGER ::= 39
id-DCH-ModifyList-RL-ReconfPrepFDD        INTEGER ::= 40
id-DCH-ModifyList-RL-ReconfPrepTDD        INTEGER ::= 41
id-DCH-ModifyList-RL-ReconfRqstFDD        INTEGER ::= 42
id-DCH-ModifyList-RL-ReconfRqstTDD        INTEGER ::= 43
id-DL-CCTrCH-Information-RL-ReconfPrepTDD INTEGER ::= 44
id-DL-CCTrCH-Information-RL-ReconfRqstTDD INTEGER ::= 45
id-DL-CCTrCH-InformationList-RL-ReconfPrepTDD INTEGER ::= 46
id-DL-CCTrCH-InformationList-RL-ReconfRqstTDD INTEGER ::= 47
id-DL-CCTrChInformationItem-RL-SetupReqTDD INTEGER ::= 48
id-DL-CCTrChInformationList-RL-SetupReqTDD INTEGER ::= 49
id-DL-CodeInformation-PhyChReconfRqstFDD  INTEGER ::= 50
id-DL-DPCH-Information                    INTEGER ::= 51
id-DL-DPCH-Information-RL-SetupReqFDD      INTEGER ::= 52
id-DL-DPCH-InformationList-PhyChReconfRqstTDD INTEGER ::= 53
id-DL-DPCH-InformationList-RL-ReconfReadyTDD INTEGER ::= 54
id-DL-EbNoTarget                          INTEGER ::= 55
id-DL-FrameType                            INTEGER ::= 56
id-DL-MeanBitRate                          INTEGER ::= 57
id-DL-ReferencePowerInformation-DL-PC-Rqst  INTEGER ::= 578
id-DRX-Parameter                          INTEGER ::= 589
id-DedicatedMeasurementObjectType-DM-Rprt   INTEGER ::= 5960
id-DedicatedMeasurementObjectType-DM-Rqst   INTEGER ::= 601
id-DedicatedMeasurementObjectType-DM-Rspns   INTEGER ::= 612
id-FACH-InfoForOptionalGroupS-CCPCH        INTEGER ::= 623
id-FACH-InfoForOptionals-CCPCH             INTEGER ::= 634
id-FACH-InfoForS-CCPCH-CoupledToPRACH      INTEGER ::= 645
id-GapPositionMode                        INTEGER ::= 656
id-L3-Information                          INTEGER ::= 667
id-MeasurementCharacteristics               INTEGER ::= 678
id-MeasurementID                           INTEGER ::= 689
id-MultipleURAsIndicator                   INTEGER ::= 6970
id-PD                                       INTEGER ::= 701
id-PagingArea-PagingRqst                  INTEGER ::= 712

```

```

id-PowerControlMode          INTEGER ::= 723
id-PowerResumeMode          INTEGER ::= 734
id-ProcedureScope-DL-PC-Rqst  INTEGER ::= 745
id-RANAP-RelocationInformation  INTEGER ::= 756
id-RL-Information-PhyChReconfRqstFDD  INTEGER ::= 767
id-RL-Information-PhyChReconfRqstTDD  INTEGER ::= 778
id-RL-Information-RL-AdditionRqstFDD  INTEGER ::= 789
id-RL-Information-RL-AdditionRqstTDD  INTEGER ::= 7980
id-RL-Information-RL-DeletionRqst  INTEGER ::= 801
id-RL-Information-RL-FailureInd  INTEGER ::= 812
id-RL-Information-RL-ReconfPrepFDD  INTEGER ::= 823
id-RL-Information-RL-RestoreInd  INTEGER ::= 834
id-RL-Information-RL-SetupReqFDD  INTEGER ::= 845
id-RL-Information-RL-SetupReqTDD  INTEGER ::= 856
id-RL-InformationItem-DM-Rprt  INTEGER ::= 867
id-RL-InformationItem-DM-Rqst  INTEGER ::= 878
id-RL-InformationItem-DM-Rspns  INTEGER ::= 889
id-RL-InformationItem-RL-SetupReqFDD  INTEGER ::= 8990
id-RL-InformationList-RL-AdditionRqstFDD  INTEGER ::= 901
id-RL-InformationList-RL-DeletionRqst  INTEGER ::= 912
id-RL-InformationList-RL-FailureInd  INTEGER ::= 923
id-RL-InformationList-RL-ReconfPrepFDD  INTEGER ::= 934
id-RL-InformationList-RL-RestoreInd  INTEGER ::= 945
id-RL-InformationResponse-RL-AdditionRspTDD  INTEGER ::= 956
id-RL-InformationResponse-RL-ReconfReadyTDD  INTEGER ::= 967
id-RL-InformationResponse-RL-SetupRspTDD  INTEGER ::= 978
id-RL-InformationResponseItem-RL-AdditionRspFDD  INTEGER ::= 989
id-RL-InformationResponseItem-RL-ReconfReadyFDD  INTEGER ::= 99100
id-RL-InformationResponseItem-RL-SetupRspFDD  INTEGER ::= 1001
id-RL-InformationResponseList-RL-AdditionRspFDD  INTEGER ::= 1012
id-RL-InformationResponseList-RL-ReconfReadyFDD  INTEGER ::= 1023
id-RL-InformationResponseList-RL-SetupRspFDD  INTEGER ::= 1034
id-RL-ReconfigurationFailure-RL-ReconfFail  INTEGER ::= 1045
id-RL-ReconfigurationFailureList-RL-ReconfFail  INTEGER ::= 1056
id-RNCsWithCellsInTheAccessedURA-List-UL-ST-Ind  INTEGER ::= 1067
id-ReportCharacteristics      INTEGER ::= 1078
id-S-RNTI                    INTEGER ::= 1089
id-SAI                      INTEGER ::= 10910
id-SN                      INTEGER ::= 1101
id-SRNC-ID                 INTEGER ::= 1112
id-ScramblingCodeChange     INTEGER ::= 1123
id-SuccessfulRL-InformationResponse-RL-AdditionFailureFDD  INTEGER ::= 1134
id-SuccessfulRL-InformationResponse-RL-SetupFailureFDD  INTEGER ::= 1145
id-SuccessfulRL-InformationResponseList-RL-AdditionFailureFDD  INTEGER ::= 1156
id-SuccessfulRL-InformationResponseList-RL-SetupFailureFDD  INTEGER ::= 1167
id-TGD                    INTEGER ::= 1178
id-TGL                    INTEGER ::= 1189
id-TGP1                   INTEGER ::= 11920
id-TGP2                   INTEGER ::= 1201
id-TransportBearerID       INTEGER ::= 1212
id-TransportBearerRequestIndicator  INTEGER ::= 1223
id-TransportLayerAddress   INTEGER ::= 1234
id-UC-ID                  INTEGER ::= 1245
id-UL-CCTrCH-Information-RL-ReconfPrepTDD  INTEGER ::= 1256
id-UL-CCTrCH-Information-RL-ReconfRqstTDD  INTEGER ::= 1267
id-UL-CCTrCH-InformationList-RL-ReconfPrepTDD  INTEGER ::= 1278

```

```

id-UL-CCTrCH-InformationList-RL-ReconfRqstTDD          INTEGER ::= 1289
id-UL-CCTrChInformationItem-RL-SetupReqTDD            INTEGER ::= 12930
id-UL-CCTrChInformationList-RL-SetupReqTDD           INTEGER ::= 1301
id-UL-DL-CompressedModeSelection                     INTEGER ::= 1312
id-UL-DPCH-Information                               INTEGER ::= 1323
id-UL-DPCH-Information-RL-SetupReqFDD                INTEGER ::= 1334
id-UL-DPCH-InformationList-PhyChReconfRqstTDD       INTEGER ::= 1345
id-UL-DPCH-InformationList-RL-ReconfReadyTDD        INTEGER ::= 1356
id-UL-DeltaEbNo                                     INTEGER ::= 1367
id-UL-DeltaEbNoAfter                                INTEGER ::= 1378
id-UL-EbNoTarget                                    INTEGER ::= 1389
id-UL-MeanBitRate                                   INTEGER ::= 140
id-URA-ID                                           INTEGER ::= 13941
id-UnsuccessfulRL-InformationResponse                INTEGER ::= 1402
id-UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD INTEGER ::= 1413
id-UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD INTEGER ::= 1424
id-UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD INTEGER ::= 1435
id-UnsuccessfulRL-InformationResponseList-RL-AdditionFailureFDD INTEGER ::= 1446
id-UnsuccessfulRL-InformationResponseList-RL-SetupFailureFDD INTEGER ::= 1457
id-CriticalityDiagnostics                           INTEGER ::= 1468

```

END

CHANGE REQUEST		Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.	
25.423 CR 64r1		Current Version: 3.0.0	
GSM (AA.BB) or 3G (AA.BBB) specification number ↑		↑ CR number as allocated by MCC support team	
For submission to: RAN#7	for approval <input checked="" type="checkbox"/>	strategic <input type="checkbox"/>	(for SMG use only)
<small>list expected approval meeting # here ↑</small>	for information <input type="checkbox"/>	non-strategic <input type="checkbox"/>	

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: <ftp://ftp.3gpp.org/Information/CR-Form-v2.doc>

Proposed change affects: (U)SIM ME UTRAN / Radio Core Network
(at least one should be marked with an X)

Source: R-WG3, RAN-WG3 **Date:**

Subject: Beginning of DL transmission in one RL

Work item:

Category: <small>(only one category shall be marked with an X)</small>	F Correction	<input checked="" type="checkbox"/>	Release: Phase 2 <input type="checkbox"/> Release 96 <input type="checkbox"/> Release 97 <input type="checkbox"/> Release 98 <input type="checkbox"/> Release 99 <input checked="" type="checkbox"/> Release 00 <input type="checkbox"/>
	A Corresponds to a correction in an earlier release	<input type="checkbox"/>	
	B Addition of feature	<input type="checkbox"/>	
	C Functional modification of feature	<input type="checkbox"/>	
	D Editorial modification	<input type="checkbox"/>	

Reason for change: In the description of the RL Addition procedure it is reported that " The DRNS shall start transmission on the new RL after synchronisation is achieved in the lur user plane as specified in ref. 25.427". The same sentence is reported also for the RL Setup procedure (currently it is not defined when the 'DL transmission on the new RL starts).

Clauses affected: 8.3.1.2, 8.3.2.2

Other specs affected:	Other 3G core specifications	<input type="checkbox"/>	→ List of CRs:	
	Other GSM core specifications	<input type="checkbox"/>	→ List of CRs:	
	MS test specifications	<input type="checkbox"/>	→ List of CRs:	
	BSS test specifications	<input type="checkbox"/>	→ List of CRs:	
	O&M specifications	<input type="checkbox"/>	→ List of CRs:	

Other comments:

8.3.1.2 Successful Operation

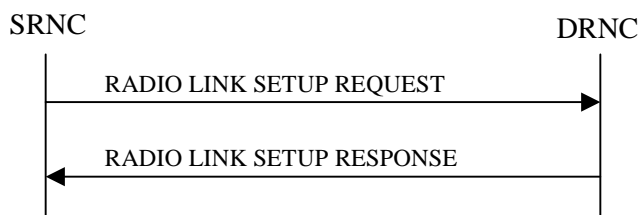


Figure 1: Radio Link Setup procedure: Successful Operation

When the SRNC makes an algorithmic decision to add the first cell or set of cells from a DRNS to the active set of a specific RRC connection, the RADIO LINK SETUP REQUEST message is sent to the corresponding DRNC to request setup of the radio link(s).

The message is also used to establish the connection-oriented service of the signalling bearer in the DRNC. The message includes the S-RNTI associated to the UE, and, if the UE context is already present in the DRNC, the corresponding D-RNTI.

[FDD - The Diversity Control Field indicates for each RL except for the first RL whether the DRNS shall combine the RL with any of the other RLs or not on the Iur. If the *Diversity Control Field* IE is set to "May" (be combined with another RL), then the DRNS shall decide for any of the alternatives. When an RL is to be combined the DRNS shall choose which RL(s) to combine it with.]

If the RADIO LINK SETUP REQUEST message includes the *Allowed Queuing Time* IE the DRNS may queue the request before providing a response to the SRNC.

If the *Initial DL TX Power* IE and *UL Eb/No Target* IE [FDD] are present in the message, the DRNS shall use the indicated DL TX Power and UL Eb/No Target [FDD] as initial value.

If the *Primary CPICH Eb/No* IE [FDD] or the *Primary CCPCH RSCP* IE [TDD] is present, the DRNC should use them when deciding the Initial DL TX Power.

If the RADIO LINK SETUP REQUEST message includes the *DCH Combination Indicator* IE for a DCH, the DRNS shall treat all DCHs with the same value of this IE as a set of co-ordinated DCHs. The included *RLC Mode* IE of the DCH may be used by the DRNS to optimise the power control.

The *Allocation/Retention Priority* IE defines the priority level that should be used by the DRNS to prioritise the allocation and the retention of the resources used by the DCH. The *Frame Handling Priority* IE defines the priority level that should be used by the DRNS to prioritise the discard/delay of the data frames of the DCH.

The DRNS shall use the included *UL DCH FP Mode* IE for a DCH as the new DCH FP Mode in the Uplink of the user plane for this DCH.

The DRNS shall use the included *ToAWS* IE for a DCH as the new Time of Arrival Window Start Point in the user plane for this DCH.

The DRNS shall use the included *ToAWE* IE for a DCH as the new Time of Arrival Window End Point in the user plane for this DCH.

[FDD - If the RADIO LINK SETUP REQUEST message includes the *SSDT Cell Identity* IE, the DRNS may activate SSDT using the *SSDT Cell Identity* IE and *SSDT Cell Identity Length* IE.]

At the reception of the RADIO LINK SETUP REQUEST message, DRNS allocates requested type of channelisation codes and other physical channel resources for each RL and assigns a binding identifier and a transport layer address for each DCH or set of co-ordinated DCHs. This information shall be sent to the SRNS in the message RADIO LINK SETUP RESPONSE when all the RLs have been successfully setup.

If the *Initial DL TX Power* and the *UL Eb/No Target* IEs are not present in the RADIO LINK SETUP REQUEST message, then DRNC shall include the suggested initial UL Eb/No Target and the DL Eb/No Target in the RADIO LINK SETUP RESPONSE message.

In the case of combining one or more RLs the DRNC shall indicate in the RADIO LINK SETUP RESPONSE message with the Diversity Indication that the RL is combined with another RL. In this case the Reference RL ID shall be

included to indicate with which RL the combination is performed. The Reference RL ID shall be included for all but one of the combined RLs, for which the *Transport Layer Address* IE and the *Binding ID* IE shall be included.

In the case of not combining an RL with another RL, the DRNC shall indicate in the RADIO LINK SETUP RESPONSE message with the Diversity Indication that no combining is done. In this case the DRNC shall include both the *Transport Layer Address* IE and the *Binding ID* IE for the transport bearer to be established for each DCH of the RL in the RADIO LINK SETUP RESPONSE message.

In case of a set of co-ordinated DCHs requiring a new transport bearer on Iur the *Binding Identifier* IE and the *Transport Layer Address* IE shall be included only for one of the DCH in the set of co-ordinated DCHs.

[FDD - Irrespective of SSdT activation, the DRNS shall include in the RADIO LINK SETUP RESPONSE message an indication concerning the capability to support SSdT on this RL. Only if the RADIO LINK SETUP REQUEST message requested SSdT activation and the RADIO LINK SETUP RESPONSE message indicates that the SSdT capability is supported for this RL, SSdT is activated in the DRNS.]

The DRNS shall also provide the SRNC with the UTRAN Cell Identifier (UC-Id) and information of the neighbouring cells to the cell(s) where the radio link(s) are added.

If a neighbouring cell is controlled by another RNC, the DRNC shall report also the node identifications (i.e. RNC, CN domain nodes) of the RNC controlling the neighbouring cell.

If there was no UE context for this UE in the DRNS before the RADIO LINK SETUP REQUEST message was received the DRNC shall include the node identifications of the CN Domain nodes that the RNC is connected to (using LAC and RAC of the current cell), and the D-RNTI in the RADIO LINK SETUP RESPONSE message.

After sending of the RADIO LINK SETUP RESPONSE message the DRNS shall continuously attempt to obtain UL synchronisation and start reception on the new RL. The DRNS shall start transmission on the new RL after synchronisation is achieved in the DL user plane as specified in ref. [3].

8.3.2.2 Successful Operation

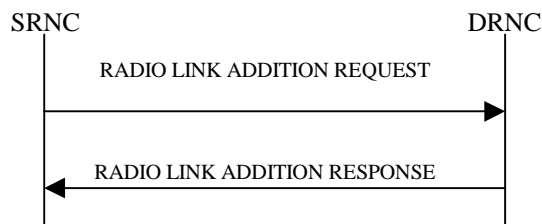


Figure 2: Radio Link Addition procedure: Successful Operation

The procedure is initiated with a RADIO LINK ADDITION REQUEST message sent from the SRNC to the DRNC.

Upon reception, the DRNS shall reserve the necessary resources and configure the new RL(s) according to the parameters given in the message. Unless specified below, the meaning of parameters is specified in other specifications.

[FDD - The Diversity Control Field indicates for each RL whether the DRNS shall combine the new RL with existing RL(s) or not on the Iur. If the *Diversity Control Field* IE is set to "May" (be combined with another RL), then the DRNS shall decide for any of the alternatives. When a new RL is to be combined the DRNS shall choose which RL(s) to combine it with.]

If the *Primary CCPCH Ec/Io* IE [FDD] or the *Primary CCPCH RSCP* IE [TDD] measured by the UE is included in the RADIO LINK ADDITION REQUEST message, the DRNS shall use this in the calculation of the Initial DL TX Power. If the *Primary CCPCH Ec/Io* IE is not present, the DRNS sets the Initial DL TX Power accordingly to the power used by the existing RLs.

[FDD - The DRNS shall use the provided UL Eb/No Target value as the current target for the inner-loop power control.]

[FDD - If the RADIO LINK ADDITION REQUEST message contains an *SSDT Cell Identity* IE, SSDT may be activated for the concerned new RL, with the indicated SSDT Cell Identity used for that RL.]

The DRNS shall activate any feedback mode diversity according to the received settings.

If all requested RLs are successfully added, the DRNC shall respond with a RADIO LINK ADDITION RESPONSE message.

In the case of combining an RL with existing RL(s) the DRNC shall indicate in the RADIO LINK ADDITION RESPONSE message with the Diversity Indication that the RL is combined. In this case the Reference RL ID shall be included to indicate one of the existing RLs that the new RL is combined with.

In the case of not combining an RL with existing RL(s), the DRNC shall indicate in the RADIO LINK ADDITION RESPONSE message with the Diversity Indication that no combining is done. In this case the DRNC shall include both the Transport Layer Address and the binding ID for the transport bearer to be established for each DCH of the RL in the RADIO LINK ADDITION RESPONSE message.

In case of co-ordinated DCH, the binding ID and the transport address shall be included for only one of the co-ordinated DCHs.

[FDD - Irrespective of SSDT activation, the DRNS shall include in the RADIO LINK ADDITION RESPONSE message an indication concerning the capability to support SSDT on this RL. Only if the RADIO LINK ADDITION REQUEST message requested SSDT activation and the RADIO LINK ADDITION RESPONSE message indicates that the SSDT capability is supported for this RL, SSDT is activated in the DRNS.]

For any cell neighbouring of a cell in which a RL was added, the DRNC shall provide in the RADIO LINK ADDITION RESPONSE message the UTRAN Cell Identifier (UC-Id), the Frequency Number, the Primary Scrambling Code and the node identification of CN nodes connected to the RNC controlling the neighbouring cell if the neighbouring cell is not controlled by the DRNC. In addition, if the information is available, the DRNC shall also provide the CPICH Power level and Frame Offset of the neighbouring cell.

The DRNC shall also provide the configured uplink Maximum Eb/No and UL Minimum Eb/No for every new RL to the SRNC in the RADIO LINK ADDITION RESPONSE message. These values are taken into consideration by DRNS admission control and shall be used by the SRNC as limits for the UL inner-loop power control target.

The DRNC shall also provide the selected scrambling- and channelisation codes of the new RLs in order to enable the SRNC to inform the UE about the selected codes.

After sending of the RADIO LINK ADDITION RESPONSE message the DRNS shall continuously attempt to obtain UL synchronisation and start reception on the new RL. The DRNS shall start transmission on the new RL after synchronisation is achieved in the ~~Iur-DL~~ user plane as specified in ref. [3].

CHANGE REQUEST		Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.
25.423	CR 055	Current Version: 3.0.0
GSM (AA.BB) or 3G (AA.BBB) specification number ↑	↑ CR number as allocated by MCC support team	
For submission to: RAN #7 <small>list expected approval meeting # here ↑</small>	for approval for information <input checked="" type="checkbox"/>	strategic <input type="checkbox"/> non-strategic <input type="checkbox"/> <small>(for SMG use only)</small>

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: ftp://ftp.3gpp.org/Information/CR-Form-v2.doc

Proposed change affects: (U)SIM ME UTRAN / Radio Core Network
(at least one should be marked with an X)

Source: RAN WG3 **Date:** 23 Feb 00

Subject: Alignment of Abnormal Event Handling

Work item:

Category:	F Correction <input checked="" type="checkbox"/> A Corresponds to a correction in an earlier release <input type="checkbox"/> B Addition of feature <input type="checkbox"/> C Functional modification of feature <input type="checkbox"/> D Editorial modification <input type="checkbox"/>	Release:	Phase 2 <input type="checkbox"/> Release 96 <input type="checkbox"/> Release 97 <input type="checkbox"/> Release 98 <input type="checkbox"/> Release 99 <input checked="" type="checkbox"/> Release 00 <input type="checkbox"/>
------------------	--	-----------------	--

(only one category shall be marked with an X)

Reason for change: The current specification is internally and externally inconsistent in this area. This CR aligns internally, with RANAP and NBAP.

Clauses affected: 8.3.6.3, 8.3.15.3, 8.4.1.4, 8.4.2.3, ~~9.2.1.5~~, 10.3.3

Other specs affected:	Other 3G core specifications <input checked="" type="checkbox"/> Other GSM core specifications <input type="checkbox"/> MS test specifications <input type="checkbox"/> BSS test specifications <input type="checkbox"/> O&M specifications <input type="checkbox"/>	→ List of CRs: 25.413 (052), 25.433 (045) → List of CRs: → List of CRs: → List of CRs: → List of CRs:
------------------------------	--	---

Other comments: The change in rev 1 is the removal of the proposed change to the Cause section.



<----- double-click here for help and instructions on how to create a CR.

8.3.6 Synchronised Radio Link Reconfiguration Cancellation

8.3.6.1 General

This procedure is used to order the DRNS to release the new configuration for the Radio Link(s) within the DRNS, previously prepared by the Synchronised Radio Link Preparation procedure.

This procedure shall use the signalling bearer connection for the relevant UE context.

8.3.6.2 Successful Operation



Figure 143: Synchronised Radio Link Reconfiguration Cancellation procedure, Successful Operation

The DRNS shall release the new configuration previously prepared by the Synchronised RL Reconfiguration Preparation procedure and continue using the old configuration when receiving the RADIO LINK RECONFIGURATION CANCEL message from the SRNC.

8.3.6.3 Abnormal Conditions

~~If the DRNS receives the RADIO LINK RECONFIGURATION CANCEL message from the SRNC when there is no new configuration for the Radio Link(s) within the DRNS, previously prepared by the Synchronised Radio Link Preparation procedure, the message shall be ignored.~~

8.3.15 Down Link Power Control [FDD]

8.3.15.1 General

The purpose of this procedure is to balance the DL transmission powers of the radio links for one UE.

This procedure shall use the signalling bearer connection for the relevant UE context.

The Down Link Power Control procedure may be initiated by the SRNC at any time after establishing a Radio Link. If the SRNC has initiated deletion of the last Radio Link in this DRNS the Down Link Power Control procedure shall not be initiated.

8.3.15.2 Successful Operation



Figure 225: Down Link Power Control procedure, Successful Operation

The Down Link Power Control procedure is initiated by the SRNC sending a DL POWER CONTROL REQUEST message to the DRNC.

If the message contains the *DL Reference Power* IE, the DRNC shall perform the power balancing (see below) for all radio links for the UE context.

Alternatively, if the message contains the *DL Reference Power Information* IE, the DRNC shall perform the power balancing (see below) for all radio links addressed in the message.

The DRNS performs the power balancing by using the received desired DL Reference Power as a reference for adjusting the applied DL power.

[Editor's note: The exact mechanism is FFS.]

8.3.15.3 Abnormal Conditions

~~If the DRNC receives the DL POWER CONTROL REQUEST message after a request to delete the last radio link in the DRNC has been received, the DRNC shall ignore the message.~~

8.4.1 Common Transport Channel Resources Initialisation

8.4.1.1 General

The Common Transport Channel Resources Initialisation procedure is used by the SRNC for the initialisation of the Common Transport Channel user plane towards the DRNC and/or for the initialisation of the UE context in the DRNC.

This procedure shall use the connectionless mode of the signalling bearer.

8.4.1.2 Successful Operation

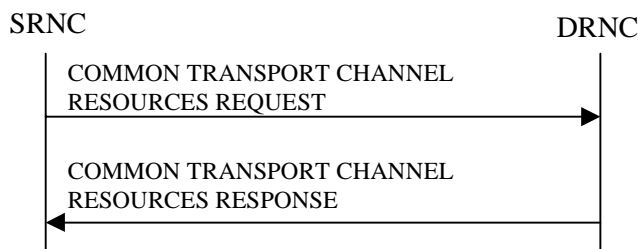


Figure 330: Common Transport Channel Resources Initialisation procedure, Successful Operation

The SRNC initiates the procedure by sending the message COMMON TRANSPORT CHANNEL RESOURCES REQUEST to the DRNC.

Upon reception of the COMMON TRANSPORT CHANNEL RESOURCES REQUEST message, the DRNC shall respond by sending a COMMON TRANSPORT CHANNEL RESOURCES RESPONSE message to the SRNC.

If the value of the *Transport Bearer Request Indicator* IE is set to "Bearer Requested", the DRNC shall store the received *Transport Bearer ID* IE and include the *Binding Identity* and *Transport Layer Address* IEs in the COMMON TRANSPORT CHANNEL RESOURCES RESPONSE message.

If the value of the *Transport Bearer Request Indicator* IE is set to "Bearer not Requested", the DRNC shall use the transport bearer for the indicated by the *Transport Bearer ID* IE.

The DRNC shall include the *FACH Priority Indicator* IE and *FACH Initial Window Size* IE for each priority class that the DRNC has determined shall be used. The DRNC may include several *MAC-c SDU Length* IEs for each priority class.

If there exists multiple Secondary CCPCHs in the cell where the UE is located, the DRNC may include in the COMMON TRANSPORT CHANNEL RESOURCES RESPONSE message the *FACH Info for optional S-CCPCH* IE group to be used by the UE which is different from the Secondary CCPCH used by the UE at reception of the COMMON TRANSPORT CHANNEL RESOURCES REQUEST message. If the DRNC includes the *FACH Info for optional S-CCPCH* IE group, then it shall also include the *FACH Priority Indicator* IE and *FACH Initial Window Size* IE for each priority class for the new Secondary CCPCH.

8.4.1.3 Unsuccessful Operation

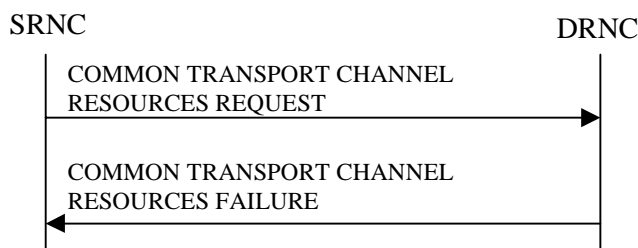


Figure 434: Common Transport Channel Resources Initialisation procedure, Unsuccessful Operation

If the *Transport Bearer Request Indicator* IE is set to "Bearer Requested" and the DRNC is not able to provide a Transport Bearer, the DRNC shall respond to the SRNC with the COMMON TRANSPORT CHANNEL RESOURCES FAILURE message, indicating the cause of the failure.

8.4.1.4 Abnormal Conditions

~~If the DRNC receives the COMMON TRANSPORT CHANNEL RESOURCES REQUEST message for an unknown D-RNTI it shall respond to the SRNC with the COMMON TRANSPORT CHANNEL RESOURCES FAILURE message, indicating the cause of the failure.~~

8.4.2 Common Transport Channel Resources Release

8.4.2.1 General

This procedure is used by the SRNC to request release of Common Transport Channel Resources for a given UE in the DRNS. The SRNC uses this procedure either to release the UE context from the DRNC (and thus both the D-RNTI and the C-RNTI) or to release only the C-RNTI.

This procedure shall use the connectionless mode of the signalling bearer.

8.4.2.2 Successful Operation



Figure 532: Common Transport Channel Resources Release procedure, Successful Operation

The SRNC initiates the Common Transport Channel Resources Release procedure by sending the message COMMON TRANSPORT CHANNEL RESOURCES RELEASE REQUEST to the DRNC. The SRNC may include the C-RNTI in the message to request the release of an individual C-RNTI.

At the reception of the message, if the C-RNTI is not present in the message, the DRNC shall release the whole UE context identified by the D-RNTI.

If the C-RNTI is included in the message, the DRNC shall release only the indicated C-RNTI.

8.4.2.3 Abnormal Conditions

~~If the DRNC receives the COMMON TRANSPORT CHANNEL RESOURCES RELEASE REQUEST messages for an unknown D-RNTI the message shall be ignored.~~

~~If the D-RNTI is known but the C-RNTI does not exist for that D-RNTI (UE context) the message shall be ignored.~~

9.2.1.5 Cause

The purpose of the cause information element is to indicate the reason for a particular event for the whole protocol.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Cause Group	M		ENUMERATED (Radio Network Layer, Transport Layer, Protocol, Misc)	
<i>CHOICE cause group</i>				
<i>Radio Network Layer</i>				
Radio Network Layer Cause	M		ENUMERATED (Unknown C-ID, Cell not Available, Power Level not Supported, UL Scrambling Code Already in Use, DL Radio Resources not Available, UL Radio Resources not Available, Measurement not Supported For The Object, Macrodiversity Combining Not Possible, Reconfiguration not Allowed, Requested Configuration not Supported Synchronisation Failure, Unspecified, <i>Context already exists</i>)	
<i>Transport Layer</i>				
Transport Layer Cause	M		ENUMERATED (Transport link failure, Transmission port not available, Unspecified)	
<i>Protocol</i>				
Protocol Cause			ENUMERATED (Transaction not Allowed, Transfer Syntax Error, Abstract Syntax Error (Reject), Abstract Syntax Error (Ignore and Notify), Message not Compatible with Receiver State, Semantic Error, Unspecified)	
<i>Misc</i>				
Miscellaneous Cause	M		ENUMERATED (Control Processing Overload Hardware Failure, O&M Intervention, Not enough User Plane Processing Resources, Unspecified)	

10.3.3 Logical Error Handling

Logical error situations occur when a message is comprehended correctly, but the information contained within the message is not valid (i.e. semantic error), or describes a procedure which is not compatible with the state of the receiver. In these conditions, the following behaviour shall be performed ([unless otherwise specified](#)) as defined by the class of the elementary procedure, irrespective of the criticality of the IEs containing the erroneous values.

Class 1:

Where the logical error occurs in a request message of a class 1 procedure, and the procedure has a failure message, the failure message shall be sent with an appropriate cause value. Typical cause values are:

Protocol Causes:

1. Semantic Error
2. Message not Compatible with Receiver State

Where the logical error is contained in a request message of a class 1 procedure, and the procedure does not have a failure message, the Error Indication procedure shall be initiated with an appropriate cause value.

Where the logical error exists in a response message of a class 1 procedure, local error handling shall be initiated.

Class 2:

Where the logical error occurs in a message of a class 2 procedure, the Error Indication procedure shall be initiated with an appropriate cause value.

TSG-RAN Working Group 3 Meeting #11
Sophia Antipolis, France, 28th February– 3rd
March 2000

Document R3-000786

e.g. for 3GPP use the format TP-99xxx
or for SMG, use the format P-99-xxx

CHANGE REQUEST		<small>Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.</small>	
25.423	CR	053r1	Current Version: 3.0.0
<small>GSM (AA.BB) or 3G (AA.BBB) specification number ↑</small>		<small>↑ CR number as allocated by MCC support team</small>	
For submission to: TSG RAN #7	for approval <input checked="" type="checkbox"/>	strategic <input type="checkbox"/>	<small>(for SMG use only)</small>
<small>list expected approval meeting # here ↑</small>	for information <input type="checkbox"/>	non-strategic <input type="checkbox"/>	

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: <http://ftp.3gpp.org/Information/CR-Form-v2.doc>

Proposed change affects: (U)SIM ME UTRAN / Radio Core Network
(at least one should be marked with an X)

Source: RAN-WG3 **Date:** 28 February 2000

Subject: Addition of "Cell Individual Offset" IE to Neighbouring Cell Information

Work item:

Category:	F Correction <input type="checkbox"/>	Release:	Phase 2 <input type="checkbox"/>
	A Corresponds to a correction in an earlier release <input type="checkbox"/>		Release 96 <input type="checkbox"/>
<small>(only one category shall be marked with an X)</small>	B Addition of feature <input checked="" type="checkbox"/>		Release 97 <input type="checkbox"/>
	C Functional modification of feature <input type="checkbox"/>		Release 98 <input type="checkbox"/>
	D Editorial modification <input type="checkbox"/>		Release 99 <input checked="" type="checkbox"/>
			Release 00 <input type="checkbox"/>

Reason for change: In R2, the use of Cell Individual Offset is understood as a significant feature for R99. This function enables operators to fine-tune the cell-site configuration. The use of such feature and the effect introduced by this feature are described in TS25.331 and TS25.304 respectively.

However, this feature has not been introduced to R3 at this moment. This feature bring potentially better performance to UTRAN configuration while the impacts on the current specification are very few.

This CR proposes to introduce "Cell Individual Offset" IE to RNSAP specification.

Clauses affected:

- 9.1.4 RADIO LINK SETUP RESPONSE
- 9.1.5 RADIO LINK SETUP FAILURE
- 9.1.7 RADIO LINK ADDITION RESPONSE
- 9.1.8 RADIO LINK ADDITION FAILURE
- 9.2.2 FDD Specific Parameters
- 9.3.3 PDU Definitions
- 9.3.4 Information Element Definitions

Other specs affected:

Other 3G core specifications	<input type="checkbox"/>	→ List of CRs:	
Other GSM core specifications	<input type="checkbox"/>	→ List of CRs:	
MS test specifications	<input type="checkbox"/>	→ List of CRs:	
BSS test specifications	<input type="checkbox"/>	→ List of CRs:	
O&M specifications	<input type="checkbox"/>	→ List of CRs:	

**Other
comments:**



help.doc



<----- double-click here for help and instructions on how to create a CR.

9.1.4 RADIO LINK SETUP RESPONSE

9.1.4.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
D-RNTI	O			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
RL Information Response		1..<maxnoofRLs>		
RL ID	M			
SAI	M			
UL Interference Level	M			
DL Code Information		1..<maxnoofDLCode s>		
DL Scrambling Code	M			
FDD DL Channelisation Code Number	M			
Diversity Indication	C-NotFirstRL			
CHOICE <i>diversity Indication Combining</i>				
RL ID	M			Reference RL ID for the combining
<i>Non Combining or IE not present</i>				"IE not present" is equivalent to "First RL".
DCH Information Response		0..<maxnoofDCHs>		Only one DCH per set of co-ordinated DCHs shall be included
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
SSDT Support Indicator	M			
Maximum Uplink Eb/No	M		Uplink Eb/No	
Minimum Uplink Eb/No	M		Uplink Eb/No	
Neighbouring FDD Cell Information		0..<maxnoofFDDn eighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
>>Cell Individual Offset	O			
Neighbouring TDD Cell Information		0..<maxnoofTDDn eighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case1			
PSCH Time Slot	C-Case2&3			
>>Cell Individual Offset	O			

Uplink Eb/No Target	O		Uplink Eb/No	
Downlink Eb/No Target	O			
Criticality Diagnostics	O			

Condition	Explanation
IfComb	This IE is present if the 'Diversity Indication' IE indicates 'combining' in the Node B.
IfNotComb	This IE is present if the 'Diversity Indication' IE indicates 'non combining' in the Node B.
NotFirstRL	The IE is present only if the RL is not the first RL in the RL Information
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range bound	Explanation
MaxnoofRLs	Maximum no. of RLs for one UE.
MaxnoofDCHs	Maximum no. of DCHs for one UE.
MaxnoofFDDneighbours	Maximum number of neighbouring FDD cell for one cell.
MaxnoofTDDneighbours	Maximum number of neighbouring TDD cell for one cell.

9.1.4.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
D-RNTI	O			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
RL Information Response		1		
RL ID	M			
SAI	M			
UL Interference Level	M			
Maximum Uplink Eb/No	M		Uplink Eb/No	
Minimum Uplink Eb/No	M		Uplink Eb/No	
Uplink Eb/No Target	O		Uplink Eb/No	
Downlink Eb/No Target	O			
UL CCTrCH Information		1..<maxnoofCCTrCHs>		
CCTrCH ID	M			
UL DPCH Information		1..<MaxnoofDPC Hs>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
DL CCTrCH Information		1..<maxnoofCCTrCHs>		
CCTrCH ID	M			
DL DPCH Information		1..<MaxnoofDPC Hs>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
DCH Information Response		1..<maxnoofDCHs >		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
Neighbouring FDD Cell Information	O	0..<maxnoofFDDn eighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			

Primary Scrambling Code	M			
Primary CPICH Power	O			
>>Cell Individual Offset	O			
Neighbouring TDD Cell Information	O	<i>0..<maxnoofTDDneighbours></i>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case1			
PSCH Time Slot	C-Case2&3			
>>Cell Individual Offset	O			
Criticality Diagnostics	O			

Condition	Explanation
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range bound	Explanation
MaxnoofDPCHs	Maximum no. of DPCHs for one CCTrCH.
MaxnoofDCHs	Maximum no. of DCHs for one UE.
MaxnoofFDDneighbours	Maximum number of neighbouring FDD cell for one cell
MaxnoofTDDneighbours	Maximum number of neighbouring TDD cell for one cell
MaxnoofCCTrCHs	Maximum no. of CCTrCH for one UE.

9.1.5 RADIO LINK SETUP FAILURE

9.1.5.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
D-RNTI	O			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
Unsuccessful RL Information Response		1...<maxnoofRLs>		
RL ID	M			
Cause	M			
Successful RL Information Response		0..<maxnoofRLs-1>		
RL ID	M			
SAI	M			
UL Interference Level	M			
DL Code Information		1..<maxnoofDL Codes>		
DL Scrambling Code	M			
FDD DL Channelisation Code Number	M			
Diversity Indication	M			
CHOICE <i>diversity Indication Combining</i>				
RL ID	M			Reference RL ID for the combining
<i>Non Combining or IE not present</i>				"IE not present" is equivalent to "First RL".
DCH Information Response		0..<maxnoofDCHs>		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
SSDT Support Indicator	M			
Neighbouring FDD Cell Information	O			
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
>>Cell Individual Offset	O			
Neighbouring TDD Cell Information	O			
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case3			
PSCH Time Slot	C-Case2&3			
>>Cell Individual Offset	O			
Uplink Eb/No Target	O		Uplink	

			Eb/No	
Maximum Uplink Eb/No	M		Uplink Eb/No	
Minimum Uplink Eb/No	M		Uplink Eb/No	
Downlink Eb/No Target	O			
Criticality Diagnostics	O			

Condition	Explanation
IfComb	This IE is present if the 'Diversity Indication' IE indicates 'combining' in the Node B.
IfNotComb	This IE is present if the 'Diversity Indication' IE indicates 'non combining' in the Node B.
NotFirstRL	The IE is present only if the RL is not the first RL in the RL Information
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range bound	Explanation
MaxnoofRLs	Maximum no. of RLs for one UE.
MaxnoofDCHs	Maximum no. of DCHs for one UE.

9.1.5.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
Unsuccessful RL Information Response		1		
RL ID	M			
Cause	M			
Criticality Diagnostics	O			

9.1.7 RADIO LINK ADDITION RESPONSE

9.1.7.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
RL Information Response		1..<maxnoofRLs-1>		
RL ID	M			
SAI	M			
UL Interference Level	M			
DL Code Information		1..<maxnoofDLCodes>		
DL Scrambling Code	M			
DL Channelisation Code	M			
Diversity Indication	M			
CHOICE <i>diversity indication</i>				
<i>Combining</i>				
RL ID	M			Reference RL-Id
<i>Non combining</i>				
DCH Information Response		1..<maxnoofDCHs>		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
SSDT Support Indicator	M			
Minimum Uplink Eb/No	M		Uplink Eb/No	
Maximum Uplink Eb/No	M		Uplink Eb/No	
Neighbouring FDD Cell Information		0..<maxnoofFDD Neighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
>>Cell Individual Offset	O			
Neighbouring TDD Cell Information		0..<maxnoofTDD Neighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case1			
PSCH Time Slot	C-Case2&3			
>>Cell Individual Offset	O			
Criticality Diagnostics	O			

Condition	Explanation
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range bound	Explanation
MaxnoofDCHs	Maximum number of dedicated channels on one RL
MaxnoofRLs	Maximum number of radio links for one UE
MaxnoofFDDNeighbours	Maximum number of neighbouring FDD cells for one cell
MaxnoofTDDNeighbours	Maximum number of neighbouring TDD cells for one cell
MaxnoofDLCodes	Maximum number of DL code information

9.1.7.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
RL Information Response		1		
—RL ID	M			
—SAI	M			
—UL Interference Level	M			
—UL CCTrCH Information		1..<maxnoof CCTrCHs>		
—CCTrCH ID	M			
—UL DPCH Information		1..<maxnoOfDPC Hs>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
—DL CCTrCH Information		1..<maxnoof CCTrCHs>		
—CCTrCH ID	M			
—DL DPCH information		1..<maxnoOfDPC Hs>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
Diversity Indication	M			
CHOICE <i>diversity indication</i>				
<i>Combining</i>				
RL ID	M			Reference RL
<i>Non combining</i>				
DCH Information Response		1..<maxnoofDCHs >		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
Minimum Uplink Eb/No	M		Uplink Eb/No	
Maximum Uplink Eb/No	M		Uplink Eb/No	
Neighbouring FDD Cell Information		0..<maxnoofFDD Neighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			

Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
>>Cell Individual Offset	O			
Neighbouring TDD Cell Information		<i>0..<maxnoofTDD Neighbours></i>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case1			
PSCH Time Slot	C-Case2&3			
>>Cell Individual Offset	O			
Criticality Diagnostics	O			

Condition	Explanation
Case1	This IE is present only if Sync Case = Case1
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range Bound	Explanation
MaxnoofDCHs	Maximum number of dedicated channels on one RL
MaxnoofFDDNeighbours	Maximum number of neighbouring FDD cells for one cell
MaxnoofTDDNeighbours	Maximum number of neighbouring TDD cells for one cell
MaxnoofDLCodes	Maximum number of DL code information
MaxnoOfDPCHs	Maximum number of DPCH in one CCTrCH
MaxnoofCCTrCHs	no. of CCTrCH for one UE.

9.1.8 RADIO LINK ADDITION FAILURE

9.1.8.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
Unsuccessful RL Information Response		1..<maxnoofRLs-1>		
RL ID	M			
Cause	M			
Successful RL Information Response		1..<maxnoofRLs-2>		
RL ID	M			
SAI	M			
UL Interference Level	M			
DL Code Information		1..<maxnoofDLCodes>		
DL scrambling code	M			
DL channelisation code	M			
Diversity Indication	M			
<i>CHOICE diversity indication</i>				
<i>Combining</i>				
RL ID	M			Reference RL-Id
<i>Non combining</i>				
DCH Information Response		1..<maxnoofDCHs>		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
SSDT Support Indicator	M			
Minimum Uplink Eb/No	M		Uplink Eb/No	
Maximum Uplink Eb/No	M		Uplink Eb/No	
Neighbouring FDD Cell Information		0..<maxnoofFDD Neighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
>>Cell Individual Offset	O			
Neighbouring TDD Cell Information		0..<maxnoofTDD Neighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case1			
PSCH Time Slot	C-Case2&3			
>>Cell Individual Offset	O			
Criticality Diagnostics	O			

Condition	Explanation
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range bound	Explanation
MaxnoofDCHs	Maximum number of dedicated channels on one RL
MaxnoofRLs	Maximum number of radio links for one UE
MaxnoofFDDNeighbours	Maximum number of neighbouring FDD cells for one cell
MaxnoofTDDNeighbours	Maximum number of neighbouring TDD cells for one cell
MaxnoofDLCodes	Maximum number of DL code information

9.1.8.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
Unsuccessful RL Information Response		1		
RL ID	M			
Cause	M			
Criticality Diagnostics	O			

9.2.1.X Cell Individual Offset

Cell individual offset is an offset that will be applied by UE to the measurement results for a P-CPICH[FDD]/ P-CCPCH[TDD], before the measurement takes place. This allows operators to easily monitor specific cell, as well as other uses. The offset can be positive or negative, so the measured results can be reported as better than, or worse than what it really is.

<u>IE/Group Name</u>	<u>Presence</u>	<u>Range</u>	<u>IE type and reference</u>	<u>Semantics description</u>
<u>Cell individual offset</u>			<u>Integer (-20,...,+20)</u>	<u>-20 -> -10dB</u> <u>-19 -> -9.5dB</u> <u>...</u> <u>+20 -> +10dB</u>

9.2.2 FDD Specific Parameters

9.3.3 PDU Definitions

```

-- *****
--
-- PDU definitions for RNSAP.
--
-- *****

RNSAP-PDU-Contents -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

-- *****
--
-- IE parameter types from other modules.
--
-- *****

IMPORTS
    AllocationRetentionPriority,
    AllowedQueuingTime,
    BLER,
    BindingID,
    BurstType,
    CellIndividualOffset,
    C-ID,
    C-RNTI,
    CCTrCH-ID,
    CFN,
    CN-CS-DomainIdentifier,
    CN-PS-DomainIdentifier,
    CPICH-EcIo,
    CPICH-Power,
    Cause,
    CellParameterID,
    ChipOffset,
    CompressedModeMethod,
    CriticalityDiagnostics,
    D-FieldLength,
    D-RNTI,
    D-RNTI-ReleaseIndication,
    DCH-CombinationInd,
    DCH-ID,
    DL-ChannelisationCode,
    DL-DPCCH-SlotFormat,
    DL-DPCH-SlotNumber,
    DL-EbNo,
    DL-EbNoTarget,
    DL-FrameType,
    DL-Power,
    DL-ScramblingCode,
    DPCH-ID,
    DRX-Parameter,
    DedicatedMeasurementValue,
    DiversityControlField,
    DiversityMode,
    FACH-DataFrameSize,
    FACH-InitialWindowSize,
    FACH-PriorityIndicator,
    FDD-DL-ChannelisationCodeNumber,
    FDD-S-CCPCH-Offset,
    FrameHandlingPriority,
    FrameOffset,
    GapPeriod,
    GapPositionMode,
    L3-Information,
    MAC-c-SDU-Length,
    MaxNrOFUL-DPCHs,
    MeanBitRate,
    MeasurementCharacteristics,
    MeasurementID,
    MidambleShift,
    MinUL-ChannelisationCodeLength,
    MultipleURAsIndicator,
    MultiplexingPosition,
    Offset,
    PD,

```



```

PSCH-PCCPCH-TimeSlot,
PSCH-TimeSlot,
PayloadCRC-PresenceIndicator,
PilotBitsUsedIndicator,
PowerControlMode,
PowerOffset,
PowerResumeMode,
PrimaryCCPCH-RSCP,
PrimaryCPICH-EcNo,
PrimaryCPICH-Power,
PrimaryScramblingCode,
PropagationDelay,
PunctureLimit,
RANAP-RelocationInformation,
RL-ID,
RLC-Mode,
RNC-ID,
RepetitionLength,
RepetitionPeriod,
ReportCharacteristics,
S-FieldLength,
S-RNTI,
SAI,
SN,
SRNC-ID,
SSDT-CellID,
SSDT-CellID-Length,
SSDT-Indication,
SSDT-SupportIndicator,
ScaledUL-InterferenceLevel,
ScramblingCode,
ScramblingCodeChange,
SecondaryCCPCH-SlotFormat,
SyncCase,
TDD-ChannelisationCode,
TDD-PhysicalChannelOffset,
TFCI-Coding,
TFCI-Presence,
TFCI-SignallingMode,
TGD,
TGL,
TPC-StepSize,
TimeSlot,
ToAWE,
ToAWS,
TransportBearerID,
TransportBearerRequestIndicator,
TransportFormatCombinationSet,

```

..... Omitted

```

-- *****
--
-- RADIO LINK SETUP RESPONSE FDD
--
-- *****

RadioLinkSetupResponseFDD ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container        {{RadioLinkSetupResponseFDD-IEs}},
    protocolExtensions          ProtocolExtensionContainer  {{RadioLinkSetupResponseFDD-
Extensions}}
    ...
    OPTIONAL,
}

RadioLinkSetupResponseFDD-IEs RNSAP-PROTOCOL-IES ::= {
    optional { ID id-D-RNTI                CRITICALITY ignore TYPE D-RNTI                PRESENCE
    optional { ID id-CN-PS-DomainIdentifier CRITICALITY ignore TYPE CN-PS-DomainIdentifier
    PRESENCE optional } |
    optional { ID id-CN-CS-DomainIdentifier CRITICALITY ignore TYPE CN-CS-DomainIdentifier
    PRESENCE optional } |
    { ID id-RL-InformationResponseList-RL-SetupRspFDD
    CRITICALITY ignore TYPE RL-InformationResponseList-RL-SetupRspFDD
    PRESENCE mandatory } |
    optional { ID id-UL-EbNoTarget          CRITICALITY ignore TYPE UL-EbNoTarget          PRESENCE
    optional } |
    optional { ID id-DL-EbNoTarget          CRITICALITY ignore TYPE DL-EbNoTarget          PRESENCE
    optional } |
}

```

```

    { ID id-CriticalityDiagnostics          CRITICALITY ignore  TYPE CriticalityDiagnostics
      PRESENCE optional  },
    ...
  }

RL-InformationResponseList-RL-SetupRspFDD ::= RL-IE-ContainerList { {RL-
InformationResponseItemIEs-RL-SetupRspFDD} }

RL-InformationResponseItemIEs-RL-SetupRspFDD RNSAP-PROTOCOL-IES ::= {
  { ID id-RL-InformationResponseItem-RL-SetupRspFDD
    CRITICALITY ignore  TYPE RL-InformationResponseItem-RL-SetupRspFDD
    PRESENCE mandatory  },
  ...
}

RL-InformationResponseItem-RL-SetupRspFDD ::= SEQUENCE {
  rL-ID          RL-ID,
  sAI            SAI,
  ul-InterferenceLevel      ScaledUL-InterferenceLevel,
  dl-CodeInformation      DL-CodeInformationList-RL-SetupRspFDD,
  sSDT-SupportIndicator  SSDT-SupportIndicator,
  maxUL-EbNo          UL-EbNo,
  minUL-EbNo          UL-EbNo,
  neighbouringFDD-CellInformation      NeighbouringFDD-CellInformationList-RL-SetupRsp
OPTIONAL,
  neighbouringTDD-CellInformation      NeighbouringTDD-CellInformationList-RL-SetupRsp
OPTIONAL,
  iE-Extensions          ProtocolExtensionContainer { {RL-InformationResponseItem-RL-
SetupRspFDD-ExtIEs} } OPTIONAL,
  ...
}

RL-InformationResponseItem-RL-SetupRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CodeInformationList-RL-SetupRspFDD ::= SEQUENCE (SIZE (1..maxNoOfDL-Codes)) OF DL-
CodeInformationItem-RL-SetupRspFDD

DL-CodeInformationItem-RL-SetupRspFDD ::= SEQUENCE {
  dl-ScramblingCode      DL-ScramblingCode,
  fDD-DL-ChannelisationCodeNumber      FDD-DL-ChannelisationCodeNumber,
  -- ** NOTE: How many alternatives are there, 2 or 3? **
  diversityIndication    CHOICE {
    combining              SEQUENCE {
      rL-ID                RL-ID
    },
    nonCombiningOrIENotPresent      SEQUENCE {
      dCH-InformationResponse-RL-SetupRspFDD      DCH-InformationResponseList-RL-SetupRspFDD
OPTIONAL
    }
  } OPTIONAL
  -- This IE is present only if the RL is not the first on in the RL Information -- ,
  iE-Extensions          ProtocolExtensionContainer { {DL-CodeInformationItem-RL-
SetupRspFDD-ExtIEs} } OPTIONAL,
  ...
}

DL-CodeInformationItem-RL-SetupRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ** NOTE: Shall this be made as an IE container? **
DCH-InformationResponseList-RL-SetupRspFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-
InformationResponseItem-RL-SetupRspFDD

DCH-InformationResponseItem-RL-SetupRspFDD ::= SEQUENCE {
  dCH-ID          DCH-ID,
  bindingID      BindingID,
  transportLayerAddress      TransportLayerAddress,
  iE-Extensions          ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-
SetupRspFDD-ExtIEs} } OPTIONAL,
  ...
}

DCH-InformationResponseItem-RL-SetupRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ** NOTE: Both FDD and TDD messages use these definitions **
NeighbouringFDD-CellInformationList-RL-SetupRsp ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours)) OF
NeighbouringFDD-CellInformationItem-RL-SetupRsp

```

```

NeighbouringFDD-CellInformationItem-RL-SetupRsp ::= SEQUENCE {
    uC-ID                C-ID,
    cN-PS-DomainIdentifier    CN-PS-DomainIdentifier    OPTIONAL,
    cN-CS-DomainIdentifier    CN-CS-DomainIdentifier    OPTIONAL,
    uARFCN                UARFCN,
    frameOffset            FrameOffset    OPTIONAL,
    primaryScramblingCode    PrimaryScramblingCode,
    primaryCPICH-Power        PrimaryCPICH-Power    OPTIONAL,
    cell-individual            CellIndividualOffset    OPTIONAL,
    iE-Extensions            ProtocolExtensionContainer { {NeighbouringFDD-
CellInformationItem-RL-SetupRsp-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringFDD-CellInformationItem-RL-SetupRsp-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringTDD-CellInformationList-RL-SetupRsp ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours)) OF
    NeighbouringTDD-CellInformationItem-RL-SetupRsp

NeighbouringTDD-CellInformationItem-RL-SetupRsp ::= SEQUENCE {
    c-ID                C-ID,
    cN-PS-DomainIdentifier    CN-PS-DomainIdentifier    OPTIONAL,
    cN-CS-DomainIdentifier    CN-CS-DomainIdentifier    OPTIONAL,
    uARFCN                UARFCN,
    frameOffset            FrameOffset    OPTIONAL,
    cellParameterID        CellParameterID,
    syncCase                SyncCase,
    timeSlot                TimeSlot    OPTIONAL
    -- This IE is present only if SyncCase is Case1 -- ,
    pSCH-TimeSlot            PSCH-TimeSlot    OPTIONAL
    -- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
    cell-individual            CellIndividualOffset    OPTIONAL,
    ul-EbNo                UL-EbNo    OPTIONAL,
    dl-EbNo                DL-EbNo    OPTIONAL,
    iE-Extensions            ProtocolExtensionContainer { {NeighbouringTDD-
CellInformationItem-RL-SetupRsp-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringTDD-CellInformationItem-RL-SetupRsp-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkSetupResponseFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK SETUP RESPONSE TDD
--
-- *****

RadioLinkSetupResponseTDD ::= SEQUENCE {
    protocolIEs            ProtocolIE-Container    {{RadioLinkSetupResponseTDD-IEs}},
    protocolExtensions    ProtocolExtensionContainer {{RadioLinkSetupResponseTDD-
Extensions}}
    OPTIONAL,
    ...
}

RadioLinkSetupResponseTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI                CRITICALITY ignore TYPE D-RNTI                PRESENCE
optional } |
    { ID id-CN-PS-DomainIdentifier    CRITICALITY ignore TYPE CN-PS-DomainIdentifier
PRESENCE optional } |
    { ID id-CN-CS-DomainIdentifier    CRITICALITY ignore TYPE CN-CS-DomainIdentifier
PRESENCE optional } |
    { ID id-RL-InformationResponse-RL-SetupRspTDD    CRITICALITY ignore TYPE RL-InformationResponse-
RL-SetupRspTDD PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics    CRITICALITY ignore TYPE CriticalityDiagnostics
PRESENCE optional },
    ...
}

RL-InformationResponse-RL-SetupRspTDD ::= SEQUENCE {
    rL-ID                RL-ID,
    sAI                SAI,
    ul-InterferenceLevel    ScaledUL-InterferenceLevel,
    maxUL-EbNo            UL-EbNo,
    minUL-EbNo            UL-EbNo,

```

```

    ul-EbNoTarget          UL-EbNo          OPTIONAL,
    dl-EbNoTarget          DL-EbNo          OPTIONAL,
    ul-CCTrCHInformation   UL-CCTrCHInformationList-RL-SetupRspTDD,
    dl-CCTrCHInformation   DL-CCTrCHInformationList-RL-SetupRspTDD,
    dCH-InformationResponse DCH-InformationResponseList-RL-SetupRspTDD,
    neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-SetupRsp
OPTIONAL,
    neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-SetupRsp
OPTIONAL,
    iE-Extensions          ProtocolExtensionContainer { {RL-InformationResponse-RL-
SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

RL-InformationResponse-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
UL-CCTrCHInformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF UL-
CCTrCHInformationItem-RL-SetupRspTDD

UL-CCTrCHInformationItem-RL-SetupRspTDD ::= SEQUENCE {
    cCTrCH-ID              CCTrCH-ID,
    ul-DPCH-Information     UL-DPCH-InformationList-RL-SetupRspTDD,
    iE-Extensions           ProtocolExtensionContainer { {UL-CCTrCHInformationItem-RL-
SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

UL-CCTrCHInformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
UL-DPCH-InformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF UL-DPCH-
InformationItem-RL-SetupRspTDD

-- **NOTE: UL-DPCH-InformationItem-RL-SetupRspTDD and DL-DPCH-InformationItem-RL-SetupRspTDD
-- are currently similar. Combine them? **
UL-DPCH-InformationItem-RL-SetupRspTDD ::= SEQUENCE {
    dPCH-ID                DPCH-ID,
    tDD-ChannelisationCode TDD-ChannelisationCode,
    burstType               BurstType,
    midambleShift           MidambleShift,
    timeSlot                TimeSlot,
    tDD-PhysicalChannelOffset TDD-PhysicalChannelOffset,
    repetitionPeriod        RepetitionPeriod,
    repetitionLength        RepetitionLength,
    tFCI-Presence           TFCI-Presence,
    iE-Extensions           ProtocolExtensionContainer { {UL-DPCH-InformationItem-RL-
SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

UL-DPCH-InformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CCTrCHInformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF DL-
CCTrCHInformationItem-RL-SetupRspTDD

DL-CCTrCHInformationItem-RL-SetupRspTDD ::= SEQUENCE {
    cCTrCH-ID              CCTrCH-ID,
    dl-DPCH-Information     DL-DPCH-InformationList-RL-SetupRspTDD,
    iE-Extensions           ProtocolExtensionContainer { {DL-CCTrCHInformationItem-RL-
SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CCTrCHInformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-DPCH-InformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF DL-DPCH-
InformationItem-RL-SetupRspTDD

DL-DPCH-InformationItem-RL-SetupRspTDD ::= SEQUENCE {
    dPCH-ID                DPCH-ID,
    tDD-ChannelisationCode TDD-ChannelisationCode,
    burstType               BurstType,

```

```

midambleShift          MidambleShift,
timeSlot               TimeSlot,
tDD-PhysicalChannelOffset  TDD-PhysicalChannelOffset,
repetitionPeriod      RepetitionPeriod,
repetitionLength      RepetitionLength,
tFCI-Presence         TFCI-Presence,
iE-Extensions         ProtocolExtensionContainer { {DL-DPCH-InformationItem-RL-
SetupRspTDD-ExtIEs} } OPTIONAL,
...
}

DL-DPCH-InformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

DCH-InformationResponseList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-
InformationResponseItem-RL-SetupRspTDD

DCH-InformationResponseItem-RL-SetupRspTDD ::= SEQUENCE {
dCH-ID                DCH-ID,
bindingID             BindingID,
transportLayerAddress TransportLayerAddress,
iE-Extensions         ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-
SetupRspTDD-ExtIEs} } OPTIONAL,
...
}

DCH-InformationResponseItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

RadioLinkSetupResponseTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- *****
--
-- RADIO LINK SETUP FAILURE FDD
--
-- *****

RadioLinkSetupFailureFDD ::= SEQUENCE {
protocolIEs          ProtocolIE-Container      {{RadioLinkSetupFailureFDD-IEs}},
protocolExtensions   ProtocolExtensionContainer {{RadioLinkSetupFailureFDD-
Extensions}}
OPTIONAL,
...
}

RadioLinkSetupFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
{ ID id-D-RNTI          CRITICALITY ignore TYPE D-RNTI          PRESENCE
mandatory } |
{ ID id-CN-PS-DomainIdentifier CRITICALITY ignore TYPE CN-PS-DomainIdentifier
PRESENCE mandatory } |
{ ID id-CN-CS-DomainIdentifier CRITICALITY ignore TYPE CN-CS-DomainIdentifier
PRESENCE mandatory } |
{ ID id-UnsuccessfulRL-InformationResponseList-RL-SetupFailureFDD
CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponseList-RL-
SetupFailureFDD
PRESENCE mandatory } |
{ ID id-SuccessfulRL-InformationResponseList-RL-SetupFailureFDD
CRITICALITY ignore TYPE SuccessfulRL-InformationResponseList-RL-
SetupFailureFDD
PRESENCE mandatory } |
{ ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics
PRESENCE optional },
...
}

UnsuccessfulRL-InformationResponseList-RL-SetupFailureFDD ::= RL-IE-ContainerList { {UnsuccessfulRL-
InformationResponse-RL-SetupFailureFDD-IEs} }

UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
{ ID id-UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD
CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponse-RL-
SetupFailureFDD
PRESENCE mandatory },
...
}

UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD ::= SEQUENCE {
rL-ID                RL-ID,
cause                Cause,

```

```

    iE-Extensions          ProtocolExtensionContainer { {UnsuccessfulRL-
InformationResponse-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

SuccessfulRL-InformationResponseList-RL-SetupFailureFDD ::= RL-IE-ContainerList { {SuccessfulRL-
InformationResponse-RL-SetupFailureFDD-IEs} }

SuccessfulRL-InformationResponse-RL-SetupFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-SuccessfulRL-InformationResponse-RL-SetupFailureFDD
      CRITICALITY ignore TYPE SuccessfulRL-InformationResponse-RL-
SetupFailureFDD
      PRESENCE mandatory },
    ...
}

SuccessfulRL-InformationResponse-RL-SetupFailureFDD ::= SEQUENCE {
    rL-ID          RL-ID,
    sAI           SAI,
    ul-InterferenceLevel ScaledUL-InterferenceLevel,
    dl-CodeInformation DL-CodeInformationList-RL-SetupFailureFDD,
    sSDT-SupportIndicator SSDT-SupportIndicator,
    neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-SetupFailureFDD
OPTIONAL,
    neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-SetupFailureFDD
OPTIONAL,
    ul-EbNoTarget          UL-EbNo,
    maxUL-EbNo            UL-EbNo,
    minUL-EbNo            UL-EbNo,
    dl-EbNoTarget          DL-EbNo,
    iE-Extensions          ProtocolExtensionContainer { {SuccessfulRL-InformationResponse-
RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
    ...
}
-- ** NOTE: Shall this be made as an IE container? **
DL-CodeInformationList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNoOfDL-Codes)) OF DL-
CodeInformationItem-RL-SetupFailureFDD

SuccessfulRL-InformationResponse-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DL-CodeInformationItem-RL-SetupFailureFDD ::= SEQUENCE {
    dl-ScramblingCode          DL-ScramblingCode,
    fDD-DL-ChannelisationCodeNumber FDD-DL-ChannelisationCodeNumber,
    -- ** NOTE: How many alternatives are there, 2 or 3? **
    diversityIndication        CHOICE {
        combining              SEQUENCE {
            rL-ID              RL-ID
        },
        nonCombiningOrIENotPresent SEQUENCE {
            dCH-InformationResponse-RL-SetupFailureFDD DCH-InformationResponseList-RL-
SetupFailureFDD OPTIONAL
        }
    } OPTIONAL
    -- This IE is present only if the RL is not the first on in the RL Information -- ,
    iE-Extensions          ProtocolExtensionContainer { {DL-CodeInformationItem-RL-
SetupFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CodeInformationItem-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DCH-InformationResponseList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-
InformationResponseItem-RL-SetupFailureFDD

DCH-InformationResponseItem-RL-SetupFailureFDD ::= SEQUENCE {
    dCH-ID          DCH-ID,
    bindingID       BindingID,
    transportLayerAddress TransportLayerAddress,
    iE-Extensions   ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-
SetupFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-InformationResponseItem-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {

```

```

}
...
NeighbouringFDD-CellInformationList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfFDD-
Neighbours)) OF
    NeighbouringFDD-CellInformationItem-RL-SetupFailureFDD

NeighbouringFDD-CellInformationItem-RL-SetupFailureFDD ::= SEQUENCE {
    uC-ID                               C-ID,
    cN-PS-DomainIdentifier              CN-PS-DomainIdentifier    OPTIONAL,
    cN-CS-DomainIdentifier              CN-CS-DomainIdentifier    OPTIONAL,
    uARFCN                              UARFCN,
    frameOffset                         FrameOffset            OPTIONAL,
    primaryScramblingCode              PrimaryScramblingCode,
    primaryCPICH-Power                 PrimaryCPICH-Power    OPTIONAL,
    cell-individual                    CellIndividualOffset  OPTIONAL,
    iE-Extensions                      ProtocolExtensionContainer { {NeighbouringFDD-
CellInformationItem-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringFDD-CellInformationItem-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringTDD-CellInformationList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfTDD-
Neighbours)) OF
    NeighbouringTDD-CellInformationItem-RL-SetupFailureFDD

NeighbouringTDD-CellInformationItem-RL-SetupFailureFDD ::= SEQUENCE {
    uC-ID                               C-ID,
    cN-PS-DomainIdentifier              CN-PS-DomainIdentifier    OPTIONAL,
    cN-CS-DomainIdentifier              CN-CS-DomainIdentifier    OPTIONAL,
    uARFCN                              UARFCN,
    frameOffset                         FrameOffset            OPTIONAL,
    cellParameterID                    CellParameterID,
    syncCase                            SyncCase,
    timeSlot                            TimeSlot,
    pSCH-TimeSlot                      PSCH-TimeSlot          OPTIONAL
    -- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
    cell-individual                    CellIndividualOffset  OPTIONAL,
    iE-Extensions                      ProtocolExtensionContainer { {NeighbouringTDD-
CellInformationItem-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringTDD-CellInformationItem-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkSetupFailureFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK SETUP FAILURE TDD
--
-- *****

RadioLinkSetupFailureTDD ::= SEQUENCE {
    protocolIEs                        ProtocolIE-Container     {{RadioLinkSetupFailureTDD-IEs}},
    protocolExtensions                 ProtocolExtensionContainer {{RadioLinkSetupFailureTDD-
Extensions}}
    ...
}

RadioLinkSetupFailureTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD
    CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponse-RL-
SetupFailureTDD
    PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics      CRITICALITY ignore TYPE CriticalityDiagnostics
    PRESENCE optional },
    ...
}

UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD ::= SEQUENCE {
    rL-ID                              RL-ID,
    cause                               Cause,
    iE-Extensions                      ProtocolExtensionContainer { {UnsuccessfulRL-
InformationResponse-RL-SetupFailureTDD-ExtIEs} } OPTIONAL,
    ...
}

```

```

}
UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}
RadioLinkSetupFailureTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

..... Omitted

```

-- *****
--
-- RADIO LINK ADDITION RESPONSE FDD
--
-- *****

RadioLinkAdditionResponseFDD ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container        {{RadioLinkAdditionResponseFDD-IEs}},
    protocolExtensions         ProtocolExtensionContainer  {{RadioLinkAdditionResponseFDD-
Extensions}}
    OPTIONAL,
    ...
}

RadioLinkAdditionResponseFDD-IEs RNSAP-PROTOCOL-IES ::= {
    optional { ID id-D-RNTI                CRITICALITY ignore TYPE D-RNTI                PRESENCE
    { ID id-RL-InformationResponseList-RL-AdditionRspFDD
    CRITICALITY ignore TYPE RL-InformationResponseList-RL-AdditionRspFDD
    PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics        CRITICALITY ignore TYPE CriticalityDiagnostics
    PRESENCE optional },
    ...
}

RL-InformationResponseList-RL-AdditionRspFDD ::= RL-IE-ContainerList { {RL-
InformationResponseItemIEs-RL-AdditionRspFDD} }

RL-InformationResponseItemIEs-RL-AdditionRspFDD RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationResponseItem-RL-AdditionRspFDD
    CRITICALITY ignore TYPE RL-InformationResponseItem-RL-AdditionRspFDD
    PRESENCE mandatory },
    ...
}

RL-InformationResponseItem-RL-AdditionRspFDD ::= SEQUENCE {
    rL-ID                RL-ID,
    sAI                  SAI,
    ul-InterferenceLevel ScaledUL-InterferenceLevel,
    dl-CodeInformation   DL-CodeInformationList-RL-AdditionRspFDD,
    sSDT-SupportIndicator SSDT-SupportIndicator,
    maxUL-EbNo           UL-EbNo,
    minUL-EbNo           UL-EbNo,
    neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-SetupRsp
OPTIONAL,
    neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-SetupRsp
OPTIONAL,
    iE-Extensions       ProtocolExtensionContainer { {RL-InformationResponseItem-RL-
AdditionRspFDD-ExtIEs} } OPTIONAL,
    ...
}

RL-InformationResponseItem-RL-AdditionRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CodeInformationList-RL-AdditionRspFDD ::= SEQUENCE (SIZE (1..maxNoOfDL-Codes)) OF DL-
CodeInformationItem-RL-AdditionRspFDD

DL-CodeInformationItem-RL-AdditionRspFDD ::= SEQUENCE {
    dl-ScramblingCode        DL-ScramblingCode,
    fDD-DL-ChannelisationCodeNumber FDD-DL-ChannelisationCodeNumber,
    -- ** NOTE: How many alternatives are there, 2 or 3? **
    diversityIndication      CHOICE {
        combining            SEQUENCE {

```



```

        rL-ID                RL-ID
    },
    nonCombiningOrIENotPresent SEQUENCE {
        dCH-InformationResponse-RL-AdditionRspFDD DCH-InformationResponseList-RL-
AdditionRspFDD OPTIONAL
    }
    } OPTIONAL
    -- This IE is present only if the RL is not the first on in the RL Information -- ,
    iE-Extensions ProtocolExtensionContainer { {DL-CodeInformationItem-RL-
AdditionRspFDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CodeInformationItem-RL-AdditionRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DCH-InformationResponseList-RL-AdditionRspFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-
InformationResponseItem-RL-AdditionRspFDD

DCH-InformationResponseItem-RL-AdditionRspFDD ::= SEQUENCE {
    dCH-ID                DCH-ID,
    bindingID             BindingID,
    transportLayerAddress TransportLayerAddress,
    iE-Extensions        ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-
AdditionRspFDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-InformationResponseItem-RL-AdditionRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Both FDD and TDD messages use these definitions **
NeighbouringFDD-CellInformationList-RL-AdditionRsp ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours)) OF
NeighbouringFDD-CellInformationItem-RL-AdditionRsp

NeighbouringFDD-CellInformationItem-RL-AdditionRsp ::= SEQUENCE {
    uC-ID                C-ID,
    cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,
    cN-CS-DomainIdentifier CN-CS-DomainIdentifier OPTIONAL,
    uARFCN               UARFCN,
    frameOffset          FrameOffset OPTIONAL,
    primaryScramblingCode PrimaryScramblingCode,
    primaryCPICH-Power   PrimaryCPICH-Power OPTIONAL,
    cell-individual      CellIndividualOffset OPTIONAL,
    iE-Extensions        ProtocolExtensionContainer { {NeighbouringFDD-
CellInformationItem-RL-AdditionRsp-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringFDD-CellInformationItem-RL-AdditionRsp-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringTDD-CellInformationList-RL-AdditionRsp ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours)) OF
NeighbouringTDD-CellInformationItem-RL-AdditionRsp

NeighbouringTDD-CellInformationItem-RL-AdditionRsp ::= SEQUENCE {
    uC-ID                C-ID,
    cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,
    cN-CS-DomainIdentifier CN-CS-DomainIdentifier OPTIONAL,
    uARFCN               UARFCN,
    frameOffset          FrameOffset OPTIONAL,
    cellParameterID      CellParameterID,
    syncCase             SyncCase,
    timeSlot             TimeSlot,
    pSCH-TimeSlot        PSCH-TimeSlot OPTIONAL
    -- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
    cell-individual      CellIndividualOffset OPTIONAL,
    iE-Extensions        ProtocolExtensionContainer { {NeighbouringTDD-
CellInformationItem-RL-AdditionRsp-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringTDD-CellInformationItem-RL-AdditionRsp-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkAdditionResponseFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

```

-- *****
--
-- RADIO LINK ADDITION RESPONSE TDD
--
-- *****

RadioLinkAdditionResponseTDD ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container        {{RadioLinkAdditionResponseTDD-IEs}},
    protocolExtensions          ProtocolExtensionContainer  {{RadioLinkAdditionResponseTDD-
Extensions}}
    OPTIONAL,
    ...
}

RadioLinkAdditionResponseTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI                CRITICALITY ignore TYPE D-RNTI                PRESENCE
optional } |
    { ID id-RL-InformationResponse-RL-AdditionRspTDD
    PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics
    PRESENCE optional },
    ...
}

RL-InformationResponse-RL-AdditionRspTDD ::= SEQUENCE {
    rL-ID                RL-ID,
    sAI                  SAI,
    ul-InterferenceLevel ScaledUL-InterferenceLevel,
    ul-CCTrCHInformation UL-CCTrCHInformationList-RL-AdditionRspTDD,
    dl-CCTrCHInformation DL-CCTrCHInformationList-RL-AdditionRspTDD,
    diversityIndication CHOICE {
        combining          SEQUENCE {
            rL-ID          RL-ID
        },
        nonCombiningOrIENotPresent SEQUENCE {
            dCH-InformationResponse-RL-AdditionRspFDD OPTIONAL
            DCH-InformationResponseList-RL-
            AdditionRspFDD
        }
    },
    maxUL-EbNo          UL-EbNo,
    minUL-EbNo          UL-EbNo,
    neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-AdditionRspTDD
    OPTIONAL,
    neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-AdditionRspTDD
    OPTIONAL,
    iE-Extensions      ProtocolExtensionContainer { {RL-InformationResponse-RL-
AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

RL-InformationResponse-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
UL-CCTrCHInformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF UL-
CCTrCHInformationItem-RL-AdditionRspTDD

UL-CCTrCHInformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    cCtRCH-ID          CCTrCH-ID,
    ul-DPCH-Information UL-DPCH-InformationList-RL-AdditionRspTDD,
    iE-Extensions      ProtocolExtensionContainer { {UL-CCTrCHInformationItem-RL-
AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

UL-CCTrCHInformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
UL-DPCH-InformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF UL-DPCH-
InformationItem-RL-AdditionRspTDD

UL-DPCH-InformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    dPCH-ID          DPCH-ID,
    tDD-ChannelisationCode TDD-ChannelisationCode,
    burstType        BurstType,
    midambleShift    MidambleShift,
    timeSlot         TimeSlot,
    offset           Offset,
    tDD-PhysicalChannelOffset TDD-PhysicalChannelOffset,
}

```

```

    repetitionPeriod          RepetitionPeriod,
    repetitionLength          RepetitionLength,
    tFCI-Presence             TFCI-Presence,
    iE-Extensions             ProtocolExtensionContainer { {UL-DPCH-InformationItem-RL-
AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

UL-DPCH-InformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CCTrCHInformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF DL-
CCTrCHInformationItem-RL-AdditionRspTDD

DL-CCTrCHInformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    cCTrCH-ID                 CCTrCH-ID,
    dl-DPCH-Information       DL-DPCH-InformationList-RL-AdditionRspTDD,
    iE-Extensions             ProtocolExtensionContainer { {DL-CCTrCHInformationItem-RL-
AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CCTrCHInformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-DPCH-InformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF DL-DPCH-
InformationItem-RL-AdditionRspTDD

DL-DPCH-InformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    dPCH-ID                   DPCH-ID,
    tDD-ChannelisationCode    TDD-ChannelisationCode,
    burstType                 BurstType,
    midambleShift             MidambleShift,
    timeSlot                  TimeSlot,
    tDD-PhysicalChannelOffset TDD-PhysicalChannelOffset,
    repetitionPeriod          RepetitionPeriod,
    repetitionLength          RepetitionLength,
    tFCI-Presence             TFCI-Presence,
    iE-Extensions             ProtocolExtensionContainer { {DL-DPCH-InformationItem-RL-
AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-DPCH-InformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringFDD-CellInformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours))
OF
    NeighbouringFDD-CellInformationItem-RL-AdditionRspTDD

NeighbouringFDD-CellInformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    uC-ID                     C-ID,
    cN-PS-DomainIdentifier     CN-PS-DomainIdentifier     OPTIONAL,
    cN-CS-DomainIdentifier     CN-CS-DomainIdentifier     OPTIONAL,
    uARFCN                    UARFCN,
    frameOffset                FrameOffset              OPTIONAL,
    primaryScramblingCode      PrimaryScramblingCode,
    primaryCPICH-Power         PrimaryCPICH-Power       OPTIONAL,
    cell-individual          CellIndividualOffset    OPTIONAL,
    iE-Extensions             ProtocolExtensionContainer { {NeighbouringFDD-
CellInformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringFDD-CellInformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringTDD-CellInformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours))
OF
    NeighbouringTDD-CellInformationItem-RL-AdditionRspTDD

NeighbouringTDD-CellInformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    uC-ID                     C-ID,
    cN-PS-DomainIdentifier     CN-PS-DomainIdentifier     OPTIONAL,
    cN-CS-DomainIdentifier     CN-CS-DomainIdentifier     OPTIONAL,
    uARFCN                    UARFCN,
    frameOffset                FrameOffset              OPTIONAL,

```

```

cellParameterID          CellParameterID,
syncCase                  SyncCase,
timeSlot                  TimeSlot,
pSCH-TimeSlot            PSCH-TimeSlot          OPTIONAL
-- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
cell-individual          CellIndividualOffset  OPTIONAL,
iE-Extensions            ProtocolExtensionContainer { {NeighbouringTDD-
CellInformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
...
}

NeighbouringTDD-CellInformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

RadioLinkAdditionResponseTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- *****
--
-- RADIO LINK ADDITION FAILURE FDD
--
-- *****

RadioLinkAdditionFailureFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container          {{RadioLinkAdditionFailureFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer   {{RadioLinkAdditionFailureFDD-
Extensions}}
    OPTIONAL,
    ...
}

RadioLinkAdditionFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UnsuccessfulRL-InformationResponseList-RL-AdditionFailureFDD
    CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponseList-RL-
AdditionFailureFDD
    PRESENCE mandatory } |
    { ID id-SuccessfulRL-InformationResponseList-RL-AdditionFailureFDD
    CRITICALITY ignore TYPE SuccessfulRL-InformationResponseList-RL-
AdditionFailureFDD
    PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics          CRITICALITY ignore TYPE CriticalityDiagnostics
    PRESENCE optional },
    ...
}

UnsuccessfulRL-InformationResponseList-RL-AdditionFailureFDD ::= RL-IE-ContainerList {
{UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD-IEs} }

UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD
    CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponse-RL-
AdditionFailureFDD
    PRESENCE mandatory },
    ...
}

UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD ::= SEQUENCE {
    rL-ID          RL-ID,
    cause          Cause,
    iE-Extensions ProtocolExtensionContainer { {UnsuccessfulRL-
InformationResponse-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

SuccessfulRL-InformationResponseList-RL-AdditionFailureFDD ::= RL-IE-ContainerList { {SuccessfulRL-
InformationResponse-RL-AdditionFailureFDD-IEs} }

SuccessfulRL-InformationResponse-RL-AdditionFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-SuccessfulRL-InformationResponse-RL-AdditionFailureFDD
    CRITICALITY ignore TYPE SuccessfulRL-InformationResponse-RL-
AdditionFailureFDD
    PRESENCE mandatory },
    ...
}

SuccessfulRL-InformationResponse-RL-AdditionFailureFDD ::= SEQUENCE {
    rL-ID          RL-ID,
    sAI            SAI,

```

```

    ul-InterferenceLevel                ScaledUL-InterferenceLevel,
    dl-CodeInformation                  DL-CodeInformationList-RL-AdditionFailureFDD,
    sSDT-SupportIndicator                SSdT-SupportIndicator,
    maxUL-EbNo                          UL-EbNo,
    minUL-EbNo                          UL-EbNo,
    neighbouringFDD-CellInformation      NeighbouringFDD-CellInformationList-RL-
AdditionFailureFDD OPTIONAL,
    neighbouringTDD-CellInformation      NeighbouringTDD-CellInformationList-RL-
AdditionFailureFDD OPTIONAL,
    iE-Extensions                       ProtocolExtensionContainer { {SuccessfulRL-InformationResponse-
RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

SuccessfulRL-InformationResponse-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CodeInformationList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNoOfDL-Codes)) OF DL-
CodeInformationItem-RL-AdditionFailureFDD

DL-CodeInformationItem-RL-AdditionFailureFDD ::= SEQUENCE {
    dl-ScramblingCode                   DL-ScramblingCode,
    dl-ChannelisationCode                DL-ChannelisationCode,
    diversityIndication                  CHOICE {
        combining                       SEQUENCE {
            rL-ID                        RL-ID
        },
        nonCombiningOrIENotPresent      SEQUENCE {
            dCH-InformationResponse-RL-AdditionFailureFDD      DCH-InformationResponseList-RL-
AdditionFailureFDD OPTIONAL
        }
    },
    iE-Extensions                       ProtocolExtensionContainer { {DL-CodeInformationItem-RL-
AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CodeInformationItem-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DCH-InformationResponseList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-
InformationResponseItem-RL-AdditionFailureFDD

DCH-InformationResponseItem-RL-AdditionFailureFDD ::= SEQUENCE {
    dCH-ID                              DCH-ID,
    bindingID                            BindingID,
    transportLayerAddress                 TransportLayerAddress,
    iE-Extensions                       ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-
AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-InformationResponseItem-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringFDD-CellInformationList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfFDD-
Neighbours)) OF
    NeighbouringFDD-CellInformationItem-RL-AdditionFailureFDD

NeighbouringFDD-CellInformationItem-RL-AdditionFailureFDD ::= SEQUENCE {
    uC-ID                                C-ID,
    cN-PS-DomainIdentifier                CN-PS-DomainIdentifier    OPTIONAL,
    cN-CS-DomainIdentifier                CN-CS-DomainIdentifier    OPTIONAL,
    uARFCN                                UARFCN,
    frameOffset                          FrameOffset            OPTIONAL,
    primaryScramblingCode                 PrimaryScramblingCode,
    cPICH-Power                          CPICH-Power            OPTIONAL,
    cell-individual                    CellIndividualOffset    OPTIONAL,
    iE-Extensions                       ProtocolExtensionContainer { {NeighbouringFDD-
CellInformationItem-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringFDD-CellInformationItem-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

```

NeighbouringTDD-CellInformationList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfTDD-
Neighbours)) OF
    NeighbouringTDD-CellInformationItem-RL-AdditionFailureFDD

NeighbouringTDD-CellInformationItem-RL-AdditionFailureFDD ::= SEQUENCE {
    uC-ID                C-ID,
    cN-PS-DomainIdentifier    CN-PS-DomainIdentifier    OPTIONAL,
    cN-CS-DomainIdentifier    CN-CS-DomainIdentifier    OPTIONAL,
    uARFCN                UARFCN,
    frameOffset            FrameOffset    OPTIONAL,
    cellParameterID        CellParameterID,
    syncCase                SyncCase,
    timeSlot                TimeSlot,
    pSCH-TimeSlot            PSCH-TimeSlot    OPTIONAL
    -- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
    cell-individual            CellIndividualOffset    OPTIONAL,
    iE-Extensions            ProtocolExtensionContainer { {NeighbouringTDD-
CellInformationItem-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringTDD-CellInformationItem-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkAdditionFailureFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK ADDITION FAILURE TDD
--
-- *****

RadioLinkAdditionFailureTDD ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container    {{RadioLinkAdditionFailureTDD-IEs}},
    protocolExtensions          ProtocolExtensionContainer {{RadioLinkAdditionFailureTDD-
Extensions}}
    OPTIONAL,
    ...
}

RadioLinkAdditionFailureTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UnsuccessfulRL-InformationResponse    CRITICALITY ignore    TYPE UnsuccessfulRL-
InformationResponse    PRESENCE mandatory    } |
    { ID id-CriticalityDiagnostics                CRITICALITY ignore    TYPE CriticalityDiagnostics
    PRESENCE optional    },
    ...
}

UnsuccessfulRL-InformationResponse ::= SEQUENCE {
    rL-ID                RL-ID,
    cause                Cause,
    iE-Extensions            ProtocolExtensionContainer { {UnsuccessfulRL-
InformationResponse-ExtIEs} } OPTIONAL,
    ...
}

UnsuccessfulRL-InformationResponse-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkAdditionFailureTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

..... Omitted

9.3.4 Information Element Definitions

```

-- *****
--
-- Information Element Definitions
--
-- *****

```

```

RNSAP-IEs -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

IMPORTS
    maxNrOfErrors,
    maxRateMatching,
    maxNrOfTFCs,
    maxNrOfTFs,
    maxTTI-Count
FROM RNSAP-Constants

    Criticality,
    ProcedureCode,
    ProtocolIE-ID,
    TransactionID,
    TriggeringMessage
FROM RNSAP-CommonDataTypes

    ProtocolExtensionContainer{},
    RNSAP-PROTOCOL-EXTENSION
FROM RNSAP-Containers;

-- A

AllocationRetentionPriority ::= FrameHandlingPriority

AllowedQueuingTime ::= INTEGER (0..60)
-- seconds

-- B

-- ** NOTE: Size in tabular 1..4,... **
BindingID ::= OCTET STRING (SIZE (1..MAX))

BLER ::= INTEGER (-63..0)
-- Step 0.1 (Range -6.3..0). It is the Log10 of the BLER

BurstType ::= ENUMERATED {
    type1 (1),
    type2 (2)
}

-- C

Cause ::= CHOICE {
    radioNetwork          CauseRadioNetwork,
    transmissionNetwork  CauseTransmissionNetwork,
    protocol              CauseProtocol,
    misc                  CauseMisc,
    ...
}

CauseMisc ::= ENUMERATED {
    control-processing-overload,
    hardware-failure,
    om-intervention,
    not-enough-user-plane-processing-resources,
    unspecified,
    ...
}

CauseProtocol ::= ENUMERATED {
    transaction-not-allowed,
    transfer-syntax-error,
    abstract-syntax-error-reject,
    abstract-syntax-error-ignore-and-notify,
    unspecified,
    ...
}

CauseRadioNetwork ::= ENUMERATED {
    unknown-C-ID,
    cell-not-available,
    power-level-not-supported,
    ul-scrambling-code-already-in-use,
    dl-radio-resources-not-available,
    ul-radio-resources-not-available,
    measurement-not-supported-for-the-object,
    macrodiversity-combining-not-possible,
    reconfiguration-not-allowed,
    Synchronisation-failure,
}

```

```

    unspecified,
    ...
}
CauseTransmissionNetwork ::= ENUMERATED {
    transmission-link-failure,
    transmission-port-not-available,
    unspecified,
    ...
}
CellIndividualOffset ::= INTEGER (-20..20)
C-ID ::= INTEGER (0..65535)
CCTrCH-ID ::= INTEGER (0..15)
CellParameterID ::= INTEGER (0..127)
CFN ::= INTEGER (0..255)
ChannelCodingType ::= ENUMERATED {
    no-coding,
    convolutional-coding,
    turbo-coding--,
    -- ...
}
-- ** TODO **
ChipOffset ::= INTEGER
CodingRate ::= ENUMERATED {
    half,
    third--,
    -- ...
}
CompressedModeMethod ::= ENUMERATED {
    none,
    puncturing,
    sF2,
    gating
}
CPICH-EcIo ::= INTEGER

```

..... Omitted

CHANGE REQUEST		Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.
25.423	CR 037r1	Current Version: 3.0.0
GSM (AA.BB) or 3G (AA.BBB) specification number ↑	↑ CR number as allocated by MCC support team	
For submission to: RAN #7 <small>list expected approval meeting # here ↑</small>	for approval <input checked="" type="checkbox"/> for information <input type="checkbox"/>	strategic <input type="checkbox"/> non-strategic <input type="checkbox"/> <small>(for SMG use only)</small>

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: <ftp://ftp.3gpp.org/Information/CR-Form-v2.doc>

Proposed change affects: (U)SIM ME UTRAN / Radio Core Network
(at least one should be marked with an X)

Source: RAN WG3 **Date:** February 2000

Subject: Adding of the DPCH Constant within Neighbouring TDD Cell Information

Work item:

Category:	F Correction <input checked="" type="checkbox"/> A Corresponds to a correction in an earlier release <input type="checkbox"/> B Addition of feature <input type="checkbox"/> C Functional modification of feature <input type="checkbox"/> D Editorial modification <input type="checkbox"/>	Release:	Phase 2 <input type="checkbox"/> Release 96 <input type="checkbox"/> Release 97 <input type="checkbox"/> Release 98 <input type="checkbox"/> Release 99 <input checked="" type="checkbox"/> Release 00 <input type="checkbox"/>
------------------	--	-----------------	--

(only one category shall be marked with an X)

Reason for change: Whenever the Neighbouring TDD Cell information is transmitted from the DRNC to the SRNC, the DPCH Constant Value should be sent to allow for the correct setting of the initial DPCH power after handover.

Clauses affected:

Other specs affected:	Other 3G core specifications <input type="checkbox"/> Other GSM core specifications <input type="checkbox"/> MS test specifications <input type="checkbox"/> BSS test specifications <input type="checkbox"/> O&M specifications <input type="checkbox"/>	→ List of CRs: → List of CRs: → List of CRs: → List of CRs: → List of CRs:	
------------------------------	---	--	--

Other comments: This CR is dependent on the acceptance of 25.423 CR 006



help.doc

----- double-click here for help and instructions on how to create a CR.

8.3 DCH procedures

8.3.1 Radio Link Setup

8.3.1.1 General

8.3.1.2 Successful Operation

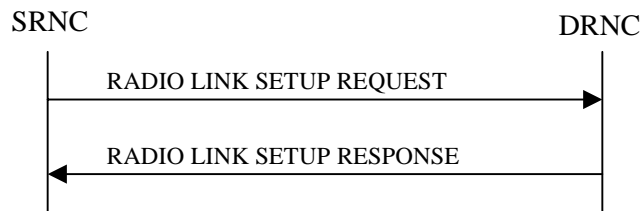


Figure 1: Radio Link Setup procedure: Successful Operation

When the SRNC makes an algorithmic decision to add the first cell or set of cells from a DRNS to the active set of a specific RRC connection, the RADIO LINK SETUP REQUEST message is sent to the corresponding DRNC to request setup of the radio link(s).

The message is also used to establish the connection-oriented service of the signalling bearer in the DRNC. The message includes the S-RNTI associated to the UE, and, if the UE context is already present in the DRNC, the corresponding D-RNTI.

[FDD - The Diversity Control Field indicates for each RL except for the first RL whether the DRNS shall combine the RL with any of the other RLs or not on the Iur. If the *Diversity Control Field* IE is set to "May" (be combined with another RL), then the DRNS shall decide for any of the alternatives. When an RL is to be combined the DRNS shall choose which RL(s) to combine it with.]

If the RADIO LINK SETUP REQUEST message includes the *Allowed Queuing Time* IE the DRNS may queue the request before providing a response to the SRNC.

If the *Initial DL TX Power* IE and *UL Eb/No Target* IE [FDD] are present in the message, the DRNS shall use the indicated DL TX Power and UL Eb/No Target [FDD] as initial value.

If the *Primary CPICH Eb/No* IE [FDD] or the *Primary CCPCH RSCP* IE [TDD] is present, the DRNC should use them when deciding the Initial DL TX Power.

If the RADIO LINK SETUP REQUEST message includes the *DCH Combination Indicator* IE for a DCH, the DRNS shall treat all DCHs with the same value of this IE as a set of co-ordinated DCHs. The included *RLC Mode* IE of the DCH may be used by the DRNS to optimise the power control.

The *Allocation/Retention Priority* IE defines the priority level that should be used by the DRNS to prioritise the allocation and the retention of the resources used by the DCH. The *Frame Handling Priority* IE defines the priority level that should be used by the DRNS to prioritise the discard/delay of the data frames of the DCH.

The DRNS shall use the included *UL DCH FP Mode* IE for a DCH as the new DCH FP Mode in the Uplink of the user plane for this DCH.

The DRNS shall use the included *ToAWS* IE for a DCH as the new Time of Arrival Window Start Point in the user plane for this DCH.

The DRNS shall use the included *ToAWE* IE for a DCH as the new Time of Arrival Window End Point in the user plane for this DCH.

[FDD - If the RADIO LINK SETUP REQUEST message includes the *SSDT Cell Identity* IE, the DRNS may activate SSDT using the *SSDT Cell Identity* IE and *SSDT Cell Identity Length* IE.]

At the reception of the RADIO LINK SETUP REQUEST message, DRNS allocates requested type of channelisation codes and other physical channel resources for each RL and assigns a binding identifier and a transport layer address for each DCH or set of co-ordinated DCHs. This information shall be sent to the SRNS in the message RADIO LINK

SETUP RESPONSE when all the RLs have been successfully setup.

If the *Initial DL TX Power* and the *UL Eb/No Target* IEs are not present in the RADIO LINK SETUP REQUEST message, then DRNC shall include the suggested initial UL Eb/No Target and the DL Eb/No Target in the RADIO LINK SETUP RESPONSE message.

In the case of combining one or more RLs the DRNC shall indicate in the RADIO LINK SETUP RESPONSE message with the Diversity Indication that the RL is combined with another RL. In this case the Reference RL ID shall be included to indicate with which RL the combination is performed. The Reference RL ID shall be included for all but one of the combined RLs, for which the *Transport Layer Address* IE and the *Binding ID* IE shall be included.

In the case of not combining an RL with another RL, the DRNC shall indicate in the RADIO LINK SETUP RESPONSE message with the Diversity Indication that no combining is done. In this case the DRNC shall include both the *Transport Layer Address* IE and the *Binding ID* IE for the transport bearer to be established for each DCH of the RL in the RADIO LINK SETUP RESPONSE message.

In case of a set of co-ordinated DCHs requiring a new transport bearer on Iur the *Binding Identifier* IE and the *Transport Layer Address* IE shall be included only for one of the DCH in the set of co-ordinated DCHs.

[FDD - Irrespective of SSdT activation, the DRNS shall include in the RADIO LINK SETUP RESPONSE message an indication concerning the capability to support SSdT on this RL. Only if the RADIO LINK SETUP REQUEST message requested SSdT activation and the RADIO LINK SETUP RESPONSE message indicates that the SSdT capability is supported for this RL, SSdT is activated in the DRNS.]

The DRNS shall also provide the SRNC with the UTRAN Cell Identifier (UC-Id), the Frequency Number, the [FDD-Primary Scrambling Code], the [TDD-Cell Parameter ID, the Sync Case, the PSCH Time Slot information] of the neighbouring cells to the cell(s) where the radio link(s) are added. In addition, if the information is available, the DRNC shall also provide the [FDD-CPICH Power level]/[TDD-PCCPCH Power level, [DPCH Constant Value](#)] and Frame Offset of the neighbouring cell.

If a neighbouring cell is controlled by another RNC, the DRNC shall report also the node identifications (i.e. RNC, CN domain nodes) of the RNC controlling the neighbouring cell.

If there was no UE context for this UE in the DRNS before the RADIO LINK SETUP REQUEST message was received the DRNC shall include the node identifications of the CN Domain nodes that the RNC is connected to (using LAC and RAC of the current cell), and the D-RNTI in the RADIO LINK SETUP RESPONSE message.

8.3.2 Radio Link Addition

8.3.2.2 Successful Operation

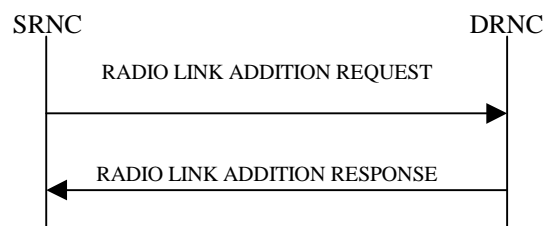


Figure 2: Radio Link Addition procedure: Successful Operation

The procedure is initiated with a RADIO LINK ADDITION REQUEST message sent from the SRNC to the DRNC.

Upon reception, the DRNS shall reserve the necessary resources and configure the new RL(s) according to the parameters given in the message. Unless specified below, the meaning of parameters is specified in other specifications.

[FDD - The Diversity Control Field indicates for each RL whether the DRNS shall combine the new RL with existing RL(s) or not on the Iur. If the *Diversity Control Field* IE is set to "May" (be combined with another RL), then the DRNS shall decide for any of the alternatives. When a new RL is to be combined the DRNS shall choose which RL(s) to combine it with.]

If the *Primary CCPCH Ec/Io* IE [FDD] or the *Primary CCPCH RSCP* IE [TDD] measured by the UE is included in the RADIO LINK ADDITION REQUEST message, the DRNS shall use this in the calculation of the Initial DL TX Power. If the *Primary CCPCH Ec/Io* IE is not present, the DRNS sets the Initial DL TX Power accordingly to the power used

by the existing RLs.

[FDD - The DRNS shall use the provided UL Eb/No Target value as the current target for the inner-loop power control.]

[FDD - If the RADIO LINK ADDITION REQUEST message contains an *SSDT Cell Identity* IE, SSDT may be activated for the concerned new RL, with the indicated SSDT Cell Identity used for that RL.]

The DRNS shall activate any feedback mode diversity according to the received settings.

If all requested RLs are successfully added, the DRNC shall respond with a RADIO LINK ADDITION RESPONSE message.

In the case of combining an RL with existing RL(s) the DRNC shall indicate in the RADIO LINK ADDITION RESPONSE message with the Diversity Indication that the RL is combined. In this case the Reference RL ID shall be included to indicate one of the existing RLs that the new RL is combined with.

In the case of not combining an RL with existing RL(s), the DRNC shall indicate in the RADIO LINK ADDITION RESPONSE message with the Diversity Indication that no combining is done. In this case the DRNC shall include both the Transport Layer Address and the binding ID for the transport bearer to be established for each DCH of the RL in the RADIO LINK ADDITION RESPONSE message.

In case of co-ordinated DCH, the binding ID and the transport address shall be included for only one of the co-ordinated DCHs.

[FDD - Irrespective of SSDT activation, the DRNS shall include in the RADIO LINK ADDITION RESPONSE message an indication concerning the capability to support SSDT on this RL. Only if the RADIO LINK ADDITION REQUEST message requested SSDT activation and the RADIO LINK ADDITION RESPONSE message indicates that the SSDT capability is supported for this RL, SSDT is activated in the DRNS.]

For any cell neighbouring of a cell in which a RL was added, the DRNC shall provide in the RADIO LINK ADDITION RESPONSE message the UTRAN Cell Identifier (UC-Id), and the node identification of CN nodes connected to the RNC controlling the neighbouring cell if the neighbouring cell is not controlled by the DRNC. In addition, if the information is available, the DRNC shall also provide the [FDD-CPICH Power level]/[TDD-PCCPCH Power level, [DPCH Constant Value](#)] and Frame Offset of the neighbouring cell.

The DRNC shall also provide the configured uplink Maximum Eb/No and UL Minimum Eb/No for every new RL to the SRNC in the RADIO LINK ADDITION RESPONSE message. These values are taken into consideration by DRNS admission control and shall be used by the SRNC as limits for the UL inner-loop power control target.

The DRNC shall also provide the selected scrambling- and channelisation codes of the new RLs in order to enable the SRNC to inform the UE about the selected codes.

After sending of the RADIO LINK ADDITION RESPONSE message the DRNS shall continuously attempt to obtain UL synchronisation and start reception on the new RL. The DRNS shall start transmission on the new RL after synchronisation is achieved in the Iur user plane as specified in ref. **[Error! Reference source not found.]**.

9.1.4 RADIO LINK SETUP RESPONSE

9.1.4.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
D-RNTI	O			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
RL Information Response		1..<maxnoofRLs>		
RL ID	M			
SAI	M			
UL Interference Level	M			
DL Code Information		1..<maxnoofDL Codes>		
DL Scrambling Code	M			
FDD DL Channelisation Code Number	M			
Diversity Indication	C-NotFirstRL			
CHOICE <i>diversity Indication Combining</i>				
RL ID	M			Reference RL ID for the combining
<i>Non Combining or IE not present</i>				"IE not present" is equivalent to "First RL".
DCH Information Response		0..<maxnoofDCHs>		Only one DCH per set of co-ordinated DCHs shall be included
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
SSDT Support Indicator	M			
Maximum Uplink Eb/No	M		Uplink Eb/No	
Minimum Uplink Eb/No	M		Uplink Eb/No	
Neighbouring FDD Cell Information		0..<maxnoofFDDneighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
Neighbouring TDD Cell Information	O	0..<maxnoofTDDneighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case1			
PSCH Time Slot	C-Case2&3			
.....DPCH Constant Value	O			
Uplink Eb/No Target	O		Uplink Eb/No	
Downlink Eb/No Target	O			
Criticality Diagnostics	O			

Condition	Explanation
IfComb	This IE is present if the 'Diversity Indication' IE indicates 'combining' in the Node B.
IfNotComb	This IE is present if the 'Diversity Indication' IE indicates 'non combining' in the Node B.
NotFirstRL	The IE is present only if the RL is not the first RL in the RL Information
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range bound	Explanation
MaxnoofRLs	Maximum no. of RLs for one UE.
MaxnoofDCHs	Maximum no. of DCHs for one UE.
MaxnoofFDDneighbours	Maximum number of neighbouring FDD cell for one cell.
MaxnoofTDDneighbours	Maximum number of neighbouring TDD cell for one cell.

9.1.4.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
D-RNTI	O			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
RL Information Response		1		
RL ID	M			
SAI	M			
UL Interference Level	M			
Maximum Uplink Eb/No	M		Uplink Eb/No	
Minimum Uplink Eb/No	M		Uplink Eb/No	
Uplink Eb/No Target	O		Uplink Eb/No	
Downlink Eb/No Target	O			
UL CTrCH Information		1..<maxnoofCCTrCHs>		
CCTrCH ID	M			
UL DPCH Information		1..<MaxnoofDPC Hs>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
DL CTrCH Information		1..<maxnoofCCTrCHs>		
CCTrCH ID	M			
DL DPCH Information		1..<MaxnoofDPC Hs>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel	M			

Offset				
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
DCH Information Response		1..<maxnoofDCHs >		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
Neighbouring FDD Cell Information	O	0..<maxnoofFDDneighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
Neighbouring TDD Cell Information	O	0..<maxnoofTDDneighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case1			
PSCH Time Slot	C-Case2&3			
.....DPCH Constant Value	O			
Criticality Diagnostics	O			

Condition	Explanation
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range bound	Explanation
MaxnoofDPCHs	Maximum no. Of DPCHs for one CCTrCH.
MaxnoofDCHs	Maximum no. Of DCHs for one UE.
MaxnoofFDDneighbours	Maximum number of neighbouring FDD cell for one cell
MaxnoofTDDneighbours	Maximum number of neighbouring TDD cell for one cell
MaxnoofCCTrCHs	Maximum no. Of CCTrCH for one UE.

9.1.5 RADIO LINK SETUP FAILURE

9.1.5.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
D-RNTI	O			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
Unsuccessful RL Information Response		1...<maxnoofRLs>		
RL ID	M			
Cause	M			
Successful RL Information Response		0..<maxnoofRLs-1>		
RL ID	M			
SAI	M			
UL Interference Level	M			
DL Code Information		1..<maxnoofDL Codes>		
DL Scrambling Code	M			
FDD DL Channelisation Code Number	M			
Diversity Indication	M			
<i>CHOICE diversity Indication Combining</i>				
RL ID	M			Reference RL ID for the combining
<i>Non Combining or IE not present</i>				"IE not present" is equivalent to "First RL".
DCH Information Response		0..<maxnoofDCHs>		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
SSDT Support Indicator	M			
Neighbouring FDD Cell Information	O			
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
Neighbouring TDD Cell Information	O			
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case3			
PSCH Time Slot	C-Case2&3			
.....DPCH Constant Value	O			
Uplink Eb/No Target	O		Uplink Eb/No	
Maximum Uplink Eb/No	M		Uplink Eb/No	
Minimum Uplink Eb/No	M		Uplink Eb/No	

Downlink Eb/No Target	O			
Criticality Diagnostics	O			

9.1.7 RADIO LINK ADDITION RESPONSE

9.1.7.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
RL Information Response		1..<maxnoofRLs-1>		
RL ID	M			
SAI	M			
UL Interference Level	M			
DL Code Information		1..<maxnoofDLCodes>		
DL Scrambling Code	M			
DL Channelisation Code	M			
Diversity Indication	M			
CHOICE <i>diversity indication</i>				
<i>Combining</i>				
RL ID	M			Reference RL-Id
<i>Non combining</i>				
DCH Information Response		1..<maxnoofDCHs>		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
SSDT Support Indicator	M			
Minimum Uplink Eb/No	M		Uplink Eb/No	
Maximum Uplink Eb/No	M		Uplink Eb/No	
Neighbouring FDD Cell Information		0..<maxnoofFDD Neighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
Neighbouring TDD Cell Information		0..<maxnoofTDD Neighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case1			
PSCH Time Slot	C-Case2&3			
.....DPCH Constant Value	O			
Criticality Diagnostics	O			

Condition	Explanation
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range bound	Explanation
MaxnoofDCHs	Maximum number of dedicated channels on one RL
MaxnoofRLs	Maximum number of radio links for one UE
MaxnoofFDDNeighbours	Maximum number of neighbouring FDD cells for one cell
MaxnoofTDDNeighbours	Maximum number of neighbouring TDD cells for one cell
MaxnoofDLCodes	Maximum number of DL code information

9.1.7.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
RL Information Response		1		
RL ID	M			
SAI	M			
UL Interference Level	M			
UL CCH Information		1..<maxnoof CCHs>		
CCH ID	M			
UL DPCH Information		1..<maxnoOfDPCHs>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
DL CCH Information		1..<maxnoof CCHs>		
CCH ID	M			
DL DPCH information		1..<maxnoOfDPCHs>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
Diversity Indication	M			
CHOICE <i>diversity indication</i>				
<i>Combining</i>				
RL ID	M			Reference RL
<i>Non combining</i>				
DCH Information Response		1..<maxnoofDCHs >		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
Minimum Uplink Eb/No	M		Uplink Eb/No	
Maximum Uplink Eb/No	M		Uplink	

			Eb/No	
Neighbouring FDD Cell Information		<i>0..<maxnoofFDD Neighbours></i>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
Neighbouring TDD Cell Information		<i>0..<maxnoofTDD Neighbours></i>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case1			
PSCH Time Slot	C-Case2&3			
.....DPCH Constant Value	O			
Criticality Diagnostics	O			

Condition	Explanation
Case1	This IE is present only if Sync Case = Case1
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range Bound	Explanation
MaxnoofDCHs	Maximum number of dedicated channels on one RL
MaxnoofFDDNeighbours	Maximum number of neighbouring FDD cells for one cell
MaxnoofTDDNeighbours	Maximum number of neighbouring TDD cells for one cell
MaxnoofDLCodes	Maximum number of DL code information
MaxnoOfDPCHs	Maximum number of DPCH in one CCTrCH
MaxnoofCCTrCHs	no. Of CCTrCH for one UE.

9.1.8 RADIO LINK ADDITION FAILURE

9.1.8.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
Unsuccessful RL Information Response		<i>1..<maxnoofRLs-1></i>		
RL ID	M			
Cause	M			
Succesfull RL Information Response		<i>1..<maxnoofRLs-2></i>		
RL ID	M			
SAI	M			
UL Interference Level	M			
DL Code Information		<i>1..<maxnoofDLCodes></i>		
DL scrambling code	M			
DL channelisation code	M			
Diversity Indication	M			

<i>CHOICE diversity indication</i>				
<i>Combining</i>				
RL ID	M			Reference RL-Id
<i>Non combining</i>				
DCH Information Response		<i>1..<maxnoofDCHs ></i>		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
SSDT Support Indicator	M			
Minimum Uplink Eb/No	M		Uplink Eb/No	
Maximum Uplink Eb/No	M		Uplink Eb/No	
Neighbouring FDD Cell Information		<i>0..<maxnoofFDD Neighbours></i>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
Neighbouring TDD Cell Information		<i>0..<maxnoofTDD Neighbours></i>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case1			
PSCH Time Slot	C-Case2&3			
.....DPCH Constant Value	O			
Criticality Diagnostics	O			

Condition	Explanation
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range bound	Explanation
MaxnoofDCHs	Maximum number of dedicated channels on one RL
MaxnoofRLs	Maximum number of radio links for one UE
MaxnoofFDDNeighbours	Maximum number of neighbouring FDD cells for one cell
MaxnoofTDDNeighbours	Maximum number of neighbouring TDD cells for one cell
MaxnoofDLCodes	Maximum number of DL code information

9.2.1.x DPCH Constant Value

DPCH Constant Value is the power margin used by a UE to set the proper uplink power.

<u>IE/Group Name</u>	<u>Presence</u>	<u>Range</u>	<u>IE type and reference</u>	<u>Semantics description</u>
<u>DPCH Constant Value</u>			<u>INTEGER</u> <u>(-32...31)</u>	<u>Unit dBm</u> <u>Granularity 1 dB.</u>

9.3.2 Elementary Procedure Definitions

```
-- *****
--
-- Elementary Procedure definitions
--
-- *****

RNSAP-PDU-Descriptions -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

-- *****
--
-- IE parameter types from other modules.
--
-- *****

IMPORTS
    Criticality,
    .
    .
    .
    DL-Power,
    DL-ScramblingCode,
    DPCH-ID,
    DPCHConstantValue,
    DRX-Parameter,
    DedicatedMeasurementValue,
    DiversityControlField,
    DiversityMode,
    .
    .
    .
FROM RNSAP-IEs
    .
    .
    .
```

9.3.3 NBAP PDU Content Definitions

```

.
.
.

-- *****
--
-- RADIO LINK SETUP RESPONSE FDD
--
-- *****

RadioLinkSetupResponseFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkSetupResponseFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkSetupResponseFDD-Extensions}}
    ...
}

RadioLinkSetupResponseFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI          CRITICALITY ignore TYPE D-RNTI          PRESENCE optional } |
    { ID id-CN-PS-DomainIdentifier CRITICALITY ignore TYPE CN-PS-DomainIdentifier PRESENCE optional } |
    { ID id-CN-CS-DomainIdentifier CRITICALITY ignore TYPE CN-CS-DomainIdentifier PRESENCE optional } |
    { ID id-RL-InformationResponseList-RL-SetupRspFDD
      CRITICALITY ignore TYPE RL-InformationResponseList-RL-SetupRspFDD
      PRESENCE mandatory } |
    { ID id-UL-EbNoTarget   CRITICALITY ignore TYPE UL-EbNoTarget   PRESENCE optional } |
    { ID id-DL-EbNoTarget   CRITICALITY ignore TYPE DL-EbNoTarget   PRESENCE optional } |
    { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
    ...
}

RL-InformationResponseList-RL-SetupRspFDD ::= RL-IE-ContainerList { {RL-InformationResponseItemIEs-RL-SetupRspFDD} }

RL-InformationResponseItemIEs-RL-SetupRspFDD RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationResponseItem-RL-SetupRspFDD
      CRITICALITY ignore TYPE RL-InformationResponseItem-RL-SetupRspFDD PRESENCE mandatory },
    ...
}

RL-InformationResponseItem-RL-SetupRspFDD ::= SEQUENCE {
    rL-ID          RL-ID,
    sAI            SAI,
    ul-InterferenceLevel ScaledUL-InterferenceLevel,
    dl-CodeInformation DL-CodeInformationList-RL-SetupRspFDD,
    sSDT-SupportIndicator SSDT-SupportIndicator,
    maxUL-EbNo      UL-EbNo,
    minUL-EbNo      UL-EbNo,
    neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-SetupRsp OPTIONAL,
    neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-SetupRsp OPTIONAL,
    iE-Extensions   ProtocolExtensionContainer { {RL-InformationResponseItem-RL-SetupRspFDD-ExtIEs} } OPTIONAL,
    ...
}

```



```

RL-InformationResponseItem-RL-SetupRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CodeInformationList-RL-SetupRspFDD ::= SEQUENCE (SIZE (1..maxNoOfDL-Codes)) OF DL-CodeInformationItem-RL-SetupRspFDD

DL-CodeInformationItem-RL-SetupRspFDD ::= SEQUENCE {
    dl-ScramblingCode          DL-ScramblingCode,
    fdd-DL-ChannelisationCodeNumber FDD-DL-ChannelisationCodeNumber,
    -- ** NOTE: How many alternatives are there, 2 or 3? **
    diversityIndication        CHOICE {
        combining                SEQUENCE {
            rL-ID                RL-ID
        },
        nonCombiningOrIENotPresent SEQUENCE {
            dch-InformationResponse-RL-SetupRspFDD DCH-InformationResponseList-RL-SetupRspFDD OPTIONAL
        }
    },
    OPTIONAL
}
-- This IE is present only if the RL is not the first on in the RL Information -- ,
ie-Extensions                ProtocolExtensionContainer { {DL-CodeInformationItem-RL-SetupRspFDD-ExtIEs} } OPTIONAL,
...
}

DL-CodeInformationItem-RL-SetupRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DCH-InformationResponseList-RL-SetupRspFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-InformationResponseItem-RL-SetupRspFDD

DCH-InformationResponseItem-RL-SetupRspFDD ::= SEQUENCE {
    dch-ID                    DCH-ID,
    bindingID                 BindingID,
    transportLayerAddress     TransportLayerAddress,
    ie-Extensions             ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-SetupRspFDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-InformationResponseItem-RL-SetupRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Both FDD and TDD messages use these definitions **
NeighbouringFDD-CellInformationList-RL-SetupRsp ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours)) OF
    NeighbouringFDD-CellInformationItem-RL-SetupRsp

NeighbouringFDD-CellInformationItem-RL-SetupRsp ::= SEQUENCE {
    uC-ID                    C-ID,
    cn-PS-DomainIdentifier   CN-PS-DomainIdentifier    OPTIONAL,
    cn-CS-DomainIdentifier   CN-CS-DomainIdentifier    OPTIONAL,
    uARFCN                  UARFCN,
    frameOffset             FrameOffset              OPTIONAL,
    primaryScramblingCode   PrimaryScramblingCode,

```

```

    primaryCPICH-Power      PrimaryCPICH-Power      OPTIONAL,
    iE-Extensions           ProtocolExtensionContainer { {NeighbouringFDD-CellInformationItem-RL-SetupRsp-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringFDD-CellInformationItem-RL-SetupRsp-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringTDD-CellInformationList-RL-SetupRsp ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours)) OF
    NeighbouringTDD-CellInformationItem-RL-SetupRsp

NeighbouringTDD-CellInformationItem-RL-SetupRsp ::= SEQUENCE {
    c-ID                    C-ID,
    cN-PS-DomainIdentifier  CN-PS-DomainIdentifier  OPTIONAL,
    cN-CS-DomainIdentifier  CN-CS-DomainIdentifier  OPTIONAL,
    uARFCN                  UARFCN,
    frameOffset             FrameOffset            OPTIONAL,
    cellParameterID        CellParameterID,
    syncCase                SyncCase,
    timeSlot                TimeSlot              OPTIONAL
    -- This IE is present only if SyncCase is Case1 -- ,
    pSCH-TimeSlot           PSCH-TimeSlot          OPTIONAL
    -- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
    dpCHConstantValue     DPCHConstantValue     OPTIONAL,
    ul-EbNo                 UL-EbNo               OPTIONAL,
    dl-EbNo                 DL-EbNo               OPTIONAL,
    iE-Extensions           ProtocolExtensionContainer { {NeighbouringTDD-CellInformationItem-RL-SetupRsp-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringTDD-CellInformationItem-RL-SetupRsp-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkSetupResponseFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK SETUP RESPONSE TDD
--
-- *****

RadioLinkSetupResponseTDD ::= SEQUENCE {
    protocolIEs             ProtocolIE-Container    {{RadioLinkSetupResponseTDD-IEs}},
    protocolExtensions      ProtocolExtensionContainer {{RadioLinkSetupResponseTDD-Extensions}}
    ...
}

RadioLinkSetupResponseTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI          CRITICALITY ignore TYPE D-RNTI          PRESENCE optional } |
    { ID id-CN-PS-DomainIdentifier CRITICALITY ignore TYPE CN-PS-DomainIdentifier PRESENCE optional } |
    { ID id-CN-CS-DomainIdentifier CRITICALITY ignore TYPE CN-CS-DomainIdentifier PRESENCE optional } |

```

```

    { ID id-RL-InformationResponse-RL-SetupRspTDD CRITICALITY ignore TYPE RL-InformationResponse-RL-SetupRspTDD PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
    ...
}

RL-InformationResponse-RL-SetupRspTDD ::= SEQUENCE {
    rL-ID RL-ID,
    SAI SAI,
    ul-InterferenceLevel ScaledUL-InterferenceLevel,
    maxUL-EbNo UL-EbNo,
    minUL-EbNo UL-EbNo,
    ul-EbNoTarget UL-EbNo OPTIONAL,
    dl-EbNoTarget DL-EbNo OPTIONAL,
    ul-CCTrCHInformation UL-CCTrCHInformationList-RL-SetupRspTDD,
    dl-CCTrCHInformation DL-CCTrCHInformationList-RL-SetupRspTDD,
    dCH-InformationResponse DCH-InformationResponseList-RL-SetupRspTDD,
    neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-SetupRsp OPTIONAL,
    neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-SetupRsp OPTIONAL,
    iE-Extensions ProtocolExtensionContainer { {RL-InformationResponse-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

RL-InformationResponse-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
UL-CCTrCHInformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF UL-CCTrCHInformationItem-RL-SetupRspTDD

UL-CCTrCHInformationItem-RL-SetupRspTDD ::= SEQUENCE {
    cCTrCH-ID CCTrCH-ID,
    ul-DPCH-Information UL-DPCH-InformationList-RL-SetupRspTDD,
    iE-Extensions ProtocolExtensionContainer { {UL-CCTrCHInformationItem-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

UL-CCTrCHInformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
UL-DPCH-InformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF UL-DPCH-InformationItem-RL-SetupRspTDD

-- **NOTE: UL-DPCH-InformationItem-RL-SetupRspTDD and DL-DPCH-InformationItem-RL-SetupRspTDD
-- are currently similar. Combine them? **
UL-DPCH-InformationItem-RL-SetupRspTDD ::= SEQUENCE {
    dPCH-ID DPCH-ID,
    tDD-ChannelisationCode TDD-ChannelisationCode,
    burstType BurstType,
    midambleShift MidambleShift,
    timeSlot TimeSlot,
    tDD-PhysicalChannelOffset TDD-PhysicalChannelOffset,
    repetitionPeriod RepetitionPeriod,
    repetitionLength RepetitionLength,
    tFCI-Presence TFCI-Presence,

```

```

    iE-Extensions                ProtocolExtensionContainer { {UL-DPCH-InformationItem-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

UL-DPCH-InformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CCTrCHInformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF DL-CCTrCHInformationItem-RL-SetupRspTDD

DL-CCTrCHInformationItem-RL-SetupRspTDD ::= SEQUENCE {
    cCTrCH-ID                    CCTrCH-ID,
    dl-DPCH-Information          DL-DPCH-InformationList-RL-SetupRspTDD,
    iE-Extensions                ProtocolExtensionContainer { {DL-CCTrCHInformationItem-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CCTrCHInformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-DPCH-InformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF DL-DPCH-InformationItem-RL-SetupRspTDD

DL-DPCH-InformationItem-RL-SetupRspTDD ::= SEQUENCE {
    dpCH-ID                    DPCH-ID,
    tDD-ChannelisationCode     TDD-ChannelisationCode,
    burstType                  BurstType,
    midambleShift              MidambleShift,
    timeSlot                   TimeSlot,
    tDD-PhysicalChannelOffset   TDD-PhysicalChannelOffset,
    repetitionPeriod           RepetitionPeriod,
    repetitionLength            RepetitionLength,
    tFCI-Presence              TFCI-Presence,
    iE-Extensions                ProtocolExtensionContainer { {DL-DPCH-InformationItem-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-DPCH-InformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-InformationResponseList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-InformationResponseItem-RL-SetupRspTDD

DCH-InformationResponseItem-RL-SetupRspTDD ::= SEQUENCE {
    dCH-ID                    DCH-ID,
    bindingID                  BindingID,
    transportLayerAddress      TransportLayerAddress,
    iE-Extensions                ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-InformationResponseItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

```

}
RadioLinkSetupResponseTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}
-- *****
--
-- RADIO LINK SETUP FAILURE FDD
--
-- *****

RadioLinkSetupFailureFDD ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container      {{RadioLinkSetupFailureFDD-IEs}},
  protocolExtensions   ProtocolExtensionContainer {{RadioLinkSetupFailureFDD-Extensions}}      OPTIONAL,
  ...
}

RadioLinkSetupFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-D-RNTI          CRITICALITY ignore  TYPE D-RNTI          PRESENCE mandatory } |
  { ID id-CN-PS-DomainIdentifier  CRITICALITY ignore  TYPE CN-PS-DomainIdentifier  PRESENCE mandatory } |
  { ID id-CN-CS-DomainIdentifier  CRITICALITY ignore  TYPE CN-CS-DomainIdentifier  PRESENCE mandatory } |
  { ID id-UnsuccessfulRL-InformationResponseList-RL-SetupFailureFDD
    CRITICALITY ignore  TYPE UnsuccessfulRL-InformationResponseList-RL-SetupFailureFDD
    PRESENCE mandatory } |
  { ID id-SuccessfulRL-InformationResponseList-RL-SetupFailureFDD
    CRITICALITY ignore  TYPE SuccessfulRL-InformationResponseList-RL-SetupFailureFDD
    PRESENCE mandatory } |
  { ID id-CriticalityDiagnostics  CRITICALITY ignore  TYPE CriticalityDiagnostics  PRESENCE optional },
  ...
}

UnsuccessfulRL-InformationResponseList-RL-SetupFailureFDD ::= RL-IE-ContainerList { {UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD-IEs} }

UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD
    CRITICALITY ignore  TYPE UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD
    PRESENCE mandatory },
  ...
}

UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD ::= SEQUENCE {
  rL-ID          RL-ID,
  cause          Cause,
  iE-Extensions ProtocolExtensionContainer { {UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
  ...
}

UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

SuccessfulRL-InformationResponseList-RL-SetupFailureFDD ::= RL-IE-ContainerList { {SuccessfulRL-InformationResponse-RL-SetupFailureFDD-IEs} }

SuccessfulRL-InformationResponse-RL-SetupFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {

```

```

    { ID id-SuccessfulRL-InformationResponse-RL-SetupFailureFDD
      CRITICALITY ignore TYPE SuccessfulRL-InformationResponse-RL-SetupFailureFDD
      PRESENCE mandatory },
    ...
  }

SuccessfulRL-InformationResponse-RL-SetupFailureFDD ::= SEQUENCE {
  rL-ID RL-ID,
  SAI SAI,
  ul-InterferenceLevel ScaledUL-InterferenceLevel,
  dl-CodeInformation DL-CodeInformationList-RL-SetupFailureFDD,
  sSDT-SupportIndicator SSDT-SupportIndicator,
  neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-SetupFailureFDD OPTIONAL,
  neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-SetupFailureFDD OPTIONAL,
  ul-EbNoTarget UL-EbNo,
  maxUL-EbNo UL-EbNo,
  minUL-EbNo UL-EbNo,
  dl-EbNoTarget DL-EbNo,
  iE-Extensions ProtocolExtensionContainer { {SuccessfulRL-InformationResponse-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
  ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CodeInformationList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNoOfDL-Codes)) OF DL-CodeInformationItem-RL-SetupFailureFDD

SuccessfulRL-InformationResponse-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DL-CodeInformationItem-RL-SetupFailureFDD ::= SEQUENCE {
  dl-ScramblingCode DL-ScramblingCode,
  fDD-DL-ChannelisationCodeNumber FDD-DL-ChannelisationCodeNumber,
  -- ** NOTE: How many alternatives are there, 2 or 3? **
  diversityIndication CHOICE {
    combining SEQUENCE {
      rL-ID RL-ID
    },
    nonCombiningOrIENotPresent SEQUENCE {
      dCH-InformationResponse-RL-SetupFailureFDD DCH-InformationResponseList-RL-SetupFailureFDDOPTIONAL
    }
  } OPTIONAL
  -- This IE is present only if the RL is not the first on in the RL Information -- ,
  iE-Extensions ProtocolExtensionContainer { {DL-CodeInformationItem-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
  ...
}

DL-CodeInformationItem-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ** NOTE: Shall this be made as an IE container? **
DCH-InformationResponseList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-InformationResponseItem-RL-SetupFailureFDD

DCH-InformationResponseItem-RL-SetupFailureFDD ::= SEQUENCE {
  dCH-ID DCH-ID,
  bindingID BindingID,

```

```

transportLayerAddress      TransportLayerAddress,
iE-Extensions              ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
...
}

DCH-InformationResponseItem-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

NeighbouringFDD-CellInformationList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours)) OF
NeighbouringFDD-CellInformationItem-RL-SetupFailureFDD

NeighbouringFDD-CellInformationItem-RL-SetupFailureFDD ::= SEQUENCE {
uC-ID                      C-ID,
cN-PS-DomainIdentifier     CN-PS-DomainIdentifier     OPTIONAL,
cN-CS-DomainIdentifier     CN-CS-DomainIdentifier     OPTIONAL,
uARFCN                    UARFCN,
frameOffset               FrameOffset               OPTIONAL,
primaryScramblingCode     PrimaryScramblingCode,
primaryCPICH-Power        PrimaryCPICH-Power        OPTIONAL,
iE-Extensions             ProtocolExtensionContainer { {NeighbouringFDD-CellInformationItem-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
...
}

NeighbouringFDD-CellInformationItem-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

NeighbouringTDD-CellInformationList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours)) OF
NeighbouringTDD-CellInformationItem-RL-SetupFailureFDD

NeighbouringTDD-CellInformationItem-RL-SetupFailureFDD ::= SEQUENCE {
uC-ID                      C-ID,
cN-PS-DomainIdentifier     CN-PS-DomainIdentifier     OPTIONAL,
cN-CS-DomainIdentifier     CN-CS-DomainIdentifier     OPTIONAL,
uARFCN                    UARFCN,
frameOffset               FrameOffset               OPTIONAL,
cellParameterID          CellParameterID,
syncCase                  SyncCase,
timeSlot                  TimeSlot,
pSCH-TimeSlot             PSCH-TimeSlot             OPTIONAL
-- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
DPCHConstantValue       DPCHConstantValue       OPTIONAL,
iE-Extensions             ProtocolExtensionContainer { {NeighbouringTDD-CellInformationItem-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
...
}

NeighbouringTDD-CellInformationItem-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

RadioLinkSetupFailureFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
...
}

```

```

*****
--
-- RADIO LINK ADDITION RESPONSE FDD
--
-- *****

RadioLinkAdditionResponseFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container      {{RadioLinkAdditionResponseFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkAdditionResponseFDD-Extensions}}
    ...
}

RadioLinkAdditionResponseFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI          CRITICALITY ignore TYPE D-RNTI          PRESENCE optional } |
    { ID id-RL-InformationResponseList-RL-AdditionRspFDD
      CRITICALITY ignore TYPE RL-InformationResponseList-RL-AdditionRspFDD
      PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
    ...
}

RL-InformationResponseList-RL-AdditionRspFDD ::= RL-IE-ContainerList { {RL-InformationResponseItemIEs-RL-AdditionRspFDD} }

RL-InformationResponseItemIEs-RL-AdditionRspFDD RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationResponseItem-RL-AdditionRspFDD
      CRITICALITY ignore TYPE RL-InformationResponseItem-RL-AdditionRspFDD PRESENCE mandatory },
    ...
}

RL-InformationResponseItem-RL-AdditionRspFDD ::= SEQUENCE {
    rL-ID          RL-ID,
    sAI            SAI,
    ul-InterferenceLevel ScaledUL-InterferenceLevel,
    dl-CodeInformation DL-CodeInformationList-RL-AdditionRspFDD,
    sSDT-SupportIndicator SSDT-SupportIndicator,
    maxUL-EbNo      UL-EbNo,
    minUL-EbNo      UL-EbNo,
    neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-SetupRsp OPTIONAL,
    neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-SetupRsp OPTIONAL,
    iE-Extensions   ProtocolExtensionContainer { {RL-InformationResponseItem-RL-AdditionRspFDD-ExtIEs} } OPTIONAL,
    ...
}

RL-InformationResponseItem-RL-AdditionRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CodeInformationList-RL-AdditionRspFDD ::= SEQUENCE (SIZE (1..maxNoOfDL-Codes)) OF DL-CodeInformationItem-RL-AdditionRspFDD

DL-CodeInformationItem-RL-AdditionRspFDD ::= SEQUENCE {
    dl-ScramblingCode          DL-ScramblingCode,
    fDD-DL-ChannelisationCodeNumber FDD-DL-ChannelisationCodeNumber,
    -- ** NOTE: How many alternatives are there, 2 or 3? **
}

```



```

diversityIndication          CHOICE {
  combining                   SEQUENCE {
    rL-ID                     RL-ID
  },
  nonCombiningOrIENotPresent SEQUENCE {
    dCH-InformationResponse-RL-AdditionRspFDD DCH-InformationResponseList-RL-AdditionRspFDD OPTIONAL
  }
}
-- This IE is present only if the RL is not the first on in the RL Information --
iE-Extensions                ProtocolExtensionContainer { {DL-CodeInformationItem-RL-AdditionRspFDD-ExtIEs} } OPTIONAL,
...
}

DL-CodeInformationItem-RL-AdditionRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ** NOTE: Shall this be made as an IE container? **
DCH-InformationResponseList-RL-AdditionRspFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-InformationResponseItem-RL-AdditionRspFDD

DCH-InformationResponseItem-RL-AdditionRspFDD ::= SEQUENCE {
  dCH-ID                      DCH-ID,
  bindingID                   BindingID,
  transportLayerAddress       TransportLayerAddress,
  iE-Extensions               ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-AdditionRspFDD-ExtIEs} } OPTIONAL,
  ...
}

DCH-InformationResponseItem-RL-AdditionRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ** NOTE: Both FDD and TDD messages use these definitions **
NeighbouringFDD-CellInformationList-RL-AdditionRsp ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours)) OF
  NeighbouringFDD-CellInformationItem-RL-AdditionRsp

NeighbouringFDD-CellInformationItem-RL-AdditionRsp ::= SEQUENCE {
  uC-ID                       C-ID,
  cN-PS-DomainIdentifier       CN-PS-DomainIdentifier OPTIONAL,
  cN-CS-DomainIdentifier       CN-CS-DomainIdentifier OPTIONAL,
  uARFCN                       UARFCN,
  frameOffset                  FrameOffset OPTIONAL,
  primaryScramblingCode        PrimaryScramblingCode,
  primaryCPICH-Power           PrimaryCPICH-Power OPTIONAL,
  iE-Extensions               ProtocolExtensionContainer { {NeighbouringFDD-CellInformationItem-RL-AdditionRsp-ExtIEs} } OPTIONAL,
  ...
}

NeighbouringFDD-CellInformationItem-RL-AdditionRsp-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

NeighbouringTDD-CellInformationList-RL-AdditionRsp ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours)) OF
  NeighbouringTDD-CellInformationItem-RL-AdditionRsp

```

```

NeighbouringTDD-CellInformationItem-RL-AdditionRsp ::= SEQUENCE {
    uC-ID                C-ID,
    cN-PS-DomainIdentifier    CN-PS-DomainIdentifier    OPTIONAL,
    cN-CS-DomainIdentifier    CN-CS-DomainIdentifier    OPTIONAL,
    uARFCN                UARFCN,
    frameOffset            FrameOffset    OPTIONAL,
    cellParameterID        CellParameterID,
    syncCase                SyncCase,
    timeSlot                TimeSlot,
    pSCH-TimeSlot            PSCH-TimeSlot    OPTIONAL
    -- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
    DPCHConstantValue        DPCHConstantValue    OPTIONAL,
    iE-Extensions            ProtocolExtensionContainer { {NeighbouringTDD-CellInformationItem-RL-AdditionRsp-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringTDD-CellInformationItem-RL-AdditionRsp-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkAdditionResponseFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK ADDITION RESPONSE TDD
--
-- *****

RadioLinkAdditionResponseTDD ::= SEQUENCE {
    protocolIEs            ProtocolIE-Container    {{RadioLinkAdditionResponseTDD-IEs}},
    protocolExtensions      ProtocolExtensionContainer {{RadioLinkAdditionResponseTDD-Extensions}}
    ...
}

RadioLinkAdditionResponseTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI            CRITICALITY ignore TYPE D-RNTI                    PRESENCE optional } |
    { ID id-RL-InformationResponse-RL-AdditionRspTDD
      CRITICALITY ignore TYPE RL-InformationResponse-RL-AdditionRspTDD PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
    ...
}

RL-InformationResponse-RL-AdditionRspTDD ::= SEQUENCE {
    rL-ID                RL-ID,
    SAI,
    ul-InterferenceLevel    ScaledUL-InterferenceLevel,
    ul-CCTrCHInformation    UL-CCTrCHInformationList-RL-AdditionRspTDD,
    dl-CCTrCHInformation    DL-CCTrCHInformationList-RL-AdditionRspTDD,
    diversityIndication      CHOICE {
        combining            SEQUENCE {
            rL-ID            RL-ID
        },
        nonCombiningOrIENotPresent SEQUENCE {

```

```

        dCH-InformationResponse-RL-AdditionRspFDD          DCH-InformationResponseList-RL-AdditionRspFDD OPTIONAL
    }
}
OPTIONAL,
maxUL-EbNo          UL-EbNo,
minUL-EbNo          UL-EbNo,
neighbouringFDD-CellInformation      NeighbouringFDD-CellInformationList-RL-AdditionRspTDD OPTIONAL,
neighbouringTDD-CellInformation      NeighbouringTDD-CellInformationList-RL-AdditionRspTDD OPTIONAL,
iE-Extensions          ProtocolExtensionContainer { {RL-InformationResponse-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
...
}

RL-InformationResponse-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
UL-CCTrCHInformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF UL-CCTrCHInformationItem-RL-AdditionRspTDD

UL-CCTrCHInformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    cCTrCH-ID          CCTrCH-ID,
    ul-DPCH-Information      UL-DPCH-InformationList-RL-AdditionRspTDD,
    iE-Extensions          ProtocolExtensionContainer { {UL-CCTrCHInformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

UL-CCTrCHInformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
UL-DPCH-InformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF UL-DPCH-InformationItem-RL-AdditionRspTDD

UL-DPCH-InformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    dpCH-ID          DPCH-ID,
    tDD-ChannelisationCode      TDD-ChannelisationCode,
    burstType          BurstType,
    midambleShift          MidambleShift,
    timeSlot          TimeSlot,
    offset          Offset,
    tDD-PhysicalChannelOffset      TDD-PhysicalChannelOffset,
    repetitionPeriod          RepetitionPeriod,
    repetitionLength          RepetitionLength,
    tFCI-Presence          TFCI-Presence,
    iE-Extensions          ProtocolExtensionContainer { {UL-DPCH-InformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

UL-DPCH-InformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CCTrCHInformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF DL-CCTrCHInformationItem-RL-AdditionRspTDD

DL-CCTrCHInformationItem-RL-AdditionRspTDD ::= SEQUENCE {

```

```

    cCTrCH-ID          CCTrCH-ID,
    dl-DPCH-Information DL-DPCH-InformationList-RL-AdditionRspTDD,
    iE-Extensions      ProtocolExtensionContainer { {DL-CCTrCHInformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CCTrCHInformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-DPCH-InformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF DL-DPCH-InformationItem-RL-AdditionRspTDD

DL-DPCH-InformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    dpch-ID          DPCH-ID,
    tdd-ChannelisationCode TDD-ChannelisationCode,
    burstType        BurstType,
    midambleShift    MidambleShift,
    timeSlot         TimeSlot,
    tdd-PhysicalChannelOffset TDD-PhysicalChannelOffset,
    repetitionPeriod RepetitionPeriod,
    repetitionLength RepetitionLength,
    tFCI-Presence    TFCI-Presence,
    iE-Extensions    ProtocolExtensionContainer { {DL-DPCH-InformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-DPCH-InformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringFDD-CellInformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours)) OF
    NeighbouringFDD-CellInformationItem-RL-AdditionRspTDD

NeighbouringFDD-CellInformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    uC-ID          C-ID,
    cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,
    cN-CS-DomainIdentifier CN-CS-DomainIdentifier OPTIONAL,
    uARFCN         UARFCN,
    frameOffset    FrameOffset OPTIONAL,
    primaryScramblingCode PrimaryScramblingCode,
    primaryCPICH-Power PrimaryCPICH-Power OPTIONAL,
    iE-Extensions ProtocolExtensionContainer { {NeighbouringFDD-CellInformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringFDD-CellInformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringTDD-CellInformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours)) OF
    NeighbouringTDD-CellInformationItem-RL-AdditionRspTDD

NeighbouringTDD-CellInformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    uC-ID          C-ID,

```

```

cN-PS-DomainIdentifier          CN-PS-DomainIdentifier          OPTIONAL,
cN-CS-DomainIdentifier          CN-CS-DomainIdentifier          OPTIONAL,
uARFCN                          UARFCN,
frameOffset                     FrameOffset              OPTIONAL,
cellParameterID                CellParameterID,
syncCase                       SyncCase,
timeSlot                       TimeSlot,
pSCH-TimeSlot                  PSCH-TimeSlot          OPTIONAL
-- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
iE-Extensions                  ProtocolExtensionContainer { {NeighbouringTDD-CellInformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
...
}

NeighbouringTDD-CellInformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

RadioLinkAdditionResponseTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- *****
--
-- RADIO LINK ADDITION FAILURE FDD
--
-- *****

RadioLinkAdditionFailureFDD ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container    {{RadioLinkAdditionFailureFDD-IEs}},
    protocolExtensions         ProtocolExtensionContainer {{RadioLinkAdditionFailureFDD-Extensions}}
    ...
}

RadioLinkAdditionFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UnsuccessfulRL-InformationResponseList-RL-AdditionFailureFDD
      CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponseList-RL-AdditionFailureFDD
      PRESENCE mandatory } |
    { ID id-SuccessfulRL-InformationResponseList-RL-AdditionFailureFDD
      CRITICALITY ignore TYPE SuccessfulRL-InformationResponseList-RL-AdditionFailureFDD
      PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics          CRITICALITY ignore TYPE CriticalityDiagnostics          PRESENCE optional },
    ...
}

UnsuccessfulRL-InformationResponseList-RL-AdditionFailureFDD ::= RL-IE-ContainerList { {UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD-IEs} }

UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD
      CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD
      PRESENCE mandatory },
    ...
}

UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD ::= SEQUENCE {
    rL-ID                      RL-ID,

```

```

    cause                Cause,
    iE-Extensions        ProtocolExtensionContainer { {UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

SuccessfulRL-InformationResponseList-RL-AdditionFailureFDD ::= RL-IE-ContainerList { {SuccessfulRL-InformationResponse-RL-AdditionFailureFDD-IEs} }

SuccessfulRL-InformationResponse-RL-AdditionFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-SuccessfulRL-InformationResponse-RL-AdditionFailureFDD
      CRITICALITY ignore TYPE SuccessfulRL-InformationResponse-RL-AdditionFailureFDD
      PRESENCE mandatory },
    ...
}

SuccessfulRL-InformationResponse-RL-AdditionFailureFDD ::= SEQUENCE {
    rL-ID                RL-ID,
    SAI                  SAI,
    ul-InterferenceLevel ScaledUL-InterferenceLevel,
    dl-CodeInformation   DL-CodeInformationList-RL-AdditionFailureFDD,
    sSDT-SupportIndicator SSDT-SupportIndicator,
    maxUL-EbNo          UL-EbNo,
    minUL-EbNo          UL-EbNo,
    neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-AdditionFailureFDD OPTIONAL,
    neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-AdditionFailureFDD OPTIONAL,
    iE-Extensions       ProtocolExtensionContainer { {SuccessfulRL-InformationResponse-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

SuccessfulRL-InformationResponse-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CodeInformationList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNoOfDL-Codes)) OF DL-CodeInformationItem-RL-AdditionFailureFDD

DL-CodeInformationItem-RL-AdditionFailureFDD ::= SEQUENCE {
    dl-ScramblingCode      DL-ScramblingCode,
    dl-ChannelisationCode  DL-ChannelisationCode,
    diversityIndication    CHOICE {
        combining          SEQUENCE {
            rL-ID          RL-ID
        },
        nonCombiningOrIENotPresent SEQUENCE {
            dCH-InformationResponse-RL-AdditionFailureFDD DCH-InformationResponseList-RL-AdditionFailureFDD OPTIONAL
        }
    } OPTIONAL
    -- This IE is present only if the RL is not the first on in the RL Information -- ,
    iE-Extensions         ProtocolExtensionContainer { {DL-CodeInformationItem-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

```

```

DL-CodeInformationItem-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DCH-InformationResponseList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-InformationResponseItem-RL-AdditionFailureFDD

DCH-InformationResponseItem-RL-AdditionFailureFDD ::= SEQUENCE {
    dCH-ID                DCH-ID,
    bindingID             BindingID,
    transportLayerAddress TransportLayerAddress,
    iE-Extensions        ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-InformationResponseItem-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringFDD-CellInformationList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours)) OF
    NeighbouringFDD-CellInformationItem-RL-AdditionFailureFDD

NeighbouringFDD-CellInformationItem-RL-AdditionFailureFDD ::= SEQUENCE {
    uC-ID                C-ID,
    cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,
    cN-CS-DomainIdentifier CN-CS-DomainIdentifier OPTIONAL,
    uARFCN               UARFCN,
    frameOffset          FrameOffset OPTIONAL,
    primaryScramblingCode PrimaryScramblingCode,
    cPICH-Power          CPICH-Power OPTIONAL,
    iE-Extensions        ProtocolExtensionContainer { {NeighbouringFDD-CellInformationItem-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringFDD-CellInformationItem-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringTDD-CellInformationList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours)) OF
    NeighbouringTDD-CellInformationItem-RL-AdditionFailureFDD

NeighbouringTDD-CellInformationItem-RL-AdditionFailureFDD ::= SEQUENCE {
    uC-ID                C-ID,
    cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,
    cN-CS-DomainIdentifier CN-CS-DomainIdentifier OPTIONAL,
    uARFCN               UARFCN,
    frameOffset          FrameOffset OPTIONAL,
    cellParameterID      CellParameterID,
    syncCase             SyncCase,
    timeSlot             TimeSlot,
    pSCH-TimeSlot        PSCH-TimeSlot OPTIONAL
    -- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
    dpCHConstantValue   DPCHConstantValue OPTIONAL,
    iE-Extensions        ProtocolExtensionContainer { {NeighbouringTDD-CellInformationItem-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

```

```
}  
NeighbouringTDD-CellInformationItem-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {  
    ...  
}  
RadioLinkAdditionFailureFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {  
    ...  
}
```


9.3.4 Information Element Definitions

```
-- *****
--
-- Information Element Definitions
--
-- *****
.
.
.
DL-FrameType ::= ENUMERATED {
    typeA,
    typeB,
    ...
}

DPCH-ID                ::= INTEGER (0..239)

--**TODO**

-- DPCH Constant Value unit dBm
-- DPCH Constant Value step 1 dBm
DPCH Constant Value ::= INTEGER (-32..31)

DRX-Parameter          ::= TBD

-- **TODO**
DSCH-TransportFormatCombinationSet ::= INTEGER

-- **TODO**

.
.
.
```

<h2 style="margin: 0;">CHANGE REQUEST</h2>		Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.
25.423	CR 039r1	Current Version: 3.0.0
GSM (AA.BB) or 3G (AA.BBB) specification number ↑	↑ CR number as allocated by MCC support team	
For submission to: RAN#7 <i>list expected approval meeting # here ↑</i>	for approval <input checked="" type="checkbox"/> for information <input type="checkbox"/>	strategic <input type="checkbox"/> non-strategic <input type="checkbox"/> <i>(for SMG use only)</i>

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: <ftp://ftp.3gpp.org/Information/CR-Form-v2.doc>

Proposed change affects: (U)SIM ME UTRAN / Radio Core Network
(at least one should be marked with an X)

Source: R-WG3 **Date:** _____

Subject: Clarification on the 'RLC Mode' parameter

Work item: _____

Category:	F Correction <input checked="" type="checkbox"/> A Corresponds to a correction in an earlier release <input type="checkbox"/> B Addition of feature <input type="checkbox"/> C Functional modification of feature <input type="checkbox"/> D Editorial modification <input type="checkbox"/>	Release:	Phase 2 <input type="checkbox"/> Release 96 <input type="checkbox"/> Release 97 <input type="checkbox"/> Release 98 <input type="checkbox"/> Release 99 <input checked="" type="checkbox"/> Release 00 <input type="checkbox"/>
------------------	--	-----------------	--

(only one category shall be marked with an X)

Reason for change: The 'RLC Mode' parameter was agreed in WG3 meeting #8 (as proposed by Tdoc R3-99F23). This CR is intended to clarify the effect of this parameter on the closed loop power control algorithm. The parameter is renamed Limited Power Increase.

Clauses affected: 8.3.1.2, 8.3.4.2, 8.3.7.2, 9.1.3, 9.1.11, 9.1.13, 9.2.1.40, 9.3.3, 9.3.4

Other specs affected:	Other 3G core specifications <input type="checkbox"/> Other GSM core specifications <input type="checkbox"/> MS test specifications <input type="checkbox"/> BSS test specifications <input type="checkbox"/> O&M specifications <input type="checkbox"/>	→ List of CRs: _____ → List of CRs: _____ → List of CRs: _____ → List of CRs: _____ → List of CRs: _____
------------------------------	---	--

Other comments: _____

8.3.1.2 Successful Operation

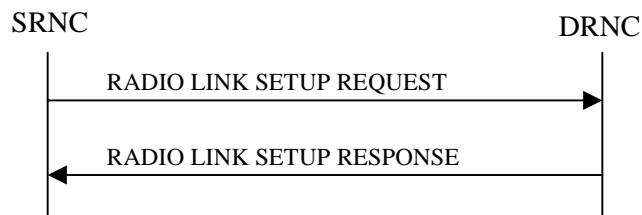


Figure 15: Radio Link Setup procedure: Successful Operation

When the SRNC makes an algorithmic decision to add the first cell or set of cells from a DRNS to the active set of a specific RRC connection, the RADIO LINK SETUP REQUEST message is sent to the corresponding DRNC to request setup of the radio link(s).

The message is also used to establish the connection-oriented service of the signalling bearer in the DRNC. The message includes the S-RNTI associated to the UE, and, if the UE context is already present in the DRNC, the corresponding D-RNTI.

[FDD - The Diversity Control Field indicates for each RL except for the first RL whether the DRNS shall combine the RL with any of the other RLs or not on the Iur. If the *Diversity Control Field* IE is set to "May" (be combined with another RL), then the DRNS shall decide for any of the alternatives. When an RL is to be combined the DRNS shall choose which RL(s) to combine it with.]

If the RADIO LINK SETUP REQUEST message includes the *Allowed Queuing Time* IE the DRNS may queue the request before providing a response to the SRNC.

If the *Initial DL TX Power* IE and *UL Eb/No Target* IE [FDD] are present in the message, the DRNS shall use the indicated DL TX Power and UL Eb/No Target [FDD] as initial value.

If the *Primary CPICH Eb/No* IE [FDD] or the *Primary CCPCH RSCP* IE [TDD] is present, the DRNC should use them when deciding the Initial DL TX Power.

If the RADIO LINK SETUP REQUEST message includes the *DCH Combination Indicator* IE for a DCH, the DRNS shall treat all DCHs with the same value of this IE as a set of co-ordinated DCHs. ~~The included *RLC Mode* IE of the DCH may be used by the DRNS to optimise the power control.~~

The *Allocation/Retention Priority* IE defines the priority level that should be used by the DRNS to prioritise the allocation and the retention of the resources used by the DCH. The *Frame Handling Priority* IE defines the priority level that should be used by the DRNS to prioritise the discard/delay of the data frames of the DCH.

The DRNS shall use the included *UL DCH FP Mode* IE for a DCH as the new DCH FP Mode in the Uplink of the user plane for this DCH.

The DRNS shall use the included *ToAWS* IE for a DCH as the new Time of Arrival Window Start Point in the user plane for this DCH.

The DRNS shall use the included *ToAWE* IE for a DCH as the new Time of Arrival Window End Point in the user plane for this DCH.

[FDD - If the RADIO LINK SETUP REQUEST message includes the *SSDT Cell Identity* IE, the DRNS may activate SSDT using the *SSDT Cell Identity* IE and *SSDT Cell Identity Length* IE.]

At the reception of the RADIO LINK SETUP REQUEST message, DRNS allocates requested type of channelisation codes and other physical channel resources for each RL and assigns a binding identifier and a transport layer address for each DCH or set of co-ordinated DCHs. This information shall be sent to the SRNS in the message RADIO LINK SETUP RESPONSE when all the RLs have been successfully setup.

If the *Initial DL TX Power* and the *UL Eb/No Target* IEs are not present in the RADIO LINK SETUP REQUEST message, then DRNC shall include the suggested initial UL Eb/No Target and the DL Eb/No Target in the RADIO LINK SETUP RESPONSE message.

In the case of combining one or more RLs the DRNC shall indicate in the RADIO LINK SETUP RESPONSE message with the Diversity Indication that the RL is combined with another RL. In this case the Reference RL ID shall be

included to indicate with which RL the combination is performed. The Reference RL ID shall be included for all but one of the combined RLs, for which the *Transport Layer Address* IE and the *Binding ID* IE shall be included.

In the case of not combining an RL with another RL, the DRNC shall indicate in the RADIO LINK SETUP RESPONSE message with the Diversity Indication that no combining is done. In this case the DRNC shall include both the *Transport Layer Address* IE and the *Binding ID* IE for the transport bearer to be established for each DCH of the RL in the RADIO LINK SETUP RESPONSE message.

In case of a set of co-ordinated DCHs requiring a new transport bearer on Iur the *Binding Identifier* IE and the *Transport Layer Address* IE shall be included only for one of the DCH in the set of co-ordinated DCHs.

[FDD - Irrespective of SSdT activation, the DRNS shall include in the RADIO LINK SETUP RESPONSE message an indication concerning the capability to support SSdT on this RL. Only if the RADIO LINK SETUP REQUEST message requested SSdT activation and the RADIO LINK SETUP RESPONSE message indicates that the SSdT capability is supported for this RL, SSdT is activated in the DRNS.]

The DRNS shall also provide the SRNC with the UTRAN Cell Identifier (UC-Id) and information of the neighbouring cells to the cell(s) where the radio link(s) are added.

If a neighbouring cell is controlled by another RNC, the DRNC shall report also the node identifications (i.e. RNC, CN domain nodes) of the RNC controlling the neighbouring cell.

If there was no UE context for this UE in the DRNS before the RADIO LINK SETUP REQUEST message was received the DRNC shall include the node identifications of the CN Domain nodes that the RNC is connected to (using LAC and RAC of the current cell), and the D-RNTI in the RADIO LINK SETUP RESPONSE message.

8.3.4.2 Successful Operation

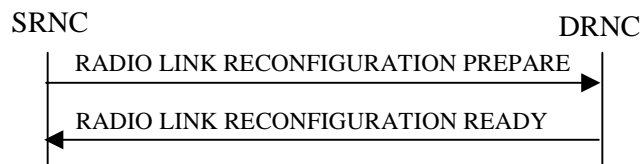


Figure 240: Synchronised Radio Link Reconfiguration Preparation procedure, Successful Operation

The Synchronised Radio Link Reconfiguration Preparation procedure is initiated by the SRNC by sending the RADIO LINK RECONFIGURATION PREPARE message to the DRNC.

Upon reception, the DRNS shall reserve necessary resources for the new configuration of the Radio Link(s) according to the parameters given in the message. Unless specified below, the meaning of parameters is specified in other specifications.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *Allowed Queuing Time* IE the DRNS may queue the request before providing a response to the SRNC.

DCH Modification :

If the RADIO LINK RECONFIGURATION PREPARE message includes the *Allocation/Retention Priority* IE for a DCH to be modified, the DRNS should use this information when reserving resources for this DCH in the new configuration.

[Editor's note: The priority handling in the DRNS has not been discussed in RAN WG3. Neither has the possibilities for pre-emption (not retaining a resource) of DCHs/RLs. The handling of the *Allocation/Retention Priority* IE is thus not clear and is regarded as FFS.]

If the RADIO LINK RECONFIGURATION PREPARE message includes the *Frame Handling Priority* IE for a DCH to be modified, the DRNS should store this information for this DCH in the new configuration. The received Frame Handling Priority should be used when prioritising between different frames in the downlink on the radio interface in congestion situations within the DRNS once the new configuration has been activated.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *Transport Format Set (UL)* IE for a DCH to be modified, the DRNS shall apply the new Transport Format Set in the Uplink of this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *Transport Format Set (DL)* IE for a DCH to be modified, the DRNS shall apply the new Transport Format Set in the Downlink of this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *UL DCH FP Mode* IE for a DCH to be modified, the DRNS shall apply the new DCH FP Mode in the Uplink of the user plane for this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes on the *ToAWS* IE for a DCH to be modified, the DRNS shall apply the new ToAWS in the user plane for this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes on the *ToAWE* IE for a DCH to be modified, the DRNS shall apply the new ToAWE in the user plane for this DCH in the new configuration.

DCH Addition:

If the RADIO LINK RECONFIGURATION PREPARE message includes any DCH to be added to the Radio Link(s), the DRNS shall reserve necessary resources for the new configuration of the Radio Link(s) according to the parameters given in the message and include these DCH in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *DCH Combination Indicator* IE for a DCH to be added, the DRNS shall

1. treat all DCHs with the same value of this IE as a set of co-ordinated DCHs and

2. include this DCH in the new configuration only if it can include all DCHs with the same value of the *DCH Combination Indicator* IE in the new configuration

The DRNS should use the *Allocation/Retention Priority* IE received for a DCH to be added when reserving resources for this DCH in the new configuration.

[Editor's note: The priority handling in the DRNS has not been discussed in RAN WG3. Neither has the possibilities for pre-emption (not retaining a resource) of DCHs/RLs. The handling of the *Allocation/Retention Priority* IE is thus not clear and is regarded as FFS.]

The DRNS should store the *Frame Handling Priority* IE received for a DCH to be added in the new configuration. The received Frame Handling Priority should be used when prioritising between different frames in the downlink on the radio interface in congestion situations within the DRNS once the new configuration has been activated.

~~The DRNS may use the included *RLC Mode* IE to optimise the power control.~~

The DRNS shall use the included *UL DCH FP Mode* IE for a DCH to be added as the new DCH FP Mode in the Uplink of the user plane for this DCH in the new configuration.

The DRNS shall use the included *ToAWS* IE for a DCH to be added as the new Time of Arrival Window Start Point in the user plane for this DCH in the new configuration.

The DRNS shall use the included *ToAWE* IE for a DCH to be added as the new Time of Arrival Window End Point in the user plane for this DCH in the new configuration.

DCH Deletion:

If the RADIO LINK RECONFIGURATION PREPARE message includes any DCH to be deleted from the Radio Link(s), the DRNS shall not include this DCH in the new configuration.

If all of the DCHs belonging to a set of co-ordinated DCHs are requested to be deleted, the DRNS shall not include this set of co-ordinated DCHs in the new configuration

Physical Channel Modification:

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes the *Uplink Scrambling Code* IE, the DRNS shall apply this Uplink Scrambling Code to the new configuration.]

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes one or more *Uplink Channelisation Code* IEs, the DRNS shall apply the new Uplink Channelisation Code(s) in the new configuration.

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes one or more *Spreading Factor of Channelisation Code (DL)* IE, for each *Spreading Factor of Channelisation Code (DL)* IE the DRNS shall allocate one new Downlink Channelisation Code per Radio Link and apply the new Downlink Channelisation Code(s) to the new configuration. Each Downlink Channelisation Code allocated for the new configuration shall be included as a *Channelisation Code (DL)* IE in the RADIO LINK RECONFIGURATION READY message when sent to the SRNC.]

The DRNS shall use the *TFCS (UL)* IE when reserving resources for the uplink of the new configuration. The DRNS shall apply the new TFCS in the Uplink of [TDD – the CCTrCH of] the new configuration.

The DRNS shall use the *TFCS (DL)* IE when reserving resources for the downlink of the new configuration. The DRNS shall apply the new TFCS in the Downlink of [TDD – the CCTrCH of] the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *Mean Bit Rate (UL)* IE, the DRNS should use this information when reserving resources for the Uplink of the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *Mean Bit Rate (DL)* IE, the DRNS should use this information when reserving resources for the Downlink of the new configuration.

[Editor's note: There is presently no clear definition of the *Mean Bit Rate* IEs. The handling of these IEs is thus regarded as FFS.]

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes on the *UL DPCCH Structure* IE, group the DRNS shall apply the new Uplink DPCCH Structure to the new configuration.]

SSDT Activation/Deactivation:

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes the *SSDT Indication* IE set to "SSDT Active in the UE", the DRNS may activate SSDT using the *SSDT Cell Identity* IE and *SSDT Cell Identity Length* IE in the new configuration.]

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes the SSDT Indication IE set to "SSDT not Active in the UE", the DRNS shall deactivate SSDT in the new configuration.]

If the requested modifications are allowed by the DRNS, and the DRNS has successfully reserved the required resources for the new configuration of the Radio Link(s) it shall respond to the SRNC with the RADIO LINK RECONFIGURATION READY message.

The DRNS decides the maximum and minimum Eb/No for the uplink of the Radio Link(s) and shall return this in the *Maximum Uplink Eb/No* IE and *Minimum Uplink Eb/No* IE for each Radio Link in the RADIO LINK RECONFIGURATION READY message.

[TDD – The DRNC shall include all the IEs corresponding to the new physical channel parameters for the DL DPCH and/or the UL DPCH to be reconfigured in the RADIO LINK RECONFIGURATION READY message.]

[Editor's note: Which information in the RL RECONFIGURATION PREPARE message triggers the DRNC to include any of the following *Optional* TDD information?:

- a) DL DPCH Group
- b) UL DPCH Group
- c) TDD Physical Channel Offset, *Repetition* Length, and TFCI Presence IEs as part of the DL DPCH Group
- d) TDD Physical Channel Offset, *Repetition* Length, and TFCI Presence IEs as part of the UL DPCH Group.]

In case of a set of co-ordinated DCHs requiring a new transport bearer on Iur the *DCH to be Added* IE group or the *DCH to be Modified* IE group shall be included only for one of the DCHs in the set of co-ordinated DCHs.

In case of a Radio Link being combined with another Radio Link within the DRNS the *DCH to be Added* IE group and the *DCH to be Modified* IE group shall be included only for one of the combined Radio Links.

8.3.7.2 Successful Operation

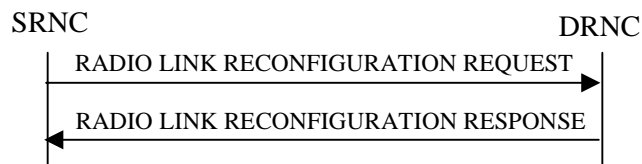


Figure 314: Unsynchronised Radio Link Reconfiguration procedure, Successful Operation

The Unsynchronised Radio Link Reconfiguration procedure is initiated by the SRNC by sending the RADIO LINK RECONFIGURATION REQUEST message to the DRNC.

Upon reception, the DRNS shall modify the configuration of the Radio Link(s) according to the parameters given in the message. Unless specified below, the meaning of parameters is specified in other specifications.

If the RADIO LINK RECONFIGURATION REQUEST message includes the *Allowed Queuing Time* IE the DRNS may queue the request before providing a response to the SRNC.

DCH Modification:

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *Allocation/Retention Priority* IE for a DCH to be modified, the DRNS should use this information when reserving resources for this DCH in the new configuration.

[Editor's note: The priority handling in the DRNS has not been discussed in RAN WG3. Neither has the possibilities for pre-emption (not retaining a resource) of DCHs/RLs. The handling of the *Allocation/Retention Priority* IE is thus not clear and is regarded as FFS.]

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *Frame Handling Priority* IE for a DCH to be modified, the DRNS should store this information for this DCH in the new configuration. The received Frame Handling Priority should be used when prioritising between different frames in the downlink on the radio interface in congestion situations within the DRNS once the new configuration has been activated.

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *Transport Format Set (UL)* IE for a DCH to be modified, the DRNS shall apply the new Transport Format Set in the Uplink of this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *Transport Format Set (DL)* IE for a DCH to be modified, the DRNS shall apply the new Transport Format Set in the Downlink of this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *UL DCH FP Mode* IE for a DCH to be modified, the DRNS shall apply the new DCH FP Mode in the Uplink of the user plane for this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *ToAWS* IE for a DCH to be modified, the DRNS shall apply the new ToAWS in the user plane for this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *ToAWE* IE for a DCH to be modified, the DRNS shall apply the new ToAWE in the user plane for this DCH in the new configuration.

DCH Addition:

If the RADIO LINK RECONFIGURATION REQUEST message includes any DCH to be added to the Radio Link(s), the DRNS shall reserve necessary resources for the new configuration of the Radio Link(s) according to the parameters given in the message and include these DCH in the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes the *DCH Combination Indicator* IE for a DCH to be added, the DRNS shall.

1. treat all DCHs with the same value of this IE as a set of co-ordinated DCHs and
2. include this DCH in the new configuration only if it can include all DCHs with the same value of the *DCH Combination Indicator* IE in the new configuration

- The DRNS should use the *Allocation/Retention Priority* IE received for a DCH to be added when allocating resources for this DCH in the new configuration.

[Editor's note: The priority handling in the DRNS has not been discussed in RAN WG3. Neither has the possibilities for pre-emption (not retaining a resource) of DCHs/RLs. The handling of the *Allocation/Retention Priority* IE is thus not clear and is regarded as FFS.]

The DRNS should store the *Frame Handling Priority* IE received for a DCH to be added in the new configuration. The received Frame Handling Priority should be used when prioritising between different frames in the downlink on the radio interface in congestion situations within the DRNS once the new configuration has been activated.

~~If the RADIO LINK RECONFIGURATION REQUEST message includes the *RLC Mode* IE, the DRNS may use this information to optimise the power control.~~

The DRNS shall use the included *UL DCH FP Mode* IE for a DCH to be added as the new DCH FP Mode in the Uplink of the user plane for this DCH in the new configuration.

The DRNS shall use the included *ToAWS* IE for a DCH to be added as the new Time of Arrival Window Start Point in the user plane for this DCH in the new configuration.

The DRNS shall use the included *ToAWE* IE for a DCH to be added as the new Time of Arrival Window End Point in the user plane for this DCH in the new configuration.

DCH Deletion:

If the RADIO LINK RECONFIGURATION REQUEST message includes any DCH to be deleted from the Radio Link(s), the DRNS shall not include this DCH in the new configuration.

If all of the DCHs belonging to a set of co-ordinated DCHs are requested to be deleted, the DRNS shall not include this set of co-ordinated DCHs in the new configuration

Physical Channel Modification:

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *TFCS (UL)* IE, the DRNS shall apply the new TFCS in the Uplink of [TDD – the CCTrCH of] the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *TFCS (DL)* IE, the DRNS shall apply the new TFCS in the Downlink of [TDD – the CCTrCH of] the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *Mean Bit Rate (UL)* IE, the DRNS should use this information when reserving resources for the Uplink of the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *Mean Bit Rate (DL)* IE, the DRNS should use this information when reserving resources for the Downlink of the new configuration.

[Editor's note: There is presently no clear definition of the *Mean Bit Rate* IEs. The handling of these IEs is thus regarded as FFS.]

If the requested modifications are allowed by the DRNS, the DRNS has successfully allocated the required resources, and changed to the new configuration it shall respond to the SRNC with the RADIO LINK RECONFIGURATION RESPONSE message.

The DRNS decides the maximum and minimum Eb/No for the uplink of the Radio Link(s) and shall return this in the IEs *Maximum Uplink Eb/No* and *Minimum Uplink Eb/No* for each Radio Link in the RADIO LINK RECONFIGURATION RESPONSE message.

In case of a set of co-ordinated DCHs requiring a new transport bearer on Iur the *DCH to be Added* IE group or the *DCH to be Modified* IE group shall be included only for one of the DCH in the set of co-ordinated DCHs.

In case of a Radio Link being combined with another Radio Link within the DRNS the *DCH to be Added* IE group and the *DCH to be Modified* IE group shall be included only for one of the combined Radio Links.

9.1.3 RADIO LINK SETUP REQUEST

9.1.3.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
S-RNTI	M			
D-RNTI	O			
Allowed Queuing time	O			
UL DPCH Information		1		
UL Scrambling Code	M			
Min UL Channelisation Code Length	M			
Max Number of UL DPCHs	C – CodeLen			
Puncture Limit	M			For the UL.
UL Transport Format Combination Set	M			
UL DPCCH Slot Format	M			
UL Eb/No Target	O			
Diversity mode	M			
D Field Length	C-FB			
SSDT Cell ID Length	O			
S Field Length	O			
Mean Bit Rate	O			For the UL.
DL DPCH Information		1		
Transport Format Combination Set	M			
DL DPCH Slot Format	M			
TFCI Signalling Mode	M			
TFCI Presence	C- SlotFormat			
Multiplexing Position	M			
Power Offset Information		1		
PO1	M		Power Offset	Power offset for the TFCI bits.
PO2	M		Power Offset	Power offset for the TPC bits.
PO3	M		Power Offset	Power offset for the pilot bits.
TPC Downlink Step Size	M			
Mean Bit Rate	O			For the DL.
DCH Information		1..<maxnoofDCHs >		
DCH ID	M			
DCH Combination Ind	O			
<u>Limited Power Increase</u>	M			
RLC Mode				
Transport Format Set	M			For the UL.
Transport Format Set	M			For the DL.
BLER	M			For the UL.
BLER	M			For the DL.
Allocation/Retention Priority	M			
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP Mode	M			
ToAWS	M			
ToAWE	M			
RL Information		1...<maxnoofRLs >		

RL ID	M			
C-ID	M			
Frame Offset	M			
Chip Offset	M			
Propagation Delay	O			
Diversity Control Field	C – NotFirstRL			
Initial DL TX Power	O		DL Power	
Primary CPICH Ec/lo	O			
SSDT Cell ID	O			

Condition	Explanation
CodeLen	This IE is present only "f "Min UL Channelisation Code len"th" equals to 4
FB	This IE is present only if Feed Back mode diversity is activated.
SlotFormat	This IE is only present if the DL DPCH Slot Format is equal to any of the values 12 to 16.
NotFirstRL	This IE is present only if the RL is not the first one in the RL Information .

Range bound	Explanation
MaxnoofDCHs	Maximum no. of DCHs for one UE.
MaxnoofRLs	Maximum no. of RLs for one UE.

9.1.3.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
S-RNTI	M			
D-RNTI	O			
Allowed Queuing time	O			
Mean Bit Rate	O			For the UL.
Mean Bit Rate	O			For the DL.
UL CCH Information		<i>1..<maxnoofCCHs></i>		
CCH ID	M			
TFCS	M			For the UL.
TFCI Coding	M			
Puncture Limit	M			
DL CCH Information		<i>1..<maxnoofCCHs></i>		
CCH ID	M			
TFCS	M			For the DL.
TFCI Coding	M			
Puncture Limit	M			
DCH Information		<i>1..<maxnoofDCHs></i>		
DCH ID	M			
CCH ID	M			UL CCH in which the DCH is mapped
CCH ID	M			DL CCH in which the DCH is mapped
DCH Combination Ind	O			
Limited Power Increase	M			
RLC Mode				
Transport Format Set	M			For the UL.
Transport Format Set	M			For the DL.
BLER	M			For the UL.
BLER	M			For the DL.
Allocation/Retention Priority	M			
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP Mode	M			
ToAWS	M			
ToAWE	M			
RL Information		<i>1</i>		
RL ID	M			
C-ID	M			
Frame Offset	M			
Primary CCPCH RSCP	O			

Range bound	Explanation
MaxnoofDCHs	Maximum no. of DCHs for one UE.
MaxnoofCCHs	Maximum no. of CCH for one UE.

9.1.11 RADIO LINK RECONFIGURATION PREPARE

9.1.11.1 FDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			
Allowed Queuing Time	O			
UL DPCH Information		0..1		
UL Scrambling code	O			
Min UL Channelisation Code Length	O			
Max Number of UL DPDCHs	C – CodeLen			
Puncture Limit	O			For the UL.
TFCS	O			TFCS for the UL.
UL DPCH Slot Format	O			
SSDT Cell Identity Length	O			
S-Field Length	O			
Mean Bit Rate	O			For the UL.
DL DPCH Information		0..1		
TFCS	O			TFCS for the DL.
DL DPCH Slot Format	O			
TFCI Signalling Mode	O			
TFCI Presence	C- SlotFormat			
MultiplexingPosition	O			
Mean Bit Rate	O			For the DL.
DCHs to Modify		0..<maxnoofDCHs >		
DCH ID	M			
Transport Format Set	O			For the UL.
Transport Format Set	O			For the DL.
Allocation/Retention Priority	O			
Frame Handling Priority	O			
UL FP Mode	O			
ToAWS	O			
ToAWE	O			
DCHs to Add		0..<maxnoofDCHs >		
DCH ID	M			
DCH Combination Indicator	O			
Limited Power Increase RLC Mode	M			
Transport Format Set	M			For the UL.
Transport Format Set	M			For the DL.
BLER	M			For the UL.
BLER	M			For the DL.
Allocation/Retention Priority	M			
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP Mode	M			
ToAWS	M			
ToAWE	M			
DCHs to Delete		0..<maxnoofDCHs >		
DCH ID	M			
RL Information		0..<maxnoofRLs>		
RL ID	M			
SSDT Indication	O			

SSDT Cell Identity	C - SSDTIndON			
--------------------	---------------	--	--	--

Condition	Explanation
SSDTIndON	The IE may be present if the SSDT Indication is set to 'SSDT Active in the UE'.
CodeLen	This IE is present only if "Min UL Channelisation Code length" equals to 4.
SlotFormat	This IE is only present if the DL DPCH Slot Format is equal to any of the values 12 to 16.

Range bound	Explanation
MaxnoofDCHs	Maximum number of DCHs for a UE.
MaxnoofRLs	Maximum number of RLs for a UE.

9.1.11.2 TDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			
Allowed Queuing Time	O			
Mean Bit Rate	O			For the UL
Mean Bit Rate	O			For the DL
UL CCH Information		<i>0..<maxnoofCCHs></i>		
CCH ID	M			
TFCS	O			For the UL.
TFCI Coding	O			
Puncture Limit	O			
DL CCH Information		<i>0..<maxnoofCCHs></i>		
CCH ID	M			
TFCS	O			For the DL.
TFCI Coding	O			
Puncture Limit	O			
DCHs to Modify		<i>0..<maxnoofDCHs></i>		
DCH ID	M			
CCH Id	O			UL CCH in which the DCH is mapped.
CCH Id	O			DL CCH in which the DCH is mapped
Transport Format Set	O			For the UL.
Transport Format Set	O			For the DL.
Allocation/Retention Priority	O			
Frame Handling Priority	O			
UL FP Mode	O			
ToAWS	O			
ToAWE	O			
DCHs to Add		<i>0..<maxnoofDCHs></i>		
DCH ID	M			
CCH Id	M			UL CCH in which the DCH is mapped.
CCH Id	M			DL CCH in which the DCH is mapped
DCH Combination Indicator	O			
Limited Power Increase RLC Mode	M			
Transport Format Set	M			For the UL.
Transport Format Set	M			For the DL.
BLER	M			For the UL.
BLER	M			For the DL.
Allocation/Retention Priority	M			
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP Mode	M			
ToAWS	M			
ToAWE	M			
DCHs to Delete		<i>0..<maxnoofDCHs></i>		
DCH ID	M			

Range bound	Explanation
MaxnoofDCHs	Maximum number of DCHs for a UE.
MaxnoofCCHs	Maximum number of CCHs for a UE.

9.1.16 RADIO LINK RECONFIGURATION REQUEST

9.1.16.1 FDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			
Allowed Queuing Time	O			
UL DPCH Information		0..1		
TFCS	O			TFCS for the UL.
Mean Bit Rate	O			
DL DPCH Information		0..1		
TFCS	O			TFCS for the DL.
TFCI Signalling Mode	O			
Mean Bit Rate	O			
DCHs to Modify		0..<maxnoofDCHs >		
DCH ID	M			
Transport Format Set	O			For the UL.
Transport Format Set	O			For the DL.
Allocation/Retention Priority	O			
Frame Handling Priority	O			
UL FP Mode	O			
ToAWS	O			
ToAWE	O			
DCHs to add		0..<maxnoofDCHs >		
DCH ID	M			
DCH Combination Ind	O			
Limited Power Increase	M			
RLC Mode				
Transport Format Set	M			For the UL.
Transport Format Set	M			For the DL.
Allocation/Retention Priority	M			
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP mode	M			
ToAWS	M			
ToAWE	M			
DCHs to Delete		0..<maxnoofDCHs >		
DCH ID	M			

Range Bound	Explanation
MaxnoofDCHs	Maximum number of DCHs for a UE.

9.1.16.2 TDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			
Allowed Queuing Time	O			
Mean Bit Rate	O			For the UL
Mean Bit Rate	O			For the DL
UL CCTrCH Information		<i>0..<maxnoofCCTrCHs></i>		
CCTrCH ID	M			
TFCS	M			
DL CCTrCH Information		<i>0..<maxnoofCCTrCHs></i>		
CCTrCH ID	M			
TFCS	M			
DCHs to Modify		<i>0..<maxnoofDCHs></i>		
DCH ID	M			
CCTrCH ID	O			UL CCTrCH in which the DCH is mapped.
CCTrCH ID	O			DL CCTrCH in which the DCH is mapped
Transport Format Set	O			For the UL.
Transport Format Set	O			For the DL.
Allocation/Retention Priority	O			
Frame Handling Priority	O			
UL FP Mode	O			
ToAWS	O			
ToAWE	O			
DCHs to Add		<i>0..<maxnoofDCHs></i>		
DCH ID	M			
Limited Power Increase RLC Mode	M			
CCTrCH ID	M			UL CCTrCH in which the DCH is mapped.
CCTrCH ID	M			DL CCTrCH in which the DCH is mapped
DCH Combination Ind	O			
Transport Format Set	M			For the UL.
Transport Format Set	M			For the DL.
Allocation/Retention Priority	M			
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP Mode	M			
ToAWS	M			
ToAWE	M			
DCHs to Delete		<i>0..<maxnoofDCHs></i>		
DCH ID	M			

Range Bound	Explanation
MaxnoofDCHs	Maximum number of DCHs for a UE.
MaxnoofCCTrCHs	Maximum number of CCTrCHs for a UE.

9.2.1.40 Limited Power Increase RLC Mode

This parameter defines the RLC mode of the logical channels multiplexed on the transport channel. The parameter is used for a more efficient use of the inner loop DL power control for non real time data.

If the limited power increase is used, DRNS shall not increase the DL power of the RL if it exceeds by more than *Power Raise Limit* dB the averaged DL power used in the last *DL power averaging window size* timeslots of the same RL.

Power Raise Limit and *DL power averaging window size* are parameters configured in the DRNS.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
<u>Limited Power Increase</u> RLC Mode			ENUMERATED(Used, Not used, Acknowledged Mode, Unacknowledged Mode, Transparent Mode)	

9.3.3 PDU Definitions

```

-- *****
--
-- PDU definitions for RNSAP.
--
-- *****

RNSAP-PDU-Contents -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

-- *****
--
-- IE parameter types from other modules.
--
-- *****

IMPORTS
    AllocationRetentionPriority,
    AllowedQueuingTime,
    BLER,
    BindingID,
    BurstType,
    C-ID,
    C-RNTI,
    CCTrCH-ID,
    CFN,
    CN-CS-DomainIdentifier,
    CN-PS-DomainIdentifier,
    CPICH-EcIo,
    CPICH-Power,
    Cause,
    CellParameterID,
    ChipOffset,
    CompressedModeMethod,
    CriticalityDiagnostics,
    D-FieldLength,
    D-RNTI,
    D-RNTI-ReleaseIndication,
    DCH-CombinationInd,
    DCH-ID,
    DL-ChannelisationCode,
    DL-DPCCH-SlotFormat,
    DL-DPCH-SlotNumber,
    DL-EbNo,
    DL-EbNoTarget,
    DL-FrameType,
    DL-Power,
    DL-ScramblingCode,
    DPCH-ID,
    DRX-Parameter,
    DedicatedMeasurementValue,

```

DiversityControlField,
DiversityMode,
FACH-DataFrameSize,
FACH-InitialWindowSize,
FACH-PriorityIndicator,
FDD-DL-ChannelisationCodeNumber,
FDD-S-CCPCH-Offset,
FrameHandlingPriority,
FrameOffset,
GapPeriod,
GapPositionMode,
L3-Information,
LimitedPowerIncrease,
MAC-c-SDU-Length,
MaxNrOfUL-DPCHs,
MeanBitRate,
MeasurementCharacteristics,
MeasurementID,
MidambleShift,
MinUL-ChannelisationCodeLength,
MultipleURAsIndicator,
MultiplexingPosition,
Offset,
PD,
PSCH-PCCPCH-TimeSlot,
PSCH-TimeSlot,
PayloadCRC-PresenceIndicator,
PilotBitsUsedIndicator,
PowerControlMode,
PowerOffset,
PowerResumeMode,
PrimaryCCPCH-RSCP,
PrimaryCPICH-EcNo,
PrimaryCPICH-Power,
PrimaryScramblingCode,
PropagationDelay,
PunctureLimit,
RANAP-RelocationInformation,
RL-ID,
~~RLC-Mode,~~
RNC-ID,
RepetitionLength,
RepetitionPeriod,
ReportCharacteristics,
S-FieldLength,
S-RNTI,
SAI,
SN,
SRNC-ID,
SSDT-CellID,
SSDT-CellID-Length,
SSDT-Indication,
SSDT-SupportIndicator,
ScaledUL-InterferenceLevel,
ScramblingCode,
ScramblingCodeChange,

SecondaryCCPCH-SlotFormat,
SyncCase,
TDD-ChannelisationCode,
TDD-PhysicalChannelOffset,
TFCI-Coding,
TFCI-Presence,
TFCI-SignallingMode,
TGD,
TGL,
TPC-StepSize,
TimeSlot,
ToAWE,
ToAWS,
TransportBearerID,
TransportBearerRequestIndicator,
TransportFormatCombinationSet,
TransportFormatSet,
TransportLayerAddress,
UARFCN,
UC-ID,
UL-DL-CompressedModeSelection,
UL-DPCCH-SlotFormat,
UL-EbNo,
UL-EbNoTarget,
UL-FP-Mode,
UL-ScramblingCode,
URA-ID

```

-- *****
--
-- RADIO LINK SETUP REQUEST FDD
--
-- *****

RadioLinkSetupRequestFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkSetupRequestFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkSetupRequestFDD-Extensions}}      OPTIONAL,
    ...
}

RadioLinkSetupRequestFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-S-RNTI          CRITICALITY ignore TYPE S-RNTI          PRESENCE mandatory } |
    { ID id-D-RNTI          CRITICALITY ignore TYPE D-RNTI          PRESENCE optional   } |
    { ID id-AllowedQueuingTime CRITICALITY ignore TYPE AllowedQueuingTime PRESENCE optional   } |
    { ID id-UL-DPCH-Information-RL-SetupReqFDD CRITICALITY ignore TYPE UL-DPCH-Information-RL-SetupReqFDD PRESENCE mandatory } |
    { ID id-DL-DPCH-Information-RL-SetupReqFDD CRITICALITY ignore TYPE DL-DPCH-Information-RL-SetupReqFDD PRESENCE mandatory } |
    { ID id-DCH-Information-RL-SetupReqFDD     CRITICALITY ignore TYPE DCH-InformationList-RL-SetupReqFDD PRESENCE mandatory } |
    { ID id-RL-Information-RL-SetupReqFDD     CRITICALITY ignore TYPE RL-InformationList-RL-SetupReqFDD PRESENCE mandatory },
    ...
}

UL-DPCH-Information-RL-SetupReqFDD ::= SEQUENCE {
    ul-ScramblingCode          UL-ScramblingCode,
    minUL-ChannelisationCodeLength MinUL-ChannelisationCodeLength,
    maxNrOfUL-DPCHs            MaxNrOfUL-DPCHs          OPTIONAL
    -- This IE is present only if minUL-ChannelisationCodeLength equals to 4 -- ,
    ul-PunctureLimit           PunctureLimit,
    ul-TransportFormatCombinationSet TransportFormatCombinationSet,
    ul-DPCCH-SlotFormat        UL-DPCCH-SlotFormat,
    ul-EbNoTarget              UL-EbNoTarget          OPTIONAL,
    diversityMode              DiversityMode,
    d-FieldLength              D-FieldLength          OPTIONAL
    -- This IE is present only if Feed Back mode diversity is activated -- ,
    sSDT-CellIdLength          SSDT-CellID-Length    OPTIONAL,
    s-FieldLength              S-FieldLength          OPTIONAL,
    ul-meanBitRate             MeanBitRate            OPTIONAL,
    iE-Extensions              ProtocolExtensionContainer { {UL-DPCH-Information-RL-SetupReqFDD-ExtIEs} } OPTIONAL,
    ...
}

UL-DPCH-Information-RL-SetupReqFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DL-DPCH-Information-RL-SetupReqFDD ::= SEQUENCE {
    transportFormatCombinationSet TransportFormatCombinationSet,
    dl-DPCH-SlotNumber          DL-DPCH-SlotNumber,
    tFCI-SignallingMode         TFCI-SignallingMode,
    tFCI-Presence               TFCI-Presence          OPTIONAL
    -- This IE is present if Slot Format is from 12 to 16 -- ,
    multiplexingPosition        MultiplexingPosition,
    powerOffsetInformation      SEQUENCE {
        po1-ForTFCI-Bits        PowerOffset,
        po2-ForTPC-Bits         PowerOffset,
    }
}

```

```

        po3-ForPilotBits          PowerOffset,
        ...
    },
    dl-TPC-StepSize                TPC-StepSize,
    meanBitRate                    MeanBitRate          OPTIONAL,
    iE-Extensions                  ProtocolExtensionContainer { {DL-DPCH-Information-RL-SetupReqFDD-ExtIEs} } OPTIONAL,
    ...
}

DL-DPCH-Information-RL-SetupReqFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-InformationList-RL-SetupReqFDD ::= DCH-IE-ContainerList { {DCH-InformationItemIEs-RL-SetupReqFDD} }

DCH-InformationItemIEs-RL-SetupReqFDD RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-InformationItem-RL-SetupReqFDD CRITICALITY ignore TYPE DCH-InformationItem-RL-SetupReqFDD PRESENCE mandatory },
    ...
}

DCH-InformationItem-RL-SetupReqFDD ::= SEQUENCE {
    dCH-ID                        DCH-ID,
    dCH-CombinationInd            DCH-CombinationInd          OPTIONAL,
    limitedPowerIncreaseRLC-Mode LimitedPowerIncreaseRLC-Mode,
    ul-transportFormatSet         TransportFormatSet,
    dl-transportFormatSet         TransportFormatSet,
    ul-BLER                       BLER,
    dl-BLER                       BLER,
    allocationRetentionPriority    AllocationRetentionPriority,
    frameHandlingPriority          FrameHandlingPriority,
    payloadCRC-PresenceIndicator  PayloadCRC-PresenceIndicator,
    ul-FP-Mode                    UL-FP-Mode,
    toAWS                         ToAWS,
    toAWE                         ToAWE,
    iE-Extensions                  ProtocolExtensionContainer { {DCH-InformationItem-RL-SetupReqFDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-InformationItem-RL-SetupReqFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RL-InformationList-RL-SetupReqFDD ::= RL-IE-ContainerList { {RL-InformationItemIEs-RL-SetupReqFDD} }

RL-InformationItemIEs-RL-SetupReqFDD RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationItem-RL-SetupReqFDD CRITICALITY ignore TYPE RL-InformationItem-RL-SetupReqFDD PRESENCE mandatory },
    ...
}

RL-InformationItem-RL-SetupReqFDD ::= SEQUENCE {
    rL-ID                        RL-ID,
    uC-ID                        C-ID,
    frameOffset                  FrameOffset,
    chipOffset                   ChipOffset,
    propagationDelay             PropagationDelay          OPTIONAL,
    diversityControlField        DiversityControlField     OPTIONAL
}

```

```

-- This IE is present only if the RL is not the first one in the RL-InformationList-RL-SetupReqFDD --,
dl-InitialTX-Power          DL-Power          OPTIONAL
-- Initial DL transmission power -- ,
cPICH-EcIo                  CPICH-EcIo        OPTIONAL,
sSDT-CellID                 SSDT-CellID       OPTIONAL,
iE-Extensions               ProtocolExtensionContainer { {RL-InformationItem-RL-SetupReqFDD-ExtIEs} } OPTIONAL,
...
}

RL-InformationItem-RL-SetupReqFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

RadioLinkSetupRequestFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- *****
--
-- RADIO LINK SETUP REQUEST TDD
--
-- *****

RadioLinkSetupRequestTDD ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container   {{RadioLinkSetupRequestTDD-IEs}},
  protocolExtensions   ProtocolExtensionContainer {{RadioLinkSetupRequestTDD-Extensions}}          OPTIONAL,
  ...
}

RadioLinkSetupRequestTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-S-RNTI          CRITICALITY ignore TYPE S-RNTI          PRESENCE mandatory } |
  { ID id-D-RNTI          CRITICALITY ignore TYPE D-RNTI          PRESENCE optional   } |
  { ID id-AllowedQueuingTime CRITICALITY ignore TYPE AllowedQueuingTime PRESENCE optional   } |
  { ID id-UL-MeanBitRate   CRITICALITY ignore TYPE MeanBitRate   PRESENCE optional   } |
  { ID id-DL-MeanBitRate   CRITICALITY ignore TYPE MeanBitRate   PRESENCE optional   } |
  { ID id-UL-CCTrChInformationList-RL-SetupReqTDD CRITICALITY ignore TYPE UL-CCTrChInformationList-RL-SetupReqTDD PRESENCE mandatory } |
  { ID id-DL-CCTrChInformationList-RL-SetupReqTDD CRITICALITY ignore TYPE DL-CCTrChInformationList-RL-SetupReqTDD PRESENCE mandatory } |
  { ID id-DCH-InformationList-RL-SetupReqTDD CRITICALITY ignore TYPE DCH-InformationList-RL-SetupReqTDD PRESENCE mandatory } |
  { ID id-RL-Information-RL-SetupReqTDD CRITICALITY ignore TYPE RL-Information-RL-SetupReqTDD PRESENCE mandatory } |
  ...
}

UL-CCTrChInformationList-RL-SetupReqTDD ::= CCTrCH-IE-ContainerList { {UL-CCTrChInformationItemIEs-RL-SetupReqTDD} }

UL-CCTrChInformationItemIEs-RL-SetupReqTDD RNSAP-PROTOCOL-IES ::= {
  { ID id-UL-CCTrChInformationItem-RL-SetupReqTDD CRITICALITY ignore TYPE UL-CCTrChInformationItem-RL-SetupReqTDD PRESENCE mandatory },
  ...
}

UL-CCTrChInformationItem-RL-SetupReqTDD ::= SEQUENCE {
  cCTrCH-ID          CCTrCH-ID,
  ul-TFCS            TransportFormatCombinationSet,
  tFCI-Coding        TFCI-Coding,
  ul-PunctureLimit   PunctureLimit,
  iE-Extensions      ProtocolExtensionContainer { {UL-CCTrChInformationItem-RL-SetupReqTDD-ExtIEs} } OPTIONAL,
  ...
}

```



```

}
UL-CCTrChInformationItem-RL-SetupReqTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}
DL-CCTrChInformationList-RL-SetupReqTDD ::= CCTrCH-IE-ContainerList { {DL-CCTrChInformationItemIEs-RL-SetupReqTDD} }
DL-CCTrChInformationItemIEs-RL-SetupReqTDD RNSAP-PROTOCOL-IES ::= {
  { ID id-DL-CCTrChInformationItem-RL-SetupReqTDD CRITICALITY ignore TYPE DL-CCTrChInformationItem-RL-SetupReqTDD PRESENCE mandatory },
  ...
}
DL-CCTrChInformationItem-RL-SetupReqTDD ::= SEQUENCE {
  cCTrCH-ID CCTrCH-ID,
  dl-TFCS TransportFormatCombinationSet,
  tFCI-Coding TFCI-Coding,
  dl-PunctureLimit PunctureLimit,
  iE-Extensions ProtocolExtensionContainer { {DL-CCTrChInformationItem-RL-SetupReqTDD-ExtIEs} } OPTIONAL,
  ...
}
DL-CCTrChInformationItem-RL-SetupReqTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}
DCH-InformationList-RL-SetupReqTDD ::= DCH-IE-ContainerList { {DCH-InformationItemIEs-RL-SetupReqTDD} }
DCH-InformationItemIEs-RL-SetupReqTDD RNSAP-PROTOCOL-IES ::= {
  { ID id-DCH-InformationItem-RL-SetupReqTDD CRITICALITY ignore TYPE DCH-InformationItem-RL-SetupReqTDD PRESENCE mandatory },
  ...
}
DCH-InformationItem-RL-SetupReqTDD ::= SEQUENCE {
  dCH-ID DCH-ID,
  ul-cCTrCH-ID CCTrCH-ID, -- UL CCTrCH in which the DCH is mapped
  dl-cCTrCH-ID CCTrCH-ID, -- DL CCTrCH in which the DCH is mapped
  dCH-CombinationInd DCH-CombinationInd OPTIONAL,
  limitedPowerIncreaseRLC-Mode LimitedPowerIncreaseRLC-Mode,
  ul-transportFormatSet TransportFormatSet,
  dl-transportFormatSet TransportFormatSet,
  ul-BLER BLER,
  dl-BLER BLER,
  allocationRetentionPriority AllocationRetentionPriority,
  frameHandlingPriority FrameHandlingPriority,
  payloadCRC-PresenceIndicator PayloadCRC-PresenceIndicator,
  ul-FP-Mode UL-FP-Mode,
  toAWS ToAWS,
  toAWE ToAWE,
  iE-Extensions ProtocolExtensionContainer { {DCH-InformationItem-RL-SetupReqTDD-ExtIEs} } OPTIONAL,
  ...
}
DCH-InformationItem-RL-SetupReqTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

```

```
RL-Information-RL-SetupReqTDD ::= SEQUENCE {
    rL-ID                RL-ID,
    c-ID                C-ID,
    frameOffset          FrameOffset,
    primaryCCPCH-RSCP    PrimaryCCPCH-RSCP OPTIONAL,
    iE-Extensions        ProtocolExtensionContainer { {RL-Information-RL-SetupReqTDD-ExtIEs} } OPTIONAL,
    ...
}

RL-Information-RL-SetupReqTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkSetupRequestTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}
```

```

-- *****
--
-- RADIO LINK RECONFIGURATION PREPARE FDD
--
-- *****

RadioLinkReconfigurationPrepareFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container  {{{RadioLinkReconfigurationPrepareFDD-IEs}}},
    protocolExtensions   ProtocolExtensionContainer {{{RadioLinkReconfigurationPrepareFDD-Extensions}}} OPTIONAL,
    ...
}

RadioLinkReconfigurationPrepareFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-AllowedQueuingTime          CRITICALITY ignore TYPE AllowedQueuingTime          PRESENCE mandatory } |
    { ID id-UL-DPCH-Information          CRITICALITY ignore TYPE UL-DPCH-Information          PRESENCE optional } |
    { ID id-DL-DPCH-Information          CRITICALITY ignore TYPE DL-DPCH-Information          PRESENCE optional } |
    { ID id-DCH-ModifyList-RL-ReconfPrepFDD CRITICALITY ignore TYPE DCH-ModifyList-RL-ReconfPrepFDD PRESENCE optional } |
    { ID id-DCH-AddList-RL-ReconfPrepFDD CRITICALITY ignore TYPE DCH-AddList-RL-ReconfPrepFDD PRESENCE optional } |
    { ID id-DCH-DeleteList-RL-ReconfPrepFDD CRITICALITY ignore TYPE DCH-DeleteList-RL-ReconfPrepFDD PRESENCE optional } |
    { ID id-RL-InformationList-RL-ReconfPrepFDD CRITICALITY ignore TYPE RL-InformationList-RL-ReconfPrepFDD PRESENCE mandatory } |
    ...
}

UL-DPCH-Information ::= SEQUENCE {
    ul-ScramblingCode          UL-ScramblingCode          OPTIONAL,
    minUL-ChannelisationCodeLength MinUL-ChannelisationCodeLength OPTIONAL,
    maxNrOfUL-DPDCHs          MaxNrOfUL-DPDCHs          OPTIONAL,
    -- This IE is present only if minUL-ChannelisationCodeLength equals to 4 --,
    ul-PunctureLimit          PunctureLimit          OPTIONAL,
    tFCS                      TransportFormatCombinationSet OPTIONAL,
    ul-DPCCH-SlotFormat        UL-DPCCH-SlotFormat        OPTIONAL,
    sSDT-CellIDLength          SSDT-CellID-Length          OPTIONAL,
    s-FieldLength              S-FieldLength              OPTIONAL,
    meanBitRate                MeanBitRate                OPTIONAL,
    iE-Extensions              ProtocolExtensionContainer { {UL-DPCH-Information-ExtIEs} } OPTIONAL,
    ...
}

UL-DPCH-Information-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DL-DPCH-Information ::= SEQUENCE {
    tFCS                      TransportFormatCombinationSet OPTIONAL,
    dl-DPCCH-SlotFormat        DL-DPCCH-SlotFormat        OPTIONAL,
    tFCI-SignallingMode        TFCI-SignallingMode        OPTIONAL,
    tFCI-Presence              TFCI-Presence              OPTIONAL,
    -- This IE is present if Slot Format is from 12 to 16 --,
    multiplexingPosition        MultiplexingPosition        OPTIONAL,
    meanBitRate                MeanBitRate                OPTIONAL,
    iE-Extensions              ProtocolExtensionContainer { {DL-DPCH-Information-ExtIEs} } OPTIONAL,
    ...
}

DL-DPCH-Information-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

```

}
DCH-ModifyList-RL-ReconfPrepFDD ::= DCH-IE-ContainerList { {DCH-Modify-RL-ReconfPrepFDD-IEs} }
DCH-Modify-RL-ReconfPrepFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-DCH-ModifyItem-RL-ReconfPrepFDD CRITICALITY ignore TYPE DCH-ModifyItem-RL-ReconfPrepFDD PRESENCE mandatory },
  ...
}
DCH-ModifyItem-RL-ReconfPrepFDD ::= SEQUENCE {
  dCH-ID DCH-ID,
  ul-TransportformatSet TransportFormatSet OPTIONAL,
  dl-TransportformatSet TransportFormatSet OPTIONAL,
  allocationRetentionPriority AllocationRetentionPriority OPTIONAL,
  frameHandlingPriority FrameHandlingPriority OPTIONAL,
  ul-FP-Mode UL-FP-Mode OPTIONAL,
  toAWS ToAWS OPTIONAL,
  toAWE ToAWE OPTIONAL,
  iE-Extensions ProtocolExtensionContainer { {DCH-ModifyItem-RL-ReconfPrepFDD-ExtIEs} } OPTIONAL,
  ...
}
DCH-ModifyItem-RL-ReconfPrepFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}
DCH-AddList-RL-ReconfPrepFDD ::= DCH-IE-ContainerList { {DCH-Add-RL-ReconfPrepFDD-IEs} }
DCH-Add-RL-ReconfPrepFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-DCH-AddItem-RL-ReconfPrepFDD CRITICALITY ignore TYPE DCH-AddItem-RL-ReconfPrepFDD PRESENCE mandatory },
  ...
}
DCH-AddItem-RL-ReconfPrepFDD ::= SEQUENCE {
  dCH-ID DCH-ID,
  limitedPowerIncreaseRLC-Mode LimitedPowerIncreaseRLC-Mode,
  dCH-CombinationInd DCH-CombinationInd OPTIONAL,
  ul-TransportformatSet TransportFormatSet,
  dl-TransportformatSet TransportFormatSet,
  ul-BLER BLER,
  dl-BLER BLER,
  allocationRetentionPriority AllocationRetentionPriority,
  frameHandlingPriority FrameHandlingPriority,
  payloadCRC-PresenceIndicator PayloadCRC-PresenceIndicator,
  ul-FP-Mode UL-FP-Mode,
  toAWS ToAWS,
  toAWE ToAWE,
  iE-Extensions ProtocolExtensionContainer { {DCH-AddItem-RL-ReconfPrepFDD-ExtIEs} } OPTIONAL,
  ...
}
DCH-AddItem-RL-ReconfPrepFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}
DCH-DeleteList-RL-ReconfPrepFDD ::= DCH-IE-ContainerList { {DCH-Delete-RL-ReconfPrepFDD-IEs} }

```

```

DCH-Delete-RL-ReconfPrepFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-DCH-DeleteItem-RL-ReconfPrepFDD    CRITICALITY ignore  TYPE DCH-DeleteItem-RL-ReconfPrepFDD    PRESENCE mandatory    },
  ...
}

DCH-DeleteItem-RL-ReconfPrepFDD ::= SEQUENCE {
  dCH-ID                                DCH-ID,
  iE-Extensions                          ProtocolExtensionContainer { {DCH-DeleteItem-RL-ReconfPrepFDD-ExtIEs} } OPTIONAL,
  ...
}

DCH-DeleteItem-RL-ReconfPrepFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

RL-InformationList-RL-ReconfPrepFDD      ::= RL-IE-ContainerList { {RL-Information-RL-ReconfPrepFDD-IEs} }

RL-Information-RL-ReconfPrepFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-RL-Information-RL-ReconfPrepFDD    CRITICALITY ignore  TYPE RL-Information-RL-ReconfPrepFDD    PRESENCE mandatory    },
  ...
}

RL-Information-RL-ReconfPrepFDD ::= SEQUENCE {
  rL-ID                                RL-ID,
  sSDT-Indication                        SSdT-Indication    OPTIONAL,
  sSDT-CellIdentity                       SSdT-CellID      OPTIONAL
  -- The IE may be present if the sSDT-Indication is set to 'sSDT-active-in-the-UE' --,
  iE-Extensions                          ProtocolExtensionContainer { {RL-Information-RL-ReconfPrepFDD-ExtIEs} } OPTIONAL,
  ...
}

RL-Information-RL-ReconfPrepFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

RadioLinkReconfigurationPrepareFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
--
-- RADIO LINK RECONFIGURATION PREPARE TDD
--
-- *****

RadioLinkReconfigurationPrepareTDD ::= SEQUENCE {
  protocolIEs                          ProtocolIE-Container  {{RadioLinkReconfigurationPrepareTDD-IEs}},
  protocolExtensions                    ProtocolExtensionContainer {{RadioLinkReconfigurationPrepareTDD-Extensions}}
  ...
}

RadioLinkReconfigurationPrepareTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-AllowedQueuingTime            CRITICALITY ignore  TYPE AllowedQueuingTime            PRESENCE optional    } |
  { ID id-UL-MeanBitRate                 CRITICALITY ignore  TYPE MeanBitRate                   PRESENCE optional    } |
  { ID id-DL-MeanBitRate                 CRITICALITY ignore  TYPE MeanBitRate                   PRESENCE optional    } |

```

```

{ ID id-UL-CCTrCH-InformationList-RL-ReconfPrepTDD
  CRITICALITY ignore TYPE UL-CCTrCH-InformationList-RL-ReconfPrepTDD PRESENCE mandatory } |
{ ID id-DL-CCTrCH-InformationList-RL-ReconfPrepTDD
  CRITICALITY ignore TYPE DL-CCTrCH-InformationList-RL-ReconfPrepTDD PRESENCE mandatory } |
{ ID id-DCH-ModifyList-RL-ReconfPrepTDD CRITICALITY ignore TYPE DCH-ModifyList-RL-ReconfPrepTDD PRESENCE mandatory } |
{ ID id-DCH-AddList-RL-ReconfPrepTDD CRITICALITY ignore TYPE DCH-AddList-RL-ReconfPrepTDD PRESENCE mandatory } |
{ ID id-DCH-DeleteList-RL-ReconfPrepTDD CRITICALITY ignore TYPE DCH-DeleteList-RL-ReconfPrepTDD PRESENCE mandatory } ,
...
}

UL-CCTrCH-InformationList-RL-ReconfPrepTDD ::= CCTrCH-IE-ContainerList { {UL-CCTrCH-Information-RL-ReconfPrepTDD-IEs} }

UL-CCTrCH-Information-RL-ReconfPrepTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-UL-CCTrCH-Information-RL-ReconfPrepTDD CRITICALITY ignore TYPE UL-CCTrCH-Information-RL-ReconfPrepTDD PRESENCE mandatory },
  ...
}

UL-CCTrCH-Information-RL-ReconfPrepTDD ::= SEQUENCE {
  cCTrCH-ID CCTrCH-ID,
  tFCS TransportFormatCombinationSet OPTIONAL,
  tFCI-Coding TFCI-Coding OPTIONAL,
  punctureLimit PunctureLimit OPTIONAL,
  iE-Extensions ProtocolExtensionContainer { {UL-CCTrCH-Information-RL-ReconfPrepTDD-ExtIEs} } OPTIONAL,
  ...
}

UL-CCTrCH-Information-RL-ReconfPrepTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DL-CCTrCH-InformationList-RL-ReconfPrepTDD ::= CCTrCH-IE-ContainerList { {DL-CCTrCH-Information-RL-ReconfPrepTDD-IEs} }

DL-CCTrCH-Information-RL-ReconfPrepTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-DL-CCTrCH-Information-RL-ReconfPrepTDD CRITICALITY ignore TYPE DL-CCTrCH-Information-RL-ReconfPrepTDD PRESENCE mandatory },
  ...
}

DL-CCTrCH-Information-RL-ReconfPrepTDD ::= SEQUENCE {
  cCTrCH-ID CCTrCH-ID,
  tFCS TransportFormatCombinationSet OPTIONAL,
  tFCI-Coding TFCI-Coding OPTIONAL,
  punctureLimit PunctureLimit OPTIONAL,
  iE-Extensions ProtocolExtensionContainer { {DL-CCTrCH-Information-RL-ReconfPrepTDD-ExtIEs} } OPTIONAL,
  ...
}

DL-CCTrCH-Information-RL-ReconfPrepTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DCH-ModifyList-RL-ReconfPrepTDD ::= DCH-IE-ContainerList { {DCH-Modify-RL-ReconfPrepTDD-IEs} }

DCH-Modify-RL-ReconfPrepTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-DCH-ModifyItem-RL-ReconfPrepTDD CRITICALITY ignore TYPE DCH-ModifyItem-RL-ReconfPrepTDD PRESENCE mandatory },
  ...
}

```

```

DCH-ModifyItem-RL-ReconfPrepTDD ::= SEQUENCE {
    dCH-ID                DCH-ID,
    ul-CCTrCH-ID          CCTrCH-ID      OPTIONAL,
    dl-CCTrCH-ID          CCTrCH-ID      OPTIONAL,
    ul-TransportformatSet TransportFormatSet OPTIONAL,
    dl-TransportformatSet TransportFormatSet OPTIONAL,
    allocationRetentionPriority AllocationRetentionPriority OPTIONAL,
    frameHandlingPriority FrameHandlingPriority OPTIONAL,
    ul-FP-Mode            UL-FP-Mode      OPTIONAL,
    toAWS                 ToAWS           OPTIONAL,
    toAWE                 ToAWE           OPTIONAL,
    iE-Extensions        ProtocolExtensionContainer { {DCH-ModifyItem-RL-ReconfPrepTDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-ModifyItem-RL-ReconfPrepTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-AddList-RL-ReconfPrepTDD          ::= DCH-IE-ContainerList { {DCH-Add-RL-ReconfPrepTDD-IEs} }

DCH-Add-RL-ReconfPrepTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-AddItem-RL-ReconfPrepTDD          CRITICALITY ignore TYPE DCH-AddItem-RL-ReconfPrepTDD          PRESENCE mandatory          },
    ...
}

DCH-AddItem-RL-ReconfPrepTDD ::= SEQUENCE {
    dCH-ID                DCH-ID,
    limitedPowerIncreaseRLC-Mode          LimitedPowerIncreaseRLC-Mode,
    ul-CCTrCH-ID          CCTrCH-ID,
    dl-CCTrCH-ID          CCTrCH-ID,
    dCH-CombinationInd    DCH-CombinationInd OPTIONAL,
    ul-TransportformatSet TransportFormatSet,
    dl-TransportformatSet TransportFormatSet,
    ul-BLER               BLER,
    dl-BLER               BLER,
    allocationRetentionPriority AllocationRetentionPriority,
    frameHandlingPriority FrameHandlingPriority,
    payloadCRC-PresenceIndicator PayloadCRC-PresenceIndicator,
    ul-FP-Mode            UL-FP-Mode,
    toAWS                 ToAWS,
    toAWE                 ToAWE,
    iE-Extensions        ProtocolExtensionContainer { {DCH-AddItem-RL-ReconfPrepTDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-AddItem-RL-ReconfPrepTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-DeleteList-RL-ReconfPrepTDD          ::= DCH-IE-ContainerList { {DCH-Delete-RL-ReconfPrepTDD-IEs} }

DCH-Delete-RL-ReconfPrepTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-DeleteItem-RL-ReconfPrepTDD          CRITICALITY ignore TYPE DCH-DeleteItem-RL-ReconfPrepTDD          PRESENCE mandatory          },
    ...
}

```

```
}  
DCH-DeleteItem-RL-ReconfPrepTDD ::= SEQUENCE {  
    dCH-ID          DCH-ID,  
    iE-Extensions  ProtocolExtensionContainer { {DCH-DeleteItem-RL-ReconfPrepTDD-ExtIEs} } OPTIONAL,  
    ...  
}  
DCH-DeleteItem-RL-ReconfPrepTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {  
    ...  
}  
RadioLinkReconfigurationPrepareTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {  
    ...  
}
```



```

-- *****
--
-- RADIO LINK RECONFIGURATION REQUEST FDD
--
-- *****

RadioLinkReconfigurationRequestFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container  {{RadioLinkReconfigurationRequestFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer  {{RadioLinkReconfigurationRequestFDD-Extensions}}
    ...
}

RadioLinkReconfigurationRequestFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-AllowedQueuingTime          CRITICALITY ignore TYPE AllowedQueuingTime          PRESENCE mandatory } |
    { ID id-UL-DPCH-Information          CRITICALITY ignore TYPE UL-DPCH-Information-RL-ReconfRqstFDD PRESENCE optional } |
    { ID id-DL-DPCH-Information          CRITICALITY ignore TYPE DL-DPCH-Information-RL-ReconfRqstFDD PRESENCE optional } |
    { ID id-DCH-ModifyList-RL-ReconfRqstFDD CRITICALITY ignore TYPE DCH-ModifyList-RL-ReconfRqstFDD PRESENCE mandatory } |
    { ID id-DCH-AddList-RL-ReconfRqstFDD CRITICALITY ignore TYPE DCH-AddList-RL-ReconfRqstFDD PRESENCE mandatory } |
    { ID id-DCH-DeleteList-RL-ReconfRqstFDD CRITICALITY ignore TYPE DCH-DeleteList-RL-ReconfRqstFDD PRESENCE mandatory }
    ...
}

UL-DPCH-Information-RL-ReconfRqstFDD ::= SEQUENCE {
    tFCS                TransportFormatCombinationSet  OPTIONAL,
    meanBitRate          MeanBitRate  OPTIONAL,
    iE-Extensions        ProtocolExtensionContainer { {UL-DPCH-Information-RL-ReconfRqstFDD-ExtIEs} } OPTIONAL,
    ...
}

UL-DPCH-Information-RL-ReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DL-DPCH-Information-RL-ReconfRqstFDD ::= SEQUENCE {
    tFCS                TransportFormatCombinationSet  OPTIONAL,
    tFCI-SignallingMode TFCI-SignallingMode OPTIONAL,
    meanBitRate          MeanBitRate  OPTIONAL,
    iE-Extensions        ProtocolExtensionContainer { {DL-DPCH-Information-RL-ReconfRqstFDD-ExtIEs} } OPTIONAL,
    ...
}

DL-DPCH-Information-RL-ReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-ModifyList-RL-ReconfRqstFDD ::= DCH-IE-ContainerList { {DCH-Modify-RL-ReconfRqstFDD-IEs} }

DCH-Modify-RL-ReconfRqstFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-ModifyItem-RL-ReconfRqstFDD CRITICALITY ignore TYPE DCH-ModifyItem-RL-ReconfRqstFDD PRESENCE mandatory }
    ...
}

DCH-ModifyItem-RL-ReconfRqstFDD ::= SEQUENCE {
    dCH-ID              DCH-ID,
    ul-TransportformatSet TransportFormatSet  OPTIONAL,
    dl-TransportformatSet TransportFormatSet  OPTIONAL,
}

```

```

allocationRetentionPriority      AllocationRetentionPriority OPTIONAL,
frameHandlingPriority            FrameHandlingPriority   OPTIONAL,
ul-FP-Mode                      UL-FP-Mode           OPTIONAL,
toAWS                           ToAWS           OPTIONAL,
toAWE                           ToAWE           OPTIONAL,
iE-Extensions                    ProtocolExtensionContainer { {DCH-ModifyItem-RL-ReconfRqstFDD-ExtIEs} } OPTIONAL,
...
}

DCH-ModifyItem-RL-ReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

DCH-AddList-RL-ReconfRqstFDD          ::= DCH-IE-ContainerList { {DCH-Add-RL-ReconfRqstFDD-IEs} }

DCH-Add-RL-ReconfRqstFDD-IEs RNSAP-PROTOCOL-IES ::= {
{ ID id-DCH-AddItem-RL-ReconfRqstFDD          CRITICALITY ignore TYPE DCH-AddItem-RL-ReconfRqstFDD          PRESENCE mandatory          },
...
}

DCH-AddItem-RL-ReconfRqstFDD ::= SEQUENCE {
dCH-ID                                DCH-ID,
limitedPowerIncreaseRLC-Mode          LimitedPowerIncreaseRLC-Mode,
dCH-CombinationInd                    DCH-CombinationInd OPTIONAL,
ul-TransportformatSet                 TransportFormatSet,
dl-TransportformatSet                 TransportFormatSet,
allocationRetentionPriority           AllocationRetentionPriority,
frameHandlingPriority                 FrameHandlingPriority,
payloadCRC-PresenceIndicator          PayloadCRC-PresenceIndicator,
ul-FP-Mode                            UL-FP-Mode,
toAWS                                 ToAWS,
toAWE                                 ToAWE,
iE-Extensions                          ProtocolExtensionContainer { {DCH-AddItem-RL-ReconfRqstFDD-ExtIEs} } OPTIONAL,
...
}

DCH-AddItem-RL-ReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

DCH-DeleteList-RL-ReconfRqstFDD       ::= DCH-IE-ContainerList { {DCH-Delete-RL-ReconfRqstFDD-IEs} }

DCH-Delete-RL-ReconfRqstFDD-IEs RNSAP-PROTOCOL-IES ::= {
{ ID id-DCH-DeleteItem-RL-ReconfRqstFDD      CRITICALITY ignore TYPE DCH-DeleteItem-RL-ReconfRqstFDD      PRESENCE mandatory          },
...
}

DCH-DeleteItem-RL-ReconfRqstFDD ::= SEQUENCE {
dCH-ID                                DCH-ID,
iE-Extensions                          ProtocolExtensionContainer { {DCH-DeleteItem-RL-ReconfRqstFDD-ExtIEs} } OPTIONAL,
...
}

DCH-DeleteItem-RL-ReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

```

```

RadioLinkReconfigurationRequestFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}
-- *****
--
-- RADIO LINK RECONFIGURATION REQUEST TDD
--
-- *****

RadioLinkReconfigurationRequestTDD ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container      {{RadioLinkReconfigurationRequestTDD-IEs}},
  protocolExtensions   ProtocolExtensionContainer {{RadioLinkReconfigurationRequestTDD-Extensions}} OPTIONAL,
  ...
}

RadioLinkReconfigurationRequestTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-AllowedQueuingTime      CRITICALITY ignore TYPE AllowedQueuingTime          PRESENCE optional    } |
  { ID id-UL-MeanBitRate          CRITICALITY ignore TYPE MeanBitRate              PRESENCE optional    } |
  { ID id-DL-MeanBitRate          CRITICALITY ignore TYPE MeanBitRate              PRESENCE optional    } |
  { ID id-UL-CCTrCH-InformationList-RL-ReconfRqstTDD
    CRITICALITY ignore TYPE UL-CCTrCH-InformationList-RL-ReconfRqstTDD PRESENCE mandatory } |
  { ID id-DL-CCTrCH-InformationList-RL-ReconfRqstTDD
    CRITICALITY ignore TYPE DL-CCTrCH-InformationList-RL-ReconfRqstTDD PRESENCE mandatory } |
  { ID id-DCH-ModifyList-RL-ReconfRqstTDD CRITICALITY ignore TYPE DCH-ModifyList-RL-ReconfRqstTDD PRESENCE mandatory } |
  { ID id-DCH-AddList-RL-ReconfRqstTDD   CRITICALITY ignore TYPE DCH-AddList-RL-ReconfRqstTDD PRESENCE mandatory } |
  { ID id-DCH-DeleteList-RL-ReconfRqstTDD CRITICALITY ignore TYPE DCH-DeleteList-RL-ReconfRqstTDD PRESENCE mandatory } ,
  ...
}

UL-CCTrCH-InformationList-RL-ReconfRqstTDD ::= CCTrCH-IE-ContainerList { {UL-CCTrCH-Information-RL-ReconfRqstTDD-IEs} }

UL-CCTrCH-Information-RL-ReconfRqstTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-UL-CCTrCH-Information-RL-ReconfRqstTDD CRITICALITY ignore TYPE UL-CCTrCH-Information-RL-ReconfRqstTDD PRESENCE mandatory },
  ...
}

UL-CCTrCH-Information-RL-ReconfRqstTDD ::= SEQUENCE {
  cCCTrCH-ID          CCTrCH-ID,
  tFCS                TransportFormatCombinationSet,
  iE-Extensions       ProtocolExtensionContainer { {UL-CCTrCH-Information-RL-ReconfRqstTDD-ExtIEs} } OPTIONAL,
  ...
}

UL-CCTrCH-Information-RL-ReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DL-CCTrCH-InformationList-RL-ReconfRqstTDD ::= CCTrCH-IE-ContainerList { {DL-CCTrCH-Information-RL-ReconfRqstTDD-IEs} }

DL-CCTrCH-Information-RL-ReconfRqstTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-DL-CCTrCH-Information-RL-ReconfRqstTDD CRITICALITY ignore TYPE DL-CCTrCH-Information-RL-ReconfRqstTDD PRESENCE mandatory },
  ...
}

```

```

DL-CCTrCH-Information-RL-ReconfRqstTDD ::= SEQUENCE {
    cCTrCH-ID          CCTrCH-ID,
    tFCS              TransportFormatCombinationSet,
    iE-Extensions     ProtocolExtensionContainer { {DL-CCTrCH-Information-RL-ReconfRqstTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CCTrCH-Information-RL-ReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-ModifyList-RL-ReconfRqstTDD          ::= DCH-IE-ContainerList { {DCH-Modify-RL-ReconfRqstTDD-IEs} }

DCH-Modify-RL-ReconfRqstTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-ModifyItem-RL-ReconfRqstTDD    CRITICALITY ignore    TYPE DCH-ModifyItem-RL-ReconfRqstTDD    PRESENCE mandatory    },
    ...
}

DCH-ModifyItem-RL-ReconfRqstTDD ::= SEQUENCE {
    dCH-ID          DCH-ID,
    ul-CCTrCH-ID    CCTrCH-ID    OPTIONAL,
    dl-CCTrCH-ID    CCTrCH-ID    OPTIONAL,
    ul-TransportformatSet    TransportFormatSet    OPTIONAL,
    dl-TransportformatSet    TransportFormatSet    OPTIONAL,
    allocationRetentionPriority    AllocationRetentionPriority    OPTIONAL,
    frameHandlingPriority    FrameHandlingPriority    OPTIONAL,
    ul-FP-Mode        UL-FP-Mode    OPTIONAL,
    toAWS             ToAWS    OPTIONAL,
    toAWE             ToAWE    OPTIONAL,
    iE-Extensions     ProtocolExtensionContainer { {DCH-ModifyItem-RL-ReconfRqstTDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-ModifyItem-RL-ReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-AddList-RL-ReconfRqstTDD          ::= DCH-IE-ContainerList { {DCH-Add-RL-ReconfRqstTDD-IEs} }

DCH-Add-RL-ReconfRqstTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-AddItem-RL-ReconfRqstTDD    CRITICALITY ignore    TYPE DCH-AddItem-RL-ReconfRqstTDD    PRESENCE mandatory    },
    ...
}

DCH-AddItem-RL-ReconfRqstTDD ::= SEQUENCE {
    dCH-ID          DCH-ID,
    limitedPowerIncreaseRLC-Mode          LimitedPowerIncreaseRLC-Mode,
    ul-CCTrCH-ID    CCTrCH-ID,
    dl-CCTrCH-ID    CCTrCH-ID,
    dCH-CombinationInd    DCH-CombinationInd    OPTIONAL,
    ul-TransportformatSet    TransportFormatSet,
    dl-TransportformatSet    TransportFormatSet,
    allocationRetentionPriority    AllocationRetentionPriority,
    frameHandlingPriority    FrameHandlingPriority,
    ul-FP-Mode        UL-FP-Mode,
    toAWS             ToAWS,

```

```

toAWE
iE-Extensions
...
}
DCH-AddItem-RL-ReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}
DCH-DeleteList-RL-ReconfRqstTDD ::= DCH-IE-ContainerList { {DCH-Delete-RL-ReconfRqstTDD-IEs} }
DCH-Delete-RL-ReconfRqstTDD-IEs RNSAP-PROTOCOL-IES ::= {
{ ID id-DCH-DeleteItem-RL-ReconfRqstTDD CRITICALITY ignore TYPE DCH-DeleteItem-RL-ReconfRqstTDD PRESENCE mandatory },
...
}
DCH-DeleteItem-RL-ReconfRqstTDD ::= SEQUENCE {
dCH-ID DCH-ID,
iE-Extensions ProtocolExtensionContainer { {DCH-DeleteItem-RL-ReconfRqstTDD-ExtIEs} } OPTIONAL,
...
}
DCH-DeleteItem-RL-ReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}
RadioLinkReconfigurationRequestTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
...
}

```

9.3.4 Information Element Definitions

```
LimitedPowerIncreaseRLC-Mode ::= ENUMERATED {  
  acknowledged-mode,  
  unacknowledged-mode,  
  transparent-modeused,  
  not-used  
}
```

3GPP TSG-RAN WG3 Meeting #10
Sophia-Antipolis, FR, 28 Feb-03 Mar, 2000

Document **R3-000891**

e.g. for 3GPP use the format TP-99xxx
or for SMG, use the format P-99-xxx

CHANGE REQUEST

Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.

25.423 CR 001r1

Current Version: **3.0.0**

GSM (AA.BB) or 3G (AA.BBB) specification number ↑

↑ CR number as allocated by MCC support team

For submission to: **TSG-RAN#7**

list expected approval meeting # here ↑

for approval

for information

strategic

non-strategic

(for SMG use only)

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: ftp://ftp.3gpp.org/Information/CR-Form-v2.doc

Proposed change affects: (U)SIM ME UTRAN / Radio Core Network

(at least one should be marked with an X)

Source: RAN WG3 **Date:** 28 Feb 2000

Subject: Changes for CPCH

Work item:

Category: <small>(only one category shall be marked with an X)</small>	F Correction	<input type="checkbox"/>	Release:	Phase 2	<input type="checkbox"/>
	A Corresponds to a correction in an earlier release	<input type="checkbox"/>		Release 96	<input type="checkbox"/>
	B Addition of feature	<input checked="" type="checkbox"/>		Release 97	<input type="checkbox"/>
	C Functional modification of feature	<input type="checkbox"/>		Release 98	<input type="checkbox"/>
D Editorial modification	<input type="checkbox"/>	Release 99	<input checked="" type="checkbox"/>		
			Release 00	<input type="checkbox"/>	

Reason for change: This CR adds changes to include specifications CPCH transport on the specified RNSAP interface in the UTRAN architecture.

Clauses affected: 3.3, 9.1.36.1, 9.2.2, 9.3.2

Other specs affected:	Other 3G core specifications	<input type="checkbox"/>	→ List of CRs:	
	Other GSM core specifications	<input type="checkbox"/>	→ List of CRs:	
	MS test specifications	<input type="checkbox"/>	→ List of CRs:	
	BSS test specifications	<input type="checkbox"/>	→ List of CRs:	
	O&M specifications	<input type="checkbox"/>	→ List of CRs:	

Other comments:

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ASN.1	Abstract Syntax Notation One
ATM	Asynchronous Transfer Mode
BCCH	Broadcast Control Channel
BLER	Block Error Rate
CCPCH	Common Control Physical Channel
CCTrCH	Coded Composite Transport Channel
CFN	Connection Frame Number
CN	Core Network
CRNC	Controlling RNC
CPICH	Common Pilot Channel
DCH	Dedicated Channel
DL	Downlink
DPCCH	Dedicated Physical Control Channel
DPCH	Dedicated Physical Channel
DRNC	Drift RNC
DRNS	Drift RNS
DRX	Discontinuous Reception
DSCH	Downlink Shared Channel
FN	Frame Number
FP	Frame Protocol
MAC	Medium Access Control
PDU	Protocol Data Unit
<u>PCPCH</u>	<u>Physical Common Packet Channel</u>
PSCH	Physical Synchronisation Channel
RAB	Radio Access Bearer
<u>RACH</u>	<u>Random Access Channel</u>
RL	Radio Link
RLC	Radio Link Control
RNS	Radio Network Subsystem
RNSAP	Radio Network Subsystem Application Part
RNTI	Radio Network Temporary Identifier
RRC	Radio Resource Control
RSCP	Received Signal Code Power
SFN	System Frame Number
SRNC	Serving RNC
SRNS	Serving RNS
SSDT	Site Selection Diversity Transmit
TFCI	Transport Format Combination Indicator
TFCS	Transport Format Combination Set
TFS	Transport Format Set
UARFCN	UMTS Absolute Radio Frequency Channel Number
UE	User Equipment
UL	Uplink
URA	UTRAN Registration Area
UTRAN	UMTS Terrestrial Radio Access Network

9.1.36 COMMON TRANSPORT CHANNEL RESOURCES RESPONSE

9.1.36.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
S-RNTI	M			
FACH Info for S-CCPCH coupled to PRACH <i>or</i> PCPCH				
Priority Indicator & Initial Window Size		1..16		Provide Information for each priority class used
FACH Priority Indicator	M			
MAC-c SDU Length		1..<MaxNbMACcSDULength>		
MAC-c SDU Length	M			
FACH Initial Window Size	M			
FACH Info for optional S-CCPCH	O			
FDD S-CCPCH Offset	M			Corresponds to: $\tau_{S-CCPCH,k}$, see ref. [Error! Reference source not found.]
DL Scrambling Code	M			
FDD DL Channelisation Code Number	M			
TFCS	M			For the DL.
Secondary CCPCH Slot Format	M			
Pilot Bits Used Indicator	M			
MultiplexingPosition	M			
STTD Indicator	M			
Priority Indicator & Initial Window Size		1..16		Provide Information for each priority class used
FACH Priority Indicator	M			
Data Frame Size		1..<MaxNbMACcSDULength>		
.....MAC-c SDU Length	M			
FACH Initial Window Size	M			
Transport Layer Address	O			
Binding Identity	O			
Criticality Diagnostics	O			

Range Bound	Explanation
MaxNbMACcSDULength	Maximum number of different MAC-c SDU Lengths.

9.3.2 Elementary Procedure Definitions

```
-- *****
--
-- Elementary Procedure definitions
--
-- *****

RNSAP-PDU-Descriptions -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

-- *****
--
-- IE parameter types from other modules.
--
-- *****

IMPORTS
    Criticality,
    ProcedureID,
    TransactionID
FROM RNSAP-CommonDataTypes

    CommonTransportChannelResourcesFailure,
    CommonTransportChannelResourcesRequest,
    CommonTransportChannelResourcesReleaseRequest,
    CommonTransportChannelResourcesResponseFDD,
    CommonTransportChannelResourcesResponseTDD,
    CompressedModeCancel,
    CompressedModeCommit,
    CompressedModeFailure,
    CompressedModePrepare,
    CompressedModeReady,
    DedicatedMeasurementFailureIndication,
    DedicatedMeasurementInitiationFailure,
    DedicatedMeasurementInitiationRequest,
    DedicatedMeasurementInitiationResponse,
    DedicatedMeasurementReport,
    DedicatedMeasurementTerminationRequest,
    DL-PowerControlRequest,
    DownlinkSignallingTransferRequest,
    ErrorIndication,
    PagingRequest,
    PhysicalChannelReconfigurationCommand,
    PhysicalChannelReconfigurationFailure,
    PhysicalChannelReconfigurationRequestFDD,
    PhysicalChannelReconfigurationRequestTDD,
    PrivateMessage,
```

Error! No text of specified style in document.

6

Error! No text of specified style in document.

RadioLinkAdditionFailureFDD,
RadioLinkAdditionFailureTDD,
RadioLinkAdditionRequestFDD,
RadioLinkAdditionRequestTDD,
RadioLinkAdditionResponseFDD,
RadioLinkAdditionResponseTDD,
RadioLinkDeletionRequest,
RadioLinkDeletionResponse,
RadioLinkFailureIndication,
RadioLinkReconfigurationCancel,
RadioLinkReconfigurationCommit,
RadioLinkReconfigurationFailure,
RadioLinkReconfigurationPrepareFDD,
RadioLinkReconfigurationPrepareTDD,
RadioLinkReconfigurationReadyFDD,
RadioLinkReconfigurationReadyTDD,
RadioLinkReconfigurationRequestFDD,
RadioLinkReconfigurationRequestTDD,
RadioLinkReconfigurationResponseFDD,
RadioLinkReconfigurationResponseTDD,
RadioLinkRestoreIndication,
RadioLinkSetupFailureFDD,
RadioLinkSetupFailureTDD,
RadioLinkSetupRequestFDD,
RadioLinkSetupRequestTDD,
RadioLinkSetupResponseFDD,
RadioLinkSetupResponseTDD,
RelocationCommit,
UplinkSignallingTransferIndication

FROM RNSAP-PDU-Contents

id-commonTransportChannelResourcesInitiationFDD,
id-commonTransportChannelResourcesInitiationTDD,
id-commonTransportChannelResourcesRelease,
id-compressedModeCancellationFDD,
id-compressedModeCommitFDD,
id-compressedModePrepareFDD,
id-downlinkPowerControl,
id-downlinkSignallingTransfer,
id-errorIndication,
id-measurementFailure,
id-measurementInitiation,
id-measurementReporting,
id-measurementTermination,
id-pagingRequest,
id-physicalChannelReconfiguration,
id-privateMessage,
id-radioLinkAddition,
id-radioLinkDeletion,
id-radioLinkFailure,
id-radioLinkRestoration,

Error! No text of specified style in document.

Error! No text of specified style in document.

```
id-radioLinkSetup,
id-srnsRelocationCommit,
id-synchronisedRadioLinkReconfigurationCancellation,
id-synchronisedRadioLinkReconfigurationCommit,
id-synchronisedRadioLinkReconfigurationPrepare,
id-unSynchronisedRadioLinkReconfiguration,
id-uplinkSignallingTransfer
FROM RNSAP-Constants;

-- *****
--
-- Interface Elementary Procedure Class
--
-- *****

RNSAP-ELEMENTARY-PROCEDURE ::= CLASS {
    &InitiatingMessage          ,
    &SuccessfulOutcome          OPTIONAL,
    &UnsuccessfulOutcome       OPTIONAL,
    &Outcome                    OPTIONAL,
    &procedureID                ProcedureID    UNIQUE,
    &criticality                Criticality    DEFAULT ignore
}
WITH SYNTAX {
    INITIATING MESSAGE      &InitiatingMessage
    [SUCCESSFUL OUTCOME    &SuccessfulOutcome]
    [UNSUCCESSFUL OUTCOME  &UnsuccessfulOutcome]
    [OUTCOME                &Outcome]
    PROCEDURE ID           &procedureID
    [CRITICALITY           &criticality]
}

-- *****
--
-- Interface PDU Definition
--
-- *****

RNSAP-PDU ::= CHOICE {
    initiatingMessage    InitiatingMessage,
    succesfulOutcome     SuccessfulOutcome,
    unsuccessfullOutcome UnsuccessfulOutcome,
    outcome              Outcome,
    ...
}

InitiatingMessage ::= SEQUENCE {
    procedureID RNSAP-ELEMENTARY-PROCEDURE.&procedureID    ( {RNSAP-ELEMENTARY-PROCEDURES} ),
    criticality RNSAP-ELEMENTARY-PROCEDURE.&criticality      ( {RNSAP-ELEMENTARY-PROCEDURES} {@procedureID} ),
    transactionID TransactionID,
    value        RNSAP-ELEMENTARY-PROCEDURE.&InitiatingMessage ( {RNSAP-ELEMENTARY-PROCEDURES} {@procedureID} )
}
```

```

}

SuccessfulOutcome ::= SEQUENCE {
    procedureID RNSAP-ELEMENTARY-PROCEDURE.&procedureID      ({RNSAP-ELEMENTARY-PROCEDURES}),
    criticality RNSAP-ELEMENTARY-PROCEDURE.&criticality      ({RNSAP-ELEMENTARY-PROCEDURES}{@procedureID}),
    transactionID TransactionID,
    value       RNSAP-ELEMENTARY-PROCEDURE.&SuccessfulOutcome ({RNSAP-ELEMENTARY-PROCEDURES}{@procedureID})
}

UnsuccessfulOutcome ::= SEQUENCE {
    procedureID RNSAP-ELEMENTARY-PROCEDURE.&procedureID      ({RNSAP-ELEMENTARY-PROCEDURES}),
    criticality RNSAP-ELEMENTARY-PROCEDURE.&criticality      ({RNSAP-ELEMENTARY-PROCEDURES}{@procedureID}),
    transactionID TransactionID,
    value       RNSAP-ELEMENTARY-PROCEDURE.&UnsuccessfulOutcome ({RNSAP-ELEMENTARY-PROCEDURES}{@procedureID})
}

Outcome ::= SEQUENCE {
    procedureID RNSAP-ELEMENTARY-PROCEDURE.&procedureID      ({RNSAP-ELEMENTARY-PROCEDURES}),
    criticality RNSAP-ELEMENTARY-PROCEDURE.&criticality      ({RNSAP-ELEMENTARY-PROCEDURES}{@procedureID}),
    transactionID TransactionID,
    value       RNSAP-ELEMENTARY-PROCEDURE.&Outcome          ({RNSAP-ELEMENTARY-PROCEDURES}{@procedureID})
}

-- *****
--
-- Interface Elementary Procedure List
--
-- *****

RNSAP-ELEMENTARY-PROCEDURES RNSAP-ELEMENTARY-PROCEDURE ::= {
    RNSAP-ELEMENTARY-PROCEDURES-CLASS-1 |
    RNSAP-ELEMENTARY-PROCEDURES-CLASS-2 |
    RNSAP-ELEMENTARY-PROCEDURES-CLASS-3 |
    ...
}

RNSAP-ELEMENTARY-PROCEDURES-CLASS-1 RNSAP-ELEMENTARY-PROCEDURE ::= {
    radioLinkSetupFDD |
    radioLinkSetupTDD |
    radioLinkAdditionFDD |
    radioLinkAdditionTDD |
    radioLinkDeletion |
    synchronisedRadioLinkReconfigurationPreparationFDD |
    synchronisedRadioLinkReconfigurationPreparationTDD |
    unSynchronisedRadioLinkReconfigurationFDD |
    unSynchronisedRadioLinkReconfigurationTDD |
    physicalChannelReconfigurationFDD |
    physicalChannelReconfigurationTDD |
    measurementInitiation |
    compressedModePreparationFDD |
    commonTransportChannelResourcesInitiationFDD |

```

Error! No text of specified style in document.

Error! No text of specified style in document.

```
commonTransportChannelResourcesInitiationTDD
...
}

RNSAP-ELEMENTARY-PROCEDURES-CLASS-2 RNSAP-ELEMENTARY-PROCEDURE ::= {
  uplinkSignallingTransfer
  downlinkSignallingTransfer
  srnsRelocationCommit
  paging
  synchronisedRadioLinkReconfigurationCommit
  synchronisedRadioLinkReconfigurationCancellation
  radioLinkFailure
  radioLinkRestoration
  measurementReporting
  measurementTermination
  measurementFailure
  downlinkPowerControlFDD
  compressedModeCommitFDD
  compressedModeCancellationFDD
  commonTransportChannelResourcesRelease
  errorIndication
  privateMessage
  ...
}

RNSAP-ELEMENTARY-PROCEDURES-CLASS-3 RNSAP-ELEMENTARY-PROCEDURE ::= {
  ...
}

-- *****
--
-- Interface Elementary Procedures
--
-- *****

radioLinkSetupFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE RadioLinkSetupRequestFDD
  SUCCESSFUL OUTCOME RadioLinkSetupResponseFDD
  UNSUCCESSFUL OUTCOME RadioLinkSetupFailureFDD
  PROCEDURE ID { procedureCode id-radioLinkSetup, ddMode fdd }
  CRITICALITY ignore
}

radioLinkSetupTDD RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE RadioLinkSetupRequestTDD
  SUCCESSFUL OUTCOME RadioLinkSetupResponseTDD
  UNSUCCESSFUL OUTCOME RadioLinkSetupFailureTDD
  PROCEDURE ID { procedureCode id-radioLinkSetup, ddMode tdd }
  CRITICALITY ignore
}
```

```
radioLinkAdditionFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  RadioLinkAdditionRequestFDD
  SUCCESSFUL OUTCOME  RadioLinkAdditionResponseFDD
  UNSUCCESSFUL OUTCOME  RadioLinkAdditionFailureFDD
  PROCEDURE ID        { procedureCode id-radioLinkAddition , ddMode fdd }
  CRITICALITY         ignore
}

radioLinkAdditionTDD RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  RadioLinkAdditionRequestTDD
  SUCCESSFUL OUTCOME  RadioLinkAdditionResponseTDD
  UNSUCCESSFUL OUTCOME  RadioLinkAdditionFailureTDD
  PROCEDURE ID        { procedureCode id-radioLinkAddition , ddMode tdd }
  CRITICALITY         ignore
}

radioLinkDeletion RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  RadioLinkDeletionRequest
  SUCCESSFUL OUTCOME  RadioLinkDeletionResponse
  PROCEDURE ID        { procedureCode id-radioLinkDeletion, ddMode common }
  CRITICALITY         ignore
}

synchronisedRadioLinkReconfigurationPreparationFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  RadioLinkReconfigurationPrepareFDD
  SUCCESSFUL OUTCOME  RadioLinkReconfigurationReadyFDD
  UNSUCCESSFUL OUTCOME  RadioLinkReconfigurationFailure
  PROCEDURE ID        { procedureCode id-synchronisedRadioLinkReconfigurationPrepare, ddMode fdd }
  CRITICALITY         ignore
}

synchronisedRadioLinkReconfigurationPreparationTDD RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  RadioLinkReconfigurationPrepareTDD
  SUCCESSFUL OUTCOME  RadioLinkReconfigurationReadyTDD
  UNSUCCESSFUL OUTCOME  RadioLinkReconfigurationFailure
  PROCEDURE ID        { procedureCode id-synchronisedRadioLinkReconfigurationPrepare, ddMode tdd }
  CRITICALITY         ignore
}

unSynchronisedRadioLinkReconfigurationFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  RadioLinkReconfigurationRequestFDD
  SUCCESSFUL OUTCOME  RadioLinkReconfigurationResponseFDD
  UNSUCCESSFUL OUTCOME  RadioLinkReconfigurationFailure
  PROCEDURE ID        { procedureCode id-unSynchronisedRadioLinkReconfiguration, ddMode fdd }
  CRITICALITY         ignore
}

unSynchronisedRadioLinkReconfigurationTDD RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  RadioLinkReconfigurationRequestTDD
  SUCCESSFUL OUTCOME  RadioLinkReconfigurationResponseTDD
  UNSUCCESSFUL OUTCOME  RadioLinkReconfigurationFailure
}
```

Error! No text of specified style in document.

Error! No text of specified style in document.

```
PROCEDURE ID      { procedureCode id-unSynchronisedRadioLinkReconfiguration, ddMode tdd }
CRITICALITY      ignore
}

physicalChannelReconfigurationFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE PhysicalChannelReconfigurationRequestFDD
  SUCCESSFUL OUTCOME  PhysicalChannelReconfigurationCommand
  UNSUCCESSFUL OUTCOME PhysicalChannelReconfigurationFailure
  PROCEDURE ID      { procedureCode id-physicalChannelReconfiguration, ddMode fdd }
  CRITICALITY      ignore
}

physicalChannelReconfigurationTDD RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE PhysicalChannelReconfigurationRequestTDD
  SUCCESSFUL OUTCOME  PhysicalChannelReconfigurationCommand
  UNSUCCESSFUL OUTCOME PhysicalChannelReconfigurationFailure
  PROCEDURE ID      { procedureCode id-physicalChannelReconfiguration, ddMode tdd }
  CRITICALITY      ignore
}

measurementInitiation RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE DedicatedMeasurementInitiationRequest
  SUCCESSFUL OUTCOME  DedicatedMeasurementInitiationResponse
  UNSUCCESSFUL OUTCOME DedicatedMeasurementInitiationFailure
  PROCEDURE ID      { procedureCode id-measurementInitiation, ddMode common }
  CRITICALITY      ignore
}

compressedModePreparationFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE CompressedModePrepare
  SUCCESSFUL OUTCOME  CompressedModeReady
  UNSUCCESSFUL OUTCOME CompressedModeFailure
  PROCEDURE ID      { procedureCode id-compressedModePrepareFDD, ddMode fdd }
  CRITICALITY      ignore
}

commonTransportChannelResourcesInitiationFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE CommonTransportChannelResourcesRequest
  SUCCESSFUL OUTCOME  CommonTransportChannelResourcesResponseFDD
  UNSUCCESSFUL OUTCOME CommonTransportChannelResourcesFailure
  PROCEDURE ID      { procedureCode id-commonTransportChannelResourcesInitiationFDD, ddMode common }
  CRITICALITY      ignore
}

commonTransportChannelResourcesInitiationTDD RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE CommonTransportChannelResourcesRequest
  SUCCESSFUL OUTCOME  CommonTransportChannelResourcesResponseTDD
  UNSUCCESSFUL OUTCOME CommonTransportChannelResourcesFailure
  PROCEDURE ID      { procedureCode id-commonTransportChannelResourcesInitiationTDD, ddMode common }
  CRITICALITY      ignore
}
```



```
uplinkSignallingTransfer RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE UplinkSignallingTransferIndication
  PROCEDURE ID       { procedureCode id-uplinkSignallingTransfer, ddMode common }
  CRITICALITY        ignore
}

downlinkSignallingTransfer RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE DownlinkSignallingTransferRequest
  PROCEDURE ID       { procedureCode id-downlinkSignallingTransfer, ddMode common }
  CRITICALITY        ignore
}

srnsRelocationCommit RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE RelocationCommit
  PROCEDURE ID       { procedureCode id-srnsRelocationCommit, ddMode common }
  CRITICALITY        ignore
}

paging RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE PagingRequest
  PROCEDURE ID       { procedureCode id-pagingRequest, ddMode common }
  CRITICALITY        ignore
}

synchronisedRadioLinkReconfigurationCommit RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE RadioLinkReconfigurationCommit
  PROCEDURE ID       { procedureCode id-synchronisedRadioLinkReconfigurationCommit, ddMode common }
  CRITICALITY        ignore
}

synchronisedRadioLinkReconfigurationCancellation RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE RadioLinkReconfigurationCancel
  PROCEDURE ID       { procedureCode id-synchronisedRadioLinkReconfigurationCancellation, ddMode common }
  CRITICALITY        ignore
}

radioLinkFailure RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE RadioLinkFailureIndication
  PROCEDURE ID       { procedureCode id-radioLinkFailure, ddMode common }
  CRITICALITY        ignore
}

radioLinkRestoration RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE RadioLinkRestoreIndication
  PROCEDURE ID       { procedureCode id-radioLinkRestoration, ddMode common }
  CRITICALITY        ignore
}

measurementReporting RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE DedicatedMeasurementReport
```

Error! No text of specified style in document.

13

Error! No text of specified style in document.

```
PROCEDURE ID      { procedureCode id-measurementReporting, ddMode common }
CRITICALITY      ignore
}

measurementTermination RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE DedicatedMeasurementTerminationRequest
  PROCEDURE ID      { procedureCode id-measurementTermination, ddMode common }
  CRITICALITY      ignore
}

measurementFailure RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE DedicatedMeasurementFailureIndication
  PROCEDURE ID      { procedureCode id-measurementFailure, ddMode common }
  CRITICALITY      ignore
}

downlinkPowerControlFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE DL-PowerControlRequest
  PROCEDURE ID      { procedureCode id-downlinkPowerControl, ddMode fdd }
  CRITICALITY      ignore
}

compressedModeCommitFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE CompressedModeCommit
  PROCEDURE ID      { procedureCode id-compressedModeCommitFDD, ddMode fdd }
  CRITICALITY      ignore
}

compressedModeCancellationFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE CompressedModeCancel
  PROCEDURE ID      { procedureCode id-compressedModeCancellationFDD, ddMode fdd }
  CRITICALITY      ignore
}

commonTransportChannelResourcesRelease RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE CommonTransportChannelResourcesReleaseRequest
  PROCEDURE ID      { procedureCode id-commonTransportChannelResourcesRelease, ddMode common }
  CRITICALITY      ignore
}

errorIndication RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE ErrorIndication
  PROCEDURE ID      { procedureCode id-errorIndication, ddMode common }
  CRITICALITY      ignore
}

privateMessage RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE PrivateMessage
  PROCEDURE ID      { procedureCode id-privateMessage, ddMode common }
  CRITICALITY      ignore
}
```

END

9.3.3 PDU Definitions

```
-- *****
--
-- PDU definitions for RNSAP.
--
-- *****

RNSAP-PDU-Contents -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

-- *****
--
-- IE parameter types from other modules.
--
-- *****

IMPORTS
    AllocationRetentionPriority,
    AllowedQueuingTime,
    BLER,
    BindingID,
    BurstType,
    C-ID,
    C-RNTI,
    CCTrCH-ID,
    CFN,
    CN-CS-DomainIdentifier,
    CN-PS-DomainIdentifier,
    CPICH-EcIo,
    CPICH-Power,
    Cause,
    CellParameterID,
    ChipOffset,
    CompressedModeMethod,
    CriticalityDiagnostics,
    D-FieldLength,
    D-RNTI,
    D-RNTI-ReleaseIndication,
    DCH-CombinationInd,
    DCH-ID,
    DL-ChannelisationCode,
    DL-DPCCCH-SlotFormat,
    DL-DPCH-SlotNumber,
    DL-EbNo,
    DL-EbNoTarget,
```

Error! No text of specified style in document.

Error! No text of specified style in document.

DL-FrameType,
DL-Power,
DL-ScramblingCode,
DPCH-ID,
DRX-Parameter,
DedicatedMeasurementValue,
DiversityControlField,
DiversityMode,
FACH-DataFrameSize,
FACH-InitialWindowSize,
FACH-PriorityIndicator,
FDD-DL-ChannelisationCodeNumber,
FDD-S-CCPCH-Offset,
FrameHandlingPriority,
FrameOffset,
GapPeriod,
GapPositionMode,
L3-Information,
MAC-c-SDU-Length,
MaxNrOfUL-DPCHs,
MeanBitRate,
MeasurementCharacteristics,
MeasurementID,
MidambleShift,
MinUL-ChannelisationCodeLength,
MultipleURAsIndicator,
MultiplexingPosition,
Offset,
PD,
PSCH-PCCPCH-TimeSlot,
PSCH-TimeSlot,
PayloadCRC-PresenceIndicator,
PilotBitsUsedIndicator,
PowerControlMode,
PowerOffset,
PowerResumeMode,
PrimaryCCPCH-RSCP,
PrimaryCPICH-EcNo,
PrimaryCPICH-Power,
PrimaryScramblingCode,
PropagationDelay,
PunctureLimit,
RANAP-RelocationInformation,
RL-ID,
RLC-Mode,
RNC-ID,
RepetitionLength,
RepetitionPeriod,
ReportCharacteristics,
S-FieldLength,
S-RNTI,

Error! No text of specified style in document.

Error! No text of specified style in document.

```
SAI,  
SN,  
SRNC-ID,  
SSDT-CellID,  
SSDT-CellID-Length,  
SSDT-Indication,  
SSDT-SupportIndicator,  
ScaledUL-InterferenceLevel,  
ScramblingCode,  
ScramblingCodeChange,  
SecondaryCCPCH-SlotFormat,  
SyncCase,  
TDD-ChannelisationCode,  
TDD-PhysicalChannelOffset,  
TFCI-Coding,  
TFCI-Presence,  
TFCI-SignallingMode,  
TGD,  
TGL,  
TPC-StepSize,  
TimeSlot,  
ToAWE,  
ToAWS,  
TransportBearerID,  
TransportBearerRequestIndicator,  
TransportFormatCombinationSet,  
TransportFormatSet,  
TransportLayerAddress,  
UARFCN,  
UC-ID,  
UL-DL-CompressedModeSelection,  
UL-DPCCH-SlotFormat,  
UL-EbNo,  
UL-EbNoTarget,  
UL-FP-Mode,  
UL-ScramblingCode,  
URA-ID  
FROM RNSAP-IEs  
  
PrivateExtensionContainer{},  
ProtocolExtensionContainer{},  
ProtocolIE-ContainerList{},  
ProtocolIE-ContainerPair{},  
ProtocolIE-ContainerPairList{},  
ProtocolIE-Container{},  
RNSAP-PRIVATE-EXTENSION,  
RNSAP-PROTOCOL-EXTENSION,  
RNSAP-PROTOCOL-IES,  
RNSAP-PROTOCOL-IES-PAIR  
FROM RNSAP-Containers
```

Error! No text of specified style in document.

Error! No text of specified style in document.

maxNoOfDL-Codes ,
maxNrOfCCTrCHs ,
maxNrOfDCHs ,
maxNrOfDL-Codes ,
maxNrOfDPCHs ,
maxNrOfFACH-FD-Size ,
maxNrOfFDD-Neighbours ,
maxNrOfMACcSDU-Length ,
maxNrOfTDD-Neighbours ,
maxNrOfRLs ,
maxNrOfSCCPCHs ,
maxRNCinURA ,

id-AllowedQueuingTime ,
id-BindingID ,
id-C-ID ,
id-C-RNTI ,
id-CCTrCH-ID ,
id-CFN ,
id-CN-CS-DomainIdentifier ,
id-CN-PS-DomainIdentifier ,
id-Cause ,
id-CompressedModeMethod ,
id-CriticalityDiagnostics ,
id-D-RNTI ,
id-D-RNTI-ReleaseIndication ,
id-DCH-AddItem ,
id-DCH-AddItem-RL-ReconfPrepFDD ,
id-DCH-AddItem-RL-ReconfPrepTDD ,
id-DCH-AddItem-RL-ReconfReadyFDD ,
id-DCH-AddItem-RL-ReconfRqstFDD ,
id-DCH-AddItem-RL-ReconfRqstTDD ,
id-DCH-AddList-RL-ReconfPrepFDD ,
id-DCH-AddList-RL-ReconfPrepTDD ,
id-DCH-AddList-RL-ReconfRqstFDD ,
id-DCH-AddList-RL-ReconfRqstTDD ,
id-DCH-DeleteItem-RL-ReconfPrepFDD ,
id-DCH-DeleteItem-RL-ReconfPrepTDD ,
id-DCH-DeleteItem-RL-ReconfRqstFDD ,
id-DCH-DeleteItem-RL-ReconfRqstTDD ,
id-DCH-DeleteList-RL-ReconfPrepFDD ,
id-DCH-DeleteList-RL-ReconfPrepTDD ,
id-DCH-DeleteList-RL-ReconfRqstFDD ,
id-DCH-DeleteList-RL-ReconfRqstTDD ,
id-DCH-Information-RL-SetupReqFDD ,
id-DCH-InformationItem-RL-SetupReqFDD ,
id-DCH-InformationItem-RL-SetupReqTDD ,
id-DCH-InformationList-RL-SetupReqTDD ,
id-DCH-ModifyItem ,
id-DCH-ModifyItem-RL-ReconfPrepFDD ,
id-DCH-ModifyItem-RL-ReconfPrepTDD ,

Error! No text of specified style in document.

Error! No text of specified style in document.

id-DCH-ModifyItem-RL-ReconfReadyFDD,
id-DCH-ModifyItem-RL-ReconfRqstFDD,
id-DCH-ModifyItem-RL-ReconfRqstTDD,
id-DCH-ModifyList-RL-ReconfPrepFDD,
id-DCH-ModifyList-RL-ReconfPrepTDD,
id-DCH-ModifyList-RL-ReconfRqstFDD,
id-DCH-ModifyList-RL-ReconfRqstTDD,
id-DL-CCTrCH-Information-RL-ReconfPrepTDD,
id-DL-CCTrCH-Information-RL-ReconfRqstTDD,
id-DL-CCTrCH-InformationList-RL-ReconfPrepTDD,
id-DL-CCTrCH-InformationList-RL-ReconfRqstTDD,
id-DL-CCTrChInformationItem-RL-SetupReqTDD,
id-DL-CCTrChInformationList-RL-SetupReqTDD,
id-DL-CodeInformation-PhyChReconfRqstFDD,
id-DL-DPCH-Information,
id-DL-DPCH-Information-RL-SetupReqFDD,
id-DL-DPCH-InformationList-PhyChReconfRqstTDD,
id-DL-DPCH-InformationList-RL-ReconfReadyTDD,
id-DL-EbNoTarget,
id-DL-FrameType,
id-DL-MeanBitRate,
id-DL-ReferencePowerInformation-DL-PC-Rqst,
id-DRX-Parameter,
id-DedicatedMeasurementObjectType-DM-Rprt,
id-DedicatedMeasurementObjectType-DM-Rqst,
id-DedicatedMeasurementObjectType-DM-Rspns,
id-FACH-InfoForOptionalGroupS-CCPCH,
id-FACH-InfoForOptionals-CCPCH,
id-FACH-InfoForS-CCPCH-CoupledToPRACHorPCPCH,
id-GapPositionMode,
id-L3-Information,
id-MeasurementCharacteristics,
id-MeasurementID,
id-MultipleURAsIndicator,
id-PD,
id-PagingArea-PagingRqst,
id-PowerControlMode,
id-PowerResumeMode,
id-ProcedureScope-DL-PC-Rqst,
id-RANAP-RelocationInformation,
id-RL-Information-PhyChReconfRqstFDD,
id-RL-Information-PhyChReconfRqstTDD,
id-RL-Information-RL-AdditionRqstFDD,
id-RL-Information-RL-AdditionRqstTDD,
id-RL-Information-RL-DeletionRqst,
id-RL-Information-RL-FailureInd,
id-RL-Information-RL-ReconfPrepFDD,
id-RL-Information-RL-RestoreInd,
id-RL-Information-RL-SetupReqFDD,
id-RL-Information-RL-SetupReqTDD,
id-RL-InformationItem-DM-Rprt,

Error! No text of specified style in document.

Error! No text of specified style in document.

id-RL-InformationItem-DM-Rqst,
id-RL-InformationItem-DM-Rspns,
id-RL-InformationItem-RL-SetupReqFDD,
id-RL-InformationList-RL-AdditionRqstFDD,
id-RL-InformationList-RL-DeletionRqst,
id-RL-InformationList-RL-FailureInd,
id-RL-InformationList-RL-ReconfPrepFDD,
id-RL-InformationList-RL-RestoreInd,
id-RL-InformationResponse-RL-AdditionRspTDD,
id-RL-InformationResponse-RL-ReconfReadyTDD,
id-RL-InformationResponse-RL-SetupRspTDD,
id-RL-InformationResponseItem-RL-AdditionRspFDD,
id-RL-InformationResponseItem-RL-ReconfReadyFDD,
id-RL-InformationResponseItem-RL-SetupRspFDD,
id-RL-InformationResponseList-RL-AdditionRspFDD,
id-RL-InformationResponseList-RL-ReconfReadyFDD,
id-RL-InformationResponseList-RL-SetupRspFDD,
id-RL-ReconfigurationFailure-RL-ReconfFail,
id-RL-ReconfigurationFailureList-RL-ReconfFail,
id-RNCsWithCellsInTheAccessedURA-List-UL-ST-Ind,
id-ReportCharacteristics,
id-S-RNTI,
id-SAI,
id-SN,
id-SRNC-ID,
id-ScramblingCodeChange,
id-SuccessfulRL-InformationResponse-RL-AdditionFailureFDD,
id-SuccessfulRL-InformationResponse-RL-SetupFailureFDD,
id-SuccessfulRL-InformationResponseList-RL-AdditionFailureFDD,
id-SuccessfulRL-InformationResponseList-RL-SetupFailureFDD,
id-TGD,
id-TGL,
id-TGP1,
id-TGP2,
id-TransportBearerID,
id-TransportBearerRequestIndicator,
id-TransportLayerAddress,
id-UC-ID,
id-UL-CCTrCH-Information-RL-ReconfPrepTDD,
id-UL-CCTrCH-Information-RL-ReconfRqstTDD,
id-UL-CCTrCH-InformationList-RL-ReconfPrepTDD,
id-UL-CCTrCH-InformationList-RL-ReconfRqstTDD,
id-UL-CCTrChInformationItem-RL-SetupReqTDD,
id-UL-CCTrChInformationList-RL-SetupReqTDD,
id-UL-DL-CompressedModeSelection,
id-UL-DPCH-Information,
id-UL-DPCH-Information-RL-SetupReqFDD,
id-UL-DPCH-InformationList-PhyChReconfRqstTDD,
id-UL-DPCH-InformationList-RL-ReconfReadyTDD,
id-UL-DeltaEbNo,
id-UL-DeltaEbNoAfter,


```

id-UL-EbNoTarget,
id-UL-MeanBitRate,
id-URA-ID,
id-UnsuccessfulRL-InformationResponse,
id-UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD,
id-UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD,
id-UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD,
id-UnsuccessfulRL-InformationResponseList-RL-AdditionFailureFDD,
id-UnsuccessfulRL-InformationResponseList-RL-SetupFailureFDD
FROM RNSAP-Constants;

-- *****
--
-- Common Container List
--
-- *****

DCH-IE-ContainerList      { RNSAP-PROTOCOL-IES : IEsSetParam } ::= ProtocolIE-ContainerList { 1, maxNrOfDCHs, { IEsSetParam } }
RL-IE-ContainerList      { RNSAP-PROTOCOL-IES : IEsSetParam } ::= ProtocolIE-ContainerList { 1, maxNrOfRLs, { IEsSetParam } }
CCTrCH-IE-ContainerList  { RNSAP-PROTOCOL-IES : IEsSetParam } ::= ProtocolIE-ContainerList { 1, maxNrOfCCTrCHs, { IEsSetParam } }
DL-Code-IE-ContainerList { RNSAP-PROTOCOL-IES : IEsSetParam } ::= ProtocolIE-ContainerList { 1, maxNrOfDL-Codes, { IEsSetParam } }

-- *****
--
-- RADIO LINK SETUP REQUEST FDD
--
-- *****

RadioLinkSetupRequestFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkSetupRequestFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkSetupRequestFDD-Extensions}} OPTIONAL,
    ...
}

RadioLinkSetupRequestFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-S-RNTI          CRITICALITY ignore TYPE S-RNTI          PRESENCE mandatory } |
    { ID id-D-RNTI          CRITICALITY ignore TYPE D-RNTI          PRESENCE optional   } |
    { ID id-AllowedQueuingTime CRITICALITY ignore TYPE AllowedQueuingTime PRESENCE optional   } |
    { ID id-UL-DPCH-Information-RL-SetupReqFDD CRITICALITY ignore TYPE UL-DPCH-Information-RL-SetupReqFDD PRESENCE mandatory } |
    { ID id-DL-DPCH-Information-RL-SetupReqFDD CRITICALITY ignore TYPE DL-DPCH-Information-RL-SetupReqFDD PRESENCE mandatory } |
    { ID id-DCH-Information-RL-SetupReqFDD CRITICALITY ignore TYPE DCH-InformationList-RL-SetupReqFDD PRESENCE mandatory } |
    { ID id-RL-Information-RL-SetupReqFDD CRITICALITY ignore TYPE RL-InformationList-RL-SetupReqFDD PRESENCE mandatory },
    ...
}

UL-DPCH-Information-RL-SetupReqFDD ::= SEQUENCE {
    ul-ScramblingCode          UL-ScramblingCode,
    minUL-ChannelisationCodeLength MinUL-ChannelisationCodeLength,
    maxNrOfUL-DPCHs            MaxNrOfUL-DPCHs OPTIONAL
    -- This IE is present only if minUL-ChannelisationCodeLength equals to 4 -- ,
    ul-PunctureLimit           PunctureLimit,

```

```

ul-TransportFormatCombinationSet      TransportFormatCombinationSet,
ul-DPCCH-SlotFormat                    UL-DPCCH-SlotFormat,
ul-EbNoTarget                          UL-EbNoTarget          OPTIONAL,
diversityMode                          DiversityMode,
d-FieldLength                          D-FieldLength          OPTIONAL
-- This IE is present only if Feed Back mode diversity is activated -- ,
sSDT-CellIdLength                      SSDT-CellID-Length     OPTIONAL,
s-FieldLength                          S-FieldLength          OPTIONAL,
ul-meanBitRate                          MeanBitRate            OPTIONAL,
iE-Extensions                          ProtocolExtensionContainer { {UL-DPCH-Information-RL-SetupReqFDD-ExtIEs} } OPTIONAL,
...
}

UL-DPCH-Information-RL-SetupReqFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

DL-DPCH-Information-RL-SetupReqFDD ::= SEQUENCE {
transportFormatCombinationSet      TransportFormatCombinationSet,
dl-DPCH-SlotNumber                 DL-DPCH-SlotNumber,
tFCI-SignallingMode                TFCI-SignallingMode,
tFCI-Presence                       TFCI-Presence          OPTIONAL
-- This IE is present if Slot Format is from 12 to 16 --,
multiplexingPosition                MultiplexingPosition,
powerOffsetInformation              SEQUENCE {
    po1-ForTFCI-Bits                PowerOffset,
    po2-ForTPC-Bits                 PowerOffset,
    po3-ForPilotBits                 PowerOffset,
    ...
},
dl-TPC-StepSize                     TPC-StepSize,
meanBitRate                          MeanBitRate            OPTIONAL,
iE-Extensions                          ProtocolExtensionContainer { {DL-DPCH-Information-RL-SetupReqFDD-ExtIEs} } OPTIONAL,
...
}

DL-DPCH-Information-RL-SetupReqFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

DCH-InformationList-RL-SetupReqFDD ::= DCH-IE-ContainerList { {DCH-InformationItemIEs-RL-SetupReqFDD} }

DCH-InformationItemIEs-RL-SetupReqFDD RNSAP-PROTOCOL-IES ::= {
{ ID id-DCH-InformationItem-RL-SetupReqFDD CRITICALITY ignore TYPE DCH-InformationItem-RL-SetupReqFDD PRESENCE mandatory },
...
}

DCH-InformationItem-RL-SetupReqFDD ::= SEQUENCE {
dCH-ID                               DCH-ID,
dCH-CombinationInd                   DCH-CombinationInd     OPTIONAL,
rLC-Mode                             RLC-Mode,

```

Error! No text of specified style in document.

Error! No text of specified style in document.

```
ul-transportFormatSet      TransportFormatSet,
dl-transportFormatSet      TransportFormatSet,
ul-BLER                    BLER,
dl-BLER                    BLER,
allocationRetentionPriority AllocationRetentionPriority,
frameHandlingPriority      FrameHandlingPriority,
payloadCRC-PresenceIndicator PayloadCRC-PresenceIndicator,
ul-FP-Mode                UL-FP-Mode,
toAWS                     ToAWS,
toAWE                     ToAWE,
IE-Extensions             ProtocolExtensionContainer { {DCH-InformationItem-RL-SetupReqFDD-ExtIEs} } OPTIONAL,
...
}

DCH-InformationItem-RL-SetupReqFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

RL-InformationList-RL-SetupReqFDD ::= RL-IE-ContainerList { {RL-InformationItemIEs-RL-SetupReqFDD} }

RL-InformationItemIEs-RL-SetupReqFDD RNSAP-PROTOCOL-IES ::= {
  { ID id-RL-InformationItem-RL-SetupReqFDD CRITICALITY ignore TYPE RL-InformationItem-RL-SetupReqFDD PRESENCE mandatory },
  ...
}

RL-InformationItem-RL-SetupReqFDD ::= SEQUENCE {
  rL-ID                RL-ID,
  uC-ID                C-ID,
  frameOffset          FrameOffset,
  chipOffset           ChipOffset,
  propagationDelay     PropagationDelay OPTIONAL,
  diversityControlField DiversityControlField OPTIONAL
  -- This IE is present only if the RL is not the first one in the RL-InformationList-RL-SetupReqFDD --,
  dl-InitialTX-Power   DL-Power OPTIONAL
  -- Initial DL transmission power -- ,
  cPICH-EcIo          CPICH-EcIo OPTIONAL,
  sSDT-CellID         SSDT-CellID OPTIONAL,
  IE-Extensions       ProtocolExtensionContainer { {RL-InformationItem-RL-SetupReqFDD-ExtIEs} } OPTIONAL,
  ...
}

RL-InformationItem-RL-SetupReqFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

RadioLinkSetupRequestFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- *****
--
```

```

-- RADIO LINK SETUP REQUEST TDD
--
-- *****

RadioLinkSetupRequestTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container          {{RadioLinkSetupRequestTDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer    {{RadioLinkSetupRequestTDD-Extensions}}          OPTIONAL,
    ...
}

RadioLinkSetupRequestTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-S-RNTI          CRITICALITY ignore TYPE S-RNTI          PRESENCE mandatory } |
    { ID id-D-RNTI          CRITICALITY ignore TYPE D-RNTI          PRESENCE optional   } |
    { ID id-AllowedQueuingTime CRITICALITY ignore TYPE AllowedQueuingTime PRESENCE optional   } |
    { ID id-UL-MeanBitRate   CRITICALITY ignore TYPE MeanBitRate   PRESENCE optional   } |
    { ID id-DL-MeanBitRate   CRITICALITY ignore TYPE MeanBitRate   PRESENCE optional   } |
    { ID id-UL-CCTrChInformationList-RL-SetupReqTDD CRITICALITY ignore TYPE UL-CCTrChInformationList-RL-SetupReqTDD PRESENCE mandatory } |
    { ID id-DL-CCTrChInformationList-RL-SetupReqTDD CRITICALITY ignore TYPE DL-CCTrChInformationList-RL-SetupReqTDD PRESENCE mandatory } |
    { ID id-DCH-InformationList-RL-SetupReqTDD CRITICALITY ignore TYPE DCH-InformationList-RL-SetupReqTDD PRESENCE mandatory } |
    { ID id-RL-Information-RL-SetupReqTDD CRITICALITY ignore TYPE RL-Information-RL-SetupReqTDD PRESENCE mandatory },
    ...
}

UL-CCTrChInformationList-RL-SetupReqTDD ::= CCTrCH-IE-ContainerList { {UL-CCTrChInformationItemIEs-RL-SetupReqTDD} }

UL-CCTrChInformationItemIEs-RL-SetupReqTDD RNSAP-PROTOCOL-IES ::= {
    { ID id-UL-CCTrChInformationItem-RL-SetupReqTDD CRITICALITY ignore TYPE UL-CCTrChInformationItem-RL-SetupReqTDD PRESENCE mandatory },
    ...
}

UL-CCTrChInformationItem-RL-SetupReqTDD ::= SEQUENCE {
    cCTrCH-ID          CCTrCH-ID,
    ul-TFCS             TransportFormatCombinationSet,
    tFCI-Coding         TFCI-Coding,
    ul-PunctureLimit    PunctureLimit,
    iE-Extensions       ProtocolExtensionContainer { {UL-CCTrChInformationItem-RL-SetupReqTDD-ExtIEs} } OPTIONAL,
    ...
}

UL-CCTrChInformationItem-RL-SetupReqTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DL-CCTrChInformationList-RL-SetupReqTDD ::= CCTrCH-IE-ContainerList { {DL-CCTrChInformationItemIEs-RL-SetupReqTDD} }

DL-CCTrChInformationItemIEs-RL-SetupReqTDD RNSAP-PROTOCOL-IES ::= {
    { ID id-DL-CCTrChInformationItem-RL-SetupReqTDD CRITICALITY ignore TYPE DL-CCTrChInformationItem-RL-SetupReqTDD PRESENCE mandatory },
    ...
}

DL-CCTrChInformationItem-RL-SetupReqTDD ::= SEQUENCE {

```

```

cCTrCH-ID          CCTrCH-ID,
dl-TFCS            TransportFormatCombinationSet,
tFCI-Coding        TFCI-Coding,
dl-PunctureLimit   PunctureLimit,
iE-Extensions      ProtocolExtensionContainer { {DL-CCTrChInformationItem-RL-SetupReqTDD-ExtIEs} } OPTIONAL,
...
}

DL-CCTrChInformationItem-RL-SetupReqTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

DCH-InformationList-RL-SetupReqTDD ::= DCH-IE-ContainerList { {DCH-InformationItemIEs-RL-SetupReqTDD} }

DCH-InformationItemIEs-RL-SetupReqTDD RNSAP-PROTOCOL-IES ::= {
  { ID id-DCH-InformationItem-RL-SetupReqTDD CRITICALITY ignore TYPE DCH-InformationItem-RL-SetupReqTDD PRESENCE mandatory },
  ...
}

DCH-InformationItem-RL-SetupReqTDD ::= SEQUENCE {
  dCH-ID            DCH-ID,
  ul-cCTrCH-ID      CCTrCH-ID, -- UL CCTrCH in which the DCH is mapped
  dl-cCTrCH-ID      CCTrCH-ID, -- DL CCTrCH in which the DCH is mapped
  dCH-CombinationInd DCH-CombinationInd OPTIONAL,
  rLC-Mode          RLC-Mode,
  ul-transportFormatSet TransportFormatSet,
  dl-transportFormatSet TransportFormatSet,
  ul-BLER           BLER,
  dl-BLER           BLER,
  allocationRetentionPriority AllocationRetentionPriority,
  frameHandlingPriority FrameHandlingPriority,
  payloadCRC-PresenceIndicator PayloadCRC-PresenceIndicator,
  ul-FP-Mode        UL-FP-Mode,
  toAWS             ToAWS,
  toAWE             ToAWE,
  iE-Extensions     ProtocolExtensionContainer { {DCH-InformationItem-RL-SetupReqTDD-ExtIEs} } OPTIONAL,
  ...
}

DCH-InformationItem-RL-SetupReqTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

RL-Information-RL-SetupReqTDD ::= SEQUENCE {
  rL-ID            RL-ID,
  c-ID             C-ID,
  frameOffset      FrameOffset,
  primaryCCPCH-RSCP PrimaryCCPCH-RSCP OPTIONAL,
  iE-Extensions     ProtocolExtensionContainer { {RL-Information-RL-SetupReqTDD-ExtIEs} } OPTIONAL,
  ...
}

```

```

RL-Information-RL-SetupReqTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkSetupRequestTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK SETUP RESPONSE FDD
--
-- *****

RadioLinkSetupResponseFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkSetupResponseFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkSetupResponseFDD-Extensions}}    OPTIONAL,
    ...
}

RadioLinkSetupResponseFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI          CRITICALITY ignore TYPE D-RNTI          PRESENCE optional } |
    { ID id-CN-PS-DomainIdentifier CRITICALITY ignore TYPE CN-PS-DomainIdentifier PRESENCE optional } |
    { ID id-CN-CS-DomainIdentifier CRITICALITY ignore TYPE CN-CS-DomainIdentifier PRESENCE optional } |
    { ID id-RL-InformationResponseList-RL-SetupRspFDD
        CRITICALITY ignore TYPE RL-InformationResponseList-RL-SetupRspFDD
        PRESENCE mandatory } |
    { ID id-UL-EbNoTarget   CRITICALITY ignore TYPE UL-EbNoTarget   PRESENCE optional } |
    { ID id-DL-EbNoTarget   CRITICALITY ignore TYPE DL-EbNoTarget   PRESENCE optional } |
    { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
    ...
}

RL-InformationResponseList-RL-SetupRspFDD ::= RL-IE-ContainerList { {RL-InformationResponseItemIEs-RL-SetupRspFDD} }

RL-InformationResponseItemIEs-RL-SetupRspFDD RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationResponseItem-RL-SetupRspFDD
        CRITICALITY ignore TYPE RL-InformationResponseItem-RL-SetupRspFDD PRESENCE mandatory },
    ...
}

RL-InformationResponseItem-RL-SetupRspFDD ::= SEQUENCE {
    rL-ID          RL-ID,
    sAI            SAI,
    ul-InterferenceLevel ScaledUL-InterferenceLevel,
    dl-CodeInformation DL-CodeInformationList-RL-SetupRspFDD,
    sSDT-SupportIndicator SSdT-SupportIndicator,
    maxUL-EbNo      UL-EbNo,
    minUL-EbNo      UL-EbNo,
    neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-SetupRsp OPTIONAL,

```

Error! No text of specified style in document.

Error! No text of specified style in document.

```
neighbouringTDD-CellInformation      NeighbouringTDD-CellInformationList-RL-SetupRsp OPTIONAL,
iE-Extensions                        ProtocolExtensionContainer { {RL-InformationResponseItem-RL-SetupRspFDD-ExtIEs} } OPTIONAL,
...
}
```

```
RL-InformationResponseItem-RL-SetupRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}
```

-- ** NOTE: Shall this be made as an IE container? **

```
DL-CodeInformationList-RL-SetupRspFDD ::= SEQUENCE (SIZE (1..maxNoOfDL-Codes)) OF DL-CodeInformationItem-RL-SetupRspFDD
```

```
DL-CodeInformationItem-RL-SetupRspFDD ::= SEQUENCE {
dl-ScramblingCode          DL-ScramblingCode,
fDD-DL-ChannelisationCodeNumber      FDD-DL-ChannelisationCodeNumber,
-- ** NOTE: How many alternatives are there, 2 or 3? **
diversityIndication        CHOICE {
    combining                SEQUENCE {
        rL-ID                RL-ID
    },
    nonCombiningOrIENotPresent      SEQUENCE {
        dCH-InformationResponse-RL-SetupRspFDD      DCH-InformationResponseList-RL-SetupRspFDD  OPTIONAL
    }
}
OPTIONAL
-- This IE is present only if the RL is not the first on in the RL Information -- ,
iE-Extensions              ProtocolExtensionContainer { {DL-CodeInformationItem-RL-SetupRspFDD-ExtIEs} } OPTIONAL,
...
}
```

```
DL-CodeInformationItem-RL-SetupRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}
```

-- ** NOTE: Shall this be made as an IE container? **

```
DCH-InformationResponseList-RL-SetupRspFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-InformationResponseItem-RL-SetupRspFDD
```

```
DCH-InformationResponseItem-RL-SetupRspFDD ::= SEQUENCE {
dCH-ID                      DCH-ID,
bindingID                   BindingID,
transportLayerAddress        TransportLayerAddress,
iE-Extensions                ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-SetupRspFDD-ExtIEs} } OPTIONAL,
...
}
```

```
DCH-InformationResponseItem-RL-SetupRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}
```

-- ** NOTE: Both FDD and TDD messages use these definitions **

```
NeighbouringFDD-CellInformationList-RL-SetupRsp ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours)) OF
NeighbouringFDD-CellInformationItem-RL-SetupRsp
```

```

NeighbouringFDD-CellInformationItem-RL-SetupRsp ::= SEQUENCE {
    uC-ID                C-ID,
    cN-PS-DomainIdentifier    CN-PS-DomainIdentifier    OPTIONAL,
    cN-CS-DomainIdentifier    CN-CS-DomainIdentifier    OPTIONAL,
    uARFCN                UARFCN,
    frameOffset            FrameOffset            OPTIONAL,
    primaryScramblingCode    PrimaryScramblingCode,
    primaryCPICH-Power        PrimaryCPICH-Power        OPTIONAL,
    iE-Extensions            ProtocolExtensionContainer { {NeighbouringFDD-CellInformationItem-RL-SetupRsp-ExtIEs} } OPTIONAL,
    ...
}

```

```

NeighbouringFDD-CellInformationItem-RL-SetupRsp-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

```

NeighbouringTDD-CellInformationList-RL-SetupRsp ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours)) OF
    NeighbouringTDD-CellInformationItem-RL-SetupRsp

```

```

NeighbouringTDD-CellInformationItem-RL-SetupRsp ::= SEQUENCE {
    c-ID                C-ID,
    cN-PS-DomainIdentifier    CN-PS-DomainIdentifier    OPTIONAL,
    cN-CS-DomainIdentifier    CN-CS-DomainIdentifier    OPTIONAL,
    uARFCN                UARFCN,
    frameOffset            FrameOffset            OPTIONAL,
    cellParameterID        CellParameterID,
    syncCase                SyncCase,
    timeSlot                TimeSlot            OPTIONAL
    -- This IE is present only if SyncCase is Case1 -- ,
    pSCH-TimeSlot            pSCH-TimeSlot            OPTIONAL
    -- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
    ul-EbNo                UL-EbNo            OPTIONAL,
    dl-EbNo                DL-EbNo            OPTIONAL,
    iE-Extensions            ProtocolExtensionContainer { {NeighbouringTDD-CellInformationItem-RL-SetupRsp-ExtIEs} } OPTIONAL,
    ...
}

```

```

NeighbouringTDD-CellInformationItem-RL-SetupRsp-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

```

RadioLinkSetupResponseFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

```

-- *****
--
-- RADIO LINK SETUP RESPONSE TDD
--
-- *****

```



```

RadioLinkSetupResponseTDD ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container    {{RadioLinkSetupResponseTDD-IEs}},
    protocolExtensions         ProtocolExtensionContainer {{RadioLinkSetupResponseTDD-Extensions}}      OPTIONAL,
    ...
}

RadioLinkSetupResponseTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI                CRITICALITY ignore TYPE D-RNTI                PRESENCE optional } |
    { ID id-CN-PS-DomainIdentifier CRITICALITY ignore TYPE CN-PS-DomainIdentifier PRESENCE optional } |
    { ID id-CN-CS-DomainIdentifier CRITICALITY ignore TYPE CN-CS-DomainIdentifier PRESENCE optional } |
    { ID id-RL-InformationResponse-RL-SetupRspTDD CRITICALITY ignore TYPE RL-InformationResponse-RL-SetupRspTDD PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional } ,
    ...
}

RL-InformationResponse-RL-SetupRspTDD ::= SEQUENCE {
    rL-ID                RL-ID,
    sAI                  SAI,
    ul-InterferenceLevel ScaledUL-InterferenceLevel,
    maxUL-EbNo          UL-EbNo,
    minUL-EbNo          UL-EbNo,
    ul-EbNoTarget       UL-EbNo                OPTIONAL,
    dl-EbNoTarget       DL-EbNo                OPTIONAL,
    ul-CCTrCHInformation UL-CCTrCHInformationList-RL-SetupRspTDD,
    dl-CCTrCHInformation DL-CCTrCHInformationList-RL-SetupRspTDD,
    dCH-InformationResponse DCH-InformationResponseList-RL-SetupRspTDD,
    neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-SetupRsp OPTIONAL,
    neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-SetupRsp OPTIONAL,
    iE-Extensions       ProtocolExtensionContainer { {RL-InformationResponse-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

RL-InformationResponse-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
UL-CCTrCHInformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF UL-CCTrCHInformationItem-RL-SetupRspTDD

UL-CCTrCHInformationItem-RL-SetupRspTDD ::= SEQUENCE {
    cCTrCH-ID          CCTrCH-ID,
    ul-DPCH-Information UL-DPCH-InformationList-RL-SetupRspTDD,
    iE-Extensions       ProtocolExtensionContainer { {UL-CCTrCHInformationItem-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

UL-CCTrCHInformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

```

-- ** NOTE: Shall this be made as an IE container? **
UL-DPCH-InformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF UL-DPCH-InformationItem-RL-SetupRspTDD

-- **NOTE: UL-DPCH-InformationItem-RL-SetupRspTDD and DL-DPCH-InformationItem-RL-SetupRspTDD
-- are currently similar. Combine them? **
UL-DPCH-InformationItem-RL-SetupRspTDD ::= SEQUENCE {
    dPCH-ID                DPCH-ID,
    tDD-ChannelisationCode TDD-ChannelisationCode,
    burstType              BurstType,
    midambleShift         MidambleShift,
    timeSlot              TimeSlot,
    tDD-PhysicalChannelOffset TDD-PhysicalChannelOffset,
    repetitionPeriod      RepetitionPeriod,
    repetitionLength      RepetitionLength,
    tFCI-Presence         TFCI-Presence,
    iE-Extensions         ProtocolExtensionContainer { {UL-DPCH-InformationItem-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

UL-DPCH-InformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CCTrCHInformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF DL-CCTrCHInformationItem-RL-SetupRspTDD

DL-CCTrCHInformationItem-RL-SetupRspTDD ::= SEQUENCE {
    cCTrCH-ID                CCTrCH-ID,
    dl-DPCH-Information      DL-DPCH-InformationList-RL-SetupRspTDD,
    iE-Extensions           ProtocolExtensionContainer { {DL-CCTrCHInformationItem-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CCTrCHInformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-DPCH-InformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF DL-DPCH-InformationItem-RL-SetupRspTDD

DL-DPCH-InformationItem-RL-SetupRspTDD ::= SEQUENCE {
    dPCH-ID                DPCH-ID,
    tDD-ChannelisationCode TDD-ChannelisationCode,
    burstType              BurstType,
    midambleShift         MidambleShift,
    timeSlot              TimeSlot,
    tDD-PhysicalChannelOffset TDD-PhysicalChannelOffset,
    repetitionPeriod      RepetitionPeriod,
    repetitionLength      RepetitionLength,
    tFCI-Presence         TFCI-Presence,
    iE-Extensions         ProtocolExtensionContainer { {DL-DPCH-InformationItem-RL-SetupRspTDD-ExtIEs} } OPTIONAL,

```

```

}
...
DL-DPCH-InformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

DCH-InformationResponseList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-InformationResponseItem-RL-SetupRspTDD

DCH-InformationResponseItem-RL-SetupRspTDD ::= SEQUENCE {
dCH-ID DCH-ID,
bindingID BindingID,
transportLayerAddress TransportLayerAddress,
iE-Extensions ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
...
}

DCH-InformationResponseItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

RadioLinkSetupResponseTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- *****
--
-- RADIO LINK SETUP FAILURE FDD
--
-- *****

RadioLinkSetupFailureFDD ::= SEQUENCE {
protocolIEs ProtocolIE-Container {{RadioLinkSetupFailureFDD-IEs}},
protocolExtensions ProtocolExtensionContainer {{RadioLinkSetupFailureFDD-Extensions}} OPTIONAL,
...
}

RadioLinkSetupFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
{ ID id-D-RNTI CRITICALITY ignore TYPE D-RNTI PRESENCE mandatory } |
{ ID id-CN-PS-DomainIdentifier CRITICALITY ignore TYPE CN-PS-DomainIdentifier PRESENCE mandatory } |
{ ID id-CN-CS-DomainIdentifier CRITICALITY ignore TYPE CN-CS-DomainIdentifier PRESENCE mandatory } |
{ ID id-UnsuccessfulRL-InformationResponseList-RL-SetupFailureFDD
CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponseList-RL-SetupFailureFDD
PRESENCE mandatory } |
{ ID id-SuccessfulRL-InformationResponseList-RL-SetupFailureFDD
CRITICALITY ignore TYPE SuccessfulRL-InformationResponseList-RL-SetupFailureFDD
PRESENCE mandatory } |
{ ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
...
}

```

Error! No text of specified style in document.

31

Error! No text of specified style in document.

```
UnsuccessfulRL-InformationResponseList-RL-SetupFailureFDD ::= RL-IE-ContainerList { {UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD-IEs} }

UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD
    CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD
    PRESENCE mandatory },
  ...
}

UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD ::= SEQUENCE {
  rL-ID          RL-ID,
  cause          Cause,
  iE-Extensions ProtocolExtensionContainer { {UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
  ...
}

UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

SuccessfulRL-InformationResponseList-RL-SetupFailureFDD ::= RL-IE-ContainerList { {SuccessfulRL-InformationResponse-RL-SetupFailureFDD-IEs} }

SuccessfulRL-InformationResponse-RL-SetupFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-SuccessfulRL-InformationResponse-RL-SetupFailureFDD
    CRITICALITY ignore TYPE SuccessfulRL-InformationResponse-RL-SetupFailureFDD
    PRESENCE mandatory },
  ...
}

SuccessfulRL-InformationResponse-RL-SetupFailureFDD ::= SEQUENCE {
  rL-ID          RL-ID,
  sAI            SAI,
  ul-InterferenceLevel ScaledUL-InterferenceLevel,
  dl-CodeInformation DL-CodeInformationList-RL-SetupFailureFDD,
  sSDT-SupportIndicator SSdT-SupportIndicator,
  neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-SetupFailureFDD OPTIONAL,
  neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-SetupFailureFDD OPTIONAL,
  ul-EbNoTarget      UL-EbNo,
  maxUL-EbNo         UL-EbNo,
  minUL-EbNo         UL-EbNo,
  dl-EbNoTarget      DL-EbNo,
  iE-Extensions     ProtocolExtensionContainer { {SuccessfulRL-InformationResponse-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
  ...
}
-- ** NOTE: Shall this be made as an IE container? **
DL-CodeInformationList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNoOfDL-Codes)) OF DL-CodeInformationItem-RL-SetupFailureFDD

SuccessfulRL-InformationResponse-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}
```

```

DL-CodeInformationItem-RL-SetupFailureFDD ::= SEQUENCE {
    dl-ScramblingCode          DL-ScramblingCode,
    fdd-DL-ChannelisationCodeNumber FDD-DL-ChannelisationCodeNumber,
    -- ** NOTE: How many alternatives are there, 2 or 3? **
    diversityIndication        CHOICE {
        combining                SEQUENCE {
            rL-ID                RL-ID
        },
        nonCombiningOrIENotPresent SEQUENCE {
            dch-InformationResponse-RL-SetupFailureFDD DCH-InformationResponseList-RL-SetupFailureFDD OPTIONAL
        }
    } OPTIONAL
    -- This IE is present only if the RL is not the first on in the RL Information -- ,
    iE-Extensions              ProtocolExtensionContainer { {DL-CodeInformationItem-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CodeInformationItem-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DCH-InformationResponseList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-InformationResponseItem-RL-SetupFailureFDD

DCH-InformationResponseItem-RL-SetupFailureFDD ::= SEQUENCE {
    dch-ID                    DCH-ID,
    bindingID                 BindingID,
    transportLayerAddress     TransportLayerAddress,
    iE-Extensions             ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-InformationResponseItem-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringFDD-CellInformationList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours)) OF
    NeighbouringFDD-CellInformationItem-RL-SetupFailureFDD

NeighbouringFDD-CellInformationItem-RL-SetupFailureFDD ::= SEQUENCE {
    uC-ID                    C-ID,
    cN-PS-DomainIdentifier   CN-PS-DomainIdentifier OPTIONAL,
    cN-CS-DomainIdentifier   CN-CS-DomainIdentifier OPTIONAL,
    uARFCN                   UARFCN,
    frameOffset              FrameOffset OPTIONAL,
    primaryScramblingCode    PrimaryScramblingCode,
    primaryCPICH-Power       PrimaryCPICH-Power OPTIONAL,
    iE-Extensions            ProtocolExtensionContainer { {NeighbouringFDD-CellInformationItem-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

```

Error! No text of specified style in document.

Error! No text of specified style in document.

```
NeighbouringFDD-CellInformationItem-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringTDD-CellInformationList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours)) OF
    NeighbouringTDD-CellInformationItem-RL-SetupFailureFDD

NeighbouringTDD-CellInformationItem-RL-SetupFailureFDD ::= SEQUENCE {
    uC-ID                C-ID,
    cN-PS-DomainIdentifier    CN-PS-DomainIdentifier    OPTIONAL,
    cN-CS-DomainIdentifier    CN-CS-DomainIdentifier    OPTIONAL,
    uARFCN                UARFCN,
    frameOffset            FrameOffset    OPTIONAL,
    cellParameterID        CellParameterID,
    syncCase                SyncCase,
    timeSlot                TimeSlot,
    pSCH-TimeSlot            PSCH-TimeSlot    OPTIONAL
    -- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
    iE-Extensions            ProtocolExtensionContainer { {NeighbouringTDD-CellInformationItem-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringTDD-CellInformationItem-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkSetupFailureFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK SETUP FAILURE TDD
--
-- *****

RadioLinkSetupFailureTDD ::= SEQUENCE {
    protocolIEs            ProtocolIE-Container    {{RadioLinkSetupFailureTDD-IEs}},
    protocolExtensions      ProtocolExtensionContainer {{RadioLinkSetupFailureTDD-Extensions}}    OPTIONAL,
    ...
}

RadioLinkSetupFailureTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD
        CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD
        PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics
        CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
    ...
}

UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD ::= SEQUENCE {
```

```

    rL-ID                RL-ID,
    cause                Cause,
    iE-Extensions        ProtocolExtensionContainer { {UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD-ExtIEs} } OPTIONAL,
    ...
}

UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkSetupFailureTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK ADDITION REQUEST FDD
--
-- *****

RadioLinkAdditionRequestFDD ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container    {{RadioLinkAdditionRequestFDD-IEs}},
    protocolExtensions        ProtocolExtensionContainer {{RadioLinkAdditionRequestFDD-Extensions}}          OPTIONAL,
    ...
}

RadioLinkAdditionRequestFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UL-EbNoTarget          CRITICALITY ignore TYPE UL-EbNo          PRESENCE mandatory } |
    { ID id-RL-InformationList-RL-AdditionRqstFDD CRITICALITY ignore TYPE RL-InformationList-RL-AdditionRqstFDD PRESENCE mandatory },
    ...
}

RL-InformationList-RL-AdditionRqstFDD ::= RL-IE-ContainerList { {RL-Information-RL-AdditionRqstFDD-IEs} }

RL-Information-RL-AdditionRqstFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-Information-RL-AdditionRqstFDD CRITICALITY ignore TYPE RL-Information-RL-AdditionRqstFDD PRESENCE mandatory },
    ...
}

RL-Information-RL-AdditionRqstFDD ::= SEQUENCE {
    rL-ID                RL-ID,
    c-ID                C-ID,
    frameOffset          FrameOffset,
    chipOffset           ChipOffset,
    diversityControlField DiversityControlField,
    primaryCPICH-EcNo    PrimaryCPICH-EcNo          OPTIONAL,
    sSDT-CellID          SSDT-CellID          OPTIONAL,
    iE-Extensions        ProtocolExtensionContainer { {RL-Information-RL-AdditionRqstFDD-ExtIEs} } OPTIONAL,
    ...
}

```

Error! No text of specified style in document.

Error! No text of specified style in document.

```
RL-Information-RL-AdditionRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkAdditionRequestFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK ADDITION REQUEST TDD
--
-- *****

RadioLinkAdditionRequestTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkAdditionRequestTDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkAdditionRequestTDD-Extensions}} OPTIONAL,
    ...
}

RadioLinkAdditionRequestTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-Information-RL-AdditionRqstTDD   CRITICALITY ignore   TYPE RL-Information-RL-AdditionRqstTDD   PRESENCE mandatory   },
    ...
}

RL-Information-RL-AdditionRqstTDD ::= SEQUENCE {
    rL-ID                RL-ID,
    c-ID                 C-ID,
    frameOffset          FrameOffset,
    chipOffset           ChipOffset,
    diversityControlField DiversityControlField,
    primaryCCPCH-RSCP    PrimaryCCPCH-RSCP,
    iE-Extensions        ProtocolExtensionContainer { {RL-Information-RL-AdditionRqstTDD-ExtIEs} } OPTIONAL,
    ...
}

RL-Information-RL-AdditionRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkAdditionRequestTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK ADDITION RESPONSE FDD
--
-- *****

RadioLinkAdditionResponseFDD ::= SEQUENCE {
```


Error! No text of specified style in document.

36

Error! No text of specified style in document.

```
protocolIEs          ProtocolIE-Container    {{RadioLinkAdditionResponseFDD-IEs}},
protocolExtensions  ProtocolExtensionContainer {{RadioLinkAdditionResponseFDD-Extensions}}
...
}

RadioLinkAdditionResponseFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-D-RNTI          CRITICALITY ignore TYPE D-RNTI          PRESENCE optional } |
  { ID id-RL-InformationResponseList-RL-AdditionRspFDD
    CRITICALITY ignore TYPE RL-InformationResponseList-RL-AdditionRspFDD
    PRESENCE mandatory } |
  { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
  ...
}

RL-InformationResponseList-RL-AdditionRspFDD ::= RL-IE-ContainerList { {RL-InformationResponseItemIEs-RL-AdditionRspFDD} }

RL-InformationResponseItemIEs-RL-AdditionRspFDD RNSAP-PROTOCOL-IES ::= {
  { ID id-RL-InformationResponseItem-RL-AdditionRspFDD
    CRITICALITY ignore TYPE RL-InformationResponseItem-RL-AdditionRspFDD PRESENCE mandatory },
  ...
}

RL-InformationResponseItem-RL-AdditionRspFDD ::= SEQUENCE {
  rL-ID          RL-ID,
  sAI            SAI,
  ul-InterferenceLevel ScaledUL-InterferenceLevel,
  dl-CodeInformation DL-CodeInformationList-RL-AdditionRspFDD,
  sSDT-SupportIndicator SSDT-SupportIndicator,
  maxUL-EbNo     UL-EbNo,
  minUL-EbNo     UL-EbNo,
  neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-SetupRsp OPTIONAL,
  neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-SetupRsp OPTIONAL,
  iE-Extensions  ProtocolExtensionContainer { {RL-InformationResponseItem-RL-AdditionRspFDD-ExtIEs} } OPTIONAL,
  ...
}

RL-InformationResponseItem-RL-AdditionRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CodeInformationList-RL-AdditionRspFDD ::= SEQUENCE (SIZE (1..maxNoOfDL-Codes)) OF DL-CodeInformationItem-RL-AdditionRspFDD

DL-CodeInformationItem-RL-AdditionRspFDD ::= SEQUENCE {
  dl-ScramblingCode DL-ScramblingCode,
  fDD-DL-ChannelisationCodeNumber FDD-DL-ChannelisationCodeNumber,
  -- ** NOTE: How many alternatives are there, 2 or 3? **
  diversityIndication CHOICE {
    combining SEQUENCE {
      rL-ID RL-ID
    },
  },
}
```

Error! No text of specified style in document.

Error! No text of specified style in document.

```
        nonCombiningOrIENotPresent          SEQUENCE {
            dCH-InformationResponse-RL-AdditionRspFDD          DCH-InformationResponseList-RL-AdditionRspFDD OPTIONAL
        }
    }
    OPTIONAL
    -- This IE is present only if the RL is not the first on in the RL Information -- ,
    iE-Extensions          ProtocolExtensionContainer { {DL-CodeInformationItem-RL-AdditionRspFDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CodeInformationItem-RL-AdditionRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DCH-InformationResponseList-RL-AdditionRspFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-InformationResponseItem-RL-AdditionRspFDD

DCH-InformationResponseItem-RL-AdditionRspFDD ::= SEQUENCE {
    dCH-ID          DCH-ID,
    bindingID          BindingID,
    transportLayerAddress          TransportLayerAddress,
    iE-Extensions          ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-AdditionRspFDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-InformationResponseItem-RL-AdditionRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Both FDD and TDD messages use these definitions **
NeighbouringFDD-CellInformationList-RL-AdditionRsp ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours)) OF
    NeighbouringFDD-CellInformationItem-RL-AdditionRsp

NeighbouringFDD-CellInformationItem-RL-AdditionRsp ::= SEQUENCE {
    uC-ID          C-ID,
    cN-PS-DomainIdentifier          CN-PS-DomainIdentifier          OPTIONAL,
    cN-CS-DomainIdentifier          CN-CS-DomainIdentifier          OPTIONAL,
    uARFCN          UARFCN,
    frameOffset          FrameOffset          OPTIONAL,
    primaryScramblingCode          PrimaryScramblingCode,
    primaryCPICH-Power          PrimaryCPICH-Power          OPTIONAL,
    iE-Extensions          ProtocolExtensionContainer { {NeighbouringFDD-CellInformationItem-RL-AdditionRsp-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringFDD-CellInformationItem-RL-AdditionRsp-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringTDD-CellInformationList-RL-AdditionRsp ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours)) OF
    NeighbouringTDD-CellInformationItem-RL-AdditionRsp
```

Error! No text of specified style in document.

38

Error! No text of specified style in document.

```
NeighbouringTDD-CellInformationItem-RL-AdditionRsp ::= SEQUENCE {
    uC-ID                C-ID,
    cN-PS-DomainIdentifier    CN-PS-DomainIdentifier    OPTIONAL,
    cN-CS-DomainIdentifier    CN-CS-DomainIdentifier    OPTIONAL,
    uARFCN                UARFCN,
    frameOffset            FrameOffset    OPTIONAL,
    cellParameterID        CellParameterID,
    syncCase                SyncCase,
    timeSlot                TimeSlot,
    pSCH-TimeSlot            PSCH-TimeSlot    OPTIONAL
    -- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
    iE-Extensions            ProtocolExtensionContainer { {NeighbouringTDD-CellInformationItem-RL-AdditionRsp-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringTDD-CellInformationItem-RL-AdditionRsp-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkAdditionResponseFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK ADDITION RESPONSE TDD
--
-- *****

RadioLinkAdditionResponseTDD ::= SEQUENCE {
    protocolIEs            ProtocolIE-Container    {{RadioLinkAdditionResponseTDD-IEs}},
    protocolExtensions      ProtocolExtensionContainer {{RadioLinkAdditionResponseTDD-Extensions}}    OPTIONAL,
    ...
}

RadioLinkAdditionResponseTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI                CRITICALITY ignore TYPE D-RNTI                PRESENCE optional } |
    { ID id-RL-InformationResponse-RL-AdditionRspTDD
      CRITICALITY ignore TYPE RL-InformationResponse-RL-AdditionRspTDD PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
    ...
}

RL-InformationResponse-RL-AdditionRspTDD ::= SEQUENCE {
    rL-ID                RL-ID,
    sAI                    SAI,
    ul-InterferenceLevel    ScaledUL-InterferenceLevel,
    ul-CCTrCHInformation    UL-CCTrCHInformationList-RL-AdditionRspTDD,
    dl-CCTrCHInformation    DL-CCTrCHInformationList-RL-AdditionRspTDD,
    diversityIndication      CHOICE {
        combining            SEQUENCE {
```

```

    rL-ID                RL-ID
  },
  nonCombiningOrIENotPresent SEQUENCE {
    dCH-InformationResponse-RL-AdditionRspFDD DCH-InformationResponseList-RL-AdditionRspFDD OPTIONAL
  }
}
OPTIONAL,
maxUL-EbNo                UL-EbNo,
minUL-EbNo                UL-EbNo,
neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-AdditionRspTDD OPTIONAL,
neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-AdditionRspTDD OPTIONAL,
iE-Extensions            ProtocolExtensionContainer { {RL-InformationResponse-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
...
}

RL-InformationResponse-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ** NOTE: Shall this be made as an IE container? **
UL-CCTrCHInformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF UL-CCTrCHInformationItem-RL-AdditionRspTDD

UL-CCTrCHInformationItem-RL-AdditionRspTDD ::= SEQUENCE {
  cCTrCH-ID                CCTrCH-ID,
  ul-DPCH-Information      UL-DPCH-InformationList-RL-AdditionRspTDD,
  iE-Extensions            ProtocolExtensionContainer { {UL-CCTrCHInformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
  ...
}

UL-CCTrCHInformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ** NOTE: Shall this be made as an IE container? **
UL-DPCH-InformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF UL-DPCH-InformationItem-RL-AdditionRspTDD

UL-DPCH-InformationItem-RL-AdditionRspTDD ::= SEQUENCE {
  dPCH-ID                DPCH-ID,
  tDD-ChannelisationCode TDD-ChannelisationCode,
  burstType              BurstType,
  midambleShift          MidambleShift,
  timeSlot               TimeSlot,
  offset                 Offset,
  tDD-PhysicalChannelOffset TDD-PhysicalChannelOffset,
  repetitionPeriod       RepetitionPeriod,
  repetitionLength       RepetitionLength,
  tFCI-Presence          TFCI-Presence,
  iE-Extensions            ProtocolExtensionContainer { {UL-DPCH-InformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
  ...
}

UL-DPCH-InformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {

```

```

}
...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CCTrCHInformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF DL-CCTrCHInformationItem-RL-AdditionRspTDD

DL-CCTrCHInformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    cCTrCH-ID                CCTrCH-ID,
    dl-DPCH-Information      DL-DPCH-InformationList-RL-AdditionRspTDD,
    iE-Extensions            ProtocolExtensionContainer { {DL-CCTrCHInformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CCTrCHInformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-DPCH-InformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF DL-DPCH-InformationItem-RL-AdditionRspTDD

DL-DPCH-InformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    dPCH-ID                DPCH-ID,
    tDD-ChannelisationCode  TDD-ChannelisationCode,
    burstType               BurstType,
    midambleShift           MidambleShift,
    timeSlot                TimeSlot,
    tDD-PhysicalChannelOffset TDD-PhysicalChannelOffset,
    repetitionPeriod        RepetitionPeriod,
    repetitionLength        RepetitionLength,
    tFCI-Presence           TFCI-Presence,
    iE-Extensions            ProtocolExtensionContainer { {DL-DPCH-InformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-DPCH-InformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringFDD-CellInformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours)) OF
    NeighbouringFDD-CellInformationItem-RL-AdditionRspTDD

NeighbouringFDD-CellInformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    uC-ID                C-ID,
    cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,
    cN-CS-DomainIdentifier CN-CS-DomainIdentifier OPTIONAL,
    uARFCN               UARFCN,
    frameOffset          FrameOffset OPTIONAL,
    primaryScramblingCode PrimaryScramblingCode,
    primaryCPICH-Power   PrimaryCPICH-Power OPTIONAL,
    iE-Extensions        ProtocolExtensionContainer { {NeighbouringFDD-CellInformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

```

```

}

NeighbouringFDD-CellInformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringTDD-CellInformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours)) OF
    NeighbouringTDD-CellInformationItem-RL-AdditionRspTDD

NeighbouringTDD-CellInformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    uC-ID                C-ID,
    cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,
    cN-CS-DomainIdentifier CN-CS-DomainIdentifier OPTIONAL,
    uARFCN                UARFCN,
    frameOffset           FrameOffset OPTIONAL,
    cellParameterID       CellParameterID,
    syncCase              SyncCase,
    timeSlot              TimeSlot,
    pSCH-TimeSlot         PSCH-TimeSlot OPTIONAL
    -- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
    iE-Extensions         ProtocolExtensionContainer { {NeighbouringTDD-CellInformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringTDD-CellInformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkAdditionResponseTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK ADDITION FAILURE FDD
--
-- *****

RadioLinkAdditionFailureFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkAdditionFailureFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkAdditionFailureFDD-Extensions}}
    ...
}

RadioLinkAdditionFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UnsuccessfulRL-InformationResponseList-RL-AdditionFailureFDD
      CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponseList-RL-AdditionFailureFDD
      PRESENCE mandatory } |
    { ID id-SuccessfulRL-InformationResponseList-RL-AdditionFailureFDD
      CRITICALITY ignore TYPE SuccessfulRL-InformationResponseList-RL-AdditionFailureFDD
      PRESENCE mandatory } |

```

Error! No text of specified style in document.

Error! No text of specified style in document.

```
{ ID id-CriticalityDiagnostics          CRITICALITY ignore  TYPE CriticalityDiagnostics  PRESENCE optional },
...
}

UnsuccessfulRL-InformationResponseList-RL-AdditionFailureFDD ::= RL-IE-ContainerList { {UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD-IEs} }

UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD
    CRITICALITY ignore  TYPE UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD
    PRESENCE mandatory },
  ...
}

UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD ::= SEQUENCE {
  rL-ID          RL-ID,
  cause          Cause,
  iE-Extensions ProtocolExtensionContainer { {UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
  ...
}

UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

SuccessfulRL-InformationResponseList-RL-AdditionFailureFDD ::= RL-IE-ContainerList { {SuccessfulRL-InformationResponse-RL-AdditionFailureFDD-IEs} }

SuccessfulRL-InformationResponse-RL-AdditionFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-SuccessfulRL-InformationResponse-RL-AdditionFailureFDD
    CRITICALITY ignore  TYPE SuccessfulRL-InformationResponse-RL-AdditionFailureFDD
    PRESENCE mandatory },
  ...
}

SuccessfulRL-InformationResponse-RL-AdditionFailureFDD ::= SEQUENCE {
  rL-ID          RL-ID,
  SAI            SAI,
  ul-InterferenceLevel  ScaledUL-InterferenceLevel,
  dl-CodeInformation  DL-CodeInformationList-RL-AdditionFailureFDD,
  sSDT-SupportIndicator  SSDT-SupportIndicator,
  maxUL-EbNo          UL-EbNo,
  minUL-EbNo          UL-EbNo,
  neighbouringFDD-CellInformation  NeighbouringFDD-CellInformationList-RL-AdditionFailureFDD OPTIONAL,
  neighbouringTDD-CellInformation  NeighbouringTDD-CellInformationList-RL-AdditionFailureFDD OPTIONAL,
  iE-Extensions      ProtocolExtensionContainer { {SuccessfulRL-InformationResponse-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
  ...
}

SuccessfulRL-InformationResponse-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}
```

```

-- ** NOTE: Shall this be made as an IE container? **
DL-CodeInformationList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNoOfDL-Codes)) OF DL-CodeInformationItem-RL-AdditionFailureFDD

DL-CodeInformationItem-RL-AdditionFailureFDD ::= SEQUENCE {
    dl-ScramblingCode          DL-ScramblingCode,
    dl-ChannelisationCode     DL-ChannelisationCode,
    diversityIndication       CHOICE {
        combining              SEQUENCE {
            rL-ID              RL-ID
        },
        nonCombiningOrIENotPresent SEQUENCE {
            dCH-InformationResponse-RL-AdditionFailureFDD    DCH-InformationResponseList-RL-AdditionFailureFDD    OPTIONAL
        }
    }
    OPTIONAL
    -- This IE is present only if the RL is not the first on in the RL Information -- ,
    iE-Extensions             ProtocolExtensionContainer { {DL-CodeInformationItem-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CodeInformationItem-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DCH-InformationResponseList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-InformationResponseItem-RL-AdditionFailureFDD

DCH-InformationResponseItem-RL-AdditionFailureFDD ::= SEQUENCE {
    dCH-ID                    DCH-ID,
    bindingID                 BindingID,
    transportLayerAddress     TransportLayerAddress,
    iE-Extensions             ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-InformationResponseItem-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringFDD-CellInformationList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours)) OF
    NeighbouringFDD-CellInformationItem-RL-AdditionFailureFDD

NeighbouringFDD-CellInformationItem-RL-AdditionFailureFDD ::= SEQUENCE {
    uC-ID                    C-ID,
    cN-PS-DomainIdentifier   CN-PS-DomainIdentifier    OPTIONAL,
    cN-CS-DomainIdentifier   CN-CS-DomainIdentifier    OPTIONAL,
    uARFCN                   UARFCN,
    frameOffset              FrameOffset              OPTIONAL,
    primaryScramblingCode    PrimaryScramblingCode,
    cPICH-Power              CPICH-Power              OPTIONAL,
    iE-Extensions            ProtocolExtensionContainer { {NeighbouringFDD-CellInformationItem-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

```



```

}

NeighbouringFDD-CellInformationItem-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringTDD-CellInformationList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours)) OF
    NeighbouringTDD-CellInformationItem-RL-AdditionFailureFDD

NeighbouringTDD-CellInformationItem-RL-AdditionFailureFDD ::= SEQUENCE {
    uC-ID                C-ID,
    cN-PS-DomainIdentifier    CN-PS-DomainIdentifier    OPTIONAL,
    cN-CS-DomainIdentifier    CN-CS-DomainIdentifier    OPTIONAL,
    uARFCN                UARFCN,
    frameOffset            FrameOffset                OPTIONAL,
    cellParameterID        CellParameterID,
    syncCase                SyncCase,
    timeSlot                TimeSlot,
    pSCH-TimeSlot            PSCH-TimeSlot                OPTIONAL
    -- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
    iE-Extensions            ProtocolExtensionContainer { {NeighbouringTDD-CellInformationItem-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringTDD-CellInformationItem-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkAdditionFailureFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK ADDITION FAILURE TDD
--
-- *****

RadioLinkAdditionFailureTDD ::= SEQUENCE {
    protocolIEs            ProtocolIE-Container        {{RadioLinkAdditionFailureTDD-IEs}},
    protocolExtensions    ProtocolExtensionContainer  {{RadioLinkAdditionFailureTDD-Extensions}}          OPTIONAL,
    ...
}

RadioLinkAdditionFailureTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UnsuccessfulRL-InformationResponse CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponse PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics            CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
    ...
}

UnsuccessfulRL-InformationResponse ::= SEQUENCE {

```

```

    rL-ID                RL-ID,
    cause                Cause,
    iE-Extensions        ProtocolExtensionContainer { {UnsuccessfulRL-InformationResponse-ExtIEs} } OPTIONAL,
    ...
}

UnsuccessfulRL-InformationResponse-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkAdditionFailureTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK DELETION REQUEST
--
-- *****

RadioLinkDeletionRequest ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container    {{RadioLinkDeletionRequest-IEs}},
    protocolExtensions        ProtocolExtensionContainer {{RadioLinkDeletionRequest-Extensions}}          OPTIONAL,
    ...
}

RadioLinkDeletionRequest-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationList-RL-DeletionRqst  CRITICALITY ignore  TYPE RL-InformationList-RL-DeletionRqst  PRESENCE mandatory  },
    ...
}

RL-InformationList-RL-DeletionRqst ::= RL-IE-ContainerList { {RL-Information-RL-DeletionRqst-IEs} }

RL-Information-RL-DeletionRqst-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-Information-RL-DeletionRqst  CRITICALITY ignore  TYPE RL-Information-RL-DeletionRqst  PRESENCE mandatory  },
    ...
}

RL-Information-RL-DeletionRqst ::= SEQUENCE {
    rL-ID                RL-ID,
    iE-Extensions        ProtocolExtensionContainer { {RL-Information-RL-DeletionRqst-ExtIEs} } OPTIONAL,
    ...
}

RL-Information-RL-DeletionRqst-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkDeletionRequest-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

```

-- *****
--
-- RADIO LINK DELETION RESPONSE
--
-- *****

RadioLinkDeletionResponse ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkDeletionResponse-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkDeletionResponse-Extensions}}    OPTIONAL,
    ...
}

RadioLinkDeletionResponse-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-CriticalityDiagnostics          CRITICALITY ignore  TYPE CriticalityDiagnostics          PRESENCE optional },
    ...
}

RadioLinkDeletionResponse-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK RECONFIGURATION PREPARE FDD
--
-- *****

RadioLinkReconfigurationPrepareFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkReconfigurationPrepareFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkReconfigurationPrepareFDD-Extensions}}    OPTIONAL,
    ...
}

RadioLinkReconfigurationPrepareFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-AllowedQueuingTime          CRITICALITY ignore  TYPE AllowedQueuingTime          PRESENCE mandatory } |
    { ID id-UL-DPCH-Information          CRITICALITY ignore  TYPE UL-DPCH-Information          PRESENCE optional } |
    { ID id-DL-DPCH-Information          CRITICALITY ignore  TYPE DL-DPCH-Information          PRESENCE optional } |
    { ID id-DCH-ModifyList-RL-ReconfPrepFDD CRITICALITY ignore  TYPE DCH-ModifyList-RL-ReconfPrepFDD PRESENCE optional } |
    { ID id-DCH-AddList-RL-ReconfPrepFDD CRITICALITY ignore  TYPE DCH-AddList-RL-ReconfPrepFDD PRESENCE optional } |
    { ID id-DCH-DeleteList-RL-ReconfPrepFDD CRITICALITY ignore  TYPE DCH-DeleteList-RL-ReconfPrepFDD PRESENCE optional } |
    { ID id-RL-InformationList-RL-ReconfPrepFDD CRITICALITY ignore  TYPE RL-InformationList-RL-ReconfPrepFDD PRESENCE mandatory },
    ...
}

UL-DPCH-Information ::= SEQUENCE {
    ul-ScramblingCode          UL-ScramblingCode          OPTIONAL,
    minUL-ChannelisationCodeLength MinUL-ChannelisationCodeLength OPTIONAL,
    maxNrOfUL-DPDCHs          MaxNrOfUL-DPDCHs          OPTIONAL
    -- This IE is present only if minUL-ChannelisationCodeLength equals to 4 --,
    ul-PunctureLimit          PunctureLimit          OPTIONAL,
}

```

Error! No text of specified style in document.

Error! No text of specified style in document.

```
tFCS TransportFormatCombinationSet OPTIONAL,
ul-DPCCH-SlotFormat UL-DPCCH-SlotFormat OPTIONAL,
sSDT-CellIDLength SSdT-CellID-Length OPTIONAL,
s-FieldLength S-FieldLength OPTIONAL,
meanBitRate MeanBitRate OPTIONAL,
iE-Extensions ProtocolExtensionContainer { {UL-DPCH-Information-ExtIEs} } OPTIONAL,
...
}

UL-DPCH-Information-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

DL-DPCH-Information ::= SEQUENCE {
tFCS TransportFormatCombinationSet OPTIONAL,
dl-DPCCH-SlotFormat DL-DPCCH-SlotFormat OPTIONAL,
tFCI-SignallingMode TFCI-SignallingMode OPTIONAL,
tFCI-Presence TFCI-Presence OPTIONAL
-- This IE is present if Slot Format is from 12 to 16 --,
multiplexingPosition MultiplexingPosition OPTIONAL,
meanBitRate MeanBitRate OPTIONAL,
iE-Extensions ProtocolExtensionContainer { {DL-DPCH-Information-ExtIEs} } OPTIONAL,
...
}

DL-DPCH-Information-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

DCH-ModifyList-RL-ReconfPrepFDD ::= DCH-IE-ContainerList { {DCH-Modify-RL-ReconfPrepFDD-IEs} }

DCH-Modify-RL-ReconfPrepFDD-IEs RNSAP-PROTOCOL-IES ::= {
{ ID id-DCH-ModifyItem-RL-ReconfPrepFDD CRITICALITY ignore TYPE DCH-ModifyItem-RL-ReconfPrepFDD PRESENCE mandatory },
...
}

DCH-ModifyItem-RL-ReconfPrepFDD ::= SEQUENCE {
dCH-ID DCH-ID,
ul-TransportformatSet TransportFormatSet OPTIONAL,
dl-TransportformatSet TransportFormatSet OPTIONAL,
allocationRetentionPriority AllocationRetentionPriority OPTIONAL,
frameHandlingPriority FrameHandlingPriority OPTIONAL,
ul-FP-Mode UL-FP-Mode OPTIONAL,
toAWS ToAWS OPTIONAL,
toAWE ToAWE OPTIONAL,
iE-Extensions ProtocolExtensionContainer { {DCH-ModifyItem-RL-ReconfPrepFDD-ExtIEs} } OPTIONAL,
...
}

DCH-ModifyItem-RL-ReconfPrepFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}
```

```

}

DCH-AddList-RL-ReconfPrepFDD ::= DCH-IE-ContainerList { {DCH-Add-RL-ReconfPrepFDD-IEs} }

DCH-Add-RL-ReconfPrepFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-DCH-AddItem-RL-ReconfPrepFDD      CRITICALITY ignore  TYPE DCH-AddItem-RL-ReconfPrepFDD      PRESENCE mandatory  },
  ...
}

DCH-AddItem-RL-ReconfPrepFDD ::= SEQUENCE {
  dCH-ID                DCH-ID,
  rLC-Mode              RLC-Mode,
  dCH-CombinationInd    DCH-CombinationInd      OPTIONAL,
  ul-TransportformatSet TransportFormatSet,
  dl-TransportformatSet TransportFormatSet,
  ul-BLER               BLER,
  dl-BLER               BLER,
  allocationRetentionPriority AllocationRetentionPriority,
  frameHandlingPriority FrameHandlingPriority,
  payloadCRC-PresenceIndicator PayloadCRC-PresenceIndicator,
  ul-FP-Mode            UL-FP-Mode,
  toAWS                 ToAWS,
  toAWE                 ToAWE,
  iE-Extensions         ProtocolExtensionContainer { {DCH-AddItem-RL-ReconfPrepFDD-ExtIEs} } OPTIONAL,
  ...
}

DCH-AddItem-RL-ReconfPrepFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DCH-DeleteList-RL-ReconfPrepFDD ::= DCH-IE-ContainerList { {DCH-Delete-RL-ReconfPrepFDD-IEs} }

DCH-Delete-RL-ReconfPrepFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-DCH-DeleteItem-RL-ReconfPrepFDD    CRITICALITY ignore  TYPE DCH-DeleteItem-RL-ReconfPrepFDD    PRESENCE mandatory  },
  ...
}

DCH-DeleteItem-RL-ReconfPrepFDD ::= SEQUENCE {
  dCH-ID                DCH-ID,
  iE-Extensions         ProtocolExtensionContainer { {DCH-DeleteItem-RL-ReconfPrepFDD-ExtIEs} } OPTIONAL,
  ...
}

DCH-DeleteItem-RL-ReconfPrepFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

RL-InformationList-RL-ReconfPrepFDD ::= RL-IE-ContainerList { {RL-Information-RL-ReconfPrepFDD-IEs} }

RL-Information-RL-ReconfPrepFDD-IEs RNSAP-PROTOCOL-IES ::= {

```

Error! No text of specified style in document.

Error! No text of specified style in document.

```
{ ID id-RL-Information-RL-ReconfPrepFDD      CRITICALITY ignore  TYPE RL-Information-RL-ReconfPrepFDD      PRESENCE mandatory  },
...
}

RL-Information-RL-ReconfPrepFDD ::= SEQUENCE {
  rL-ID                RL-ID,
  sSDT-Indication      SSdT-Indication      OPTIONAL,
  sSDT-CellIdentity    SSdT-CellID         OPTIONAL
  -- The IE may be present if the sSDT-Indication is set to 'sSDT-active-in-the-UE' --,
  iE-Extensions        ProtocolExtensionContainer { {RL-Information-RL-ReconfPrepFDD-ExtIEs} } OPTIONAL,
  ...
}

RL-Information-RL-ReconfPrepFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

RadioLinkReconfigurationPrepareFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
--
-- RADIO LINK RECONFIGURATION PREPARE TDD
--
-- *****

RadioLinkReconfigurationPrepareTDD ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container   {{RadioLinkReconfigurationPrepareTDD-IEs}},
  protocolExtensions   ProtocolExtensionContainer {{RadioLinkReconfigurationPrepareTDD-Extensions}}      OPTIONAL,
  ...
}

RadioLinkReconfigurationPrepareTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-AllowedQueuingTime      CRITICALITY ignore  TYPE AllowedQueuingTime          PRESENCE optional  } |
  { ID id-UL-MeanBitRate           CRITICALITY ignore  TYPE MeanBitRate                 PRESENCE optional  } |
  { ID id-DL-MeanBitRate           CRITICALITY ignore  TYPE MeanBitRate                 PRESENCE optional  } |
  { ID id-UL-CCTrCH-InformationList-RL-ReconfPrepTDD
                                CRITICALITY ignore  TYPE UL-CCTrCH-InformationList-RL-ReconfPrepTDD PRESENCE mandatory } |
  { ID id-DL-CCTrCH-InformationList-RL-ReconfPrepTDD
                                CRITICALITY ignore  TYPE DL-CCTrCH-InformationList-RL-ReconfPrepTDD PRESENCE mandatory } |
  { ID id-DCH-ModifyList-RL-ReconfPrepTDD  CRITICALITY ignore  TYPE DCH-ModifyList-RL-ReconfPrepTDD  PRESENCE mandatory } |
  { ID id-DCH-AddList-RL-ReconfPrepTDD     CRITICALITY ignore  TYPE DCH-AddList-RL-ReconfPrepTDD     PRESENCE mandatory } |
  { ID id-DCH-DeleteList-RL-ReconfPrepTDD  CRITICALITY ignore  TYPE DCH-DeleteList-RL-ReconfPrepTDD  PRESENCE mandatory },
  ...
}

UL-CCTrCH-InformationList-RL-ReconfPrepTDD ::= CCTrCH-IE-ContainerList { {UL-CCTrCH-Information-RL-ReconfPrepTDD-IEs} }

UL-CCTrCH-Information-RL-ReconfPrepTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-UL-CCTrCH-Information-RL-ReconfPrepTDD  CRITICALITY ignore  TYPE UL-CCTrCH-Information-RL-ReconfPrepTDD PRESENCE mandatory  },
```

```

}
...
}
UL-CCTrCH-Information-RL-ReconfPrepTDD ::= SEQUENCE {
    cCTrCH-ID          CCTrCH-ID,
    tFCS               TransportFormatCombinationSet OPTIONAL,
    tFCI-Coding        TFCI-Coding OPTIONAL,
    punctureLimit      PunctureLimit OPTIONAL,
    iE-Extensions      ProtocolExtensionContainer { {UL-CCTrCH-Information-RL-ReconfPrepTDD-ExtIEs} } OPTIONAL,
    ...
}
UL-CCTrCH-Information-RL-ReconfPrepTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}
DL-CCTrCH-InformationList-RL-ReconfPrepTDD ::= CCTrCH-IE-ContainerList { {DL-CCTrCH-Information-RL-ReconfPrepTDD-IEs} }
DL-CCTrCH-Information-RL-ReconfPrepTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DL-CCTrCH-Information-RL-ReconfPrepTDD CRITICALITY ignore TYPE DL-CCTrCH-Information-RL-ReconfPrepTDD PRESENCE mandatory },
    ...
}
DL-CCTrCH-Information-RL-ReconfPrepTDD ::= SEQUENCE {
    cCTrCH-ID          CCTrCH-ID,
    tFCS               TransportFormatCombinationSet OPTIONAL,
    tFCI-Coding        TFCI-Coding OPTIONAL,
    punctureLimit      PunctureLimit OPTIONAL,
    iE-Extensions      ProtocolExtensionContainer { {DL-CCTrCH-Information-RL-ReconfPrepTDD-ExtIEs} } OPTIONAL,
    ...
}
DL-CCTrCH-Information-RL-ReconfPrepTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}
DCH-ModifyList-RL-ReconfPrepTDD ::= DCH-IE-ContainerList { {DCH-Modify-RL-ReconfPrepTDD-IEs} }
DCH-Modify-RL-ReconfPrepTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-ModifyItem-RL-ReconfPrepTDD CRITICALITY ignore TYPE DCH-ModifyItem-RL-ReconfPrepTDD PRESENCE mandatory },
    ...
}
DCH-ModifyItem-RL-ReconfPrepTDD ::= SEQUENCE {
    dCH-ID             DCH-ID,
    ul-CCTrCH-ID       CCTrCH-ID OPTIONAL,
    dl-CCTrCH-ID       CCTrCH-ID OPTIONAL,
    ul-TransportformatSet TransportFormatSet OPTIONAL,
    dl-TransportformatSet TransportFormatSet OPTIONAL,
    allocationRetentionPriority AllocationRetentionPriority OPTIONAL,
    frameHandlingPriority FrameHandlingPriority OPTIONAL,
}

```

Error! No text of specified style in document.

Error! No text of specified style in document.

```
ul-FP-Mode          UL-FP-Mode          OPTIONAL,
toAWS               ToAWS               OPTIONAL,
toAWE               ToAWE               OPTIONAL,
iE-Extensions      ProtocolExtensionContainer { {DCH-ModifyItem-RL-ReconfPrepTDD-ExtIEs} } OPTIONAL,
...
}

DCH-ModifyItem-RL-ReconfPrepTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

DCH-AddList-RL-ReconfPrepTDD          ::= DCH-IE-ContainerList { {DCH-Add-RL-ReconfPrepTDD-IEs} }

DCH-Add-RL-ReconfPrepTDD-IEs RNSAP-PROTOCOL-IES ::= {
{ ID id-DCH-AddItem-RL-ReconfPrepTDD          CRITICALITY ignore TYPE DCH-AddItem-RL-ReconfPrepTDD          PRESENCE mandatory },
...
}

DCH-AddItem-RL-ReconfPrepTDD ::= SEQUENCE {
dCH-ID          DCH-ID,
rLC-Mode       RLC-Mode,
ul-CCTrCH-ID   CCTrCH-ID,
dl-CCTrCH-ID   CCTrCH-ID,
dCH-CombinationInd DCH-CombinationInd OPTIONAL,
ul-TransportformatSet TransportFormatSet,
dl-TransportformatSet TransportFormatSet,
ul-BLER        BLER,
dl-BLER        BLER,
allocationRetentionPriority AllocationRetentionPriority,
frameHandlingPriority FrameHandlingPriority,
payloadCRC-PresenceIndicator PayloadCRC-PresenceIndicator,
ul-FP-Mode     UL-FP-Mode,
toAWS          ToAWS,
toAWE          ToAWE,
iE-Extensions ProtocolExtensionContainer { {DCH-AddItem-RL-ReconfPrepTDD-ExtIEs} } OPTIONAL,
...
}

DCH-AddItem-RL-ReconfPrepTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

DCH-DeleteList-RL-ReconfPrepTDD          ::= DCH-IE-ContainerList { {DCH-Delete-RL-ReconfPrepTDD-IEs} }

DCH-Delete-RL-ReconfPrepTDD-IEs RNSAP-PROTOCOL-IES ::= {
{ ID id-DCH-DeleteItem-RL-ReconfPrepTDD          CRITICALITY ignore TYPE DCH-DeleteItem-RL-ReconfPrepTDD          PRESENCE mandatory },
...
}

DCH-DeleteItem-RL-ReconfPrepTDD ::= SEQUENCE {
dCH-ID          DCH-ID,
```



```

    iE-Extensions          ProtocolExtensionContainer { {DCH-DeleteItem-RL-ReconfPrepTDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-DeleteItem-RL-ReconfPrepTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkReconfigurationPrepareTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK RECONFIGURATION READY FDD
--
-- *****

RadioLinkReconfigurationReadyFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container      {{RadioLinkReconfigurationReadyFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkReconfigurationReadyFDD-Extensions}} OPTIONAL,
    ...
}

RadioLinkReconfigurationReadyFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationResponseList-RL-ReconfReadyFDD
      CRITICALITY ignore TYPE RL-InformationResponseList-RL-ReconfReadyFDD
      PRESENCE optional } |
    { ID id-CriticalityDiagnostics          CRITICALITY ignore TYPE CriticalityDiagnostics          PRESENCE optional },
    ...
}

RL-InformationResponseList-RL-ReconfReadyFDD ::= RL-IE-ContainerList { {RL-InformationResponse-RL-ReconfReadyFDD-IEs} }

RL-InformationResponse-RL-ReconfReadyFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationResponseItem-RL-ReconfReadyFDD
      CRITICALITY ignore TYPE RL-InformationResponseItem-RL-ReconfReadyFDD
      PRESENCE mandatory },
    ...
}

RL-InformationResponseItem-RL-ReconfReadyFDD ::= SEQUENCE {
    rL-ID                RL-ID,
    max-UL-EbNo          UL-EbNo,
    min-UL-EbNo          UL-EbNo,
    dCHsToBeAdded        DCH-AddList-RL-ReconfReadyFDD          OPTIONAL,
    dCHsToBeModified     DCH-ModifyList-RL-ReconfReadyFDD        OPTIONAL,
    iE-Extensions        ProtocolExtensionContainer { {RL-InformationResponseItem-RL-ReconfReadyFDD-ExtIEs} } OPTIONAL,
    ...
}

```

```

RL-InformationResponseItem-RL-ReconfReadyFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-AddList-RL-ReconfReadyFDD ::= DCH-IE-ContainerList { {DCH-Add-RL-ReconfReadyFDD-IEs} }

DCH-Add-RL-ReconfReadyFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-AddItem-RL-ReconfReadyFDD      CRITICALITY ignore  TYPE DCH-AddItem-RL-ReconfReadyFDD      PRESENCE mandatory  },
    ...
}

DCH-AddItem-RL-ReconfReadyFDD ::= SEQUENCE {
    dCH-ID                DCH-ID,
    bindingID             BindingID,
    transportLayerAddress TransportLayerAddress,
    iE-Extensions        ProtocolExtensionContainer { {DCH-AddItem-RL-ReconfReadyFDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-AddItem-RL-ReconfReadyFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-ModifyList-RL-ReconfReadyFDD ::= DCH-IE-ContainerList { {DCH-Modify-RL-ReconfReadyFDD-IEs} }

DCH-Modify-RL-ReconfReadyFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-ModifyItem-RL-ReconfReadyFDD  CRITICALITY ignore  TYPE DCH-ModifyItem-RL-ReconfReadyFDD  PRESENCE mandatory  },
    ...
}

DCH-ModifyItem-RL-ReconfReadyFDD ::= SEQUENCE {
    dCH-ID                DCH-ID,
    bindingID             BindingID,
    transportLayerAddress TransportLayerAddress,
    iE-Extensions        ProtocolExtensionContainer { {DCH-ModifyItem-RL-ReconfReadyFDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-ModifyItem-RL-ReconfReadyFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkReconfigurationReadyFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK RECONFIGURATION READY TDD
--
-- *****

```

```
RadioLinkReconfigurationReadyTDD ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container    {{RadioLinkReconfigurationReadyTDD-IEs}},
  protocolExtensions  ProtocolExtensionContainer {{RadioLinkReconfigurationReadyTDD-Extensions}}
  ...
}
```

```
RadioLinkReconfigurationReadyTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-RL-InformationResponse-RL-ReconfReadyTDD
    CRITICALITY ignore TYPE RL-InformationResponse-RL-ReconfReadyTDD PRESENCE optional } |
  { ID id-CriticalityDiagnostics
    CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
  ...
}
```

```
RL-InformationResponse-RL-ReconfReadyTDD ::= SEQUENCE {
  rL-ID          RL-ID,
  max-UL-EbNo    UL-EbNo,
  min-UL-EbNo    UL-EbNo,
  ul-CCTrCH-Information
  dl-CCTrCH-Information
  dCHsToBeAdded  DCH-AddList-RL-ReconfReadyTDD
  dCHsToBeModified
  iE-Extensions  ProtocolExtensionContainer { {RL-InformationResponse-RL-ReconfReadyTDD-ExtIEs} }
  ...
}
```

```
RL-InformationResponse-RL-ReconfReadyTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}
```

```
UL-CCTrCH-InformationList-RL-ReconfReadyTDD ::= CCTrCH-IE-ContainerList { {UL-CCTrCH-InformationList-RL-ReconfReadyTDD-IEs} }
```

```
UL-CCTrCH-InformationList-RL-ReconfReadyTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-CCTrCH-ID
    CRITICALITY ignore TYPE CCTrCH-ID PRESENCE mandatory } |
  { ID id-UL-DPCH-InformationList-RL-ReconfReadyTDD
    CRITICALITY ignore TYPE UL-DPCH-InformationList-RL-ReconfReadyTDD
    PRESENCE mandatory },
  ...
}
```

```
UL-DPCH-InformationList-RL-ReconfReadyTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF
SEQUENCE {
  dPCH-ID          DPCH-ID,
  tDD-ChannelisationCode
  burstType        BurstType
  midambleShift    MidambleShift
  timeSlot         TimeSlot
  tDD-PhysicalChannelOffset
  repetitionPeriod RepetitionPeriod
  repetitionLength RepetitionLength
  tFCI-Presence    TFCI-Presence
  ...
}
```

Error! No text of specified style in document.

Error! No text of specified style in document.

```

    iE-Extensions
    ...
}
ProtocolExtensionContainer { {UL-DPCH-InformationList-RL-ReconfReadyTDD-ExtIEs} } OPTIONAL,
}
}
UL-DPCH-InformationList-RL-ReconfReadyTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}
DL-CCTrCH-InformationList-RL-ReconfReadyTDD ::= CCTrCH-IE-ContainerList { {DL-CCTrCH-InformationList-RL-ReconfReadyTDD-IEs} }
DL-CCTrCH-InformationList-RL-ReconfReadyTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-CCTrCH-ID CRITICALITY ignore TYPE CCTrCH-ID PRESENCE mandatory } |
    { ID id-DL-DPCH-InformationList-RL-ReconfReadyTDD
      CRITICALITY ignore TYPE DL-DPCH-InformationList-RL-ReconfReadyTDD
      PRESENCE mandatory },
    ...
}
DL-DPCH-InformationList-RL-ReconfReadyTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF
SEQUENCE {
    dPCH-ID DPCH-ID,
    tDD-ChannelisationCode TDD-ChannelisationCode OPTIONAL,
    burstType BurstType OPTIONAL,
    midambleShift MidambleShift OPTIONAL,
    timeSlot TimeSlot OPTIONAL,
    tDD-PhysicalChannelOffset TDD-PhysicalChannelOffset OPTIONAL,
    repetitionPeriod RepetitionPeriod OPTIONAL,
    repetitionLength RepetitionLength OPTIONAL,
    tFCI-Presence TFCI-Presence OPTIONAL,
    iE-Extensions ProtocolExtensionContainer { {DL-DPCH-InformationList-RL-ReconfReadyTDD-ExtIEs} } OPTIONAL,
    ...
}
DL-DPCH-InformationList-RL-ReconfReadyTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}
DCH-AddList-RL-ReconfReadyTDD ::= DCH-IE-ContainerList { {DCH-Add-RL-ReconfReadyTDD-IEs} }
DCH-Add-RL-ReconfReadyTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-AddItem CRITICALITY ignore TYPE DCH-AddItem-RL-ReconfReadyTDD PRESENCE mandatory },
    ...
}
DCH-AddItem-RL-ReconfReadyTDD ::= SEQUENCE {
    dCH-ID DCH-ID,
    bindingID BindingID,
    transportLayerAddress TransportLayerAddress,
    iE-Extensions ProtocolExtensionContainer { {DCH-AddItem-RL-ReconfReadyTDD-ExtIEs} } OPTIONAL,
    ...
}
}
```

```

DCH-AddItem-RL-ReconfReadyTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-ModifyList-RL-ReconfReadyTDD ::= DCH-IE-ContainerList { {DCH-Modify-RL-ReconfReadyTDD-IEs} }

DCH-Modify-RL-ReconfReadyTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-ModifyItem          CRITICALITY ignore TYPE DCH-ModifyItem-RL-ReconfReadyTDD PRESENCE mandatory },
    ...
}

DCH-ModifyItem-RL-ReconfReadyTDD ::= SEQUENCE {
    dCH-ID          DCH-ID,
    bindingID       BindingID,
    transportLayerAddress TransportLayerAddress,
    iE-Extensions  ProtocolExtensionContainer { {DCH-ModifyItem-RL-ReconfReadyTDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-ModifyItem-RL-ReconfReadyTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkReconfigurationReadyTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK RECONFIGURATION COMMIT
--
-- *****

RadioLinkReconfigurationCommit ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkReconfigurationCommit-IEs}},
    protocolExtensions  ProtocolExtensionContainer {{RadioLinkReconfigurationCommit-Extensions}} OPTIONAL,
    ...
}

RadioLinkReconfigurationCommit-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-CFN          CRITICALITY ignore TYPE CFN          PRESENCE mandatory },
    ...
}

RadioLinkReconfigurationCommit-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--

```

Error! No text of specified style in document.

Error! No text of specified style in document.

```
-- RADIO LINK RECONFIGURATION FAILURE
--
-- *****

RadioLinkReconfigurationFailure ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container          {{RadioLinkReconfigurationFailure-IEs}},
    protocolExtensions   ProtocolExtensionContainer    {{RadioLinkReconfigurationFailure-Extensions}}
    ...
}

RadioLinkReconfigurationFailure-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-Cause          CRITICALITY ignore TYPE Cause          PRESENCE mandatory } |
    { ID id-RL-ReconfigurationFailureList-RL-ReconfFail
      CRITICALITY ignore TYPE RL-ReconfigurationFailureList-RL-ReconfFail
      PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
    ...
}

RL-ReconfigurationFailureList-RL-ReconfFail ::= RL-IE-ContainerList { {RL-ReconfigurationFailure-RL-ReconfFail-IEs} }

RL-ReconfigurationFailure-RL-ReconfFail-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-ReconfigurationFailure-RL-ReconfFail CRITICALITY ignore TYPE RL-ReconfigurationFailure-RL-ReconfFail PRESENCE mandatory },
    ...
}

RL-ReconfigurationFailure-RL-ReconfFail ::= SEQUENCE {
    rL-ID          RL-ID,
    cause          Cause,
    iE-Extensions ProtocolExtensionContainer { {RL-ReconfigurationFailure-RL-ReconfFail-ExtIEs} } OPTIONAL,
    ...
}

RL-ReconfigurationFailure-RL-ReconfFail-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkReconfigurationFailure-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK RECONFIGURATION CANCEL
--
-- *****

RadioLinkReconfigurationCancel ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container          {{RadioLinkReconfigurationCancel-IEs}},
    protocolExtensions   ProtocolExtensionContainer    {{RadioLinkReconfigurationCancel-Extensions}}
    ...
}
```

```

}

RadioLinkReconfigurationCancel-IEs RNSAP-PROTOCOL-IES ::= {
  ...
}

RadioLinkReconfigurationCancel-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
--
-- RADIO LINK RECONFIGURATION REQUEST FDD
--
-- *****

RadioLinkReconfigurationRequestFDD ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container    {{RadioLinkReconfigurationRequestFDD-IEs}},
  protocolExtensions   ProtocolExtensionContainer {{RadioLinkReconfigurationRequestFDD-Extensions}}
  ...
}

RadioLinkReconfigurationRequestFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-AllowedQueuingTime          CRITICALITY ignore TYPE AllowedQueuingTime          PRESENCE mandatory } |
  { ID id-UL-DPCH-Information          CRITICALITY ignore TYPE UL-DPCH-Information-RL-ReconfRqstFDD PRESENCE optional } |
  { ID id-DL-DPCH-Information          CRITICALITY ignore TYPE DL-DPCH-Information-RL-ReconfRqstFDD PRESENCE optional } |
  { ID id-DCH-ModifyList-RL-ReconfRqstFDD CRITICALITY ignore TYPE DCH-ModifyList-RL-ReconfRqstFDD PRESENCE mandatory } |
  { ID id-DCH-AddList-RL-ReconfRqstFDD   CRITICALITY ignore TYPE DCH-AddList-RL-ReconfRqstFDD PRESENCE mandatory } |
  { ID id-DCH-DeleteList-RL-ReconfRqstFDD CRITICALITY ignore TYPE DCH-DeleteList-RL-ReconfRqstFDD PRESENCE mandatory },
  ...
}

UL-DPCH-Information-RL-ReconfRqstFDD ::= SEQUENCE {
  tFCS          TransportFormatCombinationSet OPTIONAL,
  meanBitRate   MeanBitRate OPTIONAL,
  iE-Extensions ProtocolExtensionContainer { {UL-DPCH-Information-RL-ReconfRqstFDD-ExtIEs} } OPTIONAL,
  ...
}

UL-DPCH-Information-RL-ReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DL-DPCH-Information-RL-ReconfRqstFDD ::= SEQUENCE {
  tFCS          TransportFormatCombinationSet OPTIONAL,
  tFCI-SignallingMode TFCI-SignallingMode OPTIONAL,
  meanBitRate   MeanBitRate OPTIONAL,
  iE-Extensions ProtocolExtensionContainer { {DL-DPCH-Information-RL-ReconfRqstFDD-ExtIEs} } OPTIONAL,
  ...
}

```

```

DL-DPCH-Information-RL-ReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-ModifyList-RL-ReconfRqstFDD ::= DCH-IE-ContainerList { {DCH-Modify-RL-ReconfRqstFDD-IEs} }

DCH-Modify-RL-ReconfRqstFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-ModifyItem-RL-ReconfRqstFDD CRITICALITY ignore TYPE DCH-ModifyItem-RL-ReconfRqstFDD PRESENCE mandatory },
    ...
}

DCH-ModifyItem-RL-ReconfRqstFDD ::= SEQUENCE {
    dCH-ID DCH-ID,
    ul-TransportformatSet TransportFormatSet OPTIONAL,
    dl-TransportformatSet TransportFormatSet OPTIONAL,
    allocationRetentionPriority AllocationRetentionPriority OPTIONAL,
    frameHandlingPriority FrameHandlingPriority OPTIONAL,
    ul-FP-Mode UL-FP-Mode OPTIONAL,
    toAWS ToAWS OPTIONAL,
    toAWE ToAWE OPTIONAL,
    iE-Extensions ProtocolExtensionContainer { {DCH-ModifyItem-RL-ReconfRqstFDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-ModifyItem-RL-ReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-AddList-RL-ReconfRqstFDD ::= DCH-IE-ContainerList { {DCH-Add-RL-ReconfRqstFDD-IEs} }

DCH-Add-RL-ReconfRqstFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-AddItem-RL-ReconfRqstFDD CRITICALITY ignore TYPE DCH-AddItem-RL-ReconfRqstFDD PRESENCE mandatory },
    ...
}

DCH-AddItem-RL-ReconfRqstFDD ::= SEQUENCE {
    dCH-ID DCH-ID,
    rLC-Mode RLC-Mode,
    dCH-CombinationInd DCH-CombinationInd OPTIONAL,
    ul-TransportformatSet TransportFormatSet,
    dl-TransportformatSet TransportFormatSet,
    allocationRetentionPriority AllocationRetentionPriority,
    frameHandlingPriority FrameHandlingPriority,
    payloadCRC-PresenceIndicator PayloadCRC-PresenceIndicator,
    ul-FP-Mode UL-FP-Mode,
    toAWS ToAWS,
    toAWE ToAWE,
    iE-Extensions ProtocolExtensionContainer { {DCH-AddItem-RL-ReconfRqstFDD-ExtIEs} } OPTIONAL,
    ...
}

```



```

DCH-AddItem-RL-ReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-DeleteList-RL-ReconfRqstFDD ::= DCH-IE-ContainerList { {DCH-Delete-RL-ReconfRqstFDD-IEs} }

DCH-Delete-RL-ReconfRqstFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DCH-DeleteItem-RL-ReconfRqstFDD CRITICALITY ignore TYPE DCH-DeleteItem-RL-ReconfRqstFDD PRESENCE mandatory },
    ...
}

DCH-DeleteItem-RL-ReconfRqstFDD ::= SEQUENCE {
    dCH-ID DCH-ID,
    iE-Extensions ProtocolExtensionContainer { {DCH-DeleteItem-RL-ReconfRqstFDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-DeleteItem-RL-ReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkReconfigurationRequestFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK RECONFIGURATION REQUEST TDD
--
-- *****

RadioLinkReconfigurationRequestTDD ::= SEQUENCE {
    protocolIEs ProtocolIE-Container {{RadioLinkReconfigurationRequestTDD-IEs}},
    protocolExtensions ProtocolExtensionContainer {{RadioLinkReconfigurationRequestTDD-Extensions}} OPTIONAL,
    ...
}

RadioLinkReconfigurationRequestTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-AllowedQueuingTime CRITICALITY ignore TYPE AllowedQueuingTime PRESENCE optional } |
    { ID id-UL-MeanBitRate CRITICALITY ignore TYPE MeanBitRate PRESENCE optional } |
    { ID id-DL-MeanBitRate CRITICALITY ignore TYPE MeanBitRate PRESENCE optional } |
    { ID id-UL-CCTrCH-InformationList-RL-ReconfRqstTDD
      CRITICALITY ignore TYPE UL-CCTrCH-InformationList-RL-ReconfRqstTDD PRESENCE mandatory } |
    { ID id-DL-CCTrCH-InformationList-RL-ReconfRqstTDD
      CRITICALITY ignore TYPE DL-CCTrCH-InformationList-RL-ReconfRqstTDD PRESENCE mandatory } |
    { ID id-DCH-ModifyList-RL-ReconfRqstTDD CRITICALITY ignore TYPE DCH-ModifyList-RL-ReconfRqstTDD PRESENCE mandatory } |
    { ID id-DCH-AddList-RL-ReconfRqstTDD CRITICALITY ignore TYPE DCH-AddList-RL-ReconfRqstTDD PRESENCE mandatory } |
    { ID id-DCH-DeleteList-RL-ReconfRqstTDD CRITICALITY ignore TYPE DCH-DeleteList-RL-ReconfRqstTDD PRESENCE mandatory },
    ...
}

```

Error! No text of specified style in document.

Error! No text of specified style in document.

```
UL-CCTrCH-InformationList-RL-ReconfRqstTDD ::= CCTrCH-IE-ContainerList { {UL-CCTrCH-Information-RL-ReconfRqstTDD-IEs} }

UL-CCTrCH-Information-RL-ReconfRqstTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-UL-CCTrCH-Information-RL-ReconfRqstTDD CRITICALITY ignore TYPE UL-CCTrCH-Information-RL-ReconfRqstTDD PRESENCE mandatory },
  ...
}

UL-CCTrCH-Information-RL-ReconfRqstTDD ::= SEQUENCE {
  cCTrCH-ID CCTrCH-ID,
  tFCS TransportFormatCombinationSet,
  iE-Extensions ProtocolExtensionContainer { {UL-CCTrCH-Information-RL-ReconfRqstTDD-ExtIEs} } OPTIONAL,
  ...
}

UL-CCTrCH-Information-RL-ReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DL-CCTrCH-InformationList-RL-ReconfRqstTDD ::= CCTrCH-IE-ContainerList { {DL-CCTrCH-Information-RL-ReconfRqstTDD-IEs} }

DL-CCTrCH-Information-RL-ReconfRqstTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-DL-CCTrCH-Information-RL-ReconfRqstTDD CRITICALITY ignore TYPE DL-CCTrCH-Information-RL-ReconfRqstTDD PRESENCE mandatory },
  ...
}

DL-CCTrCH-Information-RL-ReconfRqstTDD ::= SEQUENCE {
  cCTrCH-ID CCTrCH-ID,
  tFCS TransportFormatCombinationSet,
  iE-Extensions ProtocolExtensionContainer { {DL-CCTrCH-Information-RL-ReconfRqstTDD-ExtIEs} } OPTIONAL,
  ...
}

DL-CCTrCH-Information-RL-ReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DCH-ModifyList-RL-ReconfRqstTDD ::= DCH-IE-ContainerList { {DCH-Modify-RL-ReconfRqstTDD-IEs} }

DCH-Modify-RL-ReconfRqstTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-DCH-ModifyItem-RL-ReconfRqstTDD CRITICALITY ignore TYPE DCH-ModifyItem-RL-ReconfRqstTDD PRESENCE mandatory },
  ...
}

DCH-ModifyItem-RL-ReconfRqstTDD ::= SEQUENCE {
  dCH-ID DCH-ID,
  ul-CCTrCH-ID CCTrCH-ID OPTIONAL,
  dl-CCTrCH-ID CCTrCH-ID OPTIONAL,
  ul-TransportformatSet TransportFormatSet OPTIONAL,
  dl-TransportformatSet TransportFormatSet OPTIONAL,
  allocationRetentionPriority AllocationRetentionPriority OPTIONAL,
  frameHandlingPriority FrameHandlingPriority OPTIONAL,
}
```

Error! No text of specified style in document.

Error! No text of specified style in document.

```
ul-FP-Mode          UL-FP-Mode          OPTIONAL,
toAWS               ToAWS               OPTIONAL,
toAWE               ToAWE               OPTIONAL,
iE-Extensions      ProtocolExtensionContainer { {DCH-ModifyItem-RL-ReconfRqstTDD-ExtIEs} } OPTIONAL,
...
}

DCH-ModifyItem-RL-ReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

DCH-AddList-RL-ReconfRqstTDD          ::= DCH-IE-ContainerList { {DCH-Add-RL-ReconfRqstTDD-IEs} }

DCH-Add-RL-ReconfRqstTDD-IEs RNSAP-PROTOCOL-IES ::= {
{ ID id-DCH-AddItem-RL-ReconfRqstTDD          CRITICALITY ignore TYPE DCH-AddItem-RL-ReconfRqstTDD          PRESENCE mandatory },
...
}

DCH-AddItem-RL-ReconfRqstTDD ::= SEQUENCE {
dCH-ID          DCH-ID,
rLC-Mode        RLC-Mode,
ul-CCTrCH-ID    CCTrCH-ID,
dl-CCTrCH-ID    CCTrCH-ID,
dCH-CombinationInd DCH-CombinationInd OPTIONAL,
ul-TransportformatSet TransportFormatSet,
dl-TransportformatSet TransportFormatSet,
allocationRetentionPriority AllocationRetentionPriority,
frameHandlingPriority FrameHandlingPriority,
ul-FP-Mode      UL-FP-Mode,
toAWS           ToAWS,
toAWE           ToAWE,
iE-Extensions  ProtocolExtensionContainer { {DCH-AddItem-RL-ReconfRqstTDD-ExtIEs} } OPTIONAL,
...
}

DCH-AddItem-RL-ReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

DCH-DeleteList-RL-ReconfRqstTDD          ::= DCH-IE-ContainerList { {DCH-Delete-RL-ReconfRqstTDD-IEs} }

DCH-Delete-RL-ReconfRqstTDD-IEs RNSAP-PROTOCOL-IES ::= {
{ ID id-DCH-DeleteItem-RL-ReconfRqstTDD          CRITICALITY ignore TYPE DCH-DeleteItem-RL-ReconfRqstTDD          PRESENCE mandatory },
...
}

DCH-DeleteItem-RL-ReconfRqstTDD ::= SEQUENCE {
dCH-ID          DCH-ID,
iE-Extensions  ProtocolExtensionContainer { {DCH-DeleteItem-RL-ReconfRqstTDD-ExtIEs} } OPTIONAL,
...
}
```

```

DCH-DeleteItem-RL-ReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkReconfigurationRequestTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK RECONFIGURATION RESPONSE FDD
--
-- *****

RadioLinkReconfigurationResponseFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container      {{RadioLinkReconfigurationResponseFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkReconfigurationResponseFDD-Extensions}}
    ...
}

RadioLinkReconfigurationResponseFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-CriticalityDiagnostics          CRITICALITY ignore TYPE CriticalityDiagnostics          PRESENCE optional },
    ...
}

RadioLinkReconfigurationResponseFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK RECONFIGURATION RESPONSE TDD
--
-- *****

RadioLinkReconfigurationResponseTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container      {{RadioLinkReconfigurationResponseTDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkReconfigurationResponseTDD-Extensions}}
    ...
}

RadioLinkReconfigurationResponseTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-CriticalityDiagnostics          CRITICALITY ignore TYPE CriticalityDiagnostics          PRESENCE optional },
    ...
}

RadioLinkReconfigurationResponseTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

```

-- *****
--
-- RADIO LINK FAILURE INDICATION
--
-- *****

RadioLinkFailureIndication ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkFailureIndication-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkFailureIndication-Extensions}}    OPTIONAL,
    ...
}

RadioLinkFailureIndication-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationList-RL-FailureInd    CRITICALITY ignore    TYPE RL-InformationList-RL-FailureInd    PRESENCE mandatory    },
    ...
}

RL-InformationList-RL-FailureInd          ::= RL-IE-ContainerList { {RL-Information-RL-FailureInd-IEs} }

RL-Information-RL-FailureInd-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-Information-RL-FailureInd          CRITICALITY ignore    TYPE RL-Information-RL-FailureInd          PRESENCE mandatory    },
    ...
}

RL-Information-RL-FailureInd ::= SEQUENCE {
    rL-ID          RL-ID,
    cause          Cause,
    iE-Extensions ProtocolExtensionContainer { {RL-Information-RL-FailureInd-ExtIEs} } OPTIONAL,
    ...
}

RL-Information-RL-FailureInd-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkFailureIndication-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK RESTORE INDICATION
--
-- *****

RadioLinkRestoreIndication ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkRestoreIndication-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkRestoreIndication-Extensions}}    OPTIONAL,
    ...
}

```

```

RadioLinkRestoreIndication-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-RL-InformationList-RL-RestoreInd    CRITICALITY ignore  TYPE RL-InformationList-RL-RestoreInd    PRESENCE mandatory  },
  ...
}

RL-InformationList-RL-RestoreInd          ::= RL-IE-ContainerList { {RL-Information-RL-RestoreInd-IEs} }

RL-Information-RL-RestoreInd-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-RL-Information-RL-RestoreInd          CRITICALITY ignore  TYPE RL-Information-RL-RestoreInd          PRESENCE mandatory  },
  ...
}

RL-Information-RL-RestoreInd ::= SEQUENCE {
  rL-ID                RL-ID,
  iE-Extensions        ProtocolExtensionContainer { {RL-Information-RL-RestoreInd-ExtIEs} } OPTIONAL,
  ...
}

RL-Information-RL-RestoreInd-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

RadioLinkRestoreIndication-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
--
-- DOWNLINK POWER CONTROL REQUEST
--
-- *****

DL-PowerControlRequest ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container    {{DL-PowerControlRequest-IEs}},
  protocolExtensions  ProtocolExtensionContainer {{DL-PowerControlRequest-Extensions}}          OPTIONAL,
  ...
}

DL-PowerControlRequest-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-ProcedureScope-DL-PC-Rqst          CRITICALITY ignore  TYPE ProcedureScope-DL-PC-Rqst          PRESENCE mandatory  },
  ...
}

ProcedureScope-DL-PC-Rqst ::= CHOICE {
  allRLs                DL-Power,
  individualRLs          DL-ReferencePowerInformationList-DL-PC-Rqst,
  ...
}

DL-ReferencePowerInformationList-DL-PC-Rqst          ::= RL-IE-ContainerList { {DL-ReferencePowerInformation-DL-PC-Rqst-IEs} }

```

```

DL-ReferencePowerInformation-DL-PC-Rqst-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-DL-ReferencePowerInformation-DL-PC-Rqst CRITICALITY ignore TYPE DL-ReferencePowerInformation-DL-PC-Rqst PRESENCE mandatory },
  ...
}

DL-ReferencePowerInformation-DL-PC-Rqst ::= SEQUENCE {
  rL-ID RL-ID,
  dl-Power DL-Power,
  iE-Extensions ProtocolExtensionContainer { {DL-ReferencePowerInformation-DL-PC-Rqst-ExtIEs} } OPTIONAL,
  ...
}

DL-ReferencePowerInformation-DL-PC-Rqst-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DL-PowerControlRequest-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
--
-- PHYSICAL CHANNEL RECONFIGURATION REQUEST FDD
--
-- *****

PhysicalChannelReconfigurationRequestFDD ::= SEQUENCE {
  protocolIEs ProtocolIE-Container {{PhysicalChannelReconfigurationRequestFDD-IEs}},
  protocolExtensions ProtocolExtensionContainer {{PhysicalChannelReconfigurationRequestFDD-Extensions}} OPTIONAL,
  ...
}

PhysicalChannelReconfigurationRequestFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-RL-Information-PhyChReconfRqstFDD CRITICALITY ignore TYPE RL-Information-PhyChReconfRqstFDD PRESENCE mandatory },
  ...
}

RL-Information-PhyChReconfRqstFDD ::= SEQUENCE {
  rL-ID RL-ID,
  dl-CodeInformations DL-CodeInformationList-PhyChReconfRqstFDD,
  iE-Extensions ProtocolExtensionContainer { {RL-Information-PhyChReconfRqstFDD-ExtIEs} } OPTIONAL,
  ...
}

RL-Information-PhyChReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DL-CodeInformationList-PhyChReconfRqstFDD ::= DL-Code-IE-ContainerList { {DL-CodeInformation-PhyChReconfRqstFDD-IEs} }

```

```

DL-CodeInformation-PhyChReconfRqstFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-DL-CodeInformation-PhyChReconfRqstFDD  CRITICALITY ignore  TYPE DL-CodeInformation-PhyChReconfRqstFDD  PRESENCE mandatory  },
  ...
}

DL-CodeInformation-PhyChReconfRqstFDD ::= SEQUENCE {
  dl-scramblingCode          DL-ScramblingCode,
  fDD-DL-ChannelisationCodeNumber  FDD-DL-ChannelisationCodeNumber,
  iE-Extensions              ProtocolExtensionContainer { {DL-CodeInformation-PhyChReconfRqstFDD-ExtIEs} } OPTIONAL,
  ...
}

DL-CodeInformation-PhyChReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

PhysicalChannelReconfigurationRequestFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
--
-- PHYSICAL CHANNEL RECONFIGURATION REQUEST TDD
--
-- *****

PhysicalChannelReconfigurationRequestTDD ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container      {{PhysicalChannelReconfigurationRequestTDD-IEs}},
  protocolExtensions  ProtocolExtensionContainer {{PhysicalChannelReconfigurationRequestTDD-Extensions}}      OPTIONAL,
  ...
}

PhysicalChannelReconfigurationRequestTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-RL-Information-PhyChReconfRqstTDD  CRITICALITY ignore  TYPE RL-Information-PhyChReconfRqstTDD  PRESENCE mandatory  },
  ...
}

RL-Information-PhyChReconfRqstTDD ::= SEQUENCE {
  rL-ID          RL-ID,
  ul-CCTrCH-Information  UL-CCTrCH-InformationList-PhyChReconfRqstTDD,
  dl-CCTrCH-Information  DL-CCTrCH-InformationList-PhyChReconfRqstTDD,
  iE-Extensions          ProtocolExtensionContainer { {RL-Information-PhyChReconfRqstTDD-ExtIEs} } OPTIONAL,
  ...
}

RL-Information-PhyChReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

UL-CCTrCH-InformationList-PhyChReconfRqstTDD ::= CCTrCH-IE-ContainerList { {UL-CCTrCH-InformationList-PhyChReconfRqstTDD-IEs} }

```


Error! No text of specified style in document.

68

Error! No text of specified style in document.

```
UL-CCTrCH-InformationList-PhyChReconfRqstTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-CCTrCH-ID          CRITICALITY ignore TYPE CCTrCH-ID          PRESENCE mandatory } |
  { ID id-UL-DPCH-InformationList-PhyChReconfRqstTDD
    CRITICALITY ignore TYPE UL-DPCH-InformationList-PhyChReconfRqstTDD
    PRESENCE mandatory },
  ...
}

-- List items have same criticality as parent
UL-DPCH-InformationList-PhyChReconfRqstTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF
SEQUENCE {
  dPCH-ID          DPCH-ID,
  tDD-ChannelisationCode TDD-ChannelisationCode OPTIONAL,
  burstType        BurstType OPTIONAL,
  midambleShift    MidambleShift OPTIONAL,
  timeSlot         TimeSlot OPTIONAL,
  tDD-PhysicalChannelOffset TDD-PhysicalChannelOffset OPTIONAL,
  repetitionPeriod RepetitionPeriod OPTIONAL,
  repetitionLength RepetitionLength OPTIONAL,
  tFCI-Presence    TFCI-Presence OPTIONAL,
  iE-Extensions    ProtocolExtensionContainer { {UL-DPCH-InformationList-PhyChReconfRqstTDD-ExtIEs} } OPTIONAL,
  ...
}

UL-DPCH-InformationList-PhyChReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DL-CCTrCH-InformationList-PhyChReconfRqstTDD ::= CCTrCH-IE-ContainerList { {DL-CCTrCH-InformationList-PhyChReconfRqstTDD-IEs} }

DL-CCTrCH-InformationList-PhyChReconfRqstTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-CCTrCH-ID          CRITICALITY ignore TYPE CCTrCH-ID          PRESENCE mandatory } |
  { ID id-DL-DPCH-InformationList-PhyChReconfRqstTDD
    CRITICALITY ignore TYPE DL-DPCH-InformationList-PhyChReconfRqstTDD
    PRESENCE mandatory },
  ...
}

-- List items have same criticality as parent
DL-DPCH-InformationList-PhyChReconfRqstTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF
SEQUENCE {
  dPCH-ID          DPCH-ID,
  tDD-ChannelisationCode TDD-ChannelisationCode OPTIONAL,
  burstType        BurstType OPTIONAL,
  midambleShift    MidambleShift OPTIONAL,
  timeSlot         TimeSlot OPTIONAL,
  tDD-PhysicalChannelOffset TDD-PhysicalChannelOffset OPTIONAL,
  repetitionPeriod RepetitionPeriod OPTIONAL,
  repetitionLength RepetitionLength OPTIONAL,
  tFCI-Presence    TFCI-Presence OPTIONAL,
  iE-Extensions    ProtocolExtensionContainer { {DL-DPCH-InformationList-PhyChReconfRqstTDD-ExtIEs} } OPTIONAL,
  ...
}
```

```

    }
    ...
}

DL-DPCH-InformationList-PhyChReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

PhysicalChannelReconfigurationRequestTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- PHYSICAL CHANNEL RECONFIGURATION COMMAND
--
-- *****

PhysicalChannelReconfigurationCommand ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container    {{PhysicalChannelReconfigurationCommand-IEs}},
    protocolExtensions         ProtocolExtensionContainer {{PhysicalChannelReconfigurationCommand-Extensions}}
    ...
}

PhysicalChannelReconfigurationCommand-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-CFN                CRITICALITY ignore TYPE CFN                PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
    ...
}

PhysicalChannelReconfigurationCommand-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- PHYSICAL CHANNEL RECONFIGURATION FAILURE
--
-- *****

PhysicalChannelReconfigurationFailure ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container    {{PhysicalChannelReconfigurationFailure-IEs}},
    protocolExtensions         ProtocolExtensionContainer {{PhysicalChannelReconfigurationFailure-Extensions}}
    ...
}

PhysicalChannelReconfigurationFailure-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-Cause              CRITICALITY ignore TYPE Cause              PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
    ...
}

```

```

PhysicalChannelReconfigurationFailure-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- UPLINK SIGNALLING TRANSFER INDICATION
--
-- *****

UplinkSignallingTransferIndication ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container    {{UplinkSignallingTransferIndication-IEs}},
    protocolExtensions         ProtocolExtensionContainer {{UplinkSignallingTransferIndication-Extensions}}    OPTIONAL,
    ...
}

UplinkSignallingTransferIndication-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UC-ID                CRITICALITY ignore TYPE UC-ID                PRESENCE mandatory } |
    { ID id-SAI                  CRITICALITY ignore TYPE SAI                  PRESENCE mandatory } |
    { ID id-C-RNTI               CRITICALITY ignore TYPE C-RNTI               PRESENCE mandatory } |
    { ID id-S-RNTI               CRITICALITY ignore TYPE S-RNTI               PRESENCE mandatory } |
    { ID id-D-RNTI               CRITICALITY ignore TYPE D-RNTI               PRESENCE optional   } |
    { ID id-L3-Information        CRITICALITY ignore TYPE L3-Information        PRESENCE mandatory } |
    { ID id-CN-PS-DomainIdentifier CRITICALITY ignore TYPE CN-PS-DomainIdentifier PRESENCE optional } |
    { ID id-CN-CS-DomainIdentifier CRITICALITY ignore TYPE CN-CS-DomainIdentifier PRESENCE optional } |
    { ID id-URA-ID              CRITICALITY ignore TYPE URA-ID              PRESENCE mandatory } |
    { ID id-MultipleURAsIndicator CRITICALITY ignore TYPE MultipleURAsIndicator PRESENCE mandatory } |
    { ID id-RNCsWithCellsInTheAccessedURA-List-UL-ST-Ind
      CRITICALITY ignore TYPE RNCsWithCellsInTheAccessedURA-List-UL-ST-Ind
      PRESENCE mandatory },
    ...
}

-- All RNC-IDs share same criticality!
RNCsWithCellsInTheAccessedURA-List-UL-ST-Ind ::= SEQUENCE (SIZE (1..maxRNCinURA)) OF
    SEQUENCE {
        rNC-ID                RNC-ID,
        iE-Extensions         ProtocolExtensionContainer { {RNCsWithCellsInTheAccessedURA-List-UL-ST-Ind-ExtIEs} } OPTIONAL,
        ...
    }

RNCsWithCellsInTheAccessedURA-List-UL-ST-Ind-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

UplinkSignallingTransferIndication-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--

```

Error! No text of specified style in document.

Error! No text of specified style in document.

```
-- DOWNLINK SIGNALLING TRANSFER REQUEST
--
-- *****
DownlinkSignallingTransferRequest ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container          {{DownlinkSignallingTransferRequest-IEs}},
    protocolExtensions   ProtocolExtensionContainer    {{DownlinkSignallingTransferRequest-Extensions}}
    ...
}

DownlinkSignallingTransferRequest-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-C-ID          CRITICALITY ignore TYPE C-ID          PRESENCE mandatory } |
    { ID id-D-RNTI       CRITICALITY ignore TYPE D-RNTI       PRESENCE mandatory } |
    { ID id-L3-Information CRITICALITY ignore TYPE L3-Information PRESENCE mandatory } |
    { ID id-D-RNTI-ReleaseIndication CRITICALITY ignore TYPE D-RNTI-ReleaseIndication PRESENCE mandatory },
    ...
}

DownlinkSignallingTransferRequest-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
-- RELOCATION COMMIT
--
-- *****

RelocationCommit ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container          {{RelocationCommit-IEs}},
    protocolExtensions   ProtocolExtensionContainer    {{RelocationCommit-Extensions}}
    ...
}

RelocationCommit-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI       CRITICALITY ignore TYPE D-RNTI       PRESENCE mandatory } |
    { ID id-RANAP-RelocationInformation CRITICALITY ignore TYPE RANAP-RelocationInformation PRESENCE mandatory },
    ...
}

RelocationCommit-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
-- PAGING REQUEST
--
-- *****

PagingRequest ::= SEQUENCE {
```

Error! No text of specified style in document.

Error! No text of specified style in document.

```
protocolIEs          ProtocolIE-Container    {{PagingRequest-IEs}},
protocolExtensions   ProtocolExtensionContainer {{PagingRequest-Extensions}}          OPTIONAL,
...
}

PagingRequest-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-PagingArea-PagingRqst          CRITICALITY ignore TYPE PagingArea-PagingRqst          PRESENCE mandatory } |
  { ID id-SRNC-ID                        CRITICALITY ignore TYPE SRNC-ID                        PRESENCE mandatory } |
  { ID id-S-RNTI                          CRITICALITY ignore TYPE S-RNTI                          PRESENCE mandatory } |
  { ID id-DRX-Parameter                   CRITICALITY ignore TYPE DRX-Parameter                   PRESENCE mandatory },
  ...
}

PagingArea-PagingRqst ::= CHOICE {
  uRA          URA-ID,
  cell         C-ID,
  ...
}

PagingRequest-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
--
-- DEDICATED MEASUREMENT INITIATION REQUEST
--
-- *****

DedicatedMeasurementInitiationRequest ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container    {{DedicatedMeasurementInitiationRequest-IEs}},
  protocolExtensions   ProtocolExtensionContainer {{DedicatedMeasurementInitiationRequest-Extensions}}          OPTIONAL,
  ...
}

DedicatedMeasurementInitiationRequest-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-MeasurementID          CRITICALITY ignore TYPE MeasurementID          PRESENCE mandatory } |
  { ID id-DedicatedMeasurementObjectType-DM-Rqst CRITICALITY ignore TYPE DedicatedMeasurementObjectType-DM-Rqst PRESENCE mandatory } |
  { ID id-MeasurementCharacteristics          CRITICALITY ignore TYPE MeasurementCharacteristics          PRESENCE mandatory } |
  { ID id-ReportCharacteristics              CRITICALITY ignore TYPE ReportCharacteristics              PRESENCE mandatory },
  ...
}

DedicatedMeasurementObjectType-DM-Rqst ::= CHOICE {
  rLs          RL-InformationList-DM-Rqst,
  ...
}

RL-InformationList-DM-Rqst ::= RL-IE-ContainerList { {RL-Information-DM-Rqst-IEs} }

RL-Information-DM-Rqst-IEs RNSAP-PROTOCOL-IES ::= {
```

Error! No text of specified style in document.

Error! No text of specified style in document.

```
{ ID id-RL-InformationItem-DM-Rqst          CRITICALITY ignore  TYPE RL-InformationItem-DM-Rqst          PRESENCE mandatory  },
...
}

RL-InformationItem-DM-Rqst ::= SEQUENCE {
  rL-ID          RL-ID,
  dPCH-ID        DPCH-ID          OPTIONAL,
  iE-Extensions ProtocolExtensionContainer { {RL-InformationItem-DM-Rqst-ExtIEs} } OPTIONAL,
  ...
}

RL-InformationItem-DM-Rqst-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DedicatedMeasurementInitiationRequest-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
--
-- DEDICATED MEASUREMENT INITIATION RESPONSE
--
-- *****

DedicatedMeasurementInitiationResponse ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container          {{DedicatedMeasurementInitiationResponse-IEs}},
  protocolExtensions  ProtocolExtensionContainer {{DedicatedMeasurementInitiationResponse-Extensions}}          OPTIONAL,
  ...
}

DedicatedMeasurementInitiationResponse-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-MeasurementID          CRITICALITY ignore  TYPE MeasurementID          PRESENCE mandatory  } |
  { ID id-DedicatedMeasurementObjectType-DM-Rspns CRITICALITY ignore  TYPE DedicatedMeasurementObjectType-DM-Rspns PRESENCE mandatory  } |
  { ID id-CFN          CRITICALITY ignore  TYPE CFN          PRESENCE mandatory  } |
  { ID id-CriticalityDiagnostics          CRITICALITY ignore  TYPE CriticalityDiagnostics          PRESENCE optional },
  ...
}

DedicatedMeasurementObjectType-DM-Rspns ::= CHOICE {
  rLs          RL-InformationList-DM-Rspns,
  allRL        AllRL-Information-DM-Rspns,
  ...
}

RL-InformationList-DM-Rspns          ::= RL-IE-ContainerList { {RL-Information-DM-Rspns-IEs} }

RL-Information-DM-Rspns-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-RL-InformationItem-DM-Rspns          CRITICALITY ignore  TYPE RL-InformationItem-DM-Rspns          PRESENCE mandatory  },
  ...
}
```

```

RL-InformationItem-DM-Rspns ::= SEQUENCE {
    rL-ID                RL-ID,
    dPCH-ID              DPCH-ID                OPTIONAL,
    dedicatedMeasurementValue    DedicatedMeasurementValue,
    iE-Extensions        ProtocolExtensionContainer { {RL-InformationItem-DM-Rspns-ExtIEs} } OPTIONAL,
    ...
}

RL-InformationItem-DM-Rspns-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

AllRL-Information-DM-Rspns ::= SEQUENCE {
    dedicatedMeasurementValue    DedicatedMeasurementValue,
    iE-Extensions                ProtocolExtensionContainer { {AllRL-Information-DM-Rspns-ExtIEs} } OPTIONAL,
    ...
}

AllRL-Information-DM-Rspns-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DedicatedMeasurementInitiationResponse-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- DEDICATED MEASUREMENT INITIATION FAILURE
--
-- *****

DedicatedMeasurementInitiationFailure ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container    {{DedicatedMeasurementInitiationFailure-IEs}},
    protocolExtensions          ProtocolExtensionContainer {{DedicatedMeasurementInitiationFailure-Extensions}}
    ...
}

DedicatedMeasurementInitiationFailure-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-MeasurementID                CRITICALITY ignore TYPE MeasurementID                PRESENCE mandatory } |
    { ID id-Cause                          CRITICALITY ignore TYPE Cause                          PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics          CRITICALITY ignore TYPE CriticalityDiagnostics          PRESENCE optional },
    ...
}

DedicatedMeasurementInitiationFailure-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****

```

```

--
-- DEDICATED MEASUREMENT REPORT
--
-- *****

DedicatedMeasurementReport ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container    {{DedicatedMeasurementReport-IEs}},
    protocolExtensions         ProtocolExtensionContainer {{DedicatedMeasurementReport-Extensions}} OPTIONAL,
    ...
}

DedicatedMeasurementReport-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-MeasurementID          CRITICALITY ignore TYPE MeasurementID          PRESENCE mandatory } |
    { ID id-DedicatedMeasurementObjectType-DM-Rprt CRITICALITY ignore TYPE DedicatedMeasurementObjectType-DM-Rprt PRESENCE mandatory } |
    { ID id-CFN                    CRITICALITY ignore TYPE CFN                    PRESENCE optional },
    ...
}

DedicatedMeasurementObjectType-DM-Rprt ::= CHOICE {
    rLs                RL-InformationList-DM-Rprt,
    allRL              AllRL-Information-DM-Rprt,
    ...
}

RL-InformationList-DM-Rprt ::= RL-IE-ContainerList { {RL-Information-DM-Rprt-IEs} }

RL-Information-DM-Rprt-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationItem-DM-Rprt          CRITICALITY ignore TYPE RL-InformationItem-DM-Rprt          PRESENCE mandatory },
    ...
}

RL-InformationItem-DM-Rprt ::= SEQUENCE {
    rL-ID                RL-ID,
    dPCH-ID              DPCH-ID          OPTIONAL,
    dedicatedMeasurementValue DedicatedMeasurementValue,
    iE-Extensions        ProtocolExtensionContainer { {RL-InformationItem-DM-Rprt-ExtIEs} } OPTIONAL,
    ...
}

RL-InformationItem-DM-Rprt-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

AllRL-Information-DM-Rprt ::= SEQUENCE {
    dedicatedMeasurementValue DedicatedMeasurementValue,
    iE-Extensions            ProtocolExtensionContainer { {AllRL-Information-DM-Rprt-ExtIEs} } OPTIONAL,
    ...
}

AllRL-Information-DM-Rprt-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```



```

}

DedicatedMeasurementReport-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- DEDICATED MEASUREMENT TERMINATION REQUEST
--
-- *****

DedicatedMeasurementTerminationRequest ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container  {{{DedicatedMeasurementTerminationRequest-IEs}}},
    protocolExtensions   ProtocolExtensionContainer {{{DedicatedMeasurementTerminationRequest-Extensions}}}
    ...
}

DedicatedMeasurementTerminationRequest-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-MeasurementID          CRITICALITY ignore TYPE MeasurementID          PRESENCE mandatory },
    ...
}

DedicatedMeasurementTerminationRequest-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- DEDICATED MEASUREMENT FAILURE INDICATION
--
-- *****

DedicatedMeasurementFailureIndication ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container  {{{DedicatedMeasurementFailureIndication-IEs}}},
    protocolExtensions   ProtocolExtensionContainer {{{DedicatedMeasurementFailureIndication-Extensions}}}
    ...
}

DedicatedMeasurementFailureIndication-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-MeasurementID          CRITICALITY ignore TYPE MeasurementID          PRESENCE mandatory } |
    { ID id-Cause                  CRITICALITY ignore TYPE Cause                PRESENCE mandatory },
    ...
}

DedicatedMeasurementFailureIndication-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--

```

```

-- COMMON TRANSPORT CHANNEL RESOURCES RELEASE REQUEST
--
-- *****
CommonTransportChannelResourcesReleaseRequest ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container    {{CommonTransportChannelResourcesReleaseRequest-IEs}},
    protocolExtensions         ProtocolExtensionContainer {{CommonTransportChannelResourcesReleaseRequest-Extensions}}
    ...
}

CommonTransportChannelResourcesReleaseRequest-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI                CRITICALITY ignore TYPE D-RNTI                PRESENCE mandatory } |
    { ID id-C-RNTI                CRITICALITY ignore TYPE C-RNTI                PRESENCE optional  },
    ...
}

CommonTransportChannelResourcesReleaseRequest-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
-- COMMON TRANSPORT CHANNEL RESOURCES REQUEST
--
-- *****

CommonTransportChannelResourcesRequest ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container    {{CommonTransportChannelResourcesRequest-IEs}},
    protocolExtensions         ProtocolExtensionContainer {{CommonTransportChannelResourcesRequest-Extensions}}
    ...
}

CommonTransportChannelResourcesRequest-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI                CRITICALITY ignore TYPE D-RNTI                PRESENCE mandatory } |
    { ID id-TransportBearerRequestIndicator CRITICALITY ignore TYPE TransportBearerRequestIndicator PRESENCE mandatory } |
    { ID id-TransportBearerID      CRITICALITY ignore TYPE TransportBearerID      PRESENCE mandatory },
    ...
}

CommonTransportChannelResourcesRequest-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
-- COMMON TRANSPORT CHANNEL RESOURCES RESPONSE FDD
--
-- *****

CommonTransportChannelResourcesResponseFDD ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container    {{CommonTransportChannelResourcesResponseFDD-IEs}},

```

Error! No text of specified style in document.

Error! No text of specified style in document.

```
protocolExtensions          ProtocolExtensionContainer {{CommonTransportChannelResourcesResponseFDD-Extensions}}
...
}

CommonTransportChannelResourcesResponseFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-S-RNTI          CRITICALITY ignore  TYPE S-RNTI          PRESENCE mandatory } |
  { ID id-FACH-InfoForS-CCPCH-CoupledToPRACHorPCPCH  CRITICALITY ignore  TYPE FACH-InfoForS-CCPCH-CoupledToPRACHorPCPCH  PRESENCE mandatory } |
  { ID id-FACH-InfoForOptionals-CCPCH          CRITICALITY ignore  TYPE FACH-InfoForOptionals-CCPCH          PRESENCE optional } |
  { ID id-TransportLayerAddress          CRITICALITY ignore  TYPE TransportLayerAddress          PRESENCE optional } |
  { ID id-BindingID          CRITICALITY ignore  TYPE BindingID          PRESENCE optional } |
  { ID id-CriticalityDiagnostics          CRITICALITY ignore  TYPE CriticalityDiagnostics          PRESENCE optional },
  ...
}

FACH-InfoForS-CCPCH-CoupledToPRACHorPCPCH ::= SEQUENCE {
  priorityIndicatorAndInitialWindowSize          PriorityIndicatorAndInitialWindowSizeList,
  iE-Extensions          ProtocolExtensionContainer { {FACH-InfoForS-CCPCH-CoupledToPRACHorPCPCH-ExtIEs} } OPTIONAL,
  ...
}

FACH-InfoForS-CCPCH-CoupledToPRACHorPCPCH-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

PriorityIndicatorAndInitialWindowSizeList ::= SEQUENCE (SIZE (1..16)) OF
  SEQUENCE {
    fACH-PriorityIndicator          FACH-PriorityIndicator,
    mAC-c-SDU-Lengths          MAC-c-SDU-LengthList,
    fACH-InitialWindowSize          FACH-InitialWindowSize,
    iE-Extensions          ProtocolExtensionContainer { {PriorityIndicatorAndInitialWindowSizeList-ExtIEs} } OPTIONAL,
    ...
  }

PriorityIndicatorAndInitialWindowSizeList-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

MAC-c-SDU-LengthList ::= SEQUENCE (SIZE (1..maxNrOfMACcSDU-Length)) OF
  SEQUENCE {
    mAC-c-SDU-Length          MAC-c-SDU-Length,
    iE-Extensions          ProtocolExtensionContainer { {MAC-c-SDU-LengthList-ExtIEs} } OPTIONAL,
    ...
  }

MAC-c-SDU-LengthList-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

FACH-InfoForOptionals-CCPCH ::= SEQUENCE {
  fDD-S-CCPCH-Offset          FDD-S-CCPCH-Offset,
  dl-ScramblingCode          DL-ScramblingCode,
```

Error! No text of specified style in document.

Error! No text of specified style in document.

```
fDD-DL-ChannelisationCodeNumber      FDD-DL-ChannelisationCodeNumber,
dl-TFCS                               TransportFormatCombinationSet,
secondaryCCPCHs                       SecondaryCCPCH-List,
pilotBitsUsedIndicator                PilotBitsUsedIndicator,
multiplexingPosition                  MultiplexingPosition,
sSDT-Indication                       SSDT-Indication,
priorityIndicatorAndInitialWindowSizeList PriorityIndicatorAndInitialWindowSizeList,
fACH-DataFrameSize                    FACH-DataFrameSize,
fACH-InitialWindowSize                FACH-InitialWindowSize,
iE-Extensions                          ProtocolExtensionContainer { {FACH-InfoForOptionals-CCPCH-ExtIEs} } OPTIONAL,
...
}

FACH-InfoForOptionals-CCPCH-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

SecondaryCCPCH-List ::= SEQUENCE (SIZE (1..maxNrOfSCCPCHs)) OF
SEQUENCE {
tDD-ChannelisationCode                TDD-ChannelisationCode,
timeSlot                              TimeSlot,
burstType                             BurstType,
midambleShift                         MidambleShift,
offset                                Offset,
repetitionPeriod                      RepetitionPeriod,
repetitionLength                      RepetitionLength,
iE-Extensions                          ProtocolExtensionContainer { {SecondaryCCPCH-List-ExtIEs} } OPTIONAL,
...
}

SecondaryCCPCH-List-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

CommonTransportChannelResourcesResponseFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- *****
--
-- COMMON TRANSPORT CHANNEL RESOURCES RESPONSE TDD
--
-- *****

CommonTransportChannelResourcesResponseTDD ::= SEQUENCE {
protocolIEs                            ProtocolIE-Container      {{CommonTransportChannelResourcesResponseTDD-IEs}},
protocolExtensions                      ProtocolExtensionContainer {{CommonTransportChannelResourcesResponseTDD-Extensions}}
...
}

CommonTransportChannelResourcesResponseTDD-IEs RNSAP-PROTOCOL-IES ::= {
```

Error! No text of specified style in document.

Error! No text of specified style in document.

```
{ ID id-S-RNTI CRITICALITY ignore TYPE S-RNTI PRESENCE mandatory } |
{ ID id-FACH-InfoForS-CCPCH-CoupledToPRACHorPCPCH CRITICALITY ignore TYPE FACH-InfoForS-CCPCH-CoupledToPRACHorPCPCH PRESENCE optional } |
{ ID id-FACH-InfoForOptionalGroupS-CCPCH CRITICALITY ignore TYPE FACH-InfoForOptionalGroupOfS-CCPCH PRESENCE optional } |
{ ID id-TransportLayerAddress CRITICALITY ignore TYPE TransportLayerAddress PRESENCE optional } |
{ ID id-BindingID CRITICALITY ignore TYPE BindingID PRESENCE optional } |
{ ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
...
}

FACH-InfoForOptionalGroupOfS-CCPCH ::= SEQUENCE {
    dl-TFCS TransportFormatCombinationSet,
    secondaryCCPCHs SecondaryCCPCH-TDD-List,
    iE-Extensions ProtocolExtensionContainer { {FACH-InfoForOptionalGroupOfS-CCPCH-ExtIEs} } OPTIONAL,
    ...
}

FACH-InfoForOptionalGroupOfS-CCPCH-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

SecondaryCCPCH-TDD-List ::= SEQUENCE (SIZE (1..maxNrOfSCCPCHs)) OF
SEQUENCE {
    tDD-ChannelisationCode TDD-ChannelisationCode,
    timeSlot TimeSlot,
    burstType BurstType,
    midambleShift MidambleShift,
    tDD-PhysicalChannelOffset TDD-PhysicalChannelOffset,
    repetitionPeriod RepetitionPeriod,
    repetitionLength RepetitionLength,
    sSDT-Indication SSdT-Indication,
    priorityIndicatorAndInitialWindowSizeList PriorityIndicatorAndInitialWindowSizeList,
    iE-Extensions ProtocolExtensionContainer { {SecondaryCCPCH-TDD-List-ExtIEs} } OPTIONAL,
    ...
}

SecondaryCCPCH-TDD-List-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

CommonTransportChannelResourcesResponseTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- COMMON TRANSPORT CHANNEL RESOURCES FAILURE
--
-- *****

CommonTransportChannelResourcesFailure ::= SEQUENCE {
    protocolIEs ProtocolIE-Container {{CommonTransportChannelResourcesFailure-IEs}},
```

Error! No text of specified style in document.

Error! No text of specified style in document.

```
    protocolExtensions          ProtocolExtensionContainer {{CommonTransportChannelResourcesFailure-Extensions}}
    ...
}

CommonTransportChannelResourcesFailure-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-S-RNTI          CRITICALITY ignore TYPE S-RNTI          PRESENCE mandatory } |
  { ID id-Cause           CRITICALITY ignore TYPE Cause           PRESENCE mandatory } |
  { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
  ...
}

CommonTransportChannelResourcesFailure-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
--
-- COMPRESSED MODE PREPARE
--
-- *****

CompressedModePrepare ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container          {{CompressedModePrepare-IEs}},
  protocolExtensions   ProtocolExtensionContainer {{CompressedModePrepare-Extensions}}
  ...
}

CompressedModePrepare-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-TGP1          CRITICALITY ignore TYPE GapPeriod          PRESENCE mandatory } |
  { ID id-TGP2          CRITICALITY ignore TYPE GapPeriod          PRESENCE optional } |
  { ID id-TGL           CRITICALITY ignore TYPE TGL                PRESENCE mandatory } |
  { ID id-TGD           CRITICALITY ignore TYPE TGD                PRESENCE mandatory } |
  { ID id-PD            CRITICALITY ignore TYPE PD                 PRESENCE mandatory } |
  { ID id-UL-DL-CompressedModeSelection CRITICALITY ignore TYPE UL-DL-CompressedModeSelection PRESENCE mandatory } |
  { ID id-CompressedModeMethod CRITICALITY ignore TYPE CompressedModeMethod PRESENCE mandatory } |
  { ID id-GapPositionMode CRITICALITY ignore TYPE GapPositionMode PRESENCE mandatory } |
  { ID id-SN            CRITICALITY ignore TYPE SN                 PRESENCE conditional
  -- This IE is present only if "GapPositionMode" equals to "flexible" --
  } |
  { ID id-DL-FrameType CRITICALITY ignore TYPE DL-FrameType       PRESENCE mandatory } |
  { ID id-ScramblingCodeChange CRITICALITY ignore TYPE ScramblingCodeChange PRESENCE conditional
  -- This IE is present only if "CompressedModeMethod" equals to "SF/2" --
  } |
  { ID id-PowerControlMode CRITICALITY ignore TYPE PowerControlMode PRESENCE mandatory } |
  { ID id-PowerResumeMode CRITICALITY ignore TYPE PowerResumeMode PRESENCE mandatory } |
  { ID id-UL-DeltaEbNo CRITICALITY ignore TYPE UL-EbNo            PRESENCE mandatory } |
  { ID id-UL-DeltaEbNoAfter CRITICALITY ignore TYPE UL-EbNo      PRESENCE mandatory },
  ...
}

CompressedModePrepare-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}
```

```

-- *****
--
-- COMPRESSED MODE READY
--
-- *****

CompressedModeReady ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{CompressedModeReady-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CompressedModeReady-Extensions}}    OPTIONAL,
    ...
}

CompressedModeReady-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-CriticalityDiagnostics          CRITICALITY ignore TYPE CriticalityDiagnostics          PRESENCE optional },
    ...
}

CompressedModeReady-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- COMPRESSED MODE FAILURE
--
-- *****

CompressedModeFailure ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{CompressedModeFailure-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CompressedModeFailure-Extensions}}    OPTIONAL,
    ...
}

CompressedModeFailure-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-Cause          CRITICALITY ignore TYPE Cause          PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics          CRITICALITY ignore TYPE CriticalityDiagnostics          PRESENCE optional },
    ...
}

CompressedModeFailure-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- COMPRESSED MODE COMMIT
--
-- *****

CompressedModeCommit ::= SEQUENCE {

```

Error! No text of specified style in document.

Error! No text of specified style in document.

```
    protocolIEs          ProtocolIE-Container    {{CompressedModeCommit-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CompressedModeCommit-Extensions}}
    ...
}

CompressedModeCommit-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-CFN          CRITICALITY ignore  TYPE CFN          PRESENCE mandatory },
    ...
}

CompressedModeCommit-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- COMPRESSED MODE CANCEL
--
-- *****

CompressedModeCancel ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{CompressedModeCancel-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CompressedModeCancel-Extensions}}
    ...
}

CompressedModeCancel-IEs RNSAP-PROTOCOL-IES ::= {
    ...
}

CompressedModeCancel-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- ERROR INDICATION
--
-- *****

ErrorIndication ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{ErrorIndication-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{ErrorIndication-Extensions}}
    ...
}

ErrorIndication-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-Cause          CRITICALITY ignore  TYPE Cause          PRESENCE conditional
    -- At least either of Cause IE or Criticality IE shall be present -- } |
    { ID id-CriticalityDiagnostics CRITICALITY ignore  TYPE CriticalityDiagnostics PRESENCE conditional
    -- At least either of Cause IE or Criticality IE shall be present -- },
    ...
}
```



```

}
...
}
ErrorIndication-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
...
}
-- *****
--
-- PRIVATE MESSAGE
--
-- *****

PrivateMessage ::= SEQUENCE {
    privateExtensions      PrivateExtensionContainer  {{PrivateExtensions}},
    ...
}

PrivateExtensions RNSAP-PRIVATE-EXTENSION ::= {
...
}

END

```

9.3.4 Information Element Definitions

```

-- *****
--
-- Information Element Definitions
--
-- *****

RNSAP-IEs -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

IMPORTS
    maxNrOfErrors,
    maxRateMatching,
    maxNrOfTFCS,
    maxNrOfTFs,
    maxTTL-Count
FROM RNSAP-Constants

    Criticality,
    ProcedureCode,
    ProtocolIE-ID,
    TransactionID,
    TriggeringMessage

```

Error! No text of specified style in document.

Error! No text of specified style in document.

```
FROM RNSAP-CommonDataTypes

    ProtocolExtensionContainer{},
    RNSAP-PROTOCOL-EXTENSION
FROM RNSAP-Containers;

-- A

AllocationRetentionPriority ::= FrameHandlingPriority

AllowedQueuingTime ::= INTEGER (0..60)
-- seconds

-- B

-- ** NOTE: Size in tabular 1..4,... **
BindingID ::= OCTET STRING (SIZE (1..MAX))

BLER ::= INTEGER (-63..0)
-- Step 0.1 (Range -6.3..0). It is the Log10 of the BLER

BurstType ::= ENUMERATED {
    type1 (1),
    type2 (2)
}

-- C

Cause ::= CHOICE {
    radioNetwork CauseRadioNetwork,
    transmissionNetwork CauseTransmissionNetwork,
    protocol CauseProtocol,
    misc CauseMisc,
    ...
}

CauseMisc ::= ENUMERATED {
    control-processing-overload,
    hardware-failure,
    om-intervention,
    not-enough-user-plane-processing-resources,
    unspecified,
    ...
}

CauseProtocol ::= ENUMERATED {
    transaction-not-allowed,
    transfer-syntax-error,
    abstract-syntax-error-reject,
    abstract-syntax-error-ignore-and-notify,
    unspecified,
}
```

```
    ...
}

CauseRadioNetwork ::= ENUMERATED {
    unknown-C-ID,
    cell-not-available,
    power-level-not-supported,
    ul-scrambling-code-already-in-use,
    dl-radio-resources-not-available,
    ul-radio-resources-not-available,
    measurement-not-supported-for-the-object,
    macrodiversity-combining-not-possible,
    reconfiguration-not-allowed,
    Synchronisation-failure,
    unspecified,
    ...
}

CauseTransmissionNetwork ::= ENUMERATED {
    transmission-link-failure,
    transmission-port-not-available,
    unspecified,
    ...
}

C-ID ::= INTEGER (0..65535)

CCTrCH-ID ::= INTEGER (0..15)

CellParameterID ::= INTEGER (0..127)

CFN ::= INTEGER (0..255)

ChannelCodingType ::= ENUMERATED {
    no-coding,
    convolutional-coding,
    turbo-coding--,
-- ...
}

-- ** TODO **
ChipOffset ::= INTEGER

CodingRate ::= ENUMERATED {
    half,
    third--,
-- ...
}

CompressedModeMethod ::= ENUMERATED {
    none,
```

```

    puncturing,
    sF2,
    gating
}

CPICH-EcIo ::= INTEGER

CRC-Size ::= INTEGER (0| 8| 12| 16| 24)

CriticalityDiagnostics ::= SEQUENCE {
    procedureCode      ProcedureCode      OPTIONAL,
    triggeringMessage  TriggeringMessage  OPTIONAL,
    criticalityResponse Criticality        OPTIONAL,
    transactionID     TransactionID      OPTIONAL,
    iEsCriticalityResponses CriticalityDiagnostics-IE-List OPTIONAL,
    iE-Extensions     ProtocolExtensionContainer { {CriticalityDiagnostics-ExtIEs} } OPTIONAL,
    ...
}

CriticalityDiagnostics-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

CriticalityDiagnostics-IE-List ::= SEQUENCE (SIZE (1..maxNrOfErrors)) OF
    SEQUENCE {
        criticalityResponse Criticality,
        iE-ID               ProtocolIE-ID,
        iE-Extensions       ProtocolExtensionContainer { {CriticalityDiagnostics-IE-List-ExtIEs} } OPTIONAL,
        ...
    }

CriticalityDiagnostics-IE-List-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** TODO **
CTFC ::= INTEGER
-- See formula (must be resolved)

CN-CS-DomainIdentifier ::= SEQUENCE {
    pLMN-ID      PLMN-ID,
    iE-Extensions ProtocolExtensionContainer { {CN-CS-DomainIdentifier-ExtIEs} } OPTIONAL,
    LAC          LAC
}

CN-CS-DomainIdentifier-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

CN-PS-DomainIdentifier ::= SEQUENCE {
    pLMN-ID      PLMN-ID,

```

Error! No text of specified style in document.

Error! No text of specified style in document.

```

    LAC          LAC,
    iE-Extensions ProtocolExtensionContainer { {CN-PS-DomainIdentifier-ExtIEs} } OPTIONAL,
    rAC          RAC
}

CN-PS-DomainIdentifier-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- **TODO**
CPICH-Power          ::= INTEGER

C-RNTI               ::= INTEGER (0..65535)

-- D

DCH-CombinationInd   ::= INTEGER (0..255)

DCH-ID               ::= INTEGER (0..255)

DedicatedMeasurementObjectType ::= ENUMERATED {
    r1,
    all-r1,
    ...
}

-- ** OR:
-- DedicatedMeasurementObjectType ::= INTEGER {
--   r1(0),
--   allR1(1)
-- } (0..255)
-- **

DedicatedMeasurementType ::= ENUMERATED {
    sir,
    sir-error,
    transmitted-code-power,
    rSCP,
    ...
}

-- timeslotTSCP is used by TDD only

-- ** OR:
-- DedicatedMeasurementType ::= INTEGER {
--   sIR(0),
--   sIR-Error(1),
--   transmittedCodePower(2),
--   rSCP(3)
-- } (0..255)
-- **

-- ** NOTE: Extensibility added **
```

Error! No text of specified style in document.

Error! No text of specified style in document.

```
-- **TODO**

DedicatedMeasurementValue ::= SEQUENCE {
    sIR-Value          ScaledSIR-Value          OPTIONAL,
    sIR-ErrorValue     ScaledSIR-ErrorValue     OPTIONAL,
    transmittedCodePowerValue ScaledTransmittedCodePowerValue OPTIONAL, -- Relative to CPICH
    rSCP               TBD                     OPTIONAL, -- TDD only
    iE-Extensions      ProtocolExtensionContainer { {DedicatedMeasurementValue-ExtIEs} } OPTIONAL,
    ...
}

DedicatedMeasurementValue-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** TODO **
DiversityControlField ::= INTEGER

-- ** TODO **
DiversityMode ::= INTEGER

-- ** TODO **
DL-ChannelisationCode ::= INTEGER

-- ** TODO **
DL-DPCCH-SlotFormat ::= INTEGER

-- ** TODO **
DL-DPCH-SlotNumber ::= INTEGER

DL-EbNo ::= ScaledUL-EbNo

DL-EbNoTarget ::= ScaledUL-EbNo

-- ** TODO **
DL-Power ::= INTEGER

D-RNTI ::= INTEGER (0..1048576)
-- ** OR:
-- D-RNTI ::= BIT STRING (SIZE (20))
-- **

D-RNTI-ReleaseIndication ::= ENUMERATED {
    not-release-D-RNTI,
    release-D-RNTI
}

-- ** TODO **
DL-ScramblingCode ::= INTEGER

DL-FrameType ::= ENUMERATED {
```

Error! No text of specified style in document.

Error! No text of specified style in document.

```
    typeA,  
    typeB,  
    ...  
}  
  
DPCH-ID                ::= INTEGER (0..239)  
  
-- **TODO**  
DRX-Parameter          ::= TBD  
  
-- **TODO**  
DSCH-TransportFormatCombinationSet ::= INTEGER  
  
-- **TODO**  
DSCH-TFS               ::= INTEGER  
  
-- **TODO**  
D-FieldLength          ::= INTEGER  
  
-- E  
  
EventA ::= SEQUENCE {  
    measurementTreshold      MeasurementThreshold,  
    measurementHysteresisTime ScaledMeasurementHysteresisTime OPTIONAL,  
    iE-Extensions            ProtocolExtensionContainer { {EventA-ExtIEs} } OPTIONAL,  
    ...  
}  
  
EventA-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {  
    ...  
}  
  
EventB ::= SEQUENCE {  
    measurementTreshold      MeasurementThreshold,  
    measurementHysteresisTime ScaledMeasurementHysteresisTime OPTIONAL,  
    iE-Extensions            ProtocolExtensionContainer { {EventB-ExtIEs} } OPTIONAL,  
    ...  
}  
  
EventC ::= SEQUENCE {  
    measurementIncreaseThreshold MeasurementIncreaseThreshold,  
    measurementChangeTime       ScaledMeasurementChangeTime,  
    ...  
}  
  
EventB-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {  
    ...  
}  
  
EventD ::= SEQUENCE {  
    measurementDecreaseThreshold MeasurementDecreaseThreshold,
```

Error! No text of specified style in document.

Error! No text of specified style in document.

```
measurementChangeTime      ScaledMeasurementChangeTime,
iE-Extensions               ProtocolExtensionContainer { {EventD-ExtIEs} } OPTIONAL,
...
}

EventD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

EventE ::= SEQUENCE {
measurementThreshold1      MeasurementThreshold,
measurementThreshold2      MeasurementThreshold          OPTIONAL,
measurementHysteresisTime  ScaledMeasurementHysteresisTime  OPTIONAL,
reportPeriodicity          ReportPeriodicity              OPTIONAL,
iE-Extensions              ProtocolExtensionContainer { {EventE-ExtIEs} } OPTIONAL,
...
}

EventE-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

EventF ::= SEQUENCE {
measurementThreshold1      MeasurementThreshold,
measurementThreshold2      MeasurementThreshold          OPTIONAL,
measurementHysteresisTime  ScaledMeasurementHysteresisTime  OPTIONAL,
reportPeriodicity          ReportPeriodicity              OPTIONAL,
iE-Extensions              ProtocolExtensionContainer { {EventF-ExtIEs} } OPTIONAL,
...
}

EventF-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- F

FACH-DataFrameSize          ::= INTEGER (1..5000)
-- Size of data frame in number of bits

FACH-InitialWindowSize     ::= INTEGER { unlimited(255) } (0..255)
-- Number of FACH data frames.
-- 255 = Unlimited number of FACH data frames

-- ** TODO **
FACH-InfoForOptionals-CCPCH ::= INTEGER

-- ** TODO **
FACH-InfoForS-CCPCH-CoupledToPRACHorPCPCH ::= INTEGER

-- ** TODO **
```


Error! No text of specified style in document.

92

Error! No text of specified style in document.

```
FDD-DL-ChannelisationCodeNumber ::= INTEGER

-- ** TODO **
FDD-FL-ChannelisationCodeNumber ::= INTEGER

-- ** TODO **
FDD-S-CCPCH-Offset ::= INTEGER

FACH-PriorityIndicator ::= INTEGER { lowest(0), highest(15) } (0..15)
FrameHandlingPriority ::= INTEGER { lowest(0), highest(15) } (0..15)
FrameOffset ::= INTEGER (0..255)
-- Frames

-- G

GapPositionMode ::= ENUMERATED {
    fixed,
    flexible
}

GapPeriod ::= INTEGER (0..255)

-- H
-- I

-- **TODO**
InitialDL-TX-Power ::= INTEGER

-- J
-- K
-- L

LAC ::= OCTET STRING (SIZE (2)) --(EXCEPT ('0000'H|'FFFF'H))

-- ** TODO **
L3-Information ::= INTEGER

-- M

-- ** TODO **
MaxNrOfUL-DPCHs ::= INTEGER

MAC-c-SDU-Length ::= INTEGER (1..5000)

-- **TODO**
MACd-MACsh-TransportFormatSet ::= INTEGER

-- **NOTE: extensibility**
MeasurementCharacteristics ::= SEQUENCE {
```

Error! No text of specified style in document.

Error! No text of specified style in document.

```
measurementFrequency      TBD,
averagingDuration         TBD,
IE-Extensions             ProtocolExtensionContainer { {MeasurementCharacteristics-ExtIEs} } OPTIONAL,
...
}

MeasurementCharacteristics-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- ** TODO **
MeanBitRate                ::= INTEGER

MeasurementID              ::= INTEGER (0..1048576)
-- **OR:
-- MeasurementID          ::= BIT STRING (SIZE (20))
-- **

MultipleURAsIndicator ::= ENUMERATED {
    single-URA-exists,
    multiple-URAs-exist
}

-- ** TODO **
MCC-Digit                  ::= OCTET STRING (SIZE (3))
-- FFS
-- Reference: 24.008

-- ** TODO **
MNC-Digit                  ::= OCTET STRING (SIZE (3))
-- FFS
-- Reference: 24.008

ScaledMeasurementChangeTime ::= INTEGER (1..1000)
-- MeasurementChangeTime = ScaledMeasurementChangeTime * 10
-- Unit is ms

-- ** TODO **
MeasurementDecreaseThreshold ::= INTEGER

ScaledMeasurementHysteresisTime ::= INTEGER (1..1000)
-- MeasurementHysteresisTime = ScaledMeasurementHysteresisTime * 10
-- Unit is ms

-- ** TODO **
MeasurementIncreaseThreshold ::= INTEGER

-- ** TODO **
MeasurementThreshold       ::= INTEGER

MidambleShift              ::= INTEGER (0..15)
```

```
MinUL-ChannelisationCodeLength ::= INTEGER

MultiplexingPosition ::= ENUMERATED {
    fixed,
    flexible
}

-- N

NrOfTransportBlocks ::= INTEGER (0..4095)

-- O

Offset ::= INTEGER (0..63)

-- P

PD ::= INTEGER (0..2047, ...)

PayloadCRC-PresenceIndicator ::= ENUMERATED {
    crc-not-included,
    crc-included--,
    ...
}

PSCH-TimeSlot ::= INTEGER (0..6)

Periodic ::= SEQUENCE {
    reportPeriodicity ReportPeriodicity,
    iE-Extensions ProtocolExtensionContainer { {Periodic-ExtIEs} } OPTIONAL,
    ...
}

Periodic-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** TODO **
PilotBitsUsedIndicator ::= INTEGER

-- ** TODO **
PLMN-ID ::= SEQUENCE {
    mCC-digit MCC-Digit,
    iE-Extensions ProtocolExtensionContainer { {PLMN-ID-ExtIEs} } OPTIONAL,
    mNC-digit MNC-Digit
}

-- FFS

PLMN-ID-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}
```

Error! No text of specified style in document.

95

Error! No text of specified style in document.

```
}  
  
PowerControlMode ::= ENUMERATED {  
    v0,  
    v1,  
    ...  
}  
  
PowerOffset          ::= INTEGER (0..24)  
  
PowerResumeMode ::= ENUMERATED {  
    v0,  
    v1,  
    ...  
}  
  
-- ** TODO **  
PrimaryCPICH-Power      ::= INTEGER  
  
PrimaryCPICH-EcNo      ::= INTEGER (-30..30)  
  
-- ** TODO **  
PrimaryCCPCH-RSCP      ::= INTEGER  
  
PrimaryScramblingCode  ::= ScramblingCode  
  
PropagationDelay       ::= INTEGER (0..255)  
  
SyncCase ::= ENUMERATED {  
    case1,  
    case2,  
    case3--,  
    ...  
}  
  
-- ** TODO **  
PSCH-CCPCH-TimeSlot    ::= TimeSlot  
  
-- ** TODO **  
PSCH-PCCPCH-TimeSlot   ::= TimeSlot  
  
-- ** TODO **  
P-CPICH-Power          ::= INTEGER  
  
PunctureLimit          ::= INTEGER (0..100)  
-- Unit is %  
  
-- Q  
-- R  
  
-- ** TODO **
```

Error! No text of specified style in document.

Error! No text of specified style in document.

```
RAC ::= INTEGER

-- ** TODO **
-- OCTET STRING?
RANAP-RelocationInformation ::= BIT STRING

RateMatchingAttribute ::= INTEGER (1..maxRateMatching)

RepetitionLength ::= INTEGER (1..63)

RepetitionPeriod ::= ENUMERATED {
    v1,
    v2,
    v4,
    v8,
    v16,
    v32,
    v64--,
    -- ...
}

-- This is changed from the tabular format because it seems that
-- this is what is wanted.
ReportCharacteristics ::= CHOICE {
    onDemand          NULL,
    periodic          Periodic,
    eventA            EventA,
    eventB            EventB,
    eventC            EventC,
    eventD            EventD,
    eventE            EventE,
    eventF            EventF--,
    -- ...
}

-- Changed
ReportPeriodicity ::= CHOICE {
    msec              INTEGER (1..1000),
    min               INTEGER (1..60)
}

RLC-Mode ::= ENUMERATED {
    acknowledged-mode,
    unacknowledged-mode,
    transparent-mode
}

RL-ID ::= INTEGER (0..31)

RNC-ID ::= INTEGER (0..4095)
```

Error! No text of specified style in document.

97

Error! No text of specified style in document.

```
-- S

-- Changed BIT STRING -> OCTET STRING
SAC ::= OCTET STRING (SIZE (2))

SAI ::= SEQUENCE {
    PLMN-ID          PLMN-ID,
    LAC              LAC,
    SAC              SAC,
    iE-Extensions   ProtocolExtensionContainer { {SAI-ExtIEs} } OPTIONAL
}

SAI-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** TODO **
ScramblingCode ::= INTEGER

ScramblingCodeChange ::= ENUMERATED {
    no-code-change,
    code-change
}

ScaledSIR-ErrorValue ::= INTEGER (-100..100)
-- ScaledSIR-ErrorValue = SIR-ErrorValue * 10
-- If SIR-ErrorValue <= -10 ScaledSIR-ErrorValue shall be set to -100
-- If SIR-ErrorValue >= 10 ScaledSIR-ErrorValue shall be set to 100
-- SIR-ErrorValue step 0.1 dB

ScaledSIR-Value ::= INTEGER (-100..200)
-- ScaledSIR-Value = SIR-Value * 10
-- SIR-Value step 0.1 dB

ScaledTransmittedCodePowerValue ::= INTEGER (-350..150)
-- ScaledTransmittedCodePowerValue = TransmittedCodePowerValue * 10
-- TransmittedCodePowerValue step 0.1 dB

-- ** TODO **
SharedChannelType ::= INTEGER

-- ** TODO **
SecondaryCCPCH-SlotFormat ::= INTEGER

SN ::= TimeSlot

SpreadingFactorOfChannelisationCode ::= ENUMERATED {
    v256,
    v128,
    v64,
    v32,
```

Error! No text of specified style in document.

98

Error! No text of specified style in document.

```
v16,  
v8,  
v4,  
v2,  
v1  
}  
  
-- Changed  
S-FieldLength ::= INTEGER (1..2)  
  
S-RNTI ::= INTEGER (0..1048575)  
-- From 0 to 2^20-1  
  
-- ** TODO **  
SRNC-ID ::= INTEGER  
  
SSDT-CellID ::= ENUMERATED {  
a,  
b,  
c,  
d,  
e,  
f,  
g,  
h  
}  
  
SSDT-CellID-Length ::= ENUMERATED {  
short,  
medium,  
long  
}  
  
SSDT-Indication ::= ENUMERATED {  
sSDT-active-in-the-UE,  
sSDT-not-active-in-the-UE  
}  
  
SSDT-SupportIndicator ::= ENUMERATED {  
sSDT-not-supported,  
sSDT-supported  
}  
  
-- T  
  
-- ** TODO **  
TBD ::= NULL  
-- Remove this type  
  
TDD-ChannelisationCode ::= INTEGER (1..31)
```

Error! No text of specified style in document.

99

Error! No text of specified style in document.

```
TDD-PhysicalChannelOffset      ::= INTEGER (0..63)

TFCI-Coding ::= ENUMERATED {
    v4,
    v8,
    v16,
    v32
}

TFCI-Presence ::= ENUMERATED {
    not-present,
    present
}

TFCI-SignallingMode ::= ENUMERATED {
    normal,
    split
}

-- ** TODO **
TimeReference      ::= INTEGER
-- TimeReference   ::= INTEGER (0..255)

TimeSlot           ::= INTEGER (0..14)

ToAWE              ::= INTEGER (0..2559)

ToAWS              ::= INTEGER (0..1279)

TPC-StepSize ::= ENUMERATED {
    half,
    one
}

TGD                ::= INTEGER (0..255)

TGL                ::= INTEGER (3| 4| 7| 10| 14)

TransmissionTimeInterval ::= ENUMERATED {
    msec-10,
    msec-20,
    msec-40,
    msec-80--,
    -- ...
}

TransportBearerID   ::= INTEGER (0..4095)

-- Compare title and IE name in table TransportBearerRequestIndicator vs.
-- FACH-PriorityIndicator
TransportBearerRequestIndicator ::= INTEGER { lowest (0), highest (15) } (0..15)
```



```
TransportBlockSize ::= INTEGER (1..5000)
-- Unit is bits

TransportFormatCombinationSet ::= SEQUENCE (SIZE (1..maxNrOfTFcs)) OF
    SEQUENCE {
        cTFC          CTFC,
        iE-Extensions ProtocolExtensionContainer { {TransportFormatCombinationSet-ExtIEs} } OPTIONAL,
        ...
    }

TransportFormatCombinationSet-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

TransportFormatSet ::= SEQUENCE {
    dynamicParts      TransportFormatSet-DynamicPartList,
    semi-staticPart   TransportFormatSet-Semi-staticPart,
    iE-Extensions     ProtocolExtensionContainer { {TransportFormatSet-ExtIEs} } OPTIONAL,
    ...
}

TransportFormatSet-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

TransportFormatSet-DynamicPartList ::= SEQUENCE (SIZE (1..maxNrOfTFs)) OF
    SEQUENCE {
        nrOfTransportBlocks      NrOfTransportBlocks,
        transportBlockSize       TransportBlockSize OPTIONAL
        -- This IE is only present if nrOfTransportBlocks is greater than 0 --,
        mode                     TransportFormatSet-ModeDP,
        iE-Extensions            ProtocolExtensionContainer { {TransportFormatSet-DynamicPartList-ExtIEs} } OPTIONAL,
        ...
    }

TransportFormatSet-DynamicPartList-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

TransportFormatSet-ModeDP ::= CHOICE {
    tdd          TransmissionTimeIntervallList,
    -- This IE is mandatory if not defined as semistatic parameter, otherwise it is absent --
    ...
}

TransmissionTimeIntervallList ::= SEQUENCE (SIZE (1..maxTTI-Count)) OF
    SEQUENCE {
        transmissionTimeInterval      TransmissionTimeIntervallList,
        iE-Extensions                 ProtocolExtensionContainer { {TransmissionTimeIntervallList-ExtIEs} } OPTIONAL,
        ...
    }
```

Error! No text of specified style in document.

101

Error! No text of specified style in document.

```
}
TransmissionTimeIntervalList-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}
TransportFormatSet-Semi-staticPart ::= SEQUENCE {
  transmissionTime      TransmissionTimeInterval,
  channelCoding         ChannelCodingType,
  codingRate            CodingRate OPTIONAL
  -- This IE is only present if channelCoding is 'convolutional' or 'turbo' --,
  rateMatchingAttribute RateMatchingAttribute,
  CRC-Size              CRC-Size,
  mode                  TransportFormatSet-ModeSSP OPTIONAL,
  iE-Extensions        ProtocolExtensionContainer { {TransportFormatSet-Semi-staticPart-ExtIEs} } OPTIONAL,
  ...
}
TransportFormatSet-Semi-staticPart-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}
TransportFormatSet-ModeSSP ::= CHOICE {
  tdd                    SecondInterleavingMode,
  ...
}
SecondInterleavingMode ::= ENUMERATED {
  frame-related,
  timeslot-related,
  ...
}
-- TransportLayerAddress ::= BIT STRING (1..160, ...)
TransportLayerAddress ::= OCTET STRING (SIZE (1..20, ...))
-- U
UARFCN ::= INTEGER (0..698, ...)
UL-DL-CompressedModeSelection ::= ENUMERATED {
  ul-only,
  dl-only,
  both
}
UL-DeltaEbNo ::= INTEGER (-60..100)
UL-DeltaEbNoAfter ::= INTEGER (-60..100)
-- ** TODO **
```

Error! No text of specified style in document.

Error! No text of specified style in document.

```
UL-EbNo ::= INTEGER

-- ** TODO **
UL-EbNoTarget ::= INTEGER

UC-ID ::= SEQUENCE {
    rNC-ID RNC-ID,
    c-ID C-ID,
    iE-Extensions ProtocolExtensionContainer { {UC-ID-ExtIEs} } OPTIONAL,
    ...
}

UC-ID-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

UL-DPCCH-SlotFormat ::= INTEGER (0..5)

ScaledUL-EbNo ::= INTEGER (0..255)
-- UL-EbNo = ScaledUL-EbNo / 10

UL-FP-Mode ::= ENUMERATED {
    normal,
    silent--,
    ...
}

ScaledUL-InterferenceLevel ::= INTEGER (-1280..-600)
-- UL-InterferenceLevel = UL-InterferenceLevel / 10

-- Relation to the ScramblingCode??
UL-ScramblingCode ::= SEQUENCE {
    ul-ScramblingCodeNumber UL-ScramblingCodeNumber,
    ul-ScramblingCodeLength UL-ScramblingCodeLength,
    iE-Extensions ProtocolExtensionContainer { {UL-ScramblingCode-ExtIEs} } OPTIONAL
}

UL-ScramblingCode-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

UL-ScramblingCodeLength ::= ENUMERATED {
    short,
    long
}

UL-ScramblingCodeNumber ::= INTEGER (0..16777215)

URA-ID ::= INTEGER (0..65535)

-- V
```

Error! No text of specified style in document.

Error! No text of specified style in document.

```
-- W  
-- X  
-- Y  
-- Z
```

END

9.3.5 Common Definitions

```
-- *****  
--  
-- Common definitions  
--  
-- *****
```

```
RNSAP-CommonDataTypes -- { object identifier to be allocated }--  
DEFINITIONS AUTOMATIC TAGS ::=
```

BEGIN

```
Criticality ::= ENUMERATED { reject, ignore, notify }
```

```
Presence ::= ENUMERATED { optional, conditional, mandatory }
```

```
PrivateExtensionID ::= CHOICE {  
  local INTEGER (0..65535),  
  global OBJECT IDENTIFIER  
}
```

```
ProcedureCode ::= INTEGER (0..255)
```

```
ProcedureID ::= SEQUENCE {  
  procedureCode ProcedureCode,  
  ddMode ENUMERATED { tdd, fdd, common }  
}
```

```
ProtocolExtensionID ::= INTEGER (0..65535)
```

```
ProtocolIE-ID ::= INTEGER (0..65535)
```

```
TransactionID ::= INTEGER (0..65535)
```

```
TriggeringMessage ::= ENUMERATED { initiating-message, successful-outcome, unsuccessful-outcome, outcome }
```

END

9.3.6 Constant Definitions

```
-- *****
```

```

--
-- Constant definitions
--
-- *****

RNSAP-Constants -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

-- *****
--
-- Elementary Procedures
--
-- *****

id-commonTransportChannelResourcesInitiationFDD          INTEGER ::= 0
id-commonTransportChannelResourcesInitiationTDD          INTEGER ::= 1
id-commonTransportChannelResourcesRelease                INTEGER ::= 2
id-compressedModeCancellationFDD                        INTEGER ::= 3
id-compressedModeCommitFDD                              INTEGER ::= 4
id-compressedModePrepareFDD                             INTEGER ::= 5
id-downlinkPowerControl                                 INTEGER ::= 6
id-downlinkSignallingTransfer                           INTEGER ::= 7
id-errorIndication                                      INTEGER ::= 8
id-measurementFailure                                  INTEGER ::= 9
id-measurementInitiation                                INTEGER ::= 10
id-measurementReporting                                  INTEGER ::= 11
id-measurementTermination                               INTEGER ::= 12
id-pagingRequest                                       INTEGER ::= 13
id-physicalChannelReconfiguration                       INTEGER ::= 14
id-privateMessage                                       INTEGER ::= 15
id-radioLinkAddition                                    INTEGER ::= 16
id-radioLinkDeletion                                    INTEGER ::= 17
id-radioLinkFailure                                    INTEGER ::= 18
id-radioLinkRestoration                                 INTEGER ::= 19
id-radioLinkSetup                                       INTEGER ::= 20
id-srnsRelocationCommit                                INTEGER ::= 21
id-synchronisedRadioLinkReconfigurationCancellation      INTEGER ::= 22
id-synchronisedRadioLinkReconfigurationCommit           INTEGER ::= 23
id-synchronisedRadioLinkReconfigurationPrepare          INTEGER ::= 24
id-unSynchronisedRadioLinkReconfiguration               INTEGER ::= 25
id-uplinkSignallingTransfer                             INTEGER ::= 26

-- *****
--
-- Extension constants
--
-- *****

maxPrivateExtensions                                    INTEGER ::= 65535

```

Error! No text of specified style in document.

Error! No text of specified style in document.

```
maxProtocolExtensions          INTEGER ::= 65535
maxProtocolIEs                 INTEGER ::= 65535

-- *****
--
-- Lists
--
-- *****

maxRateMatching                INTEGER ::= 10
maxNrOfTFCs                    INTEGER ::= 10
maxNrOfTFs                     INTEGER ::= 10

maxNoOfDL-Codes                INTEGER ::= 10
maxNrOfCCTrCHs                 INTEGER ::= 10
maxNrOfDCHs                    INTEGER ::= 10
maxNrOfDL-Codes                INTEGER ::= 10
maxNrOfDPCHs                   INTEGER ::= 10
maxNrOfErrors                  INTEGER ::= 10
maxNrOfFACH-FD-Size            INTEGER ::= 10
maxNrOfFDD-Neighbours           INTEGER ::= 10
maxNrOfMACcSDU-Length          INTEGER ::= 10
maxNrOfTDD-Neighbours          INTEGER ::= 10
maxNrOfRLs                     INTEGER ::= 10
maxNrOfSCCPCHs                 INTEGER ::= 10
maxRNCinURA                   INTEGER ::= 10
maxTTI-Count                   INTEGER ::= 10

-- *****
--
-- IEs
--
-- *****

id-AllowedQueuingTime          INTEGER ::= 0
id-BindingID                   INTEGER ::= 1
id-C-ID                         INTEGER ::= 2
id-C-RNTI                       INTEGER ::= 3
id-CCTrCH-ID                   INTEGER ::= 4
id-CFN                          INTEGER ::= 5
id-CN-CS-DomainIdentifier       INTEGER ::= 6
id-CN-PS-DomainIdentifier       INTEGER ::= 7
id-Cause                        INTEGER ::= 8
id-CompressedModeMethod        INTEGER ::= 9
id-D-RNTI                       INTEGER ::= 10
id-D-RNTI-ReleaseIndication    INTEGER ::= 11
id-DCH-AddItem                 INTEGER ::= 12
id-DCH-AddItem-RL-ReconfPrepFDD INTEGER ::= 13
id-DCH-AddItem-RL-ReconfPrepTDD INTEGER ::= 14
id-DCH-AddItem-RL-ReconfReadyFDD INTEGER ::= 15
id-DCH-AddItem-RL-ReconfRqstFDD INTEGER ::= 16
```

Error! No text of specified style in document.

Error! No text of specified style in document.

id-DCH-AddItem-RL-ReconfRqstTDD	INTEGER ::= 17
id-DCH-AddList-RL-ReconfPrepFDD	INTEGER ::= 18
id-DCH-AddList-RL-ReconfPrepTDD	INTEGER ::= 19
id-DCH-AddList-RL-ReconfRqstFDD	INTEGER ::= 20
id-DCH-AddList-RL-ReconfRqstTDD	INTEGER ::= 21
id-DCH-DeleteItem-RL-ReconfPrepFDD	INTEGER ::= 22
id-DCH-DeleteItem-RL-ReconfPrepTDD	INTEGER ::= 23
id-DCH-DeleteItem-RL-ReconfRqstFDD	INTEGER ::= 24
id-DCH-DeleteItem-RL-ReconfRqstTDD	INTEGER ::= 25
id-DCH-DeleteList-RL-ReconfPrepFDD	INTEGER ::= 26
id-DCH-DeleteList-RL-ReconfPrepTDD	INTEGER ::= 27
id-DCH-DeleteList-RL-ReconfRqstFDD	INTEGER ::= 28
id-DCH-DeleteList-RL-ReconfRqstTDD	INTEGER ::= 29
id-DCH-Information-RL-SetupReqFDD	INTEGER ::= 30
id-DCH-InformationItem-RL-SetupReqFDD	INTEGER ::= 31
id-DCH-InformationItem-RL-SetupReqTDD	INTEGER ::= 32
id-DCH-InformationList-RL-SetupReqTDD	INTEGER ::= 33
id-DCH-ModifyItem	INTEGER ::= 34
id-DCH-ModifyItem-RL-ReconfPrepFDD	INTEGER ::= 35
id-DCH-ModifyItem-RL-ReconfPrepTDD	INTEGER ::= 36
id-DCH-ModifyItem-RL-ReconfReadyFDD	INTEGER ::= 37
id-DCH-ModifyItem-RL-ReconfRqstFDD	INTEGER ::= 38
id-DCH-ModifyItem-RL-ReconfRqstTDD	INTEGER ::= 39
id-DCH-ModifyList-RL-ReconfPrepFDD	INTEGER ::= 40
id-DCH-ModifyList-RL-ReconfPrepTDD	INTEGER ::= 41
id-DCH-ModifyList-RL-ReconfRqstFDD	INTEGER ::= 42
id-DCH-ModifyList-RL-ReconfRqstTDD	INTEGER ::= 43
id-DL-CCTrCH-Information-RL-ReconfPrepTDD	INTEGER ::= 44
id-DL-CCTrCH-Information-RL-ReconfRqstTDD	INTEGER ::= 45
id-DL-CCTrCH-InformationList-RL-ReconfPrepTDD	INTEGER ::= 46
id-DL-CCTrCH-InformationList-RL-ReconfRqstTDD	INTEGER ::= 47
id-DL-CCTrChInformationItem-RL-SetupReqTDD	INTEGER ::= 48
id-DL-CCTrChInformationList-RL-SetupReqTDD	INTEGER ::= 49
id-DL-CodeInformation-PhyChReconfRqstFDD	INTEGER ::= 50
id-DL-DPCH-Information	INTEGER ::= 51
id-DL-DPCH-Information-RL-SetupReqFDD	INTEGER ::= 52
id-DL-DPCH-InformationList-PhyChReconfRqstTDD	INTEGER ::= 53
id-DL-DPCH-InformationList-RL-ReconfReadyTDD	INTEGER ::= 54
id-DL-EbNoTarget	INTEGER ::= 55
id-DL-FrameType	INTEGER ::= 56
id-DL-MeanBitRate	INTEGER ::= 57
id-DL-ReferencePowerInformation-DL-PC-Rqst	INTEGER ::= 58
id-DRX-Parameter	INTEGER ::= 59
id-DedicatedMeasurementObjectType-DM-Rprt	INTEGER ::= 60
id-DedicatedMeasurementObjectType-DM-Rqst	INTEGER ::= 61
id-DedicatedMeasurementObjectType-DM-Rspns	INTEGER ::= 62
id-FACH-InfoForOptionalGroupS-CCPCH	INTEGER ::= 63
id-FACH-InfoForOptionals-CCPCH	INTEGER ::= 64
id-FACH-InfoForS-CCPCH-CoupledToPRACHorPCPCH	INTEGER ::= 65
id-GapPositionMode	INTEGER ::= 66
id-L3-Information	INTEGER ::= 67

Error! No text of specified style in document.

Error! No text of specified style in document.

```
id-MeasurementCharacteristics          INTEGER ::= 68
id-MeasurementID                       INTEGER ::= 69
id-MultipleURAsIndicator                INTEGER ::= 70
id-PD                                  INTEGER ::= 71
id-PagingArea-PagingRqst               INTEGER ::= 72
id-PowerControlMode                    INTEGER ::= 73
id-PowerResumeMode                      INTEGER ::= 74
id-ProcedureScope-DL-PC-Rqst           INTEGER ::= 75
id-RANAP-RelocationInformation          INTEGER ::= 76
id-RL-Information-PhyChReconfRqstFDD    INTEGER ::= 77
id-RL-Information-PhyChReconfRqstTDD    INTEGER ::= 78
id-RL-Information-RL-AdditionRqstFDD    INTEGER ::= 79
id-RL-Information-RL-AdditionRqstTDD    INTEGER ::= 80
id-RL-Information-RL-DeletionRqst       INTEGER ::= 81
id-RL-Information-RL-FailureInd         INTEGER ::= 82
id-RL-Information-RL-ReconfPrepFDD      INTEGER ::= 83
id-RL-Information-RL-RestoreInd         INTEGER ::= 84
id-RL-Information-RL-SetupReqFDD        INTEGER ::= 85
id-RL-Information-RL-SetupReqTDD        INTEGER ::= 86
id-RL-InformationItem-DM-Rprt           INTEGER ::= 87
id-RL-InformationItem-DM-Rqst           INTEGER ::= 88
id-RL-InformationItem-DM-Rspns          INTEGER ::= 89
id-RL-InformationItem-RL-SetupReqFDD     INTEGER ::= 90
id-RL-InformationList-RL-AdditionRqstFDD INTEGER ::= 91
id-RL-InformationList-RL-DeletionRqst    INTEGER ::= 92
id-RL-InformationList-RL-FailureInd      INTEGER ::= 93
id-RL-InformationList-RL-ReconfPrepFDD   INTEGER ::= 94
id-RL-InformationList-RL-RestoreInd      INTEGER ::= 95
id-RL-InformationResponse-RL-AdditionRspTDD INTEGER ::= 96
id-RL-InformationResponse-RL-ReconfReadyTDD INTEGER ::= 97
id-RL-InformationResponse-RL-SetupRspTDD INTEGER ::= 98
id-RL-InformationResponseItem-RL-AdditionRspFDD INTEGER ::= 99
id-RL-InformationResponseItem-RL-ReconfReadyFDD INTEGER ::= 100
id-RL-InformationResponseItem-RL-SetupRspFDD INTEGER ::= 101
id-RL-InformationResponseList-RL-AdditionRspFDD INTEGER ::= 102
id-RL-InformationResponseList-RL-ReconfReadyFDD INTEGER ::= 103
id-RL-InformationResponseList-RL-SetupRspFDD INTEGER ::= 104
id-RL-ReconfigurationFailure-RL-ReconfFail INTEGER ::= 105
id-RL-ReconfigurationFailureList-RL-ReconfFail INTEGER ::= 106
id-RNCsWithCellsInTheAccessedURA-List-UL-ST-Ind INTEGER ::= 107
id-ReportCharacteristics                INTEGER ::= 108
id-S-RNTI                               INTEGER ::= 109
id-SAI                                  INTEGER ::= 110
id-SN                                   INTEGER ::= 111
id-SRNC-ID                              INTEGER ::= 112
id-ScramblingCodeChange                 INTEGER ::= 113
id-SuccessfulRL-InformationResponse-RL-AdditionFailureFDD INTEGER ::= 114
id-SuccessfulRL-InformationResponse-RL-SetupFailureFDD    INTEGER ::= 115
id-SuccessfulRL-InformationResponseList-RL-AdditionFailureFDD INTEGER ::= 116
id-SuccessfulRL-InformationResponseList-RL-SetupFailureFDD INTEGER ::= 117
id-TGD                                  INTEGER ::= 118
```


Error! No text of specified style in document.

Error! No text of specified style in document.

```
id-TGL INTEGER ::= 119
id-TGP1 INTEGER ::= 120
id-TGP2 INTEGER ::= 121
id-TransportBearerID INTEGER ::= 122
id-TransportBearerRequestIndicator INTEGER ::= 123
id-TransportLayerAddress INTEGER ::= 124
id-UC-ID INTEGER ::= 125
id-UL-CCTrCH-Information-RL-ReconfPrepTDD INTEGER ::= 126
id-UL-CCTrCH-Information-RL-ReconfRqstTDD INTEGER ::= 127
id-UL-CCTrCH-InformationList-RL-ReconfPrepTDD INTEGER ::= 128
id-UL-CCTrCH-InformationList-RL-ReconfRqstTDD INTEGER ::= 129
id-UL-CCTrChInformationItem-RL-SetupReqTDD INTEGER ::= 130
id-UL-CCTrChInformationList-RL-SetupReqTDD INTEGER ::= 131
id-UL-DL-CompressedModeSelection INTEGER ::= 132
id-UL-DPCH-Information INTEGER ::= 133
id-UL-DPCH-Information-RL-SetupReqFDD INTEGER ::= 134
id-UL-DPCH-InformationList-PhyChReconfRqstTDD INTEGER ::= 135
id-UL-DPCH-InformationList-RL-ReconfReadyTDD INTEGER ::= 136
id-UL-DeltaEbNo INTEGER ::= 137
id-UL-DeltaEbNoAfter INTEGER ::= 138
id-UL-EbNoTarget INTEGER ::= 139
id-UL-MeanBitRate INTEGER ::= 140
id-URA-ID INTEGER ::= 141
id-UnsuccessfulRL-InformationResponse INTEGER ::= 142
id-UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD INTEGER ::= 143
id-UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD INTEGER ::= 144
id-UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD INTEGER ::= 145
id-UnsuccessfulRL-InformationResponseList-RL-AdditionFailureFDD INTEGER ::= 146
id-UnsuccessfulRL-InformationResponseList-RL-SetupFailureFDD INTEGER ::= 147
id-CriticalityDiagnostics INTEGER ::= 148
```

END

9.3.7 Container Definitions

```
-- *****
--
-- Container definitions
--
-- *****

RNSAP-Containers -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

-- *****
--
-- IE parameter types from other modules.
--
-- *****
```

```

IMPORTS
    Criticality,
    Presence,
    PrivateExtensionID,
    ProtocolExtensionID,
    ProtocolIE-ID
FROM RNSAP-CommonDataTypes

    maxPrivateExtensions,
    maxProtocolExtensions,
    maxProtocolIEs
FROM RNSAP-Constants;

-- *****
--
-- Class Definition for Protocol IEs
--
-- *****

RNSAP-PROTOCOL-IES ::= CLASS {
    &id          ProtocolIE-ID          UNIQUE,
    &criticality Criticality,
    &Value,
    &presence    Presence
}
WITH SYNTAX {
    ID          &id
    CRITICALITY &criticality
    TYPE        &Value
    PRESENCE    &presence
}

-- *****
--
-- Class Definition for Protocol IEs
--
-- *****

RNSAP-PROTOCOL-IES-PAIR ::= CLASS {
    &id          ProtocolIE-ID          UNIQUE,
    &firstCriticality Criticality,
    &FirstValue,
    &secondCriticality Criticality,
    &SecondValue,
    &presence    Presence
}
WITH SYNTAX {
    ID          &id
    FIRST CRITICALITY &firstCriticality
    FIRST TYPE      &FirstValue
}

```

Error! No text of specified style in document.

Error! No text of specified style in document.

```
SECOND CRITICALITY      &secondCriticality
SECOND TYPE             &SecondValue
PRESENCE                &presence
}

-- *****
--
-- Class Definition for Protocol Extensions
--
-- *****

RNSAP-PROTOCOL-EXTENSION ::= CLASS {
    &id                ProtocolExtensionID          UNIQUE,
    &criticality       Criticality,
    &Extension
}
WITH SYNTAX {
    ID                &id
    CRITICALITY       &criticality
    EXTENSION         &Extension
}

-- *****
--
-- Class Definition for Private Extensions
--
-- *****

RNSAP-PRIVATE-EXTENSION ::= CLASS {
    &id                PrivateExtensionID,
    &criticality       Criticality,
    &Extension
}
WITH SYNTAX {
    ID                &id
    CRITICALITY       &criticality
    EXTENSION         &Extension
}

-- *****
--
-- Container for Protocol IEs
--
-- *****

ProtocolIE-Container {RNSAP-PROTOCOL-IES : IEsSetParam} ::=
    SEQUENCE (SIZE (0..maxProtocolIEs)) OF
    ProtocolIE-Field {{IEsSetParam}}

ProtocolIE-Field {RNSAP-PROTOCOL-IES : IEsSetParam} ::= SEQUENCE {
    id                RNSAP-PROTOCOL-IES.&id      ({IEsSetParam}),
```

Error! No text of specified style in document.

Error! No text of specified style in document.

```
    criticality      RNSAP-PROTOCOL-IES.&criticality      ({IESiParam}{@id}),
    value           RNSAP-PROTOCOL-IES.&Value           ({IESiParam}{@id})
}

-- *****
--
-- Container for Protocol IE Pairs
--
-- *****

ProtocolIE-ContainerPair {RNSAP-PROTOCOL-IES-PAIR : IESiParam} ::=
    SEQUENCE (SIZE (0..maxProtocolIEs)) OF
    ProtocolIE-FieldPair {{IESiParam}}

ProtocolIE-FieldPair {RNSAP-PROTOCOL-IES-PAIR : IESiParam} ::= SEQUENCE {
    id                RNSAP-PROTOCOL-IES-PAIR.&id                ({IESiParam}),
    firstCriticality  RNSAP-PROTOCOL-IES-PAIR.&firstCriticality  ({IESiParam}{@id}),
    firstValue       RNSAP-PROTOCOL-IES-PAIR.&FirstValue       ({IESiParam}{@id}),
    secondCriticality RNSAP-PROTOCOL-IES-PAIR.&secondCriticality ({IESiParam}{@id}),
    secondValue      RNSAP-PROTOCOL-IES-PAIR.&SecondValue      ({IESiParam}{@id})
}

-- *****
--
-- Container Lists for Protocol IE Containers
--
-- *****

ProtocolIE-ContainerList {INTEGER : lowerBound, INTEGER : upperBound, RNSAP-PROTOCOL-IES : IESiParam} ::=
    SEQUENCE (SIZE (lowerBound..upperBound)) OF
    ProtocolIE-Container {{IESiParam}}

ProtocolIE-ContainerPairList {INTEGER : lowerBound, INTEGER : upperBound, RNSAP-PROTOCOL-IES-PAIR : IESiParam} ::=
    SEQUENCE (SIZE (lowerBound..upperBound)) OF
    ProtocolIE-ContainerPair {{IESiParam}}

-- *****
--
-- Container for Protocol Extensions
--
-- *****

ProtocolExtensionContainer {RNSAP-PROTOCOL-EXTENSION : ExtensioniParam} ::=
    SEQUENCE (SIZE (1..maxProtocolExtensions)) OF
    ProtocolExtensionField {{ExtensioniParam}}

ProtocolExtensionField {RNSAP-PROTOCOL-EXTENSION : ExtensioniParam} ::= SEQUENCE {
    id                RNSAP-PROTOCOL-EXTENSION.&id                ({ExtensioniParam}),
    criticality       RNSAP-PROTOCOL-EXTENSION.&criticality       ({ExtensioniParam}{@id}),
    extensionValue    RNSAP-PROTOCOL-EXTENSION.&Extension        ({ExtensioniParam}{@id})
}
```

Error! No text of specified style in document.

Error! No text of specified style in document.

```
-- *****
--
-- Container for Private Extensions
--
-- *****

PrivateExtensionContainer {RNSAP-PRIVATE-EXTENSION : ExtensionSetParam} ::=
  SEQUENCE (SIZE (1..maxPrivateExtensions)) OF
  PrivateExtensionField {{ExtensionSetParam}}

PrivateExtensionField {RNSAP-PRIVATE-EXTENSION : ExtensionSetParam} ::= SEQUENCE {
  id                RNSAP-PRIVATE-EXTENSION.&id                ({ExtensionSetParam}),
  criticality       RNSAP-PRIVATE-EXTENSION.&criticality       ({ExtensionSetParam}@id}),
  extensionValue    RNSAP-PRIVATE-EXTENSION.&Extension         ({ExtensionSetParam}@id)}
}

END
```

3GPP-RAN-WG3 Meeting #10
Sophia Antipolis, 28 February- 3 March 2000

e.g. for 3GPP use the format TP-99xxx
 or for SMG, use the format P-99-xxx

<h2 style="margin: 0;">CHANGE REQUEST</h2>		Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.
25.423	CR	051r1
		Current Version: 3.0.0
GSM (AA.BB) or 3G (AA.BBB) specification number ↑		↑ CR number as allocated by MCC support team
For submission to: TSG RAN#7 <small>list expected approval meeting # here ↑</small>	for approval for information	strategic <input type="checkbox"/> non-strategic <input type="checkbox"/> <small>(for SMG use only)</small>
Form: CR cover sheet, version 2 for 3GPP and SMG		The latest version of this form is available from: ftp://ftp.3gpp.org/Information/CR-Form-v2.doc

Proposed change affects: (U)SIM ME UTRAN / Radio Core Network
(at least one should be marked with an X)

Source: RAN-WG3 **Date:** 28th February 2000

Subject: Some Editorial modifications to RNSAP

Work item:

Category:	F Correction <input type="checkbox"/> A Corresponds to a correction in an earlier release <input type="checkbox"/> B Addition of feature <input type="checkbox"/> C Functional modification of feature <input type="checkbox"/> D Editorial modification <input checked="" type="checkbox"/>		Release:	Phase 2 <input type="checkbox"/> Release 96 <input type="checkbox"/> Release 97 <input type="checkbox"/> Release 98 <input type="checkbox"/> Release 99 <input checked="" type="checkbox"/> Release 00 <input type="checkbox"/>
------------------	--	--	-----------------	--

(only one category Shall be marked With an X)

Reason for change: This CR modifies two minor editorial errors:

- In section 9.2.1.1 "Allocation/Retention Priority", "9.2.1.1" shall be deleted from the **IE/Group Name** column
- LAC in CN CS Domain Identifier shall occupy only "2oct". while the current RNSAP V3.0.0 specifies "3oct". (ASN.1 is already correct.)

Clauses affected: 9.2.1.1 Allocation/Retention Priority
 9.2.1.9 CN CS Domain Identifier

Other specs Affected:	Other 3G core specifications <input type="checkbox"/> Other GSM core specifications <input type="checkbox"/> MS test specifications <input type="checkbox"/> BSS test specifications <input type="checkbox"/> O&M specifications <input type="checkbox"/>	→ List of CRs: → List of CRs: → List of CRs: → List of CRs: → List of CRs:	
------------------------------	---	--	--

Other comments:



<----- double-click here for help and instructions on how to create a CR.

9.2.1.1 Allocation/Retention Priority

This parameter indicates the priority level in the allocation and retention of DCH resources in DRNS.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
9.2.1.1 -Allocation/Retention Priority			Frame Handling Priority	

9.2.1.9 CN CS Domain Identifier

Identification of the CN node in the CS Domain.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
CN PS Domain Identifier				
PLMN Id	M		OCTET STRING (3)	<ul style="list-style-type: none"> - digits 0 to 9, two digits per octet, - each digit encoded 0000 to 1001, - 1111 used as filler - bit 4 to 1 of octet n encoding digit 2n-1 - bit 8 to 5 of octet n encoding digit 2n <p>-The PLMN-ID consists of 3 digits from MCC followed by either</p> <ul style="list-style-type: none"> -a filler plus 2 digits from MNC (in case of 2 digit MNC) or -3 digits from MNC (in case of a 3 digit MNC).
LAC	M		OCTET STRING (2 3)	0000 and FFFE not allowed

CHANGE REQUEST

Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.

25.423 CR 63r2

Current Version: **3.0.0**

GSM (AA.BB) or 3G (AA.BBB) specification number ↑

↑ CR number as allocated by MCC support team

For submission to: **TSG RAN #7**
list expected approval meeting # here
↑

for approval
for information

Strategic
non-strategic (for SMG use only)

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: <ftp://ftp.3gpp.org/Information/CR-Form-v2.doc>

Proposed change affects: (U)SIM ME UTRAN / Radio Core Network
(at least one should be marked with an X)

Source: RAN-WG3 **Date:** 2 Mar 2000

Subject: Editorial modifications of RNSAP version 3.0.0

Work item:

Category:	F Correction	<input type="checkbox"/>	Release:	Phase 2	<input type="checkbox"/>
<small>(only one category shall be marked with an X)</small>	A Corresponds to a correction in an earlier release	<input type="checkbox"/>		Release 96	<input type="checkbox"/>
	B Addition of feature	<input type="checkbox"/>		Release 97	<input type="checkbox"/>
	C Functional modification of feature	<input type="checkbox"/>		Release 98	<input type="checkbox"/>
	D Editorial modification	<input checked="" type="checkbox"/>		Release 99	<input checked="" type="checkbox"/>
				Release 00	<input type="checkbox"/>

Reason for change:

Clauses affected: 8.3.1.2, 9.1.4, 9.1.21, 9.1.36, 9.3.3

Other specs affected:	Other 3G core specifications	<input type="checkbox"/>	→ List of CRs:	
	Other GSM core specifications	<input type="checkbox"/>	→ List of CRs:	
	MS test specifications	<input type="checkbox"/>	→ List of CRs:	
	BSS test specifications	<input type="checkbox"/>	→ List of CRs:	
	O&M specifications	<input type="checkbox"/>	→ List of CRs:	

Other comments: revision 1:
In '9.1.36.2 COMMON TRANSPORT CHANNEL RESOURCES RESPONSE – TDD' the *STTD indicator* IE has been removed from the *Secondary CCPCH* group according to CR10 for NBAP (R3-000229).

8.3 DCH procedures

8.3.1 Radio Link Setup

8.3.1.1 General

This procedure is used for establishing the necessary resources in the DRNS for one or more radio links.

This procedure shall use the connection-oriented service of the signalling bearer.

8.3.1.2 Successful Operation

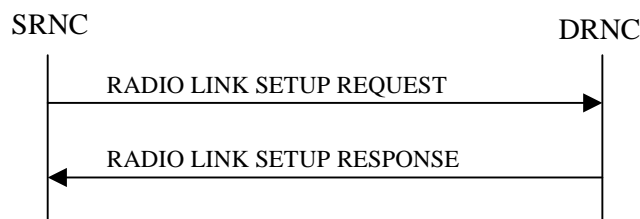


Figure 1: Radio Link Setup procedure: Successful Operation

When the SRNC makes an algorithmic decision to add the first cell or set of cells from a DRNS to the active set of a specific RRC connection, the RADIO LINK SETUP REQUEST message is sent to the corresponding DRNC to request setup of the radio link(s).

The message is also used to establish the connection-oriented service of the signalling bearer in the DRNC. The message includes the S-RNTI associated to the UE, and, if the UE context is already present in the DRNC, the corresponding D-RNTI.

[FDD - The Diversity Control Field indicates for each RL except for the first RL whether the DRNS shall combine the RL with any of the other RLs or not on the Iur. If the *Diversity Control Field* IE is set to "May" (be combined with another RL), then the DRNS shall decide for any of the alternatives. When an RL is to be combined the DRNS shall choose which RL(s) to combine it with.]

If the RADIO LINK SETUP REQUEST message includes the *Allowed Queuing Time* IE the DRNS may queue the request before providing a response to the SRNC.

[FDD - If the *Initial DL TX Power* IE and *Uplink Eb/No Target* IE are present in the message, the DRNS shall use the indicated DL TX Power and Uplink Eb/No Target as initial value.]

If the *Primary CPICH Ec/No* IE [FDD] or the *Primary CCPCH RSCP* IE [TDD] is present, the DRNC should use them when deciding the Initial DL TX Power.

If the RADIO LINK SETUP REQUEST message includes the *DCH Combination Indicator* IE for a DCH, the DRNS shall treat all DCHs with the same value of this IE as a set of co-ordinated DCHs. The included *RLC Mode* IE of the DCH may be used by the DRNS to optimise the power control.

The *Allocation/Retention Priority* IE defines the priority level that should be used by the DRNS to prioritise the allocation and the retention of the resources used by the DCH. The *Frame Handling Priority* IE defines the priority level that should be used by the DRNS to prioritise the discard/delay of the data frames of the DCH.

The DRNS shall use the included *UL DCH FP Mode* IE for a DCH as the new DCH FP Mode in the Uplink of the user plane for this DCH.

The DRNS shall use the included *ToAWS* IE for a DCH as the new Time of Arrival Window Start Point in the user plane for this DCH.

The DRNS shall use the included *ToAWE* IE for a DCH as the new Time of Arrival Window End Point in the user plane for this DCH.

[FDD - If the RADIO LINK SETUP REQUEST message includes the *SSDT Cell Identity* IE, the DRNS may activate SSDT using the *SSDT Cell Identity* IE and *SSDT Cell Identity Length* IE.]

At the reception of the RADIO LINK SETUP REQUEST message, DRNS allocates requested type of channelisation codes and other physical channel resources for each RL and assigns a binding identifier and a transport layer address for each DCH or set of co-ordinated DCHs. This information shall be sent to the SRNS in the message RADIO LINK SETUP RESPONSE when all the RLs have been successfully setup.

[FDD - If the *Initial DL TX Power* and the *Uplink Eb/No Target* IEs are not present in the RADIO LINK SETUP REQUEST message, then DRNC shall include the suggested initial Uplink and Downlink Eb/No Targets in the RADIO LINK SETUP RESPONSE message.]

In the case of combining one or more RLs the DRNC shall indicate in the RADIO LINK SETUP RESPONSE message with the *Diversity Indication* that the RL is combined with another RL. In this case the Reference RL ID shall be included to indicate with which RL the combination is performed. The Reference RL ID shall be included for all but one of the combined RLs, for which the *Transport Layer Address* IE and the *Binding ID* IE shall be included.

In the case of not combining an RL with another RL, the DRNC shall indicate in the RADIO LINK SETUP RESPONSE message with the *Diversity Indication* IE that no combining is performed. In this case the DRNC shall include both the *Transport Layer Address* IE and the *Binding ID* IE for the transport bearer to be established for each DCH of the RL in the RADIO LINK SETUP RESPONSE message.

In case of a set of co-ordinated DCHs requiring a new transport bearer on Iur the *Binding Identifier* IE and the *Transport Layer Address* IE shall be included only for one of the DCH in the set of co-ordinated DCHs.

[FDD - Irrespective of SSDT activation, the DRNS shall include in the RADIO LINK SETUP RESPONSE message an indication concerning the capability to support SSDT on this RL. Only if the RADIO LINK SETUP REQUEST message requested SSDT activation and the RADIO LINK SETUP RESPONSE message indicates that the SSDT capability is supported for this RL, SSDT is activated in the DRNS.]

The DRNS shall also provide the SRNC with the UTRAN Cell Identifier (UC-Id) and information of the neighbouring cells to the cell(s) where the radio link(s) are added.

If a neighbouring cell is controlled by another RNC, the DRNC shall report also the node identifications (i.e. RNC, CN domain nodes) of the RNC controlling the neighbouring cell.

If there was no UE context for this UE in the DRNS before the RADIO LINK SETUP REQUEST message was received the DRNC shall include the node identifications of the CN Domain nodes that the RNC is connected to (using LAC and RAC of the current cell), and the D-RNTI in the RADIO LINK SETUP RESPONSE message.

8.3.1.3 Unsuccessful Operation

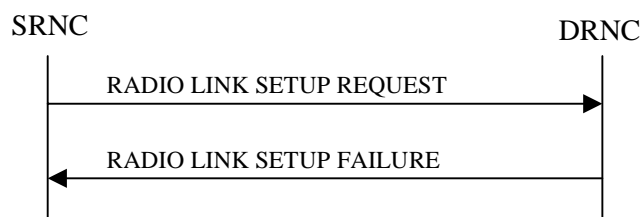


Figure 2: Radio Link Setup procedure: Unsuccessful Operation

In unsuccessful case (i.e. one or more RLs can not be setup) the RADIO LINK SETUP FAILURE message shall be sent to the SRNC, indicating the reason for failure. If some radio links were established successfully, the DRNC shall indicate this in the RADIO LINK SETUP FAILURE message in the same way as in the RADIO LINK SETUP RESPONSE message.

Typical cause values are:

9.1.4 RADIO LINK SETUP RESPONSE

9.1.4.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
D-RNTI	O			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
RL Information Response		1		
RL ID	M			
SAI	M			
UL Interference Level	M			
Maximum Uplink Eb/No	M		Uplink Eb/No	
Minimum Uplink Eb/No	M		Uplink Eb/No	
Uplink Eb/No Target	OM		Uplink Eb/No	
Downlink Eb/No Target	OM		Uplink Eb/No	
UL CCTrCH Information		1..<maxnoofCCTrCHs>		
CCTrCH ID	M			
UL DPCH Information		1..<MaxnoofDPC Hs>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
DL CCTrCH Information		1..<maxnoofCCTrCHs>		
CCTrCH ID	M			
DL DPCH Information		1..<MaxnoofDPC Hs>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
DCH Information Response		1..<maxnoofDCHs >		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
Neighbouring FDD Cell Information	O	0..<maxnoofFDDneighbours>		
UC-Id	M			

CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
Neighbouring TDD Cell Information	O	<i>0..<maxnoofTDDn neighbours></i>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case1			
PSCH Time Slot	C- Case2&3			
Criticality Diagnostics	O			

Condition	Explanation
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range bound	Explanation
MaxnoofDPCHs	Maximum number of DPCHs for one CCTrCH.
MaxnoofDCHs	Maximum number of DCHs for one UE.
MaxnoofFDDneighbours	Maximum number of neighbouring FDD cell for one cell
MaxnoofTDDneighbours	Maximum number of neighbouring TDD cell for one cell
MaxnoofCCTrCHs	Maximum number of CCTrCH for one UE.

9.1.21 PHYSICAL CHANNEL RECONFIGURATION REQUEST

9.1.21.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
RL Information		1		
RL ID	M			
UL CTrCH Information		1..<maxnoofCTrCHs>		
CTrCH ID	M			
UL DPCH Information		1..<MaxnoofDPC Hs>		
DPCH ID	M			
TDD Channelisation Code	O			
Burst Type	O			
Midamble Shift	O			
Time Slot	O			
TDD Physical Channel Offset	O			
Repetition Period	O			
Repetition Length	O			
TFCI Presence	O			
DL CTrCH Information		1..<maxnoofCTrCHs>		
CTrCH ID	M			
DL DPCH Information		1..<MaxnoofDPC Hs>		
DPCH ID	M			
TDD Channelisation Code	O			
Burst Type	O			
Midamble Shift	O			
Time Slot	O			
TDD Physical Channel Offset	O			
Repetition Period	O			
Repetition Length	O			
TFCI Presence	O			

Range bound	Explanation
MaxnoofDPCHs	Maximum number of DPCHs for one CTrCH.
MaxnoofCTrCHs	Maximum number of CTrCHs for a UE.

9.1.36 COMMON TRANSPORT CHANNEL RESOURCES RESPONSE

9.1.36.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
S-RNTI	M			
FACH Info for S-CCPCH coupled to PRACH				
Priority Indicator & Initial Window Size		1..16		Provide Information for each priority class used
FACH Priority Indicator	M			
MAC-c SDU Length		1..<MaxNbMACcSDULength>		
MAC-c SDU Length	M			
FACH Initial Window Size	M			
FACH Info for optional S-CCPCH	O			
FDD S-CCPCH Offset	M			Corresponds to: $\tau_{S-CCPCH,k}$, see ref. [Error! Reference source not found.]
DL Scrambling Code	M			
FDD DL Channelisation Code Number	M			
TFCS	M			For the DL.
Secondary CCPCH Slot Format	M			
Pilot Bits Used Indicator	M			
MultiplexingPosition	M			
STTD Indicator	M			
Priority Indicator & Initial Window Size		1..16		Provide Information for each priority class used
FACH Priority Indicator	M			
Data Frame Size		1..<MaxNbMACcSDULength>		
MAC-c SDU Length	M			
FACH Initial Window Size	M			
Transport Layer Address	O			
Binding Identity	O			
Criticality Diagnostics	O			

Range Bound	Explanation
MaxNbMACcSDULength	Maximum number of different MAC-c SDU Lengths.

9.1.36.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
S-RNTI	M			
FACH Info for S-CCPCHs coupled to PRACH		0 .. 1		
Priority Indicator & Initial Window Size		1 .. 16		Provide Information for each priority class used
FACH Priority Indicator	M			
MAC-c SDU Length		1..<MaxNbMACcSDU Length>		
MAC-c SDU Length	M			
FACH Initial Window Size	M			
FACH Info for optional group of S-CCPCHs		0 .. 1		
TFCS	M			For DL CCTrCH supporting several Secondary CCPCHs
Secondary CCPCH	M	1..<MaxnoofSCCPC Hs>		
TDD Channelisation Code	M			
Time Slot	M			
Burst Type	M			
Midamble shift	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
STTD Indicator	M			
Priority Indicator & Initial Window Size		1..16		Provide Information for each priority class used
FACH Priority Indicator	M			
Data Frame Size		1..<MaxNbMACcSDU Length>		
MAC-c SDU Length	M			
FACH Initial Window Size	M			
Transport Layer Address	O			
Binding Identity	O			
Criticality Diagnostics	O			

Range Bound	Explanation
MaxNbMACcSDULength	Maximum number of different MAC-c SDU Lengths.
MaxnoofSCCPC Hs	TBD

9.3.3 PDU Definitions

```

-- *****
--
-- PDU definitions for RNSAP.
--
-- *****
.
.
.
-- *****
--
-- RADIO LINK SETUP RESPONSE TDD
--
-- *****

RadioLinkSetupResponseTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkSetupResponseTDD-IEs}},
    protocolExtensions  ProtocolExtensionContainer {{RadioLinkSetupResponseTDD-Extensions}}          OPTIONAL,
    ...
}

RadioLinkSetupResponseTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI          CRITICALITY ignore TYPE D-RNTI          PRESENCE optional } |
    { ID id-CN-PS-DomainIdentifier CRITICALITY ignore TYPE CN-PS-DomainIdentifier PRESENCE optional } |
    { ID id-CN-CS-DomainIdentifier CRITICALITY ignore TYPE CN-CS-DomainIdentifier PRESENCE optional } |
    { ID id-RL-InformationResponse-RL-SetupRspTDD CRITICALITY ignore TYPE RL-InformationResponse-RL-SetupRspTDD PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
    ...
}

RL-InformationResponse-RL-SetupRspTDD ::= SEQUENCE {
    rL-ID          RL-ID,
    sAI            SAI,
    ul-InterferenceLevel ScaledUL-InterferenceLevel,
    maxUL-EbNo     UL-EbNo,
    minUL-EbNo     UL-EbNo,
    ul-EbNoTarget  UL-EbNo OPTIONAL,
    dl-EbNoTarget  DL-EbNo OPTIONAL,
    ul-CCTrCHInformation UL-CCTrCHInformationList-RL-SetupRspTDD,
    dl-CCTrCHInformation DL-CCTrCHInformationList-RL-SetupRspTDD,
    dCH-InformationResponse DCH-InformationResponseList-RL-SetupRspTDD,
    neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-SetupRsp OPTIONAL,
    neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-SetupRsp OPTIONAL,
    iE-Extensions  ProtocolExtensionContainer { {RL-InformationResponse-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

RL-InformationResponse-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {

```



```

    ...
}

-- ** NOTE: Shall this be made as an IE container? **
UL-CCTrCHInformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF UL-CCTrCHInformationItem-RL-SetupRspTDD

UL-CCTrCHInformationItem-RL-SetupRspTDD ::= SEQUENCE {
    cCTrCH-ID                CCTrCH-ID,
    ul-DPCH-Information      UL-DPCH-InformationList-RL-SetupRspTDD,
    iE-Extensions            ProtocolExtensionContainer { {UL-CCTrCHInformationItem-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

UL-CCTrCHInformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
UL-DPCH-InformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF UL-DPCH-InformationItem-RL-SetupRspTDD

-- **NOTE: UL-DPCH-InformationItem-RL-SetupRspTDD and DL-DPCH-InformationItem-RL-SetupRspTDD
-- are currently similar. Combine them? **
UL-DPCH-InformationItem-RL-SetupRspTDD ::= SEQUENCE {
    dPCH-ID                DPCH-ID,
    tDD-ChannelisationCode  TDD-ChannelisationCode,
    burstType               BurstType,
    midambleShift           MidambleShift,
    timeSlot                TimeSlot,
    tDD-PhysicalChannelOffset TDD-PhysicalChannelOffset,
    repetitionPeriod        RepetitionPeriod,
    repetitionLength        RepetitionLength,
    tFCI-Presence           TFCI-Presence,
    iE-Extensions            ProtocolExtensionContainer { {UL-DPCH-InformationItem-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

UL-DPCH-InformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CCTrCHInformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF DL-CCTrCHInformationItem-RL-SetupRspTDD

DL-CCTrCHInformationItem-RL-SetupRspTDD ::= SEQUENCE {
    cCTrCH-ID                CCTrCH-ID,
    dl-DPCH-Information      DL-DPCH-InformationList-RL-SetupRspTDD,
    iE-Extensions            ProtocolExtensionContainer { {DL-CCTrCHInformationItem-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CCTrCHInformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

-- ** NOTE: Shall this be made as an IE container? **

DL-DPCH-InformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF DL-DPCH-InformationItem-RL-SetupRspTDD

```
DL-DPCH-InformationItem-RL-SetupRspTDD ::= SEQUENCE {
    dPCH-ID                DPCH-ID,
    tDD-ChannelisationCode TDD-ChannelisationCode,
    burstType              BurstType,
    midambleShift          MidambleShift,
    timeSlot               TimeSlot,
    tDD-PhysicalChannelOffset TDD-PhysicalChannelOffset,
    repetitionPeriod       RepetitionPeriod,
    repetitionLength       RepetitionLength,
    tFCI-Presence          TFCI-Presence,
    iE-Extensions          ProtocolExtensionContainer { {DL-DPCH-InformationItem-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}
```

```
DL-DPCH-InformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}
```

DCH-InformationResponseList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-InformationResponseItem-RL-SetupRspTDD

```
DCH-InformationResponseItem-RL-SetupRspTDD ::= SEQUENCE {
    dCH-ID                DCH-ID,
    bindingID             BindingID,
    transportLayerAddress TransportLayerAddress,
    iE-Extensions          ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}
```

```
DCH-InformationResponseItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}
```

```
RadioLinkSetupResponseTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}
```

-
-
-

```

.
.
.

-- *****
--
-- COMMON TRANSPORT CHANNEL RESOURCES RESPONSE TDD
--
-- *****

CommonTransportChannelResourcesResponseTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container      {{CommonTransportChannelResourcesResponseTDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CommonTransportChannelResourcesResponseTDD-Extensions}} OPTIONAL,
    ...
}

CommonTransportChannelResourcesResponseTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-S-RNTI          CRITICALITY ignore TYPE S-RNTI          PRESENCE mandatory } |
    { ID id-FACH-InfoForS-CCPCH-CoupledToPRACH CRITICALITY ignore TYPE FACH-InfoForS-CCPCH-CoupledToPRACH PRESENCE optional } |
    { ID id-FACH-InfoForOptionalGroupS-CCPCH   CRITICALITY ignore TYPE FACH-InfoForOptionalGroupOfS-CCPCH   PRESENCE optional } |
    { ID id-TransportLayerAddress              CRITICALITY ignore TYPE TransportLayerAddress              PRESENCE optional } |
    { ID id-BindingID                          CRITICALITY ignore TYPE BindingID                          PRESENCE optional } |
    { ID id-CriticalityDiagnostics             CRITICALITY ignore TYPE CriticalityDiagnostics             PRESENCE optional },
    ...
}

FACH-InfoForOptionalGroupOfS-CCPCH ::= SEQUENCE {
    dl-TFCS          TransportFormatCombinationSet,
    secondaryCCPCHs SecondaryCCPCH-TDD-List,
    iE-Extensions   ProtocolExtensionContainer { {FACH-InfoForOptionalGroupOfS-CCPCH-ExtIEs} } OPTIONAL,
    ...
}

FACH-InfoForOptionalGroupOfS-CCPCH-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

SecondaryCCPCH-TDD-List ::= SEQUENCE (SIZE (1..maxNrOfSCCPCHs)) OF
SEQUENCE {
    tdd-ChannelisationCode      TDD-ChannelisationCode,
    timeSlot                    TimeSlot,
    burstType                   BurstType,
    midambleShift               MidambleShift,
    tdd-PhysicalChannelOffset   TDD-PhysicalChannelOffset,
    repetitionPeriod            RepetitionPeriod,
    repetitionLength            RepetitionLength,
    sSDT Indication        sSDT Indication,
    priorityIndicatorAndInitialWindowSizeList PriorityIndicatorAndInitialWindowSizeList,
    iE-Extensions               ProtocolExtensionContainer { {SecondaryCCPCH-TDD-List-ExtIEs} } OPTIONAL,
    ...
}

```

```
    }  
SecondaryCCPCH-TDD-List-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {  
    ...  
}  
CommonTransportChannelResourcesResponseTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {  
    ...  
}
```

CHANGE REQUEST

Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.

25.423 CR 034r1

Current Version: **3.0.0**

GSM (AA.BB) or 3G (AA.BBB) specification number ↑

↑ CR number as allocated by MCC support team

For submission to: **RAN #7**
list expected approval meeting # here
↑

for approval
for information

strategic
non-strategic (for SMG use only)

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: [ftp://ftp.3gpp.org/Information/CR-Form-v2.doc](http://ftp.3gpp.org/Information/CR-Form-v2.doc)

Proposed change affects: (U)SIM ME UTRAN / Radio Core Network
(at least one should be marked with an X)

Source: **RAN-WG3** **Date:** **March 1, 2000**

Subject: **Removal of Sync Case 3**

Work item: _____

Category:	F Correction <input checked="" type="checkbox"/> A Corresponds to a correction in an earlier release <input type="checkbox"/> B Addition of feature <input type="checkbox"/> C Functional modification of feature <input type="checkbox"/> D Editorial modification <input type="checkbox"/>	Release:	Phase 2 <input type="checkbox"/> Release 96 <input type="checkbox"/> Release 97 <input type="checkbox"/> Release 98 <input type="checkbox"/> Release 99 <input checked="" type="checkbox"/> Release 00 <input type="checkbox"/>
------------------	--	-----------------	--

(only one category shall be marked with an X)

Reason for change: This document aligns TS 25.423 with the decision made at RAN1#11 and removes the Sync Case 3 for TDD related to Cell configuration. By this modification the previous defined transport channel SCH is removed and the Physical channel is renamed from PSCH to SCH.

Clauses affected: 3.3, 9.1.4.1, 9.1.4.2, 9.1.5.1, 9.1.7.1, 9.1.7.2, 9.1.8.1, 9.2.1.35, 9.2.1.44, 9.3.3, 9.3.4

Other specs affected:	Other 3G core specifications <input checked="" type="checkbox"/> Other GSM core specifications <input type="checkbox"/> MS test specifications <input type="checkbox"/> BSS test specifications <input type="checkbox"/> O&M specifications <input type="checkbox"/>	→ List of CRs: R1-000220, R3-000667, R3-000548 → List of CRs: → List of CRs: → List of CRs: → List of CRs:
------------------------------	--	--

Other comments: _____



<----- double-click here for help and instructions on how to create a CR.

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ASN.1	Abstract Syntax Notation One
ATM	Asynchronous Transfer Mode
BCCH	Broadcast Control Channel
BLER	Block Error Rate
CCPCH	Common Control Physical Channel
CCTrCH	Coded Composite Transport Channel
CFN	Connection Frame Number
CN	Core Network
CRNC	Controlling RNC
CPICH	Common Pilot Channel
DCH	Dedicated Channel
DL	Downlink
DPCCH	Dedicated Physical Control Channel
DPCH	Dedicated Physical Channel
DRNC	Drift RNC
DRNS	Drift RNS
DRX	Discontinuous Reception
DSCH	Downlink Shared Channel
FN	Frame Number
FP	Frame Protocol
MAC	Medium Access Control
PDU	Protocol Data Unit
PSCH	Physical Synchronisation Channel
RAB	Radio Access Bearer
RL	Radio Link
RLC	Radio Link Control
RNS	Radio Network Subsystem
RNSAP	Radio Network Subsystem Application Part
RNTI	Radio Network Temporary Identifier
RRC	Radio Resource Control
RSCP	Received Signal Code Power
SCH	Synchronisation Channel
SFN	System Frame Number
SRNC	Serving RNC
SRNS	Serving RNS
SSDT	Site Selection Diversity Transmit
TFCI	Transport Format Combination Indicator
TFCS	Transport Format Combination Set
TFS	Transport Format Set
UARFCN	UMTS Absolute Radio Frequency Channel Number
UE	User Equipment
UL	Uplink
URA	UTRAN Registration Area
UTRAN	UMTS Terrestrial Radio Access Network

9.1.4 RADIO LINK SETUP RESPONSE

9.1.4.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
D-RNTI	O			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
RL Information Response		1..<maxnoofRLs>		
RL ID	M			
SAI	M			
UL Interference Level	M			
DL Code Information		1..<maxnoofDLCode s>		
DL Scrambling Code	M			
FDD DL Channelisation Code Number	M			
Diversity Indication	C-NotFirstRL			
CHOICE <i>diversity Indication Combining</i>				
RL ID	M			Reference RL ID for the combining
<i>Non Combining or IE not present</i>				"IE not present" is equivalent to "First RL".
DCH Information Response		0..<maxnoofDCHs >		Only one DCH per set of co-ordinated DCHs shall be included
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
SSDT Support Indicator	M			
Maximum Uplink Eb/No	M		Uplink Eb/No	
Minimum Uplink Eb/No	M		Uplink Eb/No	
Neighbouring FDD Cell Information		0..<maxnoofFDDn eighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
Neighbouring TDD Cell Information	O	0..<maxnoofTDDn eighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case1			
PSCH Time Slot	C-Case2&3			
Uplink Eb/No Target	O		Uplink Eb/No	

Downlink Eb/No Target	O			
Criticality Diagnostics	O			

Condition	Explanation
IfComb	This IE is present if the 'Diversity Indication' IE indicates 'combining' in the Node B.
IfNotComb	This IE is present if the 'Diversity Indication' IE indicates 'non combining' in the Node B.
NotFirstRL	The IE is present only if the RL is not the first RL in the RL Information
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2- or Case3.

Range bound	Explanation
MaxnoofRLs	Maximum no. of RLs for one UE.
MaxnoofDCHs	Maximum no. of DCHs for one UE.
MaxnoofFDDneighbours	Maximum number of neighbouring FDD cell for one cell.
MaxnoofTDDneighbours	Maximum number of neighbouring TDD cell for one cell.

9.1.4.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
D-RNTI	O			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
RL Information Response		1		
RL ID	M			
SAI	M			
UL Interference Level	M			
Maximum Uplink Eb/No	M		Uplink Eb/No	
Minimum Uplink Eb/No	M		Uplink Eb/No	
Uplink Eb/No Target	O		Uplink Eb/No	
Downlink Eb/No Target	O			
UL CCTrCH Information		1..<maxnoofCCTr CHs>		
CCTrCH ID	M			
UL DPCH Information		1..<MaxnoofDPC Hs>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
DL CCTrCH Information		1..<maxnoofCCTr CHs>		
CCTrCH ID	M			
DL DPCH Information		1..<MaxnoofDPC Hs>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
DCH Information Response		1..<maxnoofDCHs >		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
Neighbouring FDD Cell Information	O	0..<maxnoofFDDn eighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			

Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
Neighbouring TDD Cell Information	O	<i>0..<maxnoofTDDn neighbours></i>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case1			
PSCH Time Slot	C-Case2&3			
Criticality Diagnostics	O			

Condition	Explanation
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range bound	Explanation
MaxnoofDPCHs	Maximum no. of DPCHs for one CCTrCH.
MaxnoofDCHs	Maximum no. of DCHs for one UE.
MaxnoofFDDneighbours	Maximum number of neighbouring FDD cell for one cell
MaxnoofTDDneighbours	Maximum number of neighbouring TDD cell for one cell
MaxnoofCCTrCHs	Maximum no. of CCTrCH for one UE.

9.1.5 RADIO LINK SETUP FAILURE

9.1.5.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
D-RNTI	O			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
Unsuccessful RL Information Response		1...<maxnoofRLs>		
RL ID	M			
Cause	M			
Successful RL Information Response		0..<maxnoofRLs-1>		
RL ID	M			
SAI	M			
UL Interference Level	M			
DL Code Information		1..<maxnoofDL Codes>		
DL Scrambling Code	M			
FDD DL Channelisation Code Number	M			
Diversity Indication	M			
CHOICE <i>diversity Indication Combining</i>				
RL ID	M			Reference RL ID for the combining
<i>Non Combining or IE not present</i>				"IE not present" is equivalent to "First RL".
DCH Information Response		0..<maxnoofDCHs>		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
SSDT Support Indicator	M			
Neighbouring FDD Cell Information	O			
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
Neighbouring TDD Cell Information	O			
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case3			
PSCH Time Slot	C-Case2&3			
Uplink Eb/No Target	O		Uplink Eb/No	

Maximum Uplink Eb/No	M		Uplink Eb/No	
Minimum Uplink Eb/No	M		Uplink Eb/No	
Downlink Eb/No Target	O			
Criticality Diagnostics	O			

Condition	Explanation
IfComb	This IE is present if the 'Diversity Indication' IE indicates 'combining' in the Node B.
IfNotComb	This IE is present if the 'Diversity Indication' IE indicates 'non combining' in the Node B.
NotFirstRL	The IE is present only if the RL is not the first RL in the RL Information
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2-or-Case3.

Range bound	Explanation
MaxnoofRLs	Maximum no. of RLs for one UE.
MaxnoofDCHs	Maximum no. of DCHs for one UE.

9.1.7 RADIO LINK ADDITION RESPONSE

9.1.7.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
RL Information Response		1..<maxnoofRLs-1>		
RL ID	M			
SAI	M			
UL Interference Level	M			
DL Code Information		1..<maxnoofDLCodes>		
DL Scrambling Code	M			
DL Channelisation Code	M			
Diversity Indication	M			
CHOICE <i>diversity indication</i>				
<i>Combining</i>				
RL ID	M			Reference RL-Id
<i>Non combining</i>				
DCH Information Response		1..<maxnoofDCHs>		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
SSDT Support Indicator	M			
Minimum Uplink Eb/No	M		Uplink Eb/No	
Maximum Uplink Eb/No	M		Uplink Eb/No	
Neighbouring FDD Cell Information		0..<maxnoofFDD Neighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
Neighbouring TDD Cell Information		0..<maxnoofTDD Neighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case1			
PSCH Time Slot	C-Case2&3			
Criticality Diagnostics	O			

Condition	Explanation
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2-or-Case3.

Range bound	Explanation
MaxnoofDCHs	Maximum number of dedicated channels on one RL
MaxnoofRLs	Maximum number of radio links for one UE
MaxnoofFDDNeighbours	Maximum number of neighbouring FDD cells for one cell
MaxnoofTDDNeighbours	Maximum number of neighbouring TDD cells for one cell
MaxnoofDLCodes	Maximum number of DL code information

9.1.7.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
RL Information Response		1		
RL ID	M			
SAI	M			
UL Interference Level	M			
UL CTrCH Information		1..<maxnoof CTrCHs>		
CTrCH ID	M			
UL DPCH Information		1..<maxnoOfDPCHs>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
DL CTrCH Information		1..<maxnoof CTrCHs>		
CTrCH ID	M			
DL DPCH information		1..<maxnoOfDPCHs>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
Diversity Indication	M			
CHOICE <i>diversity indication</i>				
<i>Combining</i>				
RL ID	M			Reference RL
<i>Non combining</i>				
DCH Information Response		1..<maxnoofDCHs >		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
Minimum Uplink Eb/No	M		Uplink Eb/No	
Maximum Uplink Eb/No	M		Uplink Eb/No	
Neighbouring FDD Cell Information		0..<maxnoofFDD Neighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			

Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
Neighbouring TDD Cell Information		<i>0..<maxnoofTDD Neighbours></i>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case1			
PSCH Time Slot	C-Case2&3			
Criticality Diagnostics	O			

Condition	Explanation
Case1	This IE is present only if Sync Case = Case1
Case2&3	This IE is present only if Sync Case = Case2 or Case3 .

Range Bound	Explanation
MaxnoofDCHs	Maximum number of dedicated channels on one RL
MaxnoofFDDNeighbours	Maximum number of neighbouring FDD cells for one cell
MaxnoofTDDNeighbours	Maximum number of neighbouring TDD cells for one cell
MaxnoofDLCodes	Maximum number of DL code information
MaxnoOfDPCHs	Maximum number of DPCH in one CCTrCH
MaxnoofCCTrCHs	no. of CCTrCH for one UE.

9.1.8 RADIO LINK ADDITION FAILURE

9.1.8.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
Unsuccessful RL Information Response		1..<maxnoofRLs-1>		
RL ID	M			
Cause	M			
Successful RL Information Response		1..<maxnoofRLs-2>		
RL ID	M			
SAI	M			
UL Interference Level	M			
DL Code Information		1..<maxnoofDLCodes>		
DL scrambling code	M			
DL channelisation code	M			
Diversity Indication	M			
CHOICE <i>diversity indication</i>				
<i>Combining</i>				
RL ID	M			Reference RL-Id
<i>Non combining</i>				
DCH Information Response		1..<maxnoofDCHs>		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
SSDT Support Indicator	M			
Minimum Uplink Eb/No	M		Uplink Eb/No	
Maximum Uplink Eb/No	M		Uplink Eb/No	
Neighbouring FDD Cell Information		0..<maxnoofFDD Neighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
Neighbouring TDD Cell Information		0..<maxnoofTDD Neighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case1			
PSCH Time Slot	C-Case2&3			
Criticality Diagnostics	O			

Condition	Explanation
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2- or -Case3.

Range bound	Explanation
MaxnoofDCHs	Maximum number of dedicated channels on one RL
MaxnoofRLs	Maximum number of radio links for one UE
MaxnoofFDDNeighbours	Maximum number of neighbouring FDD cells for one cell
MaxnoofTDDNeighbours	Maximum number of neighbouring TDD cells for one cell
MaxnoofDLCodes	Maximum number of DL code information

9.2.1.35 PSCH Time Slot

The PSCH Time Slot is only applicable if the value of *Sync Case* IE is Case 2-~~or~~3.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
PSCHTime Slot			INTEGER(0..6)	

9.2.1.44 Sync Case

The PSCH and PCCPCH in a TDD cell are mapped on one or two downlink slots per frame. There are ~~three~~two cases of Sync Case as follows:

Case 1) ~~PSCH and PCCPCH allocated in a single TS#k~~

Case 2) ~~PSCH allocated in two TS and PCCPCH in the same two TS: TS#k and TS#k+8~~
PCCPCH allocated in TS#k

~~Case 3) PSCH in two TS, TS#k and TS#k+8, and the PCCPCH in TS#i, pointed by PSCH.~~

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Sync Case			ENUMERATED (Case1, Case2, Case3)	

9.3.3 PDU Definitions

```

-- *****
--
-- PDU definitions for RNSAP.
--
-- *****

RNSAP-PDU-Contents -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

-- *****
--
-- IE parameter types from other modules.
--
-- *****

IMPORTS
    AllocationRetentionPriority,
    .
    .
    .
    MultiplexingPosition,
    Offset,
    PD,
    PSCH-PCCPCH-TimeSlot,
    PSCH-TimeSlot,
    PayloadCRC-PresenceIndicator,
    PilotBitsUsedIndicator,
    PowerControlMode,
    PowerOffset,
    PowerResumeMode,
    PrimaryCCPCH-RSCP,
    PrimaryCPICH-EcNo,
    PrimaryCPICH-Power,
    .
    .
    .

```

```

-- *****
--
-- RADIO LINK SETUP RESPONSE FDD
--
-- *****

RadioLinkSetupResponseFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkSetupResponseFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkSetupResponseFDD-Extensions}}
    ...
}

RadioLinkSetupResponseFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI          CRITICALITY ignore TYPE D-RNTI          PRESENCE optional } |
    { ID id-CN-PS-DomainIdentifier CRITICALITY ignore TYPE CN-PS-DomainIdentifier PRESENCE optional } |
    { ID id-CN-CS-DomainIdentifier CRITICALITY ignore TYPE CN-CS-DomainIdentifier PRESENCE optional } |
    { ID id-RL-InformationResponseList-RL-SetupRspFDD
      CRITICALITY ignore TYPE RL-InformationResponseList-RL-SetupRspFDD
      PRESENCE mandatory } |
    { ID id-UL-EbNoTarget   CRITICALITY ignore TYPE UL-EbNoTarget   PRESENCE optional } |
    { ID id-DL-EbNoTarget   CRITICALITY ignore TYPE DL-EbNoTarget   PRESENCE optional } |
    { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
    ...
}

RL-InformationResponseList-RL-SetupRspFDD ::= RL-IE-ContainerList { {RL-InformationResponseItemIEs-RL-SetupRspFDD} }

RL-InformationResponseItemIEs-RL-SetupRspFDD RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationResponseItem-RL-SetupRspFDD
      CRITICALITY ignore TYPE RL-InformationResponseItem-RL-SetupRspFDD PRESENCE mandatory },
    ...
}

RL-InformationResponseItem-RL-SetupRspFDD ::= SEQUENCE {
    rL-ID          RL-ID,
    sAI            SAI,
    ul-InterferenceLevel ScaledUL-InterferenceLevel,
    dl-CodeInformation DL-CodeInformationList-RL-SetupRspFDD,
    sSDT-SupportIndicator SSdT-SupportIndicator,
    maxUL-EbNo      UL-EbNo,
    minUL-EbNo      UL-EbNo,
    neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-SetupRsp OPTIONAL,
    neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-SetupRsp OPTIONAL,
    iE-Extensions   ProtocolExtensionContainer { {RL-InformationResponseItem-RL-SetupRspFDD-ExtIEs} } OPTIONAL,
    ...
}

RL-InformationResponseItem-RL-SetupRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

```

-- ** NOTE: Shall this be made as an IE container? **
DL-CodeInformationList-RL-SetupRspFDD ::= SEQUENCE (SIZE (1..maxNoOfDL-Codes)) OF DL-CodeInformationItem-RL-SetupRspFDD

DL-CodeInformationItem-RL-SetupRspFDD ::= SEQUENCE {
    dl-ScramblingCode          DL-ScramblingCode,
    fdd-DL-ChannelisationCodeNumber  FDD-DL-ChannelisationCodeNumber,
    -- ** NOTE: How many alternatives are there, 2 or 3? **
    diversityIndication       CHOICE {
        combining              SEQUENCE {
            rL-ID              RL-ID
        },
        nonCombiningOrIENotPresent  SEQUENCE {
            dch-InformationResponse-RL-SetupRspFDD  DCH-InformationResponseList-RL-SetupRspFDD  OPTIONAL
        }
    } OPTIONAL
    -- This IE is present only if the RL is not the first on in the RL Information -- ,
    iE-Extensions             ProtocolExtensionContainer { {DL-CodeInformationItem-RL-SetupRspFDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CodeInformationItem-RL-SetupRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DCH-InformationResponseList-RL-SetupRspFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-InformationResponseItem-RL-SetupRspFDD

DCH-InformationResponseItem-RL-SetupRspFDD ::= SEQUENCE {
    dch-ID                    DCH-ID,
    bindingID                 BindingID,
    transportLayerAddress     TransportLayerAddress,
    iE-Extensions             ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-SetupRspFDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-InformationResponseItem-RL-SetupRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Both FDD and TDD messages use these definitions **
NeighbouringFDD-CellInformationList-RL-SetupRsp ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours)) OF
    NeighbouringFDD-CellInformationItem-RL-SetupRsp

NeighbouringFDD-CellInformationItem-RL-SetupRsp ::= SEQUENCE {
    uC-ID                    C-ID,
    cN-PS-DomainIdentifier   CN-PS-DomainIdentifier  OPTIONAL,
    cN-CS-DomainIdentifier   CN-CS-DomainIdentifier  OPTIONAL,
    uARFCN                   UARFCN,
    frameOffset              FrameOffset            OPTIONAL,
    primaryScramblingCode    PrimaryScramblingCode,
    primaryCPICH-Power       PrimaryCPICH-Power     OPTIONAL,
}

```

```

    iE-Extensions          ProtocolExtensionContainer { {NeighbouringFDD-CellInformationItem-RL-SetupRsp-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringFDD-CellInformationItem-RL-SetupRsp-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringTDD-CellInformationList-RL-SetupRsp ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours)) OF
    NeighbouringTDD-CellInformationItem-RL-SetupRsp

NeighbouringTDD-CellInformationItem-RL-SetupRsp ::= SEQUENCE {
    c-ID                    C-ID,
    cN-PS-DomainIdentifier  CN-PS-DomainIdentifier  OPTIONAL,
    cN-CS-DomainIdentifier  CN-CS-DomainIdentifier  OPTIONAL,
    uARFCN                  UARFCN,
    frameOffset             FrameOffset            OPTIONAL,
    cellParameterID        CellParameterID,
    syncCase                SyncCase,
    timeSlot                TimeSlot              OPTIONAL
    -- This IE is present only if SyncCase is Case1 -- ,
    pSCH-TimeSlot           PSCH-TimeSlot          OPTIONAL
    -- This IE is present only if pSCH-PCCPCH-Allocation = Case3-Case2 -- ,
    ul-EbNo                 UL-EbNo                OPTIONAL,
    dl-EbNo                 DL-EbNo                OPTIONAL,
    iE-Extensions          ProtocolExtensionContainer { {NeighbouringTDD-CellInformationItem-RL-SetupRsp-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringTDD-CellInformationItem-RL-SetupRsp-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkSetupResponseFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK SETUP RESPONSE TDD
--
-- *****

RadioLinkSetupResponseTDD ::= SEQUENCE {
    protocolIEs             ProtocolIE-Container  {{RadioLinkSetupResponseTDD-IEs}},
    protocolExtensions     ProtocolExtensionContainer {{RadioLinkSetupResponseTDD-Extensions}} OPTIONAL,
    ...
}

RadioLinkSetupResponseTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI          CRITICALITY ignore TYPE D-RNTI          PRESENCE optional } |

```



```

{ ID id-CN-PS-DomainIdentifier          CRITICALITY ignore TYPE CN-PS-DomainIdentifier          PRESENCE optional } |
{ ID id-CN-CS-DomainIdentifier          CRITICALITY ignore TYPE CN-CS-DomainIdentifier          PRESENCE optional } |
{ ID id-RL-InformationResponse-RL-SetupRspTDD  CRITICALITY ignore TYPE RL-InformationResponse-RL-SetupRspTDD  PRESENCE mandatory } |
{ ID id-CriticalityDiagnostics          CRITICALITY ignore TYPE CriticalityDiagnostics          PRESENCE optional },
...
}

RL-InformationResponse-RL-SetupRspTDD ::= SEQUENCE {
    rL-ID                RL-ID,
    sAI                  SAI,
    ul-InterferenceLevel ScaledUL-InterferenceLevel,
    maxUL-EbNo           UL-EbNo,
    minUL-EbNo           UL-EbNo,
    ul-EbNoTarget        UL-EbNo                OPTIONAL,
    dl-EbNoTarget        DL-EbNo                OPTIONAL,
    ul-CCTrCHInformation UL-CCTrCHInformationList-RL-SetupRspTDD,
    dl-CCTrCHInformation DL-CCTrCHInformationList-RL-SetupRspTDD,
    dCH-InformationResponse DCH-InformationResponseList-RL-SetupRspTDD,
    neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-SetupRsp OPTIONAL,
    neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-SetupRsp OPTIONAL,
    iE-Extensions        ProtocolExtensionContainer { {RL-InformationResponse-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

RL-InformationResponse-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
UL-CCTrCHInformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF UL-CCTrCHInformationItem-RL-SetupRspTDD

UL-CCTrCHInformationItem-RL-SetupRspTDD ::= SEQUENCE {
    cCTrCH-ID            CCTrCH-ID,
    ul-DPCH-Information  UL-DPCH-InformationList-RL-SetupRspTDD,
    iE-Extensions        ProtocolExtensionContainer { {UL-CCTrCHInformationItem-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

UL-CCTrCHInformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
UL-DPCH-InformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF UL-DPCH-InformationItem-RL-SetupRspTDD

-- **NOTE: UL-DPCH-InformationItem-RL-SetupRspTDD and DL-DPCH-InformationItem-RL-SetupRspTDD
-- are currently similar. Combine them? **
UL-DPCH-InformationItem-RL-SetupRspTDD ::= SEQUENCE {
    dPCH-ID              DPCH-ID,
    tDD-ChannelisationCode TDD-ChannelisationCode,
    burstType            BurstType,

```

```

midambleShift           MidambleShift,
timeSlot                TimeSlot,
tDD-PhysicalChannelOffset  TDD-PhysicalChannelOffset,
repetitionPeriod        RepetitionPeriod,
repetitionLength        RepetitionLength,
tFCI-Presence           TFCI-Presence,
IE-Extensions           ProtocolExtensionContainer { {UL-DPCH-InformationItem-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
...
}

UL-DPCH-InformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CCTrCHInformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF DL-CCTrCHInformationItem-RL-SetupRspTDD

DL-CCTrCHInformationItem-RL-SetupRspTDD ::= SEQUENCE {
    cCTrCH-ID            CCTrCH-ID,
    dl-DPCH-Information  DL-DPCH-InformationList-RL-SetupRspTDD,
    IE-Extensions        ProtocolExtensionContainer { {DL-CCTrCHInformationItem-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CCTrCHInformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-DPCH-InformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF DL-DPCH-InformationItem-RL-SetupRspTDD

DL-DPCH-InformationItem-RL-SetupRspTDD ::= SEQUENCE {
    dPCH-ID             DPCH-ID,
    tDD-ChannelisationCode  TDD-ChannelisationCode,
    burstType            BurstType,
    midambleShift        MidambleShift,
    timeSlot             TimeSlot,
    tDD-PhysicalChannelOffset  TDD-PhysicalChannelOffset,
    repetitionPeriod      RepetitionPeriod,
    repetitionLength      RepetitionLength,
    tFCI-Presence         TFCI-Presence,
    IE-Extensions        ProtocolExtensionContainer { {DL-DPCH-InformationItem-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-DPCH-InformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-InformationResponseList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-InformationResponseItem-RL-SetupRspTDD

```

```

DCH-InformationResponseItem-RL-SetupRspTDD ::= SEQUENCE {
    dCH-ID                DCH-ID,
    bindingID             BindingID,
    transportLayerAddress TransportLayerAddress,
    iE-Extensions         ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-InformationResponseItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkSetupResponseTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK SETUP FAILURE FDD
--
-- *****

RadioLinkSetupFailureFDD ::= SEQUENCE {
    protocolIEs           ProtocolIE-Container    {{RadioLinkSetupFailureFDD-IEs}},
    protocolExtensions    ProtocolExtensionContainer {{RadioLinkSetupFailureFDD-Extensions}}          OPTIONAL,
    ...
}

RadioLinkSetupFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI          CRITICALITY ignore  TYPE D-RNTI          PRESENCE mandatory } |
    { ID id-CN-PS-DomainIdentifier  CRITICALITY ignore  TYPE CN-PS-DomainIdentifier  PRESENCE mandatory } |
    { ID id-CN-CS-DomainIdentifier  CRITICALITY ignore  TYPE CN-CS-DomainIdentifier  PRESENCE mandatory } |
    { ID id-UnsuccessfulRL-InformationResponseList-RL-SetupFailureFDD
      CRITICALITY ignore  TYPE UnsuccessfulRL-InformationResponseList-RL-SetupFailureFDD
      PRESENCE mandatory } |
    { ID id-SuccessfulRL-InformationResponseList-RL-SetupFailureFDD
      CRITICALITY ignore  TYPE SuccessfulRL-InformationResponseList-RL-SetupFailureFDD
      PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics  CRITICALITY ignore  TYPE CriticalityDiagnostics  PRESENCE optional },
    ...
}

UnsuccessfulRL-InformationResponseList-RL-SetupFailureFDD ::= RL-IE-ContainerList { {UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD-IEs} }

UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD
      CRITICALITY ignore  TYPE UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD
      PRESENCE mandatory },
    ...
}

```

```

UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD ::= SEQUENCE {
    rL-ID                RL-ID,
    cause                Cause,
    iE-Extensions       ProtocolExtensionContainer { {UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

SuccessfulRL-InformationResponseList-RL-SetupFailureFDD ::= RL-IE-ContainerList { {SuccessfulRL-InformationResponse-RL-SetupFailureFDD-IEs} }

SuccessfulRL-InformationResponse-RL-SetupFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-SuccessfulRL-InformationResponse-RL-SetupFailureFDD
      CRITICALITY ignore TYPE SuccessfulRL-InformationResponse-RL-SetupFailureFDD
      PRESENCE mandatory },
    ...
}

SuccessfulRL-InformationResponse-RL-SetupFailureFDD ::= SEQUENCE {
    rL-ID                RL-ID,
    sAI                  SAI,
    ul-InterferenceLevel ScaledUL-InterferenceLevel,
    dl-CodeInformation  DL-CodeInformationList-RL-SetupFailureFDD,
    sSDT-SupportIndicator SSDT-SupportIndicator,
    neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-SetupFailureFDD OPTIONAL,
    neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-SetupFailureFDD OPTIONAL,
    ul-EbNoTarget       UL-EbNo,
    maxUL-EbNo          UL-EbNo,
    minUL-EbNo          UL-EbNo,
    dl-EbNoTarget       DL-EbNo,
    iE-Extensions       ProtocolExtensionContainer { {SuccessfulRL-InformationResponse-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
    ...
}
-- ** NOTE: Shall this be made as an IE container? **
DL-CodeInformationList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNoOfDL-Codes)) OF DL-CodeInformationItem-RL-SetupFailureFDD

SuccessfulRL-InformationResponse-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DL-CodeInformationItem-RL-SetupFailureFDD ::= SEQUENCE {
    dl-ScramblingCode      DL-ScramblingCode,
    fDD-DL-ChannelisationCodeNumber FDD-DL-ChannelisationCodeNumber,
    -- ** NOTE: How many alternatives are there, 2 or 3? **
    diversityIndication    CHOICE {
        combining          SEQUENCE {
            rL-ID          RL-ID
        },
        nonCombiningOrIENotPresent SEQUENCE {

```

```

        dCH-InformationResponse-RL-SetupFailureFDD      DCH-InformationResponseList-RL-SetupFailureFDD OPTIONAL
    }
}
OPTIONAL
-- This IE is present only if the RL is not the first on in the RL Information -- ,
iE-Extensions      ProtocolExtensionContainer { {DL-CodeInformationItem-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
...
}

DL-CodeInformationItem-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DCH-InformationResponseList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-InformationResponseItem-RL-SetupFailureFDD

DCH-InformationResponseItem-RL-SetupFailureFDD ::= SEQUENCE {
    dCH-ID          DCH-ID,
    bindingID       BindingID,
    transportLayerAddress TransportLayerAddress,
    iE-Extensions   ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-InformationResponseItem-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringFDD-CellInformationList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours)) OF
    NeighbouringFDD-CellInformationItem-RL-SetupFailureFDD

NeighbouringFDD-CellInformationItem-RL-SetupFailureFDD ::= SEQUENCE {
    uC-ID          C-ID,
    cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,
    cN-CS-DomainIdentifier CN-CS-DomainIdentifier OPTIONAL,
    uARFCN         UARFCN,
    frameOffset    FrameOffset OPTIONAL,
    primaryScramblingCode PrimaryScramblingCode,
    primaryCPICH-Power PrimaryCPICH-Power OPTIONAL,
    iE-Extensions   ProtocolExtensionContainer { {NeighbouringFDD-CellInformationItem-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringFDD-CellInformationItem-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringTDD-CellInformationList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours)) OF
    NeighbouringTDD-CellInformationItem-RL-SetupFailureFDD

NeighbouringTDD-CellInformationItem-RL-SetupFailureFDD ::= SEQUENCE {
    uC-ID          C-ID,

```

```

cN-PS-DomainIdentifier          CN-PS-DomainIdentifier  OPTIONAL,
cN-CS-DomainIdentifier          CN-CS-DomainIdentifier  OPTIONAL,
uARFCN                          UARFCN,
frameOffset                      FrameOffset          OPTIONAL,
cellParameterID                 CellParameterID,
syncCase                         SyncCase,
timeSlot                         TimeSlot,
pSCH-TimeSlot                    PSCH-TimeSlot          OPTIONAL
-- This IE is present only if pSCH-PCCPCH-Allocation = Case3-Case2 -- ,
iE-Extensions                    ProtocolExtensionContainer { {NeighbouringTDD-CellInformationItem-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
...
}

NeighbouringTDD-CellInformationItem-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

RadioLinkSetupFailureFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- *****
--
-- RADIO LINK SETUP FAILURE TDD
--
-- *****

RadioLinkSetupFailureTDD ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container    {{RadioLinkSetupFailureTDD-IEs}},
    protocolExtensions          ProtocolExtensionContainer {{RadioLinkSetupFailureTDD-Extensions}}
    ...
}

RadioLinkSetupFailureTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD
      CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD
      PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics
      CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
    ...
}

UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD ::= SEQUENCE {
    rL-ID                       RL-ID,
    cause                        Cause,
    iE-Extensions                ProtocolExtensionContainer { {UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD-ExtIEs} } OPTIONAL,
    ...
}

UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

```

```

RadioLinkSetupFailureTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK ADDITION REQUEST FDD
--
-- *****

RadioLinkAdditionRequestFDD ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container    {{RadioLinkAdditionRequestFDD-IEs}},
    protocolExtensions          ProtocolExtensionContainer {{RadioLinkAdditionRequestFDD-Extensions}} OPTIONAL,
    ...
}

RadioLinkAdditionRequestFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UL-EbNoTarget          CRITICALITY ignore TYPE UL-EbNo          PRESENCE mandatory } |
    { ID id-RL-InformationList-RL-AdditionRqstFDD CRITICALITY ignore TYPE RL-InformationList-RL-AdditionRqstFDD PRESENCE mandatory },
    ...
}

RL-InformationList-RL-AdditionRqstFDD ::= RL-IE-ContainerList { {RL-Information-RL-AdditionRqstFDD-IEs} }

RL-Information-RL-AdditionRqstFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-Information-RL-AdditionRqstFDD CRITICALITY ignore TYPE RL-Information-RL-AdditionRqstFDD PRESENCE mandatory },
    ...
}

RL-Information-RL-AdditionRqstFDD ::= SEQUENCE {
    rL-ID                RL-ID,
    c-ID                  C-ID,
    frameOffset           FrameOffset,
    chipOffset            ChipOffset,
    diversityControlField DiversityControlField,
    primaryCPICH-EcNo     PrimaryCPICH-EcNo OPTIONAL,
    sSDT-CellID           SSDT-CellID OPTIONAL,
    iE-Extensions         ProtocolExtensionContainer { {RL-Information-RL-AdditionRqstFDD-ExtIEs} } OPTIONAL,
    ...
}

RL-Information-RL-AdditionRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkAdditionRequestFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****

```

```

--
-- RADIO LINK ADDITION REQUEST TDD
--
-- *****

RadioLinkAdditionRequestTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkAdditionRequestTDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkAdditionRequestTDD-Extensions}}    OPTIONAL,
    ...
}

RadioLinkAdditionRequestTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-Information-RL-AdditionRqstTDD    CRITICALITY ignore    TYPE RL-Information-RL-AdditionRqstTDD    PRESENCE mandatory    },
    ...
}

RL-Information-RL-AdditionRqstTDD ::= SEQUENCE {
    rL-ID                RL-ID,
    c-ID                 C-ID,
    frameOffset          FrameOffset,
    chipOffset           ChipOffset,
    diversityControlField DiversityControlField,
    primaryCCPCH-RSCP    PrimaryCCPCH-RSCP,
    iE-Extensions        ProtocolExtensionContainer { {RL-Information-RL-AdditionRqstTDD-ExtIEs} } OPTIONAL,
    ...
}

RL-Information-RL-AdditionRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkAdditionRequestTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK ADDITION RESPONSE FDD
--
-- *****

RadioLinkAdditionResponseFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkAdditionResponseFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkAdditionResponseFDD-Extensions}}    OPTIONAL,
    ...
}

RadioLinkAdditionResponseFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI                CRITICALITY ignore    TYPE D-RNTI                PRESENCE optional    } |
    { ID id-RL-InformationResponseList-RL-AdditionRspFDD
      CRITICALITY ignore    TYPE RL-InformationResponseList-RL-AdditionRspFDD
    }
}

```



```

        { ID id-CriticalityDiagnostics          CRITICALITY ignore TYPE CriticalityDiagnostics          PRESENCE mandatory } |
        ...
    }

RL-InformationResponseList-RL-AdditionRspFDD ::= RL-IE-ContainerList { {RL-InformationResponseItemIEs-RL-AdditionRspFDD} }

RL-InformationResponseItemIEs-RL-AdditionRspFDD RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationResponseItem-RL-AdditionRspFDD
        CRITICALITY ignore TYPE RL-InformationResponseItem-RL-AdditionRspFDD PRESENCE mandatory },
    ...
}

RL-InformationResponseItem-RL-AdditionRspFDD ::= SEQUENCE {
    rL-ID                RL-ID,
    sAI                  SAI,
    ul-InterferenceLevel ScaledUL-InterferenceLevel,
    dl-CodeInformation   DL-CodeInformationList-RL-AdditionRspFDD,
    sSDT-SupportIndicator SSDT-SupportIndicator,
    maxUL-EbNo          UL-EbNo,
    minUL-EbNo          UL-EbNo,
    neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-SetupRsp OPTIONAL,
    neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-SetupRsp OPTIONAL,
    iE-Extensions       ProtocolExtensionContainer { {RL-InformationResponseItem-RL-AdditionRspFDD-ExtIEs} } OPTIONAL,
    ...
}

RL-InformationResponseItem-RL-AdditionRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CodeInformationList-RL-AdditionRspFDD ::= SEQUENCE (SIZE (1..maxNoOfDL-Codes)) OF DL-CodeInformationItem-RL-AdditionRspFDD

DL-CodeInformationItem-RL-AdditionRspFDD ::= SEQUENCE {
    dl-ScramblingCode        DL-ScramblingCode,
    fDD-DL-ChannelisationCodeNumber FDD-DL-ChannelisationCodeNumber,
    -- ** NOTE: How many alternatives are there, 2 or 3? **
    diversityIndication      CHOICE {
        combining            SEQUENCE {
            rL-ID            RL-ID
        },
        nonCombiningOrIENotPresent SEQUENCE {
            dCH-InformationResponse-RL-AdditionRspFDD DCH-InformationResponseList-RL-AdditionRspFDD OPTIONAL
        }
    }
    OPTIONAL
    -- This IE is present only if the RL is not the first on in the RL Information -- ,
    iE-Extensions           ProtocolExtensionContainer { {DL-CodeInformationItem-RL-AdditionRspFDD-ExtIEs} } OPTIONAL,
    ...
}

```

```

DL-CodeInformationItem-RL-AdditionRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DCH-InformationResponseList-RL-AdditionRspFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-InformationResponseItem-RL-AdditionRspFDD

DCH-InformationResponseItem-RL-AdditionRspFDD ::= SEQUENCE {
    dCH-ID                DCH-ID,
    bindingID             BindingID,
    transportLayerAddress TransportLayerAddress,
    iE-Extensions        ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-AdditionRspFDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-InformationResponseItem-RL-AdditionRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Both FDD and TDD messages use these definitions **
NeighbouringFDD-CellInformationList-RL-AdditionRsp ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours)) OF
    NeighbouringFDD-CellInformationItem-RL-AdditionRsp

NeighbouringFDD-CellInformationItem-RL-AdditionRsp ::= SEQUENCE {
    uC-ID                C-ID,
    cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,
    cN-CS-DomainIdentifier CN-CS-DomainIdentifier OPTIONAL,
    uARFCN               UARFCN,
    frameOffset          FrameOffset OPTIONAL,
    primaryScramblingCode PrimaryScramblingCode,
    primaryCPICH-Power   PrimaryCPICH-Power OPTIONAL,
    iE-Extensions        ProtocolExtensionContainer { {NeighbouringFDD-CellInformationItem-RL-AdditionRsp-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringFDD-CellInformationItem-RL-AdditionRsp-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringTDD-CellInformationList-RL-AdditionRsp ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours)) OF
    NeighbouringTDD-CellInformationItem-RL-AdditionRsp

NeighbouringTDD-CellInformationItem-RL-AdditionRsp ::= SEQUENCE {
    uC-ID                C-ID,
    cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,
    cN-CS-DomainIdentifier CN-CS-DomainIdentifier OPTIONAL,
    uARFCN               UARFCN,
    frameOffset          FrameOffset OPTIONAL,
    cellParameterID      CellParameterID,
    syncCase              SyncCase,
    timeSlot              TimeSlot,
}

```

```

pSCH-TimeSlot          PSCH-TimeSlot          OPTIONAL
-- This IE is present only if pSCH-PCCPCH-Allocation = Case3-Case2 -- ,
IE-Extensions          ProtocolExtensionContainer { {NeighbouringTDD-CellInformationItem-RL-AdditionRsp-ExtIEs} } OPTIONAL,
...
}

NeighbouringTDD-CellInformationItem-RL-AdditionRsp-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

RadioLinkAdditionResponseFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- *****
--
-- RADIO LINK ADDITION RESPONSE TDD
--
-- *****

RadioLinkAdditionResponseTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkAdditionResponseTDD-IEs}},
    protocolExtensions  ProtocolExtensionContainer {{RadioLinkAdditionResponseTDD-Extensions}}
    ...
}

RadioLinkAdditionResponseTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI          CRITICALITY ignore TYPE D-RNTI          PRESENCE optional } |
    { ID id-RL-InformationResponse-RL-AdditionRspTDD
      CRITICALITY ignore TYPE RL-InformationResponse-RL-AdditionRspTDD PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics
      CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
    ...
}

RL-InformationResponse-RL-AdditionRspTDD ::= SEQUENCE {
    rL-ID                RL-ID,
    sAI                  SAI,
    ul-InterferenceLevel ScaledUL-InterferenceLevel,
    ul-CCTrCHInformation UL-CCTrCHInformationList-RL-AdditionRspTDD,
    dl-CCTrCHInformation DL-CCTrCHInformationList-RL-AdditionRspTDD,
    diversityIndication CHOICE {
        combining          SEQUENCE {
            rL-ID          RL-ID
        },
        nonCombiningOrIENotPresent SEQUENCE {
            dCH-InformationResponse-RL-AdditionRspFDD DCH-InformationResponseList-RL-AdditionRspFDD OPTIONAL
        }
    }
    ...
}
maxUL-EbNo          UL-EbNo,
minUL-EbNo          UL-EbNo,
neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-AdditionRspTDD OPTIONAL,

```

```

    neighbouringTDD-CellInformation      NeighbouringTDD-CellInformationList-RL-AdditionRspTDD OPTIONAL,
    iE-Extensions                       ProtocolExtensionContainer { {RL-InformationResponse-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

RL-InformationResponse-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
UL-CCTrCHInformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF UL-CCTrCHInformationItem-RL-AdditionRspTDD

UL-CCTrCHInformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    cCTrCH-ID                CCTrCH-ID,
    ul-DPCH-Information      UL-DPCH-InformationList-RL-AdditionRspTDD,
    iE-Extensions           ProtocolExtensionContainer { {UL-CCTrCHInformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

UL-CCTrCHInformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
UL-DPCH-InformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF UL-DPCH-InformationItem-RL-AdditionRspTDD

UL-DPCH-InformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    dPCH-ID                DPCH-ID,
    tDD-ChannelisationCode TDD-ChannelisationCode,
    burstType              BurstType,
    midambleShift         MidambleShift,
    timeSlot               TimeSlot,
    offset                 Offset,
    tDD-PhysicalChannelOffset TDD-PhysicalChannelOffset,
    repetitionPeriod       RepetitionPeriod,
    repetitionLength       RepetitionLength,
    tFCI-Presence          TFCI-Presence,
    iE-Extensions          ProtocolExtensionContainer { {UL-DPCH-InformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

UL-DPCH-InformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CCTrCHInformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF DL-CCTrCHInformationItem-RL-AdditionRspTDD

DL-CCTrCHInformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    cCTrCH-ID                CCTrCH-ID,
    dl-DPCH-Information      DL-DPCH-InformationList-RL-AdditionRspTDD,

```

```

    iE-Extensions          ProtocolExtensionContainer { {DL-CCTrCHInformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CCTrCHInformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-DPCH-InformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF DL-DPCH-InformationItem-RL-AdditionRspTDD

DL-DPCH-InformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    dPCH-ID                DPCH-ID,
    tDD-ChannelisationCode TDD-ChannelisationCode,
    burstType              BurstType,
    midambleShift          MidambleShift,
    timeSlot               TimeSlot,
    tDD-PhysicalChannelOffset TDD-PhysicalChannelOffset,
    repetitionPeriod       RepetitionPeriod,
    repetitionLength       RepetitionLength,
    tFCI-Presence          TFCI-Presence,
    iE-Extensions          ProtocolExtensionContainer { {DL-DPCH-InformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-DPCH-InformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringFDD-CellInformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours)) OF
    NeighbouringFDD-CellInformationItem-RL-AdditionRspTDD

NeighbouringFDD-CellInformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    uC-ID                  C-ID,
    cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,
    cN-CS-DomainIdentifier CN-CS-DomainIdentifier OPTIONAL,
    uARFCN                 UARFCN,
    frameOffset            FrameOffset OPTIONAL,
    primaryScramblingCode  PrimaryScramblingCode,
    primaryCPICH-Power     PrimaryCPICH-Power OPTIONAL,
    iE-Extensions          ProtocolExtensionContainer { {NeighbouringFDD-CellInformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringFDD-CellInformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringTDD-CellInformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours)) OF
    NeighbouringTDD-CellInformationItem-RL-AdditionRspTDD

```

```

NeighbouringTDD-CellInformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    uC-ID                C-ID,
    cN-PS-DomainIdentifier    CN-PS-DomainIdentifier    OPTIONAL,
    cN-CS-DomainIdentifier    CN-CS-DomainIdentifier    OPTIONAL,
    uARFCN                UARFCN,
    frameOffset            FrameOffset    OPTIONAL,
    cellParameterID        CellParameterID,
    syncCase                SyncCase,
    timeSlot                TimeSlot,
    pSCH-TimeSlot            PSCH-TimeSlot    OPTIONAL
    -- This IE is present only if pSCH-PCCPCH-Allocation = Case3-Case2 -- ,
    iE-Extensions            ProtocolExtensionContainer { {NeighbouringTDD-CellInformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringTDD-CellInformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkAdditionResponseTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK ADDITION FAILURE FDD
--
-- *****

RadioLinkAdditionFailureFDD ::= SEQUENCE {
    protocolIEs            ProtocolIE-Container    {{RadioLinkAdditionFailureFDD-IEs}},
    protocolExtensions      ProtocolExtensionContainer {{RadioLinkAdditionFailureFDD-Extensions}}    OPTIONAL,
    ...
}

RadioLinkAdditionFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UnsuccessfulRL-InformationResponseList-RL-AdditionFailureFDD
        CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponseList-RL-AdditionFailureFDD
        PRESENCE mandatory } |
    { ID id-SuccessfulRL-InformationResponseList-RL-AdditionFailureFDD
        CRITICALITY ignore TYPE SuccessfulRL-InformationResponseList-RL-AdditionFailureFDD
        PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics            CRITICALITY ignore TYPE CriticalityDiagnostics            PRESENCE optional },
    ...
}

UnsuccessfulRL-InformationResponseList-RL-AdditionFailureFDD ::= RL-IE-ContainerList { {UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD-IEs} }

UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD
        CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD

```

```

    PRESENCE mandatory },
}
...
}
UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD ::= SEQUENCE {
    rL-ID                RL-ID,
    cause                Cause,
    iE-Extensions       ProtocolExtensionContainer { {UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}
UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}
SuccessfulRL-InformationResponseList-RL-AdditionFailureFDD ::= RL-IE-ContainerList { {SuccessfulRL-InformationResponse-RL-AdditionFailureFDD-IEs} }
SuccessfulRL-InformationResponse-RL-AdditionFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-SuccessfulRL-InformationResponse-RL-AdditionFailureFDD
      CRITICALITY ignore TYPE SuccessfulRL-InformationResponse-RL-AdditionFailureFDD
      PRESENCE mandatory },
    ...
}
SuccessfulRL-InformationResponse-RL-AdditionFailureFDD ::= SEQUENCE {
    rL-ID                RL-ID,
    SAI                  SAI,
    ul-InterferenceLevel ScaledUL-InterferenceLevel,
    dl-CodeInformation   DL-CodeInformationList-RL-AdditionFailureFDD,
    sSDT-SupportIndicator SSDT-SupportIndicator,
    maxUL-EbNo          UL-EbNo,
    minUL-EbNo          UL-EbNo,
    neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-AdditionFailureFDD OPTIONAL,
    neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-AdditionFailureFDD OPTIONAL,
    iE-Extensions       ProtocolExtensionContainer { {SuccessfulRL-InformationResponse-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}
SuccessfulRL-InformationResponse-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}
-- ** NOTE: Shall this be made as an IE container? **
DL-CodeInformationList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNoOfDL-Codes)) OF DL-CodeInformationItem-RL-AdditionFailureFDD
DL-CodeInformationItem-RL-AdditionFailureFDD ::= SEQUENCE {
    dl-ScramblingCode    DL-ScramblingCode,
    dl-ChannelisationCode DL-ChannelisationCode,
    diversityIndication  CHOICE {
        combining        SEQUENCE {
            rL-ID        RL-ID
        }
    }
}

```

```

    },
    nonCombiningOrIENotPresent          SEQUENCE {
        dCH-InformationResponse-RL-AdditionFailureFDD          DCH-InformationResponseList-RL-AdditionFailureFDD  OPTIONAL
    }
}
OPTIONAL
-- This IE is present only if the RL is not the first on in the RL Information -- ,
IE-Extensions          ProtocolExtensionContainer { {DL-CodeInformationItem-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
...
}

DL-CodeInformationItem-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DCH-InformationResponseList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-InformationResponseItem-RL-AdditionFailureFDD

DCH-InformationResponseItem-RL-AdditionFailureFDD ::= SEQUENCE {
    dCH-ID                DCH-ID,
    bindingID             BindingID,
    transportLayerAddress TransportLayerAddress,
    IE-Extensions         ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-InformationResponseItem-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringFDD-CellInformationList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours)) OF
    NeighbouringFDD-CellInformationItem-RL-AdditionFailureFDD

NeighbouringFDD-CellInformationItem-RL-AdditionFailureFDD ::= SEQUENCE {
    uC-ID                C-ID,
    cN-PS-DomainIdentifier CN-PS-DomainIdentifier          OPTIONAL,
    cN-CS-DomainIdentifier CN-CS-DomainIdentifier          OPTIONAL,
    uARFCN               UARFCN,
    frameOffset          FrameOffset          OPTIONAL,
    primaryScramblingCode PrimaryScramblingCode,
    cPICH-Power          CPICH-Power          OPTIONAL,
    IE-Extensions         ProtocolExtensionContainer { {NeighbouringFDD-CellInformationItem-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringFDD-CellInformationItem-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringTDD-CellInformationList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours)) OF
    NeighbouringTDD-CellInformationItem-RL-AdditionFailureFDD

```



```

NeighbouringTDD-CellInformationItem-RL-AdditionFailureFDD ::= SEQUENCE {
    uC-ID                C-ID,
    cN-PS-DomainIdentifier  CN-PS-DomainIdentifier  OPTIONAL,
    cN-CS-DomainIdentifier  CN-CS-DomainIdentifier  OPTIONAL,
    uARFCN                UARFCN,
    frameOffset           FrameOffset             OPTIONAL,
    cellParameterID       CellParameterID,
    syncCase              SyncCase,
    timeSlot              TimeSlot,
    pSCH-TimeSlot         pSCH-TimeSlot           OPTIONAL
    -- This IE is present only if pSCH-PCCPCH-Allocation = Case3-Case2 -- ,
    iE-Extensions         ProtocolExtensionContainer { {NeighbouringTDD-CellInformationItem-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringTDD-CellInformationItem-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkAdditionFailureFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK ADDITION FAILURE TDD
--
-- *****

RadioLinkAdditionFailureTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkAdditionFailureTDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkAdditionFailureTDD-Extensions}}
    ...
}

RadioLinkAdditionFailureTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UnsuccessfulRL-InformationResponse  CRITICALITY ignore  TYPE UnsuccessfulRL-InformationResponse  PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics              CRITICALITY ignore  TYPE CriticalityDiagnostics      PRESENCE optional },
    ...
}

UnsuccessfulRL-InformationResponse ::= SEQUENCE {
    rL-ID                RL-ID,
    cause                Cause,
    iE-Extensions        ProtocolExtensionContainer { {UnsuccessfulRL-InformationResponse-ExtIEs} } OPTIONAL,
    ...
}

UnsuccessfulRL-InformationResponse-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

```
RadioLinkAdditionFailureTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {  
  ...  
}
```

-
-
-

9.3.4 Information Element Definitions

```

-- *****
--
-- Information Element Definitions
--
-- *****

.
.
.
-- P

PD ::= INTEGER (0..2047, ...)

PayloadCRC-PresenceIndicator ::= ENUMERATED {
    crc-not-included,
    crc-included--,
    ...
}

| PSCH-TimeSlot ::= INTEGER (0..6)

Periodic ::= SEQUENCE {
    reportPeriodicity ReportPeriodicity,
    iE-Extensions ProtocolExtensionContainer { {Periodic-ExtIEs} } OPTIONAL,
    ...
}

.
.
.

PropagationDelay ::= INTEGER (0..255)

SyncCase ::= ENUMERATED {
    case1,
    case2,
    case3,
    ...
}

| PSCH-CCPCH TimeSlot ::= TimeSlot

PSCH-PCCPCH TimeSlot ::= TimeSlot

```


8.3.16 Compressed Mode Preparation [FDD]

8.3.16.1 General

The Compressed Mode Preparation procedure is used to prepare the compressed mode in the DRNS for one UE-UTRAN connection.

This procedure shall use the signalling bearer connection for the relevant UE context.

8.3.16.2 Successful Operation

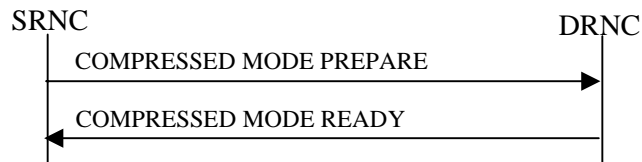


Figure 126: Compressed Mode Preparation procedure, Successful Operation

The Compressed Mode Preparation procedure is initiated by the SRNC by sending the COMPRESSED MODE PREPARE message to the DRNC.

If the PD IE is set to 'infinite', the DRNS shall continue with the compressed mode until it is requested to terminate the compressed mode.

If the proposed modifications are allowed by the DRNS and the DRNC has successfully initialised the required resources, the DRNC shall respond to the SRNC with COMPRESSED MODE READY message.

If the *Compressed Mode Method* IE is set to 'None', the DRNS shall terminate the compressed mode even if the COMPRESSED MODE PREPARE message was received before the end of the compressed mode period.

8.3.16.3 Unsuccessful Operation

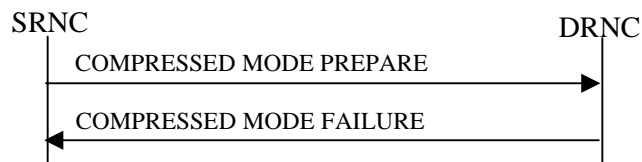


Figure 227: Compressed Mode Preparation procedure, unsuccessful case

If the requested reconfiguration fails for one or more RLS the DRNC shall abort the procedure and send the COMPRESSED MODE FAILURE message to the SRNC, indicating the reason for failure.

Typical cause values are:

Radio Network Layer Causes:

- Requested Configuration not Supported

Miscellaneous Causes:

- Not enough User Plane Processing Resources

8.3.16.4 Abnormal Conditions

-

9.2.2.17 Pattern Duration (PD)

Pattern duration is the total time of then compressed mode pattern (all consecutive TGPs) expressed in number of frames.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
PD			INTEGER(0..2047, ...)	Frames If the value is set to '0', the Pattern Duration shall be interpreted as 'infinite'.

CHANGE REQUEST				Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.	
25.423 CR 058r1		Current Version: 3.0.0			
GSM (AA.BB) or 3G (AA.BBB) specification number ↑		↑ CR number as allocated by MCC support team			
For submission to: TSG RAN #7 <small>list expected approval meeting # here ↑</small>		for approval <input checked="" type="checkbox"/>		strategic <input type="checkbox"/> <small>(for SMG use only)</small>	
		for information <input type="checkbox"/>		non-strategic <input type="checkbox"/>	

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: ftp://ftp.3gpp.org/Information/CR-Form-v2.doc

Proposed change affects: (U)SIM ME UTRAN / Radio Core Network
(at least one should be marked with an X)

Source: RAN-WG3 **Date:** 28 February 2000

Subject: Maximum allowed UL Tx Power in a cell

Work item: _____

Category:	F Correction <input type="checkbox"/>	Release:	Phase 2 <input type="checkbox"/>
	A Corresponds to a correction in an earlier release <input type="checkbox"/>		Release 96 <input type="checkbox"/>
<small>(only one category shall be marked with an X)</small>	B Addition of feature <input checked="" type="checkbox"/>		Release 97 <input type="checkbox"/>
	C Functional modification of feature <input type="checkbox"/>		Release 98 <input type="checkbox"/>
	D Editorial modification <input type="checkbox"/>		Release 99 <input checked="" type="checkbox"/>
			Release 00 <input type="checkbox"/>

Reason for change:

There exist various sizes of cell radiuses. In R2 specification, each of those cells has its unique value of **Maximum allowed UL Tx Power** for a UE. This value is given to UE by RRC messages. When a UE is given this value, the UE is prohibited to transmit UL power exceeding the given value for the lifetime of camping in a particular cell.

This parameter will bring some benefits e.g. the radius of a cell may be changed by modification of this value through O&M, or excessive UL interference of a particular cell can be prevented if the value is lowered.

This CR introduces **Maximum allowed UL Tx Power** to R3 specification. **Maximum allowed UL Tx Power** is a cell specific value stored in CRNC. In CELL_DCH state, this value shall be sent across Iur interfaces from DRNC to SRNC so that the SRNC can indicate the value to UE by RRC. This CR proposes to add **Maximum Allowed UL Tx Power** to RNSAP: RADIO LINK SETUP RESPONSE/FAILURE and RADIO LINK ADDITION RESPONSE/FAILURE messages.

Clauses affected:

9.1.4 RADIO LINK SETUP RESPONSE

9.1.5 RADIO LINK SETUP FAILURE

9.1.7 RADIO LINK ADDITION RESPONSE

9.1.8 RADIO LINK ADDITION FAILURE

9.3.3 PDU Definitions

9.3.4 Information Element Definitions

Other specs Other 3G core specifications → List of CRs: _____

affected:

Other GSM core specifications	<input type="checkbox"/>	→ List of CRs:
MS test specifications	<input type="checkbox"/>	→ List of CRs:
BSS test specifications	<input type="checkbox"/>	→ List of CRs:
O&M specifications	<input type="checkbox"/>	→ List of CRs:

**Other
comments:**



help.doc

<----- [double-click here for help and instructions on how to create a CR.](#)

9.1.4 RADIO LINK SETUP RESPONSE

9.1.4.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
D-RNTI	O			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
RL Information Response		1..<maxnoofRLs>		
RL ID	M			
SAI	M			
UL Interference Level	M			
DL Code Information		1..<maxnoofDL Codes>		
DL Scrambling Code	M			
FDD DL Channelisation Code Number	M			
Diversity Indication	C-NotFirstRL			
CHOICE <i>diversity Indication Combining</i>				
RL ID	M			Reference RL ID for the combining
<i>Non Combining or IE not present</i>				"IE not present" is equivalent to "First RL".
DCH Information Response		0..<maxnoofDCHs>		Only one DCH per set of co-ordinated DCHs shall be included
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
SSDT Support Indicator	M			
Maximum Uplink Eb/No	M		Uplink Eb/No	
Minimum Uplink Eb/No	M		Uplink Eb/No	
>Maximum Allowed UL Tx Power	M			
Neighbouring FDD Cell Information		0..<maxnoofFDDneighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
Neighbouring TDD Cell Information	O	0..<maxnoofTDDneighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case1			
PSCH Time Slot	C-Case2&3			
Uplink Eb/No Target	O		Uplink Eb/No	

Downlink Eb/No Target	O			
Criticality Diagnostics	O			

Condition	Explanation
IfComb	This IE is present if the 'Diversity Indication' IE indicates 'combining' in the Node B.
IfNotComb	This IE is present if the 'Diversity Indication' IE indicates 'non combining' in the Node B.
NotFirstRL	The IE is present only if the RL is not the first RL in the RL Information
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range bound	Explanation
MaxnoofRLs	Maximum no. of RLs for one UE.
MaxnoofDCHs	Maximum no. of DCHs for one UE.
MaxnoofFDDneighbours	Maximum number of neighbouring FDD cell for one cell.
MaxnoofTDDneighbours	Maximum number of neighbouring TDD cell for one cell.

9.1.4.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
D-RNTI	O			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
RL Information Response		1		
RL ID	M			
SAI	M			
UL Interference Level	M			
Maximum Uplink Eb/No	M		Uplink Eb/No	
Minimum Uplink Eb/No	M		Uplink Eb/No	
>Maximum Allowed UL Tx Power	M			
Uplink Eb/No Target	O		Uplink Eb/No	
Downlink Eb/No Target	O			
UL CCH Information		1..<maxnoofCCHs>		
CCH ID	M			
UL DPCH Information		1..<MaxnoofDPC Hs>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
DL CCH Information		1..<maxnoofCCHs>		
CCH ID	M			
DL DPCH Information		1..<MaxnoofDPC Hs>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
DCH Information Response		1..<maxnoofDCHs>		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
Neighbouring FDD Cell Information	O	0..<maxnoofFDDneighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Primary Scrambling Code	M			

Primary CPICH Power	O			
Neighbouring TDD Cell Information	O	<i>0..<maxnoofTDDneighbours></i>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case1			
PSCH Time Slot	C-Case2&3			
Criticality Diagnostics	O			

Condition	Explanation
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range bound	Explanation
MaxnoofDPCHs	Maximum no. of DPCHs for one CTrCH.
MaxnoofDCHs	Maximum no. of DCHs for one UE.
MaxnoofFDDneighbours	Maximum number of neighbouring FDD cell for one cell
MaxnoofTDDneighbours	Maximum number of neighbouring TDD cell for one cell
MaxnoofCTrCHs	Maximum no. of CTrCH for one UE.

9.1.5 RADIO LINK SETUP FAILURE

9.1.5.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
D-RNTI	O			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
Unsuccessful RL Information Response		1...<maxnoofRLs>		
RL ID	M			
Cause	M			
Successful RL Information Response		0..<maxnoofRLs-1>		
RL ID	M			
SAI	M			
UL Interference Level	M			
DL Code Information		1..<maxnoofDL Codes>		
DL Scrambling Code	M			
FDD DL Channelisation Code Number	M			
Diversity Indication	M			
CHOICE <i>diversity Indication Combining</i>				
RL ID	M			Reference RL ID for the combining
<i>Non Combining or IE not present</i>				"IE not present" is equivalent to "First RL".
DCH Information Response		0..<maxnoofDCHs>		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
SSDT Support Indicator	M			
>Maximum Allowed UL Tx Power	M			
Neighbouring FDD Cell Information	O			
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
Neighbouring TDD Cell Information	O			
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case3			
PSCH Time Slot	C-Case2&3			
Uplink Eb/No Target	O		Uplink Eb/No	
Maximum Uplink Eb/No	M		Uplink Eb/No	

Minimum Uplink Eb/No	M		Uplink Eb/No	
Downlink Eb/No Target	O			
Criticality Diagnostics	O			

Condition	Explanation
IfComb	This IE is present if the 'Diversity Indication' IE indicates 'combining' in the Node B.
IfNotComb	This IE is present if the 'Diversity Indication' IE indicates 'non combining' in the Node B.
NotFirstRL	The IE is present only if the RL is not the first RL in the RL Information
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range bound	Explanation
MaxnoofRLs	Maximum no. of RLs for one UE.
MaxnoofDCHs	Maximum no. of DCHs for one UE.

9.1.5.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
Unsuccessful RL Information Response		1		
RL ID	M			
Cause	M			
Criticality Diagnostics	O			

9.1.7 RADIO LINK ADDITION RESPONSE

9.1.7.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
RL Information Response		1..<maxnoofRLs-1>		
RL ID	M			
SAI	M			
UL Interference Level	M			
DL Code Information		1..<maxnoofDLCodes>		
DL Scrambling Code	M			
DL Channelisation Code	M			
Diversity Indication	M			
CHOICE <i>diversity indication</i>				
<i>Combining</i>				
RL ID	M			Reference RL-Id
<i>Non combining</i>				
DCH Information Response		1..<maxnoofDCHs>		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
SSDT Support Indicator	M			
Minimum Uplink Eb/No	M		Uplink Eb/No	
Maximum Uplink Eb/No	M		Uplink Eb/No	
>Maximum Allowed UL Tx Power	M			
Neighbouring FDD Cell Information		0..<maxnoofFDD Neighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
Neighbouring TDD Cell Information		0..<maxnoofTDD Neighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case1			
PSCH Time Slot	C-Case2&3			
Criticality Diagnostics	O			

Condition	Explanation
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range bound	Explanation
MaxnoofDCHs	Maximum number of dedicated channels on one RL
MaxnoofRLs	Maximum number of radio links for one UE
MaxnoofFDDNeighbours	Maximum number of neighbouring FDD cells for one cell
MaxnoofTDDNeighbours	Maximum number of neighbouring TDD cells for one cell
MaxnoofDLCodes	Maximum number of DL code information

9.1.7.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
RL Information Response		1		
RL ID	M			
SAI	M			
UL Interference Level	M			
UL CCTrCH Information		1..<maxnoof CCTrCHs>		
CCTrCH ID	M			
UL DPCH Information		1..<maxnoOfDPCHs>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
DL CCTrCH Information		1..<maxnoof CCTrCHs>		
CCTrCH ID	M			
DL DPCH information		1..<maxnoOfDPCHs>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
Diversity Indication	M			
CHOICE <i>diversity indication</i>				
<i>Combining</i>				
RL ID	M			Reference RL
<i>Non combining</i>				
DCH Information Response		1..<maxnoofDCHs >		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
Minimum Uplink Eb/No	M		Uplink Eb/No	
Maximum Uplink Eb/No	M		Uplink Eb/No	
>Maximum Allowed UL Tx Power	M			
Neighbouring FDD Cell Information		0..<maxnoofFDD Neighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			

Primary Scrambling Code	M			
Primary CPICH Power	O			
Neighbouring TDD Cell Information		<i>0..<maxnoofTDD Neighbours></i>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case1			
PSCH Time Slot	C-Case2&3			
Criticality Diagnostics	O			

Condition	Explanation
Case1	This IE is present only if Sync Case = Case1
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range Bound	Explanation
MaxnoofDCHs	Maximum number of dedicated channels on one RL
MaxnoofFDDNeighbours	Maximum number of neighbouring FDD cells for one cell
MaxnoofTDDNeighbours	Maximum number of neighbouring TDD cells for one cell
MaxnoofDLCodes	Maximum number of DL code information
MaxnoOfDPCHs	Maximum number of DPCH in one CCTrCH
MaxnoofCCTrCHs	no. of CCTrCH for one UE.

9.1.8 RADIO LINK ADDITION FAILURE

9.1.8.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
Unsuccessful RL Information Response		1..<maxnoofRLs-1>		
RL ID	M			
Cause	M			
Successful RL Information Response		1..<maxnoofRLs-2>		
RL ID	M			
SAI	M			
UL Interference Level	M			
DL Code Information		1..<maxnoofDLCodes>		
DL scrambling code	M			
DL channelisation code	M			
Diversity Indication	M			
CHOICE <i>diversity indication</i>				
<i>Combining</i>				
RL ID	M			Reference RL-Id
<i>Non combining</i>				
DCH Information Response		1..<maxnoofDCHs>		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
SSDT Support Indicator	M			
>Maximum Allowed UL Tx Power	M			
Minimum Uplink Eb/No	M		Uplink Eb/No	
Maximum Uplink Eb/No	M		Uplink Eb/No	
Neighbouring FDD Cell Information		0..<maxnoofFDD Neighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
Neighbouring TDD Cell Information		0..<maxnoofTDD Neighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case1			
PSCH Time Slot	C-Case2&3			
Criticality Diagnostics	O			

Condition	Explanation
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range bound	Explanation
MaxnoofDCHs	Maximum number of dedicated channels on one RL
MaxnoofRLs	Maximum number of radio links for one UE
MaxnoofFDDNeighbours	Maximum number of neighbouring FDD cells for one cell
MaxnoofTDDNeighbours	Maximum number of neighbouring TDD cells for one cell
MaxnoofDLCodes	Maximum number of DL code information

9.1.8.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
Unsuccessful RL Information Response		1		
RL ID	M			
Cause	M			
Criticality Diagnostics	O			

9.2.1.X Maximum Allowed UL Tx Power

Maximum Allowed UL Tx Power is the maximum power that a UE in a particular cell is allowed to transmit.

<u>IE/Group Name</u>	<u>Presence</u>	<u>Range</u>	<u>IE type and reference</u>	<u>Semantics description</u>
<u>Maximum Allowed UL Tx Power</u>			<u>INTEGER (-50..+33)</u>	<u>dBm</u>

9.3.3 PDU Definitions

```

-- *****
--
-- PDU definitions for RNSAP.
--
-- *****

RNSAP-PDU-Contents -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

-- *****
--
-- IE parameter types from other modules.
--
-- *****

IMPORTS
    AllocationRetentionPriority,
    AllowedQueuingTime,
    BLER,
    BindingID,
    BurstType,
    C-ID,
    C-RNTI,
    CCTrCH-ID,
    CFN,
    CN-CS-DomainIdentifier,
    CN-PS-DomainIdentifier,
    CPICH-EcIo,
    CPICH-Power,
    Cause,
    CellParameterID,
    ChipOffset,
    CompressedModeMethod,
    CriticalityDiagnostics,
    D-FieldLength,
    D-RNTI,
    D-RNTI-ReleaseIndication,
    DCH-CombinationInd,
    DCH-ID,
    DL-ChannelisationCode,
    DL-DPCCCH-SlotFormat,
    DL-DPCH-SlotNumber,
    DL-EbNo,
    DL-EbNoTarget,
    DL-FrameType,
    DL-Power,
    DL-ScramblingCode,
    DPCH-ID,
    DRX-Parameter,
    DedicatedMeasurementValue,
    DiversityControlField,
    DiversityMode,
    FACH-DataFrameSize,
    FACH-InitialWindowSize,
    FACH-PriorityIndicator,
    FDD-DL-ChannelisationCodeNumber,
    FDD-S-CCPCH-Offset,
    FrameHandlingPriority,
    FrameOffset,
    GapPeriod,
    GapPositionMode,
    L3-Information,
    MAC-c-SDU-Length,
    MaxNrOfUL-DPCHs,
    MaximumAllowedULTxPower,
    MeanBitRate,
    MeasurementCharacteristics,
    MeasurementID,
    MidambleShift,
    MinUL-ChannelisationCodeLength,
    MultipleURAsIndicator,
    MultiplexingPosition,
    Offset,
    PD,
    PSCH-PCCPCH-TimeSlot,
    PSCH-TimeSlot,
    PayloadCRC-PresenceIndicator,
    PilotBitsUsedIndicator,
    PowerControlMode,
    PowerOffset,

```

```

PowerResumeMode,
PrimaryCCPCH-RSCP,
PrimaryCPICH-EcNo,
PrimaryCPICH-Power,
PrimaryScramblingCode,
PropagationDelay,
PunctureLimit,
RANAP-RelocationInformation,
RL-ID,
RLC-Mode,
RNC-ID,
RepetitionLength,
RepetitionPeriod,
ReportCharacteristics,
S-FieldLength,
S-RNTI,
SAI,
SN,
SRNC-ID,
SSDT-CellID,
SSDT-CellID-Length,
SSDT-Indication,
SSDT-SupportIndicator,
ScaledUL-InterferenceLevel,
ScramblingCode,
ScramblingCodeChange,
SecondaryCCPCH-SlotFormat,
SyncCase,
TDD-ChannelisationCode,
TDD-PhysicalChannelOffset,
TFCI-Coding,
TFCI-Presence,
TFCI-SignallingMode,
TGD,
TGL,
TPC-StepSize,
TimeSlot,
ToAWE,
ToAWS,
TransportBearerID,
TransportBearerRequestIndicator,
TransportFormatCombinationSet,
TransportFormatSet,
TransportLayerAddress,
UARFCN,
UC-ID,
UL-DL-CompressedModeSelection,
UL-DPCCH-SlotFormat,
UL-EbNo,
UL-EbNoTarget,
UL-FP-Mode,
UL-ScramblingCode,
URA-ID

```

--- PARTLY OMITTED ---

```

-- *****
--
-- RADIO LINK SETUP RESPONSE FDD
--
-- *****

RadioLinkSetupResponseFDD ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container        {{RadioLinkSetupResponseFDD-IEs}},
    protocolExtensions         ProtocolExtensionContainer  {{RadioLinkSetupResponseFDD-
Extensions}}                OPTIONAL,
    ...
}

RadioLinkSetupResponseFDD-IEs RNSAP-PROTOCOL-IES ::= {
optional { ID id-D-RNTI                CRITICALITY ignore TYPE D-RNTI                PRESENCE
          } |
          { ID id-CN-PS-DomainIdentifier CRITICALITY ignore TYPE CN-PS-DomainIdentifier
          PRESENCE optional } |
          { ID id-CN-CS-DomainIdentifier CRITICALITY ignore TYPE CN-CS-DomainIdentifier
          PRESENCE optional } |
          { ID id-RL-InformationResponseList-RL-SetupRspFDD
          CRITICALITY ignore TYPE RL-InformationResponseList-RL-SetupRspFDD
          PRESENCE mandatory } |
          { ID id-UL-EbNoTarget          CRITICALITY ignore TYPE UL-EbNoTarget
          PRESENCE optional } |
          { ID id-DL-EbNoTarget          CRITICALITY ignore TYPE DL-EbNoTarget
          PRESENCE optional } |

```

```

    { ID id-CriticalityDiagnostics          CRITICALITY ignore  TYPE CriticalityDiagnostics
      PRESENCE optional  },
    ...
  }

RL-InformationResponseList-RL-SetupRspFDD ::= RL-IE-ContainerList { {RL-
InformationResponseItemIEs-RL-SetupRspFDD} }

RL-InformationResponseItemIEs-RL-SetupRspFDD RNSAP-PROTOCOL-IES ::= {
  { ID id-RL-InformationResponseItem-RL-SetupRspFDD
    CRITICALITY ignore  TYPE RL-InformationResponseItem-RL-SetupRspFDD
    PRESENCE mandatory  },
  ...
}

RL-InformationResponseItem-RL-SetupRspFDD ::= SEQUENCE {
  rL-ID                RL-ID,
  sAI                  SAI,
  ul-InterferenceLevel ScaledUL-InterferenceLevel,
  dl-CodeInformation   DL-CodeInformationList-RL-SetupRspFDD,
  sSDT-SupportIndicator SSDT-SupportIndicator,
  maxUL-EbNo          UL-EbNo,
  minUL-EbNo          UL-EbNo,
  maximumAllowedULTxPower MaximumAllowedULTxPower,
  neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-SetupRsp
OPTIONAL,
  neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-SetupRsp
OPTIONAL,
  iE-Extensions       ProtocolExtensionContainer { {RL-InformationResponseItem-RL-
SetupRspFDD-ExtIEs} } OPTIONAL,
  ...
}

RL-InformationResponseItem-RL-SetupRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CodeInformationList-RL-SetupRspFDD ::= SEQUENCE (SIZE (1..maxNoOfDL-Codes)) OF DL-
CodeInformationItem-RL-SetupRspFDD

DL-CodeInformationItem-RL-SetupRspFDD ::= SEQUENCE {
  dl-ScramblingCode      DL-ScramblingCode,
  fDD-DL-ChannelisationCodeNumber FDD-DL-ChannelisationCodeNumber,
  -- ** NOTE: How many alternatives are there, 2 or 3? **
  diversityIndication    CHOICE {
    combining             SEQUENCE {
      rL-ID              RL-ID
    },
    nonCombiningOrIENotPresent SEQUENCE {
      dCH-InformationResponse-RL-SetupRspFDD DCH-InformationResponseList-RL-SetupRspFDD
OPTIONAL
    }
  } OPTIONAL
  -- This IE is present only if the RL is not the first on in the RL Information -- ,
  iE-Extensions         ProtocolExtensionContainer { {DL-CodeInformationItem-RL-
SetupRspFDD-ExtIEs} } OPTIONAL,
  ...
}

DL-CodeInformationItem-RL-SetupRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ** NOTE: Shall this be made as an IE container? **
DCH-InformationResponseList-RL-SetupRspFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-
InformationResponseItem-RL-SetupRspFDD

DCH-InformationResponseItem-RL-SetupRspFDD ::= SEQUENCE {
  dCH-ID                DCH-ID,
  bindingID             BindingID,
  transportLayerAddress TransportLayerAddress,
  iE-Extensions         ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-
SetupRspFDD-ExtIEs} } OPTIONAL,
  ...
}

DCH-InformationResponseItem-RL-SetupRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ** NOTE: Both FDD and TDD messages use these definitions **
NeighbouringFDD-CellInformationList-RL-SetupRsp ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours)) OF
NeighbouringFDD-CellInformationItem-RL-SetupRsp

NeighbouringFDD-CellInformationItem-RL-SetupRsp ::= SEQUENCE {

```

```

uC-ID                C-ID,
cN-PS-DomainIdentifier  CN-PS-DomainIdentifier  OPTIONAL,
cN-CS-DomainIdentifier  CN-CS-DomainIdentifier  OPTIONAL,
uARFCN               UARFCN,
frameOffset          FrameOffset      OPTIONAL,
primaryScramblingCode PrimaryScramblingCode,
primaryCPICH-Power   PrimaryCPICH-Power  OPTIONAL,
iE-Extensions        ProtocolExtensionContainer { {NeighbouringFDD-
CellInformationItem-RL-SetupRsp-ExtIEs} } OPTIONAL,
...
}

NeighbouringFDD-CellInformationItem-RL-SetupRsp-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

NeighbouringTDD-CellInformationList-RL-SetupRsp ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours)) OF
NeighbouringTDD-CellInformationItem-RL-SetupRsp

NeighbouringTDD-CellInformationItem-RL-SetupRsp ::= SEQUENCE {
c-ID                C-ID,
cN-PS-DomainIdentifier  CN-PS-DomainIdentifier  OPTIONAL,
cN-CS-DomainIdentifier  CN-CS-DomainIdentifier  OPTIONAL,
uARFCN               UARFCN,
frameOffset          FrameOffset      OPTIONAL,
cellParameterID      CellParameterID,
syncCase             SyncCase,
timeSlot             TimeSlot        OPTIONAL
-- This IE is present only if SyncCase is Case1 -- ,
pSCH-TimeSlot        PSCH-TimeSlot    OPTIONAL
-- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
ul-EbNo              UL-EbNo          OPTIONAL,
dl-EbNo              DL-EbNo          OPTIONAL,
iE-Extensions        ProtocolExtensionContainer { {NeighbouringTDD-
CellInformationItem-RL-SetupRsp-ExtIEs} } OPTIONAL,
...
}

NeighbouringTDD-CellInformationItem-RL-SetupRsp-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

RadioLinkSetupResponseFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- *****
--
-- RADIO LINK SETUP RESPONSE TDD
--
-- *****

RadioLinkSetupResponseTDD ::= SEQUENCE {
protocolIEs          ProtocolIE-Container      {{RadioLinkSetupResponseTDD-IEs}},
protocolExtensions   ProtocolExtensionContainer {{RadioLinkSetupResponseTDD-
Extensions}}
OPTIONAL,
...
}

RadioLinkSetupResponseTDD-IEs RNSAP-PROTOCOL-IES ::= {
{ ID id-D-RNTI                CRITICALITY ignore TYPE D-RNTI                PRESENCE
optional } |
{ ID id-CN-PS-DomainIdentifier CRITICALITY ignore TYPE CN-PS-DomainIdentifier
PRESENCE optional } |
{ ID id-CN-CS-DomainIdentifier CRITICALITY ignore TYPE CN-CS-DomainIdentifier
PRESENCE optional } |
{ ID id-RL-InformationResponse-RL-SetupRspTDD CRITICALITY ignore TYPE RL-
InformationResponse-RL-SetupRspTDD PRESENCE mandatory } |
{ ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics
PRESENCE optional },
...
}

RL-InformationResponse-RL-SetupRspTDD ::= SEQUENCE {
rL-ID                RL-ID,
SAI                  SAI,
ul-InterferenceLevel ScaledUL-InterferenceLevel,
maxUL-EbNo           UL-EbNo,
minUL-EbNo           UL-EbNo,
maximumAllowedULTxPower MaximumAllowedULTxPower,
ul-EbNoTarget        UL-EbNo          OPTIONAL,
dl-EbNoTarget        DL-EbNo          OPTIONAL,
ul-CCTrCHInformation UL-CCTrCHInformationList-RL-SetupRspTDD,
dl-CCTrCHInformation DL-CCTrCHInformationList-RL-SetupRspTDD,
dCH-InformationResponse DCH-InformationResponseList-RL-SetupRspTDD,

```



```

    neighbouringFDD-CellInformation      NeighbouringFDD-CellInformationList-RL-SetupRsp
OPTIONAL,
    neighbouringTDD-CellInformation      NeighbouringTDD-CellInformationList-RL-SetupRsp
OPTIONAL,
    iE-Extensions                       ProtocolExtensionContainer { {RL-InformationResponse-RL-
SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

RL-InformationResponse-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
UL-CCTrCHInformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF UL-
CCTrCHInformationItem-RL-SetupRspTDD

UL-CCTrCHInformationItem-RL-SetupRspTDD ::= SEQUENCE {
    cCTrCH-ID                          CCTrCH-ID,
    ul-DPCH-Information                 UL-DPCH-InformationList-RL-SetupRspTDD,
    iE-Extensions                       ProtocolExtensionContainer { {UL-CCTrCHInformationItem-RL-
SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

UL-CCTrCHInformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
UL-DPCH-InformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF UL-DPCH-
InformationItem-RL-SetupRspTDD

-- **NOTE: UL-DPCH-InformationItem-RL-SetupRspTDD and DL-DPCH-InformationItem-RL-SetupRspTDD
-- are currently similar. Combine them? **
UL-DPCH-InformationItem-RL-SetupRspTDD ::= SEQUENCE {
    dPCH-ID                             DPCH-ID,
    tDD-ChannelisationCode               TDD-ChannelisationCode,
    burstType                            BurstType,
    midambleShift                        MidambleShift,
    timeSlot                             TimeSlot,
    tDD-PhysicalChannelOffset            TDD-PhysicalChannelOffset,
    repetitionPeriod                     RepetitionPeriod,
    repetitionLength                     RepetitionLength,
    tFCI-Presence                        TFCI-Presence,
    iE-Extensions                       ProtocolExtensionContainer { {UL-DPCH-InformationItem-RL-
SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

UL-DPCH-InformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CCTrCHInformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF DL-
CCTrCHInformationItem-RL-SetupRspTDD

DL-CCTrCHInformationItem-RL-SetupRspTDD ::= SEQUENCE {
    cCTrCH-ID                          CCTrCH-ID,
    dl-DPCH-Information                 DL-DPCH-InformationList-RL-SetupRspTDD,
    iE-Extensions                       ProtocolExtensionContainer { {DL-CCTrCHInformationItem-RL-
SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CCTrCHInformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-DPCH-InformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF DL-DPCH-
InformationItem-RL-SetupRspTDD

DL-DPCH-InformationItem-RL-SetupRspTDD ::= SEQUENCE {
    dPCH-ID                             DPCH-ID,
    tDD-ChannelisationCode               TDD-ChannelisationCode,
    burstType                            BurstType,
    midambleShift                        MidambleShift,
    timeSlot                             TimeSlot,
    tDD-PhysicalChannelOffset            TDD-PhysicalChannelOffset,
    repetitionPeriod                     RepetitionPeriod,
    repetitionLength                     RepetitionLength,
    tFCI-Presence                        TFCI-Presence,
    iE-Extensions                       ProtocolExtensionContainer { {DL-DPCH-InformationItem-RL-
SetupRspTDD-ExtIEs} } OPTIONAL,

```

```

}
...
DL-DPCH-InformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
}
...
DCH-InformationResponseList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-
InformationResponseItem-RL-SetupRspTDD
DCH-InformationResponseItem-RL-SetupRspTDD ::= SEQUENCE {
dCH-ID DCH-ID,
bindingID BindingID,
transportLayerAddress TransportLayerAddress,
iE-Extensions ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-
SetupRspTDD-ExtIEs} } OPTIONAL,
...
}
DCH-InformationResponseItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
}
...
RadioLinkSetupResponseTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
}
...
-- *****
--
-- RADIO LINK SETUP FAILURE FDD
--
-- *****

RadioLinkSetupFailureFDD ::= SEQUENCE {
protocolIEs ProtocolIE-Container {{RadioLinkSetupFailureFDD-IEs}},
protocolExtensions ProtocolExtensionContainer {{RadioLinkSetupFailureFDD-
Extensions}}
OPTIONAL,
...
}
RadioLinkSetupFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
{ ID id-D-RNTI CRITICALITY ignore TYPE D-RNTI PRESENCE
mandatory } |
{ ID id-CN-PS-DomainIdentifier CRITICALITY ignore TYPE CN-PS-DomainIdentifier
PRESENCE mandatory } |
{ ID id-CN-CS-DomainIdentifier CRITICALITY ignore TYPE CN-CS-DomainIdentifier
PRESENCE mandatory } |
{ ID id-UnsuccessfulRL-InformationResponseList-RL-SetupFailureFDD
CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponseList-RL-
SetupFailureFDD PRESENCE mandatory } |
{ ID id-SuccessfulRL-InformationResponseList-RL-SetupFailureFDD
CRITICALITY ignore TYPE SuccessfulRL-InformationResponseList-RL-
SetupFailureFDD PRESENCE mandatory } |
{ ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics
PRESENCE optional },
...
}
UnsuccessfulRL-InformationResponseList-RL-SetupFailureFDD ::= RL-IE-ContainerList {
{UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD-IEs} }
UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
{ ID id-UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD
CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponse-RL-
SetupFailureFDD PRESENCE mandatory },
...
}
UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD ::= SEQUENCE {
rL-ID RL-ID,
cause Cause,
iE-Extensions ProtocolExtensionContainer { {UnsuccessfulRL-
InformationResponse-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
...
}
UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
}
...
SuccessfulRL-InformationResponseList-RL-SetupFailureFDD ::= RL-IE-ContainerList { {SuccessfulRL-
InformationResponse-RL-SetupFailureFDD-IEs} }

```

```

SuccessfulRL-InformationResponse-RL-SetupFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-SuccessfulRL-InformationResponse-RL-SetupFailureFDD
    CRITICALITY ignore TYPE SuccessfulRL-InformationResponse-RL-
SetupFailureFDD
    PRESENCE mandatory },
  ...
}

SuccessfulRL-InformationResponse-RL-SetupFailureFDD ::= SEQUENCE {
  rL-ID RL-ID,
  sAI SAI,
  ul-InterferenceLevel ScaledUL-InterferenceLevel,
  dl-CodeInformation DL-CodeInformationList-RL-SetupFailureFDD,
  sSDT-SupportIndicator SSDT-SupportIndicator,
  maximumAllowedULTxPower MaximumAllowedULTxPower,
  neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-SetupFailureFDD
OPTIONAL,
  neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-SetupFailureFDD
OPTIONAL,
  ul-EbNoTarget UL-EbNo,
  maxUL-EbNo UL-EbNo,
  minUL-EbNo UL-EbNo,
  dl-EbNoTarget DL-EbNo,
  iE-Extensions ProtocolExtensionContainer { {SuccessfulRL-InformationResponse-
RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
  ...
}
-- ** NOTE: Shall this be made as an IE container? **
DL-CodeInformationList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNoOfDL-Codes)) OF DL-
CodeInformationItem-RL-SetupFailureFDD

SuccessfulRL-InformationResponse-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DL-CodeInformationItem-RL-SetupFailureFDD ::= SEQUENCE {
  dl-ScramblingCode DL-ScramblingCode,
  fDD-DL-ChannelisationCodeNumber FDD-DL-ChannelisationCodeNumber,
  -- ** NOTE: How many alternatives are there, 2 or 3? **
  diversityIndication CHOICE {
    combining SEQUENCE {
      rL-ID RL-ID
    },
    nonCombiningOrIENotPresent SEQUENCE {
      dCH-InformationResponse-RL-SetupFailureFDD DCH-InformationResponseList-RL-
SetupFailureFDD OPTIONAL
    }
  } OPTIONAL
  -- This IE is present only if the RL is not the first on in the RL Information -- ,
  iE-Extensions ProtocolExtensionContainer { {DL-CodeInformationItem-RL-
SetupFailureFDD-ExtIEs} } OPTIONAL,
  ...
}

DL-CodeInformationItem-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ** NOTE: Shall this be made as an IE container? **
DCH-InformationResponseList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-
InformationResponseItem-RL-SetupFailureFDD

DCH-InformationResponseItem-RL-SetupFailureFDD ::= SEQUENCE {
  dCH-ID DCH-ID,
  bindingID BindingID,
  transportLayerAddress TransportLayerAddress,
  iE-Extensions ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-
SetupFailureFDD-ExtIEs} } OPTIONAL,
  ...
}

DCH-InformationResponseItem-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

NeighbouringFDD-CellInformationList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfFDD-
Neighbours)) OF
  NeighbouringFDD-CellInformationItem-RL-SetupFailureFDD

NeighbouringFDD-CellInformationItem-RL-SetupFailureFDD ::= SEQUENCE {
  uC-ID C-ID,
  cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,
  cN-CS-DomainIdentifier CN-CS-DomainIdentifier OPTIONAL,
  uARFCN UARFCN,
  frameOffset FrameOffset OPTIONAL,
  primaryScramblingCode PrimaryScramblingCode,

```

```

    primaryCPICH-Power          PrimaryCPICH-Power          OPTIONAL,
    iE-Extensions               ProtocolExtensionContainer { {NeighbouringFDD-
CellInformationItem-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringFDD-CellInformationItem-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringTDD-CellInformationList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfTDD-
Neighbours)) OF
    NeighbouringTDD-CellInformationItem-RL-SetupFailureFDD

NeighbouringTDD-CellInformationItem-RL-SetupFailureFDD ::= SEQUENCE {
    uC-ID                       C-ID,
    cN-PS-DomainIdentifier      CN-PS-DomainIdentifier      OPTIONAL,
    cN-CS-DomainIdentifier      CN-CS-DomainIdentifier      OPTIONAL,
    uARFCN                      UARFCN,
    frameOffset                 FrameOffset              OPTIONAL,
    cellParameterID            CellParameterID,
    syncCase                    SyncCase,
    timeSlot                    TimeSlot,
    pSCH-TimeSlot              PSCH-TimeSlot              OPTIONAL
    -- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
    iE-Extensions               ProtocolExtensionContainer { {NeighbouringTDD-
CellInformationItem-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringTDD-CellInformationItem-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkSetupFailureFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

--- PARTLY OMITTED ---

-- *****
--
-- RADIO LINK ADDITION RESPONSE FDD
-- *****

RadioLinkAdditionResponseFDD ::= SEQUENCE {
    protocolIEs                 ProtocolIE-Container      {{RadioLinkAdditionResponseFDD-
IEs}},
    protocolExtensions          ProtocolExtensionContainer {{RadioLinkAdditionResponseFDD-
Extensions}}
    OPTIONAL,
    ...
}

RadioLinkAdditionResponseFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI              CRITICALITY ignore TYPE D-RNTI              PRESENCE
optional } |
    { ID id-RL-InformationResponseList-RL-AdditionRspFDD
CRITICALITY ignore TYPE RL-InformationResponseList-RL-AdditionRspFDD
PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics
PRESENCE optional },
    ...
}

RL-InformationResponseList-RL-AdditionRspFDD ::= RL-IE-ContainerList { {RL-
InformationResponseItemIEs-RL-AdditionRspFDD} }

RL-InformationResponseItemIEs-RL-AdditionRspFDD RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationResponseItem-RL-AdditionRspFDD
CRITICALITY ignore TYPE RL-InformationResponseItem-RL-AdditionRspFDD
PRESENCE mandatory },
    ...
}

RL-InformationResponseItem-RL-AdditionRspFDD ::= SEQUENCE {
    rL-ID                       RL-ID,
    SAI                          SAI,
    ul-InterferenceLevel         ScaledUL-InterferenceLevel,
    dl-CodeInformation           DL-CodeInformationList-RL-AdditionRspFDD,
    sSDT-SupportIndicator        SSDT-SupportIndicator,

```

```

maxUL-EbNo          UL-EbNo,
minUL-EbNo          UL-EbNo,
maximumAllowedULTxPower  MaximumAllowedULTxPower,
neighbouringFDD-CellInformation  NeighbouringFDD-CellInformationList-RL-SetupRsp
OPTIONAL,
neighbouringTDD-CellInformation  NeighbouringTDD-CellInformationList-RL-SetupRsp
OPTIONAL,
iE-Extensions      ProtocolExtensionContainer { {RL-InformationResponseItem-RL-
AdditionRspFDD-ExtIEs} } OPTIONAL,
...
}

RL-InformationResponseItem-RL-AdditionRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CodeInformationList-RL-AdditionRspFDD ::= SEQUENCE (SIZE (1..maxNoOfDL-Codes)) OF DL-
CodeInformationItem-RL-AdditionRspFDD

DL-CodeInformationItem-RL-AdditionRspFDD ::= SEQUENCE {
dl-ScramblingCode          DL-ScramblingCode,
fDD-DL-ChannelisationCodeNumber  FDD-DL-ChannelisationCodeNumber,
-- ** NOTE: How many alternatives are there, 2 or 3? **
diversityIndication        CHOICE {
    combining                SEQUENCE {
        rL-ID                RL-ID
    },
    nonCombiningOrIENotPresent  SEQUENCE {
        dCH-InformationResponse-RL-AdditionRspFDD  DCH-InformationResponseList-RL-
AdditionRspFDD  OPTIONAL
    }
},
iE-Extensions              ProtocolExtensionContainer { {DL-CodeInformationItem-RL-
AdditionRspFDD-ExtIEs} } OPTIONAL,
...
}

DL-CodeInformationItem-RL-AdditionRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- ** NOTE: Shall this be made as an IE container? **
DCH-InformationResponseList-RL-AdditionRspFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-
InformationResponseItem-RL-AdditionRspFDD

DCH-InformationResponseItem-RL-AdditionRspFDD ::= SEQUENCE {
dCH-ID                    DCH-ID,
bindingID                 BindingID,
transportLayerAddress     TransportLayerAddress,
iE-Extensions            ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-
AdditionRspFDD-ExtIEs} } OPTIONAL,
...
}

DCH-InformationResponseItem-RL-AdditionRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- ** NOTE: Both FDD and TDD messages use these definitions **
NeighbouringFDD-CellInformationList-RL-AdditionRsp ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours))
OF
    NeighbouringFDD-CellInformationItem-RL-AdditionRsp

NeighbouringFDD-CellInformationItem-RL-AdditionRsp ::= SEQUENCE {
uC-ID                    C-ID,
cN-PS-DomainIdentifier   CN-PS-DomainIdentifier  OPTIONAL,
cN-CS-DomainIdentifier   CN-CS-DomainIdentifier  OPTIONAL,
uARFCN                  UARFCN,
frameOffset             FrameOffset  OPTIONAL,
primaryScramblingCode   PrimaryScramblingCode,
primaryCPICH-Power      PrimaryCPICH-Power  OPTIONAL,
iE-Extensions          ProtocolExtensionContainer { {NeighbouringFDD-
CellInformationItem-RL-AdditionRsp-ExtIEs} } OPTIONAL,
...
}

NeighbouringFDD-CellInformationItem-RL-AdditionRsp-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

NeighbouringTDD-CellInformationList-RL-AdditionRsp ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours))
OF
    NeighbouringTDD-CellInformationItem-RL-AdditionRsp

```

```

NeighbouringTDD-CellInformationItem-RL-AdditionRsp ::= SEQUENCE {
    uC-ID                               C-ID,
    cN-PS-DomainIdentifier                CN-PS-DomainIdentifier    OPTIONAL,
    cN-CS-DomainIdentifier                CN-CS-DomainIdentifier    OPTIONAL,
    uARFCN                                UARFCN,
    frameOffset                          FrameOffset              OPTIONAL,
    cellParameterID                      CellParameterID,
    syncCase                             SyncCase,
    timeSlot                             TimeSlot,
    pSCH-TimeSlot                        PSCH-TimeSlot            OPTIONAL
    -- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
    iE-Extensions                        ProtocolExtensionContainer { {NeighbouringTDD-
CellInformationItem-RL-AdditionRsp-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringTDD-CellInformationItem-RL-AdditionRsp-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkAdditionResponseFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK ADDITION RESPONSE TDD
--
-- *****

RadioLinkAdditionResponseTDD ::= SEQUENCE {
    protocolIEs                          ProtocolIE-Container      {{RadioLinkAdditionResponseTDD-
IEs}},
    protocolExtensions                    ProtocolExtensionContainer {{RadioLinkAdditionResponseTDD-
Extensions}}
    ...
}

RadioLinkAdditionResponseTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI                        CRITICALITY ignore TYPE D-RNTI                PRESENCE
optional } |
    { ID id-RL-InformationResponse-RL-AdditionRspTDD
PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics        CRITICALITY ignore TYPE CriticalityDiagnostics
PRESENCE optional },
    ...
}

RL-InformationResponse-RL-AdditionRspTDD ::= SEQUENCE {
    rL-ID                                RL-ID,
    sAI                                  SAI,
    ul-InterferenceLevel                 ScaledUL-InterferenceLevel,
    ul-CCTrCHInformation                 UL-CCTrCHInformationList-RL-AdditionRspTDD,
    dl-CCTrCHInformation                 DL-CCTrCHInformationList-RL-AdditionRspTDD,
    diversityIndication                  CHOICE {
        combining                          SEQUENCE {
            rL-ID                          RL-ID
        },
        nonCombiningOrIENotPresent        SEQUENCE {
            dCH-InformationResponse-RL-AdditionRspFDD
            AdditionRspFDD                 DCH-InformationResponseList-RL-
OPTIONAL
        }
    } OPTIONAL,
    maxUL-EbNo                           UL-EbNo,
    minUL-EbNo                           UL-EbNo,
    maximumAllowedULTxPower              MaximumAllowedULTxPower,
    neighbouringFDD-CellInformation       NeighbouringFDD-CellInformationList-RL-AdditionRspTDD
OPTIONAL,
    neighbouringTDD-CellInformation       NeighbouringTDD-CellInformationList-RL-AdditionRspTDD
OPTIONAL,
    iE-Extensions                        ProtocolExtensionContainer { {RL-InformationResponse-RL-
AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

RL-InformationResponse-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
UL-CCTrCHInformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF UL-
CCTrCHInformationItem-RL-AdditionRspTDD

UL-CCTrCHInformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    cCTrCH-ID                            CCTrCH-ID,

```

```

        ul-DPCH-Information          UL-DPCH-InformationList-RL-AdditionRspTDD,
        iE-Extensions                ProtocolExtensionContainer { {UL-CCTrCHInformationItem-RL-
AdditionRspTDD-ExtIEs} } OPTIONAL,
        ...
    }

UL-CCTrCHInformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
UL-DPCH-InformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF UL-DPCH-
InformationItem-RL-AdditionRspTDD

UL-DPCH-InformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    dPCH-ID                DPCH-ID,
    tDD-ChannelisationCode TDD-ChannelisationCode,
    burstType              BurstType,
    midambleShift          MidambleShift,
    timeSlot               TimeSlot,
    offset                 Offset,
    tDD-PhysicalChannelOffset TDD-PhysicalChannelOffset,
    repetitionPeriod       RepetitionPeriod,
    repetitionLength       RepetitionLength,
    tFCI-Presence          TFCI-Presence,
    iE-Extensions          ProtocolExtensionContainer { {UL-DPCH-InformationItem-RL-
AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

UL-DPCH-InformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CCTrCHInformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF DL-
CCTrCHInformationItem-RL-AdditionRspTDD

DL-CCTrCHInformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    cCTrCH-ID              CCTrCH-ID,
    dl-DPCH-Information    DL-DPCH-InformationList-RL-AdditionRspTDD,
    iE-Extensions          ProtocolExtensionContainer { {DL-CCTrCHInformationItem-RL-
AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CCTrCHInformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-DPCH-InformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF DL-DPCH-
InformationItem-RL-AdditionRspTDD

DL-DPCH-InformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    dPCH-ID                DPCH-ID,
    tDD-ChannelisationCode TDD-ChannelisationCode,
    burstType              BurstType,
    midambleShift          MidambleShift,
    timeSlot               TimeSlot,
    tDD-PhysicalChannelOffset TDD-PhysicalChannelOffset,
    repetitionPeriod       RepetitionPeriod,
    repetitionLength       RepetitionLength,
    tFCI-Presence          TFCI-Presence,
    iE-Extensions          ProtocolExtensionContainer { {DL-DPCH-InformationItem-RL-
AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-DPCH-InformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringFDD-CellInformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfFDD-
Neighbours)) OF
    NeighbouringFDD-CellInformationItem-RL-AdditionRspTDD

NeighbouringFDD-CellInformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    uC-ID                  C-ID,
    cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,
    cN-CS-DomainIdentifier CN-CS-DomainIdentifier OPTIONAL,
    uARFCN                 UARFCN,
    frameOffset             FrameOffset OPTIONAL,
    primaryScramblingCode   PrimaryScramblingCode,
    primaryCPICH-Power      PrimaryCPICH-Power OPTIONAL,

```

```

    iE-Extensions          ProtocolExtensionContainer { {NeighbouringFDD-
CellInformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringFDD-CellInformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringTDD-CellInformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfTDD-
Neighbours)) OF
    NeighbouringTDD-CellInformationItem-RL-AdditionRspTDD

NeighbouringTDD-CellInformationItem-RL-AdditionRspTDD ::= SEQUENCE {
    uC-ID                C-ID,
    cN-PS-DomainIdentifier    CN-PS-DomainIdentifier    OPTIONAL,
    cN-CS-DomainIdentifier    CN-CS-DomainIdentifier    OPTIONAL,
    uARFCN                UARFCN,
    frameOffset            FrameOffset    OPTIONAL,
    cellParameterID        CellParameterID,
    syncCase                SyncCase,
    timeSlot                TimeSlot,
    pSCH-TimeSlot            PSCH-TimeSlot    OPTIONAL
    -- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
    iE-Extensions          ProtocolExtensionContainer { {NeighbouringTDD-
CellInformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringTDD-CellInformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkAdditionResponseTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK ADDITION FAILURE FDD
--
-- *****

RadioLinkAdditionFailureFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkAdditionFailureFDD-IEs}},
    protocolExtensions  ProtocolExtensionContainer {{RadioLinkAdditionFailureFDD-
Extensions}}
    ...
}

RadioLinkAdditionFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UnsuccessfulRL-InformationResponseList-RL-AdditionFailureFDD
    CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponseList-RL-
    AdditionFailureFDD
    PRESENCE mandatory } |
    { ID id-SuccessfulRL-InformationResponseList-RL-AdditionFailureFDD
    CRITICALITY ignore TYPE SuccessfulRL-InformationResponseList-RL-
    AdditionFailureFDD
    PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics          CRITICALITY ignore TYPE CriticalityDiagnostics
    PRESENCE optional },
    ...
}

UnsuccessfulRL-InformationResponseList-RL-AdditionFailureFDD ::= RL-IE-ContainerList {
{UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD-IEs} }

UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD
    CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponse-RL-
    AdditionFailureFDD
    PRESENCE mandatory },
    ...
}

UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD ::= SEQUENCE {
    rL-ID                RL-ID,
    cause                Cause,
    iE-Extensions          ProtocolExtensionContainer { {UnsuccessfulRL-
InformationResponse-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```



```

SuccessfulRL-InformationResponseList-RL-AdditionFailureFDD ::= RL-IE-ContainerList { {SuccessfulRL-
InformationResponse-RL-AdditionFailureFDD-IEs} }

SuccessfulRL-InformationResponse-RL-AdditionFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-SuccessfulRL-InformationResponse-RL-AdditionFailureFDD
    CRITICALITY ignore TYPE SuccessfulRL-InformationResponse-RL-
AdditionFailureFDD
    PRESENCE mandatory },
  ...
}

SuccessfulRL-InformationResponse-RL-AdditionFailureFDD ::= SEQUENCE {
  rL-ID RL-ID,
  sAI SAI,
  ul-InterferenceLevel ScaledUL-InterferenceLevel,
  dl-CodeInformation DL-CodeInformationList-RL-AdditionFailureFDD,
  sSDT-SupportIndicator SSdT-SupportIndicator,
  maximumAllowedULTxPower MaximumAllowedULTxPower,
  maxUL-EbNo UL-EbNo,
  minUL-EbNo UL-EbNo,
  neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-
AdditionFailureFDD OPTIONAL,
  neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-
AdditionFailureFDD OPTIONAL,
  iE-Extensions ProtocolExtensionContainer { {SuccessfulRL-InformationResponse-
RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
  ...
}

SuccessfulRL-InformationResponse-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CodeInformationList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNoOfDL-Codes)) OF DL-
CodeInformationItem-RL-AdditionFailureFDD

DL-CodeInformationItem-RL-AdditionFailureFDD ::= SEQUENCE {
  dl-ScramblingCode DL-ScramblingCode,
  dl-ChannelisationCode DL-ChannelisationCode,
  diversityIndication CHOICE {
    combining SEQUENCE {
      rL-ID RL-ID
    },
    nonCombiningOrIENotPresent SEQUENCE {
      dCH-InformationResponse-RL-AdditionFailureFDD DCH-InformationResponseList-RL-
AdditionFailureFDD OPTIONAL
    }
  } OPTIONAL
  -- This IE is present only if the RL is not the first on in the RL Information -- ,
  iE-Extensions ProtocolExtensionContainer { {DL-CodeInformationItem-RL-
AdditionFailureFDD-ExtIEs} } OPTIONAL,
  ...
}

DL-CodeInformationItem-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ** NOTE: Shall this be made as an IE container? **
DCH-InformationResponseList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-
InformationResponseItem-RL-AdditionFailureFDD

DCH-InformationResponseItem-RL-AdditionFailureFDD ::= SEQUENCE {
  dCH-ID DCH-ID,
  bindingID BindingID,
  transportLayerAddress TransportLayerAddress,
  iE-Extensions ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-
AdditionFailureFDD-ExtIEs} } OPTIONAL,
  ...
}

DCH-InformationResponseItem-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

NeighbouringFDD-CellInformationList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfFDD-
Neighbours)) OF
  NeighbouringFDD-CellInformationItem-RL-AdditionFailureFDD

NeighbouringFDD-CellInformationItem-RL-AdditionFailureFDD ::= SEQUENCE {
  uC-ID C-ID,
  cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,
  cN-CS-DomainIdentifier CN-CS-DomainIdentifier OPTIONAL,
  uARFCN UARFCN,

```

```

    frameOffset                FrameOffset                OPTIONAL,
    primaryScramblingCode      PrimaryScramblingCode,
    cPICH-Power                CPICH-Power                OPTIONAL,
    iE-Extensions              ProtocolExtensionContainer { {NeighbouringFDD-
CellInformationItem-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringFDD-CellInformationItem-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringTDD-CellInformationList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfTDD-
Neighbours)) OF
    NeighbouringTDD-CellInformationItem-RL-AdditionFailureFDD

NeighbouringTDD-CellInformationItem-RL-AdditionFailureFDD ::= SEQUENCE {
    uC-ID                      C-ID,
    cN-PS-DomainIdentifier     CN-PS-DomainIdentifier     OPTIONAL,
    cN-CS-DomainIdentifier     CN-CS-DomainIdentifier     OPTIONAL,
    uARFCN                     UARFCN,
    frameOffset                FrameOffset                OPTIONAL,
    cellParameterID            CellParameterID,
    syncCase                   SyncCase,
    timeSlot                   TimeSlot,
    pSCH-TimeSlot              PSCH-TimeSlot              OPTIONAL
    -- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
    iE-Extensions              ProtocolExtensionContainer { {NeighbouringTDD-
CellInformationItem-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringTDD-CellInformationItem-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkAdditionFailureFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

--- PARTLY OMITTED ---

9.3.4 Information Element Definitions

--- PARTLY OMITTED ---

```

-- J
-- K
-- L

LAC                ::= OCTET STRING (SIZE (2)) --(EXCEPT ('0000'H|'FFFF'H))

-- ** TODO **
L3-Information     ::= INTEGER

-- M

-- ** TODO **
MaxNrOfUL-DPCHs   ::= INTEGER
MaximumAllowedULTxPower ::= INTEGER (-50..33)

MAC-c-SDU-Length  ::= INTEGER (1..5000)

-- **TODO**
MACd-MACsh-TransportFormatSet ::= INTEGER

```

CHANGE REQUEST		Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.	
25.423 CR 040r1		Current Version: 3.0.0	
GSM (AA.BB) or 3G (AA.BBB) specification number ↑		↑ CR number as allocated by MCC support team	
For submission to: RAN#7 <small>list expected approval meeting # here ↑</small>	for approval <input checked="" type="checkbox"/> for information <input type="checkbox"/>	strategic <input type="checkbox"/> non-strategic <input type="checkbox"/>	(for SMG use only)

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: <ftp://ftp.3gpp.org/Information/CR-Form-v2.doc>

Proposed change affects: (U)SIM ME UTRAN / Radio Core Network
(at least one should be marked with an X)

Source: R-WG3 **Date:** _____

Subject: Clarification on the DL power control procedure and message

Work item: _____

Category:	F Correction <input checked="" type="checkbox"/>	Release:	Phase 2 <input type="checkbox"/>
(only one category shall be marked with an X)	A Corresponds to a correction in an earlier release <input type="checkbox"/>		Release 96 <input type="checkbox"/>
	B Addition of feature <input type="checkbox"/>		Release 97 <input type="checkbox"/>
	C Functional modification of feature <input type="checkbox"/>		Release 98 <input type="checkbox"/>
	D Editorial modification <input type="checkbox"/>		Release 99 <input checked="" type="checkbox"/>
			Release 00 <input type="checkbox"/>

Reason for change: The use of the DL Reference power parameter is not clearly defined in current WG3 specification. This was identified by TSG RAN as an open issue for RAN7. This CR clarify this, and introduces some constrains on the dynamic of the power adjustment in the DRNS, without removing the flexibility to freely choose algorithm. This is needed for the correct operation in multivendor environment. This approach was suggested by WG1(see LS in Tdoc R3-99J83). Parameters introduced are:

- *Max adjustment step*: It is the maximum correction of the DL power that can be performed in one slot period in addition to the normal operation of the DL PC. This sets a constrain on the maximum dynamic of the power adjustment
- *Max adjustment period*: defines the maximum number of slot where the target adjustment shall be performed. This sets a constrain on the minimum dynamic of the power adjustment

If the algorithm proposed (as example) in 25.214 is used, the parameter *r* and *Sadj_max* are calculated considering the proposed limit.

Clauses affected: 8.3.15.2, 9.1.20, 9.2.2, 9.3.3, 9.3.4, 9.3.6

Other specs affected:	Other 3G core specifications <input type="checkbox"/>	→ List of CRs:	
	Other GSM core specifications <input type="checkbox"/>	→ List of CRs:	
	MS test specifications <input type="checkbox"/>	→ List of CRs:	
	BSS test specifications <input type="checkbox"/>	→ List of CRs:	
	O&M specifications <input type="checkbox"/>	→ List of CRs:	

Other comments: _____

8.3.15 Down Link Power Control [FDD]

8.3.15.1 General

The purpose of this procedure is to balance the DL transmission powers of the radio links for one UE.

This procedure shall use the signalling bearer connection for the relevant UE context.

The Down Link Power Control procedure may be initiated by the SRNC at any time after establishing a Radio Link. If the SRNC has initiated deletion of the last Radio Link in this DRNS the Down Link Power Control procedure shall not be initiated.

8.3.15.2 Successful Operation



Figure 1: Down Link Power Control procedure, Successful Operation

The Down Link Power Control procedure is initiated by the SRNC sending a DL POWER CONTROL REQUEST message to the DRNC.

The *Power Adjustment Type* IE defines the characteristic of the power adjustment.

If the value of the *Power Adjustment Type* IE is *Common*, ~~If the message contains the *DL Reference Power* IE,~~ the DRNC shall perform the power ~~balancing~~ adjustment (see below) for all radio links for the UE context using a common DL reference power level.

If the value of the *Power Adjustment Type* IE is *Individual*, ~~Alternatively, if the message contains the *DL Reference Power Information* IE,~~ the DRNC shall perform the power adjustment ~~balancing~~ (see below) for all radio links addressed in the message using the given DL Reference Power per RL.

If the value of the *Power Adjustment Type* IE is 'None', the DRNS shall suspend on going power adjustments for all radio links for the UE context.

Power Adjustment

The DRNS performs the power balancing by using the received desired *DL Reference Power* IE as a reference for adjusting the applied DL power.

The adjustment of the power shall be done with constrains given by the included parameters *Max Adjustment Step* IE and *Adjustment Period* IE. The Power adjustment is repeated for every adjustment period.

DRNS shall suspend on going power adjustment operations at the reception of a new DL POWER CONTROL REQUEST message, and then performs the adjustment based on the new parameters.

~~[Editor's note: The exact mechanism is FFS.]~~

8.3.15.3 Abnormal Conditions

If the DRNC receives the DL POWER CONTROL REQUEST message after a request to delete the last radio link in the DRNC has been received, the DRNC shall ignore the message.

9.1.20 DL POWER CONTROL REQUEST [FDD]

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
Power Adjustment Type CHOICE procedure scope	M			
"ALL RL"				
—DL Reference Power	C- CommonM		DL Power	
"Individual RLS"				
DL Reference Power Information	C- Individual	1..<maxnoofRLs>		
RL ID	M			
DL Reference Power	M		DL Power	The SRNS requested downlink power to be used by the downlink inner loop power control to eliminate the power drifting problem.
Max Adjustment Step	C- CommonOrIndividual			
Max. Adjustment Period	C- CommonOrIndividual			

Condition	Explanation
Common	This IE is present only "Adjustment Type " equals to 'Common'
Individual	This IE is present only "Adjustment Type " equals to 'Individual'
CommonOrIndividual	This IE is present only "Adjustment Type " equals to 'Common' or 'Individual'

Range Bound	Explanation
MaxnoofRLs	Maximum number of RLS for one UE.

9.2.2.x Power Adjustment Type

Defines the characteristic of the power adjustment.

<u>IE/Group Name</u>	<u>Presence</u>	<u>Range</u>	<u>IE type and reference</u>	<u>Semantics description</u>
PowerAdjustment Type			ENUMERATED (None, Common, Individual)	

9.2.2.x Max Adjustment Step

Defines the maximum allowed value for the change of DL power level in one slot period that can be utilised by the Power drifting prevention algorithm. This value does not include the DL inner loop PC adjustment.

<u>IE/Group Name</u>	<u>Presence</u>	<u>Range</u>	<u>IE type and reference</u>	<u>Semantics description</u>
Maximum Adjustment Step			INTEGER (0.1, 0.2, 0.3, 0.4, 0.5, 0.6, 0.7, 0.8, 0.9, 1)	dB

9.2.2.x Max Adjustment Period

Adjustment Period IE defines the period at the end of which the DL transmitted power shall converge, [with an accuracy of ± 0.25 dB] to the reference power value assuming zero-sum alternating stream of DL PC commands received in that period of time.

<u>IE/Group Name</u>	<u>Presence</u>	<u>Range</u>	<u>IE type and reference</u>	<u>Semantics description</u>
Max Adjustment Period			INTEGER (10, 20, 30, 40, ..., 500)	Slots

9.3.3 PDU Definitions

```

-- *****
--
-- PDU definitions for RNSAP.
--
-- *****

RNSAP-PDU-Contents -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

-- *****
--
-- IE parameter types from other modules.
--
-- *****

IMPORTS
    AllocationRetentionPriority,
    AllowedQueuingTime,
    BLER,
    BindingID,
    BurstType,
    C-ID,
    C-RNTI,
    CCTrCH-ID,
    CFN,
    CN-CS-DomainIdentifier,
    CN-PS-DomainIdentifier,
    CPICH-EcIo,
    CPICH-Power,
    Cause,
    CellParameterID,
    ChipOffset,
    CompressedModeMethod,
    CriticalityDiagnostics,
    D-FieldLength,
    D-RNTI,
    D-RNTI-ReleaseIndication,
    DCH-CombinationInd,
    DCH-ID,
    DL-ChannelisationCode,
    DL-DPCCH-SlotFormat,
    DL-DPCH-SlotNumber,
    DL-EbNo,
    DL-EbNoTarget,
    DL-FrameType,
    DL-Power,
    DL-ScramblingCode,
    DPCH-ID,
    DRX-Parameter,
    DedicatedMeasurementValue,

```

DiversityControlField,
DiversityMode,
FACH-DataFrameSize,
FACH-InitialWindowSize,
FACH-PriorityIndicator,
FDD-DL-ChannelisationCodeNumber,
FDD-S-CCPCH-Offset,
FrameHandlingPriority,
FrameOffset,
GapPeriod,
GapPositionMode,
L3-Information,
MAC-c-SDU-Length,
MaxNrOfUL-DPCHs,
MeanBitRate,
MeasurementCharacteristics,
MeasurementID,
MidambleShift,
MinUL-ChannelisationCodeLength,
MultipleURAsIndicator,
MultiplexingPosition,
Offset,
PD,
PSCH-PCCPCH-TimeSlot,
PSCH-TimeSlot,
PayloadCRC-PresenceIndicator,
PilotBitsUsedIndicator,
PowerControlMode,
PowerOffset,
PowerAdjustmentType,
PowerResumeMode,
PrimaryCCPCH-RSCP,
PrimaryCPICH-EcNo,
PrimaryCPICH-Power,
PrimaryScramblingCode,
PropagationDelay,
PunctureLimit,
RANAP-RelocationInformation,
RL-ID,
RLC-Mode,
RNC-ID,
RepetitionLength,
RepetitionPeriod,
ReportCharacteristics,
S-FieldLength,
S-RNTI,
SAI,
SN,
SRNC-ID,
SSDT-CellID,
SSDT-CellID-Length,
SSDT-Indication,
SSDT-SupportIndicator,
ScaledMaxAdjustmentPeriod,
ScaledMaxAdjustmentStep,
ScaledUL-InterferenceLevel,


```

ScramblingCode,
ScramblingCodeChange,
SecondaryCCPCH-SlotFormat,
SyncCase,
TDD-ChannelisationCode,
TDD-PhysicalChannelOffset,
TFCI-Coding,
TFCI-Presence,
TFCI-SignallingMode,
TGD,
TGL,
TPC-StepSize,
TimeSlot,
ToAWE,
ToAWS,
TransportBearerID,
TransportBearerRequestIndicator,
TransportFormatCombinationSet,
TransportFormatSet,
TransportLayerAddress,
UARFCN,
UC-ID,
UL-DL-CompressedModeSelection,
UL-DPCCH-SlotFormat,
UL-EbNo,
UL-EbNoTarget,
UL-FP-Mode,
UL-ScramblingCode,
URA-ID
FROM RNSAP-IEs

PrivateExtensionContainer{},
ProtocolExtensionContainer{},
ProtocolIE-ContainerList{},
ProtocolIE-ContainerPair{},
ProtocolIE-ContainerPairList{},
ProtocolIE-Container{},
RNSAP-PRIVATE-EXTENSION,
RNSAP-PROTOCOL-EXTENSION,
RNSAP-PROTOCOL-IES,
RNSAP-PROTOCOL-IES-PAIR
FROM RNSAP-Containers

maxNoOfDL-Codes,
maxNrOfCCTrCHs,
maxNrOfDCHs,
maxNrOfDL-Codes,
maxNrOfDPCHs,
maxNrOfFACH-FD-Size,
maxNrOfFDD-Neighbours,
maxNrOfMACcSDU-Length,
maxNrOfTDD-Neighbours,
maxNrOfRLs,
maxNrOfSCCPCHs,
maxRNCinURA,

```

id-AllowedQueuingTime,
id-BindingID,
id-C-ID,
id-C-RNTI,
id-CCTrCH-ID,
id-CFN,
id-CN-CS-DomainIdentifier,
id-CN-PS-DomainIdentifier,
id-Cause,
id-CompressedModeMethod,
id-CriticalityDiagnostics,
id-D-RNTI,
id-D-RNTI-ReleaseIndication,
id-DCH-AddItem,
id-DCH-AddItem-RL-ReconfPrepFDD,
id-DCH-AddItem-RL-ReconfPrepTDD,
id-DCH-AddItem-RL-ReconfReadyFDD,
id-DCH-AddItem-RL-ReconfRqstFDD,
id-DCH-AddItem-RL-ReconfRqstTDD,
id-DCH-AddList-RL-ReconfPrepFDD,
id-DCH-AddList-RL-ReconfPrepTDD,
id-DCH-AddList-RL-ReconfRqstFDD,
id-DCH-AddList-RL-ReconfRqstTDD,
id-DCH-DeleteItem-RL-ReconfPrepFDD,
id-DCH-DeleteItem-RL-ReconfPrepTDD,
id-DCH-DeleteItem-RL-ReconfRqstFDD,
id-DCH-DeleteItem-RL-ReconfRqstTDD,
id-DCH-DeleteList-RL-ReconfPrepFDD,
id-DCH-DeleteList-RL-ReconfPrepTDD,
id-DCH-DeleteList-RL-ReconfRqstFDD,
id-DCH-DeleteList-RL-ReconfRqstTDD,
id-DCH-Information-RL-SetupReqFDD,
id-DCH-InformationItem-RL-SetupReqFDD,
id-DCH-InformationItem-RL-SetupReqTDD,
id-DCH-InformationList-RL-SetupReqTDD,
id-DCH-ModifyItem,
id-DCH-ModifyItem-RL-ReconfPrepFDD,
id-DCH-ModifyItem-RL-ReconfPrepTDD,
id-DCH-ModifyItem-RL-ReconfReadyFDD,
id-DCH-ModifyItem-RL-ReconfRqstFDD,
id-DCH-ModifyItem-RL-ReconfRqstTDD,
id-DCH-ModifyList-RL-ReconfPrepFDD,
id-DCH-ModifyList-RL-ReconfPrepTDD,
id-DCH-ModifyList-RL-ReconfRqstFDD,
id-DCH-ModifyList-RL-ReconfRqstTDD,
id-DL-CCTrCH-Information-RL-ReconfPrepTDD,
id-DL-CCTrCH-Information-RL-ReconfRqstTDD,
id-DL-CCTrCH-InformationList-RL-ReconfPrepTDD,
id-DL-CCTrCH-InformationList-RL-ReconfRqstTDD,
id-DL-CCTrChInformationItem-RL-SetupReqTDD,
id-DL-CCTrChInformationList-RL-SetupReqTDD,
id-DL-CodeInformation-PhyChReconfRqstFDD,
id-DL-DPCH-Information,
id-DL-DPCH-Information-RL-SetupReqFDD,
id-DL-DPCH-InformationList-PhyChReconfRqstTDD,
id-DL-DPCH-InformationList-RL-ReconfReadyTDD,

id-DL-EbNoTarget,
 id-DL-FrameType,
 id-DL-MeanBitRate,
 id-DL-ReferencePowerInformation-DL-PC-Rqst,
 id-DRX-Parameter,
 id-DedicatedMeasurementObjectType-DM-Rprt,
 id-DedicatedMeasurementObjectType-DM-Rqst,
 id-DedicatedMeasurementObjectType-DM-Rspns,
 id-FACH-InfoForOptionalGroupS-CCPCH,
 id-FACH-InfoForOptionals-CCPCH,
 id-FACH-InfoForS-CCPCH-CoupledToPRACH,
 id-GapPositionMode,
 id-L3-Information,
 id-MaxAdjustmentPeriod,
 id-MaxAdjustmentStep,
 id-MeasurementCharacteristics,
 id-MeasurementID,
 id-MultipleURAsIndicator,
 id-PD,
 id-PagingArea-PagingRqst,
 id-PowerControlMode,
 id-PowerResumeMode,
 id-ProcedureScope-DL-PC-Rqst,
 id-RANAP-RelocationInformation,
 id-RL-Information-PhyChReconfRqstFDD,
 id-RL-Information-PhyChReconfRqstTDD,
 id-RL-Information-RL-AdditionRqstFDD,
 id-RL-Information-RL-AdditionRqstTDD,
 id-RL-Information-RL-DeletionRqst,
 id-RL-Information-RL-FailureInd,
 id-RL-Information-RL-ReconfPrepFDD,
 id-RL-Information-RL-RestoreInd,
 id-RL-Information-RL-SetupReqFDD,
 id-RL-Information-RL-SetupReqTDD,
 id-RL-InformationItem-DM-Rprt,
 id-RL-InformationItem-DM-Rqst,
 id-RL-InformationItem-DM-Rspns,
 id-RL-InformationItem-RL-SetupReqFDD,
 id-RL-InformationList-RL-AdditionRqstFDD,
 id-RL-InformationList-RL-DeletionRqst,
 id-RL-InformationList-RL-FailureInd,
 id-RL-InformationList-RL-ReconfPrepFDD,
 id-RL-InformationList-RL-RestoreInd,
 id-RL-InformationResponse-RL-AdditionRspTDD,
 id-RL-InformationResponse-RL-ReconfReadyTDD,
 id-RL-InformationResponse-RL-SetupRspTDD,
 id-RL-InformationResponseItem-RL-AdditionRspFDD,
 id-RL-InformationResponseItem-RL-ReconfReadyFDD,
 id-RL-InformationResponseItem-RL-SetupRspFDD,
 id-RL-InformationResponseList-RL-AdditionRspFDD,
 id-RL-InformationResponseList-RL-ReconfReadyFDD,
 id-RL-InformationResponseList-RL-SetupRspFDD,
 id-RL-ReconfigurationFailure-RL-ReconfFail,
 id-RL-ReconfigurationFailureList-RL-ReconfFail,
 id-RNCsWithCellsInTheAccessedURA-List-UL-ST-Ind,
 id-ReportCharacteristics,

```
id-S-RNTI,
id-SAI,
id-SN,
id-SRNC-ID,
id-ScramblingCodeChange,
id-SuccessfulRL-InformationResponse-RL-AdditionFailureFDD,
id-SuccessfulRL-InformationResponse-RL-SetupFailureFDD,
id-SuccessfulRL-InformationResponseList-RL-AdditionFailureFDD,
id-SuccessfulRL-InformationResponseList-RL-SetupFailureFDD,
id-TGD,
id-TGL,
id-TGP1,
id-TGP2,
id-TransportBearerID,
id-TransportBearerRequestIndicator,
id-TransportLayerAddress,
id-UC-ID,
id-UL-CCTrCH-Information-RL-ReconfPrepTDD,
id-UL-CCTrCH-Information-RL-ReconfRqstTDD,
id-UL-CCTrCH-InformationList-RL-ReconfPrepTDD,
id-UL-CCTrCH-InformationList-RL-ReconfRqstTDD,
id-UL-CCTrChInformationItem-RL-SetupReqTDD,
id-UL-CCTrChInformationList-RL-SetupReqTDD,
id-UL-DL-CompressedModeSelection,
id-UL-DPCH-Information,
id-UL-DPCH-Information-RL-SetupReqFDD,
id-UL-DPCH-InformationList-PhyChReconfRqstTDD,
id-UL-DPCH-InformationList-RL-ReconfReadyTDD,
id-UL-DeltaEbNo,
id-UL-DeltaEbNoAfter,
id-UL-EbNoTarget,
id-UL-MeanBitRate,
id-URA-ID,
id-UnsuccessfulRL-InformationResponse,
id-UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD,
id-UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD,
id-UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD,
id-UnsuccessfulRL-InformationResponseList-RL-AdditionFailureFDD,
id-UnsuccessfulRL-InformationResponseList-RL-SetupFailureFDD
FROM RNSAP-Constants;
```

```

-- *****
--
-- DOWNLINK POWER CONTROL REQUEST
--
-- *****

DL-PowerControlRequest ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{DL-PowerControlRequest-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{DL-PowerControlRequest-Extensions}} OPTIONAL,
    ...
}

DL-PowerControlRequest-IEs RNSAP-PROTOCOL-IES ::= {


|                                   |                    |                                                  |                    |   |
|-----------------------------------|--------------------|--------------------------------------------------|--------------------|---|
| { ID id-ProcedureScope-DL-PC-Rqst | CRITICALITY ignore | TYPE ProcedureScope-DL-PC-Rqst                   | PRESENCE mandatory | } |
| { ID id-PowerAdjustmentType       | CRITICALITY ignore | TYPE PowerAdjustmentType                         | PRESENCE mandatory | } |
| { ID id-DLReferencePower          | CRITICALITY ignore | TYPE DL-Power                                    | PRESENCE mandatory | } |
| { ID id-DLReferencePowerList      | CRITICALITY ignore | TYPE DL-ReferencePowerInformationList-DL-PC-Rqst | PRESENCE mandatory | } |
| { ID id-MaxAdjustmentStep         | CRITICALITY ignore | TYPE ScaledMaxAdjustmentStep                     | PRESENCE optional  | } |
| { ID id-MaxAdjustmentPeriod       | CRITICALITY ignore | TYPE ScaledMaxAdjustmentPeriod                   | PRESENCE optional  | } |


    ...
}

ProcedureScope-DL-PC-Rqst ::= CHOICE {


|               |                                              |
|---------------|----------------------------------------------|
| allRLs        | DL-Power,                                    |
| individualRLs | DL-ReferencePowerInformationList-DL-PC-Rqst, |


    ...
}

DL-ReferencePowerInformationList-DL-PC-Rqst ::= RL-IE-ContainerList { {DL-ReferencePowerInformation-DL-PC-Rqst-IEs} }

DL-ReferencePowerInformation-DL-PC-Rqst-IEs RNSAP-PROTOCOL-IES ::= {


|                                                 |                    |                                              |                    |   |
|-------------------------------------------------|--------------------|----------------------------------------------|--------------------|---|
| { ID id-DL-ReferencePowerInformation-DL-PC-Rqst | CRITICALITY ignore | TYPE DL-ReferencePowerInformation-DL-PC-Rqst | PRESENCE mandatory | } |
|-------------------------------------------------|--------------------|----------------------------------------------|--------------------|---|


    ...
}

DL-ReferencePowerInformation-DL-PC-Rqst ::= SEQUENCE {
    rL-ID          RL-ID,
    dl-Power       DL-Power,
    iE-Extensions   ProtocolExtensionContainer { {DL-ReferencePowerInformation-DL-PC-Rqst-ExtIEs} } OPTIONAL,
    ...
}

DL-ReferencePowerInformation-DL-PC-Rqst-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DL-PowerControlRequest-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

9.3.4 Information Element Definitions

```

-- *****
--
-- Information Element Definitions
--
-- *****

RNSAP-IEs -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

IMPORTS
    maxNrOfErrors,
    maxRateMatching,
    maxNrOfTFCs,
    maxNrOfTFs,
    maxTTL-Count
FROM RNSAP-Constants

    Criticality,
    ProcedureCode,
    ProtocolIE-ID,
    TransactionID,
    TriggeringMessage
FROM RNSAP-CommonDataTypes

    ProtocolExtensionContainer{},
    RNSAP-PROTOCOL-EXTENSION
FROM RNSAP-Containers;

-- A

AllocationRetentionPriority ::= FrameHandlingPriority

AllowedQueuingTime ::= INTEGER (0..60)
-- seconds

-- B

-- ** NOTE: Size in tabular 1..4,... **
BindingID ::= OCTET STRING (SIZE (1..MAX))

BLER ::= INTEGER (-63..0)
-- Step 0.1 (Range -6.3..0). It is the Log10 of the BLER

BurstType ::= ENUMERATED {
    type1 (1),
    type2 (2)
}

-- C

```

```

Cause ::= CHOICE {
    radioNetwork          CauseRadioNetwork,
    transmissionNetwork  CauseTransmissionNetwork,
    protocol              CauseProtocol,
    misc                  CauseMisc,
    ...
}

CauseMisc ::= ENUMERATED {
    control-processing-overload,
    hardware-failure,
    om-intervention,
    not-enough-user-plane-processing-resources,
    unspecified,
    ...
}

CauseProtocol ::= ENUMERATED {
    transaction-not-allowed,
    transfer-syntax-error,
    abstract-syntax-error-reject,
    abstract-syntax-error-ignore-and-notify,
    unspecified,
    ...
}

CauseRadioNetwork ::= ENUMERATED {
    unknown-C-ID,
    cell-not-available,
    power-level-not-supported,
    ul-scrambling-code-already-in-use,
    dl-radio-resources-not-available,
    ul-radio-resources-not-available,
    measurement-not-supported-for-the-object,
    macrodiversity-combining-not-possible,
    reconfiguration-not-allowed,
    Synchronisation-failure,
    unspecified,
    ...
}

CauseTransmissionNetwork ::= ENUMERATED {
    transmission-link-failure,
    transmission-port-not-available,
    unspecified,
    ...
}

C-ID ::= INTEGER (0..65535)

CCTrCH-ID ::= INTEGER (0..15)

CellParameterID ::= INTEGER (0..127)

CFN ::= INTEGER (0..255)

```

```

ChannelCodingType ::= ENUMERATED {
    no-coding,
    convolutional-coding,
    turbo-coding--,
    -- ...
}

-- ** TODO **
ChipOffset          ::= INTEGER

CodingRate ::= ENUMERATED {
    half,
    third--,
    -- ...
}

CompressedModeMethod ::= ENUMERATED {
    none,
    puncturing,
    sF2,
    gating
}

CPICH-EcIo          ::= INTEGER

CRC-Size            ::= INTEGER (0| 8| 12| 16| 24)

CriticalityDiagnostics ::= SEQUENCE {
    procedureCode      ProcedureCode          OPTIONAL,
    triggeringMessage  TriggeringMessage     OPTIONAL,
    criticalityResponse Criticality           OPTIONAL,
    transactionID      TransactionID         OPTIONAL,
    iEsCriticalityResponses CriticalityDiagnostics-IE-List OPTIONAL,
    iE-Extensions      ProtocolExtensionContainer { {CriticalityDiagnostics-ExtIEs} } OPTIONAL,
    ...
}

CriticalityDiagnostics-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

CriticalityDiagnostics-IE-List ::= SEQUENCE (SIZE (1..maxNrOfErrors)) OF
    SEQUENCE {
        criticalityResponse Criticality,
        iE-ID               ProtocolIE-ID,
        iE-Extensions       ProtocolExtensionContainer { {CriticalityDiagnostics-IE-List-ExtIEs} } OPTIONAL,
        ...
    }

CriticalityDiagnostics-IE-List-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** TODO **
CTFC          ::= INTEGER

```



```

-- See formula (must be resolved)
CN-CS-DomainIdentifier ::= SEQUENCE {
    pLMN-ID          PLMN-ID,
    iE-Extensions   ProtocolExtensionContainer { {CN-CS-DomainIdentifier-ExtIEs} } OPTIONAL,
    LAC              LAC
}

CN-CS-DomainIdentifier-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

CN-PS-DomainIdentifier ::= SEQUENCE {
    pLMN-ID          PLMN-ID,
    LAC              LAC,
    iE-Extensions   ProtocolExtensionContainer { {CN-PS-DomainIdentifier-ExtIEs} } OPTIONAL,
    rAC              RAC
}

CN-PS-DomainIdentifier-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- **TODO**
CPICH-Power          ::= INTEGER

C-RNTI                ::= INTEGER (0..65535)

-- D

DCH-CombinationInd   ::= INTEGER (0..255)

DCH-ID                ::= INTEGER (0..255)

DedicatedMeasurementObjectType ::= ENUMERATED {
    r1,
    all-r1,
    ...
}

-- ** OR:
-- DedicatedMeasurementObjectType ::= INTEGER {
--    rL(0),
--    allRL(1)
-- } (0..255)
-- **

DedicatedMeasurementType ::= ENUMERATED {
    sir,
    sir-error,
    transmitted-code-power,
    rSCP,
    ...
}

-- timeslotTSCP is used by TDD only

-- ** OR:

```

```

-- DedicatedMeasurementType ::= INTEGER {
--   sIR(0),
--   sIR-Error(1),
--   transmittedCodePower(2),
--   rSCP(3)
-- } (0..255)
-- **

-- ** NOTE: Extensibility added **
-- **TODO**

DedicatedMeasurementValue ::= SEQUENCE {
  sIR-Value          ScaledSIR-Value          OPTIONAL,
  sIR-ErrorValue    ScaledSIR-ErrorValue     OPTIONAL,
  transmittedCodePowerValue ScaledTransmittedCodePowerValue OPTIONAL, -- Relative to CPICH
  rSCP              TBD                      OPTIONAL, -- TDD only
  iE-Extensions     ProtocolExtensionContainer { {DedicatedMeasurementValue-ExtIEs} } OPTIONAL,
  ...
}

DedicatedMeasurementValue-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ** TODO **
DiversityControlField ::= INTEGER

-- ** TODO **
DiversityMode ::= INTEGER

-- ** TODO **
DL-ChannelisationCode ::= INTEGER

-- ** TODO **
DL-DPCCH-SlotFormat ::= INTEGER

-- ** TODO **
DL-DPCH-SlotNumber ::= INTEGER

DL-EbNo ::= ScaledUL-EbNo

DL-EbNoTarget ::= ScaledUL-EbNo

-- ** TODO **
DL-Power ::= INTEGER

D-RNTI ::= INTEGER (0..1048576)
-- ** OR:
-- D-RNTI ::= BIT STRING (SIZE (20))
-- **

D-RNTI-ReleaseIndication ::= ENUMERATED {
  not-release-D-RNTI,
  release-D-RNTI
}

```

```

-- ** TODO **
DL-ScramblingCode ::= INTEGER

DL-FrameType ::= ENUMERATED {
    typeA,
    typeB,
    ...
}

DPCH-ID ::= INTEGER (0..239)

-- **TODO**
DRX-Parameter ::= TBD

-- **TODO**
DSCH-TransportFormatCombinationSet ::= INTEGER

-- **TODO**
DSCH-TFS ::= INTEGER

-- **TODO**
D-FieldLength ::= INTEGER

-- E

EventA ::= SEQUENCE {
    measurementTreshold MeasurementThreshold,
    measurementHysteresisTime ScaledMeasurementHysteresisTime OPTIONAL,
    iE-Extensions ProtocolExtensionContainer { {EventA-ExtIEs} } OPTIONAL,
    ...
}

EventA-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

EventB ::= SEQUENCE {
    measurementTreshold MeasurementThreshold,
    measurementHysteresisTime ScaledMeasurementHysteresisTime OPTIONAL,
    iE-Extensions ProtocolExtensionContainer { {EventB-ExtIEs} } OPTIONAL,
    ...
}

EventC ::= SEQUENCE {
    measurementIncreaseThreshold MeasurementIncreaseThreshold,
    measurementChangeTime ScaledMeasurementChangeTime,
    ...
}

EventB-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

EventD ::= SEQUENCE {
    measurementDecreaseThreshold MeasurementDecreaseThreshold,
    measurementChangeTime ScaledMeasurementChangeTime,

```

```

    iE-Extensions          ProtocolExtensionContainer { {EventD-ExtIEs} } OPTIONAL,
    ...
}

EventD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

EventE ::= SEQUENCE {
    measurementThreshold1      MeasurementThreshold,
    measurementThreshold2      MeasurementThreshold OPTIONAL,
    measurementHysteresisTime  ScaledMeasurementHysteresisTime OPTIONAL,
    reportPeriodicity          ReportPeriodicity OPTIONAL,
    iE-Extensions              ProtocolExtensionContainer { {EventE-ExtIEs} } OPTIONAL,
    ...
}

EventE-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

EventF ::= SEQUENCE {
    measurementThreshold1      MeasurementThreshold,
    measurementThreshold2      MeasurementThreshold OPTIONAL,
    measurementHysteresisTime  ScaledMeasurementHysteresisTime OPTIONAL,
    reportPeriodicity          ReportPeriodicity OPTIONAL,
    iE-Extensions              ProtocolExtensionContainer { {EventF-ExtIEs} } OPTIONAL,
    ...
}

EventF-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- F

FACH-DataFrameSize          ::= INTEGER (1..5000)
-- Size of data frame in number of bits

FACH-InitialWindowSize      ::= INTEGER { unlimited(255) } (0..255)
-- Number of FACH data frames.
-- 255 = Unlimited number of FACH data frames

-- ** TODO **
FACH-InfoForOptionalS-CCPCH ::= INTEGER

-- ** TODO **
FACH-InfoForS-CCPCH-CoupledToPRACH ::= INTEGER

-- ** TODO **
FDD-DL-ChannelisationCodeNumber ::= INTEGER

-- ** TODO **
FDD-FL-ChannelisationCodeNumber ::= INTEGER

-- ** TODO **

```

```

FDD-S-CCPCH-Offset      ::= INTEGER

FACH-PriorityIndicator  ::= INTEGER { lowest(0), highest(15) } (0..15)

FrameHandlingPriority    ::= INTEGER { lowest(0), highest(15) } (0..15)

FrameOffset             ::= INTEGER (0..255)
-- Frames

-- G

GapPositionMode ::= ENUMERATED {
    fixed,
    flexible
}

GapPeriod              ::= INTEGER (0..255)

-- H
-- I

-- **TODO**
InitialDL-TX-Power     ::= INTEGER

-- J
-- K
-- L

LAC                    ::= OCTET STRING (SIZE (2)) --(EXCEPT ('0000'H|'FFFF'H))

-- ** TODO **
L3-Information         ::= INTEGER

-- M

-- ** TODO **
MaxNrOfUL-DPCHs       ::= INTEGER

MAC-c-SDU-Length      ::= INTEGER (1..5000)

-- **TODO**
MACd-MACsh-TransportFormatSet ::= INTEGER

-- **NOTE: extensibility**
MeasurementCharacteristics ::= SEQUENCE {
    measurementFrequency    TBD,
    averagingDuration       TBD,
    IE-Extensions           ProtocolExtensionContainer { {MeasurementCharacteristics-ExtIEs} } OPTIONAL,
    ...
}

MeasurementCharacteristics-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** TODO **

```

```

MeanBitRate                ::= INTEGER

MeasurementID              ::= INTEGER (0..1048576)
-- **OR:
-- MeasurementID          ::= BIT STRING (SIZE (20))
-- **

MultipleURAsIndicator ::= ENUMERATED {
    single-URA-exists,
    multiple-URAs-exist
}

-- ** TODO **
MCC-Digit                  ::= OCTET STRING (SIZE (3))
-- FFS
-- Reference: 24.008

-- ** TODO **
MNC-Digit                  ::= OCTET STRING (SIZE (3))
-- FFS
-- Reference: 24.008

ScaledMaxAdjustmentPeriod ::= INTEGER(1..50)
-- MaxAdjustmentPeriod (slots) = 10 * ScaledMaxAdjustmentPeriod

ScaledMaxAdjustmentStep    ::= INTEGER(0..10)
-- MaxAdjustmentStep (dB) = ScaledMaxAdjustmentStep / 10

ScaledMeasurementChangeTime ::= INTEGER (1..1000)
-- MeasurementChangeTime = ScaledMeasurementChangeTime * 10
-- Unit is ms

-- ** TODO **
MeasurementDecreaseThreshold ::= INTEGER

ScaledMeasurementHysteresisTime ::= INTEGER (1..1000)
-- MeasurementHysteresisTime = ScaledMeasurementHysteresisTime * 10
-- Unit is ms

-- ** TODO **
MeasurementIncreaseThreshold ::= INTEGER

-- ** TODO **
MeasurementThreshold        ::= INTEGER

MidambleShift              ::= INTEGER (0..15)

MinUL-ChannelisationCodeLength ::= INTEGER

MultiplexingPosition ::= ENUMERATED {
    fixed,
    flexible
}

```



```

maxProtocolExtensions          INTEGER ::= 65535
maxProtocolIEs                 INTEGER ::= 65535

-- *****
--
-- Lists
--
-- *****

maxRateMatching                INTEGER ::= 10
maxNrOfTFCs                    INTEGER ::= 10
maxNrOfTFs                     INTEGER ::= 10

maxNoOfDL-Codes                INTEGER ::= 10
maxNrOfCCTrCHs                 INTEGER ::= 10
maxNrOfDCHs                     INTEGER ::= 10
maxNrOfDL-Codes                INTEGER ::= 10
maxNrOfDPCHs                   INTEGER ::= 10
maxNrOfErrors                   INTEGER ::= 10
maxNrOfFACH-FD-Size            INTEGER ::= 10
maxNrOfFDD-Neighbours          INTEGER ::= 10
maxNrOfMACcSDU-Length          INTEGER ::= 10
maxNrOfTDD-Neighbours          INTEGER ::= 10
maxNrOfRLs                     INTEGER ::= 10
maxNrOfSCCPCHs                 INTEGER ::= 10
maxRNCinURA                   INTEGER ::= 10
maxTTI-Count                   INTEGER ::= 10

-- *****
--
-- IEs
--
-- *****

id-AllowedQueuingTime          INTEGER ::= 0
id-BindingID                   INTEGER ::= 1
id-C-ID                         INTEGER ::= 2
id-C-RNTI                       INTEGER ::= 3
id-CCTrCH-ID                   INTEGER ::= 4
id-CFN                          INTEGER ::= 5
id-CN-CS-DomainIdentifier       INTEGER ::= 6
id-CN-PS-DomainIdentifier       INTEGER ::= 7
id-Cause                       INTEGER ::= 8
id-CompressedModeMethod         INTEGER ::= 9
id-D-RNTI                       INTEGER ::= 10
id-D-RNTI-ReleaseIndication     INTEGER ::= 11
id-DCH-AddItem                 INTEGER ::= 12
id-DCH-AddItem-RL-ReconfPrepFDD INTEGER ::= 13
id-DCH-AddItem-RL-ReconfPrepTDD INTEGER ::= 14
id-DCH-AddItem-RL-ReconfReadyFDD INTEGER ::= 15
id-DCH-AddItem-RL-ReconfRqstFDD INTEGER ::= 16
id-DCH-AddItem-RL-ReconfRqstTDD INTEGER ::= 17
id-DCH-AddList-RL-ReconfPrepFDD INTEGER ::= 18
id-DCH-AddList-RL-ReconfPrepTDD INTEGER ::= 19
id-DCH-AddList-RL-ReconfRqstFDD INTEGER ::= 20
id-DCH-AddList-RL-ReconfRqstTDD INTEGER ::= 21

```



```

id-DCH-DeleteItem-RL-ReconfPrepFDD          INTEGER ::= 22
id-DCH-DeleteItem-RL-ReconfPrepTDD          INTEGER ::= 23
id-DCH-DeleteItem-RL-ReconfRqstFDD          INTEGER ::= 24
id-DCH-DeleteItem-RL-ReconfRqstTDD          INTEGER ::= 25
id-DCH-DeleteList-RL-ReconfPrepFDD          INTEGER ::= 26
id-DCH-DeleteList-RL-ReconfPrepTDD          INTEGER ::= 27
id-DCH-DeleteList-RL-ReconfRqstFDD          INTEGER ::= 28
id-DCH-DeleteList-RL-ReconfRqstTDD          INTEGER ::= 29
id-DCH-Information-RL-SetupReqFDD           INTEGER ::= 30
id-DCH-InformationItem-RL-SetupReqFDD       INTEGER ::= 31
id-DCH-InformationItem-RL-SetupReqTDD       INTEGER ::= 32
id-DCH-InformationList-RL-SetupReqTDD       INTEGER ::= 33
id-DCH-ModifyItem                           INTEGER ::= 34
id-DCH-ModifyItem-RL-ReconfPrepFDD          INTEGER ::= 35
id-DCH-ModifyItem-RL-ReconfPrepTDD          INTEGER ::= 36
id-DCH-ModifyItem-RL-ReconfReadyFDD         INTEGER ::= 37
id-DCH-ModifyItem-RL-ReconfRqstFDD          INTEGER ::= 38
id-DCH-ModifyItem-RL-ReconfRqstTDD          INTEGER ::= 39
id-DCH-ModifyList-RL-ReconfPrepFDD          INTEGER ::= 40
id-DCH-ModifyList-RL-ReconfPrepTDD          INTEGER ::= 41
id-DCH-ModifyList-RL-ReconfRqstFDD          INTEGER ::= 42
id-DCH-ModifyList-RL-ReconfRqstTDD          INTEGER ::= 43
id-DL-CCTrCH-Information-RL-ReconfPrepTDD   INTEGER ::= 44
id-DL-CCTrCH-Information-RL-ReconfRqstTDD   INTEGER ::= 45
id-DL-CCTrCH-InformationList-RL-ReconfPrepTDD INTEGER ::= 46
id-DL-CCTrCH-InformationList-RL-ReconfRqstTDD INTEGER ::= 47
id-DL-CCTrChInformationItem-RL-SetupReqTDD  INTEGER ::= 48
id-DL-CCTrChInformationList-RL-SetupReqTDD  INTEGER ::= 49
id-DL-CodeInformation-PhyChReconfRqstFDD    INTEGER ::= 50
id-DL-DPCH-Information                       INTEGER ::= 51
id-DL-DPCH-Information-RL-SetupReqFDD        INTEGER ::= 52
id-DL-DPCH-InformationList-PhyChReconfRqstTDD INTEGER ::= 53
id-DL-DPCH-InformationList-RL-ReconfReadyTDD INTEGER ::= 54
id-DL-EbNoTarget                             INTEGER ::= 55
id-DL-FrameType                             INTEGER ::= 56
id-DL-MeanBitRate                           INTEGER ::= 57
id-DL-ReferencePowerInformation-DL-PC-Rqst    INTEGER ::= 58
id-DRX-Parameter                           INTEGER ::= 59
id-DedicatedMeasurementObjectType-DM-Rprt     INTEGER ::= 60
id-DedicatedMeasurementObjectType-DM-Rqst     INTEGER ::= 61
id-DedicatedMeasurementObjectType-DM-Rspns    INTEGER ::= 62
id-FACH-InfoForOptionalGroupS-CCPCH          INTEGER ::= 63
id-FACH-InfoForOptionals-CCPCH               INTEGER ::= 64
id-FACH-InfoForS-CCPCH-CoupledToPRACH        INTEGER ::= 65
id-GapPositionMode                          INTEGER ::= 66
id-L3-Information                           INTEGER ::= 67
id-MaxAdjustmentPeriod                       INTEGER ::= 68
id-MaxAdjustmentStep                         INTEGER ::= 69
id-MeasurementCharacteristics                 INTEGER ::= 7068
id-MeasurementID                             INTEGER ::= 7169
id-MultipleURAsIndicator                     INTEGER ::= 720

```

.. (new numbering needed) ..

```
id-UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD      INTEGER ::= 1475
id-UnsuccessfulRL-InformationResponseList-RL-AdditionFailureFDD  INTEGER ::= 1486
id-UnsuccessfulRL-InformationResponseList-RL-SetupFailureFDD    INTEGER ::= 1497
id-CriticalityDiagnostics                                       INTEGER ::= 1504
```

```
END
```