

**TSG-RAN Meeting #7  
Madrid, Spain, 13 - 15 March 2000**

**TSGRP#7(00)0106**

**Title: Agreed CRs to TS 25.433**

**Source: TSG-RAN WG3**

**Agenda item: 6.4.3**

Tdoc_Num	Specification	CR_Num	Revision_Num	CR_Subject	CR_Category	WG_Status	Cur_Ver_Num	New_Ver_Num
R3-000225	25.433	002		Editorial Improvements of NBAP version 3.0.0	D	agreed	3.0.0	3.1.0
R3-000024	25.433	003		Insertion of missing mapping table; Functions to Elementary Procedures	F	agreed	3.0.0	3.1.0
R3-000025	25.433	004		Replacement of the Error Indication procedure with the procedure text agreed at RAN WG3 #9	F	agreed	3.0.0	3.1.0
R3-000081	25.433	005		Missing Cause Values in the RL Failure procedure	F	agreed	3.0.0	3.1.0
R3-000226	25.433	007		Scope of Transaction id	F	agreed	3.0.0	3.1.0
R3-000015	25.433	013		Repetition of compressed mode information elements.	F	agreed	3.0.0	3.1.0
R3-000012	25.433	014		Changing Eb/N0 to SIR.	B	agreed	3.0.0	3.1.0
R3-000138	25.433	015		TPC Step Size defined for TDD	F	agreed	3.0.0	3.1.0
R3-000259	25.433	017		Simplified Audit procedure	C	agreed	3.0.0	3.1.0
R3-000080	25.433	018		Use of Error Indication procedure on signalling	D	agreed	3.0.0	3.1.0

				bearers corresponding to the Node B control port				
R3-000088	25.433	020		Correction of number of possible CPICHs in a cell	F	agreed	3.0.0	3.1.0
R3-000046	25.433	022		CR to 25.433: Editorial Correction of the ASN.1 with the Syntax Checking of the NBAP : Common Module	C	agreed	3.0.0	3.1.0
R3-000219	25.433	023		CR to 25.433: Editorial Correction of the ASN.1 with the Syntax Checking of the NBAP : Elementary Procedure Module	C	agreed	3.0.0	3.1.0
R3-000284	25.433	025		CR to 25.433: Editorial Correction of the ASN.1 with the Syntax Checking of the NBAP : Information Element Module	C	agreed	3.0.0	3.1.0
R3-000222	25.433	026		CR to 25.433: Editorial Correction of the ASN.1 with the Syntax Checking of the NBAP : Constant Module	C	agreed	3.0.0	3.1.0
R3-000298	25.433	028		Modifications to RADIO LINK ADDITION procedure and related parameters	F	agreed	3.0.0	3.1.0
R3-000294	25.433	029		Frame Offset Correction	F	agreed	3.0.0	3.1.0
R3-000492	25.433	036		Alignment to R3 definition of puncturing limit range and step size	F	agreed	3.0.0	3.1.0
R3-000494	25.433	019	1	Update of system information procedure	F	agreed	3.0.0	3.1.0

**CHANGE REQUEST**

*Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.*

**25.433 CR 002**

Current Version: **3.0.0**

GSM (AA.BB) or 3G (AA.BBB) specification number ↑

↑ CR number as allocated by MCC support team

For submission to: **TSG RAN #7**

*list expected approval meeting # here*



for approval    
for information

strategic    
non-strategic  *(for SMG use only)*

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: <ftp://ftp.3gpp.org/Information/CR-Form-v2.doc>

**Proposed change affects:** (U)SIM  ME  UTRAN / Radio  Core Network   
(at least one should be marked with an X)

**Source:** TSG-RAN WG3 **Date:** 24-28 Jan. 2000

**Subject:** Editorial Improvements of NBAP version 3.0.0

**Work item:**

<b>Category:</b>	F Correction	<input type="checkbox"/>	<b>Release:</b>	Phase 2	<input type="checkbox"/>
<small>(only one category shall be marked with an X)</small>	A Corresponds to a correction in an earlier release	<input type="checkbox"/>		Release 96	<input type="checkbox"/>
	B Addition of feature	<input type="checkbox"/>		Release 97	<input type="checkbox"/>
	C Functional modification of feature	<input type="checkbox"/>		Release 98	<input type="checkbox"/>
	D Editorial modification	<input checked="" type="checkbox"/>		Release 99	<input checked="" type="checkbox"/>
				Release 00	<input type="checkbox"/>

**Reason for change:** The current version of NBAP contains some editorial deficiencies and incorrect descriptions that need to be corrected.

**Clauses affected:** 2, 3.1, 3.3, 5, 7, 8.1, 8.2.1, 8.2.2, 8.2.3.2, 8.2.4, 8.2.5.2, 8.2.6.2, 8.2.7.2, 8.2.8, 8.2.9, 8.2.10, 8.2.11, 8.2.12, 8.2.13, 8.2.14, 8.2.15, 8.2.16, 8.2.17, 8.3.1, 8.3.2, 8.3.3, 8.3.4, 8.3.5, 8.3.6, 8.3.7, 8.3.8, 8.3.9, 8.3.10, 8.3.11, 8.3.12, 8.3.13, 8.3.14, 8.3.15, 8.3.16, 8.4, 9.1 [except 9.1.32 to 34, 9.1.39 to 46, 9.1.48(second), and 9.1.49], 9.2.1.1, 9.2.1.2, 9.2.1.5, 9.2.1.6, 9.2.1.7, 9.2.1.9, 9.2.1.10, 9.2.1.11, 9.2.1.12, 9.2.1.13, 9.2.1.15, 9.2.1.16, 9.2.1.20, 9.2.1.21, 9.2.1.22, 9.2.1.23, 9.2.1.24, 9.2.1.33, 9.2.1.34, 9.2.1.35, 9.2.1.36, 9.2.1.37, 9.2.1.38, 9.2.1.39, 9.2.1.41, 9.2.1.42, 9.2.1.43, 9.2.1.46, 9.2.1.51, 9.2.1.52, 9.2.1.55, 9.2.1.59, 9.2.1.60, 9.2.2.1, 9.2.2.3, 9.2.2.13, 9.2.2.19, 9.2.2.20, 9.2.2.24, 9.2.2.25, 9.2.2.26, 9.2.2.28, 9.2.2.29, 9.2.2.31, 9.2.2.32, 9.2.2.37, 9.2.2.38, 9.2.2.39, 9.2.2.44, 9.2.2.45, 9.2.2.47, 9.2.2.48, 9.2.2.50, 9.2.3.3, 9.2.3.5, 9.2.3.7, 9.2.3.8, 9.2.3.9, 9.2.3.11, 9.2.3.14, 9.2.3.15, 9.2.3.17, 9.2.3.19, 9.2.3.20, 9.2.3.22, 9.2.3.23, 9.2.3.24, 9.2.3.25, 9.3.3, and 9.3.4.

<b>Other specs affected:</b>	Other 3G core specifications	<input type="checkbox"/>	→ List of CRs:	
	Other GSM core specifications	<input type="checkbox"/>	→ List of CRs:	
	MS test specifications	<input type="checkbox"/>	→ List of CRs:	
	BSS test specifications	<input type="checkbox"/>	→ List of CRs:	
	O&M specifications	<input type="checkbox"/>	→ List of CRs:	

**Other comments:** The paragraph style of the last paragraph of 8.2.2.2 is changed (from paragraph style "B1" to "Normal") to make clear that the paragraph is not related to the "sub-heading" two paragraphs above the paragraph.

Two paragraphs of 8.2.17.2 have been removed and reinserted to get rid of the incorrectly inserted underline formatting of the paragraphs.

The first paragraph of 8.3.1.3 have been removed and reinserted to get rid of the incorrect paragraph format (the paragraph format is changed from paragraph style "Editor's note" to "Normal") to make clear that the paragraph is not an editor's note.

The "Allowed Slot Format Information" is changed to **bold** since it is a group and the group content (RACH Slot Format) is indented in chapter 9.1.2.1 and 9.1.5.1.

# 3G TS 25.433 V3.0.0 (2000-01)

---

*Technical Specification*

## **3rd Generation Partnership Project; Technical Specification Group Radio Access Network; UTRAN Iub Interface NBAP Signalling (3G TS 25.433 version 3.0.0 Release 1999)**



The present document has been developed within the 3<sup>rd</sup> Generation Partnership Project (3GPP™) and may be further elaborated for the purposes of 3GPP.

The present document has not been subject to any approval process by the 3GPP Organisational Partners and shall not be implemented. This Specification is provided for future development work within 3GPP only. The Organisational Partners accept no liability for any use of this Specification. Specifications and reports for implementation of the 3GPP™ system should be obtained via the 3GPP Organisational Partners' Publications Offices.

---

Reference

---

3TS/TSGR-0325433U

Keywords

---

**3GPP**

Postal address

---

3GPP support office address

---

650 Route des Lucioles - Sophia Antipolis  
Valbonne - FRANCE  
Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Internet

---

<http://www.3gpp.org>

---

**Copyright Notification**

---

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© 2000, 3GPP Organizational Partners (ARIB, CWTS, ETSI, T1, TTA, TTC).  
All rights reserved.

# Contents

Foreword.....	<u>1312</u>
1 Scope.....	<u>1413</u>
2 References.....	<u>1413</u>
3 Definitions, symbols and abbreviations.....	<u>1413</u>
3.1 Definitions.....	<u>1413</u>
3.2 Symbols.....	<u>1514</u>
3.3 Abbreviations.....	<u>1514</u>
4 General.....	<u>1615</u>
4.1 Procedure Specification Principles.....	<u>1615</u>
4.2 Forwards and Backwards Compatibility.....	<u>1615</u>
5 NBAP Services.....	<u>1615</u>
6 Services Expected from Signalling Transport.....	<u>1615</u>
7 Functions of NBAP.....	<u>1615</u>
8 NBAP Procedures.....	<u>1716</u>
8.1 Elementary Procedures.....	<u>1716</u>
8.2 NBAP Common Procedures.....	<u>1948</u>
8.2.1 Common Transport Channel Setup.....	<u>1948</u>
8.2.1.1 General.....	<u>1948</u>
8.2.1.2 Successful Operation.....	<u>1948</u>
8.2.1.3 Unsuccessful Operation.....	<u>2049</u>
8.2.1.4 Abnormal Conditions.....	<u>2120</u>
8.2.2 Common Transport Channel Reconfigure.....	<u>2120</u>
8.2.2.1 General.....	<u>2120</u>
8.2.2.2 Successful Operation.....	<u>2120</u>
8.2.2.3 Unsuccessful Operation.....	<u>2322</u>
8.2.2.4 Abnormal Conditions.....	<u>2322</u>
8.2.3 Common Transport Channel Delete.....	<u>2422</u>
8.2.3.1 General.....	<u>2422</u>
8.2.3.2 Successful Operation.....	<u>2423</u>
8.2.3.3 Unsuccessful Operation.....	<u>2423</u>
8.2.3.4 Abnormal Conditions.....	<u>2423</u>
8.2.4 Block Resource.....	<u>2423</u>
8.2.4.1 General.....	<u>2423</u>
8.2.4.2 Successful Operation.....	<u>2524</u>
8.2.4.3 Unsuccessful Operation.....	<u>2524</u>
8.2.4.4 Abnormal Conditions.....	<u>2625</u>
8.2.5 Unblock Resource.....	<u>2625</u>
8.2.5.1 General.....	<u>2625</u>
8.2.5.2 Successful Operation.....	<u>2625</u>
8.2.5.3 Abnormal Conditions.....	<u>2625</u>
8.2.6 Audit Required.....	<u>2625</u>
8.2.6.1 General.....	<u>2625</u>
8.2.6.2 Successful Operation.....	<u>2726</u>
8.2.6.3 Abnormal Conditions.....	<u>2726</u>
8.2.7 Audit.....	<u>2726</u>
8.2.7.1 General.....	<u>2726</u>
8.2.7.2 Successful Operation.....	<u>2726</u>
8.2.7.3 Unsuccessful Operation.....	<u>2827</u>
8.2.7.4 Abnormal Conditions.....	<u>2827</u>
8.2.8 Common Measurement Initiation.....	<u>2827</u>
8.2.8.1 General.....	<u>2827</u>
8.2.8.2 Successful Operation.....	<u>2827</u>

8.2.8.3	Unsuccessful Operation.....	3028
8.2.8.4	Abnormal Conditions .....	3029
8.2.9	Common Measurement Report .....	3029
8.2.9.1	General .....	3029
8.2.9.2	Successful Operation .....	3029
8.2.9.3	Abnormal Conditions .....	3129
8.2.10	Common Measurement Termination.....	3129
8.2.10.1	General .....	3129
8.2.10.2	Successful Operation .....	3130
8.2.10.3	Abnormal Conditions .....	3130
8.2.11	Common Measurement Failure .....	3130
8.2.11.1	General .....	3130
8.2.11.2	Successful Operation .....	3130
8.2.11.3	Abnormal Conditions .....	3130
8.2.12	Cell Setup .....	3230
8.2.12.1	General .....	3230
8.2.12.2	Successful operation.....	3231
8.2.12.3	Unsuccessful operation.....	3231
8.2.12.4	Abnormal Conditions .....	3332
8.2.13	Cell Reconfiguration .....	3332
8.2.13.1	General .....	3332
8.2.13.2	Successful operation.....	3332
8.2.13.3	Unsuccessful operation.....	3433
8.2.13.4	Abnormal Conditions .....	3433
8.2.14	Cell Deletion .....	3433
8.2.14.1	General .....	3433
8.2.14.2	Successful operation.....	3533
8.2.14.3	Unsuccessful operation.....	3534
8.2.14.4	Abnormal Conditions .....	3534
8.2.15	Resource Status Indication .....	3534
8.2.15.1	General .....	3534
8.2.15.2	Successful Operation .....	3634
8.2.15.3	Abnormal Conditions .....	3635
8.2.16	System Information Update .....	3635
8.2.16.1	General .....	3635
8.2.16.2	Successful Operation .....	3735
8.2.16.3	Unsuccessful Operation.....	3736
8.2.16.4	Abnormal Conditions .....	3836
8.2.17	Radio Link Setup.....	3837
8.2.17.1	General .....	3837
8.2.17.2	Successful operation.....	3837
8.2.17.3	Unsuccessful Operation.....	4038
8.2.17.4	Abnormal Conditions .....	4039
8.3	NBAP Dedicated Procedures.....	4039
8.3.1	Radio Link Addition.....	4039
8.3.1.1	General .....	4039
8.3.1.2	Successful operation.....	4139
8.3.1.3	Unsuccessful operation.....	4240
8.3.1.4	Abnormal conditions .....	4241
8.3.2	Synchronised Radio Link Reconfiguration Preparation.....	4341
8.3.2.1	General .....	4341
8.3.2.2	Successful Operation .....	4341
8.3.2.3	Unsuccessful Operation.....	4543
8.3.2.4	Abnormal Conditions .....	4644
8.3.3	Synchronised Radio Link Reconfiguration Commit .....	4644
8.3.3.1	General .....	4644
8.3.3.2	Successful Operation .....	4644
8.3.3.3	Abnormal Conditions .....	4644
8.3.4	Synchronised Radio Link Reconfiguration Cancellation .....	4645
8.3.4.1	General .....	4645
8.3.4.2	Successful Operation .....	4745



8.3.4.3	Abnormal Conditions .....	4745
8.3.5	Unsynchronised Radio Link Reconfiguration .....	4745
8.3.5.1	General .....	4745
8.3.5.2	Successful Operation .....	4745
8.3.5.1	Unsuccessful Operation .....	4947
8.3.5.2	Abnormal Conditions .....	5048
8.3.6	Radio Link Deletion .....	5048
8.3.6.1	General .....	5048
8.3.6.2	Successful Operation .....	5048
8.3.6.3	Unsuccessful Operation .....	5048
8.3.6.4	Abnormal Conditions .....	5048
8.3.7	DL Power Control (for FDD only) .....	5049
8.3.7.1	General .....	5049
8.3.7.2	Successful Operation .....	5149
8.3.7.3	Abnormal Conditions .....	5149
8.3.8	Dedicated Measurement Initiation .....	5149
8.3.8.1	General .....	5149
8.3.8.2	Successful Operation .....	5149
8.3.8.3	Unsuccessful Operation .....	5351
8.3.8.4	Abnormal Conditions .....	5351
8.3.9	Dedicated Measurement Reporting .....	5351
8.3.9.1	General .....	5351
8.3.9.2	Successful Operation .....	5352
8.3.9.3	Abnormal Conditions .....	5452
8.3.10	Dedicated Measurement Termination .....	5452
8.3.10.1	General .....	5452
8.3.10.2	Successful Operation .....	5452
8.3.10.3	Abnormal Conditions .....	5452
8.3.11	Dedicated Measurement Failure .....	5452
8.3.11.1	General .....	5452
8.3.11.2	Successful Operation .....	5453
8.3.11.3	Abnormal Conditions .....	5553
8.3.12	Radio Link Failure .....	5553
8.3.12.1	General .....	5553
8.3.12.2	Successful Operation .....	5553
8.3.13	Radio Link Restoration .....	5553
8.3.13.1	General .....	5554
8.3.13.2	Successful Operation .....	5654
8.3.14	Compressed Mode Preparation (for FDD only) .....	5654
8.3.14.1	General .....	5654
8.3.14.2	Successful Operation .....	5654
8.3.14.3	Unsuccessful Operation .....	5755
8.3.14.4	Abnormal Conditions .....	5755
8.3.15	Compressed Mode Commit (for FDD only) .....	5755
8.3.15.1	General .....	5755
8.3.15.2	Successful Operation .....	5856
8.3.15.3	Abnormal Conditions .....	5856
8.3.16	Compressed Mode Cancellation (for FDD only) .....	5856
8.3.16.1	General .....	5856
8.3.16.2	Successful Operation .....	5856
8.3.16.3	Abnormal Conditions .....	5856
8.4	Error Handling Procedures .....	5957
8.4.1	Error Indication .....	5957
9	Elements for NBAP communication .....	5957
9.1	Message functional definition and content .....	5957
9.1.1	Message Contents .....	5957
9.1.2	COMMON TRANSPORT CHANNEL SETUP REQUEST .....	6159
9.1.2.1	FDD Message .....	6159
9.1.2.2	TDD Message .....	6260
9.1.3	COMMON TRANSPORT CHANNEL SETUP RESPONSE .....	6462
9.1.4	COMMON TRANSPORT CHANNEL SETUP FAILURE .....	6563

9.1.5	COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST.....	6664
9.1.5.1	FDD Message .....	6664
9.1.5.2	TDD Message .....	6764
9.1.6	COMMON TRANSPORT CHANNEL RECONFIGURATION RESPONSE.....	6865
9.1.7	COMMON TRANSPORT CHANNEL RECONFIGURATION FAILURE.....	6866
9.1.8	COMMON TRANSPORT CHANNEL DELETION REQUEST.....	6866
9.1.9	COMMON TRANSPORT CHANNEL DELETION RESPONSE.....	6866
9.1.10	BLOCK RESOURCE REQUEST .....	6966
9.1.11	BLOCK RESOURCE RESPONSE.....	6967
9.1.12	BLOCK RESOURCE FAILURE.....	6967
9.1.13	UNBLOCK RESOURCE INDICATION .....	6967
9.1.14	AUDIT REQUIRED INDICATION.....	6967
9.1.15	AUDIT REQUEST .....	7067
9.1.16	AUDIT RESPONSE .....	7068
9.1.17	COMMON MEASUREMENT INITIATION REQUEST.....	7370
9.1.18	COMMON MEASUREMENT INITIATION RESPONSE.....	7471
9.1.19	COMMON MEASUREMENT INITIATION FAILURE.....	7471
9.1.20	COMMON MEASUREMENT REPORT.....	7471
9.1.21	COMMON MEASUREMENT TERMINATION REQUEST.....	7471
9.1.22	COMMON MEASUREMENT FAILURE INDICATION.....	7572
9.1.23	CELL SETUP REQUEST.....	7572
9.1.23.1	FDD Message .....	7572
9.1.23.2	TDD Message.....	7673
9.1.24	CELL SETUP RESPONSE.....	7673
9.1.25	CELL SETUP FAILURE.....	7774
9.1.26	CELL RECONFIGURATION REQUEST .....	7774
9.1.26.1	FDD Message .....	7774
9.1.26.2	TDD Message.....	7774
9.1.27	CELL RECONFIGURATION RESPONSE.....	7875
9.1.28	CELL RECONFIGURATION FAILURE .....	7875
9.1.29	CELL DELETION REQUEST .....	7875
9.1.30	CELL DELETION RESPONSE .....	7875
9.1.31	RESOURCE STATUS INDICATION .....	7976
9.1.32	SYSTEM INFORMATION UPDATE REQUEST.....	8279
9.1.33	SYSTEM INFORMATION UPDATE RESPONSE.....	8279
9.1.34	SYSTEM INFORMATION UPDATE FAILURE.....	8380
9.1.35	RADIO LINK SETUP REQUEST .....	8481
9.1.35.1	FDD message.....	8481
9.1.35.2	TDD message .....	8683
9.1.36	RADIO LINK SETUP RESPONSE.....	8885
9.1.36.1	FDD message.....	8885
9.1.36.2	TDD Message.....	8986
9.1.37	RADIO LINK SETUP FAILURE.....	9087
9.1.37.1	FDD Message .....	9087
9.1.37.2	TDD Message.....	9188
9.1.38	RADIO LINK ADDITION REQUEST .....	9188
9.1.38.1	FDD Message .....	9188
9.1.38.2	TDD Message.....	9289
9.1.39	RADIO LINK ADDITION RESPONSE .....	9390
9.1.39.1	FDD message.....	9390
9.1.39.2	TDD Message.....	9491
9.1.40	RADIO LINK ADDITION FAILURE .....	9592
9.1.40.1	FDD Message .....	9592
9.1.40.2	TDD Message.....	9592
9.1.41	RADIO LINK RECONFIGURATION PREPARE .....	9693
9.1.41.1	FDD Message .....	9693
9.1.41.2	TDD Message.....	9895
9.1.42	RADIO LINK RECONFIGURATION READY .....	10198
9.1.43	RADIO LINK RECONFIGURATION FAILURE .....	10299
9.1.44	RADIO LINK RECONFIGURATION COMMIT .....	10299
9.1.45	RADIO LINK RECONFIGURATION CANCEL.....	10299

9.1.46	RADIO LINK RECONFIGURATION REQUEST .....	103400
9.1.46.1	FDD Message .....	103400
9.1.46.2	TDD Message .....	105402
9.1.48	RADIO LINK RECONFIGURATION RESPONSE .....	106403
9.1.48	RADIO LINK DELETION REQUEST .....	108405
9.1.49	RADIO LINK DELETION RESPONSE .....	108405
9.1.50	DL POWER CONTROL REQUEST (FDD only) .....	108405
9.1.51	DEDICATED MEASUREMENT INITIATION REQUEST .....	109406
9.1.52	DEDICATED MEASUREMENT INITIATION RESPONSE .....	109406
9.1.53	DEDICATED MEASUREMENT INITIATION FAILURE .....	110407
9.1.54	DEDICATED MEASUREMENT REPORT .....	110407
9.1.55	DEDICATED MEASUREMENT TERMINATION REQUEST .....	111408
9.1.56	DEDICATED MEASUREMENT FAILURE INDICATION .....	111408
9.1.57	RADIO LINK FAILURE INDICATION .....	111408
9.1.58	RADIO LINK RESTORE INDICATION .....	111408
9.1.59	COMPRESSED MODE PREPARE (FDD only) .....	112409
9.1.60	COMPRESSED MODE READY (FDD only) .....	113410
9.1.61	COMPRESSED MODE COMMIT (FDD only) .....	113410
9.1.62	COMPRESSED MODE FAILURE (FDD only) .....	113410
9.1.63	COMPRESSED MODE CANCEL (FDD only) .....	114411
9.1.64	ERROR INDICATION .....	114411
9.2	Information Element Functional Definition and Contents .....	114411
9.2.1	Common parameters .....	114411
9.2.1.1	Add/Delete Indicator .....	114411
9.2.1.2	Availability Status .....	115411
9.2.1.3	BCCH Modification Time .....	115412
9.2.1.4	Binding ID .....	115412
9.2.1.5	Blocking Priority Indicator .....	115412
9.2.1.6	Cause .....	116413
9.2.1.7	CFN .....	117414
9.2.1.8	C-ID .....	117414
9.2.1.9	Common Measurement Object Type .....	117414
9.2.1.10	Common Measurement Type .....	117414
9.2.1.11	Common Measurement Value .....	117414
9.2.1.12	Common Physical Channel Id .....	118415
9.2.1.13	Common Transport Channel Id .....	118415
9.2.1.14	Communication Control Port ID .....	118415
9.2.1.15	Configuration Generation ID .....	118415
9.2.1.16	Criticality diagnostics .....	119416
9.2.1.17	CRNC Communication Context ID .....	119416
9.2.1.18	DCH Combination Indicator .....	119416
9.2.1.19	DCH ID .....	120417
9.2.1.20	DL Power .....	120417
9.2.1.21	Dedicated Measurement Object Type .....	120417
9.2.1.22	Dedicated Measurement Type .....	120417
9.2.1.23	Dedicated Measurement Value .....	120417
9.2.1.24	DSCH ID .....	121418
9.2.1.25	DSCH Transport Format Set .....	121418
9.2.1.26	DSCH Transport Format Combination Set .....	121418
9.2.1.27	Frame Handling Priority .....	121418
9.2.1.28	Frame Offset .....	121418
9.2.1.29	IB_SG .....	122419
9.2.1.30	IB_SG_POS .....	122419
9.2.1.31	IB_SG_REP .....	122419
9.2.1.32	IB Type .....	122419
9.2.1.33	Indication Type .....	122419
9.2.1.34	Local Cell ID .....	123420
9.2.1.35	Maximum DL Power Capability .....	123420
9.2.1.36	Max Transmission Power .....	123420
9.2.1.37	Measurement ID .....	123420
9.2.1.38	Measurement Characteristics .....	123420

9.2.1.39	Report Characteristics.....	124121
9.2.1.40	Message discriminator.....	126123
9.2.1.41	Message Type.....	126123
9.2.1.42	Minimum Spreading Factor.....	128125
9.2.1.43	Node B Communication Context ID.....	128125
9.2.1.44	Payload CRC presence.....	128125
9.2.1.45	Puncture limit.....	128125
9.2.1.46	Resource Operational State.....	129126
9.2.1.47	RLC Mode.....	129126
9.2.1.48	RL ID.....	129126
9.2.1.49	Segment Type.....	129126
9.2.1.50	SIB Deletion Indicator.....	129126
9.2.1.51	SIB Originator.....	130127
9.2.1.52	Shutdown Timer.....	130127
9.2.1.53	TFCI Presence.....	130127
9.2.1.54	TFCS (Transport Format Combination Set).....	130127
9.2.1.55	TFS (Transport Format Set).....	131127
9.2.1.56	ToAWE.....	132128
9.2.1.57	ToAWS.....	132129
9.2.1.58	Transaction ID.....	132129
9.2.1.59	Transport Layer Address.....	132129
9.2.1.60	UARFCN.....	132129
9.2.1.61	UL FP mode.....	133129
9.2.1.62	UL interference level.....	133130
9.2.2	FDD specific parameters.....	133130
9.2.2.1	AICH Transmission Timing.....	133130
9.2.2.2	Chip Offset.....	133130
9.2.2.3	Compressed mode method.....	133130
9.2.2.4	D-Field Length.....	134130
9.2.2.5	Diversity Control Field.....	134131
9.2.2.6	Diversity Indication.....	134131
9.2.2.7	Diversity mode.....	134131
9.2.2.8	DL DPCH Slot Format.....	134131
9.2.2.9	DL frame type.....	135131
9.2.2.10	DL Scrambling Code.....	135132
9.2.2.11	Multiplexing Position.....	135132
9.2.2.12	FDD DL Channelisation Code Number.....	135132
9.2.2.13	FDD S-CCPCH Offset.....	135132
9.2.2.14	Gap Period.....	136133
9.2.2.15	Gap Position Mode.....	136133
9.2.2.16	Maximum Number of UL DPDCHs.....	136133
9.2.2.17	Minimum UL Channelisation Code Length.....	136133
9.2.2.18	Pattern Duration (PD).....	136133
9.2.2.19	PICH Mode.....	136133
9.2.2.20	Pilot Bits Used Indicator.....	137134
9.2.2.21	Power Control Mode.....	137134
9.2.2.22	Power Offset.....	137134
9.2.2.23	Power Resume Mode.....	137134
9.2.2.24	Preamble Signature.....	137134
9.2.2.25	Primary Scrambling code.....	137134
9.2.2.26	Primary CPICH Power.....	138135
9.2.2.27	Propagation Delay.....	138135
9.2.2.28	RACH Slot Format.....	138135
9.2.2.29	RACH sub Channel numbers.....	138135
9.2.2.30	Scrambling code change.....	138135
9.2.2.31	Scrambling Code Word Number.....	139135
9.2.2.32	Secondary CCPCH Slot Format.....	139136
9.2.2.33	S-Field Length.....	139136
9.2.2.34	SSDT Cell Identity.....	139136
9.2.2.35	SSDT Cell ID Length.....	139136
9.2.2.36	SSDT Support Indicator.....	139136

9.2.2.37	SSDT Indication .....	140136
9.2.2.38	STTD Indicator .....	140137
9.2.2.39	T_Cell .....	140137
9.2.2.40	TFCI signalling mode .....	140137
9.2.2.41	TGD .....	140137
9.2.2.42	TGL .....	141138
9.2.2.43	TPC DL step size .....	141138
9.2.2.44	Transmit Diversity Indicator .....	141138
9.2.2.45	TSTD Indicator .....	141138
9.2.2.46	UL/DL compressed mode selection: .....	141138
9.2.2.47	UL delta Eb/No .....	142138
9.2.2.48	UL delta Eb/No after .....	142139
9.2.2.49	UL DPCCCH Slot Format .....	142139
9.2.2.50	UL Eb/No .....	142139
9.2.2.51	UL Scrambling Code .....	142139
9.2.3	TDD specific Parameters .....	143139
9.2.3.1	Burst Type .....	143139
9.2.3.2	CCTrCH ID .....	143140
9.2.3.3	Cell Parameter ID .....	143140
9.2.3.4	DPCH ID .....	143140
9.2.3.5	Max PRACH Midamble shift .....	143140
9.2.3.6	Midamble shift .....	143140
9.2.3.7	Paging Indicator Length .....	144141
9.2.3.8	PCCPCH Power .....	144141
9.2.3.9	PRACH Midamble .....	144141
9.2.3.10	PSCH Time Slot .....	144141
9.2.3.11	PSCH Power .....	144141
9.2.3.12	Repetition Length .....	144141
9.2.3.13	Repetition Period .....	145142
9.2.3.14	Sync case .....	145142
9.2.3.15	Synchronisation method .....	145142
9.2.3.16	TDD Channelisation Code .....	145142
9.2.3.17	TDD Chip Offset .....	146143
9.2.3.18	TDD Physical Channel Offset .....	146143
9.2.3.19	TDD S-CCPCH Offset .....	146143
9.2.3.20	TFCI Coding .....	146143
9.2.3.21	Time Slot .....	146143
9.2.3.22	Time Slot Direction .....	146143
9.2.3.23	Time Slot Status .....	147144
9.2.3.24	Transmission Diversity Applied .....	147144
9.2.3.25	USCH ID .....	147144
9.3	Message and Information element abstract syntax (with ASN.1) .....	149145
9.3.1	Usage of protocol extension mechanism for non-standard use .....	149145
9.3.2	PDU Description for NBAP .....	149145
9.3.3	NBAP PDU Content Definitions .....	164160
9.3.4	NBAP Information Elements .....	271262
9.3.5	NBAP Common Data Type Definitions .....	290281
9.3.6	NBAP Extension Definitions .....	291282
9.3.7	Constant Definitions for NBAP .....	295285
9.4	Message transfer syntax .....	303293
9.5	Timers .....	303293
10	Handling of unknown, unforeseen and erroneous protocol data .....	303293
10.1	General .....	303293
10.2	Transfer Syntax Error .....	303293
10.3	Abstract Syntax Error .....	303293
10.3.1	General .....	303293
10.3.2	Handling of the Criticality Information at Reception .....	304293
10.3.2.1	Procedure Code .....	304293
10.3.2.2	IEs other than the Procedure Code .....	304294
10.4	Logical Error Handling .....	305294

~~3G TS 25.433 version 3.0.0 Release 1999 X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~3G TS 25.433 version 3.0.0 Release 1999~~

<b>Annex A (informative): Change history</b> .....	<b>306</b> <del>296</del>
History.....	<del>307</del> <b>297</b>

## Foreword

This Technical Specification has been produced by the 3GPP.

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of this TS, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 Indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

# 1 Scope

The present document specifies the standards for NBAP specification to be used over Iub Interface.

---

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

- [1] 3G TS 25.401: "UTRAN Overall Description".
  - [2] 3G TS 25.426: "UTRAN I<sub>ur</sub> and I<sub>ub</sub> Interface Data Transport & Transport Signalling for DCH Data Streams".
  - [3] CCITT Recommendation X.731 (01/92): "Information Technology – Open Systems Interconnection – Systems Management: State Management function".
  - [4] 3G TS 25.215: "Physical layer – Measurements (FDD)".
  - [5] 3G TS 25.225: "Physical layer – Measurements (TDD)".
  - [6] 3G TS 25.430: "UTRAN Iub General Aspect and Principle".
  - [7] 3G TS 25.211: "Physical channels and mapping of transport channels onto physical channels (FDD)".
  - [8] 3G TS 25.212: "Multiplexing and channel coding (FDD)".
  - [9] 3G TS 25.213: "Spreading and modulation (FDD)".
  - [10] 3G TS 25.214: "Physical layer procedures (FDD)".
  - [11] X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)".
  - [12] X.680, (12/94) "Information Technology - Abstract Syntax Notation One (ASN.1): Specification of basic notation".
  - [13] X.681, (12/94) "Information Technology - Abstract Syntax Notation One (ASN.1): Information object specification"
- 

# 3 Definitions, symbols and abbreviations

## 3.1 Definitions

For the purposes of the present document, the following terms and definitions apply.

**Elementary Procedure:** The NBAP protocol consists of Elementary Procedures (EPs). An Elementary Procedure is a unit of interaction between the CRNC and the Node B.



~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~3G TS 25.433 version 3.0.0 Release 1999~~

An EP consists of an initiating message and possibly a response message.

Two kinds of EPs are used:

- **Class 1:** Elementary Procedures with response (success or failure).
- **Class 2:** Elementary Procedures without response.

For **Class 1** EPs, the types of responses can be as follows:

Successful

- A signalling message explicitly indicates that the elementary procedure successfully completed with the receipt of the response.

Unsuccessful

- A signalling message explicitly indicates that the EP failed.
- On time supervision expiry (i.e. absence of expected response). Whether or not any Class 1 procedure will have a timer on NBAP is FFS. To ~~de-be~~ sorted out when discussing the details of the error cases.

**Class 2** EPs are considered always successful.

## 3.2 Symbols

No special symbols are defined in this document.

## 3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ASN.1	Abstract Syntax Notation One
ATM	Asynchronous Transfer Mode
BCCH	Broadcast Control Channel
CCPCH	Common Control Physical Channel
CFN	Connection Frame Number
CRNC	Controlling Radio Network Controller
DCH	Dedicated Channel
DL	Downlink
DPCCH	Dedicated Physical Control Channel
DPCH	Dedicated Physical Channel
DPDCH	Dedicated Physical Data Channel
<del>DRNC</del>	<del>Drift Radio Network Controller</del>
<del>DSCH</del>	<del>Downlink Shared Channel</del>
FDD	Frequency Division Duplex
FP	Frame Protocol
L1	Layer 1
L2	Layer 2
NBAP	Node B Application Part
O&M	Operation and Management
<del>QoS</del>	<del>Quality of Service</del>
RL	Radio Link
RNC	Radio Network Controller
RRC	Radio Resource Control
SRNC	Serving Radio Network Controller
TDD	Time Division Duplex
TFC	Transport Format Combination
TFCI	Transport Format Combination Indicator
TFCSet	Transport Format Combination Set
TFS	Transport Format Set

UE	User Equipment
UL	Uplink
UTRAN	UMTS Terrestrial Radio Access Network
<u>USCH</u>	<u>Uplink Shared Channel</u>

---

## 4 General

### 4.1 Procedure Specification Principles

Node B Application Part, NBAP, includes common procedures and dedicated procedures. It covers procedures for paging distribution, broadcast system information, request / complete / release of dedicated resources and management of logical resources (logical O&M [1]).

The principle for specifying the procedure logic is to specify the functional behaviour of the Node B exactly and completely. The CRNC functional behaviour is left unspecified.

### 4.2 Forwards and Backwards Compatibility

The forwards and backwards compatibility of the protocol is assured by a mechanism where all current and future the messages, and IEs or groups of related IEs, include Id and criticality fields that are coded in a standard format that will not be changed in the future. These parts can always be decoded regardless of the standard version.

---

## 5 NBAP Services

The NBAP offers the following services:

### 5.11. Parallel Transactions:

Unless explicitly indicated in the procedure description, at any instance in time one protocol peer shall have initiated maximum one ongoing dedicated NBAP procedure related to a certain Node\_B communication context.

---

## 6 Services Expected from Signalling Transport

Contents are missing.

---

## 7 Functions of NBAP

The NBAP protocol has the following functions:

- Cell Configuration Management. This function gives the CRNC the possibility to manage the cell configuration information in a Node B.
- Common Transport Channel Management. This function gives the CRNC the possibility to manage the configuration of Common Transport Channels in a Node B.
- System Information Management. This function gives the CRNC the ability to manage the scheduling of System Information to be broadcast in a cell.
- Resource Event Management. This function gives the Node B the ability to inform the CRNC about the status of Node B resources.

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~3G TS 25.433 version 3.0.0 Release 1999~~

- Configuration Alignment. This function gives the CRNC and the Node B the possibility to verify that both nodes has the same information on the configuration of the radio resources.
- Measurements on Common Resources. This function allows the CRNC to initiate measurements in the Node B. The function also allows the Node B to report the result of the measurements.

~~— Synchronisation Management (TDD) This function allows the CRNC to manage the synchronisation of a TDD cell in a Node B.~~

- Radio Link Management. This function allows the CRNC to manage radio links using dedicated resources in a ~~Node B~~ Node B.
- Radio Link Supervision. This function allows the CRNC to report failures and restorations of a Radio Link.
- Measurements on Dedicated Resources. This function allows the CRNC to initiate measurements in the ~~Node B~~ Node B. The function also allows the Node B to report the result of the measurements.
- DL Power Drifting Correction (~~FDD~~—). This function allows the CRNC to adjust the DL power level of one or more Radio Links in order to avoid DL power drifting between the Radio Links.
- Reporting of ~~general~~ General error Error situations Situations. This function allows reporting of general error situations, for which function specific error messages have not been defined.

These functions are implemented by one or several NBAP elementary procedures described in the following section.

---

## 8 NBAP Procedures

### 8.1 Elementary Procedures

NBAP procedures are divided into common procedures and dedicated procedures.

- NBAP common procedures are procedures that request initiation of a UE context for a specific UE in Node B or are not related to a specific UE. NBAP common procedures also incorporate logical O&M [1] procedures.
- NBAP dedicated procedures are procedures that are related to a specific UE context in Node B. This UE context is identified by a UE context identity.

The two types of procedures may be carried on separate signalling links.

In the following tables, all EPs are divided into Class 1 and Class 2 EPs:

Table 1: Class 1

Elementary Procedure	Message	Successful Outcome	Unsuccessful Outcome	
		Response message	Response message	Timer
Cell Setup	CELL SETUP REQUEST	CELL SETUP RESPONSE	CELL SETUP FAILURE	
Cell Reconfiguration	CELL RECONFIGURATION REQUEST	CELL RECONFIGURATION RESPONSE	CELL RECONFIGURATION FAILURE	
Cell <del>Deletion</del> <a href="#">Deletion</a>	CELL <del>DELETE</del> <a href="#">DELETION</a> REQUEST	CELL <del>DELETE</del> <a href="#">DELETION</a> RESPONSE		
Common Transport Channel Setup	COMMON TRANSPORT CHANNEL SETUP REQUEST	COMMON TRANSPORT CHANNEL SETUP RESPONSE	COMMON TRANSPORT CHANNEL SETUP FAILURE	
Common Transport Channel <del>Reconfiguration</del> <a href="#">Reconfiguration</a>	COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST	COMMON TRANSPORT CHANNEL RECONFIGURATION RESPONSE	COMMON TRANSPORT CHANNEL RECONFIGURATION FAILURE	
Common Transport Channel <del>Deletion</del> <a href="#">Deletion</a>	COMMON TRANSPORT CHANNEL DELETION REQUEST	COMMON TRANSPORT CHANNEL DELETION RESPONSE		
Audit	AUDIT REQUEST	AUDIT RESPONSE		
Block Resource	BLOCK RESOURCE REQUEST	BLOCK RESOURCE RESPONSE	BLOCK RESOURCE FAILURE	
Radio Link Setup	RADIO LINK SETUP REQUEST	RADIO LINK SETUP RESPONSE	RADIO LINK SETUP FAILURE	
System Information Update	SYSTEM INFORMATION UPDATE REQUEST	SYSTEM INFORMATION UPDATE RESPONSE	SYSTEM INFORMATION UPDATE FAILURE	
Common Measurement Initiation	COMMON MEASUREMENT INITIATION REQUEST	COMMON MEASUREMENT INITIATION RESPONSE	COMMON MEASUREMENT INITIATION FAILURE	
Radio Link Addition	RADIO LINK ADDITION REQUEST	RADIO LINK ADDITION RESPONSE	RADIO LINK ADDITION FAILURE	
Radio Link Deletion	RADIO LINK DELETION REQUEST	RADIO LINK DELETION RESPONSE		
Synchronised Radio Link Reconfiguration Preparation	RADIO LINK RECONFIGURATION PREPARE	RADIO LINK RECONFIGURATION READY	RADIO LINK RECONFIGURATION FAILURE	
Unsynchronised Radio Link Reconfiguration	RADIO LINK RECONFIGURATION REQUEST	RADIO LINK RECONFIGURATION RESPONSE	RADIO LINK RECONFIGURATION FAILURE	
Dedicated Measurement Initiation	DEDICATED MEASUREMENT INITIATION REQUEST	DEDICATED MEASUREMENT INITIATION RESPONSE	DEDICATED MEASUREMENT INITIATION FAILURE	
Synchronised Compressed Mode Control Preparation	COMPRESSED MODE PREPARE	COMPRESSED MODE READY	COMPRESSED MODE FAILURE	

Table 2: Class 2

Elementary Procedure	Message
Resource Status Indication	RESOURCE STATUS INDICATION
Audit Required	AUDIT REQUIRED INDICATION
Common Measurement Reporting	COMMON MEASUREMENT REPORT
Common Measurement Termination	COMMON MEASUREMENT TERMINATION REQUEST
Common Measurement Failure	COMMON MEASUREMENT FAILURE INDICATION
Synchronised Radio Link Reconfiguration Commit	RADIO LINK RECONFIGURATION COMMIT
Synchronised Radio Link Reconfiguration Cancellation	RADIO LINK RECONFIGURATION CANCELLATION
Radio Link Failure	RADIO LINK FAILURE INDICATION
Radio Link Restoration	RADIO LINK RESTORE INDICATION
Dedicated Measurement Reporting	DEDICATED MEASUREMENT REPORT
Dedicated Measurement Termination	DEDICATED MEASUREMENT TERMINATION REQUEST
Dedicated Measurement Failure	DEDICATED MEASUREMENT FAILURE INDICATION
Downlink Power Control [FDD]	DL POWER CONTROL REQUEST
Compressed Mode Control Commit	COMPRESSED MODE COMMIT
Compressed Mode Control Cancellation	COMPRESSED MODE CANCEL
Unblock Resource	UNBLOCK RESOURCE INDICATION
Error Indication	ERROR INDICATION

## 8.2 NBAP Common Procedures

### 8.2.1 Common Transport Channel Setup

#### 8.2.1.1 General

This procedure is used for establishing the necessary resources in Node B, regarding Secondary CCPCH, PICH, PRACH, AICH, FACH, PCH, and RACH.

#### 8.2.1.2 Successful Operation

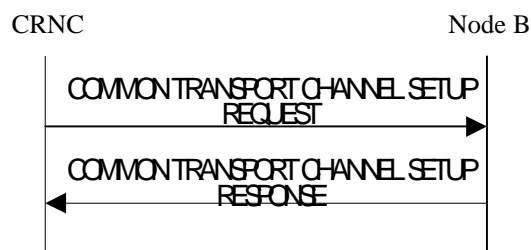


Figure 1: Common Transport Channel Setup procedure, [successful operation case](#)

The procedure is initiated with a COMMON TRANSPORT CHANNEL SETUP REQUEST message sent from the CRNC to the Node B.

One message can configure only one of the following combinations:

- [FDD-one Secondary CCPCH, and FACHes, PCH and PICH related to that Secondary CCPCH], or

- [TDD- Secondary CCPCHes and FACHes, PCHes with the corresponding PICH related to that group of Secondary CCPCHes], or
- one PRACH, and one RACH and one AICH ~~(FDD)~~ related to that PRACH at the time.

~~[FDD- Secondary CCPCH]:~~ [FDD- When the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains a Secondary CCPCH, the Node B shall configure and activate it according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message. ~~[FDD-~~The handling of the optional *STTD* IE is FFS.]

~~[TDD- Secondary CCPCHes]:~~ [TDD- When the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains a one or more Secondary CCPCHes, the Node B shall configure and activate ~~#them~~ according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message.]

[TDD- FACHs and PCHs may be mapped onto a CCTrCH which may consist of several Secondary CCPCHes]

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains one or several FACHes, the Node B shall configure and activate them according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message.

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains a PCH and a PICH, the Node B shall configure and activate them according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message. [FDD- The handling of the optional *STTD* IE for PICH is FFS.]


**PRACH:**

When the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains a PRACH, the Node B shall configure and activate it according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message.

[FDD- The handling of the optional *STTD* IE for AICH ~~(FDD)~~ is FFS.]

After a successful procedure, the defined common transport channels and the common physical channels have adopted the operational state Enabled in Node B and the common transport channels exist on the Uu interface. The Node B shall store the new-value of *Configuration Generation ID* IE and it shall respond with the COMMON TRANSPORT CHANNEL SETUP RESPONSE message with the transport layer information for the configured common transport channels.

8.2.1.3 Unsuccessful Operation

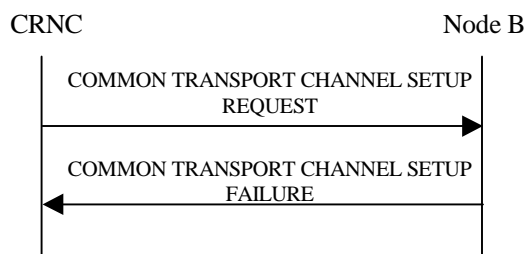

**Figure 2: Common Transport Channel Setup procedure, unsuccessful- Unsuccessful Operation case**

If the Node B is not able to support all part of the configuration, it shall reject the configuration of all the channels in the COMMON TRANSPORT CHANNEL SETUP REQUEST message. The *Cause Value* IE shall be set to an appropriate value. The new-value of *Configuration Generation ID* IE from the COMMON TRANSPORT CHANNEL SETUP REQUEST message shall not be stored.

If the configuration was unsuccessful, the Node B shall respond with a COMMON TRANSPORT CHANNEL SETUP FAILURE message.

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~3G TS 25.433 version 3.0.0 Release 1999~~

Typical cause values are as follows:

**Radio Network Layer Cause**

- Cell not available
- Power level not supported
- [Node B](#) Resources unavailable

**Transport Layer Cause**

- Transport Resources Unavailable

**Protocol Cause**

- Semantic error

**Miscellaneous Cause**

- O&M Intervention
- Unspecified [Failure](#)
- Control processing overload
- HW failure

**8.2.1.4 Abnormal Conditions**


If the C-ID in the COMMON TRANSPORT CHANNEL SETUP REQUEST message is not existing in the Node B, it shall respond with the COMMON TRANSPORT CHANNEL SETUP FAILURE message with the Cause IE = ["Unknown C-ID"](#).

**8.2.2 Common Transport Channel Reconfiguration**

**8.2.2.1 General**

This procedure is used for reconfiguring common transport channels and/or common physical channels, while they still might be in operation.

**8.2.2.2 Successful Operation**

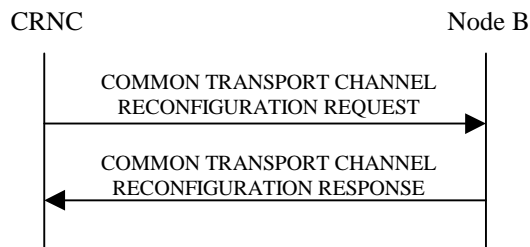

**Figure 3: Common Transport Channel Reconfiguration, [Successful Operation](#)**

The procedure is initiated with a COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message sent from the CRNC to the Node B.

**[TDD S-CCPCH]:** If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the *S-CCPCH Power* IE, the Node B shall reconfigure the power that the indicated S-CCPCH shall use.]

**FACH:** When one or several FACHes are present Node B reconfigures the indicated FACHes.

[FDD]- If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the *Max FACH Power* IE, the Node B shall reconfigure the maximum power that the FACH may use.]

If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the *ToAWS* IE, the Node B shall reconfigure the time of arrival window startpoint that the FACH shall use.

If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the *ToAWE* IE, the Node B shall reconfigure the time of arrival window endpoint that the FACH shall use.

**PCH:** When one PCH [TDD\_ or several PCHs] is present Node B reconfigures the indicated PCH\_[TDD\_ PCHs].

[FDD\_ If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the *PCH Power* IE, the Node B shall reconfigure the power that the PCH shall use.]

If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the *ToAWS* IE, the Node B shall reconfigure the time of arrival window startpoint that the PCH shall use.

If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the *ToAWE* IE, the Node B shall reconfigure the time of arrival window endpoint that the PCH shall use.

**PICH:** When a PICH is present Node B reconfigures the indicated PICH.

If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the *PICH Power* IE, the Node B shall reconfigure the power that the PICH shall use.

**[FDD- PRACH]:** When a PRACH is present Node B reconfigures the indicated PRACH.

If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the Allowed Preamble Signatures Information, the Node B shall reconfigure the preamble signatures that the PRACH shall use.

If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the Allowed Slot Format Information, the Node B shall reconfigure the slot formats that the PRACH shall use.

If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the Allowed Sub Channel Information, the Node B shall reconfigure the sub channel numbers that the PRACH shall use.


**[FDD- AICH]:** When a AICH is present Node B reconfigures the indicated AICH.

If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the *AICH Power* IE, the Node B shall reconfigure the power that the AICH shall use.

After a successful procedure, the channels have adopted the new configuration in Node B. Node B shall store the **new** value of *Configuration Generation ID* IE, and the Node B shall respond with the COMMON TRANSPORT CHANNEL RECONFIGURATION RESPONSE message.



### 8.2.2.3 Unsuccessful Operation

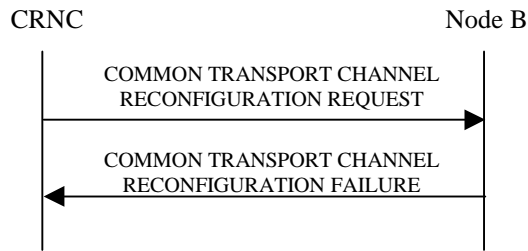

**Figure 4: Common Transport Channel Reconfiguration procedure, unsuccessful Unsuccessful Operation**

If the Node B is not able to support all parts of the configuration, it shall reject the configuration of all the channels in the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message. The *Cause Value* IE shall be set to an appropriate value. The *new*-value of *Configuration Generation ID* IE from the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message shall not be stored.

If the configuration was unsuccessful, the Node B shall respond with the COMMON TRANSPORT CHANNEL SETUP FAILURE message, the Node B shall respond with the COMMON TRANSPORT CHANNEL RECONGURATION FAILURE message.

Typical cause values are as follows:

#### Radio Network Layer Cause

- Cell not available
- Power level not supported
- Node B Resources unavailable

#### Transport Layer Cause

- Transport Resources Unavailable

#### Protocol Cause

- Semantic error

#### Miscellaneous Cause

- O&M Intervention
- Unspecified Failure
- Control processing overload
- HW failure

### 8.2.2.4 Abnormal Conditions


If the C-ID in the COMMON TRANSPORT CHANNEL RECONGURATION REQUEST message is not existing in the Node B, it shall respond with the COMMON TRANSPORT CHANNEL RECONGURATION FAILURE message with the *Cause* IE = 'unknown-Unknown C-ID'.

## 8.2.3 Common Transport Channel Deletion

### 8.2.3.1 General

This procedure is used for deleting common physical channels and common transport channels setup by the Common Transport Channel Setup procedure in a cell.

### 8.2.3.2 Successful Operation

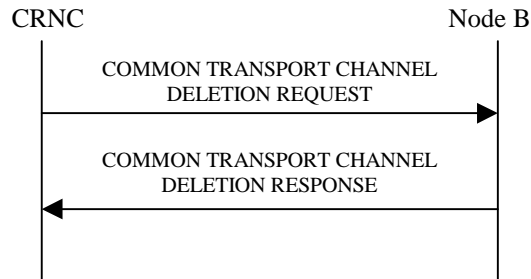

**Figure 5: Common Transport Channel Deletion procedure, successful operation**

The procedure is initiated with a COMMON TRANSPORT CHANNEL DELETION REQUEST message sent from the CRNC to the Node B.

**Secondary CCPCH:** When the COMMON TRANSPORT CHANNEL DELETION REQUEST message contains a Secondary CCPCH, Node B shall delete the indicated channel and the FACHes and PCH supported by that Secondary CCPCH. If there is a PCH that is deleted, the PICH associated with that PCH shall also be deleted.

**PRACH:** When the COMMON TRANSPORT CHANNEL DELETION REQUEST message contains a PRACH, Node B shall delete the indicated channel and the RACH supported by the PRACH. [FDD- The AICH associated with the PCH shall also be deleted.]

[TDD- If the requested common physical channel is a part of a CCTrCH, all common transport channels and all common physical channels associated with this CCTrCH shall be deleted.]

After a successful procedure, the channels are deleted in Node B. Node B shall store the new value of the *Configuration Generation ID* IE, and respond with the COMMON TRANSPORT CHANNEL DELETION RESPONSE message.

### 8.2.3.3 Unsuccessful Operation

-

### 8.2.3.4 Abnormal Conditions


If the C-ID in the COMMON TRANSPORT CHANNEL DELETION REQUEST message is not existing in the Node B, the Node B shall respond with the COMMON TRANSPORT CHANNEL DELETION RESPONSE message.

## 8.2.4 Block Resource

### 8.2.4.1 General

The Node B initiates this procedure to request the CRNC to prohibit the usage of the specified logical resources.

### 8.2.4.2 Successful Operation

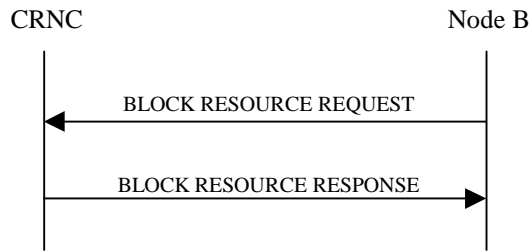

**Figure 66: Block Resource procedure, Successful Operation**

The procedure is initiated with a BLOCK RESOURCE REQUEST message sent from the Node B to the CRNC.

Upon reception of the BLOCK RESOURCE REQUEST message, the CRNC shall prohibit the use of the indicated logical resources according to the *Blocking Priority Indicator* IE.

If the *Blocking Priority Indicator* IE in the BLOCK RESOURCE REQUEST message indicates 'High Priority', the CRNC shall prohibit the use of the logical resources immediately.

The BLOCK RESOURCE REQUEST message shall include the *Shutdown Timer* IE when the *Blocking Priority Indicator* IE indicates 'Normal Priority'. The CRNC shall prohibit the use of the logical resources if the resources are idle or immediately upon expiry of the shutdown timer specified in the message. New traffic shall not be allowed to use the logical resources while the CRNC waits for the resources to become idle and once the resources are blocked.

If the *Blocking Priority Indicator* IE in the BLOCK RESOURCE REQUEST message indicates 'Low Priority', the CRNC shall prohibit the use of the logical resources when the resources become idle. New traffic shall not be allowed to use the logical resources while the CRNC waits for the resources to become idle and once the resources are blocked.

When the only logical resource that can be indicated is a cell, all associated physical channels and transport channels are blocked.


If the resources are successfully blocked, the CRNC shall respond with a BLOCK RESOURCE RESPONSE message. Upon reception of the BLOCK RESOURCE RESPONSE message, the Node B shall consider the logical resources blocked.

#### Interactions with the Unblock Resource procedure:

If the UNBLOCK RESOURCE INDICATION message is received by the CRNC while a Block Resource procedure on the same logical resources is in progress, the CRNC shall cancel the Block Resource procedure and proceed with the Unblock Resource procedure.

If the BLOCK RESOURCE RESPONSE message or the BLOCK RESOURCE FAILURE message is received by the Node B after the Node B has initiated an Unblock Resource procedure on the same logical resources as the ongoing Block Resource procedure, the Node B shall ignore the response to the Block Resource procedure.

### 8.2.4.3 Unsuccessful Operation

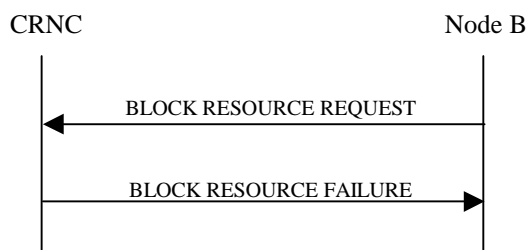

**Figure 77: Block Resource procedure, Unsuccessful Operation**

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~3G TS 25.433 version 3.0.0 Release 1999~~

The CRNC may reject the request to block the logical resources, in which case the logical resources will remain unaffected and the CRNC shall respond to the Node B with the BLOCK RESOURCE FAILURE message. Upon reception of the BLOCK RESOURCE FAILURE message, the Node B shall leave the logical resources in the state that they were in prior to the start of the Block Resource procedure.

Typical cause values are as follows:

**Protocol Cause**

- Semantic error

**Miscellaneous Cause**

- O&M Intervention
- Control processing overload
- HW failure

8.2.4.4 Abnormal Conditions

-

8.2.5 Unblock Resource

8.2.5.1 General

The Node B initiates this procedure to indicate to the CRNC that logical resources are now unblocked.

8.2.5.2 Successful Operation



**Figure 88: Unblock Resource procedure, Successful [Operation](#)**

The procedure is initiated with an UNBLOCK RESOURCE INDICATION message sent from the Node B to the CRNC. Upon reception of the UNBLOCK RESOURCE INDICATION message, the CRNC may permit the use of the logical resources.

When the logical resource indicated is a cell, all associated physical channels and transport channels are unblocked.

8.2.5.3 Abnormal Conditions


-

8.2.6 Audit Required

8.2.6.1 General

The Node B initiates this procedure to request the CRNC to perform an audit of the logical resources at the Node B. This procedure is used to indicate a possible misalignment of state or configuration information

### 8.2.6.2 Successful Operation

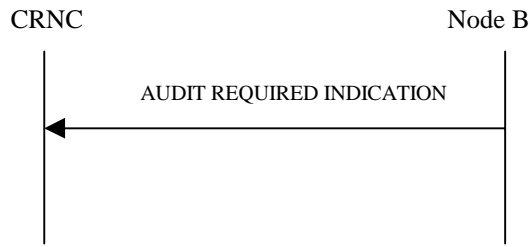

**Figure 9-9: Audit Required procedure, Successful Operation**

The procedure is initiated with an AUDIT REQUIRED INDICATION message sent from the Node B to the CRNC.

If the Node B cannot ensure alignment of the state or configuration information, it should initiate the Audit required indication procedure.

Upon receipt of the AUDIT REQUIRED INDICATION message, the CRNC should initiate the Audit procedure.

### 8.2.6.3 Abnormal Conditions


-

## 8.2.7 Audit

### 8.2.7.1 General

This procedure is executed by the CRNC to perform an audit of the configuration and status of the logical resources in the Node B. Additionally, the audit may cause the CRNC and Node B to re-sync to the logical resources known by the CRNC and to the status information from the Node B.

### 8.2.7.2 Successful Operation

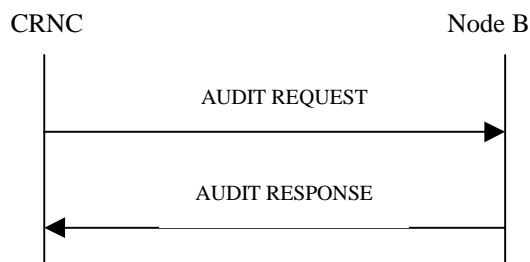

**Figure 10-10: Audit procedure, Successful Operation**

The procedure is initiated with an AUDIT REQUEST message sent from the CRNC to the Node B. The configuration returned by the Node B in the AUDIT RESPONSE shall be the configuration existing upon reception of the AUDIT REQUEST. Upon reception by the Node B, with each pair of *C-ID IE Configuration Generation ID IE* that is present in the message, the Node B compares the stored Configuration Generation ID for the corresponding cell.

For each cell where the *Configuration Generation ID IE* value does not match the stored Configuration Generation ID value, the Node B shall not take any action.

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~, ~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~, ~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~, ~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~, ~~3G TS 25.433 version 3.0.0 Release 1999~~

For each cell where the *Configuration Generation ID* IE value matches the stored Configuration Generation ID value, the Node B shall include the *Cell Information* IE group for that cell in the AUDIT RESPONSE message.

The following condition applies to the [\[FDD - Primary SCH Information IE group, Secondary SCH Information IE group\]](#)/[\[TDD - SCH Information IE group, PSCH Information IE group\]](#), Primary CCPCCH Information IE group, Secondary CCPCCH Information IE group, [\[FDD - Primary CPICH Information IE group, Secondary CPICH Information IE group\]](#), *BCH Information IE group*, *PCH Information IE group*, *PICH Information IE group*, *FACH Information IE group*, *RACH Information IE group*, and [\[FDD - AICH Information IE group\]](#). The Node B shall include the IE group within the *Cell Information* IE group, if that resource is present in the Node B for that cell.

The Node B shall include in the AUDIT RESPONSE message a *Communication Control Port Information* IE group for each communication control port present in the Node B

The Node B shall include in the AUDIT RESPONSE message a *Local Cell Information* IE group for each local cell present in the Node B. ~~The Node B shall include the *Number Of Channel Elements* IE if the value is known by the Node B.~~ The Node B shall include the *Maximum DL Power Capability* IE if the value is known by the Node B.

For each cell existing in the Node B but not indicated in the AUDIT REQUEST message, the associated cell configuration information shall be removed from the Node B including any related common physical channels and common transport channels. For each cell not existing in the Node B but indicated in the AUDIT REQUEST message, the Node B shall not take any action.

Upon reception by the CRNC of the AUDIT RESPONSE message, the CRNC compares the received list of C-ID with the expected list of C-IDs.

For each missing cell, a configuration error has occurred and recovery actions should be taken by the CRNC.

### 8.2.7.3 Unsuccessful Operation

-

### 8.2.7.4 Abnormal Conditions


-

## 8.2.8 Common Measurement Initiation

### 8.2.8.1 General

This procedure is used by a CRNC to request the initiation of ~~common~~ measurements [on common resources](#) in a Node B.

### 8.2.8.2 Successful Operation

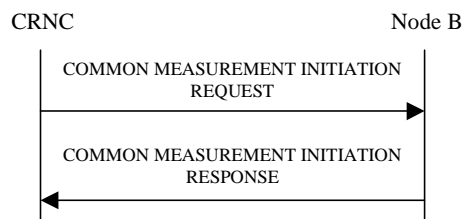

**Figure 1144: [Common Measurement Request Initiation](#) procedure: Successful Operation**

The procedure is initiated with a COMMON MEASUREMENT INITIATION REQUEST message sent from the CRNC to the Node B using the Node B control port.

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~ ~~3G TS 25.433 version 3.0.0 Release 1999~~ ~~(PER)"~~ ~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~ ~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~ ~~3G TS 25.433 version 3.0.0 Release 1999~~

Upon reception, the Node B shall initiate the requested measurement according to the parameters given in the request. Unless specified below, the meaning of the parameters are given in other specifications.

[TDD- If the Time Slot Information is provided in the *Common Measurement Object* Type IE , the measurement request shall apply to the requested time slot individually.]

The *Report Characteristics* IE indicates how the reporting of the measurement shall be performed.

If the *Report Characteristics* IE is set to indicate-'On-Demand', the Node B shall report the result of the requested measurement immediately.

If the *Report Characteristics* IE is set to indicate-'Periodic', the Node B shall periodically initiate a Measurement Reporting procedure for this measurement, with the requested report frequency.

If the *Report Characteristics* IE is set to indicate-'Event A', the Node B shall initiate a Measurement Reporting procedure when the measured entity rises above the requested threshold and stays there for the requested hysteresis time. If no hysteresis time is given, the Node B shall use the value zero for the hysteresis time.

If the *Report Characteristics* IE is set to indicate-'Event B', the Node B shall initiate a Measurement Reporting procedure when the measured entity falls below the requested threshold and stays there for the requested hysteresis time. If no hysteresis time is given, the Node B shall use the value zero for the hysteresis time.

If the *Report Characteristics* IE is set to indicate-'Event C', the Node B shall initiate a Measurement Reporting procedure when the measured entity rises more than the requested threshold within the requested time.

If the *Report Characteristics* IE is set to indicate-'Event D', the Node B shall initiate a Measurement Reporting procedure when the measured entity falls more than the requested threshold within the requested time.


If the *Report Characteristics* IE is set to indicate-'Event E', the Node B shall initiate a Measurement Reporting procedure when the measured entity rises above the 'Measurement Threshold 1' and stays there for the 'Measurement Hysteresis Time' (Report A). The Node B shall also initiate a Measurement Reporting procedure when the measured entity falls below the 'Measurement Threshold 2' and stays there for the 'Measurement Hysteresis Time' (Report B). If the *Report Periodicity Frequency* IE is provided, the Node B shall initiate Measurement Reporting procedures periodically, with the requested frequency, between Report A and Report B. If 'Measurement Threshold 2' is not present, the Node B shall use 'Measurement Threshold 1' instead. If no 'Measurement Hysteresis Time' is provided, the Node B shall use the value zero as hysteresis times for both Report A and Report B.

If the *Report Characteristics* IE is set to indicate-'Event F', the Node B shall initiate a Measurement Reporting procedure when the measured entity falls below the 'Measurement Threshold 1' and stays there for the 'Measurement Hysteresis Time' (Report A). The Node B shall also initiate a Measurement Reporting procedure when the measured entity rises above the 'Measurement Threshold 2' and stays there for the 'Measurement Hysteresis Time' (Report B). If the *Report Periodicity Frequency* IE is provided, the Node B shall initiate Measurement Reporting procedures periodically, with the requested frequency, between Report A and Report B. If 'Measurement Threshold 2' is not present, the Node B shall use 'Measurement Threshold 1' instead. If no 'Measurement Hysteresis Time' is provided, the Node B shall use the value zero as hysteresis times for both Report A and Report B.

If at the start of the measurement, the reporting criteria are fulfilled for any of Event A, Event B, Event E or Event F, the Node B shall initiate a Measurement Reporting procedure immediately, and then continue with the measurements as specified in the COMMON MEASUREMENT INITIATION REQUEST message in normal operation.

If the Node B was able to initiate the measurement requested by the CRNC it shall respond with the COMMON MEASUREMENT INITIATION RESPONSE message sent over the Node B control port. The message shall include the same Measurement Id that was used in the measurement request. Only in the case when the *Report Characteristics* IE is set to indicate-'On-Demand', the COMMON MEASUREMENT INITIATION RESPONSE message shall contain the measurement result.

### 8.2.8.3 Unsuccessful Operation

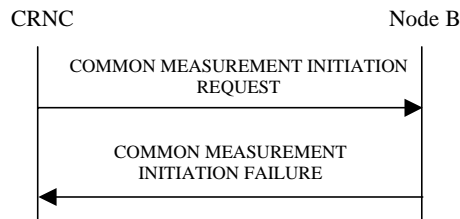

**Figure 1242: Common Measurement Request Initiation procedure: Unsuccessful Operation**

If the requested measurement cannot be initiated, the Node B shall send a COMMON MEASUREMENT INITIATION FAILURE message sent over the Node B control port. The message shall include the same Measurement Id that was used in the [COMMON MEASUREMENT INITIATION REQUEST message](#) and the *Cause* IE set to an appropriate value.

Typical cause values are as follows:

#### Radio Network Layer Cause

- Measurement not supported for the object.

### 8.2.8.4 Abnormal Conditions


-

## 8.2.9 Common Measurement Reporting

### 8.2.9.1 General

This procedure is used by a Node B to report the result of measurements requested by the CRNC with the [Common Measurement Initiation](#) procedure.

### 8.2.9.2 Successful Operation

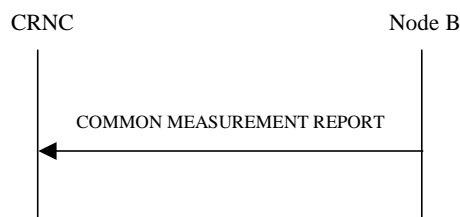

**Figure 1343: Common Measurement Reporting procedure: Successful Operation**

If the requested measurement reporting criteria are met, the Node B shall initiate a Measurement Reporting procedure. The COMMON MEASUREMENT REPORT message shall use the Node B control port. Unless specified below, the meaning of the parameters are given in other specifications.

The *Common Measurement Id* IE shall be set to the Common Measurement Id provided by the CRNC when initiating the measurement with the [Common Measurement Initiation](#) procedure.



### 8.2.9.3 Abnormal Conditions

-

## 8.2.10 Common Measurement Termination

### 8.2.10.1 General

This procedure is used by the CRNC to terminate a measurement previously requested by the [Common](#) Measurement Initiation procedure.

### 8.2.10.2 Successful Operation



**Figure 1444: [Common](#) Measurement Termination procedure: Successful Operation**

This procedure is initiated with a COMMON MEASUREMENT TERMINATION REQUEST message, sent from the CRNC to the Node B using the Node B control port.

Upon reception, the Node B shall terminate reporting of measurements corresponding to the Common Measurement Id.

### 8.2.10.3 Abnormal Conditions

-

## 8.2.11 Common Measurement Failure

### 8.2.11.1 General

This procedure is used by the Node B to notify the CRNC that a measurement previously requested by the [Common](#) Measurement Initiation procedure can no longer be reported.

### 8.2.11.2 Successful Operation



**Figure 1545: [Common](#) Measurement Failure procedure: Successful Operation**

This procedure is initiated with a COMMON MEASUREMENT FAILURE INDICATION message, sent from the Node B to the CRNC using the Node B control port, to inform the CRNC that a previously requested measurement no longer can be reported.

### 8.2.11.3 Abnormal Conditions


-

## 8.2.12 Cell Setup

### 8.2.12.1 General

This procedure is used to set up a cell in Node B. The CRNC takes the cell, identified via the *C-ID* IE, into service and uses the resources in Node B identified via the *Local Cell ID* IE.

### 8.2.12.2 Successful eOperation

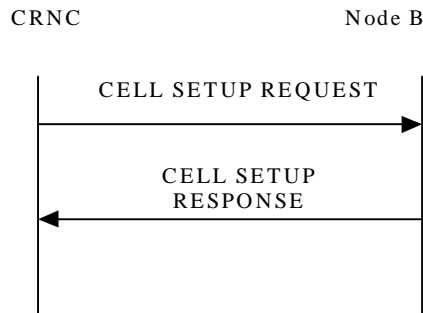

**Figure 16: Cell Setup procedure: Successful Operation**

The procedure is initiated with a CELL SETUP REQUEST message sent from CRNC to Node B. Upon Reception, the Node B shall reserve the necessary resources and configure the new cell according to the parameters given in the message.


[FDD - If the CELL SETUP REQUEST message includes the *Secondary CPICH Information* IE group the Node B shall configure and activate the Secondary CPICH in the cell according to received configuration data.]

The *Maximum transmission power* IE value shall be stored in the Node B and at any instance of time the total maximum output power in the cell shall not be above this value.

When the cell is successfully configured the Node B shall store the *Configuration Generation ID* IE value and send a CELL SETUP RESPONSE message as a response.

[FDD- When the cell is successfully configured CPICH(s), Primary SCH, Secondary SCH, Primary CCPCH and BCH exist.][TDD- When the cell is successfully configured PSCH, SCH, Primary CCPCH and BCH exist and the switching-points for the TDD frame structure are defined.]

### 8.2.12.3 Unsuccessful eOperation

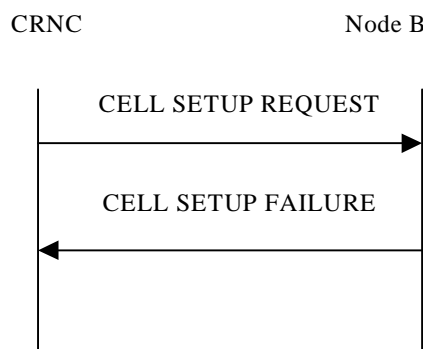

**Figure 17: Cell Setup procedure: Unsuccessful Operation**

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~3G TS 25.433 version 3.0.0 Release 1999~~

If the Node B cannot set up the cell according to the information given in CELL SETUP REQUEST message the CELL SETUP FAILURE message shall be sent to CRNC.

In this case the cell is Non Existing in Node B. The Configuration Generation ID shall not be changed in Node B.

The *Cause* IE shall be set to an appropriate value.

### 8.2.12.4 Abnormal Conditions


If the CELL SETUP REQUEST message includes a Local Cell ID IE that is Non Existing in Node B the Node B shall send the CELL SETUP FAILURE message as response.

## 8.2.13 Cell Reconfiguration

### 8.2.13.1 General

This procedure is used to reconfigure a cell in Node B.

### 8.2.13.2 Successful Operation

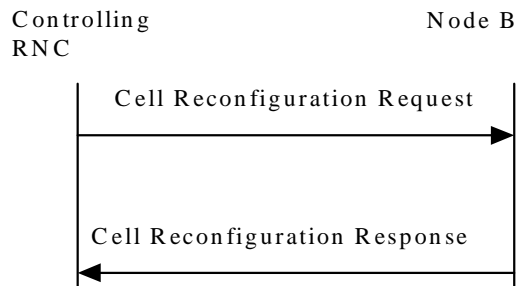

**Figure 18: Cell Reconfiguration procedure: Successful Operation**

The procedure is initiated with a CELL RECONFIGURATION REQUEST message sent from CRNC to Node B. Upon Reception, the Node B shall reconfigure the cell according to the parameters given in the message.

[FDD\_ If the CELL RECONFIGURATION REQUEST message includes the *Primary SCH Information* IE group the Node B shall reconfigure Primary SCH power in the cell according to *Primary SCH Power* IE value.]

[FDD\_ If the CELL RECONFIGURATION REQUEST message includes the *Secondary SCH Information* IE group the Node B shall reconfigure Secondary SCH power in the cell according to the *Secondary SCH Power* IE value.]

[FDD\_ If the CELL RECONFIGURATION REQUEST message includes the *Primary CPICH Information* IE group the Node B shall reconfigure Primary CPICH power in the cell according to the *Primary CPICH Power* IE value. ~~Node B~~ Node B shall adjust all the transmitted power levels relative to the Primary CPICH power according to the new value.]

[FDD\_ If the CELL RECONFIGURATION REQUEST message includes the *Secondary CPICH Information* IE group the Node B shall reconfigure Secondary CPICH power in the cell according to the *Secondary CPICH Power* IE value.]

[TDD\_ If the CELL RECONFIGURATION REQUEST message includes the *PSCH Information* IE group the Node B shall reconfigure PSCH power in the cell according to the *PSCH Power* IE value.]

[FDD\_ If the CELL RECONFIGURATION REQUEST message includes the *Primary CCPCH Information* IE group the Node B shall reconfigure BCH power in the cell according to the *BCH Power* IE value.]

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~3G TS 25.433 version 3.0.0 Release 1999~~


[TDD - If the CELL RECONFIGURATION REQUEST message includes the *Primary CCPCH Information* IE group the Node B shall reconfigure P-CCPCH power in the cell according to the *P-CCPCH Power* IE value. ~~Node B~~ Node B shall adjust all the transmitted power levels relative to the Primary CPPCH power according to the new value.]

If the CELL RECONFIGURATION REQUEST message includes the *Maximum Transmission Power* IE the value shall be stored in the Node B and at any instance of time the total maximum output power in the cell shall not be above this value.

[TDD - If the CELL RECONFIGURATION REQUEST message includes the *Timeslot Information* IE group the Node B shall reconfigure switching-point structure in the cell according to the *Timeslot* IE value.]

When the cell is successfully reconfigured the Node B shall store the new *Configuration Generation ID* IE value and send a CELL RECONFIGURATION RESPONSE message as a response.

### 8.2.13.3 Unsuccessful Operation

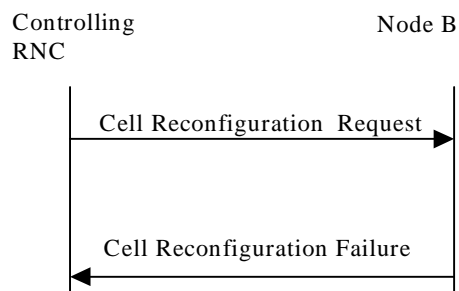

**Figure 19: Cell Reconfiguration procedure: Unsuccessful Operation**

If the Node B cannot reconfigure the cell according to the information given in CELL RECONFIGURATION REQUEST message the CELL RECONFIGURATION FAILURE message shall be sent to CRNC.

In this case, the Node B shall keep the old configuration of the cell and the Configuration Generation ID shall not be changed in Node B.

The Cause IE shall be set to an appropriate value.

(Note.: Remark received that at WG3#7, in tdoc D63 (secretary minutes), it was stated that the failure message should be added with a list of cause values, with one cause value per failed reconfiguration item. It is not clear what functional impact this have and how it should be coded in the CELL RECONFIGURATION FAILURE message.)

### 8.2.13.4 Abnormal Conditions

If the CELL RECONFIGURATION REQUEST message includes a *Local Cell-IDC-ID* IE that is Non Existing in Node B the Node B shall send the CELL RECONFIGURATION FAILURE message as response.


The Cause IE shall be set to an appropriate value.

## 8.2.14 Cell Deletion

### 8.2.14.1 General

This procedure is used to delete a cell in Node B.

#### 8.2.14.2 Successful eOperation

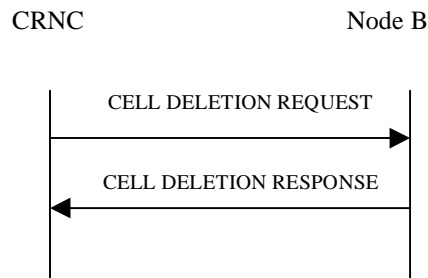

**Figure 20: Cell Deletion procedure: Successful Operation**

The procedure is initiated with a CELL DELETION REQUEST message sent from CRNC to Node B. Upon Reception, the Node B shall remove the cell and any channel within the cell created by the Cell Setup procedure or Common Transport Channel Setup procedure.

When the cell is deleted, the Node B shall send a CELL DELETION RESPONSE message as a response.

#### 8.2.14.3 Unsuccessful eOperation

-

#### 8.2.14.4 Abnormal Conditions

If the CELL DELETION REQUEST message includes a *C-ID* IE value that is not existing in Node B the Node B shall respond with the CELL DELETION RESPONSE message.

### 8.2.15 Resource Status Indication


#### 8.2.15.1 General

This procedure is used in six different cases:

1. When a Local Cell becomes Existing at the Node B, it shall be made available to the RNC
2. When a Local Cell is to be deleted in Node B, i.e. become Not Existing, the Local Cell shall be withdrawn from the CRNC
3. When the capabilities of the Local Cell changes at the Node B
4. When a cell has changed its capability and/or its resource operational state at the Node B
5. When common physical channels and/or common transport channels have changed their capabilities at a Node B
6. When a communication control port changed its resource operational state at the Node B

Each of the above cases shall trigger a Resource Indication procedure and the RESOURCE STATUS INDICATION message shall contain the logical resources affected for that case and the cause value when applicable.

## 8.2.15.2 Successful Operation

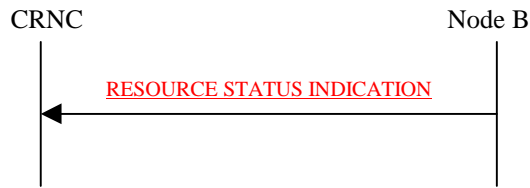

**Figure 21: Resource Status Indication [procedure: Successful Operation](#)**

The procedure is initiated with a RESOURCE STATUS INDICATION message sent from the Node B to CRNC.

When a Local Cell becomes Existing at the Node B, the Node B shall make it available to the CRNC by sending a RESOURCE STATUS INDICATION message with the Local Cell Id IE and the Add/Delete Indicator IE set equal to 'Add'.

When a Local Cell is to be deleted in Node B, i.e. become Not Existing, the Node B shall withdraw the Local Cell from the CRNC by sending a RESOURCE STATUS INDICATION message with the Local Cell Id IE and the Add/Delete Indicator IE set equal to 'Delete'. The Node B shall not withdraw a previously configured cell at the Node B that the CRNC had configured using the Cell Setup procedure, until the CRNC has deleted that cell at the Node B using the Cell Delete procedure.

When the capabilities of a Local Cell changes at the Node B, the Node B shall report the new capability by sending a RESOURCE STATUS INDICATION message with the Local Cell Id. The Add/Delete Indicator IE shall not be included in the message. The Cause IE in the RESOURCE STATUS INDICATION message shall be set to the appropriate value.

When the capabilities and/or resource operational state of a cell changes at the Node B, the Node B shall report the new capability and/or resource operational state by sending a RESOURCE STATUS INDICATION message with the C-ID IE. The Cause IE in the RESOURCE STATUS INDICATION message shall be set to the appropriate value.

When the capabilities and/or resource operational state of common physical channels and/or common transport channels have changed, the Node B shall report the new capability and/or resource operational state by sending a RESOURCE STATUS INDICATION message with the logical resource. The Cause IE in the RESOURCE STATUS INDICATION message shall be set to the appropriate value.

When the resource operational state of a communication control port has changed, the Node B shall report the new resource operational state by sending a RESOURCE STATUS INDICATION message with the Communication Control Port ID IE. The Cause IE in the RESOURCE STATUS INDICATION message shall be set to the appropriate value.

## 8.2.15.3 Abnormal Conditions


-

## 8.2.16 System Information Update

### 8.2.16.1 General

The System Information Update procedure performs the scheduling and provision of system information segments broadcast on the BCCH, to the Node B.

### 8.2.16.2 Successful Operation

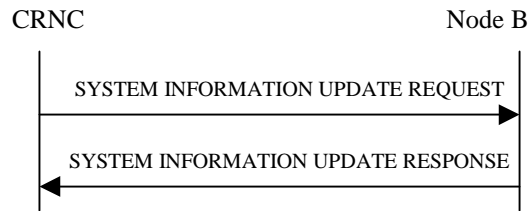

**Figure 22: System Information Update procedure: Successful Operation Case**

The procedure is initiated with a SYSTEM INFORMATION UPDATE REQUEST message sent from the CRNC to the Node B.

If the SYSTEM INFORMATION UPDATE message includes the BCCH Modification Time IE, the new segments provided in the SYSTEM INFORMATION UPDATE REQUEST message shall be applied by Node B at the first time instance starting from the SFN value set by the BCCH Modification Time IE. If no BCCH Modification Time IE is included, the new segments shall be applied as soon as possible.

The Node B shall determine the correct cell system frame number(s) (SFN) for transmission of the segments of system information, from the scheduling parameters provided in the SYSTEM INFORMATION UPDATE REQUEST message. The SFN for transmitting the segments shall be determined by the SIB SG REP IE and SIB SG POS IE such that:

$$- \text{SFN mod IB\_SG\_REP} = \text{IB\_SG\_POS}$$

If the SYSTEM INFORMATION UPDATE REQUEST message contains Master Information Block (MIB) segments in addition to SIB segments, the MIB segments shall be updated last in the physical channel scheduling cycle by the Node B.

The Segment Type IE shall be used by the Node B to concatenate several segments into one BCH transport block. The allowed combinations of concatenation are specified in TS 25.331.


If the SIB Deletion Indicator IE value is set to 'Deletion' the Node B shall delete the SIB of the type indicated by the SIB Type IE from the transmission schedule on BCCH.

If the SIB Originator IE value is set to 'Node B' the Node B shall create the SIB segment of the SIB type given by the IB Type IE and autonomously update the SIB segment and apply the scheduling and repetition as given by the IB SG REP IE and IB SG POS IE.

SIBs originating from the Node B can only be SIBs containing information that the Node B can obtain on its own and use the expiration timer feature.

If the Node B successfully completes the updating of the physical channel scheduling cycle according to the parameters given in the SYSTEM INFORMATION UPDATE REQUEST message, it shall respond to the CRNC with a SYSTEM INFORMATION UPDATE RESPONSE message.

### 8.2.16.3 Unsuccessful Operation

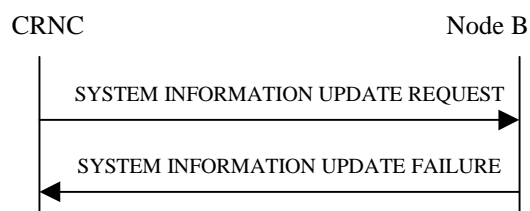

**Figure 23: System Information Update procedure: Unsuccessful Operation Case**

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~3G TS 25.433 version 3.0.0 Release 1999~~

If the Node B is unable to update the physical channel scheduling cycle according to all the parameters given in the SYSTEM INFORMATION UPDATE REQUEST message, it shall respond with a SYSTEM INFORMATION UPDATE FAILURE message with an appropriate cause value. Possible cause values are:

**Radio Network Layer Cause**

- Insufficient physical channel resources
- Unknown C-ID
- SIB Origination in Node B not Supported

**Miscellaneous Cause**

- Hardware failure
- Control Processor Processing overload
- C ID not defined
- O&M Intervention
- Unspecified failure
- SIB origination in Node B not supported

In this case, the Node B shall not incorporate any of the requested changes into the physical channel scheduling cycle, and the previous system information configuration shall remain intact.

8.2.16.4 Abnormal Conditions


-

8.2.17 Radio Link Setup

8.2.17.1 General

This procedure is used for establishing the necessary resources for a new Node B Communication Context in the Node B.

8.2.17.2 Successful Operation

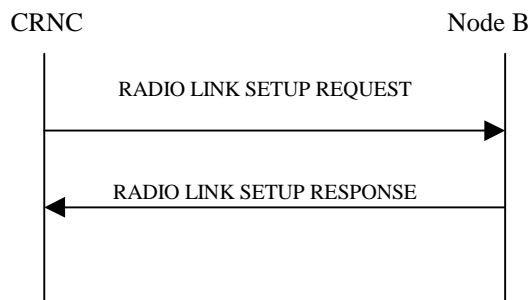

**Figure 24: Radio Link Setup procedure: Successful Operation**

The procedure is initiated with a RADIO LINK SETUP REQUEST message sent from the CRNC to Node B.

Upon reception of RADIO LINK SETUP REQUEST message, the Node B shall reserve necessary resources and configure the new Radio Link(s) according to the parameters given in the message.



~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~ X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)" X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)" 3G TS 25.433 version 3.0.0 Release 1999

[FDD – The RL Setup procedure can be used to setup one or more radio links. The procedure shall include the establishment of one or more DCHs on all radio links, and in addition, it can include the establishment of one or more DSCHs on one radio link.]

~~[FDD – The RL Setup procedure can be used to setup one or more radio links. The procedure shall include the establishment of one or more DCHs on all radio links, and in addition, it can include the establishment of one or more DSCHs on one radio link.]~~

[TDD – The RL Setup procedure is used for setup of one radio link including one or more transport channels. The transport channels can be a mix of DCHs, DSCHs, and USCHs. The Radio Link Setup Request message shall include the required TFS and TFCS for the DCH, DSCH and USCH channels.]

~~[TDD – The RL Setup procedure is used for setup of one radio link including one or more transport channels. The transport channels can be a mix of DCHs, DSCHs, and USCHs. The Radio Link Setup Request message shall include the required TFS and TFCS for the DCH, DSCH and USCH channels.]~~

[FDD] - The *Diversity Control Field* IE indicates for each RL (except the first RL in the message) whether the Node B shall combine the concerned RL or not. If the *Diversity Control Field* IE indicates, "may be combined with already existing RLs", then Node B shall decide for either of the alternatives. Diversity combining is applied to Dedicated Transport Channels (DCH), i.e. it is not applied to the DSCHs. When a new RL is to be combined, the ~~Node B~~ Node B shall choose which RL(s) to combine it with.]

If the RADIO LINK SETUP REQUEST message includes the *DCH Combination Indicator* IE for a DCH to be added, the Node B shall

- Treat all DCHs with the same value of this IE as a set of co-ordinated DCHs and
- Include this DCH in the new configuration only if it can include all DCHs with the same value of the *DCH Combination Indicator* IE in the new configuration

The received *Frame Handling Priority* IE specified for each Transport Channel should be used when prioritising between different frames in the downlink on the radio interface in congestion situations within the Node B once the new configuration has been activated.

[FDD] - If the *Propagation Delay* IE is ~~present~~ included, the Node B may use this information to speed up the detection of L1 ~~synchronizations~~ synchronisation.]

The included *RLC Mode* IE may be used by the ~~Node B~~ Node B to optimise the power control.

[FDD] - ~~In FDD mode, the~~ The *UL Eb/No Target* IE included in the message shall be used by the Node B as initial UL Eb/No target for the UL power control.]

The Node B shall start the DL transmission using the initial DL power specified in the message. The DL power can then vary accordingly to the fast power control, but shall always be kept within the maximum and minimum limit specified in the RL SETUP REQUEST message.

If the RLs are successfully setup, the Node B shall start reception on the new RL(s) and respond with a RADIO LINK SETUP RESPONSE message.

[FDD] - The Node B shall indicate with the *Diversity Indication* IE whether the RL is combined or not. In case of combining, only the *Reference RL ID* IE shall be included to indicate one of the existing RLs that the concerned RL is combined with. In case of not combining the Node B shall include in the RL SETUP RESPONSE the *Binding ID* IE and *Transport Layer Address* IE for the transport bearer to be established for each DCH of this RL.]


[TDD – The ~~Node B~~ Node B shall include in the RADIO LINK SETUP RESPONSE the *Binding ID* IE and *Transport Layer Address* IE for the transport bearer to be established for each DCH of this RL.]

The ~~Node B~~ Node B shall include in the RADIO LINK SETUP RESPONSE the *Binding ID* IE and *Transport Layer Address* IE for the transport bearer to be established for each DSCH of this RL.

[TDD – The ~~Node B~~ Node B shall include in the RADIO LINK SETUP RESPONSE the *Binding ID* IE and *Transport Layer Address* IE for the transport bearer to be established for each USCH of this RL.]

In case of coordinated DCH, the *Binding ID* IE and the *Transport Layer Address* IE shall be specify for only one of the coordinated DCHs.

### 8.2.17.3 Unsuccessful Operation

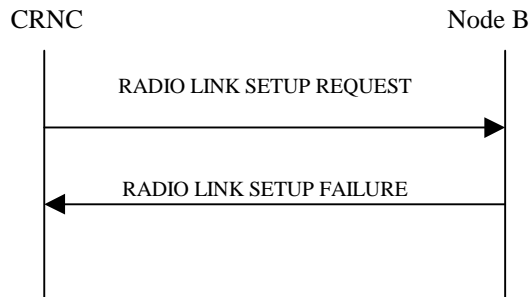

**Figure 25: Radio Link Setup procedure: Unsuccessful Operation**

If the establishment of at least one radio link is unsuccessful, the Node B shall respond with a RADIO LINK SETUP FAILURE message. The message contains the failure cause in the *Cause* IE.

If some radio links were established successfully, the Node B shall indicate this in the RADIO LINK SETUP FAILURE message in the same way as in the RADIO LINK SETUP RESPONSE message.

Typical cause values are as follows:

#### Radio Network Layer Cause

- RL Already Activated/allocated

#### Transport Layer Cause

- Transport Resources Unavailable

#### Protocol Cause

- Semantic error

#### Miscellaneous Cause

- O&M Intervention
- Unspecified Failure
- Control processing overload
- HW failure

### 8.2.17.4 Abnormal Conditions

-

## 8.3 NBAP Dedicated Procedures

### 8.3.1 Radio Link Addition

#### 8.3.1.1 General

This procedure is used for establishing the necessary resources in the Node B for one or more additional RLS towards a UE when there is already a Node B communication context for this UE in the Node B.

### 8.3.1.2 Successful eOoperation

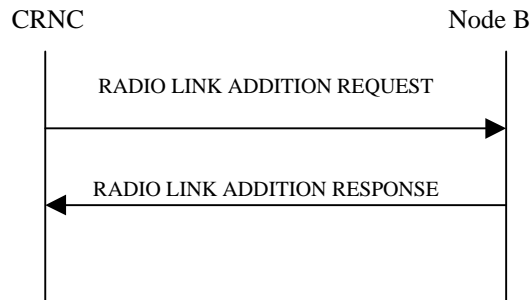


Figure: 26 Radio Link Addition procedure: Successful Operation

The procedure is initiated with a RADIO LINK ADDITION REQUEST message sent from the CRNC to the Node B.

Upon reception, the Node B shall reserve the necessary resources and configure the new RL(s) according to the parameters given in the message. Unless specified below, the meaning of parameters is specified in other specifications.

[FDD - The *Diversity Control Field* IE indicates for each RL whether the Node B shall combine the new RL with existing RL(s) or not.-]. [TDD - The *Diversity Control Field* IE indicates whether the Node B shall reuse the Iub interface Transport Bearers of the old RL for the new RL.] If the *Diversity Control Field* IE indicates, "may be combined with already existing RLs", then Node B shall decide for any of the alternatives. When a new RL is to be combined, the Node B shall choose which RL(s) to combine it with.

If the RADIO LINK ADDITION REQUEST message includes the *Initial DL Transmission Power* IE, the Node B shall apply the given power to the transmission on each DL Channelisation Code of the RL when starting transmission. If no *Initial DL Transmission power* IE is included, the Node B shall use any transmission power level currently used on already existing RLs for this UE.

If the RADIO LINK ADDITION REQUEST message includes the *Maximum DL power* IE, the Node B shall store this value and never transmit with a higher power on any DL Channelisation Code of the RL. If no *Maximum DL power* IE is included, any Maximum DL power stored for already existing RLs for this UE shall be applied.

If the RADIO LINK ADDITION REQUEST message includes the *Minimum DL power* IE, the Node B shall store this value and never transmit with a lower power on any DL Channelisation Code of the RL. If no *Minimum DL power* IE is included, any Minimum DL power stored for already existing RLs for this UE shall be applied.

[FDD - If the RADIO LINK ADDITION REQUEST message contains an *SSDT Cell Identity* IE the Node B may activate SSDT for the concerned new RL-, with the indicated cell identity used for that RL.]

If all requested RLs are successfully added, the Node B shall respond with a RADIO LINK ADDITION RESPONSE message.

[FDD - In the case of combining an RL with existing RL(s) the Node B shall indicate in the RADIO LINK ADDITION RESPONSE message with the Diversity Indication that the RL is combined. In this case the Reference RL ID shall be included to indicate one of the existing RLs that the new RL is combined with.]

[FDD - In the case of not combining an RL with existing RL(s), the Node B shall indicate in the RADIO LINK ADDITION RESPONSE message with the Diversity Indication that no combining is done. In this case the Node B shall include both the Transport Layer Address and the binding ID for the transport bearer to be established for each DCH of the RL in the RADIO LINK ADDITION RESPONSE message.]

[TDD - In the case of not reusing the transport bearers of the old RL for the new RL, the Node B shall indicate in the RADIO LINK ADDITION RESPONSE message with the "Diversity Indication" that no transport bearer reuse is done. In this case the Node B shall include both the Transport Layer Address and the Binding ID for the transport bearer to be established for each DCH, DSCH and USCH of the RL in the RADIO LINK ADDITION RESPONSE message.]


In case of coordinated DCH, the binding ID and the transport address shall be included for only one of the co-ordinated DCHs.

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~3G TS 25.433 version 3.0.0 Release 1999~~

[FDD]- Irrespective of SSDT activation, the Node B shall include in the RADIO LINK ADDITION RESPONSE message an indication concerning the capability to support SSDT on this RL. Only if the RADIO LINK ADDITION REQUEST message requested SSDT activation and the RADIO LINK ADDITION RESPONSE message indicates that the SSDT capability is supported for this RL, SSDT is activated in the Node B.]

[FDD]- After sending of the RADIO LINK ADDITION RESPONSE message the Node B shall continuously attempt to obtain UL synchronisation and start reception on the new RL. The Node B shall start transmission on the new RL after synchronisation is achieved in the Iub user plane as specified in 25.427.]

### 8.3.1.3 Unsuccessful Operation

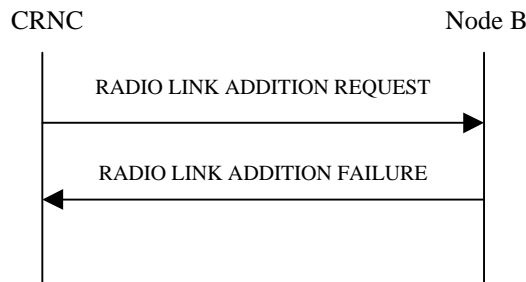

**Figure 27: Radio Link Addition procedure: Unsuccessful Operation**

If the establishment of at least one RL is unsuccessful, the Node B shall send a RADIO LINK ADDITION FAILURE as response indicating the failure cause.

~~If the establishment of at least one RL is unsuccessful, the Node B shall send a RADIO LINK ADDITION FAILURE as response indicating the failure cause.~~

If some RL(s) were established successfully, the Node B shall indicate this in the RADIO LINK ADDITION FAILURE message in the same way as in the RADIO LINK ADDITION RESPONSE message.

Typical cause values are as follows:

#### Radio Network Layer Cause

- RL Already Activated/allocated

#### Transport Layer Cause

- Transport Resources Unavailable

#### Protocol Cause

- Semantic error

#### Miscellaneous Cause

- O&M Intervention
- Unspecified Failure
- Control processing overload
- HW failure

### 8.3.1.4 Abnormal conditions


-

## 8.3.2 Synchronised Radio Link Reconfiguration Preparation

### 8.3.2.1 General

The Synchronised Radio Link Reconfiguration Preparation procedure is used to prepare a new configuration of all Radio Links related to one UE-UTRAN connection within a Node B.

### 8.3.2.2 Successful Operation

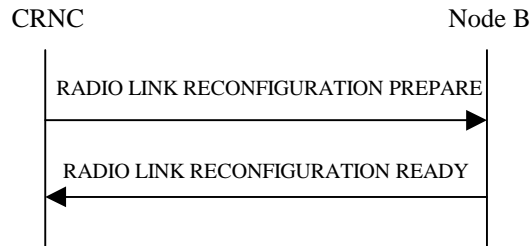

**Figure 28: Synchronised Radio Link Reconfiguration procedure, Successful [Operation Case](#)**

The Synchronised Radio Link Reconfiguration Preparation procedure is initiated by the CRNC by sending the message RADIO LINK RECONFIGURATION PREPARE to the Node B. The message shall use the Communication Control Port assigned for this Node B Communication Context.

Upon reception, the [DRNS-Node B](#) shall reserve necessary resources for the new configuration of the Radio Link(s) according to the parameters given in the message. Unless specified below, the meaning of parameters is specified in other specifications.

#### **DCH Modification:**

If the RADIO LINK RECONFIGURATION PREPARE message includes the *Frame Handling Priority* IE for a DCH to be modified, the Node B should store this information for this DCH in the new configuration. The received Frame Handling Priority should be used when prioritising between different frames in the downlink on the radio interface in congestion situations within the Node B once the new configuration has been activated.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *Transport Format Set (UL)* IE for [the UL](#) of a DCH to be modified, the Node B shall apply the new Transport Format Set in the Uplink of this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *Transport Format Set (DL)* IE for [the DL](#) of a DCH to be modified, the Node B shall apply the new Transport Format Set in the Downlink of this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *UL DCH-FP Mode* IE for a DCH to be modified, the Node B shall apply the new [DCH-FP Mode](#) in the Uplink of the user plane for this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *ToAWS* IE for a DCH to be modified, the Node B shall apply the new ToAWS in the user plane for this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *ToAWE* IE for a DCH to be modified, the Node B shall apply the new ToAWE in the user plane for this DCH in the new configuration.

#### **DCH Addition:**

If the RADIO LINK RECONFIGURATION PREPARE message includes any DCH to be added to the Radio Link(s), the Node B shall reserve necessary resources for the new configuration of the Radio Link(s) according to the parameters given in the message and include these DCH in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *DCH Combination Indicator* IE for a DCH to be added, the Node B shall.

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~, ~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~, ~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~, ~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~, ~~3G TS 25.433 version 3.0.0 Release 1999~~

1. treat all DCHs with the same value of this IE as a set of coordinated DCHs and
2. include this DCH in the new configuration only if it can include all DCHs with the same value of the *DCH Combination Indicator* IE in the new configuration

The Node B should store the *Frame Handling Priority* IE received for a DCH to be added in the new configuration. The received Frame Handling Priority should be used when prioritising between different frames in the downlink on the radio interface in congestion situations within the Node B once the new configuration has been activated.

The Node B may use the included *RLC Mode* IE to optimise the power control.

The Node B shall use the included *UL DCH-FP Mode* IE for a DCH to be added as the new *DCH-FP Mode* in the Uplink of the user plane for this DCH in the new configuration.

The Node B shall use the included *ToAWS* IE for a DCH to be added as the new Time of Arrival Window Start Point in the user plane for this DCH in the new configuration.

The Node B shall use the included *ToAWE* IE for a DCH to be added as the new Time of Arrival Window End Point in the user plane for this DCH in the new configuration.

#### **DCH Deletion:**

If the RADIO LINK RECONFIGURATION ~~PREPARE REQUEST~~ message includes any DCH to be deleted from the Radio Link(s), the Node B shall not include this DCH in the new configuration.

If of all the DCHs belonging to a set of coordinated DCHs are requested to be deleted, the Node B shall not include this set of coordinated DCHs in the new configuration.

#### **Physical Channel Modification:**

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes the *Uplink Scrambling Code* IE, the Node B shall apply this Uplink Scrambling Code to the new configuration.]

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes one or more *Uplink Channelisation Code* IEs, the Node B shall apply the new Uplink Channelisation Code(s) in the new configuration.]

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes one or more *Downlink Channelisation Code* IEs, the Node B shall apply the new Downlink Channelisation Code(s) in the new configuration.]

[TDD - If the RADIO LINK RECONFIGURATION PREPARE message includes one or more *UL DPCH Information* IE groups, the Node B shall apply the new UL physical channel(s) setting in the new configuration.]

[TDD - If the RADIO LINK RECONFIGURATION PREPARE message includes one or more *DL DPCH Information* IE groups, the Node B shall apply the new physical channel(s) setting in the new configuration.]

The Node B shall use the *TFCS (UL) IE for the UL* when reserving resources for the uplink of the new configuration. The ~~DRNS-Node B~~ shall apply the new TFCS in the Uplink of [TDD – the CCTrCH of] the new configuration.

The Node B shall use the *TFCS (DL) IE for the DL* when reserving resources for the downlink of the new configuration. The ~~DRNS-Node B~~ shall apply the new TFCS in the Downlink of [TDD – the CCTrCH of] the new configuration.

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes on the *UL DPCCCH Structure* IE, group the Node B shall set the new Uplink DPCCCH Structure to the new configuration.]

If the RADIO LINK RECONFIGURATION PREPARE includes the *Maximum DL Power* IE, the Node B shall apply this value to the new configuration and never transmit with a higher power on any Downlink Channelisation Code of the Radio Link once the new configuration is being used.

If the RADIO LINK RECONFIGURATION PREPARE includes the *Minimum DL Power* IE, the Node B shall apply this value to the new configuration and never transmit with a lower power on any Downlink Channelisation Code of the Radio Link once the new configuration is being used.

#### **SSDT Activation/Deactivation:**

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~3G TS 25.433 version 3.0.0 Release 1999~~

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes the *SSDT Indication* IE set to "SSDT Active in the UE", the Node B may activate SSDT using the *SSDT Cell Identity* IE and *SSDT Cell Identity Length* IE in the new configuration.]

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes the *SSDT Indication* IE set to "SSDT not Active in the UE", the Node B shall deactivate SSDT in the new configuration.]

**DSCH [TDD – and/or USCH] Addition/Modification/Deletion:**

[FDD]- It is FFS how the Node B shall treat any included DSCH Information.]


[TDD – The RADIO LINK RECONFIGURATION PREPARE message shall include DSCH information and USCH information for the DSCHs and USCHs to be added/modified/deleted. The Node B shall use this information to add/modify/delete the indicated DSCH and USCH channels to/from the radio link, in the same way as the DCH info is used to add/modify/release DCHs. – It shall include in the RADIO LINK RECONFIGURATION READY message the Transport Layer Address and the Binding ID of the DCHs/DSCHs/USCHs being added or modified.]

If the requested modifications are allowed by the Node B and the Node B has successfully reserved the required resources for the new configuration of the Radio Link(s), it shall respond to the CRNC with the RADIO LINK RECONFIGURATION READY message.

In case of a set of coordinated DCHs requiring a new transport bearer on Iub DCH-to-be-added group or DCH-to-be-modified group shall be included only for one of the DCH in the set of coordinated DCHs.

In case of a Radio Link being combined with another Radio Link within the Node B, the RL Information Response IE group shall be included only for one of the combined RLs.

**8.3.2.3 Unsuccessful Operation**

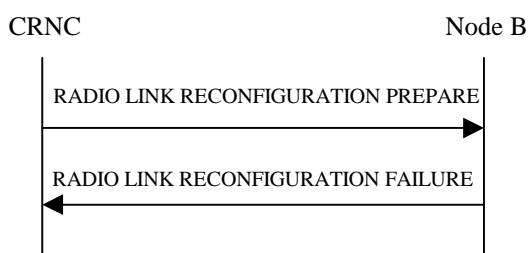

**Figure 29: Synchronised Radio Link Reconfiguration procedure, Unsuccessful Operation Case**

If the Node B cannot reserve the necessary resources for all the new DCHs of one set of coordinated DCHs requested to be added, it shall regard the Synchronised Radio Link Reconfiguration procedure as having failed.

If the requested Synchronised Radio Link Reconfiguration procedure fails for one or more RLs the Node B shall send the RADIO LINK RECONFIGURATION FAILURE message to the CRNC, indicating the reason for failure.

Typical cause values are as follows:

**Radio Network Layer Cause**

- RL Already Activated/allocated

**Transport Layer Cause**

- Transport Resources Unavailable

**Protocol Cause**

- Semantic error

**Miscellaneous Cause**

- O&M Intervention

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~3G TS 25.433 version 3.0.0 Release 1999~~

- Unspecified Failure
- Control processing overload
- HW failure

### 8.3.2.4 Abnormal Conditions

If only a subset of all the DCHs belonging to a set of coordinated DCHs is requested to be deleted, the Node B shall regard the Synchronised Radio Link Reconfiguration Preparation procedure as having failed and the Node B shall send the RADIO LINK RECONFIGURATION FAILURE message to the CRNC ~~with~~.


## 8.3.3 Synchronised Radio Link Reconfiguration Commit

### 8.3.3.1 General

This procedure is used to order the Node B to switch to the new configuration for the Radio Link(s) within the Node B, previously prepared by the Synchronised Radio Link Preparation procedure.

The message shall use the Communication Control Port assigned for this Node B Communication Context.

### 8.3.5.2 Successful Operation

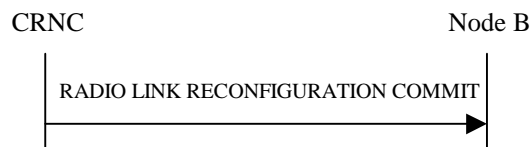

**Figure 30: Synchronised Radio Link Reconfiguration Commit procedure, Successful Operation**

The Node B shall switch to the new configuration previously prepared by the Synchronised RL Reconfiguration procedure at the CFN requested by the CRNC when receiving the RADIO LINK RECONFIGURATION COMMIT message from the CRNC.

### 8.3.5.3 Abnormal Conditions

If the Node B receives the RADIO LINK RECONFIGURATION COMMIT message from the CRNC when there is no new configuration for the Radio Link(s) within the Node B, previously prepared by the Synchronised Radio Link Preparation procedure, the message shall be ignored.

## 8.3.4 Synchronised Radio Link Reconfiguration Cancellation


### 8.3.4.1 General

This procedure is used to order the Node B to release the new configuration for the Radio Link(s) within the Node B, previously prepared by the Synchronised Radio Link Preparation procedure.

The message shall use the Communication Control Port assigned for this Node B Communication Context.



### 8.3.4.2 Successful Operation

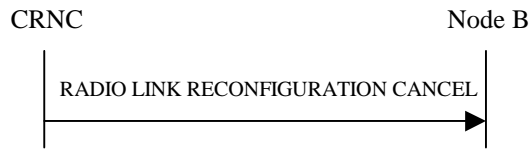

**Figure 31: Synchronised Radio Link Reconfiguration Cancellation Procedure, Successful Operation Case**

The **Node B** shall release the new configuration previously prepared by the Synchronised RL Reconfiguration Preparation procedure and continue using the old configuration when receiving the RADIO LINK RECONFIGURATION CANCEL message from the CRNC.

### 8.3.4.3 Abnormal Conditions

If the **Node B** receives the RADIO LINK RECONFIGURATION CANCEL message from the CRNC when there is no new configuration for the Radio Link(s) within the Node B, previously prepared by the Synchronised Radio Link Preparation procedure, the message shall be ignored.


## 8.3.5 Unsynchronised Radio Link Reconfiguration

### 8.3.5.1 General

The Unsynchronised Radio Link Reconfiguration procedure is used to reconfigure Radio Link(s) related to one UE-UTRAN connection within a Node B.

The Unsynchronised RL Reconfiguration procedure is used when there is no need to synchronise the time of the switching from the old to the new configuration in one Node B used for a UE-UTRAN connection with any other Node B also used for the UE –UTRAN connection.

### 8.3.5.2 Successful Operation

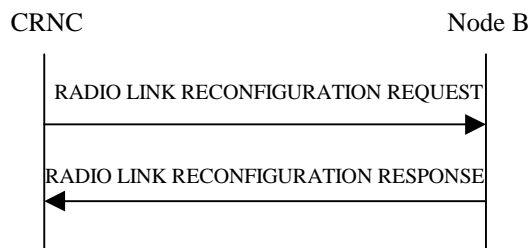

**Figure 32: Unsynchronised Radio Link Reconfiguration Procedure, Successful Operation Case**

The Unsynchronised Radio Link Reconfiguration procedure is initiated by the CRNC by sending the message RADIO LINK RECONFIGURATION REQUEST to the Node B. The message shall use the Communication Control Port assigned for this Node B Communication Context.

Upon reception, the **Node B** shall modify the configuration of the Radio Link(s) according to the parameters given in the message. Unless specified below, the meaning of parameters is specified in other specifications.

#### DCH Modification:

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *Frame Handling Priority* IE for a DCH to be modified, the Node B should store this information for this DCH in the new configuration. The received Frame Handling Priority should be used when prioritising between different frames in the downlink on the radio interface in congestion situations within the Node B once the new configuration has been activated.

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~ X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)" X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)" X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)" 3G TS 25.433 version 3.0.0 Release 1999

If the RADIO LINK RECONFIGURATION REQUEST message includes the *Transport Format Set* (~~UL~~) IE for the UL of a DCH to be modified, the Node B shall apply the new Transport Format Set in the Uplink of this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes the *Transport Format Set* (~~DL~~) IE for the DL of a DCH to be modified, the Node B shall apply the new Transport Format Set in the Downlink of this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes the *UL DCH-FP Mode* IE for a DCH to be modified, the Node B shall apply the new *DCH-FP Mode* in the Uplink of the user plane for this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes the *ToAWS* IE for a DCH to be modified, the Node B shall apply the new *ToAWS* in the user plane for this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes the *ToAWE* IE for a DCH to be modified, the Node B shall apply the new *ToAWE* in the user plane for this DCH in the new configuration.

#### **DCH Addition:**

If the RADIO LINK RECONFIGURATION REQUEST message includes any DCH to be added to the Radio Link(s), the Node B shall reserve necessary resources for the new configuration of the Radio Link(s) according to the parameters given in the message and include these DCH in the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes the *DCH Combination Indicator* IE for a DCH to be added, the *DRNS-Node B* shall.

1. Treat all DCHs with the same value of this IE as a set of coordinated DCHs and
2. Include this DCH in the new configuration only if it can include all DCHs with the same value of the *DCH Combination Indicator* IE in the new configuration.

The Node B should store the *Frame Handling Priority* IE received for a DCH to be added in the new configuration. The received Frame Handling Priority should be used when prioritising between different frames in the downlink on the radio interface in congestion situations within the *DRNS-Node B* once the new configuration has been activated.

If the RADIO LINK RECONFIGURATION REQUEST message includes the *RLC Mode* IE, the Node B may use this information to optimise the power control.

The Node B shall use the included *UL DCH-FP Mode* IE for a DCH to be added as the new *DCH-FP Mode* in the Uplink of the user plane for this DCH in the new configuration.

The Node B shall use the included *ToAWS* IE for a DCH to be added as the new Time of Arrival Window Start Point in the user plane for this DCH in the new configuration.

The Node B shall use the included *ToAWE* IE for a DCH to be added as the new Time of Arrival Window End Point in the user plane for this DCH in the new configuration.

#### **DCH Deletion:**

If the RADIO LINK RECONFIGURATION REQUEST message includes any DCH to be deleted from the Radio Link(s), the Node B shall not include this DCH in the new configuration.

If of all the DCHs belonging to a set of coordinated DCHs are requested to be deleted, the Node B shall not include this set of coordinated DCHs in the new configuration.

#### **Physical Channel Modification:**

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *TFCS (UL)* IE, the Node B shall apply the new TFCS in the Uplink of [TDD – the CCTrCH of] the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *TFCS (DL)* IE, the Node B shall apply the new TFCS in the Downlink of [TDD – the CCTrCH of] the new configuration.

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~3G TS 25.433 version 3.0.0 Release 1999~~

If the RADIO LINK RECONFIGURATION REQUEST includes the *Maximum DL Power* IE, the Node B shall apply this value to the new configuration and never transmit with a higher power on any Downlink Channelisation Code of the Radio Link once the new configuration is being used.

If the RADIO LINK RECONFIGURATION REQUEST includes the *Minimum DL Power* IE, the Node B shall apply this value to the new configuration and never transmit with a lower power on any Downlink Channelisation Code of the Radio Link once the new configuration is being used.

**DSCH [TDD – and/or USCH] Addition/Modification/Deletion:**

-[FDD]- It is FFS how the Node B shall treat any included DSCH Information.]


-[TDD – The RADIO LINK RECONFIGURATION REQUEST message shall include DSCH information and USCH information for the DSCHs and USCHs to be added/modified/deleted. The ~~Node B~~ Node B shall use this information to add/modify/delete the indicated DSCH and USCH channels to/from the radio link, in the same way as the DCH info is used to add/modify/release DCHs. – It shall include in the RADIO LINK RECONFIGURATION RESPONSE message the Transport Layer Address and the Binding ID of the DCHs/DSCHs/USCHs being added or modified.]

If the requested modifications are allowed by the Node B, the Node B has successfully allocated the required resources, and changed to the new configuration it shall respond to the CRNC with the RADIO LINK RECONFIGURATION RESPONSE message.

In case of a set of coordinated DCHs requiring a new transport bearer on Iub, the DCH-to-be-added group or DCH-to-be-modified group shall be included for one of the DCH in the set of coordinated DCHs.

In case of a Radio Link being combined with another Radio Link within the Node B, RL Information Response IE group shall be included only for one of the combined Radio Links.

**8.3.5.34 Unsuccessful Operation**

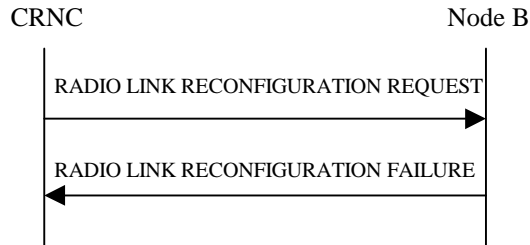

**Figure 33: Unsynchronised Radio Link Reconfiguration procedure, Successful-Unsuccessful Operation Case**

If the ~~DRNS~~ Node B cannot allocate the necessary resources for all the new DCHs of one set of coordinated, DCHs requested to be set-up it shall regard the Synchronised-Unsynchronised Radio Link Reconfiguration procedure as having failed.

If the requested Unsynchronised Radio Link Reconfiguration procedure fails for one or more Radio Link(s) the Node B shall send the RADIO LINK RECONFIGURATION FAILURE message to the CRNC, indicating the reason for failure.

Typical cause values are as follows:

**Radio Network Layer Cause**

- RL Already Activated/allocated

**Transport Layer Cause**

- Transport Resources Unavailable

**Protocol Cause**

- Semantic error

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~3G TS 25.433 version 3.0.0 Release 1999~~

**Miscellaneous Cause**

- O&M Intervention
- Unspecified [Failure](#)
- Control processing overload
- HW failure

**8.3.5.42 Abnormal Conditions**


If only a subset of all the DCHs belonging to a set of coordinated DCHs is requested to be deleted, the Node B shall regard the [Synchronised-Unsynchronised](#) Radio Link Reconfiguration procedure as having failed and shall send the RADIO LINK RECONFIGURATION FAILURE message to the CRNC.

**8.3.6 Radio Link Deletion**

**8.3.6.1 General**

The Radio Link Deletion procedure is used to release the resources in a Node B for one or more established radio links towards a UE.

**8.3.6.2 Successful Operation**

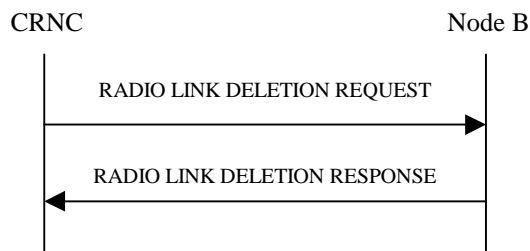

**Figure 34: Radio Link Deletion [procedure](#): Successful [Operation Case](#)**

The procedure is initiated with a RADIO LINK DELETION REQUEST message sent from the CRNC to the Node B.

Upon receipt of this message, the Node B shall delete the radio link(s) identified in the message and release all associated resources and respond to the CRNC with a RADIO LINK DELETION RESPONSE message.

**8.3.6.3 Unsuccessful Operation**

-

**8.3.6.4 Abnormal Conditions**

-

**8.3.7 [Downlink](#) Power Control ([for \[FDD-only\]](#))**

**8.3.7.1 General**

The purpose of this procedure is to balance the DL transmission powers of one or more Radio Links used for the related RRC connection within the [Node B Node B](#). The [Downlink Power Control DL-POWER-CONTROL](#) procedure may be initiated by the CRNC at any time when the [Node B Node B](#) communication context exists, irrespective of other ongoing CRNC initiated dedicated NBAP procedures towards this [Node B Node B](#) communication context. The only exception

X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". 3G TS 25.433 version 3.0.0 Release 1999

occurs when the CRNC has requested the deletion of the last RL via this [Node B](#), in which case the [Downlink Power Control](#) procedure shall no longer be initiated.

### 8.3.7.2 Successful Operation



Figure 35: [Downlink Power Control Procedure](#): Successful Operation

The procedure is initiated by the CRNC sending a DL POWER CONTROL REQUEST message to the Node B.

On reception, if the message contains the *DL Reference Power* IE, the Node B shall perform the power balancing (see below) for all radio links associated with the context identified by the *Node B Communication Context Id* IE.

Alternatively, if the message contains the *DL Reference Power Information* IE group, the Node B shall perform the power balancing (see below) for all radio links addressed in the message.

The Node B performs the power balancing by using the received power.

Editor's Note: FFS (currently we only have "using the received desired DL reference power as a reference for adjusting the applied DL power"), which I don't think is sufficiently precise!

### 8.3.7.3 Abnormal Conditions

-

## 8.3.8 Dedicated Measurement Initiation

### 8.3.8.1 General

This procedure is used by a CRNC to request the initiation of [dedicated](#) measurements [on dedicated resources](#) in a Node B.

### 8.3.8.2 Successful Operation

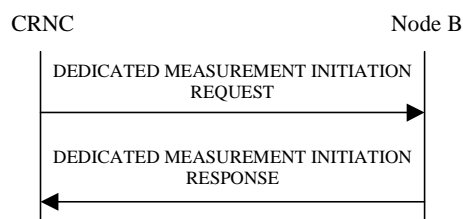


Figure 36: [Dedicated Measurement Initiation Request](#) procedure: Successful Operation

The procedure is initiated with a DEDICATED MEASUREMENT INITIATION REQUEST message sent from the CRNC to the Node B using the communication control port assigned to the Node B communication context.

Upon reception, the Node B shall initiate the requested measurement according to the parameters given in the request. Unless specified below the meaning of the parameters are given in other specifications.

If the Node B Communication Context Id IE equals the reserved value 'All NBCC', this measurement request shall apply for all current and future Node B Communication Contexts that can be contacted via the current communication

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~ X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)" X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)" X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)" 3G TS 25.433 version 3.0.0 Release 1999

control port. Otherwise, this measurement request shall apply for the requested Node B Communication Context Id only.

If no RL Information is provided in the *Dedicated Measurement Object* IE, the measurement reports shall give the aggregated result for all radio links within the requested Node B Communication Context. If RL Information is provided in the request, the measurement request shall apply for the requested radio links individually.

[TDD - If DPCH Id is provided within the RL Information the measurement request shall apply for the requested physical channel individually.]

The *Report Characteristics* IE indicates how the reporting of the measurement shall be performed.

If the *Report Characteristics* IE ~~is set to~~ *indicates* 'On-Demand', the Node B shall return the result of the measurement immediately.

If the *Report Characteristics* IE ~~is set to~~ *indicates* 'Periodic', the Node B shall periodically initiate a Measurement Report procedure for this measurement, with the requested report frequency.

If the *Report Characteristics* IE ~~is set to~~ *indicates* 'Event A', the Node B shall initiate a Measurement Reporting procedure when the measured entity rises above the requested threshold and stays there for the requested hysteresis time. If no hysteresis time is given, the Node B shall use the value zero for the hysteresis time.

If the *Report Characteristics* IE ~~is set to~~ *indicates* 'Event B', the Node B shall initiate a Measurement Reporting procedure when the measured entity falls below the requested threshold and stays there for the requested hysteresis time. If no hysteresis time is given, the Node B shall use the value zero for the hysteresis time.

If the *Report Characteristics* IE ~~is set to~~ *indicates* 'Event C', the Node B shall initiate a Measurement Reporting procedure when the measured entity rises more than the requested threshold within the requested time.

If the *Report Characteristics* IE ~~is set to~~ *indicates* 'Event D', the Node B shall initiate a Measurement Reporting procedure when the measured entity falls more than the requested threshold within the requested time.

If the *Report Characteristics* IE ~~is set to~~ *indicates* 'Event E', the Node B shall initiate a Measurement Reporting procedure when the measured entity rises above the 'Measurement Threshold 1' and stays there for the 'Measurement Hysteresis Time' (Report A). The Node B shall also initiate a Measurement Reporting procedure when the measured entity falls below the 'Measurement Threshold 2' and stays there for the 'Measurement Hysteresis Time' (Report B). If the *Report Periodicity Frequency* IE is provided, the Node B shall ~~send shall~~ initiate Measurement Reporting procedures periodically, with the requested frequency, between Report A and Report B. If 'Measurement Threshold 2' is not present, the Node B shall use 'Measurement Threshold 1' instead. If no 'Measurement Hysteresis Time' is provided, the Node B shall use the value zero as hysteresis times for both Report A and Report B.


If the *Report Characteristics* IE ~~is set to~~ *indicates* 'Event F', the Node B shall initiate a Measurement Reporting procedure when the measured entity falls below the 'Measurement Threshold 1' and stays there for the 'Measurement Hysteresis Time' (Report A). The Node B shall also initiate a Measurement Reporting procedure when the measured entity rises above the 'Measurement Threshold 2' and stays there for the 'Measurement Hysteresis Time' (Report B). If the *Report Periodicity Frequency* IE is provided, the Node B shall ~~send shall~~ initiate Measurement Reporting procedures periodically, with the requested frequency, between Report A and Report B. If 'Measurement Threshold 2' is not present, the Node B shall use 'Measurement Threshold 1' instead. If no 'Measurement Hysteresis Time' is provided, the Node B shall use the value zero as hysteresis times for both Report A and Report B.

If at the start of the measurement, the reporting criteria are fulfilled for any of Event A, Event B, Event E or Event F, the Node B shall initiate a Measurement Reporting procedure immediately, and then continue with the measurements as ~~specified in the DEDICATED MEASUREMENT INITIATION REQUEST message~~ specified in the DEDICATED MEASUREMENT INITIATION REQUEST message in normal operation.

If the ~~Node B~~ Node B was able to initiate the measurement requested by the ~~DRNC-CRNC~~ it shall respond with the DEDICATED MEASUREMENT INITIATION RESPONSE message using the communication control port assigned to the Node B communication context. The message shall include the same Measurement Id that was used in the measurement request.

Only in the case ~~when~~ the *Report Characteristics* IE ~~is set to indicated~~ "On-Demand", the ~~DEDICATED COMMON~~ MEASUREMENT INITIATION RESPONSE message shall contain the measurement result. In this case also the *Dedicated Measurement Object* IE shall be included if it was included in the request message.

### 8.3.8.3 Unsuccessful Operation

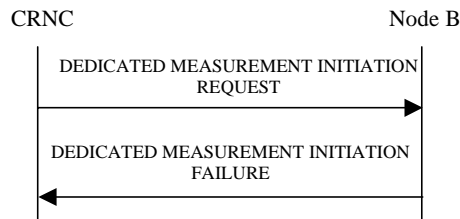

**Figure 37: Dedicated Measurement Request procedure: Unsuccessful Operation**

If the requested measurement cannot be initiated, the Node B shall send a DEDICATED MEASUREMENT INITIATION FAILURE message using the communication control port assigned to the Node B communication context. The message shall include the same Measurement Id that was used in the DEDICATED MEASUREMENT INITIATION REQUEST message ~~measurement initiation request~~ and the *Cause* IE set to an appropriate value.

Typical cause values are as follows:

#### Radio Network Layer cause

- Measurement not supported for the object

#### Miscellaneous Cause

- O&M Intervention
- Control processing overload
- HW failure

### 8.3.8.4 Abnormal Conditions


-

## 8.3.9 Dedicated Measurement Reporting

### 8.3.9.1 General

This procedure is used by the Node B to report the result of measurements requested by the CRNC with the Dedicated Measurement Initiation procedure. The ~~Node B~~ Node B is allowed to may initiate the Dedicated Measurement Reporting ~~DEDICATED MEASUREMENT REPORTING message procedure~~ at any time after ~~having sent the RADIO LINK SETUP RESPONSE message~~ establishing a Radio Link, as long as the ~~Node B~~ Node B communication context exists.

### 8.3.9.2 Successful Operation

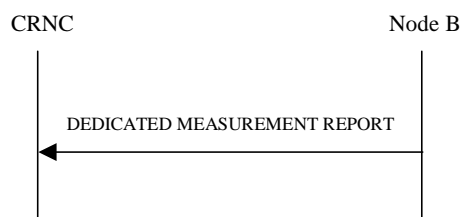

**Figure 38: Dedicated Measurement Reporting procedure: Successful Operation**

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~, ~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~, ~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~, ~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~, ~~3G TS 25.433 version 3.0.0 Release 1999~~

If the requested measurement reporting criteria are met, the Node B shall initiate a Measurement Reporting procedure. The DEDICATED MEASUREMENT REPORT message shall use the communication control port assigned to the Node B communication context. Unless specified below, the meaning of the parameters are given in other specifications.

The *Dedicated Measurement Id* IE shall be set to the Dedicated Measurement Id provided by the CRNC when initiating the measurement with the [Dedicated](#) Measurement Initiation procedure.

### 8.3.9.3 Abnormal Conditions


-

## 8.3.10 Dedicated Measurement Termination

### 8.3.10.1 General

This procedure is used by the CRNC to terminate a measurement previously requested by the [Dedicated](#) Measurement Initiation procedure.

### 8.3.10.2 Successful Operation

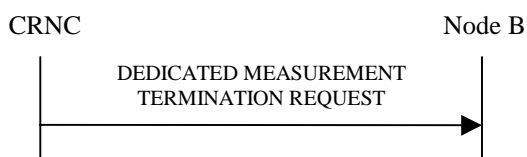

**Figure 39: [Dedicated](#) Measurement Termination procedure: Successful Operation**

This procedure is initiated with a DEDICATED MEASUREMENT TERMINATION REQUEST message, sent from the CRNC to the Node B using the communication control port assigned to the Node B communication context.

Upon reception, the Node B shall terminate reporting of measurements corresponding to the [received](#) Dedicated Measurement Id.

### 8.3.10.3 Abnormal Conditions

-

## 8.3.11 Dedicated Measurement Failure

### 8.3.11.1 General

This procedure is used by the Node B to notify the CRNC that a measurement previously requested by the Measurement Initiation procedure can no longer be reported. The [Node B](#) is allowed to initiate the DEDICATED MEASUREMENT FAILURE INDICATION message at any time after having sent the RADIO LINK SETUP RESPONSE message, as long as the [Node B](#) communication context exists.

### 8.3.11.2 Successful Operation



**Figure 40: [Dedicated](#) Measurement Failure procedure: Successful Operation**



~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~3G TS 25.433 version 3.0.0 Release 1999~~

This procedure is initiated with a DEDICATED MEASUREMENT FAILURE INDICATION message, sent from the Node B to the CRNC using the communication control port assigned to the Node B communication context, to inform the CRNC that a previously requested measurement no longer can be reported.

### 8.3.11.3 Abnormal Conditions


-

## 8.3.12 Radio Link Failure

### 8.3.12.1 General

This procedure is used by Node B to indicate a failure in one or more radio links.

### 8.3.12.2 Successful Operation

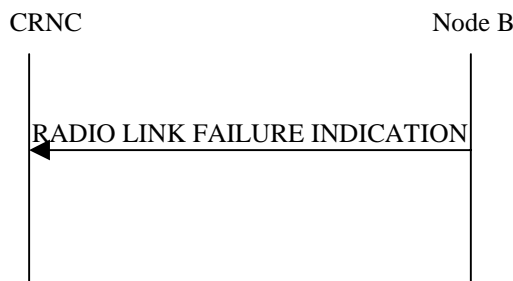

**Figure 41: Radio Link Failure [procedure: Successful Operation](#)**

When Node B detects that one or more radio link is no longer available, it sends the RADIO LINK FAILURE INDICATION message to CRNC indicating the failed radio links with the most appropriate cause values in the *Cause* IE. [Possible cause values may be:](#)

When the Radio Link Failure procedure is used to notify the non-achievement or loss of UL synchronisation, the message is sent when the UL synchronisation of the radio link is not achieved at the RL [setup](#)[Setup](#), or RL Addition [procedures](#), or it is lost during [the an](#) active connection.

### [8.3.12.3 Abnormal Conditions](#)


-

## 8.3.13 Radio Link Restoration

### 8.3.13.1 General

This procedure is used by the Node B to notify the re-achievement of uplink synchronisation.

### 8.3.13.2 Successful Operation

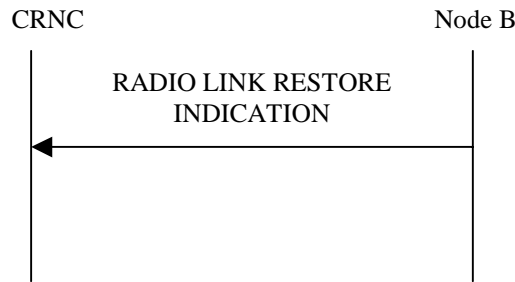

**Figure 42: Radio Link Restoration procedure: Successful Operation**

The Node B may initiate this procedure only if it has previously used the RL Failure procedure to notify the loss of uplink synchronisation. If the uplink synchronisation is re-established, the Node B shall send the RL RESTORE INDICATION message to the CRNC.

The Node B shall not send RADIO LINK RESTORE INDICATION message if Radio Link Deletion procedure has already been activated in the Node B after the RADIO LINK FAILURE INDICATION sent by the Node B.

### 8.3.13.3 Abnormal Conditions


=

## 8.3.14 Compressed Mode Preparation (for [FDD-only])

### 8.3.14.1 General

The Compressed Mode Preparation procedure is used to prepare the compressed mode in the ~~NodeB~~Node B for one UE-UTRAN connection.

### 8.3.14.2 Successful Operation

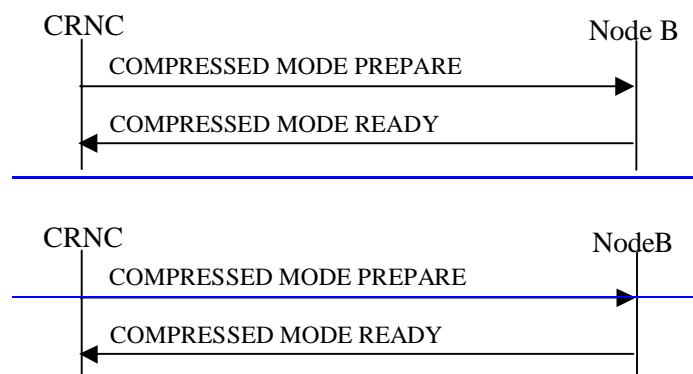

**Figure 43: Compressed Mode Preparation procedure, Successful Operation**

The Compressed Mode Preparation procedure is initiated by the CRNC by sending the COMPRESSED MODE PREPARE message to the ~~NodeB~~Node B.

If the proposed modifications are allowed by the ~~NodeB~~Node B and the ~~NodeB~~Node B has successfully initialised the required resources, the ~~NodeB~~Node B shall respond to the CRNC with COMPRESSED MODE READY message.

If the *Compressed Mode Method* IE is set to 'None', the ~~NodeB~~Node B shall terminate the compressed mode even if the COMPRESSED MODE PREPARE message was received before the end of the compressed mode period.

### 8.3.14.3 Unsuccessful Operation

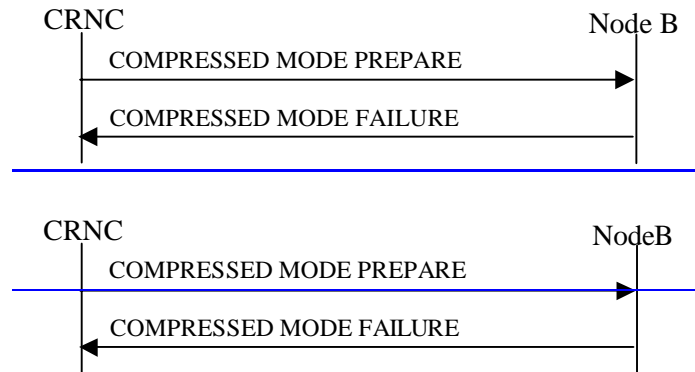


Figure 44: Compressed Mode Preparation procedure, unsuccessful Unsuccessful Operation

If the requested reconfiguration fails for one or more RLS the NodeB Node B shall abort the procedure and send the COMPRESSED MODE FAILURE message to the CRNC, indicating the reason for failure.

Typical cause values are:

#### Radio Network Layer Causes:

- Requested Configuration not Supported

#### Miscellaneous Causes:

- Not enough User Plane Processing Resources

### 8.3.14.4 Abnormal Conditions


-

## 8.3.15 Compressed Mode Commit (for [FDD-only])

### 8.3.15.1 General

The Compressed Mode Commit procedure is used to activate the compressed mode in the NodeB Node B for one UE-UTRAN connection.

### 8.3.15.2 Successful Operation

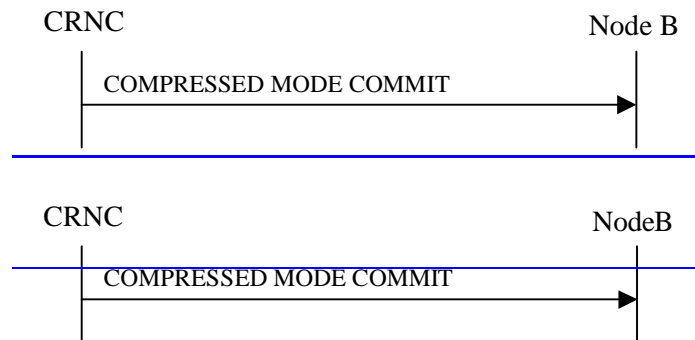

**Figure 45: Compressed Mode Commit procedure, Successful Operation**

The ~~NodeB~~Node B shall initiate the compressed mode in accordance with the settings prepared by the Compressed Mode Preparation procedure at the CFN requested by the CRNC when receiving the COMPRESSED MODE COMMIT message from the CRNC.

### 8.3.15.3 Abnormal Conditions


-

## 8.3.16 Compressed Mode Cancellation (for [FDD-only])

### 8.3.16.1 General

The Compressed Mode Cancellation procedure is used to cancel the compressed mode in the ~~NodeB~~Node B for one UE-UTRAN connection.

### 8.3.16.2 Successful Operation

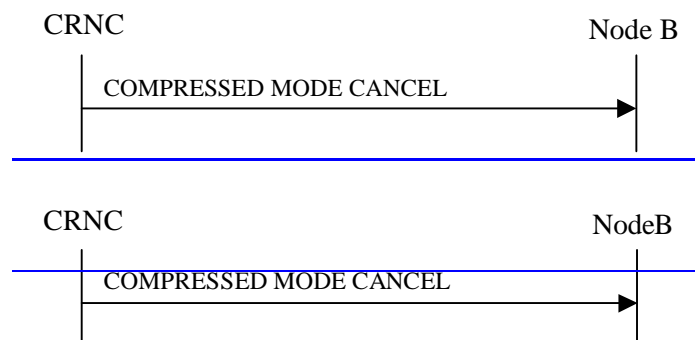

**Figure 46: Compressed Mode Cancellation procedure, Successful Operation**

The ~~NodeB~~Node B shall abort the compressed mode if it receives the COMPRESSED MODE CANCEL message.

### 8.3.16.3 Abnormal Conditions

-

## 8.4 Error Handling Procedures

### 8.4.1 Error Indication

This procedure is used by both ~~Node B~~ and its CRNC to report detected errors or any other problems in one incoming message if they cannot be reported by any other procedure.

When ~~Node B~~ or CRNC detect an erroneous message (or a message, which for some other reasons cannot be processed), it sends an ERROR INDICATION message with the most appropriate cause value.

The message contains as a transparent L3 information the erroneous message (coded), CRNC communication context ID (in UL), and ~~Node B~~ communication context ID (in DL), if the ~~Node B~~ is able to deduce it from the erroneous message.

Possible error cause can be:

- Unknown message ID: the message contains a message ID that is not known to the receiver
- Unknown Information element: the message contains an information element that is not known or cannot be interpreted by the receiver
- Procedural errors: the message is not compatible with the status of the receiver.
- Unknown failure reason: requested procedure failed to process by unknown reason

The message is sent using the Dedicated NBAP signalling connection of the incoming message, or using the Common NBAP if the incoming message was sent via Common NBAP.

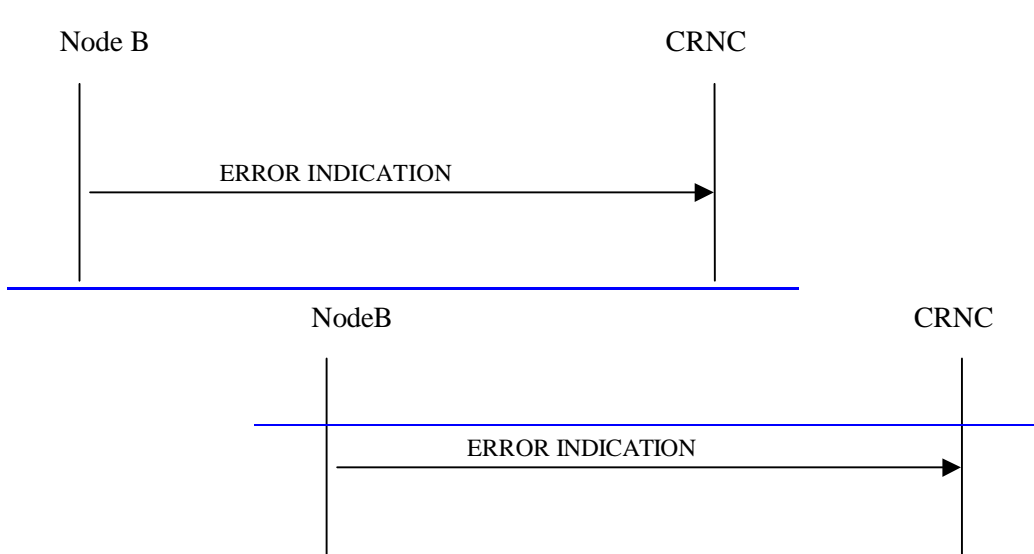


Figure 47: Error Indication

## 9 Elements for NBAP communication

### 9.1 Message functional definition and content

#### 9.1.1 Message Contents

An information element can be of the following *types*:

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". 3G TS 25.433 version 3.0.0 Release 1999~~ ~~3G TS 25.433 v3.0.0 (2000-01)~~

<b>M</b>	The information element is mandatory, i.e. always present in the message
<b>O</b>	The information element is optional, i.e. may or may not be present in the message independently on the presence or value of other information elements in the same message
<b>C</b>	The presence of the information element is conditional to the presence or to the value of another information element, as reported in the <a href="#">table below the message containing the explanation of the condition</a> <del>correspondent footnote</del>

In case of an information element group, the group is preceded by a name for the info group (in bold). It is also indicated [how many times a group may be repeated in the message and](#) whether the group is ~~mandatory, optional or~~ conditional. ~~Each group may be also repeated within one message.~~ The presence field of the information elements inside one group defines if the information element is mandatory, optional or conditional if the group is present.

## 9.1.2 COMMON TRANSPORT CHANNEL SETUP REQUEST

### 9.1.2.1 FDD Message

<u>Information Element/Group Name</u>	<u>Presence</u>	<u>Range</u>	<u>IE type and reference</u>	<u>Semantics description</u>
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
C-ID	M			
Configuration Generation ID	M			
<b>CHOICE common physical channel to be configured</b>				
<i>Secondary CCPCH</i>				
<b>Secondary CCPCH</b>		1		
Common Physical Channel ID	M			
FDD S-CCPCH Offset	M			Corresponds to 25.211: s-CCPCH,k
DL Scrambling Code	M			
FDD DL Channelisation Code Number	M			
TFCS	M			For the DL.
Secondary CCPCH Slot Format	M			
Pilot Bits Used Indicator	M			
Multiplexing Position	M			
STTD Indicator	M			
<b>FACH Parameters</b>	C-choiceCh	0..<maxnoofFACHs>		
Common transport channel ID	M			
Transport Format Set	M			For the DL.
ToAWS	M			
ToAWE	M			
Max FACH Power	M		DL Power	Maximum allowed power on the FACH.
<b>PCH Parameters</b>	C-choiceCh	0..1		
Common Transport Channel ID	M			
Transport Format Set	M			For the DL.
ToAWS	M			
ToAWE	M			
PCH Power	M		DL Power	
<b>PICH Parameters</b>		1		
Common Physical Channel ID	M			
DL Scrambling Code	M			
FDD DL Channelisation Code Number	M			
PICH Power	M		DL Power	Power to be used on the PICH.
PICH Mode	M			Number of PI per frame
STTD Indicator	M			
<i>PRACH</i>				

<b>PRACH</b>		1		
Common Physical Channel ID	M			
Scrambling Code Word Number	M			
TFCS	M			For the UL.
Preamble Signatures	M			
<b>Allowed Slot Format Information</b>		1..<maxSF>		
RACH Slot Format	M			
RACH Sub Channel Numbers	M			
Puncture Limit	M			For the UL
<b>RACH Parameters</b>		1		
Common Transport Channel ID	M			
Transport Format Set	M			For the UL.
<b>AICH Parameters</b>		1		
Common Physical Channel ID	M			
DL Scrambling Code	M			
AICH Transmission Timing	M			
FDD DL Channelisation Code Number	M			
AICH Power	M		DL Power	
STTD Indicator	M			

Condition	Explanation
<i>ChoiceCh</i>	One of the channels FACH or PCH or both must be present.

Range bound	Explanation
<i>MaxnoofFACHs</i>	Maximum number of FACHs that can be defined on a Secondary CCPCH.
<i>MaxSF</i>	Maximum number of SF for a PRACH

### 9.1.2.2 TDD Message

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
C-ID	M			
Configuration Generation ID	M			
CHOICE <i>common physical channels to be configured</i>				
<i>Secondary CCPCHs</i>				
CCTrCH ID	M			For DL CCTrCH supporting one or several Secondary CCPCHs
TFCS	M			For DL CCTrCH supporting one or several



				Secondary CCPCHs
<b>Secondary CCPCH</b>		1..<maxnoofS-CCPCHs>		
Common physical channel ID	M			
TDD Channelisation Code	M			
Time Slot	M			
Burst Type	M			Long or short midamble
Midamble shift	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
S-CCPCH Power	M		DL Power	
STTD Indicator	M			
<i>PRACH</i>				
<b>PRACH</b>	M			
Common physical channel ID	M			
Time Slot	M			
TDD Channelisation Code	M			
Max PRACH Midamble Shifts	O			
PRACH Midamble	M			
<i>CHOICE common transport channels to be configured</i>				
<i>FACH</i>				
<b>FACH</b>	C ChoiceCh	1..<maxnoofFA CHs>		
Common transport channel ID	M			
Transport Format Set	M			For the DL.
ToAWS	M			
ToAWE	M			
<i>PCH</i>				
<b>PCH</b>	C ChoiceCh	1..<maxnoofPC Hs>		
Common transport channel ID	M			
Transport Format Set	M			For the DL.
ToAWS	M			
ToAWE	M			
<b>PICH Parameters</b>				
Common Physical Channel ID	M	1		
TDD Channelisation Code	M			
Time Slot	M			
Burst type	O			
Midamble shift	M			
TDD Physical Channel Offset	M			
Repetition period	M			
Repetition length	M			
Paging Indicator Length	M			
PICH Power	M			

X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". 3G TS 25.433 version 3.0.0 Release 1999

RACH		1		
<b>RACH</b>				
Common transport channel ID	M			

Condition	Explanation
ChoiceCh	One of the channels FACH or PCH or both must be present.

Range bound	Explanation
MaxnoofS-CCPCHs	Maximum number of Secondary CCPCHs per CCTrCH.
MaxnoofCCTrCHs	Maximum number of CCTrCHs that can be defined in a cell.
MaxnoofFACHs	Maximum number of FACHs that can be defined on a Secondary CCPCH.
MaxnoofPCHs	Maximum number of PCHs that can be defined on a Secondary CCPCH.

### 9.1.3 COMMON TRANSPORT CHANNEL SETUP RESPONSE

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
CHOICE <i>common transport channel configured</i>				
<i>FACH</i>				
<b>FACH Parameters</b>	C-choiceCh	0..<maxnoofFACHs>		
Common Transport Channel ID	M			
Binding ID	M			
Transport layer address	M			
<i>PCH</i>				
<b>PCH Parameters</b>	C-choiceCh	0..1		
Common transport channel ID	M			
Binding ID	M			
Transport layer address	M			
<i>RACH</i>				
<b>RACH parameters</b>		1		
Common transport channel ID	M			
Binding ID	M			
Transport layer address	M			
Criticality Diagnostics	O			

X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". 3G TS 25.433 version 3.0.0 Release 1999

Condition	Explanation
<i>ChoiceCh</i>	One of the channels FACH or PCH or both must be present.

Range bound	Explanation
<i>MaxnoofFACHs</i>	Maximum number of FACHs that can be defined on a Secondary CCPCH_[FDD] / a group of Secondary CCPCHs [TDD].

#### 9.1.4 COMMON TRANSPORT CHANNEL SETUP FAILURE

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
Cause	M			
Criticality diagnostics	O			

## 9.1.5 COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST

### 9.1.5.1 FDD Message

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
C-ID	M			
Configuration Generation ID	M			
<b>FACH parameters</b>		<i>0..&lt;maxFACHCell&gt;</i>		
Common Transport Channel ID	M			
Max FACH Power	O		DL Power	Maximum allowed power on the FACH.
ToAWS	O			
ToAWE	O			
<b>PCH Parameters</b>		<i>0..1</i>		
Common Transport Channel ID	M			
PCH Power	O		DL Power	Power to be used on the PCH.
ToAWS	O			
ToAWE	O			
<b>PICH Parameters</b>		<i>0..1</i>		
Common Physical Channel ID	M			
PICH Power	M		DL Power	Power to be used on the PICH.
<b>PRACH Parameters</b>		<i>0..&lt;maxnoofPRACHs&gt;</i>		
Common Physical Channel ID	M			
Preamble Signatures	M			
<b>Allowed Slot Format Information</b>		<i>0..&lt;maxSF&gt;</i>		
<u>RACH</u> Slot Format	M			
RACH Sub Channel Numbers	O			
<b>AICH Parameters</b>		<i>0..&lt;maxnoofPRACHs&gt;</i>		
Common Physical Channel ID	M			
AICH Power	M		DL Power	Power to be used on the AICH.

Range bound	Explanation
<i>MaxFACHCell</i>	Maximum number of FACHs that can be defined in a Cell
<i>maxnoofPRACHs</i>	Maximum number of PRACHs and AICHs that can be defined in a Cell
<i>maxSF</i>	Maximum number of SF for a PRACH

9.1.5.2 TDD Message

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
C-ID	M			
Configuration Generation ID	M			
CHOICE common physical channels to be reconfigured				
<i>Secondary CCPCHs</i>				
CCTrCH ID	M			For DL CCTrCH supporting one or several Secondary CCPCHs
<b>Secondary CCPCH</b>		0..<MaxnoofSCCPCHs>		
Common physical channel ID	M			
S-CCPCH Power	M			DL power
<i>PICH</i>				
<b>PICH Parameters</b>		0..1		
Common physical channel ID	M			
PICH Power	M			
CHOICE common transport channels to be reconfigured				
<i>FACH</i>				
<b>FACH parameters</b>		0..<MaxnoofFACHs>		
Common Transport Channel ID	M			
ToAWS	O			
ToAWE	O			
<i>PCH</i>				
<b>PCH parameters</b>		0..<MaxnoofPCHs>		
Common Transport Channel ID	M			
ToAWS	O			
ToAWE	O			

Range bound	Explanation
<i>MaxFACHCell</i>	Maximum number of FACHs that can be repeated in a Cell
<i>MaxnoofPCHs</i>	Maximum number of PCHs that can be defined in a cell.

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". 3G TS 25.433 version 3.0.0 Release 1999~~

## 9.1.6 COMMON TRANSPORT CHANNEL RECONFIGURATION RESPONSE

<u>Information Element/Group Name</u>	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
Criticality diagnostics	O			

## 9.1.7 COMMON TRANSPORT CHANNEL RECONFIGURATION FAILURE

<u>Information Element/Group Name</u>	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
Cause	M			
Criticality diagnostics	O			

## 9.1.8 COMMON TRANSPORT CHANNEL DELETION REQUEST

<u>Information Element/Group Name</u>	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
C-ID	M			
Common Physical Channel ID	M			Indicates the Common Physical Channel for which the Common Transport Channels (together with the Common Physical Channel) shall be deleted.
Configuration Generation ID	M			

## 9.1.9 COMMON TRANSPORT CHANNEL DELETION RESPONSE

<u>Information Element/Group Name</u>	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
Criticality diagnostics	O			

### 9.1.10 BLOCK RESOURCE REQUEST

Information Element Name	IE/Group	Presence	Range	IE type and reference	Semantics description
Message Discriminator		M			
Message Type		M			
Transaction ID		M			
C-ID		M			
Blocking Priority Indicator		M			
Shutdown Timer		C-BlockNormal			

Condition	Explanation
BlockNormal	The information element is present when the Blocking Priority Indicator IE indicates 'Normal Priority'.

### 9.1.11 BLOCK RESOURCE RESPONSE

Information Element Name	IE/Group	Presence	Range	IE type and reference	Semantics description
Message Discriminator		M			
Message Type		M			
Transaction ID		M			
Criticality diagnostics		O			

### 9.1.12 BLOCK RESOURCE FAILURE

Information Element Name	IE/Group	Presence	Range	IE type and reference	Semantics description
Message Discriminator		M			
Message Type		M			
Transaction ID		M			
Cause		M			
Criticality diagnostics		O			

### 9.1.13 UNBLOCK RESOURCE INDICATION

Information Element Name	IE/Group	Presence	Range	IE type and reference	Semantics description
Message Discriminator		M			
Message Type		M			
Transaction ID		M			
C-ID		M			

### 9.1.14 AUDIT REQUIRED INDICATION

Information Element Name	IE/Group	Presence	Range	IE type and reference	Semantics description
Message Discriminator		M			
Message Type		M			
Transaction ID		M			

### 9.1.15 AUDIT REQUEST

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
<b>Cell parameters</b>		0.. <maxCellinNodeB>		
C-ID	M			
Configuration Generation Id	M			

Range bound	Explanation
MaxCellinNodeB	Maximum number of cell that can be configured in Node B

### 9.1.16 AUDIT RESPONSE

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
<b>Cell Information</b>		0.. <maxCellinNodeB, maxUCIDinNodeB>		
C-ID	M			
Resource Operational State	M			
Availability Status	M			
Maximum DL Power Capability	FFS			
Minimum Spreading Factor	FFS			



X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~3G TS 25.433 version 3.0.0 Release 1999~~

<b>Primary SCH Information</b>		0..1		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>Secondary SCH Information</b>		0..1		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>Primary CPICH Information</b>		0..1		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>Secondary CPICH Information</b>		0..<maxSCPIC HCell>		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>Primary CCPCH Information</b>		0..1		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>BCH Information</b>		0..1		
Common Transport Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>Secondary CCPCH Information</b>		0..<maxSCCP CHCell>		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>PCH Information</b>		0..<maxPCHC ell >		
Common Transport Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>PICH Information</b>		0..1		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>FACH Information</b>		0..<maxFACH Cell>		
Common Transport	M			

Channel ID				
Resource Operational State	M			
Availability Status	M			
<b>PRACH Information</b>		0..<maxPRACHCell>		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>RACH Information</b>		0..<maxRACHCell>		
Common Transport Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>AICH Information</b>		0..<maxRACHCell>		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>SCH Information</b>		0..1		
Common Transport Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>PSCH Information</b>		0..1		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>Communication Control Port Information</b>		0..<maxCCPinNodeB>		
Communication Control Port ID	M			
Resource Operational State	M			
Availability Status	M			
<b>Local Cell Information</b>		0..<maxLocalCellinNodeB>		
Local Cell ID	M			
Number of Channel Elements	0			
Maximum DL Power Capability	O			
Criticality diagnostics	O			

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~, ~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~, ~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~, ~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~, ~~3G TS 25.433 version 3.0.0 Release 1999~~

Range bound	Explanation
maxCellinNodeB	Maximum number of Cell that can be configured in Node B
maxCCPinNodeB	Maximum number of communication control ports that can exist in the Node B
maxLocalCellinNodeB	Maximum number of Local Cells that can exist in the Node B
maxSCPICHCell	Maximum number of Secondary CPICH that can be defined in a Cell.
maxSCCPCHCell	Maximum number of Secondary CCPCH that can be defined in a Cell.
maxFACHCell	Maximum number of FACHes that can be defined in a Cell
maxRACHCell	Maximum number of RACHes that can be defined in a Cell
maxPCHCell	Maximum number of PCHes that can be defined in a Cell
maxPICHCell	Maximum number of PICHes that can be defined in a Cell

### 9.1.17 COMMON MEASUREMENT INITIATION REQUEST

Information Element/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Discriminator	M			
Message Type	M			
Transaction Id	M			
Measurement Id	M			
Common Measurement Object Type	M			
CHOICE Common Measurement Object Type				
"Cell"				
C-ID	M			
Time Slot	O			TDD only
"RACH"				
C-ID	M			
Common transport channel ID	M			
Common Measurement Type	M			
Measurement Characteristics	M			
Report Characteristics	M			

### 9.1.18 COMMON MEASUREMENT INITIATION RESPONSE

Information Element/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Discriminator	M			
Message Type	M			
Transaction Id	M			
Measurement Id	M			
CHOICE Common Measurement Object Type				
"Cell"				
Common Measurement value	M			
"RACH"				
Common Measurement Value	M			
SFN	O			Common Measurement Time Reference
Criticality Diagnostics	O			

### 9.1.19 COMMON MEASUREMENT INITIATION FAILURE

Information Element/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Discriminator	M			
Message Type	M			
Transaction Id	M			
Measurement Id	M			
Cause	M			
Criticality diagnostics	O			

### 9.1.20 COMMON MEASUREMENT REPORT

Information Element/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Discriminator	M			
Message Type	M			
Transaction Id	M			
Measurement Id	M			
CHOICE Common Measurement Object Type				
"Cell"				
Common Measurement value	M			
"RACH"				
Common Measurement Value	M			
SFN	O			Common Measurement Time Reference

### 9.1.21 COMMON MEASUREMENT TERMINATION REQUEST

Information Element/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Discriminator	M			
Message Type	M			
Transaction Id	M			
Measurement Id	M			

## 9.1.22 COMMON MEASUREMENT FAILURE INDICATION

Information Element/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Discriminator	M			
Message Type	M			
Transaction Id	M			
Measurement Id	M			
Cause	M			

## 9.1.23 CELL SETUP REQUEST

### 9.1.23.1 FDD Message

Information Element/Group Name	Presence	Range	IE type and Reference	Semantics description
Message discriminator	M			
Message Type	M			
Transaction ID	M			
Local Cell Id	M			
C-Id	M			
Configuration Generation Id	M			
T Cell	M			
UARFCN	M			Indicates UL/DL Frequency
Maximum transmission power	M			
Primary scrambling code	M			
<b>Primary SCH Information</b>		1		
Common Physical Channel ID	M			
Primary SCH Power	M		DL Power	
TSTD Indicator	M			
<b>Secondary SCH Information</b>		1		
Common Physical Channel ID	M			
Secondary SCH power	M		DL Power	
TSTD Indicator	M			
<b>Primary CPICH Information</b>		1		
Common Physical Channel ID	M			
Primary CPICH power	M			
Transmit Diversity Indicator	M			
<b>Secondary CPICH Information</b>		0..1		
Common Physical Channel ID	M			
DL Scrambling code	M			
FDD DL Channelisation Code Number	M			
Secondary CPICH Power	M		DL Power	
Transmit Diversity Indicator	M			
<b>Primary CCPCH Information</b>		1		
Common Physical Channel ID	M			
<b>BCH Information</b>		1		
Common Transport Channel ID	M			
BCH Power	M		DL Power	
STTD Indicator	M			

### 9.1.23.2 TDD Message

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Message discriminator	M			
Message Type	M			
Transaction ID	M			
Local Cell Id	M			
C-Id	M			
Configuration Generation Id	M			
UARFCN	M			
Cell Parameter ID	M			
Maximum Transmission Power	<u>EM</u>			
Transmission Diversity Applied	M			On DCHs
Sync Case	M			
<b>PSCH Information</b>		1		
Common physical channel ID	M			
CHOICE Sync Case				
Case 1				The same TS is used for PCCPCH
Time Slot	M			
Case 2 and Case 3				In Case 2 the same TS is used for PCCPCH
PSCH Time Slot	M			
PSCH Power	M		<u>DL Power</u>	<u>DL Power</u>
TSTD Indicator	M			
<b>PCCPCH Information</b>		1		
Common physical channel ID	M			
CHOICE Sync Case				
Case 3				
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
PCCPCH Power	M			
STTD Indicator	M			
<b>Time Slot Configuration</b>		1 .. 15		
Time Slot	M			
Time Slot Status	M			
Time Slot Direction	M			

Condition	Explanation
Case 3	This IE is only present if <u>the PSCH &amp; PCCPCH Allocation Sync Case</u> is equal to 3

### 9.1.24 CELL SETUP RESPONSE

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Message discriminator	M			
Message Type	M			
Transaction ID	M			
Criticality diagnostics	O			

## 9.1.25 CELL SETUP FAILURE

Information Element Name	Presence	Range	IE type and reference	Semantics description
Message discriminator	M			
Message Type	M			
Transaction ID	M			
Cause	M			
Criticality diagnostics	O			

## 9.1.26 CELL RECONFIGURATION REQUEST

### 9.1.26.1 FDD Message

Information Element Name	Presence	Range	IE type and reference	Semantics description
Message discriminator	M			
Message Type	M			
Transaction ID	M			
C-ID	M			
Configuration Generation Id	M			
Maximum transmission power	O			
<b>Primary SCH Information</b>		0,1		
Common Physical Channel ID	M			
Primary SCH power	M		DL Power	
<b>Secondary SCH Information</b>		0,1		
Common Physical Channel ID	M			
Secondary SCH power	M		DL Power	
<b>Primary CPICH Information</b>		0,1		
Common Physical Channel ID	M			
Primary CPICH power	M			
<b>Secondary CPICH Information</b>		0,1		
Common Physical Channel ID	M			
Secondary CPICH Power	M		DL Power	
<b>Primary CCPCH Information</b>		0,1		
<b>BCH Information</b>		1		
Common Transport Channel ID	M			
BCH Power	M		DL Power	

### 9.1.26.2 TDD Message

Information Element Name	Presence	Range	IE type and reference	Semantics description
Message discriminator	M			
Message Type	M			
Transaction ID	M			
C-Id	M			
Configuration Generation ID	M			
<b>PSCH Information</b>		0,1		
Common Physical Channel ID	M			
PSCH Power	M		DL Power	
<b>PCCPCH Information</b>		0,1		
Common Physical Channel ID	M			
PCCPCH Power	M			

X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". 3G TS 25.433 version 3.0.0 Release 1999

Maximum Transmission Power	O			
<b>Time Slot Configuration</b>		01..15		
Time Slot	M			
Time Slot Status	M			
Time Slot Direction	M			

### 9.1.27 CELL RECONFIGURATION RESPONSE

<u>Information Element/Group Name</u>	Presence	Range	IE type and reference	Semantics description
Message discriminator	M			
Message Type	M			
Transaction ID	M			
Criticality diagnostics	O			

### 9.1.28 CELL RECONFIGURATION FAILURE

<u>Information Element/Group Name</u>	Presence	Range	IE type and reference	Semantics description
Message discriminator	M			
Message Type	M			
Transaction ID	M			
Cause	M			
Criticality diagnostics	O			

### 9.1.29 CELL DELETION REQUEST

<u>Information Element/Group Name</u>	Presence	Range	IE type and reference	Semantics description
Message discriminator	M			
Message Type	M			
Transaction ID	M			
C-ID	M			

### 9.1.30 CELL DELETION RESPONSE

<u>Information Element/Group Name</u>	Presence	Range	IE type and reference	Semantics description
Message discriminator	M			
Message Type	M			
Transaction ID	M			
Criticality diagnostics	O			



### 9.1.31 RESOURCE STATUS INDICATION

Information Element Name	E/Group	Presence	Range	IE type and reference	Semantics description
Message Discriminator		M			
Message Type		M			
Transaction ID		M			
Indication Type		M			
CHOICE Indication Type					
"No Failure"					
<b>Local Cell Information</b>			1.. <maxLocalCellinNo deB >		
Local Cell ID		M			
Add/Delete Indicator		M			
Number of Channel Elements		M			
Maximum DL Power Capability		M			
"Service Impacting"					
<b>Local Cell Information</b>			0.. <maxLocalCell inNodeB>		
Local Cell ID		M			
Number of Channel Elements		⊖			
Maximum DL Power Capability		O			
<b>Communication Control Port Information</b>			0.. <maxCCPinNo deB>		
Communication Control Port ID		M			
Resource Operational State		M			
Availability Status		M			
<b>Cell Information</b>			0.. <maxCellinNo deB>		
C-ID		M			
Resource Operational State		M			
Availability Status		M			
Maximum DL Power Capability		FFS			
Minimum Spreading Factor		FFS			
<b>Primary SCH Information</b>			0..1		
Common Physical Channel ID		M			
Resource Operational State		M			
Availability Status		M			
<b>Secondary SCH Information</b>			0..1		
Common Physical Channel ID		M			

Resource Operational State	M			
Availability Status	M			
<b>Primary CPICH Information</b>		0..1		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>Secondary CPICH Information</b>		0..<maxSCPICHCell>		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>Primary CCPCH Information</b>		0..1		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>BCH Information</b>		0..1		
Common Transport Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>Secondary CCPCH Information</b>		0..<maxSCCPCHCell>		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>PCH Information</b>		0..<maxPCHCell>		
Common Transport Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>PICH Information</b>		0..1		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>FACH Information</b>		0..<maxFACHCell>		
Common Transport Channel ID	M			
Resource Operational State	M			

Availability Status	M			
<b>PRACH Information</b>			0..<maxPRACH HCell>	
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>RACH Information</b>			0..<maxPRACH Cell>	
Common Transport Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>AICH Information</b>			0..<maxPRACH Cell>	
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>SCH Information</b>			0..1	
Common Transport Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>PSCH Information</b>			0..1	
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
Cause	O			

Range bound	Explanation
<i>maxLocalCellinNodeB</i>	Maximum number of Local Cells that can exist in the Node B
<i>maxCellinNodeB</i>	Maximum number of C ID that can be configured in Node B
<i>maxSCPICHCell</i>	Maximum number of Secondary CPICH that can be defined in a Cell.
<i>maxSCCPCHCell</i>	Maximum number of Secondary CCPCH that can be defined in a Cell.
<i>maxFACHCell</i>	Maximum number of FACHes that can be defined in a Cell
<i>maxPCHCell</i>	Maximum number of PCHes that can be defined in a Cell
<i>maxPRACHCell</i>	Maximum number of PRACHes and AICHes that can be defined in a Cell
<i>maxCCPinNodeB</i>	Maximum number of communication control ports that can exist in the Node B

### 9.1.32 SYSTEM INFORMATION UPDATE REQUEST

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
C-ID	M			
BCCH Modification Time	O			
<b>MIB/SIB Information</b>		1.. <i>maxIB</i>		
IB Type	M			
SIB Deletion Indicator	C-NotMIB			
CHOICE <i>DeletionIndicator</i>				
<i>NoDeletion</i>				
SIB Originator	C-NotMIB			
<b>Segment Information</b>		1.. <i>maxIBSEG</i>		
Segment Type	M			
IB SG REP	M			
IB SG POS	M			
IB SG	C – CRNCOri- gination			

Range bound	Explanation
1.. <i>maxIB</i>	Maximum number of information Blocks supported in a physical channel scheduling cycle
1.. <i>maxIBSEG</i>	Maximum number of segments for one Information Block

Condition	Explanation
CRNCOri- gination	The IE shall be present if <i>the SIB Originator</i> IE is set to 'CRNC'
NotMIB	This IE shall be present if the IB Type is not equal to "MIB"

### 9.1.33 SYSTEM INFORMATION UPDATE RESPONSE

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
Criticality diagnostics	O			

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~3G TS 25.433 version 3.0.0 Release 1999~~

### 9.1.34 SYSTEM INFORMATION UPDATE FAILURE

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
Cause	M			
Criticality diagnostics	O			

## 9.1.35 RADIO LINK SETUP REQUEST

### 9.1.35.1 FDD message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context ID	M			
Transaction ID	M			
<b>UL DPCH Information</b>		1		
UL Scrambling Code	M			
Min UL Channelisation Code length	M			
Max Number of UL DPDCHs	C – CodeLen			
puncture limit	M			For UL
Transport Format Combination Set	M			for UL
UL DPCCH Slot Format	M			
UL Eb/No Target	M		Uplink Eb/No	
Diversity mode	M			
D Field Length	C – FB			
SSDT cell ID Length	O			
S Field Length	O			
<b>DL DPCH Information</b>				
<a href="#">TFCSTransport Format Combination Set</a>	M			For DL
DL DPCH Slot Format	M			
TFCI signalling mode	M			
TFCI presence	C- SlotFormat			
Multiplexing Position	M			
<b>Power Offset Information</b>		1		
PO1	M		Power Offset	Power offset for the TFCI bits
PO2	M		Power Offset	Power offset for the TPC bits
PO3	M		Power Offset	Power offset for the pilot bits
Delta TPC	M			
<b>DCH Information</b>		1 to <maxnoofDCHs>		
DCH ID	M			
DCH Combination Ind	O			
RLC mode	M			
Transport Format Set	M			For UL
Transport Format Set	M			For DL
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP mode	M			
ToAWS	M			
ToAWE	M			
RL ID	O			RL Supporting the DSCH
DSCH TFC	O			

<b>DSCH Information</b>		0 to <maxnoofDSCHs >		
DSCH ID	M			
Transport Format Set	M			For DSCH
Frame handling Priority	M			
ToAWS	M			
ToAWE	M			
<b>RL Information</b>		1 to <maxnoofRLs>		
RL ID	M			
C-ID	M			
Frame Offset	M			
Chip Offset	M			
Propagation Delay	O			
Diversity Control Field	C – NotFirstRL			
<b>DL Code Information</b>		1 to <maxnoof-DLCodes		
DL Scrambling Code	M			
FDD DL Channelisation Code Number	M			
Initial DL transmission Power	M			DL Power
Maximum DL power	M			DL Power
Minimum DL power	M			DL Power
SSTD Cell Identity	O			

Condition	Explanation
CodeLen	This IE is present only if "Min UL Channelisation Code length" equals to 4
FB	This IE is present only if Feed Back mode diversity is activated.
NotFirstRL	This IE is present only if the RL is not the first one in the RL Information.
SlotFormat	This IE is only present if the DL DPCH slot format is equal to any of the value 12 to 16.

Range bound	Explanation
MaxnoofDSCHs	Maximum <a href="#">no-number</a> of DSCHs for one UE.
MaxnoofDCHs	Maximum <a href="#">no-number</a> of DCHs for one UE.
MaxnoofRLs	Maximum <a href="#">no-number</a> of RLs for one UE.
MaxnoofDLCodes	Maximum <a href="#">no-number</a> of DL code information.

9.1.35.2 TDD message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context ID	M			
Transaction ID	M			
<b>UL CCTrCH Information</b>		0 to <maxno CCTrCH>		
CCTrCH ID	M			
TFCSTransport Format Combination Set	M			
TFCI Coding	M			
Puncture Limit	M			
<b>UL DPCH Information</b>		0 to <maxnoOfDPCH>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
<b>DL CCTrCH Information</b>		0 to <maxno CCTrCH>		
CCTrCH ID	M			
TFCSTransport Format Combination Set	M			
TFCI Coding	M			
Puncture Limit	M			
<b>DL DPCH information</b>		0 to <maxnoOfDPCH>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
<b>DCH Information</b>		1 to <maxnoofDCHs>		
DCH ID	M			
RLC mode	M			
CCTrCH ID	M			UL CCTrCH in which the DCH is mapped
CCTrCH ID	M			DL CCTrCH in which the DCH is mapped
DCH Combination Ind	O			



~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". 3G TS 25.433 version 3.0.0 Release 1999~~

Transport Format Set	M			For UL
Transport Format Set	M			For DL
Frame Handling Priority	O			
Payload CRC Presence Indicator	M			
UL FP mode	M			
ToAWS	M			
ToAWE	M			
<b>DSCH Information</b>		0 to <MaxnoofDSCHs >		
DSCH ID	M			
CCTrCH ID	M			DL CCTrCH in which the DSCH is mapped
Transport Format Set	M			For DSCH
Frame handling Priority	M			
ToAWS	M			
ToAWE	M			
<b>USCH Information</b>		0 to <MaxnoofUSCHs >		
USCH ID	M			
CCTrCH ID	M			UL CCTrCH in which the USCH is mapped
Transport Format Set	M			For USCH
<b>RL Information</b>		1		
RL ID	M			
C-ID	M			
Frame TDD Physical Channel Offset	M			
Initial DL transmission Power	M		DL Power	
Maximum DL power	M		DL Power	
Minimum DL power	M		DL Power	

Range bound	Explanation
MaxnoofDCHs	Maximum <del>no</del> number of DCHs for one UE.
maxnoOfDPCH	Maximum number of DPCH in one CCTrCH
maxnoCCTrCH	<del>no</del> Number of CCTrCH for one UE.
MaxnoofDSCHs	Maximum number of DSCH for one UE
MaxnoofUSCHs	Maximum number of USCH for one UE

## 9.1.36 RADIO LINK SETUP RESPONSE

### 9.1.36.1 FDD message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context ID	M			
Transaction ID	M			
Node B Communication Context ID	M			
Communication Control Port ID	M			
<b>RL Information Response</b>		1 to <maxnoofRLs>		
RL ID	M			
UL interference level	M			
Diversity Indication	C-NotFirstRL			
CHOICE <i>diversity Indication</i>				
<i>Combining</i>				
RL ID	M			Reference RL ID for the combining
<i>Non Combining or IE not present</i>				
<b>DCH Information Response</b>		0 to <maxnoofDCHs>		Only one DCH per set of coordinated DCH shall be included
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
<b>DSCH Information Response</b>		0 to <Numof DSCH>		
DSCH ID	M			
Binding ID	M			
Transport Layer Address	M			
SSDT Support Indicator	M			
Criticality diagnostics	O			

Condition	Explanation
NotFirstRL	This IE is present only if the RL is not the first one in the RL Information.

Range bound	Explanation
MaxnoofRLs	Maximum <a href="#">no-number</a> of RLs for one UE.
MaxnoofDCHs	Maximum <a href="#">no-number</a> of DCH per UE.
MaxnoofDSCHs	Maximum <a href="#">no-number</a> of DSCHs for one UE.

9.1.36.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context ID	M			
Transaction ID	M			
Node B Communication Context ID	M			
Communication Control Port ID	M			
<b>RL Information Response</b>		1		
RL ID	M			
UL interference level	M			
<b>DCH Information Response</b>		1 to <maxnoofDCH>		Only one DCH per set of coordinated DCH shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
<b>DSCH Information Response</b>		0 .. <Maxnoof DSCHs>		
DSCH ID	M			
Binding ID	M			
Transport Layer Address	M			
<b>USCH Information Response</b>		0 .. <Maxnoof USCHs>		
USCH ID	M			
Binding ID	M			
Transport Layer Address	M			
Criticality diagnostics	O			

Range bound	Explanation
MaxnoofDCHs	Maximum <del>no</del> number of DCH per UE.
MaxnoofDSCHs	Maximum number of DSCHs for one UE
MaxnoofUSCHs	Maximum number of USCHs for one UE

## 9.1.37 RADIO LINK SETUP FAILURE

### 9.1.37.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context ID	M			
Transaction ID	M			
Node B Communication Context ID	M			
Communication Control Port ID	O			
<b>Unsuccessful RL Information Response</b>		1 to <maxnoofRLs>		
RL ID	M			
Cause	M			
<b>Successful RL Information Response</b>		0 to <maxnoofRLs-1>		
RL ID	M			
UL interference level	M			
Diversity Indication	C-NotFirstRL			
CHOICE <i>diversity Indication</i>				
<i>Combining</i>				
RL ID	M			Reference RL ID for the combining
<i>Non Combining or IE not present</i>				
<b>DCH Information Response</b>		0 to <maxnoofDCHs>		Only one DCH per set of coordinated DCH shall be included
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
<b>DSCH Information Response</b>		0 to <Numof DSCH>		
DSCH ID	M			
Binding ID	M			
Transport Layer Address	M			
SSDT Support Indicator	M			
Criticality diagnostics	O			

Condition	Explanation
Success	This IE is present if at least one of the radio links has been successfully set up.
NotFirstRL	This IE is present only if the RL is not the first one in the RL Information.

X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)" X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)" X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)" 3G TS 25.433 version 3.0.0 Release 1999

Range bound	Explanation
MaxnoofRLs	Maximum <del>no-number</del> of RLs for one UE.
MaxnoofDCHs	Maximum <del>no-number</del> of set DCH per UE.
MaxnoofDSCHs	Maximum number of DSCH for one UE

### 9.1.37.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context ID	M			
Transaction ID	M			
<b>Unsuccessful RL Information Response</b>		1		
RL ID	M			
Cause	M			
Criticality diagnostics	O			

## 9.1.38 RADIO LINK ADDITION REQUEST

### 9.1.38.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Node B Communication Context ID	M			
Transaction ID	M			
<b>RL Information</b>		1..<maxnoofRL-1>		
RL ID	M			
C-Id	M			
Frame Offset	M			
Chip Offset	M			
Diversity Control Field	M			
<b>DL Code Information</b>		1..maxnoofDLCodes		
DL Scrambling code	M			
FDD DL channelisation code number	M			
Initial DL transmission power	O		DL Power	
Maximum DL power	O		DL Power	
Minimum DL power	O		DL Power	
SSDT Cell Identity	O			

Range bound	Explanation
MaxnoofRL	Maximum number of RLs for one UE
MaxnoofDLCodes	Maximum number of DL code information

9.1.38.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Node B Communication Context ID	M			
Transaction ID	M			
<b>UL CTrCH Information</b>		0 to <maxno CTrCH>		
CTrCH ID	M			
<b>UL DPCH Information</b>		0 to <maxnoOfDPCH>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
<b>DL CTrCH Information</b>		0 to <maxno CTrCH>		
CTrCH ID	M			
<b>DL DPCH information</b>		0 to <maxnoOfDPCH>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
<b>RL Information</b>		1		
RL ID	M			
C-Id	M			
Frame Offset	M			
Diversity Control Field	M			
Initial DL Power	O		DL Power	
Maximum DL power	O		DL Power	
Minimum DL power	O		DL Power	

Range bound	Explanation
MaxnoOfDPCH	Maximum number of DPCH in one CTrCH
MaxnoCTrCH	no-Number of CTrCH for one UE.

## 9.1.39 RADIO LINK ADDITION RESPONSE

### 9.1.39.1 FDD message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context ID	M			
Transaction ID	M			
<b>RL Information Response</b>		1..<maxnoofRL-1>		
RL ID	M			
UL interference level	M			
Diversity Indication	M			
CHOICE <i>diversity indication</i>				
<i>Combining</i>				
RL ID	M			Reference RL
<i>Non combining</i>				
<b>DCH Information Response</b>		1..<maxnoofDCHs>		
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
SSDT support indicator	M			
Criticality diagnostics	O			

Range bound	Explanation
<i>MaxnoofDCHs</i>	Maximum number of DCHs per UE
<i>MaxnoofRL</i>	Maximum number of RLs for one UE

9.1.39.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context ID	M			
Transaction ID	M			
<b>RL Information response</b>		1		
RL ID	M			
UL interference level	M			
Diversity Indication	M			
CHOICE <i>diversity indication</i>				
<i>Combining</i>				In TDD it indicates whether the old Transport Bearer shall be reused or not
RL ID	M			Reference RL
<i>Non combining</i>				
<b>DCH Information Response</b>		0..<maxnoofDCHs>		
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
<b>DSCH Information Response</b>		0 .. <MaxnoofDSCHs>		
DSCH ID	M			
Binding ID	M			
Transport Layer Address	M			
<b>USCH Information Response</b>		0 .. <MaxnoofUSCHs>		
USCH ID	M			
Binding ID	M			
Transport Layer Address	M			
Criticality diagnostics	O			

Range bound	Explanation
<i>MaxnoofDCHs</i>	Maximum number of DCHs per UE
<i>MaxnoofDSCHs</i>	Maximum number of DSCHs for one UE
<i>MaxnoofUSCHs</i>	Maximum number of USCHs for one UE



## 9.1.40 RADIO LINK ADDITION FAILURE

### 9.1.40.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context ID	M			
Transaction ID	M			
<b>Unsuccessful RL Information Response</b>		1..<maxnoofRL-1>		
RL ID	M			
Cause	M			
<b>Successful RL Information Response</b>		1..<maxnoofRL-2>		
RL ID	M			
UL interference level	M			
Diversity Indication	M			
CHOICE <i>diversity indication</i>				
<i>Combining</i>				
RL ID	M			Reference RL
<i>Non combining</i>				
<b>DCH Information Response</b>		1..<maxnoofDCHs>		
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
SSDT support indicator	M			
Criticality diagnostics	O			

Range bound	Explanation
<i>MaxnoofDCHs</i>	Maximum number of DCHs per UE
<i>MaxnoofRL</i>	Maximum number of RLs for one UE

### 9.1.40.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context ID	M			
Transaction ID	M			
<b>Unsuccessful RL Information Response</b>		1		
RL ID	M			
Cause	M			
Criticality diagnostics	O			

## 9.1.41 RADIO LINK RECONFIGURATION PREPARE

### 9.1.41.1 FDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantic Description
Message Discriminator	M			
Message Type	M			
Node B Communication Context ID	M			
Transaction ID	M			
<b>UL DPCH Information</b>		0..1		
UL Scrambling code	O			
Min UL Channelisation Code Length	O			
Max Number of UL DPCHs	C – CodeLen			
Puncture Limit	O			For UL
TFCS	O			
UL DPCH Slot Format	O			
SSDT Cell Identity Length	O			
S-Field Length	O			
<b>DL DPCH Information</b>		0..1		
TFCS	O			
DL DPCH Slot Format	O			
TFCI Signalling Mode	O			
TFCI presence	C-Slot Format			
DTX Insertion Point	O			
<b>DCHs to Modify</b>		0..<maxnoof DCHs>		
DCH ID	M			
Transport Format Set	O			For the UL.
Transport Format Set	O			For the DL.
Frame Handling Priority	O			
UL FP Mode	O			
ToAWS	O			
ToAWE	O			
<b>DCHs to Add</b>		0..<maxnoof DCHs>		
DCH ID	M			
DCH Combination Ind	O			
RLC Mode	M			
Transport Format Set	M			For the UL.
Transport Format Set	M			For the DL.
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP Mode	M			
ToAWS	M			
ToAWE	M			
<b>DCHs to Delete</b>		0..<maxnoof DCHs>		
DCH ID	M			
<b>DSCH to modify</b>		0..1		
Transport Format Set	O			For the DL.
RL ID	O			

Frame Handling Priority	O			
ToAWS	O			
ToAWE	O			
<b>DSCH to add</b>		0..1		
Transport Format Set	M			For the DL.
RL ID	M			
Frame Handling Priority	M			
ToAWS	M			
ToAWE	M			
<b>DSCH to Delete</b>		0..1		
RL ID	M			
<b>RL Information</b>		0..<maxnoof RLs>		
RL ID	M			
<b>DL Code Information</b>		0..<maxnoof DLCodes<		
DL Scrambling Code	O			
FDD DL Channelisation Code Number	O			
Maximum DL Power	O		DL Power	
Minimum DL Power	O		DL Power	
SSDT Indication	O			
SSDT Cell Identity	C - SSDTIndON			

Condition	Explanation
SSDTIndON	The IE may be present if the SSDT Indication is set to 'SSDT Active in the UE'.
CodeLen	This IE is present only if "Min UL Channelisation Code length" equals to 4.
SlotFormat	This IE is only present if the DL DPCH slot format is equal to any of the value 12 to 16.

Range Bound	Explanation
MaxnoofDCHs	Maximum number of DCHs for a UE.
MaxnoofRLs	Maximum number of RLs for a UE.
MaxnoofDLCodes	Maximum number of Downlink Channelisation Codes.

9.1.41.2 TDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantic Description
Message Discriminator	M			
Message Type	M			
Node B Communication Context ID	M			
Transaction ID	M			
<b>UL CCTrCH Information</b>		0.. <maxnoof CCTrCHs>		
CCTrCH ID	M			
TFCS	O			
TFCI Coding	O			
Puncture Limit	O			
<b>UL DPCH Information</b>		0.. <maxnoof DPCHs>		
DPCH ID	M			
TDD Channelisation Code	O			
Burst Type	O			
Midamble Shift	O			
Time Slot	O			
TDD Physilca channel Offset	O			
Repetition Period	O			
Repetition Length	O			
TFCI Presence	O			
<b>DL CCTrCH Information</b>		0.. <maxnoof CCTrCHs		
CCTrCH ID	M			
TFCS	O			
TFCI Coding	O			
PunctureLimit				
<b>DL DPCH Information</b>		0.. <maxnoof DPCHs>		
DPCH ID	M			
TDD Channelisation Code	O			
Burst Type	O			
Midamble Shift	O			
Time Slot	O			
TDD Physical Channel Offset	O			
Repetition Period	O			
Repetition Length	O			
TFCI Presence	O			
<b>DCHs to Modify</b>		0..<maxnoof DCHs>		
DCH ID	M			
CCTrCH ID	O			UL CCTrCH in which the DCH is mapped.
CCTrCH ID	O			DL CCTrCH in which the DCH is mapped
Transport Format Set	O			For the UL.
Transport Format Set	O			For the DL.
Frame Handling Priority	O			

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~3G TS 25.433 version 3.0.0 Release 1999~~

UL FP Mode	O			
ToAWS	O			
ToAWE	O			
<b>DCHs to Add</b>		0..<maxnoof DCHs>		
DCH ID	M			
RLC Mode	M			
CCTrCH ID	M			UL CCTrCH in which the DCH is mapped.
CCTrCH ID	M			DL CCTrCH in which the DCH is mapped
DCH Combination Ind	O			
Transport Format Set	M			For the UL.
Transport Format Set	M			For the DL.
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP Mode	M			
ToAWS	M			
ToAWE	M			
<b>DCHs to Delete</b>		0..<maxnoof DCHs>		
DCH ID	M			
<b>DSCH Information to modify</b>		0 .. <Maxnoof DSCHs>		
DSCH ID	M			
CCTrCH ID	O			DL CCTrCH in which the DSCH is mapped
Transport Format Set	O			
Frame handling Priority	O			
ToAWS	O			
ToAWE	O			
<b>DSCH Information to add</b>		0 .. <Maxnoof DSCHs>		
DSCH ID	M			
CCTrCH ID	M			DL CCTrCH in which the DSCH is mapped
Transport Format Set	M			
Frame handling Priority	O			
ToAWS	M			
ToAWE	M			
<b>DSCH Information to delete</b>		0 .. <Maxnoof DSCHs>		
DSCH ID	M			
<b>USCH Information to modify</b>		0 .. <Maxnoof USCHs>		
USCH ID	M			
Transport Format Set	O			
CCTrCH ID	O			UL CCTrCH in which the USCH is mapped
<b>USCH Information to add</b>		0 .. <Maxnoof USCHs>		
USCH ID	M			
CCTrCH ID	M			UL CCTrCH in which the USCH is mapped

X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". 3G TS 25.433 version 3.0.0 Release 1999

Transport Format Set	M			
<b>USCH Information to delete</b>		0 .. <Maxnoof USCHs>		
USCH ID	M			
<b>RL Information</b>		0..1		
RL ID	M			
Maximum Downlink Power	O		DL Power	
Minimum Downlink Power	O		DL Power	

Range Bound	Explanation
<i>MaxnoofDCHs</i>	Maximum number of DCHs for a UE.
<i>MaxnoofCCTrCHs</i>	Maximum number of CCTrCHs for a UE.
<i>Maxnoof DPCHs</i>	Maximum number of DPCHs in one CCTrCH.
<i>MaxnoofDSCHs</i>	Maximum number of DSCHs for one UE
<i>MaxnoofUSCHs</i>	Maximum number of USCHs for one UE

## 9.1.42 RADIO LINK RECONFIGURATION READY

IE/Group name	Presence	Range	IE Type and Reference	Semantic Description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context ID	M			
Transaction ID	M			
<b>RL Information Response</b>		0..<maxnoof RLS>		Only one RL information response group for one group of combined RLs shall be present
RL ID	M			
<b>DCH to be Added</b>		0..<maxnoof DCHs>		Only one DCH per set of coordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
<b>DCH to be Modified</b>		0..<maxnoof DCHs>		Only one DCH per set of coordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
<b>DSCH to be Setup</b>		0..<Maxnoof DSCHs>		
DSCH ID	M			
Binding ID	M			
Transport Layer Address	M			
<b>DSCH to be Modified</b>		0..<Maxnoof DSCHs>		
DSCH ID	M			
Binding ID	M			
Transport Layer Address	M			
<b>USCH to be setup</b>		0 .. <Maxnoof USCHs>		
USCH ID	M			
Binding ID	M			
Transport Layer Address	M			
<b>USCH to be modified</b>		0 .. <Maxnoof USCHs>		
USCH ID	M			
Binding ID	M			
Transport Layer Address	M			
Criticality diagnostics	O			

Range Bound	Explanation
<i>MaxnoofDCHs</i>	Maximum number of DCHs for a UE.
<i>MaxnoofRLs</i>	Maximum number of RLs for a UE.
<i>MaxnoofDSCHs</i>	Maximum number of DSCHs for one UE
<i>MaxnoofUSCHs</i>	Maximum number of USCHs for one UE

### 9.1.43 RADIO LINK RECONFIGURATION FAILURE

IE/Group Name	Presence	Range	IE Type and Reference	Semantic Description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context ID	M			
Transaction ID	M			
Cause	M			
<b>RLs Causing Reconfiguration Failure</b>		<i>0..&lt;maxnoof RLs&gt;</i>		
RL ID	M			
Cause	M			
Criticality diagnostics	O			

Range Bound	Explanation
<i>MaxnoofRLs</i>	Maximum number of RLs for a UE.

### 9.1.44 RADIO LINK RECONFIGURATION COMMIT

IE/Group Name	Presence	Range	IE Type and Reference	Semantic Description
Message Discriminator	M			
Message type	M			
Node B Communication Context ID	M			
Transaction ID	M			
CFN	M			

### 9.1.45 RADIO LINK RECONFIGURATION CANCEL

IE/Group Name	Presence	Range	IE Type and Reference	Semantic Description
Message Discriminator	M			
Message type	M			
Node B Communication Context ID	M			
Transaction ID	M			



## 9.1.46 RADIO LINK RECONFIGURATION REQUEST

### 9.1.46.1 FDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantic Description
Message Discriminator	M			
Message Type	M			
Node B Communication Context ID	M			
Transaction ID	M			
<b>UL DPCH Information</b>		0..1		
TFCS	O			For the UL.
<b>DL DPCH Information</b>		0..1		
TFCS	O			For the DL.
TFCI Signalling Mode	O			
<b>DCHs to Modify</b>		0..<maxnoof DCHs>		
DCH ID	M			
Transport Format Set	O			For the UL.
Transport Format Set	O			For the DL.
Frame Handling Priority	O			
UL FP Mode	O			
ToAWS	O			
ToAWE	O			
<b>DCHs to Add</b>		0..<maxnoof DCHs>		
DCH ID	M			
DCH Combination Ind	O			
RLC Mode	M			
Transport Format Set	M			For the UL.
Transport Format Set	M			For the DL.
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP mode	M			
ToAWS	M			
ToAWE	M			
<b>DCHs to Delete</b>		0..<maxnoof DCHs>		
DCH ID	M			
<b>DSCH to Modify</b>		0..1		
Transport Format Set	O			For the DL.
RL ID	O			
Frame Handling Priority	O			
ToAWS	O			
ToAWE	O			
<b>DSCH to Add</b>		0..1		
Transport Format Set	M			For the DL.
RL ID	M			
Frame Handling Priority	M			
ToAWS	M			
ToAWE	M			
<b>DSCH to Delete</b>		0..1		
RL ID	M			
<b>Radio Link Information</b>		0..<maxnoof		

X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". 3G TS 25.433 version 3.0.0 Release 1999

		<i>RLs&gt;</i>		
RL ID	M			
Maximum DL Power	O		DL Power	
Minimum DL Power	O		DL Power	

Range Bound	Explanation
<i>MaxnoofDCHs</i>	Maximum number of DCHs for a UE.
<i>MaxnoofRLs</i>	Maximum number of RLs for a UE.

9.1.46.2 TDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantic Description
Message Discriminator	M			
Message Type	M			
Node B Communication Context ID	M			
Transaction ID	M			
<b>UL CCTrCH Information</b>		0..<maxnoof CCTrCHs>		
CCTrCH ID	M			
TFCS	O			
Puncture Limit	O			
<b>DL CCTrCH Information</b>		0..<maxnoof CCTrCHs>		
CCTrCH ID	M			
TFCS	O			
Puncture Limit	O			
<b>DCHs to Modify</b>		0..<maxnoof DCHs>		
DCH ID	M			
CCTrCH ID	O			UL CCTrCH in which the DCH is mapped.
CCTrCH ID	O			DL CCTrCH in which the DCH is mapped
Transport Format Set	O			For the UL.
Transport Format Set	O			For the DL.
Frame Handling Priority	O			
UL FP Mode	O			
ToAWS	O			
ToAWE	O			
<b>DCHs to Add</b>		0..<maxnoof DCHs>		
DCH ID	M			
RLC Mode	M			
CCTrCH ID	M			UL CCTrCH in which the DCH is mapped.
CCTrCH ID	M			DL CCTrCH in which the DCH is mapped
DCH Combination Ind	O			
Transport Format Set	M			For the UL.
Transport Format Set	M			For the DL.
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP Mode	M			
ToAWS	M			
ToAWE	M			
<b>DCHs to Delete</b>		0..<maxnoof DCHs>		
DCH ID	M			
<b>DSCH Information to modify</b>		0 .. <Maxnoof DSCHs>		
DSCH ID	M			
CCTrCH ID	O			DL CCTrCH in which the DSCH is mapped
Transport Format Set	O			

Frame handling Priority	O			
ToAWS	O			
ToAWE	O			
<b>DSCH Information to add</b>		0 .. <Maxnoof DSCHs>		
DSCH ID	M			
CCTrCH ID	M			DL CCTrCH in which the DSCH is mapped
Transport Format Set	M			
Frame handling Priority	O			
ToAWS	M			
ToAWE	M			
<b>DSCH Information to delete</b>		0 .. <Maxnoof DSCHs>		
DSCH ID	M			
<b>USCH Information to modify</b>		0 .. <Maxnoof USCHs>		
USCH ID	M			
CCTrCH ID	O			UL CCTrCH in which the USCH is mapped
Transport Format Set	O			
<b>USCH Information to add</b>		0 .. <Maxnoof USCHs>		
USCH ID	M			
CCTrCH ID	M			UL CCTrCH in which the USCH is mapped
Transport Format Set	M			
<b>USCH Information to delete</b>		0 .. <Maxnoof USCHs>		
USCH ID	M			
<b>RL Information</b>		0..1		
RL ID	M			
Maximum Downlink Power	O			DL Power
Minimum Downlink Power	O			DL Power

Range bound	Explanation
<i>MaxnoofDCHs</i>	Maximum number of DCHs for a UE.
<i>MaxnoofCCTrCHs</i>	Maximum number of CCTrCHs for a UE.
<i>MaxnoofDSCHs</i>	Maximum number of DSCHs for one UE
<i>MaxnoofUSCHs</i>	Maximum number of USCHs for one UE

## 9.1.4847 RADIO LINK RECONFIGURATION RESPONSE

IE/Group Name	Presence	Range	IE Type and Reference	Semantic Description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context ID	M			
Transaction ID	M			
<b>RL Information Response</b>		0..<maxnoof RLs>		Only one RL information response group for one group of combined RLs shall be present
RL ID	M			
<b>DCH to be Added</b>		0..<maxnoof DCHs>		Only one DCH per set of coordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
<b>DCH to be Modified</b>		0..<maxnoof DCHs>		Only one DCH per set of coordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
<b>DSCH to be Setup</b>		0..<Maxnoof DSCHs>		
DSCH ID	M			
Binding ID	M			
Transport Layer Address	M			
<b>DSCH to be Modified</b>		0..<Maxnoof DSCHs>		
DSCH ID	M			
Binding ID	M			
Transport Layer Address	M			
<b>USCH to be setup</b>		0 .. <Maxnoof USCHs>		
USCH ID	M			
Binding ID	M			
Transport Layer Address	M			
<b>USCH to be modified</b>		0 .. <Maxnoof USCHs>		
USCH ID	M			
Binding ID	M			
Transport Layer Address	M			
Criticality diagnostics	O			

Range bound	Explanation
<i>MaxnoofDCHs</i>	Maximum number of DCHs for a UE.
<i>MaxnoofRLs</i>	Maximum number of RLs for a UE.
<i>MaxnoofDSCHs</i>	Maximum number of DSCHs for one UE
<i>MaxnoofUSCHs</i>	Maximum number of USCHs for one UE

### 9.1.48 RADIO LINK DELETION REQUEST

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Node B Communication Context ID	M			
Transaction ID	M			
<b>RL Information</b>		1..<maxnoofRLs>		
RL ID	M			

Range bound	Explanation
MaxnoofRLs	Maximum number of radio links for one UE

### 9.1.49 RADIO LINK DELETION RESPONSE

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context ID	M			
Transaction ID	M			
Criticality diagnostics	O			

### 9.1.50 DL POWER CONTROL REQUEST ([FDD-only])

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Node B Communication Context ID	M			
Transaction ID	M			
CHOICE <i>procedure scope</i>				
"ALL RL's"				
DL Reference Power	M		DL power	
"Individual RL's"				
<b>DL Reference Power Information</b>		1..<maxnoofRLs>		
RL ID	M			
DL Reference Power	M		DL power	

Range Bound	Explanation
MaxnoofRLs	Maximum number of Radio Links for a UE

### 9.1.51 DEDICATED MEASUREMENT INITIATION REQUEST

Information Element/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Discriminator	M			
Message Type	M			
Node B Communication Context Id	M			
Transaction Id	M			
Measurement Id	M			
Dedicated Measurement Object Type	M			
CHOICE <i>Dedicated Measurement Object Type</i>				
"RL"				
<b>RL Information</b>		1..<maxno ofRLs>		
RL-id	M			
DPCH ID	O			
Dedicated Measurement Type	M			
Measurement Characteristics	M			
Report Characteristics	M			

Range	Explanation
<i>Maxno ofRLs</i>	Maximum number of individual RL's a measurement can be started on.

### 9.1.52 DEDICATED MEASUREMENT INITIATION RESPONSE

Information Element/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context Id	M			
Transaction Id	M			
Measurement Id	M			
CHOICE <i>Dedicated Measurement Object Type</i>				Dedicated Measurement Object Type the measurement was initiated with
"RL"				
<b>RL Information</b>		1..<maxno ofRLs>		
RL-id	M			
DPCH ID	O			
Dedicated Measurement Value	M			
"ALLRL"				
Dedicated Measurement Value	M			
CFN	O			Dedicated Measurement Time Reference
Criticality diagnostics	O			

X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". 3G TS 25.433 version 3.0.0 Release 1999

Range	Explanation
MaxnoofRLs	Maximum number of individual RL's the measurement can be started on.

### 9.1.53 DEDICATED MEASUREMENT INITIATION FAILURE

Information Element/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context Id	M			
Transaction Id	M			
Measurement Id	M			
Cause	M			
Criticality diagnostics	O			

### 9.1.54 DEDICATED MEASUREMENT REPORT

Information Element/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context Id	M			
Transaction Id	M			
Measurement Id	M			
CHOICE <i>Dedicated Measurement Object Type</i>				Dedicated Measurement Object Type the measurement was initiated with
"RL"				
<b>RL Information</b>		1..<maxnoofRLs>		
RL-id	M			
DPCH ID	O			
Dedicated Measurement Value	M			
"ALLRL"				
Dedicated Measurement Value	M			
CFN	O			Dedicated Measurement Time Reference

Range	Explanation
MaxnoofRLs	Maximum number of individual RL's the measurement can be started on.



### 9.1.55 DEDICATED MEASUREMENT TERMINATION REQUEST

Information Element/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Discriminator	M			
Message Type	M			
Node B Communication Context Id	M			
Transaction Id	M			
Measurement Id	M			

### 9.1.56 DEDICATED MEASUREMENT FAILURE INDICATION

Information Element/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context Id	M			
Transaction Id	M			
Measurement Id	M			
Cause	M			

### 9.1.57 RADIO LINK FAILURE INDICATION

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
CRNC Communication Context ID	M			
<b>Radio Link Information</b>		1 to <MaxnoofRLs>		
RL ID	M			
Cause	M			

Range bound	Explanation
MaxnoofRLs	Maximum <a href="#">no-number</a> of RLs for one UE.

### 9.1.58 RADIO LINK RESTORE INDICATION

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
CRNC Communication Context ID	M			
<b>Radio Link Information</b>		1 to <MaxnoofRLs>		
RL ID	M			

X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". 3G TS 25.433 version 3.0.0 Release 1999

Range bound	Explanation
MaxnoofRLs	Maximum <del>no</del> number of RLs for one UE.

### 9.1.59 COMPRESSED MODE PREPARE ([FDD-only])

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
<del>Node B</del> NodeB communication context ID	M			
Transaction ID	M			
TGP1	M		Gap Period	Refer to 25.215
TGP2	O		Gap Period	Refer to 25.215
TGL	M			
TGD	M			
PD	M			
UL/DL compressed mode selection	M			
Compressed mode method	M			
Gap Position Mode	M			
SN	C-Flex		TimeSlot	
Downlink Frame Type	M			
Scrambling Code Change	C-SF/2			
Power Control Mode	M			
Power Resume Mode	M			
UL delta Eb/No	M			
UL delta Eb/No after	M			

Condition	Explanation
Flex	This IE is present only if "Gap position Mode" equals to 'flexible'.
SF/2	This IE is present only if Compressed Mode Method equals to SF/2

X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". 3G TS 25.433 version 3.0.0 Release 1999

### 9.1.60 COMPRESSED MODE READY ([FDD-only])

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
CRNC communication context ID	M			
Transaction ID	M			
Criticality diagnostics	O			

### 9.1.61 COMPRESSED MODE COMMIT ([FDD-only])

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
<del>Node B</del> NodeB communication context ID	M			
Transaction ID	M			
CFN	M			

### 9.1.62 COMPRESSED MODE FAILURE ([FDD-only])

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
CRNC communication context ID	M			
Transaction ID	M			
Cause	M			
Criticality diagnostics	O			

### 9.1.63 COMPRESSED MODE CANCEL ([FDD-only])

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
<a href="#">Node B NodeB</a> communication context ID	M			
Transaction ID	M			

### 9.1.64 ERROR INDICATION

Information Element/IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Message Discriminator	M			
<a href="#">CRNC Communication Context Id</a>	C-ifUL			
<a href="#">Node B Communication Context Id</a>	C-ifDL			
Transaction Id	M			
Cause	C-ifalone			
<a href="#">CRNC Communication Context Id</a>	C-ifUL			
<a href="#">Node B Communication Context Id</a>	C-ifDL			
Criticality diagnostics	C-ifalone			

Condition	Explanation
C-ifDL	This IE is only present when message is transmitted by RNC
C-ifUL	This IE is only present when message is transmitted by node B
C-ifalone	At least either of Cause IE or Criticality Diagnostics IE shall be present.

## 9.2 Information Element Functional Definition and Contents

### 9.2.1 Common parameters

#### 9.2.1.1 Add/Delete Indicator

The add/delete indicator shall notify the RNC whether the associated resource has been added to or removed from the Node B.

Information Element/IE/Group Name	Presence	Range	IE type and reference	Semantics description
Add/Delete Indicator			ENUMERATED(Add, Delete)	

### 9.2.1.2 Availability Status

The availability status is used to indicate more detailed information of the availability of the resource. In accordance with [6], following values are defined. If the value of this attribute is an empty set, this implies that none of the status conditions described in [6] are present.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Availability Status			ENUMERATED (empty, in test, failed, power off, off line, off duty, dependency, degraded, not installed, log full, ...)	

### 9.2.1.3 BCCH Modification Time

Indicates the time after which the new system information shall be applied on BCCH.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
BCCH Modification Time			Integer (0, 2, 4, ...,4095)	All even SFN values are allowed The tabular description is a direct copy from TS 25.331 CR 078

### 9.2.1.4 Binding ID

The Binding ID is the identifier of a user data stream. It is allocated at Node B and it is unique for each transport bearer under establishment to/from the Node B. The length of this parameter is variable.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Binding ID			Octetstring (1..4,...)	

### 9.2.1.5 Blocking Priority Indicator

The Blocking priority indicator shall indicate the immediacy with which a resource should be blocked from use. The following priority classes shall be supported in the Blocking priority indicator.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Blocking Priority Indicator			ENUMERATED (High, Normal, Low)	High priority: Block resource immediately. Normal priority: Block resource when idle or upon timer expiry. Low priority: Block resource when idle.

### 9.2.1.6 Cause

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Cause group	M		Enumerated (Radio Network Layer, Transport Layer, Protocol, Misc)	
<i>CHOICE Cause group</i>				
<i>Radio Network Layer Cause</i>	M		Enumerated (unknown C-ID, Cell not available, Power level not supported, UL scrambling code already in use, DL radio resources not available, UL radio resources not available, RL Already Activated/allocated Node B Resources Unavailable Insufficient physical channel resources Measurement not supported for the object, Macrodiversity combining not possible, Reconfiguration not allowed, Requested configuration not supported <a href="#">Synchronization Synchronisation failure, SIB Origination in Node B not Supported.</a> Unspecified)	
<i>Transport Layer Cause</i>	M		Enumerated (Transport link failure, Transmission port not available, Transport resource unavailable Unspecified)	
<i>Protocol Cause</i>			Enumerated (Transaction not allowed, Transfer syntax error, Abstract syntax error (reject), Abstract syntax error (ignore and notify), Message not compatible with receiver state Semantic error Unspecified)	
<i>Misc Cause</i>	M		Enumerated (Control processing overload Hardware failure, O&M intervention, Not enough user plane processing resources, Unspecified)	

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~, ~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~, ~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~, ~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~, ~~3G TS 25.433 version 3.0.0 Release 1999~~

### 9.2.1.7 CFN

Connection Frame Number for the radio connection, see ref. [25.402].

<del>Information Element/</del> IE/Group Name	Presence	Range	IE type and reference	Semantics description
CFN			Integer (0..255)	

### 9.2.1.8 C-ID

The C-ID (Cell identifier) is the identifier of a cell in one RNC.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
C-ID			INTEGER (0...65535)	

### 9.2.1.9 Common Measurement Object Type

The Common Measurement Object type indicates the type of object that the measurement is to be performed on.

<del>Information Element/</del> IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Dedicated Measurement Object Type			ENUMERATED (CELL, RACH,...)	

### 9.2.1.10 Common Measurement Type

The Common Measurement Type identifies which measurement that shall be performed.

<del>Information Element/</del> IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Common Measurement Type			ENUMERATED (RSSI, Transmitted Carrier Power, Acknowledged RA tries, Timeslot ISCP,...)	

### 9.2.1.11 Common Measurement Value

The Common Measurement Value shall be the most recent value for this measurement, for which the reporting criteria were met.

X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~3G TS 25.433 version 3.0.0 Release 1999~~

Information Element / IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Transmitted Carrier Power Value	O		Enumerated(-35 .. 15), step 0.1 dB	
RSSI Value	O		Enumerated(-30..-100) step 0.1	
Acknowledged RA tries Value	O		TBD	The number of L1 acknowledged random access tries per transmission time interval on the PCCPCH.
Timeslot ISCP (TDD only)	O		TBD	

<Editors Note: Some adjustment of the ranges for these measurements might be needed as they await a decision on range for this measurement in TSG RAN WG1>

### 9.2.1.12 Common Physical Channel Id

Common Physical Channel Id is the unique identifier for one common physical channel within a cell.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Common Physical Channel ID			Integer(0..255)	

### 9.2.1.13 Common Transport Channel Id

Common Transport Channel Id is the unique identifier for one common transport channel within a cell.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Common Transport Channel ID			Integer(0..255)	

### 9.2.1.14 Communication Control Port ID

A Communication Control Port corresponds to one signalling bearer between the RNC and Node B for the control of Node B Communication Contexts. Node B may have multiple Communication Control Ports (one per Traffic Termination Point). The Communication Control Port is selected at creation of the Node B Communication Context. The Communication Control Port ID is the identifier of the Communication Control Port.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Communication Control Port ID			INTEGER (0..65535)	

### 9.2.1.15 Configuration Generation ID

The Configuration Generation ID describes the generation of the configuration of logical resources in a cell.



X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". 3G TS 25.433 version 3.0.0 Release 1999

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Configuration Generation ID			Integer(0..255)	Value '0' means "No configuration". At possible wraparound of the ID counter in CRNC the value '0' shall not be used.

### 9.2.1.16 Criticality diagnostics

IE/Group Name	Presence	Range	IE type and reference	Semantics description
<b>Criticality Diagnostics</b>				
_Procedure Code	O		INTEGER (0..255)	Procedure code is to be used if Criticality diagnostics is part of Error Indication procedure, and not within the response message of the same operation that caused the error
_Triggering Message	O		ENUMERATED (initiating message, successful outcome, unsuccessful outcome, outcome)	The Triggering Message is used only if the Criticality diagnostics is part of Error Indication except when the procedure code is not understood.
_Criticality Response	O		ENUMERATED (reject, ignore, notify)	This Criticality response IE is used for reporting the Criticality of the Triggering message
_Transaction Id	O		INTEGER (0..255)	
<b>Information Element Criticality Diagnostics</b>		1 to <maxnoof errors>		
_Criticality Response	M		ENUMERATED (reject, ignore, notify)	The Criticality response IE is used for reporting the criticality of the triggering IE. The value 'ignore' shall never be used.
_IE Id	M		INTEGER (0..65535)	The IE Id of the not understood IE

Range bound	Explanation
<i>maxnooferrors</i>	Maximum <i>no-number</i> of IE errors allowed to be reported with a single message. The value for maxnooferrors is 256.

### 9.2.1.17 CRNC Communication Context ID

The CRNC Communication Context ID is the identifier of the Communication Context in the CRNC.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
CRNC Communication Context ID			INTEGER (0..2 <sup>20</sup> -1)	

### 9.2.1.18 DCH Combination Indicator

The DCH Combination Indicator is used to indicate the multiplexing of more than one DCH on transport bearer. The value should be unique for each group of coordinated DCH's per request message.

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~ ~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~ ~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~ ~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~ ~~3G TS 25.433 version 3.0.0 Release 1999~~ ~~3G TS 25.433 v3.0.0 (2000-01)~~

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DCH Combination Ind			INTEGER (0..255)	

### 9.2.1.19 DCH ID

The DCH ID is the identifier of an active dedicated transport channel. It is unique for each active DCH among the active DCHs simultaneously allocated for the same UE.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DCH ID			INTEGER (0..255)	

### 9.2.1.20 DL Power

The DL Power IE indicates a power level relative to the [FDD-primary CPICH power] [TDD-primary CCPCH power] configured in a cell.

<del>Information Element</del> IE/Group Name	Presence	Range	IE type and reference	Semantics description
DL Power			Enumerated(-35..+15dB)	Step 0.1dB

### 9.2.1.21 Dedicated Measurement Object Type

The Dedicated Measurement Object type indicates the type of object that the measurement is to be performed on.

<del>Information Element</del> IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Dedicated Measurement Object Type			ENUMERATED (RL,ALLRL, ...)	

### 9.2.1.22 Dedicated Measurement Type

The Dedicated Measurement Type identifies the type of measurement that shall be performed.

<del>Information Element</del> IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Dedicated Measurement Type			ENUMERATED (SIR, SIR Error, Transmitted Code Power, RSCP,...)	RSCP is used by TDD only.

Note. For definitions of the measurement types refer to 25.215 and 25.225.

### 9.2.1.23 Dedicated Measurement Value

The Dedicated Measurement Value shall be the most recent value for this measurement, for which the reporting criteria were met.

X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". 3G TS 25.433 version 3.0.0 Release 1999

Information Element / IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Dedicated measurement Value				
SIR value	O		Enumerated(-10 .. 20), step 0.1 dB	
SIR error Value	O		Enumerated (-10 .. 10), step 0.1 dB	If SIRerror<=-10, SIR error Value shall be set to -10 If SIRerror=>10, SIR error Value shall be set to 10
Transmitted Code Power Value	O		Enumerated (-35 .. 15), step 0.1 dB	Relative to CPICH
RSCP	O		TBD	TDD only.

<Editors Note: Some adjustment of the ranges for these measurements might be needed as they await a decision on range for this measurement in TSG RAN WG1>

#### 9.2.1.24 DSCH ID

The DSCH ID uniquely identifies a DSCH within a Node B Communication Context.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
DSCH ID			INTEGER (0..255)	

#### 9.2.1.25 DSCH Transport Format Set

This parameter defines the transport format set for DSCH.

Note: the parameter need to be defined. It may correspond to the DL TFS defined for DCH

#### 9.2.1.26 DSCH Transport Format Combination Set

This parameter defines the transport format combination set for DSCH.

Note: to be defined. Each DSCH TFCI also indicates the code to be used

Note: the parameter need to be defined. It may correspond to the DL TFS defined for DCH

#### 9.2.1.27 Frame Handling Priority

This parameter indicates the priority level to be used during the lifetime of the DCH/DSCH for temporary restriction of the allocated resources due overload reason.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Frame Handling Priority			INTEGER (0..15)	0=lower priority, 15=higher priority

#### 9.2.1.28 Frame Offset

Frame Offset is the required offset between the dedicated channel downlink transmission frames (CFN, Connection Frame Number) and the broadcast channel frame offset (Cell Frame Number). The Frame\_offset is used in the translation between Connection Frame Number (CFN) on lub/lur and least significant 8 bits of SFN (System Frame Number) on Uu. The Frame Offset is UE and cell specific.

X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". 3G TS 25.433 version 3.0.0 Release 1999

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Frame Offset			INTEGER (0..255)	Frames

### 9.2.1.29 IB\_SG

Segment which is part of an Information Block.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
IB SG			Bit String	Contents defined in ref:25.331.

### 9.2.1.30 IB\_SG\_POS

First position of an Information Block segment in the SFN cycle (IB\_SG\_POS < IB\_SG\_REP).

IE/Group Name	Presence	Range	IE type and reference	Semantics description
IB SG POS			INTEGER (0..2 <sup>12</sup> -1)	

### 9.2.1.31 IB\_SG\_REP

Repetition distance for an Information Block segment. The segment shall be transmitted when SFN mod IB\_SG\_REP = IB\_SG\_POS.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
IB SG REP			INTEGER (16, 32, 64, 128, 256, 512, 1024, 2048)	Repetition period for the IB segment in frames

### 9.2.1.32 IB Type

The IB type identifies a specific system information block.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
IB Type			Enumerated (MIB, SIB1, SIB2, ... SIB12, ...)	Complete R99 SIB range still TBD.

### 9.2.1.33 Indication Type

The indication type shall indicate the category of a failure with respect to its impact on the logical resources supported at Node B.

X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". 3G TS 25.433 version 3.0.0 Release 1999

Information Element / IE/Group Name	Presence	Range	IE type and reference	Semantics description
Indication Type			ENUMERATED (No Failure, Service Impacting, Cell Control,...)	Service Impacting – The failure has impacted on the logical resources supported at Node B.  Cell Control – The failure has impacted on the ability for the cell parameters to be administered or O&M functions performed.

### 9.2.1.34 Local Cell ID

The local cell ID represents resources in Node B that can be used for the configuration of a cell.

Information Element / IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Local Cell ID			INTEGER(0 ..268435455)	

### 9.2.1.35 Maximum DL Power Capability

This parameter indicates the maximum DL power capability for a local cell within Node B.

Information Element / IE/Group Name	Presence	Range	IE type and reference	Semantics description
Maximum DL Power Capability			ENUMERATED(0...50)	dBm, granularity 1 dBm

### 9.2.1.36 Maximum Transmission Power

Maximum Transmission Power is maximum power for all downlink channels added together, that is allowed to be used simultaneously in a cell.

Information Element / IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Maximum transmission Power			ENUMERATED(0, 1,2 ..50)	Unit dBm  Granularity 1 dB

### 9.2.1.37 Measurement ID

The Measurement Id uniquely identifies any measurement per (Node B- or communication) control port.

Information Element / IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Measurement ID			Integer(0 .. 2^20-1)	

### 9.2.1.38 Measurement Characteristics

The Measurement Characteristics indicates how the measurement shall be performed.

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". 3G TS 25.433 version 3.0.0 Release 1999~~

Information Element / IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
<b>Measurement Characteristics</b>				
Measurement Frequency	M		TBD	
Averaging Duration	M		TBD	

Editors Note: The exact definition and structure is this information element awaits decisions in TSG RAN WG2.

### 9.2.1.39 Report Characteristics

The report characteristics, defines how the reporting shall be performed.

Information Element / IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
<b>Report characteristics</b>				
Report characteristics type			ENUMERATED (On Demand, Periodic, Event A, Event B, Event C, Event D, Event E, Event F)	
<b>Periodic Report Information</b>	C – Periodic			
Report Periodicity	M		ENUMERATED (10ms...1min) step 10ms, (1min...1hr) step 1min	The frequency with which the Node B shall send measurement reports. First working assumption!
<b>Event A</b>	C – Event A			
Measurement Threshold	M		TBD	The threshold for which the Node B shall trigger a measurement report.
Measurement Hysteresis Time	O		ENUMERATED (10ms...1min) step 10ms,...	
<b>Event B</b>	C – Event B			
Measurement Threshold	M		TBD	The threshold for which the Node B shall trigger a measurement report.
Measurement Hysteresis Time	O		ENUMERATED (10ms...1min) step 10ms,...	
<b>Event C</b>	C – Event C			
Measurement Increase Threshold	M		TBD	
Measurement Change Time	M		ENUMERATED (10ms...1min) step 10ms,...	The time the measurement entity shall rise on (in ms), in order to trigger a measurement report.
<b>Event D</b>	C – Event D			
Measurement Decrease Threshold	M		TBD	
Measurement Change Time	M		ENUMERATED (10ms...1min) step 10ms,...	The time the measurement entity shall fall (in ms), in order to trigger a measurement report.
<b>Event E</b>	C – Event E			
Measurement Threshold 1	M		TBD	
Measurement Threshold	O		TBD	

2				
Measurement Hysteresis Time	O		ENUMERATED (10ms...1min) step 10ms,...	The hysteresis time in ms
Report Periodicity	O		ENUMERATED (10ms...1min) step 10ms, (1min...1hr) step 1min	The frequency with which the Node B shall send measurement reports.
<b>Event F</b>	C – Event F			
Measurement Threshold 1	M		TBD	
Measurement Threshold 2	O		TBD	
Measurement Hysteresis Time	O		ENUMERATED (10ms...1min) step 10ms,...	The hysteresis time in ms
Report Periodicity	O		ENUMERATED (10ms...1min) step 10ms, (1min...1hr) step 1min	The frequency with which the Node B shall send measurement reports.

Editors note: Encoding of threshold TBD.

Condition	Explanation
C-Periodic	Valid if <i>Report Characteristics Type</i> IE indicates "periodic"
C-Event A	Valid if <i>Report Characteristics Type</i> IE indicates "Event A"
C-Event B	Valid if <i>Report Characteristics Type</i> IE indicates "Event B"
C-Event C	Valid if <i>Report Characteristics Type</i> IE indicates "Event C"
C-Event D	Valid if <i>Report Characteristics Type</i> IE indicates "Event D"
C-Event E	Valid if <i>Report Characteristics Type</i> IE indicates "Event E"
C-Event F	Valid if <i>Report Characteristics Type</i> IE indicates "Event F"

#### 9.2.1.40 Message discriminator

This field is used to discriminate between Dedicated NBAP and Common NBAP messages.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator			ENUMERATED (Common, Dedicated)	

#### 9.2.1.41 Message Type

The Message Type uniquely identifies the message being sent.



X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)" X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)" X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)" 3G TS 25.433 version 3.0.0 Release 1999

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type			ENUMERATED ( COMMON TRANSPORT CHANNEL SETUP REQUEST, COMMON TRANSPORT CHANNEL SETUP RESPONSE, COMMON TRANSPORT CHANNEL SETUP FAILURE, COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST, COMMON TRANSPORT CHANNEL RECONFIGURATION RESPONSE, COMMON TRANSPORT CHANNEL RECONFIGURATION FAILURE, COMMON TRANSPORT CHANNEL DELETION REQUEST, COMMON TRANSPORT CHANNEL DELETION RESPONSE, BLOCK RESOURCE REQUEST, BLOCK RESOURCE RESPONSE, BLOCK RESOURCE FAILURE, UNBLOCK RESOURCE INDICATION, AUDIT REQUIRED INDICATION AUDIT REQUEST AUDIT RESPONSE COMMON MEASUREMENT INITIATION REQUEST, COMMON MEASUREMENT INITIATION RESPONSE, COMMON MEASUREMENT INITIATION FAILURE, COMMON MEASUREMENT REPORT, COMMON MEASUREMENT TERMINATION REQUEST, COMMON MEASUREMENT TERMINATION FAILURE INDICATION, CELL SETUP REQUEST, CELL SETUP RESPONSE, CELL SETUP FAILURE, CELL RECONFIGURATION REQUEST, CELL RECONFIGURATION RESPONSE, CELL RECONFIGURATION FAILURE, CELL DELETION REQUEST, CELL DELETION RESPONSE, RESOURCE STATUS INDICATION, SYSTEM INFORMATION UPDATE REQUEST, SYSTEM INFORMATION UPDATE RESPONSE, SYSTEM INFORMATION UPDATE FAILURE, RL SETUP REQUEST, RL SETUP RESPONSE, RL SETUP FAILURE, RL ADDITION REQUEST, RL ADDITION RESPONSE, RL ADDITION FAILURE, RL RECONFIGURATION PREPARE, RL RECONFIGURATION READY, RL RECONFIGURATION FAILURE, RL RECONFIGURATION COMMIT, RL RECONFIGURATION CANCEL, RL RECONFIGURATION REQUEST, RL RECONFIGURATION RESPONSE, RL DELETION REQUEST, RL DELETION RESPONSE, DL POWER CONTROL REQUEST, DEDICATED MEASUREMENT INITIATION REQUEST, DEDICATED MEASUREMENT INITIATION RESPONSE, DEDICATED MEASUREMENT INITIATION FAILURE, DEDICATED MEASUREMENT REPORT, DEDICATED MEASUREMENT TERMINATION REQUEST, DEDICATED MEASUREMENT TERMINATION FAILURE INDICATION,	Future extensions shall be possible

X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". 3G TS 25.433 version 3.0.0 Release 1999

			RL FAILURE INDICATION, RL RESTORE INDICATION, COMPRESSED MODE PREPARE, COMPRESSED MODE READY, COMPRESSED MODE COMMIT, COMPRESSED MODE FAILURE, COMPRESSED MODE CANCEL ERROR INDICATION, ...)	
--	--	--	--	--

#### 9.2.1.42 Minimum Spreading Factor

This parameter indicates the minimum spreading factor supported at a cell within the Node B.

Information Element / IE/Group Name	Presence	Range	IE type and reference	Semantics description
Minimum Spreading Factor			Enumerated(4, 16, 32, 64, 128, 256, 512)	

#### 9.2.1.43 Node B Communication Context ID

The Node B Communication Context ID is the identifier of the Communication Context in the Node B, it corresponds to the dedicated resources which are necessary for an UE using one or more dedicated channels in a given Node B.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Node B Communication Context ID			INTEGER (0..2 <sup>20</sup> -1)	2 <sup>20</sup> -1 is reserved value to indicate all the existing and future Node B communication contexts that can be reached by the communication control port (All NBCC).

#### 9.2.1.44 Payload CRC presence

This parameter indicates whether FP payload 16 bit CRC is used or not.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Payload CRC Presence Indicator			ENUMERATED (CRC Included, CRC not included)	

#### 9.2.1.45 Puncture limit

The Puncture limit limits the amount of puncturing that can be applied in order to minimise the number of dedicated physical channels.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UL puncture limit			INTEGER (0..100)	%

### 9.2.1.46 Resource Operational State

The resource operational state is used to indicate the current operational state of the associated resource following a Node B failure.

Information Element Name	IE/Group	Presence	Range	IE type and reference	Semantics description
Resource Operational State				ENUMERATED(Enabled, Disabled)	When a resource is marked as disabled, then its child resources are implicitly disabled. Cell Resource hierarchy can be referred to [6].

### 9.2.1.47 RLC Mode

This parameter defines the RLC mode of the logical channels multiplexed on the transport channel.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
RLC mode			ENUMERATED(Acknowledged Mode, Unacknowledged Mode, Transparent Mode)	

### 9.2.1.48 RL ID

The RL ID is the unique identifier for one RL associated with a UE.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
RL ID			INTEGER (0..31)	

### 9.2.1.49 Segment Type

Indicates the type of segment of the SIB.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Segment Type			Enumerated (First, Subsequent, Last, Complete)	

### 9.2.1.50 SIB Deletion Indicator

Indicates if the SIB shall be deleted or not.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SIB Deletion Indicator			Enumerated(NoDeletion, Deletion)	

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". 3G TS 25.433 version 3.0.0 Release 1999~~ ~~3G TS 25.433 v3.0.0 (2000-01)~~

### 9.2.1.51 SIB Originator

Indicates if the Node B shall fill in the SIB information or not.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SIB Originator			Enumerated( <a href="#">NodeBNodeB</a> , CRNC)	

### 9.2.1.52 Shutdown Timer

The shutdown timer shall indicate the length of time available to the CRNC to perform the block of a resource when a Normal priority block is requested.

<del>Information Element</del> IE/Group Name	Presence	Range	IE type and reference	Semantics description
Shutdown Timer			INTEGER(1. .3600)	Value in seconds

### 9.2.1.53 TFCI Presence

The TFCI Presence parameter indicates whether the TFCI shall be included.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TFCI presence			ENUMERATED (Present, not present)	

### 9.2.1.54 TFCS (Transport Format Combination Set)

The Transport Format Combination Set is defined as a set of Transport Format Combinations on a Coded Composite Transport Channel. It is the allowed Transport Format Combinations of the corresponding Transport Channels. The DL Transport Format Combination Set is applicable for DL Transport Channels.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TFCS		1 to <maxnoofTFCS>		The first instance of the parameter corresponds to TFC zero, the second to 1 and so on.
CTFC	M		INTEGER(0. .MaxCTFC-1)	Integer number calculated according to TS 25.331

Range bound	Explanation
MaxnoofTFCS	The maximum number of Transport Format Combinations (1024).
MaxCTFC	Maximum number of the CTFC value is calculated according to the following: $\sum_{i=1}^I (L_i - 1)P_i$ with the notation according to TS 25.331

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". 3G TS 25.433 version 3.0.0 Release 1999~~

### 9.2.1.55 ~~TFS~~ (Transport Format Set)

The Transport Format Set is defined as the set of Transport Formats associated to a Transport Channel, e.g. DCH.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
<del>DL</del> Transport Format Set				
<b>Dynamic Transport Format Information</b>		1 to <maxTFcount>		
Number of Transport blocks	M		INTEGER (0..4095)	
Transport Block Size	C – Blocks		INTEGER (1..5000)	Bits
CHOICE mode				
TDD				
Transmission time interval	C- TTIdynamic	1 to <maxTTIcount>	Enumerated(10, 20, 40, 80)	
<b>Semi-static Transport Format Information</b>				
Transmission time interval	C- TTIsemistatic		ENUMERATED (10, 20, 40, 80)	msec
Type of channel coding	M		ENUMERATED (No coding, Convolutional, Turbo)	
Coding Rate	C – Coding		ENUMERATED (1/2, 1/3)	
Rate matching attribute	M		INTEGER (1..maxRM)	
CRC size	M		ENUMERATED (0, 8, 12, 16, 24)	
CHOICE mode				
TDD				
2 <sup>nd</sup> interleaving mode	M		Enumerated(Frame related, Timeslot related)	

Condition	Explanation
Blocks	This IE is only present if "Number of Transport Blocks" is greater than 0.
Coding	This IE is only present if IE "Type of channel coding" is "Convolutional" or "Turbo"
<i>TTIdynamic</i>	This IE is mandatory if not defined as semistatic parameter. Otherwise it is absent.
<i>TTIsemistatic</i>	This IE is mandatory if not defined as dynamic parameter. Otherwise it is absent.

Range bound	Explanation
MaxTFcount	Maximum number of different transport formats that can be included in the Transport format set for one transport channel is 32.
MaxRM	Maximum number that could be set as rate matching attribute for a transport channel.
<i>maxTTIcount</i>	The amount of different TTI that are possible for that transport format is 4.

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~3G TS 25.433 version 3.0.0 Release 1999~~

### 9.2.1.56 ToAWE

TOAWE is the window endpoint. DL data frames are expected to be received before this window endpoint. TOAWE is defined with a positive value relative Latest Time of Arrival (LTOA). A data frame arriving after TOAWE gives a Timing Adjustment Control frame response.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
ToAWE			INTEGER (0..2559)	msec.

### 9.2.1.57 ToAWS

TOAWS is the window startpoint. DL data frames are expected to be received after this window startpoint. TOAWS is defined with a positive value relative Time of Arrival Window Endpoint (TOAWE). A data frame arriving before TOAWS gives a Timing Adjustment Control frame response.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
ToAWS			INTEGER (0..1279)	msec.

### 9.2.1.58 Transaction ID

The Transaction ID is used to associate all the messages belonging to the same pending procedure of the same NBAP procedure type (e.g. Radio Link Addition), i.e. the Request-, Response-, Confirm-type of messages have the same Transaction ID. The messages belonging to different pending procedures have different Transaction IDs.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Transaction ID			INTEGER (0..255)	Since the scope is not clear, the range of this parameter is to be considered a working assumption

### 9.2.1.59 Transport Layer Address

Transport Layer Address defines the transport address of the [NodeB](#). For details on the Transport Address used see [2].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Transport Layer Address			Bit string(1..160, ...)	

### 9.2.1.60 UARFCN

Designate the central frequency of the channel number.

Information Element / IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
UARFCN			INTEGER(0..698,...)	corresponds to 1885.2MHz..2024.8MHz (25.101, section 5.4 and 25.105)

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~, ~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~, ~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~, ~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~, ~~3G TS 25.433 version 3.0.0 Release 1999~~

[Editor's Note: in RRC they have additional attributes such as the "raster" included in the IE ]

### 9.2.1.61 UL FP mode

This parameter defines if normal or silent mode of the Frame Protocol shall be used for the UL.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UL FP mode			ENUMERATED(Normal, Silent)	

### 9.2.1.62 UL interference level

The UL interference level indicates the UL interference at a certain cell under CRNC.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UL interference level			ENUMERATED(-128.0dBm..-60.0dBm)	Resolution is 0.1 dBm.

## 9.2.2 FDD specific parameters

### 9.2.2.1 AICH Transmission Timing

Information Element Name	IE/Group Name	Presence	Range	IE type and reference	Semantics description
AICH Transmission Timing				ENUMERATED(0, 1)	According to 25.331 chapter 10.2.6.17.

### 9.2.2.2 Chip Offset

The Chip Offset is defined as the radio timing offset inside a radio frame. The Chip offset is used as offset for the DL DPCH relative to the Primary CPICH timing.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Chip Offset			INTEGER(0..38399)	Chips

### 9.2.2.3 Compressed mode method

Defines the method for generating the downlink compressed mode gap, as described in 25.212.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Compressed Mode Method			ENUMERATED (None, Puncturing, SF/2, <a href="#">Higher Layer Scheduling</a> )	None = restore the normal mode

#### 9.2.2.4 D-Field Length

Defines the D Field size of the UL DPCCH slot.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
D Field Length			ENUMERATED (1, 2)	

#### 9.2.2.5 Diversity Control Field

The Diversity Control Field indicates if the current RL may, must or must not be combined with the already existing RLs.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Diversity Control Field			ENUMERATED (May, Must, Must not)	

#### 9.2.2.6 Diversity Indication

The Diversity Indication indicates if the RL has been or has not been combined with another RL.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Diversity Indication			ENUMERATED (Combined, not combined)	

#### 9.2.2.7 Diversity mode

Define the diversity mode to be applied.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Diversity Mode			ENUMERATED (None, STTD, Closed loop mode 1, Closed loop mode2)	

#### 9.2.2.8 DL DPCH Slot Format

Indicates the slot format used in DPCH in DL, accordingly to 25.211.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DL DPCH slot format			INTEGER (0..16)	



~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~  
~~3G TS 25.433 version 3.0.0 Release 1999~~

### 9.2.2.9 DL frame type

This parameter defines if frame structure type 'A' or 'B' shall be used in downlink compressed mode. This is defined in TS 25.212

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Downlink Frame Type			ENUMERATED (TypeA, TypeB)	

### 9.2.2.10 DL Scrambling Code

DL scrambling code to be used by the RL. One cell may have multiple DL scrambling codes available.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DL Scrambling Code			INTEGER (0..15)	0= Primary scrambling code of the cell 1...15= Secondary scrambling code

### 9.2.2.11 Multiplexing Position

Multiplexing Position specifies whether fixed or flexible positions of transport channels shall be used in the physical channel.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Multiplexing Position			ENUMERATED (Fixed, Flexible)	

### 9.2.2.12 FDD DL Channelisation Code Number

The DL Channelisation Code Number indicates the DL Channelisation Code number for a specific DL physical channel.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
FDD DL Channelisation Code Number			INTEGER(0.. 255)	The maximum value is equal to the DL spreading factor –1

### 9.2.2.13 FDD S-CCPCH Offset

The Secondary CCPCH offset is defined as the time offset towards the Primary CCPCH in the cell. The offset is a multiple of 256 chips.

Information Element Name	IE/Group Name	Presence	Range	IE type and reference	Semantics description
FDD S-CCPCH Offset				INTEGER(0.. 149)	0: 0 chip 1: 256 chip 2: 512 chip .. 149: 38144 chip [TS 25.211]

X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". 3G TS 25.433 version 3.0.0 Release 1999

#### 9.2.2.14 Gap Period

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Gap Period			INTEGER(0..255)	Frames

#### 9.2.2.15 Gap Position Mode

The gap position can be fixed or adjustable, as defined in TS 25.212.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Gap Position Mode			ENUMERATED (Fixed, Flexible)	

#### 9.2.2.16 Maximum Number of UL DPDCHs

This parameter is an UE Radio Access Capability parameter which is needed in rate matching algorithm.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Max Number of UL DPDCHs			INTEGER (1..6)	

#### 9.2.2.17 Minimum UL Channelisation Code Length

Minimum UL channelisation code length (spreading factor) of a DPDCH which is supported by UE. Needed by rate matching algorithm.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Min UL Channelisation Code length			ENUMERATED(4,8,16,32,64,128,256)	

#### 9.2.2.18 Pattern Duration (PD)

IE/Group Name	Presence	Range	IE type and reference	Semantics description
PD			INTEGER(0..2047, ...)	Frames

#### 9.2.2.19 PICH Mode

The number of paging indicators (PIs) in a PICH frame.

Information Element Name	IE/Group Name	Presence	Range	IE type and reference	Semantics description
PICH Mode				Enumerated(18, 36, 72, 144)	Number of PI per frame

### 9.2.2.20 Pilot Bits Used Indicator

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Pilot Bits Used Indicator			ENUMERATED (Pilot Bits Used, Pilot Bits not Used)	

### 9.2.2.21 Power Control Mode

Power Control Mode specifies the uplink power mode applied during recovery period after each transmission gap in compressed mode. PCM can take 2 values (0 or 1). The different power control modes are described in TS 25.214.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Power Control Mode			ENUMERATED (0, 1,..)	

### 9.2.2.22 Power Offset

This IE defines a power offset respect the Downlink transmission power of a DPCH.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Power Offset			INTEGER (0...24)	Step 0.25 dB, range 0-6 dB

### 9.2.2.23 Power Resume Mode

Power Resume Mode selects the uplink power control method to calculate the initial transmit power after the gap. PRM can take two values (0 or 1) and is described in TS 25.214.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Power Resume Mode			ENUMERATED (0, 1,..)	Described in TS 25.214

### 9.2.2.24 Preamble Signature

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Preamble Signatures			BIT STRING (16)	Bit 0=P0 Bit 1=P1 .. Bit 15=P15 [25.213]

### 9.2.2.25 Primary Scrambling code

The Primary scrambling code to be used in the cell.

X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". 3G TS 25.433 version 3.0.0 Release 1999

Information Element Name	IE/Group	Presence	Range	IE type and reference	Semantics description
Primary Scrambling Code				Integer (0 .. 511)	

### 9.2.2.26 Primary CPICH Power

Primary CPICH power is the power that shall be used for transmitting the P-CPICH in a cell.

Information Element Name	IE/Group	Presence	Range	IE type and reference	Semantics description
Primary CPICH power				Enumerated (-15, ..., 40)	Unit dBm Granularity 0.1 dB

### 9.2.2.27 Propagation Delay

Propagation delay is the one-way propagation delay of the radio signal from the MS to the Node B.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Propagation Delay			INTEGER (0..255)	Chips. Step size is 3 chips. 0=0 chips, 1=3 chips, ...

### 9.2.2.28 RACH Slot Format

Information Element Name	IE/Group	Presence	Range	IE type and reference	Semantics description
RACH Slot Format				ENUMERATED(0..3)	See 25.211.

### 9.2.2.29 RACH sub Channel numbers

Information Element Name	IE/Group	Presence	Range	IE type and reference	Semantics description
RACH Sub Channel Numbers				BIT STRING (15)	Bit 0=Sub Channel Number 0 Bit 1=Sub Channel Number 1 ... Bit 14=Sub Channel Number 14

### 9.2.2.30 Scrambling code change

This parameter indicates whether the alternative scrambling code is used for compressed mode method 'SF/2'.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Scrambling Code Change			ENUMERATED (Change, No change)	

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". 3G TS 25.433 version 3.0.0 Release 1999~~

### 9.2.2.31 Scrambling Code Word Number

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Scrambling Code Word Number			INTEGER (0..255)	

### 9.2.2.32 Secondary CCPCH Slot Format

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Secondary CCPCH Slot Format			INTEGER(0..8)	

### 9.2.2.33 S-Field Length

The UE uses the S Field of the UL DPCCH slot to send the SSDT Cell ID to the network.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
S Field Length			ENUMERATED (1, 2)	

### 9.2.2.34 SSDT Cell Identity

The SSDT Cell ID is a temporary ID for SSDT assigned to a cell.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SSDT Cell Identity			ENUMERATED (a, b.., h)	

### 9.2.2.35 SSDT Cell ID Length

The SSDT Cell ID Length parameter shows the length of the SSDT Cell ID.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Cell ID Length			ENUMERATED (Short, Medium, Long)	

### 9.2.2.36 SSDT Support Indicator

The SSDT Support Indicator indicates whether a RL supports SSDT or not.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SSDT Support Indicator			ENUMERATED (SSDT Supported, SSDT not supported).	

### 9.2.2.37 SSdT Indication

The SSdT Indication indicates whether SSdT is in use by the UE or not.

Information Element/Group name	Presence	Range	IE type and reference	Semantics description
SSdT Indication			ENUMERATED(SSdT Active in the UE, SSdT not Active in the UE)	

### 9.2.2.38 STTD Indicator

Indicates if STTD shall be active or not.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
STTD Indicator			ENUMERATED(active, inactive)	

### 9.2.2.39 T\_Cell

Timing delay used for defining start of SCH, CPICH and the DL scrambling code(s) in a cell relative to BFN. Resolution 256 chips.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
T_Cell			Enumerated (0, 1, ...,9)	0: 0 chip 1: 256 chip .. 9: 2304 chip [TS 25.402]

### 9.2.2.40 TFCI signalling mode

This parameter indicates if the normal or split mode is used for the TFCI.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TFCI signalling mode			ENUMERATED (Normal, Split)	

### 9.2.2.41 TGD

Transmission Gap Distance is the duration of transmission between two consecutive transmission gaps within a transmission gap period, expressed in number of frames. In case there is only one transmission gap in the transmission gap period, this parameter shall be set to zero.

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". 3G TS 25.433 version 3.0.0 Release 1999~~ ~~3G TS 25.433 v3.0.0 (2000-01)~~

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TGD			INTEGER(0..255)	Frames

#### 9.2.2.42 TGL

Transmission Gap Length is the duration of no transmission, expressed in number of slots.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TGL			INTEGER (3,4,7,10,14)	Slot

#### 9.2.2.43 TPC DL step size

This parameter indicates step size for the DL power adjustment.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TPC Downlink step size			ENUMERATED (0.5, 1)	

#### 9.2.2.44 Transmit Diversity Indicator

Indicates if transmit diversity shall be active or not for primary and secondary CPICH.

Information Element Name	IE/Group Name	Presence	Range	IE type and reference	Semantics description
Transmit Diversity Indicator				ENUMERATED (active, inactive)	

#### 9.2.2.45 TSTD Indicator

Indicates if TSTD shall be active or not.

Information Element Name	IE/Group Name	Presence	Range	IE type and reference	Semantics description
TSTD Indicator				ENUMERATED (active, inactive)	

#### 9.2.2.46 UL/DL compressed mode selection:

This parameter specifies whether compressed mode is used in UL only, DL only or both UL and DL

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UL/DL compressed mode selection			ENUMERATED (in UL only, DL only or both UL and DL)	

### 9.2.2.47 UL delta Eb/No

The delta in uplink Eb/No that shall be added to the Eb/No target used during compressed mode frames.

Information Element Name	IE/Group	Presence	Range	IE type and reference	Semantics description
Uplink Delta Eb/No				Enumerated (-6..+10dB)	Step 0.1 dB.

### 9.2.2.48 UL delta Eb/No after

The delta in uplink Eb/No target that shall be added to the Eb/No target used one frame after the compressed mode frames.

Information Element Name	IE/Group	Presence	Range	IE type and reference	Semantics description
Uplink Delta Eb/No after				Enumerated (-6..+10dB)	Step 0.1 dB.

### 9.2.2.49 UL DPCCH Slot Format

Indicates the slot format used in DPCCH in UL, accordingly to 25.211

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UL DPCCH slot format			INTEGER (0..5)	

### 9.2.2.50 Uplink Eb/No

The Uplink Eb/No indicates a received Uplink Eb/No.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Uplink Eb/No			INTEGER (0..255)	Resolution is 0.1 dB, range 0-25.5 dB.

### 9.2.2.51 UL Scrambling Code

The UL Scrambling Code is the scrambling code used by UE. Every UE has its specific UL Scrambling Code.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
<b>UL scrambling code</b>				
UL scrambling code number	M		INTEGER (0.. 2 <sup>24</sup> -1)	
UL scrambling code length	M		ENUMERATED(Short, Long)	



## 9.2.3 TDD specific Parameters

### 9.2.3.1 Burst Type

The Burst Type as described in TS25.221.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Burst Type			ENUMERATED (Type1, Type2)	

### 9.2.3.2 CCTrCH ID

The CCTrCH ID identifies unambiguously a CCTrCH inside a Radio Link.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
CCTrCH ID			INTEGER (0..15)	

### 9.2.3.3 Cell Parameter ID

The Cell Parameter ID identifies unambiguously the Code Groups, Scrambling Codes, Midambles and Toffset (see table 9 of TS25.223)

<b>Information Element</b> IE/Group Name	Presence	Range	IE type and reference	Semantics description
Cell Parameter ID			INTEGER (0..127)	

### 9.2.3.4 DPCH ID

The DPCH ID identifies unambiguously a DPCH inside a Radio Link.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DPCH ID	M		INTEGER (0..239)	

### 9.2.3.5 Max PRACH Midamble shift

<b>Information Element</b> IE/Group Name	Presence	Range	IE type and reference	Semantics description
Max PRACH Midamble Shifts			ENUMERATED (4, 8)	

### 9.2.3.6 Midamble shift

Different bursts transmitted simultaneously, using the same midamble code shall use different Midamble Shifts.

The 256 chip midamble supports 3 different time shifts, the 512 chips midamble may support 8 or even 16 time shifts.

The range of this parameter is 0 .. 15 for long midamble and 0 .. 2 for short midamble.

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". 3G TS 25.433 version 3.0.0 Release 1999~~

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Midamble Shift			INTEGER (0..15)	

### 9.2.3.7 Paging Indicator Length

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Paging Indicator Length			INTEGER (2 4 8)	number of symbols in the page indicator / see TS25.221

### 9.2.3.8 PCCPCH Power

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
PCCPCH Power			INTEGER(-15..+40dBm)	Unit 0.1dBm Granularity 0.1 dB

### 9.2.3.9 PRACH Midamble

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
PRACH Midamble			ENUMERATED (Inverted, Direct)	

### 9.2.3.10 PSCH Time Slot

The PSCH Time Slot is only applicable if the value of Sync Case IE is Case 2 or 3.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
PSCH Time Slot			INTEGER(0..6)	

### 9.2.3.11 PSCH Power

PSCH power is the power that should be used for transmitting the Physical Synch Channel in a cell. Primary sequence (Primary SCH) and secondary sequences (Secondary SCH) are superimposed for transmission.

Relation of TX power between Primary and Secondary is fixed, thus only one value is to be configured.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
PSCH Power			Integer (0..511)	

### 9.2.3.11 Repetition Length

The Repetition Length represents the number of consecutive Radio Frames inside a Repetition Period in which the same Time Slot is assigned to the same Physical Channel.

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". 3G TS 25.433 version 3.0.0 Release 1999~~

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Repetition Length			INTEGER(1..63)	

### 9.2.3.4312 Repetition Period

The Repetition Period represents the number of consecutive Radio Frames after which the same assignment scheme of Time Slots to a Physical Channel is repeated. This means that if the Time Slot  $K$  is assigned to a physical channel in the Radio Frame  $J$ , it is assigned to the same physical channel also in all the Radio Frames  $J+n*Repetition\ Period$  (where  $n$  is an integer).

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Repetition Period			ENUMERATED(1,2,4,8,16,32,64)	

### 9.2.3.4413 Sync case

The PSCH and PCCPCH are mapped on one or two downlink slots per frame. There are three cases of PSCH and PCCPCH allocation as follows:

- Case 1) PSCH and PCCPCH allocated in a single TS#k
- Case 2) PSCH in two TS and PCCPCH in the same two TS: TS#k and TS#k+8
- Case 3) PSCH in two TS, TS#k and TS#k+8, and the PCCPCH in TS#i, pointed by PSCH.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Sync Case			Integer (1..3)	

### 9.2.3.15 Synchronisation method

This parameter indicates which synchronisation method shall be applied.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Synchronisation Method			ENUMERATED (ExternalReference, LockedToMasterCell, OneTimeSynchronisation)	

### 9.2.3.4614 TDD Channelisation Code

The Channelisation Code Number indicates which Channelisation Code is used for a given Physical Channel. In TDD the Channelisation Code is an Orthogonal Variable Spreading Factor code, that can have a spreading factor of 1, 2, 4, 8 or 16.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TDD Channelisation Code			ENUMERATED ((1/1), (2/1), (2/2), (4/1),... (4/4), (8/1), (8/8), (16/1)... (16/16))	

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". 3G TS 25.433 version 3.0.0 Release 1999~~

### 9.2.3.17 TDD Chip Offset

The Chip Offset Adjustment represent the timing adjustment to be applied to achieve frame synchronisation.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
TDD Chip Offset			INTEGER (-19200..+19199)	Chip

### 9.2.3.18 TDD Physical Channel Offset

The Offset represents the phase information for the allocation of a physical channel. (SFN mod Repetition Period = Offset).

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TDD Physical Channel Offset			INTEGER (0..63)	

### 9.2.3.19 TDD S-CCPCH Offset

The Secondary CCPCH offset is defined as the time offset towards the Primary CCPCH in the cell.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
TDD S-CCPCH Offset			INTEGER(0.. 63)	

### 9.2.3.20 TFCI Coding

The TFCI Coding describes the way how the TFCI bits are coded. By default 1 TFCI bit is coded with 4 bits, 2 TFCI bits are coded with 8 bits, 3-5 TFCI bits are coded with 16 bits and 6-10 TFCI bits are coded with 32 bits.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
TFCI Coding			Enumerated (4, 8, 16, 32)	

### 9.2.3.21 Time Slot

The Time Slot represents the minimum time interval inside a Radio Frame that can be assigned to a Physical Channel.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Time Slot			INTEGER (0..14)	

### 9.2.3.22 Time Slot Direction

This parameter indicates whether the TS in the cell is used in Uplink or Downlink direction.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Time Slot Direction			Enumerated (UL, DL)	

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". 3G TS 25.433 version 3.0.0 Release 1999~~  
[X.691, \(12/94\) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules \(PER\)". 3G TS 25.433 version 3.0.0 Release 1999](#)

### 9.2.3.2319 Time Slot Status

This parameter indicates whether the TS in the cell is active or not.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Time Slot Status			Enumerated (active, notActive)	

### 9.2.3.2420 Transmission Diversity Applied

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Transmission Diversity Applied			Boolean	

### 9.2.3.2521 USCH ID

The USCH ID uniquely identifies a USCH within a Node B Communication Context.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
USCH ID			INTEGER (0..255)	

## 9.3 Message and Information element abstract syntax (with ASN.1)

This chapter is for the time being only **INFORMATIVE**.

In case of misalignment with the tabular format of the messages in chapter 9.1 the ASN.1 needs to be aligned with the tabular format.

The setting of the criticality field and the level on which criticality is set for the IEs and sequences of IEs is still to be decided upon.

### 9.3.1 Usage of protocol extension mechanism for non-standard use

The protocol extension mechanism for non-standard use may be used

- For special operator- (and/or vendor) specific features considered not to be part of the basic functionality, i.e. the functionality required for a complete and high-quality specification in order to guarantee multi-vendor inter-operability.
- By vendors for research purposes, e.g. to implement and evaluate new algorithms/features before such features are proposed for standardisation

The extension mechanism shall not be used for basic functionality. Such functionality shall be standardised.

### 9.3.2 PDU Description for NBAP

```
-- *****  
--  
-- Elementary Procedure definitions  
--  
-- *****  
  
NBAP-ELEMENTARY-PROCEDUREdefinitions -- { object identifier to be allocated }--  
DEFINITIONS AUTOMATIC TAGS ::=  
  
BEGIN  
  
-- *****  
--  
-- IE parameter types from other modules.  
--  
-- *****  
  
IMPORTS  
    Criticality,  
    ProcedureID,  
    MessageDiscriminator,
```







id-commonTransportChannelDeletion,  
id-commonTransportChannelReconfiguration,  
id-commonTransportChannelSetup,  
id-compressedModeControlCancellation,  
id-compressedModeControlCommit,  
id-compressedModeControlPreparation,  
id-dedicatedMeasurementFailure,  
id-dedicatedMeasurementInitiation,  
id-dedicatedMeasurementReport,  
id-dedicatedMeasurementTermination,  
id-dlPowerControl,  
id-neighbourCellMeasurement,  
id-radioLinkAddition,  
id-radioLinkDeletion,  
id-radioLinkFailure,  
id-radioLinkReconfigurationCommit,  
id-radioLinkReconfigurationCancel,  
id-radioLinkRestoration,  
id-radioLinkSetup,  
id-resourceStatusIndication,  
id-synchronisationAdjustment,  
id-synchronisationFailure,  
id-synchronisationRestart,  
id-synchronisedRadioLinkReconfigurationPreparation,  
id-systemInformationUpdate,  
id-unblockResource,  
id-unsynchronisedRadioLinkReconfiguration

FROM NBAP-Constants;

-- \*\*\*\*\*  
--  
-- Interface Elementary Procedure Class  
--  
-- \*\*\*\*\*

```
NBAP-ELEMENTARY-PROCEDURE ::= CLASS {  
  &InitiatingMessage           ,  
  &SuccessfulOutcome           OPTIONAL,  
  &UnsuccessfulOutcome         OPTIONAL,  
  &Outcome                     OPTIONAL,  
  &messageDiscriminator        MessageDiscriminator,  
  &procedureID                 ProcedureID    UNIQUE,  
  &criticality                 Criticality    DEFAULT ignore  
}
```

```
WITH SYNTAX {  
  INITIATING MESSAGE           &InitiatingMessage  
  [SUCCESSFUL OUTCOME         &SuccessfulOutcome]  
  [UNSUCCESSFUL OUTCOME       &UnsuccessfulOutcome]
```

```
[OUTCOME          &Outcome]
MESSAGE DISCRIMINATOR  &messageDiscriminator
PROCEDURE ID          &procedureID
[CRITICALITY        &criticality]
}

-- *****
--
-- Interface PDU Definition
--
-- *****

NBAP-PDU ::= CHOICE {
    initiatingMessage      InitiatingMessage,
    successfulOutcome      SuccessfulOutcome,
    unsuccessfulOutcome    UnsuccessfulOutcome,
    outcome                Outcome,
    ...
}

InitiatingMessage ::= SEQUENCE {
    procedureID      NBAP-ELEMENTARY-PROCEDURE.&procedureID  ({NBAP-ELEMENTARY-PROCEDURES}),
    criticality      NBAP-ELEMENTARY-PROCEDURE.&criticality  ({NBAP-ELEMENTARY-PROCEDURES}@procedureID}),
    messageDiscriminator  NBAP-ELEMENTARY-PROCEDURE.&messageDiscriminator
                        ({NBAP-ELEMENTARY-PROCEDURES}@procedureID}),
    transactionID    TransactionID,
    value            NBAP-ELEMENTARY-PROCEDURE.&InitiatingMessage
                        ({NBAP-ELEMENTARY-PROCEDURES}@procedureID)
}

SuccessfulOutcome ::= SEQUENCE {
    procedureID      NBAP-ELEMENTARY-PROCEDURE.&procedureID  ({NBAP-ELEMENTARY-PROCEDURES}),
    criticality      NBAP-ELEMENTARY-PROCEDURE.&criticality  ({NBAP-ELEMENTARY-PROCEDURES}@procedureID}),
    messageDiscriminator  NBAP-ELEMENTARY-PROCEDURE.&messageDiscriminator
                        ({NBAP-ELEMENTARY-PROCEDURES}@procedureID}),
    transactionID    TransactionID,
    value            NBAP-ELEMENTARY-PROCEDURE.&SuccessfulOutcome
                        ({NBAP-ELEMENTARY-PROCEDURES}@procedureID)
}

UnsuccessfulOutcome ::= SEQUENCE {
    procedureID      NBAP-ELEMENTARY-PROCEDURE.&procedureID  ({NBAP-ELEMENTARY-PROCEDURES}),
    criticality      NBAP-ELEMENTARY-PROCEDURE.&criticality  ({NBAP-ELEMENTARY-PROCEDURES}@procedureID}),
    messageDiscriminator  NBAP-ELEMENTARY-PROCEDURE.&messageDiscriminator
                        ({NBAP-ELEMENTARY-PROCEDURES}@procedureID}),
    transactionID    TransactionID,
    value            NBAP-ELEMENTARY-PROCEDURE.&UnsuccessfulOutcome
                        ({NBAP-ELEMENTARY-PROCEDURES}@procedureID)
}
```

```
Outcome ::= SEQUENCE {
  procedureID      NBAP-ELEMENTARY-PROCEDURE.&procedureID   ({NBAP-ELEMENTARY-PROCEDURES}),
  criticality      NBAP-ELEMENTARY-PROCEDURE.&criticality   ({NBAP-ELEMENTARY-PROCEDURES}@procedureID}),
  messageDiscriminator
    NBAP-ELEMENTARY-PROCEDURE.&messageDiscriminator
    ({NBAP-ELEMENTARY-PROCEDURES}@procedureID}),
  transactionID   TransactionID,
  value          NBAP-ELEMENTARY-PROCEDURE.&Outcome   ({NBAP-ELEMENTARY-PROCEDURES}@procedureID)
}
```

```
-- *****
--
-- Interface Elementary Procedure List
--
-- *****
```

```
NBAP-ELEMENTARY-PROCEDURES NBAP-ELEMENTARY-PROCEDURE ::= {
  NBAP-ELEMENTARY-PROCEDURES-CLASS-1 |
  NBAP-ELEMENTARY-PROCEDURES-CLASS-2 ,
  ...
}
```

```
NBAP-ELEMENTARY-PROCEDURES-CLASS-1 NBAP-ELEMENTARY-PROCEDURE ::= {
  commonTransportChannelSetupFDD |
  commonTransportChannelSetupTDD |
  commonTransportChannelReconfigurationFDD |
  commonTransportChannelReconfigurationTDD |
  commonTransportChannelDeletion |
  blockResource |
  audit |
  commonMeasurementInitiation |
  cellSetupFDD |
  cellSetupTDD |
  cellReconfigurationFDD |
  cellReconfigurationTDD |
  cellDeletion |
  systemInformationUpdate |
  radioLinkSetupFDD |
  radioLinkSetupTDD |
  neighbourCellMeasurementTDD |
  synchronisationAdjustmentTDD |
  radioLinkAdditionFDD |
  radioLinkAdditionTDD |
  radioLinkReconfigurationCommit |
  radioLinkReconfigurationCancellation |
  radioLinkDeletion |
  dedicatedMeasurementInitiation |
  compressedModeControlPreparationFDD ,
}
```





```
INITIATING MESSAGE UnblockResourceIndication
MESSAGE DISCRIMINATOR common
PROCEDURE ID { procedureCode id-unblockResource, ddMode common }
CRITICALITY ignore
}

-- *****
-- *** AuditRequired ***
auditRequired NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE AuditRequiredIndication
  MESSAGE DISCRIMINATOR common
  PROCEDURE ID { procedureCode id-auditRequired, ddMode common }
  CRITICALITY ignore
}

-- *** Audit ***
audit NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE AuditRequest
  SUCCESSFUL OUTCOME AuditResponse
  MESSAGE DISCRIMINATOR common
  PROCEDURE ID { procedureCode id-audit, ddMode common }
  CRITICALITY ignore
}

-- *****
-- *** CommonMeasurementInitiation ***
commonMeasurementInitiation NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE CommonMeasurementInitiationRequest
  SUCCESSFUL OUTCOME CommonMeasurementInitiationResponse
  UNSUCCESSFUL OUTCOME CommonMeasurementInitiationFailure
  MESSAGE DISCRIMINATOR common
  PROCEDURE ID { procedureCode id-commonMeasurementInitiation, ddMode common }
  CRITICALITY ignore
}

-- *** CommonMeasurementTermination ***
commonMeasurementTermination NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE CommonMeasurementTerminationRequest
  MESSAGE DISCRIMINATOR common
  PROCEDURE ID { procedureCode id-commonMeasurementTermination, ddMode common }
  CRITICALITY ignore
}

-- *** CommonMeasurementFailure ***
commonMeasurementFailure NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE CommonMeasurementFailureIndication
  MESSAGE DISCRIMINATOR common
  PROCEDURE ID { procedureCode id-commonMeasurementFailure, ddMode common }
  CRITICALITY ignore
}
```

```
}  
  
-- *** CommonMeasurementReport ***  
commonMeasurementReport NBAP-ELEMENTARY-PROCEDURE ::= {  
  INITIATING MESSAGE CommonMeasurementReport  
  MESSAGE DISCRIMINATOR common  
  PROCEDURE ID { procedureCode id-commonMeasurementReport, ddMode common }  
  CRITICALITY ignore  
}  
  
-- *****  
-- *** CellSetup (FDD) ***  
cellSetupFDD NBAP-ELEMENTARY-PROCEDURE ::= {  
  INITIATING MESSAGE CellSetupRequestFDD  
  SUCCESSFUL OUTCOME CellSetupResponse  
  UNSUCCESSFUL OUTCOME CellSetupFailure  
  MESSAGE DISCRIMINATOR common  
  PROCEDURE ID { procedureCode id-cellSetup, ddMode fdd }  
  CRITICALITY ignore  
}  
  
-- *** CellSetup (TDD) ***  
cellSetupTDD NBAP-ELEMENTARY-PROCEDURE ::= {  
  INITIATING MESSAGE CellSetupRequestTDD  
  SUCCESSFUL OUTCOME CellSetupResponse  
  UNSUCCESSFUL OUTCOME CellSetupFailure  
  MESSAGE DISCRIMINATOR common  
  PROCEDURE ID { procedureCode id-cellSetup, ddMode tdd }  
  CRITICALITY ignore  
}  
  
-- *** CellReconfiguration(FDD) ***  
cellReconfigurationFDD NBAP-ELEMENTARY-PROCEDURE ::= {  
  INITIATING MESSAGE CellReconfigurationRequestFDD  
  SUCCESSFUL OUTCOME CellReconfigurationResponse  
  UNSUCCESSFUL OUTCOME CellReconfigurationFailure  
  MESSAGE DISCRIMINATOR common  
  PROCEDURE ID { procedureCode id-cellReconfiguration, ddMode fdd }  
  CRITICALITY ignore  
}  
  
-- *** CellReconfiguration(TDD) ***  
cellReconfigurationTDD NBAP-ELEMENTARY-PROCEDURE ::= {  
  INITIATING MESSAGE CellReconfigurationRequestTDD  
  SUCCESSFUL OUTCOME CellReconfigurationResponse  
  UNSUCCESSFUL OUTCOME CellReconfigurationFailure  
  MESSAGE DISCRIMINATOR common  
  PROCEDURE ID { procedureCode id-cellReconfiguration, ddMode tdd }  
  CRITICALITY ignore
```

```
}

-- *** CellDeletion ***
cellDeletion NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE CellDeletionRequest
  SUCCESSFUL OUTCOME CellDeletionResponse
  MESSAGE DISCRIMINATOR common
  PROCEDURE ID { procedureCode id-cellDeletion, ddMode common }
  CRITICALITY ignore
}

-- *****
-- *** ResourceStatusIndication ***
resourceStatusIndication NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE ResourceStatusIndication
  MESSAGE DISCRIMINATOR common
  PROCEDURE ID { procedureCode id-resourceStatusIndication, ddMode common }
  CRITICALITY ignore
}

-- *****
-- *** SystemInformationUpdate ***
systemInformationUpdate NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE SystemInformationUpdateRequest
  SUCCESSFUL OUTCOME SystemInformationUpdateResponse
  UNSUCCESSFUL OUTCOME SystemInformationUpdateFailure
  MESSAGE DISCRIMINATOR common
  PROCEDURE ID { procedureCode id-systemInformationUpdate, ddMode common }
  CRITICALITY ignore
}

-- *****
-- *** RadioLinkSetup (FDD) ***
radioLinkSetupFDD NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE RadioLinkSetupRequestFDD
  SUCCESSFUL OUTCOME RadioLinkSetupResponseFDD
  UNSUCCESSFUL OUTCOME RadioLinkSetupFailureFDD
  MESSAGE DISCRIMINATOR common
  PROCEDURE ID { procedureCode id-radioLinkSetup, ddMode fdd }
  CRITICALITY ignore
}

-- *** RadioLinkSetup (TDD) ***
radioLinkSetupTDD NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE RadioLinkSetupRequestTDD
  SUCCESSFUL OUTCOME RadioLinkSetupResponseTDD
  UNSUCCESSFUL OUTCOME RadioLinkSetupFailureTDD
  MESSAGE DISCRIMINATOR common
  PROCEDURE ID { procedureCode id-radioLinkSetup, ddMode tdd }
  CRITICALITY ignore
}
```



```
}  
  
-- *****  
-- *** NeighbourCellMeasurement (TDD only) ***  
neighbourCellMeasurementTDD NBAP-ELEMENTARY-PROCEDURE ::= {  
  INITIATING MESSAGE NeighbourCellMeasurementRequestTDD  
  SUCCESSFUL OUTCOME NeighbourCellMeasurementResponseTDD  
  UNSUCCESSFUL OUTCOME NeighbourCellMeasurementFailureTDD  
  MESSAGE DISCRIMINATOR common  
  PROCEDURE ID { procedureCode id-neighbourCellMeasurement, ddMode tdd }  
  CRITICALITY ignore  
}  
  
-- *****  
-- *** SynchronisationAdjustment (TDD only) ***  
synchronisationAdjustmentTDD NBAP-ELEMENTARY-PROCEDURE ::= {  
  INITIATING MESSAGE SynchronisationAdjustmentRequestTDD  
  SUCCESSFUL OUTCOME SynchronisationAdjustmentResponseTDD  
  UNSUCCESSFUL OUTCOME SynchronisationAdjustmentFailureTDD  
  MESSAGE DISCRIMINATOR common  
  PROCEDURE ID { procedureCode id-synchronisationAdjustment, ddMode tdd }  
  CRITICALITY ignore  
}  
  
-- *** NodeBOutOfSyncIndication (TDD only) ***  
synchronisationFailureTDD NBAP-ELEMENTARY-PROCEDURE ::= {  
  INITIATING MESSAGE NodeBOutOfSyncIndicationTDD  
  MESSAGE DISCRIMINATOR common  
  PROCEDURE ID { procedureCode id-synchronisationFailure, ddMode tdd }  
  CRITICALITY ignore  
}  
  
-- *** SynchronisationRestart (TDD only) ***  
synchronisationRestartTDD NBAP-ELEMENTARY-PROCEDURE ::= {  
  INITIATING MESSAGE SynchronisationRestartRequestTDD  
  MESSAGE DISCRIMINATOR common  
  PROCEDURE ID { procedureCode id-synchronisationRestart, ddMode tdd }  
  CRITICALITY ignore  
}  
  
-- *****  
-- *** RadioLinkAddition (FDD) ***  
radioLinkAdditionFDD NBAP-ELEMENTARY-PROCEDURE ::= {  
  INITIATING MESSAGE RadioLinkAdditionRequestFDD  
  SUCCESSFUL OUTCOME RadioLinkAdditionResponseFDD  
  UNSUCCESSFUL OUTCOME RadioLinkAdditionFailureFDD  
  MESSAGE DISCRIMINATOR dedicated  
  PROCEDURE ID { procedureCode id-radioLinkAddition, ddMode fdd }  
  CRITICALITY ignore
```

```
}  
  
-- *** RadioLinkAddition (TDD) ***  
radioLinkAdditionTDD NBAP-ELEMENTARY-PROCEDURE ::= {  
    INITIATING MESSAGE  RadioLinkAdditionRequestTDD  
    SUCCESSFUL OUTCOME  RadioLinkAdditionResponseTDD  
    UNSUCCESSFUL OUTCOME RadioLinkAdditionFailureTDD  
    MESSAGE DISCRIMINATOR dedicated  
    PROCEDURE ID        { procedureCode id-radioLinkAddition, ddMode tdd }  
    CRITICALITY         ignore  
}  
  
-- *** RadioReconfirurationPrepare (FDD) ***  
synchronisedRadioLinkReconfigurationPreparationFDD NBAP-ELEMENTARY-PROCEDURE ::= {  
    INITIATING MESSAGE  RadioLinkReconfigurationPrepareFDD  
    SUCCESSFUL OUTCOME  RadioLinkReconfigurationReady  
    UNSUCCESSFUL OUTCOME RadioLinkReconfigurationFailure  
    MESSAGE DISCRIMINATOR dedicated  
    PROCEDURE ID        { procedureCode id-synchronisedRadioLinkReconfigurationPreparation, ddMode fdd }  
    CRITICALITY         ignore  
}  
  
-- *** RadioReconfirurationPrepare (TDD) ***  
synchronisedRadioLinkReconfigurationPreparationTDD NBAP-ELEMENTARY-PROCEDURE ::= {  
    INITIATING MESSAGE  RadioLinkReconfigurationPrepareTDD  
    SUCCESSFUL OUTCOME  RadioLinkReconfigurationReady  
    UNSUCCESSFUL OUTCOME RadioLinkReconfigurationFailure  
    MESSAGE DISCRIMINATOR dedicated  
    PROCEDURE ID        { procedureCode id-synchronisedRadioLinkReconfigurationPreparation, ddMode tdd }  
    CRITICALITY         ignore  
}  
  
-- *** (FDD) ***  
unsynchronisedRadioLinkReconfigurationFDD NBAP-ELEMENTARY-PROCEDURE ::= {  
    INITIATING MESSAGE  RadioLinkReconfigurationRequestFDD  
    SUCCESSFUL OUTCOME  RadioLinkReconfigurationResponse  
    UNSUCCESSFUL OUTCOME RadioLinkReconfigurationFailure  
    MESSAGE DISCRIMINATOR dedicated  
    PROCEDURE ID        { procedureCode id-unsynchronisedRadioLinkReconfiguration, ddMode fdd }  
    CRITICALITY         ignore  
}  
  
-- *** (TDD) ***  
unsynchronisedRadioLinkReconfigurationTDD NBAP-ELEMENTARY-PROCEDURE ::= {  
    INITIATING MESSAGE  RadioLinkReconfigurationRequestTDD  
    SUCCESSFUL OUTCOME  RadioLinkReconfigurationResponse  
    UNSUCCESSFUL OUTCOME RadioLinkReconfigurationFailure  
    MESSAGE DISCRIMINATOR dedicated  
    PROCEDURE ID        { procedureCode id-unsynchronisedRadioLinkReconfiguration, ddMode tdd }  
    CRITICALITY         ignore  
}
```

```
}

-- *** RadioLinkReconfigurationCommit ***
radioLinkReconfigurationCommit NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE RadioLinkReconfigurationCommit
  MESSAGE DISCRIMINATOR dedicated
  PROCEDURE ID { procedureCode id-radioLinkReconfigurationCommit, ddMode common }
  CRITICALITY ignore
}

-- *** RadioReconfigurationCancellation ***
radioLinkReconfigurationCancellation NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE RadioLinkReconfigurationCancel
  MESSAGE DISCRIMINATOR dedicated
  PROCEDURE ID { procedureCode id-radioLinkReconfigurationCancel, ddMode common }
  CRITICALITY ignore
}

-- *** RadioLinkDeletion ***
radioLinkDeletion NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE RadioLinkDeletionRequest
  SUCCESSFUL OUTCOME RadioLinkDeletionResponse
  MESSAGE DISCRIMINATOR dedicated
  PROCEDURE ID { procedureCode id-radioLinkDeletion, ddMode common }
  CRITICALITY ignore
}

-- *****
-- *** DLPowerControl (FDD only) ***
dlPowerControlFDD NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE DLPowerControlRequestFDD
  MESSAGE DISCRIMINATOR dedicated
  PROCEDURE ID { procedureCode id-dlPowerControl, ddMode fdd }
  CRITICALITY ignore
}

-- *****
-- *** DedicatedMeasurementInitiation ***
dedicatedMeasurementInitiation NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE DedicatedMeasurementInitiationRequest
  SUCCESSFUL OUTCOME DedicatedMeasurementInitiationResponse
  UNSUCCESSFUL OUTCOME DedicatedMeasurementInitiationFailure
  MESSAGE DISCRIMINATOR dedicated
  PROCEDURE ID { procedureCode id-dedicatedMeasurementInitiation, ddMode common }
  CRITICALITY ignore
}

-- *** DedicatedMeasurementTermination ***
```



```
-- *** CompressedModeCommit (FDD only) ***
compressedModeControlCommitFDD NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  CompressedModeCommitFDD
  MESSAGE DISCRIMINATOR  dedicated
  PROCEDURE ID        { procedureCode id-compressedModeControlCommit, ddMode fdd }
  CRITICALITY         ignore
}

-- *** CompressedModeCommit (FDD only) ***
compressedModeControlCancellationFDD NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  CompressedModeCancelFDD
  MESSAGE DISCRIMINATOR  dedicated
  PROCEDURE ID        { procedureCode id-compressedModeControlCancellation, ddMode fdd }
  CRITICALITY         ignore
}

-- *** ErrorIndication ***
errorIndication NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  errorIndication
  MESSAGE DISCRIMINATOR  dedicated
  PROCEDURE ID        { procedureCode id-errorIndication Cancellation, ddMode common }
  CRITICALITY         ignore
}
```

END

### 9.3.3 NBAP PDU Content Definitions

```
-- *****
--
-- PDU definitions for NBAP.
--
-- *****

NBAP-PDU-Contents -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

-- *****
--
-- IE parameter types from other modules.
--
-- *****

IMPORTS
```











id-CFN,  
id-CRNC-CommunicationContextID,  
id-CRNCCommunicationContextID,  
id-Cause,  
id-Cell-Information-ResourceStatIndItem,  
id-Cell-InformationItem,  
id-Cell-InformationList,  
id-Cell-Parameter,  
id-Cell-ParametersItem,  
id-Cell-ParametersList,  
id-CellParameter,  
id-CommonMeasurementObjectType,  
id-CommonMeasurementType,  
id-CommonPhysicalChannelID,  
id-CommonPhysicalChannelType-CTCHsetup-Req-FDD,  
id-CommonPhysicalChannelType-CTCHsetup-Response,  
id-CommunicationControlPort-InformationItem,  
id-CommunicationControlPortID,  
id-CommunicationControlPortInformation-ResourceStatIndItem,  
id-CommunicationControlPortInformationList,  
id-CompressesModeMethod,  
id-ConfigurationGenerationID,  
id-DCH-Add-RL-ReconfPrepFDDItem,  
id-DCH-Add-RL-ReconfPrepTDDItem,  
id-DCH-Add-RL-ReconfReadyItem,  
id-DCH-Add-RL-ReconfReqFDDItem,  
id-DCH-Add-RL-ReconfReqTDDItem,  
id-DCH-AddItem-RL-ReconfResp,  
id-DCH-AddList-RL-ReconfPrepFDD,  
id-DCH-AddList-RL-ReconfPrepTDD,  
id-DCH-AddList-RL-ReconfReqFDD,  
id-DCH-AddList-RL-ReconfReqTDD,  
id-DCH-Delete-RL-ReconfPrepFDDItem,  
id-DCH-Delete-RL-ReconfPrepTDDItem,  
id-DCH-Delete-RL-ReconfReqFDDItem,  
id-DCH-Delete-RL-ReconfReqTDDItem,  
id-DCH-DeleteList-RL-ReconfPrepFDD,  
id-DCH-DeleteList-RL-ReconfPrepTDD,  
id-DCH-DeleteList-RL-ReconfReqFDD,  
id-DCH-DeleteList-RL-ReconfReqTDD,  
id-DCH-Information-RL-SetupReqFDDItem,  
id-DCH-Information-RL-SetupReqTDDItem,  
id-DCH-InformationList-RL-SetupReqFDD,  
id-DCH-InformationList-RL-SetupReqTDD,  
id-DCH-InformationResponse-RL-SetupFailFDDItem,  
id-DCH-InformationResponse-RL-setupResTDDItem,  
id-DCH-InformationResponseItem,  
id-DCH-Modify-RL-ReconfPrepFDDItem,  
id-DCH-Modify-RL-ReconfPrepTDDItem,

id-DCH-Modify-RL-ReconfReadyItem,  
id-DCH-Modify-RL-ReconfReqFDDItem,  
id-DCH-Modify-RL-ReconfReqTDDItem,  
id-DCH-ModifyItem-RL-ReconfResp,  
id-DCH-ModifyList-RL-ReconfPrepFDD,  
id-DCH-ModifyList-RL-ReconfPrepTDD,  
id-DCH-ModifyList-RL-ReconfReqFDD,  
id-DCH-ModifyList-RL-ReconfReqTDD,  
id-DL-CCTrCH-Information-RL-ReconfPrepTDDItem,  
id-DL-CCTrCH-Information-RL-ReconfReqTDDItem,  
id-DL-CCTrCH-Information-RL-SetupReqTDDItem,  
id-DL-CCTrCH-InformationItem,  
id-DL-CCTrCH-InformationList-RL-ReconfPrepTDD,  
id-DL-CCTrCH-InformationList-RL-ReconfReqTDD,  
id-DL-CCTrCH-InformationList-RL-SetupReqTDD,  
id-DL-CCTrCHInformationItem,  
id-DL-CCTrCHInformationList,  
id-DL-CodeInformation,  
id-DL-CodeInformation-RL-ReconfPrepFDDItem,  
id-DL-CodeInformation-RL-SetupReqFDDItem,  
id-DL-DPCH-Information-RL-ReconfPrepFDD,  
id-DL-DPCH-Information-RL-ReconfPrepTDDItem,  
id-DL-DPCH-Information-RL-SetupReqTDDItem,  
id-DL-DPCH-InformationItem,  
id-DL-DPCH-InformationItem-RL-ReconfReqFDD,  
id-DL-DPCH-InformationItem-RL-SetupReqFDD,  
id-DL-FrameType,  
id-DL-ReferencePowerInformationItem,  
id-DSCH-AddItem-RL-ReconfPrepFDD,  
id-DSCH-AddItem-RL-ReconfReqFDD,  
id-DSCH-DeleteItem-RL-ReconfPrepFDD,  
id-DSCH-DeleteItem-RL-ReconfReqFDD,  
id-DSCH-ID,  
id-DSCH-Information-RL-SetupReqFDDItem,  
id-DSCH-InformationList-RL-SetupReqFDD,  
id-DSCH-InformationResponse-RL-SetupFailFDDItem,  
id-DSCH-InformationResponse-RL-setupResFDDItem,  
id-DSCH-ModifyItem-RL-ReconfPrepFDD,  
id-DSCH-ModifyItem-RL-ReconfReqFDD,  
id-DedicatedMeasurementObjectType,  
id-DedicatedMeasurementType,  
id-FACH-Information-ResourceStatIndItem,  
id-FACH-InformationItem,  
id-FACH-ListItem,  
id-FACH-ParametersList-CTCHreconf-Req-FDD,  
id-FACH-ParametersList-CTCHreconf-Req-TTD,  
id-FACH-ParametersListItem-CTCHreconf-Req-FDD,  
id-FACH-ParametersListItem-CTCHreconf-Req-TTD,  
id-FACH-ParametersListItem-CTCHsetup-Req-FDD,







```

maxnoofRLs,
maxnoofSCCPCHs,
maxnoofTDDNeighbours,
maxnoofUSCHs
FROM NBAP-Constants;

-- *****
--
-- COMMON TRANSPORT CHANNEL SETUP REQUEST FDD
--
-- *****

CommonTransportChannelSetupRequestFDD ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container        {{CommonTransportChannelSetupRequestFDD-IEs}},
    protocolExtensions          ProtocolExtensionContainer  {{CommonTransportChannelSetupRequestFDD-Extensions}}    OPTIONAL,
    ...
}

CommonTransportChannelSetupRequestFDD-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-C-ID                CRITICALITY ignore TYPE C-ID                PRESENCE mandatory }|
    { ID id-ConfigurationGenerationID CRITICALITY ignore TYPE ConfigurationGenerationID PRESENCE mandatory }|
    { ID id-CommonPhysicalChannelType-CTCHsetup-Req-FDD CRITICALITY ignore TYPE CommonPhysicalChannelType-CTCHsetup-Req-FDD PRESENCE mandatory }
},
...
}

CommonTransportChannelSetupRequestFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

CommonPhysicalChannelType-CTCHsetup-Req-FDD ::= ENUMERATED {
    secondary-CCPCH-parameters-CTCHsetup-Req-FDD,                Secondary-CCPCH-parameters-CTCHsetup-Req-FDD,
    pRACH-parameters-CTCHsetup-Req-FDD                            PRACH-parameters-CTCHsetup-Req-FDD
}

Secondary-CCPCH-parameters-CTCHsetup-Req-FDD ::= SEQUENCE {
    commonPhysicalChannelID        CommonPhysicalChannelID,
    fdd-SCCPCH-Offset              FDD-SCCPCH-Offset,
    dl-ScramblingCode              DL-ScramblingCode,
    fdd-DL-ChannelisationCodeNumber FDD-DL-ChannelisationCodeNumber,
    tFCS                            TFCS,
    secondaryCCPCH-SlotFormat      SecondaryCCPCH-SlotFormat,
    pilotBitsUsedIndicator          PilotBitsUsedIndicator,
    multiPlexingPosition           MultiPlexngPosition,
    sTTD-Indicator                 STTD-Indicator,
    commonTransportChannelType     CommonTransportChannelType-CTCHsetup-Req-FDD
}

```







```

CommonTransportChannelSetupRequestTDD-IEs NBAP-PROTOCOL-IES ::= {
  { ID id-C-ID CRITICALITY ignore TYPE C-ID PRESENCE mandatory }|
  { ID id-ConfigurationGenerationID CRITICALITY ignore TYPE ConfigurationGenerationID PRESENCE mandatory }|
  { ID id-CommonPhysicalChannelType-CTCHsetupReqTDD CRITICALITY ignore TYPE CommonPhysicalChannelType-CTCHsetupReqTDD PRESENCE
  mandatory
}
}|
{ ID id-CommontransportChannelType-CTCHsetupReqTDD CRITICALITY ignore TYPE CommontransportChannelType-CTCHsetupReqTDD PRESENCE
  mandatory
},
...
}

CommonTransportChannelSetupRequestTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

CommonPhysicalChannelType-CTCHsetupReqTDD ::= ENUMERATED {
  secondary-CCPCH-parameters-CTCHsetupReqTDD Secondary-CCPCH-parameters-CTCHsetupReqTDD,
  PRACH-parameters-CTCHsetupReqTDD PRACH-parameters-CTCHsetupReqTDD
}

Secondary-CCPCH-parameters-CTCHsetupReqTDD ::= SEQUENCE {
  cCtrCH-ID CCtrCH-ID,
  tFCS TFCS,
  secondaryCCPCH SecondaryCCPCHList-CTCHsetupReqTDD,
}

SecondaryCCPCHList-CTCHsetupReqTDD ::= SEQUENCE (SIZE (1..maxnoofSCCPCHs)) OF
  ProtocolIE-Container {{ SecondaryCCPCHList-CTCHsetupReqTDDItemIE }}

SecondaryCCPCHList-CTCHsetupReqTDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-SecondaryCCPCHList-CTCHsetupReqTDDItem CRITICALITY ignore TYPE SecondaryCCPCHList-CTCHsetupReqTDDItem PRESENCE mandatory
  },
  ...
}

SecondaryCCPCHList-CTCHsetupReqTDDItem ::= SEQUENCE {
  commonPhysicalChannelID CommonPhysicalChannelID,
  tdd-ChannelisationCode TDD-ChannelisationCode,
  timeslot TimeSlot,
  burstType BurstType,
  midambleShift MidambleShift,
  tdd-PhysicalChannelOffset TDD-PhysicalChannelOffset,
  repetitionPeriod RepetitionPeriod,
  repetitionLength RepetitionLength,
  s-CCPCH-Power DL-Power,
  tSTD-Indicator TSTD-Indicator
}

```

```

PRACH-parameters-CTCHsetupReqTDD ::= SEQUENCE {
    commonPhysicalChannelID    CommonPhysicalChannelID,
    timeslot                    TimeSlot,
    tdd-ChannelisationCode      TDD-ChannelisationCode,
    burstType                    BurstType,
    maxPRACH-MidambleShift      MaxPRACH-MidambleShift OPTIONAL,
    pRACH-Midamble               PRACH-Midamble,
    commonTransportChannelType   CommonTransportChannelType-CTCHsetupReqTDD,
    rACH                          RACH-CTCHsetupReqTDD
}

CommonTransportChannelType-CTCHsetupReqTDD ::= ENUMERATED {
    fACH-ParametersList         FACH-ParametersList-CTCHsetupReqTDD,
    pCH-Parameters              PCH-Parameters-CTCHsetupReqTDD,
    bothCH-Parameters           BothCH-Parameters-CTCHsetupReqTDD
}

BothCH-Parameters-CTCHsetupReqTDD ::= SEQUENCE {
    fACH-ParametersList         FACH-ParametersList-CTCHsetupReqFDD,
    pCH-Parameters              PCH-Parameters-CTCHsetupReqFDD
}

FACH-ParametersList-CTCHsetupReqFDD ::= SEQUENCE (SIZE (1..maxnoofFACHs)) OF
    ProtocolIE-Container {{FACH-ParametersList-CTCHsetupReqFDD ItemIE }}

FACH-ParametersList-CTCHsetupReqFDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-FACH-ParametersList-CTCHsetupReqFDDItem CRITICALITY ignore TYPE FACH-ParametersList-CTCHsetupReqFDDItem PRESENCE mandatory },
    ...
}

FACH-ParametersList-CTCHsetupReqFDDItem ::= SEQUENCE {
    commonTransportChannelID    CommonTransportChannelID,
    dl-TransportFormatSet        DL-TransportFormatSet,
    toAWS                        ToAWS,
    toAWE                        ToAWE
}

PCH-ParametersList-CTCHsetupReqFDD ::= SEQUENCE (SIZE (1..maxnoofPCHs)) OF
    ProtocolIE-Container {{PCH-ParametersList-CTCHsetupReqFDD ItemIE }}

PCH-ParametersList-CTCHsetupReqFDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-PCH-ParametersList-CTCHsetupReqFDDItem CRITICALITY ignore TYPE PCH-ParametersList-CTCHsetupReqFDDItem PRESENCE mandatory },
    ...
}

PCH-ParametersList-CTCHsetupReqFDDItem ::= SEQUENCE {
    commonTransportChannelID    CommonTransportChannelID,
    dl-TransportFormatSet        DL-TransportFormatSet,
    toAWS                        ToAWS,
}

```



```

CommonTransportChannelType-CTCHsetup-Resp ::= ENUMERATED {
    fACH-ParametersList      FACH-ParametersList-CTCHsetup-Resp,
    pCH-Parameters          PCH-Parameters-CTCHsetup-Resp,
    bothCH-Parameters       BothCH-Parameters-CTCHsetup-Resp
}

BothCH-Parameters-CTCHsetup-Resp ::= SEQUENCE {
    fACH-ParametersList      FACH-ParametersList-CTCHsetup-Resp,
    pCH-Parameters          PCH-Parameters-CTCHsetupResp
}

FACH-ParametersList-CTCHsetup-Resp ::= SEQUENCE (SIZE (1..maxnoofFACHs)) OF
    ProtocolIE-Container {{FACH-ParametersList-CTCHsetup-RespItemIE}}

FACH-ParametersList-CTCHsetup-RespItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-FACH-ParametersList-CTCHsetup-RespItem CRITICALITY ignore TYPE FACH-ParametersList-CTCHsetup-RespItem PRESENCE mandatory },
    ...
}

FACH-ParametersList-CTCHsetup-RespItem ::= SEQUENCE {
    commonTransportChannelID      CommonTransportChannelID,
    transportLayerAddress          TransportLayerAddress,
    bindingID                      BindingID
}

PCH-Parameters-CTCHsetup-Resp ::= SEQUENCE {
    commonTransportChannelID      CommonTransportChannelID,
    transportLayerAddress          TransportLayerAddress,
    bindingID                      BindingID
}

PRACH-Parameters-CTCHsetup-Resp ::= SEQUENCE {
    commonTransportChannelID      CommonTransportChannelID,
    transportLayerAddress          TransportLayerAddress,
    bindingID                      BindingID
}

-- *****
--
-- COMMON TRANSPORT CHANNEL SETUP FAILURE
--
-- *****

CommonTransportChannelSetupFailure ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container      {{CommonTransportChannelSetupFailure-IEs}},
    protocolExtensions    ProtocolExtensionContainer {{CommonTransportChannelSetupFailure-Extensions}}
    OPTIONAL,
    ...
}

```

```
CommonTransportChannelSetupFailure-IEs NBAP-PROTOCOL-IES ::= {
  { ID id-Cause          CRITICALITY ignore  TYPE Cause          PRESENCE mandatory }|
  { ID id-CriticalityDiagnostic CRITICALITY ignore  TYPE CriticalityDiagnostic PRESENCE optional
  }|
  { ID id-CriticalityDiagnostic CRITICALITY ignore  TYPE CriticalityDiagnostic PRESENCE optional
  },
  ...
}

CommonTransportChannelSetupFailure-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
--
-- COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST FDD
--
-- *****

CommonTransportChannelReconfigurationRequestFDD ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container    {{CommonTransportChannelReconfigurationRequestFDD-IEs}},
  protocolExtensions   ProtocolExtensionContainer {{CommonTransportChannelReconfigurationRequestFDD-Extensions}}
OPTIONAL,
  ...
}

CommonTransportChannelReconfigurationRequestFDD-IEs NBAP-PROTOCOL-IES ::= {
  { ID id-ConfigurationGenerationID CRITICALITY ignore  TYPE ConfigurationGenerationID PRESENCE mandatory }|
  { ID id-FACH-ParametersList-CTCHreconf-Req-FDD CRITICALITY ignore  TYPE FACH-ParametersList-CTCHreconf-Req-FDD PRESENCE optional }|
  { ID id-PCH-ParametersList-CTCHreconf-Req-FDD CRITICALITY ignore  TYPE PCH-ParametersList-CTCHreconf-Req-FDD PRESENCE optional }|
  { ID id-PICH-ParametersList-CTCHreconf-Req-FDD CRITICALITY ignore  TYPE PICH-ParametersList-CTCHreconf-Req-FDD PRESENCE optional }|
  { ID id-PRACH-ParametersList-CTCHreconf-Req-FDD CRITICALITY ignore  TYPE PRACH-ParametersList-CTCHreconf-Req-FDD PRESENCE optional
  }|
  { ID id-AllowedSlotFormatInformationList-CTCHreconf-Req-FDD
CRITICALITY ignor          TYPE AllowedSlotFormatInformationList-CTCHreconf-Req-FDD PRESENCE optional
  }|
  { ID id-AICH-ParametersList-CTCHreconf-Req-FDD CRITICALITY ignore  TYPE AICH-ParametersList-CTCHreconf-Req-FDD PRESENCE optional },
  ...
}

CommonTransportChannelReconfigurationRequestFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

FACH-ParametersList-CTCHreconf-Req-FDD ::= SEQUENCE (SIZE (1..maxFACHCell)) OF
  ProtocolIE-Container {{FACH-ParametersListItemIE-CTCHreconf-Req-FDD}}
```



```

AllowedSlotFormatInformationListItem-CTCHreconf-Req-FDD ::= SEQUENCE {
    slotFormat          SlotFormat
    rACH-SubChannelNumbers  RACH-SubChannelNumbers  OPTIONAL
}

AICH-ParametersList-CTCHreconf-Req-FDD ::= SEQUENCE (SIZE (1..maxnoofPRACHs)) OF
    ProtocolIE-Container {{ AICH-ParametersListItemIE-CTCHreconf-Req-FDD }}

AICH-ParametersListItemIE-CTCHreconf-Req-FDD NBAP-PROTOCOL-IES ::= {
    { ID id-AICH-ParametersListItem-CTCHreconf-Req-FDD          CRITICALITY ignore          TYPE AICH-ParametersListItem-CTCHreconf-Req-FDD
      PRESENCE          mandatory },
    ...
}

AICH-ParametersListItem-CTCHreconf-Req-FDD ::= SEQUENCE {
    commonTransportChannelID  CommonTransportChannelID,
    aICH-Power                DL-Power
}

-- *****
--
-- COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST TDD
--
-- *****

CommonTransportChannelReconfigurationRequestTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container          {{CommonTransportChannelReconfigurationRequestTDD-IEs}},
    protocolExtensions  ProtocolExtensionContainer {{CommonTransportChannelReconfigurationRequestTDD-Extensions}}
OPTIONAL,
    ...
}

CommonTransportChannelReconfigurationRequestTDD-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-C-ID          CRITICALITY ignore          TYPE C-ID          PRESENCE mandatory }|
    { ID id-ConfigurationGenerationID          CRITICALITY ignore          TYPE ConfigurationGenerationID          PRESENCE mandatory }|
    { ID id-CommonPhysicalChannelType-CTCHreconfReqTDD          CRITICALITY          ignore          TYPE          CommonPhysicalChannelType-CTCHreconfReqTDD          PRESENCE
      mandatory
    }|
    { ID id-FACH-ParametersList-CTCHreconfReqTTD          CRITICALITY ignore          TYPE FACH-ParametersList-CTCHreconfReqTTD          PRESENCE optional }|
    { ID id-PCH-ParametersList-CTCHreconfReqTTD          CRITICALITY ignore          TYPE          PCH-ParametersList-CTCHreconfReqTTD          PRESENCE optional },
    ...
}

CommonTransportChannelReconfigurationRequestTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

CommonPhysicalChannelType-CTCHreconfReqTDD ::= ENUMERATED {

```





```
-- *****
--
-- COMMON TRANSPORT CHANNEL RECONFIGURATION RESPONSE
--
-- *****

CommonTransportChannelReconfigurationResponse ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container      {{CommonTransportChannelReconfigurationResponse-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CommonTransportChannelReconfigurationResponse-Extensions}}
    ...
}

CommonTransportChannelReconfigurationResponse-IEs NBAP-PROTOCOL-IES ::= {
{ ID id-CriticalityDiagnostic          CRITICALITY ignore          TYPE CriticalityDiagnostic          PRESENCE optional
},
...
}

CommonTransportChannelReconfigurationResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
...
}

-- *****
--
-- COMMON TRANSPORT CHANNEL RECONFIGURATION FAILURE
--
-- *****

CommonTransportChannelReconfigurationFailure ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container      {{CommonTransportChannelReconfigurationFailure-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CommonTransportChannelReconfigurationFailure-Extensions}}
    ...
}

CommonTransportChannelReconfigurationFailure-IEs NBAP-PROTOCOL-IES ::= {
{ ID id-Cause          CRITICALITY ignore          TYPE Cause          PRESENCE mandatory }|
{ ID id-CriticalityDiagnostic          CRITICALITY ignore          TYPE CriticalityDiagnostic          PRESENCE optional
}|
{ ID id-CriticalityDiagnostic          CRITICALITY ignore          TYPE CriticalityDiagnostic          PRESENCE optional
},
...
}

CommonTransportChannelReconfigurationFailure-Extensions NBAP-PROTOCOL-EXTENSION ::= {
...
}
```

```
-- *****
--
-- COMMON TRANSPORT CHANNEL DELETION REQUEST
--
-- *****

CommonTransportChannelDeletionRequest ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container          {{CommonTransportChannelDeletionRequest-IEs}},
    protocolExtensions   ProtocolExtensionContainer    {{CommonTransportChannelDeletionRequest-Extensions}}          OPTIONAL,
}

CommonTransportChannelDeletionRequest-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-C-ID          CRITICALITY ignore TYPE C-ID          PRESENCE mandatory } |
    { ID id-CommonPhysicalChannelID CRITICALITY ignore TYPE CommonPhysicalChannelID PRESENCE mandatory } |
    { ID id-ConfigurationGenerationID CRITICALITY ignore TYPE ConfigurationGenerationID PRESENCE mandatory },
    ...
}

CommonTransportChannelDeletionRequest-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- COMMON TRANSPORT CHANNEL DELETION RESPONSE
--
-- *****

CommonTransportChannelDeletionResponse ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container          {{CommonTransportChannelDeletionResponse-IEs}},
    protocolExtensions   ProtocolExtensionContainer    {{CommonTransportChannelDeletionResponse-Extensions}}          OPTIONAL,
}

CommonTransportChannelDeletionResponse-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-CriticalityDiagnostic CRITICALITY ignore TYPE CriticalityDiagnostic PRESENCE optional },
    ...
}

CommonTransportChannelDeletionResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- BLOCK RESOURCE REQUEST
--
```

```
-- *****  
  
BlockResourceRequest ::= SEQUENCE {  
    protocolIEs          ProtocolIE-Container    {{BlockResourceRequest-IEs}},  
    protocolExtensions  ProtocolExtensionContainer {{BlockResourceRequest-Extensions}}    OPTIONAL,  
    ...  
}
```

```
BlockResourceRequest-IEs NBAP-PROTOCOL-IES ::= {  
    { ID id-C-ID          CRITICALITY ignore TYPE C-ID          PRESENCE mandatory } |  
    { ID id-BlockingPriorityIndicator CRITICALITY ignore TYPE BlockingPriorityIndicator PRESENCE mandatory } |  
    { ID id-ShutdownTimer CRITICALITY ignore TYPE ShutdownTimer PRESENCE conditional } |  
    },  
    -- The information element is present when the Blocking Priority Indicator IE indicates 'Normal Priority'--  
    ...  
}
```

```
BlockResourceRequest-Extensions NBAP-PROTOCOL-EXTENSION ::= {  
    ...  
}
```

```
-- *****  
--  
-- BLOCK RESOURCE RESPONSE  
--  
-- *****
```

```
BlockResourceResponse ::= SEQUENCE {  
    protocolIEs          ProtocolIE-Container    {{BlockResourceResponse-IEs}},  
    protocolExtensions  ProtocolExtensionContainer {{BlockResourceResponse-Extensions}}    OPTIONAL,  
    ...  
}
```

```
BlockResourceResponse-IEs NBAP-PROTOCOL-IES ::= {  
    { ID id-CriticalityDiagnostic CRITICALITY ignore TYPE CriticalityDiagnostic PRESENCE optional } |  
    },  
    ...  
}
```

```
BlockResourceResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {  
    ...  
}
```

```
-- *****  
--  
-- BLOCK RESOURCE FAILURE  
--
```

```
-- *****
BlockResourceFailure ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container    {{BlockResourceFailure-IEs}},
  protocolExtensions  ProtocolExtensionContainer {{BlockResourceFailure-Extensions}}    OPTIONAL,
  ...
}

BlockResourceFailure-IEs NBAP-PROTOCOL-IES ::= {
  { ID id-Cause          CRITICALITY ignore    TYPE Cause          PRESENCE mandatory    },
  { ID id-CriticalityDiagnostic CRITICALITY ignore    TYPE CriticalityDiagnostic PRESENCE optional    },
  ...
}

BlockResourceFailure-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
-- UNBLOCK RESOURCE INDICATION
-- *****

UnblockResourceIndication ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container    {{UnblockResourceIndication-IEs}},
  protocolExtensions  ProtocolExtensionContainer {{UnblockResourceIndication-Extensions}}    OPTIONAL,
  ...
}

UnblockResourceIndication-IEs NBAP-PROTOCOL-IES ::= {
  { ID id-C-ID          CRITICALITY ignore    TYPE C-ID          PRESENCE mandatory    },
  ...
}

UnblockResourceIndication-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
-- AUDIT REQUIRED INDICATION
-- *****

AuditRequiredIndication ::= SEQUENCE {
```



```

}

-- *****
--
-- AUDIT RESPONSE
--
-- *****

AuditResponse ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{AuditResponse-IEs}},
    protocolExtensions  ProtocolExtensionContainer {{AuditResponse-Extensions}}    OPTIONAL,
    ...
}

AuditResponse-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-Cell-InformationList-Audit-Res    CRITICALITY ignore    TYPE Cell-InformationList-Audit-Res    PRESENCE optional }|
    { ID id-CommunicationControlPort-InformationList-Audit-Res    CRITICALITY ignore    TYPE CommunicationControlPort-InformationList-Audit-Res    PRESENCE optional }
}|
{ ID id-Cell-InformationList-Audit-Res    CRITICALITY ignore    TYPE Cell-InformationList-Audit-Res    PRESENCE optional }|
{ ID id-CriticalityDiagnostic    CRITICALITY ignore    TYPE CriticalityDiagnostic    PRESENCE optional
},
...
}

AuditResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

Cell-InformationList-Audit-Res ::= SEQUENCE (SIZE (1.. maxCellInNodeB maxUCIDinNodeB)) OF
    ProtocolIE-Container {{Cell-InformationItemIE-Audit-Res }}

Cell-InformationItemIE-Audit-Res NBAP-PROTOCOL-IES ::= {
    { ID id-Cell-InformationItem-Audit-Res    CRITICALITY ignore    TYPE Cell-InformationItem-Audit-Res    PRESENCE    optional    },
    ...
}

Cell-InformationItem-Audit-Res ::= SEQUENCE {
    c-ID          C-ID,
    resourceOperationState    ResourceOperationState,
    availabilityStatus    AvailabilityStatus,
    maximumDLPowerCapability    MaximumDLPowerCapability,
    -- to do
    minimumSpreadingFactor    MinimumSpreadingFactor,
    -- to do
    primary-SCH-Information    P-SCH-Information-Audit-Res    OPTIONAL,
    secondary-SCH-Information    S-SCH-Information-Audit-Res    OPTIONAL,
}

```







```
}

FACH-InformationItem-Audit-Res ::= SEQUENCE {
    commonPhysicalChannelID    CommonPhysicalChannelID,
    resourceOperationState     ResourceOperationState,
    availabilityStatus         AvailabilityStatus
}

PRACH-InformationList-Audit-Res ::= SEQUENCE (SIZE (1..maxPRACHCell)) OF
    ProtocolIE-Container {{PRACH-InformationItemIE-Audit-Res}}

PRACH-InformationItemIE-Audit-Res NBAP-PROTOCOL-IES ::= {
    { ID id-PRACH-InformationItem-Audit-Res    CRITICALITY ignore    TYPE PRACH-InformationItem-Audit-Res    PRESENCE mandatory    },
    ...
}

PRACH-InformationItem-Audit-Res ::= SEQUENCE {
    commonPhysicalChannelID    CommonPhysicalChannelID,
    resourceOperationState     ResourceOperationState,
    availabilityStatus         AvailabilityStatus
}

RACH-InformationList-Audit-Res ::= SEQUENCE (SIZE (1..maxRACHCell)) OF
    ProtocolIE-Container {{RACH-InformationItemIE-Audit-Res}}

RACH-InformationItemIE-Audit-Res NBAP-PROTOCOL-IES ::= {
    { ID id-RACH-InformationItem-Audit-Res    CRITICALITY ignore    TYPE RACH-InformationItem-Audit-Res    PRESENCE mandatory    },
    ...
}

RACH-InformationItem-Audit-Res ::= SEQUENCE {
    commonTransportChannelID    CommonTransportChannelID,
    resourceOperationState     ResourceOperationState,
    availabilityStatus         AvailabilityStatus
}

AICH-InformationList-Audit-Res ::= SEQUENCE (SIZE (1..maxRACHCell)) OF
    ProtocolIE-Container {{RACH-InformationItemIE-Audit-Res}}

AICH-InformationItemIE-Audit-Res NBAP-PROTOCOL-IES ::= {
    { ID id-RACH-InformationItem-Audit-Res    CRITICALITY ignore    TYPE RACH-InformationItem-Audit-Res    PRESENCE mandatory    },
    ...
}

AICH-InformationItem-Audit-Res ::= SEQUENCE {
    CommonPhysicalChannelID    CommonPhysicalChannelID,
    resourceOperationState     ResourceOperationState,
    availabilityStatus         AvailabilityStatus
}
```





```
CommonMeasurementInitiationResponse-IEs NBAP-PROTOCOL-IES ::= {
  { ID id-MeasurementID          CRITICALITY ignore TYPE MeasurementID          PRESENCE mandatory }|
  { ID id-CommonMeasurementType-Res CRITICALITY ignore TYPE CommonMeasurementType-Res PRESENCE mandatory }|
  { ID id-SFN                    CRITICALITY ignore TYPE SFN                    PRESENCE optional }|
  { ID id-CriticalityDiagnostic   CRITICALITY ignore TYPE CriticalityDiagnostic   PRESENCE optional
  },
  ...
}

CommonMeasurementInitiationResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

CommonMeasurementObjectType-Res ::= CHOICE {
  cell          Cell-CommonMeasurement-Res,
  rACH          RACH-CommonMeasurement-Res
}

Cels-CommonMeasurement-Req ::= SEQUENCE {
  commonMeasurementValue CommonMeasurementValue
}

RACH-CommonMeasurement-Req ::= SEQUENCE {
  commonMeasurementValue CommonMeasurementValue
}

-- *****
--
-- COMMON MEASUREMENT INITIATION FAILURE
--
-- *****

CommonMeasurementInitiationFailure ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container    {{CommonMeasurementInitiationFailure-IEs}},
  protocolExtensions  ProtocolExtensionContainer {{CommonMeasurementInitiationFailure-Extensions}}
  OPTIONAL,
  ...
}

CommonMeasurementInitiationFailure-IEs NBAP-PROTOCOL-IES ::= {
  { ID id-MeasurementID          CRITICALITY ignore TYPE MeasurementID          PRESENCE mandatory }|
  { ID id-Cause                  CRITICALITY ignore TYPE Cause                  PRESENCE mandatory }|
  { ID id-CriticalityDiagnostic   CRITICALITY ignore TYPE CriticalityDiagnostic   PRESENCE optional
  },
  ...
}

CommonMeasurementInitiationFailure-Extensions NBAP-PROTOCOL-EXTENSION ::= {
```

```
...
}

-- *****
--
-- COMMON MEASUREMENT REPORT
--
-- *****

CommonMeasurementReport ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container          {{CommonMeasurementReport-IEs}},
    protocolExtensions   ProtocolExtensionContainer    {{CommonMeasurementReport-Extensions}}    OPTIONAL,
    ...
}

CommonMeasurementReport-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-MeasurementID          CRITICALITY ignore TYPE MeasurementID          PRESENCE mandatory }|
    { ID id-CommonMeasurementObjectType-Rep CRITICALITY ignore TYPE CommonMeasurementObjectType-Rep PRESENCE mandatory }|
    { ID id-SFN                    CRITICALITY ignore TYPE SFN                    PRESENCE optional },
    ...
}

CommonMeasurementReport-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

CommonMeasurementObjectType-Rep ::= ENUMERATED {
    cell          Cell-CommonMeasurement-Rep,
    rACH          RACH-CommonMeasurement-Rep
}

Cell-CommonMeasurement-Rep ::= SEQUENCE {
    commonMeasurementValue CommonMeasurementValue
}

RACH-CommonMeasurement-Rep ::= SEQUENCE {
    commonMeasurementValue CommonMeasurementValue
}

-- *****
--
-- COMMON MEASUREMENT TERMINATION REQUEST
--
-- *****

CommonMeasurementTerminationRequest ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container          {{CommonMeasurementTerminationRequest-IEs}},
```

```

    protocolExtensions      ProtocolExtensionContainer {{CommonMeasurementTerminationRequest-Extensions}}
    ...
}

```

```

CommonMeasurementTerminationRequest-IEs NBAP-PROTOCOL-IES ::= {
  { ID id-MeasurementID      CRITICALITY ignore  TYPE MeasurementID      PRESENCE mandatory  },
  ...
}

```

```

CommonMeasurementTerminationRequest-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

```

```

-- *****
--
-- COMMON MEASUREMENT FAILURE INDICATION
--
-- *****

```

```

CommonMeasurementFailureIndication ::= SEQUENCE {
  protocolIEs      ProtocolIE-Container      {{CommonMeasurementFailureIndication-IEs}},
  protocolExtensions ProtocolExtensionContainer {{CommonMeasurementFailureIndication-Extensions}}
  ...
}

```

```

CommonMeasurementFailureIndication-IEs NBAP-PROTOCOL-IES ::= {
  { ID id-MeasurementID      CRITICALITY ignore  TYPE MeasurementID      PRESENCE mandatory  }|
  { ID id-Cause              CRITICALITY ignore  TYPE Cause                  PRESENCE mandatory  }|
  { ID id-CriticalityDiagnostic CRITICALITY ignore  TYPE CriticalityDiagnostic  PRESENCE optional   },
  ...
}

```

```

CommonMeasurementFailureIndication-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

```

```

-- *****
--
-- CELL SETUP REQUEST FDD
--
-- *****

```

```

CellSetupRequestFDD ::= SEQUENCE {
  protocolIEs      ProtocolIE-Container      {{CellSetupRequestFDD-IEs}},
  protocolExtensions ProtocolExtensionContainer {{CellSetupRequestFDD-Extensions}}
  ...
}

```

```

}

CellSetupRequestFDD-IEs NBAP-PROTOCOL-IES ::= {
  { ID id-LocalCell-ID          CRITICALITY ignore  TYPE LocalCell-ID          PRESENCE mandatory }|
  { ID id-C-ID                  CRITICALITY ignore  TYPE C-ID                  PRESENCE mandatory }|
  { ID id-ConfigurationGenerationID  CRITICALITY ignore  TYPE ConfigurationGenerationID  PRESENCE mandatory }|
  { ID id-T-Cell                CRITICALITY ignore  TYPE T-Cell                PRESENCE mandatory }|
  { ID id-UARFCN                CRITICALITY ignore  TYPE UARFCN                PRESENCE mandatory }|
  { ID id-MaximumTransmissionPower  CRITICALITY ignore  TYPE MaximumTransmissionPower  PRESENCE mandatory }|
  { ID id-PrimaryScramblingCode     CRITICALITY ignore  TYPE PrimaryScramblingCode     PRESENCE mandatory }|
  { ID id-PrimarySCH-Information-Cellsetup-Req  CRITICALITY ignore  TYPE PrimarySCH-Information-Cellsetup-Req  PRESENCE mandatory }|
  { ID id-SecondarySCH-Information-Cellsetup-Req  CRITICALITY ignore  TYPE SecondarySCH-Information-Cellsetup-Req  PRESENCE mandatory }|
  { ID id-PrimaryCPICH-Information-Cellsetup-Req  CRITICALITY ignore  TYPE PrimaryCPICH-Information-Cellsetup-Req  PRESENCE mandatory }|
  { ID id-SecondaryCPICH-Information-Cellsetup-Req  CRITICALITY ignore  TYPE SecondaryCPICH-Information-Cellsetup-Req  PRESENCE optional }
}|
  { ID id-PrimaryCCPCH-Information-Cellsetup-Req  CRITICALITY ignore  TYPE PrimaryCCPCH-Information-Cellsetup-Req  PRESENCE mandatory },
  ...
}

CellSetupRequestFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

PrimarySCH-Information-Cellsetup-Req ::= SEQUENCE {
  commonPhysicalChannelID  CommonPhysicalChannelID,
  primarySCH-Power         DL-Power,
  tSTD-Indicator           TSTD-Indicator
}

SecondarySCH-Information-Cellsetup-Req ::= SEQUENCE {
  commonPhysicalChannelID  CommonPhysicalChannelID,
  secondarySCH-Power       DL-Power,
  transmitDiversityIndication  TransmitDiversityIndication
}

PrimaryCPICH-Information-Cellsetup-Req ::= SEQUENCE {
  commonPhysicalChannelID  CommonPhysicalChannelID,
  primaryCPICH-Power       PrimaryCPICH-PowerDL-Power,
  sTTD-Indicator           STTD-Indicator
}

SecondaryCPICH-Information-Cellsetup-Req ::= SEQUENCE {
  commonPhysicalChannelID  CommonPhysicalChannelID,
  dl-ScramblingCode       DL-ScramblingCode,
  secondaryCPICH-Power     DL-Power,
  transmitDiversityIndication  TransmitDiversityIndication
}

```



```

PrimaryCCPCH-Information-Cellsetup-Req ::= SEQUENCE {
    commonPhysicalChannelID    CommonPhysicalChannelID,
    bCH-information-Cellsetup-Req    BCH-Information-PrimCCPCH-Cellsetup-Req,
    sTTD-Indicator              STTD-Indicator
}

BCH-Information-PrimCCPCH-Cellsetup-Req ::= SEQUENCE {
    commonTransportChannelID    CommonTransportChannelID,
    bCH-Power                    DL-Power
}

-- *****
--
-- CELL SETUP REQUEST TDD
--
-- *****

CellSetupRequestTDD ::= SEQUENCE {
    protocolIEs                  ProtocolIE-Container    {{CellSetupRequestTDD-IEs}},
    protocolExtensions           ProtocolExtensionContainer {{CellSetupRequestTDD-Extensions}}          OPTIONAL,
    ...
}

CellSetupRequestTDD-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-LocalCell-ID          CRITICALITY ignore TYPE LocalCell-ID          PRESENCE mandatory }|
    { ID id-C-ID                  CRITICALITY ignore TYPE C-ID                  PRESENCE mandatory }|
    { ID id-ConfigurationGenerationID    CRITICALITY ignore TYPE ConfigurationGenerationID    PRESENCE mandatory }|
    { ID id-UARFCN                 CRITICALITY ignore TYPE UARFCN                 PRESENCE mandatory }|
    { ID id-Cell-Parameter-ID        CRITICALITY ignore TYPE Cell-Parameter-ID        PRESENCE mandatory }|
    { ID id-MaximumTransmissionPower    CRITICALITY ignore TYPE MaximumTransmissionPower    PRESENCE mandatoryoptional }|
    { ID id-TransmissionDiversityApplied    CRITICALITY ignore TYPE TransmissionDiversityApplied    PRESENCE mandatory }|
    { ID id-SyncCase                CRITICALITY ignore TYPE TransmissionDiversityApplied    PRESENCE mandatory }|
    { ID id-PSCH-Information-CellsetupReqTDD    CRITICALITY ignore TYPE PSCH-Information-CellsetupReqTDD    PRESENCE mandatory }|
    { ID id-PCCPCH-Information-CellsetupReqTDD    CRITICALITY ignore TYPE PCCPCH-Information-CellsetupReqTDD    PRESENCE mandatory }|
    { ID id-TimeSlotConfigurationList-CellsetupReqTDD    CRITICALITY ignore TYPE TimeSlotConfigurationList-CellsetupReqTDD
    PRESENCE mandatory
    },
    ...
}

CellSetupRequestTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

PSCH-Information-CellsetupReqTDD ::= SEQUENCE {
    commonPhysicalChannelID    CommonPhysicalChannelID,
    syncCaseIndicator          SyncCaseIndicator-CellsetupReqTDD,
}

```

```

    pSCH-Power          DL-Power,
    tSTD-Indicator      TSTD-Indicator
}

SyncCaseIndicator-CellsetupReqTDD ::= ENUMERATED {
    case1              Case1-CellsetupReqTDD,
    case2andCase3     Case2andCase3-CellsetupReqTDD
}

Case1-CellsetupReqTDD ::= SEQUENCE {
    timeSlot          TimeSlot
}

Case2andCase3-CellsetupReqTDD ::= SEQUENCE {
    PSCH-TimeSlot    PSCH-TimeSlot
}

PCCPCH-Information-CellsetupReqTDD ::= SEQUENCE {
    syncCaseIndicator SyncCaseIndicator-CellsetupReqTDD2,
    repetitionPeriod  RepetitionPeriod,
    repetitionLength  RepetitionLength,
    pCCPCH-Power      DL-Power,
    tSTD-Indicator    TSTD-Indicator
}

SyncCaseIndicator-CellsetupReqTDD2 ::= ENUMERATED {
    case3              Case3-CellsetupReqTDD
}

Case3-CellsetupReqTDD ::= SEQUENCE {
    timeSlot          TimeSlot
}

TimeSlotConfigurationList-CellsetupReqTDD ::= SEQUENCE (SIZE (1..15)) OF
    ProtocolIE-Container{{TimeSlotConfigurationList-CellsetupReqTDD ItemIE }}

TimeSlotConfigurationList-CellsetupReqTDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-TimeSlotConfigurationList-CellsetupReqTDDItem     CRITICALITY ignore          TYPE          TimeSlotConfigurationList-
CellsetupReqTDDItem      PRESENCE          mandatory
},
    ...
}

TimeSlotConfigurationList-CellsetupReqTDDItem ::= SEQUENCE {
    timeSlot          TimeSlot,
    timeSlotStatus    TimeSlotStatus,
    timeSlotDirection TimeSlotDirection
}

```

```

-- *****
--
-- CELL SETUP RESPONSE
--
-- *****

CellSetupResponse ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{CellSetupResponse-IEs}},
    protocolExtensions  ProtocolExtensionContainer {{CellSetupResponse-Extensions}}    OPTIONAL,
    ...
}

CellSetupResponse-IEs NBAP-PROTOCOL-IES ::= {
{ ID id-CriticalityDiagnostic          CRITICALITY ignore          TYPE CriticalityDiagnostic          PRESENCE optional
    },
    ...
}

CellSetupResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- CELL SETUP FAILURE
--
-- *****

CellSetupFailure ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{CellSetupFailure-IEs}},
    protocolExtensions  ProtocolExtensionContainer {{CellSetupFailure-Extensions}}    OPTIONAL,
    ...
}

CellSetupFailure-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-Cause          CRITICALITY ignore          TYPE Cause          PRESENCE mandatory }|
{ ID id-CriticalityDiagnostic          CRITICALITY ignore          TYPE CriticalityDiagnostic          PRESENCE optional
    },
    ...
}

CellSetupFailure-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--

```





```
TimeSlotConfiguration-CellReconfReqItemIE NBAP-PROTOCOL-IES ::= {
  { I D id-TimeSlotConfiguration-CellReconfReqItem    CRITICALITY    ignore    TYPE    TimeSlotConfiguration-CellReconfReqItem    PRESENCE
    mandatory
  },
  ...
}

TimeSlotConfiguration-CellReconfReqItem ::= SEQUENCE {
  timeSlot          TimeSlot,
  timeSlotStatus    TimeSlotStatus,
  timeSlotDirection TimeSlotDirection
}

-- *****
--
-- CELL RECONFIGURATION RESPONSE
--
-- *****

CellReconfigurationResponse ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container    {{CellReconfigurationResponse-IEs}},
  protocolExtensions  ProtocolExtensionContainer {{CellReconfigurationResponse-Extensions}}    OPTIONAL,
  ...
}

CellReconfigurationResponse-IEs NBAP-PROTOCOL-IES ::= {
  { ID id-CriticalityDiagnostic    CRITICALITY ignore    TYPE CriticalityDiagnostic    PRESENCE optional
  },
  ...
}

CellReconfigurationResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
--
-- CELL RECONFIGURATION FAILURE
--
-- *****

CellReconfigurationFailure ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container    {{CellReconfigurationFailure-IEs}},
  protocolExtensions  ProtocolExtensionContainer {{CellReconfigurationFailure-Extensions}}    OPTIONAL,
  privateExtensions   PrivateExtensionContainer {{CellReconfigurationFailure-PrivateExtensions}}    OPTIONAL,
  ...
}
```









```
CRITICALITY ignore           TYPE CommunicationControlPortInformation-ResourceStatIndItem
PRESENCE mandatory },
...
}

CommunicationControlPortInformation-ResourceStatIndItem ::= SEQUENCE {
communicationControlPortID    CommunicationControlPortID,
resourceOperationalState      ResourceOperationalState,
availabilityStatus            AvailabilityStatus
}

Cell-InformationList-ResourceStatInd ::= SEQUENCE (SIZE (1..maxCellInNodeB)) OF
ProtocolIE-Container {{Cell-Information-ResourceStatIndItemIE }}

Cell-Information-ResourceStatIndItemIE NBAP-PROTOCOL-IES ::= {
{ ID id-Cell-Information-ResourceStatIndItem    CRITICALITY ignore    TYPE Cell-Information-ResourceStatIndItem    PRESENCE mandatory},
...
}

Cell-Information-ResourceStatIndItem ::= SEQUENCE {
c-ID                C-ID,
resourceOperationalState    ResourceOperationalState,
availabilityStatus    AvailabilityStatus,
maximumDL-PowerCapability    MaximumDL-PowerCapability,
minimumSpreadingFactor    MinimumSpreadingFactor
}

P-SCH-Information-ResourceStatInd ::= SEQUENCE {
commonTransportChannelID    CommonTransportChannelID,
resourceOperationState    ResourceOperationState,
availabilityStatus    AvailabilityStatus
}

S-SCH-Information-ResourceStatInd ::= SEQUENCE {
commonPhysicalChannelID    CommonPhysicalChannelID,
resourceOperationState    ResourceOperationState,
availabilityStatus    AvailabilityStatus
}

P-CPICH-Information-ResourceStatInd ::= SEQUENCE {
commonPhysicalChannelID    CommonPhysicalChannelID,
resourceOperationState    ResourceOperationState,
availabilityStatus    AvailabilityStatus
}

S-CPICH-InformationList-ResourceStatInd ::= SEQUENCE (SIZE (1..maxSCPICHCell)) OF
ProtocolIE-Container {{S-CPICH-InformationItemIE-ResourceStatInd }}

S-CPICH-InformationItemIE-ResourceStatInd NBAP-PROTOCOL-IES ::= {
```

```
{ ID id-S-CPICH-InformationItem-ResourceStatInd    CRITICALITY ignore    TYPE S-CPICH-InformationItem-ResourceStatInd    PRESENCE mandatory
},
...
}

S-CPICH-InformationItem-ResourceStatInd ::= SEQUENCE {
    commonTransportChannelID    CommonTransportChannelID,
    resourceOperationState      ResourceOperationState,
    availabilityStatus          AvailabilityStatus
}

P-CCPCH-Information-ResourceStatInd ::= SEQUENCE {
    commonPhysicalChannelID    CommonPhysicalChannelID,
    resourceOperationState      ResourceOperationState,
    availabilityStatus          AvailabilityStatus
}

BCH-InformationItem-ResourceStatInd ::= SEQUENCE {
    commonTransportChannelID    CommonTransportChannelID,
    resourceOperationalState    ResourceOperationalState,
    availabilityStatus          AvailabilityStatus
}

PCH-InformationList-ResourceStatInd ::= SEQUENCE (SIZE (1..maxPCHinNodeB)) OF
    ProtocolIE-Container {{PCH-Information-ResourceStatIndItemIE }}

PCH-Information-ResourceStatIndItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-PCH-Information-ResourceStatIndItem    CRITICALITY ignore    TYPE PCH-Information-ResourceStatIndItem    PRESENCE mandatory},
    ...
}

PCH-Information-ResourceStatIndItem ::= SEQUENCE {
    commonTransportChannelID    CommonTransportChannelID,
    resourceOperationalState    ResourceOperationalState,
    availabilityStatus          AvailabilityStatus
}

PICH-InformationItem-ResourceStatInd ::= SEQUENCE {
    commonPhysicalChannelID    CommonPhysicalChannelID,
    resourceOperationalState    ResourceOperationalState,
    availabilityStatus          AvailabilityStatus
}

FACH-InformationList-ResourceStatInd ::= SEQUENCE (SIZE (1..maxFACHCell)) OF
    ProtocolIE-Container {{FACH-Information-ResourceStatIndItemIE }}

FACH-Information-ResourceStatIndItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-FACH-Information-ResourceStatIndItem    CRITICALITY ignore    TYPE FACH-Information-ResourceStatIndItem    PRESENCE mandatory},
    ...
}
```

```
}  
  
FACH-Information-ResourceStatIndItem ::= SEQUENCE {  
    commonTransportChannelID      CommonTransportChannelID,  
    resourceOperationalState      ResourceOperationalState,  
    availabilityStatus             AvailabilityStatus  
}  
  
PRACH-InformationList-ResourceStatInd ::= SEQUENCE (SIZE (1..maxPRACHCell)) OF  
    ProtocolIE-Container {{PRACH-InformationItemIE-ResourceStatInd}}  
  
PRACH-InformationItemIE-ResourceStatInd NBAP-PROTOCOL-IES ::= {  
    { ID id-PRACH-InformationItem-ResourceStatInd      CRITICALITY ignore  TYPE PRACH-InformationItem-ResourceStatInd PRESENCE mandatory  },  
    ...  
}  
  
PRACH-InformationItem-ResourceStatInd ::= SEQUENCE {  
    commonPhysicalChannelID      CommonPhysicalChannelID,  
    resourceOperationState       ResourceOperationState,  
    availabilityStatus            AvailabilityStatus  
}  
  
RACH-InformationList-ResourceStatInd ::= SEQUENCE (SIZE (1..maxRACHCell)) OF  
    ProtocolIE-Container {{RACH-Information-ResourceStatIndItemIE }}  
  
RACH-Information-ResourceStatIndItemIE NBAP-PROTOCOL-IES ::= {  
    { ID id-RACH-Information-ResourceStatIndItem      CRITICALITY ignore  TYPE RACH-Information-ResourceStatIndItem  PRESENCE mandatory},  
    ...  
}  
  
RACH-Information-ResourceStatIndItem ::= SEQUENCE {  
    commonTransportChannelID      CommonTransportChannelID,  
    resourceOperationalState      ResourceOperationalState,  
    availabilityStatus             AvailabilityStatus  
}  
  
AICH-InformationList-ResourceStatInd ::= SEQUENCE (SIZE (1..maxAICHCell)) OF  
    ProtocolIE-Container {{AICH-Information-ResourceStatIndItemIE }}  
  
AICH-Information-ResourceStatIndItemIE NBAP-PROTOCOL-IES ::= {  
    { ID id-AICH-Information-ResourceStatIndItem      CRITICALITY ignore  TYPE AICH-Information-ResourceStatIndItem  PRESENCE mandatory},  
    ...  
}  
  
AICH-Information-ResourceStatIndItem ::= SEQUENCE {  
    commonPhysicalChannelID      CommonPhysicalChannelID,  
    resourceOperationalState      ResourceOperationalState,  
    availabilityStatus            AvailabilityStatus  
}
```



```

MIB-SIB-InformationList-SystemInfoUpdateItem ::= SEQUENCE {
    iB-Type          IB-Type,
    sIB-DeletionIndicator      SIB-DeletionIndicator-SystemInfoUpdate
}

SIB-DeletionIndicator-SystemInfoUpdate ::= ENUMERATED {
    no-Delition          No-Delitionist-SystemInfoUpdate
}

No-DelitionList-SystemInfoUpdate ::= SEQUENCE (SIZE (1..maxIBSEG)) OF
    ProtocolIE-Container{{ No-DelitionList-SystemInfoUpdateItemIE }}

No-DelitionList-SystemInfoUpdateItemIE NBAP-PROTOCOL-IES ::= {
    { ID id- No-DelitionList-SystemInfoUpdate      CRITICALITY ignore      TYPE No-DelitionList-SystemInfoUpdate      PRESENCE optional },
    ...
}

No-DelitionList-SystemInfoUpdate ::= SEQUENCE {
    sIB-Originator          sIB-Originator          OPTIONAL,
    segmentInformation      SegmentInformation-SystemInfoUpdate
}

SegmentInformation-SystemInfoUpdate ::= SEQUENCE (SIZE (1..maxIBSEG)) OF
    ProtocolIE-Container{{ SegmentInformation-SystemInfoUpdateItemIE }}

SegmentInformation-SystemInfoUpdateItemIE NBAP-PROTOCOL-IES ::= {
    { ID id- SegmentInformation-SystemInfoUpdateItem      CRITICALITY ignore      TYPE      SegmentInformation-SystemInfoUpdateItem      PRESENCE
    optional
    },
    ...
}

SegmentInformation-SystemInfoUpdateItem ::= SEQUENCE {
    segmentType          SegmentType,
    iB-SG-REP            IB-SG-REP,
    iB-SG-POS            IB-SG-POS,
    iB-SG                IB-SG          OPTIONAL
}

-- *****
--
-- SYSTEM INFORMATION UPDATE RESPONSE
--
-- *****

SystemInformationUpdateResponse ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container      {{SystemInformationUpdateResponse-IEs}},

```

```

    protocolExtensions          ProtocolExtensionContainer {{SystemInformationUpdateResponse-Extensions}}
    ...
}

SystemInformationUpdateResponse-IEs NBAP-PROTOCOL-IES ::= {
{ ID id-CriticalityDiagnostic          CRITICALITY ignore          TYPE CriticalityDiagnostic          PRESENCE optional
},
...
}

SystemInformationUpdateResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
...
}

-- *****
--
-- SYSTEM INFORMATION UPDATE FAILURE
--
-- *****

SystemInformationUpdateFailure ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container          {{SystemInformationUpdateFailure-IEs}},
    protocolExtensions    ProtocolExtensionContainer {{SystemInformationUpdateFailure-Extensions}}
    ...
}

SystemInformationUpdateFailure-IEs NBAP-PROTOCOL-IES ::= {
{ ID id-Cause          CRITICALITY ignore          TYPE Cause          PRESENCE mandatory    }|
{ ID id-CriticalityDiagnostic          CRITICALITY ignore          TYPE CriticalityDiagnostic          PRESENCE optional
},
...
}

SystemInformationUpdateFailure-Extensions NBAP-PROTOCOL-EXTENSION ::= {
...
}

-- *****
--
-- RADIO LINK SETUP REQUEST FDD
--
-- *****

RadioLinkSetupRequestFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container          {{RadioLinkSetupRequestFDD-IEs}},
    protocolExtensions    ProtocolExtensionContainer {{RadioLinkSetupRequestFDD-Extensions}}
    ...
}

```

```

}

RadioLinkSetupRequestFDD-IEs NBAP-PROTOCOL-IES ::= {
  { ID id-CRNC-CommunicationContextID      CRITICALITY ignore TYPE CRNC-CommunicationContextID      PRESENCE mandatory }|
  { ID id-UL-DPCH-InformationItem-RL-SetupReq-FDD CRITICALITY ignore TYPE UL-DPCH-InformationItem-RL-SetupReq-FDD PRESENCE mandatory }|
  { ID id-DL-DPCH-InformationItem-RL-SetupReq-FDD CRITICALITY ignore TYPE DL-DPCH-InformationItem-RL-SetupReq-FDD PRESENCE mandatory }|
  { ID id-DCH-InformationList-RL-SetupReq-FDD CRITICALITY ignore TYPE DCH-InformationList-RL-SetupReq-FDD PRESENCE mandatory }|
  { ID id-RL-ID                               CRITICALITY ignore TYPE RL-ID                               PRESENCE optional }|
  { ID id-DSCH-ID                               CRITICALITY ignore TYPE DSCH-ID                               PRESENCE optional }|
  { ID id-DSCH-InformationList-RL-SetupReq-FDD CRITICALITY ignore TYPE DSCH-InformationList-RL-SetupReq-FDD PRESENCE optional }|
  { ID id-RL-InformationList-RL-SetupReq-FDD CRITICALITY ignore TYPE RL-InformationList-RL-SetupReq-FDD PRESENCE mandatory },
  ...
}

RadioLinkSetupRequestFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

UL-DPCH-InformationItem-RL-SetupReq-FDD ::= SEQUENCE {
  ul-ScramblingCode          UL-ScramblingCode,
  minUL-ChannelisationCodeLength MinUL-ChannelisationCodeLength,
  maxNumberOfUL-DPDCHs      MaxNumberOfUL-DPDCHs      OPTIONAL
  -- This IE is present only if "Min UL Channelisation Code length" equals to 4 -- ,
  ul-PunctureLimit          UL-PunctureLimit,
  transportFormatCombinationSetTFCS TransportFormatCombinationSetTFCS,
  ul-DPCH-SlotFormat        UL-DPCH-SlotFormat,
  ul-EbNo-Target            UplinkEbNo,
  diversityMode              DiversityMode,
  d-FieldLength             D-FieldLength          OPTIONAL
  -- This IE is present only if Feed Back mode diversity is activated -- ,
  sSDT-Cell-IDLength        SSDT-Cell-IDLength    OPTIONAL,
  s-FieldLength             S-FieldLength          OPTIONAL
}

DL-DPCH-InformationItem-RL-SetupReq-FDD ::= SEQUENCE {
  transportFormatCombinationSetTFCS TransportFormatCombinationSetTFCS,
  dl-DPCH-SlotFormat         DL-DPCH-SlotFormat,
  tFCI-SignallingMode        TFCI-SignallingMode,
  multiplexingPosition,      MultiplexingPosition,
  tFCI-Presence              TFCI-Presence,
  powerOffsetInformationItem-RL-SetupReq-FDD
  PowerOffsetInformationItem-RL-SetupReq-FDD,
  deltaTPC                   DeltaTPC
}

PowerOffsetInformationItem-RL-SetupReq-FDD ::= SEQUENCE {
  p01          PowerOffset,
  p02          PowerOffset,
}

```



```
p03          PowerOffset
}

DCH-InformationList-RL-SetupReq-FDD ::= SEQUENCE (SIZE (1..maxnoofDCHs)) OF
  ProtocolIE-Container{{DCH-Information-RL-SetupReq-FDDItemIE }}

DCH-Information-RL-SetupReq-FDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DCH-Information-RL-SetupReq-FDDItem CRITICALITY ignore TYPE DCH-Information-RL-SetupReq-FDDItem PRESENCE mandatory },
  ...
}

DCH-Information-RL-SetupReq-FDDItem ::= SEQUENCE {
  dCH-ID          DCH-ID,
  dCH-CombinationIndication DCH-CombinationIndication OPTIONAL,
  rLC-Mode        RLC-Mode,
  ul-TransportFormatSet TransportFormatSet,
  dl-TransportFormatSet TransportFormatSet,
  frameHandlingPriority FrameHandlingPriority,
  payloadCRC-PresenceIndicator PayloadCRC-PresenceIndicator,
  ul-FP-Mode      UL-FP-Mode,
  toAWS           ToAWS,
  toAWE           ToAWE
}

DSCH-InformationList-RL-SetupReq-FDD ::= SEQUENCE (SIZE (1..maxnoofDSCHs)) OF
  ProtocolIE-Container{{DSCH-Information-RL-SetupReq-FDDItemIE }}

DSCH-Information-RL-SetupReq-FDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DSCH-Information-RL-SetupReq-FDDItem CRITICALITY ignore TYPE DSCH-Information-RL-SetupReq-FDDItem PRESENCE mandatory },
  ...
}

DSCH-Information-RL-SetupReq-FDDItem ::= SEQUENCE {
  dSCH-ID          DSCH-ID,
  dSCH-TransportFormatSet DSCH-TransportFormatSet,
  frameHandlingPriority FrameHandlingPriority,
  toAWS            ToAWS,
  toAWE            ToAWE
}

RL-InformationList-RL-SetupReq-FDD ::= SEQUENCE (SIZE (1..maxnoofRLs)) OF
  ProtocolIE-Container{{RL-Information-RL-SetupReq-FDDItemIE }}

RL-Information-RL-SetupReq-FDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-RL-Information-RL-SetupReq-FDDItem CRITICALITY ignore TYPE RL-Information-RL-SetupReq-FDDItem PRESENCE optional },
  ...
}

RL-Information-RL-SetupReq-FDDItem ::= SEQUENCE {
```

```

rL-ID          RL-ID,
c-ID           C-ID,
frameOffset    FrameOffset,
chipOffset     ChipOffset,
propagationDelay PropagationDelay,
diversityControlField DiversityControlField OPTIONAL,
-- This IE is present only if the RL is not the first one in the RL Information
dl-CodeInformationList-RL-SetupReqFDD          DL-CodeInformationList-RL-SetupReqFDD,
initialDL-transmissionPower DL-Power,
maximumDL-power          DL-Power,
minimumDL-power          DL-Power,
sSDT-CellIdentity        SSDT-CellIdentity OPTIONAL
}

DL-CodeInformationList-RL-SetupReqFDD ::= SEQUENCE (SIZE (1..maxnoofRLs)) OF
  ProtocolIE-Container{{DL-CodeInformation-RL-SetupReqFDDItemIE }}

DL-CodeInformation-RL-SetupReqFDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DL-CodeInformation-RL-SetupReqFDDItem CRITICALITY ignore TYPE DL-CodeInformation-RL-SetupReqFDDItem PRESENCE optional },
  ...
}

DL-CodeInformation-RL-SetupReqFDDItem ::= SEQUENCE {
  dl-ScramblingCode          DL-ScramblingCode,
  fdd-DL-ChannelisationCodeNumber FDD-DL-ChannelisationCodeNumber
}

-- *****
--
-- RADIO LINK SETUP REQUEST TDD
--
-- *****

RadioLinkSetupRequestTDD ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container {{RadioLinkSetupRequestTDD-IEs}},
  protocolExtensions  ProtocolExtensionContainer {{RadioLinkSetupRequestTDD-Extensions}} OPTIONAL,
  ...
}

RadioLinkSetupRequestTDD-IEs NBAP-PROTOCOL-IES ::= {
  { ID id-CRNC-CommunicationContextID CRITICALITY ignore TYPE CRNC-CommunicationContextID PRESENCE mandatory }|
  { ID id-UL-CCTrCH-InformationList-RL-SetupReqTDD CRITICALITY ignore TYPE UL-CCTrCH-InformationList-RL-SetupReqTDD PRESENCE optional }|
  { ID id-DL-CCTrCH-InformationList-RL-SetupReqTDD CRITICALITY ignore TYPE DL-CCTrCH-InformationList-RL-SetupReqTDD PRESENCE optional }|
  { ID id-DCH-InformationList-RL-SetupReqTDD CRITICALITY ignore TYPE DCH-InformationList-RL-SetupReqTDD PRESENCE optional }|
  { ID id-DSCH-InformationList-RL-SetupReqTDD CRITICALITY ignore TYPE DSCH-InformationList-RL-SetupReqTDD PRESENCE optional }|
  { ID id-USCH-InformationList-RL-SetupReqTDD CRITICALITY ignore TYPE USCH-InformationList-RL-SetupReqTDD PRESENCE optional }|
  { ID id-RL-InformationItem-RL-SetupReqTDD CRITICALITY ignore TYPE RL-InformationItem-RL-SetupReqTDD PRESENCE mandatory },
  ...
}

```

```
RadioLinkSetupRequestTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

UL-CCTrCH-InformationList-RL-SetupReqTDD ::= SEQUENCE (SIZE(1..maxnoofCCTrCHs)) OF
    ProtocolIE-Container{{UL-CCTrCH-Information-RL-SetupReqTDDItemIE }}

UL-CCTrCH-Information-RL-SetupReqTDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-UL-CCTrCH-Information-RL-SetupReqTDDItem CRITICALITY ignore TYPE UL-CCTrCH-Information-RL-SetupReqTDDItem PRESENCE mandatory },
    ...
}

UL-CCTrCH-Information-RL-SetupReqTDDItem ::= SEQUENCE {
    cCTrCH-ID                CCTrCH-ID,
    transportFormatCombinationSetTFCS    TransportFormatCombinationSetTFCS,
    tFCI-Coding              TFCI-Coding,
    puncturing-Limit         Puncturing-Limit,
    ul-DPCH-InformationList-RL-SetupReqTDD    UL-DPCH-InformationList-RL-SetupReqTDD    OPTIONAL
}

UL-DPCH-InformationList-RL-SetupReqTDD ::= SEQUENCE (SIZE (1..maxnoofDPCHs)) OF
    ProtocolIE-Container{{UL-DPCH-Information-RL-SetupReqTDDItemIE }}

UL-DPCH-Information-RL-SetupReqTDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-UL-DPCH-Information-RL-SetupReqTDDItem CRITICALITY ignore TYPE UL-DPCH-Information-RL-SetupReqTDDItem PRESENCE mandatory },
    ...
}

UL-DPCH-Information-RL-SetupReqTDDItem ::= SEQUENCE {
    dPCH-ID                DPCH-ID,
    tdd-ChannelisationCode    TDD-ChannelisationCode,
    burstType                BurstType,
    midambleShift            MidambleShift,
    timeSlot                 TimeSlot,
    tdd-PhysicalChannelOffset    TDD-PhysicalChannelOffset,
    repetitionPeriod         RepetitionPeriod,
    repetitionLength         RepetitionLength,
    tFCI-Presence            TFCI-Presence
}

DL-CCTrCH-InformationList-RL-SetupReqTDD ::= SEQUENCE (SIZE (1..maxnoCCTrCHs)) OF
    ProtocolIE-Container{{DL-CCTrCH-Information-RL-SetupReqTDDItemIE }}

DL-CCTrCH-Information-RL-SetupReqTDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DL-CCTrCH-Information-RL-SetupReqTDDItem CRITICALITY ignore TYPE DL-CCTrCH-Information-RL-SetupReqTDDItem PRESENCE mandatory },

```

```
...
}

DL-CCTrCH-Information-RL-SetupReqTDDItem ::= SEQUENCE {
    cCTrCH-ID          CCTrCH-ID,
    transportFormatCombinationSetTFCS TransportFormatCombinationSetTFCS,
    tFCI-Coding        TFCI-Coding,
    puncturing-Limit   Puncturing-Limit,
    dl-DPCH-InformationList-RL-SetupReqTDD DL-DPCH-InformationList-RL-SetupReqTDD OPTIONAL
}

DL-DPCH-InformationList-RL-SetupReqTDD ::= SEQUENCE (SIZE (1..maxnoofDPCHs)) OF
    ProtocolIE-Container{{DL-DPCH-Information-RL-SetupReqTDDItemIE }}

DL-DPCH-Information-RL-SetupReqTDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DL-DPCH-Information-RL-SetupReqTDDItem CRITICALITY ignore TYPE DL-DPCH-Information-RL-SetupReqTDDItem PRESENCE mandatory},
    ...
}

DL-DPCH-Information-RL-SetupReqTDDItem ::= SEQUENCE {
    dPCH-ID          DPCH-ID,
    tdd-ChannelisationCode TDD-ChannelisationCode,
    burstType        BurstType,
    midambleShift    MidambleShift,
    timeSlot         TimeSlot,
    tdd-PhysicalChannelOffset TDD-PhysicalChannelOffset,
    repetitionPeriod RepetitionPeriod,
    repetitionLength  RepetitionLength,
    tFCI-Presence     TFCI-Presence
}

DCH-InformationList-RL-SetupReqTDD ::= SEQUENCE (SIZE (0+..maxnoofDPCHs)) OF
    ProtocolIE-Container{{DCH-Information-RL-SetupReqTDDItemIE }}

DCH-Information-RL-SetupReqTDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DCH-Information-RL-SetupReqTDDItem CRITICALITY ignore TYPE DCH-Information-RL-SetupReqTDDItem PRESENCE mandatory},
    ...
}

DCH-Information-RL-SetupReqTDDItem ::= SEQUENCE {
    ul-CCTrCH-ID          UL-CCTrCH-ID,
    dl-CCTrCH-ID          DL-CCTrCH-ID,
    dCH-CombinationIndication DCH-CombinationIndication OPTIONAL,
    ul-TransportFormatSet   TransportFormatSet,
    dl-TransportFormatSet   TransportFormatSet,
    frameHandlingPriority    FrameHandlingPriority,
    payloadCRC-PresenceIndicator PayloadCRC-PresenceIndicator,
    ul-FP-Mode              UL-FP-Mode,
    toAWE                  ToAWE,
}
```



```

RadioLinkSetupResponseFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkSetupResponseFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkSetupResponseFDD-Extensions}}          OPTIONAL,
    ...
}

RadioLinkSetupResponseFDD-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-CRNC-CommunicationContextID      CRITICALITY ignore TYPE CRNC-CommunicationContextID      PRESENCE mandatory }|
    { ID id-NodeB-CommunicationContextID     CRITICALITY ignore TYPE NodeB-CommunicationContextID     PRESENCE mandatory }|
    { ID id-CommunicationControlPortID      CRITICALITY ignore TYPE CommunicationControlPortID      PRESENCE mandatory }|
    { ID id-RL-InformationResponseList-RL-setupResFDD      CRITICALITY ignore TYPE RL-InformationResponseList-RL-setupResFDD PRESENCE mandatory }|
}
{ ID id-CriticalityDiagnostic              CRITICALITY ignore TYPE CriticalityDiagnostic              PRESENCE optional
},
...
}

RadioLinkSetupResponseFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

RL-InformationResponseList-RL-setupResFDD ::= SEQUENCE (SIZE (1..maxnoofRLs)) OF
    ProtocolIE-Container{{RL-InformationResponse-RL-setupResFDDItemIE }}

RL-InformationResponse-RL-setupResFDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationResponse-RL-setupResFDDItem CRITICALITY ignore TYPE RL-InformationResponse-RL-setupResFDDItem PRESENCE mandatory },
    ...
}

RL-InformationResponse-RL-setupResFDDItem ::= SEQUENCE {
    rL-ID          RL-ID,
    ul-InterferenceLevel      UL-InterferenceLevel,
    diversityIndication      DiversityIndication OPTIONAL,
    -- This IE is present only if the RL is not the first one in the RL Information
    dSCH-InformationResponse-RL-setupResFDD      DSCH-InformationResponse-RL-setupResFDD      OPTIONAL,
    sSDT-SupportIndicator      SSDT-SupportIndicator
}

DiversityIndication ::= ENUMERATED {
    combining      CombiningItem,
    non-Combining      Non-CombiningItem
}

CombiningItem ::= SEQUENCE {
    dCH-ID          DCH-ID
}

Non-CombiningItem ::= SEQUENCE {

```

```

dCH-InformationResponse-RL-setupResFDD                DCH-InformationResponse-RL-setupResFDD                OPTIONAL
}

DCH-InformationResponseList-RL-setupResFDD ::= SEQUENCE (SIZE (1..maxnoofDCHs)) OF
  ProtocolIE-Container{{DCH-InformationResponse-RL-setupResFDDItemIE }}

DCH-InformationResponse-RL-setupResFDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DSCH-InformationResponse-RL-setupResFDDItem CRITICALITY ignore TYPE DCH-InformationResponse-RL-setupResFDDItem PRESENCE mandatory
  },
  ...
}

DCH-InformationResponse-RL-setupResFDDItem ::= SEQUENCE {
  dCH-ID                DCH-ID,
  bindingID              BindingID,
  transportLayerAddress  TransportLayerAddress
}

DSCH-InformationResponseList-RL-setupResFDD ::= SEQUENCE (SIZE (1..numofDSCH)) OF
  ProtocolIE-Container{{DSCH-InformationResponse-RL-setupResFDDItemIE }}

-- ** TODO **
numofDSCH INTEGER ::= 10

DSCH-InformationResponse-RL-setupResFDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DSCH-InformationResponse-RL-setupResFDDItem CRITICALITY ignore TYPE DSCH-InformationResponse-RL-setupResFDDItem
  PRESENCE mandatory
  },
  ...
}

DSCH-InformationResponse-RL-setupResFDDItem ::= SEQUENCE {
  dSCH-ID                DSCH-ID,
  bindingID              BindingID,
  transportLayerAddress  TransportLayerAddress
}

-- *****
--
-- RADIO LINK SETUP RESPONSE TDD
--
-- *****

RadioLinkSetupResponseTDD ::= SEQUENCE {
  protocolIEs                ProtocolIE-Container  {{RadioLinkSetupResponseTDD-IEs}},
  protocolExtensions          ProtocolExtensionContainer  {{RadioLinkSetupResponseTDD-Extensions}}
  ...
}

```

```

RadioLinkSetupResponseTDD-IEs NBAP-PROTOCOL-IES ::= {
  { ID id-CRNC-CommunicationContextID      CRITICALITY ignore  TYPE CRNC-CommunicationContextID      PRESENCE mandatory  }|
  { ID id-NodeB-CommunicationContextID     CRITICALITY ignore  TYPE NodeB-CommunicationContextID     PRESENCE mandatory  }|
  { ID id-CommunicationControlPortID      CRITICALITY ignore  TYPE CommunicationControlPortID      PRESENCE mandatory  }|
  { ID id-RL-Information-RL-setupResTDD    CRITICALITY ignore  TYPE RL-Information-RL-setupResTDD    PRESENCE mandatory  }|
  {ID id-DSCH-InformationResponseList-RL-setupResTDD CRITICALITY ignore  TYPE DSCH-InformationResponseList-RL-setupResTDD PRESENCE optional
  }|
  {ID id-USCH-InformationResponseList-RL-setupResTDD CRITICALITY ignore  TYPE USCH-InformationResponseList-RL-setupResTDD PRESENCE optional
  }|
  { ID id-CriticalityDiagnostic            CRITICALITY ignore  TYPE CriticalityDiagnostic            PRESENCE optional
  },
  ...
}

RadioLinkSetupResponseTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

RL-InformationResponseList-RL-setupResTDD ::= SEQUENCE {
  rL-ID          RL-ID,
  ul-InterferenceLevel  UL-InterferenceLevel,
  dCH-InformationResponseList-RL-setupResTDD          DCH-InformationResponseList-RL-setupResTDD
}

DCH-InformationResponseList-RL-setupResTDD ::= SEQUENCE (SIZE (1..maxnumofDCHs)) OF ProtocolIE-Container{{DCH-InformationResponse-RL-setupResTDDItemIE}}

DCH-InformationResponse-RL-setupResFDDItemIE NBAP-PROTOCOL-IES ::= {
  { I D id-DCH-InformationResponse-RL-setupResTDDItem CRITICALITY ignore  TYPE DCH-InformationResponse-RL-setupResTDDItem PRESENCE
  mandatory
  },
  ...
}

DCH-InformationResponse-RL-setupResTDDItem ::= SEQUENCE {
  dCH-ID          DCH-ID,
  bindingID       BindingID,
  transportLayerAddress  TransportLayerAddress
}

DSCH-InformationResponseList-RL-SetupResTDD ::= SEQUENCE (SIZE (1..maxnoofDSCHs)) OF ProtocolIE-Container{{DSCH-InformationResponse-RL-SetupResTDDItemIE}}

DSCH-Informationresponse-RL-SetupResTDDItemIE NBAP-PROTOCOL-IES ::= {
  {ID id-DCH-InformationResponse-RL-SetupResTDDItem CRITICALITY ignore  TYPE DSCH-Informationresponse-RL-SetupReqTDDItem PRESENCE mandatory
  },
  ...
}

```







```

Non-Combining-RL-SetupFailFDD ::= SEQUENCE {
    dCH-InformationResponseList-RL-SetupFailFDD
}

DCH-InformationResponseList-RL-SetupFailFDD ::= SEQUENCE (SIZE (1.. maxnoofDCHs)) OF
    ProtocolIE-Container{ {DCH-InformationResponse-RL-SetupFailFDDItemIE } }

DCH-InformationResponse-RL-SetupFailFDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DCH-InformationResponse-RL-SetupFailFDDItem CRITICALITY ignore TYPE DCH-InformationResponse-RL-SetupFailFDDItem PRESENCE
    mandatory },
    ...
}

DCH-InformationResponse-RL-SetupFailFDDItem ::= SEQUENCE {
    dCH-ID DCH-ID,
    bindingID BindingID,
    transportLayerAddress TransportLayerAddress
}

DSCH-InformationResponseList-RL-SetupFailFDD ::= SEQUENCE (SIZE (1..numofDSCH)) OF
    ProtocolIE-Container{ {DSCH-InformationResponse-RL-SetupFailFDDItemIE } }

DSCH-InformationResponse-RL-SetupFailFDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DSCH-InformationResponse-RL-SetupFailFDDItem CRITICALITY ignore TYPE DSCH-InformationResponse-RL-SetupFailFDDItem
    PRESENCE mandatory },
    ...
}

DSCH-InformationResponse-RL-SetupFailFDDItem ::= SEQUENCE {
    dSCH-ID DSCH-ID,
    bindingID BindingID,
    transportLayerAddress TransportLayerAddress
}

-- *****
--
-- RADIO LINK SETUP FAILURE TDD
--
-- *****

RadioLinkSetupFailureTDD ::= SEQUENCE {
    protocolIEs ProtocolIE-Container { {RadioLinkSetupFailureTDD-IEs} },
    protocolExtensions ProtocolExtensionContainer { {RadioLinkSetupFailureTDD-Extensions} } OPTIONAL,
    ...
}

RadioLinkSetupFailureTDD-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-CRNC-CommunicationContextID CRITICALITY ignore TYPE CRNC-CommunicationContextID PRESENCE mandatory } |

```

```

    { ID id-Unsuccessful-RL-InformationResponseItem-RL-SetupFailTDD CRITICALITY ignore
TYPE      Unsuccessful-RL-InformationResponseItem-RL-SetupFailTDD
PRESENCE  mandatory
    }|
    { ID id-CriticalityDiagnostic          CRITICALITY ignore      TYPE CriticalityDiagnostic          PRESENCE optional
      },
      ...
    }

RadioLinkSetupFailureTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

Unsuccessful-RL-InformationResponseItem-RL-SetupFailTDD ::= SEQUENCE {
    rL-ID          RL-ID,
    cause          Cause
}

-- *****
--
-- RADIO LINK ADDITION REQUEST FDD
--
-- *****

RadioLinkAdditionRequestFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container          {{RadioLinkAdditionRequestFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer    {{RadioLinkAdditionRequestFDD-Extensions}}          OPTIONAL,
    ...
}

RadioLinkAdditionRequestFDD-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-NodeB-CommunicationContextID          CRITICALITY ignore      TYPE NodeB-CommunicationContextID          PRESENCE mandatory } |
    { ID id-RL-InformationList-RL-Add-ReqFDD      CRITICALITY ignore      TYPE RL-InformationList-RL-Add-ReqFDD      PRESENCE optional },
    ...
}

RadioLinkAdditionRequestFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkAdditionRequestFDD-PrivateExtensions NBAP-PRIVATE-EXTENSION ::= {
    ...
}

RL-InformationList-RL-Add-ReqFDD ::= SEQUENCE (SIZE (1..maxnoofRL-1)) OF
    ProtocolIE-Container {{RL-informationList-RL-Add-ReqFDDItemIE }}

RL-InformationList-RL-Add-ReqFDDItemIE NBAP-PROTOCOL-IES ::= {

```

```
{ ID id-RL-InformationList-RL-Add-ReqFDDItem    CRITICALITY ignore    TYPE RL-InformationList-RL-Add-ReqFDDItem PRESENCE mandatory },
...
}
```

```
RL-InformationList-RL-Add-ReqFDDItem ::= SEQUENCE {
  rL-ID          RL-ID,
  c-ID           C-ID,
  frameOffset    FrameOffset,
  chipOffset     ChipOffset,
  diversityControlField DiversityControlField,
  dl-CodeInformationList-RL-Add-ReqFDD          DL-CodeInformationList-RL-Add-ReqFDD
  initialDL-TransmissionPower DL-Power,
  maximumDL-Power            DL-Power    OPTIONAL,
  minimumDL-Power           DL-Power    OPTIONAL,
  sSDT-CellIdentity         SSDT-CellIdentity    OPTIONAL
}
```

```
DL-CodeInformationList-RL-Add-ReqFDD ::= SEQUENCE (SIZE (1..maxnoofDLCodes)) OF
  ProtocolIE-Container {{ DL-CodeInformationList-RL-Add-ReqFDDItemIE }}
```

```
DL-CodeInformationList-RL-Add-ReqFDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DL-CodeInformationList-RL-Add-ReqFDD    CRITICALITY ignore    TYPE DL-CodeInformationList-RL-Add-ReqFDD PRESENCE mandatory },
  ...
}
```

```
DL-CodeInformationList-RL-Add-ReqFDD ::= SEQUENCE {
  scramblingCode          ScramblingCode,
  fdd-DL-ChannelisationCodeNumber FDD-DL-ChannelisationCodeNumber
}
```

```
-- *****
--
-- RADIO LINK ADDITION REQUEST TDD
--
-- *****
```

```
RadioLinkAdditionRequestTDD ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container    {{RadioLinkAdditionRequestTDD-IEs}},
  protocolExtensions   ProtocolExtensionContainer {{RadioLinkAdditionRequestTDD-Extensions}}    OPTIONAL,
  ...
}
```

```
RadioLinkAdditionRequestTDD-IEs NBAP-PROTOCOL-IES ::= {
  { ID id-NodeB-CommunicationContextID    CRITICALITY ignore    TYPE NodeB-CommunicationContextID    PRESENCE mandatory }|
  { ID id-UL-CCTrCHInformationList-RL-Add-ReqTDD    CRITICALITY ignore    TYPE UL-CCTrCHInformationList-RL-Add-ReqTDD    PRESENCE optional }|
  { ID id-DL-CCTrCHInformationList-RL-Add-ReqTDD    CRITICALITY ignore    TYPE DL-CCTrCHInformationList-RL-Add-ReqTDD    PRESENCE optional }|
  { ID id-RL-Information-RL-Add-ReqTDD    CRITICALITY ignore    TYPE RL-Information-RL-Add-ReqTDD    PRESENCE mandatory },
  ...
}
```

```

RadioLinkAdditionRequestTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

UL-CCTrCHInformationList-RL-Add-ReqTDD ::= SEQUENCE (SIZE (1..maxnoofCCTrCH)) OF
    ProtocolIE-Container {{UL-CCTrCHInformation-RL-Add-ReqTDDItemIE }}

UL-CCTrCHInformation-RL-Add-ReqTDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-UL-CCTrCHInformation-RL-Add-ReqTDDItem CRITICALITY ignore          TYPE UL-CCTrCHInformation-RL-Add-ReqTDDItem PRESENCE mandatory },
    ...
}

UL-CCTrCHInformation-RL-Add-ReqTDDItem ::= SEQUENCE {
    cCTrCH          CCTrCH,
    ul-DPCH-InformationList    UL-DPCH-InformationList-RL-Add-ReqTDD    OPTIONAL
}

UL-DPCH-InformationList-RL-Add-ReqTDD ::= SEQUENCE (SIZE (1..maxnoofDPCHs)) OF
    ProtocolIE-Container {{UL-DPCH-InformationList-RL-Add-ReqTDDItemIE}}

UL-DPCH-InformationList-RL-Add-ReqTDDItemIE NBAP-PROTOCOL-IES ::= {
    {ID id- UL-DPCH-InformationList-RL-Add-ReqTDDItem          CRITICALITY ignore          TYPE UL-DPCH-InformationList-RL-Add-ReqTDDItem
    PRESENCE          mandatory
    },
    ...
}

UL-DPCH-InformationList-RL-Add-ReqTDDItem ::= SEQUENCE {
    dPCH-ID          DPCH-ID,
    tdd-ChannelisationCode    TDD-ChannelisationCode,
    burstType          BurstType,
    midambleShift          MidambleShift,
    timeSlot          TimeSlot,
    tdd-PhysicalChannelOffset    TDD-PhysicalChannelOffset,
    repetitionPeriod          RepetitionPeriod,
    repetitionLength          RepetitionLength,
    tFCI-Presence          TFCI-Presence
}

DL-CCTrCHInformationList-RL-Add-ReqTDD ::= SEQUENCE (SIZE (1..maxnoofCCTrCHs)) OF
    ProtocolIE-Container {{ DL-CCTrCHInformationList-RL-Add-ReqTDDItemIE }}

DL-CCTrCHInformationList-RL-Add-ReqTDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DL-CCTrCHInformationList-RL-Add-ReqTDDItem CRITICALITY          ignore          TYPE          DL-CCTrCHInformationList-RL-Add-ReqTDDItem          PRESENCE
    mandatory
    },
    ...
}

```

```

}

DL-CCTrCHInformationList-RL-Add-ReqTDDItem ::= SEQUENCE {
    cCTrCH-ID          CCTrCH-ID,
    dl-DPCH-InformationList-RL-Add-ReqTDD          DL-DPCH-InformationList-RL-Add-ReqTDD          OPTIONAL
}

DL-DPCH-InformationList-RL-Add-ReqTDD ::= SEQUENCE (SIZE (1..maxnoofDPCHs)) OF
    ProtocolIE-Container {{ DL-DPCH-InformationList-RL-Add-ReqTDDItemIE }}

DL-DPCH-InformationList-RL-Add-ReqTDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DL-DPCH-InformationList-RL-Add-ReqTDDItem          CRITICALITY          ignore          TYPE          DL-DPCH-InformationList-RL-Add-ReqTDDItem          PRESENCE
    mandatory
},
    ...
}

DL-DPCH-InformationList-RL-Add-ReqTDDItem ::= SEQUENCE {
    dPCH-ID          DPCH-ID,
    tdd-ChannelisationCode          TDD-ChannelisationCode,
    burstType          BurstType,
    midambleShift          MidambleShift,
    timeSlot          TimeSlot,
    tdd-PhysicalChannelOffset          TDD-PhysicalChannelOffset,
    repetitionPeriod          RepetitionPeriod,
    repetitionLength          RepetitionLength,
    tFCI-Presence          TFCI-Presence
}

RL-informationItem-RL-Add-ReqTDD ::= SEQUENCE {
    rL-ID          RL-ID,
    c-ID          C-ID,
    cFN          CFN          OPTIONAL,
    frameOffset          FrameOffset,
    diversityControlField          DiversityControlField,
    initial-DL-Transmission-Power          DL-Power          OPTIONAL,
    maximumDL-Power          DL-Power          OPTIONAL,
    minimumDL-Power          DL-Power          OPTIONAL
}

-- *****
--
-- RADIO LINK ADDITION RESPONSE FDD
--
-- *****

RadioLinkAdditionResponseFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container          {{RadioLinkAdditionResponseFDD-IEs}},
    protocolExtensions          ProtocolExtensionContainer {{RadioLinkAdditionResponseFDD-Extensions}}          OPTIONAL,
}

```

```

...
}

RadioLinkAdditionResponseFDD-IEs NBAP-PROTOCOL-IES ::= {
  { ID id-CRNC-CommunicationContextID CRITICALITY ignore          TYPE CRNC-CommunicationContextID PRESENCE mandatory  }|
  { ID id-RL-ResponseInformationList-RL-Add-ResFDD              CRITICALITY ignore          TYPE      RL-ResponseInformationList-RL-Add-ResFDD
    PRESENCE      mandatory          }|
  { ID id-CriticalityDiagnostic          CRITICALITY ignore          TYPE CriticalityDiagnostic          PRESENCE optional
  },
  ...
}

RadioLinkAdditionResponseFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

RL-ResponseInformationList-RL-Add-ResFDD ::= SEQUENCE (SIZE (1..maxnoofRL-1)) OF
  ProtocolIE-Container {{RL-ResponseInformationList-RL-Add-ResFDDItemIE }

RL-ResponseInformation-RL-Add-ResFDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-RL-ResponseInformation-RL-Add-ResFDDItem              CRITICALITY ignore          TYPE      RL-ResponseInformation-RL-Add-ResFDDItem
    PRESENCE      mandatory          }
},
  ...
}

RL-ResponseInformation-RL-Add-ResFDDItem ::= SEQUENCE {
  rL-ID                RL-ID,
  ul-InterferenceLevel      UL-InterferenceLevel,
  diversityIndication      DiversityIndication-RL-Add-ResFDD,
  sSDT-SupportIndicator      SSDT-SupportIndicator
}

DiversityIndication-RL-Add-ResFDD ::= ENUMERATED {
  combining              Combining-RL-Add-ResFDD,
  non-combining          Non-Combining-RL-Add-ResFDD
}

Combining-RL-Add-ResFDD ::= SEQUENCE {
  rL-ID                RL-ID
}

Non-Combining-RL-Add-ResFDD ::= SEQUENCE {
  dCH-InformationResponseList-RL-Add-ResFDD
  DCH-InformationResponseList-RL-Add-ResFDD
}

DCH-InformationResponseList-RL-Add-ResFDD ::= SEQUENCE (SIZE (1..maxnoofRL-1)) OF

```



```
ProtocolIE-Container{{DCH-InformationResponseList-RL-Add-ResFDD ItemIE }}

DCH-InformationResponseList-RL-Add-ResFDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DCH-InformationResponseList-RL-Add-ResFDDItem          CRITICALITY ignore          TYPE DCH-InformationResponseList-RL-Add-ResFDDItem          PRESENCE mandatory
  },
  ...
}

DCH-InformationResponseList-RL-Add-ResFDDItem ::= SEQUENCE {
  dCH-ID                DCH-ID,
  bindingID             BindingID,
  transportLayerAddress TransportLayerAddress
}

-- *****
--
-- RADIO LINK ADDITION RESPONSE TDD
--
-- *****

RadioLinkAdditionResponseTDD ::= SEQUENCE {
  protocolIEs           ProtocolIE-Container          {{RadioLinkAdditionResponseTDD-IEs}},
  protocolExtensions   ProtocolExtensionContainer    {{RadioLinkAdditionResponseTDD-Extensions}}          OPTIONAL,
  ...
}

RadioLinkAdditionResponseTDD-IEs NBAP-PROTOCOL-IES ::= {
  { ID id-CRNC-Communication-Context-ID  CRITICALITY ignore          TYPE CRNC-Communication-Context-ID PRESENCE mandatory }|
  { ID id-RL-Information-RL-Add-RespTDD  CRITICALITY ignore          TYPE RL-Information-RL-Add-RespTDD PRESENCE mandatory }|
  { ID id-CriticalityDiagnostic          CRITICALITY ignore          TYPE CriticalityDiagnostic          PRESENCE optional
  },
  ...
}

RadioLinkAdditionResponseTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

RL-Information-RL-Add-Resp ::= SEQUENCE {
  rL-ID                RL-ID,
  ul-InterferenceLevel UL-InterferenceLevel,
  diversityIndication  DiversityIndication-RL-Add-RespTDD,
}

DiversityIndication-RL-Add-RespTDD ::= ENUMERATED {
  combining            Combining-RL-Add-RespTDD,
  non-Combining        Non-Combining-RL-Add-RespTDD
}
```



```

...
}

USCH-InformationResponseList-RL-Add-RespTDDItem ::= SEQUENCE {
    uSCH-ID          USCH-ID,
    binding-ID       Binding-ID,
    transport-Layer-Address Transport-Laer-Address
}

-- *****
--
-- RADIO LINK ADDITION FAILURE FDD
--
-- *****

RadioLinkAdditionFailureFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkAdditionFailureFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkAdditionFailureFDD-Extensions}}    OPTIONAL,
    ...
}

RadioLinkAdditionFailureFDD-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-CRNC-CommunicationContextID    CRITICALITY ignore    TYPE CRNC-CommunicationContextID    PRESENCE mandatory    }|
    { ID id-Unsuccessful-RL-InformationResponseList-RL-Add-FailFDD    CRITICALITY ignore    TYPE Unsuccessful-RL-
InformationResponseList-RL-Add-FailFDD    PRESENCE    mandatory
}|
    { ID id-Successful-RL-InformationResponseList-RL-Add-FailFDD    CRITICALITY ignore    TYPE Successful-RL-
InformationResponseList-RL-Add-FailFDD    PRESENCE    mandatory
}|
    { ID id-CriticalityDiagnostic          CRITICALITY ignore    TYPE CriticalityDiagnostic          PRESENCE optional
    },
    ...
}

RadioLinkAdditionFailureFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

Unsuccessful-RL-InformationResponseList-RL-Add-FailFDD ::= SEQUENCE (SIZE (1..maxnoofRL-1)) OF
    ProtocolIE-Container    {{Unsuccessful-RL-InformationResponseList-RL-Add-FailFDDItemIE }}

Unsuccessful-RL-InformationResponseList-RL-Add-FailFDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-Unsuccessful-RL-InformationResponseList-RL-Add-FailFDDItem    CRITICALITY ignore    TYPE Unsuccessful-RL-
InformationResponseList-RL-Add-FailFDDItem    PRESENCE    mandatory
    },
    ...
}

Unsuccessful-RL-InformationResponseList-RL-Add-FailFDDItem ::= SEQUENCE {

```



```
--
-- RADIO LINK ADDITION FAILURE TDD
--
-- *****

RadioLinkAdditionFailureTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkAdditionFailureTDD-IEs}},
    protocolExtensions  ProtocolExtensionContainer {{RadioLinkAdditionFailureTDD-Extensions}}          OPTIONAL,
    ...
}

RadioLinkAdditionFailureTDD-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-Unsuccessful-RL-InformationResponse CRITICALITY ignore TYPE Unsuccessful-RL-InformationResponse PRESENCE mandatory } |
    { ID id-CriticalityDiagnostic CRITICALITY ignore TYPE CriticalityDiagnostic PRESENCE optional } |
    ,
    ...
}

RadioLinkAdditionFailureTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

Unsuccessful-RL-InformationResponse ::= SEQUENCE {
    rL-ID          RL-ID,
    cause          Cause
}

-- *****
--
-- RADIO LINK RECONFIGURATION PREPARE FDD
--
-- *****

RadioLinkReconfigurationPrepareFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkReconfigurationPrepareFDD-IEs}},
    protocolExtensions  ProtocolExtensionContainer {{RadioLinkReconfigurationPrepareFDD-Extensions}}          OPTIONAL,
    ...
}

RadioLinkReconfigurationPrepareFDD-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-NodeB-CommunicationContextID CRITICALITY ignore TYPE NodeB-CommunicationContextID PRESENCE mandatory } |
    { ID id-UL-DPCH-Information-RL-ReconfPrepFDD CRITICALITY ignore TYPE UL-DPCH-Information-RL-ReconfPrepFDD PRESENCE optional } |
    { ID id-DL-DPCH-Information-RL-ReconfPrepFDD CRITICALITY ignore TYPE DL-DPCH-Information-RL-ReconfPrepFDD PRESENCE optional } |
    { ID id-DCH-ModifyList-RL-ReconfPrepFDD CRITICALITY ignore TYPE DCH-ModifyList-RL-ReconfPrepFDD PRESENCE optional } |
    { ID id-DCH-AddList-RL-ReconfPrepFDD CRITICALITY ignore TYPE DCH-AddList-RL-ReconfPrepFDD PRESENCE optional } |
    { ID id-DCH-DeleteList-RL-ReconfPrepFDD CRITICALITY ignore TYPE DCH-DeleteList-RL-ReconfPrepFDD PRESENCE optional } |
    { ID id-DSCH-ModifyItem-RL-ReconfPrepFDD CRITICALITY ignore TYPE DSCH-ModifyItem-RL-ReconfPrepFDD PRESENCE optional } |
}
```

```
{ ID id-DSCH-AddItem-RL-ReconfPrepFDD          CRITICALITY ignore          TYPE DSCH-AddItem-RL-ReconfPrepFDD    PRESENCE optional } |
{ ID id-DSCH-DeleteItem-RL-ReconfPrepFDD      CRITICALITY ignore          TYPE DSCH-DeleteItem-RL-ReconfPrepFDD PRESENCE optional } |
{ ID id-RadioLinkInformationList-RL-ReconfPrepFDD CRITICALITY ignore          TYPE RadioLinkInformationList-RL-ReconfPrepFDD PRESENCE optional
},
...
}
```

```
RadioLinkReconfigurationPrepareFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
...
}
```

```
UL-DPCH-Information-RL-ReconfPrepFDD ::= SEQUENCE {
  ul-ScramblingCode          UL-ScramblingCode          OPTIONAL,
  minUL-ChannelisationCodeLength MinUL-ChannelisationCodeLength OPTIONAL,
  maxNrOfUL-DPDCHs          MaxNrOfUL-DPDCHs          OPTIONAL
  -- This IE is present only if minUL-ChannelisationCodeLength equals to 4
  ul-PunctureLimit          UL-PunctureLimit          OPTIONAL,
  tFCS                      TFCS                      OPTIONAL,
  ul-DPCCH-SlotFormat       UL-DPCCH-SlotFormat       OPTIONAL,
  sSDT-CellIdentityLength   SSDT-CellIdentityLength   OPTIONAL,
  s-FieldLength             S-FieldLength             OPTIONAL,
  -- The following information element is needed if there is a need to add Ies with specific criticality.
}
```

```
DL-DPCH-Information-RL-ReconfPrepFDD ::= SEQUENCE {
  tFCS                      TFCS                      OPTIONAL,
  dl-DPCH-SlotFormat        DL-DPCH-SlotFormat        OPTIONAL,
  tFCI-SignallingMode       TFCI-SignallingMode       OPTIONAL,
  tFCI-Presence             TFCI-Presence             OPTIONAL,
  dTX-InsertionPoint        DTX-InsertionPoint        OPTIONAL,
  ...
}
```

```
DCH-ModifyList-RL-ReconfPrepFDD ::= SEQUENCE (SIZE (1..maxnoofDCHs)) OF
  ProtocolIE-Container {{DCH-Modify-RL-ReconfPrepFDDItemIE }}
```

```
DCH-Modify-RL-ReconfPrepFDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DCH-Modify-RL-ReconfPrepFDDItem CRITICALITY ignore          TYPE DCH-Modify-RL-ReconfPrepFDDItem PRESENCE optional },
  ...
}
```

```
DCH-Modify-RL-ReconfPrepFDDItem ::= SEQUENCE {
  dCH-ID                    DCH-ID,
  ul-TransportFormatSet     TransportFormatSet OPTIONAL,
  dl-TransportFormatSet     TransportFormatSet OPTIONAL,
  frameHandlingPriority     FrameHandlingPriority OPTIONAL,
  ul-FP-Mode                UL-FP-Mode          OPTIONAL,
  toAWS                     ToAWS                    OPTIONAL,
}
```



```

toAWE                ToAWE
}

DSCH-DeleteItem-RL-ReconfPrepFDD ::= SEQUENCE {
    rL-ID              RL-ID
}

RadioLinkInformationList-RL-ReconfPrepFDD ::= SEQUENCE (SIZE (1..maxnoofRLs)) OF
    ProtocolIE-Container {{RadioLinkInformation-RL-ReconfPrepFDDItemIE}}

RadioLinkInformation-RL-ReconfPrepFDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-RadioLinkInformation-RL-ReconfPrepFDDItem CRITICALITY ignore TYPE RadioLinkInformation-RL-ReconfPrepFDDItem PRESENCE
    mandatory},
    ...
}

RadioLinkInformation-RL-ReconfPrepFDDItem ::= SEQUENCE {
    rL-ID              RL-ID,
    dl-CodeInformationList-RL-ReconfPrepFDD DL-CodeInformationList-RL-ReconfPrepFDD OPTIONAL,
    maxDL-Power        DL-Power OPTIONAL,
    minDL-Power        DL-Power OPTIONAL,
    sSDT-Indication    SSdT-Indication OPTIONAL,
    sSDT-CellIdentity  SSdT-CellIdentity OPTIONAL
-- The IE may be present if the SSdT Indication is set to SSdT Active in the UE
}

DL-CodeInformationList-RL-ReconfPrepFDD ::= SEQUENCE (SIZE (1..maxnoofDLCodes)) OF
    ProtocolIE-Container {{DL-CodeInformation-RL-ReconfPrepFDDItemIE }}

DL-CodeInformation-RL-ReconfPrepFDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DL-CodeInformation-RL-ReconfPrepFDDItem CRITICALITY ignore TYPE DL-CodeInformation-RL-ReconfPrepFDDItem PRESENCE optional },
    ...
}

DL-CodeInformation-RL-ReconfPrepFDDItem ::= SEQUENCE {
    scramblingCode    ScramblingCode OPTIONAL,
    fdd-DL-ChannelisationCodeNumber FDD-DL-ChannelisationCodeNumber OPTIONAL
}

-- *****
--
-- RADIO LINK RECONFIGURATION PREPARE TDD
--
-- *****

RadioLinkReconfigurationPrepareTDD ::= SEQUENCE {
    protocolIEs        ProtocolIE-Container {{RadioLinkReconfigurationPrepareTDD-IEs}},
    protocolExtensions ProtocolExtensionContainer {{RadioLinkReconfigurationPrepareTDD-Extensions}} OPTIONAL,
    ...
}

```





```

...
}

UL-CCTrCH-Information-RL-ReconfPrepTDDItem ::= SEQUENCE {
    cCTrCH-ID          CCTrCH-ID,
    tFCS               TFCS          OPTIONAL,
    tFCI-Coding        TFCI-Coding  OPTIONAL,      punturing-Limit          Punturing-Limit  OPTIONAL
    ul-DPCH-InformationList-RL-ReconfPrepTDD          UL-DPCH-InformationList-RL-ReconfPrepTDD  OPTIONAL
}

UL-DPCH-InformationList-RL-ReconfPrepTDD ::= SEQUENCE (SIZE (1..maxnoofDPCHs)) OF
    ProtocolIE-Container {{UL-DPCH-Information-RL-ReconfPrepTDDItemIE }}

UL-DPCH-Information-RL-ReconfPrepTDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-UL-DPCH-Information-RL-ReconfPrepTDDItem  CRITICALITY          ignore          TYPE          UL-DPCH-Information-RL-ReconfPrepTDDItem  PRESENCE
    mandatory
    },
    ...
}

UL-DPCH-Information-RL-ReconfPrepTDDItem ::= SEQUENCE {
dPCH-ID          DPCH-ID,
    tDD-ChannelisationCode          TDD-ChannelisationCode  OPTIONAL,
    burstType          BurstType          OPTIONAL,
    midambleShift      MidambleShift      OPTIONAL,
    timeSlot           TimeSlot           OPTIONAL,
    tdd-PhysicalChannelOffset          TDD-PhysicalChannelOffset          OPTIONAL,
    repetitionPeriod      RepetitionPeriod  OPTIONAL,
    repetitionLength      RepetitionLength  OPTIONAL,
    tFCI-Presence         TFCI-Presence     OPTIONAL
}

DL-CCTrCH-InformationList-RL-ReconfPrepTDD ::= SEQUENCE (SIZE (1..maxnoofCCTrCHs)) OF ProtocolIE-Container {{DL-CCTrCH-Information-RL-ReconfPrepTDDItemIE }}

DL-CCTrCH-Information-RL-ReconfPrepTDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DL-CCTrCH-Information-RL-ReconfPrepTDDItem  CRITICALITY          ignore          TYPE          DL-CCTrCH-Information-RL-ReconfPrepTDDItem  PRESENCE
    mandatory
    },
    ...
}

DL-CCTrCH-Information-RL-ReconfPrepTDDItem ::= SEQUENCE {
    cCTrCH-ID          CCTrCH-ID,
    tFCS               TFCS          OPTIONAL,
    tFCI-Coding        TFCI-Coding  OPTIONAL,      punturing-Limit          Punturing-Limit  OPTIONAL
    dl-DPCH-InformationList-RL-ReconfPrepTDD          DL-DPCH-InformationList-RL-ReconfPrepTDD  OPTIONAL
}

```

```
DL-DPCH-InformationList-RL-ReconfPrepTDD ::= SEQUENCE (SIZE (1..maxnoofDPCHs)) OF
  ProtocolIE-Container {{DL-DPCH-Information-RL-ReconfPrepTDDItemIE }}

DL-DPCH-Information-RL-ReconfPrepTDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DL-DPCH-Information-RL-ReconfPrepTDDItem   CRITICALITY   ignore   TYPE   DL-DPCH-Information-RL-ReconfPrepTDDItem   PRESENCE
  mandatory
  },
  ...
}

DL-DPCH-Information-RL-ReconfPrepTDDItem ::= SEQUENCE {
dPCH-ID          DPCH-ID,
  tDD-ChannelisationCode   TDD-ChannelisationCode   OPTIONAL,
  burstType                BurstType                OPTIONAL,
  midambleShift            MidambleShift            OPTIONAL,
  timeSlot                 TimeSlot                 OPTIONAL,
  tdd-PhysicalChannelOffset TDD-PhysicalChannelOffset OPTIONAL,
  repetitionPeriod         RepetitionPeriod         OPTIONAL,
  rpetitionLength          RepetitionLength          OPTIONAL,
  tFCI-Presence            TFCI-Presence            OPTIONAL
}

DCH-ModifyList-RL-ReconfPrepTDD ::= SEQUENCE (SIZE (1..maxnoofDCHs)) OF
  ProtocolIE-Container {{DCH-Modify-RL-ReconfPrepTDDItemIE }}

DCH-Modify-RL-ReconfPrepTDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DCH-Modify-RL-ReconfPrepTDDItem   CRITICALITY ignore   TYPE DCH-Modify-RL-ReconfPrepTDDItem   PRESENCE optional },
  ...
}

DCH-Modify-RL-ReconfPrepTDDItem ::= SEQUENCE {
  dCH-ID          DCH-ID,
  ul-TransportFormatSet   TransportFormatSet   OPTIONAL,
  dl-TransportFormatSet   TransportFormatSet   OPTIONAL,
  frameHandlingPriority   FrameHandlingPriority   OPTIONAL,
  ul-FP-Mode            UL-FP-Mode            OPTIONAL,
  toAWS                 ToAWS                 OPTIONAL,
  toAWE                 ToAWE                 OPTIONAL,
}

DCH-AddList-RL-ReconfPrepTDD ::= SEQUENCE (SIZE (1..maxnoofDCHs)) OF
  ProtocolIE-Container {{DCH-Add-RL-ReconfPrepTDDItemIE }}

DCH-Add-RL-ReconfPrepTDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DCH-Add-RL-ReconfPrepTDDItem   CRITICALITY ignore   TYPE DCH-Add-RL-ReconfPrepTDDItem   PRESENCE optional },
  ...
}

DCH-Add-RL-ReconfPrepTDDItem ::= SEQUENCE {
```









```
}

DSCH-SetupList-RL-ReconfReady ::= SEQUENCE (SIZE (1..maxnoofDSCHs)) OF
  ProtocolIE-Container {{DSCH-Setup-RL-ReconfReadyItemIE }}

DSCH-Setup-RL-ReconfReadyItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DSCH-Setup-RL-ReconfReadyItem          CRITICALITY ignore  TYPE DSCH-Setup-RL-ReconfReadyItem          PRESENCE mandatory  },
  ...
}

DSCH-Setup-RL-ReconfReadyitem ::= SEQUENCE {
  dSCH-ID          DSCH-ID
  bindingID        BindingID,
  transportLayerAddress  TransportLayerAddress
}

DSCH-ModifyList-RL-ReconfReady ::= SEQUENCE (SIZE (1..maxnoofDSCHs)) OF
  ProtocolIE-Container {{DSCH-Modify-RL-ReconfReadyItemIE }}

DSCH-Modify-RL-ReconfReadyItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DSCH-Modify-RL-ReconfReadyItem          CRITICALITY ignore  TYPE DSCH-Modify-RL-ReconfReadyItem          PRESENCE mandatory  },
  ...
}

DSCH-ModifyItem-RL-ReconfReadyItem ::= SEQUENCE {
  dSCH-ID          DSCH-ID
  bindingID        BindingID,
  transportLayerAddress  TransportLayerAddress
}

USCH-SetupList-RL-ReconfReady ::= SEQUENCE (SIZE (1..maxnoofUSCHs)) OF
  ProtocolIE-Container {{USCH-Setup-RL-ReconfReadyItemIE }}

USCH-Setup-RL-ReconfReadyItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-USCH-Setup-RL-ReconfReadyItem          CRITICALITY ignore  TYPE USCH-Setup-RL-ReconfReadyItem          PRESENCE mandatory  },
  ...
}

USCH-Setup-RL-ReconfReadyitem ::= SEQUENCE {
  uSCH-ID          USCH-ID
  bindingID        BindingID,
  transportLayerAddress  TransportLayerAddress
}

USCH-ModifyList-RL-ReconfReady ::= SEQUENCE (SIZE (1..maxnoofUSCHs)) OF
  ProtocolIE-Container {{USCH-Modify-RL-ReconfReadyItemIE }}

USCH-Modify-RL-ReconfReadyItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-USCH-Modify-RL-ReconfReadyItem          CRITICALITY ignore  TYPE USCH-Modify-RL-ReconfReadyItem          PRESENCE mandatory  },
```



```
...
}

USCH-ModifyItem-RL-ReconfReadyItem ::= SEQUENCE {
    uSCH-ID            USCH-ID
    bindingID          BindingID,
    transportLayerAddress TransportLayerAddress
}

-- *****
--
-- RADIO LINK RECONFIGURATION FAILURE
--
-- *****

RadioLinkReconfigurationFailure ::= SEQUENCE {
    protocolIEs           ProtocolIE-Container    {{RadioLinkReconfigurationFailure-IEs}},
    protocolExtensions    ProtocolExtensionContainer {{RadioLinkReconfigurationFailure-Extensions}}           OPTIONAL,
    ...
}

RadioLinkReconfigurationFailure-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-CRNC-CommunicationContextID      CRITICALITY ignore      TYPE CRNC-CommunicationContextID      PRESENCE mandatory } |
    { ID id-Cause                            CRITICALITY ignore      TYPE Cause                            PRESENCE mandatory } |
    { ID id-RL-ReconfigurationFailureList-RL-ReconfFail CRITICALITY ignore      TYPE RL-ReconfigurationFailureList-RL-ReconfFail PRESENCE optional } }
{ ID id-CriticalityDiagnostic                CRITICALITY ignore      TYPE CriticalityDiagnostic                PRESENCE optional
},
...
}

RadioLinkReconfigurationFailure-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

RL-ReconfigurationFailureList-RL-ReconfFail ::= SEQUENCE (SIZE (1..maxnoofRLs)) OF
    ProtocolIE-Container {{RL-ReconfigurationFailure-RL-ReconfFailItemIE}}

RL-ReconfigurationFailure-RL-ReconfFailItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-RL-ReconfigurationFailure-RL-ReconfFailItem CRITICALITY ignore      TYPE RL-ReconfigurationFailure-RL-ReconfFailItem PRESENCE optional
},
    ...
}

RL-ReconfigurationFailure-RL-ReconfFailItem ::= SEQUENCE {
    rL-ID            RL-ID,
    cause            Cause
}
}
```

```
-- *****
--
-- RADIO LINK RECONFIGURATION COMMIT
--
-- *****

RadioLinkReconfigurationCommit ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkReconfigurationCommit-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkReconfigurationCommit-Extensions}}      OPTIONAL,
    ...
}

RadioLinkReconfigurationCommit-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-NodeB-CommunicationContextID          CRITICALITY ignore          TYPE NodeB-CommunicationContextID PRESENCE mandatory } |
    { ID id-CFN                                   CRITICALITY ignore          TYPE CFN                          PRESENCE mandatory },
    ...
}

RadioLinkReconfigurationCommit-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- RADIO LINK RECONFIGURATION CANCEL
--
-- *****

RadioLinkReconfigurationCancel ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkReconfigurationCancel-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkReconfigurationCancel-Extensions}}      OPTIONAL,
    ...
}

RadioLinkReconfigurationCancel-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-NodeB-CommunicationContextID          CRITICALITY ignore          TYPE NodeB-CommunicationContextID PRESENCE mandatory },
    ...
}

RadioLinkReconfigurationCancel-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
```

```
-- RADIO LINK RECONFIGURATION REQUEST FDD
--
-- *****

RadioLinkReconfigurationRequestFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkReconfigurationRequestFDD-IEs}},
    protocolExtensions  ProtocolExtensionContainer {{RadioLinkReconfigurationRequestFDD-Extensions}}      OPTIONAL,
    ...
}

RadioLinkReconfigurationRequestFDD-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-NodeB-CommunicationContextID          CRITICALITY ignore          TYPE NodeB-CommunicationContextID          PRESENCE mandatory } |
    { ID id-UL-DPCH-InformationItem-RL-ReconfReqFDD CRITICALITY ignore          TYPE UL-DPCH-InformationItem-RL-ReconfReqFDD PRESENCE optional } |
    { ID id-DL-DPCH-InformationItem-RL-ReconfReqFDD CRITICALITY ignore          TYPE DL-DPCH-InformationItem-RL-ReconfReqFDD PRESENCE optional } |
    { ID id-DCH-ModifyList-RL-ReconfReqFDD         CRITICALITY ignore          TYPE DCH-ModifyList-RL-ReconfReqFDD         PRESENCE optional } |
    { ID id-DCH-AddList-RL-ReconfReqFDD            CRITICALITY ignore          TYPE DCH-AddList-RL-ReconfReqFDD            PRESENCE optional } |
    { ID id-DCH-DeleteList-RL-ReconfReqFDD         CRITICALITY ignore          TYPE DCH-DeleteList-RL-ReconfReqFDD         PRESENCE optional } |
    { ID id-DSCH-ModifyItem-RL-ReconfReqFDD        CRITICALITY ignore          TYPE DSCH-ModifyItem-RL-ReconfReqFDD        PRESENCE optional } |
    { ID id-DSCH-AddItem-RL-ReconfReqFDD           CRITICALITY ignore          TYPE DSCH-AddItem-RL-ReconfReqFDD           PRESENCE optional } |
    { ID id-DSCH-DeleteItem-RL-ReconfReqFDD        CRITICALITY ignore          TYPE DSCH-DeleteItem-RL-ReconfReqFDD        PRESENCE optional } |
    { ID id-RL-InformationList-RL-ReconfReqFDD     CRITICALITY ignore          TYPE RL-InformationList-RL-ReconfReqFDD     PRESENCE optional },
    ...
}

RadioLinkReconfigurationRequestFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

UL-DPCH-InformationItem-RL-ReconfReqFDD ::= SEQUENCE {
    tFCS          TFCS          OPTIONAL
}

DL-DPCH-InformationItem-RL-ReconfReqFDD ::= SEQUENCE {
    tFCS          TFCS          OPTIONAL
    tFCI-SignallingMode  TFCI-SignallingMode OPTIONAL
}

DCH-ModifyList-RL-ReconfReqFDD ::= SEQUENCE (SIZE (1..maxnoofDCHs)) OF
    ProtocolIE-Container {{DCH-Modify-RL-ReconfReqFDDItemIE }}

DCH-Modify-RL-ReconfReqFDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DCH-Modify-RL-ReconfReqFDDItem CRITICALITY ignore          TYPE DCH-Modify-RL-ReconfReqFDDItem PRESENCE optional },
    ...
}

DCH-Modify-RL-ReconfReqFDDItem ::= SEQUENCE {
    dCH-ID          DCH-ID,
    ul-TransportFormatSet  TransportFormatSet OPTIONAL,

```

```

dl-TransportFormatSet      TransportFormatSet OPTIONAL,
frameHandlingPriority      FrameHandlingPriority  OPTIONAL,
ul-FP-Mode                UL-FP-Mode           OPTIONAL,
toAWS                     ToAWS                 OPTIONAL,
toAWE                     ToAWE                 OPTIONAL
}

DCH-AddList-RL-ReconfReqFDD ::= SEQUENCE (SIZE (1..maxnoofDCHs)) OF
  ProtocolIE-Container {{DCH-Add-RL-ReconfReqFDDItemIE }}

DCH-Add-RL-ReconfReqFDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DCH-Add-RL-ReconfReqFDDItem CRITICALITY ignore      TYPE DCH-Add-RL-ReconfReqFDDItem PRESENCE optional  },
  ...
}

DCH-Add-RL-ReconfReqFDDItem ::= SEQUENCE {
  dCH-ID                    DCH-ID,
  ul-TransportFormatSet    TransportFormatSet,
  dl-TransportFormatSet    TransportFormatSet,
  frameHandlingPriority    FrameHandlingPriority,
  payloadCRC-PresenceIndicator  PayloadCRC-PresenceIndicator,
  ul-FP-Mode              UL-FP-Mode,
  toAWS                   ToAWS,
  toAWE                   ToAWE
}

DCH-DeleteList-RL-ReconfReqFDD ::= SEQUENCE (SIZE (1..maxnoofDCHs)) OF
  ProtocolIE-Container {{DCH-Delete-RL-ReconfReqFDDItemIE }}

DCH-Delete-RL-ReconfReqFDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DCH-Delete-RL-ReconfReqFDDItem CRITICALITY ignore      TYPE DCH-Delete-RL-ReconfReqFDDItem PRESENCE optional },
  ...
}

DCH-Delete-RL-ReconfReqFDDItem ::= SEQUENCE {
  dCH-ID                    DCH-ID
}

DSCH-ModifyItem-RL-ReconfReqFDD ::= SEQUENCE {
  dl-TransportFormatSet    TransportFormatSet OPTIONAL,
  rL-ID                    RL-ID               OPTIONAL,
  frameHandlingPriority    FrameHandlingPriority  OPTIONAL,
  toAWS                    ToAWS                 OPTIONAL,
  toAWE                    ToAWE                 OPTIONAL
}

DSCH-AddItem-RL-ReconfReqFDD ::= SEQUENCE {
  dl-TransportFormatSet    TransportFormatSet,
  rL-ID                    RL-ID,

```

```
    frameHandlingPriority        FrameHandlingPriority,
    toAWS                        ToAWS,
    toAWE                        ToAWE
  }

DSCH-DeleteItem-RL-ReconfReqFDD ::= SEQUENCE {
  rL-ID                          RL-ID
}

RL-InformationList-RL-ReconfPrepFDD ::= SEQUENCE (SIZE (1..maxnoofRLs)) OF
  ProtocolIE-Container { {RL-Information-RL-ReconfPrepFDDItemIE } }

RL-Information-RL-ReconfPrepFDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-RL-Information-RL-ReconfPrepFDDItem CRITICALITY ignore TYPE RL-Information-RL-ReconfPrepFDDItem PRESENCE optional },
  ...
}

RL-Information-RL-ReconfPrepFDDItem ::= SEQUENCE {
  rL-ID                          RL-ID,
  maxDL-Power                    DL-Power          OPTIONAL,
  minDL-Power                    DL-Power          OPTIONAL
}

-- *****
--
-- RADIO LINK RECONFIGURATION REQUEST TDD
--
-- *****

RadioLinkReconfigurationRequestTDD ::= SEQUENCE {
  protocolIEs                    ProtocolIE-Container    { {RadioLinkReconfigurationRequestTDD-IEs} },
  protocolExtensions             ProtocolExtensionContainer { {RadioLinkReconfigurationRequestTDD-Extensions} }
  ...
  OPTIONAL,
}

RadioLinkReconfigurationRequestTDD-IEs NBAP-PROTOCOL-IES ::= {
  { ID id-NodeB-CommunicationContextID CRITICALITY ignore TYPE NodeB-CommunicationContextID PRESENCE mandatory } |
  { ID id-UL-CCTrCH-InformationList-RL-ReconfReqTDD CRITICALITY ignore TYPE UL-CCTrCH-InformationList-RL-ReconfReqTDD PRESENCE optional } |
  { ID id-DL-CCTrCH-InformationList-RL-ReconfReqTDD CRITICALITY ignore TYPE DL-CCTrCH-InformationList-RL-ReconfReqTDD PRESENCE optional } |
  { ID id-DCH-ModifyList-RL-ReconfReqTDD CRITICALITY ignore TYPE DCH-ModifyList-RL-ReconfReqTDD PRESENCE optional } |
  { ID id-DCH-AddList-RL-ReconfReqTDD CRITICALITY ignore TYPE DCH-AddList-RL-ReconfReqTDD PRESENCE optional } |
  { ID id-DCH-DeleteList-RL-ReconfReqTDD CRITICALITY ignore TYPE DCH-DeleteList-RL-ReconfReqTDD PRESENCE optional } |
  { ID id-DSCH-ModifyList-RL-ReconfReqTDD CRITICALITY ignore TYPE DSCH-ModifyList-RL-ReconfReqTDD PRESENCE optional } |
  { ID id-DSCH-AddList-RL-ReconfReqTDD CRITICALITY ignore TYPE DSCH-AddList-RL-ReconfReqTDD PRESENCE optional } |
  { ID id-DSCH-DeleteList-RL-ReconfReqTDD CRITICALITY ignore TYPE DSCH-DeleteList-RL-ReconfReqTDD PRESENCE optional } |
}
```

```

    { ID id-USCH-ModifyList-RL-ReconfReqTDD      CRITICALITY ignore  TYPE USCH-ModifyList-RL-ReconfReqTDD      PRESENCE optional } |
    { ID id-USCH-AddList-RL-ReconfReqTDD        CRITICALITY ignore  TYPE USCH-AddList-RL-ReconfReqTDD        PRESENCE optional } |
    { ID id-USCH-DeleteList-RL-ReconfReqTDD     CRITICALITY ignore  TYPE USCH-DeleteList-RL-ReconfReqTDD     PRESENCE optional },
    ...
}

RadioLinkReconfigurationRequestTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

UL-CCTrCH-InformationList-RL-ReconfReqTDD ::= SEQUENCE (SIZE (1..maxnoofCCTrCHs)) OF
    ProtocolIE-Container {{UL-CCTrCH-Information-RL-ReconfReqTDDItemIE }}

UL-CCTrCH-Information-RL-ReconfReqTDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-UL-CCTrCH-Information-RL-ReconfReqTDDItem  CRITICALITY ignore      TYPE      UL-CCTrCH-Information-RL-ReconfReqTDDItem
    PRESENCE      mandatory
    },
    ...
}

UL-CCTrCH-Information-RL-ReconfReqTDDItem ::= SEQUENCE {
    cCTrCH-ID          CCTrCH-ID,
    tFCS               TFCS,
    puncturingLimit   PuncturingLimit
}

DL-CCTrCH-InformationList-RL-ReconfReqTDD ::= SEQUENCE (SIZE (1..maxnoofCCTrCHs)) OF
    ProtocolIE-Container {{DL-CCTrCH-Information-RL-ReconfReqTDDItemIE }}

DL-CCTrCH-Information-RL-ReconfReqTDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DL-CCTrCH-Information-RL-ReconfReqTDDItem  CRITICALITY ignore      TYPE      DL-CCTrCH-Information-RL-ReconfReqTDDItem
    PRESENCE      mandatory
    },
    ...
}

DL-CCTrCH-Information-RL-ReconfReqTDDItem ::= SEQUENCE {
    cCTrCH-ID          CCTrCH-ID,
    tFCS               TFCS,
    puncturingLimit   PuncturingLimit
}

DCH-ModifyList-RL-ReconfReqTDD ::= SEQUENCE (SIZE (1..maxnoofDCHs)) OF
    ProtocolIE-Container {{DCH-Modify-RL-ReconfReqTDDItemIE }}

DCH-Modify-RL-ReconfReqTDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DCH-Modify-RL-ReconfReqTDDItem  CRITICALITY ignore      TYPE DCH-Modify-RL-ReconfReqTDDItem PRESENCE optional },

```







```

USCH-Modify-RL-ReconfReqTDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-USCH-Modify-RL-ReconfReqTDDItem    CRITICALITY ignore      TYPE USCH-Modify-RL-ReconfReqTDDItem    PRESENCE optional },
  ...
}

USCH-Modify-RL-ReconfReqTDDItem ::= SEQUENCE {
  uSCH-ID          USCH-ID,
  cCTrCH-ID        CCTrCH-ID      OPTIONAL,
  transportFormatSet  TransportFormatSet  OPTIONAL,
}

USCH-AddList-RL-ReconfReqTDD ::= SEQUENCE (SIZE (1..maxnoofUSCHs)) OF
  ProtocolIE-Container {{USCH-Add-RL-ReconfReqTDDItemIE }}

USCH-Add-RL-ReconfReqTDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-USCH-Add-RL-ReconfReqTDDItem    CRITICALITY ignore      TYPE USCH-Add-RL-ReconfReqTDDItem    PRESENCE optional },
  ...
}

USCH-Add-RL-ReconfReqTDDItem ::= SEQUENCE {
  uSCH-ID          USCH-ID,
  cCTrCH-ID        CCTrCH-ID,
  transportFormatSet  TransportFormatSet,
}

USCH-DeleteList-RL-ReconfReqTDD ::= SEQUENCE (SIZE (1..maxnoofUSCHs)) OF
  ProtocolIE-Container {{USCH-Delete-RL-ReconfReqTDDItemIE }}

USCH-Delete-RL-ReconfReqTDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-USCH-Delete-RL-ReconfReqTDDItem CRITICALITY ignore      TYPE USCH-Delete-RL-ReconfReqTDDItem    PRESENCE mandatory },
  ...
}

USCH-Delete-RL-ReconfReqTDDItem ::= SEQUENCE {
  uSCH-ID          USCH-ID
}

-- *****
--
-- RADIO LINK RECONFIGURATION RESPONSE
--
-- *****

RadioLinkReconfigurationResponse ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container  {{RadioLinkReconfigurationResponse-IEs}},
  protocolExtensions   ProtocolExtensionContainer  {{RadioLinkReconfigurationResponse-Extensions}}
  ...
}

```

```

RadioLinkReconfigurationResponse-IEs NBAP-PROTOCOL-IES ::= {
  { ID id-CRNC-CommunicationContextID      CRITICALITY ignore  TYPE CRNC-CommunicationContextID      PRESENCE mandatory } |
  { ID id-RL-InformationResponseList-RL-ReconfResp      CRITICALITY ignore  TYPE RL-InformationResponseList-RL-ReconfResp      PRESENCE optional }
}|
{ ID id-CriticalityDiagnostic              CRITICALITY ignore      TYPE CriticalityDiagnostic              PRESENCE optional
  },
  ...
}

RL-InformationResponseList-RL-ReconfResp ::= SEQUENCE (SIZE (1..maxnoofRLs)) OF
ProtocolIE-Container { {RL-InformationResponseItem-RL-ReconfRespIE } }

RL-InformationResponseItem-RL-ReconfRespIE NBAP-PROTOCOL-IE ::= {
  { ID id-RL-InformationResponseItem-RL-ReconfResp      CRITICALITY ignore  TYPE RL-InformationResponseItem-RL-ReconfResp      PRESENCE      mandatory
  },
  ...
}

RL-InformationResponseItem-RL-ReconfResp ::= SEQUENCE {
  rL-ID          RL-ID,
  dCHsToBeAdded  DCH-AddList-RL-ReconfResp  OPTIONAL,
  dCHsToBeModified  DCH-ModifyList-RL-ReconfResp  OPTIONAL,
  dSCHsToBeSetup    DSCH-SetupList-RL-ReconfResp  OPTIONAL,
  dSCHsToBeModifie  DSCH-ModifyList-RL-ReconfResp  OPTIONAL,
  uSCHsToBeSetup    USCH-SetupList-RL-ReconfResp  OPTIONAL,
  uSCHsToBeModifie  USCH-ModifyList-RL-ReconfResp  OPTIONAL
  ...
}

DCH-ModifyList-RL-ReconfResp ::= SEQUENCE (SIZE (1..maxnoofDCHs)) OF
ProtocolIE-Container {{DCH-Modify-RL-ReconfRespItemIE }}

DCH-Modify-RL-ReconfRespItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DCH-Modify-RL-ReconfRespItem      CRITICALITY ignore      TYPE DCH-Modify-RL-ReconfRespItem      PRESENCE optional },
  ...
}

DCH-Modify-RL-ReconfRespItem ::= SEQUENCE {
  dCH-ID          DCH-ID,
  bindingID       BindingID,
  transportLayerAddress      TransportLayerAddress
}

DCH-AddList-RL-ReconfResp ::= SEQUENCE (SIZE (1..maxnoofDCHs)) OF
ProtocolIE-Container {{DCH-Add-RL-ReconfRespItemIE }}

DCH-Add-RL-ReconfRespItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DCH-Add-RL-ReconfRespItem      CRITICALITY ignore      TYPE DCH-Add-RL-ReconfRespItem      PRESENCE optional },
  ...
}

```

```
}

DCH-Add-RL-ReconfRespItem ::= SEQUENCE {
    dCH-ID          DCH-ID,
    bindingID       BindingID,
    transportLayerAddress TransportLayerAddress
}

DSCH-SetupList-RL-ReconfResp ::= SEQUENCE (SIZE (1..maxnoofDSCHs)) OF
    ProtocolIE-Container {{DSCH-Setup-RL-ReconfRespItemIE }}

DSCH-Setup-RL-ReconfRespItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DSCH-Setup-RL-ReconfRespItem    CRITICALITY ignore    TYPE DSCH-Setup-RL-ReconfRespItem    PRESENCE optional    },
    ...
}

DSCH-Setup-RL-ReconfRespItem ::= SEQUENCE {
    dSCH-ID          DSCH-ID,
    bindingID       BindingID,
    transportLayerAddress TransportLayerAddress
}

DSCH-ModifyList-RL-ReconfResp ::= SEQUENCE (SIZE (1..maxnoofDSCHs)) OF
    ProtocolIE-Container {{DSCH-Modify-RL-ReconfRespItemIE }}

DSCH-Modify-RL-ReconfRespItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DSCH-Modify-ReconfRespItem    CRITICALITY ignore    TYPE DSCH-Modify-RL-ReconfRespItem    PRESENCE optional },
    ...
}

DSCH-Modify-RL-ReconfRespItem ::= SEQUENCE {
    dSCH-ID          DSCH-ID,
    bindingID       BindingID,
    transportLayerAddress TransportLayerAddress
}

USCH-ModifyList-RL-ReconfResp ::= SEQUENCE (SIZE (1..maxnoofUSCHs)) OF
    ProtocolIE-Container {{USCH-Modify-RL-ReconfRespItemIE }}

USCH-Modify-RL-ReconfRespItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-USCH-Modify-RL-ReconfRespItem    CRITICALITY ignore    TYPE USCH-Modify-RL-ReconfRespItem    PRESENCE optional },
    ...
}

USCH-Modify-RL-ReconfRespItem ::= SEQUENCE {
    uSCH-ID          USCH-ID,
    cCTrCH-ID       CCTrCH-ID,
    transportFormatSet TransportFormatSet,
}
```

```

USCH-ModifyList-RL-ReconfResp ::= SEQUENCE (SIZE (1..maxnoofUSCHs)) OF
  ProtocolIE-Container {{USCH-Modify-RL-ReconfRespItemIE }}

USCH-Modify-RL-ReconfRespItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-USCH-Modify-RL-ReconfRespItem      CRITICALITY ignore      TYPE USCH-Modify-RL-ReconfRespItem      PRESENCE optional },
  ...
}

USCH-Modify-RL-ReconfRespItem ::= SEQUENCE {
  uSCH-ID          USCH-ID,
  cCTrCH-ID        CCTrCH-ID      OPTIONAL,
  transportFormatSet  TransportFormatSet  OPTIONAL,
}

RadioLinkReconfigurationResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
--
-- RADIO LINK DELETION REQUEST
--
-- *****

RadioLinkDeletionRequest ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container  {{RadioLinkDeletionRequest-IEs}},
  protocolExtensions  ProtocolExtensionContainer {{RadioLinkDeletionRequest-Extensions}}      OPTIONAL,
  ...
}

RadioLinkDeletionRequest-IEs NBAP-PROTOCOL-IES ::= {
  { ID id-NodeB-CommunicationContextID      CRITICALITY ignore      TYPE NodeB-CommunicationContextID      PRESENCE mandatory } |
  { ID id-RL-informationList-RL-Del-Req      CRITICALITY ignore      TYPE RL-informationList-RL-Del-Req      PRESENCE mandatory } ,
  ...
}

RadioLinkDeletionRequest-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

RL-informationList-RL-Del-Req ::= SEQUENCE (SIZE (1..maxnoofRLs)) OF
  ProtocolIE-Container {{RL-informationList-RL-Del-ReqItemIE }}

RL-informationList-RL-Del-ReqItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-RL-informationList-RL-Del-ReqItem  CRITICALITY ignore      TYPE RL-informationList-RL-Del-ReqItem  PRESENCE mandatory },
  ...
}

```

```

}

RL-informationList-RL-Del-ReqItem ::= SEQUENCE {
    rL-ID          RL-ID
}

-- *****
--
-- RADIO LINK DELETION RESPONSE
--
-- *****

RadioLinkDeletionResponse ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkDeletionResponse-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkDeletionResponse-Extensions}}    OPTIONAL,
    ...
}

RadioLinkDeletionResponse-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-CRNC-CommunicationContextID    CRITICALITY ignore    TYPE CRNC-CommunicationContextID    PRESENCE mandatory    } |
    { ID id-CriticalityDiagnostic          CRITICALITY ignore    TYPE CriticalityDiagnostic          PRESENCE optional    }
    ,
    ...
}

RadioLinkDeletionResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- DL POWER CONTROL REQUEST FDD
--
-- *****

DLPowerControlRequestFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{DLPowerControlRequestFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{DLPowerControlRequestFDD-Extensions}}    OPTIONAL,
    privateExtensions    PrivateExtensionContainer {{DLPowerControlRequestFDD-PrivateExtensions}}    OPTIONAL,
    ...
}

DLPowerControlRequestFDD-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-NodeB-CommunicationContextID    CRITICALITY ignore    TYPE NodeB-CommunicationContextID    PRESENCE mandatory    } |
    { ID id-ProcedureScopeType              CRITICALITY ignore    TYPE ProcedureScopeType              PRESENCE mandatory    } ,
    ...
}

```

```
DLPowerControlRequestFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

DLPowerControlRequestFDD-PrivateExtensions NBAP-PRIVATE-EXTENSION ::= {
    ...
}

ProcedureScopeType ::= CHOICE {
    all-RL             All-RL,
    individualRL      IndividualRL
}

All-RL ::= SEQUENCE {
    dl-ReferencePower DL-Power
}

IndividualRL ::= SEQUENCE {
    dl-ReferencePowerInformationList-PC              DL-ReferencePowerInformationList-PC
}

DL-ReferencePowerInformationList-PC ::= SEQUENCE (SIZE (1..maxnoofRLs)) OF
    ProtocolIE-Container {{DL-ReferencePowerInformationList-PCItemIE }}

DL-ReferencePowerInformationList-PCItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DL-ReferencePowerInformationList-PCItem      CRITICALITY      ignore      TYPE      DL-ReferencePowerInformationList-PCItem      PRESENCE
    mandatory
    },
    ...
}

DL-ReferencePowerInformationList-PCItem ::= SEQUENCE {
    rL-ID             RL-ID,
    dl-ReferencePower DL-Power
}

-- *****
--
-- DEDICATED MEASUREMENT INITIATION REQUEST
--
-- *****

DedicatedMeasurementInitiationRequest ::= SEQUENCE {
    protocolIES          ProtocolIE-Container {{DedicatedMeasurementInitiationRequest-IEs}},
    protocolExtensions  ProtocolExtensionContainer {{DedicatedMeasurementInitiationRequest-Extensions}}
    ...
}
OPTIONAL,
```

```
DedicatedMeasurementInitiationRequest-IEs NBAP-PROTOCOL-IES ::= {
  { ID id-NodeB-CommunicationContextID          CRITICALITY ignore          TYPE NodeB-CommunicationContextID          PRESENCE mandatory } |
  { ID id-MeasurementID                          CRITICALITY ignore          TYPE MeasurementID                          PRESENCE mandatory } |
  { ID id-DedicatedMeasurementObjectType-Req    CRITICALITY ignore          TYPE DedicatedMeasurementObjectType-Req    PRESENCE mandatory } |
  { ID id-DedicatedMeasurementType              CRITICALITY ignore          TYPE DedicatedMeasurementType              PRESENCE mandatory } |
  { ID id-MeasurementCharacteristics             CRITICALITY ignore          TYPE MeasurementCharacteristics            PRESENCE mandatory } |
  { ID id-ReportCharacteristics                  CRITICALITY ignore          TYPE ReportCharacteristics                  PRESENCE mandatory } ,
  ...
}
```

```
DedicatedMeasurementInitiationRequest-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  ...
}
```

```
DedicatedMeasurementObjectType-Req ::= ENUMERATED {
  rL                      RL-DMeasureReq,
  all-RL                   All-DMeasureReq
}
```

```
RL-DMeasureReq ::= SEQUENCE {
  rL-InformationList      RL-InformationList-DMeasureReq
}
```

```
RL-InformationList-DMeasureReq ::= SEQUENCE (SIZE (1..maxnoofRLs)) OF
  ProtocolIE-Container {{ RL-InformationList-DMeasureReqItemIE }}
```

```
RL-InformationList-DMeasureReqItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-RL-InformationList-DMeasureReqItem  CRITICALITY ignore
  TYPE    RL-InformationList-DMeasureReqItem  PRESENCE mandatory
  },
  ...
}
```

```
RL-InformationList-DMeasureReqItem ::= SEQUENCE {
  rL-ID              RL-ID,
  dPCH-ID            DPCH-ID
}
```

```
All-RL-Req ::= SEQUENCE {
  dedicatedMeasurementValue      DedicatedMeasurementValue
}
```

```
-- *****
--
-- DEDICATED MEASUREMENT INITIATION RESPONSE
--
-- *****
```

```

DedicatedMeasurementInitiationResponse ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container    {{DedicatedMeasurementInitiationResponse-IEs}},
    protocolExtensions         ProtocolExtensionContainer {{DedicatedMeasurementInitiationResponse-Extensions}}
    ...
}

DedicatedMeasurementInitiationResponse-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-CRNC-CommunicationContextID    CRITICALITY ignore    TYPE CRNC-CommunicationContextID    PRESENCE mandatory } |
    { ID id-MeasurementID                  CRITICALITY ignore    TYPE MeasurementID                PRESENCE mandatory } |
    { ID id-DedicatedMeasurementObjectType-Resp CRITICALITY ignore    TYPE DedicatedMeasurementObjectType-Resp PRESENCE mandatory } |
    { ID id-CFN                            CRITICALITY ignore    TYPE CFN                          PRESENCE mandatory } |
    { ID id-CriticalityDiagnostic          CRITICALITY ignore    TYPE CriticalityDiagnostic          PRESENCE optional
    },
    ...
}

DedicatedMeasurementInitiationResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

DedicatedMeasurementObjectType-Resp ::= ENUMERATED {
    rL                RL-Resp,
    all-RL            All-RL-resp
}

RL-Resp ::= SEQUENCE {
    rL-InformationList-DMeasureResponse          RL-InformationList-DmeasureResponse
}

RL-InformationList-DmeasureResponse ::= SEQUENCE (SIZE (1..maxnoofRLs)) OF
    ProtocolIE-Container {{RL-Information-DMeasureResponseItemIE }}

RL-Information-DMeasureResponseItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-RL-Information-DMeasureResponseItem    CRITICALITY ignore    TYPE    RL-Information-DMeasureResponseItem PRESENCE mandatory
    },
    ...
}

RL-Information-DMeasureResponseItem ::= SEQUENCE {
    rL-ID                RL-ID,
    dedicatedMeasurementValue    DedicatedMeasurementValue
}

All-RL-Resp ::= SEQUENCE {
    dedicatedMeasurementValue    DedicatedMeasurementValue
}

-- *****

```



```
--
-- DEDICATED MEASUREMENT INITIATION FAILURE
--
-- *****

DedicatedMeasurementInitiationFailure ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{DedicatedMeasurementInitiationFailure-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{DedicatedMeasurementInitiationFailure-Extensions}} OPTIONAL,
    ...
}

DedicatedMeasurementInitiationFailure-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-CRNC-CommunicationContextID    CRITICALITY ignore    TYPE CRNC-CommunicationContextID    PRESENCE mandatory } |
    { ID id-MeasurementID                  CRITICALITY ignore    TYPE MeasurementID                  PRESENCE mandatory } |
    { ID id-Cause                          CRITICALITY ignore    TYPE Cause                          PRESENCE mandatory } |
    { ID id-CriticalityDiagnostic          CRITICALITY ignore    TYPE CriticalityDiagnostic          PRESENCE optional
    },
    ...
}

DedicatedMeasurementInitiationFailure-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- DEDICATED MEASUREMENT REPORT
--
-- *****

DedicatedMeasurementReport ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{DedicatedMeasurementReport-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{DedicatedMeasurementReport-Extensions}} OPTIONAL,
    ...
}

DedicatedMeasurementReport-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-CRNC-CommunicationContextID    CRITICALITY ignore    TYPE CRNC-CommunicationContextID    PRESENCE mandatory } |
    { ID id-MeasurementID                  CRITICALITY ignore    TYPE MeasurementID                  PRESENCE mandatory } |
    { ID id-DedicatedMeasurementObjectType-Rep CRITICALITY ignore    TYPE DedicatedMeasurementObjectType-Rep PRESENCE mandatory } |
    { ID id-CFN                            CRITICALITY ignore    TYPE CFN                            PRESENCE mandatory },
    ...
}

DedicatedMeasurementReport-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}
```

```

DedicatedMeasurementObjectRep ::= ENUMERATED {
    rL                RL-Rep,
    all-RL            All-RL-Rep
}

RL-Rep ::= SEQUENCE {
    rL-InformationList-DMeasureReport          RL-InformationList-DMeasureReport
}

RL-InformationList-DmeasureReport ::= SEQUENCE (SIZE (1..maxnoofRLs)) OF
    ProtocolIE-Container {{RL-Information-DMeasureReportItemIE }}

RL-Information-DMeasureReportItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-RL-Information-DMeasureReportItem    CRITICALITY ignore    TYPE RL-Information-DMeasureReportItem    PRESENCE mandatory    },
    ...
}

RL-Information-DMeasureReportItem ::= SEQUENCE {
    rL-ID                RL-ID,
    dedicatedMeasurementValue    DedicatedMeasurementValue
}

All-RL-Rep ::= SEQUENCE {
    dedicatedMeasurementValue    DedicatedMeasurementValue
}

-- *****
--
-- DEDICATED MEASUREMENT TERMINATION REQUEST
--
-- *****

DedicatedMeasurementTerminationRequest ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container    {{DedicatedMeasurementTerminationRequest-IEs}},
    protocolExtensions          ProtocolExtensionContainer {{DedicatedMeasurementTerminationRequest-Extensions}}
OPTIONAL,
    ...
}

DedicatedMeasurementTerminationRequest-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-NodeB-CommunicationContextID    CRITICALITY ignore    TYPE NodeB-CommunicationContextID    PRESENCE mandatory    } |
    { ID id-MeasurementID                    CRITICALITY ignore    TYPE MeasurementID                    PRESENCE mandatory    },
    ...
}

DedicatedMeasurementTerminationRequest-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

```



```

}

RadioLinkFailureIndication-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

RL-InformationList-RL-FailInd ::= SEQUENCE (SIZE (1..maxnoofRLs)) OF
    ProtocolIE-Container {{ RL-InformationList-RL-FailIndItemIE }}

RL-InformationList-RL-FailInd ItemIE NBAP-PROTOCOL-IES ::= {
    { I D id- RL-InformationList-RL-FailIndItem CRITICALITY ignore      TYPE RL-InformationList-RL-FailIndItem      PRESENCE mandatory },
    ...
}

RL-InformationList-RL-FailIndItem ::= SEQUENCE {
    rL-ID          RL-ID,
    cause          Cause
}

-- *****
--
-- RADIO LINK RESTORE INDICATION
--
-- *****

RadioLinkRestoreIndication ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container      {{RadioLinkRestoreIndication-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkRestoreIndication-Extensions}}      OPTIONAL,
    ...
}

RadioLinkRestoreIndication-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-CRNC-CommunicationContextID      CRITICALITY ignore      TYPE CRNC-CommunicationContextID      PRESENCE mandatory } |
    { ID id-RL-InformationList-RL-RestoreInd      CRITICALITY ignore      TYPE RL-InformationList-RL-RestoreInd      PRESENCE mandatory },
    ...
}

RadioLinkRestoreIndication-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

RL-InformationList-RL-RestoreInd ::= SEQUENCE (SIZE (1..maxnoofRLs)) OF
    ProtocolIE-Container {{RL-InformationList-RL-RestoreIndItemIE }}

RL-InformationList-RL-RestoreIndItemIE NBAP-PROTOCOL-IES ::= {
    { I D id-RL-InformationList-RL-RestoreIndItem      CRITICALITY ignore      TYPE RL-InformationList-RL-RestoreIndItem      PRESENCE mandatory },
    ...
}

```

```

}

RL-InformationList-RL-RestoreIndItem ::= SEQUENCE {
    rL-ID          RL-ID
}

-- *****
--
-- COMPRESSED MODE PREPARE FDD
--
-- *****

CompressedModePrepareFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{CompressedModePrepareFDD-IEs}},
    protocolExtensions  ProtocolExtensionContainer {{CompressedModePrepareFDD-Extensions}}    OPTIONAL,
    ...
}

CompressedModePrepareFDD-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-NodeB-CommunicationContextID    CRITICALITY ignore          TYPE NodeB-CommunicationContextID    PRESENCE mandatory } |
    { ID id-TGP1                            CRITICALITY ignore          TYPE TGP1                            PRESENCE mandatory } |
    { ID id-TGP2                            CRITICALITY ignore          TYPE TGP2                            PRESENCE optional } |
    { ID id-TGL                             CRITICALITY ignore          TYPE TGL                             PRESENCE mandatory } |
    { ID id-TGD                             CRITICALITY ignore          TYPE TGD                             PRESENCE mandatory } |
    { ID id-UL-DL-CompressedModeSeletion    CRITICALITY ignore          TYPE UL-DL-CompressedModeSeletion    PRESENCE mandatory } |
    { ID id-CompressesModeMethod            CRITICALITY ignore          TYPE CompressesModeMethod            PRESENCE mandatory } |
    { ID id-GapPositionMode                 CRITICALITY ignore          TYPE GapPositionMode                 PRESENCE mandatory } |
    { ID id-SN                             CRITICALITY ignore          TYPE SN                             PRESENCE optional } |
    -- This IE is present if Gap position mode = 'flexible position'--
    { ID id-DL-FrameType                    CRITICALITY ignore          TYPE DL-FrameType                    PRESENCE mandatory } |
    { ID id-ScramblingCodeChange            CRITICALITY ignore          TYPE ScramblingCodeChange            PRESENCE optional } |
    -- This IE is present if Compressed mode method = 'SF/2' --
    { ID id-PowerControlMode                CRITICALITY ignore          TYPE PowerControlMode                PRESENCE mandatory } |
    { ID id-PowerResumeMode                 CRITICALITY ignore          TYPE PowerResumeMode                 PRESENCE mandatory } |
    { ID id-UL-DeltaEb-No                   CRITICALITY ignore          TYPE UL-DeltaEb-No                   PRESENCE mandatory } |
    { ID id-UL-DeltaEb-NoAfter              CRITICALITY ignore          TYPE UL-DeltaEb-NoAfter              PRESENCE mandatory },
    ...
}

CompressedModePrepareFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
--
-- COMPRESSED MODE READY FDD
--
-- *****

```

```
CompressedModeReadyFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{CompressedModeReadyFDD-IEs}},
    protocolExtensions  ProtocolExtensionContainer {{CompressedModeReadyFDD-Extensions}}          OPTIONAL,
    ...
}
```

```
CompressedModeReadyFDD-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-CRNCCommunicationContextID          CRITICALITY ignore          TYPE CRNC-CommunicationContextID PRESENCE mandatory },
    ...
}
```

```
CompressedModeReadyFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}
```

```
-- *****
--
-- COMPRESSED MODE COMMIT FDD
--
-- *****
```

```
CompressedModeCommitFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{CompressedModeCommitFDD-IEs}},
    protocolExtensions  ProtocolExtensionContainer {{CompressedModeCommitFDD-Extensions}}          OPTIONAL,
    ...
}
```

```
CompressedModeCommitFDD-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-NodeB-CommunicationContextID          CRITICALITY ignore          TYPE NodeB-CommunicationContextID PRESENCE mandatory } |
    { ID id-CFN          CRITICALITY ignore          TYPE CFN          PRESENCE mandatory },
    ...
}
```

```
CompressedModeCommitFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}
```

```
-- *****
--
-- COMPRESSED MODE FAILURE FDD
--
-- *****
```

```
CompressedModeFailureFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{CompressedModeFailureFDD-IEs}},
    protocolExtensions  ProtocolExtensionContainer {{CompressedModeFailureFDD-Extensions}}          OPTIONAL,
    ...
}
```

























```
time10ms,  
time20ms,  
time30ms,  
...  
}  
  
MeasurementID ::= INTEGER (0..1048575)  
  
-- to do  
MeasurementThreshold ::= TBD  
  
-- to do  
MeasurementThreshold1 ::= TBD  
  
-- to do  
MeasurementThreshold2 ::= TBD  
  
MeasurementType ::= ENUMERATED {  
sCH,  
syncRACH-access  
}  
  
MessageDiscriminator ::= ENUMERATED {  
common,  
dedicated  
}  
  
MidambleShift ::= INTEGER (0..15)  
  
MinimumSpreadingFactor ::= ENUMERATED {  
sF4,  
sF16,  
sF32,  
sF64,  
sF128,  
sF256,  
sF512  
}  
  
MinUL-ChannelisationCodeLength ::= ENUMERATED {  
code-length4,  
code-length8,  
code-length16,  
code-length32,  
code-length64,  
code-length128,  
code-length256  
}
```

```

MiscellaneousCause ::= ENUMERATED {
control-processing-overload,
hardware-failure,
oam-intervention,
not-enough-user-plane-processing-resources,
unspecified
}

Mode-DynamicTFS ::= CHOICE {
tdd-mode-dynamic    TransmissionTimeInterval-Dynamic,
...
}

Mode-SemiStaticTFS ::= CHOICE {
tdd-mode-semistatic TransmissionTimeInterval-SemiStatic,
...
}

-----
-- N
-----

-- to do
NumberOfChannelElements ::= TBD

NodeB-CommunicationContextID ::= INTEGER (0..1048576)

NumberOfTransportBlocks ::= INTEGER (0..4095)

-----
-- O
-----

-----
-- P
-----

PagingIndicatorLength ::= ENUMERATED {
ind-length2,
ind-length4,
ind-length8
}

PayloadCRC-PresenceIndicator ::= ENUMERATED {
CRC-Included,
CRC-NotIncluded
}

PD ::= INTEGER(0..2047)

```



```
PropagationDelay ::= INTEGER (0..255)

ProtocolCause ::= ENUMERATED
transaction-not-allowed,
transfer-syntax-error,
abstract-syntax-error -reject,
abstract-syntax-error-ignore-and-notify,
message-not-compatible-with-receiver-state,
semantic-error,
unspecified
}

-- PCCPCH Power unit dBm
-- PCCPCH Power step 0.1dBm
PCCPCH-power ::= INTEGER (-15..40)

PSCH-TimeSlot ::= INTEGER (0..6)

PSCH-Power ::= INTEGER (0..511)

PUSCH-Offset ::= INTEGER (0..255)

-----
-- R
-----

-- SF
RACH-SlotFormat ::= ENUMERATED {
format256,
format128,
format64,
format32
}

-- Bit 0=Sub Channel Number 0, Bit 1=Sub Channel Number 1, .., Bit 14=Sub Channel Number 14 --
RACH-SubChannelNumbers ::= BIT STRING (SIZE (15))

RadioNetworkLayerCause ::= Enumerated {
unknown-C-ID,
cell-not-available,
power-level-not-supported,
ul-scramblingcode-already-in-use,
dl-radio-resources-not-available,
ul-radio-resources-not-available,
rl-Already-ActivatedorAllocated,
nodeB-Resources-Unavailable,
insufficient-physical-channel-resources,
measurement-not-supported-for-the-object,
```



```
-- -30..-100 step 0.1
-- rssi1 indicates -30
RSSI-Value ::= ENUMERATED {
rssi1,
rssi2,
...
}
-----
-- S
-----

ScramblingCodeChange ::= ENUMERATED {
change,
no-change
}

Scrambling Code Word Number ::= INTEGER (0..255)

SecondaryCCPCH-SlotFormat ::= INTEGER(0..8)

SegmentType ::= ENUMERATED {
first,
subsequent,
last,
complete
}

SemiStaticTransportFormatInformation ::= SEQUENCE {
transmissionTimeInterval      TransmissionTimeInterval,
typeOfChannelCoding           TypeOfChannelCoding,
codingRate                     CodingRate           OPTIONAL
-- This IE is only present if IE Type of channel coding is Convolutional or Turbo --,
rateMatchingAttribute         RateMatchingAttribute,
cRC-Size                       CRC-Size,
mode-semistatic                Mode-SemiStatic
}

S-FieldLength ::= ENUMERATED {
s-length1,
s-length2
}

SIB-DeletionIndicator ::= ENUMERATED {
noDeletion,
deletion
}

SIB-Originator ::= ENUMERATED {
```



```

T-Cell ::= ENUMERATED {
    chip-0,
    chip-256,
    chip-512,
    chip-768,
    chip-1024,
    chip-1280,
    chip-1536,
    chip-1892,
    chip-2048,
    chip-2304
}

TDD-ChannelisationCode ::= ENUMERATED {
    channelisationCode1-1,
    channelisationCode2-1,
    channelisationCode2-2,
    channelisationCode4-1,
    channelisationCode4-2,
    ...
}

the ChipOffset is -19200 to +19199
TDD-ChipOffset ::= INTEGER (-19200..19199)

TransmissionTimeInterval-Dynamic ::= SEQUENCE (SIZE (1..maxTTIcount)) OF
    ENUMERATED {tti10, tti20, tti40, tti80}
}

TransmissionTimeInterval-SemiStatic ::= ENUMERATED {
    frameRelated,
    timeSlotRelated
}

TDD-S-CCPCH-Offset ::= INTEGER (0..63)

TFCI-Presence ::= ENUMERATED {
    present,
    not-present
}

TFCI-SignallingMode ::= ENUMERATED {
    normal,
    split
}

TFCS ::= SEQUENCE (SIZE (1..maxnoofTFCS)) OF
    SEQUENCE {

```



```

        cTFC          CTFC
    }

TFS ::= SEQUENCE {
    dynamicTransportFormatInformation          DynamicTransportFormatInformation,
    semiStaticTransportFormatInformation      SemiStaticTransportFormatInformation
}

TGD ::= INTEGER (0..255)

TGL ::= INTEGER (3,4,7,10,14)

TimeSlot ::= INTEGER (0..14)

TimeSlotDirection ::= ENUMERATED {
    ul,
    dl
}

-- to do
TimeSlotISCP-Value ::= TBD

TimeSlotStatus ::= ENUMERATED {
    active,
    not-active
}

ToAWE ::= INTEGER (0..2559) -- msec. --
ToAWS ::= INTEGER (0..1279) -- msec. --

TPC-DownlinkStepSize ::= ENUMERATED {
    step-size0-5,
    step-size1
}

Transmit Diversity Indicator ::= ENUMERATED {
    active,
    Inactive
}

TransmissionTimeInterval ::= ENUMERATED {
    time-interval10,
    time-interval20,
    time-interval40,
    time-interval80
}
```

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)". 3GPP TS 25.433 version 3.0.0 Release 1999~~

```
}          -- mec --

--** TODO. -35..15 is transformed to 0..50. 0.1 steps gives 0..500 **
-- carrier-power1 indicates 5 dB
TransmittedCarrierPowerValue ::= ENUMERATED {
carrier-power1,
carrier-power2,
...
}

--** TODO. -35..15 is transformed to 0..50. 0.1 steps gives 0..500 **
-- code-power1 indicated 5 dB
TransmittedCodePowerValue ::= ENUMERATED {
code-power1,
code-power2,
...
}

TransportBlockSize ::= INTEGER (1..5000)
-- bit --

TSTD-Indicator ::= ENUMERATED {
    active,
    inactive
}

TransportLayerAddress ::= OCTET STRING (SIZE (1..20, ...))

TransportLayerCause ::= ENUMERATED {
transport-link-failure,
transmission-port-not-available,
transport-resource-unavailable,
unspecified
}

TypeOfChannelCoding ::= ENUMERATED {
no-coding,
convolutional,
turbo
}

-----
-- U
-----

UARFCN ::= INTEGER (174 .. 474)

UL-DL-CompressedModeSelection ::= ENUMERATED {
ul-only,
```





```

--
-- *****
IMPORTS
    Criticality,
    Presence,
    PrivateExtensionID,
    ProtocolExtensionID,
    ProtocolIE-ID
FROM NBAP-CommonDataTypes

    maxProtocolExtensions,
    maxPrivateExtensions,
    maxProtocolIEs
FROM NBAP-Constants;

-- *****
--
-- Class Definition for Protocol IEs
--
-- *****

NBAP-PROTOCOL-IES ::= CLASS {
    &id      ProtocolIE-ID      UNIQUE,
    &criticality  Criticality,
    &Value,
    &presence  Presence
}
WITH SYNTAX {
    ID      &id
    CRITICALITY &criticality
    TYPE      &Value
    PRESENCE  &presence
}

-- *****
--
-- Class Definition for Protocol IEs
--
-- *****

NBAP-PROTOCOL-IES-PAIR ::= CLASS {
    &id      ProtocolIE-ID      UNIQUE,
    &firstCriticality  Criticality,
    &FirstValue,
    &secondCriticality  Criticality,
    &SecondValue,
    &presence      Presence
}

```

```
WITH SYNTAX {
    ID          &id
    FIRST CRITICALITY &firstCriticality
    FIRST TYPE      &FirstValue
    SECOND CRITICALITY &secondCriticality
    SECOND TYPE     &SecondValue
    PRESENCE       &presence
}

-- *****
--
-- Class Definition for Protocol Extensions
--
-- *****

NBAP-PROTOCOL-EXTENSION ::= CLASS {
    &id      ProtocolExtensionID      UNIQUE,
    &criticality Criticality,
    &Extension
}
WITH SYNTAX {
    ID          &id
    CRITICALITY &criticality
    EXTENSION   &Extension
}

-- *****
--
-- Class Definition for Private Extensions
--
-- *****

NBAP-PRIVATE-EXTENSION ::= CLASS {
    &id      PrivateExtensionID,
    &criticality Criticality,
    &Extension
}
WITH SYNTAX {
    ID          &id
    CRITICALITY &criticality
    EXTENSION   &Extension
}

-- *****
--
-- Container for Protocol IEs
--
-- *****
```

```

ProtocolIE-Container {NBAP-PROTOCOL-IES : IEsSetParam} ::=
  SEQUENCE (SIZE (0..maxProtocolIEs)) OF
  ProtocolIE-Field {{IEsSetParam}}

ProtocolIE-Field {NBAP-PROTOCOL-IES : IEsSetParam} ::= SEQUENCE {
  id      NBAP-PROTOCOL-IES.&id      ({IEsSetParam}),
  criticality NBAP-PROTOCOL-IES.&criticality ({IEsSetParam}{@id}),
  value     NBAP-PROTOCOL-IES.&Value     ({IEsSetParam}{@id})
}

-- *****
--
-- Container for Protocol IE Pairs
--
-- *****

ProtocolIE-ContainerPair {NBAP-PROTOCOL-IES-PAIR : IEsSetParam} ::=
  SEQUENCE (SIZE (0..maxProtocolIEs)) OF
  ProtocolIE-FieldPair {{IEsSetParam}}

ProtocolIE-FieldPair {NBAP-PROTOCOL-IES-PAIR : IEsSetParam} ::= SEQUENCE {
  id      NBAP-PROTOCOL-IES-PAIR.&id      ({IEsSetParam}),
  firstCriticality NBAP-PROTOCOL-IES-PAIR.&firstCriticality ({IEsSetParam}{@id}),
  firstValue NBAP-PROTOCOL-IES-PAIR.&FirstValue ({IEsSetParam}{@id}),
  secondCriticality NBAP-PROTOCOL-IES-PAIR.&secondCriticality ({IEsSetParam}{@id}),
  secondValue NBAP-PROTOCOL-IES-PAIR.&SecondValue ({IEsSetParam}{@id})
}

-- *****
--
-- Container Lists for Protocol IE Containers
--
-- *****

ProtocolIE-ContainerList {INTEGER : lowerBound, INTEGER : upperBound, NBAP-PROTOCOL-IES : IEsSetParam} ::=
  SEQUENCE (SIZE (lowerBound..upperBound)) OF
  ProtocolIE-Container {{IEsSetParam}}

ProtocolIE-ContainerPairList {INTEGER : lowerBound, INTEGER : upperBound, NBAP-PROTOCOL-IES-PAIR : IEsSetParam} ::=
  SEQUENCE (SIZE (lowerBound..upperBound)) OF
  ProtocolIE-ContainerPair {{IEsSetParam}}

-- *****
--
-- Container for Protocol Extensions
--
-- *****

ProtocolExtensionContainer {NBAP-PROTOCOL-EXTENSION : ExtensionSetParam} ::=

```





```
id-audit INTEGER ::= 0
id-auditRequired INTEGER ::= 1
id-blockResource INTEGER ::= 2
id-cellDeletion INTEGER ::= 3
id-cellReconfiguration INTEGER ::= 4
id-cellSetup INTEGER ::= 5
id-commonMeasurementFailure INTEGER ::= 6
id-commonMeasurementInitiation INTEGER ::= 7
id-commonMeasurementReport INTEGER ::= 8
id-commonMeasurementTermination INTEGER ::= 9
id-commonTransportChannelDeletion INTEGER ::= 10
id-commonTransportChannelReconfiguration INTEGER ::= 11
id-commonTransportChannelSetup INTEGER ::= 12
id-compressedModeControlCancellation INTEGER ::= 13
id-compressedModeControlCommit INTEGER ::= 14
id-compressedModeControlPreparation INTEGER ::= 15
id-dedicatedMeasurementFailure INTEGER ::= 16
id-dedicatedMeasurementInitiation INTEGER ::= 17
id-dedicatedMeasurementReport INTEGER ::= 18
id-dedicatedMeasurementTermination INTEGER ::= 19
id-dlPowerControl INTEGER ::= 20
id-neighbourCellMeasurement INTEGER ::= 21
id-radioLinkAddition INTEGER ::= 22
id-radioLinkDeletion INTEGER ::= 23
id-radioLinkFailure INTEGER ::= 24
id-radioLinkReconfigurationCommit INTEGER ::= 25
id-radioLinkReconfigurationCancel INTEGER ::= 26
id-radioLinkRestoration INTEGER ::= 27
id-radioLinkSetup INTEGER ::= 28
id-resourceStatusIndication INTEGER ::= 29
id-synchronisationAdjustment INTEGER ::= 30
id-synchronisationFailure INTEGER ::= 31
id-synchronisationRestart INTEGER ::= 32
id-synchronisedRadioLinkReconfigurationPreparation INTEGER ::= 33
id-systemInformationUpdate INTEGER ::= 34
id-unblockResource INTEGER ::= 35
id-unsynchronisedRadioLinkReconfiguration INTEGER ::= 36

-- *****
--
-- Extension constants
--
-- *****

maxPrivateExtensions INTEGER ::= 65535
maxProtocolExtensions INTEGER ::= 65535
maxProtocolIEs INTEGER ::= 65535

-- *****
```

```
--  
-- Lists  
--  
-- *****  
  
maxSF                INTEGER ::= 10  
maxnoofDLCodes      INTEGER ::= 10  
maxnoofRLs          INTEGER ::= 10  
maxnoofDPCHs        INTEGER ::= 10  
maxnoofSCCPCHs      INTEGER ::= 10  
maxnoofPRACHs       INTEGER ::= 10  
maxnoofDCHs         INTEGER ::= 10  
maxnoofDSCHs        INTEGER ::= 10  
maxnoofFACHs        INTEGER ::= 10  
maxnoofCCTrCHs     INTEGER ::= 10  
maxnoofPCHs         INTEGER ::= 10  
maxnoofPUCSHs       INTEGER ::= 10  
maxnoofTFCs         INTEGER ::= 10  
maxnoofUSCHs        INTEGER ::= 10  
maxUCIDinNodeB      INTEGER ::= 10  
maxCellinNodeB      INTEGER ::= 10  
maxCCPinNodeB       INTEGER ::= 10  
maxCTF-1            INTEGER ::= 10  
maxLocalCellinNodeB INTEGER ::= 10  
maxPCHinNodeB       INTEGER ::= 10  
maxRACHCell         INTEGER ::= 10  
maxnoofFACHCell     INTEGER ::= 10  
maxPCHCell          INTEGER ::= 10  
maxUSCHCell         INTEGER ::= 10  
maxAICHCell         INTEGER ::= 10  
maxMIBSEG           INTEGER ::= 10  
maxSIBSEG           INTEGER ::= 10  
maxnoofFDDNeighbours INTEGER ::= 10  
maxnoofTDDNeighbours INTEGER ::= 10  
maxTFcount          INTEGER ::= 10  
maxnoofTFCs         INTEGER ::= 10  
maxFACHCell         INTEGER ::= 10  
maxnoCCTrCH         INTEGER ::= 10  
maxnoCCTrCHs        INTEGER ::= 10  
maxnoofCCTrCH       INTEGER ::= 10  
maxnoofDPCH         INTEGER ::= 10  
maxnoofPUSHs        INTEGER ::= 10  
maxnoofRL-1         INTEGER ::= 10  
maxnoofRL-2         INTEGER ::= 10  
maxRM               INTEGER ::= 10  
  
-- *****  
--
```

```
-- IEs
--
-- *****

id-AICH-Information-ResourceStatIndItem          INTEGER ::= 0
id-AICH-ParametersList                          INTEGER ::= 1
id-AICH-ParametersListItem                      INTEGER ::= 2
id-AllowedSlotFormatInformationListItem-CTCHreconf-Req-FDD  INTEGER ::= 3
id-AllowedSlotFormatInformationListItem-CTCHsetup-Req-FDD  INTEGER ::= 4
id-BlockingPriorityIndicator                    INTEGER ::= 5
id-CCTrCH-ParametersList                       INTEGER ::= 6
id-CCTrCH-ParametersListItem                   INTEGER ::= 7
id-CFN                                          INTEGER ::= 8
id-CRNC-CommunicationContextID                  INTEGER ::= 9
id-CRNCommunicationContextID                   INTEGER ::= 10
id-Cause                                        INTEGER ::= 11
id-Cell-Information-ResourceStatIndItem        INTEGER ::= 12
id-Cell-InformationItem                        INTEGER ::= 13
id-Cell-InformationList                       INTEGER ::= 14
id-Cell-Parameter                             INTEGER ::= 15
id-Cell-ParametersItem                        INTEGER ::= 16
id-Cell-ParametersList                       INTEGER ::= 17
id-CellParameter                             INTEGER ::= 18
id-CommonMeasurementObjectType                 INTEGER ::= 19
id-CommonMeasurementType                      INTEGER ::= 20
id-CommonPhysicalChannelID                    INTEGER ::= 21
id-CommonPhysicalChannelType-CTCHsetup-Req-FDD  INTEGER ::= 22
id-CommonPhysicalChannelType-CTCHsetup-Response  INTEGER ::= 23
id-CommunicationControlPort-InformationItem     INTEGER ::= 24
id-CommunicationControlPortID                 INTEGER ::= 25
id-CommunicationControlPortInformation-ResourceStatIndItem  INTEGER ::= 26
id-CommunicationControlPortInformationList      INTEGER ::= 27
id-CompressesModeMethod                       INTEGER ::= 28
id-ConfigurationGenerationID                  INTEGER ::= 29
id-DCH-Add-RL-ReconfPrepFDDItem               INTEGER ::= 30
id-DCH-Add-RL-ReconfPrepTDDItem              INTEGER ::= 31
id-DCH-Add-RL-ReconfReadyItem                 INTEGER ::= 32
id-DCH-Add-RL-ReconfReqFDDItem               INTEGER ::= 33
id-DCH-Add-RL-ReconfReqTDDItem               INTEGER ::= 34
id-DCH-AddItem-RL-ReconfResp                  INTEGER ::= 35
id-DCH-AddList-RL-ReconfPrepFDD              INTEGER ::= 36
id-DCH-AddList-RL-ReconfPrepTDD              INTEGER ::= 37
id-DCH-AddList-RL-ReconfReqFDD               INTEGER ::= 38
id-DCH-AddList-RL-ReconfReqTDD               INTEGER ::= 39
id-DCH-Delete-RL-ReconfPrepFDDItem            INTEGER ::= 40
id-DCH-Delete-RL-ReconfPrepTDDItem           INTEGER ::= 41
id-DCH-Delete-RL-ReconfReqFDDItem            INTEGER ::= 42
id-DCH-Delete-RL-ReconfReqTDDItem            INTEGER ::= 43
id-DCH-DeleteList-RL-ReconfPrepFDD           INTEGER ::= 44
```

```

id-DCH-DeleteList-RL-ReconfPrepTDD          INTEGER ::= 45
id-DCH-DeleteList-RL-ReconfReqFDD          INTEGER ::= 46
id-DCH-DeleteList-RL-ReconfReqTDD          INTEGER ::= 47
id-DCH-Information-RL-SetupReqFDDItem      INTEGER ::= 48
id-DCH-Information-RL-SetupReqTDDItem      INTEGER ::= 49
id-DCH-InformationList-RL-SetupReqFDD      INTEGER ::= 50
id-DCH-InformationList-RL-SetupReqTDD      INTEGER ::= 51
id-DCH-InformationResponse-RL-SetupFailFDDItem  INTEGER ::= 52
id-DCH-InformationResponse-RL-setupResTDDItem  INTEGER ::= 53
id-DCH-InformationResponseItem             INTEGER ::= 54
id-DCH-Modify-RL-ReconfPrepFDDItem         INTEGER ::= 55
id-DCH-Modify-RL-ReconfPrepTDDItem        INTEGER ::= 56
id-DCH-Modify-RL-ReconfReadyItem          INTEGER ::= 57
id-DCH-Modify-RL-ReconfReqFDDItem         INTEGER ::= 58
id-DCH-Modify-RL-ReconfReqTDDItem         INTEGER ::= 59
id-DCH-ModifyItem-RL-ReconfResp           INTEGER ::= 60
id-DCH-ModifyList-RL-ReconfPrepFDD        INTEGER ::= 61
id-DCH-ModifyList-RL-ReconfPrepTDD        INTEGER ::= 62
id-DCH-ModifyList-RL-ReconfReqFDD         INTEGER ::= 63
id-DCH-ModifyList-RL-ReconfReqTDD         INTEGER ::= 64
id-DL-CCTrCH-Information-RL-ReconfPrepTDDItem  INTEGER ::= 65
id-DL-CCTrCH-Information-RL-ReconfReqTDDItem  INTEGER ::= 66
id-DL-CCTrCH-Information-RL-SetupReqTDDItem  INTEGER ::= 67
id-DL-CCTrCH-InformationItem              INTEGER ::= 68
id-DL-CCTrCH-InformationList-RL-ReconfPrepTDD  INTEGER ::= 69
id-DL-CCTrCH-InformationList-RL-ReconfReqTDD  INTEGER ::= 70
id-DL-CCTrCH-InformationList-RL-SetupReqTDD  INTEGER ::= 71
id-DL-CCTrCHInformationItem               INTEGER ::= 72
id-DL-CCTrCHInformationList               INTEGER ::= 73
id-DL-CodeInformation                     INTEGER ::= 74
id-DL-CodeInformation-RL-ReconfPrepFDDItem  INTEGER ::= 75
id-DL-CodeInformation-RL-SetupReqFDDItem    INTEGER ::= 76
id-DL-DPCH-Information-RL-ReconfPrepFDD     INTEGER ::= 77
id-DL-DPCH-Information-RL-ReconfPrepTDDItem  INTEGER ::= 78
id-DL-DPCH-Information-RL-SetupReqTDDItem    INTEGER ::= 79
id-DL-DPCH-InformationItem                 INTEGER ::= 80
id-DL-DPCH-InformationItem-RL-ReconfReqFDD   INTEGER ::= 81
id-DL-DPCH-InformationItem-RL-SetupReqFDD   INTEGER ::= 82
id-DL-FrameType                           INTEGER ::= 83
id-DL-ReferencePowerInformationItem         INTEGER ::= 84
id-DSCH-AddItem-RL-ReconfPrepFDD           INTEGER ::= 85
id-DSCH-AddItem-RL-ReconfReqFDD           INTEGER ::= 86
id-DSCH-DeleteItem-RL-ReconfPrepFDD        INTEGER ::= 87
id-DSCH-DeleteItem-RL-ReconfReqFDD         INTEGER ::= 88
id-DSCH-ID                                 INTEGER ::= 89
id-DSCH-Information-RL-SetupReqFDDItem      INTEGER ::= 90
id-DSCH-InformationList-RL-SetupReqFDD     INTEGER ::= 91
id-DSCH-InformationResponse-RL-SetupFailFDDItem  INTEGER ::= 92
id-DSCH-InformationResponse-RL-setupResFDDItem  INTEGER ::= 93

```

```

id-DSCH-ModifyItem-RL-ReconfPrepFDD                INTEGER ::= 94
id-DSCH-ModifyItem-RL-ReconfReqFDD                INTEGER ::= 95
id-DedicatedMeasurementObjectType                INTEGER ::= 96
id-DedicatedMeasurementType                    INTEGER ::= 97
id-FACH-Information-ResourceStatIndItem            INTEGER ::= 98
id-FACH-InformationItem                            INTEGER ::= 99
id-FACH-ListItem                                    INTEGER ::= 100
id-FACH-ParametersList-CTChreconf-Req-FDD          INTEGER ::= 101
id-FACH-ParametersList-CTChreconf-Req-TTD          INTEGER ::= 102
id-FACH-ParametersListItem-CTChreconf-Req-FDD      INTEGER ::= 103
id-FACH-ParametersListItem-CTChreconf-Req-TTD      INTEGER ::= 104
id-FACH-ParametersListItem-CTChsetup-Req-FDD       INTEGER ::= 105
id-FACH-ParametersListItem-CTChsetup-Response     INTEGER ::= 106
id-GapStartingSlotNumber                        INTEGER ::= 107
id-IndicationType                                INTEGER ::= 108
id-Local-Cell-Information-ResourceStatIndItem      INTEGER ::= 109
id-Local-CellInformation-ResourceStatIndItem      INTEGER ::= 110
id-LocalCell-ID                                  INTEGER ::= 111
id-LocalCell-InformationItem                      INTEGER ::= 112
id-LocalCellInformationList                       INTEGER ::= 113
id-MIB-SegmentInformationItem                    INTEGER ::= 114
id-MIB-SegmentInformationList                    INTEGER ::= 115
id-MaximumTransmissionPower                      INTEGER ::= 116
id-MeasuredCellInfo                              INTEGER ::= 117
id-MeasurementCharacteristics                     INTEGER ::= 118
id-MeasurementID                                 INTEGER ::= 119
id-MeasurementType                                INTEGER ::= 120
id-NeighbouringFDD-Cell-InformationItem           INTEGER ::= 121
id-NeighbouringTDD-Cell-InformationItem           INTEGER ::= 122
id-NodeB-CommunicationContextID                  INTEGER ::= 123
id-PCCPCH-Information                            INTEGER ::= 124
id-PCH-Information-ResourceStatIndItem            INTEGER ::= 125
id-PCH-InformationItem                            INTEGER ::= 126
id-PCH-ListItem                                    INTEGER ::= 127
id-PCH-Parameters-CTChreconf-Req-FDD             INTEGER ::= 128
id-PCH-ParametersList                            INTEGER ::= 129
id-PCH-ParametersListItem                        INTEGER ::= 130
id-PICH-Parameters-CTChreconf-Req-FDD           INTEGER ::= 131
id-PRACH-ParametersList                          INTEGER ::= 132
id-PRACH-ParametersListItem                      INTEGER ::= 133
id-PSCH-Information                              INTEGER ::= 134
id-PSCHandPCCPCH-Information                     INTEGER ::= 135
id-PUSCH-ListItem                                INTEGER ::= 136
id-PatternDuration                               INTEGER ::= 137
id-PowerControlMode                              INTEGER ::= 138
id-PowerResumeMode                               INTEGER ::= 139
id-PrimaryCCPCH-Information                      INTEGER ::= 140
id-PrimaryCPICH-Information                      INTEGER ::= 141
id-PrimarySCH-Information                        INTEGER ::= 142

```

```

id-PrimaryScramblingCode          INTEGER ::= 143
id-ProcedureScopeType             INTEGER ::= 144
id-RACH-Information-ResourceStatIndItem  INTEGER ::= 145
id-RACH-InformationItem           INTEGER ::= 146
id-RL-ID                          INTEGER ::= 147
id-RL-Information                 INTEGER ::= 148
id-RL-Information-DMeasureReportItem  INTEGER ::= 149
id-RL-Information-DMeasureRequestItem  INTEGER ::= 150
id-RL-Information-DMeasureResponseItem  INTEGER ::= 151
id-RL-Information-RL-ReconfPrepFDDItem  INTEGER ::= 152
id-RL-Information-RL-SetupReqFDDItem    INTEGER ::= 153
id-RL-InformationItem             INTEGER ::= 154
id-RL-InformationItem-RL-SetupReqTDD    INTEGER ::= 155
id-RL-InformationList             INTEGER ::= 156
id-RL-InformationList-RL-ReconfReqFDD   INTEGER ::= 157
id-RL-InformationList-RL-SetupReqFDD    INTEGER ::= 158
id-RL-InformationResponse-RL-setupResFDDItem  INTEGER ::= 159
id-RL-InformationResponseItem-RL-ReconfResp  INTEGER ::= 160
id-RL-InformationResponseList-RL-ReconfReady  INTEGER ::= 161
id-RL-InformationResponseList-RL-ReconfReadyItem  INTEGER ::= 162
id-RL-InformationResponseList-RL-ReconfResp  INTEGER ::= 163
id-RL-InformationResponseList-RL-setupResFDD  INTEGER ::= 164
id-RL-InformationResponseList-RL-setupResTDD  INTEGER ::= 165
id-RL-ReconfigurationFailure-RL-ReconfFailItem  INTEGER ::= 166
id-RL-ReconfigurationFailureList-RL-ReconfFail  INTEGER ::= 167
id-RL-ResponseInformation         INTEGER ::= 168
id-RL-ResponseInformationItem      INTEGER ::= 169
id-RL-ResponseInformationList      INTEGER ::= 170
id-RL-informationItem             INTEGER ::= 171
id-RL-informationList             INTEGER ::= 172
id-RadioLinkInformation-RL-ReconfPrepFDDItem  INTEGER ::= 173
id-RadioLinkInformation-RL-ReconfPrepTDD     INTEGER ::= 174
id-RadioLinkInformation-RL-ReconfReqTDD     INTEGER ::= 175
id-RadioLinkInformationList-RL-ReconfPrepFDD  INTEGER ::= 176
id-ReportCharacteristics          INTEGER ::= 177
id-SFN                            INTEGER ::= 178
id-SIB-SegmentInformationItem      INTEGER ::= 179
id-SIB-SegmentInformationList      INTEGER ::= 180
id-ScramblingCodeChange           INTEGER ::= 181
id-Secondary-CCPCHListItem        INTEGER ::= 182
id-SecondaryCPICH-Information      INTEGER ::= 183
id-SecondarySCH-Information        INTEGER ::= 184
id-ShutdownTimer                 INTEGER ::= 185
id-Successful-RL-InformationResponse-RL-SetupFailFDDItem  INTEGER ::= 186
id-Successful-RL-InformationResponseItem  INTEGER ::= 187
id-Successful-RL-InformationResponseList  INTEGER ::= 188
id-Successful-RL-InformationResponseList-RL-SetupFailFDD  INTEGER ::= 189
id-SynchronisationMethod          INTEGER ::= 190
id-T-Cell                        INTEGER ::= 190+

```

~~X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)"~~ X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)" X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)" 3GPP TS 25.433 V3.0.0 (2000-01)  
~~TS 25.433 version 3.0.0 Release 1999~~ TS 25.433 version 3.0.0 Release 1999

```
id-TDDChipOffset INTEGER ::= 192
id-TimeSlotConfigurationItem INTEGER ::= 1913
id-TimeSlotConfigurationList INTEGER ::= 1924
id-TransmissionGapDistance INTEGER ::= 1935
id-TransmissionGapPeriod INTEGER ::= 1946
id-TransmitGapLength INTEGER ::= 1957
id-TransmitGapPositionMode INTEGER ::= 1968
id-UARFCN INTEGER ::= 1979
id-UC-ID INTEGER ::= 198200
id-UL-CCTrCH-Information-RL-ReconfPrepTDDItem INTEGER ::= 199201
id-UL-CCTrCH-Information-RL-ReconfReqTDDItem INTEGER ::= 2002
id-UL-CCTrCH-Information-RL-SetupReqTDDItem INTEGER ::= 2013
id-UL-CCTrCH-InformationItem IE INTEGER ::= 2024
id-UL-CCTrCH-InformationList-RL-ReconfPrepTDD INTEGER ::= 2035
id-UL-CCTrCH-InformationList-RL-ReconfReqTDD INTEGER ::= 2046
id-UL-CCTrCH-InformationList-RL-SetupReqTDD INTEGER ::= 2057
id-UL-CCTrCHInformation INTEGER ::= 2068
id-UL-CCTrCHInformationList INTEGER ::= 2079
id-UL-DPCH-Information-RL-ReconfPrepFDD INTEGER ::= 20810
id-UL-DPCH-Information-RL-ReconfPrepTDDItem INTEGER ::= 20911
id-UL-DPCH-Information-RL-SetupReqTDDItem INTEGER ::= 2102
id-UL-DPCH-InformationItem-RL-ReconfReqFDD INTEGER ::= 2113
id-UL-DPCH-InformationItem-RL-SetupReqFDD INTEGER ::= 2124
id-UL-DPCH-InformationItem IE INTEGER ::= 2135
id-USCH-Information-ResourceStatIndItem INTEGER ::= 2146
id-USCH-InformationItem INTEGER ::= 2157
id-USCH-ListItem-CTCHsetup-Req-TDD INTEGER ::= 2168
id-Unsuccessful-RL-InformationResponse INTEGER ::= 2179
id-Unsuccessful-RL-InformationResponse-RL-SetupFailFDDItem INTEGER ::= 21820
id-Unsuccessful-RL-InformationResponseItem INTEGER ::= 21921
id-Unsuccessful-RL-InformationResponseItem-RL-SetupFailTDD INTEGER ::= 2202
id-Unsuccessful-RL-InformationResponseList INTEGER ::= 2213
id-Unsuccessful-RL-InformationResponseList-RL-SetupFailFDD INTEGER ::= 2224
```

END

## 9.4 Message Transfer Syntax

NBAP shall use the ASN.1 Packed Encoding Rules (PER) Aligned Variant as transfer syntax as specified in ref. [11].

[Editor's note: The dating of reference [11] needs to be verified. It has been included from the ITU-T list of recommendations in force. The dating of the reference is FFS.]

## 9.5 Timers

---

# 10 Handling of unknown, unforeseen and erroneous protocol data

## 10.1 General

Protocol Error cases can be divided into two classes:

- Transfer Syntax error
- Abstract Syntax error

## 10.2 Transfer Syntax Error

A Transfer Syntax Error occurs when the receiver is not able to decode the received message i.e. the transfer syntax cannot be opened. If Transfer Syntax Error occurs, the receiver should initiate Error Indication procedure with appropriate cause value for the protocol error.

## 10.3 Abstract Syntax Error

### 10.3.1 General

In the NBAP messages there is criticality information set for individual IEs and/or sequences of IEs. This criticality information instructs the receiver how to act when receiving an IE that is not comprehended. An IE shall be regarded as not comprehended if the receiving node either cannot decode the IE or does not comprehend the function represented by the IE value. The case of the not comprehended IE is an Abstract Syntax Error.

If an Abstract Syntax Error occurs, the receiver shall read the remaining message and shall then for each detected Abstract Syntax Error act according to the Criticality Information for the IE or sequences of IEs due to which Abstract Syntax Error occurred in accordance with chapter 10.3.2.

The receiving node shall take different actions depending on the value of the Criticality Information. The three possible values of the Criticality Information are:

- Reject IE
- Ignore IE and Notify Sender
- Ignore IE



## 10.3.2 Handling of the Criticality Information at Reception

### 10.3.2.1 Procedure Code

The receiving node shall treat the different types of criticality information of the *Procedure Code* according to the following:

#### Reject IE:

- If a message is received with a *Procedure Code* marked with "*Reject IE*" which the receiving node does not comprehend, the receiving node shall reject the procedure using the Error Indication procedure.

#### Ignore IE and Notify Sender:

- If a message is received with a *Procedure Code* marked with "*Ignore IE and Notify Sender*" which the receiving node does not comprehend, the receiving node shall ignore the procedure and initiate the Error Indication procedure.

#### Ignore IE:

- If a message is received with a *Procedure Code* marked with "*Ignore IE*" which the receiving node does not comprehend, the receiving node shall ignore the procedure.

### 10.3.2.2 IEs other than the Procedure Code

The receiving node shall treat the different types of criticality information of an IE other than the *Procedure Code* according to the following:

#### Reject IE:

- If a message *initiating* a procedure is received containing one or more IEs marked with "*Reject IE*" which the receiving node does not comprehend; none of the functional requests of the message shall be executed. The receiving node shall reject the procedure and report the rejection of one or more IEs using the message normally used to report unsuccessful outcome of the procedure.
- If a message *initiating* a procedure that does not have a message to report unsuccessful outcome is received containing one or more IEs marked with "*Reject IE*" which the receiving node does not comprehend, the receiving node shall initiate the Error Indication procedure.
- If a *response* message is received containing one or more IEs marked with "*Reject IE*", the receiving node shall initiate local error handling.

#### Ignore IE and Notify Sender:

- If a message *initiating* a procedure is received containing one or more IEs marked with "*Ignore IE and Notify Sender*" which the receiving node does not comprehend, the receiving node shall continue with the procedure using the understood IEs and report that one or more IEs have been ignored in the response message of the procedure.
- If a *response* message is received containing one or more IEs marked with "*Ignore IE and Notify Sender*" which the receiving node does not comprehend, the receiving node shall ignore the IE and initiate the Error Indication procedure.

#### Ignore IE:

- If a message *initiating* a procedure is received containing one or more IEs marked with "*Ignore IE*" which the receiving node does not comprehend, the receiving node shall continue with the procedure using the understood IEs.

## 10.4 Logical Error Handling

Logical error situations occur when a message is comprehended correctly, but the information contained within the message is not valid (i.e. semantic error), or describes a procedure which is not compatible with the state of the receiver. In these conditions, the following behaviour shall be performed as defined by the class of the elementary procedure, irrespective of the criticality of the IE's containing the erroneous values.

### **Class 1:**

Where the logical error occurs in a request message of a class 1 procedure, and the procedure has a failure message, the failure message shall be sent with an appropriate cause value.

Typical cause values are:

- Protocol Causes:
  1. Semantic Error
  2. Message not compatible with receiver state

Where the logical error is contained in a request message of a class 1 procedure, and the procedure does not have a failure message, the ERROR INDICATION procedure shall be initiated with an appropriate cause value.

Where the logical error exists in a response message of a class 1 procedure, local error handling shall be initiated.

### **Class 2:**

Where the logical error occurs in a message of a class 2 procedure, the ERROR INDICATION procedure shall be initiated with an appropriate cause value.

### **Class 3:**

Where the logical error occurs in a request message of a class 3 procedure, and the procedure has a failure message, the failure message shall be sent with an appropriate cause value. Typical cause values are:

1. Semantic Error
2. Message not compatible with receiver state

Where the logical error is contained in a request message of a class 3 procedure, and the procedure does not have a failure message, the ERROR INDICATION procedure shall be initiated with an appropriate cause value.

Where the logical error exists in a response message of a class 3 procedure, local error handling shall be initiated.

## Annex A (informative): Change history

Change history					
TSG RAN#	Version	CR	Tdoc RAN	New Version	Subject/Comment
RAN_06	-	-	RP-99764	3.0.0	Approved at TSG RAN #6 and placed under Change Control
<p>Rapporteur for TS25.433 is:</p> <p>Nobutaka Ishikawa  RAN-WG3</p> <p>Tel.: +81 468 40 3220  Fax : +81 468 40 3840  Email : <a href="mailto:nobu@wsp.yrp.nttdocomo.co.jp">nobu@wsp.yrp.nttdocomo.co.jp</a></p>					

## History

Document history		

**3GPP TSG-RAN Meeting #7**  
**Madrid, Spain, 13 - 15 March 2000**

**Document R3-000024**

e.g. for 3GPP use the format TP-99xxx  
or for SMG, use the format P-99-xxx

## CHANGE REQUEST

Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.

**25.433 CR 003**

Current Version: **3.0.0**

GSM (AA.BB) or 3G (AA.BBB) specification number ↑

↑ CR number as allocated by MCC support team

For submission to: **TSG RAN #7**

list expected approval meeting # here

↑

for approval  
for information

<b>X</b>

strategic  
non-strategic


(for SMG  
use only)

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: <ftp://ftp.3gpp.org/Information/CR-Form-v2.doc>

**Proposed change affects:**

(at least one should be marked with an X)

(U)SIM

ME

UTRAN / Radio

Core Network

**Source:**

TSG-RAN WG3

**Date:**

24-28 Jan. 2000

**Subject:**

Insertion of missing mapping table; Functions to Elementary Procedures

**Work item:**

**Category:**

(only one category shall be marked with an X)

F Correction

A Corresponds to a correction in an earlier release

B Addition of feature

C Functional modification of feature

D Editorial modification

<b>X</b>

**Release:**

Phase 2

Release 96

Release 97

Release 98

Release 99

Release 00

<b>X</b>

**Reason for change:**

At the RAN WG3 meeting #8 in Abiko it was agreed to include not only the functions proposed for NBAP (R3-99D98) but also the table showing the mapping between Functions and Elementary procedures

**Clauses affected:**

7

**Other specs affected:**

Other 3G core specifications

Other GSM core specifications

MS test specifications

BSS test specifications

O&M specifications


→ List of CRs:

→ List of CRs:

→ List of CRs:

→ List of CRs:

→ List of CRs:

**Other comments:**

The table included in this CR has been aligned with the present content of NBAP, i.e. some functions proposed in Abiko does not exist any more and some elementary procedures have different names. The function Compressed Mode Control has been added in the same way as agreed for RNSAP.

---

## 7 Functions of NBAP

The NBAP protocol has the following functions:

- Cell Configuration Management. This function gives the CRNC the possibility to manage the cell configuration information in a Node B.
- Common Transport Channel Management. This function gives the CRNC the possibility to manage the configuration of Common Transport Channels in a Node B.
- System Information Management. This function gives the CRNC the ability to manage the scheduling of System Information to be broadcast in a cell.
- Resource Event Management. This function gives the Node B the ability to inform the CRNC about the status of Node B resources.
- Configuration Alignment. This function gives the CRNC and the Node B the possibility to verify that both nodes has the same information on the configuration of the radio resources.
- Measurements on Common Resources. This function allows the CRNC to initiate measurements in the Node B. The function also allows the Node B to report the result of the measurements.
- ~~Synchronisation Management.(TDD) This function allows the CRNC to manage the synchronisation of a TDD cell in a Node B.~~
- Radio Link Management. This function allows the CRNC to manage radio links using dedicated resources in a NodeB.
- Radio Link Supervision. This function allows the CRNC to report failures and restorations of a Radio Link.
- Compressed Mode Control [FDD]. This function allows the CRNC to control the usage of compressed mode in a Node B.
- Measurements on Dedicated Resources. This function allows the CRNC to initiate measurements in the NodeB. The function also allows the NodeB to report the result of the measurements.
- DL Power Drifting Correction (FDD). This function allows the CRNC to adjust the DL power level of one or more Radio Links in order to avoid DL power drifting between the Radio Links.
- Reporting general error situations. This function allows reporting of general error situations, for which function specific error messages have not been defined.

The mapping between the above functions and NBAP elementary procedures is shown in the table below.

**Table 1: Mapping between functions and NBAP elementary procedures**

<b>Function</b>	<b>Elementary Procedure(s)</b>
<a href="#">Cell Configuration Management</a>	<a href="#">a) Cell Setup</a> <a href="#">b) Cell Reconfiguration</a> <a href="#">c) Cell Deletion</a>
<a href="#">Common Transport Channel Management</a>	<a href="#">a) Common Transport Channel Setup</a> <a href="#">b) Common Transport Channel Reconfiguration</a> <a href="#">c) Common Transport Channel Deletion</a>
<a href="#">System Information Management</a>	<a href="#">System Information Update</a>
<a href="#">Resource Event Management</a>	<a href="#">a) Block Resource</a> <a href="#">b) Unblock Resource</a> <a href="#">c) Resource Status Indication</a>
<a href="#">Configuration Alignment</a>	<a href="#">a) Audit Required</a> <a href="#">b) Audit</a>
<a href="#">Measurements on Common Resources</a>	<a href="#">a) Common Measurement Initiation</a> <a href="#">b) Common Measurement Reporting</a> <a href="#">c) Common Measurement Termination</a> <a href="#">d) Common Measurement Failure</a>
<a href="#">Radio Link Management.</a>	<a href="#">a) RL Setup</a> <a href="#">b) RL Addition</a> <a href="#">c) RL Deletion</a> <a href="#">d) Unsynchronised RL Reconfiguration</a> <a href="#">e) Synchronised RL Reconfiguration Preparation</a> <a href="#">f) Synchronised RL Reconfiguration Commit</a> <a href="#">g) Synchronised RL Reconfiguration Cancellation</a>
<a href="#">Radio Link Supervision.</a>	<a href="#">a) RL Failure</a> <a href="#">b) RL Restoration</a>
<a href="#">Compressed Mode Control [FDD]</a>	<a href="#">a) Compressed Mode Preparation</a> <a href="#">b) Compressed Mode Commit</a> <a href="#">c) Compressed Mode Cancellation</a>
<a href="#">Measurements on Dedicated Resources</a>	<a href="#">a) Measurement Request</a> <a href="#">b) Measurement Reporting</a> <a href="#">c) Measurement Termination</a> <a href="#">d) Measurement Failure</a>
<a href="#">DL Power Drifting Correction [FDD]</a>	<a href="#">Downlink Power Control</a>
<a href="#">Reporting of General Error Situations</a>	<a href="#">Error Indication</a>

~~These functions are implemented by one or several NBAP elementary procedures described in the following section.~~

## CHANGE REQUEST

Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.

**25.433 CR 004**

Current Version: **3.0.0**

GSM (AA.BB) or 3G (AA.BBB) specification number ↑

↑ CR number as allocated by MCC support team

For submission to: **TSG RAN #7**

list expected approval meeting # here  
 ↑

for approval   
 for information

strategic   
 non-strategic  (for SMG use only)

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: <ftp://ftp.3gpp.org/Information/CR-Form-v2.doc>

**Proposed change affects:** (U)SIM  ME  UTRAN / Radio  Core Network   
 (at least one should be marked with an X)

**Source:** TSG-RAN WG3 **Date:** 24-28 Jan. 2000

**Subject:** Replacement of the Error Indication procedure with the procedure text agreed at RAN WG3 #9

**Work item:**

<b>Category:</b> <i>(only one category shall be marked with an X)</i>	F Correction	<input checked="" type="checkbox"/>	<b>Release:</b>	Phase 2	<input type="checkbox"/>
	A Corresponds to a correction in an earlier release	<input type="checkbox"/>		Release 96	<input type="checkbox"/>
	B Addition of feature	<input type="checkbox"/>		Release 97	<input type="checkbox"/>
	C Functional modification of feature	<input type="checkbox"/>		Release 98	<input type="checkbox"/>
	D Editorial modification	<input type="checkbox"/>		Release 99	<input checked="" type="checkbox"/>
			Release 00	<input type="checkbox"/>	

**Reason for change:** At the RAN WG3 meeting #9 in Paris it was agreed to change the procedure specification text of the Error Indication procedure in accordance with R3-99i60. This update is missing in the approved NBAP specification.

**Clauses affected:** 8.4

<b>Other specs affected:</b>	Other 3G core specifications	<input type="checkbox"/>	→ List of CRs:	
	Other GSM core specifications	<input type="checkbox"/>	→ List of CRs:	
	MS test specifications	<input type="checkbox"/>	→ List of CRs:	
	BSS test specifications	<input type="checkbox"/>	→ List of CRs:	
	O&M specifications	<input type="checkbox"/>	→ List of CRs:	

**Other comments:** The figure has been included once per direction for editorial reasons.



## 8.4 Error Handling Procedures

### 8.4.1 Error Indication

#### 8.4.1.1 General

~~The Error Indication procedure is initiated by a node to report detected errors in one incoming message, provided they cannot be reported by an appropriate failure message. This procedure is used by both NodeB and its CRNC to report detected errors or any other problems in one incoming message if they cannot be reported by any other procedure.~~

#### 8.4.1.2 Successful Operation

~~When the conditions defined in chapter 10 are fulfilled, the Error Indication procedure is initiated by an ERROR INDICATION message sent from the receiving node.~~

~~When the ERROR INDICATION message is sent from a Node B to its CRNC, the CRNC Communication Context ID IE shall be included in the message if available. When the ERROR INDICATION message is sent from a CRNC to a Node B, the Node B Communication Context ID IE shall be included in the message if available.~~

~~Typical cause values for the ERROR INDICATION message are:~~

#### **Protocol Causes:**

- ~~- Transfer Syntax Error~~
- ~~- Abstract Syntax Error (Reject)~~
- ~~- Abstract Syntax Error (Ignore and Notify)~~
- ~~- Message not Compatible with Receiver State~~
- ~~- Unspecified~~


~~When NodeB or CRNC detect an erroneous message (or a message, which for some other reasons cannot be processed), it sends an ERROR INDICATION message with the most appropriate cause value.~~

~~The message contains as a transparent L3 information the erroneous message (coded), CRNC communication context ID (in UL), and NodeB communication context ID (in DL), if the NodeB is able to deduce it from the erroneous message.~~


~~Possible error cause can be:~~

- ~~— Unknown message ID: the message contains a message ID that is not known to the receiver~~
- ~~— Unknown Information element: the message contains an information element that is not known or cannot be interpreted by the receiver~~
- ~~— Procedural errors: the message is not compatible with the status of the receiver.~~
- ~~— Unknown failure reason: requested procedure failed to process by unknown reason~~

~~The message is sent using the Dedicated NBAP signalling connection of the incoming message, or using the Common NBAP if the incoming message was sent via Common NBAP.~~

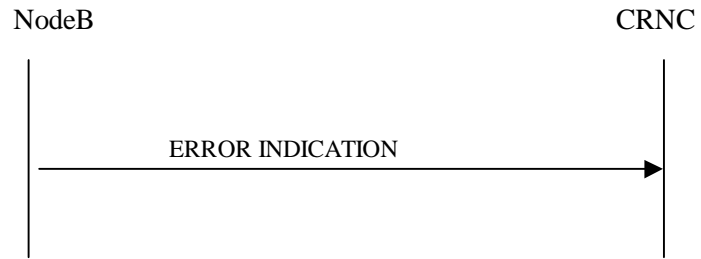

**Figure 1: Error Indication [procedure \(Node B to CRNC\): Successful Operation](#)**

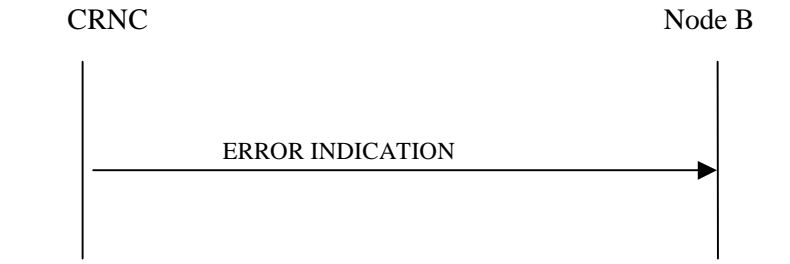

**Figure 2: Error Indication [procedure \(CRNC to Node B\): Successful Operation](#)**

### 8.4.1.3 Abnormal Conditions

=

**CHANGE REQUEST**

*Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.*

**25.433 CR 005**

Current Version: **3.0.0**

GSM (AA.BB) or 3G (AA.BBB) specification number ↑

↑ CR number as allocated by MCC support team

For submission to: **TSG RAN #7**

list expected approval meeting # here ↑

for approval   
for information

strategic   
non-strategic  (for SMG use only)

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: ftp://ftp.3gpp.org/Information/CR-Form-v2.doc

**Proposed change affects:** (U)SIM  ME  UTRAN / Radio  Core Network   
(at least one should be marked with an X)

**Source:** TSG-RAN WG3 **Date:** 24-28 Jan. 2000

**Subject:** Missing Cause Values in the RL Failure procedure

**Work item:**

**Category:** F Correction  **Release:** Phase 2   
(only one category shall be marked with an X) A Corresponds to a correction in an earlier release  Release 96   
B Addition of feature  Release 97   
C Functional modification of feature  Release 98   
D Editorial modification  Release 99   
Release 00

**Reason for change:** The current version of NBAP does not include the typical cause values agreed for RL Failure during RAN WG3 #9.

**Clauses affected:** 8.2.12

**Other specs affected:** Other 3G core specifications  → List of CRs:  
Other GSM core specifications  → List of CRs:  
MS test specifications  → List of CRs:  
BSS test specifications  → List of CRs:  
O&M specifications  → List of CRs:

**Other comments:**

## 8.3.12 Radio Link Failure

### 8.3.12.1 General

This procedure is used by Node B to indicate a failure in one or more radio links.

### 8.3.12.2 Successful Operation



**Figure 1: Radio Link Failure**

When Node B detects that one or more radio link is no longer available, it sends the RADIO LINK FAILURE INDICATION message to CRNC indicating the failed radio links with the most appropriate cause values in the *Cause IE*. Possible cause values may be:

When the Radio Link Failure procedure is used to notify the non-achievement or loss of UL synchronisation, the message is sent when the UL synchronisation of the radio link is not achieved at the RL setup, or RL Addition, or it is lost during the active connection.

Typical cause values are:

**Radio Network Layer Causes:**

- Synchronisation Failure

**Miscellaneous Causes:**

- Control Processing Overload
- HW Failure
- O&M Intervention

<b>CHANGE REQUEST</b>		<i>Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.</i>	
<b>25.433 CR 007</b>		Current Version: <b>3.0.0.</b>	
<small>GSM (AA.BB) or 3G (AA.BBB) specification number ↑</small>		<small>↑ CR number as allocated by MCC support team</small>	
For submission to: <b>TSG RAN #7</b> <small>list expected approval meeting # here ↑</small>	For approval for information <input checked="" type="checkbox"/>	strategic <input type="checkbox"/>	(for SMG use only)
		non-strategic <input type="checkbox"/>	

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: <ftp://ftp.3gpp.org/Information/CR-Form-v2.doc>

**Proposed change affects:** (U)SIM  ME  UTRAN / Radio  Core Network   
(at least one should be marked with an X)

**Source:** TSG-RAN WG3 **Date:** 24<sup>th</sup>-28<sup>th</sup> January

**Subject:** Scope of Transaction id (Update of R3-0000079)

**Work item:**

<b>Category:</b>	F Correction <input checked="" type="checkbox"/>	<b>Release:</b>	Phase 2 <input type="checkbox"/>
<small>(only one category Shall be marked With an X)</small>	A Corresponds to a correction in an earlier release <input type="checkbox"/>		Release 96 <input type="checkbox"/>
	B Addition of feature <input type="checkbox"/>		Release 97 <input type="checkbox"/>
	C Functional modification of feature <input type="checkbox"/>		Release 98 <input type="checkbox"/>
	D Editorial modification <input type="checkbox"/>		Release 99 <input checked="" type="checkbox"/>
			Release 00 <input type="checkbox"/>

**Reason for change:** Already during a longer period, the Transaction id is included in all messages on NBAP and RNSAP. However, up to now, the scope of this Transaction id has not been addressed yet. This contribution proposes a scope and range for the Transaction id.

**1. Purpose**

The Transaction id is assumed to have the following main purpose:

- it shall be sufficiently unique to link the response/failure message of a Class 1 procedure to the request message within the relevant context.

In addition the Transaction id could also be used for the following purpose:

- it should be sufficiently unique to link an ERROR\_INDICATION message to the procedure that triggered the error.

**2. Rationale**

The protocol peer initiating the procedure will determine the value of the Transaction id. It is assumed that from the message type it is always clear who initiated the procedure. Therefore there should be no problem when different peers allocating the same Transaction id (no need for a "transaction flag").

W.r.t. the size of the Transaction id, common and dedicated procedures are considered separately:

**2.1. Common procedures**

For common procedures, almost no limitations exist concerning the parallelism of procedures signalled over the Node-B control port. The Transaction id only needs to be able to discriminate between procedures using the same procedure code and signalled over the same Node B control port. Large Node Bs might consist of many cells and many procedures might be ongoing in parallel.

## 2.2. Dedicated procedures

Currently almost no parallelism is supported for dedicated procedures. Therefore a Transaction is in principle not required. However, in order to enable parallelism in the future still it was decided to have a Transaction id in dedicated procedures.

Normally, the Transaction id can be much smaller in the case of dedicated procedures than in the case of common procedures. The Transaction id only needs to be able to discriminate uniquely between procedures using the same procedure code and initiated towards the same Node B/CRNC context.

## 3. PROPOSAL

In order to have the flexibility of both a small Transaction id not wasting much bits if only a small number of different Transaction ids needs to be supported, and also being able to support a large number of different Transaction ids for those cases that that is needed, it is proposed to have the Transaction id as a CHOICE between 7 and 15 bits. Given that the CHOICE will require 1 bit, the total IE will always be octet aligned.

If this contribution is accepted, a similar contribution for RNSAP will be submitted.

**Clauses affected:** 9.2.1.58, 9.2.1.16, 9.3.5.

**Other specs**  
**Affected:**

Other 3G core specifications  
Other GSM core specifications  
MS test specifications  
BSS test specifications  
O&M specifications

	→ List of CRs:
	→ List of CRs:
	→ List of CRs:
	→ List of CRs:
	→ List of CRs:

**Other**  
**comments:**



help.doc

<----- [double-click here for help and instructions on how to create a CR.](#)

## 9.2.1.16 Criticality diagnostics

IE/Group Name	Presence	Range	IE type and reference	Semantics description
<b>Criticality Diagnostics</b>				
Procedure Code	O		INTEGER (0..255)	Procedure code is to be used if Criticality diagnostics is part of Error Indication procedure, and not within the response message of the same operation that caused the error
Triggering Message	O		ENUMERATED (initiating message, successful outcome, unsuccessful outcome, outcome)	The Triggering Message is used only if the Criticality diagnostics is part of Error Indication except when the procedure code is not understood.
Criticality Response	O		ENUMERATED (reject, ignore, notify)	This Criticality response IE is used for reporting the Criticality of the Triggering message
Transaction Id	O		<del>INTEGER (0..255)</del> Transaction ID	
<b>Information Element Criticality Diagnostics</b>		1 to <maxnoof errors>		
Criticality Response	M		ENUMERATED (reject, ignore, notify)	The Criticality response IE is used for reporting the criticality of the triggering IE. The value 'ignore' shall never be used.
IE Id	M		INTEGER (0..65535)	The IE Id of the not understood IE

Range bound	Explanation
<i>maxnooferrors</i>	Maximum no. of IE errors allowed to be reported with a single message. The value for maxnooferrors is 256.

### 9.2.1.58 Transaction ID

The ~~T~~transaction ID is used to associate all the messages belonging to the same ~~pending~~ procedure ~~of the same NBAP procedure type (e.g. Radio Link Addition), i.e. the Request, Response, Confirm type of messages have the same Transaction ID. The messages belonging to different pending procedures have different Transaction IDs. Messages belonging to the same procedure shall use the same transaction ID.~~

The transaction ID is determined by the initiating peer of a procedure. For common procedures the transaction ID shall uniquely identify a procedure within all ongoing parallel procedures initiated by one protocol peer, using the same procedure code and signalled over the same Node B control port. For dedicated procedures the transaction ID shall uniquely identify a procedure within all ongoing parallel procedures initiated by one protocol peer, using the same procedure code and initiated towards the same Node B/CRNC context.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Transaction ID			<u>CHOICE</u> INTEGER (0..127255) or <u>INTEGER</u> (0..32767)	<u>Since the scope is not clear, the range of this parameter is to be considered a working assumption</u>



```

UL-ScramblingCodeNumber ::= ENUMERATED {
short,
long
}

UplinkDeltaEb-No ::= ENUMERATED {
deltaEb-No-6dB,
...
}

UplinkDeltaEb-No-after ::= ENUMERATED {
deltaEb-No-after-6dB,
...
}

END

```

### 9.3.5 NBAP Common Data Type Definitions

```

-- *****
--
-- Common definitions
--
-- *****

NBAP-CommonDataTypes -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

Criticality      ::= ENUMERATED { reject, ignore, notify }

MessageDiscriminator ::= ENUMERATED { common, dedicated }

Presence        ::= ENUMERATED { optional, conditional, mandatory }

PrivateExtensionID ::= CHOICE {
    local          INTEGER (0..65535),
    global         OBJECT IDENTIFIER
}

ProcedureID      ::= SEQUENCE {
    procedureCode  INTEGER (0..255),
    ddMode        ENUMERATED { tdd, fdd, common }
}

ProtocolExtensionID ::= INTEGER (0..65535)

ProtocolIE-ID    ::= INTEGER (0..65535)

TransactionID    ::= CHOICE {

```

```
| ShortTransActionId INTEGER (0..127255),  
| LongTransActionId  INTEGER (0..32767)  
| }
```

END

**CHANGE REQUEST**

Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.

**25.433 CR 013**

Current Version: **3.0.0**

GSM (AA.BB) or 3G (AA.BBB) specification number ↑

↑ CR number as allocated by MCC support team

For submission to: **TSG RAN #7**  
 list expected approval meeting # here ↑

for approval   
 for information

strategic   
 non-strategic  (for SMG use only)

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: <ftp://ftp.3gpp.org/Information/CR-Form-v2.doc>

**Proposed change affects:** (U)SIM  ME  UTRAN / Radio  Core Network   
 (at least one should be marked with an X)

**Source:** TSG-RAN WG3 **Date:** 00.01.24

**Subject:** Repetition of compressed mode information elements.

**Work item:**

**Category:** F Correction  **Release:** Phase 2   
 A Corresponds to a correction in an earlier release  Release 96   
 B Addition of feature  Release 97   
 C Functional modification of feature  Release 98   
 D Editorial modification  Release 99   
 Release 00   
 (only one category shall be marked with an X)

**Reason for change:** To introduce the support of parallel compressed mode patterns we shall repeat all IEs related to a compressed mode pattern in the message COMPRESSED MODE PREPARE (FDD only). We shall also add a new parameter *CFN Offset* that specify the activation time for each pattern which prevents that all patterns are activated at the same frame.

**Clauses affected:** 9.1.59, 9.2.1

**Other specs affected:** Other 3G core specifications  → List of CRs:  
 Other GSM core specifications  → List of CRs:  
 MS test specifications  → List of CRs:  
 BSS test specifications  → List of CRs:  
 O&M specifications  → List of CRs:

**Other comments:**



<----- double-click here for help and instructions on how to create a CR.

## 9.1.59 COMPRESSED MODE PREPARE (FDD only)

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
NodeB communication context ID	M			
Transaction ID	M			
<b>CM Pattern Information</b>		<a href="#">1 to 8</a>		<a href="#">Range defined ref. [4]</a>
<a href="#">CFN Offset</a>	<a href="#">M</a>			
<a href="#">_TGP1</a>	M		Gap Period	Refer to <a href="#">[4]25.215</a>
<a href="#">_TGP2</a>	O		Gap Period	Refer to <a href="#">[4]25.215</a>
<a href="#">_TGL</a>	M			
<a href="#">_TGD</a>	M			
<a href="#">_PD</a>	M			
<a href="#">_UL/DL compressed mode selection</a>	M			
<a href="#">_Compressed mode method</a>	M			
<a href="#">_Gap Position Mode</a>	M			
<a href="#">_SN</a>	C-Flex		TimeSlot	
<a href="#">_Downlink Frame Type</a>	M			
<a href="#">_Scrambling Code Change</a>	C-SF/2			
<a href="#">_Power Control Mode</a>	M			
<a href="#">_Power Resume Mode</a>	M			
<a href="#">_UL delta Eb/No</a>	M			
<a href="#">_UL delta Eb/No after</a>	M			

## 9.2.1.x CFN Offset &lt;new section&gt;

Activation time for the compressed mode pattern.

<b>Information Element/Group Name</b>	<b>Presence</b>	<b>Range</b>	<b>IE type and reference</b>	<b>Semantics description</b>
CFN Offset			Integer (0..255)	Number of frames between CFN and the CM pattern activation.

```

-- *****
--
-- COMPRESSED MODE PREPARE FDD
--
-- *****

CompressedModePrepareFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{CompressedModePrepareFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CompressedModePrepareFDD-Extensions}}
    ...
}

CompressedModePrepareFDD-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-CompressedModePattern-List    CRITICALITY ignore TYPE CompressedModePattern-List    PRESENCE mandatory }
    ...
}

CompressedModePattern-List ::= SEQUENCE (SIZE (1..maxnoofCMpatterns)) OF
    ProtocolIE-Container {{CompressedModePattern-IEs }}

CompressedModePattern-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-CFNOffset          CRITICALITY ignore    TYPE CFNOffset          PRESENCE mandatory } |
    { ID id-NodeB-CommunicationContextID    CRITICALITY ignore    TYPE NodeB-CommunicationContextID    PRESENCE mandatory } |
    { ID id-TGP1                CRITICALITY ignore    TYPE TGP1                PRESENCE mandatory } |
    { ID id-TGP2                CRITICALITY ignore    TYPE TGP2                PRESENCE optional } |
    { ID id-TGL                 CRITICALITY ignore    TYPE TGL                 PRESENCE mandatory } |
    { ID id-TGD                 CRITICALITY ignore    TYPE TGD                 PRESENCE mandatory } |
    { ID id-UL-DL-CompressedModeSeletion    CRITICALITY ignore    TYPE UL-DL-CompressedModeSeletion    PRESENCE mandatory } |
    { ID id-CompressesModeMethod    CRITICALITY ignore    TYPE CompressesModeMethod    PRESENCE mandatory } |
    { ID id-GapPositionMode        CRITICALITY ignore    TYPE GapPositionMode        PRESENCE mandatory } |
    { ID id-SN                    CRITICALITY ignore    TYPE SN                    PRESENCE optional } |
    -- This IE is present if Gap position mode = 'flexible position'--
    { ID id-DL-FrameType          CRITICALITY ignore    TYPE DL-FrameType          PRESENCE mandatory } |
    { ID id-ScramblingCodeChange    CRITICALITY ignore    TYPE ScramblingCodeChange    PRESENCE optional } |
    -- This IE is present if Compressed mode method = 'SF/2' --
    { ID id-PowerControlMode      CRITICALITY ignore    TYPE PowerControlMode      PRESENCE mandatory } |
    { ID id-PowerResumeMode      CRITICALITY ignore    TYPE PowerResumeMode      PRESENCE mandatory } |
    { ID id-UL-DeltaEb-No        CRITICALITY ignore    TYPE UL-DeltaEb-No        PRESENCE mandatory } |
    { ID id-UL-DeltaEb-NoAfter    CRITICALITY ignore    TYPE UL-DeltaEb-NoAfter    PRESENCE mandatory },
    ...
}

CompressedModePrepareFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

```

-----
-- C
-----

Cause ::= ENUMERATED {
radioNetworkLayer      RadioNetworkLayerCause,
transportLayer         TransportLayerCause,
protocol               ProtocolCause,
misc                   MiscellaneousCause
...
}

CCTrCH-ID ::= INTEGER (1..15)

CellID-Length ::= ENUMERATED {
    short,
    medium,
    long
}

CFN ::= INTEGER (0..255)
CFNOffset ::= INTEGER (0..255)

ChipOffset ::= INTEGER (0..38399)

C-ID ::= INTEGER (0..65535)

CodingRate ::= ENUMERATED {
    rate1-2,
    rate1-3
}

CommonMeasurementObjectType ::= ENUMERATED {
    cell,
    rach,
    ...
}

CommonMeasurementType ::= SEQUENCE {
    rssi                RSSI-Value,
    transmitted-carrier-power    TransmittedCarrierPowerValue,
    acknowledged-ra-tries    AcknowledgedRA-TriesValue,
    time-slot-iscp        TimeSlotISCP-Value,
    ...
}

CommonPhysicalChannelID ::= INTEGER (0..255)

CommonTransportChannelID ::= INTEGER (0..255)

CommunicationControlPortID ::= INTEGER (0..65535)

CompressedModeMethod ::= ENUMERATED {
    puncturing,
    sF-2,
}

```

```
gating,  
none  
}
```

```
ConfigurationGenerationID ::= INTEGER (0..255)
```

```
CRC-Size ::= ENUMERATED {  
size0,  
size12,  
size16,  
size24  
}
```

```
CRNC-CommunicationContextID ::= INTEGER (0..1048575)
```

```
CTFC ::= INTEGER (0..maxCTF-1)
```



### 9.3.7. Constant Definitions for NBAP

```

-- *****
--
-- Constant definitions
--
-- *****

NBAP-Constants -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

-- *****
--
-- Elementary Procedures
--
-- *****

id-audit                               INTEGER ::= 0
id-auditRequired                       INTEGER ::= 1
id-blockResource                       INTEGER ::= 2
id-cellDeletion                        INTEGER ::= 3
id-cellReconfiguration                 INTEGER ::= 4
id-cellSetup                           INTEGER ::= 5
id-commonMeasurementFailure            INTEGER ::= 6
id-commonMeasurementInitiation         INTEGER ::= 7
id-commonMeasurementReport             INTEGER ::= 8
id-commonMeasurementTermination        INTEGER ::= 9
id-commonTransportChannelDeletion      INTEGER ::= 10
id-commonTransportChannelReconfiguration INTEGER ::= 11
id-commonTransportChannelSetup         INTEGER ::= 12
id-compressedModeControlCancellation   INTEGER ::= 13
id-compressedModeControlCommit         INTEGER ::= 14
id-compressedModeControlPreparation    INTEGER ::= 15
id-dedicatedMeasurementFailure         INTEGER ::= 16
id-dedicatedMeasurementInitiation      INTEGER ::= 17
id-dedicatedMeasurementReport         INTEGER ::= 18
id-dedicatedMeasurementTermination     INTEGER ::= 19
id-dlPowerControl                     INTEGER ::= 20
id-neighbourCellMeasurement           INTEGER ::= 21
id-radioLinkAddition                  INTEGER ::= 22
id-radioLinkDeletion                  INTEGER ::= 23
id-radioLinkFailure                   INTEGER ::= 24
id-radioLinkReconfigurationCommit      INTEGER ::= 25
id-radioLinkReconfigurationCancel      INTEGER ::= 26
id-radioLinkRestoration                INTEGER ::= 27
id-radioLinkSetup                      INTEGER ::= 28
id-resourceStatusIndication            INTEGER ::= 29
id-synchronisationAdjustment           INTEGER ::= 30
id-synchronisationFailure              INTEGER ::= 31
id-synchronisationRestart              INTEGER ::= 32
id-synchronisedRadioLinkReconfigurationPreparation INTEGER ::= 33
id-systemInformationUpdate             INTEGER ::= 34
id-unblockResource                     INTEGER ::= 35
id-unsynchronisedRadioLinkReconfiguration INTEGER ::= 36

-- *****
--
-- Extension constants
--
-- *****

maxPrivateExtensions                   INTEGER ::= 65535
maxProtocolExtensions                  INTEGER ::= 65535
maxProtocolIEs                         INTEGER ::= 65535

-- *****
--
-- Lists
--
-- *****

maxSF                                   INTEGER ::= 10
maxnoofCMPatterns                       INTEGER ::= 8
maxnoofDLCodes                          INTEGER ::= 10
maxnoofRLs                              INTEGER ::= 10
maxnoofDPCHs                            INTEGER ::= 10
maxnoofSCCPCHs                          INTEGER ::= 10
maxnoofPRACHs                           INTEGER ::= 10
maxnoofDCHs                             INTEGER ::= 10
maxnoofDSCHs                            INTEGER ::= 10

```

```

maxnoofFACHs                INTEGER ::= 10
maxnoofCCTrCHs              INTEGER ::= 10
maxnoofPCHs                 INTEGER ::= 10
maxnoofPUCSHs               INTEGER ::= 10
maxnoofTFCs                 INTEGER ::= 10
maxnoofUSCHs                INTEGER ::= 10
maxUCIDinNodeB              INTEGER ::= 10
maxCellinNodeB              INTEGER ::= 10
maxCCPinNodeB               INTEGER ::= 10
maxCTF-1                     INTEGER ::= 10
maxLocalCellinNodeB         INTEGER ::= 10
maxPCHinNodeB               INTEGER ::= 10
maxRACHCell                  INTEGER ::= 10
maxnoofFACHCell              INTEGER ::= 10
maxPCHCell                   INTEGER ::= 10
maxUSCHCell                  INTEGER ::= 10
maxAICHCell                  INTEGER ::= 10
maxMIBSEG                    INTEGER ::= 10
maxSIBSEG                    INTEGER ::= 10
maxnoofFDDNeighbours         INTEGER ::= 10
maxnoofTDDNeighbours         INTEGER ::= 10
maxTFcount                   INTEGER ::= 10
maxnoofTFCs                  INTEGER ::= 10
maxFACHCell                  INTEGER ::= 10
maxnoCCTrCH                  INTEGER ::= 10
maxnoCCTrCHs                 INTEGER ::= 10
maxnoofCCTrCH                INTEGER ::= 10
maxnoofDPCH                  INTEGER ::= 10
maxnoofPUSHs                 INTEGER ::= 10
maxnoofRL-1                  INTEGER ::= 10
maxnoofRL-2                  INTEGER ::= 10
maxRM                         INTEGER ::= 10

-- *****
--
-- IEs
--
-- *****

id-AICH-Information-ResourceStatIndItem    INTEGER ::= 0
id-AICH-ParametersList                    INTEGER ::= 1
id-AICH-ParametersListItem                 INTEGER ::= 2
id-AllowedSlotFormatInformationListItem-CTCHreconf-Req-FDD  INTEGER ::= 3
id-AllowedSlotFormatInformationListItem-CTCHsetup-Req-FDD  INTEGER ::= 4
id-BlockingPriorityIndicator                INTEGER ::= 5
id-CCTrCH-ParametersList                   INTEGER ::= 6
id-CCTrCH-ParametersListItem                INTEGER ::= 7
id-CFN                                     INTEGER ::= 8
id-CFNoffset                              INTEGER ::= 225
id-CompressedModePattern-List              INTEGER ::= 226
id-CRNC-CommunicationContextID              INTEGER ::= 9
id-CRNCCommunicationContextID              INTEGER ::= 10
id-Cause                                   INTEGER ::= 11
id-Cell-Information-ResourceStatIndItem     INTEGER ::= 12
id-Cell-InformationItem                    INTEGER ::= 13
id-Cell-InformationList                    INTEGER ::= 14
id-Cell-Parameter                          INTEGER ::= 15
id-Cell-ParametersItem                     INTEGER ::= 16
id-Cell-ParametersList                     INTEGER ::= 17
id-CellParameter                           INTEGER ::= 18
id-CommonMeasurementObjectType              INTEGER ::= 19
id-CommonMeasurementType                   INTEGER ::= 20
id-CommonPhysicalChannelID                 INTEGER ::= 21
id-CommonPhysicalChannelType-CTCHsetup-Req-FDD  INTEGER ::= 22
id-CommonPhysicalChannelType-CTCHsetup-Response  INTEGER ::= 23
id-CommunicationControlPort-InformationItem  INTEGER ::= 24
id-CommunicationControlPortID               INTEGER ::= 25
id-CommunicationControlPortInformation-ResourceStatIndItem  INTEGER ::= 26
id-CommunicationControlPortInformationList  INTEGER ::= 27
id-CompressesModeMethod                    INTEGER ::= 28
id-ConfigurationGenerationID                INTEGER ::= 29
id-DCH-Add-RL-ReconfPrepFDDItem            INTEGER ::= 30
id-DCH-Add-RL-ReconfPrepTDDItem            INTEGER ::= 31
id-DCH-Add-RL-ReconfReadyItem              INTEGER ::= 32
id-DCH-Add-RL-ReconfReqFDDItem             INTEGER ::= 33
id-DCH-Add-RL-ReconfReqTDDItem             INTEGER ::= 34
id-DCH-AddItem-RL-ReconfResp               INTEGER ::= 35
id-DCH-AddList-RL-ReconfPrepFDD            INTEGER ::= 36
id-DCH-AddList-RL-ReconfPrepTDD            INTEGER ::= 37
id-DCH-AddList-RL-ReconfReqFDD            INTEGER ::= 38
id-DCH-AddList-RL-ReconfReqTDD            INTEGER ::= 39
id-DCH-Delete-RL-ReconfPrepFDDItem         INTEGER ::= 40

```

id-DCH-Delete-RL-ReconfPrepTDDItem	INTEGER ::= 41
id-DCH-Delete-RL-ReconfReqFDDItem	INTEGER ::= 42
id-DCH-Delete-RL-ReconfReqTDDItem	INTEGER ::= 43
id-DCH-DeleteList-RL-ReconfPrepFDD	INTEGER ::= 44
id-DCH-DeleteList-RL-ReconfPrepTDD	INTEGER ::= 45
id-DCH-DeleteList-RL-ReconfReqFDD	INTEGER ::= 46
id-DCH-DeleteList-RL-ReconfReqTDD	INTEGER ::= 47
id-DCH-Information-RL-SetupReqFDDItem	INTEGER ::= 48
id-DCH-Information-RL-SetupReqTDDItem	INTEGER ::= 49
id-DCH-InformationList-RL-SetupReqFDD	INTEGER ::= 50
id-DCH-InformationList-RL-SetupReqTDD	INTEGER ::= 51
id-DCH-InformationResponse-RL-SetupFailFDDItem	INTEGER ::= 52
id-DCH-InformationResponse-RL-setupResTDDItem	INTEGER ::= 53
id-DCH-InformationResponseItem	INTEGER ::= 54
id-DCH-Modify-RL-ReconfPrepFDDItem	INTEGER ::= 55
id-DCH-Modify-RL-ReconfPrepTDDItem	INTEGER ::= 56
id-DCH-Modify-RL-ReconfReadyItem	INTEGER ::= 57
id-DCH-Modify-RL-ReconfReqFDDItem	INTEGER ::= 58
id-DCH-Modify-RL-ReconfReqTDDItem	INTEGER ::= 59
id-DCH-ModifyItem-RL-ReconfResp	INTEGER ::= 60
id-DCH-ModifyList-RL-ReconfPrepFDD	INTEGER ::= 61
id-DCH-ModifyList-RL-ReconfPrepTDD	INTEGER ::= 62
id-DCH-ModifyList-RL-ReconfReqFDD	INTEGER ::= 63
id-DCH-ModifyList-RL-ReconfReqTDD	INTEGER ::= 64
id-DL-CCTrCH-Information-RL-ReconfPrepTDDItem	INTEGER ::= 65
id-DL-CCTrCH-Information-RL-ReconfReqTDDItem	INTEGER ::= 66
id-DL-CCTrCH-Information-RL-SetupReqTDDItem	INTEGER ::= 67
id-DL-CCTrCH-InformationItem	INTEGER ::= 68
id-DL-CCTrCH-InformationList-RL-ReconfPrepTDD	INTEGER ::= 69
id-DL-CCTrCH-InformationList-RL-ReconfReqTDD	INTEGER ::= 70
id-DL-CCTrCH-InformationList-RL-SetupReqTDD	INTEGER ::= 71
id-DL-CCTrCHInformationItem	INTEGER ::= 72
id-DL-CCTrCHInformationList	INTEGER ::= 73
id-DL-CodeInformation	INTEGER ::= 74
id-DL-CodeInformation-RL-ReconfPrepFDDItem	INTEGER ::= 75
id-DL-CodeInformation-RL-SetupReqFDDItem	INTEGER ::= 76
id-DL-DPCH-Information-RL-ReconfPrepFDD	INTEGER ::= 77
id-DL-DPCH-Information-RL-ReconfPrepTDDItem	INTEGER ::= 78
id-DL-DPCH-Information-RL-SetupReqTDDItem	INTEGER ::= 79
id-DL-DPCH-InformationItem	INTEGER ::= 80
id-DL-DPCH-InformationItem-RL-ReconfReqFDD	INTEGER ::= 81
id-DL-DPCH-InformationItem-RL-SetupReqFDD	INTEGER ::= 82
id-DL-FrameType	INTEGER ::= 83
id-DL-ReferencePowerInformationItem	INTEGER ::= 84
id-DSCH-AddItem-RL-ReconfPrepFDD	INTEGER ::= 85
id-DSCH-AddItem-RL-ReconfReqFDD	INTEGER ::= 86
id-DSCH-DeleteItem-RL-ReconfPrepFDD	INTEGER ::= 87
id-DSCH-DeleteItem-RL-ReconfReqFDD	INTEGER ::= 88
id-DSCH-ID	INTEGER ::= 89
id-DSCH-Information-RL-SetupReqFDDItem	INTEGER ::= 90
id-DSCH-InformationList-RL-SetupReqFDD	INTEGER ::= 91
id-DSCH-InformationResponse-RL-SetupFailFDDItem	INTEGER ::= 92
id-DSCH-InformationResponse-RL-setupResFDDItem	INTEGER ::= 93
id-DSCH-ModifyItem-RL-ReconfPrepFDD	INTEGER ::= 94
id-DSCH-ModifyItem-RL-ReconfReqFDD	INTEGER ::= 95
id-DedicatedMeasurementObjectType	INTEGER ::= 96
id-DedicatedMeasurementType	INTEGER ::= 97
id-FACH-Information-ResourceStatIndItem	INTEGER ::= 98
id-FACH-InformationItem	INTEGER ::= 99
id-FACH-ListItem	INTEGER ::= 100
id-FACH-ParametersList-CTChreconf-Req-FDD	INTEGER ::= 101
id-FACH-ParametersList-CTChreconf-Req-TTD	INTEGER ::= 102
id-FACH-ParametersListItem-CTChreconf-Req-FDD	INTEGER ::= 103
id-FACH-ParametersListItem-CTChreconf-Req-TTD	INTEGER ::= 104
id-FACH-ParametersListItem-CTChsetup-Req-FDD	INTEGER ::= 105
id-FACH-ParametersListItem-CTChsetup-Response	INTEGER ::= 106
id-GapStartingSlotNumber	INTEGER ::= 107
id-IndicationType	INTEGER ::= 108
id-Local-Cell-Information-ResourceStatIndItem	INTEGER ::= 109
id-Local-Cell-Information-ResourceStatIndItem	INTEGER ::= 110
id-LocalCell-ID	INTEGER ::= 111
id-LocalCell-InformationItem	INTEGER ::= 112
id-LocalCellInformationList	INTEGER ::= 113
id-MIB-SegmentInformationItem	INTEGER ::= 114
id-MIB-SegmentInformationList	INTEGER ::= 115
id-MaximumTransmissionPower	INTEGER ::= 116
id-MeasuredCellInfo	INTEGER ::= 117
id-MeasurementCharacteristics	INTEGER ::= 118
id-MeasurementID	INTEGER ::= 119
id-MeasurementType	INTEGER ::= 120
id-NeighbouringFDD-Cell-InformationItem	INTEGER ::= 121
id-NeighbouringTDD-Cell-InformationItem	INTEGER ::= 122
id-NodeB-CommunicationContextID	INTEGER ::= 123

id-PCCPCH-Information	INTEGER ::= 124
id-PCH-Information-ResourceStatIndItem	INTEGER ::= 125
id-PCH-InformationItem	INTEGER ::= 126
id-PCH-ListItem	INTEGER ::= 127
id-PCH-Parameters-CTCHreconf-Req-FDD	INTEGER ::= 128
id-PCH-ParametersList	INTEGER ::= 129
id-PCH-ParametersListItem	INTEGER ::= 130
id-PTCH-Parameters-CTCHreconf-Req-FDD	INTEGER ::= 131
id-PRACH-ParametersList	INTEGER ::= 132
id-PRACH-ParametersListItem	INTEGER ::= 133
id-PSCH-Information	INTEGER ::= 134
id-PSCHandPCCPCH-Information	INTEGER ::= 135
id-PUSCH-ListItem	INTEGER ::= 136
id-PatternDuration	INTEGER ::= 137
id-PowerControlMode	INTEGER ::= 138
id-PowerResumeMode	INTEGER ::= 139
id-PrimaryCCPCH-Information	INTEGER ::= 140
id-PrimaryCPICH-Information	INTEGER ::= 141
id-PrimarySCH-Information	INTEGER ::= 142
id-PrimaryScramblingCode	INTEGER ::= 143
id-ProcedureScopeType	INTEGER ::= 144
id-RACH-Information-ResourceStatIndItem	INTEGER ::= 145
id-RACH-InformationItem	INTEGER ::= 146
id-RL-ID	INTEGER ::= 147
id-RL-Information	INTEGER ::= 148
id-RL-Information-DMeasureReportItem	INTEGER ::= 149
id-RL-Information-DMeasureRequestItem	INTEGER ::= 150
id-RL-Information-DMeasureResponseItem	INTEGER ::= 151
id-RL-Information-RL-ReconfPrepFDDItem	INTEGER ::= 152
id-RL-Information-RL-SetupReqFDDItem	INTEGER ::= 153
id-RL-InformationItem	INTEGER ::= 154
id-RL-InformationItem-RL-SetupReqTDD	INTEGER ::= 155
id-RL-InformationList	INTEGER ::= 156
id-RL-InformationList-RL-ReconfReqFDD	INTEGER ::= 157
id-RL-InformationList-RL-SetupReqFDD	INTEGER ::= 158
id-RL-InformationResponse-RL-setupResFDDItem	INTEGER ::= 159
id-RL-InformationResponseItem-RL-ReconfResp	INTEGER ::= 160
id-RL-InformationResponseList-RL-ReconfReady	INTEGER ::= 161
id-RL-InformationResponseList-RL-ReconfReadyItem	INTEGER ::= 162
id-RL-InformationResponseList-RL-ReconfResp	INTEGER ::= 163
id-RL-InformationResponseList-RL-setupResFDD	INTEGER ::= 164
id-RL-InformationResponseList-RL-setupResTDD	INTEGER ::= 165
id-RL-ReconfigurationFailure-RL-ReconfFailItem	INTEGER ::= 166
id-RL-ReconfigurationFailureList-RL-ReconfFail	INTEGER ::= 167
id-RL-ResponseInformation	INTEGER ::= 168
id-RL-ResponseInformationItem	INTEGER ::= 169
id-RL-ResponseInformationList	INTEGER ::= 170
id-RL-informationItem	INTEGER ::= 171
id-RL-informationList	INTEGER ::= 172
id-RadioLinkInformation-RL-ReconfPrepFDDItem	INTEGER ::= 173
id-RadioLinkInformation-RL-ReconfPrepTDD	INTEGER ::= 174
id-RadioLinkInformation-RL-ReconfReqTDD	INTEGER ::= 175
id-RadioLinkInformationList-RL-ReconfPrepFDD	INTEGER ::= 176
id-ReportCharacteristics	INTEGER ::= 177
id-SFN	INTEGER ::= 178
id-SIB-SegmentInformationItem	INTEGER ::= 179
id-SIB-SegmentInformationList	INTEGER ::= 180
id-ScramblingCodeChange	INTEGER ::= 181
id-Secondary-CCPCHListItem	INTEGER ::= 182
id-SecondaryCPICH-Information	INTEGER ::= 183
id-SecondarySCH-Information	INTEGER ::= 184
id-ShutdownTimer	INTEGER ::= 185
id-Successful-RL-InformationResponse-RL-SetupFailFDDItem	INTEGER ::= 186
id-Successful-RL-InformationResponseItem	INTEGER ::= 187
id-Successful-RL-InformationResponseList	INTEGER ::= 188
id-Successful-RL-InformationResponseList-RL-SetupFailFDD	INTEGER ::= 189
id-SynchronisationMethod	INTEGER ::= 190
id-T-Cell	INTEGER ::= 191
id-TDDChipOffset	INTEGER ::= 192
id-TimeSlotConfigurationItem	INTEGER ::= 193
id-TimeSlotConfigurationList	INTEGER ::= 194
id-TransmissionGapDistance	INTEGER ::= 195
id-TransmissionGapPeriod	INTEGER ::= 196
id-TransmitGapLength	INTEGER ::= 197
id-TransmitGapPositionMode	INTEGER ::= 198
id-UARFCN	INTEGER ::= 199
id-UC-ID	INTEGER ::= 200
id-UL-CCTrCH-Information-RL-ReconfPrepTDDItem	INTEGER ::= 201
id-UL-CCTrCH-Information-RL-ReconfReqTDDItem	INTEGER ::= 202
id-UL-CCTrCH-Information-RL-SetupReqTDDItem	INTEGER ::= 203
id-UL-CCTrCH-InformationItemIE	INTEGER ::= 204
id-UL-CCTrCH-InformationList-RL-ReconfPrepTDD	INTEGER ::= 205
id-UL-CCTrCH-InformationList-RL-ReconfReqTDD	INTEGER ::= 206

```
id-UL-CCTrCH-InformationList-RL-SetupReqTDD          INTEGER ::= 207
id-UL-CCTrCHInformation                             INTEGER ::= 208
id-UL-CCTrCHInformationList                          INTEGER ::= 209
id-UL-DPCH-Information-RL-ReconfPrepFDD             INTEGER ::= 210
id-UL-DPCH-Information-RL-ReconfPrepTDDItem         INTEGER ::= 211
id-UL-DPCH-Information-RL-SetupReqTDDItem           INTEGER ::= 212
id-UL-DPCH-InformationItem-RL-ReconfReqFDD          INTEGER ::= 213
id-UL-DPCH-InformationItem-RL-SetupReqFDD           INTEGER ::= 214
id-UL-DPCH-InformationItemIE                        INTEGER ::= 215
id-USCH-Information-ResourceStatIndItem             INTEGER ::= 216
id-USCH-InformationItem                             INTEGER ::= 217
id-USCH-ListItem-CTCHsetup-Req-TDD                 INTEGER ::= 218
id-Unsuccessful-RL-InformationResponse               INTEGER ::= 219
id-Unsuccessful-RL-InformationResponse-RL-SetupFailFDDItem INTEGER ::= 220
id-Unsuccessful-RL-InformationResponseItem           INTEGER ::= 221
id-Unsuccessful-RL-InformationResponseItem-RL-SetupFailTDD INTEGER ::= 222
id-Unsuccessful-RL-InformationResponseList           INTEGER ::= 223
id-Unsuccessful-RL-InformationResponseList-RL-SetupFailFDD INTEGER ::= 224
```

END

<h2 style="margin: 0;">CHANGE REQUEST</h2>		<i>Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.</i>
<b>25.433</b>	<b>CR 014</b>	Current Version: <b>3.0.0</b>
GSM (AA.BB) or 3G (AA.BBB) specification number ↑	↑ CR number as allocated by MCC support team	
For submission to: <b>TSG RAN #7</b> <i>list expected approval meeting # here</i> ↑	for approval for information	strategic non-strategic <span style="float: right;">(for SMG use only)</span>
	<input checked="" type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>

Form: CR cover sheet, version 2 for 3GPP and SMG    The latest version of this form is available from: <ftp://ftp.3gpp.org/Information/CR-Form-v2.doc>

**Proposed change affects:**    (U)SIM     ME     UTRAN / Radio     Core Network   
(at least one should be marked with an X)

**Source:**    TSG-RAN WG3    **Date:**    00.01.24

**Subject:**    Changing Eb/N0 to SIR.

**Work item:**    \_\_\_\_\_

<b>Category:</b>	F Correction <input type="checkbox"/> A Corresponds to a correction in an earlier release <input type="checkbox"/> B Addition of feature <input checked="" type="checkbox"/> C Functional modification of feature <input type="checkbox"/> D Editorial modification <input type="checkbox"/>	<b>Release:</b>	Phase 2 <input type="checkbox"/> Release 96 <input type="checkbox"/> Release 97 <input type="checkbox"/> Release 98 <input type="checkbox"/> Release 99 <input checked="" type="checkbox"/> Release 00 <input type="checkbox"/>
------------------	--	-----------------	--

(only one category shall be marked with an X)

**Reason for change:**    To align with the TSG RAN WG1 specifications, se also R3-000009.

**Clauses affected:**    8.2.17; 8.3.2; 9.1.35; 9.1.41; 9.1.59; 9.2.2.47; 9.2.2.48; 9.2.2.50

<b>Other specs affected:</b>	Other 3G core specifications <input type="checkbox"/> Other GSM core specifications <input type="checkbox"/> MS test specifications <input type="checkbox"/> BSS test specifications <input type="checkbox"/> O&M specifications <input type="checkbox"/>	→ List of CRs: → List of CRs: → List of CRs: → List of CRs: → List of CRs:	
------------------------------	---	--	--

**Other comments:**    \_\_\_\_\_




<----- double-click here for help and instructions on how to create a CR.

## 8.2.17 Radio Link Setup

### 8.2.17.1 General

This procedure is used for establishing the necessary resources for a new Node B Communication Context in the Node B.

### 8.2.17.2 Successful operation

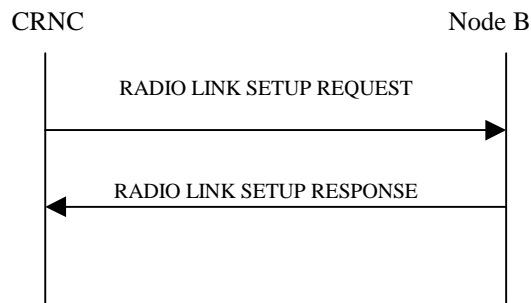

**Figure 1: RL Setup procedure: Successful case**

The procedure is initiated with a RADIO LINK SETUP REQUEST message sent from the CRNC to Node B.

Upon reception of RADIO LINK SETUP REQUEST message, the Node B shall reserve necessary resources and configure the new Radio Link(s) according to the parameters given in the message.

[FDD – The RL Setup procedure can be used to setup one or more radio links. The procedure shall include the establishment of one or more DCHs on all radio links, and in addition, it can include the establishment of one or more DSCHs on one radio link.]

[TDD – The RL Setup procedure is used for setup of one radio link including one or more transport channels. The transport channels can be a mix of DCHs, DSCHs, and USCHs. The Radio Link Setup Request message shall include the required TFS and TFCS for the DCH, DSCH and USCH channels.]

[FDD] The *Diversity Control Field* IE indicates for each RL (except the first RL in the message) whether the Node B shall combine the concerned RL or not. If the *Diversity Control Field* IE indicates, "may be combined with already existing RLs", then Node B shall decide for either of the alternatives. Diversity combining is applied to Dedicated Transport Channels (DCH), i.e. it is not applied to the DSCHs. When a new RL is to be combined, the NodeB shall choose which RL(s) to combine it with.

If the RADIO LINK SETUP REQUEST message includes the *DCH Combination Indicator* IE for a DCH to be added, the Node B shall

- Treat all DCHs with the same value of this IE as a set of co-ordinated DCHs and
- Include this DCH in the new configuration only if it can include all DCHs with the same value of the *DCH Combination Indicator* IE in the new configuration

The received *Frame Handling Priority* IE specified for each Transport Channel should be used when prioritising between different frames in the downlink on the radio interface in congestion situations within the Node B once the new configuration has been activated.

[FDD] If the *Propagation Delay* IE is present, the Node B may use this information to speed up the detection of L1 synchronization.

The included *RLC Mode* IE may be used by the NodeB to optimise the power control.

[FDD] In FDD mode, the UL *Eb/No-SIR Target* IE included in the message shall be used by the Node B as initial UL *Eb/No-SIR* target for the UL *inner loop* power control.

The Node B shall start the DL transmission using the initial DL power specified in the message. The DL power can then vary accordingly to the fast power control, but shall always be kept within the maximum and minimum limit specified in the RL SETUP REQUEST message.

If the RLs are successfully setup, the Node B shall start reception on the new RL(s) and respond with a RADIO LINK SETUP RESPONSE message.

[FDD] The Node B shall indicate with the *Diversity Indication* IE whether the RL is combined or not. In case of combining, only the *Reference RL ID* IE shall be included to indicate one of the existing RLs that the concerned RL is combined with. In case of not combining the Node B shall include in the RL SETUP RESPONSE the *Binding ID* IE and *Transport Layer Address* IE for the transport bearer to be established for each DCH of this RL.

[TDD – The NodeB shall include in the RADIO LINK SETUP RESPONSE the *Binding ID* IE and *Transport Layer Address* IE for the transport bearer to be established for each DCH of this RL.]

The NodeB shall include in the RADIO LINK SETUP RESPONSE the *Binding ID* IE and *Transport Layer Address* IE for the transport bearer to be established for each DSCH of this RL.

[TDD – The NodeB shall include in the RADIO LINK SETUP RESPONSE the *Binding ID* IE and *Transport Layer Address* IE for the transport bearer to be established for each USCH of this RL.]

In case of coordinated DCH, the *Binding ID* IE and the *Transport Layer Address* IE shall be specify for only one of the coordinated DCHs.




## 8.3.2 Synchronised Radio Link Reconfiguration Preparation

### 8.3.2.1 General

The Synchronised Radio Link Reconfiguration Preparation procedure is used to prepare a new configuration of all Radio Links related to one UE-UTRAN connection within a Node B.

### 8.3.2.2 Successful Operation

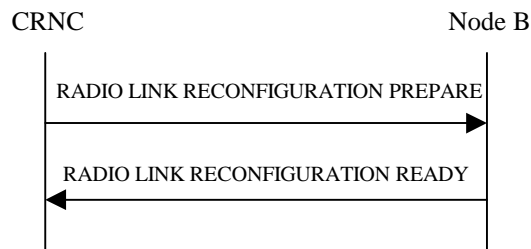

**Figure 2: Synchronised Radio Link Reconfiguration procedure, Successful Case**

The Synchronised Radio Link Reconfiguration Preparation procedure is initiated by the CRNC by sending the message RADIO LINK RECONFIGURATION PREPARE to the Node B. The message shall use the Communication Control Port assigned for this Node B Communication Context.

Upon reception, the DRNS shall reserve necessary resources for the new configuration of the Radio Link(s) according to the parameters given in the message. Unless specified below, the meaning of parameters is specified in other specifications.

#### **DCH Modification:**

If the RADIO LINK RECONFIGURATION PREPARE message includes the *Frame Handling Priority* IE for a DCH to be modified, the Node B should store this information for this DCH in the new configuration. The received Frame Handling Priority should be used when prioritising between different frames in the downlink on the radio interface in congestion situations within the Node B once the new configuration has been activated.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *Transport Format Set (UL)* IE for a DCH to be modified, the Node B shall apply the new Transport Format Set in the Uplink of this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *Transport Format Set (DL)* IE for a DCH to be modified, the Node B shall apply the new Transport Format Set in the Downlink of this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *UL DCH FP Mode* IE for a DCH to be modified, the Node B shall apply the new DCH FP Mode in the Uplink of the user plane for this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *ToAWS* IE for a DCH to be modified, the Node B shall apply the new ToAWS in the user plane for this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *ToAWE* IE for a DCH to be modified, the Node B shall apply the new ToAWE in the user plane for this DCH in the new configuration.

#### **DCH Addition:**

If the RADIO LINK RECONFIGURATION PREPARE message includes any DCH to be added to the Radio Link(s), the Node B shall reserve necessary resources for the new configuration of the Radio Link(s) according to the parameters given in the message and include these DCH in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *DCH Combination Indicator* IE for a DCH to be added, the Node B shall.

1. treat all DCHs with the same value of this IE as a set of coordinated DCHs and
2. include this DCH in the new configuration only if it can include all DCHs with the same value of the *DCH Combination Indicator* IE in the new configuration

The Node B should store the *Frame Handling Priority* IE received for a DCH to be added in the new configuration. The received Frame Handling Priority should be used when prioritising between different frames in the downlink on the radio interface in congestion situations within the Node B once the new configuration has been activated.

The Node B may use the included *RLC Mode* IE to optimise the power control.

The Node B shall use the included *UL DCH FP Mode* IE for a DCH to be added as the new DCH FP Mode in the Uplink of the user plane for this DCH in the new configuration.

The Node B shall use the included *ToAWS* IE for a DCH to be added as the new Time of Arrival Window Start Point in the user plane for this DCH in the new configuration.

The Node B shall use the included *ToAWE* IE for a DCH to be added as the new Time of Arrival Window End Point in the user plane for this DCH in the new configuration.

#### **DCH Deletion:**

If the RADIO LINK RECONFIGURATION REQUEST message includes any DCH to be deleted from the Radio Link(s), the Node B shall not include this DCH in the new configuration.

If of all the DCHs belonging to a set of coordinated DCHs are requested to be deleted, the Node B shall not include this set of coordinated DCHs in the new configuration.

#### **Physical Channel Modification:**

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes the *Uplink Scrambling Code* IE, the Node B shall apply this Uplink Scrambling Code to the new configuration.]

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes one or more *Uplink Channelisation Code* IEs, the Node B shall apply the new Uplink Channelisation Code(s) in the new configuration.]

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes one or more *Downlink Channelisation Code* IEs, the Node B shall apply the new Downlink Channelisation Code(s) in the new configuration.]

[TDD - If the RADIO LINK RECONFIGURATION PREPARE message includes one or more *UL DPCH Information* IE groups, the Node B shall apply the new UL physical channel(s) setting in the new configuration.]

[TDD - If the RADIO LINK RECONFIGURATION PREPARE message includes one or more *DL DPCH Information* IE groups, the Node B shall apply the new physical channel(s) setting in the new configuration.]

The Node B shall use the *TFCS (UL)* IE when reserving resources for the uplink of the new configuration. The DRNS shall apply the new TFCS in the Uplink of [TDD – the CCTrCH of] the new configuration.

The Node B shall use the *TFCS (DL)* IE when reserving resources for the downlink of the new configuration. The DRNS shall apply the new TFCS in the Downlink of [TDD – the CCTrCH of] the new configuration.

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes on the *UL DPCCCH Structure* IE, group the Node B shall set the new Uplink DPCCCH Structure to the new configuration.]

[FDD – If the RADIO LINK RECONFIGURATION PREPARE message includes the *UL SIR Target* IE, the Node B shall set the UL inner loop power control to the UL SIR target when the new configuration is being used.]

If the RADIO LINK RECONFIGURATION PREPARE includes the *Maximum DL Power* IE, the Node B shall apply this value to the new configuration and never transmit with a higher power on any Downlink Channelisation Code of the Radio Link once the new configuration is being used.

If the RADIO LINK RECONFIGURATION PREPARE includes the *Minimum DL Power* IE, the Node B shall apply this value to the new configuration and never transmit with a lower power on any Downlink Channelisation Code of the Radio Link once the new configuration is being used.

**SSDT Activation/Deactivation:**

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes the *SSDT Indication* IE set to "SSDT Active in the UE", the Node B may activate SSDT using the *SSDT Cell Identity* IE and *SSDT Cell Identity Length* IE in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *SSDT Indication* IE set to "SSDT not Active in the UE", the Node B shall deactivate SSDT in the new configuration.]

**DSCH Addition/Modification/Deletion:**

[FDD] It is FFS how the Node B shall treat any included DSCH Information.

[TDD – The RADIO LINK RECONFIGURATION PREPARE message shall include DSCH information and USCH information for the DSCHs and USCHs to be added/modified/deleted. The NodeB shall use this information to add/modify/delete the indicated DSCH and USCH channels to/from the radio link, in the same way as the DCH info is used to add/modify/release DCHs. – It shall include in the RADIO LINK RECONFIGURATION READY message the Transport Layer Address and the Binding ID of the DCHs/DSCHs/USCHs being added or modified.]

If the requested modifications are allowed by the Node B and the Node B has successfully reserved the required resources for the new configuration of the Radio Link(s), it shall respond to the CRNC with the RADIO LINK RECONFIGURATION READY message.

In case of a set of coordinated DCHs requiring a new transport bearer on Iub DCH-to-be-added group or DCH-to-be-modified group shall be included only for one of the DCH in the set of coordinated DCHs.

In case of a Radio Link being combined with another Radio Link within the Node B, the RL Information Response IE group shall be included only for one of the combined RLs.

## 9.1.35 RADIO LINK SETUP REQUEST

## 9.1.35.1 FDD message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context ID	M			
Transaction ID	M			
<b>UL DPCH Information</b>		1		
UL Scrambling Code	M			
Min UL Channelisation Code length	M			
Max Number of UL DPCHs	C – CodeLen			
puncture limit	M			For UL
Transport Format Combination Set	M			for UL
UL DPCH Slot Format	M			
UL <del>E<sub>b</sub>/N<sub>0</sub>-SIR</del> Target	M		Uplink E <sub>b</sub> /N <sub>0</sub> UL SIR	
Diversity mode	M			
D Field Length	C – FB			
SSDT cell ID Length	O			
S Field Length	O			
<b>DL DPCH Information</b>				
Transport Format Combination Set	M			For DL
DL DPCH Slot Format	M			
TFCI signalling mode	M			
TFCI presence	C- SlotFormat			
Multiplexing Position	M			
<b>Power Offset Information</b>		1		
PO1	M		Power Offset	Power offset for the TFCI bits
PO2	M		Power Offset	Power offset for the TPC bits
PO3	M		Power Offset	Power offset for the pilot bits
Delta TPC	M			
<b>DCH Information</b>		1 to <maxnoofDCHs>		
DCH ID	M			
DCH Combination Ind	O			
RLC mode	M			
Transport Format Set	M			For UL
Transport Format Set	M			For DL
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP mode	M			
ToAWS	M			
ToAWE	M			
RL ID	O			RL Supporting the DSCH

DSCH TFCS	O			
<b>DSCH Information</b>		0 to <maxnoofDSCHs >		
DSCH ID	M			
Transport Format Set	M			For DSCH
Frame handling Priority	M			
ToAWS	M			
ToAWE	M			
<b>RL Information</b>		1 to <maxnoofRLs>		
RL ID	M			
C-ID	M			
Frame Offset	M			
Chip Offset	M			
Propagation Delay	O			
Diversity Control Field	C – NotFirstRL			
<b>DL Code Information</b>		1 to <maxnoof- DLCodes		
DL Scrambling Code	M			
FDD DL Channelisation Code Number	M			
Initial DL transmission Power	M		DL Power	
Maximum DL power	M		DL Power	
Minimum DL power	M		DL Power	
SSDT Cell Identity	O			

Condition	Explanation
CodeLen	This IE is present only if "Min UL Channelisation Code length" equals to 4
FB	This IE is present only if Feed Back mode diversity is activated.
NotFirstRL	This IE is present only if the RL is not the first one in the RL Information.
SlotFormat	This IE is only present if the DL DPCH slot format is equal to any of the value 12 to 16.

Range bound	Explanation
MaxnoofDSCHs	Maximum no. of DSCHs for one UE.
MaxnoofDCHs	Maximum no. of DCHs for one UE.
MaxnoofRLs	Maximum no. of RLs for one UE.
MaxnoofDLCodes	Maximum no. of DL code information.

## 9.1.41 RADIO LINK RECONFIGURATION PREPARE

## 9.1.41.1 FDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantic Description
Message Discriminator	M			
Message Type	M			
Node B Communication Context ID	M			
Transaction ID	M			
<b>UL DPCH Information</b>		0..1		
UL Scrambling code	O			
<a href="#">UL SIR Target</a>	<a href="#">O</a>		<a href="#">UL SIR</a>	
Min UL Channelisation Code Length	O			
Max Number of UL DPDCHs	C – CodeLen			
Puncture Limit	O			For UL
TFCS	O			
UL DPCCH Slot Format	O			
SSDT Cell Identity Length	O			
S-Field Length	O			
<b>DL DPCH Information</b>		0..1		
TFCS	O			
DL DPCH Slot Format	O			
TFCI Signalling Mode	O			
TFCI presence	C-Slot Format			
DTX Insertion Point	O			
<b>DCHs to Modify</b>		0..<maxnoof DCHs>		
DCH ID	M			
Transport Format Set	O			For the UL.
Transport Format Set	O			For the DL.
Frame Handling Priority	O			
UL FP Mode	O			
ToAWS	O			
ToAWE	O			
<b>DCHs to Add</b>		0..<maxnoof DCHs>		
DCH ID	M			
DCH Combination Ind	O			
RLC Mode	M			
Transport Format Set	M			For the UL.
Transport Format Set	M			For the DL.
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP Mode	M			
ToAWS	M			
ToAWE	M			
<b>DCHs to Delete</b>		0..<maxnoof DCHs>		
DCH ID	M			
<b>DSCH to modify</b>		0..1		
Transport Format Set	O			For the DL.
RL ID	O			

Frame Handling Priority	O			
ToAWS	O			
ToAWE	O			
<b>DSCH to add</b>		0..1		
Transport Format Set	M			For the DL.
RL ID	M			
Frame Handling Priority	M			
ToAWS	M			
ToAWE	M			
<b>DSCH to Delete</b>		0..1		
RL ID	M			
<b>RL Information</b>		0..<maxnoof RLs>		
RL ID	M			
<b>DL Code Information</b>		0..<maxnoof DLCodes<		
DL Scrambling Code	O			
FDD DL Channelisation Code Number	O			
Maximum DL Power	O		DL Power	
Minimum DL Power	O		DL Power	
SSDT Indication	O			
SSDT Cell Identity	C - SSDTIndON			

Condition	Explanation
SSDTIndON	The IE may be present if the SSDT Indication is set to 'SSDT Active in the UE'.
CodeLen	This IE is present only if "Min UL Channelisation Code length" equals to 4.
SlotFormat	This IE is only present if the DL DPCH slot format is equal to any of the value 12 to 16.

Range Bound	Explanation
<i>MaxnoofDCHs</i>	Maximum number of DCHs for a UE.
<i>MaxnoofRLs</i>	Maximum number of RLs for a UE.
<i>MaxnoofDLCodes</i>	Maximum number of Downlink Channelisation Codes.

## 9.1.59 COMPRESSED MODE PREPARE (FDD only)

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
NodeB communication context ID	M			
Transaction ID	M			
TGP1	M		Gap Period	Refer to 25.215
TGP2	O		Gap Period	Refer to 25.215
TGL	M			
TGD	M			
PD	M			
UL/DL compressed mode selection	M			
Compressed mode method	M			
Gap Position Mode	M			
SN	C-Flex		TimeSlot	
Downlink Frame Type	M			
Scrambling Code Change	C-SF/2			
Power Control Mode	M			
Power Resume Mode	M			
UL delta <a href="#">Eb/NoSIR</a>	M			
UL delta <a href="#">Eb/NoSIR</a> after	M			

Condition	Explanation
Flex	This IE is present only if "Gap position Mode" equals to 'flexible'.
SF/2	This IE is present only if Compressed Mode Method equals to SF/2



9.2.2.47 UL delta  $E_b/N_o$ SIR

The delta in uplink  $E_b/N_o$ SIR that shall be added to the  $E_b/N_o$ SIR target used during compressed mode frames.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Uplink Delta $E_b/N_o$ SIR			Enumerated (-6..+10dB)	Step 0.1 dB.

9.2.2.48 UL delta  $E_b/N_o$ SIR after

The delta in uplink  $E_b/N_o$ SIR target that shall be added to the  $E_b/N_o$ SIR target used one frame after the compressed mode frames.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Uplink Delta $E_b/N_o$ SIR after			Enumerated (-6..+10dB)	Step 0.1 dB.

9.2.2.50 UL [Eb/No-SIR](#)

The UL Eb/No indicates a received UL [Eb/No-SIR](#).

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UL <a href="#">Eb/No-SIR</a>			INTEGER (0..255) <a href="#">ENUMERATED (-8.2 .. 17.3)</a>	Resolution is <a href="#">Step</a> 0.1 dB, range 0-25.5 dB.

### 9.3.3 NBAP PDU Content Definitions

```

-- *****
--
-- PDU definitions for NBAP.
--
-- *****

NBAP-PDU-Contents -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

-- *****
--
-- IE parameter types from other modules.
--
-- *****

IMPORTS
    AICH-InformationList,
    AICH-Parameters,
    AICH-Power,
    AICH-TransmissionTiming,
    AddOrDeleteIndicator,
    AvailabilityStatus,
    BindingID,
    BlockingPriorityIndicator,
    BurstType,
    CCTrCH-ID,
    CFN,
    CN-CSDomainIdentifier,
    CN-PSDomainIdentifier,
    CRNC-CommunicationContextID,
    Cause,
    CellParameter,
    Cell-Parameter,
    ChipOffset,
    CommonMeasurementType,
    CommonPhysicalChannelID,
    CommonPhysicalChannelType,
    CommonTransportChannelID,
    CommonTransportChannelType,
    CommunicationControlPortID,
    CommunicationControlPortInformationList,
    CompressesModeMethod,
    ConfigurationGenerationID,
    DCH-CombinationIndication,
    DCH-Delete-RL-ReconfReqTDDItem,
    DCH-ID,
    DCH-InformationResponse-RL-setupResFDD,

```

DCH-Modify-RL-ReconfPrepTDDItem,  
DL-CCTrCH-ID,  
DL-CodeInformation,  
DL-DPCH-InformationItem-RL-ReconfReqFDD,  
DL-DPCH-SlotFormat,  
DL-FrameType,  
DL-Power,  
DL-ReferencePower,  
DL-ReferencePowerInformationItem,  
DL-ScramblingCode,  
DPCH-ID,  
DPCH-Offset,  
DSCH-ID,  
DSCH-InformationResponse-RL-setupResFDD,  
DSCH-ModifyList-RL-ReconfResp,  
DSCH-SetupList-RL-ReconfResp,  
DSCH-TransportFormatSet,  
DTX-InsertionPoint,  
DTX-InsertionPosition,  
D-FieldLength,  
DedicatedMeasurementType,  
DedicatedMeasurementValue,  
DeltaTPC,  
DiversityControlField,  
DiversityMode,  
FACH-Power,  
FDD-DL-ChannelisationCodeNumber,  
FDD-SCCPCH-Offset,  
FrameHandlingPriority,  
FrameOffset,  
GapStartingSlotNumber,  
LocalCellID,  
LocalCellInformationList,  
LocalCell-ID,  
Local-CellID,  
MIB-SG-POS,  
MIB-SG-REP,  
MaxFACH-Power,  
MaxNrOfUL-DPDCHs,  
MaxNumberOfUL-DPDCHs,  
MaximumDLPowerCapability,  
MaximumDL-PowerCapability,  
MaximumTransmissionPower,  
MaximumUL-[E<sub>bn</sub>0SIR](#),  
Maximum-DL-PowerCapability,  
MeasuredCellInfo,  
MeasurementCharacteristics,  
MeasurementID,  
MeasurementType,  
MessagePartScramblingCode,  
MidambleShift,  
Midambleshift,  
MinUL-ChannelisationCodeLength,

MinimumSpreadingFactor,  
MinimumUL-EbN0SIR,  
NodeB-CommunicationContextID,  
NumberOfChannelElements,  
Offset,  
PCCPCH-Power,  
PCCPCH-TimeSlotI,  
PCH-Power,  
PICH-Information,  
PICH-Power,  
PSCH-Power,  
PSCHandPCCPCH-Allocation,  
PSCHandPCCPCH-TimeSlotK,  
PUSCH,  
PagingIndicatorLength,  
PatternDuration,  
PayloadCRC-PresenceIndicator,  
PilotBitsUsedIndicator,  
PowerControlMode,  
PowerOffset,  
PowerResumeMode,  
PreambleScramblingCode,  
PreambleSignatures,  
PrimaryCPICH-Power,  
PrimarySCH-Power,  
PrimaryScramblingCode,  
Primary-ScramblingCode,  
PropagationDelay,  
PunctureLimit,  
RACH-SlotFormat,  
RACH-SubChannelNumbers,  
RLC-Mode,  
RL-ID,  
RL-Information,  
RL-InformationItem,  
RL-InformationItem-RL-SetupReqTDD,  
RL-InformationList-DMeasureRequest,  
RL-ReconfigurationFailure-RL-ReconfFailItem,  
RadioLinkInformation-RL-ReconfReqTDD,  
RepetitionLength,  
RepetitionPeriod,  
ReportCharacteristics,  
ResourceOperationState,  
ResourceOperationalState,  
SAI,  
SFN,  
SIB-SG-POS,  
SIB-SG-REP,  
SSDT-CellIdentity,  
SSDT-CellIdentityLength,  
SSDT-Cell-IDLength,  
SSDT-Indication,  
SSDT-SupportIndicator,

```

STTD-Indicator,
S-CCPCH-Offset,
S-CCPCH-Power,
S-FieldLength,
ScramblingCode,
ScramblingCodeChange,
SecondaryCCPCH-SlotFormat,
SecondaryCPICH-Power,
SecondarySCH-Power,
ShutdownTimer,
SynchronisationMethod,
TDDChipOffset,
TDD-ChannelisationCode,
TFCI-Presence,
TFCI-SignallingMode,
TFCS,
TSTD-Indicator,
T-Cell,
TimeSlot,
TimeSlotDirection,
TimeSlotStatus,
ToAWE,
ToAWS,
TransmissionGapDistance,
TransmissionGapPeriod,
TransmitGapLength,
TransmitGapPositionMode,
TransportFormatCombinationSet,
TransportFormatSet,
TransportLayerAddress,
UARFCN,
C-ID,
UL-CCTrCHInformation,
UL-CCTrCH-ID,
UL-DPCCH-SlotFormat,
UL-FP-Mode,
UL-InterferenceLevel,
UL-PunctureLimit,
UL-ScramblingCode,
UplinkBBSIR
FROM NBAP-IEs

ProtocolExtensionContainer{},
PrivateExtensionContainer{},
ProtocolIE-Container{},
ProtocolIE-ContainerList{},
NBAP-PROTOCOL-IES,
NBAP-PROTOCOL-EXTENSION,
NBAP-PRIVATE-EXTENSION
FROM NBAP-Containers

id-AICH-Information-ResourceStatIndItem,
id-AICH-ParametersList,

```

id-AICH-ParametersListItem,  
id-AllowedSlotFormatInformationListItem-CTCHreconf-Req-FDD,  
id-AllowedSlotFormatInformationListItem-CTCHsetup-Req-FDD,  
id-BlockingPriorityIndicator,  
id-CCTrCH-ParametersList,  
id-CCTrCH-ParametersListItem,  
id-CFN,  
id-CRNC-CommunicationContextID,  
id-CRNCCommunicationContextID,  
id-Cause,  
id-Cell-Information-ResourceStatIndItem,  
id-Cell-InformationItem,  
id-Cell-InformationList,  
id-Cell-Parameter,  
id-Cell-ParametersItem,  
id-Cell-ParametersList,  
id-CellParameter,  
id-CommonMeasurementObjectType,  
id-CommonMeasurementType,  
id-CommonPhysicalChannelID,  
id-CommonPhysicalChannelType-CTCHsetup-Req-FDD,  
id-CommonPhysicalChannelType-CTCHsetup-Response,  
id-CommunicationControlPort-InformationItem,  
id-CommunicationControlPortID,  
id-CommunicationControlPortInformation-ResourceStatIndItem,  
id-CommunicationControlPortInformationList,  
id-CompressesModeMethod,  
id-ConfigurationGenerationID,  
id-DCH-Add-RL-ReconfPrepFDDItem,  
id-DCH-Add-RL-ReconfPrepTDDItem,  
id-DCH-Add-RL-ReconfReadyItem,  
id-DCH-Add-RL-ReconfReqFDDItem,  
id-DCH-Add-RL-ReconfReqTDDItem,  
id-DCH-AddItem-RL-ReconfResp,  
id-DCH-AddList-RL-ReconfPrepFDD,  
id-DCH-AddList-RL-ReconfPrepTDD,  
id-DCH-AddList-RL-ReconfReqFDD,  
id-DCH-AddList-RL-ReconfReqTDD,  
id-DCH-Delete-RL-ReconfPrepFDDItem,  
id-DCH-Delete-RL-ReconfPrepTDDItem,  
id-DCH-Delete-RL-ReconfReqFDDItem,  
id-DCH-Delete-RL-ReconfReqTDDItem,  
id-DCH-DeleteList-RL-ReconfPrepFDD,  
id-DCH-DeleteList-RL-ReconfPrepTDD,  
id-DCH-DeleteList-RL-ReconfReqFDD,  
id-DCH-DeleteList-RL-ReconfReqTDD,  
id-DCH-Information-RL-SetupReqFDDItem,  
id-DCH-Information-RL-SetupReqTDDItem,  
id-DCH-InformationList-RL-SetupReqFDD,  
id-DCH-InformationList-RL-SetupReqTDD,  
id-DCH-InformationResponse-RL-SetupFailFDDItem,  
id-DCH-InformationResponse-RL-setupRestTDDItem,  
id-DCH-InformationResponseItem,

id-DCH-Modify-RL-ReconfPrepFDDItem,  
id-DCH-Modify-RL-ReconfPrepTDDItem,  
id-DCH-Modify-RL-ReconfReadyItem,  
id-DCH-Modify-RL-ReconfReqFDDItem,  
id-DCH-Modify-RL-ReconfReqTDDItem,  
id-DCH-ModifyItem-RL-ReconfResp,  
id-DCH-ModifyList-RL-ReconfPrepFDD,  
id-DCH-ModifyList-RL-ReconfPrepTDD,  
id-DCH-ModifyList-RL-ReconfReqFDD,  
id-DCH-ModifyList-RL-ReconfReqTDD,  
id-DL-CCTrCH-Information-RL-ReconfPrepTDDItem,  
id-DL-CCTrCH-Information-RL-ReconfReqTDDItem,  
id-DL-CCTrCH-Information-RL-SetupReqTDDItem,  
id-DL-CCTrCH-InformationItem,  
id-DL-CCTrCH-InformationList-RL-ReconfPrepTDD,  
id-DL-CCTrCH-InformationList-RL-ReconfReqTDD,  
id-DL-CCTrCH-InformationList-RL-SetupReqTDD,  
id-DL-CCTrCHInformationItem,  
id-DL-CCTrCHInformationList,  
id-DL-CodeInformation,  
id-DL-CodeInformation-RL-ReconfPrepFDDItem,  
id-DL-CodeInformation-RL-SetupReqFDDItem,  
id-DL-DPCH-Information-RL-ReconfPrepFDD,  
id-DL-DPCH-Information-RL-ReconfPrepTDDItem,  
id-DL-DPCH-Information-RL-SetupReqTDDItem,  
id-DL-DPCH-InformationItem,  
id-DL-DPCH-InformationItem-RL-ReconfReqFDD,  
id-DL-DPCH-InformationItem-RL-SetupReqFDD,  
id-DL-FrameType,  
id-DL-ReferencePowerInformationItem,  
id-DSCH-AddItem-RL-ReconfPrepFDD,  
id-DSCH-AddItem-RL-ReconfReqFDD,  
id-DSCH-DeleteItem-RL-ReconfPrepFDD,  
id-DSCH-DeleteItem-RL-ReconfReqFDD,  
id-DSCH-ID,  
id-DSCH-Information-RL-SetupReqFDDItem,  
id-DSCH-InformationList-RL-SetupReqFDD,  
id-DSCH-InformationResponse-RL-SetupFailFDDItem,  
id-DSCH-InformationResponse-RL-setupResFDDItem,  
id-DSCH-ModifyItem-RL-ReconfPrepFDD,  
id-DSCH-ModifyItem-RL-ReconfReqFDD,  
id-DedicatedMeasurementObjectType,  
id-DedicatedMeasurementType,  
id-FACH-Information-ResourceStatIndItem,  
id-FACH-InformationItem,  
id-FACH-ListItem,  
id-FACH-ParametersList-CTCHreconf-Req-FDD,  
id-FACH-ParametersList-CTCHreconf-Req-TTD,  
id-FACH-ParametersListItem-CTCHreconf-Req-FDD,  
id-FACH-ParametersListItem-CTCHreconf-Req-TTD,  
id-FACH-ParametersListItem-CTCHsetup-Req-FDD,  
id-FACH-ParametersListItem-CTCHsetup-Response,  
id-GapStartingSlotNumber,



id-IndicationType,  
id-Local-Cell-Information-ResourceStatIndItem,  
id-Local-CellInformation-ResourceStatIndItem,  
id-LocalCell-ID,  
id-LocalCell-InformationItem,  
id-LocalCellInformationList,  
id-MIB-SegmentInformationItem,  
id-MIB-SegmentInformationList,  
id-MaximumTransmissionPower,  
id-MeasuredCellInfo,  
id-MeasurementCharacteristics,  
id-MeasurementID,  
id-MeasurementType,  
id-NeighbouringFDD-Cell-InformationItem,  
id-NeighbouringTDD-Cell-InformationItem,  
id-NodeB-CommunicationContextID,  
id-PCCPCH-Information,  
id-PCH-Information-ResourceStatIndItem,  
id-PCH-InformationItem,  
id-PCH-ListItem,  
id-PCH-Parameters-CTCHreconf-Req-FDD,  
id-PCH-ParametersList,  
id-PCH-ParametersListItem,  
id-PICH-Parameters-CTCHreconf-Req-FDD,  
id-PRACH-ParametersList,  
id-PRACH-ParametersListItem,  
id-PSCH-Information,  
id-PSCHandPCCPCH-Information,  
id-PUSCH-ListItem,  
id-PatternDuration,  
id-PowerControlMode,  
id-PowerResumeMode,  
id-PrimaryCCPCH-Information,  
id-PrimaryCPICH-Information,  
id-PrimarySCH-Information,  
id-PrimaryScramblingCode,  
id-ProcedureScopeType,  
id-RACH-Information-ResourceStatIndItem,  
id-RACH-InformationItem,  
id-RL-ID,  
id-RL-Information,  
id-RL-Information-DMeasureReportItem,  
id-RL-Information-DMeasureRequestItem,  
id-RL-Information-DMeasureResponseItem,  
id-RL-Information-RL-ReconfPrepFDDItem,  
id-RL-Information-RL-SetupReqFDDItem,  
id-RL-InformationItem,  
id-RL-InformationItem-RL-SetupReqTDD,  
id-RL-InformationList,  
id-RL-InformationList-RL-ReconfReqFDD,  
id-RL-InformationList-RL-SetupReqFDD,  
id-RL-InformationResponse-RL-setupResFDDItem,  
id-RL-InformationResponseItem-RL-ReconfResp,

id-RL-InformationResponseList-RL-ReconfReady,  
id-RL-InformationResponseList-RL-ReconfReadyItem,  
id-RL-InformationResponseList-RL-ReconfResp,  
id-RL-InformationResponseList-RL-setupResFDD,  
id-RL-InformationResponseList-RL-setupResTDD,  
id-RL-ReconfigurationFailure-RL-ReconfFailItem,  
id-RL-ReconfigurationFailureList-RL-ReconfFail,  
id-RL-ResponseInformation,  
id-RL-ResponseInformationItem,  
id-RL-ResponseInformationList,  
id-RL-informationItem,  
id-RL-informationList,  
id-RadioLinkInformation-RL-ReconfPrepFDDItem,  
id-RadioLinkInformation-RL-ReconfPrepTDD,  
id-RadioLinkInformation-RL-ReconfReqTDD,  
id-RadioLinkInformationList-RL-ReconfPrepFDD,  
id-ReportCharacteristics,  
id-SFN,  
id-SIB-SegmentInformationItem,  
id-SIB-SegmentInformationList,  
id-ScramblingCodeChange,  
id-Secondary-CCPCHListItem,  
id-SecondaryCPICH-Information,  
id-SecondarySCH-Information,  
id-ShutdownTimer,  
id-Successful-RL-InformationResponse-RL-SetupFailFDDItem,  
id-Successful-RL-InformationResponseItem,  
id-Successful-RL-InformationResponseList,  
id-Successful-RL-InformationResponseList-RL-SetupFailFDD,  
id-SynchronisationMethod,  
id-T-Cell,  
id-TDDChipOffset,  
id-TimeSlotConfigurationItem,  
id-TimeSlotConfigurationList,  
id-TransmissionGapDistance,  
id-TransmissionGapPeriod,  
id-TransmitGapLength,  
id-TransmitGapPositionMode,  
id-UARFCN,  
id-C-ID,  
id-UL-CCTrCH-Information-RL-ReconfPrepTDDItem,  
id-UL-CCTrCH-Information-RL-ReconfReqTDDItem,  
id-UL-CCTrCH-Information-RL-SetupReqTDDItem,  
id-UL-CCTrCH-InformationItemIE,  
id-UL-CCTrCH-InformationList-RL-ReconfPrepTDD,  
id-UL-CCTrCH-InformationList-RL-ReconfReqTDD,  
id-UL-CCTrCH-InformationList-RL-SetupReqTDD,  
id-UL-CCTrCHInformation,  
id-UL-CCTrCHInformationList,  
id-UL-DPCH-Information-RL-ReconfPrepFDD,  
id-UL-DPCH-Information-RL-ReconfPrepTDDItem,  
id-UL-DPCH-Information-RL-SetupReqTDDItem,  
id-UL-DPCH-InformationItem-RL-ReconfReqFDD,

```

id-UL-DPCH-InformationItem-RL-SetupReqFDD,
id-UL-DPCH-InformationItemIE,
id-USCH-Information-ResourceStatIndItem,
id-USCH-InformationItem,
id-USCH-ListItem-CTCHsetup-Req-TDD,
id-Unsuccessful-RL-InformationResponse,
id-Unsuccessful-RL-InformationResponse-RL-SetupFailFDDItem,
id-Unsuccessful-RL-InformationResponseItem,
id-Unsuccessful-RL-InformationResponseItem-RL-SetupFailTDD,
id-Unsuccessful-RL-InformationResponseList,
id-Unsuccessful-RL-InformationResponseList-RL-SetupFailFDD,

```

```

maxAICHCell,
maxCCPinNodeB,
maxCellinNodeB,
maxFACHCell,
maxLocalCellinNodeB,
maxMIBSEG,
maxPCHCell,
maxPCHinNodeB,
maxRACHCell,
maxSF,
maxSIBSEG,
maxUCIDinNodeB,
maxUSCHCell,
maxnoCCTrCHs,
maxnoofCCTrCHs,
maxnoofDCHs,
maxnoofDLCodes,
maxnoofDPCHs,
maxnoofDSCHs,
maxnoofFACHCell,
maxnoofFACHs,
maxnoofFDDNeighbours,
maxnoofPCHs,
maxnoofPRACHs,
maxnoofPUSHs,
maxnoofRL-1,
maxnoofRL-2,
maxnoofRLs,
maxnoofSCCPCHs,
maxnoofTDDNeighbours,
maxnoofUSCHs

```

FROM NBAP-Constants;

[CR Editors note: Some text has been removed.](#)

```

-- *****
--
-- RADIO LINK SETUP REQUEST FDD
--
-- *****

```

```

RadioLinkSetupRequestFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container          {{RadioLinkSetupRequestFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer    {{RadioLinkSetupRequestFDD-Extensions}}
    ...
}

RadioLinkSetupRequestFDD-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-CRNC-CommunicationContextID      CRITICALITY ignore TYPE CRNC-CommunicationContextID PRESENCE mandatory }|
    { ID id-UL-DPCH-InformationItem-RL-SetupReq-FDD CRITICALITY ignore TYPE UL-DPCH-InformationItem-RL-SetupReq-FDD PRESENCE mandatory }|
    { ID id-DL-DPCH-InformationItem-RL-SetupReq-FDD CRITICALITY ignore TYPE DL-DPCH-InformationItem-RL-SetupReq-FDD PRESENCE mandatory }|
    { ID id-DCH-InformationList-RL-SetupReq-FDD CRITICALITY ignore TYPE DCH-InformationList-RL-SetupReq-FDD PRESENCE mandatory }|
    { ID id-RL-ID                               CRITICALITY ignore TYPE RL-ID                               PRESENCE optional }|
    { ID id-DSCH-ID                               CRITICALITY ignore TYPE DSCH-ID                               PRESENCE optional }|
    { ID id-DSCH-InformationList-RL-SetupReq-FDD CRITICALITY ignore TYPE DSCH-InformationList-RL-SetupReq-FDD PRESENCE optional }|
    { ID id-RL-InformationList-RL-SetupReq-FDD CRITICALITY ignore TYPE RL-InformationList-RL-SetupReq-FDD PRESENCE mandatory },
    ...
}

RadioLinkSetupRequestFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

UL-DPCH-InformationItem-RL-SetupReq-FDD ::= SEQUENCE {
    ul-ScramblingCode          UL-ScramblingCode,
    minUL-ChannelisationCodeLength MinUL-ChannelisationCodeLength,
    maxNumberOfUL-DPDCHs       MaxNumberOfUL-DPDCHs OPTIONAL
    -- This IE is present only if "Min UL Channelisation Code length" equals to 4 -- ,
    ul-PunctureLimit           UL-PunctureLimit,
    transportFormatCombinationSet TransportFormatCombinationSet,
    ul-DPCCH-SlotFormat         UL-DPCCH-SlotFormat,
    ul-EbNesIR-Target           UplinkEbNesIR,
    diversityMode               DiversityMode,
    d-FieldLength               D-FieldLength OPTIONAL
    -- This IE is present only if Feed Back mode diversity is activated -- ,
    sSDT-Cell-IDLength          SSDT-Cell-IDLength OPTIONAL,
    s-FieldLength               S-FieldLength OPTIONAL
}

DL-DPCH-InformationItem-RL-SetupReq-FDD ::= SEQUENCE {
    transportFormatCombinationSet TransportFormatCombinationSet,
    dl-DPCH-SlotFormat           DL-DPCH-SlotFormat,
    tFCI-SignallingMode          TFCI-SignallingMode,
    multiplexingPosition,         MultiplexingPosition,
    tFCI-Presence                 TFCI-Presence,
    powerOffsetInformationItem-RL-SetupReq-FDD
        PowerOffsetInformationItem-RL-SetupReq-FDD,
    deltaTPC                      DeltaTPC
}

PowerOffsetInformationItem-RL-SetupReq-FDD ::= SEQUENCE {
    pO1          PowerOffset,
    pO2          PowerOffset,
}

```

```

    p03                PowerOffset
}

DCH-InformationList-RL-SetupReq-FDD ::= SEQUENCE (SIZE (1..maxnoofDCHs)) OF
    ProtocolIE-Container{{DCH-Information-RL-SetupReq-FDDItemIE }}

DCH-Information-RL-SetupReq-FDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DCH-Information-RL-SetupReq-FDDItem CRITICALITY ignore TYPE DCH-Information-RL-SetupReq-FDDItem PRESENCE mandatory },
    ...
}

DCH-Information-RL-SetupReq-FDDItem ::= SEQUENCE {
    dCH-ID                DCH-ID,
    dCH-CombinationIndication DCH-CombinationIndication OPTIONAL,
    rLC-Mode                RLC-Mode,
    ul-TransportFormatSet    TransportFormatSet,
    dl-TransportFormatSet    TransportFormatSet,
    frameHandlingPriority    FrameHandlingPriority,
    payloadCRC-PresenceIndicator PayloadCRC-PresenceIndicator,
    ul-FP-Mode                UL-FP-Mode,
    toAWS                    ToAWS,
    toAWE                    ToAWE
}

DSCH-InformationList-RL-SetupReq-FDD ::= SEQUENCE (SIZE (1..maxnoofDSCHs)) OF
    ProtocolIE-Container{{DSCH-Information-RL-SetupReq-FDDItemIE }}

DSCH-Information-RL-SetupReq-FDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DSCH-Information-RL-SetupReq-FDDItem CRITICALITY ignore TYPE DSCH-Information-RL-SetupReq-FDDItem PRESENCE mandatory },
    ...
}

DSCH-Information-RL-SetupReq-FDDItem ::= SEQUENCE {
    dSCH-ID                DSCH-ID,
    dSCH-TransportFormatSet DSCH-TransportFormatSet,
    frameHandlingPriority    FrameHandlingPriority,
    toAWS                    ToAWS,
    toAWE                    ToAWE
}

RL-InformationList-RL-SetupReq-FDD ::= SEQUENCE (SIZE (1..maxnoofRLs)) OF
    ProtocolIE-Container{{RL-Information-RL-SetupReq-FDDItemIE }}

RL-Information-RL-SetupReq-FDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-RL-Information-RL-SetupReq-FDDItem CRITICALITY ignore TYPE RL-Information-RL-SetupReq-FDDItem PRESENCE optional },
    ...
}

RL-Information-RL-SetupReq-FDDItem ::= SEQUENCE {
    rL-ID                RL-ID,
    c-ID                  C-ID,
    frameOffset            FrameOffset,
    chipOffset              ChipOffset,
}

```

```

propagationDelay      PropagationDelay,
diversityControlField DiversityControlField OPTIONAL,
-- This IE is present only if the RL is not the first one in the RL Information
dl-CodeInformationList-RL-SetupReqFDD      DL-CodeInformationList-RL-SetupReqFDD,
initialDL-transmissionPower DL-Power,
maximumDL-power      DL-Power,
minimumDL-power      DL-Power,
sSDT-CellIdentity    SSDT-CellIdentity OPTIONAL
}

DL-CodeInformationList-RL-SetupReqFDD ::= SEQUENCE (SIZE (1..maxnoofRLs)) OF
  ProtocolIE-Container{{DL-CodeInformation-RL-SetupReqFDDItemIE }}

DL-CodeInformation-RL-SetupReqFDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DL-CodeInformation-RL-SetupReqFDDItem CRITICALITY ignore TYPE DL-CodeInformation-RL-SetupReqFDDItem PRESENCE optional },
  ...
}

DL-CodeInformation-RL-SetupReqFDDItem ::= SEQUENCE {
  dl-ScramblingCode      DL-ScramblingCode,
  fdd-DL-ChannelisationCodeNumber FDD-DL-ChannelisationCodeNumber
}

CR Editors note: Some text has been removed.

-- *****
--
-- RADIO LINK RECONFIGURATION PREPARE FDD
--
-- *****

RadioLinkReconfigurationPrepareFDD ::= SEQUENCE {
  protocolIEs      ProtocolIE-Container  {{RadioLinkReconfigurationPrepareFDD-IEs}},
  protocolExtensions ProtocolExtensionContainer {{RadioLinkReconfigurationPrepareFDD-Extensions}} OPTIONAL,
  ...
}

RadioLinkReconfigurationPrepareFDD-IEs NBAP-PROTOCOL-IES ::= {
  { ID id-NodeB-CommunicationContextID CRITICALITY ignore TYPE NodeB-CommunicationContextID PRESENCE mandatory } |
  { ID id-UL-DPCH-Information-RL-ReconfPrepFDD CRITICALITY ignore TYPE UL-DPCH-Information-RL-ReconfPrepFDD PRESENCE optional } |
  { ID id-DL-DPCH-Information-RL-ReconfPrepFDD CRITICALITY ignore TYPE DL-DPCH-Information-RL-ReconfPrepFDD PRESENCE optional } |
  { ID id-DCH-ModifyList-RL-ReconfPrepFDD CRITICALITY ignore TYPE DCH-ModifyList-RL-ReconfPrepFDD PRESENCE optional } |
  { ID id-DCH-AddList-RL-ReconfPrepFDD CRITICALITY ignore TYPE DCH-AddList-RL-ReconfPrepFDD PRESENCE optional } |
  { ID id-DCH-DeleteList-RL-ReconfPrepFDD CRITICALITY ignore TYPE DCH-DeleteList-RL-ReconfPrepFDD PRESENCE optional } |
  { ID id-DSCH-ModifyItem-RL-ReconfPrepFDD CRITICALITY ignore TYPE DSCH-ModifyItem-RL-ReconfPrepFDD PRESENCE optional } |
  { ID id-DSCH-AddItem-RL-ReconfPrepFDD CRITICALITY ignore TYPE DSCH-AddItem-RL-ReconfPrepFDD PRESENCE optional } |
  { ID id-DSCH-DeleteItem-RL-ReconfPrepFDD CRITICALITY ignore TYPE DSCH-DeleteItem-RL-ReconfPrepFDD PRESENCE optional } |
  { ID id-RadioLinkInformationList-RL-ReconfPrepFDD CRITICALITY ignore TYPE RadioLinkInformationList-RL-ReconfPrepFDD PRESENCE optional }
},
...
}

```

```

RadioLinkReconfigurationPrepareFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

UL-DPCH-Information-RL-ReconfPrepFDD ::= SEQUENCE {
    ul-ScramblingCode          UL-ScramblingCode          OPTIONAL,
    ul-SIR-Target              UplinkSIR                 OPTIONAL,
    minUL-ChannelisationCodeLength  MinUL-ChannelisationCodeLength  OPTIONAL,
    maxNrOfUL-DPDCHs              MaxNrOfUL-DPDCHs              OPTIONAL
    -- This IE is present only if minUL-ChannelisationCodeLength equals to 4
    ul-PunctureLimit              UL-PunctureLimit              OPTIONAL,
    tFCS                          TFCS                          OPTIONAL,
    ul-DPCCH-SlotFormat            UL-DPCCH-SlotFormat            OPTIONAL,
    sSDT-CellIdentityLength        SSDT-CellIdentityLength        OPTIONAL,
    s-FieldLength                  S-FieldLength                  OPTIONAL,
    -- The following information element is needed if there is a need to add Ies      with specific criticality.
}

DL-DPCH-Information-RL-ReconfPrepFDD ::= SEQUENCE {
    tFCS                          TFCS                          OPTIONAL,
    dl-DPCH-SlotFormat            DL-DPCH-SlotFormat            OPTIONAL,
    tFCI-SignallingMode           TFCI-SignallingMode           OPTIONAL,
    tFCI-Presence                  TFCI-Presence                  OPTIONAL,
    dTX-InsertionPoint            DTX-InsertionPoint            OPTIONAL,
    ...
}

DCH-ModifyList-RL-ReconfPrepFDD ::= SEQUENCE (SIZE (1..maxnoofDCHs)) OF
    ProtocolIE-Container {{DCH-Modify-RL-ReconfPrepFDDItemIE }}

DCH-Modify-RL-ReconfPrepFDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DCH-Modify-RL-ReconfPrepFDDItem CRITICALITY ignore      TYPE DCH-Modify-RL-ReconfPrepFDDItem  PRESENCE optional  },
    ...
}

DCH-Modify-RL-ReconfPrepFDDItem ::= SEQUENCE {
    dCH-ID                        DCH-ID,
    ul-TransportFormatSet         TransportFormatSet  OPTIONAL,
    dl-TransportFormatSet         TransportFormatSet  OPTIONAL,
    frameHandlingPriority         FrameHandlingPriority  OPTIONAL,
    ul-FP-Mode                    UL-FP-Mode          OPTIONAL,
    toAWS                          ToAWS              OPTIONAL,
    toAWE                          ToAWE              OPTIONAL
}

DCH-AddList-RL-ReconfPrepFDD ::= SEQUENCE (SIZE (1..maxnoofDCHs)) OF
    ProtocolIE-Container {{DCH-Add-RL-ReconfPrepFDDItemIE }}

DCH-Add-RL-ReconfPrepFDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DCH-Add-RL-ReconfPrepFDDItem CRITICALITY ignore      TYPE DCH-Add-RL-ReconfPrepFDDItem  PRESENCE optional  },
    ...
}

```

```

DCH-Add-RL-ReconfPrepFDDItem ::= SEQUENCE {
    dCH-ID                DCH-ID,
    dCH-CombinationIndication  DCH-CombinationIndication  OPTIONAL,
    rLC-Mode              RLC-Mode,
    ul-TransportFormatSet  TransportFormatSet,
    dl-TransportFormatSet  TransportFormatSet,
    frameHandlingPriority  FrameHandlingPriority,
    payloadCRC-PresenceIndicator  PayloadCRC-PresenceIndicator,
    ul-FP-Mode            UL-FP-Mode,
    toAWS                 ToAWS,
    toAWE                 ToAWE
}

DCH-DeleteList-RL-ReconfPrepFDD ::= SEQUENCE (SIZE (1..maxnoofDCHs)) OF
    ProtocolIE-Container {{DCH-Delete-RL-ReconfPrepFDDItemIE }}

DCH-Delete-RL-ReconfPrepFDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DCH-Delete-RL-ReconfPrepFDDItem CRITICALITY ignore      TYPE DCH-Delete-RL-ReconfPrepFDDItem  PRESENCE optional  },
    ...
}

DCH-Delete-RL-ReconfPrepFDDItem ::= SEQUENCE {
    dCH-ID                DCH-ID
}

DSCH-ModifyItem-RL-ReconfPrepFDD ::= SEQUENCE {
    dl-TransportFormatSet  TransportFormatSet  OPTIONAL,
    rL-ID                  RL-ID              OPTIONAL,
    frameHandlingPriority  FrameHandlingPriority  OPTIONAL,
    toAWS                  ToAWS              OPTIONAL,
    toAWE                  ToAWE              OPTIONAL
}

DSCH-AddItem-RL-ReconfPrepFDD ::= SEQUENCE {
    dl-TransportFormatSet  TransportFormatSet,
    rL-ID                  RL-ID,
    frameHandlingPriority  FrameHandlingPriority,
    toAWS                  ToAWS,
    toAWE                  ToAWE
}

DSCH-DeleteItem-RL-ReconfPrepFDD ::= SEQUENCE {
    rL-ID                  RL-ID
}

RadioLinkInformationList-RL-ReconfPrepFDD ::= SEQUENCE (SIZE (1..maxnoofRLs)) OF
    ProtocolIE-Container {{RadioLinkInformation-RL-ReconfPrepFDDItemIE}}

RadioLinkInformation-RL-ReconfPrepFDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-RadioLinkInformation-RL-ReconfPrepFDDItem CRITICALITY ignore      TYPE RadioLinkInformation-RL-ReconfPrepFDDItemPRESENCE
    mandatory},
    ...
}

```



```

}

RadioLinkInformation-RL-ReconfPrepFDDItem ::= SEQUENCE {
    rL-ID                RL-ID,
    dl-CodeInformationList-RL-ReconfPrepFDD                DL-CodeInformationList-RL-ReconfPrepFDD    OPTIONAL,
    maxDL-Power          DL-Power                OPTIONAL,
    minDL-Power          DL-Power                OPTIONAL,
    sSDT-Indication      SSDT-Indication        OPTIONAL,
    sSDT-CellIdentity    SSDT-CellIdentity      OPTIONAL
-- The IE may be present if the SSDT Indication is set to SSDT Active in the UE
}

DL-CodeInformationList-RL-ReconfPrepFDD ::= SEQUENCE (SIZE (1..maxnoofDLCodes)) OF
    ProtocolIE-Container {{DL-CodeInformation-RL-ReconfPrepFDDItemIE }}

DL-CodeInformation-RL-ReconfPrepFDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DL-CodeInformation-RL-ReconfPrepFDDItem CRITICALITY ignore  TYPE DL-CodeInformation-RL-ReconfPrepFDDItem  PRESENCE optional },
    ...
}

DL-CodeInformation-RL-ReconfPrepFDDItem ::= SEQUENCE {
    scramblingCode      ScramblingCode  OPTIONAL,
    fdd-DL-ChannelisationCodeNumber    FDD-DL-ChannelisationCodeNumber  OPTIONAL
}

```

[CR Editors note: Some text has been removed.](#)

```

-- *****
--
-- COMPRESSED MODE PREPARE FDD
--
-- *****

CompressedModePrepareFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{CompressedModePrepareFDD-IEs}},
    protocolExtensions  ProtocolExtensionContainer {{CompressedModePrepareFDD-Extensions}}    OPTIONAL,
    ...
}

CompressedModePrepareFDD-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-NodeB-CommunicationContextID    CRITICALITY ignore    TYPE NodeB-CommunicationContextID  PRESENCE mandatory } |
    { ID id-TGP1                            CRITICALITY ignore    TYPE TGP1                        PRESENCE mandatory } |
    { ID id-TGP2                            CRITICALITY ignore    TYPE TGP2                        PRESENCE optional } |
    { ID id-TGL                             CRITICALITY ignore    TYPE TGL                         PRESENCE mandatory } |
    { ID id-TGD                             CRITICALITY ignore    TYPE TGD                         PRESENCE mandatory } |
    { ID id-UL-DL-CompressedModeSeletion    CRITICALITY ignore    TYPE UL-DL-CompressedModeSeletion  PRESENCE mandatory } |
    { ID id-CompessesModeMethod             CRITICALITY ignore    TYPE CompessesModeMethod          PRESENCE mandatory } |
    { ID id-GapPositionMode                 CRITICALITY ignore    TYPE GapPositionMode              PRESENCE mandatory } |
    { ID id-SN                              CRITICALITY ignore    TYPE SN                           PRESENCE optional } |
    -- This IE is present if Gap position mode = 'flexible position'--
    { ID id-DL-FrameType                    CRITICALITY ignore    TYPE DL-FrameType                 PRESENCE mandatory } |
    { ID id-ScramblingCodeChange            CRITICALITY ignore    TYPE ScramblingCodeChange         PRESENCE optional } |
    -- This IE is present if Compressed mode method = 'SF/2' --
}

```

```

{ ID id-PowerControlMode      CRITICALITY ignore      TYPE PowerControlMode      PRESENCE mandatory } |
{ ID id-PowerResumeMode       CRITICALITY ignore      TYPE PowerResumeMode       PRESENCE mandatory } |
{ ID id-UL-DeltaEb-NeSIR    CRITICALITY ignore      TYPE UL-DeltaEb-NeSIR    PRESENCE mandatory } |
{ ID id-UL-DeltaEb-NeSIRAfter  CRITICALITY ignore      TYPE UL-DeltaEb-NeSIRAfter  PRESENCE mandatory },
...
}

CompressedModePrepareFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
...
}

```

## 9.3.4 NBAP Information Elements

```

--*****
--
-- Information Element Definitions
--
--*****

```

CR Editors note: Some text has been removed.

```

-----
-- U
-----

```

```

UARFCN ::= INTEGER (174 .. 474)

```

```

UL-DL-CompressedModeSelection ::= ENUMERATED {
ul-only,
dl-only,
both-UandDL
}

```

```

UL-DPCH-SlotFormat ::= INTEGER (0..5)

```

```

UL-EbNSIR ::= INTEGER (0..255)
-- Resolution is 0.1 dB, range 0-25.5 dB According to mapping in 25.427

```

```

UL-FP-Mode ::= ENUMERATED {
normal,
silent
}

```

```

-- unit dBm, step 0.1dBm
UL-InterferenceLevel ::= INTEGER (-128..60)

```

```

UL-PunctureLimit ::= INTEGER (0..100)

```

```

UL-ScramblingCode ::= SEQUENCE {
    uL-ScramblingCodeNumber    UL-ScramblingCodeNumber,
    uL-ScramblingCodeLength    UL-ScramblingCodeLength
}

```

```

-- 2^24
UL-ScramblingCodeLength ::= INTEGER (0..16777215)

```

```

UL-ScramblingCodeNumber ::= ENUMERATED {
short,
long
}

```

```
UplinkDeltaEb-NeSIR ::= ENUMERATED {  
deltaEb-NeSIR-6dB,  
...  
}  
  
UplinkDeltaEb-NeSIR-after ::= ENUMERATED {  
deltaEb-NeSIR-after-6dB,  
...  
}  
  
END
```

<b>CHANGE REQUEST</b>		Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.
<b>25.433</b>	<b>CR 015</b>	Current Version: <b>3.0.0</b>
GSM (AA.BB) or 3G (AA.BBB) specification number ↑	↑ CR number as allocated by MCC support team	
For submission to: <b>TSG RAN #7</b> <small>list expected approval meeting # here ↑</small>	for approval for information <input checked="" type="checkbox"/>	strategic <input type="checkbox"/> non-strategic <input type="checkbox"/> <small>(for SMG use only)</small>

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: <ftp://ftp.3gpp.org/Information/CR-Form-v2.doc>

**Proposed change affects:** (U)SIM  ME  UTRAN / Radio  Core Network   
(at least one should be marked with an X)

**Source:** TSG-RAN WG3 **Date:** January 2000

**Subject:** TPC Step Size defined for TDD

**Work item:**

<b>Category:</b>	F Correction <input checked="" type="checkbox"/> A Corresponds to a correction in an earlier release <input type="checkbox"/> B Addition of feature <input type="checkbox"/> C Functional modification of feature <input type="checkbox"/> D Editorial modification <input type="checkbox"/>	<b>Release:</b>	Phase 2 <input type="checkbox"/> Release 96 <input type="checkbox"/> Release 97 <input type="checkbox"/> Release 98 <input type="checkbox"/> Release 99 <input checked="" type="checkbox"/> Release 00 <input type="checkbox"/>
------------------	--	-----------------	--

(only one category shall be marked with an X)

**Reason for change:** Definition of TPC Step size for TDD messages as per the WG1 specifications

**Clauses affected:**

<b>Other specs affected:</b>	Other 3G core specifications <input type="checkbox"/> → List of CRs: Other GSM core specifications <input type="checkbox"/> → List of CRs: MS test specifications <input type="checkbox"/> → List of CRs: BSS test specifications <input type="checkbox"/> → List of CRs: O&M specifications <input type="checkbox"/> → List of CRs:	
------------------------------	--	--

**Other comments:**

## 9.1.35 RADIO LINK SETUP REQUEST

## 9.1.35.1 FDD message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context ID	M			
Transaction ID	M			
<b>UL DPCH Information</b>		1		
UL Scrambling Code	M			
Min UL Channelisation Code length	M			
Max Number of UL DPDCHs	C – CodeLen			
puncture limit	M			For UL
Transport Format Combination Set	M			for UL
UL DPCCCH Slot Format	M			
UL Eb/No Target	M		Uplink Eb/No	
Diversity mode	M			
D Field Length	C – FB			
SSDT cell ID Length	O			
S Field Length	O			
<b>DL DPCH Information</b>				
Transport Format Combination Set	M			For DL
DL DPCH Slot Format	M			
TFCI signalling mode	M			
TFCI presence	C- SlotFormat			
Multiplexing Position	M			
<b>Power Offset Information</b>		1		
PO1	M		Power Offset	Power offset for the TFCI bits
PO2	M		Power Offset	Power offset for the TPC bits
PO3	M		Power Offset	Power offset for the pilot bits
<a href="#">Delta TPC FDD TPC DL Step Size</a>	M			
<b>DCH Information</b>		1 to <maxnoofDCHs>		
DCH ID	M			
DCH Combination Ind	O			
RLC mode	M			
Transport Format Set	M			For UL
Transport Format Set	M			For DL
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP mode	M			
ToAWS	M			
ToAWE	M			
RL ID	O			RL Supporting the DSCH
DSCH TFCS	O			

<b>DSCH Information</b>		0 to <maxnoofDSCHs >		
DSCH ID	M			
Transport Format Set	M			For DSCH
Frame handling Priority	M			
ToAWS	M			
ToAWE	M			
<b>RL Information</b>		1 to <maxnoofRLs>		
RL ID	M			
C-ID	M			
Frame Offset	M			
Chip Offset	M			
Propagation Delay	O			
Diversity Control Field	C – NotFirstRL			
<b>DL Code Information</b>		1 to <maxnoof- DLCodes		
DL Scrambling Code	M			
FDD DL Channelisation Code Number	M			
Initial DL transmission Power	M		DL Power	
Maximum DL power	M		DL Power	
Minimum DL power	M		DL Power	
SSTD Cell Identity	O			

<b>Condition</b>	<b>Explanation</b>
CodeLen	This IE is present only if "Min UL Channelisation Code length" equals to 4
FB	This IE is present only if Feed Back mode diversity is activated.
NotFirstRL	This IE is present only if the RL is not the first one in the RL Information.
SlotFormat	This IE is only present if the DL DPCH slot format is equal to any of the value 12 to 16.

<b>Range bound</b>	<b>Explanation</b>
MaxnoofDSCHs	Maximum no. of DSCHs for one UE.
MaxnoofDCHs	Maximum no. of DCHs for one UE.
MaxnoofRLs	Maximum no. of RLs for one UE.
MaxnoofDLCodes	Maximum no. of DL code information.

## 9.1.35.2 TDD message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context ID	M			
Transaction ID	M			
<b>UL CCTrCH Information</b>		0 to <maxno CCTrCH>		
CCTrCH ID	M			
Transport Format Combination Set	M			
TFCI Coding	M			
Puncture Limit	M			
<b>UL DPCH Information</b>		0 to <maxnoOfDPCH>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
<b>DL CCTrCH Information</b>		0 to <maxno CCTrCH>		
CCTrCH ID	M			
Transport Format Combination Set	M			
TFCI Coding	M			
Puncture Limit	M			
<a href="#">TDD TPC DL Step Size</a>	<a href="#">M</a>			
<b>DL DPCH information</b>		0 to <maxnoOfDPCH>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
<b>DCH Information</b>		1 to <maxnoofDCHs>		
DCH ID	M			
RLC mode	M			
CCTrCH ID	M			UL CCTrCH in which the DCH is mapped
CCTrCH ID	M			DL CCTrCH in which the DCH is mapped
DCH Combination Ind	O			
Transport Format Set	M			For UL
Transport Format Set	M			For DL



Frame Handling Priority	O			
Payload CRC Presence Indicator	M			
UL FP mode	M			
ToAWS	M			
ToAWE	M			
<b>DSCH Information</b>		0 to <MaxnoofDSCHs >		
DSCH ID	M			
CCTrCH ID	M			DL CCTrCH in which the DSCH is mapped
Transport Format Set	M			For DSCH
Frame handling Priority	M			
ToAWS	M			
ToAWE	M			
<b>USCH Information</b>		0 to <MaxnoofUSCHs >		
USCH ID	M			
CCTrCH ID	M			UL CCTrCH in which the USCH is mapped
Transport Format Set	M			For USCH
<b>RL Information</b>		1		
RL ID	M			
C-ID	M			
Frame TDD Physical Channel Offset	M			
Initial DL transmission Power	M		DL Power	
Maximum DL power	M		DL Power	
Minimum DL power	M		DL Power	

Range bound	Explanation
MaxnoofDCHs	Maximum no. of DCHs for one UE.
maxnoOfDPCH	Maximum number of DPCH in one CCTrCH
maxnoCCTrCH	no. of CCTrCH for one UE.
MaxnoofDSCHs	Maximum number of DSCH for one UE
MaxnoofUSCHs	Maximum number of USCH for one UE

### 9.2.2.13 FDD S-CCPCH Offset

The Secondary CCPCH offset is defined as the time offset towards the Primary CCPCH in the cell. The offset is a multiple of 256 chips.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
FDD S-CCPCH Offset			INTEGER(0..149)	0: 0 chip 1: 256 chip 2: 512 chip .. 149: 38144 chip [TS 25.211]

### 9.2.2.14 FDD TPC DL step size

[This parameter indicates step size for the DL power adjustment.](#)

<a href="#">IE/Group Name</a>	<a href="#">Presence</a>	<a href="#">Range</a>	<a href="#">IE type and reference</a>	<a href="#">Semantics description</a>
<a href="#">FDD TPC Downlink step size</a>			<a href="#">ENUMERATED (0.5, 1)</a>	

### 9.2.2.159.2.2.14 Gap Period

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Gap Period			INTEGER(0..255)	Frames

### 9.2.2.169.2.2.15 Gap Position Mode

The gap position can be fixed or adjustable, as defined in TS 25.212.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Gap Position Mode			ENUMERATED (Fixed, Flexible)	

### 9.2.2.179.2.2.16 Maximum Number of UL DPDCHs

This parameter is an UE Radio Access Capability parameter which is needed in rate matching algorithm.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Max Number of UL DPDCHs			INTEGER (1..6)	

### 9.2.2.189.2.2.17 Minimum UL Channelisation Code Length

Minimum UL channelisation code length (spreading factor) of a DPDCH which is supported by UE. Needed by rate matching algorithm.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Min UL Channelisation Code length			ENUMERATED(4,8,16,32,64,128,256)	

### [9.2.2.199.2.2.18](#) Pattern Duration (PD)

IE/Group Name	Presence	Range	IE type and reference	Semantics description
PD			INTEGER(0..2047, ...)	Frames

### [9.2.2.209.2.2.19](#) PICH Mode

The number of paging indicators (PIs) in a PICH frame.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
PICH Mode			Enumerated(18, 36, 72, 144)	Number of PI per frame

### [9.2.2.219.2.2.20](#) Pilot Bits Used Indicator

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Pilot Bits Used Indicator			ENUMERATED(Pilot Bits Used, Pilot Bits not Used)	

### [9.2.2.229.2.2.21](#) Power Control Mode

Power Control Mode specifies the uplink power mode applied during recovery period after each transmission gap in compressed mode. PCM can take 2 values (0 or 1). The different power control modes are described in TS 25.214.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Power Control Mode			ENUMERATED(0, 1,..)	

### [9.2.2.239.2.2.22](#) Power Offset

This IE defines a power offset respect the Downlink transmission power of a DPCH.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Power Offset			INTEGER(0..24)	Step 0.25 dB, range 0-6 dB

[9.2.2.249-2.2-23](#) Power Resume Mode

Power Resume Mode selects the uplink power control method to calculate the initial transmit power after the gap. PRM can take two values (0 or 1) and is described in TS 25.214.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Power Resume Mode			ENUMERATED (0, 1,..)	Described in TS 25.214

[9.2.2.259-2.2-24](#) Preamble Signature

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Preamble Signatures			BIT STRING (16)	Bit 0=P0 Bit 1=P1 .. Bit 15=P15 [25.213]

[9.2.2.269-2.2-25](#) Primary Scrambling code

The Primary scrambling code to be used in the cell.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Primary Scrambling Code			Integer (0 .. 511)	

[9.2.2.279-2.2-26](#) Primary CPICH Power

Primary CPICH power is the power that shall be used for transmitting the P-CPICH in a cell.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Primary CPICH power			Enumerated (-15, .., 40)	Unit dBm Granularity 0.1 dB

[9.2.2.289-2.2-27](#) Propagation Delay

Propagation delay is the one-way propagation delay of the radio signal from the MS to the Node B.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Propagation Delay			INTEGER (0..255)	Chips. Step size is 3 chips. 0=0 chips, 1=3 chips, ...

[9.2.2.299-2.2-28](#) RACH Slot Format

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
RACH Slot Format			ENUMERATED(0..3)	See 25.211.

[9.2.2.309.2.2.29](#) RACH sub Channel numbers

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
RACH Sub Channel Numbers			BIT STRING (15)	Bit 0=Sub Channel Number 0 Bit 1=Sub Channel Number 1 ... Bit 14=Sub Channel Number 14

[9.2.2.319.2.2.30](#) Scrambling code change

This parameter indicates whether the alternative scrambling code is used for compressed mode method 'SF/2'.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Scrambling Code Change			ENUMERATED (Change, No change)	

[9.2.2.329.2.2.31](#) Scrambling Code Word Number

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Scrambling Code Word Number			INTEGER (0..255)	

[9.2.2.339.2.2.32](#) Secondary CCPCH Slot Format

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Secondary CCPCH Slot Format			INTEGER(0..8)	

[9.2.2.349.2.2.33](#) S-Field Length

The UE uses the S Field of the UL DPCCH slot to send the SSST Cell ID to the network.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
S Field Length			ENUMERATED (1, 2)	

[9.2.2.359.2.2.34](#) SSST Cell Identity

The SSST Cell ID is a temporary ID for SSST assigned to a cell.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SSST Cell Identity			ENUMERATED (a, b.., h)	

[9.2.2.369.2.2.35](#) SSST Cell ID Length

The SSST Cell ID Length parameter shows the length of the SSST Cell ID.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Cell ID Length			ENUMERATED (Short, Medium, Long)	

### [9.2.2.379.2-2-36](#) SSDD Support Indicator

The SSDD Support Indicator indicates whether a RL supports SSDD or not.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SSDD Support Indicator			ENUMERATED (SSDD Supported, SSDD not supported).	

### [9.2.2.389.2-2-37](#) SSDD Indication

The SSDD Indication indicates whether SSDD is in use by the UE or not.

Information Element/Group name	Presence	Range	IE type and reference	Semantics description
SSDD Indication			ENUMERATED (SSDD Active in the UE, SSDD not Active in the UE)	

### [9.2.2.399.2-2-38](#) STTD Indicator

Indicates if STTD shall be active or not.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
STTD Indicator			ENUMERATED (active, inactive)	

### [9.2.2.409.2-2-39](#) T\_Cell

Timing delay used for defining start of SCH, CPICH and the DL scrambling code(s) in a cell relative BFN. Resolution 256 chips.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
T_Cell			Enumerated (0, 1, ...,9)	0: 0 chip 1: 256 chip .. 9: 2304 chip [TS 25.402]

**9.2.2.419.2.2.40** TFCI signalling mode

This parameter indicates if the normal or split mode is used for the TFCI.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TFCI signalling mode			ENUMERATED (Normal, Split)	

**9.2.2.429.2.2.41** TGD

Transmission Gap Distance is the duration of transmission between two consecutive transmission gaps within a transmission gap period, expressed in number of frames. In case there is only one transmission gap in the transmission gap period, this parameter shall be set to zero.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TGD			INTEGER(0..255)	Frames

**9.2.2.439.2.2.42** TGL

Transmission Gap Length is the duration of no transmission, expressed in number of slots.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TGL			INTEGER (3,4,7,10,14)	Slot

**9.2.2.43** TPC DL step size

This parameter indicates step size for the DL power adjustment.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TPC Downlink step size			ENUMERATED (0.5, 1)	

### 9.2.3.19 TDD S-CCPCH Offset

The Secondary CCPCH offset is defined as the time offset towards the Primary CCPCH in the cell.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
TDD S-CCPCH Offset			INTEGER(0.. 63)	

### 9.2.3.20 TDD TPC DL step size

This parameter indicates step size for the DL power adjustment.

<a href="#">IE/Group Name</a>	<a href="#">Presence</a>	<a href="#">Range</a>	<a href="#">IE type and reference</a>	<a href="#">Semantics description</a>
<a href="#">TDD TPC Downlink step size</a>			<a href="#">ENUMERATED (1, 2, 3)</a>	

### 9.2.3.219-2-3-20 TFCI Coding

The TFCI Coding describes the way how the TFCI bits are coded. By default 1 TFCI bit is coded with 4 bits, 2 TFCI bits are coded with 8 bits, 3-5 TFCI bits are coded with 16 bits and 6-10 TFCI bits are coded with 32 bits.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
TFCI Coding			Enumerated (4, 8, 16, 32)	

### 9.2.3.229-2-3-21 Time Slot

The Time Slot represents the minimum time interval inside a Radio Frame that can be assigned to a Physical Channel.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Time Slot			INTEGER (0..14)	

### 9.2.3.239-2-3-22 Time Slot Direction

This parameter indicates whether the TS in the cell is used in Uplink or Downlink direction.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Time Slot Direction			Enumerated (UL, DL)	

### 9.2.3.249-2-3-23 Time Slot Status

This parameter indicates whether the TS in the cell is active or not.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Time Slot Status			Enumerated (active, notActive)	



[9.2.3.259-2.3-24](#) Transmission Diversity Applied

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Transmission Diversity Applied			Boolean	

[9.2.3.269-2.3-25](#) USCH ID

The USCH ID uniquely identifies a USCH within a Node B Communication Context.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
USCH ID			INTEGER (0..255)	

### 9.3.3 NBAP PDU Content Definitions

```

-- *****
--
-- PDU definitions for NBAP.
--
-- *****

NBAP-PDU-Contents -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

-- *****
--
-- IE parameter types from other modules.
--
-- *****

IMPORTS
    AICH-InformationList,
    AICH-Parameters,
    AICH-Power,
    AICH-TransmissionTiming,
    AddOrDeleteIndicator,
    AvailabilityStatus,
    BindingID,
    BlockingPriorityIndicator,
    BurstType,
    CCTrCH-ID,
    CFN,
    CN-CSDomainIdentifier,
    CN-PSDomainIdentifier,
    CRNC-CommunicationContextID,
    Cause,
    CellParameter,
    Cell-Parameter,
    ChipOffset,
    CommonMeasurementType,
    CommonPhysicalChannelID,
    CommonPhysicalChannelType,
    CommonTransportChannelID,
    CommonTransportChannelType,
    CommunicationControlPortID,
    CommunicationControlPortInformationList,
    CompressesModeMethod,
    ConfigurationGenerationID,
    DCH-CombinationIndication,
    DCH-Delete-RL-ReconfReqTDDItem,

```

DCH-ID,  
DCH-InformationResponse-RL-setupResFDD,  
DCH-Modify-RL-ReconfPrepTDDItem,  
DL-CCTrCH-ID,  
DL-CodeInformation,  
DL-DPCH-InformationItem-RL-ReconfReqFDD,  
DL-DPCH-SlotFormat,  
DL-FrameType,  
DL-Power,  
DL-ReferencePower,  
DL-ReferencePowerInformationItem,  
DL-ScramblingCode,  
DPCH-ID,  
DPCH-Offset,  
DSCH-ID,  
DSCH-InformationResponse-RL-setupResFDD,  
DSCH-ModifyList-RL-ReconfResp,  
DSCH-SetupList-RL-ReconfResp,  
DSCH-TransportFormatSet,  
DTX-InsertionPoint,  
DTX-InsertionPosition,  
D-FieldLength,  
DedicatedMeasurementType,  
DedicatedMeasurementValue,  
~~BetaTPC,~~  
DiversityControlField,  
DiversityMode,  
FACH-Power,  
FDD-DL-ChannelisationCodeNumber,  
FDD-SCCPCH-Offset,  
~~FDD-TPC-DownlinkStepSize~~  
FrameHandlingPriority,  
FrameOffset,  
GapStartingSlotNumber,  
LocalCellID,  
LocalCellInformationList,  
LocalCell-ID,  
Local-CellID,  
MIB-SG-POS,  
MIB-SG-REP,  
MaxFACH-Power,  
MaxNrOfUL-DPDCHs,  
MaxNumberOfUL-DPDCHs,  
MaximumDLPowerCapability,  
MaximumDL-PowerCapability,  
MaximumTransmissionPower,  
MaximumUL-EbN0,  
Maximum-DL-PowerCapability,  
MeasuredCellInfo,  
MeasurementCharacteristics,  
MeasurementID,

MeasurementType,  
MessagePartScramblingCode,  
MidambleShift,  
Midambleshift,  
MinUL-ChannelisationCodeLength,  
MinimumSpreadingFactor,  
MinimumUL-EbN0,  
NodeB-CommunicationContextID,  
NumberOfChannelElements,  
Offset,  
PCCPCH-Power,  
PCCPCH-TimeSloti,  
PCH-Power,  
PICH-Information,  
PICH-Power,  
PSCH-Power,  
PSCHandPCCPCH-Allocation,  
PSCHandPCCPCH-TimeSlotK,  
PUSCH,  
PagingIndicatorLength,  
PatternDuration,  
PayloadCRC-PresenceIndicator,  
PilotBitsUsedIndicator,  
PowerControlMode,  
PowerOffset,  
PowerResumeMode,  
PreambleScramblingCode,  
PreambleSignatures,  
PrimaryCPICH-Power,  
PrimarySCH-Power,  
PrimaryScramblingCode,  
Primary-ScramblingCode,  
PropagationDelay,  
PunctureLimit,  
RACH-SlotFormat,  
RACH-SubChannelNumbers,  
RLC-Mode,  
RL-ID,  
RL-Information,  
RL-InformationItem,  
RL-InformationItem-RL-SetupReqTDD,  
RL-InformationList-DMeasureRequest,  
RL-ReconfigurationFailure-RL-ReconfFailItem,  
RadioLinkInformation-RL-ReconfReqTDD,  
RepetitionLength,  
RepetitionPeriod,  
ReportCharacteristics,  
ResourceOperationState,  
ResourceOperationalState,  
SAI,  
SFN,

SIB-SG-POS,  
SIB-SG-REP,  
SSDT-CellIdentity,  
SSDT-CellIdentityLength,  
SSDT-Cell-IDLength,  
SSDT-Indication,  
SSDT-SupportIndicator,  
STTD-Indicator,  
S-CCPCH-Offset,  
S-CCPCH-Power,  
S-FieldLength,  
ScramblingCode,  
ScramblingCodeChange,  
SecondaryCCPCH-SlotFormat,  
SecondaryCPICH-Power,  
SecondarySCH-Power,  
ShutdownTimer,  
SynchronisationMethod,  
TDDChipOffset,  
TDD-ChannelisationCode,  
TDD-TPC-DownlinkStepSize  
TFCI-Presence,  
TFCI-SignallingMode,  
TFCS,  
TSTD-Indicator,  
T-Cell,  
TimeSlot,  
TimeSlotDirection,  
TimeSlotStatus,  
ToAWE,  
ToAWS,  
TransmissionGapDistance,  
TransmissionGapPeriod,  
TransmitGapLength,  
TransmitGapPositionMode,  
TransportFormatCombinationSet,  
TransportFormatSet,  
TransportLayerAddress,  
UARFCN,  
C-ID,  
UL-CCTrCHInformation,  
UL-CCTrCH-ID,  
UL-DPCCH-SlotFormat,  
UL-FP-Mode,  
UL-InterferenceLevel,  
UL-PunctureLimit,  
UL-ScramblingCode,  
UplinkEbNo

```

-- *****
--
-- RADIO LINK SETUP REQUEST FDD
--
-- *****

RadioLinkSetupRequestFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkSetupRequestFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkSetupRequestFDD-Extensions}}          OPTIONAL,
    ...
}

RadioLinkSetupRequestFDD-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-CRNC-CommunicationContextID      CRITICALITY ignore TYPE CRNC-CommunicationContextID PRESENCE mandatory }|
    { ID id-UL-DPCH-InformationItem-RL-SetupReq-FDD CRITICALITY ignore TYPE UL-DPCH-InformationItem-RL-SetupReq-FDD PRESENCE mandatory }|
    { ID id-DL-DPCH-InformationItem-RL-SetupReq-FDD CRITICALITY ignore TYPE DL-DPCH-InformationItem-RL-SetupReq-FDD PRESENCE mandatory }|
    { ID id-DCH-InformationList-RL-SetupReq-FDD CRITICALITY ignore TYPE DCH-InformationList-RL-SetupReq-FDD PRESENCE mandatory }|
    { ID id-RL-ID                             CRITICALITY ignore TYPE RL-ID                             PRESENCE optional }|
    { ID id-DSCH-ID                             CRITICALITY ignore TYPE DSCH-ID                             PRESENCE optional }|
    { ID id-DSCH-InformationList-RL-SetupReq-FDD CRITICALITY ignore TYPE DSCH-InformationList-RL-SetupReq-FDD PRESENCE optional }|
    { ID id-RL-InformationList-RL-SetupReq-FDD CRITICALITY ignore TYPE RL-InformationList-RL-SetupReq-FDD PRESENCE mandatory }|
    ...
}

RadioLinkSetupRequestFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

UL-DPCH-InformationItem-RL-SetupReq-FDD ::= SEQUENCE {
    ul-ScramblingCode          UL-ScramblingCode,
    minUL-ChannelisationCodeLength MinUL-ChannelisationCodeLength,
    maxNumberOfUL-DPDCHs       MaxNumberOfUL-DPDCHs          OPTIONAL
    -- This IE is present only if "Min UL Channelisation Code length" equals to 4 -- ,
    ul-PunctureLimit           UL-PunctureLimit,
    transportFormatCombinationSet TransportFormatCombinationSet,
    ul-DPCCH-SlotFormat         UL-DPCCH-SlotFormat,
    ul-EbNo-Target              UplinkEbNo,
    diversityMode                DiversityMode,
    d-FieldLength                D-FieldLength              OPTIONAL
    -- This IE is present only if Feed Back mode diversity is activated -- ,
    sSDT-Cell-IDLength          SSdT-Cell-IDLength          OPTIONAL,
    s-FieldLength                S-FieldLength              OPTIONAL
}

DL-DPCH-InformationItem-RL-SetupReq-FDD ::= SEQUENCE {
    transportFormatCombinationSet TransportFormatCombinationSet,
    dl-DPCH-SlotFormat           DL-DPCH-SlotFormat,
    tFCI-SignallingMode          TFCI-SignallingMode,
    multiplexingPosition          MultiplexingPosition,
}

```

```

tFCI-Presence          TFCI-Presence,
powerOffsetInformationItem-RL-SetupReq-FDD
    PowerOffsetInformationItem-RL-SetupReq-FDD,
    DeltaTPCFDD-TPC-DownlinkStepSize          FDD-TPC-DownlinkStepSizeDeltaTPC
}

PowerOffsetInformationItem-RL-SetupReq-FDD ::= SEQUENCE {
    p01          PowerOffset,
    p02          PowerOffset,
    p03          PowerOffset
}

DCH-InformationList-RL-SetupReq-FDD ::= SEQUENCE (SIZE (1..maxnoofDCHs)) OF
    ProtocolIE-Container{{DCH-Information-RL-SetupReq-FDDItemIE }}

DCH-Information-RL-SetupReq-FDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DCH-Information-RL-SetupReq-FDDItem CRITICALITY ignore TYPE DCH-Information-RL-SetupReq-FDDItem PRESENCE mandatory },
    ...
}

DCH-Information-RL-SetupReq-FDDItem ::= SEQUENCE {
    dCH-ID          DCH-ID,
    dCH-CombinationIndication DCH-CombinationIndication OPTIONAL,
    rLC-Mode        RLC-Mode,
    ul-TransportFormatSet TransportFormatSet,
    dl-TransportFormatSet TransportFormatSet,
    frameHandlingPriority FrameHandlingPriority,
    payloadCRC-PresenceIndicator PayloadCRC-PresenceIndicator,
    ul-FP-Mode      UL-FP-Mode,
    toAWS           ToAWS,
    toAWE           ToAWE
}

DSCH-InformationList-RL-SetupReq-FDD ::= SEQUENCE (SIZE (1..maxnoofDSCHs)) OF
    ProtocolIE-Container{{DSCH-Information-RL-SetupReq-FDDItemIE }}

DSCH-Information-RL-SetupReq-FDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DSCH-Information-RL-SetupReq-FDDItem CRITICALITY ignore TYPE DSCH-Information-RL-SetupReq-FDDItem PRESENCE mandatory },
    ...
}

DSCH-Information-RL-SetupReq-FDDItem ::= SEQUENCE {
    dSCH-ID          DSCH-ID,
    dSCH-TransportFormatSet DSCH-TransportFormatSet,
    frameHandlingPriority FrameHandlingPriority,
    toAWS           ToAWS,
    toAWE           ToAWE
}

RL-InformationList-RL-SetupReq-FDD ::= SEQUENCE (SIZE (1..maxnoofRLs)) OF
    ProtocolIE-Container{{RL-Information-RL-SetupReq-FDDItemIE }}

```

```

RL-Information-RL-SetupReq-FDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-RL-Information-RL-SetupReq-FDDItem CRITICALITY ignore TYPE RL-Information-RL-SetupReq-FDDItem PRESENCE optional },
  ...
}

RL-Information-RL-SetupReq-FDDItem ::= SEQUENCE {
  rL-ID RL-ID,
  c-ID C-ID,
  frameOffset FrameOffset,
  chipOffset ChipOffset,
  propagationDelay PropagationDelay,
  diversityControlField DiversityControlField OPTIONAL,
  -- This IE is present only if the RL is not the first one in the RL Information
  dl-CodeInformationList-RL-SetupReqFDD DL-CodeInformationList-RL-SetupReqFDD,
  initialDL-transmissionPower DL-Power,
  maximumDL-power DL-Power,
  minimumDL-power DL-Power,
  sSDT-CellIdentity SSdT-CellIdentity OPTIONAL
}

DL-CodeInformationList-RL-SetupReqFDD ::= SEQUENCE (SIZE (1..maxnoofRLs)) OF
  ProtocolIE-Container{{DL-CodeInformation-RL-SetupReqFDDItemIE }}

DL-CodeInformation-RL-SetupReqFDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DL-CodeInformation-RL-SetupReqFDDItem CRITICALITY ignore TYPE DL-CodeInformation-RL-SetupReqFDDItem PRESENCE optional },
  ...
}

DL-CodeInformation-RL-SetupReqFDDItem ::= SEQUENCE {
  dl-ScramblingCode DL-ScramblingCode,
  fdd-DL-ChannelisationCodeNumber FDD-DL-ChannelisationCodeNumber
}

-- *****
--
-- RADIO LINK SETUP REQUEST TDD
--
-- *****

RadioLinkSetupRequestTDD ::= SEQUENCE {
  protocolIEs ProtocolIE-Container {{RadioLinkSetupRequestTDD-IEs}},
  protocolExtensions ProtocolExtensionContainer {{RadioLinkSetupRequestTDD-Extensions}} OPTIONAL,
  ...
}

RadioLinkSetupRequestTDD-IEs NBAP-PROTOCOL-IES ::= {
  { ID id-CRNC-CommunicationContextID CRITICALITY ignore TYPE CRNC-CommunicationContextID PRESENCE mandatory }|
  { ID id-UL-CCTrCH-InformationList-RL-SetupReqTDD CRITICALITY ignore TYPE UL-CCTrCH-InformationList-RL-SetupReqTDD PRESENCE optional }|
  { ID id-DL-CCTrCH-InformationList-RL-SetupReqTDD CRITICALITY ignore TYPE DL-CCTrCH-InformationList-RL-SetupReqTDD PRESENCE optional }|
  { ID id-DCH-InformationList-RL-SetupReqTDD CRITICALITY ignore TYPE DCH-InformationList-RL-SetupReqTDD PRESENCE optional }|
}

```



```

{ID id-DSCH-InformationList-RL-SetupReqTDD CRITICALITY ignore TYPE DSCH-InformationList-RL-SetupReqTDD PRESENCE optional }|
{ID id-USCH-InformationList-RL-SetupReqTDD CRITICALITY ignore TYPE USCH-InformationList-RL-SetupReqTDD PRESENCE optional }|
  { ID id-RL-InformationItem-RL-SetupReqTDD CRITICALITY ignore TYPE RL-InformationItem-RL-SetupReqTDD PRESENCE mandatory },
  ...
}

RadioLinkSetupRequestTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

UL-CCTrCH-InformationList-RL-SetupReqTDD ::= SEQUENCE (SIZE(1..maxnoofCCTrCHs)) OF
  ProtocolIE-Container{{UL-CCTrCH-Information-RL-SetupReqTDDItemIE }}

UL-CCTrCH-Information-RL-SetupReqTDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-UL-CCTrCH-Information-RL-SetupReqTDDItem CRITICALITY ignore TYPE UL-CCTrCH-Information-RL-SetupReqTDDItem PRESENCE mandatory },
  ...
}

UL-CCTrCH-Information-RL-SetupReqTDDItem ::= SEQUENCE {
  cCTrCH-ID CCTrCH-ID,
  transportFormatCombinationSet TransportFormatCombinationSet,
  tFCI-Coding TFCI-Coding,
  puncturing-Limit Puncturing-Limit,
  ul-DPCH-InformationList-RL-SetupReqTDD UL-DPCH-InformationList-RL-SetupReqTDD OPTIONAL
}

UL-DPCH-InformationList-RL-SetupReqTDD ::= SEQUENCE (SIZE (1..maxnoofDPCHs)) OF
  ProtocolIE-Container{{UL-DPCH-Information-RL-SetupReqTDDItemIE }}

UL-DPCH-Information-RL-SetupReqTDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-UL-DPCH-Information-RL-SetupReqTDDItem CRITICALITY ignore TYPE UL-DPCH-Information-RL-SetupReqTDDItem PRESENCE mandatory },
  ...
}

UL-DPCH-Information-RL-SetupReqTDDItem ::= SEQUENCE {
  dPCH-ID DPCH-ID,
  tdd-ChannelisationCode TDD-ChannelisationCode,
  burstType BurstType,
  midambleShift MidambleShift,
  timeSlot TimeSlot,
  tdd-PhysicalChannelOffset TDD-PhysicalChannelOffset,
  repetitionPeriod RepetitionPeriod,
  repetitionLength RepetitionLength,
  tFCI-Presence TFCI-Presence
}

DL-CCTrCH-InformationList-RL-SetupReqTDD ::= SEQUENCE (SIZE (1..maxnoCCTrCHs)) OF
  ProtocolIE-Container{{DL-CCTrCH-Information-RL-SetupReqTDDItemIE }}

```

```

DL-CCTrCH-Information-RL-SetupReqTDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DL-CCTrCH-Information-RL-SetupReqTDDItem CRITICALITY ignore TYPE DL-CCTrCH-Information-RL-SetupReqTDDItem PRESENCE mandatory },
  ...
}

DL-CCTrCH-Information-RL-SetupReqTDDItem ::= SEQUENCE {
  cCtRch-ID          CCTrCH-ID,
  transportFormatCombinationSet  TransportFormatCombinationSet,
  tFCI-Coding        TFCI-Coding,
  puncturing-Limit   Puncturing-Limit,
  TDD-TPC-DownlinkStepSize      TDD-TPC-DownlinkStepSize
  dl-DPCH-InformationList-RL-SetupReqTDD          DL-DPCH-InformationList-RL-SetupReqTDD  OPTIONAL
}

DL-DPCH-InformationList-RL-SetupReqTDD ::= SEQUENCE (SIZE (1..maxnoofDPCHs)) OF
  ProtocolIE-Container{{DL-DPCH-Information-RL-SetupReqTDDItemIE }}

DL-DPCH-Information-RL-SetupReqTDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DL-DPCH-Information-RL-SetupReqTDDItem CRITICALITY ignore TYPE DL-DPCH-Information-RL-SetupReqTDDItem PRESENCE mandatory },
  ...
}

DL-DPCH-Information-RL-SetupReqTDDItem ::= SEQUENCE {
  dPCH-ID          DPCH-ID,
  tdd-ChannelisationCode  TDD-ChannelisationCode,
  burstType            BurstType,
  midambleShift        MidambleShift,
  timeSlot             TimeSlot,
  tdd-PhysicalChannelOffset  TDD-PhysicalChannelOffset,
  repetitionPeriod      RepetitionPeriod,
  repetitionLength      RepetitionLength,
  tFCI-Presence         TFCI-Presence
}

DCH-InformationList-RL-SetupReqTDD ::= SEQUENCE (SIZE (1..maxnoofDPCHs)) OF
  ProtocolIE-Container{{DCH-Information-RL-SetupReqTDDItemIE }}

DCH-Information-RL-SetupReqTDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DCH-Information-RL-SetupReqTDDItem CRITICALITY ignore TYPE DCH-Information-RL-SetupReqTDDItem PRESENCE mandatory },
  ...
}

DCH-Information-RL-SetupReqTDDItem ::= SEQUENCE {
  ul-CCTrCH-ID          UL-CCTrCH-ID,
  dl-CCTrCH-ID          DL-CCTrCH-ID,
  dCH-CombinationIndication  DCH-CombinationIndication  OPTIONAL,
  ul-TransportFormatSet      TransportFormatSet,
  dl-TransportFormatSet      TransportFormatSet,
  frameHandlingPriority       FrameHandlingPriority,
  payloadCRC-PresenceIndicator  PayloadCRC-PresenceIndicator,
}

```

```

    ul-FP-Mode          UL-FP-Mode,
    toAWE               ToAWE,
    toAWS               ToAWS
}

DSCH-InformationList-RL-SetupReqTDD ::= SEQUENCE (SIZE (1..maxnoofDSCHs)) OF
    ProtocolIE-Container{{DSCH-Information-RL-SetupReqTDDItemIE}}

DSCH-Information-RL-SetupReqTDDItemIE NBAP-PROTOCOL-IES ::= {
    {ID id-DCH-Information-RL-SetupReqTDDItem   CRITICALITY ignore   TYPE      DSCH-Information-RL-SetupReqTDDItem PRESENCE mandatory}
    ...
}

DSCH-Information-RL-SetupReqTDDItem ::= SEQUENCE {
    dSCH-ID             DSCH-ID,
    cCTrCH-ID          CCTrCH-ID,
    transportFormatSet TransportFormatSet,
    frameHandlingPriority FrameHandlingPriority,
    toAWE               ToAWE,
    toAWS               ToAWS
}

USCH-InformationList-RL-SetupReqTDD ::= SEQUENCE (SIZE (1..maxnoofUSCHs)) OF
    ProtocolIE-Container{{USCH-Information-RL-SetupReqTDDItemIE}}

USCH-Information-RL-SetupReqTDDItemIE NBAP-PROTOCOL-IES ::= {
    {ID id-USCH-Information-RL-SetupReqTDDItem   CRITICALITY ignore   TYPE      USCH-Information-RL-SetupReqTDDItem PRESENCE mandatory}
    ...
}

USCH-Information-RL-SetupReqTDDItem ::= SEQUENCE {
    uSCH-ID             USCH-ID,
    cCTrCH-ID          CCTrCH-ID,
    transportFormatSet TransportFormatSet
}

RL-Information-RL-SetupReqTDD ::= SEQUENCE {
    rL-ID              RL-ID,
    c-ID              C-ID,
    tdd-PhysicalChannelOffset TDD-PhysicalChannelOffset,
    initialDL-transmissionPower DL-Power,
    maximumDL-power      DL-Power,
    minimumDL-power      DL-Power
}

```

## 9.3.4 NBAP Information Elements

```

--*****
--
-- Information Element Definitions
--
--*****

NBAP-IEs
DEFINITIONS AUTOMATIC TAGS ::=
BEGIN

IMPORTS
    maxTFcount,
    maxnoofTFCS,
    maxCTF-1,
    maxRM,

FROM NBAP-Constants;

DTX-InsertionPoint ::= INTEGER
DedicatedMeasurementValue ::= INTEGER
DeltaTPC ::= INTEGER

-----
-- A
-----

-- to do
AcknowledgedRA-TriesValue ::= TBD

AddOrDeleteIndicator ::= ENUMERATED {
    add,
    delete
}

AICH-TransmissionTiming ::= ENUMERATED {
    timing0,
    timing1
}

AvailabilityStatus ::= ENUMERATED {
    empty,
    in-test,
    failed,
    power-off,
    off-line,
    off-duty,
    dependency,

```

```
degraded,  
not-installed,  
log-full,  
...  
}  
  
--to do  
AveragingDuration ::= TBD  
  
-----  
-- B  
-----  
  
BCCH-ModificationTime ::= INTEGER (0| 2| 4| .. | 4095)  
  
BindingID ::= OCTET STRING (SIZE (4))  
  
BlockingPriorityIndicator ::= ENUMERATED {  
high,  
normal,  
low  
}  
-- High priority: Block resource immediately.  
-- Normal priority: Block resource when idle or upon timer expiry.  
-- Low priority: Block resource when idle.  
  
BurstType ::= ENUMERATED {  
type1,  
type2  
}  
  
-----  
-- C  
-----  
  
Cause ::= ENUMERATED {  
radioNetworkLayer      RadioNetworkLayerCause,  
transportLayer         TransportLayerCause,  
protocol               ProtocolCause,  
misc                   MiscellaneousCause  
...  
}  
  
CCTrCH-ID ::= INTEGER (1..15)  
  
CellID-Length ::= ENUMERATED {  
short,  
medium,  
long  
}
```

```
CFN ::= INTEGER (0..255)

ChipOffset ::= INTEGER (0..38399)

C-ID ::= INTEGER (0..65535)

CodingRate ::= ENUMERATED {
    rate1-2,
    rate1-3
}

CommonMeasurementObjectType ::= ENUMERATED {
    cell,
    rach,
    ...
}

CommonMeasurementType ::= SEQUENCE {
    rssi                RSSI-Value,
    transmitted-carrier-power    TransmittedCarrierPowerValue,
    acknowledged-ra-tries    AcknowledgedRA-TriesValue,
    time-slot-iscp        TimeSlotISCP-Value,
    ...
}

CommonPhysicalChannelID ::= INTEGER (0..255)

CommonTransportChannelID ::= INTEGER (0..255)

CommunicationControlPortID ::= INTEGER (0..65535)

CompressedModeMethod ::= ENUMERATED {
    puncturing,
    sF-2,
    gating,
    none
}

ConfigurationGenerationID ::= INTEGER (0..255)

CRC-Size ::= ENUMERATED {
    size0,
    size12,
    size16,
    size24
}

CRNC-CommunicationContextID ::= INTEGER (0..1048575)

CTFC ::= INTEGER (0..maxCTF-1)
```

```
-----  
-- D  
-----  
  
DCH-CombinationInd ::= INTEGER (0..255)  
  
DCH-ID ::= INTEGER (0..255)  
  
DedicatedMeasurementObjectType1 ::= ENUMERATED {  
    cell,  
    rach,  
    ...  
}  
  
DedicatedMeasurementObjectType2 ::= SEQUENCE {  
    sir-value          SIR-Value          OPTIONAL,  
    sir-error-value   SIR-ErrorValue     OPTIONAL,  
    transmitted-code-power TransmittedCodePowerValue OPTIONAL,  
    time-slot-iscp    TimeSlotISCP-Value OPTIONAL,  
    ...  
}  
  
DedicatedMeasurementObjectType3 ::= ENUMERATED {  
    rl,  
    all-rl,  
    ...  
}  
  
-- Reference: 25.215 and 25.225  
DedicatedMeasurementType ::= ENUMERATED {  
    sir,  
    sir-error,  
    transmitted-code-power,  
    timeslot-iscp,  
    ...  
}  
  
D-FieldLength ::= ENUMERATED {  
    d-length1,  
    d-length2  
}  
  
DiversityControlField ::= ENUMERATED {  
    may,  
    must,  
    must-not  
}  
  
DiversityIndication ::= ENUMERATED {
```

```
combined,
not-combined
}

DiversityMode ::= ENUMERATED {
none,
sTTD,
closed-loop-mode1,
closed-loop-mode2
}

DL-DPCH-SlotFormat ::= INTEGER (0..16)

DL-FrameType ::= ENUMERATED {
typeA,
typeB
}

-- -35..15 is transformed into 0..50. 0.1 steps gives 0..500
-- Power0 indicates -35dB, Power1 indicates -34.9dB, ..., Power500 indicates 15dB
DL-Power ::= ENUMERATED {
power0,
power1,
...
}

-- 0= Primary scrambling code of the cell, 1..15= Secondary scrambling code --
DL-ScramblingCode ::= INTEGER (0..15)

DPCH-ID ::= INTEGER (0..15)

DPCH-Offset ::= INTEGER (0..255)

DSCH-ID ::= INTEGER (0..255)

-- to do
-- the parameter need to be defined. It may correspond to the DL TFS defined for DCH
DSCH-TransportFormatSet ::= TBD

-- to do
-- the parameter need to be defined. It may correspond to the DL TFS defined for DCH
DSCH-TransportFormatCombinationSet ::= TBD

DTX-InsertionPosition ::= ENUMERATED {
fixed,
flexible
}

DynamicTransportFormatInformation ::= SEQUENCE (SIZE (1..maxTFcount)) OF
SEQUENCE {
numberOfTransportBlocks      NumberOfTransportBlocks,
```



```

transportBlockSize      TransportBlockSize  OPTIONAL
-- This IE is only present if Number of Transport Blocks is greater than 0 --,
mode-dynamicTFS        Mode-DynamicTFS
    ...
}

-----
-- E
-----

EventA ::= SEQUENCE {
    measurementThreshold      MeasurementThreshold,
    measurementHysteresisTime MeasurementHysteresisTime  OPTIONAL
}

EventB ::= SEQUENCE {
    measurementThreshold      MeasurementThreshold,
    measurementHysteresisTime MeasurementHysteresisTime  OPTIONAL
}

EventC ::= SEQUENCE {
    measurementIncreaseThreshold MeasurementIncreaseThreshold,
    measurementChangeTime      MeasurementChangeTime
}

EventD ::= SEQUENCE {
    measurementDecreaseThreshold MeasurementDecreaseThreshold,
    measurementChangeTime      MeasurementChangeTime
}

EventE ::= SEQUENCE {
    measurementThreshold1      MeasurementThreshold1,
    measurementThreshold2      MeasurementThreshold2  OPTIONAL,
    measurementHysteresisTime  MeasurementHysteresisTime  OPTIONAL,
    reportPeriodicity          ReportPeriodicity    OPTIONAL
}

EventF ::= SEQUENCE {
    measurementThreshold1      MeasurementThreshold1,
    measurementThreshold2      MeasurementThreshold2  OPTIONAL,
    measurementHysteresisTime  MeasurementHysteresisTime  OPTIONAL,
    reportPeriodicity          ReportPeriodicity    OPTIONAL
}

-----
-- F
-----

-- The maximum value is equal to the DL spreading factor □ --
FDD-DL-ChannalisationCodeNumber ::= INTEGER(0.. 255)

```

```
-- 0: 0 chip, 1: 256 chip, 2: 512 chip, .. ,149: 38144 chip [TS 25.211] --
FDD-S-CCPCH-Offset ::= INTEGER (0.. 149)

FDD-TPC-DownlinkStepSize ::= ENUMERATED {
step-size0-5,
step-size1
}

-- 0=lower priority, 15=higher priority --
FrameHandlingPriority ::= INTEGER (0..15)

-----
-- G
-----

GapPeriod ::= INTEGER(0..255)

Gap Position Mode ::= ENUMERATED {
fixed,
flexible
}

-----
-- H
-----

-----
-- I
-----

-- to do
IB-SG ::= BIT STRING

IB-SG-POS ::= INTEGER (0..4095)

IB-SG-REP ::= INTEGER {rep(16), rep(32), rep(64), rep(128), rep(256), rep(512), rep(1024), rep(2048)}

IB-Type :: Enumerated {
MIB,
SIB1,
SIB2,
SIB12
}

IndicationType ::= ENUMERATED {
noFailure,
serviceImpacting,
cellControl,
```

```
...
}

-----
-- J
-----

-----
-- L
-----

LocalCell-ID ::= INTEGER (0..268435455)

-----
-- M
-----
-- dBm, granularity 1 dBm
-- dl-power0 indicates 0 dBm
MaximumDL-PowerCapability ::= ENUMERATED{
dl-power0,
dl-power1,
dl-power2,
...
}

-- Unit dBm, 0 to 50, Granularity 1 dB
MaximumTransmissionPower ::= ENUMERATED {
power0,
power1,
power2,
...
}

MaxNumberOfUL-DPDCHs ::= INTEGER (1..6)

MaxPRACH-MidambleShifts ::= ENUMERATED {
shift4,
shift8
}

-- 10ms to 1min, Step10ms
MeasurementChangeTime ::= ENUMERATED {
time10ms,
time20ms,
time30ms,
...
}

MeasurementCharacteristics ::= SEQUENCE {
    measurementFrequency      MeasurementFrequency,
```

```
    averagingDuration      AveragingDuration
}

-- to do
MeasurementDecreaseThreshold ::= TBD

-- to do
MeasurementFrequency ::= TBD

-- to do
MeasurementIncreaseThreshold ::= TBD

-- to do
-- 10ms to 1min, Step10ms --
MeasurementHysteresisTime ::= ENUMERATED {
time10ms,
time20ms,
time30ms,
...
}

MeasurementID ::= INTEGER (0..1048575)

-- to do
MeasurementThreshold ::= TBD

-- to do
MeasurementThreshold1 ::= TBD

-- to do
MeasurementThreshold2 ::= TBD

MeasurementType ::= ENUMERATED {
sCH,
syncRACH-access
}

MessageDiscriminator ::= ENUMERATED {
common,
dedicated
}

MidambleShift ::= INTEGER (0..15)

MinimumSpreadingFactor ::= ENUMERATED {
sF4,
sF16,
sF32,
sF64,
sF128,
sF256,
```

```

sF512
}

MinUL-ChannelisationCodeLength ::= ENUMERATED {
code-length4,
code-length8,
code-length16,
code-length32,
code-length64,
code-length128,
code-length256
}

MiscellaneousCause ::= ENUMERATED {
control-processing-overload,
hardware-failure,
oam-intervention,
not-enough-user-plane-processing-resources,
unspecified
}

Mode-DynamicTFS ::= CHOICE {
tdd-mode-dynamic    TransmissionTimeInterval-Dynamic,
...
}

Mode-SemiStaticTFS ::= CHOICE {
tdd-mode-semistatic TransmissionTimeInterval-SemiStatic,
...
}

-----
-- N
-----

-- to do
NumberOfChannelElements ::= TBD

NodeB-CommunicationContextID ::= INTEGER (0..1048576)

NumberOfTransportBlocks ::= INTEGER (0..4095)

-----
-- O
-----

-----
-- P
-----

PagingIndicatorLength ::= ENUMERATED {

```

```
ind-length2,  
ind-length4,  
ind-length8  
}  
  
PayloadCRC-PresenceIndicator ::= ENUMERATED {  
cRC-Included,  
cRC-NotIncluded  
}  
  
PD ::= INTEGER(0..2047)  
  
PICH-Mode ::= ENUMERATED {  
noofPI18,  
noofPI36,  
noofPI72,  
noofPI144  
}  
  
PilotBitsUsedIndicator ::= ENUMERATED {  
pilot-bits-used,  
pilot-bits-not-used  
}  
  
PowerControlMode ::= ENUMERATED {  
pcm0,  
pcm1,  
...  
}  
  
-- Chips. Step size is 3 chips. 0=0 chips, 1=3 chips .. --  
--** TODO. -15..40 is transformed to 0..55. 0.1 steps gives 0..550 **  
PowerOffset ::= INTEGER (0..24)  
  
PowerResumeMode ::= ENUMERATED {  
prm0,  
prm1,  
...  
}  
  
PRACH-Midamble ::= ENUMERATED {  
inverted,  
direct  
}  
  
PreambleScramblingCode ::= INTEGER (0..4095)  
  
-- Bit 0=P0, Bit 1=P1, .. ,Bit 15=P15 [25.213] --  
PreambleSignatures ::= BIT STRING (SIZE (16))
```

```

-- Unit dBm, -15 to 40, Granularity 0.1 dB
-- cpich-power1 indicates 5 dB
PrimaryCPICH-Power ::= ENUMERATED {
cpich-power1,
cpich-power2,
...
}

PrimaryScramblingCode ::= INTEGER (0..511)

PropagationDelay ::= INTEGER (0..255)

ProtocolCause ::= ENUMERATED
transaction-not-allowed,
transfer-syntax-error,
abstract-syntax-error -reject,
abstract-syntax-error-ignore-and-notify,
message-not-compatible-with-receiver-state,
semantic-error,
unspecified
}

-- PCCPCH Power unit dBm
-- PCCPCH Power step 0.1dBm
PCCPCH-power ::= INTEGER (-15..40)

PSCH-TimeSlot ::= INTEGER (0..6)

PSCH-Power ::= INTEGER (0..511)

PUSCH-Offset ::= INTEGER (0..255)

-----
-- R
-----

-- SF
RACH-SlotFormat ::= ENUMERATED {
format256,
format128,
format64,
format32
}

-- Bit 0=Sub Channel Number 0, Bit 1=Sub Channel Number 1, ..., Bit 14=Sub Channel Number 14 --
RACH-SubChannelNumbers ::= BIT STRING (SIZE (15))

RadioNetworkLayerCause ::= Enumerated {
unknown-C-ID,
cell-not-available,
power-level-not-supported,

```

```

ul-scramblingcode-already-in-use,
dl-radio-resources-not-available,
ul-radio-resources-not-available,
rl-Already-ActivatedorAllocated,
nodeB-Resources-Unavailable,
insufficient-physical-channel-resources,
measurement-not-supported-for-the-object,
macrodiversity-combining-not-possible,
reconfiguration-not-allowed,
requested-configuration-not-supported,
synchronization-failure,
unspecified
}

RateMatchingAttribute ::= INTEGER (1..maxRM)

RepetitionLength ::= ENUMERATED {
length1,
length2,
length4,
length8
}

ReportCharacteristicsType ::= CHOICE {
    onDemand          NULL,
    periodic          ReportPeriodicity,
    event-a           EventA,
    event-b           EventB,
    event-c           EventC,
    event-d           EventD,
    event-e           EventE,
    event-f           EventF
}

-- 10ms to 1min, step 10ms or
-- 1min to 1hour, step 1min
ReportPeriodicity ::= CHOICE {
    msec              INTEGER (1..1000),
    min               INTEGER (1..60)
}

ResourceOperationalState ::= ENUMERATED {
enabled,
disabled
}

RLC-Mode ::= ENUMERATED {
acknowledgedMode,
unacknowledgedMode,
transparentMode
}

```



```

RL-ID ::= INTEGER (0..31)

RNC-ID ::= INTEGER (0..4095)

-- -30..-100 step 0.1
-- rssi1 indicates -30
RSSI-Value ::= ENUMERATED {
rssi1,
rssi2,
...
}
-----
-- S
-----

ScramblingCodeChange ::= ENUMERATED {
change,
no-change
}

Scrambling Code Word Number ::= INTEGER (0..255)

SecondaryCCPCH-SlotFormat ::= INTEGER(0..8)

SegmentType ::= ENUMERATED {
first,
subsequent,
last,
complete
}

SemiStaticTransportFormatInformation ::= SEQUENCE {
transmissionTimeInterval      TransmissionTimeInterval,
typeOfChannelCoding           TypeOfChannelCoding,
codingRate                    CodingRate      OPTIONAL
-- This IE is only present if IE Type of channel coding is Convolutional or Turbo --,
rateMatchingAttribute         RateMatchingAttribute,
cRC-Size                      CRC-Size,
mode-semistatic               Mode-SemiStatic
}

S-FieldLength ::= ENUMERATED {
s-length1,
s-length2
}

SIB-DeletionIndicator ::= ENUMERATED {
noDeletion,
deletion
}

```

```
SIB-Originator ::= ENUMERATED {
nodeB,
cRNC
}

--** TODO. -10..10 is transformed to 0..10. 0.1 steps gives 0..200 **
-- sir-error-value1 indicates □0 dB
SIR-ErrorValue ::= ENUMERATED {
sir-error-value1,
sir-error-value2,
...
}

--** TODO. -10..20 is transformed to 0..30. 0.1 steps gives 0..300 **
-- sir-value1 indicates □0 dB
SIR-Value ::= ENUMERATED {
sir-value1,
sir-value2,
...
}

SSDT-CellIdentity ::= ENUMERATED {a, b, c, d, e, f, g, h}

SSDT-Indication ::= ENUMERATED {
    ssdtActiveInTheUE,
    ssdtNotActiveInTheUE
}

STTD-Indicator ::= ENUMERATED {
    active,
    inactive
}

SSDT-SupportIndicator ::= ENUMERATED {
sSDT-not-supported,
sSDT-Supported
}

ShutdownTimer ::= INTEGER (1..3600)

SynchronisationMethod ::= ENUMERATED {
external-reference,
locked-toMaster-cell,
one-time-synchronisation
}

-----
-- T
-----
```

```
T-Cell ::= ENUMERATED {
    chip-0,
    chip-256,
    chip-512,
    chip-768,
    chip-1024,
    chip-1280,
    chip-1536,
    chip-1892,
    chip-2048,
    chip-2304
}

TDD-ChannelisationCode ::= ENUMERATED {
    channelisationCode1-1,
    channelisationCode2-1,
    channelisationCode2-2,
    channelisationCode4-1,
    channelisationCode4-2,
    ...
}

-- the ChipOffset is  $\pm$ 9200 to + 19199
TDD-ChipOffset ::= INTEGER (-19200..19199)

TransmissionTimeInterval-Dynamic ::= SEQUENCE (SIZE (1..maxTTIcount)) OF
    ENUMERATED {tti10, tti20, tti40, tti80}
}

TransmissionTimeInterval-SemiStatic ::= ENUMERATED {
    frameRelated,
    timeSlotRelated
}

TDD-S-CCPCH-Offset ::= INTEGER (0..63)

TDD-TPC-DownlinkStepSize ::= ENUMERATED {
    step-size1,
    step-size2,
    step-size3
}

TFCI-Presence ::= ENUMERATED {
    present,
    not-present
}

TFCI-SignallingMode ::= ENUMERATED {
    normal,
    split
}
```

```

}

TFCS ::= SEQUENCE (SIZE (1..maxnoofTFCS)) OF
  SEQUENCE {
    cTFC          CTFC
  }

TFS ::= SEQUENCE {
  dynamicTransportFormatInformation
  semiStaticTransportFormatInformation
}

TGD ::= INTEGER (0..255)

TGL ::= INTEGER (3,4,7,10,14)

TimeSlot ::= INTEGER (0..14)

TimeSlotDirection ::= ENUMERATED {
  ul,
  dl
}

-- to do
TimeSlotISCP-Value ::= TBD

TimeSlotStatus ::= ENUMERATED {
  active,
  not-active
}

ToAWE ::= INTEGER (0..2559) -- msec. --
ToAWS ::= INTEGER (0..1279) -- msec. --

TPC-DownlinkStepSize ::= ENUMERATED {
  step-size0-5,
  step-size1
}

Transmit Diversity Indicator ::= ENUMERATED {
  active,
  Inactive
}

```

```

DynamicTransportFormatInformation,
SemiStaticTransportFormatInformation

```

<b>CHANGE REQUEST</b>		<i>Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.</i>	
<b>25.433 CR 017</b>		Current Version: <b>3.0.0</b>	
<small>GSM (AA.BB) or 3G (AA.BBB) specification number ↑</small>		<small>↑ CR number as allocated by MCC support team</small>	
For submission to: <b>TSG RAN #7</b> <small>list expected approval meeting # here ↑</small>	for approval for information <input checked="" type="checkbox"/>	strategic <input type="checkbox"/>	<small>(for SMG use only)</small>
		non-strategic <input type="checkbox"/>	

Form: CR cover sheet, version 2 for 3GPP and SMG    The latest version of this form is available from: <http://ftp.3gpp.org/Information/CR-Form-v2.doc>

**Proposed change affects:**    (U)SIM     ME     UTRAN / Radio     Core Network   
(at least one should be marked with an X)

**Source:**    TSG-RAN WG3    **Date:**    2000-01-24 - 28

**Subject:**    Simplified Audit procedure

**Work item:**    \_\_\_\_\_

<b>Category:</b>	F Correction <input type="checkbox"/>	<b>Release:</b>	Phase 2 <input type="checkbox"/>
	A Corresponds to a correction in an earlier release <input type="checkbox"/>		Release 96 <input type="checkbox"/>
<small>(only one category shall be marked with an X)</small>	B Addition of feature <input type="checkbox"/>		Release 97 <input type="checkbox"/>
	C Functional modification of feature <input checked="" type="checkbox"/>		Release 98 <input type="checkbox"/>
	D Editorial modification <input type="checkbox"/>		Release 99 <input checked="" type="checkbox"/>
			Release 00 <input type="checkbox"/>

**Reason for change:**    This CR makes the Audit procedure simpler. That will lead to a simpler implementation of Node B, while the implementation of the RNC will be slightly more complex. This CR proposes to change the Audit procedure to be a purely informative procedure. The reason for this is that the Audit procedure today has two actions

- 1) inform the CRNC about Cells that have the same CG-ID (Configuration Generation ID), and
- 2) in the case that a cell (C-ID) exist in Node B that is not sent in the AUDIT REQUEST message Node B shall delete that cell.

Made purely informative, the Audit procedure only has the action of informing the CRNC about the configuration and status information of configured logical resources. Benefits of an purely informative Audit procedure are:

- 1) the implementation of Node B gets simpler,
- 2) the CRNC gets larger freedom of handling inconsistencies,
- 3) the responsibility of deleting the transport bearers will be clearer, and
- 4) the Audit procedure only have one action to perform.

**Clauses affected:**    8.2.7, 9.1.15, 9.1.16 and 9.3.3

<b>Other specs affected:</b>	Other 3G core specifications <input type="checkbox"/>	→ List of CRs:	
	Other GSM core specifications <input type="checkbox"/>	→ List of CRs:	
	MS test specifications <input type="checkbox"/>	→ List of CRs:	
	BSS test specifications <input type="checkbox"/>	→ List of CRs:	
	O&M specifications <input type="checkbox"/>	→ List of CRs:	

**Other comments:**    \_\_\_\_\_



help.doc


<----- double-click here for help and instructions on how to create a CR.

## 8.2.7 Audit

### 8.2.7.1 General

This procedure is executed by the CRNC to perform an audit of the configuration and status of the logical resources in the Node B. ~~Additionally, the~~ The audit may cause the CRNC ~~and Node B~~ to re-sync the Node B to the status of logical resources known by the CRNC, ~~and to the status information from that~~ the Node B can support.

### 8.2.7.2 Successful Operation

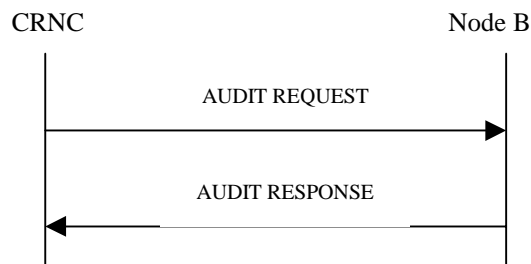

**Figure 10: Audit procedure, Successful case**

The procedure is initiated with an AUDIT REQUEST message sent from the CRNC to the Node B.

~~The configuration returned by the Node B in the AUDIT RESPONSE shall be the configuration existing upon reception of the AUDIT REQUEST. Upon reception by the Node B, with each pair of *C-ID IE Configuration Generation ID IE* that is present in the message, the Node B compares the stored Configuration Generation ID for the corresponding cell.~~

~~For each cell where the *Configuration Generation ID IE* value does not match the stored Configuration Generation ID value, the Node B shall not take any action.~~

~~For each cell where the *Configuration Generation ID IE* value matches the stored Configuration Generation ID value, the Node B shall include the *Cell Information IE* group for that cell in the AUDIT RESPONSE message.~~

~~The following condition applies to the *Primary SCH Information IE* group, *Secondary SCH Information IE* group, *Primary CCPCH Information IE* group, *Secondary CCPCH Information IE* group, *Primary CPICH Information IE* group, *Secondary CPICH Information IE* group, *BCH Information IE* group, *PCH Information IE* group, *PICH Information IE* group, *FACH Information IE* group, *RACH Information IE* group, and *AICH Information IE* group. The Node B shall include the IE group within the *Cell Information IE* group, if that resource is present in the Node B for that cell.~~

~~The Node B shall include in the AUDIT RESPONSE message a *Communication Control Port Information IE* group for each communication control port present in the Node B.~~

~~If a *Configuration Generation ID IE* for a cell can not be trusted, the Node B shall set this *Configuration Generation ID IE* = '0'.~~

The Node B shall include in the AUDIT RESPONSE message a *Local Cell Information IE* group for each local cell present in the Node B. The Node B shall include the *Number Of Channel Elements IE* if the value is known by the Node B. The Node B shall include the *Maximum DL Power Capability IE* if the value is known by the Node B.

The Node B shall include in the AUDIT RESPONSE message a *Cell Information IE* group for each cell in the Node B and information about all common transport channels and all common physical channels for each cell. Node B shall also include in the AUDIT RESPONSE message, a *Communication Control Port Information IE* group for each communication control port in the Node B.

~~For each cell existing in the Node B but not indicated in the AUDIT REQUEST message, the associated cell configuration information shall be removed from the Node B including any related common physical channels and common transport channels. For each cell not existing in the Node B but indicated in the AUDIT REQUEST message, the Node B shall not take any action.~~

~~Upon reception by the CRNC of the AUDIT RESPONSE message, the CRNC compares the received list of C-ID with the expected list of C-IDs.~~

~~For each missing cell, a configuration error has occurred and recovery actions should be taken by the CRNC.~~

#### 8.2.7.3 Unsuccessful Operation

-

#### 8.2.7.4 Abnormal Conditions

-



## 9.1.15 AUDIT REQUEST

Information Element	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
<b>Cell parameters</b>		0.. <maxCellinNodeB>		
<u>C-ID</u>	M			
<u>Configuration Generation Id</u>	M			

Range bound	Explanation
<u>MaxCellinNodeB</u>	Maximum number of cell that can be configured in Node-B

## 9.1.16 AUDIT RESPONSE

Information Element	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
<b>Cell Information</b>		0.. <maxUCIDinNodeB>		
<u>C-ID</u>	M			
<u>Configuration Generation ID</u>	M			
Resource Operational State	M			
Availability Status	M			
<u>Local Cell ID</u>	M			<u>The local cell that the cell is configured on</u>
Maximum DL Power Capability	FFS			
Minimum Spreading Factor	FFS			

<b>Primary SCH Information</b>		0..1		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>Secondary SCH Information</b>		0..1		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>Primary CPICH Information</b>		0..1		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>Secondary CPICH Information</b>		0..<maxSCPICHCell>		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>Primary CCPCH Information</b>		0..1		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>BCH Information</b>		0..1		
Common Transport Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>Secondary CCPCH Information</b>		0..<maxSCCPCHCell>		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>PCH Information</b>		0..<maxPCHCell >		
Common Transport Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>PICH Information</b>		0..1		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>FACH Information</b>		0..<maxFACHCell>		
Common Transport Channel ID	M			

Resource Operational State	M			
Availability Status	M			
<b>PRACH Information</b>		<i>0..&lt;maxPRACHCell&gt;</i>		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>RACH Information</b>		<i>0..&lt;maxRACHCell&gt;</i>		
Common Transport Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>AICH Information</b>		<i>0..&lt;maxRACHCell&gt;</i>		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>SCH Information</b>		<i>0..1</i>		
Common Transport Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>PSCH Information</b>		<i>0..1</i>		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>Communication Control Port Information</b>		<i>0..&lt;maxCCPinNodeB&gt;</i>		
Communication Control Port ID	M			
Resource Operational State	M			
Availability Status	M			
<b>Local Cell Information</b>		<i>0..&lt;maxLocalCellinNodeB&gt;</i>		
Local Cell ID	M			
Number of Channel Elements	O			
Maximum DL Power Capability	O			
Criticality diagnostics	O			

Range bound	Explanation
maxCellinNodeB	Maximum number of Cell that can be configured in Node B
maxCCPinNodeB	Maximum number of communication control ports that can exist in the Node B
maxLocalCellinNodeB	Maximum number of Local Cells that can exist in the Node B
maxSCPICHCell	Maximum number of Secondary CPICH that can be defined in a Cell.
maxSCCPCHCell	Maximum number of Secondary CCPCH that can be defined in a Cell.
maxFACHCell	Maximum number of FACHes that can be defined in a Cell
maxRACHCell	Maximum number of RACHes that can be defined in a Cell
maxPCHCell	Maximum number of PCHes that can be defined in a Cell
maxPICHCell	Maximum number of PICHes that can be defined in a Cell

### 9.3.3 NBAP PDU Content Definitions

```

-- *****
--
-- AUDIT REQUEST
--
-- *****

AuditRequest ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container    {{AuditRequest-IEs}},
    protocolExtensions         ProtocolExtensionContainer {{AuditRequest-Extensions}}    OPTIONAL,
    ...
}

AuditRequest-IEs NBAP-PROTOCOL-IES ::= {
  { ID id-Cell-ParametersList-Audit-Req CRITICALITY ignore TYPE Cell-ParametersList-Audit-Req PRESENCE optional },
  ...
}

AuditRequest-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

Cell-ParametersList-Audit-Req ::= SEQUENCE (SIZE (1..maxCellinNodeB)) OF
  ProtocolIE-Container {{Cell-ParametersItemIE-Audit-Req}}

Cell-ParametersItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-Cell-ParametersItem-Audit-Req CRITICALITY ignore TYPE Cell-ParametersItem-Audit-Req PRESENCE mandatory },
  ...
}

Cell-ParametersItem-Audit-Req ::= SEQUENCE {
  e-ID C-ID,
  configurationGenerationID ConfigurationGenerationID
}

-- *****
--
-- AUDIT RESPONSE
--
-- *****

AuditResponse ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container    {{AuditResponse-IEs}},

```

```

    protocolExtensions          ProtocolExtensionContainer {{AuditResponse-Extensions}}          OPTIONAL,
    ...
}

AuditResponse-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-Cell-InformationList-Audit-Res          CRITICALITY ignore  TYPE Cell-InformationList-Audit-Res          PRESENCE optional }|
    { ID id-CommunicationControlPort-InformationList-Audit-Res          CRITICALITY ignore          TYPE CommunicationControlPort-
InformationList-Audit-Res          PRESENCE          optional
}|
    { ID id-Cell-InformationList-Audit-Res          CRITICALITY ignore  TYPE Cell-InformationList-Audit-Res          PRESENCE optional }|
    { ID id-CriticalityDiagnostic          CRITICALITY ignore          TYPE CriticalityDiagnostic          PRESENCE optional
},
    ...
}

AuditResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

Cell-InformationList-Audit-Res ::= SEQUENCE (SIZE (1..maxUCIDinNodeB)) OF
    ProtocolIE-Container {{Cell-InformationItemIE-Audit-Res }}

Cell-InformationItemIE-Audit-Res NBAP-PROTOCOL-IES ::= {
    { ID id-Cell-InformationItem-Audit-Res          CRITICALITY ignore  TYPE Cell-InformationItem-Audit-Res          PRESENCE          optional    },
    ...
}

Cell-InformationItem-Audit-Res ::= SEQUENCE {
    c-ID          C-ID,
    configurationGenerationID          ConfigurationGenerationID,
    resourceOperationState          ResourceOperationState,
    availabilityStatus          AvailabilityStatus,
    localCellID          LocalCellID,
    maximumDLPowerCapability          MaximumDLPowerCapability,
    -- to do
    minimumSpreadingFactor          MinimumSpreadingFactor,
    -- to do
    primary-SCH-Information          P-SCH-Information-Audit-Res          OPTIONAL,
    secondary-SCH-Information          S-SCH-Information-Audit-Res          OPTIONAL,
    primary-CPICH-Information          P-CPICH-Information-Audit-Res          OPTIONAL,
    secondary-CPICH-Information          S-CPICH-Information-Audit-Res          OPTIONAL,
    primary-CCPCH-Information          P-CCPCH-Information-Audit-Res          OPTIONAL,
    bCH-Information          BCH-Information-Audit-Res          OPTIONAL,
    secondary-CCPCH-Information          S-CCPCH-Information-Audit-Res          OPTIONAL,
    pCH-InformationList          PCH-InformationList-Audit-Res          OPTIONAL,
    pICH-Information          PICH-Information-Audit-Res          OPTIONAL,
    fACH-InformationList          FACH-InformationList-Audit-Res          OPTIONAL,
    pRACH-InformationList          PRACH-InformationList-Audit-Res          OPTIONAL,
    rACH-InformationList          RACH-InformationList-Audit-Res          OPTIONAL,

```

```

aICH-InformationList      AICH-InformationList-Audit-Res  OPTIONAL,
sCH-InformationList      SCH-InformationList-Audit-Res  OPTIONAL,
pSCH-InformationList      PSCH-InformationList-Audit-Res  OPTIONAL,
communicationControlPortInformation  CommunicationControlPortInformation-Audit-Res  OPTIONAL,
local-CellInformation      Local-CellInformation-Audit-Res  OPTIONAL
}

P-SCH-Information-Audit-Res ::= SEQUENCE {
    commonTransportChannelID  CommonTransportChannelID,
    resourceOperationState    ResourceOperationState,
    availabilityStatus        AvailabilityStatus
}

S-SCH-Information-Audit-Res ::= SEQUENCE {
    commonPhysicalChannelID   CommonPhysicalChannelID,
    resourceOperationState    ResourceOperationState,
    availabilityStatus        AvailabilityStatus
}

P-CPICH-Information-Audit-Res ::= SEQUENCE {
    commonPhysicalChannelID   CommonPhysicalChannelID,
    resourceOperationState    ResourceOperationState,
    availabilityStatus        AvailabilityStatus
}

S-CPICH-InformationList-Audit-Res ::= SEQUENCE (SIZE (1..maxSCPICHCell)) OF
    ProtocolIE-Container {{S-CPICH-InformationItemIE-Audit-Res }}

S-CPICH-InformationItemIE-Audit-Res NBAP-PROTOCOL-IES ::= {
    { ID id-S-CPICH-InformationItem-Audit-Res      CRITICALITY ignore  TYPE S-CPICH-InformationItem-Audit-Res  PRESENCE mandatory
    },
    ...
}

S-CPICH-InformationItem-Audit-Res ::= SEQUENCE {
    commonTransportChannelID   CommonTransportChannelID,
    resourceOperationState    ResourceOperationState,
    availabilityStatus        AvailabilityStatus
}

P-CCPCH-Information-Audit-Res ::= SEQUENCE {
    commonPhysicalChannelID   CommonPhysicalChannelID,
    resourceOperationState    ResourceOperationState,
    availabilityStatus        AvailabilityStatus
}

BCH-Information-Audit-Res ::= SEQUENCE {
    commonTransportChannelID   CommonTransportChannelID,
    resourceOperationState    ResourceOperationState,
    availabilityStatus        AvailabilityStatus
}

```

```

S-CCPCH-InformationList-Audit-Res ::= SEQUENCE (SIZE (1..maxSCCPCHCell)) OF
  ProtocolIE-Container {{S-CCPCH-InformationItemIE-Audit-Res }}

S-CCPCH-InformationItemIE-Audit-Res NBAP-PROTOCOL-IES ::= {
  { ID id-S-CCPCH-InformationItem-Audit-Res      CRITICALITY ignore  TYPE S-CCPCH-InformationItem-Audit-Res  PRESENCE mandatory
  },
  ...
}

S-CCPCH-InformationItem-Audit-Res ::= SEQUENCE {
  commonPhysicalChannelID      CommonPhysicalChannelID,
  resourceOperationState      ResourceOperationState,
  availabilityStatus          AvailabilityStatus
}

PCH-InformationList-Audit-Res ::= SEQUENCE (SIZE (1..maxPCHCell)) OF
  ProtocolIE-Container {{PCH-InformationItemIE-Audit-Res }}

PCH-InformationItemIE-Audit-Res NBAP-PROTOCOL-IES ::= {
  { ID id-PCH-InformationItem-Audit-Res      CRITICALITY ignore  TYPE PCH-InformationItem-Audit-Res  PRESENCE mandatory
  },
  ...
}

PCH-InformationItem-Audit-Res ::= SEQUENCE {
  commonTransportChannelID      CommonTransportChannelID,
  resourceOperationState      ResourceOperationState,
  availabilityStatus          AvailabilityStatus
}

FACH-InformationList-Audit-Res ::= SEQUENCE (SIZE (1..maxFACHCell)) OF
  ProtocolIE-Container {{FACH-InformationItemIE-Audit-Res }}

FACH-InformationItemIE-Audit-Res NBAP-PROTOCOL-IES ::= {
  { ID id-FACH-InformationItem-Audit-Res      CRITICALITY ignore  TYPE FACH-InformationItem-Audit-Res  PRESENCE mandatory      },
  ...
}

FACH-InformationItem-Audit-Res ::= SEQUENCE {
  commonPhysicalChannelID      CommonPhysicalChannelID,
  resourceOperationState      ResourceOperationState,
  availabilityStatus          AvailabilityStatus
}

PRACH-InformationList-Audit-Res ::= SEQUENCE (SIZE (1..maxPRACHCell)) OF
  ProtocolIE-Container {{PRACH-InformationItemIE-Audit-Res }}

PRACH-InformationItemIE-Audit-Res NBAP-PROTOCOL-IES ::= {
  { ID id-PRACH-InformationItem-Audit-Res      CRITICALITY ignore  TYPE PRACH-InformationItem-Audit-Res  PRESENCE mandatory      },
  ...
}

```



```

}

PRACH-InformationItem-Audit-Res ::= SEQUENCE {
    commonPhysicalChannelID    CommonPhysicalChannelID,
    resourceOperationState     ResourceOperationState,
    availabilityStatus         AvailabilityStatus
}

RACH-InformationList-Audit-Res ::= SEQUENCE (SIZE (1..maxRACHCell)) OF
    ProtocolIE-Container {{RACH-InformationItemIE-Audit-Res}}

RACH-InformationItemIE-Audit-Res NBAP-PROTOCOL-IES ::= {
    { ID id-RACH-InformationItem-Audit-Res    CRITICALITY ignore    TYPE RACH-InformationItem-Audit-Res PRESENCE mandatory    },
    ...
}

RACH-InformationItem-Audit-Res ::= SEQUENCE {
    commonTransportChannelID    CommonTransportChannelID,
    resourceOperationState     ResourceOperationState,
    availabilityStatus         AvailabilityStatus
}

AICH-InformationList-Audit-Res ::= SEQUENCE (SIZE (1..maxRACHCell)) OF
    ProtocolIE-Container {{RACH-InformationItemIE-Audit-Res}}

AICH-InformationItemIE-Audit-Res NBAP-PROTOCOL-IES ::= {
    { ID id-RACH-InformationItem-Audit-Res    CRITICALITY ignore    TYPE RACH-InformationItem-Audit-Res PRESENCE mandatory    },
    ...
}

AICH-InformationItem-Audit-Res ::= SEQUENCE {
    CommonPhysicalChannelID    CommonPhysicalChannelID,
    resourceOperationState     ResourceOperationState,
    availabilityStatus         AvailabilityStatus
}

SCH-InformationItem-Audit-Res ::= SEQUENCE {
    commonPhysicalChannelID    CommonPhysicalChannelID,
    resourceOperationState     ResourceOperationState,
    availabilityStatus         AvailabilityStatus
}

RACH-InformationItem-Audit-Res ::= SEQUENCE {
    commonPhysicalChannelID    CommonPhysicalChannelID,
    resourceOperationState     ResourceOperationState,
    availabilityStatus         AvailabilityStatus
}

CommunicationControlPort-InformationList-Audit-Res ::=SEQUENCE (SIZE (1..maxCCPinNodeB)) OF
    ProtocolIE-Container {{CommunicationControlPort-InformationItemIE }}

```

```

CommunicationControlPort-InformationItemIE-Audit-Res NBAP-PROTOCOL-IES ::= {
  {ID id-CommunicationControlPort-InformationItem-Audit-Res CRITICALITY ignore
  Audit-Res PRESENCE mandatory
  },
}

CommunicationControlPort-InformationItem-Audit-Res ::= SEQUENCE {
  communicationControlPortID CommunicationControlPortID,
  resourceOperationalState ResourceOperationalState,
  availabilityStatus AvailabilityStatus
}

LocalCell-InformationList-Audit-Res ::=SEQUENCE (SIZE (1..maxLocalCellinNodeB)) OF
  ProtocolIE-Container {{LocalCell-InformationItemIE-Audit-Res}}

LocalCell-InformationItemIE-Audit-Res NBAP-PROTOCOL-IES ::= {
  { ID id-LocalCell-InformationItem-Audit-Res CRITICALITY ignore TYPE LocalCell-InformationItem-Audit-Res PRESENCE mandatory },
  ...
}

LocalCell-InformationItem-Audit-Res ::= SEQUENCE {
  localCellID LocalCellID,
  numberOfChannelElements NumberOfChannelElements OPTIONAL,
  maximumDLPowerCapability MaximumDLPowerCapability OPTIONAL
}

```

<b>CHANGE REQUEST</b>		<i>Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.</i>
<b>25.433</b>	<b>CR</b>	<b>018</b>
GSM (AA.BB) or 3G (AA.BBB) specification number ↑		↑ CR number as allocated by MCC support team
For submission to: <b>TSG RAN #7</b>	For approval for information	Current Version: <b>3.0.0.</b>
<small>list expected approval meeting # here</small>	<input checked="" type="checkbox"/>	strategic <input type="checkbox"/> non-strategic <input type="checkbox"/>
↑	<input type="checkbox"/>	<small>(for SMG use only)</small>

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: ftp://ftp.3gpp.org/Information/CR-Form-v2.doc

**Proposed change affects:** (U)SIM  ME  UTRAN / Radio  Core Network   
(at least one should be marked with an X)

**Source:** TSG-RAN WG3 **Date:** 24<sup>th</sup>-28<sup>th</sup> January

**Subject:** Use of Error Indication procedure on signalling bearers corresponding to the Node B control port

**Work item:**

<b>Category:</b>	F Correction	<input type="checkbox"/>	<b>Release:</b>	Phase 2	<input type="checkbox"/>
<small>(only one category shall be marked with an X)</small>	A Corresponds to a correction in an earlier release	<input type="checkbox"/>		Release 96	<input type="checkbox"/>
	B Addition of feature	<input type="checkbox"/>		Release 97	<input type="checkbox"/>
	C Functional modification of feature	<input type="checkbox"/>		Release 98	<input type="checkbox"/>
	D Editorial modification	<input checked="" type="checkbox"/>		Release 99	<input checked="" type="checkbox"/>
				Release 00	<input type="checkbox"/>

**Reason for change:** During R3#9 the ERROR\_INDICATION message was introduced on NBAP.  
The current conditions specified for the CRNC/Node-B communication context id's only enables usage on signalling bearers corresponding to a communication control port.  
This contribution will enable usage of the message on signalling bearers related to the Node-B control port which is assumed to be the original intention.

**Clauses affected:** 9.1.64, 9.3.3.

<b>Other specs affected:</b>	Other 3G core specifications	<input type="checkbox"/>	→ List of CRs:	
	Other GSM core specifications	<input type="checkbox"/>	→ List of CRs:	
	MS test specifications	<input type="checkbox"/>	→ List of CRs:	
	BSS test specifications	<input type="checkbox"/>	→ List of CRs:	
	O&M specifications	<input type="checkbox"/>	→ List of CRs:	

**Other comments:**



help.doc

<----- double-click here for help and instructions on how to create a CR.

### 9.1.63 COMPRESSED MODE CANCEL (FDD only)

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
NodeB communication context ID	M			
Transaction ID	M			

### 9.1.64 ERROR INDICATION

Information Element	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Message Discriminator	M			
Transaction Id	M			
Cause	C_ifalone			
CRNC Communication Context Id	C_ifUL			
Node B Communication Context Id	C_ifDL			
Criticality diagnostics	C_ifalone			

Condition	Explanation
C_ifDL	This IE is only present when message is transmitted by <a href="#">the CRNC on a signalling bearer corresponding to a communication control port.</a>
C_ifUL	This IE is only present when message is transmitted by <a href="#">the Node B on a signalling bearer corresponding to a communication control port.</a>
C_ifalone	At least either of Cause IE or Criticality Diagnostics IE shall be present.

```

-- *****
--
-- ERROR INDICATION
--
-- *****

ErrorIndication ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{ErrorIndication-IEs}},
    protocolExtensions  ProtocolExtensionContainer {{ErrorIndication-Extensions}}    OPTIONAL,
    ...
}

ErrorIndication-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-Cause          CRITICALITY ignore      TYPE Cause          PRESENCE mandatory } |
    { ID id-CRNC-CommunicationContextID  CRITICALITY ignore      TYPE CRNC-CommunicationContextID  PRESENCE optional } |
    -- This IE is only present when message is transmitted by RNC a Node B on a signalling bearer corresponding to a communication control port --
    { ID id-NodeB-CommunicationContextID  CRITICALITY ignore      TYPE NodeB-CommunicationContextID  PRESENCE optional } |
    -- This IE is only present when message is transmitted by NodeB a CRNC on a signalling bearer corresponding to a communication control port --
    { ID id-CriticalityDiagnostic  CRITICALITY ignore      TYPE L3-CriticalityDiagnostic  PRESENCE optional },
    -- At least either or Cause IE or Criticality Diagnostic IE shall be present--
    ...
}

ErrorIndication-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

END

```

## CHANGE REQUEST

Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.

**25.433 CR 020**

Current Version: **3.0.0**

GSM (AA.BB) or 3G (AA.BBB) specification number ↑

↑ CR number as allocated by MCC support team

For submission to: **TSG RAN #7**  
*list expected approval meeting # here*

for approval   
 for information

strategic   
 non-strategic  (for SMG use only)

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: ftp://ftp.3gpp.org/Information/CR-Form-v2.doc

**Proposed change affects:** (U)SIM  ME  UTRAN / Radio  Core Network   
 (at least one should be marked with an X)

**Source:** TSG-RAN WG3 **Date:** 2000-01-24 – 28

**Subject:** Correction of number of possible CPICHs in a cell

**Work item:**

<b>Category:</b>	F Correction <input checked="" type="checkbox"/> A Corresponds to a correction in an earlier release <input type="checkbox"/> B Addition of feature <input type="checkbox"/> C Functional modification of feature <input type="checkbox"/> D Editorial modification <input type="checkbox"/>	<b>Release:</b>	Phase 2 <input type="checkbox"/> Release 96 <input type="checkbox"/> Release 97 <input type="checkbox"/> Release 98 <input type="checkbox"/> Release 99 <input checked="" type="checkbox"/> Release 00 <input type="checkbox"/>
------------------	--	-----------------	--

(only one category shall be marked with an X)

**Reason for change:** The number of SecondaryCPICHs in a cell is not consistent in the NBAP spec. The Resource Status Indication procedure and the Audit procedure supports multiple Secondary CPICHs, while the Cell Setup procedure and the Cell Reconfiguration procedure does not. In the logical model in 25.430 it shall be possibility to have more than one Secondary CPICH in a cell.

**Clauses affected:** 8.2.12.2, 8.2.13.2, 9.1.23.1, 9.1.26.1, 9.3.3 and 9.3.7

<b>Other specs affected:</b>	Other 3G core specifications <input type="checkbox"/> Other GSM core specifications <input type="checkbox"/> MS test specifications <input type="checkbox"/> BSS test specifications <input type="checkbox"/> O&M specifications <input type="checkbox"/>	→ List of CRs: → List of CRs: → List of CRs: → List of CRs: → List of CRs:	
------------------------------	---	--	--


**Other comments:**



help.doc

<----- double-click here for help and instructions on how to create a CR.

### 8.2.12.2 Successful operation

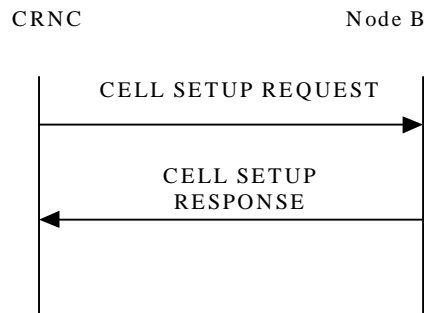

**Figure 1: Cell Setup Successful case**

The procedure is initiated with a CELL SETUP REQUEST message sent from CRNC to Node B. Upon Reception, the Node B shall reserve the necessary resources and configure the new cell according to the parameters given in the message.


[FDD If the CELL SETUP REQUEST message includes one or more ~~the~~ *Secondary CPICH Information IE* group the Node B shall configure and activate the *Secondary CPICH(s)* in the cell according to received configuration data.

The *Maximum transmission power IE* value shall be stored in the Node B and at any instance of time the total maximum output power in the cell shall not be above this value.

When the cell is successfully configured the Node B shall store the *Configuration Generation ID IE* value and send a CELL SETUP RESPONSE message as a response.

[FDD- When the cell is successfully configured CPICH(s), Primary SCH, Secondary SCH, Primary CCPCH and BCH exist.][TDD- When the cell is successfully configured PSCH, SCH, Primary CCPCH and BCH exist and the switching-points for the TDD frame structure are defined.]

## 8.2.13.2 Successful operation

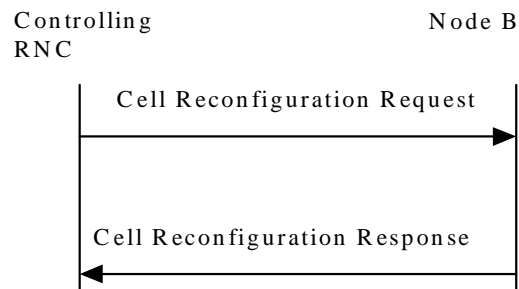

**Figure 8: Cell Reconfiguration Successful case**

The procedure is initiated with a CELL RECONFIGURATION REQUEST message sent from CRNC to Node B. Upon Reception, the Node B shall reconfigure the cell according to the parameters given in the message.

[FDD If the CELL RECONFIGURATION REQUEST message includes the *Primary SCH Information* IE group the Node B shall reconfigure Primary SCH power in the cell according to *Primary SCH Power* IE value.

[FDD If the CELL RECONFIGURATION REQUEST message includes the *Secondary SCH Information* IE group the Node B shall reconfigure Secondary SCH power in the cell according to the *Secondary SCH Power* IE value.

[FDD If the CELL RECONFIGURATION REQUEST message includes the *Primary CPICH Information* IE group the Node B shall reconfigure Primary CPICH power in the cell according to the *Primary CPICH Power* IE value. NodeB shall adjust all the transmitted power levels relative to the Primary CPICH power according to the new value]

[FDD If the CELL RECONFIGURATION REQUEST message includes one or more the *Secondary CPICH Information* IE groups, the Node B shall reconfigure the power for each Secondary CPICH ~~power~~ in the cell according to the ir *Secondary CPICH Power* IE value.

[TDD If the CELL RECONFIGURATION REQUEST message includes the *PSCH Information* IE group the Node B shall reconfigure PSCH power in the cell according to the *PSCH Power* IE value

[FDD If the CELL RECONFIGURATION REQUEST message includes the *Primary CCPCH Information* IE group the Node B shall reconfigure BCH power in the cell according to the *BCH Power* IE value.

[TDD - If the CELL RECONFIGURATION REQUEST message includes the *Primary CCPCH Information* IE group the Node B shall reconfigure P-CCPCH power in the cell according to the *P-CCPCH Power* IE value. NodeB shall adjust all the transmitted power levels relative to the Primary CPPCH power according to the new value.]

If the CELL RECONFIGURATION REQUEST message includes the *Maximum Transmission Power* IE the value shall be stored in the Node B and at any instance of time the total maximum output power in the cell shall not be above this value.

[TDD - If the CELL RECONFIGURATION REQUEST message includes the *Timeslot Information* IE group the Node B shall reconfigure switching-point structure in the cell according to the *Timeslot* IE value.]

When the cell is successfully reconfigured the Node B shall store the new *Configuration Generation ID* IE value and send a CELL RECONFIGURATION RESPONSE message as a response.



### 9.1.23 CELL SETUP REQUEST

#### 9.1.23.1 FDD Message

Information Element	Presence	Range	IE type and Reference	Semantics description
Message discriminator	M			
Message Type	M			
Transaction ID	M			
Local Cell Id	M			
C-Id	M			
Configuration Generation Id	M			
T Cell	M			
UARFCN	M			Indicates UL/DL Frequency
Maximum transmission power	M			
Primary scrambling code	M			
<b>Primary SCH Information</b>		1		
Common Physical Channel ID	M			
Primary SCH Power	M		DL Power	
TSTD Indicator	M			
<b>Secondary SCH Information</b>		1		
Common Physical Channel ID	M			
Secondary SCH power	M		DL Power	
TSTD Indicator	M			
<b>Primary CPICH Information</b>		1		
Common Physical Channel ID	M			
P-CPICH power	M			
Transmit Diversity Indicator	M			
<b>Secondary CPICH Information</b>		0..<maxSC PICHCell> 4		
Common Physical Channel ID	M			
DL Scrambling code	M			
FDD DL Channelisation Code Number	M			
S-CPICH Power	M		DL Power	
Transmit Diversity Indicator	M			
<b>Primary CCPCH Information</b>		1		
Common Physical Channel ID	M			
<b>BCH Information</b>		1		
Common Transport Channel ID	M			
BCH Power	M		DL Power	
STTD Indicator	M			

<u>Range bound</u>	<u>Explanation</u>
<a href="#">maxSCPICHCell</a>	<a href="#">Maximum number of Secondary CPICH that can be defined in a Cell.</a>

## 9.1.26 CELL RECONFIGURATION REQUEST

## 9.1.26.1 FDD Message

Information Element	Presence	Range	IE type and reference	Semantics description
Message discriminator	M			
Message Type	M			
Transaction ID	M			
C-ID	M			
Configuration Generation Id	M			
Maximum transmission power	O			
<b>Primary SCH Information</b>		0,1		
Common Physical Channel ID	M			
Primary SCH power	M		DL Power	
<b>Secondary SCH Information</b>		0,1		
Common Physical Channel ID	M			
Secondary SCH power	M		DL Power	
<b>Primary CPICH Information</b>		0,1		
Common Physical Channel ID	M			
Primary CPICH power	M			
<b>Secondary CPICH Information</b>		0..<maxSCPICHCell> 4		
Common Physical Channel ID	M			
Secondary CPICH Power	M		DL Power	
<b>Primary CCPCH Information</b>		0,1		
<b>BCH Information</b>		1		
Common Transport Channel ID	M			
BCH Power	M		DL Power	

<u>Range bound</u>	<u>Explanation</u>
<a href="#">maxSCPICHCell</a>	<a href="#">Maximum number of Secondary CPICH that can be defined in a Cell.</a>

### 9.3.3 NBAP PDU Content Definitions

FROM NBAP-Containers

id-AICH-Information-ResourceStatIndItem,  
id-AICH-ParametersList,  
id-AICH-ParametersListItem,  
id-AllowedSlotFormatInformationListItem-CTCHreconf-Req-FDD,  
id-AllowedSlotFormatInformationListItem-CTCHsetup-Req-FDD,  
id-BlockingPriorityIndicator,  
id-CCTrCH-ParametersList,  
id-CCTrCH-ParametersListItem,  
id-CFN,  
id-CRNC-CommunicationContextID,  
id-CRNCommunicationContextID,  
id-Cause,  
id-Cell-Information-ResourceStatIndItem,  
id-Cell-InformationItem,  
id-Cell-InformationList,  
id-Cell-Parameter,  
id-Cell-ParametersItem,  
id-Cell-ParametersList,  
id-CellParameter,  
id-CommonMeasurementObjectType,  
id-CommonMeasurementType,  
id-CommonPhysicalChannelID,  
id-CommonPhysicalChannelType-CTCHsetup-Req-FDD,  
id-CommonPhysicalChannelType-CTCHsetup-Response,  
id-CommunicationControlPort-InformationItem,  
id-CommunicationControlPortID,  
id-CommunicationControlPortInformation-ResourceStatIndItem,  
id-CommunicationControlPortInformationList,  
id-CompressesModeMethod,  
id-ConfigurationGenerationID,  
id-DCH-Add-RL-ReconfPrepFDDItem,  
id-DCH-Add-RL-ReconfPrepTDDItem,  
id-DCH-Add-RL-ReconfReadyItem,  
id-DCH-Add-RL-ReconfReqFDDItem,  
id-DCH-Add-RL-ReconfReqTDDItem,  
id-DCH-AddItem-RL-ReconfResp,  
id-DCH-AddList-RL-ReconfPrepFDD,  
id-DCH-AddList-RL-ReconfPrepTDD,  
id-DCH-AddList-RL-ReconfReqFDD,  
id-DCH-AddList-RL-ReconfReqTDD,  
id-DCH-Delete-RL-ReconfPrepFDDItem,  
id-DCH-Delete-RL-ReconfPrepTDDItem,  
id-DCH-Delete-RL-ReconfReqFDDItem,  
id-DCH-Delete-RL-ReconfReqTDDItem,

id-DCH-DeleteList-RL-ReconfPrepFDD,  
id-DCH-DeleteList-RL-ReconfPrepTDD,  
id-DCH-DeleteList-RL-ReconfReqFDD,  
id-DCH-DeleteList-RL-ReconfReqTDD,  
id-DCH-Information-RL-SetupReqFDDItem,  
id-DCH-Information-RL-SetupReqTDDItem,  
id-DCH-InformationList-RL-SetupReqFDD,  
id-DCH-InformationList-RL-SetupReqTDD,  
id-DCH-InformationResponse-RL-SetupFailFDDItem,  
id-DCH-InformationResponse-RL-setupResTDDItem,  
id-DCH-InformationResponseItem,  
id-DCH-Modify-RL-ReconfPrepFDDItem,  
id-DCH-Modify-RL-ReconfPrepTDDItem,  
id-DCH-Modify-RL-ReconfReadyItem,  
id-DCH-Modify-RL-ReconfReqFDDItem,  
id-DCH-Modify-RL-ReconfReqTDDItem,  
id-DCH-ModifyItem-RL-ReconfResp,  
id-DCH-ModifyList-RL-ReconfPrepFDD,  
id-DCH-ModifyList-RL-ReconfPrepTDD,  
id-DCH-ModifyList-RL-ReconfReqFDD,  
id-DCH-ModifyList-RL-ReconfReqTDD,  
id-DL-CCTrCH-Information-RL-ReconfPrepTDDItem,  
id-DL-CCTrCH-Information-RL-ReconfReqTDDItem,  
id-DL-CCTrCH-Information-RL-SetupReqTDDItem,  
id-DL-CCTrCH-InformationItem,  
id-DL-CCTrCH-InformationList-RL-ReconfPrepTDD,  
id-DL-CCTrCH-InformationList-RL-ReconfReqTDD,  
id-DL-CCTrCH-InformationList-RL-SetupReqTDD,  
id-DL-CCTrCHInformationItem,  
id-DL-CCTrCHInformationList,  
id-DL-CodeInformation,  
id-DL-CodeInformation-RL-ReconfPrepFDDItem,  
id-DL-CodeInformation-RL-SetupReqFDDItem,  
id-DL-DPCH-Information-RL-ReconfPrepFDD,  
id-DL-DPCH-Information-RL-ReconfPrepTDDItem,  
id-DL-DPCH-Information-RL-SetupReqTDDItem,  
id-DL-DPCH-InformationItem,  
id-DL-DPCH-InformationItem-RL-ReconfReqFDD,  
id-DL-DPCH-InformationItem-RL-SetupReqFDD,  
id-DL-FrameType,  
id-DL-ReferencePowerInformationItem,  
id-DSCH-AddItem-RL-ReconfPrepFDD,  
id-DSCH-AddItem-RL-ReconfReqFDD,  
id-DSCH-DeleteItem-RL-ReconfPrepFDD,  
id-DSCH-DeleteItem-RL-ReconfReqFDD,  
id-DSCH-ID,  
id-DSCH-Information-RL-SetupReqFDDItem,  
id-DSCH-InformationList-RL-SetupReqFDD,  
id-DSCH-InformationResponse-RL-SetupFailFDDItem,  
id-DSCH-InformationResponse-RL-setupResFDDItem,  
id-DSCH-ModifyItem-RL-ReconfPrepFDD,

id-DSCH-ModifyItem-RL-ReconfReqFDD,  
id-DedicatedMeasurementObjectType,  
id-DedicatedMeasurementType,  
id-FACH-Information-ResourceStatIndItem,  
id-FACH-InformationItem,  
id-FACH-ListItem,  
id-FACH-ParametersList-CTCHreconf-Req-FDD,  
id-FACH-ParametersList-CTCHreconf-Req-TTD,  
id-FACH-ParametersListItem-CTCHreconf-Req-FDD,  
id-FACH-ParametersListItem-CTCHreconf-Req-TTD,  
id-FACH-ParametersListItem-CTCHsetup-Req-FDD,  
id-FACH-ParametersListItem-CTCHsetup-Response,  
id-GapStartingSlotNumber,  
id-IndicationType,  
id-Local-Cell-Information-ResourceStatIndItem,  
id-Local-CellInformation-ResourceStatIndItem,  
id-LocalCell-ID,  
id-LocalCell-InformationItem,  
id-LocalCellInformationList,  
id-MIB-SegmentInformationItem,  
id-MIB-SegmentInformationList,  
id-MaximumTransmissionPower,  
id-MeasuredCellInfo,  
id-MeasurementCharacteristics,  
id-MeasurementID,  
id-MeasurementType,  
id-NeighbouringFDD-Cell-InformationItem,  
id-NeighbouringTDD-Cell-InformationItem,  
id-NodeB-CommunicationContextID,  
id-PCCPCH-Information,  
id-PCH-Information-ResourceStatIndItem,  
id-PCH-InformationItem,  
id-PCH-ListItem,  
id-PCH-Parameters-CTCHreconf-Req-FDD,  
id-PCH-ParametersList,  
id-PCH-ParametersListItem,  
id-PICH-Parameters-CTCHreconf-Req-FDD,  
id-PRACH-ParametersList,  
id-PRACH-ParametersListItem,  
id-PSCH-Information,  
id-PSCHandPCCPCH-Information,  
id-PUSCH-ListItem,  
id-PatternDuration,  
id-PowerControlMode,  
id-PowerResumeMode,  
id-PrimaryCCPCH-Information,  
id-PrimaryCPICH-Information,  
id-PrimarySCH-Information,  
id-PrimaryScramblingCode,  
id-ProcedureScopeType,  
id-RACH-Information-ResourceStatIndItem,

id-RACH-InformationItem,  
 id-RL-ID,  
 id-RL-Information,  
 id-RL-Information-DMeasureReportItem,  
 id-RL-Information-DMeasureRequestItem,  
 id-RL-Information-DMeasureResponseItem,  
 id-RL-Information-RL-ReconfPrepFDDItem,  
 id-RL-Information-RL-SetupReqFDDItem,  
 id-RL-InformationItem,  
 id-RL-InformationItem-RL-SetupReqTDD,  
 id-RL-InformationList,  
 id-RL-InformationList-RL-ReconfReqFDD,  
 id-RL-InformationList-RL-SetupReqFDD,  
 id-RL-InformationResponse-RL-setupResFDDItem,  
 id-RL-InformationResponseItem-RL-ReconfResp,  
 id-RL-InformationResponseList-RL-ReconfReady,  
 id-RL-InformationResponseList-RL-ReconfReadyItem,  
 id-RL-InformationResponseList-RL-ReconfResp,  
 id-RL-InformationResponseList-RL-setupResFDD,  
 id-RL-InformationResponseList-RL-setupResTDD,  
 id-RL-ReconfigurationFailure-RL-ReconfFailItem,  
 id-RL-ReconfigurationFailureList-RL-ReconfFail,  
 id-RL-ResponseInformation,  
 id-RL-ResponseInformationItem,  
 id-RL-ResponseInformationList,  
 id-RL-informationItem,  
 id-RL-informationList,  
 id-RadioLinkInformation-RL-ReconfPrepFDDItem,  
 id-RadioLinkInformation-RL-ReconfPrepTDD,  
 id-RadioLinkInformation-RL-ReconfReqTDD,  
 id-RadioLinkInformationList-RL-ReconfPrepFDD,  
 id-ReportCharacteristics,  
 id-SFN,  
 id-SIB-SegmentInformationItem,  
 id-SIB-SegmentInformationList,  
 id-ScramblingCodeChange,  
 id-Secondary-CCPCHListItem,  
[id-SecondaryCPICH-InformationList-Cellreconf-Req](#)  
[id-SecondaryCPICH-Information](#)  
[id-SecondaryCPICH-InformationList-Cellsetup-Req](#)  
 id-SecondarySCH-Information,  
 id-ShutdownTimer,  
 id-Successful-RL-InformationResponse-RL-SetupFailFDDItem,  
 id-Successful-RL-InformationResponseItem,  
 id-Successful-RL-InformationResponseList,  
 id-Successful-RL-InformationResponseList-RL-SetupFailFDD,  
 id-SynchronisationMethod,  
 id-T-Cell,  
 id-TDDChipOffset,  
 id-TimeSlotConfigurationItem,  
 id-TimeSlotConfigurationList,

id-TransmissionGapDistance,  
id-TransmissionGapPeriod,  
id-TransmitGapLength,  
id-TransmitGapPositionMode,  
id-UARFCN,  
id-C-ID,  
id-UL-CCTrCH-Information-RL-ReconfPrepTDDItem,  
id-UL-CCTrCH-Information-RL-ReconfReqTDDItem,  
id-UL-CCTrCH-Information-RL-SetupReqTDDItem,  
id-UL-CCTrCH-InformationItemIE,  
id-UL-CCTrCH-InformationList-RL-ReconfPrepTDD,  
id-UL-CCTrCH-InformationList-RL-ReconfReqTDD,  
id-UL-CCTrCH-InformationList-RL-SetupReqTDD,  
id-UL-CCTrCHInformation,  
id-UL-CCTrCHInformationList,  
id-UL-DPCH-Information-RL-ReconfPrepFDD,  
id-UL-DPCH-Information-RL-ReconfPrepTDDItem,  
id-UL-DPCH-Information-RL-SetupReqTDDItem,  
id-UL-DPCH-InformationItem-RL-ReconfReqFDD,  
id-UL-DPCH-InformationItem-RL-SetupReqFDD,  
id-UL-DPCH-InformationItemIE,  
id-USCH-Information-ResourceStatIndItem,  
id-USCH-InformationItem,  
id-USCH-ListItem-CTCHsetup-Req-TDD,  
id-Unsuccessful-RL-InformationResponse,  
id-Unsuccessful-RL-InformationResponse-RL-SetupFailFDDItem,  
id-Unsuccessful-RL-InformationResponseItem,  
id-Unsuccessful-RL-InformationResponseItem-RL-SetupFailTDD,  
id-Unsuccessful-RL-InformationResponseList,  
id-Unsuccessful-RL-InformationResponseList-RL-SetupFailFDD,

```

-- *****
--
-- CELL SETUP REQUEST FDD
--
-- *****

CellSetupRequestFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{CellSetupRequestFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CellSetupRequestFDD-Extensions}}          OPTIONAL,
    ...
}

CellSetupRequestFDD-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-LocalCell-ID          CRITICALITY ignore TYPE LocalCell-ID          PRESENCE mandatory }|
    { ID id-C-ID                  CRITICALITY ignore TYPE C-ID                  PRESENCE mandatory }|
    { ID id-ConfigurationGenerationID CRITICALITY ignore TYPE ConfigurationGenerationID PRESENCE mandatory }|
    { ID id-T-Cell                CRITICALITY ignore TYPE T-Cell                PRESENCE mandatory }|
    { ID id-UARFCN                CRITICALITY ignore TYPE UARFCN                PRESENCE mandatory }|
    { ID id-MaximumTransmissionPower CRITICALITY ignore TYPE MaximumTransmissionPower PRESENCE mandatory }|
    { ID id-PrimaryScramblingCode   CRITICALITY ignore TYPE PrimaryScramblingCode   PRESENCE mandatory }|
    { ID id-PrimarySCH-Information-Cellsetup-Req CRITICALITY ignore TYPE PrimarySCH-Information-Cellsetup-Req PRESENCE mandatory }|
    { ID id-SecondarySCH-Information-Cellsetup-Req CRITICALITY ignore TYPE SecondarySCH-Information-Cellsetup-Req PRESENCE mandatory }|
    { ID id-PrimaryCPICH-Information-Cellsetup-Req CRITICALITY ignore TYPE PrimaryCPICH-Information-Cellsetup-Req PRESENCE mandatory }|
    { ID id-SecondaryCPICH-InformationList-Cellsetup-Req CRITICALITY ignore TYPE SecondaryCPICH-Information-Cellsetup-Req PRESENCE optional }|
}

{ ID id-PrimaryCCPCH-Information-Cellsetup-Req CRITICALITY ignore TYPE PrimaryCCPCH-Information-Cellsetup-Req PRESENCE mandatory },
...
}

CellSetupRequestFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

PrimarySCH-Information-Cellsetup-Req ::= SEQUENCE {
    commonPhysicalChannelID CommonPhysicalChannelID,
    primarySCH-Power         DL-Power,
    tSTD-Indicator           TSTD-Indicator
}

SecondarySCH-Information-Cellsetup-Req ::= SEQUENCE {
    commonPhysicalChannelID CommonPhysicalChannelID,
    secondarySCH-Power       DL-Power,
    transmitDiversityIndication TransmitDiversityIndication
}

PrimaryCPICH-Information-Cellsetup-Req ::= SEQUENCE {

```



```

    commonPhysicalChannelID    CommonPhysicalChannelID,
    primaryCPICH-Power         DL-Power,
    sTTD-Indicator             STTD-Indicator
}

SecondaryCPICH-InformationList-Cellsetup-Req ::= SEQUENCE (SIZE (1.. maxSCPICHCell)) OF
SEQUENCE {
    commonPhysicalChannelID    CommonPhysicalChannelID,
    dl-ScramblingCode          DL-ScramblingCode,
    secondaryCPICH-Power       DL-Power,
    transmitDiversityIndication TransmitDiversityIndication
}

PrimaryCCPCH-Information-Cellsetup-Req ::= SEQUENCE {
    commonPhysicalChannelID    CommonPhysicalChannelID,
    bCH-information-Cellsetup-Req BCH-Information-PrimCCPCH-Cellsetup-Req,
    sTTD-Indicator             STTD-Indicator
}

BCH-Information-PrimCCPCH-Cellsetup-Req ::= SEQUENCE {
    commonTransportChannelID    CommonTransportChannelID,
    bCH-Power                   DL-Power
}

```

```

-- *****
--
-- CELL RECONFIGURATION REQUEST FDD
--
-- *****

CellReconfigurationRequestFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{CellReconfigurationRequestFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CellReconfigurationRequestFDD-Extensions}}    OPTIONAL,
    ...
}

CellReconfigurationRequestFDD-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-C-ID          CRITICALITY ignore TYPE C-ID          PRESENCE mandatory }|
    { ID id-ConfigurationGenerationID CRITICALITY ignore TYPE ConfigurationGenerationID PRESENCE mandatory }|
    { ID id-MaximumTransmissionPower CRITICALITY ignore TYPE MaximumTransmissionPower PRESENCE optional }|
    { ID id-PrimarySCH-Information-Cellreconf-Req CRITICALITY ignore TYPE PrimarySCH-Information-Cellreconf-Req PRESENCE optional }|
    { ID id-SecondarySCH-Information-Cellreconf-Req CRITICALITY ignore TYPE SecondarySCH-Information-Cellreconf-Req PRESENCE optional }|
    { ID id-PrimaryCPICH-Information-Cellreconf-Req CRITICALITY ignore TYPE PrimaryCPICH-Information-Cellreconf-Req PRESENCE optional }|
    { ID id-SecondaryCPICH-InformationList-Cellreconf-Req CRITICALITY ignore TYPE SecondaryCPICH-InformationList-Cellreconf-Req PRESENCE optional }|
    { ID id-PrimaryCCPCH-Information-Cellreconf-Req CRITICALITY ignore TYPE PrimaryCCPCH-Information-Cellreconf-Req PRESENCE optional },
    ...
}

CellReconfigurationRequestFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

PrimarySCH-Information-Cellreconf-Req ::= SEQUENCE {
    commonPhysicalChannelID CommonPhysicalChannelID,
    primarySCH-Power         DL-Power
}

SecondarySCH-Information-Cellreconf-Req ::= SEQUENCE {
    commonPhysicalChannelID CommonPhysicalChannelID,
    secondarySCH-Power       DL-Power
}

PrimaryCPICH-Information-Cellreconf-Req ::= SEQUENCE {
    commonPhysicalChannelID CommonPhysicalChannelID,
    primaryCPICH-Power       DL-Power
}

SecondaryCPICH-InformationList-Cellreconf-Req ::= SEQUENCE (SIZE (1.. maxSCPICHCell)) OF
SEQUENCE {
    commonPhysicalChannelID CommonPhysicalChannelID, secondaryCPICH-Power DL-Power
}

```

```
PrimaryCCPCH-Information-Cellreconf-Req ::= SEQUENCE {  
    bCH-information          BCH-information-Cellreconf-Req  
}
```

```
BCH-Information-Cellreconf-Req ::= SEQUENCE {  
    commonTransportChannelID    CommonTransportChannelID,  
    bCH-Power                   DL-Power  
}
```

### 9.3.7 Constant Definitions for NBAP

```

-- *****
--
-- IEs
--
-- *****

id-AICH-Information-ResourceStatIndItem          INTEGER ::= 0
id-AICH-ParametersList                          INTEGER ::= 1
id-AICH-ParametersListItem                      INTEGER ::= 2
id-AllowedSlotFormatInformationListItem-CTCHreconf-Req-FDD  INTEGER ::= 3
id-AllowedSlotFormatInformationListItem-CTCHsetup-Req-FDD  INTEGER ::= 4
id-BlockingPriorityIndicator                    INTEGER ::= 5
id-CCTrCH-ParametersList                       INTEGER ::= 6
id-CCTrCH-ParametersListItem                   INTEGER ::= 7
id-CFN                                          INTEGER ::= 8
id-CRNC-CommunicationContextID                  INTEGER ::= 9
id-CRNCommunicationContextID                    INTEGER ::= 10
id-Cause                                        INTEGER ::= 11
id-Cell-Information-ResourceStatIndItem         INTEGER ::= 12
id-Cell-InformationItem                         INTEGER ::= 13
id-Cell-InformationList                        INTEGER ::= 14
id-Cell-Parameter                             INTEGER ::= 15
id-Cell-ParametersItem                         INTEGER ::= 16
id-Cell-ParametersList                         INTEGER ::= 17
id-CellParameter                              INTEGER ::= 18
id-CommonMeasurementObjectType                 INTEGER ::= 19
id-CommonMeasurementType                       INTEGER ::= 20
id-CommonPhysicalChannelID                     INTEGER ::= 21
id-CommonPhysicalChannelType-CTCHsetup-Req-FDD  INTEGER ::= 22
id-CommonPhysicalChannelType-CTCHsetup-Response  INTEGER ::= 23
id-CommunicationControlPort-InformationItem     INTEGER ::= 24
id-CommunicationControlPortID                  INTEGER ::= 25
id-CommunicationControlPortInformation-ResourceStatIndItem  INTEGER ::= 26
id-CommunicationControlPortInformationList      INTEGER ::= 27
id-CompressesModeMethod                       INTEGER ::= 28
id-ConfigurationGenerationID                   INTEGER ::= 29
id-DCH-Add-RL-ReconfPrepFDDItem                INTEGER ::= 30
id-DCH-Add-RL-ReconfPrepTDDItem                INTEGER ::= 31
id-DCH-Add-RL-ReconfReadyItem                  INTEGER ::= 32
id-DCH-Add-RL-ReconfReqFDDItem                 INTEGER ::= 33
id-DCH-Add-RL-ReconfReqTDDItem                 INTEGER ::= 34
id-DCH-AddItem-RL-ReconfResp                    INTEGER ::= 35
id-DCH-AddList-RL-ReconfPrepFDD                 INTEGER ::= 36
id-DCH-AddList-RL-ReconfPrepTDD                 INTEGER ::= 37
id-DCH-AddList-RL-ReconfReqFDD                  INTEGER ::= 38
id-DCH-AddList-RL-ReconfReqTDD                  INTEGER ::= 39

```

id-DCH-Delete-RL-ReconfPrepFDDItem	INTEGER ::= 40
id-DCH-Delete-RL-ReconfPrepTDDItem	INTEGER ::= 41
id-DCH-Delete-RL-ReconfReqFDDItem	INTEGER ::= 42
id-DCH-Delete-RL-ReconfReqTDDItem	INTEGER ::= 43
id-DCH-DeleteList-RL-ReconfPrepFDD	INTEGER ::= 44
id-DCH-DeleteList-RL-ReconfPrepTDD	INTEGER ::= 45
id-DCH-DeleteList-RL-ReconfReqFDD	INTEGER ::= 46
id-DCH-DeleteList-RL-ReconfReqTDD	INTEGER ::= 47
id-DCH-Information-RL-SetupReqFDDItem	INTEGER ::= 48
id-DCH-Information-RL-SetupReqTDDItem	INTEGER ::= 49
id-DCH-InformationList-RL-SetupReqFDD	INTEGER ::= 50
id-DCH-InformationList-RL-SetupReqTDD	INTEGER ::= 51
id-DCH-InformationResponse-RL-SetupFailFDDItem	INTEGER ::= 52
id-DCH-InformationResponse-RL-setupRestTDDItem	INTEGER ::= 53
id-DCH-InformationResponseItem	INTEGER ::= 54
id-DCH-Modify-RL-ReconfPrepFDDItem	INTEGER ::= 55
id-DCH-Modify-RL-ReconfPrepTDDItem	INTEGER ::= 56
id-DCH-Modify-RL-ReconfReadyItem	INTEGER ::= 57
id-DCH-Modify-RL-ReconfReqFDDItem	INTEGER ::= 58
id-DCH-Modify-RL-ReconfReqTDDItem	INTEGER ::= 59
id-DCH-ModifyItem-RL-ReconfResp	INTEGER ::= 60
id-DCH-ModifyList-RL-ReconfPrepFDD	INTEGER ::= 61
id-DCH-ModifyList-RL-ReconfPrepTDD	INTEGER ::= 62
id-DCH-ModifyList-RL-ReconfReqFDD	INTEGER ::= 63
id-DCH-ModifyList-RL-ReconfReqTDD	INTEGER ::= 64
id-DL-CCTrCH-Information-RL-ReconfPrepTDDItem	INTEGER ::= 65
id-DL-CCTrCH-Information-RL-ReconfReqTDDItem	INTEGER ::= 66
id-DL-CCTrCH-Information-RL-SetupReqTDDItem	INTEGER ::= 67
id-DL-CCTrCH-InformationItem	INTEGER ::= 68
id-DL-CCTrCH-InformationList-RL-ReconfPrepTDD	INTEGER ::= 69
id-DL-CCTrCH-InformationList-RL-ReconfReqTDD	INTEGER ::= 70
id-DL-CCTrCH-InformationList-RL-SetupReqTDD	INTEGER ::= 71
id-DL-CCTrCHInformationItem	INTEGER ::= 72
id-DL-CCTrCHInformationList	INTEGER ::= 73
id-DL-CodeInformation	INTEGER ::= 74
id-DL-CodeInformation-RL-ReconfPrepFDDItem	INTEGER ::= 75
id-DL-CodeInformation-RL-SetupReqFDDItem	INTEGER ::= 76
id-DL-DPCH-Information-RL-ReconfPrepFDD	INTEGER ::= 77
id-DL-DPCH-Information-RL-ReconfPrepTDDItem	INTEGER ::= 78
id-DL-DPCH-Information-RL-SetupReqTDDItem	INTEGER ::= 79
id-DL-DPCH-InformationItem	INTEGER ::= 80
id-DL-DPCH-InformationItem-RL-ReconfReqFDD	INTEGER ::= 81
id-DL-DPCH-InformationItem-RL-SetupReqFDD	INTEGER ::= 82
id-DL-FrameType	INTEGER ::= 83
id-DL-ReferencePowerInformationItem	INTEGER ::= 84
id-DSCH-AddItem-RL-ReconfPrepFDD	INTEGER ::= 85
id-DSCH-AddItem-RL-ReconfReqFDD	INTEGER ::= 86
id-DSCH-DeleteItem-RL-ReconfPrepFDD	INTEGER ::= 87
id-DSCH-DeleteItem-RL-ReconfReqFDD	INTEGER ::= 88
id-DSCH-ID	INTEGER ::= 89
id-DSCH-Information-RL-SetupReqFDDItem	INTEGER ::= 90

id-DSCH-InformationList-RL-SetupReqFDD	INTEGER ::= 91
id-DSCH-InformationResponse-RL-SetupFailFDDItem	INTEGER ::= 92
id-DSCH-InformationResponse-RL-setupResFDDItem	INTEGER ::= 93
id-DSCH-ModifyItem-RL-ReconfPrepFDD	INTEGER ::= 94
id-DSCH-ModifyItem-RL-ReconfReqFDD	INTEGER ::= 95
id-DedicatedMeasurementObjectType	INTEGER ::= 96
id-DedicatedMeasurementType	INTEGER ::= 97
id-FACH-Information-ResourceStatIndItem	INTEGER ::= 98
id-FACH-InformationItem	INTEGER ::= 99
id-FACH-ListItem	INTEGER ::= 100
id-FACH-ParametersList-CTCHreconf-Req-FDD	INTEGER ::= 101
id-FACH-ParametersList-CTCHreconf-Req-TTD	INTEGER ::= 102
id-FACH-ParametersListItem-CTCHreconf-Req-FDD	INTEGER ::= 103
id-FACH-ParametersListItem-CTCHreconf-Req-TTD	INTEGER ::= 104
id-FACH-ParametersListItem-CTCHsetup-Req-FDD	INTEGER ::= 105
id-FACH-ParametersListItem-CTCHsetup-Response	INTEGER ::= 106
id-GapStartingSlotNumber	INTEGER ::= 107
id-IndicationType	INTEGER ::= 108
id-Local-Cell-Information-ResourceStatIndItem	INTEGER ::= 109
id-Local-CellInformation-ResourceStatIndItem	INTEGER ::= 110
id-LocalCell-ID	INTEGER ::= 111
id-LocalCell-InformationItem	INTEGER ::= 112
id-LocalCellInformationList	INTEGER ::= 113
id-MIB-SegmentInformationItem	INTEGER ::= 114
id-MIB-SegmentInformationList	INTEGER ::= 115
id-MaximumTransmissionPower	INTEGER ::= 116
id-MeasuredCellInfo	INTEGER ::= 117
id-MeasurementCharacteristics	INTEGER ::= 118
id-MeasurementID	INTEGER ::= 119
id-MeasurementType	INTEGER ::= 120
id-NeighbouringFDD-Cell-InformationItem	INTEGER ::= 121
id-NeighbouringTDD-Cell-InformationItem	INTEGER ::= 122
id-NodeB-CommunicationContextID	INTEGER ::= 123
id-PCCPCH-Information	INTEGER ::= 124
id-PCH-Information-ResourceStatIndItem	INTEGER ::= 125
id-PCH-InformationItem	INTEGER ::= 126
id-PCH-ListItem	INTEGER ::= 127
id-PCH-Parameters-CTCHreconf-Req-FDD	INTEGER ::= 128
id-PCH-ParametersList	INTEGER ::= 129
id-PCH-ParametersListItem	INTEGER ::= 130
id-PICH-Parameters-CTCHreconf-Req-FDD	INTEGER ::= 131
id-PRACH-ParametersList	INTEGER ::= 132
id-PRACH-ParametersListItem	INTEGER ::= 133
id-PSCH-Information	INTEGER ::= 134
id-PSCHandPCCPCH-Information	INTEGER ::= 135
id-PUSCH-ListItem	INTEGER ::= 136
id-PatternDuration	INTEGER ::= 137
id-PowerControlMode	INTEGER ::= 138
id-PowerResumeMode	INTEGER ::= 139
id-PrimaryCCPCH-Information	INTEGER ::= 140
id-PrimaryCPICH-Information	INTEGER ::= 141

id-PrimarySCH-Information	INTEGER ::= 142
id-PrimaryScramblingCode	INTEGER ::= 143
id-ProcedureScopeType	INTEGER ::= 144
id-RACH-Information-ResourceStatIndItem	INTEGER ::= 145
id-RACH-InformationItem	INTEGER ::= 146
id-RL-ID	INTEGER ::= 147
id-RL-Information	INTEGER ::= 148
id-RL-Information-DMeasureReportItem	INTEGER ::= 149
id-RL-Information-DMeasureRequestItem	INTEGER ::= 150
id-RL-Information-DMeasureResponseItem	INTEGER ::= 151
id-RL-Information-RL-ReconfPrepFDDItem	INTEGER ::= 152
id-RL-Information-RL-SetupReqFDDItem	INTEGER ::= 153
id-RL-InformationItem	INTEGER ::= 154
id-RL-InformationItem-RL-SetupReqTDD	INTEGER ::= 155
id-RL-InformationList	INTEGER ::= 156
id-RL-InformationList-RL-ReconfReqFDD	INTEGER ::= 157
id-RL-InformationList-RL-SetupReqFDD	INTEGER ::= 158
id-RL-InformationResponse-RL-setupResFDDItem	INTEGER ::= 159
id-RL-InformationResponseItem-RL-ReconfResp	INTEGER ::= 160
id-RL-InformationResponseList-RL-ReconfReady	INTEGER ::= 161
id-RL-InformationResponseList-RL-ReconfReadyItem	INTEGER ::= 162
id-RL-InformationResponseList-RL-ReconfResp	INTEGER ::= 163
id-RL-InformationResponseList-RL-setupResFDD	INTEGER ::= 164
id-RL-InformationResponseList-RL-setupResTDD	INTEGER ::= 165
id-RL-ReconfigurationFailure-RL-ReconfFailItem	INTEGER ::= 166
id-RL-ReconfigurationFailureList-RL-ReconfFail	INTEGER ::= 167
id-RL-ResponseInformation	INTEGER ::= 168
id-RL-ResponseInformationItem	INTEGER ::= 169
id-RL-ResponseInformationList	INTEGER ::= 170
id-RL-informationItem	INTEGER ::= 171
id-RL-informationList	INTEGER ::= 172
id-RadioLinkInformation-RL-ReconfPrepFDDItem	INTEGER ::= 173
id-RadioLinkInformation-RL-ReconfPrepTDD	INTEGER ::= 174
id-RadioLinkInformation-RL-ReconfReqTDD	INTEGER ::= 175
id-RadioLinkInformationList-RL-ReconfPrepFDD	INTEGER ::= 176
id-ReportCharacteristics	INTEGER ::= 177
id-SFN	INTEGER ::= 178
id-SIB-SegmentInformationItem	INTEGER ::= 179
id-SIB-SegmentInformationList	INTEGER ::= 180
id-ScramblingCodeChange	INTEGER ::= 181
id-Secondary-CCPCHListItem	INTEGER ::= 182
<u>id-SecondaryCPICH-InformationList-Cellreconf-Req</u>	<u>INTEGER ::= 183</u>
<u>id-SecondaryCPICH-InformationList-Cellsetup-Req</u>	<u>INTEGER ::= 184</u>
<del>id-SecondaryCPICH-Information</del>	<del>INTEGER ::= 183</del>
id-SecondarySCH-Information	INTEGER ::= <del>184</del> 185
id-ShutdownTimer	INTEGER ::= <del>185</del> 186
id-Successful-RL-InformationResponse-RL-SetupFailFDDItem	INTEGER ::= <del>186</del> 187
id-Successful-RL-InformationResponseItem	INTEGER ::= <del>187</del> 188
id-Successful-RL-InformationResponseList	INTEGER ::= <del>188</del> 189
id-Successful-RL-InformationResponseList-RL-SetupFailFDD	INTEGER ::= <del>189</del> 190
id-SynchronisationMethod	INTEGER ::= <del>190</del> 191

```

id-T-Cell INTEGER ::= 191192
id-TDDChipOffset INTEGER ::= 192193
id-TimeSlotConfigurationItem INTEGER ::= 193194
id-TimeSlotConfigurationList INTEGER ::= 194195
id-TransmissionGapDistance INTEGER ::= 195196
id-TransmissionGapPeriod INTEGER ::= 196197
id-TransmitGapLength INTEGER ::= 197198
id-TransmitGapPositionMode INTEGER ::= 198199
id-UARFCN INTEGER ::= 199200
id-UC-ID INTEGER ::= 200201
id-UL-CCTrCH-Information-RL-ReconfPrepTDDItem INTEGER ::= 201202
id-UL-CCTrCH-Information-RL-ReconfReqTDDItem INTEGER ::= 202203
id-UL-CCTrCH-Information-RL-SetupReqTDDItem INTEGER ::= 203204
id-UL-CCTrCH-InformationItemIE INTEGER ::= 204205
id-UL-CCTrCH-InformationList-RL-ReconfPrepTDD INTEGER ::= 205206
id-UL-CCTrCH-InformationList-RL-ReconfReqTDD INTEGER ::= 206207
id-UL-CCTrCH-InformationList-RL-SetupReqTDD INTEGER ::= 207208
id-UL-CCTrCHInformation INTEGER ::= 208209
id-UL-CCTrCHInformationList INTEGER ::= 209210
id-UL-DPCH-Information-RL-ReconfPrepFDD INTEGER ::= 210211
id-UL-DPCH-Information-RL-ReconfPrepTDDItem INTEGER ::= 211212
id-UL-DPCH-Information-RL-SetupReqTDDItem INTEGER ::= 212213
id-UL-DPCH-InformationItem-RL-ReconfReqFDD INTEGER ::= 213214
id-UL-DPCH-InformationItem-RL-SetupReqFDD INTEGER ::= 214215
id-UL-DPCH-InformationItemIE INTEGER ::= 215216
id-USCH-Information-ResourceStatIndItem INTEGER ::= 216217
id-USCH-InformationItem INTEGER ::= 217218
id-USCH-ListItem-CTCHsetup-Req-TDD INTEGER ::= 218219
id-Unsuccessful-RL-InformationResponse INTEGER ::= 219220
id-Unsuccessful-RL-InformationResponse-RL-SetupFailFDDItem INTEGER ::= 220221
id-Unsuccessful-RL-InformationResponseItem INTEGER ::= 221222
id-Unsuccessful-RL-InformationResponseItem-RL-SetupFailTDD INTEGER ::= 222223
id-Unsuccessful-RL-InformationResponseList INTEGER ::= 223224
id-Unsuccessful-RL-InformationResponseList-RL-SetupFailFDD INTEGER ::= 224225

```

END





<b>CHANGE REQUEST</b>		Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.
<b>25.433</b>	<b>CR 022</b>	Current Version: <b>3.0.0</b>
GSM (AA.BB) or 3G (AA.BBB) specification number ↑	↑ CR number as allocated by MCC support team	
For submission to: <b>TSG-RAN#7</b> <small>list expected approval meeting # here ↑</small>	for approval for information <input checked="" type="checkbox"/>	strategic <input type="checkbox"/> non-strategic <input type="checkbox"/> <small>(for SMG use only)</small>

Form: CR cover sheet, version 2 for 3GPP and SMG    The latest version of this form is available from: ftp://ftp.3gpp.org/Information/CR-Form-v2.doc

**Proposed change affects:**    (U)SIM     ME     UTRAN / Radio     Core Network   
(at least one should be marked with an X)

**Source:**    TSG-RAN WG3    **Date:**    24 January 2000

**Subject:**    CR to 25.433: Editorial Correction of the ASN.1 with the Syntax Checking of the NBAP : Common Module

**Work item:**    \_\_\_\_\_

<b>Category:</b>	F Correction <input type="checkbox"/> A Corresponds to a correction in an earlier release <input type="checkbox"/> B Addition of feature <input type="checkbox"/> C Functional modification of feature <input checked="" type="checkbox"/> D Editorial modification <input type="checkbox"/>	<b>Release:</b>	Phase 2 <input type="checkbox"/> Release 96 <input type="checkbox"/> Release 97 <input type="checkbox"/> Release 98 <input type="checkbox"/> Release 99 <input checked="" type="checkbox"/> Release 00 <input type="checkbox"/>
------------------	--	-----------------	--

(only one category shall be marked with an X)

**Reason for change:**    This CR is to provides the NBAP ASN.1 descripton (Common Module) with the syntax checking.

**Clauses affected:**    9.3.5

<b>Other specs affected:</b>	Other 3G core specifications <input type="checkbox"/> → List of CRs: Other GSM core specifications <input type="checkbox"/> → List of CRs: MS test specifications <input type="checkbox"/> → List of CRs: BSS test specifications <input type="checkbox"/> → List of CRs: O&M specifications <input type="checkbox"/> → List of CRs:	
------------------------------	--	--

**Other comments:**    \_\_\_\_\_



<----- double-click here for help and instructions on how to create a CR.

```

-- *****
--
-- Common definitions
--
-- *****

NBAP-CommonDataTypes -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

Criticality      ::= ENUMERATED { reject, ignore, notify }

MessageDiscriminator ::= ENUMERATED { common, dedicated }

Presence        ::= ENUMERATED { optional, conditional, mandatory }

PrivateExtensionID ::= CHOICE {
    local          INTEGER (0..65535),
    global         OBJECT IDENTIFIER
}

ProcedureCode   ::= INTEGER (0..255)

ProcedureID     ::= SEQUENCE {
    procedureCode  INTEGER (0..255),
    ddMode        ENUMERATED { tdd, fdd, common }
}

ProtocolExtensionID ::= INTEGER (0..65535)

ProtocolIE-ID   ::= INTEGER (0..65535)

TransactionID   ::= INTEGER (0..255)

TriggeringMessage ::= ENUMERATED { initiating-message, successful-outcome, unsuccessful-
outcome, outcome }

END

```

**CHANGE REQUEST**

*Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.*

**25.433**

**CR 023**

Current Version: **3.0.0**

GSM (AA.BB) or 3G (AA.BBB) specification number ↑

↑ CR number as allocated by MCC support team

For submission to: **TSG-RAN#7**  
list expected approval meeting # here ↑

for approval   
for information

strategic   
non-strategic  (for SMG use only)

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: ftp://ftp.3gpp.org/Information/CR-Form-v2.doc

**Proposed change affects:** (U)SIM  ME  UTRAN / Radio  Core Network   
(at least one should be marked with an X)

**Source:** TSG-RAN WG3 **Date:** 24 January 2000

**Subject:** CR to 25.433: Editorial Correction of the ASN.1 with the Syntax Checking of the NBAP : Elementary Procedure Module

**Work item:**

**Category:** F Correction  **Release:** Phase 2   
A Corresponds to a correction in an earlier release  Release 96   
(only one category shall be marked with an X) B Addition of feature  Release 97   
C Functional modification of feature  Release 98   
D Editorial modification  Release 99   
Release 00

**Reason for change:** This CR is to provides the NBAP ASN.1 descriptor (Elementary Procedure Module) with the syntax checking. And also alignment with the RNSAP ASN.1 description.

**Clauses affected:** 9.3.2

**Other specs affected:** Other 3G core specifications  → List of CRs:  
Other GSM core specifications  → List of CRs:  
MS test specifications  → List of CRs:  
BSS test specifications  → List of CRs:  
O&M specifications  → List of CRs:

**Other comments:**



[<----- double-click here for help and instructions on how to create a CR.](#)

```

--
-- Elementary Procedure definitions
--
-- *****
| NBAP-ELEMENTARY-PROCEDUREDefinitionsPDUsDescriptions -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

-- *****
--
-- IE parameter types from other modules.
--
-- *****

IMPORTS
    Criticality,
    ProcedureID,
    MessageDiscriminator,
    TransactionID
FROM NBAP-CommonDataTypes

    CommonTransportChannelSetupRequestFDD,
    CommonTransportChannelSetupRequestTDD,
    CommonTransportChannelSetupResponse,
    CommonTransportChannelSetupFailure,
    CommonTransportChannelReconfigurationRequestFDD,
    CommonTransportChannelReconfigurationRequestTDD,
    CommonTransportChannelReconfigurationResponse,
    CommonTransportChannelReconfigurationFailure,
    CommonTransportChannelDeletionRequest,
    CommonTransportChannelDeletionResponse,
    BlockResourceRequest,
    BlockResourceResponse,
    BlockResourceFailure,
    UnblockResourceIndication,
    AuditRequiredIndication,
    AuditRequest,
    AuditResponse,
    CommonMeasurementInitiationRequest,
    CommonMeasurementInitiationResponse,
    CommonMeasurementInitiationFailure,
    CommonMeasurementReport,
    CommonMeasurementTerminationRequest,
    CommonMeasurementFailureIndication,
    CommonMeasurementReport,
    CellSetupRequestFDD,
    CellSetupRequestTDD,
    CellSetupResponse,
    CellSetupFailure,
    CellReconfigurationRequestFDD,
    CellReconfigurationRequestTDD,
    CellReconfigurationResponse,
    CellReconfigurationFailure,
    CellDeletionRequest,
    CellDeletionResponse,
    ResourceStatusIndication,
    SystemInformationUpdateRequest,
    SystemInformationUpdateResponse,
    SystemInformationUpdateFailure,
    RadioLinkSetupRequestFDD,
    RadioLinkSetupRequestTDD,
    RadioLinkSetupResponseFDD,
    RadioLinkSetupResponseTDD,
    RadioLinkSetupFailureFDD,
    RadioLinkSetupRequestTDD,
    RadioLinkSetupResponseTDD,
    RadioLinkSetupFailureTDD,
    NeighbourCellMeasurementRequestTDD,
    NeighbourCellMeasurementResponseTDD,
    NeighbourCellMeasurementFailureTDD,
    SynchronisationAdjustmentRequestTDD,
    SynchronisationAdjustmentResponseTDD,
    SynchronisationAdjustmentFailureTDD,
    NodeBOutOfSyncIndicationTDD,

```

~~SynchronisationRestartRequestTDD,~~  
RadioLinkAdditionRequestFDD,  
RadioLinkAdditionRequestTDD,  
RadioLinkAdditionResponseFDD,  
RadioLinkAdditionResponseTDD,  
RadioLinkAdditionFailureFDD,  
~~RadioLinkAdditionRequestTDD,~~  
~~RadioLinkAdditionResponseTDD,~~  
RadioLinkAdditionFailureTDD,  
RadioLinkReconfigurationPrepareFDD,  
RadioLinkReconfigurationPrepareTDD,  
RadioLinkReconfigurationReady,  
RadioLinkReconfigurationFailure,  
RadioLinkReconfigurationCommit,  
~~RadioLinkReconfigurationFailure,~~  
RadioLinkReconfigurationCancel,  
RadioLinkReconfigurationRequestFDD,  
RadioLinkReconfigurationRequestTDD,  
RadioLinkReconfigurationResponse,  
RadioLinkDeletionRequest,  
RadioLinkDeletionResponse,  
DL-PowerControlRequest~~FDD,~~  
DedicatedMeasurementInitiationRequest,  
DedicatedMeasurementInitiationResponse,  
DedicatedMeasurementInitiationFailure,  
DedicatedMeasurementReport,  
DedicatedMeasurementTerminationRequest,  
DedicatedMeasurementFailureIndication,  
~~DedicatedMeasurementReport,~~  
RadioLinkFailureIndication,  
RadioLinkRestoreIndication,  
CompressedModePrepare~~FDD,~~  
CompressedModeReady~~FDD,~~  
CompressedModeCommit~~FDD,~~  
CompressedModeFailure~~FDD,~~  
CompressedModeCancel~~FDD,~~  
ErrorIndication,  
PrivateMessage

FROM NBAP-PDU-Contents

id-audit,  
id-auditRequired,  
id-blockResource,  
id-cellDeletion,  
id-cellReconfiguration,  
id-cellSetup,  
id-commonMeasurementFailure,  
id-commonMeasurementInitiation,  
id-commonMeasurementReport,  
id-commonMeasurementTermination,  
id-commonTransportChannelDeletion,  
id-commonTransportChannelReconfiguration,  
id-commonTransportChannelSetup,  
id-compressedMode~~Control~~Cancellation,  
id-compressedMode~~Control~~Commit,  
id-compressedMode~~Control~~Preparation,  
id-dedicatedMeasurementFailure,  
id-dedicatedMeasurementInitiation,  
id-dedicatedMeasurementReport,  
id-dedicatedMeasurementTermination,  
id-~~dl~~downlinkPowerControl,  
~~id-errorIndication,~~  
id-privateMessage,  
~~id-neighbourCellMeasurement,~~  
id-radioLinkAddition,  
id-radioLinkDeletion,  
id-radioLinkFailure,  
~~id-radioLinkReconfigurationCommit,~~  
~~id-radioLinkReconfigurationCancel,~~  
id-radioLinkRestoration,  
id-radioLinkSetup,  
id-resourceStatusIndication,  
~~id-synchronisationAdjustment,~~  
~~id-synchronisationFailure,~~  
~~id-synchronisationRestart,~~  
id-synchronisedRadioLinkReconfigurationCancellation,  
id-synchronisedRadioLinkReconfigurationCommit,

```

id-synchronisedRadioLinkReconfigurationPreparation,
id-systemInformationUpdate,
id-unblockResource,
id-unsynchronisedRadioLinkReconfiguration
FROM NBAP-Constants;

-- *****
--
-- Interface Elementary Procedure Class
--
-- *****

NBAP-ELEMENTARY-PROCEDURE ::= CLASS {
    &InitiatingMessage_           ,
    &SuccessfulOutcome_           OPTIONAL,
    &UnsuccessfulOutcome_         OPTIONAL,
    &Outcome_                     OPTIONAL,
    &messageDiscriminator_        MessageDiscriminator,
    &procedureID_                 ProcedureID    UNIQUE,
    &criticality_                 Criticality    DEFAULT ignore
}

WITH SYNTAX {
    INITIATING MESSAGE           &InitiatingMessage
    [SUCCESSFUL OUTCOME         &SuccessfulOutcome]
    [UNSUCCESSFUL OUTCOME       &UnsuccessfulOutcome]
    [OUTCOME                     &Outcome]
    MESSAGE DISCRIMINATOR       &messageDiscriminator
    PROCEDURE ID                 &procedureID
    [CRITICALITY                 &criticality]
}

-- *****
--
-- Interface PDU Definition
--
-- *****

NBAP-PDU ::= CHOICE {
    initiatingMessage_           InitiatingMessage,
    succesfulOutcome_           SuccessfulOutcome,
    unsuccessfulOutcome_        UnsuccessfulOutcome,
    outcome_                     Outcome,
    ...
}

InitiatingMessage ::= SEQUENCE {
    procedureID_                 NBAP-ELEMENTARY-PROCEDURE.&procedureID  ({NBAP-ELEMENTARY-
PROCEDURES}),
    criticality_                 NBAP-ELEMENTARY-PROCEDURE.&criticality  ({NBAP-ELEMENTARY-
PROCEDURES}{@procedureID}),
    messageDiscriminator         NBAP-ELEMENTARY-PROCEDURE.&messageDiscriminator
                                ( {NBAP-ELEMENTARY-PROCEDURES}{@procedureID} ),
    transactionID                TransactionID,
    value                         NBAP-ELEMENTARY-PROCEDURE.&InitiatingMessage
                                ( {NBAP-ELEMENTARY-PROCEDURES}{@procedureID} )
}

SuccessfulOutcome ::= SEQUENCE {
    procedureID_                 NBAP-ELEMENTARY-PROCEDURE.&procedureID  ({NBAP-ELEMENTARY-
PROCEDURES}),
    criticality_                 NBAP-ELEMENTARY-PROCEDURE.&criticality  ({NBAP-ELEMENTARY-
PROCEDURES}{@procedureID}),
    messageDiscriminator         NBAP-ELEMENTARY-PROCEDURE.&messageDiscriminator
                                ( {NBAP-ELEMENTARY-PROCEDURES}{@procedureID} ),
    transactionID                TransactionID,
    value                         NBAP-ELEMENTARY-PROCEDURE.&SuccessfulOutcome_
                                ( {NBAP-ELEMENTARY-PROCEDURES}{@procedureID} )
}

UnsuccessfulOutcome ::= SEQUENCE {
    procedureID_                 NBAP-ELEMENTARY-PROCEDURE.&procedureID  ({NBAP-ELEMENTARY-
PROCEDURES}),
    criticality_                 NBAP-ELEMENTARY-PROCEDURE.&criticality  ({NBAP-ELEMENTARY-
PROCEDURES}{@procedureID}),
    messageDiscriminator         NBAP-ELEMENTARY-PROCEDURE.&messageDiscriminator
}

```

```

    transactionID TransactionID,
    value NBAP-ELEMENTARY-PROCEDURE.&UnsuccessfulOutcome
  )
}

Outcome ::= SEQUENCE {
  procedureID NBAP-ELEMENTARY-PROCEDURE.&procedureID ( {NBAP-ELEMENTARY-
PROCEDURES} ),
  criticality NBAP-ELEMENTARY-PROCEDURE.&criticality ( {NBAP-ELEMENTARY-
PROCEDURES} {&procedureID} ),
  messageDiscriminator NBAP-ELEMENTARY-PROCEDURE.&messageDiscriminator
( {NBAP-ELEMENTARY-PROCEDURES} {&procedureID} ),
  transactionID TransactionID,
  value NBAP-ELEMENTARY-PROCEDURE.&Outcome ( {NBAP-ELEMENTARY-
PROCEDURES} {&procedureID} )
}

-- *****
--
-- Interface Elementary Procedure List
--
-- *****

NBAP-ELEMENTARY-PROCEDURES NBAP-ELEMENTARY-PROCEDURE ::= {
  NBAP-ELEMENTARY-PROCEDURES-CLASS-1 |
  NBAP-ELEMENTARY-PROCEDURES-CLASS-2 ,
  ...
}

NBAP-ELEMENTARY-PROCEDURES-CLASS-1 NBAP-ELEMENTARY-PROCEDURE ::= {
  cellSetupFDD |
  cellSetupTDD |
  cellReconfigurationFDD |
  cellReconfigurationTDD |
  cellDeletion |
  commonTransportChannelSetupFDD |
  commonTransportChannelSetupTDD |
  commonTransportChannelReconfigurationFDD |
  commonTransportChannelReconfigurationTDD |
  commonTransportChannelDeletion |
  audit |
  blockResource |
  audit +
  commonMeasurementInitiation +
  cellSetupFDD +
  cellSetupTDD +
  cellReconfigurationFDD +
  cellReconfigurationTDD +
  cellDeletion +
  systemInformationUpdate +
  radioLinkSetupFDD |
  radioLinkSetupTDD |
  systemInformationUpdate |
  commonMeasurementInitiation |
  neighbourCellMeasurementTDD +
  synchronisationAdjustmentTDD +
  radioLinkAdditionFDD |
  radioLinkAdditionTDD |
  radioLinkDeletion |
  radioLinkReconfigurationCommit +
  radioLinkReconfigurationCancellation +
  radioLinkDeletion +
  synchronisedRadioLinkReconfigurationPreparationFDD |
  synchronisedRadioLinkReconfigurationPreparationTDD |
  unsynchronisedRadioLinkReconfigurationFDD |
  unsynchronisedRadioLinkReconfigurationTDD |
  dedicatedMeasurementInitiation |
  compressedModeControlPreparationFDD |
  ...
}

NBAP-ELEMENTARY-PROCEDURES-CLASS-2 NBAP-ELEMENTARY-PROCEDURE ::= {
  resourceStatusIndication |
  unblockResource +
  auditRequired |

```



```

commonMeasurementReport
commonMeasurementTermination
commonMeasurementFailure
commonMeasurementReport
resourceStatusIndication
synchronisationFailureTDD
synchronisationRestartTDD
synchronisedRadioLinkReconfigurationCommitPreparationFDD
synchronisedRadioLinkReconfigurationCancellationPreparationTDD
unsynchronisedRadioLinkReconfigurationFDD
unsynchronisedRadioLinkReconfigurationTDD
dlPowerControlFDD
radioLinkFailure
radioLinkRestoration
dedicatedMeasurementReport
dedicatedMeasurementTermination
dedicatedMeasurementFailure
dedicatedMeasurementReport
radioLinkFailure
radioLinkRestoration
downlinkPowerControlFDD
compressedModeControlCommitFDD
compressedModeControlCancellationFDD
unblockResource
errorIndication
privateMessage
...
}

-- *****
--
-- Interface Elementary Procedures
--
-- *****

-- Class 1

-- *** CellSetup (FDD) ***
cellSetupFDD NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE      CellSetupRequestFDD
  SUCCESSFUL OUTCOME      CellSetupResponse
  UNSUCCESSFUL OUTCOME    CellSetupFailure
  MESSAGE DISCRIMINATOR   common
  PROCEDURE ID            { procedureCode id-cellSetup, ddMode fdd }
  CRITICALITY             ignore
}

-- *** CellSetup (TDD) ***
cellSetupTDD NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE      CellSetupRequestTDD
  SUCCESSFUL OUTCOME      CellSetupResponse
  UNSUCCESSFUL OUTCOME    CellSetupFailure
  MESSAGE DISCRIMINATOR   common
  PROCEDURE ID            { procedureCode id-cellSetup, ddMode tdd }
  CRITICALITY             ignore
}

-- *** CellReconfiguration(FDD) ***
cellReconfigurationFDD NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE      CellReconfigurationRequestFDD
  SUCCESSFUL OUTCOME      CellReconfigurationResponse
  UNSUCCESSFUL OUTCOME    CellReconfigurationFailure
  MESSAGE DISCRIMINATOR   common
  PROCEDURE ID            { procedureCode id-cellReconfiguration, ddMode fdd }
  CRITICALITY             ignore
}

-- *** CellReconfiguration(TDD) ***
cellReconfigurationTDD NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE      CellReconfigurationRequestTDD
  SUCCESSFUL OUTCOME      CellReconfigurationResponse
  UNSUCCESSFUL OUTCOME    CellReconfigurationFailure
  MESSAGE DISCRIMINATOR   common
  PROCEDURE ID            { procedureCode id-cellReconfiguration, ddMode tdd }
  CRITICALITY             ignore
}

```

```

-- *** CellDeletion ***
cellDeletion NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE      CellDeletionRequest
  SUCCESSFUL OUTCOME      CellDeletionResponse
  MESSAGE DISCRIMINATOR   common
  PROCEDURE ID            { procedureCode id-cellDeletion, ddMode common }
  CRITICALITY             ignore
}

-- *** CommonTransportChannelSetup (FDD) ***
commonTransportChannelSetupFDD NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE      CommonTransportChannelSetupRequestFDD
  SUCCESSFUL OUTCOME      CommonTransportChannelSetupResponse
  UNSUCCESSFUL OUTCOME    CommonTransportChannelSetupFailure
  MESSAGE DISCRIMINATOR   common
  PROCEDURE ID            { procedureCode id-commonTransportChannelSetup, ddMode fdd }
  CRITICALITY             ignore
}

-- *** CommonTransportChannelSetup (TDD) ***
commonTransportChannelSetupTDD NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE      CommonTransportChannelSetupRequestTDD
  SUCCESSFUL OUTCOME      CommonTransportChannelSetupResponse
  UNSUCCESSFUL OUTCOME    CommonTransportChannelSetupFailure
  MESSAGE DISCRIMINATOR   common
  PROCEDURE ID            { procedureCode id-commonTransportChannelSetup, ddMode tdd }
  CRITICALITY             ignore
}

-- *** CommonTransportChannelReconfiguration (FDD) ***
commonTransportChannelReconfigurationFDD NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE      CommonTransportChannelReconfigurationRequestFDD
  SUCCESSFUL OUTCOME      CommonTransportChannelReconfigurationResponse
  UNSUCCESSFUL OUTCOME    CommonTransportChannelReconfigurationFailure
  MESSAGE DISCRIMINATOR   common
  PROCEDURE ID            { procedureCode id-commonTransportChannelReconfiguration,
ddMode fdd }
  CRITICALITY             ignore
}

-- *** CommonTransportChannelReconfiguration (TDD) ***
commonTransportChannelReconfigurationTDD NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE      CommonTransportChannelReconfigurationRequestTDD
  SUCCESSFUL OUTCOME      CommonTransportChannelReconfigurationResponse
  UNSUCCESSFUL OUTCOME    CommonTransportChannelReconfigurationFailure
  MESSAGE DISCRIMINATOR   common
  PROCEDURE ID            { procedureCode id-commonTransportChannelReconfiguration,
ddMode tdd }
  CRITICALITY             ignore
}

-- *** CommonTransportChannelDeletionRequest ***
commonTransportChannelDeletionRequest NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE      CommonTransportChannelDeletionRequest
  SUCCESSFUL OUTCOME      CommonTransportChannelDeletionResponse
  MESSAGE DISCRIMINATOR   common
  PROCEDURE ID            { procedureCode id-commonTransportChannelDeletionRequest, ddMode
common }
  CRITICALITY             ignore
}

-- *** Audit ***
audit NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE      AuditRequest
  SUCCESSFUL OUTCOME      AuditResponse
  MESSAGE DISCRIMINATOR   common
  PROCEDURE ID            { procedureCode id-audit, ddMode common }
  CRITICALITY             ignore
}
*****

-- *** BlockResourceRequest ***
blockResource NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE      BlockResourceRequest
  SUCCESSFUL OUTCOME      BlockResourceResponse
  UNSUCCESSFUL OUTCOME    BlockResourceFailure
  MESSAGE DISCRIMINATOR   common
}

```

```

PROCEDURE ID      _____ { procedureCode id-blockResource, ddMode common }
CRITICALITY      _____ ignore
}

--- *** UnblockResourceIndication ***
unblockResource NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  UnblockResourceIndication
  MESSAGE DISCRIMINATOR  common
  PROCEDURE ID        { procedureCode id-unblockResource, ddMode common }
  CRITICALITY         ignore
}

-----
--- *** AuditRequired ***
auditRequired NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  AuditRequiredIndication
  MESSAGE DISCRIMINATOR  common
  PROCEDURE ID        { procedureCode id-auditRequired, ddMode common }
  CRITICALITY         ignore
}

--- *** Audit ***
audit NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  AuditRequest
  SUCCESSFUL OUTCOME  AuditResponse
  MESSAGE DISCRIMINATOR  common
  PROCEDURE ID        { procedureCode id-audit, ddMode common }
  CRITICALITY         ignore
}

-----
--- *** CommonMeasurementInitiation ***
commonMeasurementInitiation NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  CommonMeasurementInitiationRequest
  SUCCESSFUL OUTCOME  CommonMeasurementInitiationResponse
  UNSUCCESSFUL OUTCOME  CommonMeasurementInitiationFailure
  MESSAGE DISCRIMINATOR  common
  PROCEDURE ID        { procedureCode id-commonMeasurementInitiation, ddMode common }
  CRITICALITY         ignore
}

--- *** CommonMeasurementTermination ***
commonMeasurementTermination NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  CommonMeasurementTerminationRequest
  MESSAGE DISCRIMINATOR  common
  PROCEDURE ID        { procedureCode id-commonMeasurementTermination, ddMode common }
  CRITICALITY         ignore
}

--- *** CommonMeasurementFailure ***
commonMeasurementFailure NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  CommonMeasurementFailureIndication
  MESSAGE DISCRIMINATOR  common
  PROCEDURE ID        { procedureCode id-commonMeasurementFailure, ddMode common }
  CRITICALITY         ignore
}

--- *** CommonMeasurementReport ***
commonMeasurementReport NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  CommonMeasurementReport
  MESSAGE DISCRIMINATOR  common
  PROCEDURE ID        { procedureCode id-commonMeasurementReport, ddMode common }
  CRITICALITY         ignore
}

-----
--- *** CellSetup (FDD) ***
cellSetupFDD NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  CellSetupRequestFDD
  SUCCESSFUL OUTCOME  CellSetupResponse
  UNSUCCESSFUL OUTCOME  CellSetupFailure
  MESSAGE DISCRIMINATOR  common
  PROCEDURE ID        { procedureCode id-cellSetup, ddMode fdd }
  CRITICALITY         ignore
}

--- *** CellSetup (TDD) ***

```

```

cellSetupTDD NBAP-ELEMENTARY-PROCEDURE ::= {
-- INITIATING MESSAGE CellSetupRequestTDD
-- SUCCESSFUL OUTCOME CellSetupResponse
-- UNSUCCESSFUL OUTCOME CellSetupFailure
-- MESSAGE DISCRIMINATOR common
-- PROCEDURE ID { procedureCode id-cellSetup, ddMode tdd }
-- CRITICALITY ignore
}

-- *** CellReconfiguration(FDD) ***
cellReconfigurationFDD NBAP-ELEMENTARY-PROCEDURE ::= {
-- INITIATING MESSAGE CellReconfigurationRequestFDD
-- SUCCESSFUL OUTCOME CellReconfigurationResponse
-- UNSUCCESSFUL OUTCOME CellReconfigurationFailure
-- MESSAGE DISCRIMINATOR common
-- PROCEDURE ID { procedureCode id-cellReconfiguration, ddMode fdd }
-- CRITICALITY ignore
}

-- *** CellReconfiguration(TDD) ***
cellReconfigurationTDD NBAP-ELEMENTARY-PROCEDURE ::= {
-- INITIATING MESSAGE CellReconfigurationRequestTDD
-- SUCCESSFUL OUTCOME CellReconfigurationResponse
-- UNSUCCESSFUL OUTCOME CellReconfigurationFailure
-- MESSAGE DISCRIMINATOR common
-- PROCEDURE ID { procedureCode id-cellReconfiguration, ddMode tdd }
-- CRITICALITY ignore
}

-- *** CellDeletion ***
cellDeletion NBAP-ELEMENTARY-PROCEDURE ::= {
-- INITIATING MESSAGE CellDeletionRequest
-- SUCCESSFUL OUTCOME CellDeletionResponse
-- MESSAGE DISCRIMINATOR common
-- PROCEDURE ID { procedureCode id-cellDeletion, ddMode common }
-- CRITICALITY ignore
}

-----
-- *** ResourceStatusIndication ***
resourceStatusIndication NBAP-ELEMENTARY-PROCEDURE ::= {
-- INITIATING MESSAGE ResourceStatusIndication
-- MESSAGE DISCRIMINATOR common
-- PROCEDURE ID { procedureCode id-resourceStatusIndication, ddMode common }
-- CRITICALITY ignore
}

-----
-- *** SystemInformationUpdate ***
systemInformationUpdate NBAP-ELEMENTARY-PROCEDURE ::= {
-- INITIATING MESSAGE SystemInformationUpdateRequest
-- SUCCESSFUL OUTCOME SystemInformationUpdateResponse
-- UNSUCCESSFUL OUTCOME SystemInformationUpdateFailure
-- MESSAGE DISCRIMINATOR common
-- PROCEDURE ID { procedureCode id-systemInformationUpdate, ddMode common }
-- CRITICALITY ignore
}

-----
-- *** RadioLinkSetup (FDD) ***
radioLinkSetupFDD NBAP-ELEMENTARY-PROCEDURE ::= {
INITIATING MESSAGE RadioLinkSetupRequestFDD
SUCCESSFUL OUTCOME RadioLinkSetupResponseFDD
UNSUCCESSFUL OUTCOME RadioLinkSetupFailureFDD
MESSAGE DISCRIMINATOR common
PROCEDURE ID { procedureCode id-radioLinkSetup, ddMode fdd }
CRITICALITY ignore
}

-- *** RadioLinkSetup (TDD) ***
radioLinkSetupTDD NBAP-ELEMENTARY-PROCEDURE ::= {
INITIATING MESSAGE RadioLinkSetupRequestTDD
SUCCESSFUL OUTCOME RadioLinkSetupResponseTDD
UNSUCCESSFUL OUTCOME RadioLinkSetupFailureTDD
MESSAGE DISCRIMINATOR common
PROCEDURE ID { procedureCode id-radioLinkSetup, ddMode tdd }
CRITICALITY ignore
}

```

```

}

-- *** SystemInformationUpdate ***
systemInformationUpdate NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE      SystemInformationUpdateRequest
  SUCCESSFUL OUTCOME      SystemInformationUpdateResponse
  UNSUCCESSFUL OUTCOME    SystemInformationUpdateFailure
  MESSAGE DISCRIMINATOR   common
  PROCEDURE ID            { procedureCode id-systemInformationUpdate, ddMode common }
  CRITICALITY             ignore
}

-- *** CommonMeasurementInitiation ***
commonMeasurementInitiation NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE      CommonMeasurementInitiationRequest
  SUCCESSFUL OUTCOME      CommonMeasurementInitiationResponse
  UNSUCCESSFUL OUTCOME    CommonMeasurementInitiationFailure
  MESSAGE DISCRIMINATOR   common
  PROCEDURE ID            { procedureCode id-commonMeasurementInitiation, ddMode common }
  CRITICALITY             ignore
}

-----
-- *** NeighbourCellMeasurement (TDD only) ***
neighbourCellMeasurementTDD NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE      NeighbourCellMeasurementRequestTDD
  SUCCESSFUL OUTCOME      NeighbourCellMeasurementResponseTDD
  UNSUCCESSFUL OUTCOME    NeighbourCellMeasurementFailureTDD
  MESSAGE DISCRIMINATOR   common
  PROCEDURE ID            { procedureCode id-neighbourCellMeasurement, ddMode tdd }
  CRITICALITY             ignore
}

-----
-- *** SynchronisationAdjustment (TDD only) ***
synchronisationAdjustmentTDD NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE      SynchronisationAdjustmentRequestTDD
  SUCCESSFUL OUTCOME      SynchronisationAdjustmentResponseTDD
  UNSUCCESSFUL OUTCOME    SynchronisationAdjustmentFailureTDD
  MESSAGE DISCRIMINATOR   common
  PROCEDURE ID            { procedureCode id-synchronisationAdjustment, ddMode tdd }
  CRITICALITY             ignore
}

-- *** NodeBOutOfSyncIndication (TDD only) ***
synchronisationFailureTDD NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE      NodeBOutOfSyncIndicationTDD
  MESSAGE DISCRIMINATOR   common
  PROCEDURE ID            { procedureCode id-synchronisationFailure, ddMode tdd }
  CRITICALITY             ignore
}

-- *** SynchronisationRestart (TDD only) ***
synchronisationRestartTDD NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE      SynchronisationRestartRequestTDD
  MESSAGE DISCRIMINATOR   common
  PROCEDURE ID            { procedureCode id-synchronisationRestart, ddMode tdd }
  CRITICALITY             ignore
}

-----
-- *** RadioLinkAddition (FDD) ***
radioLinkAdditionFDD NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE      RadioLinkAdditionRequestFDD
  SUCCESSFUL OUTCOME      RadioLinkAdditionResponseFDD
  UNSUCCESSFUL OUTCOME    RadioLinkAdditionFailureFDD
  MESSAGE DISCRIMINATOR   dedicated
  PROCEDURE ID            { procedureCode id-radioLinkAddition, ddMode fdd }
  CRITICALITY             ignore
}

-- *** RadioLinkAddition (TDD) ***
radioLinkAdditionTDD NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE      RadioLinkAdditionRequestTDD
  SUCCESSFUL OUTCOME      RadioLinkAdditionResponseTDD
  UNSUCCESSFUL OUTCOME    RadioLinkAdditionFailureTDD
  MESSAGE DISCRIMINATOR   dedicated
}

```

```

PROCEDURE ID      ___ { procedureCode id-radioLinkAddition, ddMode tdd }
CRITICALITY      ___ ignore
}


*** RadioReconfirurationPrepare (FDD) ***
synchronisedRadioLinkReconfigurationPreparationFDD NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  RadioLinkReconfigurationPrepareFDD
  SUCCESSFUL OUTCOME  RadioLinkReconfigurationReady
  UNSUCCESSFUL OUTCOME RadioLinkReconfigurationFailure
  MESSAGE DISCRIMINATOR dedicated
  PROCEDURE ID       { procedureCode id-synchronisedRadioLinkReconfigurationPreparation,
ddMode fdd }
  CRITICALITY        ignore
}

*** RadioReconfirurationPrepare (TDD) ***
synchronisedRadioLinkReconfigurationPreparationTDD NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  RadioLinkReconfigurationPrepareTDD
  SUCCESSFUL OUTCOME  RadioLinkReconfigurationReady
  UNSUCCESSFUL OUTCOME RadioLinkReconfigurationFailure
  MESSAGE DISCRIMINATOR dedicated
  PROCEDURE ID       { procedureCode id-synchronisedRadioLinkReconfigurationPreparation,
ddMode tdd }
  CRITICALITY        ignore
}

*** (FDD) ***
unsynchronisedRadioLinkReconfigurationFDD NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  RadioLinkReconfigurationRequestFDD
  SUCCESSFUL OUTCOME  RadioLinkReconfigurationResponse
  UNSUCCESSFUL OUTCOME RadioLinkReconfigurationFailure
  MESSAGE DISCRIMINATOR dedicated
  PROCEDURE ID       { procedureCode id-unsynchronisedRadioLinkReconfiguration, ddMode
fdd }
  CRITICALITY        ignore
}

*** (TDD) ***
unsynchronisedRadioLinkReconfigurationTDD NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  RadioLinkReconfigurationRequestTDD
  SUCCESSFUL OUTCOME  RadioLinkReconfigurationResponse
  UNSUCCESSFUL OUTCOME RadioLinkReconfigurationFailure
  MESSAGE DISCRIMINATOR dedicated
  PROCEDURE ID       { procedureCode id-unsynchronisedRadioLinkReconfiguration, ddMode
tdd }
  CRITICALITY        ignore
}

*** RadioLinkReconfirurationCommit ***
radioLinkReconfigurationCommit NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  RadioLinkReconfigurationCommit
  MESSAGE DISCRIMINATOR dedicated
  PROCEDURE ID       { procedureCode id-radioLinkReconfigurationCommit, ddMode common }
  CRITICALITY        ignore
}

*** RadioReconfigurationCancellation ***
radioLinkReconfigurationCancellation NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  RadioLinkReconfigurationCancel
  MESSAGE DISCRIMINATOR dedicated
  PROCEDURE ID       { procedureCode id-radioLinkReconfirurationCancel, ddMode common }
  CRITICALITY        ignore
}

-- *** RadioLinkDeletion ***
radioLinkDeletion NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  RadioLinkDeletionRequest
  SUCCESSFUL OUTCOME  RadioLinkDeletionResponse
  MESSAGE DISCRIMINATOR dedicated
  PROCEDURE ID       { procedureCode id-radioLinkDeletion, ddMode common }
  CRITICALITY        ignore
}

*****
*** DLPowerControl (FDD only) ***
dlPowerControlFDD NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  DLPowerControlRequestFDD


```

```

MESSAGE DISCRIMINATOR dedicated
PROCEDURE ID { procedureCode id-dlPowerControl, ddMode fdd }
CRITICALITY ignore
}

-- *** SynchronisedRadioLinkReconfigurationPreparation (FDD) ***
synchronisedRadioLinkReconfigurationPreparationFDD NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE RadioLinkReconfigurationPrepareFDD
  SUCCESSFUL OUTCOME RadioLinkReconfigurationReady
  UNSUCCESSFUL OUTCOME RadioLinkReconfigurationFailure
  MESSAGE DISCRIMINATOR dedicated
  PROCEDURE ID { procedureCode id-
synchronisedRadioLinkReconfigurationPreparation, ddMode fdd }
  CRITICALITY ignore
}

-- *** SynchronisedRadioLinkReconfigurationPreparation (TDD) ***
synchronisedRadioLinkReconfigurationPreparationTDD NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE RadioLinkReconfigurationPrepareTDD
  SUCCESSFUL OUTCOME RadioLinkReconfigurationReady
  UNSUCCESSFUL OUTCOME RadioLinkReconfigurationFailure
  MESSAGE DISCRIMINATOR dedicated
  PROCEDURE ID { procedureCode id-
synchronisedRadioLinkReconfigurationPreparation, ddMode tdd }
  CRITICALITY ignore
}

-- *** UnSynchronisedRadioLinkReconfiguration (FDD) ***
unSynchronisedRadioLinkReconfigurationFDD NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE RadioLinkReconfigurationRequestFDD
  SUCCESSFUL OUTCOME RadioLinkReconfigurationResponse
  UNSUCCESSFUL OUTCOME RadioLinkReconfigurationFailure
  MESSAGE DISCRIMINATOR dedicated
  PROCEDURE ID { procedureCode id-unSynchronisedRadioLinkReconfiguration,
ddMode fdd }
  CRITICALITY ignore
}

-- *** UnSynchronisedRadioLinkReconfiguration (TDD) ***
unSynchronisedRadioLinkReconfigurationTDD NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE RadioLinkReconfigurationRequestTDD
  SUCCESSFUL OUTCOME RadioLinkReconfigurationResponse
  UNSUCCESSFUL OUTCOME RadioLinkReconfigurationFailure
  MESSAGE DISCRIMINATOR dedicated
  PROCEDURE ID { procedureCode id-unSynchronisedRadioLinkReconfiguration,
ddMode tdd }
  CRITICALITY ignore
}

*****
-- *** DedicatedMeasurementInitiation ***
dedicatedMeasurementInitiation NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE DedicatedMeasurementInitiationRequest
  SUCCESSFUL OUTCOME DedicatedMeasurementInitiationResponse
  UNSUCCESSFUL OUTCOME DedicatedMeasurementInitiationFailure
  MESSAGE DISCRIMINATOR dedicated
  PROCEDURE ID { procedureCode id-dedicatedMeasurementInitiation, ddMode
common }
  CRITICALITY ignore
}

*** DedicatedMeasurementTermination ***
dedicatedMeasurementTermination NBAP-ELEMENTARY-PROCEDURE ::= {
INITIATING MESSAGE DedicatedMeasurementTerminationRequest
MESSAGE DISCRIMINATOR dedicated
PROCEDURE ID { procedureCode id-dedicatedMeasurementTermination, ddMode common }
CRITICALITY ignore
}

-- *** DedicatedMeasurementFailure ***
dedicatedMeasurementFailure NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE DedicatedMeasurementFailureIndication
  MESSAGE DISCRIMINATOR dedicated
  PROCEDURE ID { procedureCode id-dedicatedMeasurementFailure, ddMode common }
  CRITICALITY ignore
}

```

```


--- *** DedicatedMeasurementReport ***
dedicatedMeasurementReport NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE DedicatedMeasurementReport
  MESSAGE DISCRIMINATOR dedicated
  PROCEDURE ID { procedureCode id dedicatedMeasurementReport, ddMode common }
  CRITICALITY ignore
}

*****
--- *** RadioLinkFailureIndication ***
radioLinkFailure NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE RadioLinkFailureIndication
  MESSAGE DISCRIMINATOR dedicated
  PROCEDURE ID { procedureCode id radioLinkFailure, ddMode common }
  CRITICALITY ignore
}

--- *** RadioLinkRestoreIndication ***
radioLinkRestoration NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE RadioLinkRestoreIndication
  MESSAGE DISCRIMINATOR dedicated
  PROCEDURE ID { procedureCode id radioLinkRestoration, ddMode common }
  CRITICALITY ignore
}

*****
-- *** CompressedModePreparation (FDD only) ***
compressedModeControlPreparationFDD NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE CompressedModePrepareFDD
  SUCCESSFUL OUTCOME CompressedModeReadyFDD
  UNSUCCESSFUL OUTCOME CompressedModeFailureFDD
  MESSAGE DISCRIMINATOR dedicated
  PROCEDURE ID { procedureCode id-compressedModeControlPreparation, ddMode fdd }
}
CRITICALITY ignore
}

--- *** CompressedModeCommit (FDD only) ***
compressedModeControlCommitFDD NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE CompressedModeCommitFDD
  MESSAGE DISCRIMINATOR dedicated
  PROCEDURE ID { procedureCode id-compressedModeControlCommit, ddMode fdd }
  CRITICALITY ignore
}

--- *** CompressedModeCommit (FDD only) ***
compressedModeControlCancellationFDD NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE CompressedModeCancelFDD
  MESSAGE DISCRIMINATOR dedicated
  PROCEDURE ID { procedureCode id-compressedModeControlCancellation, ddMode fdd }
  CRITICALITY ignore
}
}
-- Class 2

-- *** ResourceStatusIndication ***
resourceStatusIndication NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE ResourceStatusIndication
  MESSAGE DISCRIMINATOR common
  PROCEDURE ID { procedureCode id-resourceStatusIndication, ddMode common }
  CRITICALITY ignore
}

-- *** AuditRequired ***
auditRequired NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE AuditRequiredIndication
  MESSAGE DISCRIMINATOR common
  PROCEDURE ID { procedureCode id-auditRequired, ddMode common }
  CRITICALITY ignore
}

-- *** CommonMeasurementReport ***
commonMeasurementReport NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE CommonMeasurementReport
  MESSAGE DISCRIMINATOR common
  PROCEDURE ID { procedureCode id-commonMeasurementReport, ddMode common }
  CRITICALITY ignore
}
}


```



```

-- *** CommonMeasurementTermination ***
commonMeasurementTermination NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE      CommonMeasurementTerminationRequest
  MESSAGE DISCRIMINATOR   common
  PROCEDURE ID             { procedureCode id-commonMeasurementTermination, ddMode common }
}
  CRITICALITY              ignore
}

-- *** CommonMeasurementFailure ***
commonMeasurementFailure NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE      CommonMeasurementFailureIndication
  MESSAGE DISCRIMINATOR   common
  PROCEDURE ID             { procedureCode id-commonMeasurementFailure, ddMode common }
  CRITICALITY              ignore
}

-- *** SynchronisedRadioLinkReconfirurationCommit ***
synchronisedRadioLinkReconfigurationCommit NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE      RadioLinkReconfigurationCommit
  MESSAGE DISCRIMINATOR   dedicated
  PROCEDURE ID             { procedureCode id-synchronisedRadioLinkReconfigurationCommit,
ddMode common }
  CRITICALITY              ignore
}

-- *** SynchronisedRadioReconfigurationCancellation ***
synchronisedRadioLinkReconfigurationCancellation NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE      RadioLinkReconfigurationCancel
  MESSAGE DISCRIMINATOR   dedicated
  PROCEDURE ID             { procedureCode id-
synchronisedRadioLinkReconfigurationCancellation, ddMode common }
  CRITICALITY              ignore
}

-- *** RadioLinkFailure ***
radioLinkFailure NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE      RadioLinkFailureIndication
  MESSAGE DISCRIMINATOR   dedicated
  PROCEDURE ID             { procedureCode id-radioLinkFailure, ddMode common }
  CRITICALITY              ignore
}

-- *** RadioLinkRestoration ***
radioLinkRestoration NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE      RadioLinkRestoreIndication
  MESSAGE DISCRIMINATOR   dedicated
  PROCEDURE ID             { procedureCode id-radioLinkRestoration, ddMode common }
  CRITICALITY              ignore
}

-- *** DedicatedMeasurementReport ***
dedicatedMeasurementReport NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE      DedicatedMeasurementReport
  MESSAGE DISCRIMINATOR   dedicated
  PROCEDURE ID             { procedureCode id-dedicatedMeasurementReport, ddMode common }
  CRITICALITY              ignore
}

-- *** DedicatedMeasurementTermination ***
dedicatedMeasurementTermination NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE      DedicatedMeasurementTerminationRequest
  MESSAGE DISCRIMINATOR   dedicated
  PROCEDURE ID             { procedureCode id-dedicatedMeasurementTermination, ddMode
common }
  CRITICALITY              ignore
}

-- *** DedicatedMeasurementFailure ***
dedicatedMeasurementFailure NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE      DedicatedMeasurementFailureIndication
  MESSAGE DISCRIMINATOR   dedicated
  PROCEDURE ID             { procedureCode id-dedicatedMeasurementFailure, ddMode common }
  CRITICALITY              ignore
}

```

```

-- *** DLPowerControl (FDD only) ***
downlinkPowerControlFDD NBAP-ELEMENTARY-PROCEDURE ::= {
--itaba
  INITIATING MESSAGE      DL-PowerControlRequest
  MESSAGE DISCRIMINATOR   dedicated
--itaba
  PROCEDURE ID             { procedureCode id-downlinkPowerControl, ddMode fdd }
  CRITICALITY              ignore
}

-- *** CompressedModeCommit (FDD only) ***
compressedModeCommit NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE      CompressedModeCommit
  MESSAGE DISCRIMINATOR   dedicated
  PROCEDURE ID             { procedureCode id-compressedModeCommit, ddMode fdd }
  CRITICALITY              ignore
}

-- *** CompressedModeCancellation (FDD only) ***
compressedModeCancellation NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE      CompressedModeCancel
  MESSAGE DISCRIMINATOR   dedicated
  PROCEDURE ID             { procedureCode id-compressedModeCancellation, ddMode fdd }
  CRITICALITY              ignore
}

-- *** UnblockResourceIndication ***
unblockResource NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE      UnblockResourceIndication
  MESSAGE DISCRIMINATOR   common
  PROCEDURE ID             { procedureCode id-unblockResource, ddMode common }
  CRITICALITY              ignore
}

-- *** ErrorIndication ***
errorIndication NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE      eErrorIndication
  MESSAGE DISCRIMINATOR   dedicated
  PROCEDURE ID             { procedureCode id-errorIndication
Cancellation, ddMode common }
  CRITICALITY              ignore
}

-- *** PrivateMessage ***
privateMessage NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE      PrivateMessage
  MESSAGE DISCRIMINATOR   dedicated
  PROCEDURE ID             { procedureCode id-privateMessage, ddMode common }
  CRITICALITY              ignore
}

```

END

<b>CHANGE REQUEST</b>		Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.	
<b>25.433</b>	<b>CR</b>	<b>025</b>	Current Version: <b>3.0.0</b>
GSM (AA.BB) or 3G (AA.BBB) specification number ↑		↑ CR number as allocated by MCC support team	
For submission to: <b>TSG-RAN#7</b>	for approval <input checked="" type="checkbox"/>	strategic <input type="checkbox"/>	(for SMG use only)
list expected approval meeting # here ↑	for information <input type="checkbox"/>	non-strategic <input type="checkbox"/>	

Form: CR cover sheet, version 2 for 3GPP and SMG    The latest version of this form is available from: ftp://ftp.3gpp.org/Information/CR-Form-v2.doc

**Proposed change affects:**    (U)SIM     ME     UTRAN / Radio     Core Network   
*(at least one should be marked with an X)*

**Source:**    TSG-RAN WG3    **Date:**    26 January 2000

**Subject:**    CR to 25.433: Editorial Correction of the ASN.1 with the Syntax Checking of the NBAP : Information Element Module

**Work item:**    \_\_\_\_\_

<b>Category:</b>	F Correction <input type="checkbox"/> A Corresponds to a correction in an earlier release <input type="checkbox"/> B Addition of feature <input type="checkbox"/> C Functional modification of feature <input checked="" type="checkbox"/> D Editorial modification <input type="checkbox"/>	<b>Release:</b>	Phase 2 <input type="checkbox"/> Release 96 <input type="checkbox"/> Release 97 <input type="checkbox"/> Release 98 <input type="checkbox"/> Release 99 <input checked="" type="checkbox"/> Release 00 <input type="checkbox"/>
------------------	--	-----------------	--

(only one category shall be marked with an X)

**Reason for change:**    This CR is to provides the NBAP ASN.1 descripton (Information Element Module) with the syntax checking. And also alignment with the RNSAP ASN.1 description.

**Clauses affected:**    9.3.4

<b>Other specs affected:</b>	Other 3G core specifications <input type="checkbox"/> Other GSM core specifications <input type="checkbox"/> MS test specifications <input type="checkbox"/> BSS test specifications <input type="checkbox"/> O&M specifications <input type="checkbox"/>	→ List of CRs: → List of CRs: → List of CRs: → List of CRs: → List of CRs:	
------------------------------	---	--	--

**Other comments:**    \_\_\_\_\_



help.doc

<----- double-click here for help and instructions on how to create a CR.

## 9.3.4 NBAP Information Elements

\_\_\_\_\_  
 --

```

-- Information Element Definitions
--
--*****

NBAP-IEs
DEFINITIONS AUTOMATIC TAGS ::=
BEGIN

IMPORTS
maxTFcount,
maxnoofTFCS,
maxCTF-1,
maxRM,
maxNrOfTFCS,
maxNrOfErrors,
maxCTFC-1,
maxNrOfTFs,
maxTTI-count,
maxRateMatching

FROM NBAP-Constants+

Criticality,
ProcedureCode,
ProtocolIE-ID,
TransactionID,
TriggeringMessage
FROM NBAP-CommonDataTypes

ProtocolExtensionContainer{},
NBAP-PROTOCOL-EXTENSION
FROM NBAP-Containers;

DTX-InsertionPoint ::= INTEGER
DedicatedMeasurementValue ::= INTEGER
DeltaTPC ::= INTEGER
=====
---_A
=====

to do
AcknowledgedRA-TriesValue ::= TBD

AddOrDeleteIndicator ::= ENUMERATED {
add,
delete,
...
}

AICH-TransmissionTiming ::= ENUMERATED {
timing0,
timing1
v0,
v1,
...
}

AvailabilityStatus ::= ENUMERATED {
empty,
in-test,
failed,
power-off,
off-line,
off-duty,
dependency,
degraded,
not-installed,
log-full,
...
}

to do
AveragingDuration ::= TBD

```

```

-----
-- =====
---_B
-----
BCCH-ModificationTime ::= INTEGER (0|2|4|..|4095) (0..8190)
-- Time = BCCH-ModificationTime / 2
-- Range 0 to 4095, step 2
-- All even SFN values are allowed

BindingID ::= OCTET STRING (SIZE (4))
BindingID ::= OCTET STRING (SIZE (1..4, ...))

BlockingPriorityIndicator ::= ENUMERATED {
    high,
    normal,
    low,
    ...
}
-- High priority: Block resource immediately.
-- Normal priority: Block resource when idle or upon timer expiry.
-- Low priority: Block resource when idle.

BurstType ::= ENUMERATED {
    type1 (1),
    type2 (2),
    ...
}

-----
-- =====
---_C
-----

Cause ::= ENUMERATEDCHOICE {
radioNetworkLayer RadioNetworkLayerCause,
    radioNetwork CauseRadioNetwork,
transportLayer TransportLayerCause,
    transport CauseTransport,
protocol ProtocolCause,
    protocol CauseProtocol,
misc MiscellaneousCause
    misc CauseMisc,
    ...
}

CauseMisc ::= ENUMERATED {
    control-processing-overload,
    hardware-failure,
    oam-intervention,
    not-enough-user-plane-processing-resources,
    unspecified,
    ...
}

CauseProtocol ::= ENUMERATED {
    transaction-not-allowed,
    transfer-syntax-error,
    abstract-syntax-error-reject,
    abstract-syntax-error-ignore-and-notify,
    message-not-compatible-with-receiver-state,
    semantic-error,
    unspecified,
    ...
}

CauseRadioNetwork ::= ENUMERATED {
    unknown-C-ID,
    cell-not-available,
    power-level-not-supported,
    ul-scramblingcode-already-in-use,
    dl-radio-resources-not-available,
    ul-radio-resources-not-available,
    rl-already-ActivatedOrAlocated,
    nodeB-Resources-unavailable,
}

```

```

insufficient-physical-channel-resources,
measurement-not-supported-for-the-object,
macrodiversity-combining-not-possible,
reconfiguration-not-allowed,
requested-configuration-not-supported,
synchronization-failure,
unspecified,
...
}

CauseTransport ::= ENUMERATED {
transport-link-failure,
transmission-port-not-available,
transport-resource-unavailable,
unspecified,
...
}

CCTrCH-ID ::= INTEGER (±0..15)

Cell-ID-Length ::= ENUMERATED {
short,
medium,
long,
...
}

CellParameterID ::= INTEGER (0..127)

CFN ::= INTEGER (0..255)

ChipOffset ::= INTEGER (0..38399)
-- Unit Chip

C-ID ::= INTEGER (0..65535)

CodingRate ::= ENUMERATED {
rate1-2,
rate1-3
}

CommonMeasurementObjectType ::= ENUMERATED {
cell,
rach,
...
}

CommonMeasurementType ::= SEQUENCE ENUMERATED {
rsi, RSSI-Value,
transmitted-carrier-power TransmittedCarrierPowerValue,
acknowledged-ra-tries AcknowledgedRA-TriesValue,
time-slot-iscp TimeSlotISCP-Value,
...
}

CommonMeasurementValue ::= SEQUENCE {
transmitted-carrier-power Common-Measurement-TransmittedCarrierPowerValue
OPTIONAL,
rsi Common-Measurement-RSSI-Value
OPTIONAL,
acknowledged-ra-tries Common-Measurement-Acknowledged-RA-TriesValue
OPTIONAL,
time-slot-iscp Common-Measurement-TimeSlot-ISCP-Value
OPTIONAL,
iE-Extensions ProtocolExtensionContainer { {CommonMeasurementValue-
ExtIEs} } OPTIONAL,
...
}

CommonMeasurementValue-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
...
}

Common-Measurement-RSSI-Value ::= INTEGER(300..1000)
-- Common-Measurement-RSSI-Value = RSSI-Value * -10
-- If RSSI-Value <= -1000 Common-Measurement-RSSI-Value shall be set to -1000
-- If RSSI-Value >= -300 Common-Measurement-RSSI-Value shall be set to -300

```

```

-- Unit dB, Range -30dB .. -100dB, Step -0.1dB

-- to do, #TBD#
Common-Measurement-Acknowledged-RA-TriesValue ::= INTEGER

Common-Measurement-TransmittedCarrierPowerValue ::= INTEGER(-350..100)
-- Common-Measurement-TransmittedCarrierPowerValue = TransmittedCarrierPowerValue * 10
-- If TransmittedCarrierPowerValue <=-35 Common-Measurement-TransmittedCarrierPowerValue
shall be set to -350
-- If TransmittedCarrierPowerValue >=10 Common-Measurement-TransmittedCarrierPowerValue
shall be set to 100
-- Unit dB, Range -35dB .. +10dB, Step +0.1dB

-- to do, #TBD#
Common-Measurement-TimeSlot-ISCP-Value ::= INTEGER

CommonPhysicalChannelID ::= INTEGER (0..255)

CommonTransportChannelID ::= INTEGER (0..255)

CommunicationControlPortID ::= INTEGER (0..65535)

CompressedModeMethod ::= ENUMERATED {
  none,
  puncturing,
  sF-2,
  gating,
  none...
}
-- none = restore the normal mode

ConfigurationGenerationID ::= INTEGER (0..255)
-- Value '0' means "No configuration"

CRC-Size ::= ENUMERATED {
size0,
size12,
size16,
size24
}
CriticalityDiagnostics ::= SEQUENCE {
  procedureCode ProcedureCode OPTIONAL,
  triggeringMessage TriggeringMessage OPTIONAL,
  criticalityResponse Criticality OPTIONAL,
  transactionID TransactionID OPTIONAL,
  iEsCriticalityResponses CriticalityDiagnostics-IE-List OPTIONAL,
  iE-Extensions ProtocolExtensionContainer { {CriticalityDiagnostics-
ExtIEs} } OPTIONAL,
  ...
}

CriticalityDiagnostics-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

CriticalityDiagnostics-IE-List ::= SEQUENCE (SIZE (1..maxNrOfErrors)) OF
SEQUENCE {
  criticalityResponse Criticality,
  iE-ID ProtocolIE-ID,
  iE-Extensions ProtocolExtensionContainer { {CriticalityDiagnostics-IE-
List-ExtIEs} } OPTIONAL,
  ...
}

CriticalityDiagnostics-IE-List-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

CRNC-CommunicationContextID ::= INTEGER (0..1048575)

CTFC ::= INTEGER (0..maxCTF-1)

-----
-- =====
---_D

```

```

-----
-- =====
DCH-CombinationInd ::= INTEGER (0..255)
DCH-ID ::= INTEGER (0..255)

DedicatedMeasurementObjectType1 ::= ENUMERATED {
  cell,
  rach,
  ...
}

DedicatedMeasurementObjectType2 ::= SEQUENCE {
  sir-value SIR-Value OPTIONAL,
  sir-error-value SIR-ErrorValue OPTIONAL,
  transmitted-code-power TransmittedCodePowerValue OPTIONAL,
  time-slot-isep TimeSlotISCP-Value OPTIONAL,
  ...
}

DedicatedMeasurementObjectType3 ::= ENUMERATED {
  rl,
  all-rl,
  ...
}

-- Reference: 25.215 and 25.225
DedicatedMeasurementType ::= ENUMERATED {
  sir,
  sir-error,
  transmitted-code-power,
  timeslot-iseprscp,
  ...
}

DedicatedMeasurementValue ::= SEQUENCE {
  sIR-Value DedicatedMeasurement-SIR-Value
  OPTIONAL,
  sIR-ErrorValue DedicatedMeasurement-SIR-Error-Value
  OPTIONAL,
  transmittedCodePowerValue DedicatedMeasurement-Transmitted-Code-Power-Value
  OPTIONAL, -- Relative to CPICH
  rSCP DedicatedMeasurement-RSCP
  OPTIONAL, -- TDD only
  iE-Extensions ProtocolExtensionContainer {
  {DedicatedMeasurementValue-ExtIEs} } OPTIONAL,
  ...
}

DedicatedMeasurementValue-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- to do #TBD#
DedicatedMeasurement-RSCP ::= INTEGER

DedicatedMeasurement-SIR-Error-Value ::= INTEGER (-100..100)
-- DedicatedMeasurement-SIR-Error-Value = SIR-Error-Value * 10
-- If SIR-Error-Value <= -10 DedicatedMeasurement-SIR-ErrorValue shall be set to -100
-- If SIR-Error-Value >= 10 DedicatedMeasurement-SIR-ErrorValue shall be set to 100
-- Unit dB, Range -10dB .. +10dB, Step +0.1dB

DedicatedMeasurement-SIR-Value ::= INTEGER (-100..200)
-- DedicatedMeasurement-SIR-Value = SIR-Value * 10
-- If SIR-Value <= 10 DedicatedMeasurement-SIR-Value shall be set to -100
-- If SIR-Value >= 20 DedicatedMeasurement-SIR-Value shall be set to 200
-- Unit dB, Range -10dB .. +20dB, Step +0.1dB

DedicatedMeasurement-Transmitted-Code-Power-Value ::= INTEGER (-350..150)
-- Dedicated Measurement-Transmitted-Code-Power-Value = Transmitted-Code-Power-Value * 10
-- If Transmitted-Code-Power-Value <=35 Dedicated MeasurementType-Transmitted-Code shall be
set to -350
-- If Transmitted-Code-Power-Value >=15 Dedicated MeasurementType-Transmitted-Code shall be
set to 150
-- Unit dB, Range -35dB .. +15dB, Step +0.1dB

```



```
-- to do, This parameter is present in NBAP tabular but not defined in IE(TS25.433v3.0.0)
Delta-TPC ::= INTEGER
```

```
D-FieldLength ::= ENUMERATED {
    ___ v1,
    ___ v2,
    ___ ...
}
```

```
DiversityControlField ::= ENUMERATED {
    ___ may,
    ___ must,
    ___ must-not,
    ___ ...
}
```

```
DiversityIndication ::= ENUMERATED {
    combined,
    not-combined
}
```

```
DiversityMode ::= ENUMERATED {
    ___ none,
    ___ sTTD,
    ___ closed-loop-mode1,
    ___ closed-loop-mode2,
    ___ ...
}
```

```
DL-DPCH-SlotFormat ::= INTEGER (0..16)
```

```
DL-FrameType ::= ENUMERATED {
    ___ typeA,
    ___ typeB,
    ___ ...
}
```

```
---35..15 is transformed into 0..50. 0.1 steps gives 0..500
--- Power0 indicates -35dB, Power1 indicates -34.9dB, ..., Power500 indicates 15dB
DL-Power ::= ENUMERATED {
    power0,
    power1,
    ...
}
DL-Power ::= INTEGER (-350..150)
-- DL-Power = power * 10
-- If Power <=-35 DL-Power shall be set to -350
-- if Power >=15 DL-Power shall be set to 150
-- Unit dB, Range -35dB .. +15dB, Step +0.1dB
```

```
--- 0= Primary scrambling code of the cell, 1..15= Secondary scrambling code ---
DL-ScramblingCode ::= INTEGER (0..15)
--- 0= Primary scrambling code of the cell, 1..15= Secondary scrambling code ---
```

```
DPCH-ID ::= INTEGER (0..15239)
```

```
DPCH-Offset ::= INTEGER (0..255)
```

```
DSCH-ID ::= INTEGER (0..255)
```

```
-- to do
-- the parameter need to be defined. It may correspond to the DL TFS defined for DCH
DSCH-TransportFormatSet ::= TBD
DSCH-TFS ::= INTEGER
```

```
-- to do
-- the parameter need to be defined. It may correspond to the DL TFS defined for DCH
DSCH-TransportFormatCombinationSet ::= TBD
DSCH-TFCS ::= INTEGER
```

```
DTX-InsertionPosition ::= ENUMERATED {
    fixed,
```

```

flexible
}

DynamicTransportFormatInformation ::= SEQUENCE (SIZE (1..maxTFcount)) OF
-- SEQUENCE {
--   numberOfTransportBlocks      NumberOfTransportBlocks,
--   transportBlockSize           TransportBlockSize OPTIONAL
--   -- This IE is only present if Number of Transport Blocks is greater than 0 --,
--   mode dynamicTFS             Mode DynamicTFS
--   ...
}

```

```

-----
-- =====
---_E
-----
-- =====

```

```

EventA ::= SEQUENCE {
-- measurementThreshold          MeasurementThreshold,
-- measurementHysteresisTime     MeasurementHysteresisTime OPTIONAL
}

```

```

EventB ::= SEQUENCE {
-- measurementThreshold          MeasurementThreshold,
-- measurementHysteresisTime     MeasurementHysteresisTime OPTIONAL
}

```

```

EventC ::= SEQUENCE {
-- measurementIncreaseThreshold  MeasurementIncreaseThreshold,
-- measurementChangeTime         MeasurementChangeTime
}

```

```

EventD ::= SEQUENCE {
-- measurementDecreaseThreshold  MeasurementDecreaseThreshold,
-- measurementChangeTime         MeasurementChangeTime
}

```

```

EventE ::= SEQUENCE {
-- measurementThreshold1         MeasurementThreshold1,
-- measurementThreshold2         MeasurementThreshold2 OPTIONAL,
-- measurementHysteresisTime     MeasurementHysteresisTime OPTIONAL,
-- reportPeriodicity             ReportPeriodicity OPTIONAL
}

```

```

EventF ::= SEQUENCE {
-- measurementThreshold1         MeasurementThreshold1,
-- measurementThreshold2         MeasurementThreshold2 OPTIONAL,
-- measurementHysteresisTime     MeasurementHysteresisTime OPTIONAL,
-- reportPeriodicity             ReportPeriodicity OPTIONAL
}

```

```

-----
-- =====
---_F
-----
-- =====

```

```

-- The maximum value is equal to the DL spreading factor --
FDD-DL-ChannelisationCodeNumber ::= INTEGER(0.. 255)
-- The maximum value is equal to the DL spreading factor -1--

```

```

-- 0: 0 chip, 1: 256 chip, 2: 512 chip, ..,149: 38144 chip [TS 25.211] --
FDD-S-CCPCH-Offset ::= INTEGER (0..-149)
-- 0: 0 chip, 1: 256 chip, 2: 512 chip, ..,149: 38144 chip [TS 25.211] --

```

```

-- 0=lower priority, 15=higher priority --
FrameHandlingPriority ::= INTEGER (0..15)
-- 0=lower priority, 15=higher priority --

```

```

FrameOffset ::= INTEGER (0..255)

```

```

-----
-- =====
---_G

```

```

-----
-- =====
GapPeriod ::= INTEGER_(0..255)
-- Unit Frame

Gap-Position-Mode ::= ENUMERATED {
    fixed,
    flexible,
    ...
}

-----
---_H
-----

-----
---_I
-----

-- to do
IB-SG ::= BIT STRING

IB-SG-POS ::= INTEGER (0..4095)

IB-SG-REP ::= INTEGER {rep(16), rep(32), rep(64), rep(128), rep(256), rep(512), rep(1024),
rep(2048)}
IB-SG-REP ::= INTEGER (16| 32| 64| 128| 256| 512| 1024| 2048)

IB-Type ::= EnumeratedENUMERATED {
    MIBmib,
    SIB1sib1,
    SIB2sib2,
    SIB12sib12,
    ...
}

IndicationType ::= ENUMERATED {
    noFailure,
    serviceImpacting,
    cellControl,
    ...
}

-----
---_J
-----

-----
---_K
-----

-----
---_L
-----

Local_Cell-ID ::= INTEGER (0..268435455)

-----
---_M
-----

-- dBm, granularity 1 dBm
-- dl power0 indicates 0 dBm
MaximumDL-PowerCapability ::= ENUMERATED{ INTEGER(0..50)
-- Unit dBm, Range 0dBm .. 50dBm, Step +1dB
dl-power0,

```

```

dl-power1,
dl-power2,
...
}

-- Unit dBm, 0 to 50, Granularity 1 dB
MaximumTransmissionPower ::= ENUMERATED { INTEGER(0..50)
-- Unit dB, Range 0dB .. 50dB, Step +1dB
power0,
power1,
power2,
...
}

MaxNumberNrOfUL-DPDCHs ::= INTEGER (1..6)

MaxPRACH-MidambleShifts ::= ENUMERATED {
    shift4,
    shift8,
    ...
}

-- 10ms to 1min, Step10ms
MeasurementChangeTime ::= ENUMERATED {
time10ms,
time20ms,
time30ms,
...
}

MeasurementCharacteristics ::= SEQUENCE {
    measurementFrequency          MeasurementFrequencyMeasurementCharacteristics-
    MeasurementFrequency,
    averagingDuration             AveragingDurationMeasurementCharacteristics-
    AveragingDuration,
    iE-Extensions                 ProtocolExtensionContainer { { MeasurementCharacteristics-
    ExtIEs } } OPTIONAL,
    ...
}

MeasurementCharacteristics-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- to do #TBD#
MeasurementCharacteristics-AveragingDuration ::= INTEGER

--- to do
MeasurementDecreaseThreshold ::= TBD

--- to do
MeasurementFrequency ::= TBD
-- to do #TBD#
MeasurementCharacteristics-MeasurementFrequency ::= INTEGER

--- to do
MeasurementIncreaseThreshold ::= TBD

--- to do
--- 10ms to 1min, Step10ms ---
MeasurementHysteresisTime ::= ENUMERATED {
time10ms,
time20ms,
time30ms,
...
}

MeasurementID ::= INTEGER (0..1048575)

--- to do
MeasurementThreshold ::= TBD

--- to do
MeasurementThreshold1 ::= TBD

```

```

-- to do
MeasurementThreshold2 ::= TBD

MeasurementType ::= ENUMERATED {
SCH,
syncRACH-access
}

MessageDiscriminator ::= ENUMERATED {
common,
dedicated
}

MidambleShift ::= INTEGER (0..15)

MinimumSpreadingFactor ::= ENUMERATED {
SF4v4,
SF16v16,
SF32v32,
SF64v64,
SF128v128,
SF256v256,
SF512v512,
...
}

MinUL-ChannelisationCodeLength ::= ENUMERATED {
code-length4v4,
code-length8v8,
code-length16v16,
code-length32v32,
code-length64v64,
code-length128v128,
code-length256
...
}

MiscellaneousCause ::= ENUMERATED {
control-processing-overload,
hardware-failure,
oam-intervention,
not-enough-user-plane-processing-resources,
unspecified
}

Mode-DynamicTFS ::= CHOICE {
tdd-mode-dynamic TransmissionTimeInterval-Dynamic,
...
}

Mode-SemiStaticTFS ::= CHOICE {
tdd-mode-semistatic TransmissionTimeInterval-SemiStatic,
...
}

MultiplexingPosition ::= ENUMERATED {
fixed,
flexible,
...
}

-----
-- =====
--- N
-----
-- =====

NumberOfChannelElements ::= TBD

NodeB-CommunicationContextID ::= INTEGER (0..1048576)

-- to do, This parameter is present in NBAP tabular but not defined in IE (TS25.433v3.0.0)
NumberOfChannelElements ::= INTEGER

NumberOfTransportBlocks ::= INTEGER (0..4095)

```

```

-----
-- =====
---_O
-----
-----
-- =====
---_P
-----
-----

PagingIndicatorLength ::= ENUMERATED {INTEGER (2| 4| 8)
ind_length2,
ind_length4,
ind_length8
}

PayloadCRC-PresenceIndicator ::= ENUMERATED {
    ___cRC-Included,
    ___cRC-NotIncluded,
    ___...
}

PCCPCH-Power ::= INTEGER (-150..400)
-- PCCPCH-power = power * 10
-- If power <= -15 PCCPCH shall be set to -150
-- If power >= 40 PCCPCH shall be set to 400
-- Unit dBm, Range -15dBm .. +40 dBm, Step +0.1dBm

PD ::= INTEGER(0..2047, ...)

PICH-Mode ::= ENUMERATED {
    ___noefPI18v18,
    ___noefPI36v36,
    ___noefPI72v72,
    ___noefPI144v144,
    ___...
}

PilotBitsUsedIndicator ::= ENUMERATED {
    ___pilot-bits-used,
    ___pilot-bits-not-used,
    ___...
}

PowerControlMode ::= ENUMERATED {
    ___pem0v0,
    ___pem1v1,
    ___...
}

-- Chips. Step size is 3 chips. 0=0 chips, 1=3 chips ..--
--** TODO. -15..40 is transformed to 0..55. 0.1 steps gives 0..550 **
PowerOffset ::= INTEGER (0..24)
-- PowerOffset = offset * 0.25
-- Unit dB, Range 0dB .. +6dB, Step +0.25dB

PowerResumeMode ::= ENUMERATED {
    ___prm0v0,
    ___prm1v1,
    ___...
}

PRACH-Midamble ::= ENUMERATED {
    ___inverted,
    ___direct,
    ___...
}

PreambleScramblingCode ::= INTEGER (0..4095)

-- Bit 0=P0, Bit 1=P1, .. ,Bit 15=P15 [25.213]
PreambleSignatures ::= BIT STRING (SIZE (16))
-- Bit 0=P0, Bit 1=P1, .. ,Bit 15=P15 [25.213] --

```

```

-- Unit dBm, -15 to 40, Granularity 0.1 dB
-- epich-power1 indicates -5 dB
PrimaryCPICH-Power ::= ENUMERATED {
epich-power1,
epich-power2,
...
}
PrimaryCPICH-Power ::= INTEGER(-150..400)
-- PrimaryCPICH-Power = Power * 10
-- Unit dBm, Range -15dBm .. +40dBm, Step +0.1dBm

PrimaryScramblingCode ::= INTEGER (0..511)

PropagationDelay ::= INTEGER (0..255)
-- Unit: chips, step size 3 chips
-- example: 0 = 0chip, 1 = 3chips
ProtocolCause ::= ENUMERATED
transaction-not-allowed,
transfer-syntax-error,
abstract-syntax-error-reject,
abstract-syntax-error-ignore-and-notify,
message-not-compatible-with-receiver-state,
semantic-error,
unspecified
}

-- PCCPCH Power unit dBm
-- PCCPCH Power step 0.1dBm
PCCPCH-power ::= INTEGER (-15..40)

PSCH-TimeSlot ::= INTEGER (0..6)

PSCH-Power ::= INTEGER (0..511)

PUSCH-Offset ::= INTEGER (0..255)
PunctureLimit ::= INTEGER (0..100)
-- Unit %

-- =====
-- Q
-- =====

-----
--- R
-----

-- =====

-- SF

RACH-SlotFormat ::= ENUMERATED {
format256v0,
format128v1,
format64v2,
format32v3,
...
}

-- Bit 0=Sub Channel Number 0, Bit 1=Sub Channel Number 1, ..., Bit 14=Sub Channel Number 14
RACH-SubChannelNumbers ::= BIT STRING (SIZE (15))
-- Bit 0=Sub Channel Number 0, Bit 1=Sub Channel Number 1, ..., Bit 14=Sub Channel Number 14
RadioNetworkLayerCause ::= Enumerated {
unknown-C-ID,
cell-not-available,
power-level-not-supported,
ul-scramblingcode-already-in-use,
dl-radio-resources-not-available,
ul-radio-resources-not-available,
rl-Already-ActivatedorAllocated,
nodeB-Resources-Unavailable,
insufficient-physical-channel-resources,
measurement-not-supported-for-the-object,
macrodiversity-combining-not-possible,
reconfiguration-not-allowed,
requested-configuration-not-supported,

```

```
synchronization-failure,  
unspecified  
}
```

```
RateMatchingAttribute ::= INTEGER (1..maxRM)
```

```
RepetitionLength ::= ENUMERATED {INTEGER (1..63)  
length1,  
length2,  
length4,  
length8  
}
```

```
RepetitionPeriod ::= ENUMERATED {  
v1,  
v2,  
v4,  
v8,  
v16,  
v32,  
v64,  
...  
}
```

```
ReportCharacteristicsType ::= CHOICE {  
onDemand NULL,  
periodic ReportPeriodicityReportCharacteristicsType-ReportPeriodicity,  
event-a EventAReportCharacteristicsType-EventA,  
event-b EventBReportCharacteristicsType-EventB,  
event-c EventCReportCharacteristicsType-EventC,  
event-d EventDReportCharacteristicsType-EventD,  
event-e EventEReportCharacteristicsType-EventE,  
event-f EventFReportCharacteristicsType-EventF  
}
```

```
ReportCharacteristicsType-EventA ::= SEQUENCE {  
measurementThreshold ReportCharacteristicsType-MeasurementThreshold,  
measurementHysteresisTime ReportCharacteristicsType-  
ScaledMeasurementHysteresisTime OPTIONAL,  
iE-Extensions ProtocolExtensionContainer { {  
ReportCharacteristicsType-EventA-ExtIEs} } OPTIONAL,  
...  
}
```

```
ReportCharacteristicsType-EventA-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {  
...  
}
```

```
ReportCharacteristicsType-EventB ::= SEQUENCE {  
measurementThreshold ReportCharacteristicsType-MeasurementThreshold,  
measurementHysteresisTime ReportCharacteristicsType-  
ScaledMeasurementHysteresisTime OPTIONAL,  
iE-Extensions ProtocolExtensionContainer { {  
ReportCharacteristicsType-EventB-ExtIEs} } OPTIONAL,  
...  
}
```

```
ReportCharacteristicsType-EventB-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {  
...  
}
```

```
ReportCharacteristicsType-EventC ::= SEQUENCE {  
measurementIncreaseThreshold ReportCharacteristicsType-MeasurementIncreaseThreshold,  
measurementChangeTime ReportCharacteristicsType-ScaledMeasurementChangeTime,  
iE-Extensions ProtocolExtensionContainer { {  
ReportCharacteristicsType-EventC-ExtIEs} } OPTIONAL,  
...  
}
```

```
ReportCharacteristicsType-EventC-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {  
...  
}
```

```
ReportCharacteristicsType-EventD ::= SEQUENCE {
```



```

    measurementDecreaseThreshold    ReportCharacteristicsType-MeasurementDecreaseThreshold,
    measurementChangeTime           ReportCharacteristicsType-ScaledMeasurementChangeTime,
    iE-Extensions                   ProtocolExtensionContainer { {
ReportCharacteristicsType-EventD-ExtIEs} } OPTIONAL,
    ...
}

ReportCharacteristicsType-EventD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

ReportCharacteristicsType-EventE ::= SEQUENCE {
    measurementThreshold1           ReportCharacteristicsType-MeasurementThreshold1,
    measurementThreshold2           ReportCharacteristicsType-MeasurementThreshold2          OPTIONA
    measurementHysteresisTime       ReportCharacteristicsType-
ScaledMeasurementHysteresisTime OPTIONAL,
    reportPeriodicity               ReportCharacteristicsType-ReportPeriodicity          OPTIONA
    iE-Extensions                   ProtocolExtensionContainer { {
ReportCharacteristicsType-EventE-ExtIEs} } OPTIONAL,
    ...
}

ReportCharacteristicsType-EventE-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

ReportCharacteristicsType-EventF ::= SEQUENCE {
    measurementThreshold1           ReportCharacteristicsType-MeasurementThreshold1,
    measurementThreshold2           ReportCharacteristicsType-MeasurementThreshold2          OPTIONA
    measurementHysteresisTime       ReportCharacteristicsType-
ScaledMeasurementHysteresisTime OPTIONAL,
    reportPeriodicity               ReportCharacteristicsType-ReportPeriodicity          OPTIONA
    iE-Extensions                   ProtocolExtensionContainer { {
ReportCharacteristicsType-EventF-ExtIEs} } OPTIONAL,
    ...
}

ReportCharacteristicsType-EventF-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- to do #TBD#
ReportCharacteristicsType-MeasurementDecreaseThreshold ::= INTEGER

-- to do #TBD#
ReportCharacteristicsType-MeasurementIncreaseThreshold ::= INTEGER

-- to do #TBD#
ReportCharacteristicsType-MeasurementThreshold ::= INTEGER

-- to do #TBD#
ReportCharacteristicsType-MeasurementThreshold1 ::= INTEGER

-- to do #TBD#
ReportCharacteristicsType-MeasurementThreshold2 ::= INTEGER

ReportCharacteristicsType-ScaledMeasurementChangeTime ::= INTEGER (1..600)
-- ReportCharacteristicsType-MeasurementChangeTime = Time * 10
-- Unit ms, Range 10ms .. 6000ms(1min), Step 10ms

ReportCharacteristicsType-ScaledMeasurementHysteresisTime ::= INTEGER (1..600)
-- ReportCharacteristicsType-MeasurementHysteresisTime = Time * 10
-- Unit ms, Range 10ms .. 6000ms(1min), Step 10ms

ReportCharacteristicsType-ReportPeriodicity ::= CHOICE {
    msec           ReportPeriodicity-Scaledmsec,
    min            ReportPeriodicity-Scaledmin
}

ReportPeriodicity-Scaledmsec ::= INTEGER (1..600)
-- ReportPeriodicity-msec = ReportPeriodicity * 10
-- Unit ms, Range 10ms .. 6000ms(1min), Step 10ms

ReportPeriodicity-Scaledmin ::= INTEGER (1..60)
-- Unit min, Range 1min .. 60min(hour), Step 1min
-- 10ms to 1min, step 10ms or
-- 1min to 1hour, step 1min

```

```

ReportPeriodicity ::= CHOICE {
_____ msec _____ INTEGER (1..1000),
_____ min _____ INTEGER (1..60)
}

ResourceOperationalState ::= ENUMERATED {
_____ enabled,
_____ disabled,
_____ ...
}

RLC-Mode ::= ENUMERATED {
_____ acknowledgedMode,
_____ unacknowledgedMode,
_____ transparentMode,
_____ ...
}

RL-ID ::= INTEGER (0..31)

RNC-ID ::= INTEGER (0..4095)

---30..100 step 0.1
-- rssi1 indicates 30
RSSI-Value ::= ENUMERATED {
rssi1,
rssi2,
...
}

=====
-- =====
---_S
=====

ScramblingCodeChange ::= ENUMERATED {
_____ code-change,
_____ no-code-change,
_____ ...
}

Scrambling-Code-Word-Number ::= INTEGER (0..255)

SecondaryCCPCH-SlotFormat ::= INTEGER(0..8)

SegmentType ::= ENUMERATED {
_____ first,
_____ subsequent,
_____ last,
_____ complete,
_____ ...
}

SemiStaticTransportFormatInformation ::= SEQUENCE {
_____ transmissionTimeInterval _____ TransmissionTimeInterval,
_____ typeOfChannelCoding _____ TypeOfChannelCoding,
_____ codingRate _____ CodingRate _____ OPTIONAL
-- This IE is only present if IE Type of channel coding is Convolutional or Turbo --,
_____ rateMatchingAttribute _____ RateMatchingAttribute,
_____ crc-Size _____ CRC-Size,
_____ mode-semistatic _____ Mode-SemiStatic-
}

S-FieldLength ::= ENUMERATED {
_____ s-length1v1,
_____ s-length2v2,
_____ ...
}

-- to do, This parameter is present in NBAP tabular but not defined in IE(TS25.433v3.0.0)
SFN ::= INTEGER

ShutdownTimer ::= INTEGER (1..3600)
-- Unit sec

SIB-DeletionIndicator ::= ENUMERATED {
_____ noDeletion,

```

```

    deletion,
    ...
}

SIB-Originator ::= ENUMERATED {
    nodeB,
    cRNC,
    ...
}

-- to do, This parameter is present in NBAP tabular but not defined in IE(TS25.433v3.0.0)
SlotFormat ::= INTEGER

--** TODO, -10..10 is transformed to 0..10. 0.1 steps gives 0..200 **
--sir-error-value1 indicates -10 dB
SIR-ErrorValue ::= ENUMERATED {
    sir-error-value1,
    sir-error-value2,
    ...
}

--** TODO, -10..20 is transformed to 0..30. 0.1 steps gives 0..300 **
--sir-value1 indicates -10 dB
SIR-Value ::= ENUMERATED {
    sir-value1,
    sir-value2,
    ...
}

SSDT-Cell_Identity ::= ENUMERATED {a, b, c, d, e, f, g, h}

SSDT-CellID-Length ::= ENUMERATED {
    short,
    medium,
    long,
    ...
}

SSDT-Indication ::= ENUMERATED {
    ssdtActiveInTheUEssdt-active-in-the-UE,
    ssdtNotActiveInTheUEssdt-not-active-in-the-UE,
    ...
}

STTD-Indicator ::= ENUMERATED {
    active,
    inactive,
    ...
}

SSDT-SupportIndicator ::= ENUMERATED {
    sSDT-Supported,
    sSDT-not-supported,
    ...
}
}
sSDT-Supported
}

ShutdownTimer ::= INTEGER (1..3600)

SyncCase ::= INTEGER (1..3)

SynchronisationMethod ::= ENUMERATED {
    external-reference,
    locked-to-Master-cell,
    one-time-synchronisation,
    ...
}

-----
--- T
-----

T-Cell ::= ENUMERATED {

```

```
chip-0,  
chipP-256,  
chipP-512,  
chipP-768,  
chipP-1024,  
chipP-1280,  
chipP-1536,  
chipP-1892,  
chipP-2048,  
chipP-2304,  
...  
}
```

```
TDD-ChannelisationCode ::= ENUMERATED {  
channelisationCode1-1,  
channelisationCode2-1,  
channelisationCode2-2,  
channelisationCode4-1,  
channelisationCode4-2, chCode1div1,  
chCode2div1,  
chCode2div2,  
chCode4div1,  
chCode4div2,  
chCode4div3,  
chCode4div4,  
chCode8div1,  
chCode8div2,  
chCode8div3,  
chCode8div4,  
chCode8div5,  
chCode8div6,  
chCode8div7,  
chCode8div8,  
chCode16div1,  
chCode16div2,  
chCode16div3,  
chCode16div4,  
chCode16div5,  
chCode16div6,  
chCode16div7,  
chCode16div8,  
chCode16div9,  
chCode16div10,  
chCode16div11,  
chCode16div12,  
chCode16div13,  
chCode16div14,  
chCode16div15,  
chCode16div16,  
...  
}
```

```
TDD-PhysicalChannelOffset ::= INTEGER (0..63)
```

```
-- the ChipOffset is -9200 to +19199  
TDD-ChipOffset ::= INTEGER (-19200..19199)
```

```
TransmissionTimeInterval-Dynamic ::= SEQUENCE (SIZE (1..maxTTIcount)) OF  
ENUMERATED {tti10, tti20, tti40, tti80}  
}
```

```
TransmissionTimeInterval-SemiStatic ::= ENUMERATED {  
frameRelated,  
timeSlotRelated  
}
```

```
-- to do, This parameter is defined in IE but not present in NBAP tabular(TS25.433v3.0.0)  
--TDD-S-CCPCH-Offset ::= INTEGER (0..63)
```

```
TFCI-Coding ::= ENUMERATED {  
v4,  
v8,  
v16,  
v32,  
...  
}
```

```

TFCI-Presence ::= ENUMERATED {
    present,
    not-present,
    ...
}

TFCI-SignallingMode ::= ENUMERATED {
    normal,
    split,
    ...
}

TFCS ::= SEQUENCE (SIZE (1..maxnoofTFCs)) OF
SEQUENCE {
    eTFC CTFC
}
TFCS-CTFC ::= INTEGER (1..maxCTFC-1)

TFS ::= SEQUENCE {
    dynamicTransportFormatInformation
DynamicTransportFormatInformation,
    semiStaticTransportFormatInformation
SemiStaticTransportFormatInformation
}

TGD ::= INTEGER (0..255)

TGL ::= INTEGER (3,4,7,10,14)
TGL ::= INTEGER (3|4|7|10|14)

TimeSlot ::= INTEGER (0..14)

TimeSlotDirection ::= ENUMERATED {
    ul,
    dl,
    ...
}

-- to do
TimeSlotISCP Value ::= TBD

TimeSlotStatus ::= ENUMERATED {
    active,
    not-active,
    ...
}

ToAWE ::= INTEGER (0..2559) msec.
-- Unit ms

ToAWS ::= INTEGER (0..1279) msec.
-- Unit ms

TPC-DownlinkStepSize ::= ENUMERATED {
    step-size0-5,
    step-size1
}
-- to do, This parameter is defined in IE but not present in NBAP tabular(TS25.433)
-- TPCDownlinkStepSize ::= ENUMERATED {
    v0dot5,
    v1,
    ...
--}

Transmit Diversity Indicator ::= ENUMERATED {
    active,
    inactive
}
TransmissionDiversityApplied ::= BOOLEAN
-- true: applied, false: not applied

TransmitDiversityIndicator ::= ENUMERATED {
    active,

```

```

    inactive,
    ...
}

TransmissionTimeInterval ::= ENUMERATED {
time-interval10,
time-interval20,
time-interval40,
time-interval80
} --mcc--

--** TODO. --35..15 is transformed to 0..50. 0.1 steps gives 0..500 **
-- carrier power1 indicates -5 dB
TransmittedCarrierPowerValue ::= ENUMERATED {
carrier-power1,
carrier-power2,
...
}

--** TODO. --35..15 is transformed to 0..50. 0.1 steps gives 0..500 **
-- code power1 indicated -5 dB
TransmittedCodePowerValue ::= ENUMERATED {
eode-power1,
eode-power2,
...
}

TransportFormatCombinationSet ::= SEQUENCE (SIZE (1..maxNrOfTFCs)) OF
SEQUENCE {
cTFC TFCS-CTFC,
iE-Extensions ProtocolExtensionContainer { { TransportFormatCombinationSet-
ExtIEs } } OPTIONAL,
...
}

TransportFormatCombinationSet-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
...
}

TransportFormatSet ::= SEQUENCE {
dynamicParts TransportFormatSet-DynamicPartList,
semi-staticPart TransportFormatSet-Semi-staticPart,
iE-Extensions ProtocolExtensionContainer { { TransportFormatSet-ExtIEs } } OPTIONA
...
}

TransportFormatSet-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
...
}

TransportFormatSet-DynamicPartList ::= SEQUENCE (SIZE (1..maxNrOfTFs)) OF
SEQUENCE {
nrOfTransportBlocks TransportFormatSet-NrOfTransportBlocks,
transportBlockSize TransportFormatSet-TransportBlockSize OPTIONAL,
-- This IE is only present if "Number of Transport Blocks" is greater than 0
mode TransportFormatSet-ModeDP,
iE-Extensions ProtocolExtensionContainer { { TransportFormatSet-
DynamicPartList-ExtIEs } } OPTIONAL,
...
}

TransportFormatSet-DynamicPartList-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
...
}

TransmissionTimeIntervalList ::= SEQUENCE (SIZE (1..maxTTI-count)) OF
SEQUENCE {
transmissionTimeInterval TransportFormatSet-TransmissionTimeInterval,
iE-Extensions ProtocolExtensionContainer { {
TransmissionTimeIntervalList-ExtIEs } } OPTIONAL,
...
}

TransmissionTimeIntervalList-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
...
}

TransportFormatSet-Semi-staticPart ::= SEQUENCE {

```

```

transmissionTimeI          TransportFormatSet-TransmissionTimeInterval,
channelCoding              TransportFormatSet-ChannelCodingType,
codingRate                 TransportFormatSet-CodingRate                OPTIONAL,
-- This IE is only present if channelCoding is 'convolutional' or 'turbo'
rateMatchingAttribute     TransportFormatSet-RateMatchingAttribute,
cRC-Size                  TransportFormatSet-CRC-Size,
mode                      TransportFormatSet-ModeSSP                  OPTIONAL,
iE-Extensions             ProtocolExtensionContainer { { TransportFormatSet-Semi-
staticPart-ExtIEs} }        OPTIONAL,
...
}

TransportFormatSet-Semi-staticPart-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
...
}

TransportFormatSet-ChannelCodingType ::= ENUMERATED {
no-coding,
convolutional-coding,
turbo-coding,
...
}

TransportFormatSet-CodingRate ::= ENUMERATED {
half,
third,
...
}

TransportFormatSet-CRC-Size ::= ENUMERATED {
v0,
v8,
v12,
v16,
v24,
...
}

TransportFormatSet-ModeDP ::= CHOICE {
tdd          TransmissionTimeIntervalList,
-- This IE is mandatory if not defined as semistatic parameter, otherwise it is absent
...
}

TransportFormatSet-ModeSSP ::= CHOICE {
tdd          TransportFormatSet-SecondInterleavingMode,
...
}

TransportFormatSet-NrOfTransportBlocks ::= INTEGER (0..4095)

TransportFormatSet-RateMatchingAttribute ::= INTEGER (1..maxRateMatching)

TransportFormatSet-SecondInterleavingMode ::= ENUMERATED {
frame-related,
timeSlot-related,
...
}

TransportFormatSet-TransmissionTimeInterval ::= ENUMERATED {
msec-10,
msec-20,
msec-40,
msec-80,
...
}

TransportFormatSet-TransportBlockSize ::= INTEGER (1..5000)

TransportBlockSize ::= INTEGER (1..5000)
-- bit --

TSTD-Indicator ::= ENUMERATED {
active,
inactive
}

```

```

TransportLayerAddress ::= OCTET STRING (SIZE (1..20, ...))
TransportLayerAddress ::= BIT STRING (SIZE (1..160, ...))

TSTD-Indicator ::= ENUMERATED {
  active,
  inactive,
  ...
}

TransportLayerCause ::= ENUMERATED {
  transport-link-failure,
  transmission-port-not-available,
  transport-resource-unavailable,
  unspecified
}

TypeOfChannelCoding ::= ENUMERATED {
  no-coding,
  convolutional,
  turbo
}

-----
-- =====
-- _U
-----
-- =====

UARFCN ::= INTEGER (174 .. 474)
UARFCN ::= INTEGER (0..698, ...)
-- corresponds to 1885.2MHz .. 2024.8MHz

UL-DL-CompressedModeSelection ::= ENUMERATED {
  ul-only,
  dl-only,
  both-UandDL,
  ...
}

UL-DeltaEbNo ::= INTEGER (-60..100)
-- UL-DeltaEbNo = DeltaEbNo * 10
-- Unit dB, Range -6dB .. 10dB, Step 0.1dB

UL-DeltaEbNo-after ::= INTEGER (-60..100)
-- UL-DeltaEbNo = DeltaEbNo * 10
-- Unit dB, Range -6dB .. 10dB, Step 0.1dB

UL-DPCCH-SlotFormat ::= INTEGER (0..5)

UL-EbNo ::= INTEGER (0..255)
-- Resolution is 0.1 dB, range 0-25.5 dB --
-- Unit dB, Range 0dB .. +25.5dB, Step +0.1dB

UL-FP-Mode ::= ENUMERATED {
  normal,
  silent,
  ...
}

-- unit dBm, step 0.1dBm
UL-InterferenceLevel ::= INTEGER (-1280..-600)
-- UL-InterferenceLevel = InterferenceLevel * 10
-- Unit dBm, Range -128dBm .. -60dBm, Step 0.1dBm

UL-PunctureLimit ::= INTEGER (0..100)

UL-ScramblingCode ::= SEQUENCE {
  uL-ScramblingCodeNumber_          UL-ScramblingCodeNumber,
  uL-ScramblingCodeLength_         UL-ScramblingCodeLength,
  iE-Extensions                     ProtocolExtensionContainer { { UL-ScramblingCode-ExtIEs
} } OPTIONAL,
  ...
}

UL-ScramblingCode-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {

```



```

    ...
}
-- 2^24
UL-ScramblingCodeLengthNumber ::= INTEGER (0..16777215)
UL-ScramblingCodeNumberLength ::= ENUMERATED {
    short,
    long,
    ...
}

UplinkDeltaEb-No ::= ENUMERATED {
    deltaEb-No-6dB,
    ...
}

UplinkDeltaEb-No-after ::= ENUMERATED {
    deltaEb-No-after-6dB,
    ...
}
USCH-ID ::= INTEGER (0..255)

-- =====
-- V
-- =====

-- =====
-- W
-- =====

-- =====
-- X
-- =====

-- =====
-- Y
-- =====

-- =====
-- Z
-- =====

```

END

<b>CHANGE REQUEST</b>		<small>Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.</small>	
<b>25.433</b>	<b>CR</b>	<b>026</b>	Current Version: <b>3.0.0</b>
<small>GSM (AA.BB) or 3G (AA.BBB) specification number ↑</small>		<small>↑ CR number as allocated by MCC support team</small>	
For submission to: <b>TSG-RAN#7</b>	for approval for information	<input checked="" type="checkbox"/>	strategic <input type="checkbox"/> non-strategic <input type="checkbox"/> <small>(for SMG use only)</small>
<small>list expected approval meeting # here ↑</small>			

Form: CR cover sheet, version 2 for 3GPP and SMG    The latest version of this form is available from: ftp://ftp.3gpp.org/Information/CR-Form-v2.doc

**Proposed change affects:**    (U)SIM     ME     UTRAN / Radio     Core Network   
(at least one should be marked with an X)

**Source:**    TSG-RAN WG3    **Date:**    24 January 2000

**Subject:**    CR to 25.433: Editorial Correction of the ASN.1 with the Syntax Checking of the NBAP : Constant Module

**Work item:**    \_\_\_\_\_

<b>Category:</b>	F Correction <input type="checkbox"/> A Corresponds to a correction in an earlier release <input type="checkbox"/> B Addition of feature <input type="checkbox"/> C Functional modification of feature <input checked="" type="checkbox"/> D Editorial modification <input type="checkbox"/>	<b>Release:</b>	Phase 2 <input type="checkbox"/> Release 96 <input type="checkbox"/> Release 97 <input type="checkbox"/> Release 98 <input type="checkbox"/> Release 99 <input type="checkbox"/> Release 00 <input checked="" type="checkbox"/>
------------------	--	-----------------	--

(only one category shall be marked with an X)

**Reason for change:**    This CR is to provides the NBAP ASN.1 descriptor (Constant Module) with the syntax checking. And also alignment with the RNSAP ASN.1 description.

**Clauses affected:**    9.3.7

<b>Other specs affected:</b>	Other 3G core specifications <input type="checkbox"/> Other GSM core specifications <input type="checkbox"/> MS test specifications <input type="checkbox"/> BSS test specifications <input type="checkbox"/> O&M specifications <input type="checkbox"/>	→ List of CRs: → List of CRs: → List of CRs: → List of CRs: → List of CRs:	
------------------------------	---	--	--

**Other comments:**    \_\_\_\_\_



[<----- double-click here for help and instructions on how to create a CR.](#)

-- \*\*\*\*\*  
--

```

-- Constant definitions
--
-- *****

NBAP-Constants -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

-- *****
--
-- Elementary Procedures
--
-- *****

id-audit                               INTEGER ::= 0
id-auditRequired                       INTEGER ::= 1
id-blockResource                       INTEGER ::= 2
id-cellDeletion                        INTEGER ::= 3
id-cellReconfiguration                 INTEGER ::= 4
id-cellSetup                           INTEGER ::= 5
id-commonMeasurementFailure            INTEGER ::= 6
id-commonMeasurementInitiation         INTEGER ::= 7
id-commonMeasurementReport             INTEGER ::= 8
id-commonMeasurementTermination        INTEGER ::= 9
id-commonTransportChannelDeletion      INTEGER ::= 10
id-commonTransportChannelReconfiguration INTEGER ::= 11
id-commonTransportChannelSetup         INTEGER ::= 12
id-compressedModeControlCancellation    INTEGER ::= 13
id-compressedModeControlCommit         INTEGER ::= 14
id-compressedModeControlPreparation    INTEGER ::= 15
id-dedicatedMeasurementFailure         INTEGER ::= 16
id-dedicatedMeasurementInitiation      INTEGER ::= 17
id-dedicatedMeasurementReport          INTEGER ::= 18
id-dedicatedMeasurementTermination     INTEGER ::= 19
id-downlinkPowerControl                INTEGER ::= 20
id-errorIndication                     INTEGER ::= 21
id-privateMessage                       INTEGER ::= 22
id-neighbourCellMeasurement            INTEGER ::= 21
id-radioLinkAddition                   INTEGER ::= 23
id-radioLinkDeletion                   INTEGER ::= 24
id-radioLinkFailure                     INTEGER ::= 25
id-radioLinkReconfigurationCommit      INTEGER ::= 25
id-radioLinkReconfigurationCancel     INTEGER ::= 26
id-radioLinkRestoration                 INTEGER ::= 26
id-radioLinkSetup                       INTEGER ::= 27
id-resourceStatusIndication             INTEGER ::= 28
id-synchronisationAdjustment           INTEGER ::= 30
id-synchronisationFailure              INTEGER ::= 31
id-synchronisationRestart              INTEGER ::= 32
id-synchronisedRadioLinkReconfigurationCancellation INTEGER ::= 29
id-synchronisedRadioLinkReconfigurationCommit INTEGER ::= 30
id-synchronisedRadioLinkReconfigurationPreparation INTEGER ::= 31
id-systemInformationUpdate              INTEGER ::= 32
id-unblockResource                      INTEGER ::= 33
id-unsynchronisedRadioLinkReconfiguration INTEGER ::= 34

-- *****
--
-- Extension constants
--
-- *****

maxPrivateExtensions                   INTEGER ::= 65535
maxProtocolExtensions                  INTEGER ::= 65535
maxProtocolIEs                         INTEGER ::= 65535

-- *****
--
-- Lists
--

```

-- \*\*\*\*\*

maxSF INTEGER ::= 10  
maxNrOfCodes INTEGER ::= 10  
maxNrOfnoefDLCodes INTEGER ::= 10  
maxNrOfErrors INTEGER ::= 10  
maxNrOfTFs INTEGER ::= 10  
maxNrOfTFCs INTEGER ::= 10  
maxNrOfnoefRLs INTEGER ::= 10  
maxNrOfnoefDPCHs INTEGER ::= 10  
maxNrOfnoefSCCPCHs INTEGER ::= 10  
maxNrOfnoefPRACHs INTEGER ::= 10  
maxNrOfnoefDCHs INTEGER ::= 10  
maxNrOfnoefDSCHs INTEGER ::= 10  
maxNrOfnoefFACHs INTEGER ::= 10  
maxNrOfnoefCCTrCHs INTEGER ::= 10  
maxNrOfnoefPCHs INTEGER ::= 10  
maxnoefPUSHs INTEGER ::= 10  
maxnoefTFCs INTEGER ::= 10  
maxNrOfnoefUSCHs INTEGER ::= 10  
maxUCIDinNodeB INTEGER ::= 10  
maxSF INTEGER ::= 10  
maxCellinNodeB INTEGER ::= 10  
maxCCPinNodeB INTEGER ::= 10  
maxCTFC-1 INTEGER ::= 10  
maxLocalCellinNodeB INTEGER ::= 10  
maxPCHinNodeB INTEGER ::= 10  
maxRACHCell INTEGER ::= 10  
maxPRACHCell INTEGER ::= 10  
maxnoefFACHCell INTEGER ::= 10  
maxPCHCell INTEGER ::= 10  
maxSCCPCHCell INTEGER ::= 10  
maxSCPICHCell INTEGER ::= 10  
maxUSCHCell INTEGER ::= 10  
maxAICHCell INTEGER ::= 10  
maxMIBSEG INTEGER ::= 10  
maxSIBSEG INTEGER ::= 10  
maxnoefFDDNeighbours INTEGER ::= 10  
maxnoefTDDNeighbours INTEGER ::= 10  
maxTTI-Fcount INTEGER ::= 10  
maxnoefTFCs INTEGER ::= 10  
maxIBSEG INTEGER ::= 10  
maxIB INTEGER ::= 10  
maxFACHCell INTEGER ::= 10  
maxnoCCTrCH INTEGER ::= 10  
maxnoCCTrCHs INTEGER ::= 10  
maxnoefCCTrCH INTEGER ::= 10  
maxnoefDPCH INTEGER ::= 10  
maxnoefPUSHs INTEGER ::= 10  
maxnoefRL-1 INTEGER ::= 10  
maxnoefRL-2 INTEGER ::= 10  
maxRateMatching INTEGER ::= 10

-- \*\*\*\*\*

-- IEs

-- \*\*\*\*\*

id-AICH-ParametersItem-CTCH-ReconfRqstFDD INTEGER ::= 0  
id-AICH-ParametersList-CTCH-ReconfRqstFDD INTEGER ::= 1  
id-AICH-Information-ResourceStatIndItem INTEGER ::= 0  
id-AICH-ParametersList INTEGER ::= 1  
id-AICH-ParametersListItem INTEGER ::= 2  
id-AllowedSlotFormatInformationListItem-CTCHreconf-Req-FDD INTEGER ::= 3  
id-AllowedSlotFormatInformationListItem-CTCHsetup-Req-FDD INTEGER ::= 4  
id-BCH-ModificationTime INTEGER ::= 2  
id-BlockingPriorityIndicator INTEGER ::= 35  
id-CCTrCH-ParametersList INTEGER ::= 6  
id-CCTrCH-ParametersListItem INTEGER ::= 7

id-CFN \_\_\_\_\_ INTEGER ::= 8  
id-CRNC-CommunicationContextID \_\_\_\_\_ INTEGER ::= 9  
id-CRNCCommunicationContextID \_\_\_\_\_ INTEGER ::= 10  
id-Cause \_\_\_\_\_ INTEGER ::= 411  
id-CCP-InformationItem-AuditRsp \_\_\_\_\_ INTEGER ::= 5  
id-CCP-InformationList-AuditRsp \_\_\_\_\_ INTEGER ::= 6  
id-Cell-ParametersItem-AuditRqst \_\_\_\_\_ INTEGER ::= 7  
id-Cell-ParametersList-AuditRqst \_\_\_\_\_ INTEGER ::= 8  
id-Cell-InformationItem-AuditRsp \_\_\_\_\_ INTEGER ::= 9  
id-Cell-InformationList-AuditRsp \_\_\_\_\_ INTEGER ::= 10  
id-Cell-Information-ResourceStatIndItem \_\_\_\_\_ INTEGER ::= 12  
id-Cell-InformationItem \_\_\_\_\_ INFEGER ::= 13  
id-Cell-InformationList \_\_\_\_\_ INFEGER ::= 14  
id-Cell-Parameter \_\_\_\_\_ INFEGER ::= 15  
id-Cell-ParametersItem \_\_\_\_\_ INFEGER ::= 16  
id-Cell-ParametersList \_\_\_\_\_ INFEGER ::= 17  
id-CellParameterID \_\_\_\_\_ INTEGER ::= 118  
id-CFN \_\_\_\_\_ INTEGER ::= 12  
id-C-ID \_\_\_\_\_ INTEGER ::= 13  
id-CommonMeasurementObjectType-CM-Rprr \_\_\_\_\_ INTEGER ::= 14  
id-CommonMeasurementObjectType-CM-Rqst \_\_\_\_\_ INTEGER ::= 159  
id-CommonMeasurementObjectType-CM-Rsp \_\_\_\_\_ INTEGER ::= 16  
id-CommonMeasurementType \_\_\_\_\_ INTEGER ::= 1720  
id-CommonPhysicalChannelID \_\_\_\_\_ INTEGER ::= 1821  
id-CommonPhysicalChannelType-CTCH-ReconfRqstTDD \_\_\_\_\_ INTEGER ::= 19  
id-CommonPhysicalChannelType-CTCH-sSetup-Rqsteg-FDD \_\_\_\_\_ INTEGER ::= 202  
id-CommonPhysicalChannelType-CTCH-SetupRqstTDD \_\_\_\_\_ INTEGER ::= 21  
id-CommonPhysicalChannelType-CTCHsetup-Response \_\_\_\_\_ INFEGER ::= 23  
id-CommonTransportChannelType-CTCH-ReconfRqstTDD \_\_\_\_\_ INTEGER ::= 22  
id-CommonTransportChannelType-CTCH-SetupRqstTDD \_\_\_\_\_ INTEGER ::= 23  
id-CommonTransportChannelType-CTCH-SetupRsp \_\_\_\_\_ INTEGER ::= 24  
id-CommunicationControlPort-InformationItem \_\_\_\_\_ INFEGER ::= 24  
id-CommunicationControlPortID \_\_\_\_\_ INFEGER ::= 25  
id-CommunicationControlPortInformation-ResourceStatIndItem \_\_\_\_\_ INFEGER ::= 26  
id-CommunicationControlPortInformationList \_\_\_\_\_ INFEGER ::= 27  
id-CommunicationControlPortID \_\_\_\_\_ INFEGER ::= 25  
id-CompressedModeMethod \_\_\_\_\_ INFEGER ::= 268  
id-ConfigurationGenerationID \_\_\_\_\_ INFEGER ::= 279  
id-CriticalityDiagnostics \_\_\_\_\_ INFEGER ::= 28  
id-CRNC-CommunicationContextID \_\_\_\_\_ INFEGER ::= 29  
id-DCH-AddItem-RL-ReconfPrepFDDItem \_\_\_\_\_ INFEGER ::= 30  
id-DCH-AddItem-RL-ReconfPrepTDDItem \_\_\_\_\_ INFEGER ::= 31  
id-DCH-Add-RL-ReconfReadyItem \_\_\_\_\_ INFEGER ::= 32  
id-DCH-AddItem-RL-ReconfRqstegFDDItem \_\_\_\_\_ INFEGER ::= 323  
id-DCH-AddItem-RL-ReconfRqstegTDDItem \_\_\_\_\_ INFEGER ::= 334  
id-DCH-AddItem-RL-ReconfResp \_\_\_\_\_ INFEGER ::= 35  
id-DCH-AddList-RL-ReconfPrepFDD \_\_\_\_\_ INFEGER ::= 346  
id-DCH-AddList-RL-ReconfPrepTDD \_\_\_\_\_ INFEGER ::= 357  
id-DCH-AddList-RL-ReconfRqstegFDD \_\_\_\_\_ INFEGER ::= 368  
id-DCH-AddList-RL-ReconfRqstegTDD \_\_\_\_\_ INFEGER ::= 379  
id-DCH-DeleteItem-RL-ReconfPrepFDDItem \_\_\_\_\_ INFEGER ::= 3840  
id-DCH-DeleteItem-RL-ReconfPrepTDDItem \_\_\_\_\_ INFEGER ::= 3941  
id-DCH-DeleteItem-RL-ReconfRqstegFDDItem \_\_\_\_\_ INFEGER ::= 402  
id-DCH-DeleteItem-RL-ReconfRqstegTDDItem \_\_\_\_\_ INFEGER ::= 413  
id-DCH-DeleteList-RL-ReconfPrepFDD \_\_\_\_\_ INFEGER ::= 424  
id-DCH-DeleteList-RL-ReconfPrepTDD \_\_\_\_\_ INFEGER ::= 435  
id-DCH-DeleteList-RL-ReconfRqstegFDD \_\_\_\_\_ INFEGER ::= 446  
id-DCH-DeleteList-RL-ReconfRqstegTDD \_\_\_\_\_ INFEGER ::= 457  
id-DCH-InformationItem-RL-SetupRqstegFDDItem \_\_\_\_\_ INFEGER ::= 468  
id-DCH-InformationItem-RL-SetupRqstegTDDItem \_\_\_\_\_ INFEGER ::= 479  
id-DCH-InformationList-RL-SetupRqstegFDD \_\_\_\_\_ INFEGER ::= 4850  
id-DCH-InformationList-RL-SetupRqstegTDD \_\_\_\_\_ INFEGER ::= 4951  
id-DCH-InformationResponseItem-RL-SetupRspFailFTDDItem \_\_\_\_\_ INFEGER ::= 502  
id-DCH-InformationResponseList-RL-sSetupRspesTDDItem \_\_\_\_\_ INFEGER ::= 513  
id-DCH-InformationResponseItem \_\_\_\_\_ INFEGER ::= 54  
id-DCH-ModifyItem-RL-ReconfPrepFDDItem \_\_\_\_\_ INFEGER ::= 525  
id-DCH-ModifyItem-RL-ReconfPrepTDDItem \_\_\_\_\_ INFEGER ::= 536  
id-DCH-Modify-RL-ReconfReadyItem \_\_\_\_\_ INFEGER ::= 57  
id-DCH-ModifyItem-RL-ReconfRqstegFDDItem \_\_\_\_\_ INFEGER ::= 548  
id-DCH-ModifyItem-RL-ReconfRqstegTDDItem \_\_\_\_\_ INFEGER ::= 556  
id-DCH-ModifyItem-RL-ReconfResp \_\_\_\_\_ INFEGER ::= 60  
id-DCH-ModifyList-RL-ReconfPrepFDD \_\_\_\_\_ INFEGER ::= 5661

id-DCH-ModifyList-RL-ReconfPrepTDD INTEGER ::= 5762  
id-DCH-ModifyList-RL-ReconfRqsteqFDD INTEGER ::= 5863  
id-DCH-ModifyList-RL-ReconfRqsteqTDD INTEGER ::= 5964  
id-DedicatedMeasurementObjectType INTEGER ::= 60  
id-DedicatedMeasurementObjectType-DM-Rprt INTEGER ::= 61  
id-DedicatedMeasurementObjectType-DM-Rqst INTEGER ::= 62  
id-DedicatedMeasurementObjectType-DM-Rsp INTEGER ::= 63  
id-DedicatedMeasurementType INTEGER ::= 64  
id-DL-CCTrCH-InformationItem-RL-AdditionRqstTDD INTEGER ::= 65  
id-DL-CCTrCH-InformationItem-RL-ReconfPrepTDDItem INTEGER ::= 665  
id-DL-CCTrCH-InformationItem-RL-ReconfRqsteqTDDItem INTEGER ::= 676  
id-DL-CCTrCH-InformationItem-RL-SetupRqsteqTDDItem INTEGER ::= 687  
id-DL-CCTrCH-InformationItem INTEGER ::= 68  
id-DL-CCTrCH-InformationList-RL-AdditionRqstTDD INTEGER ::= 69  
id-DL-CCTrCH-InformationList-RL-ReconfPrepTDD INTEGER ::= 7069  
id-DL-CCTrCH-InformationList-RL-ReconfRqsteqTDD INTEGER ::= 710  
id-DL-CCTrCH-InformationList-RL-SetupRqsteqTDD INTEGER ::= 721  
id-DL-CCTrCHInformationItem INTEGER ::= 72  
id-DL-CCTrCHInformationList INTEGER ::= 73  
id-DL-CodeInformation INTEGER ::= 74  
id-DL-CodeInformation-RL-ReconfPrepFDDItem INTEGER ::= 75  
id-DL-CodeInformation-RL-SetupReqFDDItem INTEGER ::= 76  
id-DL-DPCH-InformationItem-RL-AdditionRqstTDD INTEGER ::= 73  
id-DL-DPCH-Information-RL-ReconfPrepFDD INTEGER ::= 77  
id-DL-DPCH-Information-RL-ReconfRqstFDD INTEGER ::= 78  
id-DL-DPCH-InformationItem-RL-SetupRqsteqTDDItem INTEGER ::= 749  
id-DL-DPCH-InformationItem INTEGER ::= 80  
id-DL-DPCH-InformationItem-RL-ReconfReqFDD INTEGER ::= 81  
id-DL-DPCH-InformationItem-RL-SetupReqFDD INTEGER ::= 82  
id-DL-DPCH-InformationList-RL-AdditionRqstTDD INTEGER ::= 75  
id-DL-DPCH-InformationList-RL-SetupRqstTDD INTEGER ::= 76  
id-DL-DPCH-Information-RL-ReconfPrepFDD INTEGER ::= 77  
id-DL-DPCH-Information-RL-ReconfRqstFDD INTEGER ::= 78  
id-DL-DPCH-Information-RL-SetupRqstFDD INTEGER ::= 79  
id-DL-FrameType INTEGER ::= 803  
id-DL-ReferencePowerInformationItem INTEGER ::= 84  
id-DSCH-AddItem-RL-ReconfPrepFDD INTEGER ::= 815  
id-DSCH-AddItem-RL-ReconfRqsteqFDD INTEGER ::= 826  
id-DSCH-DeleteItem-RL-ReconfPrepFDD INTEGER ::= 837  
id-DSCH-DeleteItem-RL-ReconfRqsteqFDD INTEGER ::= 848  
id-DSCH-ID INTEGER ::= 859  
id-DSCH-Information-AddItem-RL-ReconfPrepTDD INTEGER ::= 86  
id-DSCH-Information-AddItem-RL-ReconfRqstTDD INTEGER ::= 87  
id-DSCH-information-AddList-RL-ReconfPrepTDD INTEGER ::= 88  
id-DSCH-Information-AddList-RL-ReconfRqstTDD INTEGER ::= 89  
id-DSCH-Information-DeleteItem-RL-ReconfPrepTDD INTEGER ::= 90  
id-DSCH-Information-DeleteItem-RL-ReconfRqstTDD INTEGER ::= 91  
id-DSCH-Information-DeleteList-RL-ReconfPrepTDD INTEGER ::= 92  
id-DSCH-Information-DeleteList-RL-ReconfRqstTDD INTEGER ::= 93  
id-DSCH-Information-ModifyItem-RL-ReconfPrepTDD INTEGER ::= 94  
id-DSCH-Information-ModifyItem-RL-ReconfRqstTDD INTEGER ::= 95  
id-DSCH-Information-ModifyList-RL-ReconfPrepTDD INTEGER ::= 96  
id-DSCH-Information-ModifyList-RL-ReconfRqstTDD INTEGER ::= 97  
id-DSCH-InformationItem-RL-SetupRqsteqFDDItem INTEGER ::= 980  
id-DSCH-InformationItem-RL-SetupRqstTDD INTEGER ::= 99  
id-DSCH-InformationList-RL-SetupRqsteqFDD INTEGER ::= 10091  
id-DSCH-InformationList-RL-SetupRqstTDD INTEGER ::= 101  
id-DSCH-InformationResponse-RL-SetupFailFDDItem INTEGER ::= 92  
id-DSCH-InformationResponseItem-RL-SetupRspesFTDDItem INTEGER ::= 10293  
id-DSCH-InformationResponseList-RL-SetupRspTDD INTEGER ::= 103  
id-DSCH-ModifyItem-RL-ReconfPrepFDD INTEGER ::= 10494  
id-DSCH-ModifyItem-RL-ReconfRqsteqFDD INTEGER ::= 10595  
id-DSCH-TFCS INTEGER ::= 106  
id-DedicatedMeasurementObjectType INTEGER ::= 96  
id-DedicatedMeasurementType INTEGER ::= 97  
id-FACH-Information-ResourceStatIndItem INTEGER ::= 98  
id-FACH-InformationItem INTEGER ::= 99  
id-FACH-ListItem INTEGER ::= 100  
id-FACH-ParametersList-CTCHreconf-Req-FDD INTEGER ::= 101  
id-FACH-ParametersList-CTCHreconf-Req-TTD INTEGER ::= 102  
id-FACH-ParametersListItem-CTCH-Reconf-Rqsteq-FDD INTEGER ::= 1073

id-FACH-ParametersListItem-CTCH-#Reconf-RqstFDDeq-TDD \_\_\_\_\_ INTEGER ::= 1084  
id-FACH-ParametersListItem-CTCHsetup-Req-FDD \_\_\_\_\_ INTEGER ::= 105  
id-FACH-ParametersListItem-CTCHsetup-Response \_\_\_\_\_ INTEGER ::= 106  
id-GapPositionMode \_\_\_\_\_ INTEGER ::= 109  
id-GapStartingSlotNumber \_\_\_\_\_ INTEGER ::= 107  
id-IndicationType-ResourceStatusInd \_\_\_\_\_ INTEGER ::= 11008  
id-Local-Cell-ID \_\_\_\_\_ INTEGER ::= 111  
id-Local-Cell-Information-ResourceStatIndItem \_\_\_\_\_ INTEGER ::= 109  
id-Local-CellInformation-ResourceStatIndItem \_\_\_\_\_ INTEGER ::= 110  
id-LocalCell-ID \_\_\_\_\_ INTEGER ::= 111  
id-Local-Cell-InformationItem-AuditRsp \_\_\_\_\_ INTEGER ::= 112  
id-Local-Cell-InformationList-AuditRsp \_\_\_\_\_ INTEGER ::= 113  
id-MIB-SegmentInformationItem \_\_\_\_\_ INTEGER ::= 114  
id-MIB-SegmentInformationList \_\_\_\_\_ INTEGER ::= 115  
id-MaximumTransmissionPower \_\_\_\_\_ INTEGER ::= 1146  
id-MeasuredCellInfo \_\_\_\_\_ INTEGER ::= 117  
id-MeasurementCharacteristics \_\_\_\_\_ INTEGER ::= 1158  
id-MeasurementID \_\_\_\_\_ INTEGER ::= 1169  
id-MeasurementType \_\_\_\_\_ INTEGER ::= 120  
id-MIB-SIB-InformationItem-SystemInfoUpdateRqst \_\_\_\_\_ INTEGER ::= 117  
id-MIB-SIB-InformationList-SystemInfoUpdateRqst \_\_\_\_\_ INTEGER ::= 118  
id-NeighbouringFDD-Cell-InformationItem \_\_\_\_\_ INTEGER ::= 121  
id-NeighbouringTDD-Cell-InformationItem \_\_\_\_\_ INTEGER ::= 122  
id-NodeB-CommunicationContextID \_\_\_\_\_ INTEGER ::= 11923  
id-PCCPCH-Information-Cell-ReconfRqstTDD \_\_\_\_\_ INTEGER ::= 1204  
id-PCCPCH-Information-Cell-SetupRqstTDD \_\_\_\_\_ INTEGER ::= 121  
id-PCH-Information-ResourceStatIndItem \_\_\_\_\_ INTEGER ::= 125  
id-PCH-InformationItem \_\_\_\_\_ INTEGER ::= 126  
id-PCH-ListItem \_\_\_\_\_ INTEGER ::= 127  
id-PCH-Parameters-CTCH-#Reconf-RqstFDD \_\_\_\_\_ INTEGER ::= 1228  
id-PCH-ParametersList \_\_\_\_\_ INTEGER ::= 129  
id-PCH-ParametersListItem \_\_\_\_\_ INTEGER ::= 130  
id-PD \_\_\_\_\_ INTEGER ::= 123  
id-PICH-Parameters-CTCH-#Reconf-RqstFDD \_\_\_\_\_ INTEGER ::= 12431  
  
id-PowerControlMode \_\_\_\_\_ INTEGER ::= 125  
id-PowerResumeMode \_\_\_\_\_ INTEGER ::= 126  
id-PRACH-ParametersItemList-CTCH-ReconfRqstFDD \_\_\_\_\_ INTEGER ::= 12732  
id-PRACH-ParametersListItem-CTCH-ReconfRqstFDD \_\_\_\_\_ INTEGER ::= 12833  
id-PSCH-Information \_\_\_\_\_ INTEGER ::= 134  
id-PSCHandPCCPCH-Information \_\_\_\_\_ INTEGER ::= 135  
id-PUSCH-ListItem \_\_\_\_\_ INTEGER ::= 136  
id-PatternDuration \_\_\_\_\_ INTEGER ::= 137  
id-PowerControlMode \_\_\_\_\_ INTEGER ::= 138  
id-PowerResumeMode \_\_\_\_\_ INTEGER ::= 139  
id-PrimaryCCPCH-Information-Cell-ReconfRqstFDD \_\_\_\_\_ INTEGER ::= 12940  
id-PrimaryCCPCH-Information-Cell-SetupRqstFDD \_\_\_\_\_ INTEGER ::= 130  
id-PrimaryCPICH-Information-Cell-ReconfRqstFDD \_\_\_\_\_ INTEGER ::= 131  
id-PrimaryCPICH-Information-Cell-SetupRqstFDD \_\_\_\_\_ INTEGER ::= 13241  
id-PrimarySCH-Information-Cell-ReconfRqstFDD \_\_\_\_\_ INTEGER ::= 13342  
id-PrimarySCH-Information-Cell-SetupRqstFDD \_\_\_\_\_ INTEGER ::= 134  
id-PrimaryScramblingCode \_\_\_\_\_ INTEGER ::= 13543  
id-ProcedureScopeType-DL-PC-Rqst \_\_\_\_\_ INTEGER ::= 13644  
id-PSCH-Information-Cell-ReconfRqstTDD \_\_\_\_\_ INTEGER ::= 137  
id-PSCH-Information-Cell-SetupRqstTDD \_\_\_\_\_ INTEGER ::= 138  
id-ReportCharacteristics \_\_\_\_\_ INTEGER ::= 139  
id-RACH-Information-ResourceStatIndItem \_\_\_\_\_ INTEGER ::= 145  
id-RACH-InformationItem \_\_\_\_\_ INTEGER ::= 146  
id-RL-ID \_\_\_\_\_ INTEGER ::= 1407  
id-RL-Information \_\_\_\_\_ INTEGER ::= 148  
id-RL-InformationItem-RL-AdditionRqstFDD \_\_\_\_\_ INTEGER ::= 141  
id-RL-informationItem-RL-DeletionRqst \_\_\_\_\_ INTEGER ::= 142  
id-RL-InformationItem-RL-FailureInd \_\_\_\_\_ INTEGER ::= 143  
id-RL-Information-DMeasureReportItem \_\_\_\_\_ INTEGER ::= 149  
id-RL-Information-DMeasureRequestItem \_\_\_\_\_ INTEGER ::= 150  
id-RL-Information-DMeasureResponseItem \_\_\_\_\_ INTEGER ::= 151  
id-RL-InformationItem-RL-ReconfPrepFDDItem \_\_\_\_\_ INTEGER ::= 14452  
id-RL-InformationItem-RL-SetupReconfRqstFDDItem \_\_\_\_\_ INTEGER ::= 14553  
id-RL-InformationItem-RL-ReconfRqstTDD \_\_\_\_\_ INTEGER ::= 14654  
id-RL-InformationItem-RL-RestoreInd \_\_\_\_\_ INTEGER ::= 147

id-RL-InformationItem-RL-SetupRqstFDD	INTEGER ::= 14855
id-RL-InformationList-RL-AdditionRqstFDD	INTEGER ::= 14956
id-RL-informationList-RL-DeletionRqst	INTEGER ::= 150
id-RL-InformationList-RL-FailureInd	INTEGER ::= 151
id-RL-InformationList-RL-ReconfPrepFDD	INTEGER ::= 152
id-RL-InformationList-RL-ReconfRqstFDD	INTEGER ::= 1537
id-RL-InformationList-RL-ReconfRqstTDD	INTEGER ::= 154
id-RL-InformationList-RL-RestoreInd	INTEGER ::= 155
id-RL-InformationList-RL-SetupRqstFDD	INTEGER ::= 1568
id-RL-InformationResponseItem-RL-AdditionRspFDD	INTEGER ::= 157
id-RL-InformationResponseItem-RL-ReconfReady	INTEGER ::= 158
id-RL-InformationResponseItem-RL-ReconfRsp	INTEGER ::= 159
id-RL-InformationResponseItem-RL-sSetupRspesFDDItem	INTEGER ::=
16059id-RL-InformationResponseItem-RL-ReconfResp	INTEGER ::= 160
id-RL-InformationResponseList-RL-AdditionRspFDD	INTEGER ::= 161
id-RL-InformationResponseList-RL-ReconfReady	INTEGER ::= 1621
id-RL-InformationResponseList-RL-ReconfReadyItem	INTEGER ::= 162
id-RL-InformationResponseList-RL-ReconfResp	INTEGER ::= 163
id-RL-InformationResponseList-RL-sSetupRspesFDD	INTEGER ::= 164id-
RL-InformationResponseList-RL-setupRestTDD	INTEGER ::= 165
id-RL-InformationResponse-RL-AdditionRspTDD	INTEGER ::= 165
id-RL-InformationResponse-RL-SetupRspTDD	INTEGER ::= 166
id-RL-Information-RL-AdditionRqstTDD	INTEGER ::= 167
id-RL-Information-RL-ReconfPrepTDD	INTEGER ::= 168
id-RL-Information-RL-SetupRqstTDD	INTEGER ::= 169
id-RL-ReconfigurationFailureItem-RL-ReconfFailureItem	INTEGER ::= 17066
id-RL-ReconfigurationFailureList-RL-ReconfFailure	INTEGER ::= 17167
id-RL-ResponseInformation	INTEGER ::= 168
id-RL-ResponseInformationItem	INTEGER ::= 169
id-RL-ResponseInformationList	INTEGER ::= 170
id-RL-informationItem	INTEGER ::= 171
id-RL-informationList	INTEGER ::= 172
id-RadioLinkInformation-RL-ReconfPrepFDDItem	INTEGER ::= 173
id-RadioLinkInformation-RL-ReconfPrepTDD	INTEGER ::= 174
id-RadioLinkInformation-RL-ReconfReqTDD	INTEGER ::= 175
id-RadioLinkInformationList-RL-ReconfPrepFDD	INTEGER ::= 176
id-ReportCharacteristics	INTEGER ::= 177
id-SFN	INTEGER ::= 178
id-SIB-SegmentInformationItem	INTEGER ::= 179
id-SIB-SegmentInformationList	INTEGER ::= 180
id-ScramblingCodeChange	INTEGER ::= 17281
id-Secondary-CCPCHListItem	INTEGER ::= 182
id-SecondaryCPICH-Information-Cell-ReconfRqstFDD	INTEGER ::= 17383
id-SecondaryCPICH-Information-Cell-SetupRqstFDD	INTEGER ::= 174
id-SecondarySCH-Information-Cell-ReconfRqstFDD	INTEGER ::= 17584
id-SecondarySCH-Information-Cell-SetupRqstFDD	INTEGER ::= 176
id-SFN	INTEGER ::= 177
id-ShutdownTimer	INTEGER ::= 17885
id-SN	INTEGER ::= 179
id-Successful-RL-InformationRespItem-RL-AdditionFailureFDD	INTEGER ::= 180
id-Successful-RL-InformationResponseItem-RL-SetupFailureFDDItem	INTEGER ::= 181
6id-Successful-RL-InformationResponseItem	INTEGER ::= 187
id-Successful-RL-InformationResponseList-RL-AdditionFailureFDD	INTEGER ::= 1828
id-Successful-RL-InformationResponseList-RL-SetupFailureFDD	INTEGER ::= 1839
id-SyncCase	INTEGER ::= 184
id-SynchronisationMethod	INTEGER ::= 190
id-T-Cell	INTEGER ::= 18591
id-TGD	INTEGER ::= 186
id-TGL	INTEGER ::= 187
id-TGP1	INTEGER ::= 188
id-TGP2	INTEGER ::= 189
id-TDDChipOffset	INTEGER ::= 192
id-TimeSlotConfigurationItem-Cell-ReconfRqstTDD	INTEGER ::= 1903
id-TimeSlotConfigurationItem-Cell-SetupRqstTDD	INTEGER ::= 191
id-TimeSlotConfigurationList-Cell-ReconfRqstTDD	INTEGER ::= 1924
id-TimeSlotConfigurationList-Cell-SetupRqstTDD	INTEGER ::= 193
id-TransmissionDiversityApplied	INTEGER ::= 194
id-TransmissionGapDistance	INTEGER ::= 195
id-TransmissionGapPeriod	INTEGER ::= 196
id-TransmitGapLength	INTEGER ::= 197
id-TransmitGapPositionMode	INTEGER ::= 198
id-UARFCN	INTEGER ::= 1959




id-UC-ID INTEGER ::= 200  
id-UL-CCTrCH-InformationItem-RL-ReconfPrepAdditionRqstTDDItem INTEGER ::= 196201  
id-UL-CCTrCH-InformationItem-RL-ReconfReqPrepTDDItem INTEGER ::= 197202  
id-UL-CCTrCH-InformationItem-RL-ReconfRqstTDD INTEGER ::= 198  
id-UL-CCTrCH-InformationItem-RL-SetupRqsteqTDDItem INTEGER ::= 199203  
id-UL-CCTrCH-InformationItemIE INTEGER ::= 204  
id-UL-CCTrCH-InformationList-RL-AdditionRqstTDD INTEGER ::= 200  
id-UL-CCTrCH-InformationList-RL-ReconfPrepTDD INTEGER ::= 2015  
id-UL-CCTrCH-InformationList-RL-ReconfRqsteqTDD INTEGER ::= 2026  
id-UL-CCTrCH-InformationList-RL-SetupRqsteqTDD INTEGER ::= 2037  
id-UL-CCTrCHInformation INTEGER ::= 208  
id-UL-CCTrCHInformationList INTEGER ::= 209  
id-UL-DeltaEbNo INTEGER ::= 204  
id-UL-DeltaEbNo-after INTEGER ::= 205  
id-UL-DL-CompressedModeSelection INTEGER ::= 206  
id-UL-DPCH-InformationItem-RL-AdditionRqstTDD INTEGER ::= 207  
id-UL-DPCH-InformationItem-RL-SetupRqstTDD INTEGER ::= 208  
id-UL-DPCH-InformationList-RL-AdditionRqstTDD INTEGER ::= 209  
id-UL-DPCH-InformationList-RL-SetupRqstTDD INTEGER ::= 210  
id-UL-DPCH-Information-RL-ReconfPrepFDD INTEGER ::= 2110  
id-UL-DPCH-Information-RL-ReconfPrepTDDItem INTEGER ::= 211  
id-UL-DPCH-Information-RL-SetupReqTDDItem INTEGER ::= 212  
id-UL-DPCH-InformationItem-RL-ReconfRqsteqFDD INTEGER ::= 2123  
id-UL-DPCH-InformationItem-RL-SetupRqsteqFDD INTEGER ::= 2134  
id-UL-DPCH-InformationItemIE INTEGER ::= 215  
id-USCH-Information-ResourceStatIndItem INTEGER ::= 216  
id-USCH-InformationItem INTEGER ::= 217  
id-USCH-ListItem-CTCHsetup-Req-TDD INTEGER ::= 218  
id-Unsuccessful-RL-InformationResponseItem-RL-AdditionFailureFDD INTEGER ::= 2149  
id-Unsuccessful-RL-InformationResponseItem-RL-SetupFailureFDDItem INTEGER ::= 21520  
id-Unsuccessful-RL-InformationResponseItem INTEGER ::= 221  
id-Unsuccessful-RL-InformationResponseItem-RL-SetupFailTDD INTEGER ::= 222  
id-Unsuccessful-RL-InformationResponseList-RL-AdditionFailureFDD INTEGER ::= 21623  
id-Unsuccessful-RL-InformationResponseList-RL-SetupFailureFDD INTEGER ::= 21724  
id-Unsuccessful-RL-InformationResp-RL-AdditionFailureTDD INTEGER ::= 218  
id-Unsuccessful-RL-InformationResp-RL-SetupFailureTDD INTEGER ::= 219  
id-USCH-Information-AddItem-RL-ReconfPrepTDD INTEGER ::= 220  
id-USCH-Information-AddItem-RL-ReconfRqstTDD INTEGER ::= 221  
id-USCH-information-AddList-RL-ReconfPrepTDD INTEGER ::= 222  
id-USCH-Information-AddList-RL-ReconfRqstTDD INTEGER ::= 223  
id-USCH-Information-DeleteItem-RL-ReconfPrepTDD INTEGER ::= 224  
id-USCH-Information-DeleteItem-RL-ReconfRqstTDD INTEGER ::= 225  
id-USCH-Information-DeleteList-RL-ReconfPrepTDD INTEGER ::= 226  
id-USCH-Information-DeleteList-RL-ReconfRqstTDD INTEGER ::= 227  
id-USCH-Information-ModifyItem-RL-ReconfPrepTDD INTEGER ::= 228  
id-USCH-Information-ModifyItem-RL-ReconfRqstTDD INTEGER ::= 229  
id-USCH-Information-ModifyList-RL-ReconfPrepTDD INTEGER ::= 230  
id-USCH-Information-ModifyList-RL-ReconfRqstTDD INTEGER ::= 231  
id-USCH-InformationItem-RL-SetupRqstTDD INTEGER ::= 232  
id-USCH-InformationList-RL-SetupRqstTDD INTEGER ::= 233  
id-USCH-InformationResponseItem-RL-SetupRspTDD INTEGER ::= 234  
id-USCH-InformationResponseList-RL-SetupRspTDD INTEGER ::= 235

END



## 8.3.1.2 Successful operation

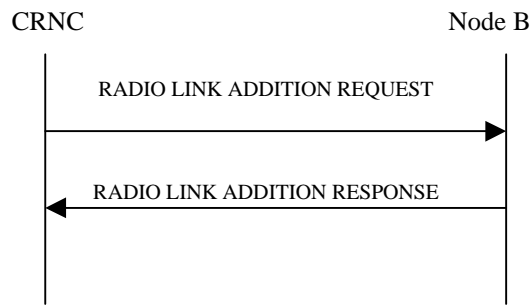

**Figure: 1 RL Addition procedure: Successful case**

The procedure is initiated with a RADIO LINK ADDITION REQUEST message sent from the CRNC to the Node B.

Upon reception, the Node B shall reserve the necessary resources and configure the new RL(s) according to the parameters given in the message. Unless specified below, the meaning of parameters is specified in other specifications.

~~[FDD] The Diversity Control Field IE indicates for each RL whether the Node B shall combine the new RL with existing RL(s) or not. [TDD The Diversity Control Field IE indicates whether the Node B shall reuse the Sub interface Transport Bearers of the old RL for the new RL.]~~ If the Diversity Control Field IE indicates, "may be combined with already existing RLs", then Node B shall decide for any of the alternatives. When a new RL is to be combined, the NodeB shall choose which RL(s) to combine it with.

If the RADIO LINK ADDITION REQUEST message includes the *Initial DL Transmission Power* IE, the Node B shall apply the given power to the transmission on each DL Channelisation Code of the RL when starting transmission. If no *Initial DL Transmission power* IE is included, the Node B shall use any transmission power level currently used on already existing RL's for this UE.

If the RADIO LINK ADDITION REQUEST message includes the *Maximum DL power* IE, the Node B shall store this value and never transmit with a higher power on any DL Channelisation Code of the RL. If no *Maximum DL power* IE is included, any Maximum DL power stored for already existing RLs for this UE shall be applied.

If the RADIO LINK ADDITION REQUEST message includes the *Minimum DL power* IE, the Node B shall store this value and never transmit with a lower power on any DL Channelisation Code of the RL. If no *Minimum DL power* IE is included, any Minimum DL power stored for already existing RLs for this UE shall be applied.

~~[FDD]~~ - If the RADIO LINK ADDITION REQUEST message contains an *SSDT Cell Identity* IE the Node B may activate SSDT for the concerned new RL , with the indicated cell identity used for that RL.]

If all requested RLs are successfully added, the Node B shall respond with a RADIO LINK ADDITION RESPONSE message.

~~[FDD]~~ In the case of combining an RL with existing RL(s) the Node B shall indicate in the RADIO LINK ADDITION RESPONSE message with the Diversity Indication that the RL is combined. In this case the Reference RL ID shall be included to indicate one of the existing RLs that the new RL is combined with.

~~[FDD]~~ In the case of not combining an RL with existing RL(s), the Node B shall indicate in the RADIO LINK ADDITION RESPONSE message with the Diversity Indication that no combining is done. In this case the Node B shall include both the Transport Layer Address and the binding ID for the transport bearer to be established for each DCH of the RL in the RADIO LINK ADDITION RESPONSE message.

~~[TDD In the case of not reusing the transport bearers of the old RL for the new RL, the Node B shall indicate in the RADIO LINK ADDITION RESPONSE message with the "Diversity Indication" that no transport bearer reuse is done. In this case the Node B shall include both the Transport Layer Address and the Binding ID for the transport bearer to be established for each DCH, DSCH and USCH of the RL in the RADIO LINK ADDITION RESPONSE message.]~~

In case of coordinated DCH, the binding ID and the transport address shall be included for only one of the co-ordinated DCHs.

[FDD ~~-~~] Irrespective of SSDT activation, the Node B shall include in the RADIO LINK ADDITION RESPONSE message an indication concerning the capability to support SSDT on this RL. Only if the RADIO LINK ADDITION REQUEST message requested SSDT activation and the RADIO LINK ADDITION RESPONSE message indicates that the SSDT capability is supported for this RL, SSDT is activated in the Node B.]

~~[FDD]~~ After sending of the RADIO LINK ADDITION RESPONSE message the Node B shall continuously attempt to obtain UL synchronisation and start reception on the new RL. The Node B shall start transmission on the new RL after synchronisation is achieved in the Iub user plane as specified in 25.427.

### 9.2. ~~1.x2.5~~ Diversity Control Field

The Diversity Control Field indicates if the current RL may, must or must not be combined with the already existing RLs.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Diversity Control Field			ENUMERATED(May, Must, Must not)	

### 9.2. ~~1.y2.6~~ Diversity Indication

The Diversity Indication indicates if the RL has been or has not been combined with another RL.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Diversity Indication			ENUMERATED(Combined, not combined)	



## 9.1.35 RADIO LINK SETUP REQUEST

## 9.1.35.1 FDD message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context ID	M			
Transaction ID	M			
<b>UL DPCH Information</b>		1		
UL Scrambling Code	M			
Min UL Channelisation Code length	M			
Max Number of UL DPDCHs	C – CodeLen			
puncture limit	M			For UL
Transport Format Combination Set	M			for UL
UL DPCCCH Slot Format	M			
UL Eb/No Target	M		Uplink Eb/No	
Diversity mode	M			
D Field Length	C – FB			
SSDT cell ID Length	O			
S Field Length	O			
<b>DL DPCH Information</b>				
Transport Format Combination Set	M			For DL
DL DPCH Slot Format	M			
TFCI signalling mode	M			
TFCI presence	C- SlotFormat			
Multiplexing Position	M			
<b>Power Offset Information</b>		1		
PO1	M		Power Offset	Power offset for the TFCI bits
PO2	M		Power Offset	Power offset for the TPC bits
PO3	M		Power Offset	Power offset for the pilot bits
Delta TPC	M			
<b>DCH Information</b>		1 to <maxnoofDCHs>		
DCH ID	M			
DCH Combination Ind	O			
RLC mode	M			
Transport Format Set	M			For UL
Transport Format Set	M			For DL
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP mode	M			
ToAWS	M			
ToAWE	M			
RL ID	O			RL Supporting the DSCH
DSCH TFCS	O			
<b>DSCH Information</b>		0 to		

		<maxnoofDSCHs >		
DSCH ID	M			
Transport Format Set	M			For DSCH
Frame handling Priority	M			
ToAWS	M			
ToAWE	M			
<b>RL Information</b>		1 to <maxnoofRLs>		
RL ID	M			
C-ID	M			
Frame Offset	M			
Chip Offset	M			
Propagation Delay	O			
Diversity Control Field	C – NotFirstRL			
<b>DL Code Information</b>		1 to <maxnoof- DLCodes		
DL Scrambling Code	M			
FDD DL Channelisation Code Number	M			
Initial DL transmission Power	M			DL Power
Maximum DL power	M			DL Power
Minimum DL power	M			DL Power
SSDT Cell Identity	O			

Condition	Explanation
CodeLen	This IE is present only if "Min UL Channelisation Code length" equals to 4
FB	This IE is present only if Feed Back mode diversity is activated.
NotFirstRL	This IE is present only if the RL is not the first one in the RL Information.
SlotFormat	This IE is only present if the DL DPCH slot format is equal to any of the value 12 to 16.

Range bound	Explanation
MaxnoofDSCHs	Maximum no. of DSCHs for one UE.
MaxnoofDCHs	Maximum no. of DCHs for one UE.
MaxnoofRLs	Maximum no. of RLs for one UE.
MaxnoofDLCodes	Maximum no. of DL code information.



## 9.1.35.2 TDD message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context ID	M			
Transaction ID	M			
<b>UL CCTrCH Information</b>		0 to <maxno CCTrCH>		
CCTrCH ID	M			
Transport Format Combination Set	M			
TFCI Coding	M			
Puncture Limit	M			
<b>UL DPCH Information</b>		0 to <maxnoOfDPCH>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
<b>DL CCTrCH Information</b>		0 to <maxno CCTrCH>		
CCTrCH ID	M			
Transport Format Combination Set	M			
TFCI Coding	M			
Puncture Limit	M			
<b>DL DPCH information</b>		0 to <maxnoOfDPCH>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
<b>DCH Information</b>		1 to <maxnoofDCHs>		
DCH ID	M			
RLC mode	M			
CCTrCH ID	M			UL CCTrCH in which the DCH is mapped
CCTrCH ID	M			DL CCTrCH in which the DCH is mapped
DCH Combination Ind	O			
Transport Format Set	M			For UL
Transport Format Set	M			For DL
Frame Handling Priority	O			

Payload CRC Presence Indicator	M			
UL FP mode	M			
ToAWS	M			
ToAWE	M			
<b>DSCH Information</b>		0 to <MaxnoofDSCHs >		
DSCH ID	M			
CCTrCH ID	M			DL CCTrCH in which the DSCH is mapped
Transport Format Set	M			For DSCH
Frame handling Priority	M			
ToAWS	M			
ToAWE	M			
<b>USCH Information</b>		0 to <MaxnoofUSCHs >		
USCH ID	M			
CCTrCH ID	M			UL CCTrCH in which the USCH is mapped
Transport Format Set	M			For USCH
<b>RL Information</b>		1		
RL ID	M			
C-ID	M			
Frame <del>TDD Physical Channel</del> -Offset	M			
Initial DL transmission Power	M		DL Power	
Maximum DL power	M		DL Power	
Minimum DL power	M		DL Power	

Range bound	Explanation
MaxnoofDCHs	Maximum no. of DCHs for one UE.
MaxnoOfDPCH	Maximum number of DPCH in one CCTrCH
MaxnoCCTrCH	no. of CCTrCH for one UE.
MaxnoofDSCHs	Maximum number of DSCH for one UE
MaxnoofUSCHs	Maximum number of USCH for one UE

```

-- *****
--
-- RADIO LINK SETUP REQUEST TDD
--
-- *****

RadioLinkSetupRequestTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{RadioLinkSetupRequestTDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkSetupRequestTDD-Extensions}}          OPTIONAL,
    ...
}

RadioLinkSetupRequestTDD-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-CRNC-CommunicationContextID      CRITICALITY ignore TYPE CRNC-CommunicationContextID      PRESENCE mandatory }|
    { ID id-UL-CCTrCH-InformationList-RL-SetupReqTDD CRITICALITY ignore TYPE UL-CCTrCH-InformationList-RL-SetupReqTDD PRESENCE optional }|
    { ID id-DL-CCTrCH-InformationList-RL-SetupReqTDD CRITICALITY ignore TYPE DL-CCTrCH-InformationList-RL-SetupReqTDD PRESENCE optional }|
    { ID id-DCH-InformationList-RL-SetupReqTDD CRITICALITY ignore TYPE DCH-InformationList-RL-SetupReqTDD PRESENCE optional }|
    {ID id-DSCH-InformationList-RL-SetupReqTDD CRITICALITY ignore TYPE DSCH-InformationList-RL-SetupReqTDD PRESENCE optional }|
    {ID id-USCH-InformationList-RL-SetupReqTDD CRITICALITY ignore TYPE USCH-InformationList-RL-SetupReqTDD PRESENCE optional }|
    { ID id-RL-InformationItem-RL-SetupReqTDD CRITICALITY ignore TYPE RL-InformationItem-RL-SetupReqTDD PRESENCE mandatory },
    ...
}

RadioLinkSetupRequestTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

UL-CCTrCH-InformationList-RL-SetupReqTDD ::= SEQUENCE (SIZE(1..maxnoofCCTrCHs)) OF
    ProtocolIE-Container{{UL-CCTrCH-Information-RL-SetupReqTDDItemIE }}

UL-CCTrCH-Information-RL-SetupReqTDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-UL-CCTrCH-Information-RL-SetupReqTDDItem CRITICALITY ignore TYPE UL-CCTrCH-Information-RL-SetupReqTDDItem PRESENCE mandatory },
    ...
}

UL-CCTrCH-Information-RL-SetupReqTDDItem ::= SEQUENCE {
    cCTrCH-ID          CCTrCH-ID,
    transportFormatCombinationSet TransportFormatCombinationSet,
    tFCI-Coding        TFCI-Coding,
    puncturing-Limit   Puncturing-Limit,
    ul-DPCH-InformationList-RL-SetupReqTDD UL-DPCH-InformationList-RL-SetupReqTDD OPTIONAL
}

UL-DPCH-InformationList-RL-SetupReqTDD ::= SEQUENCE (SIZE (1..maxnoofDPCHs)) OF
    ProtocolIE-Container{{UL-DPCH-Information-RL-SetupReqTDDItemIE }}

UL-DPCH-Information-RL-SetupReqTDDItemIE NBAP-PROTOCOL-IES ::= {

```

```

    { ID id-UL-DPCH-Information-RL-SetupReqTDDItem CRITICALITY ignore TYPE UL-DPCH-Information-RL-SetupReqTDDItem PRESENCE mandatory },
    ...
}

UL-DPCH-Information-RL-SetupReqTDDItem ::= SEQUENCE {
    dPCH-ID                DPCH-ID,
    tdd-ChannelisationCode TDD-ChannelisationCode,
    burstType              BurstType,
    midambleShift          MidambleShift,
    timeSlot                TimeSlot,
    tdd-PhysicalChannelOffset TDD-PhysicalChannelOffset,
    repetitionPeriod       RepetitionPeriod,
    repetitionLength       RepetitionLength,
    tFCI-Presence          TFCI-Presence
}

DL-CCTrCH-InformationList-RL-SetupReqTDD ::= SEQUENCE (SIZE (1..maxnoCCTrCHs)) OF
    ProtocolIE-Container{{DL-CCTrCH-Information-RL-SetupReqTDDItemIE }}

DL-CCTrCH-Information-RL-SetupReqTDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DL-CCTrCH-Information-RL-SetupReqTDDItem CRITICALITY ignore TYPE DL-CCTrCH-Information-RL-SetupReqTDDItem PRESENCE mandatory },
    ...
}

DL-CCTrCH-Information-RL-SetupReqTDDItem ::= SEQUENCE {
    cCTrCH-ID                CCTrCH-ID,
    transportFormatCombinationSet TransportFormatCombinationSet,
    tFCI-Coding              TFCI-Coding,
    puncturing-Limit         Puncturing-Limit,
    dl-DPCH-InformationList-RL-SetupReqTDD DL-DPCH-InformationList-RL-SetupReqTDD OPTIONAL
}

DL-DPCH-InformationList-RL-SetupReqTDD ::= SEQUENCE (SIZE (1..maxnoofDPCHs)) OF
    ProtocolIE-Container{{DL-DPCH-Information-RL-SetupReqTDDItemIE }}

DL-DPCH-Information-RL-SetupReqTDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DL-DPCH-Information-RL-SetupReqTDDItem CRITICALITY ignore TYPE DL-DPCH-Information-RL-SetupReqTDDItem PRESENCE mandatory },
    ...
}

DL-DPCH-Information-RL-SetupReqTDDItem ::= SEQUENCE {
    dPCH-ID                DPCH-ID,
    tdd-ChannelisationCode TDD-ChannelisationCode,
    burstType              BurstType,
    midambleShift          MidambleShift,
    timeSlot                TimeSlot,
    tdd-PhysicalChannelOffset TDD-PhysicalChannelOffset,
    repetitionPeriod       RepetitionPeriod,
    repetitionLength       RepetitionLength,
    tFCI-Presence          TFCI-Presence
}

```

```

DCH-InformationList-RL-SetupReqTDD ::= SEQUENCE (SIZE (1..maxnoofDPCHs)) OF
  ProtocolIE-Container{{DCH-Information-RL-SetupReqTDDItemIE }}

DCH-Information-RL-SetupReqTDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DCH-Information-RL-SetupReqTDDItem  CRITICALITY ignore  TYPE DCH-Information-RL-SetupReqTDDItem  PRESENCE mandatory},
  ...
}

DCH-Information-RL-SetupReqTDDItem ::= SEQUENCE {
  ul-CCTrCH-ID          UL-CCTrCH-ID,
  dl-CCTrCH-ID          DL-CCTrCH-ID,
  dCH-CombinationIndication  DCH-CombinationIndication  OPTIONAL,
  ul-TransportFormatSet      TransportFormatSet,
  dl-TransportFormatSet      TransportFormatSet,
  frameHandlingPriority      FrameHandlingPriority,
  payloadCRC-PresenceIndicator  PayloadCRC-PresenceIndicator,
  ul-FP-Mode              UL-FP-Mode,
  toAWE                   ToAWE,
  toAWS                   ToAWS
}

DSCH-InformationList-RL-SetupReqTDD ::= SEQUENCE (SIZE (1..maxnoofDSCHs)) OF
  ProtocolIE-Container{{DSCH-Information-RL-SetupReqTDDItemIE}}

DSCH-Information-RL-SetupReqTDDItemIE NBAP-PROTOCOL-IES ::= {
  {ID id-DCH-Information-RL-SetupReqTDDItem  CRITICALITY ignore  TYPE      DSCH-Information-RL-SetupReqTDDItem  PRESENCE mandatory}
  ...
}

DSCH-Information-RL-SetupReqTDDItem ::= SEQUENCE {
  dSCH-ID              DSCH-ID,
  cCTrCH-ID           CCTrCH-ID,
  transportFormatSet      TransportFormatSet,
  frameHandlingPriority      FrameHandlingPriority,
  toAWE                ToAWE,
  toAWS                ToAWS
}

USCH-InformationList-RL-SetupReqTDD ::= SEQUENCE (SIZE (1..maxnoofUSCHs)) OF
  ProtocolIE-Container{{USCH-Information-RL-SetupReqTDDItemIE}}

USCH-Information-RL-SetupReqTDDItemIE NBAP-PROTOCOL-IES ::= {
  {ID id-USCH-Information-RL-SetupReqTDDItem  CRITICALITY ignore  TYPE      USCH-Information-RL-SetupReqTDDItem  PRESENCE mandatory}
  ...
}

USCH-Information-RL-SetupReqTDDItem ::= SEQUENCE {
  uSCH-ID              USCH-ID,
  cCTrCH-ID           CCTrCH-ID,
  transportFormatSet      TransportFormatSet
}

```

```
}  
RL-Information-RL-SetupReqTDD ::= SEQUENCE {  
  rL-ID          RL-ID,  
  c-ID          C-ID,  
  frameOffset   FrameOffset, tdd-PhysicalChannelOffset TDD-PhysicalChannelOffset,  
  initialDL-transmissionPower DL-Power,  
  maximumDL-power          DL-Power,  
  minimumDL-power         DL-Power  
}
```

3GPP TSG-RAN Working Group Meeting #11  
Nice, France, 28<sup>th</sup> February – 3<sup>rd</sup> March 2000

Document **R3-000492**

e.g. for 3GPP use the format TP-99xxx  
or for SMG, use the format P-99-xxx

## CHANGE REQUEST

Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.

**25.433 CR 36**

Current Version: **3.0.0**

GSM (AA.BB) or 3G (AA.BBB) specification number ↑

↑ CR number as allocated by MCC support team

For submission to: **TSG RAN #7**

list expected approval meeting # here

↑

for approval

for information

Strategic

non-strategic  (for SMG use only)

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: <ftp://ftp.3gpp.org/Information/CR-Form-v2.doc>

**Proposed change affects:** (U)SIM  ME  UTRAN / Radio  Core Network   
(at least one should be marked with an X)

**Source:** **RAN-WG3** **Date:** **Feb , 2000**

**Subject:** **Alignment to R2 definition of puncture limit range and stepsize**

**Work item:**

**Category:** F Correction  **Release:** Phase 2   
(only one category shall be marked with an X) A Corresponds to a correction in an earlier release  Release 96   
B Addition of feature  Release 97   
C Functional modification of feature  Release 98   
D Editorial modification  Release 99   
Release 00

**Reason for change:** Currently the R2 and R3 definitions for the puncture limit are different. After long discussions between R1 and R2, it has been decided that only a limited step size and range are sufficient for the puncture limit. In order to avoid inconsistencies, it is proposed to align the R3 definition to the R2 definition.

**Clauses affected:** **9.2.1.45, 9.3.4.**

**Other specs Affected:** Other 3G core specifications  → List of CRs:  
Other GSM core specifications  → List of CRs:  
MS test specifications  → List of CRs:  
BSS test specifications  → List of CRs:  
O&M specifications  → List of CRs:

**Other comments:**

- In another CR the UL-puncture limit type is renamed to Puncture limit type in ASN.1.
- Another "inconsistency" in the handling of the puncture limit between R2 and R3 is the fact that since in RRC, the change of puncture limit is performed with the physical channel reconfiguration it can also be changed unsynchronised, whereas this is currently not possible on NBAP/RNSAP (puncture limit not included in RL\_RECONF\_REQ). However, this asynchronous capability seems more caused by the RRC procedure structure than a functional requirement. Therefore this issue not aligned.

## 9.2.1.45 Puncture limit

The Puncture limit limits the amount of puncturing that can be applied in order to minimise the number of dedicated physical channels.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
<a href="#">UL-p</a> Puncture limit			INTEGER (0..1500)	<a href="#">0: 40%</a> <a href="#">1: 44 %</a> ... <a href="#">14: 96%</a> <a href="#">15: 100%</a>



### 9.3.4 NBAP Information Elements

```

...
-----
-- U
-----

UARFCN ::= INTEGER (174 .. 474)

UL-DL-CompressedModeSelection ::= ENUMERATED {
ul-only,
dl-only,
both-UlandDL
}

UL-DPCH-SlotFormat ::= INTEGER (0..5)

UL-EbNo ::= INTEGER (0..255)
-- Resolution is 0.1 dB, range 0-25.5 dB --

UL-FP-Mode ::= ENUMERATED {
normal,
silent
}

-- unit dBm, step 0.1dBm
UL-InterferenceLevel ::= INTEGER (-128..60)
-- 0: 40%; 1: 44%; ...; 14: 96%; 15: 100%
UL-PunctureLimit ::= INTEGER (0..1500)

UL-ScramblingCode ::= SEQUENCE {
    uL-ScramblingCodeNumber    UL-ScramblingCodeNumber,
    uL-ScramblingCodeLength    UL-ScramblingCodeLength
}

-- 2^24
UL-ScramblingCodeLength ::= INTEGER (0..16777215)

UL-ScramblingCodeNumber ::= ENUMERATED {
short,
long
}

UplinkDeltaEb-No ::= ENUMERATED {
deltaEb-No-6dB,
...
}

UplinkDeltaEb-No-after ::= ENUMERATED {
deltaEb-No-after-6dB,
...
}

END

```

**3GPP TSG-RAN Working Group Meeting #11**  
**Nice, France, 28<sup>th</sup> February – 3<sup>rd</sup> March 2000**

**Document R3-000494**

e.g. for 3GPP use the format TP-99xxx  
 or for SMG, use the format P-99-xxx

## CHANGE REQUEST

Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.

**25.433 CR 19 R1**

Current Version: **3.0.0**

GSM (AA.BB) or 3G (AA.BBB) specification number ↑

↑ CR number as allocated by MCC support team

For submission to: **TSG RAN #7**

list expected approval meeting # here  
 ↑

for approval   
 for information

Strategic   
 non-strategic  (for SMG use only)

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: <ftp://ftp.3gpp.org/Information/CR-Form-v2.doc>

### Proposed change affects:

(at least one should be marked with an X)

(U)SIM  ME  UTRAN / Radio  Core Network

### Source:

**RAN-WG3**

**Date:** Feb , 2000

### Subject:

Update of System Information procedure description text and correction of Information Element is SYSTEM INFORMATION UPDATE message. This CR is used to make necessary updates to align with TS 25.331.

### Work item:

### Category:

(only one category shall be marked with an X)

F Correction   
 A Corresponds to a correction in an earlier release   
 B Addition of feature   
 C Functional modification of feature   
 D Editorial modification

**Release:** Phase 2   
 Release 96   
 Release 97   
 Release 98   
 Release 99   
 Release 00

### Reason for change:

Revision 19 R1:  
 25.331 v 3.1.0 replaces the Expiration timer with a timer equal to the repetition period. SIBs for ANSI-41 and TDD specific information has been added. Update needed on value range for IEs *IB\_SG\_REP* and *IB\_SG\_POS*.

Revision 19:  
 Further extension of CR19 to include a description on the order of the segments included in the lub message and optimise the message size.  
 All changes made in 19.2 to 19.1 are marked with yellow.

### Clauses affected:

**8.2.16, 9.1.32, 9.2.1.29, 9.2.1.30, 9.2.1.31, 9.2.1.32, 9.2.1.49, 9.3.3., 9.3.4**

### Other specs affected:

Other 3G core specifications  → List of CRs:  
 Other GSM core specifications  → List of CRs:  
 MS test specifications  → List of CRs:  
 BSS test specifications  → List of CRs:  
 O&M specifications  → List of CRs:


### Other comments:

## 8.2.16 System Information Update

### 8.2.16.1 General

The System Information Update procedure performs the scheduling and provision of system information segments broadcast on the BCCH, to the Node B.

### 8.2.16.2 Successful Operation

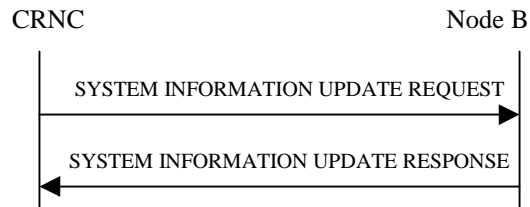

**Figure 1: System Information Update: Successful Case**

The procedure is initiated with a SYSTEM INFORMATION UPDATE REQUEST message sent from the CRNC to the Node B.

If the SYSTEM INFORMATION UPDATE REQUEST message includes segments of a certain MIB/SIB, the Node-B shall assume that all segments for that Information Block are included in the message and ordered with increasing Segment Index (starting from 0).

If the SYSTEM INFORMATION UPDATE message includes the BCCH Modification Time IE, the new segments provided in the SYSTEM INFORMATION UPDATE REQUEST message shall be applied by Node B at the first time instance starting from the SFN value set by the BCCH Modification Time IE. If no BCCH Modification Time IE is included, the new segments shall be applied as soon as possible.

The Node B shall determine the correct cell system frame number(s) (SFN) for transmission of the segments of system information, from the scheduling parameters provided in the SYSTEM INFORMATION UPDATE REQUEST message. The SFN for transmitting the segments shall be determined by the SIB SG REP IE and SIB SG POS IE such that:

$$- \text{SFN mod IB\_SG\_REP} = \text{IB\_SG\_POS}$$

If the SYSTEM INFORMATION UPDATE REQUEST message contains Master Information Block (MIB) segments in addition to SIB segments, the MIB segments shall be updated last in the physical channel scheduling cycle by the Node B.

The Segment Type IE shall be used by the Node B to concatenate several segments into one BCH transport block. The allowed combinations of concatenation are specified in TS 25.331.


If the SIB Deletion Indicator IE value is set to 'Deletion' the Node B shall delete the SIB of the type indicated by the SIB Type IE from the transmission schedule on BCCH.

If the SIB Originator IE value is set to 'NodeB' the Node B shall create the SIB segment of the SIB type given by the IB Type IE and autonomously update the SIB segment and apply the scheduling and repetition as given by the IB SG REP IE and IB SG POS IE.

SIBs originating from the Node B can only be SIBs containing information that the NodeB can obtain on its own, ~~and use the expiration timer feature.~~

If the Node B successfully completes the updating of the physical channel scheduling cycle according to the parameters given in the SYSTEM INFORMATION UPDATE REQUEST message, it shall respond to the CRNC with a SYSTEM INFORMATION UPDATE RESPONSE message.

### 8.2.16.3 Unsuccessful Operation

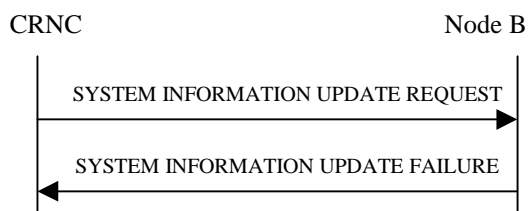

**Figure 2: System Information Update: Unsuccessful Case**

If the Node B is unable to update the physical channel scheduling cycle according to all the parameters given in the SYSTEM INFORMATION UPDATE REQUEST message, it shall respond with a SYSTEM INFORMATION UPDATE FAILURE message with an appropriate cause value. [Node B shall reject, with cause value 'SIB origination in Node B not supported', requests for Node B originated system information blocks that make use of a value tag.](#)

-Possible cause values are:

- Insufficient physical channel resources
- Hardware failure
- Processor overload
- C-ID not defined
- O&M Intervention
- Unspecified failure
- SIB origination in Node B not supported

In [this case of failure](#), the Node B shall not incorporate any of the requested changes into the physical channel scheduling cycle, and the previous system information configuration shall remain intact.

### 8.2.16.4 Abnormal Conditions

-

## 9.1.32 SYSTEM INFORMATION UPDATE REQUEST

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
C-ID	M			
BCCH Modification Time	O			
<b>MIB/SIBInformation</b>		1.. <i>maxIB</i>		
IB Type	M			In one message, every IB Type can only be indicated once.
SIB Deletion Indicator	C-NotMIB			
CHOICE <i>DeletionIndicator</i> <i>NoDeletion</i>				
SIB Originator	C-NotMIB			
<b>Segment Information</b>		1.. <i>maxIBSEG</i>		
<b>Segment Type</b>	M			
IB SG REP	M			
IB SG POS	M			
IB SG <b>DATA</b>	C – CRNCOri gination			

Range bound	Explanation
1.. <i>maxIB</i>	Maximum number of information Blocks supported in a physical channel scheduling cycle
1.. <i>maxIBSEG</i>	Maximum number of segments for one Information Block

Condition	Explanation
CRNCOri gination	The IE shall be present if <i>the SIB Originator</i> IE is set to 'CRNC'
NotMIB	This IE shall be present if the IB Type is not equal to "MIB"

## 9.2.1.29 IB\_SG\_DATA

Segment which is part of an Information Block.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
IB SG DATA			Bit String	"SIB data" in segment as Contents defined in ref:25.331.

## 9.2.1.30 IB\_SG\_POS

First position of an Information Block segment in the SFN cycle (IB\_SG\_POS < IB\_SG\_REP).

IE/Group Name	Presence	Range	IE type and reference	Semantics description
IB SG POS			INTEGER (0.. $2^{12}-1$ 2046)	Only even positions allowed. Reference TS 25.331

## 9.2.1.31 IB\_SG\_REP

Repetition distance for an Information Block segment. The segment shall be transmitted when SFN mod IB\_SG\_REP = IB\_SG\_POS.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
IB SG REP			INTEGER (4, 8, 16, 32, 64, 128, 256, 512, 1024,2048)	Repetition period for the IB segment in frames

## 9.2.1.32 IB Type

The IB type identifies a specific system information block.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
IB Type			Enumerated (MIB, SIB1, SIB2,... SIB12,... SIB3, SIB4, SIB5, SIB6, SIB7, SIB8, SIB9, SIB10, SIB11, SIB12, SIB13, SIB13.1 SIB13.2, SIB13.3, SIB13.4, SIB14,...)	Complete R99 SIB range still TBD.

### 9.2.1.49 Segment Type

Indicates the type of segment of the SIB.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Segment Type	■	■	Enumerated (First, Subsequent, Last, Complete)	

### 9.3.3 NBAP PDU Content Definitions

```

-- *****
--
-- SYSTEM INFORMATION UPDATE REQUEST
--
-- *****

SystemInformationUpdateRequest ::= SEQUENCE {
    protocolIEs                ProtocolIE-Container        {{SystemInformationUpdateRequest-
    IEs}},
    protocolExtensions          ProtocolExtensionContainer {{SystemInformationUpdateRequest-
    Extensions}}
    OPTIONAL,
    ...
}

SystemInformationUpdateRequest-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-C-ID                CRITICALITY ignore        TYPE C-ID                PRESENCE
    mandatory }|
    { ID id-BCCH-ModificationTime CRITICALITY ignore        TYPE BCCH-ModificationTime
    PRESENCE mandatory }|
    { ID id-MIB-SIB-InformationList-SystemInfoUpdate CRITICALITY ignore        TYPE MIB-SIB-
    InformationList-SystemInfoUpdate
    PRESENCE optional
    },
    ...
}

SystemInformationUpdateRequest-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

MIB-SIB-InformationList-SystemInfoUpdate ::= SEQUENCE (SIZE (1..maxIB)) OF
    ProtocolIE-Container{{ MIB-SIB-InformationList-SystemInfoUpdateItemIE }}

MIB-SIB-InformationList-SystemInfoUpdateItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-MIB-SIB-InformationList-SystemInfoUpdateItem CRITICALITY ignore        TYPE MIB-
    SIB-InformationList-SystemInfoUpdateItem PRESENCE optional
    },
    ...
}

MIB-SIB-InformationList-SystemInfoUpdateItem ::= SEQUENCE {
    iB-Type                    IB-Type,
    sIB-DeletionIndicator       SIB-DeletionIndicator-SystemInfoUpdate
}

SIB-DeletionIndicator-SystemInfoUpdate ::= ENUMERATED {
    no-Delition                No-Delitionist-SystemInfoUpdate
}

No-DelitionList-SystemInfoUpdate ::= SEQUENCE (SIZE (1..maxIBSEG)) OF
    ProtocolIE-Container{{ No-DelitionList-SystemInfoUpdateItemIE }}

No-DelitionList-SystemInfoUpdateItemIE NBAP-PROTOCOL-IES ::= {
    { ID id- No-DelitionList-SystemInfoUpdate CRITICALITY ignore        TYPE No-DelitionList-
    SystemInfoUpdate PRESENCE optional },
    ...
}

No-DelitionList-SystemInfoUpdate ::= SEQUENCE {
    sIB-Originator              sIB-Originator        OPTIONAL,
    segmentInformation           SegmentInformation-SystemInfoUpdate
}

SegmentInformation-SystemInfoUpdate ::= SEQUENCE (SIZE (1..maxIBSEG)) OF
    ProtocolIE-Container{{ SegmentInformation-SystemInfoUpdateItemIE }}

SegmentInformation-SystemInfoUpdateItemIE NBAP-PROTOCOL-IES ::= {
    { ID id- SegmentInformation-SystemInfoUpdateItem CRITICALITY ignore        TYPE
    SegmentInformation-SystemInfoUpdateItem PRESENCE optional
    },
    ...
}

```



```
| SegmentInformation-SystemInfoUpdateItem ::= SEQUENCE {  
|   segmentType SegmentType,  
|   iB-SG-REP          IB-SG-REP,  
|   iB-SG-POS          IB-SG-POS,  
|   iB-SG-DATA         IB-SG-DATA OPTIONAL  
| }
```

### 9.3.4 NBAP Information Elements

```

--*****
--
-- Information Element Definitions
--
--*****

-----
-- I
-----

-- to do
| IB-SG-DATA ::= BIT STRING
| IB-SG-POS ::= INTEGER (0..40952046) -- Only even positions allowed
| IB-SG-REP ::= ENUMERATEDINTEGER {rep4, rep8, rep(16), rep(32), rep(64), rep(128), rep(256),
| rep(512), rep(1024), rep(2048)}
| IB-Type :: ENUMERATEDEnumerated {
MIB,
SIB1,
SIB2,
SIB3,
SIB4,
SIB5,
SIB6,
SIB7,
SIB8,
SIB9,
SIB10,
SIB11,
SIB12,
SIB13,
SIB13.1,
SIB13.2,
SIB13.3,
SIB13.4,
SIB14,
...}

IndicationType ::= ENUMERATED {
noFailure,
serviceImpacting,
cellControl,
...
}

```

```

-----
-- S
-----

ScramblingCodeChange ::= ENUMERATED {
change,
no-change
}

Scrambling Code Word Number ::= INTEGER (0..255)

SecondaryCCPCH-SlotFormat ::= INTEGER(0..8)

SegmentType ::= ENUMERATED {
first,
subsequent,
last,
complete
}

SemiStaticTransportFormatInformation ::= SEQUENCE {
transmissionTimeInterval      TransmissionTimeInterval,
typeOfChannelCoding          TypeOfChannelCoding,
codingRate                    CodingRate      OPTIONAL
-- This IE is only present if IE Type of channel coding is Convolutional or Turbo --,
rateMatchingAttribute        RateMatchingAttribute,
cRC-Size                      CRC-Size,
mode-semistatic              Mode-SemiStatic
}

S-FieldLength ::= ENUMERATED {
s-length1,
s-length2
}

SIB-DeletionIndicator ::= ENUMERATED {
noDeletion,
deletion
}

SIB-Originator ::= ENUMERATED {
nodeB,
cRNC
}

--** TODO. -10..10 is transformed to 0..10. 0.1 steps gives 0..200 **
-- sir-error-value1 indicates 0 dB
SIR-ErrorValue ::= ENUMERATED {
sir-error-value1,
sir-error-value2,
...
}

--** TODO. -10..20 is transformed to 0..30. 0.1 steps gives 0..300 **
-- sir-value1 indicates 0 dB
SIR-Value ::= ENUMERATED {
sir-value1,
sir-value2,
...
}

SSDT-CellIdentity ::= ENUMERATED {a, b, c, d, e, f, g, h}

SSDT-Indication ::= ENUMERATED {
ssdtActiveInTheUE,
ssdtNotActiveInTheUE
}

STTD-Indicator ::= ENUMERATED {
active,
inactive
}

SSDT-SupportIndicator ::= ENUMERATED {
sSDT-not-supported,
sSDT-Supported
}

```

```
}
```

```
ShutdownTimer ::= INTEGER (1..3600)
```

```
SynchronisationMethod ::= ENUMERATED {  
external-reference,  
locked-toMaster-cell,  
one-time-synchronisation  
}
```