

TSG RAN Meeting #22
Maui, USA, 9 - 12 December 2003

RP-030690

Title CRs (Rel-5 only) to TS 25.423 and TS 25.433 on Correction to Addition of HS-DSCH MAC-d Flows
Source TSG RAN WG3
Agenda Item 7.4.6

RAN3 Tdoc	Spec	curr. Vers.	new Vers.	REL	CR	Rev	Cat	Title	Work item
R3-031779	25.433	5.6.0	5.7.0	REL-5	937	1	F	Correction to Addition of HS-DSCH MAC-d Flows	HSDPA-IubIur
R3-031841	25.423	5.7.0	5.8.0	REL-5	888	2	F	Correction to Addition of HS-DSCH MAC-d Flows	HSDPA-IubIur

CHANGE REQUEST

25.423 CR 888 # rev 2 # Current version: 5.7.0

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the # symbols.

Proposed change affects: UICC apps # ME # Radio Access Network X Core Network #

Title:	# Correction to Addition of HS-DSCH MAC-d Flows	
Source:	# RAN3	
Work item code:	# HSDPA-lublur	Date: # 20/11/2003
Category:	# F	Release: # REL-5
Use <u>one</u> of the following categories:		
F (correction) A (corresponds to a correction in an earlier release) B (addition of feature), C (functional modification of feature) D (editorial modification)		
Detailed explanations of the above categories can be found in 3GPP TR 21.900 .		
Use <u>one</u> of the following releases:		
2 (GSM Phase 2) R96 (Release 1996) R97 (Release 1997) R98 (Release 1998) R99 (Release 1999) Rel-4 (Release 4) Rel-5 (Release 5) Rel-6 (Release 6)		

Reason for change: # All parameters in *HS-DSCH Information To Add IE* which are not specific to a MAC-d flow (e.g. UE Caps, CQI report parameters, etc.) are marked as Mandatory in the current version of NBAP. However, it should be possible to add a MAC-d flow without changing the non-MAC-d flow parameters.

Similarly, the HS-SCCH Specific Information Response and HARQ Memory Partitioning are marked as Mandatory in the *HS-DSCH Information Response IE* today, although it should be possible to not include them.

In addition, the present CR clarifies that the SRNC should send HS-DSCH specific information only to the UE Context carrying the Serving HS-DSCH Radio Link.

Summary of change: # Rev 2:

- Protocol ID for id-HSDSCH-MACdFlows-to-Add and id-HSDSCH-MACdFlows-to-Add allocated by RNSAP rapporteur

Rev 1:

- New information element for *HS-DSCH MAC-d Flows To Delete IE*, which is common to both FDD and TDD
- Criticality GLOBAL reject added in four occurrences in the *HS-DSCH TDD Information Response IE* tabular
- Correction of wrong IE references in *HS-DSCH MAC-d Flows Information IE*
- Reversed the order of cqiPowerOffset and ackNackRepetitionFactor in the ASN.1 for *HS-DSCH FDD Information IE*

Rev 0:

- HS-DSCH Information IE* added to RL RCFG PREPARATION; this element is used only when adding the very first HS-DSCH MAC-d flow to

a UE Context

- *HS-DSCH MAC-d Flow To Add IE*: a new info element used only for addition of subsequent MAC-d flows to the already established HS-DSCH
- *HS-DSCH Information To Delete IE* renamed to *HS-DSCH MAC-d Flows To Delete IE*
- *HS-SCCH Specific Information Response IE* and *HARQ Memory Partitioning IE* made Optional in *HS-DSCH Information Response IE*
- Procedural text changed clarifying that HS-DSCH specific information shall be sent only to the UE Context carrying the Serving HS-DSCH Radio Link
- Three abnormal conditions added in Synchronised RL Rcfg procedure
- *HS-DSCH Information IE* tabular has been compacted by including *HS-DSCH MAC-d Flows Information IE* into it
- *MAC-d PDU Size IE* in *Modify Priority Queue* in *HS-DSCH Information To Modify IE* has been tagged as Mandatory
- ASN.1 modified accordingly

Impact Analysis:

Impact assessment towards the previous version of the specification (same release):

This CR has isolated impact with the previous version of the specification (same release) because it might affect implementations supporting HSDPA.

This CR has an impact under functional point of view.

The impact can be considered isolated because the change affects one system function namely HSDPA.

Consequences if not approved:  A major error will remain.

Clauses affected:  8.3.1.2; 8.3.4.2; 8.3.4.4; 9.1.11.1; 9.1.11.2; 9.2.1.30Q; 9.2.1.X (new); 9.2.1.XX (new); 9.2.2.19a; 9.2.2.19b; 9.2.3.3aa; 9.2.3.3aa; 9.3.3; 9.3.4; 9.3.6

Other specs Affected:			Other core specifications Test specifications O&M Specifications	 25.433 CR937
				
				

Other comments: 

How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked  contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

8.3.1.2 Successful Operation

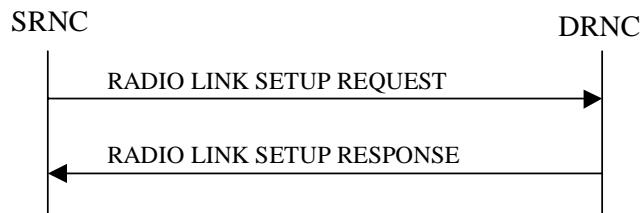


Figure 5: Radio Link Setup procedure: Successful Operation

/* text ommited *****/

HS-DSCH:

If the *HS-DSCH Information IE* is present in the *RADIO LINK SETUP REQUEST* message, then:

- The DRNS shall setup the requested HS-PDSCH resources on the Serving HS-DSCH Radio Link indicated by the *HS-PDSCH RL ID IE*.
- The DRNC shall include the *HARO Memory Partitioning IE* in the [FDD – *HS-DSCH FDD Information Response IE*] [TDD – *HS-DSCH TDD Information Response IE*] in the *RADIO LINK SETUP RESPONSE* message.
- The DRNC shall allocate an HS-DSCH-RNTI to the UE Context and include the *HS-DSCH-RNTI IE* in the *RADIO LINK SETUP RESPONSE* message.
- The DRNC shall include in the *RADIO LINK SETUP RESPONSE* message the *Binding ID IE* and *Transport Layer Address IE* for establishment of transport bearer for every HS-DSCH MAC-d flow being established.
- If the *RADIO LINK SETUP REQUEST* message includes the *Transport Layer Address IE* and *Binding ID IE* in the *HS-DSCH Information IE* for an HS-DSCH MAC-d flow, then the DRNC may use the transport layer address and the binding identifier received from the SRNC when establishing a transport bearer for the concerned HS-DSCH MAC-d flow.
- The DRNS may use the *Traffic Class IE* for a specific HS-DSCH MAC-d flow to determine the transport bearer characteristics to apply between DRNC and Node B.
- If the *RADIO LINK SETUP REQUEST* message includes the *MAC-hs Guaranteed Bit Rate IE* for a Priority Queue in the *HS-DSCH MAC-d Flows Information IE* in the *HS-DSCH Information IE*, then the DRNS shall use this information to optimise MAC-hs scheduling decisions for the related HSDPA Priority Queue.
- If the *RADIO LINK SETUP REQUEST* message includes the *Discard Timer IE* for a Priority Queue in the *HS-DSCH MAC-d Flows Information IE* in the *HS-DSCH Information IE*, then the DRNS shall use this information to discard out-of-date MAC-hs SDUs from the related HSDPA Priority Queue.
- The DRNC shall include the *HS-DSCH Initial Capacity Allocation IE* in the [FDD – *HS-DSCH FDD Information Response IE*] [TDD – *HS-DSCH TDD Information Response IE*] in the *RADIO LINK SETUP RESPONSE* message for every HS-DSCH MAC-d flow being established, if the DRNS allows the SRNC to start transmission of MAC-d PDUs before the DRNS has allocated capacity on user plane as described in [32].
- [FDD - If the *RADIO LINK SETUP REQUEST* message includes the *HS-SCCH Power Offset IE* in the *HS-DSCH Information IE*, then the DRNS may use this value to determine the HS-SCCH power. The HS-SCCH Power Offset should be applied for any HS-SCCH transmission to this UE.]
- [FDD - The DRNC shall include the *Measurement Power Offset IE* in the *HS-DSCH Information Response IE* in the *RADIO LINK SETUP RESPONSE* message.]

- [FDD - The DRNS shall allocate HS-SCCH codes corresponding to the HS-DSCH and the DRNC shall include the *HS-SCCH Specific Information Response IE* in the *HS-DSCH FDD Information Response IE* in the RADIO LINK SETUP RESPONSE message.]
- [TDD - The DRNS shall allocate HS-SCCH parameters corresponding to the HS-DSCH and the DRNC shall include the [3.84Mcps TDD - *HS-SCCH Specific Information Response IE*] [1.28Mcps TDD - *HS-SCCH Specific Information Response LCR IE*] in the *HS-DSCH TDD Information Response IE* in the RADIO LINK SETUP RESPONSE message.]
- [TDD - The DRNC shall include the [3.84 Mcps TDD - *HS-PDSCH Timeslot Specific Information IE*] [1.28 Mcps TDD - *HS-PDSCH Timeslot Specific Information LCR IE*] in the *HS-DSCH Information Response IE* in the RADIO LINK SETUP RESPONSE message.]

HS-DSCH(s):

If the ~~RADIO LINK SETUP REQUEST~~ message includes *HS DSCH Information IE* and if the *HS PDSCH RL ID IE* indicates a radio link in the DRNS, then the DRNS shall use this information to configure the indicated HS-DSCH resources on this radio link. If the *HS PDSCH RL ID IE* does not indicate a radio link in the DRNS, then the DRNS shall store the configuration of the HS-DSCH according to the received *HS DSCH Information IE*. The DRNS shall store the latest HS-DSCH configuration until the UE context is deleted.

In addition, if the *HS PDSCH RL ID IE* indicates a radio link in the DRNS, then the DRNC shall allocate an HS-DSCH-RNTI to the UE Context and include the *HS DSCH RNTI IE* in the ~~RADIO LINK SETUP RESPONSE~~ message.

If the *HS PDSCH RL ID IE* indicates a radio link in the DRNS, then the DRNS shall also include in the ~~RADIO LINK SETUP RESPONSE~~ message the *Binding ID IE* and *Transport Layer Address IE* for establishment of transport bearer(s) for the HS-DSCH MAC-d flows on this radio link.

If the ~~RADIO LINK SETUP REQUEST~~ message includes the *Transport Layer Address IE* and *Binding ID IE* in the *HS DSCH Information IE* for an HS-DSCH MAC-d flow, the DRNC may use the transport layer address and the binding identifier received from the SRNC when establishing a transport bearer for the concerned HS-DSCH MAC-d flow.

If the *HS DSCH Information IE* is included in the ~~RADIO LINK SETUP REQUEST~~ message, the DRNS may use the *Traffic Class IE* to determine the transport bearer characteristics to apply between DRNC and Node B for the related MAC-d flows.

[FDD - If the *HS SCCH Power Offset IE* is included in the *HS DSCH Information IE*, the DRNS may use this value to determine the HS-SCCH power. The HS-SCCH Power Offset should be applied for any HS-SCCH transmission to this UE.]

The DRNC shall include the *HS DSCH Initial Capacity Allocation IE* in the ~~RADIO LINK SETUP RESPONSE~~ message for each MAC-d flow, if the DRNS allows the SRNC to start transmission of MAC-d PDUs before the DRNS has allocated capacity on user plane as described in [32].

[FDD - If ~~RADIO LINK SETUP REQUEST~~ message includes the *HS DSCH Information IE* and the *PDSCH RL ID IE* indicates a Radio Link in the DRNS, then the DRNC shall include the *Measurement Power Offset IE* in the *HS DSCH Information Response IE* in the ~~RADIO LINK SETUP RESPONSE~~ message.]

If the ~~RADIO LINK SETUP REQUEST~~ message includes the *MAC-hs Guaranteed Bit Rate IE* in the *HS DSCH Information IE*, the DRNS shall use this information to optimise MAC-hs scheduling decisions.

If the ~~RADIO LINK SETUP REQUEST~~ message includes the *Discard Timer IE* in the *HS DSCH Information IE*, then the DRNS shall use this information to discard out-of-date MAC-hs SDUs.

/* text omitted ***** */

8.3.4.2 Successful Operation

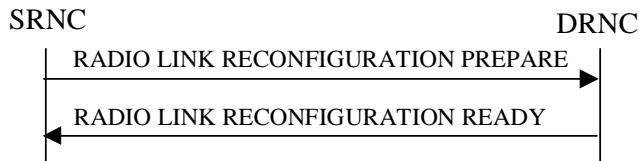


Figure 10: Synchronised Radio Link Reconfiguration Preparation procedure, Successful Operation

/ text omitted ***** */*

HS-DSCH Setup:

If the *HS-DSCH Information IE* is present in the *RADIO LINK RECONFIGURATION PREPARE* message, then:

- The DRNS shall setup the requested HS-PDSCH resources on the Serving HS-DSCH Radio Link indicated by the *HS-PDSCH RL ID IE*.
- The DRNC shall include the *HARQ Memory Partitioning IE* in the [FDD – *HS-DSCH FDD Information Response IE*] [TDD – *HS-DSCH TDD Information Response IE*] in the *RADIO LINK RECONFIGURATION READY* message.
- The DRNC shall allocate an *HS-DSCH-RNTI* to the UE Context and include the *HS-DSCH-RNTI IE* in the *RADIO LINK RECONFIGURATION READY* message.
- The DRNS may use the *Traffic Class IE* for a specific HS-DSCH MAC-d flow to determine the transport bearer characteristics to apply between DRNC and Node B.
- If the *RADIO LINK RECONFIGURATION PREPARE* message includes the *MAC-hs Guaranteed Bit Rate IE* for a Priority Queue in the *HS-DSCH MAC-d Flows Information IE* in the *HS-DSCH Information IE*, then the DRNS shall use this information to optimise MAC-hs scheduling decisions for the related HSDPA Priority Queue.
- If the *RADIO LINK RECONFIGURATION PREPARE* message includes the *Discard Timer IE* for a Priority Queue in the *HS-DSCH MAC-d Flows Information IE* in the *HS-DSCH Information IE*, then the DRNS shall use this information to discard out-of-date MAC-hs SDUs from the related HSDPA Priority Queue.
- The DRNC shall include the *HS-DSCH Initial Capacity Allocation IE* in the [FDD – *HS-DSCH FDD Information Response IE*] [TDD – *HS-DSCH TDD Information Response IE*] in the *RADIO LINK RECONFIGURATION READY* message for every HS-DSCH MAC-d flow being established, if the DRNS allows the SRNC to start transmission of MAC-d PDUs before the DRNS has allocated capacity on user plane as described in [32].
- [FDD - If the *RADIO LINK RECONFIGURATION PREPARE* message includes the *HS-SCCH Power Offset IE* in the *HS-DSCH Information IE*, then the DRNS may use this value to determine the HS-SCCH power. The HS-SCCH Power Offset should be applied for any HS-SCCH transmission to this UE.]
- [FDD - The DRNC shall include the *Measurement Power Offset IE* in the *HS-DSCH Information Response IE* in the *RADIO LINK RECONFIGURATION READY* message.]
- [FDD - The DRNS shall allocate HS-SCCH codes corresponding to the HS-DSCH and the DRNC shall include the *HS-SCCH Specific Information Response IE* in the *HS-DSCH FDD Information Response IE* in the *RADIO LINK RECONFIGURATION READY* message.]
- [TDD - The DRNS shall allocate HS-SCCH parameters corresponding to the HS-DSCH and the DRNC shall include the [3.84Mcps TDD - *HS-SCCH Specific Information Response IE*] [1.28Mcps TDD - *HS-SCCH Specific Information Response LCR IE*] in the *HS-DSCH TDD Information Response IE* in the *RADIO LINK RECONFIGURATION READY* message.]

Intra-DRNS Serving HS-DSCH Radio Link Change:

If the *RADIO LINK RECONFIGURATION PREPARE* message includes the *HS-PDSCH RL ID IE*, this indicates the new Serving HS-DSCH Radio Link:

- The DRNS shall release the HS-PDSCH resources on the old Serving HS-DSCH Radio Link and setup the HS-PDSCH resources on the new Serving HS-DSCH Radio Link.
- The DRNC may include the *HARQ Memory Partitioning IE* in the [FDD – HS-DSCH FDD Information Response IE] [TDD – HS-DSCH TDD Information Response IE] in the RADIO LINK RECONFIGURATION READY message.
- The DRNC shall allocate a new HS-DSCH-RNTI to the UE Context and include the *HS-DSCH-RNTI IE* in the RADIO LINK RECONFIGURATION READY message.
- If a reset of the MAC-hs is not required the DRNS shall include the *MAC-hs Reset Indicator IE* in the RADIO LINK RECONFIGURATION READY message.
- [FDD - The DRNC shall include the *Measurement Power Offset IE* in the *HS-DSCH Information Response IE* in the RADIO LINK RECONFIGURATION READY message.]
- [FDD - The DRNS shall allocate HS-SCCH codes corresponding to the HS-DSCH and the DRNC shall include the *HS-SCCH Specific Information Response IE* in the *HS-DSCH FDD Information Response IE* in the RADIO LINK RECONFIGURATION READY message.]
- [TDD - The DRNS shall allocate HS-SCCH parameters corresponding to the HS-DSCH and the DRNC shall include the [3.84Mcps TDD - *HS-SCCH Specific Information Response IE*] [1.28Mcps TDD - *HS-SCCH Specific Information Response LCR IE*] in the *HS-DSCH TDD Information Response IE* in the RADIO LINK RECONFIGURATION READY message.]
- [TDD - The DRNC shall include the [3.84 Mcps TDD - *HS-PDSCH Timeslot Specific Information IE*] [1.28 Mcps TDD - *HS-PDSCH Timeslot Specific Information LCR IE*] in the *HS-DSCH Information Response IE* in the RADIO LINK SETUP RESPONSE message.]

HS-DSCH Modification:

If the RADIO LINK RECONFIGURATION PREPARE message includes the *HS-DSCH Information To Modify IE*, then:

- The DRNC shall include the *HS-DSCH Initial Capacity Allocation IE* for each HS-DSCH MAC-d flow being modified for which a new transport bearer was requested with the *Transport Bearer Request Indicator IE*, if the DRNS allows the SRNC to start transmission of MAC-d PDUs before the DRNS has allocated capacity on user plane as described in [32].
- If the RADIO LINK RECONFIGURATION PREPARE message includes the *Traffic Class IE* in the *HS-DSCH Information To Modify IE* for a specific HS-DSCH MAC-d flow, the DRNS may use this information to determine the transport bearer characteristics to apply between DRNC and Node B.
- If the RADIO LINK RECONFIGURATION PREPARE message includes the *MAC-hs Guaranteed Bit Rate IE* in the *HS-DSCH Information To Modify IE*, the DRNS shall use this information to optimise MAC-hs scheduling decisions for the related HSDPA Priority Queue.
- If the RADIO LINK RECONFIGURATION PREPARE message includes the *Discard Timer IE* in the *HS-DSCH Information IE*, then the DRNS shall use this information to discard out-of-date MAC-hs SDUs from the related HSDPA Priority Queue.
- If the RADIO LINK RECONFIGURATION PREPARE message includes the *MAC-hs Window Size IE* or *T1 IE* in the *HS-DSCH Information To Modify IE*, then the DRNS shall use the indicated values in the new configuration for the related HSDPA Priority Queue.
- If the RADIO LINK RECONFIGURATION PREPARE message includes the *MAC-d PDU Size Index IE* in the *Modify Priority Queue choice*, the DRNS shall delete the previous list of MAC-d PDU Size Index values for the related HSDPA Priority Queue and use the MAC-d PDU Size Index values indicated in the *MAC-d PDU Size Index IE* in the new configuration.
- [FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes the *COI Feedback Cycle k IE*, the *CQI Repetition Factor IE*, the *ACK-NACK Repetition Factor IE*, the *ACK Power Offset IE*, the *NACK Power Offset IE* or the *CQI Power Offset IE* in the *HS-DSCH Information To Modify IE*, then the DRNS shall use the indicated CQI Feedback Cycle k value, the CQI Repetition Factor or the ACK-NACK Repetition Factor, ACK Power Offset, the NACK Power Offset or the CQI Power Offset in the new configuration.]

- [FDD - If the *HS-SCCH Power Offset IE* is included in the *HS-DSCH Information To Modify IE*, the DRNS may use this value to determine the HS-SCCH power. The HS-SCCH Power Offset should be applied for any HS-SCCH transmission to this UE.]
- [TDD – If the *RADIO LINK RECONFIGURATION PREPARE* message includes the *TDD ACK NACK Power Offset IE* in the *HS-DSCH Information To Modify IE*, the DRNS shall use the indicated power offset in the new configuration.]
- [FDD - If the *HS-DSCH Information To Modify IE* includes the *HS-SCCH Code Change Grant IE*, then the DRNS may modify the HS-SCCH codes corresponding to the HS-DSCH. The DRNC shall then report the codes which are used in the new configuration specified in the *HS-SCCH Specific Information Response IE* in the *RADIO LINK RECONFIGURATION READY* message.]
- [TDD - If the *HS-DSCH Information To Modify IE* includes the *HS-SCCH Code Change Grant IE*, then the DRNS may modify the HS-SCCH parameters corresponding to the HS-DSCH. The DRNC shall then report the values for the parameters which are used in the new configuration specified in the [3.84Mcps TDD - *HS-SCCH Specific Information Response IE*] [1.28Mcps TDD - *HS-SCCH Specific Information Response LCR IE*] in the *RADIO LINK RECONFIGURATION READY* message.]

HS-DSCH MAC-d Flow Addition/Deletion:

If the *RADIO LINK RECONFIGURATION PREPARE* message includes any *HS-DSCH MAC-d Flows To Add* or *HS-DSCH MAC-d Flows To Delete* IEs, then the DRNS shall use this information to add/delete the indicated HS-DSCH MAC-d flows on the Serving HS-DSCH Radio Link.

If the *RADIO LINK RECONFIGURATION PREPARE* message includes an *HS-DSCH MAC-d Flows To Delete* IE requesting the deletion of all remaining HS-DSCH MAC-d flows for the UE Context, then the DRNC shall delete the HS-DSCH configuration from the UE Context and release the HS-PDSCH resources.

If the *RADIO LINK RECONFIGURATION PREPARE* message includes the *HS-DSCH MAC-d Flows To Add* IE, then:

- The DRNS may use the *Traffic Class IE* for a specific HS-DSCH MAC-d flow to determine the transport bearer characteristics to apply between DRNC and Node B.
- The DRNC shall include the *HS-DSCH Initial Capacity Allocation IE* in the *RADIO LINK RECONFIGURATION READY* message for every HS-DSCH MAC-d flow being added, if the DRNS allows the SRNC to start transmission of MAC-d PDUs before the DRNS has allocated capacity on user plane as described in [32].
- If the *RADIO LINK RECONFIGURATION PREPARE* message includes the *MAC-hs Guaranteed Bit Rate IE* in the *HS-DSCH MAC-d Flows To Add IE*, the DRNS shall use this information to optimise MAC-hs scheduling decisions for the related HSDPA Priority Queue.
- If the *RADIO LINK RECONFIGURATION PREPARE* message includes the *Discard Timer IE* in the *HS-DSCH Information IE*, then the DRNS shall use this information to discard out-of-date MAC-hs SDUs from the related HSDPA Priority Queue.
- The DRNC may include the *HARQ Memory Partitioning IE* in the *RADIO LINK RECONFIGURATION READY* message.

HS-DSCH Information Addition/Modification/Deletion:

If the *RADIO LINK RECONFIGURATION PREPARE* message includes any *HS-DSCH Information To Modify*, *HS-DSCH Information To Add* or *HS-DSCH Information to Delete* IEs and if the *HS-PDSCH RL ID IE* indicates a radio link in the DRNS, then the DRNS shall use this information to add/modify/delete the indicated HS-DSCH resources to/from this radio link. If the *HS-PDSCH RL ID IE* does not indicate a radio link in the DRNS, then the DRNS shall update the configuration of the HS-DSCH according to the received *HS-DSCH Information To Modify*, *HS-DSCH Information To Add* or *HS-DSCH Information to Delete* IEs. The DRNS shall store the latest HS-DSCH configuration until the UE context is deleted.

[FDD - If the *HS-DSCH Information To Modify IE* includes the *HS-SCCH Code Change Grant IE*, then the DRNS may modify the HS-SCCH codes corresponding to the HS-DSCH. The DRNC shall then report the codes which are used in the new configuration specified in the *HS-SCCH Specific Information Response IE* in the *RADIO LINK RECONFIGURATION READY* message.]

[TDD—If the *HS-DSCH Information To Modify* IE includes the *HS-SCCH Code Change Grant* IE, then the DRNS may modify the HS-SCCH parameters corresponding to the HS-DSCH. The DRNC shall then report the values for the parameters which are used in the new configuration specified in the [3.84Meps TDD—*HS-SCCH Specific Information Response*] [1.28Meps TDD—*HS-SCCH Specific Information Response LCR*] IEs in the **RADIO LINK RECONFIGURATION READY** message.]

If the **RADIO LINK RECONFIGURATION PREPARE** message includes an *HS-DSCH Information to Delete* IE requesting the deletion of all HS-DSCH resources for the UE Context, then the DRNC shall release the HS-DSCH-RNTI allocated to the UE Context, if there was one.

If the **RADIO LINK RECONFIGURATION PREPARE** message includes the *HS-PDSCH RL ID* IE and there is a HS-DSCH existing in the UE Context after reconfiguration, then:

- If the indicated HS-PDSCH RL ID is in the DRNS and there was no HS-DSCH RNTI allocated to the UE Context, the DRNC shall allocate an HS-DSCH RNTI to the UE Context and include the *HS-DSCH RNTI* IE in the **RADIO LINK RECONFIGURATION READY** message.
 - If the indicated HS-PDSCH RL ID is in the DRNS and there was an HS-DSCH RNTI allocated to the UE Context, the DRNC shall allocate a new HS-DSCH RNTI to the UE Context, release the old HS-DSCH RNTI and include the *HS-DSCH RNTI* IE in the **RADIO LINK RECONFIGURATION READY** message.
 - If the indicated HS-PDSCH RL ID is not in the DRNS and there was an HS-DSCH RNTI allocated to the UE Context, the DRNC shall release this HS-DSCH RNTI.
- If a reset of the MAC-hs is not required the DRNC shall include the *MAC-hs Reset Indicator* IE in the **RADIO LINK RECONFIGURATION READY** message.

[FDD—If the indicated HS-PDSCH RL ID is in the DRNS and is different from previous one, then the DRNC shall include the *Measurement Power Offset* IE in the *HS-DSCH Information Response* IE in the **RADIO LINK RECONFIGURATION READY** message.]

If the **RADIO LINK RECONFIGURATION PREPARE** message includes any *HS-DSCH Information To Add* IE or *HS-DSCH Information To Modify* IE, then the DRNS may use the *Traffic Class* IE to determine the transport bearer characteristics to apply between DRNC and Node B for the related MAC-d flows.

[FDD—If the **RADIO LINK RECONFIGURATION PREPARE** message includes the *CQI Feedback Cycle k* IE, the *CQI Repetition Factor* IE, the *ACK-NACK Repetition Factor* IE, the *ACK Power Offset* IE, the *NACK Power Offset* IE or the *CQI Power Offset* IE in the *HS-DSCH Information To Modify* IE, then the DRNS shall use the indicated CQI Feedback Cycle k value, the CQI Repetition Factor or the ACK-NACK Repetition Factor, ACK Power Offset, the NACK Power Offset or the CQI Power Offset in the new configuration.]

[FDD—If the *HS-SCCH Power Offset* IE is included in the *HS-DSCH Information To Add* IE or *HS-DSCH Information To Modify* IE, the DRNS may use this value to determine the HS-SCCH power. The HS-SCCH Power Offset should be applied for any HS-SCCH transmission to this UE.]

[TDD—If the **RADIO LINK RECONFIGURATION PREPARE** message includes the *TDD ACK-NACK Power Offset* IE in the *HS-DSCH Information To Modify* IE, the DRNS shall use the indicated power offset in the new configuration.]

If the **RADIO LINK RECONFIGURATION PREPARE** message includes the *MAC-hs Window Size* IE in the *HS-DSCH Information To Modify* IE, then the DRNS shall use the indicated MAC-hs window size value in the new configuration.

The DRNC shall include the *HS-DSCH Initial Capacity Allocation* IE in the **RADIO LINK RECONFIGURATION READY** message for each MAC-d flow, if the DRNS allows the SRNC to start transmission of MAC-d PDUs before the DRNS has allocated capacity on user plane as described in [32].

If the **RADIO LINK RECONFIGURATION PREPARE** message includes the *MAC-hs Guaranteed Bit Rate* IE in the *HS-DSCH Information To Add* IE or *HS-DSCH Information To Modify* IE, the DRNS shall use this information to optimise MAC-hs scheduling decisions.

If the **RADIO LINK RECONFIGURATION PREPARE** message includes the *T1* IE in the *HS-DSCH Information To Modify* IE, then the DRNS shall use the indicated T1 value in the new configuration.

If the ~~RADIO LINK RECONFIGURATION PREPARE~~ message includes the *Discard Timer IE* in the *HS-DSCH Information To Modify IE* or the *HS-DSCH Information To Add IE*, then the DRNS shall use the indicated Discard Timer value in the new configuration.

```
/* text ommited ***** */
```

General

If the requested modifications are allowed by the DRNC and the DRNC has successfully reserved the required resources for the new configuration of the Radio Link(s), it shall respond to the SRNC with the RADIO LINK RECONFIGURATION READY message. When this procedure has been completed successfully there exists a Prepared Reconfiguration, as defined in subclause 3.1.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *Transport Layer Address IE* and *Binding ID IE* in the *DSCHs To Modify IE*, *DSCHs To Add IE*, [TDD - *USCHs To Modify IE*, *USCHs To Add IE*], *HS-DSCH Information IE*, *HS-DSCH Information To Modify IE*, *HS-DSCH Information MAC-d Flows To Add IE* or in the *RL Specific DCH Information IEs*, the DRNC may use the transport layer address and the binding identifier received from the SRNC when establishing a transport bearer for any Transport Channel or HS-DSCH MAC-d flow being added, or any Transport Channel or HS-DSCH MAC-d flow being modified for which a new transport bearer was requested with the *Transport Bearer Request Indicator IE*.

The DRNC shall include in the RADIO LINK RECONFIGURATION READY message the *Transport Layer Address IE* and the *Binding ID IE* for any Transport Channel or HS-DSCH MAC-d flow being added, or any Transport Channel or HS-DSCH MAC-d flow being modified for which a new transport bearer was requested with the *Transport Bearer Request Indicator IE*. In the case of a set of co-ordinated DCHs requiring a new transport bearer on the Iur interface, the *Transport Layer Address IE* and the *Binding ID IE* in the *DCH Information Response IE* shall be included for only one of the DCHs in the set of co-ordinated DCHs.

In the case of a Radio Link being combined with another Radio Link within the DRNS, the *Transport Layer Address IE* and the *Binding ID IE* in the *DCH Information Response IE* shall be included for only one of the combined Radio Links.

```
/* text ommited ***** */
```

8.3.4.4 Abnormal Conditions

If only a subset of all the DCHs belonging to a set of co-ordinated DCHs is requested to be deleted, the DRNS shall reject the Synchronised Radio Link Reconfiguration Preparation procedure as having failed and shall send the RADIO LINK RECONFIGURATION FAILURE message to the SRNC.

If more than one DCH of a set of co-ordinated DCHs has the *QE-Selector IE* set to "selected" [TDD - or no DCH of a set of co-ordinated DCHs has the *QE-Selector IE* set to "selected"] the DRNS shall reject the Synchronised Radio Link Reconfiguration Preparation procedure and the DRNC shall respond with a RADIO LINK RECONFIGURATION FAILURE message.

[FDD - If the *RL Information IE* includes the *SSDT Indication IE* set to "SSDT Active in the UE" and SSDT is not active in the current configuration, the DRNS shall reject the Synchronised Radio Link Reconfiguration Preparation procedure if the *UL DPCCH Information IE* does not include the *SSDT Cell Identity Length IE*. The DRNC shall then respond with a RADIO LINK RECONFIGURATION FAILURE message.]

[FDD - If the *DSCHs To Add IE* includes the *Enhanced DSCH PC IE* and the *DSCH To Modify IE* include the *Enhanced DSCH PC Indicator IE* set to "Enhanced DSCH PC not Active in the UE", then the DRNS shall deactivate enhanced DSCH power control in the new configuration.]

[FDD - If both the *DSCHs To Add IE* and the *DSCH To Modify IE* include *Enhanced DSCH PC IE*, then the DRNS shall ignore the *Enhanced DSCH PC IE* in the *DSCH To Add IE*.]

If the RADIO LINK RECONFIGURATION PREPARE message includes a *DCHs To Modify IE* or *DCHs To Add IE* with multiple *DCH Specific Info IEs*, and if the DCHs in the *DCHs To Modify IE* or *DCHs To Add IE* do not have the same *Transmission Time Interval IE* in the *Semi-static Transport Format Information IE*, then the DRNC shall reject the procedure using the RADIO LINK RECONFIGURATION FAILURE message.

[FDD - If the *RL Information IE* includes the *DL Reference Power IEs*, but the power balancing is not active in the indicated RL(s), the DRNS shall reject the Synchronised Radio Link Reconfiguration Preparation procedure as having

failed and the DRNC shall respond with the RADIO LINK RECONFIGURATION FAILURE message with the cause value "Power Balancing status not compatible".]

[FDD - If the power balancing is active with the Power Balancing Adjustment Type of the UE Context set to "Common" in the existing RL(s) but the *RL Information* IE includes more than one *DL Reference Power* IEs, the DRNS shall reject the Synchronised Radio Link Reconfiguration Preparation procedure as having failed and the DRNC shall respond with the RADIO LINK RECONFIGURATION FAILURE message with the cause value "Power Balancing status not compatible".]

[FDD - If the RADIO LINK RECONFIGURATIO PREPARE message does not include the *Split Type* IE but includes *TFCI Signalling Mode* IE set to "Split", then the DRNC shall reject the procedure using the RADIO LINK RECONFIGURATION FAILURE message.]

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message does not include the *Length of TFCI2* IE but the *Split type* IE is set to "Logical", then the DRNC shall reject the procedure using the RADIO LINK RECONFIGURATION FAILURE message.]

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes the *Split Type* IE set to the value "Hard" and the *Length Of TFCI2* IE set to the value "1", "2", "5", "8", "9" or "10", then the DRNC shall reject the procedure using the RADIO LINK RECONFIGURATION FAILURE message.]

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message does not include the *Split Type* IE but includes the *Length of TFCI2* IE, then the DRNC shall reject the procedure using the RADIO LINK RECONFIGURATION FAILURE message.]

If the RADIO LINK RECONFIGURATION PREPARE message contains the *Transport Layer Address* IE or the *Binding ID* IE when establishing a transport bearer for any Transport Channel or HS-DSCH MAC-d flow being added, or any Transport Channel or HS-DSCH MAC-d flow being modified for which a new transport bearer was requested with the *Transport Bearer Request Indicator* IE., and not both are present for a transport bearer intended to be established, the DRNC shall reject the Synchronised Radio Link Reconfiguration Preparation procedure and the DRNC shall respond with a RADIO LINK RECONFIGURATION FAILURE message.

If the RADIO LINK RECONFIGURATION PREPARE message contains any of the *HS-DSCH Information To Modify* IE, *HS-DSCH MAC-d Flows To Add* IE or *HS-DSCH MAC-d Flows To Delete* IE in addition to the *HS-DSCH Information* IE, the DRNC shall reject the procedure using the RADIO LINK RECONFIGURATION FAILURE message.

If the RADIO LINK RECONFIGURATION PREPARE message contains any of the *HS-DSCH Information To Modify* IE, *HS-DSCH MAC-d Flows To Add* IE, *HS-DSCH MAC-d Flows To Delete* IE or *HS-PDSCH RL ID* IE and the Serving HS-DSCH Radio Link is not in the DRNS, the DRNC shall reject the procedure using the RADIO LINK RECONFIGURATION FAILURE message.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *HS-DSCH Information* IE and does not include the *HS-PDSCH RL-ID* IE, the DRNC shall reject the procedure using the RADIO LINK RECONFIGURATION FAILURE message.

9.1.11 RADIO LINK RECONFIGURATION PREPARE

9.1.11.1 FDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
Message Type	M		9.2.1.40		YES	reject
Transaction ID	M		9.2.1.59		–	
Allowed Queuing Time	O		9.2.1.2		YES	reject
UL DPCCH Information		0..1			YES	reject
>UL Scrambling Code	O		9.2.2.53		–	
>UL SIR Target	O		Uplink SIR 9.2.1.69		–	
>Min UL Channelisation Code Length	O		9.2.2.25		–	
>Max Number of UL DPDCHs	C – CodeLen		9.2.2.24		–	
>Puncture Limit	O		9.2.1.46	For the UL.	–	
>TFCS	O		9.2.1.63	TFCS for the UL.	–	
>UL DPCCH Slot Format	O		9.2.2.52		–	
>Diversity Mode	O		9.2.2.8		–	
>SSDT Cell Identity Length	O		9.2.2.41		–	
>S-Field Length	O		9.2.2.36		–	
DL DPCCH Information		0..1			YES	reject
>TFCS	O		9.2.1.63	TFCS for the DL.	–	
>DL DPCCH Slot Format	O		9.2.2.9		–	
>Number of DL Channelisation Codes	O		9.2.2.26A		–	
>TFCI Signalling Mode	O		9.2.2.46		–	
>TFCI Presence	C-SlotFormat		9.2.1.55		–	
>Multiplexing Position	O		9.2.2.26		–	
>Limited Power Increase	O		9.2.2.21A		–	
>Split Type	O		9.2.2.39a		YES	reject
>Length of TFCI2	O		9.2.2.21C		YES	reject
DCHs To Modify	O		FDD DCHs To Modify 9.2.2.13C		YES	reject
DCHs To Add	O		DCH FDD Information 9.2.2.4A		YES	reject
DCHs to Delete		0..<maxnoof DCHs>			GLOBAL	reject
>DCH ID	M		9.2.1.16		–	
DSCHs To Modify		0..1			YES	reject
>DSCH Info		0..<maxnoof DSCHs>			–	
>>DSCH ID	M		9.2.1.26A		–	
>>TrCH Source Statistics Descriptor	O		9.2.1.65		–	
>>Transport Format Set	O		9.2.1.64	For DSCH	–	
>>Allocation/Retention Priority	O		9.2.1.1		–	
>>Scheduling Priority Indicator	O		9.2.1.51A		–	
>>BLER	O		9.2.1.4		–	

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
>>Transport Bearer Request Indicator	M		9.2.1.61		—	
>>Traffic Class	O		9.2.1.58A		YES	ignore
>>Binding ID	O		9.2.1.3	Shall be ignored if bearer establishment with ALCAP.	YES	ignore
>>Transport Layer Address	O		9.2.1.62	Shall be ignored if bearer establishment with ALCAP.	YES	ignore
>PDSCH RL ID	O		RL ID 9.2.1.49		—	
>TFCS	O		9.2.1.63	For DSCH	—	
>Enhanced DSCH PC Indicator	O		9.2.2.13F		YES	ignore
>Enhanced DSCH PC	C-EDSCHPC On		9.2.2.13D		YES	ignore
DSCHs To Add	O		DSCH FDD Information 9.2.2.13A		YES	reject
DSCHs to Delete		0..1			YES	reject
>DSCH Info		1..<maxnoof DSCHs>			—	
>>DSCH ID	M		9.2.1.26A		—	
RL Information		0..<maxnoof RLS>			EACH	reject
>RL ID	M		9.2.1.49		—	
>SSDT Indication	O		9.2.2.42		—	
>SSDT Cell Identity	C - SSDTIndON		9.2.2.40		—	
>Transmit Diversity Indicator	C – Diversity mode		9.2.2.48		—	
>SSDT Cell Identity for EDSCHPC	C-EDSCHPC		9.2.2.40A		YES	ignore
>DL Reference Power	O		DL Power 9.2.1.21A	Power on DPCH	YES	ignore
>RL Specific DCH Information	O		9.2.1.49A		YES	ignore
>DL DPCH Timing Adjustment	O		9.2.2.9A	Required RL Timing Adjustment	YES	reject
>Qth Parameter	O		9.2.2.34a		YES	ignore
>Phase Reference Update Indicator	O		9.2.2.27B		YES	ignore
Transmission Gap Pattern Sequence Information	O		9.2.2.47A		YES	reject
<u>HS-DSCH Information</u>	<u>O</u>		<u>HS-DSCH FDD Information 9.2.2.19a</u>		<u>YES</u>	<u>Reject</u>
HS-DSCH Information To Modify	O		9.2.1.30Q		YES	Reject
HS-DSCH <u>Information</u> <u>MAC-d Flows</u> To Add	O		<u>HS-DSCH FDD Information 9.2.2.19a</u>		YES	reject

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
			HS-DSCH MAC-d Flows Information 9.2.1.X			
HS-DSCH MAC-d Flows To Delete HS-DSCH Information To Delete	O	0.. maxnoofMACdFlows ≥	9.2.1.XX		YES GLOB AL	reject
HS-DSCH MAC-d Flow ID	M		9.2.1.300		-	
HS-PDSCH RL ID	O		RL ID 9.2.1.49		YES	reject
UE Support Of Dedicated Pilots For Channel Estimation	O		9.2.2.50A		YES	ignore
UE Support Of Dedicated Pilots For Channel Estimation Of HS-DSCH	O		9.2.2.50B		YES	ignore

Condition	Explanation
SSDTIndON	The IE shall be present if the <i>SSDT Indication</i> IE is set to "SSDT Active in the UE".
CodeLen	The IE shall be present only if the <i>Min UL Channelisation Code length</i> IE equals to 4.
SlotFormat	The IE shall only be present if the <i>DL DPCH Slot Format</i> IE is equal to any of the values from 12 to 16.
Diversity mode	The IE shall be present if <i>Diversity Mode</i> IE is present in the <i>UL DPCH Information</i> IE and is not equal to "none".
EDSCHPCOn	The IE shall be present if the <i>Enhanced DSCH PC Indicator</i> IE is set to "Enhanced DSCH PC Active in the UE".
EDSCHPC	The IE shall be present if <i>Enhanced DSCH PC</i> IE is present in either the <i>DSCHs To Modify</i> IE or the <i>DSCHs To Add</i> IE.

Range bound	Explanation
<i>maxnoofDCHs</i>	Maximum number of DCHs for a UE.
<i>maxnoofDSCHs</i>	Maximum number of DSCHs for one UE.
<i>maxnoofRLs</i>	Maximum number of RLs for a UE.
maxnoofMACdFlows	Maximum number of HS-DSCH MAC-d flows

9.1.11.2 TDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
Message Type	M		9.2.1.40		YES	reject
Transaction ID	M		9.2.1.59		–	
Allowed Queuing Time	O		9.2.1.2		YES	reject
UL CCTrCH To Add		<i>0..<maxno ofCCTrCHs></i>		For DCH and USCH	EACH	notify
>CCTrCH ID	M		9.2.3.2		–	
>TFCS	M		9.2.1.63	For the UL.	–	
>TFCI Coding	M		9.2.3.11		–	
>Puncture Limit	M		9.2.1.46		–	
>UL SIR Target	O		Uplink SIR 9.2.1.69	Mandatory for 1.28Mcps TDD; not applicable to 3.84Mcps TDD	YES	reject
>TDD TPC Uplink Step Size	O		9.2.3.10a	Mandatory for 1.28Mcps TDD, not applicable to 3.84Mcps TDD	YES	reject
UL CCTrCH To Modify		<i>0..<maxno ofCCTrCHs></i>			EACH	notify
>CCTrCH ID	M		9.2.3.2		–	
>TFCS	O		9.2.1.63	For the UL.	–	
>TFCI Coding	O		9.2.3.11		–	
>Puncture Limit	O		9.2.1.46		–	
>UL SIR Target	O		Uplink SIR 9.2.1.69	Applicable to 1.28Mcps TDD only	YES	reject
>TDD TPC Uplink Step Size	O		9.2.3.10a	Applicable to 1.28Mcps TDD only	YES	reject
UL CCTrCH to Delete		<i>0..<maxno ofCCTrCHs></i>			EACH	notify
>CCTrCH ID	M		9.2.3.2		–	
DL CCTrCH To Add		<i>0..<maxno ofCCTrCHs></i>		For DCH and DSCH	EACH	notify
>CCTrCH ID	M		9.2.3.2		–	
>TFCS	M		9.2.1.63	For the DL.	–	
>TFCI Coding	M		9.2.3.11		–	
>Puncture Limit	M		9.2.1.46		–	
>TPC CCTrCH List		<i>0..<maxno CCTrCHs></i>		List of uplink CCTrCH which provide TPC	–	
>>TPC CCTrCH ID	M		CCTrCH ID 9.2.3.2		–	
>TDD TPC Downlink Step Size	O		9.2.3.10		YES	reject
DL CCTrCH To Modify		<i>0..<maxno ofCCTrCHs></i>			EACH	notify
>CCTrCH ID	M		9.2.3.2		–	
>TFCS	O		9.2.1.63	For the DL.	–	
>TFCI Coding	O		9.2.3.11		–	

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
>Puncture Limit	O		9.2.1.46		–	
>TPC CCTrCH List		<i>0..<maxno CCTrCHs></i>		List of uplink CCTrCH which provide TPC	–	
>>TPC CCTrCH ID	M		CCTrCH ID 9.2.3.2		–	
>TDD TPC Downlink Step Size	O		9.2.3.10		YES	reject
DL CCTrCH to Delete		<i>0..<maxno ofCCTrCHs></i>			EACH	notify
>CCTrCH ID	M		9.2.3.2		–	
DCHs To Modify	O		TDD DCHs To Modify 9.2.3.8B		YES	reject
DCHs To Add	O		DCH TDD Information 9.2.3.2A		YES	reject
DCHs to Delete		<i>0..<maxno ofDCHs></i>			GLOBAL	reject
>DCH ID	M		9.2.1.16		–	
DSCHs To Modify		<i>0..<maxno ofDSCHs></i>			GLOBAL	reject
>DSCH ID	M		9.2.1.26A		–	
>CCTrCH ID	O		9.2.3.2	DL CCTrCH in which the DSCH is mapped.	–	
>TrCH Source Statistics Descriptor	O		9.2.1.65		–	
>Transport Format Set	O		9.2.1.64		–	
>Allocation/Retention Priority	O		9.2.1.1		–	
>Scheduling Priority Indicator	O		9.2.1.51A		–	
>BLER	O		9.2.1.4		–	
>Transport Bearer Request Indicator	M		9.2.1.61		–	
>Traffic Class	O		9.2.1.58A		YES	ignore
>Binding ID	O		9.2.1.3	Shall be ignored if bearer establishment with ALCAP.	YES	ignore
>Transport Layer Address	O		9.2.1.62	Shall be ignored if bearer establishment with ALCAP.	YES	ignore
DSCHs To Add	O		DSCH TDD Information 9.2.3.3a		YES	reject
DSCHs to Delete		<i>0..<maxno ofDSCHs></i>			GLOBAL	reject
>DSCH ID	M		9.2.1.26A		–	
USCHs To Modify		<i>0..<maxno ofUSCHs></i>			GLOBAL	reject
>USCH ID	M		9.2.3.14		–	

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
>CCTrCH ID	O		9.2.3.2	UL CCTrCH in which the USCH is mapped.	–	
>TrCH Source Statistics Descriptor	O		9.2.1.65		–	
>Transport Format Set	O		9.2.1.64		–	
>Allocation/Retention Priority	O		9.2.1.1		–	
>Scheduling Priority Indicator	O		9.2.1.51A		–	
>BLER	O		9.2.1.4		–	
>Transport Bearer Request Indicator	M		9.2.1.61		–	
>Binding ID	O		9.2.1.3	Shall be ignored if bearer establishment with ALCAP.	YES	ignore
>Transport Layer Address	O		9.2.1.62	Shall be ignored if bearer establishment with ALCAP.	YES	ignore
>RB Info		0..<maxno ofRBs>		All Radio Bearers using this USCH	–	
>>RB Identity	M		9.2.3.5B		–	
>Traffic class	O		9.2.1.58A		YES	ignore
USCHs To Add	O		USCH Information 9.2.3.15		YES	reject
USCHs to Delete		0..<maxno ofUSCHs>			GLOBAL	reject
>USCH ID	M		9.2.3.14		–	
RL Information		0..1			YES	ignore
>RL ID	M		9.2.1.49		–	
>RL Specific DCH Information	O		9.2.1.49A		–	
Primary CCPCH RSCP	O		9.2.3.5		YES	ignore
DL Time Slot ISCP Info	O		9.2.3.2D	Applicable to 3.84Mcps TDD only	YES	ignore
DL Time Slot ISCP Info LCR	O		9.2.3.2F	Applicable to 1.28Mcps TDD only	YES	ignore
HS-DSCH Information	O		HS-DSCH TDD Information 9.2.3.3aa		YES	reject
HS-DSCH Information To Modify	O		9.2.1.30Q		YES	reject
HS-DSCH Information MAC-d Flows To Add	O		HS-DSCH TDD Information 9.2.3.3aa HS-DSCH MAC-d Flows Information 9.2.1.X		YES	reject

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
HS-DSCH MAC-d Flows To Delete HS-DSCH Information To Delete	O	0.. maxnoofMACdFlows	9.2.1.XX		YES GLOB AL	reject
>HS-DSCH-MAC-d Flow ID	M		9.2.1.30C			
HS-PDSCH RL ID	O		RL ID 9.2.1.49		YES	reject
PDSCH-RL-ID	O		RL ID 9.2.1.49		YES	ignore
>UL Synchronisation Parameters LCR		0..1		Mandatory for 1.28Mcps TDD. Not Applicable to 3.84Mcps TDD.	YES	ignore
>Uplink Synchronisation Step Size	M		9.2.3.13J		-	
>Uplink Synchronisation Frequency	M		9.2.3.13I		-	

Range bound	Explanation
maxnoofDCHs	Maximum number of DCHs for a UE.
maxnoofCCTrCHs	Maximum number of CCTrCHs for a UE.
maxnoofDSCHs	Maximum number of DSCHs for one UE.
maxnoofUSCHs	Maximum number of USCHs for one UE.
maxnoofMACdFlows	Maximum number of HS-DSCH-MAC-d flows

9.2.1.30Q HS-DSCH Information To Modify

The *HS-DSCH Information To Modify* IE ~~provides information for HS-DSCH to be modified~~ is used for modification of HS-DSCH information in a UE Context.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
HS-DSCH MAC-d Flow Specific Information		$0..<\maxno\text{ ofMACdFI}\text{ OWS}>$			-	
>HS-DSCH MAC-d Flow ID	M		9.2.1.30Q		-	
>Allocation/Retention Priority	O		9.2.1.1		-	
>Transport-Bearer Request Indicator	M		9.2.1.64		-	
>Traffic-Class	O		9.2.1.58A		-	
>Binding ID	O		9.2.1.3	Shall be ignored if bearer establishment with ALCAP.	-	
>Transport Layer Address	O		9.2.1.62	Shall be ignored if bearer establishment with ALCAP.	-	
Priority Queue Information		$0..<\maxno\text{ ofPrioQueues}>$			-	
>CHOICE_Priority Queue	M				-	
>>Add Priority Queue					-	
>>>Priority Queue ID	M		9.2.1.45A		-	
>>>Associated HS-DSCH MAC-d Flow	M		HS-DSCH MAC-d Flow ID 9.2.1.30Q		-	
>>>Scheduling Priority Indicator	M		9.2.1.51A		-	
>>>T1	M		9.2.1.54A		-	
>>>Discard-Timer	O		9.2.1.19G			
>>>MAC-hs Window Size	M		9.2.1.34G		-	
>>>MAC-hs Guaranteed Bit Rate	O		9.2.1.34Aa		-	
>>>MAC-d PDU Size Index		$1..<\maxno\text{ ofMACdPDUindexes}>$			-	
>>>>SID	M		9.2.1.52D		-	
>>>>MAC-d PDU Size	M		9.2.1.34A		-	
>>Modify Priority Queue					-	
>>>Priority Queue ID	M		9.2.1.45A		-	
>>>Associated HS-DSCH MAC-d Flow	O		HS-DSCH MAC-d Flow ID 9.2.1.30Q		-	
>>>Scheduling Priority Indicator	O		9.2.1.51A		-	
>>>T1	O		9.2.1.54A		-	
>>>Discard-Timer	O		9.2.1.19G			
>>>MAC-hs Window Size	O		9.2.1.34G		-	
>>>MAC-hs Guaranteed Bit Rate	O		9.2.1.34Aa		-	
>>>MAC-d PDU Size Index		$0..<\maxno\text{ ofMACdPDUindexes}>$			-	
>>>>SID	M		9.2.1.52D		-	

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
>>>MAC-d-PDU-Size	0		9.2.1.34A		-	
>>Delete-Priority-Queue					-	
>>Priority-Queue-ID	M		9.2.1.45A		-	
MAC-hs-Reordering-Buffer-Size	0		9.2.1.34Ab		-	
CQI-Feedback-Cycle-k	0		9.2.2.24a	For FDD only	-	
CQI-Repetition-Factor	0		9.2.2.24c	For FDD only	-	
ACK-NACK-Repetition-Factor	0		9.2.2.a	For FDD only	-	
CQI-Power-Offset	0		9.2.2.24b	For FDD only	-	
ACK-Power-Offset	0		9.2.2.b	For FDD only	-	
NACK-Power-Offset	0		9.2.2.26a	For FDD only	-	
HS-SCCH-Power-Offset	0		9.2.2.19d	For FDD only	-	
HS-SCCH-Code-Change-Grant	0		9.2.1.30S		-	
TDD-ACK-NACK-Power-Offset	0		9.2.3.7I	For TDD only	-	

<u>IE/Group Name</u>	<u>Presence</u>	<u>Range</u>	<u>IE Type and Reference</u>	<u>Semantics Description</u>
<u>HS-DSCH MAC-d Flow Specific Information</u>		<u>0..<maxno ofMACdFI OWS></u>		
<u>>HS-DSCH MAC-d Flow ID</u>	<u>M</u>		<u>9.2.1.30O</u>	
<u>>Allocation/Retention Priority</u>	<u>O</u>		<u>9.2.1.1</u>	
<u>>Transport Bearer Request Indicator</u>	<u>M</u>		<u>9.2.1.61</u>	
<u>>Traffic Class</u>	<u>O</u>		<u>9.2.1.58A</u>	
<u>>Binding ID</u>	<u>O</u>		<u>9.2.1.3</u>	<u>Shall be ignored if bearer establishment with ALCAP.</u>
<u>>Transport Layer Address</u>	<u>O</u>		<u>9.2.1.62</u>	<u>Shall be ignored if bearer establishment with ALCAP.</u>
<u>Priority Queue Information</u>		<u>0..<maxno ofPrioQue ues></u>		
<u>>CHOICE Priority Queue</u>	<u>M</u>			
<u>>>Add Priority Queue</u>				
<u>>>Priority Queue ID</u>	<u>M</u>		<u>9.2.1.45A</u>	
<u>>>Associated HS-DSCH MAC-d Flow</u>	<u>M</u>		<u>HS-DSCH MAC-d Flow ID</u> <u>9.2.1.30O</u>	
<u>>>Scheduling Priority Indicator</u>	<u>M</u>		<u>9.2.1.51A</u>	
<u>>>T1</u>	<u>M</u>		<u>9.2.1.54A</u>	
<u>>>Discard Timer</u>	<u>O</u>		<u>9.2.1.19C</u>	
<u>>>MAC-hs Window Size</u>	<u>M</u>		<u>9.2.1.34C</u>	
<u>>>MAC-hs Guaranteed Bit Rate</u>	<u>O</u>		<u>9.2.1.34Aa</u>	
<u>>>MAC-d PDU Size Index</u>		<u>1..<maxno ofMACdP DUindexes ></u>		
<u>>>>SID</u>	<u>M</u>		<u>9.2.1.52D</u>	
<u>>>>MAC-d PDU Size</u>	<u>M</u>		<u>9.2.1.34A</u>	
<u>>>Modify Priority Queue</u>				
<u>>>Priority Queue ID</u>	<u>M</u>		<u>9.2.1.45A</u>	
<u>>>Associated HS-DSCH MAC-d Flow</u>	<u>O</u>		<u>HS-DSCH MAC-d Flow ID</u> <u>9.2.1.30O</u>	
<u>>>Scheduling Priority Indicator</u>	<u>O</u>		<u>9.2.1.51A</u>	
<u>>>T1</u>	<u>O</u>		<u>9.2.1.54A</u>	
<u>>>Discard Timer</u>	<u>O</u>		<u>9.2.1.19C</u>	
<u>>>MAC-hs Window Size</u>	<u>O</u>		<u>9.2.1.34C</u>	
<u>>>MAC-hs Guaranteed Bit Rate</u>	<u>O</u>		<u>9.2.1.34Aa</u>	
<u>>>MAC-d PDU Size Index</u>		<u>0..<maxno ofMACdP DUindexes ></u>		
<u>>>>SID</u>	<u>M</u>		<u>9.2.1.52D</u>	
<u>>>>MAC-d PDU Size</u>	<u>M</u>		<u>9.2.1.34A</u>	
<u>>>Delete Priority Queue</u>				
<u>>>Priority Queue ID</u>	<u>M</u>		<u>9.2.1.45A</u>	
<u>MAC-hs Reordering Buffer Size</u>	<u>O</u>		<u>9.2.1.34Ab</u>	
<u>CQI Feedback Cycle k</u>	<u>O</u>		<u>9.2.2.24a</u>	<u>For FDD only</u>
<u>CQI Repetition Factor</u>	<u>O</u>		<u>9.2.2.24c</u>	<u>For FDD only</u>
<u>ACK-NACK Repetition Factor</u>	<u>O</u>		<u>9.2.2.a</u>	<u>For FDD only</u>

<u>IE/Group Name</u>	<u>Presence</u>	<u>Range</u>	<u>IE Type and Reference</u>	<u>Semantics Description</u>
CQI Power Offset	O		9.2.2.24b	For FDD only
ACK Power Offset	O		9.2.2.b	For FDD only
NACK Power Offset	O		9.2.2.26a	For FDD only
HS-SCCH Power Offset	O		9.2.2.19d	For FDD only
HS-SCCH Code Change Grant	O		9.2.1.30S	
TDD ACK NACK Power Offset	O		9.2.3.7I	For TDD only

Range bound	Explanation
<i>maxnoofMACdFlows</i>	Maximum number of MAC-d flows.
<i>maxnoofPrioQueues</i>	Maximum number of Priority Queues.
<i>maxnoofMACdPDUindexes</i>	Maximum number of MAC-d PDU Size Indexes (SIDs).

9.2.1.X HS-DSCH MAC-d Flows Information

The *HS-DSCH MAC-d Flows Information* IE is used for the establishment of HS-DSCH MAC-d flows for a UE Context.

<u>IE/Group Name</u>	<u>Presence</u>	<u>Range</u>	<u>IE Type and Reference</u>	<u>Semantics Description</u>
<u>HS-DSCH MAC-d Flow Specific Information</u>		<u>1..<maxno ofMACdFlows></u>		
<u>>HS-DSCH MAC-d Flow ID</u>	M		9.2.1.30O	
<u>>Allocation/Retention Priority</u>	M		9.2.1.1	
<u>>Traffic Class</u>	M		9.2.1.58A	
<u>>Binding ID</u>	O		9.2.1.3	<u>Shall be ignored if bearer establishment with ALCAP.</u>
<u>>Transport Layer Address</u>	O		9.2.1.62	<u>Shall be ignored if bearer establishment with ALCAP.</u>
<u>Priority Queue Information</u>		<u>1..<maxno ofPrioQueues></u>		
<u>>Priority Queue ID</u>	M		9.2.1.45A	
<u>>Associated HS-DSCH MAC-d Flow</u>	M		<u>HS-DSCH MAC-d Flow ID</u> 9.2.1.30O	
<u>>Scheduling Priority Indicator</u>	M		9.2.1.51A	
<u>>T1</u>	M		9.2.1.54A	
<u>>Discard Timer</u>	O		9.2.1.19C	
<u>>MAC-hs Window Size</u>	M		9.2.1.34C	
<u>>MAC-hs Guaranteed Bit Rate</u>	O		9.2.1.34Aa	
<u>>MAC-d PDU Size Index</u>		<u>1..<maxno ofMACdPDUindexes></u>		
<u>>>SID</u>	M		9.2.1.52D	
<u>>>MAC-d PDU Size</u>	M		9.2.1.34A	

<u>Range Bound</u>	<u>Explanation</u>
<u>maxnoofMACdFlows</u>	Maximum number of HS-DSCH MAC-d flows
<u>maxnoofPrioQueues</u>	Maximum number of Priority Queues
<u>maxnoofMACdPDUindexes</u>	Maximum number of different MAC-d PDU SIDs

9.2.1.XX HS-DSCH MAC-d Flows To Delete

The *HS-DSCH MAC-d Flows To Delete* IE is used for the removal of HS-DSCH MAC-d flows from a UE Context.

<u>IE/Group Name</u>	<u>Presence</u>	<u>Range</u>	<u>IE Type and Reference</u>	<u>Semantics Description</u>
<u>HS-DSCH MAC-d Flows To Delete</u>		<u>1..<maxno ofMACdFlows></u>		
<u>>HS-DSCH MAC-d Flow ID</u>	M		9.2.1.30O	

<u>Range Bound</u>	<u>Explanation</u>
<u>maxnoofMACdFlows</u>	Maximum number of HS-DSCH MAC-d flows

9.2.2.19a HS-DSCH FDD Information

The *HS-DSCH FDD Information* IE provides information for HS-DSCH MAC-d flows to be established is used for initial addition of HS-DSCH information to UE Context.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
HS-DSCH MAC-d Flow Specific Information		<i>1..<maxno ofMACdFI ows></i>			-	
>HS-DSCH MAC-d Flow ID	M		9.2.1.30Q		-	
>Allocation/Retention Priority	M		9.2.1.1		-	
>Traffic Class	M		9.2.1.58A		-	
>Binding ID	O		9.2.1.3	Shall be ignored if bearer establishment with ALCAP.	-	
>Transport Layer Address	O		9.2.1.62	Shall be ignored if bearer establishment with ALCAP.	-	
Priority Queue Information		<i>1..<maxno ofPrioQue ues></i>			-	
>Priority Queue ID	M		9.2.1.45A		-	
>Associated HS-DSCH MAC-d Flow	M		HS-DSCH MAC-d Flow ID 9.2.1.30Q		-	
>Scheduling Priority Indicator	M		9.2.1.51A		-	
>T4	M		9.2.1.54A		-	
>Discard Timer	O		9.2.1.19C			
>MAC-hs Window-Size	M		9.2.1.34C		-	
>MAC-hs Guaranteed Bit Rate	O		9.2.1.34Aa		-	
>MAC-d PDU Size Index		<i>1..<maxno ofMACdP DUindexes ></i>			-	
>>SID	M		9.2.1.52D		-	
>>MAC-d PDU Size	M		9.2.1.34A		-	
UE Capabilities Information		4			-	
>HS-DSCH Physical Layer Category	M		9.2.1.30Qa		-	
>MAC-hs reordering-buffer size	M		9.2.1.34Ab		-	
CQI Feedback Cycle k	M		9.2.2.24a		-	
CQI Repetition Factor	G-CQICyclek		9.2.2.24e		-	
ACK-NACK Repetition Factor	M		9.2.2.3		-	
CQI Power Offset	M		9.2.2.24b		-	
ACK Power Offset	M		9.2.2.3b		-	
NACK Power Offset	M		9.2.2.26a		-	
HS-SCCH Power Offset	O		9.2.2.19d		-	

<u>IE/Group Name</u>	<u>Presence</u>	<u>Range</u>	<u>IE Type and Reference</u>	<u>Semantics Description</u>
HS-DSCH MAC-d Flows Information	M		9.2.1.X	
UE Capabilities Information		1		
>HS-DSCH Physical Layer Category	M		9.2.1.30Oa	
>MAC-hs Reordering Buffer Size	M		9.2.1.34Ab	
CQI Feedback Cycle k	M		9.2.2.24a	
CQI Repetition Factor	C- CQICyclek		9.2.2.24c	
ACK-NACK Repetition Factor	M		9.2.2.a	
CQI Power Offset	M		9.2.2.24b	
ACK Power Offset	M		9.2.2.b	
NACK Power Offset	M		9.2.2.26a	
HS-SCCH Power Offset	O		9.2.2.19d	

Condition	Explanation
CQICyclek	The IE shall be present if the <i>CQI Feedback Cycle k</i> IE is set to a value greater than 0.

Range bound	Explanation
<code>maxnofMACdFlows</code>	Maximum number of MAC-d flows.
<code>maxnofPrioQueues</code>	Maximum number of Priority Queues.
<code>maxnofMACdPDUindexes</code>	Maximum number of MAC-d PDU-Size Indexes (SIDs).

9.2.2.19b HS-DSCH FDD Information Response

The *HS-DSCH FDD Information Response* IE provides information for HS-DSCH MAC-d flows that have been established or modified. [It also provides additional HS-DSCH information determined within the DRNS.](#)

<u>IE/Group Name</u>	<u>Presence</u>	<u>Range</u>	<u>IE Type and Reference</u>	<u>Semantics Description</u>	<u>Criticality</u>	<u>Assigned Criticality</u>
HS-DSCH MAC-d Flow Specific Information Response		<i>1..<maxno ofMACdFlows></i>			-	
>HS-DSCH MAC-d Flow ID	M		9.2.1.30Q		-	
>Binding ID	O		9.2.1.3		-	
>Transport Layer Address	O		9.2.1.62		-	
>HS-DSCH Initial Capacity Allocation	O		9.2.1.30Na		-	
HS-SCCH Specific Information Response		<i>1..<maxno ofHSSCC Hcodes></i>			-	
>Code Number	M		INTEGER(0..127)		-	
Measurement Power Offset	O		9.2.2.24d		-	
CHOICE HARQ Memory Partitioning	M				-	
> <i>Implicit</i>					-	
>>Number of Processes	M		INTEGER(1..8,...)		-	
> <i>Explicit</i>					-	
>>HARQ Memory Partitioning Infomation		<i>1..<maxno ofHARQprocesses></i>			-	
>>Process Memory Size	M		9.2.1.45B	See [16]	-	

<u>IE/Group Name</u>	<u>Presence</u>	<u>Range</u>	<u>IE Type and Reference</u>	<u>Semantics Description</u>
HS-DSCH MAC-d Flow Specific Information Response		<i>0..<maxno ofMACdFlows></i>		
>HS-DSCH MAC-d Flow ID	M		9.2.1.30Q	
>Binding ID	O		9.2.1.3	
>Transport Layer Address	O		9.2.1.62	
>HS-DSCH Initial Capacity Allocation	O		9.2.1.30Na	
HS-SCCH Specific Information Response		<i>0..<maxno ofHSSCC Hcodes></i>		
>Code Number	M		INTEGER (0..127)	
Measurement Power Offset	O		9.2.2.24d	
CHOICE HARQ Memory Partitioning	O			
> <i>Implicit</i>				
>>Number of Processes	M		INTEGER (1..8,...)	
> <i>Explicit</i>				
>>HARQ Memory Partitioning Infomation		<i>1..<maxno ofHARQprocesses></i>		
>>Process Memory Size	M		9.2.1.45B	See [16]

<u>Range bound</u>	<u>Explanation</u>
<i>maxnoofMACdFlows</i>	Maximum number of MAC-d flows.
<i>maxnoofHSSCCHcodes</i>	Maximum number of HS-SCCH codes.
<i>maxnoofHARQprocesses</i>	Maximum number of HARQ processes.

9.2.3.3aa HS-DSCH TDD Information

The *HS-DSCH TDD Information IE* provides information for HS-DSCH to be established is used for initial addition of HS-DSCH information to a UE Context.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
HS-DSCH MAC-d Flow Specific Information		<i>1..<maxno ofMACdFI ows></i>			-	
>HS-DSCH MAC-d Flow ID	M		9.2.1.30Q		-	
>Allocation/Retention Priority	M		9.2.1.1		-	
>Traffic Class	M		9.2.1.58A		-	
>Binding ID	O		9.2.1.3	Shall be ignored if bearer establishment with ALCAP.	-	
>Transport Layer Address	O		9.2.1.62	Shall be ignored if bearer establishment with ALCAP.	-	
Priority Queue Information		<i>1..<maxno ofPrioQue ues></i>			-	
>Priority Queue ID	M		9.2.1.45A		-	
>Associated HS-DSCH MAC-d Flow	M		HS-DSCH MAC-d Flow ID 9.2.1.30Q		-	
>Scheduling Priority Indicator	M		9.2.1.51A			
>T4	M		9.2.1.54A			
>Discard Timer	O		9.2.1.19C			
>MAC-hs Window-Size	M		9.2.1.34C		-	
>MAC-hs Guaranteed Bit Rate	O		9.2.1.34Aa			
>MAC-d PDU Size Index		<i>1..<maxno ofMACdP DUindexes ></i>				
>>SID	M		9.2.1.52D		-	
>>MAC-d PDU Size	M		9.2.1.34A		-	
UE Capabilities Information		4			-	
>HS-DSCH Physical Layer Category	M		9.2.1.30Qa		-	
>MAC-hs reordering buffer size	M		9.2.1.34Ab			
TDD ACK NACK Power Offset	M		9.2.3.7I		-	

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
HS-DSCH MAC-d Flows Information	M		9.2.1.X	
UE Capabilities Information		1		
>HS-DSCH Physical Layer Category	M		9.2.1.30Qa	
>MAC-hs Reordering Buffer Size	M		9.2.1.34Ab	
TDD ACK NACK Power Offset	M		9.2.3.7I	

Range bound	Explanation
<i>maxnoofMACdFlows</i>	Maximum number of MAC-d flows.
<i>maxnoofPrioQueues</i>	Maximum number of Priority Queues.
<i>maxnoofMACdPDUindexes</i>	Maximum number of MAC-d PDU Size Indexes (SDIs).

9.2.3.3ab HS-DSCH TDD Information Response

The *HS-DSCH TDD Information Response* IE provides information for HS-DSCH that have been established or modified. [It also provides additional HS-DSCH information determined within the DRNS.](#)

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
HS-DSCH MAC-d Flow Specific Information Response		<i>40..<maxn oofMACdF lows></i>			—	
>HS-DSCH MAC-d Flow ID	M		9.2.1.30O		—	
>Binding ID	O		9.2.1.3		—	
>Transport Layer Address	O		9.2.1.62		—	
>HS-DSCH Initial Capacity Allocation	O		9.2.1.30Na		—	
HS-SCCH Specific Information Response		<i>0..<maxno ofHSSCC Hcodes></i>		Mandatory for 3.84 Mcps TDD, Not applicable to 1.28 Mcps TDD	—GLOBAL	reject
>Time Slot	M		9.2.1.56		—	
>Midamble Shift And Burst Type	M		9.2.3.4		—	
>TDD Channelisation Code	M		9.2.3.8		—	
>HS-SICH Information		<i>1</i>			—	
>>HS SICH ID	M		9.2.3.3ad		—	
>>Time Slot	M		9.2.1.56		—	
>>Midamble Shift And Burst Type	M		9.2.3.4		—	
>>TDD Channelisation Code	M		9.2.3.8		—	
HS-SCCH Specific Information Response LCR		<i>0..<maxno ofHSSCC Hcodes></i>		Mandatory for 1.28 Mcps TDD, Not applicable to 3.84 Mcps TDD	—GLOBAL	reject
>Time Slot LCR	M		9.2.3.12a		—	
>Midamble shift LCR	M		9.2.3.4C		—	
>First TDD Channelisation Code	M		TDD Channelisation Code 9.2.3.8		—	
>Second TDD Channelisation Code	M		TDD Channelisation Code 9.2.3.8		—	
>HS-SICH Information LCR		<i>1</i>			—	
>>HS SICH ID	M		9.2.3.3ad		—	
>>Time Slot LCR	M		9.2.3.12a		—	
>>Midamble shift LCR	M		9.2.3.4C		—	
>>TDD Channelisation Code	M		9.2.3.8		—	
HS-PDSCH Timeslot Specific Information Response		<i>0..<maxno ofDLts></i>		Mandatory for 3.84 Mcps TDD, Not Applicable to 1.28 Mcps TDD.	—GLOBAL	reject
>Time Slot	M		9.2.1.56		—	
>Midamble Shift And Burst Type	M		9.2.3.4		—	
HS-PDSCH Timeslot Specific Information Response LCR		<i>0..<maxno ofDLtsLCR ></i>		Mandatory for 1.28 Mcps TDD, Not Applicable to 3.84 Mcps TDD.	—GLOBAL	reject

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
>Time Slot LCR	M		9.2.3.12a		–	
>Midamble Shift LCR	M		9.2.3.4C		–	
CHOICE HARQ Memory Partitioning	MO				–	
> <i>Implicit</i>					–	
>>Number of Processes	M		INTEGER (1..8)		–	
> <i>Explicit</i>					–	
>>HARQ Memory Partitioning Infomation		1..<maxno ofHARQprocesses>			–	
>>>Process Memory Size	M		9.2.1.45B	See [16]	–	

Range bound	Explanation
<i>maxnoofMACdFlows</i>	Maximum number of MAC-d flows.
<i>maxnoofHSSCCHcodes</i>	Maximum number of HS-SCCH codes.
<i>maxnoofDLts</i>	Maximum number of downlink time slots per Radio Link for 3.84Mcps TDD.
<i>maxnoofDLtsLCR</i>	Maximum number of Downlink time slots per Radio Link for 1.28Mcps TDD.
<i>maxnoofHARQprocesses</i>	Maximum number of HARQ processes.

9.3.3 PDU Definitions

```

-- ****
-- PDU definitions for RNSAP.
-- ****

RNSAP-PDU-Contents {
    itu-t (0) identified-organization (4) etsi (0) mobileDomain (0)
    umts-Access (20) modules (3) rnsap (1) version1 (1) rnsap-PDU-Contents (1) }

DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

-- ****
-- IE parameter types from other modules.
-- ****

IMPORTS
    Active-Pattern-Sequence-Information,
    AllocationRetentionPriority,
/* text omitted */

    HCS-Prio,
    HSDSCH-FDD-Information,
    HSDSCH-FDD-Information-Response,
    HSDSCH-FDD-Update-Information,
    HSDSCH-TDD-Update-Information,
    HSDSCH-Information-to-Modify,
    HSDSCH-MACdFlow-ID,
    HSDSCH-MACdFlows-Information,
    HSDSCH-MACdFlows-to-Delete,
    HSDSCH-RNTI,
    HSDSCH-TDD-Information,
    HSDSCH-TDD-Information-Response,
    HS-SICH-ID,
    IMSI,
/* text omitted */

    id-HCS-Prio,
    id-HSDSCH-FDD-Information,
    id-HSDSCH-FDD-Information-Response,
    id_HSDSCH_FDD_Information_to_Add,
    id_HSDSCH_FDD_Information_to_Delete,
    id-HSDSCH-FDD-Update-Information,
    id-HSDSCH-TDD-Update-Information,
    id-HSDSCH-Information-to-Modify,

```

```
|_____  
| id-HSDSCH-MACdFlows-to-Add,  
| id-HSDSCH-MACdFlows-to-Delete,  
| id-HSDSCHMacdFlowSpecificInformationList-RL-PreemptRequiredInd,  
| id-HSDSCHMacdFlowSpecificInformationItem-RL-PreemptRequiredInd,  
| id-HSDSCH-RNTI,  
| id-HSDSCH-TDD-Information,  
| id-HSDSCH-TDD-Information-Response,  
| id-HSDSCH-TDD-Information-Response-LCR,  
| id-HSDSCH-TDD-Information-to-Add,  
| id-HSDSCH-TDD-Information-to-Delete,  
id-HSPDSCH-RL-ID,  
id-HSPDSCH-Timeslot-InformationList-PhyChReconfRqstTDD,  
id-HSPDSCH-Timeslot-InformationListLCR-PhyChReconfRqstTDD,  
id-HSSICH-Info-DM-Rprt,  
id-HSSICH-Info-DM-Rqst,  
id-HSSICH-Info-DM-Rsp,
```

*/*NEXT CHANGE ******/*

```

-- ****
-- RADIO LINK RECONFIGURATION PREPARE FDD
-- ****

RadioLinkReconfigurationPrepareFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container   {{RadioLinkReconfigurationPrepareFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkReconfigurationPrepareFDD-Extensions}} OPTIONAL,
    ...
}

/* text omitted *****

RadioLinkReconfigurationPrepareFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    { ID id-HSDSCH-FDD-Information           CRITICALITY reject EXTENSION HSDSCH-FDD-Information      PRESENCE optional}|  

    { ID id-HSDSCH-Information-to-Modify     CRITICALITY reject EXTENSION HSDSCH-Information-to-Modify PRESENCE optional}|  

    { ID id-HSDSCH-FDD-InformationMACdFlows-to-Add      CRITICALITY reject EXTENSION HSDSCH-FDD-InformationMACdFlows-Information  
PRESENCE optional}|  

    { ID id-HSDSCH-FDD-InformationMACdFlows-to-Delete    CRITICALITY reject EXTENSION HSDSCH-MACdFlows-to-Deletelist-RL  
ReconfPrepFDD PRESENCE optional}|  

        { ID id-HSPDSCH-RL-ID                  CRITICALITY reject EXTENSION RL-ID                      PRESENCE optional}|  

        { ID id-UE-Support-Of-Dedicated-Pilots-For-Channel-Estimation  CRITICALITY ignore EXTENSION UE-Support-Of-Dedicated-Pilots-For-Channel-  
Estimation      PRESENCE optional}|  

        { ID id-UE-Support-Of-Dedicated-Pilots-For-Channel-Estimation-Of-HS-DSCH  CRITICALITY ignore EXTENSION UE-Support-Of-Dedicated-Pilots-For-  
Channel-Estimation-Of-HS-DSCH  PRESENCE optional},
    ...
}

HSDSCH_DeleteList RL_ReconfPrepFDD ::= SEQUENCE {SIZE (1..maxNrofMACdFlows) } OF HSDSCH_DeleteItem RL_ReconfPrepFDD

HSDSCH_DeleteItem RL_ReconfPrepFDD ::= SEQUENCE {
    HSDSCH_MACdFlow_ID,
    IE_Extensions,
    ProtocolExtensionContainer { ( HSDSCH_DeleteItem_RL_ReconfPrepFDD_ExtIEs ) } OPTIONAL,
    ...
}

HSDSCH_DeleteItem_RL_ReconfPrepFDD_ExtIEs RNSAP_PROTOCOL_EXTENSION ::= (
    ...
)

/*NEXT CHANGE ****

```

```

-- ****
-- 
-- RADIO LINK RECONFIGURATION PREPARE TDD
-- 
-- ****

RadioLinkReconfigurationPrepareTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container   {{RadioLinkReconfigurationPrepareTDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkReconfigurationPrepareTDD-Extensions}} OPTIONAL,
    ...
}

/* text omitted *****

RadioLinkReconfigurationPrepareTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    { ID id-PrimaryCCPCH-RSCP-RL-ReconfPrepTDD   CRITICALITY ignore      EXTENSION PrimaryCCPCH-RSCP PRESENCE optional }|
    { ID id-DL-TimeSlot-ISCP-Info-RL-ReconfPrepTDD CRITICALITY ignore      EXTENSION DL-TimeSlot-ISCP-Info PRESENCE optional }|
    { ID id-DL-Timeslot-ISCP-LCR-Information-RL-ReconfPrepTDD CRITICALITY ignore EXTENSION DL-TimeSlot-ISCP-LCR-Information PRESENCE optional }|
    { ID id-HSDSCH-TDD-Information      CRITICALITY reject      EXTENSION HSDSCH-TDD-Information      PRESENCE optional }|
    { ID id-HSDSCH-Information-to-Modify     CRITICALITY reject      EXTENSION HSDSCH-Information-to-Modify     PRESENCE optional }|
    { ID id-HSDSCH-TDD-InformationMACdFlows-to-Add     CRITICALITY reject      EXTENSION HSDSCH-TDD-InformationMACdFlows-Information PRESENCE optional }|
    { ID id-HSDSCH-TDD-InformationMACdFlows-to-Delete     CRITICALITY reject      EXTENSION HSDSCH-MACdFlows-to-DeleteList-RL-  
ReconfPrepTDD      PRESENCE optional }|
    { ID id-HSPDSCH-RL-ID      CRITICALITY reject      EXTENSION RL-ID      PRESENCE optional }|
    { ID id-PDSCH-RL-ID      CRITICALITY ignore      EXTENSION RL-ID      PRESENCE optional }|
    { ID id-UL-Synchronisation-Parameters-LCR      CRITICALITY ignore      EXTENSION UL-Synchronisation-Parameters-LCR      PRESENCE optional },
    -- Mandatory for 1.28Mcps TDD, Not Applicable to 3.84Mcps TDD
    ...
}

HSDSCH_DeleteItemList-RL_ReconfPrepTDD ::= SEQUENCE {SIZE (1..maxNofMACdFlows)} OF HSDSCH_DeleteItem-RL_ReconfPrepTDD

HSDSCH_DeleteItem-RL_ReconfPrepTDD ::= SEQUENCE {
    HSDSCH_MACdFlow-ID      HSDSCH_MACdFlow-ID,
    + Extensions             ProtocolExtensionContainer {{ HSDSCH_DeleteItem-RL_ReconfPrepTDD-ExtIEs }} OPTIONAL,
    ...
}

HSDSCH_DeleteItem-RL_ReconfPrepTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

/*N E X T C H A N G E ******/

9.3.4 Information Element Definitions

```
-- ****
-- Information Element Definitions
-- ****

RNSAP-IEs {
itu-t (0) identified-organization (4) etsi (0) mobileDomain (0)
umts-Access (20) modules (3) rnsap (1) version1 (1) rnsap-IEs (2) }

DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

/* text omitted **** */

-- H

HARQ-MemoryPartitioning ::= CHOICE {
  implicit      HARQ-MemoryPartitioning-Implicit,
  explicit      HARQ-MemoryPartitioning-Explicit,
  ...
}

HARQ-MemoryPartitioning-Implicit ::= SEQUENCE {
  number-of-Processes      INTEGER (1..8,...),
  iE-Extensions            ProtocolExtensionContainer { { HARQ-MemoryPartitioning-Implicit-ExtIEs } }           OPTIONAL,
  ...
}

HARQ-MemoryPartitioning-Implicit-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

HARQ-MemoryPartitioning-Explicit ::= SEQUENCE {
  hARQ-MemoryPartitioningList      HARQ-MemoryPartitioningList,
  iE-Extensions                  ProtocolExtensionContainer { { HARQ-MemoryPartitioning-Explicit-ExtIEs } }           OPTIONAL,
  ...
}

HARQ-MemoryPartitioning-Explicit-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

HARQ-MemoryPartitioningList ::= SEQUENCE (SIZE (1..maxNrOfHARQProc)) OF HARQ-MemoryPartitioningItem

HARQ-MemoryPartitioningItem ::= SEQUENCE {
  process-Memory-Size          ENUMERATED {
```

```

hms800, hms1600, hms2400, hms3200, hms4000,
hms4800, hms5600, hms6400, hms7200, hms8000,
hms8800, hms9600, hms10400, hms11200, hms12000,
hms12800, hms13600, hms14400, hms15200, hms16000,
hms17600, hms19200, hms20800, hms22400, hms24000,
hms25600, hms27200, hms28800, hms30400, hms32000,
hms36000, hms40000, hms44000, hms48000, hms52000,
hms56000, hms60000, hms64000, hms68000, hms72000,
hms76000, hms80000, hms88000, hms96000, hms104000,
hms112000, hms120000, hms128000, hms136000, hms144000,
hms152000, hms160000, hms176000, hms192000, hms208000,
hms224000, hms240000, hms256000, hms272000, hms288000,
hms304000,...},
iE-Extensions                               ProtocolExtensionContainer { { HARQ-MemoryPartitioningItem-ExtIEs } }           OPTIONAL,
...
}

HARQ-MemoryPartitioningItem-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

HCS-Prio      ::= INTEGER (0..7)
-- 0 = lowest priority, ...7 = highest priority

HSDSCH-FDD-Information ::= SEQUENCE {
  HSDSCH-MACdFlows-Information          HSDSCH-MACdFlows-Information,
  HSDSCH-MACdFlow-Specific-Info         HSDSCH-MACdFlow-Specific-InfoList,
  priorityQueue-Info                   PriorityQueue-InfoList,
  uE-Capabilities-Info                UE-Capabilities-Info,
  cqiFeedback-CycleK                  CQI-Feedback-Cycle,
  cqiRepetitionFactor                CQI-RepetitionFactor           OPTIONAL,
  -- This IE shall be present if the CQI Feedback Cycle k is greater than 0
  cqiPowerOffset                      CQI-Power-Offset,
  ackNackRepetitionFactor             AckNack-RepetitionFactor,
  cqiPowerOffset                      CQI-Power-Offset,
  ackPowerOffset                      Ack-Power-Offset,
  nackPowerOffset                     Nack-Power-Offset,
  hssch-PowerOffset                  HSSCCH-PowerOffset           OPTIONAL,
  iE-Extensions                         ProtocolExtensionContainer { { HSDSCH-FDD-Information-ExtIEs } }           OPTIONAL,
  ...
}

HSDSCH-FDD-Information-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

HSDSCH-FDD-Information-Response ::= SEQUENCE {
  HSDSCH-MACdFlow-Specific-InfoList-Response   HSDSCH-MACdFlow-Specific-InfoList-Response           OPTIONAL,
  hSSCCH-Specific-InfoList-Response            HSSCCH-FDD-Specific-InfoList-Response           OPTIONAL,
  measurement-Power-Offset                   Measurement-Power-Offset           OPTIONAL,
  harq-MemoryPartitioning                  HARQ-MemoryPartitioning           OPTIONAL,
  iE-Extensions                            ProtocolExtensionContainer { { HSDSCH-FDD-Information-Response-ExtIEs } }           OPTIONAL,
  ...
}

```

```

HSDSCH-FDD-Information-Response-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

HSDSCH-Information-to-Modify ::= SEQUENCE {
  hSDSCH-MACdFlow-Specific-InfoList-to-Modify
  mACHs-Reordering-Buffer-Size
  priorityQueue-Info-to-Modify
  cqiFeedback-CycleK
  cqiRepetitionFactor
  ackNackRepetitionFactor
  cqiPowerOffset
  ackPowerOffset
  nackPowerOffset
  hSSCCH-PowerOffset
  hSSCCH-CodeChangeGrant
  tDDAckNackPowerOffset
  iE-Extensions
  ...
}

HSDSCH-Information-to-Modify-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

HSDSCH-MACdFlow-ID ::= INTEGER (0..maxNrOfMACdFlows-1)

HSDSCH-MACdFlow-Specific-InfoList ::= SEQUENCE (SIZE (1..maxNrOfMACdFlows)) OF HSDSCH-MACdFlow-Specific-InfoItem

HSDSCH-MACdFlow-Specific-InfoItem ::= SEQUENCE {
  hSDSCH-MACdFlow-ID
  allocationRetentionPriority
  trafficClass
  bindingID
  transportLayerAddress
  iE-Extensions
  ...
}

HSDSCH-MACdFlow-Specific-InfoItem-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

HSDSCH-MACdFlow-Specific-InfoList-Response ::= SEQUENCE (SIZE (10..maxNrOfMACdFlows)) OF HSDSCH-MACdFlow-Specific-InfoItem-Response

HSDSCH-MACdFlow-Specific-InfoItem-Response ::= SEQUENCE {
  hSDSCH-MACdFlow-ID
  bindingID
  transportLayerAddress
  hSDSCH-Initial-Capacity-Allocation
  iE-Extensions
  ...
}

HSDSCH-MACdFlow-Specific-InfoList-to-Modify      OPTIONAL,
MACHsReorderingBufferSize          OPTIONAL,
PriorityQueue-InfoList-to-Modify    OPTIONAL,
CQI-Feedback-Cycle                OPTIONAL, -- For FDD only
CQI-RepetitionFactor              OPTIONAL, -- For FDD only
AckNack-RepetitionFactor          OPTIONAL, -- For FDD only
CQI-Power-Offset                 OPTIONAL, -- For FDD only
Ack-Power-Offset                  OPTIONAL, -- For FDD only
Nack-Power-Offset                 OPTIONAL, -- For FDD only
HSSCCH-PowerOffset                OPTIONAL, -- Only for FDD
HSSCCH-Code-Change-Grant          OPTIONAL,
TDD-AckNack-Power-Offset         OPTIONAL, -- For TDD only
ProtocolExtensionContainer { { HSDSCH-Information-to-Modify-ExtIEs } }      OPTIONAL,
}

```

```

}

HSDSCH-MACdFlow-Specific-InfoItem-Response-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

HSDSCH-MACdFlow-Specific-InfoList-to-Modify ::= SEQUENCE (SIZE (1..maxNrOfMACdFlows)) OF HSDSCH-MACdFlow-Specific-InfoItem-to-Modify

HSDSCH-MACdFlow-Specific-InfoItem-to-Modify ::= SEQUENCE {
  hSDSCH-MACdFlow-ID          HSDSCH-MACdFlow-ID,
  allocationRetentionPriority AllocationRetentionPriority      OPTIONAL,
  transportBearerRequestIndicator TransportBearerRequestIndicator,
  trafficClass                  TrafficClass                 OPTIONAL,
  bindingID                     BindingID                   OPTIONAL,
  transportLayerAddress         TransportLayerAddress    OPTIONAL,
  iE-Extensions                ProtocolExtensionContainer { { HSDSCH-MACdFlow-Specific-InfoItem-to-Modify-ExtIEs } }      OPTIONAL,
  ...
}

HSDSCH-MACdFlow-Specific-InfoItem-to-Modify-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

HSDSCH-MACdFlows-Information ::= SEQUENCE {
    hSDSCH-MACdFlow-Specific-Info          HSDSCH-MACdFlow-Specific-InfoList,
    priorityQueue-Info                    PriorityQueue-InfoList,
    iE-Extensions                       ProtocolExtensionContainer { { HSDSCH-MACdFlows-to-Add-ExtIEs } }      OPTIONAL,
  ...
}

HSDSCH-MACdFlows-Information-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

HSDSCH-MACdFlows-to-Delete ::= SEQUENCE (SIZE (1..maxNrOfMACdFlows)) OF HSDSCH-MACdFlows-to-Delete-Item

HSDSCH-MACdFlows-to-Delete-Item ::= SEQUENCE {
    hSDSCH-MACdFlow-ID          HSDSCH-MACdFlow-ID,
    iE-Extensions               ProtocolExtensionContainer { { HSDSCH-MACdFlows-to-Delete-Item-ExtIEs } }      OPTIONAL,
  ...
}

HSDSCH-MACdFlows-to-Delete-Item-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

HSDSCH-Initial-Capacity-Allocation ::= SEQUENCE (SIZE (1..16)) OF HSDSCH-Initial-Capacity-AllocationItem

HSDSCH-Initial-Capacity-AllocationItem ::= SEQUENCE {
  schedulingPriorityIndicator SchedulingPriorityIndicator,
  maximum-MACdPDU-Size       MACdPDU-Size,
  hSDSCH-InitialWindowSize   HSDSCH-InitialWindowSize,
  ...
}

```

```

iE-Extensions           ProtocolExtensionContainer { {HSDSCH-Initial-Capacity-AllocationItem-ExtIEs} } OPTIONAL,
...
}

HSDSCH-Initial-Capacity-AllocationItem-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

HSDSCH-InitialWindowSize      ::= INTEGER (1..2047)
-- Number of MAC-d PDUs.
-- 2047 = Unlimited number of MAC-d PDUs

HSDSCH-RNTI ::= INTEGER (0..65535)

HSDSCH-TDD-Information ::= SEQUENCE {
      hSDSCH-MACdFlows-Information          HSDSCH-MACdFlows-Information,
      hSDSCH-MACdFlow-Specific-Info          HSDSCH-MACdFlow-Specific-InfoList,
      priorityQueue-Info                    PriorityQueue-InfoList,
  uE-Capabilities-Info        UE-Capabilities-Info,
  tDD-AckNack-Power-Offset   TDD-AckNack-Power-Offset,
  iE-Extensions               ProtocolExtensionContainer { {HSDSCH-TDD-Information-ExtIEs} } OPTIONAL,
  ...
}

HSDSCH-TDD-Information-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

HSDSCH-TDD-Information-Response ::= SEQUENCE {
  hSDSCH-MACdFlow-Specific-InfoList-Response   HSDSCH-MACdFlow-Specific-InfoList-Response OPTIONAL,
  hSSCCH-TDD-Specific-InfoList-Response         HSSCCH-TDD-Specific-InfoList-Response OPTIONAL,
  -- Mandatory for 3.84Meps TDD, Not Applicable to 1.28Mcps TDD
  hSSCCH-TDD-Specific-InfoList-Response-LCR     HSSCCH-TDD-Specific-InfoList-Response-LCR OPTIONAL,
  -- Mandatory for 1.28Meps TDD, Not Applicable to 3.84Mcps TDD
  hSPDSCH-TDD-Specific-InfoList-Response        HSPDSCH-TDD-Specific-InfoList-Response OPTIONAL,
  hSPDSCH-TDD-Specific-InfoList-Response-LCR     HSPDSCH-TDD-Specific-InfoList-Response-LCR OPTIONAL,
  hARQ-MemoryPartitioning                       HARQ-MemoryPartitioning OPTIONAL,
  iE-Extensions                                ProtocolExtensionContainer { {HSDSCH-TDD-Information-Response-ExtIEs} } OPTIONAL,
  ...
}

HSDSCH-TDD-Information-Response-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

HSPDSCH-TDD-Specific-InfoList-Response ::= SEQUENCE (SIZE (#0..maxNrOfDLTs)) OF HSPDSCH-TDD-Specific-InfoItem-Response

HSPDSCH-TDD-Specific-InfoItem-Response ::= SEQUENCE {
  timeslot                      TimeSlot,
  midambleShiftAndBurstType     MidambleShiftAndBurstType,
  iE-Extensions                  ProtocolExtensionContainer { {HSPDSCH-TDD-Specific-InfoItem-Response-ExtIEs} } OPTIONAL,
  ...
}

```

```

HSPDSCH-TDD-Specific-InfoItem-Response-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

HSPDSCH-TDD-Specific-InfoList-Response-LCR ::= SEQUENCE (SIZE (1.. maxNrOfDLTsLCR)) OF HSPDSCH-TDD-Specific-InfoItem-Response-LCR

HSPDSCH-TDD-Specific-InfoItem-Response-LCR ::= SEQUENCE {
    timeslotLCR                                TimeSlotLCR,
    midambleShiftLCR                            MidambleShiftLCR,
    iE-Extensions                               ProtocolExtensionContainer { { HSPDSCH-TDD-Specific-InfoItem-Response-LCR-ExtIEs } }
                                                OPTIONAL,
    ...
}

HSPDSCH-TDD-Specific-InfoItem-Response-LCR-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

| HSSCCH-FDD-Specific-InfoList-Response ::= SEQUENCE (SIZE (40..maxNrOfHSSCCHCodes)) OF HSSCCH-FDD-Specific-InfoItem-Response

HSSCCH-FDD-Specific-InfoItem-Response ::= SEQUENCE {
    code-Number                                 INTEGER (0..127),
    iE-Extensions                               ProtocolExtensionContainer { { HSSCCH-FDD-Specific-InfoItem-Response-ExtIEs } }
                                                OPTIONAL,
    ...
}

HSSCCH-FDD-Specific-InfoItem-Response-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

HSSCCH-PowerOffset ::= INTEGER (0..255)
-- PowerOffset = -32 + offset * 0.25
-- Unit dB, Range -32dB .. +31.75dB, Step +0.25dB

| HSSCCH-TDD-Specific-InfoList-Response ::= SEQUENCE (SIZE (40..maxNrOfHSSCCHCodes)) OF HSSCCH-TDD-Specific-InfoItem-Response

HSSCCH-TDD-Specific-InfoItem-Response ::= SEQUENCE {
    timeslot                                TimeSlot,
    midambleShiftAndBurstType                MidambleShiftAndBurstType,
    tDD-ChannelisationCode                  TDD-ChannelisationCode,
    hSSICH-Info                             HSSICH-Info,
    iE-Extensions                           ProtocolExtensionContainer { { HSSCCH-TDD-Specific-InfoItem-Response-ExtIEs } }
                                                OPTIONAL,
    ...
}

HSSCCH-TDD-Specific-InfoItem-Response-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

| HSSCCH-TDD-Specific-InfoList-Response-LCR ::= SEQUENCE (SIZE (40..maxNrOfHSSCCHCodes)) OF HSSCCH-TDD-Specific-InfoItem-Response-LCR

HSSCCH-TDD-Specific-InfoItem-Response-LCR ::= SEQUENCE {
    timeslotLCR                                TimeSlotLCR,

```

```

midambleShiftLCR
first-TDD-ChannelisationCode
second-TDD-ChannelisationCode
HSSICH-InfoLCR
iE-Extensions
...
}

HSSCCH-TDD-Specific-InfoItem-Response-LCR-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

HSSICH-Info ::= SEQUENCE {
  hssICH-ID
  timeslot
  midambleShiftAndBurstType
  tDD-ChannelisationCode
  iE-Extensions
  ...
}

HSSICH-Info-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

HSSICH-InfoLCR ::= SEQUENCE {
  hssICH-ID
  timeslotLCR
  midambleShiftLCR
  tDD-ChannelisationCode
  iE-Extensions
  ...
}

HSSICH-Info-LCR-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

HS-SICH-Reception-Quality-Value ::= SEQUENCE {
  failed-HS-SICH
  missed-HS-SICH
  total-HS-SICH
  iE-Extensions
  ...
}

HS-SICH-Reception-Quality-Value-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

HS-SICH-failed ::= INTEGER (0..20)
HS-SICH-missed ::= INTEGER (0..20)

```

```

HS-SICH-total ::= INTEGER (0..20)

HS-SICH-Reception-Quality-Measurement-Value ::= INTEGER (0..20)
-- According to mapping in [23]

HS-SICH-ID ::= INTEGER (0..31)

HSSCCH-CodeChangeIndicator ::= ENUMERATED {
    hsSCCHCodeChangeNeeded
}

HSSCCH-Code-Change-Grant ::= ENUMERATED {
    changeGranted
}

HSDSCH-FDD-Update-Information ::= SEQUENCE {
    hsSCCHCodeChangeIndicator
    cqiFeedback-CycleK
    cqiRepetitionFactor
    ackNackRepetitionFactor
    cqiPowerOffset
    ackPowerOffset
    nackPowerOffset
    iE-Extensions
    ...
}
    HSSCCH-CodeChangeIndicator          OPTIONAL,
    CQI-Feedback-Cycle                OPTIONAL,
    CQI-RepetitionFactor             OPTIONAL,
    AckNack-RepetitionFactor        OPTIONAL,
    CQI-Power-Offset                 OPTIONAL,
    Ack-Power-Offset                 OPTIONAL,
    Nack-Power-Offset               OPTIONAL,
    ProtocolExtensionContainer { { HSDSCH-FDD-Update-Information-ExtIEs } }   OPTIONAL,
}

HSDSCH-FDD-Update-Information-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

HSDSCH-TDD-Update-Information ::= SEQUENCE {
    hsSCCHCodeChangeIndicator
    tDDAckNackPowerOffset
    iE-Extensions
    ...
}
    HSSCCH-CodeChangeIndicator          OPTIONAL,
    TDD-AckNack-Power-Offset          OPTIONAL,
    ProtocolExtensionContainer { { HSDSCH-TDD-Update-Information-ExtIEs } }   OPTIONAL,
}

HSDSCH-TDD-Update-Information-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

/*NEXT CHANGE *****/

```

```

-- M

MaxNrOfUL-DPCHS      ::= INTEGER (1..6)

MAC-c-sh-SDU-Length   ::= INTEGER (1..5000)

MAC-c-sh-SDU-LengthList ::= SEQUENCE(SIZE(1..maxNrOfMACcshSDU-Length)) OF MAC-c-sh-SDU-Length

MACdPDU-Size ::= INTEGER (1..5000,...)

MACdPDU-Size-IndexList ::= SEQUENCE (SIZE (1..maxNrOfPDUIndexes)) OF MACdPDU-Size-IndexItem

MACdPDU-Size-IndexItem ::= SEQUENCE {
    SID,
    mACdPDU-Size,
    iE-Extensions          ProtocolExtensionContainer { { MACdPDU-Size-IndexItem-ExtIEs } }           OPTIONAL,
    ...
}

MACdPDU-Size-IndexItem-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

MACdPDU-Size-IndexList-to-Modify ::= SEQUENCE (SIZE (1..maxNrOfPDUIndexes)) OF MACdPDU-Size-IndexItem-to-Modify

MACdPDU-Size-IndexItem-to-Modify ::= SEQUENCE {
    SID,
    mACdPDU-Size           OPTIONAL,
    iE-Extensions          ProtocolExtensionContainer { { MACdPDU-Size-IndexItem-to-Modify-ExtIEs } }           OPTIONAL,
    ...
}

MACdPDU-Size-IndexItem-to-Modify-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

MAChsGuaranteedBitRate ::= INTEGER (0..16777215,...)

MAChsReorderingBufferSize ::= INTEGER (1..300,...)
-- Unit kBytes

MAC-hsWindowSize       ::= ENUMERATED {v4, v6, v8, v12, v16, v24, v32,...}

/*NEXT CHANGE *****/

```

9.3.6 Constant Definitions

```

-- ****
-- Constant definitions
--
-- ****

RNSAP-Constants {
    itu-t (0) identified-organization (4) etsi (0) mobileDomain (0)
    umts-Access (20) modules (3) rnsap (1) version1 (1) rnsap-Constants (4) }

DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

IMPORTS
    ProcedureCode,
    ProtocolIE-ID
FROM RNSAP-CommonDataTypes;

/* text omitted *****/

```



```

-- ****
-- IEs
--
-- ****

id-AllowedQueueingTime                                ProtocolIE-ID ::= 4
id-Allowed-Rate-Information                         ProtocolIE-ID ::= 42
id-AntennaColocationIndicator                      ProtocolIE-ID ::= 309
/* text omitted *****/

```



```

id-HSDSCH-FDD-Information                           ProtocolIE-ID ::= 452
id-HSDSCH-FDD-Information-Response                 ProtocolIE-ID ::= 453
id-HSDSCH FDD Information to Add                ProtocolIE-ID ::= 454
id-HSDSCH FDD Information to Delete             ProtocolIE-ID ::= 455
id-HSDSCH-FDD-Update-Information                  ProtocolIE-ID ::= 466
id-HSDSCH-Information-to-Modify                   ProtocolIE-ID ::= 456
id-HSDSCHMacdFlowSpecificInformationList-RL-PreemptRequiredInd ProtocolIE-ID ::= 516
id-HSDSCHMacdFlowSpecificInformationItem-RL-PreemptRequiredInd ProtocolIE-ID ::= 517
id-HSDSCH-RNTI                                    ProtocolIE-ID ::= 457
id-HSDSCH-TDD-Information                        ProtocolIE-ID ::= 458
id-HSDSCH-TDD-Information-Response               ProtocolIE-ID ::= 459
id-HSDSCH-TDD-Information-Response-LCR          ProtocolIE-ID ::= 460
id-HSDSCH TDD Information to Add                ProtocolIE-ID ::= 461
id-HSDSCH TDD Information to Delete             ProtocolIE-ID ::= 462
id-HSDSCH-TDD-Update-Information                 ProtocolIE-ID ::= 467
id-HSPDSCH-RL-ID                                 ProtocolIE-ID ::= 463

```

| id-HSDSCH-MACdFlows-to-Add
| id-HSDSCH-MACdFlows-to-Delete

ProtocolIE-ID ::= 531
ProtocolIE-ID ::= 532

CHANGE REQUEST

25.433 CR 937 # rev 1 # Current version: 5.6.0

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the # symbols.

Proposed change affects: UICC apps # ME # Radio Access Network Core Network #

Title:	# Correction to Addition of HS-DSCH MAC-d Flows	
Source:	# RAN3	
Work item code:	# HSDPA-lublur	Date: # 20/11/2003
Category:	# F	Release: # REL-5
Use <u>one</u> of the following categories:		
<u>F</u> (correction) <u>A</u> (corresponds to a correction in an earlier release) <u>B</u> (addition of feature), <u>C</u> (functional modification of feature) <u>D</u> (editorial modification)		
Detailed explanations of the above categories can be found in 3GPP TR 21.900 .		
Use <u>one</u> of the following releases:		
2 (GSM Phase 2) R96 (Release 1996) R97 (Release 1997) R98 (Release 1998) R99 (Release 1999) Rel-4 (Release 4) Rel-5 (Release 5) Rel-6 (Release 6)		

Reason for change:	# All parameters in <i>HS-DSCH Information To Add IE</i> which are not specific to a MAC-d flow (e.g. UE Caps, CQI report parameters, etc.) are marked as Mandatory in the current version of NBAP. However, it should be possible to add a MAC-d flow without changing the non-MAC-d flow parameters.
	Similarly, the HS-SCCH Specific Information Response and HARQ Memory Partitioning are marked as Mandatory in the <i>HS-DSCH Information Response IE</i> today, although it should be possible to not include them.
	In addition, the present CR clarifies that the CRNC should send HS-DSCH specific information only to the Node B Communication Context carrying the Serving HS-DSCH Radio Link.

Summary of change:	Rev 1: <ul style="list-style-type: none"> New information element for <i>HS-DSCH MAC-d Flows To Delete IE</i>, which is common to both FDD and TDD Protocol IDs allocated by NBAP rapporteur for id-HSDSCH-MACdFlows-to-Add and id-HSDSCH-MACdFlows-to-Delete
	Rev 0: <ul style="list-style-type: none"> <i>HS-DSCH Information IE</i> added to RL RCFG PREPARATION; this element is used only when adding the very first HS-DSCH MAC-d flow to a Node B Communication Context <i>HS-DSCH MAC-d Flow To Add IE</i>: a new info element used only for addition of subsequent MAC-d flows to the already established HS-DSCH <i>HS-DSCH Information To Delete IE</i> renamed to <i>HS-DSCH MAC-d Flows</i>

To Delete IE

- HS-SCCH Specific Information Response IE and HARQ Memory Partitioning IE made Optional in HS-DSCH Information Response IE
- Procedural text changed clarifying that HS-DSCH specific information shall be sent only to the Node B Communication Context carrying the Serving HS-DSCH Radio Link
- Three abnormal conditions added in Synchronised RL Rcfg procedure
- HS-DSCH Information IE tabular has been compacted by including HS-DSCH MAC-d Flows Information IE into it
- MAC-d PDU Size IE in Modify Priority Queue in HS-DSCH Information To Modify IE tagged as Mandatory and procedural text clarifying the use of MAC-d PDU Size list
- ASN.1 modified accordingly

Impact Analysis:

Impact assessment towards the previous version of the specification (same release):

This CR has isolated impact with the previous version of the specification (same release) because it might affect implementations supporting HSDPA.

This CR has an impact under functional point of view.

The impact can be considered isolated because the change affects one system function namely HSDPA.

Consequences if not approved: ☈ A major error will remain.

Clauses affected: ☈ 8.2.17.2; 8.3.2.2; 8.3.2.4; 9.1.42.1; 9.1.42.2; 9.1.31H; 9.2.1X (new); 9.2.1.XX (new); 9.2.2.18D; 9.2.2.18E; 9.2.3.5F; 9.2.3.5G; 9.3.3; 9.3.4; 9.3.6

Other specs affected:	Y	N
	X	Other core specifications
	X	Test specifications

	X	O&M Specifications
--	---	--------------------

Other comments: ☈

How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ☈ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/>. For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

8.2.17.2 Successful Operation

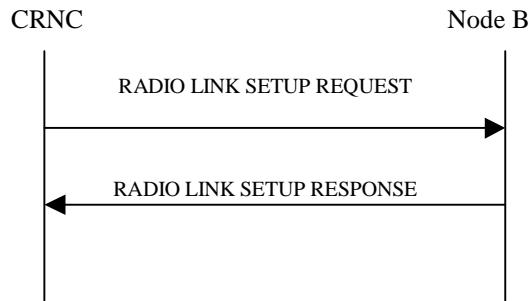


Figure 24: Radio Link Setup procedure, Successful Operation

/* text omitted *****/

HS-DSCH:

If the *HS-DSCH Information IE* is present in the *RADIO LINK SETUP REQUEST* message, then:

- The Node B shall setup the requested HS-PDSCH resources on the Serving HS-DSCH Radio Link indicated by the *HS-PDSCH RL ID IE*.
- The Node B shall include the HARQ Memory Partitioning IE in the [FDD – *HS-DSCH FDD Information Response IE*] [TDD – *HS-DSCH TDD Information Response IE*] in the *RADIO LINK SETUP RESPONSE* message.
- The Node B shall include in the *RADIO LINK SETUP RESPONSE* message the *Binding ID IE* and *Transport Layer Address IE* for establishment of transport bearer for every HS-DSCH MAC-d flow being established.
- If the *RADIO LINK SETUP REQUEST* message includes the *Transport Layer Address IE* and *Binding ID IE* in the *HS-DSCH Information IE* for an HS-DSCH MAC-d flow, then the Node B may use the transport layer address and the binding identifier received from the CRNC when establishing a transport bearer for the concerned HS-DSCH MAC-d flow.
- If the *RADIO LINK SETUP REQUEST* message includes the *MAC-hs Guaranteed Bit Rate IE* for a Priority Queue in the *HS-DSCH MAC-d Flows Information IE* in the *HS-DSCH Information IE*, then the Node B shall use this information to optimise MAC-hs scheduling decisions for the related HSDPA Priority Queue.
- If the *RADIO LINK SETUP REQUEST* message includes the *Discard Timer IE* for a Priority Queue in the *HS-DSCH MAC-d Flows Information IE* in the *HS-DSCH Information IE*, then the Node B shall use this information to discard out-of-date MAC-hs SDUs from the related HSDPA Priority Queue.
- The Node B shall include the *HS-DSCH Initial Capacity Allocation IE* in the [FDD – *HS-DSCH FDD Information Response IE*] [TDD – *HS-DSCH TDD Information Response IE*] in the *RADIO LINK SETUP RESPONSE* message for every HS-DSCH MAC-d flow being established, if the Node B allows the CRNC to start transmission of MAC-d PDUs before the Node B has allocated capacity on user plane as described in [24].
- [FDD – If the *RADIO LINK SETUP REQUEST* message includes the *HS-SCCH Power Offset IE* in the *HS-DSCH Information IE*, then the Node B may use this value to determine the HS-SCCH power. The HS-SCCH Power Offset should be applied for any HS-SCCH transmission to this UE.]
- [FDD – If the *RADIO LINK SETUP REQUEST* message includes the *Measurement Power Offset IE* in the *HS-DSCH Information IE*, then the Node B shall use the measurement power offset as described in ref [10], subclause 6A.2.]
- [FDD – The Node B shall allocate HS-SCCH codes corresponding to the HS-DSCH and include the *HS-SCCH Specific Information Response IE* in the *HS-DSCH FDD Information Response IE* in the *RADIO LINK SETUP RESPONSE* message.]

- [TDD – The Node B shall allocate HS-SCCH parameters corresponding to the HS-DSCH and include the [3.84Mcps TDD - HS-SCCH Specific Information Response IE] [1.28Mcps TDD - HS-SCCH Specific Information Response LCR IE] in the HS-DSCH TDD Information Response IE in the RADIO LINK SETUP RESPONSE message.]

HS-DSCH(s):

[FDD – If the *HS-SCCH Power Offset* IE is included in the *HS-DSCH Information* IE, the Node B may use this value to determine the *HS-SCCH* power. The *HS-SCCH Power Offset* should be applied for any *HS-SCCH* transmission to this UE.]

If the *RADIO LINK SETUP REQUEST* message includes a *HS-DSCH Information* IE and if the *HS-PDSCH RL ID* IE indicates a radio link in the Node B, then the Node B shall use this information to configure the indicated *HS-DSCH* channel on this radio link. If the *HS-PDSCH RL ID* IE does not indicate a radio link in the Node B, the Node B shall store the configuration of the *HS-DSCH* according to the received *HS-DSCH Information* IE. The Node B shall store the latest *HS-DSCH* configuration until the Node B Communication Context is deleted.

If the *HS-PDSCH RL ID* IE indicates a radio link in the Node B Communication Context, then the Node B shall include in the *RADIO LINK SETUP RESPONSE* message the *Binding ID* IE and *Transport Layer Address* IE for the transport bearers to be established for the *HS-DSCH* MAC d flows of this RL.

If the *RADIO LINK SETUP REQUEST* message includes the *Transport Layer Address* IE and *Binding ID* IE in the *HS-DSCH Information* IE for an *HS-DSCH* MAC d flow, the Node B may use the transport layer address and the binding identifier received from the CRNC when establishing a transport bearer for the concerned *HS-DSCH* MAC d flow.

If the *HS-DSCH RNTI* IE is present and the *HS-PDSCH RL ID* IE refers to a radio link in the Node B Communication Context, then the Node B shall use the *HS-DSCH RNTI* value for *HS-DSCH* processing for the respective Node B Communication Context.

The Node B shall include the *HS-DSCH Initial Capacity Allocation* IE in the *RADIO LINK SETUP RESPONSE* message for each MAC d flow, if the Node B allows the CRNC to start transmission of the MAC d PDUs before the Node B has allocated capacity on user plane as described in [24].

[FDD – If the *RADIO LINK SETUP REQUEST* message includes *Measurement Power Offset* IE in the *HS-DSCH Information* IE, then the Node B shall use the measurement power offset as described in ref [10], subclause 6A.2.]

If the *RADIO LINK SETUP REQUEST* message includes the *MAC hs Guaranteed Bit Rate* IE in the *HS-DSCH Information* IE, the Node B shall use this information to optimise *MAC hs* scheduling decisions.

If the *RADIO LINK SETUP REQUEST* message includes the *Discard Timer* IE in the *HS-DSCH Information* IE, then the Node B shall use this information to discard the out-of-dated *MAC hs* SDUs.

/* text omitted ***** */

8.3.2.2 Successful Operation

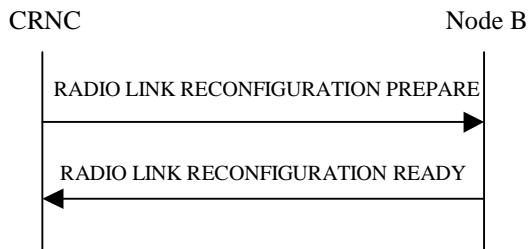


Figure 30: Synchronised Radio Link Reconfiguration Preparation procedure, Successful Operation

/* text omitted ***** */

HS-DSCH Setup:

If the *HS-DSCH Information IE* is present in the *RADIO LINK RECONFIGURATION PREPARE* message, then:

- The Node B shall setup the requested HS-PDSCH resources on the Serving HS-DSCH Radio Link indicated by the *HS-PDSCH RL ID IE*.
- The Node B shall include the *HARQ Memory Partitioning IE* in the [*FDD – HS-DSCH FDD Information Response IE*] [*TDD – HS-DSCH TDD Information Response IE*] in the *RADIO LINK RECONFIGURATION READY* message.
- If the *RADIO LINK RECONFIGURATION PREPARE* message includes the *MAC-hs Guaranteed Bit Rate IE* for a Priority Queue in the *HS-DSCH MAC-d Flows Information IE* in the *HS-DSCH Information IE*, then the Node B shall use this information to optimise MAC-hs scheduling decisions for the related HSDPA Priority Queue.
- If the *RADIO LINK RECONFIGURATION PREPARE* message includes the *Discard Timer IE* for a Priority Queue in the *HS-DSCH MAC-d Flows Information IE* in the *HS-DSCH Information IE*, then the Node B shall use this information to discard out-of-date MAC-hs SDUs from the related HSDPA Priority Queue.
- The Node B shall include the *HS-DSCH Initial Capacity Allocation IE* in the [*FDD – HS-DSCH FDD Information Response IE*] [*TDD – HS-DSCH TDD Information Response IE*] in the *RADIO LINK RECONFIGURATION READY* message for every HS-DSCH MAC-d flow being established, if the Node B allows the CRNC to start transmission of MAC-d PDUs before the Node B has allocated capacity on user plane as described in [24].
- [FDD – If the *RADIO LINK RECONFIGURATION PREPARE* message includes the *HS-SCCH Power Offset IE* is included in the *HS-DSCH Information IE*, then the Node B may use this value to determine the HS-SCCH power. The HS-SCCH Power Offset should be applied for any HS-SCCH transmission to this UE.]
- [FDD – If the *RADIO LINK RECONFIGURATION PREPARE* message includes the *Measurement Power Offset IE* in the *HS-DSCH Information IE*, then the Node B shall use the measurement power offset as described in ref [10], subclause 6A.2.]
- [FDD – The Node B shall allocate HS-SCCH codes corresponding to the HS-DSCH and include the *HS-SCCH Specific Information Response IE* in the *HS-DSCH FDD Information Response IE* in the *RADIO LINK RECONFIGURATION READY* message.]
- [TDD – The Node B shall allocate HS-SCCH parameters corresponding to the HS-DSCH and include the [*3.84Mcps TDD – HS-SCCH Specific Information Response IE*] [*1.28Mcps TDD – HS-SCCH Specific Information Response LCR IE*] in the *HS-DSCH TDD Information Response IE* in the *RADIO LINK RECONFIGURATION READY* message.]

Intra-Node B Serving HS-DSCH Radio Link Change:

If the *RADIO LINK RECONFIGURATION PREPARE* message includes the *HS-PDSCH RL ID IE*, this indicates the new Serving HS-DSCH Radio Link:

- The Node B shall release the HS-PDSCH resources on the old Serving HS-DSCH Radio Link and setup the HS-PDSCH resources on the new Serving HS-DSCH Radio Link.
- The Node B may include the *HARQ Memory Partitioning IE* in the [FDD – *HS-DSCH FDD Information Response IE*] [TDD – *HS-DSCH TDD Information Response IE*] in the RADIO LINK RECONFIGURATION READY message.
- [FDD – The Node B shall allocate HS-SCCH codes corresponding to the HS-DSCH and include the *HS-SCCH Specific Information Response IE* in the *HS-DSCH FDD Information Response IE* in the RADIO LINK RECONFIGURATION READY message.]
- [TDD – The Node B shall allocate HS-SCCH parameters corresponding to the HS-DSCH and include the [3.84Mcps TDD – *HS-SCCH Specific Information Response IE*] [1.28Mcps TDD – *HS-SCCH Specific Information Response LCR IE*] in the *HS-DSCH TDD Information Response IE* in the RADIO LINK RECONFIGURATION READY message.]

HS-DSCH Modification:

If the RADIO LINK RECONFIGURATION PREPARE message includes the *HS-DSCH Information To Modify IE*, then:

- The Node B shall include the *HS-DSCH Initial Capacity Allocation IE* for every HS-DSCH MAC-d flow being modified for which a new transport bearer was requested with the *Transport Bearer Request Indicator IE*, if the Node B allows the CRNC to start transmission of MAC-d PDUs before the Node B has allocated capacity on user plane as described in [24].
- If the RADIO LINK RECONFIGURATION PREPARE message includes the *MAC-hs Guaranteed Bit Rate IE* in the *HS-DSCH Information To Modify IE*, the Node B shall use this information to optimise MAC-hs scheduling decisions for the related HSDPA Priority Queue.
- If the RADIO LINK RECONFIGURATION PREPARE message includes the *Discard Timer IE* in the *HS-DSCH Information IE*, then the Node B shall use this information to discard out-of-date MAC-hs SDUs from the related HSDPA Priority Queue.
- If the RADIO LINK RECONFIGURATION PREPARE message includes the *MAC-hs Window Size IE* or *T1 IE* in the *HS-DSCH Information To Modify IE*, then the Node B shall use the indicated values in the new configuration for the related HSDPA Priority Queue.
- If the RADIO LINK RECONFIGURATION PREPARE message includes the *MAC-d PDU Size Index IE* in the *Modify Priority Queue choice*, the Node B shall delete the previous list of *MAC-d PDU Size Index values* for the related HSDPA Priority Queue and use the *MAC-d PDU Size Index values* indicated in the *MAC-d PDU Size Index IE* in the new configuration.
- [FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes the *CQI Feedback Cycle k IE*, the *CQI Repetition Factor IE*, the *ACK-NACK Repetition Factor IE*, the *ACK Power Offset IE*, the *NACK Power Offset IE* or the *CQI Power Offset IE* in the *HS-DSCH Information To Modify IE*, then the Node B shall use the indicated CQI Feedback Cycle k value, the CQI Repetition Factor or the ACK-NACK Repetition Factor, ACK Power Offset, the NACK Power Offset or the CQI Power Offset in the new configuration.]
- [FDD - If the *HS-SCCH Power Offset IE* is included in the *HS-DSCH Information To Modify IE*, the Node B may use this value to determine the HS-SCCH power. The HS-SCCH Power Offset should be applied for any HS-SCCH transmission to this UE.]
- [FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes *Measurement Power Offset IE* in the *HS-DSCH Information IE* or the *HS-DSCH Information To Modify IE*, then the Node B shall use the measurement power offset as described in [10] subclause 6A.2.]
- [TDD – If the RADIO LINK RECONFIGURATION PREPARE message includes the *TDD ACK NACK Power Offset IE* in the *HS-DSCH Information To Modify IE*, the Node B shall use the indicated power offset in the new configuration.]
- [FDD - If the *HS-DSCH Information To Modify IE* includes the *HS-SCCH Code Change Grant IE*, then the Node B may modify the HS-SCCH codes corresponding to the HS-DSCH. The Node B shall then report the codes which are used in the new configuration specified in the *HS-SCCH Specific Information Response IE* in the RADIO LINK RECONFIGURATION READY message.]

- [TDD - If the *HS-DSCH Information To Modify* IE includes the *HS-SCCH Code Change Grant* IE, then the Node B may modify the HS-SCCH parameters corresponding to the HS-DSCH. The Node B shall then report the values for the parameters which are used in the new configuration specified in the [3.84Mcps TDD - *HS-SCCH Specific Information Response*] [1.28Mcps TDD - *HS-SCCH Specific Information Response LCR*] IEs in the RADIO LINK RECONFIGURATION READY message.]

HS-DSCH MAC-d Flow Addition/Deletion:

If the RADIO LINK RECONFIGURATION PREPARE message includes any *HS-DSCH MAC-d Flows To Add* or *HS-DSCH MAC-d Flows To Delete* IEs, then the Node B shall use this information to add/delete the indicated HS-DSCH MAC-d flows.

If the RADIO LINK RECONFIGURATION PREPARE message includes an *HS-DSCH MAC-d Flows To Delete* IE requesting the deletion of all remaining HS-DSCH MAC-d flows for the Node B Communication Context, then the Node B shall delete the HS-DSCH configuration from the Node B Communication Context and release the HS-PDSCH resources.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *HS-DSCH MAC-d Flows To Add* IE, then:

- The Node B shall include the *HS-DSCH Initial Capacity Allocation* IE in the RADIO LINK RECONFIGURATION READY message for every HS-DSCH MAC-d flow being added, if the Node B allows the CRNC to start transmission of MAC-d PDUs before the Node B has allocated capacity on user plane as described in [24].
- If the RADIO LINK RECONFIGURATION PREPARE message includes the *MAC-hs Guaranteed Bit Rate* IE in the *HS-DSCH MAC-d Flows To Add* IE, the Node B shall use this information to optimise MAC-hs scheduling decisions for the related HSDPA Priority Queue.
- If the RADIO LINK RECONFIGURATION PREPARE message includes the *Discard Timer* IE in the *HS-DSCH Information* IE, then the Node B shall use this information to discard out-of-date MAC-hs SDUs from the related HSDPA Priority Queue.
- The Node B may include the *HARQ Memory Partitioning* IE in the RADIO LINK RECONFIGURATION READY message.

HS-DSCH Addition/Modification/Deletion:

If the RADIO LINK RECONFIGURATION PREPARE message includes any *HS-DSCH Information To Add* IE or *HS-DSCH Information To Modify* IE or *HS-DSCH Information To Delete* IE and if the *HS-PDSCH RL ID* IE indicates a radio link in the Node B, then the Node B shall use this information to add/modify/delete the indicated HS-DSCH channel to/from this radio link. If the *HS-PDSCH RL ID* IE does not indicate a radio link in the Node B, the Node B shall update the configuration of the HS-DSCH according to the received *HS-DSCH Information To Modify*, *HS-DSCH Information To Add* or *HS-DSCH Information To Delete* IEs. Node B shall store the latest HS-DSCH configuration until the Node B Communication Context is deleted.

[FDD - If the *HS-DSCH To Modify* IE includes the *HS-SCCH Code Change Grant* IE, then the Node B may modify the HS-SCCH codes corresponding to the HS-DSCH. The Node B shall then report the codes which are used in the new configuration specified in *HS-SCCH Specific Information Response* IE in the RADIO LINK RECONFIGURATION READY message.]

[TDD - If the *HS-DSCH To Modify* IE includes the *HS-SCCH Code Change Grant* IE, then the Node B may modify the HS-SCCH parameters codes corresponding to the HS-DSCH. The Node B shall then report the values for the parameters which are used in the new configuration specified in the [3.84Mcps TDD - *HS-SCCH Specific Information Response*] [1.28Mcps TDD - *HS-SCCH Specific Information Response LCR*] IEs in the RADIO LINK RECONFIGURATION READY message.]

[FDD - If the *HS-SCCH Power Offset* IE is included in the *HS-DSCH Information To Add* IE or *HS-DSCH Information To Modify* IE, the Node B may use this value to determine the HS-SCCH power. The HS-SCCH Power Offset should be applied for any HS-SCCH transmission to this UE.]

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes the *CQI Feedback Cycle k* IE, the *CQI Repetition Factor* IE, the *ACK NACK Repetition Factor* IE, the *ACK Power Offset* IE, the *NACK Power Offset* IE or the *CQI Power Offset* IE in the *HS-DSCH Information To Modify* IE, then the DRNS shall use the indicated CQI

~~Feedback Cycle k value, the CQI Repetition Factor or the ACK-NACK Repetition Factor, ACK Power Offset, the NACK Power Offset or the CQI Power Offset in the new configuration.]~~

~~[TDD—If the RADIO LINK RECONFIGURATION PREPARE message includes the *TDD ACK NACK Power Offset* IE in the *HS DSCH To Modify* IE, the DRNS shall use the indicated power offset in the new configuration.]~~

~~If the RADIO LINK RECONFIGURATION PREPARE message includes a *HS PDSCH RL ID IE* and if the *HS PDSCH RL ID IE* refers to a radio link in the Node B Communication Context, then the Node B shall configure the *HS PDSCH* in the radio link indicated by this IE. Any existing *HS PDSCH* resources from radio links associated with the Node B Communication Context and not referenced by *HS PDSCH RL ID IE* shall be removed.~~

~~If the RADIO LINK RECONFIGURATION PREPARE message includes an *HS DSCH RNTI IE*, then the Node B shall use the *HS DSCH RNTI* for the Node B Communication Context.~~

~~If the new configuration does not include a *HS DSCH*, the *HS DSCH RNTI*, if existing in the Node B Communication Context, shall be deleted from the Node B Communication Context.~~

~~If the RADIO LINK RECONFIGURATION PREPARE message includes an *HS DSCH Information To Delete IE* requesting the deletion of certain *HS DSCH* resources for the Node B Communication Context, the Node B shall remove the indicated *HS DSCH* in the new configuration.~~

~~The Node B shall include the *HS DSCH Initial Capacity Allocation IE* in the RADIO LINK RECONFIGURATION READY message for each MAC-d flow, if the Node B allows the CRNC to start transmission of MAC-d PDUs before the Node B has allocated capacity on user plane as described in [24].~~

~~If the RADIO LINK RECONFIGURATION PREPARE message includes the *MAC hs Window Size IE* in the *HS DSCH Information To Modify IE*, then the Node B shall use the indicated *MAC hs window size* value in the new configuration.~~

~~[FDD—If the RADIO LINK RECONFIGURATION PREPARE message includes *Measurement Power Offset IE* in the *HS DSCH Information To Add IE* or the *HS DSCH Information To Modify IE*, then the Node B shall use the measurement power offset as described in [10] subclause 6A.2.]~~

~~If the RADIO LINK RECONFIGURATION PREPARE message includes the *MAC hs Guaranteed Bit Rate IE* in the *HS DSCH Information To Add IE* or *HS DSCH Information To Modify IE*, the Node B shall use this information to optimise *MAC hs* scheduling decisions.~~

~~If the RADIO LINK RECONFIGURATION PREPARE message includes the *T1 IE* in the *HS DSCH Information To Modify IE*, then the Node B shall use the indicated *T1* value in the new configuration.~~

~~If the RADIO LINK RECONFIGURATION PREPARE message includes the *Discard Timer IE* in the *HS DSCH Information To Modify IE* or the *HS DSCH Information To Add IE*, then the Node B shall use the indicated Discard Timer value in the new configuration.~~

General

If the RADIO LINK RECONFIGURATION PREPARE message includes the *Transport Layer Address IE* and *Binding ID IE*s in the *DSCHs To Modify*, *DSCHs To Add*, [TDD - *USCHs To Modify*, *USCHs To Add*], *HS-DSCH Information*, *HS-DSCH Information To Modify*, *HS-DSCH Information To Add* or in the *RL Specific DCH Information IE*s, the Node B may use the transport layer address and the binding identifier received from the CRNC when establishing a transport bearer for any Transport Channel or HS-DSCH MAC-d flow being added, or any Transport Channel or HS-DSCH MAC-d flow being modified for which a new transport bearer was requested with the *Transport Bearer Request Indicator IE*.

If the requested modifications are allowed by the Node B and the Node B has successfully reserved the required resources for the new configuration of the Radio Link(s), it shall respond to the CRNC with the RADIO LINK RECONFIGURATION READY message. When this procedure has been completed successfully there exists a Prepared Reconfiguration, as defined in subclause 3.1.

The Node B shall include in the RADIO LINK RECONFIGURATION READY message the *Transport Layer Address IE* and the *Binding ID IE* for any Transport Channel or HS-DSCH MAC-d flow being added or any Transport Channel or HS-DSCH MAC-d flow being modified for which a new transport bearer was requested with the *Transport Bearer Request Indicator IE*.

In the case of a set of co-ordinated DCHs requiring a new transport bearer on the Iub interface, the *Transport Layer Address IE* and the *Binding ID IE* in the *DCH Information Response IE* shall be included only for one of the DCH in the set of co-ordinated DCHs.

In the case of a Radio Link being combined with another Radio Link within the Node B, the *Transport Layer Address IE* and the *Binding ID IE* in the *DCH Information Response IE* shall be included only for one of the combined Radio Links.

/ text ommited ***** */*

8.3.2.4 Abnormal Conditions

If only a subset of all the DCHs belonging to a set of co-ordinated DCHs is requested to be deleted, the Node B shall regard the Synchronised Radio Link Reconfiguration Preparation procedure as having failed and shall send the RADIO LINK RECONFIGURATION FAILURE message to the CRNC.

If more than one DCH of a set of co-ordinated DCHs has the *QE-Selector IE* set to "selected" [TDD – or no DCH of a set of co-ordinated DCHs has the *QE-Selector IE* set to "selected"], the Node B shall regard the Synchronised Radio Link Reconfiguration Preparation procedure as failed and shall respond with a RADIO LINK RECONFIGURATION FAILURE message.

[FDD - If the *RL Information IE* includes the *SSDT Indication IE* set to "SSDT Active in the UE" and SSDT is not active in the current configuration, the Node B shall regard the Synchronised Radio Link Reconfiguration Preparation procedure as failed if the *UL DPCH Information IE* does not include the *SSDT Cell Identity Length IE*. In this case, it shall respond with a RADIO LINK RECONFIGURATION FAILURE message.]

If the RADIO LINK RECONFIGURATION PREPARE message includes a *DCHs To Modify IE* or *DCHs To Add IE* with multiple *DCH Specific Info IE*s, and if the DCHs in the *DCHs To Modify IE* or *DCHs To Add IE* do not have the same *Transmission Time Interval IE* in the *Semi-Static Transport Format Information IE*, then the Node B shall reject the procedure using the RADIO LINK RECONFIGURATION FAILURE message.

[FDD - If the *RL Information IE* includes the *DL Reference Power IE*s, but the power balancing is not active in the indicated RL(s), the Node B shall regard the Synchronised Radio Link Reconfiguration Preparation procedure as having failed and the Node B shall respond with the RADIO LINK RECONFIGURATION FAILURE message with the cause value "Power Balancing status not compatible".]

[FDD - If the power balancing is active with the Power Balancing Adjustment Type of the Node B Communication Context set to "Common" in the existing RL(s) but the *RL Information IE* includes more than one *DL Reference Power IE*s, the Node B shall regard the Synchronised Radio Link Reconfiguration Preparation procedure as having failed and the Node B shall respond with the RADIO LINK RECONFIGURATION FAILURE message with the cause value "Power Balancing status not compatible".]

[FDD – If the RADIO LINK RECONFIGURATION PREPARE message includes the *Length Of TFCI2 IE* but the *TFCI Signalling Option IE* is set to "Normal", then the Node B shall reject the procedure using the RADIO LINK RECONFIGURATION FAILURE message.]

[FDD – If the RADIO LINK RECONFIGURATION PREPARE message does not include the *Length Of TFCI2 IE* but the *Split Type IE* is set to "Logical", then the Node B shall reject the procedure using the RADIO LINK RECONFIGURATION FAILURE message.]

[FDD – If the RADIO LINK RECONFIGURATION PREPARE message includes the *Split Type IE* set to the value "Hard" and the *Length Of TFCI2 IE* set to the value "1", "2", "5", "8", "9" or "10", then the Node B shall reject the procedure using the RADIO LINK RECONFIGURATION FAILURE message.]

If the RADIO LINK RECONFIGURATION PREPARE message contains the *Transport Layer Address IE* or the *Binding ID IE* when establishing a transport bearer for any Transport Channel or HS-DSCH MAC-d flow being added, or any Transport Channel or HS-DSCH MAC-d flow being modified for which a new transport bearer was requested with the *Transport Bearer Request Indicator IE*, and not both are present for a transport bearer intended to be established, the Node B shall reject the procedure using the RADIO LINK RECONFIGURATION FAILURE message.

[FDD – If the RADIO LINK RECONFIGURATION PREPARE message is to modify UE channel estimation information for an existing RL and the modification is not allowed according to [10] subclause 4.3.2.1, the Node B shall reject the procedure using the RADIO LINK RECONFIGURATION FAILURE message.]

If the RADIO LINK RECONFIGURATION PREPARE message contains any of the *HS-DSCH Information To Modify IE*, *HS-DSCH MAC-d Flows To Add IE* or *HS-DSCH MAC-d Flows To Delete IE* in addition to the *HS-DSCH Information IE*, the Node B shall reject the procedure using the RADIO LINK RECONFIGURATION FAILURE message.

If the RADIO LINK RECONFIGURATION PREPARE message contains any of the *HS-DSCH Information To Modify IE*, *HS-DSCH MAC-d Flows To Add IE*, *HS-DSCH MAC-d Flows To Delete IE* or *HS-PDSCH RL ID IE* and the Serving HS-DSCH Radio Link is not in the Node B, the Node B shall reject the procedure using the RADIO LINK RECONFIGURATION FAILURE message.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *HS-DSCH Information IE* and does not include the *HS-PDSCH RL-ID IE*, the Node B shall reject the procedure using the RADIO LINK RECONFIGURATION FAILURE message.

9.1.42 RADIO LINK RECONFIGURATION PREPARE

9.1.42.1 FDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		—	
Message Type	M		9.2.1.46		YES	reject
Transaction ID	M		9.2.1.62		—	
Node B Communication Context ID	M		9.2.1.48	The reserved value "All NBCC" shall not be used.	YES	reject
UL DPCH Information		0..1			YES	reject
>UL Scrambling Code	O		9.2.2.59		—	
>UL SIR Target	O		UL SIR 9.2.1.67A		—	
>Min UL Channelistion Code Length	O		9.2.2.22		—	
>Max Number of UL DPDCNs	C-CodeLen		9.2.2.21		—	
>Puncture Limit	O		9.2.1.50	For UL	—	
>TFCS	O		9.2.1.58		—	
>UL DPCCH Slot Format	O		9.2.2.57		—	
>Diversity Mode	O		9.2.2.9		—	
>SSDT Cell Identity Length	O		9.2.2.45		—	
>S-Field Length	O		9.2.2.40		—	
DL DPCH Information		0..1			YES	reject
>TFCS	O		9.2.1.58		—	
>DL DPCH Slot Format	O		9.2.2.10		—	
>TFCI Signalling Mode	O		9.2.2.50		—	
>TFCI Presence	C-SlotFormat		9.2.1.57		—	
>Multiplexing Position	O		9.2.2.23		—	
>PDSCH Code Mapping	O		9.2.2.25		—	
>PDSCH RL ID	O		RL ID 9.2.1.53		—	
>Limited Power Increase	O		9.2.2.18A		—	
DCHs To Modify	O		DCHs FDD To Modify 9.2.2.4E		YES	reject
DCHs To Add	O		DCH FDD Information 9.2.2.4D		YES	reject
DCHs To Delete		0..<maxno ofDCHs>			GLOBAL	reject
>DCH ID	M		9.2.1.20		—	
DSCH To Modify		0..<maxno ofDSCHs>			EACH	reject
>DSCH ID	M		9.2.1.27		—	
>Transport Format Set	O		9.2.1.59	For the DL.	—	
>Allocation/Retention Priority	O		9.2.1.1A		—	
>Frame Handling Priority	O		9.2.1.30		—	
>ToAWS	O		9.2.1.61		—	
>ToAWE	O		9.2.1.60		—	
>Transport Bearer Request Indicator	M		9.2.1.62A		—	

>Binding ID	O		9.2.1.4	Shall be ignored if bearer establishment with ALCAP.	YES	ignore
>Transport Layer Address	O		9.2.1.63	Shall be ignored if bearer establishment with ALCAP.	YES	ignore
DSCH To Add	O		DSCH FDD Information 9.2.2.13B		YES	reject
DSCH To Delete		0..<maxno ofDSCHs>			EACH	reject
>DSCH ID	M		9.2.1.27		–	
TFCI2 Bearer Information		0..1			YES	reject
>CHOICE TFCI2 Bearer Action	M				–	
>>Add or modify					–	
>>>ToAWS	M		9.2.1.61		–	
>>>ToAWE	M		9.2.1.60		–	
>>> TFCI2 Bearer Request Indicator	O		9.2.1.56C		YES	reject
>>>Binding ID	O		9.2.1.4	Shall be ignored if bearer establishment with ALCAP.	YES	ignore
>>>Transport Layer Address	O		9.2.1.63	Shall be ignored if bearer establishment with ALCAP.	YES	ignore
>>Delete			NULL		–	
RL Information		0..<maxno ofRLs>			EACH	reject
>RL ID	M		9.2.1.53		–	
>DL Code Information	O		FDD DL Code Information 9.2.2.14A		–	
>Maximum DL Power			DL Power 9.2.1.21	Maximum allowed power on DPCH	–	
>Minimum DL Power	O		DL Power 9.2.1.21	Minimum allowed power on DPCH	–	
>SSDT Indication	O		9.2.2.47		–	
>SSDT Cell Identity	C-SSDTIndON		9.2.2.44		–	
>Transmit Diversity Indicator	CDiversity mode		9.2.2.53		–	
>SSDT Cell Identity For EDSCHPC	C-EDSCHPC		9.2.2.44A		YES	ignore
>DL Reference Power	O		DL Power 9.2.1.21	Power on DPCH	YES	ignore
>RL Specific DCH Information	O		9.2.1.53G		YES	ignore
>DL DPCH Timing Adjustment	O		9.2.2.10A	Required RL Timing Adjustment	YES	reject

>Qth Parameter	O		9.2.2.36A		YES	ignore
>Primary CPICH Usage For Channel Estimation	O		9.2.2.33A		YES	ignore
>Secondary CPICH Information Change	O		9.2.2.43A		YES	ignore
Transmission Gap Pattern Sequence Information	O		9.2.2.53A		YES	reject
DSCH Common Information	O		DSCH FDD Common Information 9.2.2.13D		YES	ignore
Signalling Bearer Request Indicator	O		9.2.1.55A		YES	reject
<u>HS-DSCH Information</u>	<u>O</u>		<u>HS-DSCH FDD Information 9.2.2.18D</u>		<u>YES</u>	<u>reject</u>
HS-DSCH Information To Modify	O		9.2.1.31H		YES	reject
HS-DSCH Information ^{MAC-d Flows} To Add	O		HS-DSCH FDD-MAC-d Flows Information 9.2.1.X 2.18 ^D		YES	reject
HS-DSCH MAC-d Flows To Delete ^{HS-DSCH Information To Delete}	O	0 < maxno of MACdFlows	9.2.1.XX	GLOBALLY ES		reject
>HS-DSCH-MAC-D-Flow-ID	M	9.2.1.31I		-		
HS-DSCH-RNTI	O-C-HS-DSCH RadioLink		9.2.1.31J		YES	reject
HS-PDSCH RL ID	O		RL ID 9.2.1.53		YES	reject

Condition	Explanation
SSDTIndON	The IE shall be present if the <i>SSDT Indication</i> IE is set to "SSDT Active in the UE".
CodeLen	The IE shall be present if the <i>Min UL Channelisation Code Length</i> IE is equals to 4.
SlotFormat	The IE shall be present if the <i>DL DPCCH Slot Format</i> IE is equal to any of the values from 12 to 16.
Diversity mode	The IE shall be present if the <i>Diversity Mode</i> IE is present in the <i>UL DPCCH Information</i> IE and is not set to "none".
EDSCHPC	The IE shall be present if the <i>Enhanced DSCH PC</i> IE is present in the <i>DSCH Common Information</i> IE.
<u>HS-DSCH Radio Link</u>	<u>The IE shall be present if HS-PDSCH RL ID IE is present.</u>

Range Bound	Explanation
<i>maxnoofDCHs</i>	Maximum number of DCHs for a UE
<i>maxnoofDSCHs</i>	Maximum number of DSCHs for a UE
<i>maxnoofRLs</i>	Maximum number of RLS for a UE
maxnoofMACdFlows	Maximum number of MAC-d Flows

9.1.42.2 TDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		–	
Message Type	M		9.2.1.46		YES	reject
Transaction ID	M		9.2.1.62		–	
Node B Communication Context ID	M		9.2.1.48	The reserved value "All NBCC" shall not be used.	YES	reject
UL CCTrCH To Add		<i>0..<maxno ofCCTrCH S></i>			GLOBAL	reject
>CCTrCH ID	M		9.2.3.3		–	
>TFCS	M		9.2.1.58		–	
>TFCI Coding	M		9.2.3.22		–	
>Puncture Limit	M		9.2.1.50		–	
>UL DPCH Information		<i>0..1</i>		Applicable to 3.84Mcps TDD only	YES	reject
>>Repetition Period	M		9.2.3.16		–	
>>Repetition Length	M		9.2.3.15		–	
>>TDD DPCH Offset	M		9.2.3.19A		–	
>>UL Timeslot Information	M		9.2.3.26C		–	
>UL DPCH Information LCR		<i>0..1</i>		Applicable to 1.28Mcps TDD only	YES	reject
>>Repetition Period	M		9.2.3.16		–	
>>Repetition Length	M		9.2.3.15		–	
>>TDD DPCH Offset	M		9.2.3.19A		–	
>>UL Timeslot Information LCR	M		9.2.3.26E		–	
>UL SIR Target	O		UL SIR 9.2.1.67A	Mandatory for 1.28Mcps TDD. Not Applicable to 3.84Mcps TDD.	YES	reject
>TDD TPC UL Step Size	O		9.2.3.21a	Mandatory for 1.28Mcps TDD. Not Applicable to 3.84Mcps TDD.	YES	reject
UL CCTrCH To Modify		<i>0..<maxno ofCCTrCH S></i>			GLOBAL	reject
>CCTrCH ID	M		9.2.3.3		–	
>TFCS	O		9.2.1.58		–	
>TFCI Coding	O		9.2.3.22		–	
>Puncture Limit	O		9.2.1.50		–	
>UL SIR Target	O		UL SIR 9.2.1.67A	Applicable to 1.28Mcps TDD only	YES	reject
>UL DPCH To Add		<i>0..1</i>		Applicable to 3.84Mcps TDD only	YES	reject
>>Repetition Period	M		9.2.3.16		–	
>>Repetition Length	M		9.2.3.15		–	
>>TDD DPCH Offset	M		9.2.3.19A		–	
>>UL Timeslot	M		9.2.3.26C		–	

Information						
>UL DPCH To Modify		0..1			YES	reject
>>Repetition Period	O		9.2.3.16		–	
>>Repetition Length	O		9.2.3.15		–	
>>TDD DPCH Offset	O		9.2.3.19A		–	
>>UL Timeslot Information		0..<maxno ofULts>		Applicable to 3.84Mcps TDD only	–	
>>>Time Slot	M		9.2.3.23		–	
>>>Midamble Shift And Burst Type	O		9.2.3.7		–	
>>>TFCI Presence	O		9.2.1.57		–	
>>>UL Code Information		0..<maxno ofDPCHs>			–	
>>>>DPCH ID	M		9.2.3.5		–	
>>>>TDD Channelisation Code	O		9.2.3.19		–	
>>UL Timeslot Information LCR		0..<maxno ofULtsLCR >		Applicable to 1.28Mcps TDD only	GLOBAL	reject
>>>Time Slot LCR	M		9.2.3.24A		–	
>>>Midamble Shift LCR	O		9.2.3.7A			
>>>TFCI Presence	O		9.2.1.57		–	
>>>UL Code Information LCR		0..<maxno OfDPCHL CR>			–	
>>>>DPCH ID	M		9.2.3.5		–	
>>>>TDD Channelisation Code LCR	O		9.2.3.19a		–	
>>>> TDD UL DPCH Time Slot Format LCR	O		9.2.3.21C		YES	reject
>UL DPCH To Delete		0..<maxno ofDPCHs>			GLOBAL	reject
>>DPCH ID	M		9.2.3.5		–	
>UL DPCH To Add LCR		0..1		Applicable to 1.28Mcps TDD only	YES	reject
>>Repetition Period	M		9.2.3.16		–	
>>Repetition Length	M		9.2.3.15		–	
>>TDD DPCH Offset	M		9.2.3.19A		–	
>>UL Timeslot Information LCR	M		9.2.3.26E		–	
>TDD TPC UL Step Size	O		9.2.3.21a	Applicable to 1.28Mcps TDD only	YES	reject
UL CCTrCH To Delete		0..<maxno ofCCTrCH s>			GLOBAL	reject
>CCTrCH ID	M		9.2.3.3		–	
DL CCTrCH To Add		0..<maxno ofCCTrCH s>			GLOBAL	reject
>CCTrCH ID	M		9.2.3.3		–	
>TFCS	M		9.2.1.58		–	
>TFCI Coding	M		9.2.3.22		–	
>Puncture Limit	M		9.2.1.50		–	
>TPC CCTrCH List		0..<maxno ofCCTrCH s>		List of uplink CCTrCH which provide TPC	–	
>>TPC CCTrCH ID	M		CCTrCH ID		–	

			9.2.3.3			
>DL DPCH Information		0..1		Applicable to 3.84Mcps TDD only	YES	reject
>>Repetition Period	M		9.2.3.16		–	
>>Repetition Length	M		9.2.3.15		–	
>>TDD DPCH Offset	M		9.2.3.19A		–	
>>DL Timeslot Information	M		9.2.3.4E		–	
>DL DPCH Information LCR		0..1		Applicable to 1.28Mcps TDD only	YES	reject
>>Repetition Period	M		9.2.3.16		–	
>>Repetition Length	M		9.2.3.15		–	
>>TDD DPCH Offset	M		9.2.3.19A		–	
>>DL Timeslot Information LCR	M		9.2.3.4O		–	
>CCTrCH Initial DL Transmission Power	O		DL Power 9.2.1.21		YES	ignore
>TDD TPC DL Step Size	O		9.2.3.21		YES	reject

>CCTrCH Maximum DL Transmission Power	O		DL Power 9.2.1.21		YES	ignore
>CCTrCH Minimum DL Transmission Power	O		DL Power 9.2.1.21		YES	ignore
DL CCTrCH To Modify		<i>0..<maxno ofCCTrCHs></i>			GLOBAL	reject
>CCTrCH ID	M		9.2.3.3.		–	
>TFCS	O		9.2.1.58		–	
>TFCI Coding	O		9.2.3.22		–	
>Puncture Limit	O		9.2.1.50		–	
>TPC CCTrCH List		<i>0..<maxno ofCCTrCHs></i>		List of uplink CCTrCH which provide TPC	–	
>>TPC CCTrCH ID	M		CCTrCH ID 9.2.3.3		–	
>DL DPCH To Add		0..1		Applicable to 3.84Mcps TDD only	YES	reject
>>Repetition Period	M		9.2.3.16		–	
>>Repetition Length	M		9.2.3.15		–	
>>TDD DPCH Offset	M		9.2.3.19A		–	
>>DL Timeslot Information	M		9.2.3.4E		–	
>DL DPCH To Modify		0..1			YES	reject
>>Repetition Period	O		9.2.3.16		–	
>>Repetition Length	O		9.2.3.15		–	
>>TDD DPCH Offset	O		9.2.3.19A		–	
>>DL Timeslot Information		<i>0..<maxno ofDLts></i>		Applicable to 3.84Mcps TDD only	–	
>>>Time Slot	M		9.2.3.23		–	
>>>Midamble Shift And Burst Type	O		9.2.3.7		–	
>>>TFCI Presence	O		9.2.1.57		–	
>>>DL Code Information		<i>0..<maxno ofDPCHs></i>			–	
>>>>DPCH ID	M		9.2.3.5		–	
>>>>TDD Channelisation Code	O		9.2.3.19		–	
>>DL Timeslot Information LCR		<i>0..<maxno ofDLtsLCR></i>		Applicable to 1.28Mcps TDD only	GLOBAL	reject
>>>Time Slot LCR	M		9.2.3.24A		–	
>>>Midamble Shift LCR	O		9.2.3.7A		–	
>>>TFCI Presence	O		9.2.1.57		–	
>>>DL Code Information LCR		<i>0..<maxno ofDPCHsLCR></i>			–	
>>>>DPCH ID	M		9.2.3.5		–	
>>>>TDD Channelisation Code LCR	O		9.2.3.19a		–	
>>>>TDD DL DPCH Time Slot Format LCR	O		9.2.3.19D		YES	reject
>>>Maximum DL Power to Modify LCR	O		DL Power 9.2.1.21	Maximum allowed power on DPCH	YES	ignore
>>>Minimum DL Power to Modify LCR	O		DL Power 9.2.1.21	Minimum allowed power on DPCH	YES	ignore

>DL DPCH To Delete		<i>0..<maxno ofDPCHs></i>			GLOBAL	reject
>>DPCH ID	M		9.2.3.5		—	
>DL DPCH To Add LCR		0..1		Applicable to 1.28Mcps TDD only	YES	reject
>>Repetition Period	M		9.2.3.16		—	
>>Repetition Length	M		9.2.3.15		—	
>>TDD DPCH Offset	M		9.2.3.19A		—	
>>DL Timeslot Information LCR	M		9.2.3.4O		—	
>TDD TPC DL Step Size	O		9.2.3.21		YES	reject
>Maximum CCTrCH DL Power to Modify	O		DL Power 9.2.1.21		YES	ignore
>Minimum CCTrCH DL Power to Modify	O		DL Power 9.2.1.21		YES	ignore
DL CCTrCH To Delete		<i>0..<maxno ofCCTrCH s></i>			GLOBAL	reject
>CCTrCH ID	M		9.2.3.3		—	
DCHs To Modify	O		DCHs TDD To Modify 9.2.3.4D		YES	reject
DCHs To Add	O		DCH TDD Information 9.2.3.4C		YES	reject
DCHs To Delete		<i>0..<maxno ofDCHs></i>			GLOBAL	reject
>DCH ID	M		9.2.1.20		—	
DSCH To Modify		<i>0..<maxno ofDSCHs></i>			GLOBAL	reject
>DSCH ID	M		9.2.1.27		—	
>CCTrCH ID	O		9.2.3.3	DL CCTrCH in which the DSCH is mapped	—	
>Transport Format Set	O		9.2.1.59		—	
>Allocation/Retention Priority	O		9.2.1.1A		—	
>Frame Handling Priority	O		9.2.1.30		—	
>ToAWS	O		9.2.1.61		—	
>ToAWE	O		9.2.1.60		—	
>Transport Bearer Request Indicator	M		9.2.1.62A		—	
>Binding ID	O		9.2.1.4	Shall be ignored if bearer establishment with ALCAP.	YES	ignore
>Transport Layer Address	O		9.2.1.63	Shall be ignored if bearer establishment with ALCAP.	YES	ignore
DSCH To Add	O		DSCH TDD Information 9.2.3.5A		YES	reject
DSCH To Delete		<i>0..<maxno ofDSCHs></i>			GLOBAL	reject
>DSCH ID	M		9.2.1.27		—	
USCH To Modify		<i>0..<maxno ofUSCHs></i>			GLOBAL	reject
>USCH ID	M		9.2.3.27		—	

>Transport Format Set	O		9.2.1.59		—	
>Allocation/Retention Priority	O		9.2.1.1A		—	
>CCTrCH ID	O		9.2.3.2	UL CCTrCH in which the USCH is mapped	—	
>Transport Bearer Request Indicator	M		9.2.1.62A		—	
>Binding ID	O		9.2.1.4	Shall be ignored if bearer establishment with ALCAP.	YES	ignore
>Transport Layer Address	O		9.2.1.63	Shall be ignored if bearer establishment with ALCAP.	YES	ignore
USCH To Add	O		USCH Information 9.2.3.28		YES	reject
USCH To Delete		<i>0..<maxno ofUSCHs></i>			GLOBAL	reject
>USCH ID	M		9.2.3.27		—	
RL Information		<i>0..1</i>			YES	reject
>RL ID	M		9.2.1.53		—	
>Maximum Downlink Power	O		DL Power 9.2.1.21		—	
>Minimum Downlink Power	O		DL Power 9.2.1.21		—	
>Initial DL Transmission Power	O		DL Power 9.2.1.21		YES	ignore
>RL Specific DCH Information	O		9.2.1.53G		YES	ignore
>UL Synchronisation Parameters LCR		<i>0..1</i>		Mandatory for 1.28Mcps TDD. Not Applicable to 3.84Mcps TDD.	YES	ignore
>>Uplink Synchronisation Step Size	M		9.2.3.26H		—	
>>Uplink Synchronisation Frequency	M		9.2.3.26G		—	
>DL Time Slot ISCP Info LCR	O		9.2.3.4P	Applicable to 1.28Mcps TDD only	YES	ignore
Signalling Bearer Request Indicator	O		9.2.1.55A		YES	reject
HS-DSCH Information	<u>O</u>		<u>HS-DSCH TDD Information 9.2.3.5F</u>		<u>YES</u>	<u>reject</u>
HS-DSCH Information To Modify	O		9.2.1.31H		YES	reject
HS-DSCH <u>InformationMAC-d Flows</u> To Add	O		HS-DSCH <u>TDD-MAC-d Flows</u> Information 9.2.1.X <u>3.5F</u>		YES	reject
HS-DSCH MAC-d Flows To Delete HS-DSCH Information To Delete	<u>O</u>	<u>0..<maxno ofMACdFlows></u>	<u>9.2.1.XX</u>		<u>GLOBAL YES</u>	reject

>HS-DSCH-MAC-D-flow ID	M		9.2.1.34			
HS-DSCH-RNTI	Q_C-HSDSCH RadioLink		9.2.1.31J		YES	reject
HS-PDSCH RL ID	O		RL ID 9.2.1.53		YES	reject
PDSCH-RL-ID	O		RL ID 9.2.1.53		YES	ignore

Condition	Explanation
HSDSCHRadio Link	The IE shall be present if HS-PDSCH RL ID IE is present.

Range Bound	Explanation
maxnoofDCHs	Maximum number of DCHs for a UE
maxnoofCCTrCHs	Maximum number of CCTrCHs for a UE
maxnoofDPCHs	Maximum number of DPCHs in one CCTrCH for 3.84Mcps TDD
maxnoofDPCHsLCR	Maximum number of DPCHs in one CCTrCH for 1.28Mcps TDD
maxnoofDSCHs	Maximum number of DSCHs for one UE
maxnoofUSCHs	Maximum number of USCHs for one UE
maxnoofDLts	Maximum number of Downlink time slots per Radio Link for 3.84Mcps TDD
maxnoofDLtsLCR	Maximum number of Downlink time slots per Radio Link for 1.28Mcps TDD
maxnoofULts	Maximum number of Uplink time slots per Radio Link for 3.84Mcps TDD
maxnoofULtsLCR	Maximum number of Uplink time slots per Radio Link for 1.28Mcps TDD
maxnoofMACdFlows	Maximum number of HS-DSCH-MAC-d flows

9.2.1.31H HS-DSCH Information To Modify

The *HS-DSCH Information To Modify* ~~IE provides information for HS-DSCH to be modified~~ is used for modification of HS-DSCH information in a Node B Communication Context.

IE/Group-Name	Presence	Range	IE-Type and Reference	Semantics Description	Criticality	Assigned Criticality
HS-DSCH MAC-d Flow Specific Information		0..<maxn ofMACd Flows>			-	
>HS-DSCH MAC-d Flow ID	M		9.2.1.34		-	
>Allocation/Retention Priority	O		9.2.1.1A		-	
>Transport Bearer Request Indicator	M		9.2.1.62A		-	
>Binding ID	O		9.2.1.4	Shall be ignored if bearer establishment with ALCAP.	-	
>Transport Layer Address	O		9.2.1.63	Shall be ignored if bearer establishment with ALCAP.	-	
Priority Queue Information		0..<maxn ofPrioQ queues>			-	
>CHOICE Priority Queue	M				-	
>>Add Priority Queue					-	
>>>Priority Queue ID	M		9.2.1.49C		-	
>>>Associated HS-DSCH MAC-d Flow	M		HS-DSCH MAC-d Flow ID-9.2.1.34		-	
>>>Scheduling Priority Indicator	M		9.2.1.53H		-	
>>>T1	M		9.2.1.56a		-	
>>>Discard-Timer	O		9.2.1.24E		-	
>>>MAC-hs Window Size	M		9.2.1.38B		-	
>>>MAC-hs Guaranteed Bit Rate	O		9.2.1.38Aa		-	
>>>MAC-d PDU-Size Index		1..<maxn ofMACd PDUs index>			-	
>>>>SID	M		9.2.1.53I		-	
>>>>MAC-d PDU-Size	M		9.2.1.38A		-	
>>Modify Priority Queue					-	
>>>Priority Queue ID	M		9.2.1.49C		-	
>>>Associated HS-DSCH MAC-d Flow	O		HS-DSCH MAC-d Flow ID-9.2.1.34		-	
>>>Scheduling Priority Indicator	O		9.2.1.53H		-	
>>>T1	O		9.2.1.56a		-	
>>>Discard-Timer	O		9.2.1.24E		-	
>>>MAC-hs Window Size	O		9.2.1.38B		-	
>>>MAC-hs-Guaranteed Bit Rate	O		9.2.1.38Aa		-	
>>>MAC-d PDU-Size Index		0..<maxn ofMACd PDUs index>			-	
>>>>SID	M		9.2.1.53I		-	
>>>>MAC-d PDU-Size	O		9.2.1.38A		-	
>>Delete Priority Queue					-	
>>>Priority Queue ID	M		9.2.1.49C		-	
MAG-hs Reordering Buffer Size	O		9.2.1.38Ab		-	
CQI Feedback-Cycle-k	O		9.2.2.21B	For FDD only	-	

IE/Group-Name	Presence	Range	IE-Type and Reference	Semantics Description	Criticality	Assigned Criticality
CQI Repetition Factor	0		9.2.2.4Cb	For FDD only	-	
ACK-NACK Repetition Factor	0		9.2.2.a	For FDD only	-	
CQI Power Offset	0		9.2.2.4Ca	For FDD only	-	
ACK Power Offset	0		9.2.2.b	For FDD only	-	
NACK Power Offset	0		9.2.2.23a	For FDD only	-	
HS-SCCH Power Offset	0		9.2.2.18I	For FDD only	-	
Measurement Power Offset	0		9.2.2.21C	For FDD only	-	
HS-SCCH Code Change Grant	0		9.2.1.31L		-	
TDD ACK-NACK Power Offset	0		9.2.3.18F	For TDD only	-	

<u>IE/Group Name</u>	<u>Presence</u>	<u>Range</u>	<u>IE Type and Reference</u>	<u>Semantics Description</u>
<u>HS-DSCH MAC-d Flow Specific Information</u>		<u>0..<maxno ofMACdFI ows></u>		
<u>>HS-DSCH MAC-d Flow ID</u>	<u>M</u>		<u>9.2.1.31I</u>	
<u>>Allocation/Retention Priority</u>	<u>O</u>		<u>9.2.1.1A</u>	
<u>>Transport Bearer Request Indicator</u>	<u>M</u>		<u>9.2.1.62A</u>	
<u>>Binding ID</u>	<u>O</u>		<u>9.2.1.4</u>	<u>Shall be ignored if bearer establishment with ALCAP.</u>
<u>>Transport Layer Address</u>	<u>O</u>		<u>9.2.1.63</u>	<u>Shall be ignored if bearer establishment with ALCAP.</u>
<u>Priority Queue Information</u>		<u>0..<maxno ofPrioQue ues></u>		
<u>>CHOICE Priority Queue</u>	<u>M</u>			
<u>>>Add Priority Queue</u>				
<u>>>>Priority Queue ID</u>	<u>M</u>		<u>9.2.1.49C</u>	
<u>>>>Associated HS-DSCH MAC-d Flow</u>	<u>M</u>		<u>HS-DSCH MAC-d Flow ID</u> <u>9.2.1.31I</u>	
<u>>>>Scheduling Priority Indicator</u>	<u>M</u>		<u>9.2.1.53H</u>	
<u>>>>T1</u>	<u>M</u>		<u>9.2.1.56a</u>	
<u>>>>Discard Timer</u>	<u>O</u>		<u>9.2.1.24E</u>	
<u>>>>MAC-hs Window Size</u>	<u>M</u>		<u>9.2.1.38B</u>	
<u>>>>MAC-hs Guaranteed Bit Rate</u>	<u>O</u>		<u>9.2.1.38Aa</u>	
<u>>>MAC-d PDU Size Index</u>		<u>1..<maxno ofMACdP DUindexes ></u>		
<u>>>>SID</u>	<u>M</u>		<u>9.2.1.53I</u>	
<u>>>>MAC-d PDU Size</u>	<u>M</u>		<u>9.2.1.38A</u>	
<u>>>Modify Priority Queue</u>				
<u>>>>Priority Queue ID</u>	<u>M</u>		<u>9.2.1.49C</u>	
<u>>>>Associated HS-DSCH MAC-d Flow</u>	<u>O</u>		<u>HS-DSCH MAC-d Flow ID</u> <u>9.2.1.31I</u>	
<u>>>>Scheduling Priority Indicator</u>	<u>O</u>		<u>9.2.1.53H</u>	
<u>>>>T1</u>	<u>O</u>		<u>9.2.1.56a</u>	
<u>>>>Discard Timer</u>	<u>O</u>		<u>9.2.1.24E</u>	
<u>>>>MAC-hs Window Size</u>	<u>O</u>		<u>9.2.1.38B</u>	
<u>>>>MAC-hs Guaranteed Bit Rate</u>	<u>O</u>		<u>9.2.1.38Aa</u>	
<u>>>MAC-d PDU Size Index</u>		<u>0..<maxno ofMACdP DUindexes ></u>		
<u>>>>SID</u>	<u>M</u>		<u>9.2.1.53I</u>	
<u>>>>MAC-d PDU Size</u>	<u>M</u>		<u>9.2.1.38A</u>	
<u>>>Delete Priority Queue</u>				
<u>>>Priority Queue ID</u>	<u>M</u>		<u>9.2.1.49C</u>	
<u>MAC-hs Reordering Buffer Size</u>	<u>O</u>		<u>9.2.1.38Ab</u>	
<u>CQI Feedback Cycle k</u>	<u>O</u>		<u>9.2.2.21B</u>	<u>For FDD only</u>
<u>CQI Repetition Factor</u>	<u>O</u>		<u>9.2.2.4Cb</u>	<u>For FDD only</u>
<u>ACK-NACK Repetition Factor</u>	<u>O</u>		<u>9.2.2.a</u>	<u>For FDD only</u>
<u>CQI Power Offset</u>	<u>O</u>		<u>9.2.2.4Ca</u>	<u>For FDD only</u>
<u>ACK Power Offset</u>	<u>O</u>		<u>9.2.2.b</u>	<u>For FDD only</u>
<u>NACK Power Offset</u>	<u>O</u>		<u>9.2.2.23a</u>	<u>For FDD only</u>
<u>HS-SCCH Power Offset</u>	<u>O</u>		<u>9.2.2.18I</u>	<u>For FDD only</u>
<u>Measurement Power Offset</u>	<u>O</u>		<u>9.2.2.21C</u>	<u>For FDD only</u>
<u>HS-SCCH Code Change Grant</u>	<u>O</u>		<u>9.2.1.31L</u>	

TDD ACK NACK Power Offset	O		9.2.3.18F	For TDD only
Range Bound	Explanation			
\maxnoofMACdFlows	Maximum number of HS-DSCH MAC-d flows			
\maxnoofPrioQueues	Maximum number of Priority Queues			
\maxnoofMACdPDUindexes	Maximum number of different MAC-d PDU SIDs			

9.2.1.X HS-DSCH MAC-d Flows Information

The *HS-DSCH MAC-d Flows Information* IE is used for the establishment of HS-DSCH MAC-d flows for a Node B Communication Context.

<u>IE/Group Name</u>	<u>Presence</u>	<u>Range</u>	<u>IE Type and Reference</u>	<u>Semantics Description</u>
<u>HS-DSCH MAC-d Flow Specific Information</u>		<u>1..<maxno ofMACdFlows></u>		
<u>>HS-DSCH MAC-d Flow ID</u>	M		<u>9.2.1.31I</u>	
<u>>Allocation/Retention Priority</u>	M		<u>9.2.1.1A</u>	
<u>>Binding ID</u>	O		<u>9.2.1.4</u>	<u>Shall be ignored if bearer establishment with ALCAP.</u>
<u>>Transport Layer Address</u>	O		<u>9.2.1.63</u>	<u>Shall be ignored if bearer establishment with ALCAP.</u>
<u>Priority Queue Information</u>		<u>1..<maxno ofPrioQueues></u>		
<u>>Priority Queue ID</u>	M		<u>9.2.1.49C</u>	
<u>>Associated HS-DSCH MAC-d Flow</u>	M		<u>HS-DSCH MAC-d Flow ID</u> <u>9.2.1.31I</u>	
<u>>Scheduling Priority Indicator</u>	M		<u>9.2.1.53H</u>	
<u>>T1</u>	M		<u>9.2.1.56a</u>	
<u>>Discard Timer</u>	O			
<u>>MAC-hs Window Size</u>	M		<u>9.2.1.38B</u>	
<u>>MAC-hs Guaranteed Bit Rate</u>	O		<u>9.2.1.38Aa</u>	
<u>>MAC-d PDU Size Index</u>		<u>1..<maxno ofMACdPDUindexes></u>		
<u>>>SID</u>	M		<u>9.2.1.53I</u>	
<u>>>MAC-d PDU Size</u>	M		<u>9.2.1.38A</u>	

<u>Range Bound</u>	<u>Explanation</u>
<u>maxnoofMACdFlows</u>	Maximum number of HS-DSCH MAC-d flows
<u>maxnoofPrioQueues</u>	Maximum number of Priority Queues
<u>maxnoofMACdPDUindexes</u>	Maximum number of different MAC-d PDU SIDs

9.2.1.XX HS-DSCH MAC-d Flows To Delete

The *HS-DSCH MAC-d Flows To Delete* IE is used for the removal of HS-DSCH MAC-d flows from a Node B Communication Context.

<u>IE/Group Name</u>	<u>Presence</u>	<u>Range</u>	<u>IE Type and Reference</u>	<u>Semantics Description</u>
<u>HS-DSCH MAC-d Flows To Delete</u>		<u>1..<maxno ofMACdFlows></u>		
<u>>HS-DSCH MAC-d Flow ID</u>	M		<u>9.2.1.31I</u>	

<u>Range Bound</u>	<u>Explanation</u>
<u>maxnoofMACdFlows</u>	Maximum number of HS-DSCH MAC-d flows

9.2.2.18D HS-DSCH FDD Information

The *HS-DSCH FDD Information IE* provides information for HS-DSCH MAC-d flows to be established is used for initial addition of HS-DSCH information to a Node B Communication Context.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
HS-DSCH MAC-d Flow Specific Information		1..<max nofMA CdFlow =>			-	
>HS-DSCH MAC-d Flow ID	M		9.2.1.34I		-	
>Allocation/Retention Priority	M		9.2.1.1A		-	
>Binding ID	O		9.2.1.4	Shall be ignored if bearer establishment with ALCAP.	-	
>Transport Layer Address	O		9.2.1.63	Shall be ignored if bearer establishment with ALCAP.	-	
Priority Queue Information		1..<max nofPrio Queues >			-	
>Priority Queue ID	M		9.2.1.49C		-	
>Associated HS-DSCH MAC-d Flow	M		HS-DSCH MAC-d Flow ID 9.2.1.34I		-	
>Scheduling Priority Indicator	M		9.2.1.53H		-	
>T4	M		9.2.1.56a		-	
>Discard Timer	O		9.2.1.24E		-	
>MAC-hs Window Size	M		9.2.1.38B		-	
>MAC-hs Guaranteed Bit Rate	O		9.2.1.38Aa		-	
>MAC-d PDU Size Index		1..<max nofMA CdPDUIndex >			-	
>>SID	M		9.2.1.53I		-	
>>MAC-d PDU Size	M		9.2.1.38A		-	
UE Capabilities Information		+			-	
>HS-DSCH Physical Layer Category	M		9.2.1.34Ia		-	
>MAC-hs Reordering Buffer Size	M		9.2.1.38Ab		-	
CQI Feedback Cycle-k	M		9.2.2.21B		-	
CQI Repetition Factor	C-CQICyclek		9.2.2.4Cb		-	
ACK-NACK Repetition Factor	M		9.2.2.a		-	
CQI Power Offset	M		9.2.2.4Ga		-	
ACK Power Offset	M		9.2.2.b		-	
NACK Power Offset	M		9.2.2.23a		-	
HS-SCCH Power Offset	O		9.2.2.18I		-	
Measurement Power Offset	O		9.2.2.24C		-	

<u>IE/Group Name</u>	<u>Presence</u>	<u>Range</u>	<u>IE Type and Reference</u>	<u>Semantics Description</u>
HS-DSCH MAC-d Flows Information	M		9.2.1.X	
UE Capabilities Information		1		
>HS-DSCH Physical Layer Category	M		9.2.1.31la	
>MAC-hs Reordering Buffer Size	M		9.2.1.38Ab	
CQI Feedback Cycle k	M		9.2.2.21B	
CQI Repetition Factor	C- CQICyclek		9.2.2.4Cb	
ACK-NACK Repetition Factor	M		9.2.2.a	
CQI Power Offset	M		9.2.2.4Ca	
ACK Power Offset	M		9.2.2.b	
NACK Power Offset	M		9.2.2.23a	
HS-SCCH Power Offset	O		9.2.2.18l	
Measurement Power Offset	O		9.2.2.21C	

<u>Condition</u>	<u>Explanation</u>
CQICyclek	The IE shall be present if the CQI Feedback Cycle k IE is set to a value greater than 0.

<u>Condition</u>	<u>Explanation</u>
CQICyclek	The IE shall be present if the CQI Feedback Cycle k IE is set to a value greater than 0.

<u>Range Bound</u>	<u>Explanation</u>
maxnoofMACdFlows	Maximum number of HS-DSCH MAC-d flows
maxnoofPrioQueues	Maximum number of Priority Queues
maxnoofMACdPDUindexes	Maximum number of different MAC-d PDU SIDs

9.2.2.18E HS-DSCH FDD Information Response

The HS-DSCH Information Response provides information for HS-DSCH that have been established or modified. [It also provides additional HS-DSCH information determined within the Node B.](#)

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
HS-DSCH MAC-d Flow Specific Information Response		$1..<\max_{noofMA} CdFlow \gg$			-	
>HS-DSCH MAC-d Flow ID	M		9.2.1.34		-	
>Binding ID	O		9.2.1.4		-	
>Transport Layer Address	O		9.2.1.63		-	
>HS-DSCH Initial Capacity Allocation	O		9.2.1.31Ha		-	
HS-SCCH Specific Information Response		$1..<\max_{noofHS} SCCHc odes \gg$			-	
>Code Number	M		INTEGER (0..127)		-	
CHOICE HARQ Memory Partitioning	M				-	
> <i>Implicit</i>					-	
>>Number of Processes	M		INTEGER (1..8,...)		-	
> <i>Explicit</i>					-	
>>HARQ Memory Partitioning Information		$1..<\max_{noofHA} RQproces ses \gg$			-	
>>Process Memory Size	M		9.2.1.49D	See [18]	-	

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
HS-DSCH MAC-d Flow Specific Information Response		$0..<\max_{noofMACdFI} ows \gg$		
>HS-DSCH MAC-d Flow ID	M		9.2.1.31I	
>Binding ID	O		9.2.1.4	
>Transport Layer Address	O		9.2.1.63	
>HS-DSCH Initial Capacity Allocation	O		9.2.1.31Ha	
HS-SCCH Specific Information Response		$0..<\max_{noofHSSCC} Hcodes \gg$		
>Code Number	M		INTEGER (0..127)	
CHOICE HARQ Memory Partitioning	O			
> <i>Implicit</i>				
>>Number of Processes	M		INTEGER (1..8,...)	
> <i>Explicit</i>				
>>HARQ Memory Partitioning Infomation		$1..<\max_{noofHARQpr ocesses \gg}$		
>>Process Memory Size	M		9.2.1.49D	See [18]

Range Bound	Explanation
<i>maxnoofMACdFlows</i>	Maximum number of HS-DSCH MAC-d flows
<i>maxnoofHSSCChcodes</i>	Maximum number of HS-SCCH codes
<i>MaxnoofHARQprocesses</i>	Maximum number of HARQ processes for one UE

9.2.3.5F HS-DSCH TDD Information

The *HS-DSCH TDD Information IE* provides information for HS-DSCH MAC-d flows to be established is used for initial addition of HS-DSCH information to a Node B Communication Context.

<u>IE/Group Name</u>	<u>Presence</u>	<u>Range</u>	<u>IE Type and Reference</u>	<u>Semantics Description</u>	<u>Criticality</u>	<u>Assigned Criticality</u>
HS-DSCH MAC-d Flow Specific Information		<i>1..<maxno ofMACdFlows></i>			-	
>HS-DSCH MAC-d Flow ID	M		9.2.1.34		-	
>Allocation/Retention Priority	M		9.2.1.1A		-	
>Binding ID	O		9.2.1.4	Shall be ignored if bearer establishment with ALCAP.	-	
>Transport Layer Address	O		9.2.1.63	Shall be ignored if bearer establishment with ALCAP.	-	
Priority Queue Information	M	<i>1..<maxno ofPrioQues></i>			-	
>Priority Queue ID	M		9.2.1.49C		-	
>Associated HS-DSCH MAC-d Flow	M		HS-DSCH MAC-d Flow ID 9.2.1.34		-	
>Scheduling Priority Indicator	M		9.2.1.53H		-	
>T1	M		9.2.1.56a		-	
>Discard Timer	O		9.2.1.24E		-	
>MAC-hs Window Size	M		9.2.1.38B		-	
>MAC-hs Guaranteed Bit Rate	O		9.2.1.38Aa		-	
>MAC-d PDU Size Index		<i>1..<maxno ofMACdPDUIndexes></i>			-	
>>SID	M		9.2.1.53I		-	
>>MAC-d PDU Size	M		9.2.1.38A		-	
UE Capabilities Information		1			-	-
>HS-DSCH Physical Layer Category	M		9.2.1.31la		-	
>MAC-hs Reordering Buffer Size	M		9.2.1.38Ab		-	
TDD ACK NACK Power Offset	M		9.2.3.18F		-	

<u>IE/Group Name</u>	<u>Presence</u>	<u>Range</u>	<u>IE Type and Reference</u>	<u>Semantics Description</u>
HS-DSCH MAC-d Flows Information	M		9.2.1X	
UE Capabilities Information		1		
>HS-DSCH Physical Layer Category	M		9.2.1.31la	
>MAC-hs Reordering Buffer Size	M		9.2.1.38Ab	
TDD ACK NACK Power Offset	M		9.2.3.18F	

Range Bound	Explanation
<i>maxnoofMACdFlows</i>	Maximum number of HS-DSCH MAC-d flows
<i>maxnoofPrioQueues</i>	Maximum number of Priority Queues
<i>maxnoofMACdPDUindexes</i>	Maximum number of different MAC-d PDU SIDs

9.2.3.5G HS-DSCH TDD Information Response

The HS-DSCH TDD Information Response provides information for HS-DSCH MAC-d flows that have been established or modified. [It also provides additional HS-DSCH information determined within the Node B.](#)

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
HS-DSCH MAC-d Flow Specific Information Response		40..<max noofM ACdFlowS>			—	
>HS-DSCH MAC-d Flow ID	M		9.2.1.31I		—	
>Binding ID	O		9.2.1.4		—	
>Transport Layer Address	O		9.2.1.63		—	
> HS-DSCH Initial Capacity Allocation	O		9.2.1.31Ha		—	
HS-SCCH Specific Information Response		0..<max NoOfHSSCCHCodes>		Mandatory for 3.84 Mcps TDD, n ot applicable to 1.28 Mcps TDD	GLOBAL	reject
>Time Slot	M		9.2.3.23		—	
>Midamble Shift And Burst Type	M		9.2.3.7		—	
>TDD Channelisation Code	M		9.2.3.19		—	
>HS-SICH Information		1			—	
>>HS SICH ID	M		9.2.3.5Gb		—	
>>Time Slot	M		9.2.3.23		—	
>>Midamble Shift And Burst Type	M		9.2.3.7		—	
>>TDD Channelisation Code	M		9.2.3.19		—	
HS-SCCH Specific Information Response LCR		0..<max NoOfHSSCCHCodes>		Mandatory for 1.28 Mcps TDD, n ot applicable to 3.84 Mcps TDD	GLOBAL	reject
>Time Slot LCR	M		9.2.3.24A		—	
>Midamble Shift LCR	M		9.2.3.7A		—	
>First TDD Channelisation Code	M		TDD Channelisation Code 9.2.3.19		—	
>Second TDD Channelisation Code	M		TDD Channelisation Code 9.2.3.19		—	
>HS-SICH Information LCR		1			—	
>>HS SICH ID	M		9.2.3.5Gb		—	
>>Time Slot LCR	M		9.2.3.24A		—	
>>Midamble Shift LCR	M		9.2.3.7A		—	
>>TDD Channelisation Code	M		9.2.3.19		—	
CHOICE HARQ Memory Partitioning	MO				—	
> <i>Implicit</i>					—	
>>Number of Processes	M		INTEGER (1..8,...)		—	
> <i>Explicit</i>					—	
>> HARQ Memory Partitioning Infomation		1..<max noofHARQprocesses>			—	
>>>Process Memory Size	M		9.2.1.49D	See [18]	—	

Range Bound	Explanation
<i>maxnoofMACdFlows</i>	Maximum number of HS-DSCH MAC-d flows.
<i>maxnoofHSSCCHcodes</i>	Maximum number of HS-SCCH codes
<i>maxnoofHARQprocesses</i>	Maximum number of HARQ processes for one UE

9.3.3 PDU Definitions

```
-- ****
-- PDU definitions for NBAP.
-- ****

NBAP-PDU-Contents {
    itu-t (0) identified-organization (4) etsi (0) mobileDomain (0)
    umts-Access (20) modules (3) nbap (2) version1 (1) nbap-PDU-Contents (1) }

DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

-- ****
-- IE parameter types from other modules.
-- **

IMPORTS
    Active-Pattern-Sequence-Information,
    AddorDeleteIndicator,
/* text omitted ******/

    HSDSCH-FDD-Information,
    HSDSCH-FDD-Information-Response,
    HSDSCH-Information-to-Modify,
    HSDSCH-MACdFlow-ID,
    HSDSCH-MACdFlows-Information,
    HSDSCH-MACdFlows-to-Delete,
    HSDSCH-RNTI,
    HSDSCH-TDD-Information,
    HSDSCH-TDD-Information-Response,
    PrimaryCCPCH-RSCP,
    HSDSCH-FDD-Update-Information,
    HSDSCH-TDD-Update-Information,
/* text omitted ******/

    id-HSDSCH-FDD-Information,
    id-HSDSCH-FDD-Information-Response,
    id-HSDSCH-FDD-Information-to-Add,
    id-HSDSCH-FDD-Information-to-Delete,
    id-HSDSCH-Information-to-Modify,
    id-HSDSCH-MACdFlows-to-Add,
    id-HSDSCH-MACdFlows-to-Delete,
    id-HSDSCH-RearrangeList-Bearer-RearrangeInd,
    id-HSDSCH-RNTI,
    id-HSDSCH-TDD-Information,
```

id-HSDSCH-TDD-Information-Response,
id-HSDSCH-TDD-Information-Response-LCR,
~~id_HSDSCH_TDD_Information_to_Add,~~
~~id_HSDSCH_TDD_Information_to_Delete,~~
id-HSPDSCH-RL-ID,
id-HSSICH-Info-DM-Rprt,
id-HSSICH-Info-DM-Rqst,
id-HSSICH-Info-DM-Rsp,
id-PrimCCPCH-RSCP-DL-PC-RqstTDD,
id-HSDSCH-FDD-Update-Information,
id-HSDSCH-TDD-Update-Information,

*/*NEXT CHANGE ******/*

```

-- ****
-- 
-- RADIO LINK RECONFIGURATION PREPARE FDD
-- 
-- ****

RadioLinkReconfigurationPrepareFDD ::= SEQUENCE {
    protocolIES          ProtocolIE-Container {{RadioLinkReconfigurationPrepareFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkReconfigurationPrepareFDD-Extensions}} OPTIONAL,
    ...
}

RadioLinkReconfigurationPrepareFDD-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-NodeB-CommunicationContextID           CRITICALITY reject      TYPE NodeB-CommunicationContextID
        PRESENCE mandatory } |
    { ID id-UL-DPCH-Information-RL-ReconfPrepFDD  CRITICALITY reject      TYPE UL-DPCH-Information-RL-
        ReconPrepFDD      PRESENCE optional } |
    { ID id-DL-DPCH-Information-RL-ReconfPrepFDD  CRITICALITY reject      TYPE DL-DPCH-Information-RL-
        ReconPrepFDD      PRESENCE optional } |
        { ID id-FDD-DCHs-to-Modify            CRITICALITY reject      TYPE FDD-DCHs-to-Modify
        { ID id-DCHs-to-Add-FDD             CRITICALITY reject      TYPE DCH-FDD-Information
        { ID id-DCH-DeleteList-RL-ReconfPrepFDD  CRITICALITY reject      TYPE DCH-DeleteList-RL-ReconfPrepFDD
            PRESENCE optional } |
        { ID id-DSCH-ModifyList-RL-ReconfPrepFDD  CRITICALITY reject      TYPE DSCH-ModifyList-RL-ReconfPrepFDD
            PRESENCE optional } |
        { ID id-DSCHs-to-Add-FDD            CRITICALITY reject      TYPE DSCH-FDD-Information
        { ID id-DSCH-DeleteList-RL-ReconfPrepFDD  CRITICALITY reject      TYPE DSCH-DeleteList-RL-ReconfPrepFDD
            PRESENCE optional } |
        { ID id-TFCI2-BearerSpecificInformation-RL-ReconfPrepFDD  CRITICALITY reject      TYPE TFCI2-BearerSpecificInformation-
            RL-ReconfPrepFDD
            PRESENCE optional } |
        { ID id-RL-InformationList-RL-ReconfPrepFDD  CRITICALITY reject      TYPE RL-InformationList-RL-
            ReconPrepFDD      PRESENCE optional } |
            { ID id-Transmission-Gap-Pattern-Sequence-Information  CRITICALITY reject      TYPE Transmission-Gap-Pattern-Sequence-Information
                PRESENCE optional },
            ...
    }
}

RadioLinkReconfigurationPrepareFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    { ID- id-DSCH-FDD-Common-Information          CRITICALITY ignore      EXTENSION DSCH-FDD-Common-Information      PRESENCE
        optional } |
    { ID- id-SignallingBearerRequestIndicator     CRITICALITY reject      EXTENSION SignallingBearerRequestIndicator      PRESENCE
        optional } |
    { ID id-HSDSCH-FDD-Information               CRITICALITY reject      EXTENSION HSDSCH-FDD-Information      PRESENCE optional } |
    { ID id-HSDSCH-Information-to-Modify         CRITICALITY reject      EXTENSION HSDSCH-Information-to-Modify      PRESENCE optional } |
    { ID id-HSDSCH-FDD_InformationMACdFlows-to-Add  CRITICALITY reject      EXTENSION HSDSCH-FDD_InformationMACdFlows-Information
        PRESENCE optional } |
    { ID id-HSDSCH-FDD_InformationMACdFlows-to-Delete  CRITICALITY reject      EXTENSION HSDSCH-MACdFlows-to-DeleteList-RL-
        ReconPrepFDD      PRESENCE optional } |
    { ID id-HSDSCH-RNTI                         CRITICALITY reject      EXTENSION HSDSCH-RNTI      PRESENCE epconditional
        } |
    -- The IE shall be present if HS-PDSCH RL ID IE is present.
    { ID id-HSPDSCH-RL-ID                      CRITICALITY reject      EXTENSION RL-ID      PRESENCE optional },
}

```

```

}
  ...
}

UL-DPCH-Information-RL-ReconfPrepFDD ::= SEQUENCE {
  ul-ScramblingCode          UL-ScramblingCode      OPTIONAL,
  ul-SIR-Target               UL-SIR                 OPTIONAL,
  minUL-ChannelisationCodeLength MinUL-ChannelisationCodeLength OPTIONAL,
  maxNrOfUL-DPDCHs            MaxNrOfUL-DPDCHs    OPTIONAL,
  -- This IE shall be present if minUL-ChannelisationCodeLength Ie is set to 4
  ul-PunctureLimit            PunctureLimit        OPTIONAL,
  tFCS                        TFCS                  OPTIONAL,
  ul-DPCCH-SlotFormat         UL-DPCCH-SlotFormat  OPTIONAL,
  diversityMode               DiversityMode        OPTIONAL,
  sSDT-CellIDLength           SSDT-CellID-Length  OPTIONAL,
  s-FieldLength                S-FieldLength        OPTIONAL,
  iE-Extensions                ProtocolExtensionContainer { { UL-DPCH-Information-RL-ReconfPrepFDD-ExtIEs } }   OPTIONAL,
  ...
}

UL-DPCH-Information-RL-ReconfPrepFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

```

/*NEXT CHANGE ****/**

```

RL-InformationItem-RL-ReconfPrepFDD ::= SEQUENCE {
  rL-ID                      RL-ID,
  dl-CodeInformation          FDD-DL-CodeInformation  OPTIONAL,
  maxDL-Power                 DL-Power                OPTIONAL,
  minDL-Power                 DL-Power                OPTIONAL,
  sSDT-Indication             SSDT-Indication       OPTIONAL,
  sSDT-Cell-Identity          SSDT-Cell-Identity    OPTIONAL,
  -- The IE shall be present if the SSDT Indication IE is set to "SSDT Active in the UE"
  transmitDiversityIndicator  TransmitDiversityIndicator OPTIONAL,
  -- This IE shall be present if Diversity Mode IE is present in UL DPCH Information IE and it is not set to "none"
  iE-Extensions                ProtocolExtensionContainer { { RL-InformationItem-RL-ReconfPrepFDD-ExtIEs } }   OPTIONAL,
  ...
}

RL-InformationItem-RL-ReconfPrepFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
  { ID id-SSDT-CellIDforEDSCHPC   CRITICALITY ignore EXTENSION SSDT-Cell-Identity      PRESENCE conditional } |
  -- This IE shall be present if Enhanced DSCH PC IE is present in the DSCH Common Information IE.
  { ID id-DLReferencePower       CRITICALITY ignore EXTENSION DL-Power                  PRESENCE optional } |
  { ID id-RL-Specific-DCH-Info  CRITICALITY ignore EXTENSION RL-Specific-DCH-Info     PRESENCE optional } |
  { ID id-DL-DPCH-TimingAdjustment CRITICALITY reject EXTENSION DL-DPCH-TimingAdjustment PRESENCE optional } |
  { ID id-Qth-Parameter         CRITICALITY ignore EXTENSION Qth-Parameter        PRESENCE optional } |
  { ID id-Primary-CPICH-Usage-for-Channel-Estimation CRITICALITY ignore EXTENSION Primary-CPICH-Usage-for-Channel-Estimation PRESENCE optional } |
  { ID id-Secondary-CPICH-Information-Change   CRITICALITY ignore EXTENSION Secondary-CPICH-Information-Change  PRESENCE optional },
  ...
}

```

}

~~HSDSCH_DeleteList_RL_ReconfPrePDD ::= SEQUENCE { size (1..maxNofMACflows) OF HSDSCH_DeleteItem_RL_ReconfPrePDD~~

~~HSDSCH_DeleteItem_RL_ReconfPrePDD ::= SEQUENCE {
 hDSCH_MACdFlow_ID [1] HSDSCH_MACdFlow_ID,
 IE_Extensions [2] ProtocolExtensionContainer { [1] HSDSCH_DeleteItem_RL_ReconfPrePDD_ExIEs } } OPTIONAL,~~

~~+~~

~~HSDSCH_DeleteItem_RL_ReconfPrePDD_ExIEs NBAP_PROTOCOL_EXTENSION ::=~~

~~+~~

*/*NEXT CHANGE ******/*

```

-- ****
-- 
-- RADIO LINK RECONFIGURATION PREPARE TDD
-- 
-- ****

RadioLinkReconfigurationPrepareTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{RadioLinkReconfigurationPrepareTDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkReconfigurationPrepareTDD-Extensions}} OPTIONAL,
    ...
}

RadioLinkReconfigurationPrepareTDD-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-NodeB-CommunicationContextID
        PRESENCE mandatory }|
    { ID id-UL-CCTrCH-InformationAddList-RL-ReconfPrepTDD
        InformationAddList-RL-ReconfPrepTDD PRESENCE optional } |
    { ID id-UL-CCTrCH-InformationModifyList-RL-ReconfPrepTDD
        InformationModifyList-RL-ReconfPrepTDD PRESENCE optional } |
    { ID id-UL-CCTrCH-InformationDeleteList-RL-ReconfPrepTDD
        InformationDeleteList-RL-ReconfPrepTDD PRESENCE optional } |
    { ID id-DL-CCTrCH-InformationAddList-RL-ReconfPrepTDD
        InformationAddList-RL-ReconfPrepTDD PRESENCE optional } |
    { ID id-DL-CCTrCH-InformationModifyList-RL-ReconfPrepTDD
        InformationModifyList-RL-ReconfPrepTDD PRESENCE optional } |
    { ID id-DL-CCTrCH-InformationDeleteList-RL-ReconfPrepTDD
        InformationDeleteList-RL-ReconfPrepTDD PRESENCE optional } |
    { ID id-TDD-DCHs-to-Modify
        PRESENCE optional } |
    { ID id-DCHs-to-Add-TDD
        PRESENCE optional } |
    { ID id-DCH-DeleteList-RL-ReconfPrepTDD
        PRESENCE optional } |
    { ID id-DSCH-Information-ModifyList-RL-ReconfPrepTDD
        ReconfPrepTDD PRESENCE optional } |
    { ID id-DSCH-Information-Add-TDD
        PRESENCE optional } |
    { ID id-DSCH-Information-DeleteList-RL-ReconfPrepTDD
        ReconfPrepTDD PRESENCE optional } |
    { ID id-USCH-Information-ModifyList-RL-ReconfPrepTDD
        ReconfPrepTDD PRESENCE optional } |
    { ID id-USCH-Information-Add
        PRESENCE optional } |
    { ID id-USCH-Information-DeleteList-RL-ReconfPrepTDD
        ReconfPrepTDD PRESENCE optional } |
    { ID id-RL-Information-RL-ReconfPrepTDD
        PRESENCE optional } ,
    ...
}

RadioLinkReconfigurationPrepareTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    { ID id-SignallingBearerRequestIndicator CRITICALITY reject EXTENSION SignallingBearerRequestIndicator
        optional } |
    { ID id-HSDSCH-TDD-Information CRITICALITY reject EXTENSION HSDSCH-TDD-Information
        PRESENCE optional } |
    { ID id-HSDSCH-Information-to-Modify CRITICALITY reject EXTENSION HSDSCH-Information-to-Modify
        PRESENCE optional } |
}

```

```

{ ID id-HSDSCH-TDD-InformationMACdFlows-to-Add CRITICALITY reject EXTENSION HSDSCH-TDD-InformationMACdFlows-Information
  PRESENCE optional }|
{ ID id-HSDSCH-TDD-InformationMACdFlows-to-Delete CRITICALITY reject EXTENSION HSDSCH-MACdFlows-to-DeleteList-RL
  PRESENCE optional }|
ReconfPrepTDD PRESENCE optional }|
{ ID id-HSDSCH-RNTI CRITICALITY reject EXTENSION HSDSCH-RNTI PRESENCE epconditional
}||
-- The IE shall be present if HS-PDSCH RL ID IE is present.
{ ID id-HSPDSCH-RL-ID CRITICALITY reject EXTENSION RL-ID PRESENCE optional }|
{ ID id-PDSCH-RL-ID CRITICALITY ignore EXTENSION RL-ID PRESENCE optional },
...
}

```

*/*NEXT CHANGE ******/*

```

RL-Information-RL-ReconfPrepTDD ::= SEQUENCE {
  rL-ID,
  maxDL-Power,
  minDL-Power,
  iE-Extensions
    RL-ID,
    DL-Power OPTIONAL,
    DL-Power OPTIONAL,
    ProtocolExtensionContainer { { RL-Information-RL-ReconfPrepTDD-ExtIEs } } OPTIONAL,
  ...
}

RL-Information-RL-ReconfPrepTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
  { ID id-InitDL-Power CRITICALITY ignore EXTENSION DL-Power PRESENCE optional }|
  { ID id-RL-Specific-DCH-Info CRITICALITY ignore EXTENSION RL-Specific-DCH-Info PRESENCE optional }|
  { ID id-UL-Synchronisation-Parameters-LCR CRITICALITY ignore EXTENSION UL-Synchronisation-Parameters-LCR PRESENCE
optional }| -- Mandatory for 1.28Mcps TDD, Not Applicable to 3.84Mcps TDD
  { ID id-TimeslotISCP-LCR-InfoList-RL-ReconfPrepTDD CRITICALITY ignore EXTENSION DL-TimeslotISCPInfoLCR PRESENCE optional },
  -- Applicable to 1.28Mcps TDD only
  ...
}

```

HSDSCH_DeleteList-RL-ReconfPrepTDD ::= SEQUENCE (SIZE (1..maxNrOfMACdFlows)) OF HSDSCH_DeleteItem-RL-ReconfPrepTDD

HSDSCH_DeleteItem-RL-ReconfPrepTDD ::= SEQUENCE {
 HSDSCH_MACdFlow_ID,
 HSDSCH_MACdFlow_ID,
 iE_Extensions
 ProtocolExtensionContainer { { HSDSCH_DeleteItem-RL-ReconfPrepTDD-ExtIEs } } OPTIONAL,
 ...
}

HSDSCH_DeleteItem-RL-ReconfPrepTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::=

1

*/*NEXT CHANGE ******/*

9.3.4 Information Elements Definitions

```
--*****
-- Information Element Definitions
--*****

NBAP-IEs {
    itu-t (0) identified-organization (4) etsi (0) mobileDomain (0)
    umts-Access (20) modules (3) nbap (2) version1 (1) nbap-IEs (2) }

DEFINITIONS AUTOMATIC TAGS ::=

BEGIN
/* text ommited ***** */

-- =====
-- H
-- =====

HARQ-MemoryPartitioning ::= CHOICE {
    implicit      HARQ-MemoryPartitioning-Implicit,
    explicit      HARQ-MemoryPartitioning-Explicit,
    ...
}

HARQ-MemoryPartitioning-Implicit ::= SEQUENCE {
    number-of-Processes      INTEGER (1..8,...),
    iE-Extensions            ProtocolExtensionContainer { { HARQ-MemoryPartitioning-Implicit-ExtIEs } }      OPTIONAL,
    ...
}

HARQ-MemoryPartitioning-Implicit-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

HARQ-MemoryPartitioning-Explicit ::= SEQUENCE {
    hARQ-MemoryPartitioningList      HARQ-MemoryPartitioningList,
    iE-Extensions                  ProtocolExtensionContainer { { HARQ-MemoryPartitioning-Explicit-ExtIEs } }      OPTIONAL,
    ...
}

HARQ-MemoryPartitioning-Explicit-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

HARQ-MemoryPartitioningList ::= SEQUENCE (SIZE (1..maxNrOfHARQProcesses)) OF HARQ-MemoryPartitioningItem

HARQ-MemoryPartitioningItem ::= SEQUENCE {
    process-Memory-Size          ENUMERATED {
```

```

hms800, hms1600, hms2400, hms3200, hms4000,
hms4800, hms5600, hms6400, hms7200, hms8000,
hms8800, hms9600, hms10400, hms11200, hms12000,
hms12800, hms13600, hms14400, hms15200, hms16000,
hms17600, hms19200, hms20800, hms22400, hms24000,
hms25600, hms27200, hms28800, hms30400, hms32000,
hms36000, hms40000, hms44000, hms48000, hms52000,
hms56000, hms60000, hms64000, hms68000, hms72000,
hms76000, hms80000, hms88000, hms96000, hms104000,
hms112000, hms120000, hms128000, hms136000, hms144000,
hms152000, hms160000, hms176000, hms192000, hms208000,
hms224000, hms240000, hms256000, hms272000, hms288000,
hms304000,...},
iE-Extensions                               ProtocolExtensionContainer { { HARQ-MemoryPartitioningItem-ExtIEs } }           OPTIONAL,
...
}

HARQ-MemoryPartitioningItem-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
...
}

HS-DSCHProvidedBitRate ::= SEQUENCE (SIZE (1..16)) OF HS-DSCHProvidedBitRate-Item

HS-DSCHProvidedBitRate-Item ::= SEQUENCE {
    schedulingPriorityIndicator      SchedulingPriorityIndicator,
    hs-DSCHProvidedBitRateValue     HS-DSCHProvidedBitRateValue,
    iE-Extensions                   ProtocolExtensionContainer { { HS-DSCHProvidedBitRate-Item-ExtIEs } }           OPTIONAL,
...
}

HS-DSCHProvidedBitRate-Item-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
...
}

HS-DSCHProvidedBitRateValue ::= INTEGER(0..16777215,...)
-- Unit bit/s, Range 0..2^24-1, Step 1 bit

HS-DSCHRequiredPower ::= SEQUENCE (SIZE (1..16)) OF HS-DSCHRequiredPower-Item

HS-DSCHRequiredPower-Item ::= SEQUENCE {
    schedulingPriorityIndicator      SchedulingPriorityIndicator,
    hs-DSCHRequiredPowerValue        HS-DSCHRequiredPowerValue,
    hs-DSCHRequiredPowerPerUEInformation HS-DSCHRequiredPowerPerUEInformation,
    iE-Extensions                   ProtocolExtensionContainer { { HS-DSCHRequiredPower-Item-ExtIEs } }           OPTIONAL,
...
}

HS-DSCHRequiredPower-Item-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
...
}

HS-DSCHRequiredPowerValue ::= INTEGER(0..1000)

```

```

-- Unit %, Range 0 ..1000, Step 0.1%

HS-DSCHRequiredPowerPerUEInformation ::= SEQUENCE (SIZE (1.. maxNrOfContextsOnUeList)) OF HS-DSCHRequiredPowerPerUEInformation-Item

HS-DSCHRequiredPowerPerUEInformation-Item ::= SEQUENCE {
    cRNC-CommunicationContextID           CRNC-CommunicationContextID,
    hs-DSCHRequiredPowerPerUEWeight      HS-DSCHRequiredPowerPerUEWeight   OPTIONAL,
    iE-Extensions                         ProtocolExtensionContainer { { HS-DSCHRequiredPowerPerUEInformation-Item-ExtIEs} }   OPTIONAL,
    ...
}

HS-DSCHRequiredPowerPerUEInformation-Item-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

HS-DSCHRequiredPowerPerUEWeight ::= INTEGER(0..100)
-- Unit %, Range 0 ..100, Step 1%


HSDSCH-FDD-Information ::= SEQUENCE {
    hsdsch-MACdFlows-Information          HSDSCH-MACdFlows-Information,
    hsdsch MACdFlow Specific Info        hsdsch MACdFlow Specific InfoList,
    priorityQueueInfo                   PriorityQueue InfoList,
    ueCapability-Info                     UE-Capability-Information,
    cqiFeedback-CycleK                  CQI-Feedback-Cycle,
    cqiRepetitionFactor                CQI-RepetitionFactor   OPTIONAL,
    -- This IE shall be present if the CQI Feedback Cycle k is greater than 0
    ackNackRepetitionFactor            AckNack-RepetitionFactor,
    cqiPowerOffset                      CQI-Power-Offset,
    ackPowerOffset                      Ack-Power-Offset,
    nackPowerOffset                     Nack-Power-Offset,
    hsscch-PowerOffset                 HSSCCH-PowerOffset   OPTIONAL,
    measurement-Power-Offset          Measurement-Power-Offset   OPTIONAL,
    iE-Extensions                       ProtocolExtensionContainer { { HSDSCH-FDD-Information-ExtIEs} }   OPTIONAL,
    ...
}

HSDSCH-FDD-Information-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

HSDSCH-TDD-Information ::= SEQUENCE {
    hsdsch-MACdFlows-Information          HSDSCH-MACdFlows-Information,
    hsdsch MACdFlow Specific Info        hsdsch MACdFlow Specific InfoList,
    priorityQueueInfo                   PriorityQueue InfoList,
    ueCapability-Info                     UE-Capability-Information,
    tDD-AckNack-Power-Offset             TDD-AckNack-Power-Offset,
    iE-Extensions                       ProtocolExtensionContainer { { HSDSCH-TDD-Information-ExtIEs} }   OPTIONAL,
    ...
}

HSDSCH-TDD-Information-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {

```

```

}

HSDSCH-MACdFlow-Specific-InfoList ::= SEQUENCE (SIZE (1..maxNrOfMACdFlows)) OF HSDSCH-MACdFlow-Specific-InfoItem

HSDSCH-MACdFlow-Specific-InfoItem ::= SEQUENCE {
    hsDSCH-MACdFlow-ID           HSDSCH-MACdFlow-ID,
    allocationRetentionPriority   AllocationRetentionPriority,
    bindingID                     BindingID OPTIONAL,
    transportLayerAddress         TransportLayerAddress OPTIONAL,
    iE-Extensions                 ProtocolExtensionContainer { { HSDSCH-MACdFlow-Specific-InfoItem-ExtIEs } } OPTIONAL,
    ...
}

HSDSCH-MACdFlow-Specific-InfoItem-ExtIEs-NBAP-PROTOCOL-EXTENSION ::= {

}

HSDSCH-Information-to-Modify ::= SEQUENCE {
    hsDSCH-MACdFlow-Specific-Info-to-Modify
    priorityQueueInfoToModify
    mAChs-Reordering-Buffer-Size
    cqiFeedback-CycleK
    cqiRepetitionFactor
    ackNackRepetitionFactor
    cqiPowerOffset
    ackPowerOffset
    nackPowerOffset
    hsscch-PowerOffset
    measurement-Power-Offset
    HSSCCH-CodeChangeGrant
    tDDAckNackPowerOffset
    iE-Extensions
    ...
}

HSDSCH-Information-to-Modify-ExtIEs-NBAP-PROTOCOL-EXTENSION ::= {

}

HSDSCH-MACdFlow-Specific-InfoList-to-Modify ::= SEQUENCE (SIZE (1..maxNrOfMACdFlows)) OF HSDSCH-MACdFlow-Specific-InfoItem-to-Modify

HSDSCH-MACdFlow-Specific-InfoItem-to-Modify ::= SEQUENCE {
    hsDSCH-MACdFlow-ID           HSDSCH-MACdFlow-ID,
    allocationRetentionPriority   AllocationRetentionPriority OPTIONAL,
    transportBearerRequestIndicator TransportBearerRequestIndicator,
    bindingID                     BindingID OPTIONAL,
    transportLayerAddress         TransportLayerAddress OPTIONAL,
    iE-Extensions                 ProtocolExtensionContainer { { HSDSCH-MACdFlow-Specific-InfoItem-to-Modify-ExtIEs } } OPTIONAL,
    ...
}

HSDSCH-MACdFlow-Specific-InfoItem-to-Modify-ExtIEs-NBAP-PROTOCOL-EXTENSION ::= {
}

```

```

}
HSDSCH-FDD-Information-Response ::= SEQUENCE {
  hsDSCH-MACdFlow-Specific-InformationResp
  hsSCCH-Specific-Information-ResponseFDD
  HARQ-MemoryPartitioning
  iE-Extensions
  ...
}

HSDSCH-FDD-Information-Response-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

HSDSCH-TDD-Information-Response ::= SEQUENCE {
  hsDSCH-MACdFlow-Specific-InformationResp
  hsSCCH-Specific-Information-ResponseTDD
  Applicable to 1.28Mcps TDD
  hsSCCH-Specific-Information-ResponseTDDLRCR
  Applicable to 3.84Mcps TDD
  HARQ-MemoryPartitioning
  iE-Extensions
  ...
}

HSDSCH-TDD-Information-Response-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

HSDSCH-MACdFlow-Specific-InformationResp ::= SEQUENCE (SIZE (1..maxNrOfMACdFlows)) OF HSDSCH-MACdFlow-Specific-InformationResp-Item

HSDSCH-MACdFlow-Specific-InformationResp-Item ::= SEQUENCE {
  hsDSCHMacdFlow-Id
  bindingID
  transportLayerAddress
  hSDSCH-Initial-Capacity-Allocation
  iE-Extensions
  OPTIONAL,
  ...
}

HSDSCH-MACdFlow-Specific-InformationRespItem-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

HSDSCH-MACdFlows-Information ::= SEQUENCE {
  hsDSCH-MACdFlow-Specific-Info
  priorityQueue-Info
  iE-Extensions
  ...
}

```

```

HSDSCH-MACdFlows-Information-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

HSDSCH-MACdFlow-Specific-InfoList ::= SEQUENCE (SIZE (1..maxNrOfMACdFlows)) OF HSDSCH-MACdFlow-Specific-InfoItem

HSDSCH-MACdFlow-Specific-InfoItem ::= SEQUENCE {
    hsDSCH-MACdFlow-ID           HSDSCH-MACdFlow-ID,
    allocationRetentionPriority   AllocationRetentionPriority,
    bindingID                     OPTIONAL,
    transportLayerAddress         TransportLayerAddress OPTIONAL,
    iE_Extensions                 ProtocolExtensionContainer { { HSDSCH-MACdFlow-Specific-InfoItem-ExtIEs } } OPTIONAL,
    ...
}

HSDSCH-MACdFlow-Specific-InfoItem-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

HSDSCH-MACdFlows-to-Delete ::= SEQUENCE (SIZE (1..maxNrOfMACdFlows)) OF HSDSCH-MACdFlows-to-Delete-Item

HSDSCH-MACdFlows-to-Delete-Item ::= SEQUENCE {
    hsDSCH-MACdFlow-ID           HSDSCH-MACdFlow-ID,
    iE_Extensions                 ProtocolExtensionContainer { { HSDSCH-MACdFlows-to-Delete-Item-ExtIEs } } OPTIONAL,
    ...
}

HSDSCH-MACdFlows-to-Delete-Item-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

HSSCCH-PowerOffset ::= INTEGER (0..255)
-- PowerOffset = -32 + offset * 0.25
-- Unit dB, Range -32dB .. +31.75dB, Step +0.25dB

HSDSCH-Initial-Capacity-Allocation ::= SEQUENCE (SIZE (1..16)) OF HSDSCH-Initial-Capacity-AllocationItem

HSDSCH-Initial-Capacity-AllocationItem ::= SEQUENCE {
    schedulingPriorityIndicator   SchedulingPriorityIndicator,
    maximum-MACdPDU-Size          MACdPDU-Size,
    hsDSCH-InitialWindowSize      HSDSCH-InitialWindowSize,
    iE_Extensions                 ProtocolExtensionContainer { { HSDSCH-Initial-Capacity-AllocationItem-ExtIEs } } OPTIONAL,
    ...
}

HSDSCH-Initial-Capacity-AllocationItem-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

HSDSCH-InitialWindowSize           ::= INTEGER (1..2047)
-- Number of MAC-d PDUs.
-- 2047 = Unlimited number of MAC-d PDUs

```

```

HSSCCH-Specific-InformationRespListFDD ::= SEQUENCE (SIZE (1..maxNrOfHSSCCHCodes)) OF HSSCCH-Codes

HSSCCH-Codes ::= SEQUENCE {
    codeNumber                                INTEGER (1..127),
    iE-Extensions                             ProtocolExtensionContainer { { HSSCCH-Specific-InformationRespItemFDD-ExtIEs } } OPTIONAL,
    ...
}

HSSCCH-Specific-InformationRespItemFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

HSSCCH-Specific-InformationRespListTDD ::= SEQUENCE (SIZE (1..maxNrOfHSSCCHCodes)) OF HSSCCH-Specific-InformationRespItemTDD

HSSCCH-Specific-InformationRespItemTDD ::= SEQUENCE {
    timeslot                                  TimeSlot,
    midambleShiftAndBurstType                MidambleShiftAndBurstType,
    tDD-ChannelisationCode                  TDD-ChannelisationCode,
    hSSICH-Info                               HSSICH-Info,
    iE-Extensions                            ProtocolExtensionContainer { { HSSCCH-Specific-InformationRespItemTDD-ExtIEs } } OPTIONAL,
    ...
}

HSSCCH-Specific-InformationRespItemTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

HSSCCH-Specific-InformationRespListTDDLCR ::= SEQUENCE (SIZE (1..maxNrOfHSSCCHCodes)) OF HSSCCH-Specific-InformationRespItemTDDLCR

HSSCCH-Specific-InformationRespItemTDDLCR ::= SEQUENCE {
    timeslotLCR                               TimeSlotLCR,
    midambleShiftLCR                          MidambleShiftLCR,
    first-TDD-ChannelisationCode             TDD-ChannelisationCode,
    second-TDD-ChannelisationCode            TDD-ChannelisationCode,
    hSSICH-InfoLCR                           HSSICH-InfoLCR,
    iE-Extensions                            ProtocolExtensionContainer { { HSSCCH-Specific-InformationRespItemTDDLCR-ExtIEs } } OPTIONAL,
    ...
}

HSSCCH-Specific-InformationRespItemTDDLCR-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

HSSICH-Info ::= SEQUENCE {
    hSSICH-ID                                 HS-SICH-ID,
    timeslot                                  TimeSlot,
    midambleShiftAndBurstType                MidambleShiftAndBurstType,
    tDD-ChannelisationCode                  TDD-ChannelisationCode,
    iE-Extensions                            ProtocolExtensionContainer { { HSSICH-Info-ExtIEs } } OPTIONAL,
    ...
}

HSSICH-Info-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
}

```

```

}
  ...
}

HSSICH-InfoLCR ::= SEQUENCE {
  hSICH-ID                                HS-SICH-ID,
  timeslotLCR                             TimeSlotLCR,
  midambleShiftLCR                         MidambleShiftLCR,
  tDD-ChannelisationCode                   TDD-ChannelisationCode,
  iE-Extensions                            ProtocolExtensionContainer { { HSSICH-Info-LCR-ExtIEs } }      OPTIONAL,
  ...
}

HSSICH-Info-LCR-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

HS-SICH-Reception-Quality-Value ::= SEQUENCE {
  failed-HS-SICH                          HS-SICH-failed,
  missed-HS-SICH                           HS-SICH-missed,
  total-HS-SICH                            HS-SICH-total,
  iE-Extensions                            ProtocolExtensionContainer { { HS-SICH-Reception-Quality-Value-ExtIEs } } OPTIONAL,
  ...
}

HS-SICH-Reception-Quality-Value-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

HS-SICH-failed ::= INTEGER (0..20)
HS-SICH-missed ::= INTEGER (0..20)
HS-SICH-total ::= INTEGER (0..20)

HS-SICH-Reception-Quality-Measurement-Value ::= INTEGER (0..20)
-- According to mapping in [23]

HSDSCH-MACdFlow-ID ::= INTEGER (0..maxNrOfMACdFlows-1)

HSDSCH-RNTI ::= INTEGER (0..65535)

HS-PDSCH-FDD-Code-Information ::= SEQUENCE {
  number-of-HS-PDSCH-codes                INTEGER (0..maxHS-PDSCHCodeNrComp-1),
  hS-PDSCH-Start-code-number              HS-PDSCH-Start-code-number      OPTIONAL,
  -- Only included when number of HS-DSCH codes > 0
  ...
}

HS-PDSCH-Start-code-number ::= INTEGER (1..maxHS-PDSCHCodeNrComp-1)

HS-SCCH-ID ::= INTEGER (0..31)
HS-SICH-ID ::= INTEGER (0..31)

```

```

HS-SCCH-FDD-Code-Information ::= CHOICE {
    replace                  HS-SCCH-FDD-Code-List,
    remove                  NULL,
    ...
}

HS-SCCH-FDD-Code-List ::= SEQUENCE (SIZE (1..maxNrOfHSSCCHs)) OF HS-SCCH-FDD-Code-Information-Item

HS-SCCH-FDD-Code-Information-Item ::= INTEGER (0..maxHS-SCCHCodeNrComp-1)

HSSCCH-CodeChangeIndicator ::= ENUMERATED {
    hsSCCHCodeChangeNeeded
}

HSSCCH-Code-Change-Grant ::= ENUMERATED {
    changeGranted
}

HSDSCH-FDD-Update-Information ::= SEQUENCE {
    hsSCCHCodeChangeIndicator          HSSCCH-CodeChangeIndicator           OPTIONAL,
    cqiFeedback-CycleK                CQI-Feedback-Cycle                 OPTIONAL,
    cqiRepetitionFactor              CQI-RepetitionFactor               OPTIONAL,
    ackNackRepetitionFactor          AckNack-RepetitionFactor          OPTIONAL,
    cqiPowerOffset                   CQI-Power-Offset                  OPTIONAL,
    ackPowerOffset                   Ack-Power-Offset                 OPTIONAL,
    nackPowerOffset                  Nack-Power-Offset                OPTIONAL,
    iE-Extensions                    ProtocolExtensionContainer { { HSDSCH-FDD-Update-Information-ExtIEs } }   OPTIONAL,
    ...
}

HSDSCH-FDD-Update-Information-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

HSDSCH-TDD-Update-Information ::= SEQUENCE {
    hsSCCHCodeChangeIndicator          HSSCCH-CodeChangeIndicator           OPTIONAL,
    tDDAckNackPowerOffset             TDD-AckNack-Power-Offset            OPTIONAL,
    iE-Extensions                    ProtocolExtensionContainer { { HSDSCH-TDD-Update-Information-ExtIEs } }   OPTIONAL,
    ...
}

HSDSCH-TDD-Update-Information-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

/*NEXT CHANGE *****/
=====
-- M
=====

MACdPDU-Size ::= INTEGER (1..5000,...)

```

```
MACdPDU-Size-Indexlist ::= SEQUENCE (SIZE (1..maxNrOfMACdPDUIndexes)) OF MACdPDU-Size-IndexItem

MACdPDU-Size-IndexItem ::= SEQUENCE {
    sID                               INTEGER (0..7),
    macdPDU-Size,
    iE-Extensions                     ProtocolExtensionContainer { { MACdPDU-Size-IndexItem-ExtIEs} }           OPTIONAL,
    ...
}

MACdPDU-Size-IndexItem-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

MACdPDU-Size-Indexlist-to-Modify ::= SEQUENCE (SIZE (1..maxNrOfMACdPDUIndexes)) OF MACdPDU-Size-IndexItem-to-Modify

MACdPDU-Size-IndexItem-to-Modify ::= SEQUENCE {
    sID                               INTEGER (0..7),
    macdPDU-Size,
    iE-Extensions                     ProtocolExtensionContainer { { MACdPDU-Size-IndexItem-to-Modify-ExtIEs} }           OPTIONAL,
    ...
}

MACdPDU-Size-IndexItem-to-Modify-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    ...
}
```

9.3.6 Constant Definitions

```
-- ****
-- Constant definitions
--
-- ****

NBAP-Constants {
    itu-t (0) identified-organization (4) etsi (0) mobileDomain (0)
    umts-Access (20) modules (3) nbap (2) version1 (1) nbap-Constants (4)}

DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

IMPORTS
    ProcedureCode,
    ProtocolIE-ID
FROM NBAP-CommonDataTypes;
/* text ommited *****/

-- ****
-- IEs
--
-- ****

id-AICH-Information                                ProtocolIE-ID ::= 0
id-AICH-InformationItem-ResourceStatusInd          ProtocolIE-ID ::= 1
/* text ommited ****/

id-HSDSCH-FDD-Information                         ProtocolIE-ID ::= 530
id-HSDSCH-FDD-Information-Response                ProtocolIE-ID ::= 531
id-HSDSCH-FDD-Information-to-Add                 ProtocolIE-ID ::= 532
id-HSDSCH-FDD-Information-to-Delete               ProtocolIE-ID ::= 533
id-HSDSCH-Information-to-Modify                  ProtocolIE-ID ::= 534
id-HSDSCH-RNTI                                  ProtocolIE-ID ::= 535
id-HSDSCH-TDD-Information                        ProtocolIE-ID ::= 536
id-HSDSCH-TDD-Information-Response              ProtocolIE-ID ::= 537
id-HSDSCH-TDD-Information-Response-LCR          ProtocolIE-ID ::= 538
id-HSDSCH-TDD-Information-to-Add                ProtocolIE-ID ::= 539
id-HSDSCH-TDD-Information-to-Delete             ProtocolIE-ID ::= 540
id-HSPDSCH-RL-ID                                ProtocolIE-ID ::= 541
id-PrimCCPCH-RSCP-DL-PC-RqstTDD                ProtocolIE-ID ::= 542
id-Qth-Parameter                               ProtocolIE-ID ::= 64
id-PDSCH-RL-ID                                 ProtocolIE-ID ::= 66
id-HSDSCH-RearrangeList-Bearer-RearrangeInd   ProtocolIE-ID ::= 553
id-UL-Synchronisation-Parameters-LCR          ProtocolIE-ID ::= 554
```

id-HSDSCH-FDD-Update-Information
id-HSDSCH-TDD-Update-Information
id-HSDSCH-MACdFlows-to-Add
id-HSDSCH-MACdFlows-to-Delete

ProtocolIE-ID ::= 555
ProtocolIE-ID ::= 556
ProtocolIE-ID ::= 613
ProtocolIE-ID ::= 614