

**TSG RAN Meeting #25**  
**Palm Springs, USA, 07 - 09 September 2004**

**RP-040295**

**Title** CRs (Rel-4 and Rel-5/Rel-6 Category A) to TS 25.433  
**Source** TSG RAN WG3  
**Agenda Item** 7.4.4

| RAN3 Tdoc | Spec      | curr. Vers. | new Vers. | CR   | Rev | Cat | Rel   | Title   | Work item |
|-----------|-----------|-------------|-----------|------|-----|-----|-------|---|-----------|
| R3-041213 | TS 25.433 | 4.12.0      | 4.13.0    | 1017 | 2   | F   | Rel-4 | Addition of TSTD for S-CCPCH, PICH and PDSCH in 1.28 Mcps TDD | TEI4      |
| R3-041214 | TS 25.433 | 5.9.0       | 5.10.0    | 1018 | 2   | A   | Rel-5 | Addition of TSTD for S-CCPCH, PICH and PDSCH in 1.28 Mcps TDD | TEI4      |
| R3-041215 | TS 25.433 | 6.2.0       | 6.3.0     | 1019 | 2   | A   | Rel-6 | Addition of TSTD for S-CCPCH, PICH and PDSCH in 1.28 Mcps TDD | TEI4      |
| R3-041148 | TS 25.433 | 4.12.0      | 4.13.0    | 1027 | -   | F   | Rel-4 | Review on NBAP  | TEI4      |
| R3-041149 | TS 25.433 | 5.9.0       | 5.10.0    | 1028 | -   | A   | Rel-5 | Review on NBAP  | TEI4      |
| R3-041150 | TS 25.433 | 6.2.0       | 6.3.0     | 1029 | -   | A   | Rel-6 | Review on NBAP  | TEI4      |

## CHANGE REQUEST

# 25.433 CR 1017 # rev 2 # Current version: 4.12.0 #

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the # symbols.

**Proposed change affects:** UICC apps #  ME #  Radio Access Network  Core Network

|                                      |   |   |
|--------------------------------------|---|---|
| <b>Title:</b>                        | # Addition of TSTD for S-CCPCH, PICH and PDSCH in 1.28 Mcps TDD   |   |
| <b>Source:</b>                       | # RAN3  |   |
| <b>Work item code:</b>               | # TEI4  | <b>Date:</b> # 20/08/04   |
| <b>Category:</b>                     | # <b>F</b><br><i>Use one of the following categories:</i><br><b>F</b> (correction)<br><b>A</b> (corresponds to a correction in an earlier release)<br><b>B</b> (addition of feature),<br><b>C</b> (functional modification of feature)<br><b>D</b> (editorial modification)   | <b>Release:</b> # Rel-4<br><i>Use one of the following releases:</i><br>Ph2 (GSM Phase 2)<br>R96 (Release 1996)<br>R97 (Release 1997)<br>R98 (Release 1998)<br>R99 (Release 1999)<br>Rel-4 (Release 4)<br>Rel-5 (Release 5)<br>Rel-6 (Release 6)<br>Rel-7 (Release 7) |
| <b>Reason for change:</b>            | The TSTD form of transmit diversity for S-CCPCH, PICH and PDSCH in LCR TDD has been introduced in RAN1 in Release 4. But this could not be enabled via the lub until now. This CR introduces a mechanism to enable or disable it at the Node B via the lub.   |   |
| <b>Summary of change:</b>            | <p>A TSTD Indicator IE is added in COMMON TRANSPORT CHANNEL SETUP REQUEST for S-CCPCH and PICH respectively in 1.28 Mcps TDD. This is applicable to S-CCPCHs and PICH that are not beacon channels.</p> <p>A TSTD Indicator IE is added in PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST for PDSCH set in 1.28 Mcps TDD. This is applicable to PDSCH set that is not beacon channel.</p> <p><u>Impact assessment towards the previous version of the specification (same release):</u></p> <p>This CR has isolated impact towards the previous version of the specification (same release).</p> <p>This CR has an impact under functional point of view.</p> <p>The impact can be considered isolated because it only affects the use of TSTD transmit diversity in LCR TDD mode.</p> |   |
| <b>Consequences if not approved:</b> | The RNC will be unable to control the use of TSTD transmit diversity for S-CCPCH, PICH and PDSCH in LCR TDD.  |   |

|                              |   |  |
|------------------------------|---|--|
| <b>Clauses affected:</b>     | ⌘ | 8.2.1.2, 8.2.18.2, 9.1.3.2, 9.1.62, 9.3.3, 9.3.6                       |
| <b>Other specs affected:</b> | Y | N  |
|                              | ⌘ | Other core specifications<br>Test specifications<br>O&M Specifications |
|                              | X | 25.433 CR1018r2 Rel-5<br>25.433 CR1019r2 Rel-6                         |
| <b>Other comments:</b>       | ⌘ |  |

**How to create CRs using this form:**

Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.


## 8.2 NBAP Common Procedures

### 8.2.1 Common Transport Channel Setup

#### 8.2.1.1 General

This procedure is used for establishing the necessary resources in Node B, regarding Secondary CCPCH, PICH, PRACH, PCPCH [FDD], AICH [FDD], AP\_AICH [FDD], CD/CA-ICH [FDD], FACH, PCH, RACH, FPACH[1.28Mcps TDD] and CPCH [FDD].

#### 8.2.1.2 Successful Operation

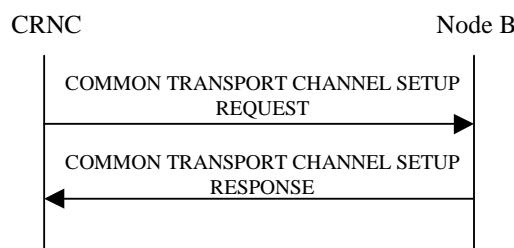

**Figure 1: Common Transport Channel Setup procedure, Successful Operation**

The procedure is initiated with a COMMON TRANSPORT CHANNEL SETUP REQUEST message sent from the CRNC to the Node B using the Node B Control Port.

One message can configure only one of the following combinations:

- [FDD - one Secondary CCPCH, and FACHs, PCH and PICH related to that Secondary CCPCH], or
- [TDD - one CCTrCH consisting of Secondary CCPCHs and FACHs, PCH with the corresponding PICH related to that group of Secondary CCPCHs], or
- one [1.28Mcps TDD – or more] PRACH, one RACH and one AICH [FDD] and one FPACH[1.28Mcps TDD] related to that PRACH.
- [FDD-PCPCHs, one CPCH, one AP\_AICH and one CD/CA-ICH related to that group of PCPCHs.]

#### Secondary CCPCH:

[FDD - When the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains the *Secondary CCPCH IE*, the Node B shall configure and activate the indicated Secondary CCPCH according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message.]

[TDD - When the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains the *Secondary CCPCH IE*, the Node B shall configure and activate the indicated Secondary CCPCH(s) according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message.]

[TDD - FACHs and PCH may be mapped onto a CCTrCH which may consist of several Secondary CCPCHs]

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains the *FACH Parameters IE*, the Node B shall configure and activate the indicated FACH(s) according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message.

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains the *PCH Parameters* IE, the Node B shall configure and activate the concerned PCH and the associated PICH according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message.

[1.28Mcps TDD – If the *PCH Power* IE is included in the *PCH Parameters* IE of the COMMON TRANSPORT CHANNEL SETUP REQUEST, the Node B shall use this value as the power at which the PCH shall be transmitted.]

[1.28Mcps TDD - If the *TSTD Indicator* IE for the S-CCPCH is included and is set to "active" in the COMMON TRANSPORT CHANNEL SETUP REQUEST, the Node B shall activate TSTD diversity for all S-CCPCHs defined in the message that are not beacon channels [19,21]. If the *TSTD Indicator* IE is set to "not active" or *TSTD Indicator* IE is not included for the S-CCPCH in the COMMON TRANSPORT CHANNEL SETUP REQUEST, the Node B shall not activate TSTD diversity for the S-CCPCHs defined in the message.]

[1.28Mcps TDD - If the *TSTD Indicator* IE for the PICH is included and is set to "active" in the COMMON TRANSPORT CHANNEL SETUP REQUEST message, the Node B shall activate TSTD diversity for the PICH if it is not a beacon channel [19,21]. If the *TSTD Indicator* IE is set to "not active" or the *TSTD Indicator* IE is not included for the PICH in the COMMON TRANSPORT CHANNEL SETUP REQUEST message, the Node B shall not activate TSTD diversity for the PICH defined in the message.]

#### PRACH:

When the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains the *PRACH* IE, the Node B shall configure and activate the indicated PRACH and the associated RACH [FDD – and the associated AICH] according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message.

#### [1.28Mcps TDD – FPACH]:

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains the *FPACH* IE, the Node B shall configure and activate the indicated FPACH according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message.

#### [FDD-PCPCHs]:

When the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains the *CPCH Parameters* IE, the Node B shall configure and activate the indicated CPCH and the associated PCPCH(s), AP-AICH and CD/CA-ICH according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message.

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message includes *CD Signatures* IE, the Node B may use only the given CD signatures on CD/CA-ICH. Otherwise, the Node B may use all the CD signatures on CD/CA-ICH.

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message includes *CD Sub Channel Numbers* IE, the Node B may use only the given CD Sub Channels on CD/CA-ICH. Otherwise, the Node B may use all the CD Sub Channels on CD/CA-ICH.

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message includes *Channel Request Parameters* IE, the Node B shall use the parameters to distinguish the PCPCHs.

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message includes *AP Sub Channel Number* IE in *Channel Request Parameters* IE, the Node B shall use only these AP sub channel number to distinguish the configured PCPCH. Otherwise all AP subchannel numbers are used to distinguish the configured PCPCH.

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message includes *AP Sub Channel Number* IE in *SF Request Parameters* IE, the Node B shall use only these AP sub channel number to

distinguish the requested Spreading Factors. Otherwise all AP subchannel numbers are used to distinguish the configured Spreading Factor.

**General:**

After successfully configuring the requested common transport channels and the common physical channels , the Node B shall store the value of *Configuration Generation ID* IE and it shall respond with the COMMON TRANSPORT CHANNEL SETUP RESPONSE message with the *Common Transport Channel ID* IE, the *Binding ID* IE and the *Transport Layer Address* IE for the configured common transport channels.

After a successful procedure and once the transport bearers are established, the configured common transport channels and the common physical channels shall adopt the state Enabled [6] in the Node B and the common physical channels exist on the Uu interface.


## 8.2.18 Physical Shared Channel Reconfiguration [TDD]

### 8.2.18.1 General

This procedure is used for handling PDSCH Sets and PUSCH Sets in the Node B, i.e.

- Adding new PDSCH Sets and/or PUSCH Sets,
- Modifying these, and
- Deleting them.

### 8.2.18.2 Successful Operation

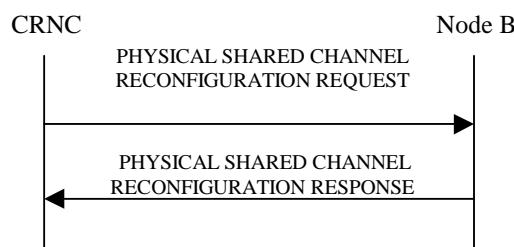

**Figure 26: Physical Shared Channel Reconfiguration: Successful Operation**

The procedure is initiated with a PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message sent from the CRNC to the Node B using the Node B Control Port.

If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message includes an SFN IE, the Node B shall activate the new configuration on that specified SFN.

#### PDSCH/PUSCH Addition

If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message includes any PDSCH sets or PUSCH sets to be added, the Node B shall add these new sets to its PDSCH/PUSCH configuration.

[1.28Mcps TDD - If the *TSTD Indicator* IE is included in *PDSCH To Add Information LCR* IE and is set to "active", the Node B shall activate TSTD diversity for PDSCH transmissions using the specified PDSCH Set that are not beacon channels [19,21]. If the *TSTD Indicator* IE is set to "not active" or the *TSTD Indicator* IE is not included in *PDSCH To Add Information LCR* IE, the Node B shall not activate TSTD diversity for the PDSCH Set.]

#### PDSCH/PUSCH Modification

If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message includes any PDSCH sets or PUSCH sets to be modified, and includes any of [3.84Mcps TDD - *DL/UL Code Information* IE, *Midamble Shift And Burst Type* IE, *Time Slot* IE], [1.28Mcps TDD - *DL/UL Code Information LCR* IE, *Midamble Shift LCR* IE, *Time Slot LCR* IE], *TDD Physical Channel Offset* IE, *Repetition Period* IE, *Repetition Length* IE or *TFCI Presence* IE, the Node B shall apply these as the new values, otherwise the old values specified for this set are still applicable.

#### PDSCH/PUSCH Deletion

If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message includes any PDSCH sets or PUSCH sets to be deleted, the Node B shall delete these sets from its PDSCH/PUSCH configuration.

In the successful case, the Node B shall add, modify and delete the PDSCH Sets and PUSCH Sets in the Common Transport Channel data base, as requested in the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message, and shall make these available to all the current and future DSCH and USCH transport channels. The Node B shall respond with the PHYSICAL SHARED CHANNEL RECONFIGURATION RESPONSE message.

**[1.28Mcps TDD – Uplink Synchronisation Parameters LCR]:**

[1.28Mcps TDD - If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message contains the *Uplink Synchronisation Parameters LCR* IE, the Node B shall use the indicated values of *Uplink Synchronisation Stepsize* IE and *Uplink Synchronisation Frequency* IE when evaluating the timing of the UL synchronisation.]

### 9.1.3 COMMON TRANSPORT CHANNEL SETUP REQUEST

#### 9.1.3.2 TDD Message

| IE/Group Name  | Presence | Range                        | IE Type and Reference | Semantics Description   | Criticality | Assigned Criticality |
|--|----------|------------------------------|-----------------------|---|-------------|----------------------|
| Message Discriminator                                  | M        |                              | 9.2.1.45              |   | –           |                      |
| Message Type   | M        |                              | 9.2.1.46              |   | YES         | reject               |
| Transaction ID   | M        |                              | 9.2.1.62              |   | –           |                      |
| C-ID   | M        |                              | 9.2.1.9               |   | YES         | reject               |
| Configuration Generation ID                            | M        |                              | 9.2.1.16              |   | YES         | reject               |
| <i>CHOICE Common Physical Channel To Be Configured</i> | M        |                              |                       |   | YES         | ignore               |
| >Secondary CCPCHs                                      |          |                              |                       |   | –           |                      |
| >>SCCPCH CCTrCH ID                                     | M        |                              | CCTrCH ID<br>9.2.3.3  | For DL<br>CCTrCH<br>supporting one<br>or several<br>Secondary<br>CCPCHs | –           |                      |
| >>TFCS   | M        |                              | 9.2.1.58              | For DL<br>CCTrCH<br>supporting one<br>or several<br>Secondary<br>CCPCHs | –           |                      |
| >>TFCI Coding  | M        |                              | 9.2.3.22              |   | –           |                      |
| >>Puncture Limit                                       | M        |                              | 9.2.1.50              |   | –           |                      |
| >>CHOICE HCR or LCR                                    | M        |                              |                       | See note 1<br>below   | –           |                      |
| >>>3.84Mcps TDD  |          |                              |                       |   | –           |                      |
| >>>Secondary<br>CCPCH                                  |          | 1..<maxno<br>ofSCCPCH<br>Hs> |                       |   | GLOBAL      | reject               |
| >>>>Common<br>Physical Channel ID                      | M        |                              | 9.2.1.13              |   | –           |                      |
| >>>>TDD<br>Channelisation Code                         | M        |                              | 9.2.3.19              |   | –           |                      |
| >>>>Time Slot  | M        |                              | 9.2.3.23              |   | –           |                      |
| >>>>Midamble<br>Shift And Burst Type                   | M        |                              | 9.2.3.7               |   | –           |                      |
| >>>>TDD Physical<br>Channel Offset                     | M        |                              | 9.2.3.20              |   | –           |                      |
| >>>>Repetition<br>Period                               | M        |                              | 9.2.3.16              |   | –           |                      |
| >>>>Repetition<br>Length                               | M        |                              | 9.2.3.15              |   | –           |                      |
| >>>>SCCPCH<br>Power                                    | M        |                              | DL Power<br>9.2.1.21  |   | –           |                      |
| >>>1.28Mcps TDD  |          |                              |                       |   | –           |                      |
| >>>Secondary   |          | 1..<maxno                    |                       |   | GLOBAL      | reject               |

|  |   |                                     |  |                                       |        |        |
|--|---|-------------------------------------|--|---------------------------------------|--------|--------|
| <b>CCPCH LCR</b>                       |   | <i>ofSCCPCH<br/>HsLCR&gt;</i>       |  |                                       |        |        |
| >>>>Common Physical Channel ID         | M |                                     | 9.2.1.13   |                                       | –      |        |
| >>>>TDD Channelisation Code LCR        | M |                                     | 9.2.3.19a  |                                       | –      |        |
| >>>>Time Slot LCR                      | M |                                     | 9.2.3.24A  |                                       | –      |        |
| >>>>Midamble Shift LCR                 | M |                                     | 9.2.3.7A   |                                       | –      |        |
| >>>>TDD Physical Channel Offset        | M |                                     | 9.2.3.20   |                                       | –      |        |
| >>>>Repetition Period                  | M |                                     | 9.2.3.16   |                                       | –      |        |
| >>>>Repetition Length                  | M |                                     | 9.2.3.15   |                                       | –      |        |
| >>>>SCCPCH Power                       | M |                                     | DL Power<br>9.2.1.21                             |                                       | –      |        |
| >>>> SCCPCH Time Slot Format LCR       | M |                                     | TDD DL<br>DPCH Time Slot Format LCR<br>9.2.3.19D |                                       | –      |        |
| <b>&gt;&gt;FACH Parameters</b>         |   | <i>0..&lt;maxno<br/>ofFACHs&gt;</i> |  |                                       | GLOBAL | reject |
| >>Common Transport Channel ID          | M |                                     | 9.2.1.14   |                                       | –      |        |
| >>FACH CCTrCH ID                       | M |                                     | CCTrCH ID<br>9.2.3.3                             |                                       | –      |        |
| >>Transport Format Set                 | M |                                     | 9.2.1.59   | For the DL.                           | –      |        |
| >>ToAWS                                | M |                                     | 9.2.1.61   |                                       | –      |        |
| >>ToAWE                                | M |                                     | 9.2.1.60   |                                       | –      |        |
| >>Max FACH Power                       | O |                                     | DL Power<br>9.2.1.21                             | Applicable to<br>1.28Mcps TDD<br>only | YES    | reject |
| <b>&gt;&gt;PCH Parameters</b>          |   | <i>0..1</i>                         |  |                                       | YES    | reject |
| >>Common Transport Channel ID          | M |                                     | 9.2.1.14   |                                       | –      |        |
| >>PCH CCTrCH ID                        | M |                                     | CCTrCH ID<br>9.2.3.3                             |                                       | –      |        |
| >>Transport Format Set                 | M |                                     | 9.2.1.59   | For the DL.                           | –      |        |
| >>ToAWS                                | M |                                     | 9.2.1.61   |                                       | –      |        |
| >>ToAWE                                | M |                                     | 9.2.1.60   |                                       | –      |        |
| >>>CHOICE HCR or LCR                   | M |                                     |  | See note 1<br>below                   | –      |        |
| >>>>3.84Mcps TDD                       |   |                                     |  |                                       | –      |        |
| <b>&gt;&gt;&gt;&gt;PICH Parameters</b> |   | 1                                   |  |                                       | YES    | reject |
| >>>>Common                             | M |                                     | 9.2.1.13   |                                       | –      |        |

|  |   |   |  |                               |     |        |
|--|---|---|--|-------------------------------|-----|--------|
| Physical Channel ID                    |   |   |  |                               |     |        |
| >>>>TDD Channelisation Code            | M |   | 9.2.3.19                                 |                               | -   |        |
| >>>>Time Slot                          | M |   | 9.2.3.23                                 |                               | -   |        |
| >>>>Midamble Shift And Burst Type      | M |   | 9.2.3.7                                  |                               | -   |        |
| >>>>TDD Physical Channel Offset        | M |   | 9.2.3.20                                 |                               | -   |        |
| >>>>Repetition Period                  | M |   | 9.2.3.16                                 |                               | -   |        |
| >>>>Repetition Length                  | M |   | 9.2.3.15                                 |                               | -   |        |
| >>>>Paging Indicator Length            | M |   | 9.2.3.8                                  |                               | -   |        |
| >>>>PICH Power                         | M |   | 9.2.1.49A                                |                               | -   |        |
| >>>1.28Mcps TDD                        |   |   |  |                               | -   |        |
| <b>&gt;&gt;&gt;PICH Parameters LCR</b> |   | 1 |  |                               | YES | reject |
| >>>>Common Physical Channel ID         | M |   | 9.2.1.13                                 |                               | -   |        |
| >>>>TDD Channelisation Code LCR        | M |   | 9.2.3.19a                                |                               | -   |        |
| >>>>Time Slot LCR                      | M |   | 9.2.3.24A                                |                               | -   |        |
| >>>>Midamble Shift LCR                 | M |   | 9.2.3.7A                                 |                               | -   |        |
| >>>>TDD Physical Channel Offset        | M |   | 9.2.3.20                                 |                               | -   |        |
| >>>>Repetition Period                  | M |   | 9.2.3.16                                 |                               | -   |        |
| >>>>Repetition Length                  | M |   | 9.2.3.15                                 |                               | -   |        |
| >>>>Paging Indicator Length            | M |   | 9.2.3.8                                  |                               | -   |        |
| >>>>PICH Power                         | M |   | 9.2.1.49A                                |                               | -   |        |
| >>>>Second TDD Channelisation Code LCR | M |   | TDD Channelisation Code LCR<br>9.2.3.19a |                               | -   |        |
| <b>&gt;&gt;&gt;&gt;TSTD Indicator</b>  | O |   | <a href="#">9.2.1.64</a>                 |                               | YES | reject |
| >>PCH Power                            | O |   | DL Power<br>9.2.1.21                     | Applicable to<br>1.28Mcps TDD | YES | reject |

|  |  |  |  |      |  |
|--|--|--|--|------|--|
|  |  |  |  | only |  |
|--|--|--|--|------|--|

| <a href="#">&gt;&gt;TSTD Indicator</a>    | <a href="#">O</a> |                        | <a href="#">9.2.1.64</a>  | <a href="#">Applicable to 1.28Mcps TDD only</a>                             | <a href="#">YES</a> | <a href="#">reject</a> |
|---|-------------------|------------------------|---------------------------|---|---------------------|------------------------|
| > <i>PRACH</i>                            |                   |                        |                           |   | –                   |                        |
| >> <i>CHOICE HCR or LCR</i>               | M                 |                        |                           | See note 1 below  | –                   |                        |
| >>> <i>3.84Mcps TDD</i>                   |                   |                        |                           |   | –                   |                        |
| >>>> <i>PRACH</i>                         |                   | 1                      |                           |   | YES                 | <a href="#">reject</a> |
| >>>>> <i>Common Physical Channel ID</i>   | M                 |                        | <a href="#">9.2.1.13</a>  |   | –                   |                        |
| >>>>> <i>TFCS</i>                         | M                 |                        | <a href="#">9.2.1.58</a>  |   | –                   |                        |
| >>>>> <i>Time Slot</i>                    | M                 |                        | <a href="#">9.2.3.23</a>  |   | –                   |                        |
| >>>>> <i>TDD Channelisation Code</i>      | M                 |                        | <a href="#">9.2.3.19</a>  |   | –                   |                        |
| >>>>> <i>Max PRACH Midamble Shifts</i>    | M                 |                        | <a href="#">9.2.3.6</a>   |   | –                   |                        |
| >>>>> <i>PRACH Midamble</i>               | M                 |                        | <a href="#">9.2.3.14</a>  |   | –                   |                        |
| >>>>> <i>RACH</i>                         |                   | 1                      |                           |   | YES                 | <a href="#">reject</a> |
| >>>>>> <i>Common Transport Channel ID</i> | M                 |                        | <a href="#">9.2.1.14</a>  |   | –                   |                        |
| >>>>>> <i>Transport Format Set</i>        | M                 |                        | <a href="#">9.2.1.59</a>  | For the UL  | –                   |                        |
| >>> <i>1.28Mcps TDD</i>                   |                   |                        |                           |   |                     |                        |
| >>>> <i>PRACH LCR</i>                     |                   | 1..<maxno ofPRACHLCRs> |                           |   | GLOBAL              | <a href="#">reject</a> |
| >>>>> <i>Common Physical Channel ID</i>   | M                 |                        | <a href="#">9.2.1.13</a>  |   | –                   |                        |
| >>>>> <i>TFCS</i>                         | M                 |                        | <a href="#">9.2.1.58</a>  |   | –                   |                        |
| >>>>> <i>Time Slot LCR</i>                | M                 |                        | <a href="#">9.2.3.24A</a> |   | –                   |                        |
| >>>>> <i>TDD Channelisation Code LCR</i>  | M                 |                        | <a href="#">9.2.3.19a</a> |   | –                   |                        |
| >>>>> <i>Midamble Shift LCR</i>           | M                 |                        | <a href="#">9.2.3.7A</a>  |   | –                   |                        |
| >>>>> <i>RACH</i>                         |                   | 1                      |                           |   | YES                 | <a href="#">reject</a> |
| >>>>>> <i>Common Transport Channel ID</i> | M                 |                        | <a href="#">9.2.1.14</a>  |   | –                   |                        |
| >>>>>> <i>Transport Format Set</i>        | M                 |                        | <a href="#">9.2.1.59</a>  | For the UL  | –                   |                        |
| >> <i>FPACH</i>                           |                   | 0..1                   |                           | <a href="#">Mandatory for 1.28Mcps TDD. Not Applicable to 3.84Mcps TDD.</a> | YES                 | <a href="#">reject</a> |
| >> <i>Common Physical Channel ID</i>      | M                 |                        | <a href="#">9.2.1.13</a>  |   | –                   |                        |
| >> <i>TDD Channelisation</i>              | M                 |                        | <a href="#">9.2.3.19a</a> |   | –                   |                        |

| Code LCR              |   |  |           |  |   |  |
|-----------------------|---|--|-----------|--|---|--|
| >>>Time Slot LCR      | M |  | 9.2.3.24A |  | - |  |
| >>>Midamble Shift LCR | M |  | 9.2.3.7A  |  | - |  |
| >>>Max FPACH Power    | M |  | 9.2.3.5E  |  | - |  |

Note 1: This information element is a simplified representation of the ASN.1. The choice is in reality performed through the use of ProtocolIE-Single-Container within the ASN.1.

| Range Bound              | Explanation   |
|--------------------------|---|
| <i>maxnoofSCCPCHs</i>    | Maximum number of Secondary CCPCHs per CCTrCH for 3.84Mcps TDD              |
| <i>maxnoofSCCPCHsLCR</i> | Maximum number of Secondary CCPCHs per CCTrCH for 1.28Mcps TDD              |
| <i>maxnoofCCTrCHs</i>    | Maximum number of CCTrCHs that can be defined in a cell                     |
| <i>maxnoofFACHs</i>      | Maximum number of FACHs that can be defined on a Secondary CCPCH            |
| <i>maxnoofPRACHLCRs</i>  | Maximum number of PRACHs LCR that can be defined on a RACH for 1.28Mcps TDD |

### 9.1.62 PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST [TDD]

| IE/Group Name                    | Presence | Range                                | IE Type and Reference | Semantics Description                                       | Criticality | Assigned Criticality |
|----------------------------------|----------|--------------------------------------|-----------------------|---|-------------|----------------------|
| Message Discriminator            | M        |                                      | 9.2.1.45              |   | –           |                      |
| Message Type                     | M        |                                      | 9.2.1.46              |   | YES         | reject               |
| Transaction ID                   | M        |                                      | 9.2.1.62              |   | –           |                      |
| C-ID                             | M        |                                      | 9.2.1.9               |   | YES         | reject               |
| SFN                              | O        |                                      | 9.2.1.53A             |   | YES         | reject               |
| <b>PDSCH Sets To Add</b>         |          | <i>0..&lt;maxno ofPDSCH Sets&gt;</i> |                       |   | GLOBAL      | reject               |
| >PDSCH Set ID                    | M        |                                      | 9.2.3.11              |   | –           |                      |
| >PDSCH To Add Information        |          | <i>0..1</i>                          |                       | Mandatory for 3.84Mcps TDD. Not Applicable to 1.28Mcps TDD. | YES         | reject               |
| >>Repetition Period              | M        |                                      | 9.2.3.16              |   | –           |                      |
| >>Repetition Length              | M        |                                      | 9.2.3.15              |   | –           |                      |
| >>TDD Physical Channel Offset    | M        |                                      | 9.2.3.20              |   | –           |                      |
| >>DL Timeslot Information        |          | <i>1..&lt;maxno ofDLts&gt;</i>       |                       |   | –           |                      |
| >>>Time Slot                     | M        |                                      | 9.2.3.23              |   | –           |                      |
| >>>Midamble Shift And Burst Type | M        |                                      | 9.2.3.7               |   | –           |                      |
| >>>TFCI Presence                 | M        |                                      | 9.2.1.57              |   | –           |                      |
| >>>DL Code Information           |          | <i>1..&lt;maxno ofPDSCHs &gt;</i>    |                       |   | –           |                      |
| >>>>PDSCH ID                     | M        |                                      | 9.2.3.10              |   | –           |                      |
| >>>>TDD Channelisation Code      | M        |                                      | 9.2.3.19              |   | –           |                      |
| >PDSCH To Add Information LCR    |          | <i>0..1</i>                          |                       | Mandatory for 1.28Mcps TDD. Not Applicable to 3.84Mcps TDD. | YES         | reject               |
| >>Repetition Period              | M        |                                      | 9.2.3.16              |   | –           |                      |
| >>Repetition Length              | M        |                                      | 9.2.3.15              |   | –           |                      |
| >>TDD Physical Channel Offset    | M        |                                      | 9.2.3.20              |   | –           |                      |
| >>DL Timeslot Information LCR    |          | <i>1..&lt;maxno ofDLtsLCR &gt;</i>   |                       |   | –           |                      |
| >>>Time Slot LCR                 | M        |                                      | 9.2.3.24A             |   | –           |                      |
| >>>Midamble Shift LCR            | M        |                                      | 9.2.3.7A              |   | –           |                      |
| >>>TFCI Presence                 | M        |                                      | 9.2.1.57              |   | –           |                      |
| >>>DL Code Information LCR       |          | <i>1..&lt;maxno ofPDSCHs &gt;</i>    |                       |   | –           |                      |
| >>>>PDSCH ID                     | M        |                                      | 9.2.3.10              |   | –           |                      |

|  |   |                                      |                          |                  |                     |                        |
|--|---|--------------------------------------|--------------------------|------------------|---------------------|------------------------|
| >>>TDD Channelisation Code LCR                     | M |                                      | 9.2.3.19a                |                  | -                   |                        |
| >> <u>TSTD Indicator</u>                           | O |                                      | <a href="#">9.2.1.64</a> |                  | <a href="#">YES</a> | <a href="#">reject</a> |
| <b>PDSCH Sets To Modify</b>                        |   | <i>0..&lt;maxno of PDSCHSets&gt;</i> |                          |                  | GLOBAL              | reject                 |
| >PDSCH Set ID                                      | M |                                      | 9.2.3.11                 |                  | -                   |                        |
| >CHOICE HCR or LCR                                 | M |                                      |                          | See note 1 below | -                   |                        |
| >>3.84Mcps TDD                                     |   |                                      |                          |                  | -                   |                        |
| <b>&gt;&gt;&gt;PDSCH To Modify Information</b>     |   | 1                                    |                          |                  | YES                 | reject                 |
| >>>Repetition Period                               | O |                                      | 9.2.3.16                 |                  | -                   |                        |
| >>>Repetition Length                               | O |                                      | 9.2.3.15                 |                  | -                   |                        |
| >>>TDD Physical Channel Offset                     | O |                                      | 9.2.3.20                 |                  | -                   |                        |
| <b>&gt;&gt;&gt;DL Timeslot Information</b>         |   | <i>0..&lt;maxno ofDLTs&gt;</i>       |                          |                  | -                   |                        |
| >>>>Time Slot                                      | M |                                      | 9.2.3.23                 |                  | -                   |                        |
| >>>>Midamble Shift And Burst Type                  | O |                                      | 9.2.3.7                  |                  | -                   |                        |
| >>>>TFCI Presence                                  | O |                                      | 9.2.1.57                 |                  | -                   |                        |
| <b>&gt;&gt;&gt;&gt;DL Code Information</b>         |   | <i>0..&lt;maxno ofPDSCHs&gt;</i>     |                          |                  | -                   |                        |
| >>>>>PDSCH ID                                      | M |                                      | 9.2.3.10                 |                  | -                   |                        |
| >>>>>TDD Channelisation Code                       | M |                                      | 9.2.3.19                 |                  | -                   |                        |
| >>1.28Mcps TDD                                     |   |                                      |                          |                  | -                   |                        |
| <b>&gt;&gt;&gt;PDSCH To Modify Information LCR</b> |   | 1                                    |                          |                  | YES                 | reject                 |
| >>>Repetition Period                               | O |                                      | 9.2.3.16                 |                  | -                   |                        |
| >>>Repetition Length                               | O |                                      | 9.2.3.15                 |                  | -                   |                        |
| >>>TDD Physical Channel Offset                     | O |                                      | 9.2.3.20                 |                  | -                   |                        |
| <b>&gt;&gt;&gt;DL Timeslot Information LCR</b>     |   | <i>0..&lt;maxno ofDLTsLCR&gt;</i>    |                          |                  | -                   |                        |
| >>>>Time Slot LCR                                  | M |                                      | 9.2.3.24A                |                  | -                   |                        |
| >>>>Midamble Shift LCR                             | O |                                      | 9.2.3.7A                 |                  | -                   |                        |
| >>>>TFCI Presence                                  | O |                                      | 9.2.1.57                 |                  | -                   |                        |
| <b>&gt;&gt;&gt;&gt;DL Code Information LCR</b>     |   | <i>0..&lt;maxno ofPDSCHs&gt;</i>     |                          |                  | -                   |                        |
| >>>>>PDSCH ID                                      | M |                                      | 9.2.3.10                 |                  | -                   |                        |

|  |   |                                      |           |   |        |        |
|--|---|--------------------------------------|-----------|---|--------|--------|
| >>>>TDD Channelisation Code LCR            | M |                                      | 9.2.3.19a |   | -      |        |
| <b>PDSCH Sets To Delete</b>                |   | <i>0..&lt;maxno of PDSCHSets&gt;</i> |           |   | GLOBAL | reject |
| >PDSCH Set ID                              | M |                                      | 9.2.3.11  |   | -      |        |
| <b>PUSCH Sets To Add</b>                   |   | <i>0..&lt;maxno of PUSCHSets&gt;</i> |           |   | GLOBAL | reject |
| >PUSCH Set ID                              | M |                                      | 9.2.3.13  |   | -      |        |
| <b>&gt;PUSCH To Add Information</b>        |   | 0..1                                 |           | Mandatory for 3.84Mcps TDD. Not Applicable to 1.28Mcps TDD. | YES    | reject |
| >>Repetition Period                        | M |                                      | 9.2.3.16  |   | -      |        |
| >>Repetition Length                        | M |                                      | 9.2.3.15  |   | -      |        |
| >>TDD Physical Channel Offset              | M |                                      | 9.2.3.20  |   | -      |        |
| <b>&gt;&gt;UL Timeslot Information</b>     |   | <i>1..&lt;maxno ofULTs&gt;</i>       |           |   | -      |        |
| >>>Time Slot                               | M |                                      | 9.2.3.23  |   | -      |        |
| >>>Midamble Shift And Burst Type           | M |                                      | 9.2.3.7   |   | -      |        |
| >>>TFCI Presence                           | M |                                      | 9.2.1.57  |   | -      |        |
| <b>&gt;&gt;&gt;UL Code Information</b>     |   | <i>1..&lt;maxno ofPUSCHs&gt;</i>     |           |   | -      |        |
| >>>PUSCH ID                                | M |                                      | 9.2.3.12  |   | -      |        |
| >>>TDD Channelisation Code                 | M |                                      | 9.2.3.19  |   | -      |        |
| <b>&gt;PUSCH To Add Information LCR</b>    |   | 0..1                                 |           | Mandatory for 1.28Mcps TDD. Not Applicable to 3.84Mcps TDD. | YES    | reject |
| >>Repetition Period                        | M |                                      | 9.2.3.16  |   | -      |        |
| >>Repetition Length                        | M |                                      | 9.2.3.15  |   | -      |        |
| >>TDD Physical Channel Offset              | M |                                      | 9.2.3.20  |   | -      |        |
| <b>&gt;&gt;UL Timeslot Information LCR</b> |   | <i>1..&lt;maxno ofULTsLCR&gt;</i>    |           |   | -      |        |
| >>>Time Slot LCR                           | M |                                      | 9.2.3.24A |   | -      |        |
| >>>Midamble Shift LCR                      | M |                                      | 9.2.3.7A  |   | -      |        |
| >>>TFCI Presence                           | M |                                      | 9.2.1.57  |   | -      |        |
| <b>&gt;&gt;&gt;UL Code Information LCR</b> |   | <i>1..&lt;maxno ofPUSCHs&gt;</i>     |           |   | -      |        |
| >>>PUSCH ID                                | M |                                      | 9.2.3.12  |   | -      |        |
| >>>TDD Channelisation Code LCR             | M |                                      | 9.2.3.19a |   | -      |        |

| PUSCH Sets To Modify               |   | 0..<maxno of PUSCHSets> |           |                                 | GLOBAL | reject |
|------------------------------------|---|-------------------------|-----------|---------------------------------|--------|--------|
| >PUSCH Set ID                      | M |                         | 9.2.3.13  |                                 | –      |        |
| >CHOICE <i>HCR or LCR</i>          | M |                         |           | See note 1 below                | –      |        |
| >>3.84Mcps TDD                     |   |                         |           |                                 | –      |        |
| >>>PUSCH To Modify Information     |   | 1                       |           |                                 | YES    | reject |
| >>>>Repetition Period              | O |                         | 9.2.3.16  |                                 | –      |        |
| >>>>Repetition Length              | O |                         | 9.2.3.15  |                                 | –      |        |
| >>>>TDD Physical Channel Offset    | O |                         | 9.2.3.20  |                                 | –      |        |
| >>>>UL Timeslot Information        |   | 0..<maxno ofULts>       |           |                                 | –      |        |
| >>>>>Time Slot                     | M |                         | 9.2.3.23  |                                 | –      |        |
| >>>>>Midamble Shift And Burst Type | O |                         | 9.2.3.7   |                                 | –      |        |
| >>>>>TFCI Presence                 | O |                         | 9.2.1.57  |                                 | –      |        |
| >>>>>UL Code Information           |   | 0..<maxno ofPUSCHs >    |           |                                 | –      |        |
| >>>>>>PUSCH ID                     | M |                         | 9.2.3.12  |                                 | –      |        |
| >>>>>>TDD Channelisation Code      | M |                         | 9.2.3.19  |                                 | –      |        |
| >>1.28Mcps TDD                     |   |                         |           |                                 | –      |        |
| >>>PUSCH To Modify Information LCR |   | 1                       |           |                                 | YES    | reject |
| >>>>Repetition Period              | O |                         | 9.2.3.16  |                                 | –      |        |
| >>>>Repetition Length              | O |                         | 9.2.3.15  |                                 | –      |        |
| >>>>TDD Physical Channel Offset    | O |                         | 9.2.3.20  |                                 | –      |        |
| >>>>UL Timeslot Information LCR    |   | 0..<maxno ofULtsLCR >   |           | Applicable to 1.28Mcps TDD only | –      |        |
| >>>>>Time Slot LCR                 | M |                         | 9.2.3.24A |                                 | –      |        |
| >>>>>Midamble Shift LCR            | O |                         | 9.2.3.7A  |                                 | –      |        |
| >>>>>TFCI Presence                 | O |                         | 9.2.1.57  |                                 | –      |        |
| >>>>>UL Code Information LCR       |   | 0..<maxno ofPUSCHs >    |           |                                 | –      |        |
| >>>>>>PUSCH ID                     | M |                         | 9.2.3.12  |                                 | –      |        |
| >>>>>>TDD Channelisation Code LCR  | M |                         | 9.2.3.19a |                                 | –      |        |

|                             |   |  |          |  |        |        |
|-----------------------------|---|--|----------|--|--------|--------|
| <b>PUSCH Sets To Delete</b> |   | <i>0..&lt;maxno<br/>ofPUSCH<br/>Sets&gt;</i> |          |  | GLOBAL | reject |
| >PUSCH Set ID               | M |  | 9.2.3.13 |  | -      |        |

Note 1: This information element is a simplified representation of the ASN.1. The choice is in reality performed through the use of ProtocolIE-Single-Container within the ASN.1.

| Range Bound             | Explanation  |
|-------------------------|--|
| <i>maxnoofPDSCHSets</i> | Maximum number of PDSCH Sets in a cell                           |
| <i>maxnoofPDSCHs</i>    | Maximum number of PDSCHs in a cell                               |
| <i>maxnoofPUSCHSets</i> | Maximum number of PUSCH Sets in a cell                           |
| <i>maxnoofPUSCHs</i>    | Maximum number of PUSCHs in a cell                               |
| <i>maxnoofDLts</i>      | Maximum number of Downlink time slots in a cell for 3.84Mcps TDD |
| <i>maxnoofDLtsLCR</i>   | Maximum number of Downlink time slots in a cell for 1.28Mcps TDD |
| <i>maxnoofULts</i>      | Maximum number of Uplink time slots in a cell for 3.84Mcps TDD   |
| <i>maxnoofULtsLCR</i>   | Maximum number of Uplink time slots in a cell for 1.28Mcps TDD   |

### 9.3.3 PDU Definitions

```
-- ****
-- IE parameter types from other modules.
--
-- ****

IMPORTS

/// break ///

FROM NBAP-Containers
    id-Active-Pattern-Sequence-Information,
    id-AdjustmentRatio,
    id-AICH-Information,
    id-AICH-ParametersListIE-CTCH-ReconfRqstFDD,
    id-AP-AICH-Information,
    id-AP-AICH-ParametersListIE-CTCH-ReconfRqstFDD,
/// break ///

    id-T-Cell,
    id-TFCI2-Bearer-Information-RL-SetupRqstFDD,
    id-TFCI2-BearerInformationResponse,
    id-TFCI2-BearerSpecificInformation-RL-ReconfPrepFDD,
    id-Transmission-Gap-Pattern-Sequence-Information,
    id-TimeSlotConfigurationList-Cell-ReconfRqstTDD,
    id-TimeSlotConfigurationList-Cell-SetupRqstTDD,
    id-timeslotInfo-CellSyncInitiationRqstTDD,
    id-TimeslotISCPInfo,
    id-TimingAdvanceApplied,
    id-TransmissionDiversityApplied,
    id-Tstd-indicator,
    id-UARFCNforNt,
    id-UARFCNforNd,
    id-UARFCNforNu,

-- ****
-- COMMON TRANSPORT CHANNEL SETUP REQUEST TDD
--
```

```

-- ****
CommonTransportChannelSetupRequestTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container   {{CommonTransportChannelSetupRequestTDD-IES}},
    protocolExtensions    ProtocolExtensionContainer {{CommonTransportChannelSetupRequestTDD-Extensions}}                                OPTIONAL,
    ...
}

CommonTransportChannelSetupRequestTDD-IES NBAP-PROTOCOL-IES ::= {
    { ID      id-C-ID                               CRITICALITY reject      TYPE
        PRESENCE mandatory }|
    { ID      id-ConfigurationGenerationID          CRITICALITY reject      TYPE
        ConfigurationGenerationID      PRESENCE mandatory }|
    { ID      id-CommonPhysicalChannelType-CTCH-SetupRqstTDD    CRITICALITY ignore      TYPE
        CommonPhysicalChannelType-CTCH-SetupRqstTDD      PRESENCE mandatory },
    ...
}

CommonTransportChannelSetupRequestTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

CommonPhysicalChannelType-CTCH-SetupRqstTDD ::= CHOICE {
    secondary-CCPCH-parameters           Secondary-CCPCH-CTCH-SetupRqstTDD,
    pRACH-parameters                     PRACH-CTCH-SetupRqstTDD,
    ...
}

Secondary-CCPCH-CTCH-SetupRqstTDD ::= SEQUENCE {
    sCCPCH-CCTrCH-ID                  CCTrCH-ID,
    tFCFS                            TFCS,
    tFCI-Coding                      TFCI-Coding,
    punctureLimit                    PunctureLimit,
    secondaryCCPCH-parameterList     Secondary-CCPCH-parameterList-CTCH-SetupRqstTDD,
    fACH-ParametersList              FACH-ParametersList-CTCH-SetupRqstTDD      OPTIONAL,
    pCH-Parameters                   PCH-Parameters-CTCH-SetupRqstTDD      OPTIONAL,
    ie-Extensions                     ProtocolExtensionContainer {{Secondary-CCPCHItem-CTCH-SetupRqstTDD-Ext IEs}}
    OPTIONAL,
    ...
}

Secondary-CCPCHItem-CTCH-SetupRqstTDD-Ext IEs NBAP-PROTOCOL-EXTENSION ::= {
    { ID      id-Tstd-indicator             CRITICALITY reject      EXTENSION  TSTD-Indicator      PRESENCE      optional },
    -- Applicable to 1.28Mcps TDD only
    ...
}

```

```

Secondary-CCPCH-parameterList-CTCH-SetupRqstTDD ::= ProtocolIE-Single-Container {{ Secondary-CCPCH-parameterListIEs-CTCH-SetupRqstTDD
} }

Secondary-CCPCH-parameterListIEs-CTCH-SetupRqstTDD NBAP-PROTOCOL-IES ::= {
    { ID id-Secondary-CCPCH-parameterListIE-CTCH-SetupRqstTDD CRITICALITY reject TYPE Secondary-CCPCH-parameterListIE-CTCH-
SetupRqstTDD PRESENCE optional }
    { ID id-Secondary-CCPCH-LCR-parameterList-CTCH-SetupRqstTDD CRITICALITY reject TYPE Secondary-CCPCH-LCR-parameterList-CTCH-
SetupRqstTDD PRESENCE optional }
}

Secondary-CCPCH-parameterListIE-CTCH-SetupRqstTDD ::= SEQUENCE (SIZE (1..maxNrOfSCCPCHs)) OF Secondary-CCPCH-parameterItem-CTCH-
SetupRqstTDD

Secondary-CCPCH-parameterItem-CTCH-SetupRqstTDD ::= SEQUENCE {
    commonPhysicalChannelID CommonPhysicalChannelID,
    tdd-ChannelisationCode TDD-ChannelisationCode,
    timeslot TimeSlot,
    midambleShiftandBurstType MidambleShiftAndBurstType,
    tdd-PhysicalChannelOffset TDD-PhysicalChannelOffset,
    repetitionPeriod RepetitionPeriod,
    repetitionLength RepetitionLength,
    s-CCPCH-Power DL-Power,
    iE-Extensions ProtocolExtensionContainer { { Secondary-CCPCH-parameterItem-CTCH-SetupRqstTDD-ExtIEs
} OPTIONAL,
...
}
}

Secondary-CCPCH-parameterItem-CTCH-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
...
}

FACH-ParametersList-CTCH-SetupRqstTDD ::= ProtocolIE-Single-Container {{ FACH-ParametersListIEs-CTCH-SetupRqstTDD }}
```

FACH-ParametersListIEs-CTCH-SetupRqstTDD NBAP-PROTOCOL-IES ::= {  
 { ID id-FACH-ParametersListIE-CTCH-SetupRqstTDD CRITICALITY reject TYPE FACH-ParametersListIE-CTCH-SetupRqstTDD PRESENCE  
 mandatory }  
}

FACH-ParametersListIE-CTCH-SetupRqstTDD ::= SEQUENCE (SIZE (1..maxNrOfFACHs)) OF FACH-ParametersItem-CTCH-SetupRqstTDD

FACH-ParametersItem-CTCH-SetupRqstTDD ::= SEQUENCE {  
 commonTransportChannelID CommonTransportChannelID,  
 fACH-CCTrCH-ID CCTrCH-ID,  
 dl-TransportFormatSet TransportFormatSet,  
 toAWS ToAWS,  
 toAWE ToAWE,

```

iE-Extensions
OPTIONAL,
...
}

FACH-ParametersItem-CTCH-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
  { ID      id-maxFACH-Power-LCR-CTCH-SetupRqstTDD      CRITICALITY reject      EXTENSION      DL-Power      PRESENCE
    optional   },
  -- Applicable to 1.28Mcps TDD only
  ...
}

PCH-Parameters-CTCH-SetupRqstTDD ::= ProtocolIE-Single-Container {{ PCH-ParametersIE-CTCH-SetupRqstTDD }}
```

PCH-ParametersIE-CTCH-SetupRqstTDD NBAP-PROTOCOL-IES ::= {  
 { ID id-PCH-ParametersItem-CTCH-SetupRqstTDD CRITICALITY reject TYPE PCH-ParametersItem-CTCH-SetupRqstTDD PRESENCE mandatory  
}
}

```

PCH-ParametersItem-CTCH-SetupRqstTDD ::= SEQUENCE {
  commonTransportChannelID          CommonTransportChannelID,
  pCH-CCTrCH-ID                   CCTrCH-ID,
  dl-TransportFormatSet            TransportFormatSet,
  toAWS                           ToAWS,
  toAWE                           ToAWE,
  pICH-Parameters                 PICH-Parameters-CTCH-SetupRqstTDD,
  iE-Extensions
  OPTIONAL,
  ...
}

PCH-ParametersItem-CTCH-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
  { ID      id-PCH-Power-LCR-CTCH-SetupRqstTDD      CRITICALITY reject      EXTENSION      DL-Power      PRESENCE
    optional   },
  ...
}

PICH-Parameters-CTCH-SetupRqstTDD ::= ProtocolIE-Single-Container {{ PICH-ParametersIE-CTCH-SetupRqstTDD }}
```

PICH-ParametersIE-CTCH-SetupRqstTDD NBAP-PROTOCOL-IES ::= {  
 { ID id-PICH-ParametersItem-CTCH-SetupRqstTDD CRITICALITY reject TYPE PICH-ParametersItem-CTCH-SetupRqstTDD PRESENCE optional  
}|  
 { ID id-PICH-LCR-Parameters-CTCH-SetupRqstTDD CRITICALITY reject TYPE PICH-LCR-Parameters-CTCH-SetupRqstTDD PRESENCE optional}
}

```

PICH-ParametersItem-CTCH-SetupRqstTDD ::= SEQUENCE {
  commonPhysicalChannelID          CommonPhysicalChannelID,
```

```

tdd-ChannelisationCode
timeSlot
midambleShiftAndBurstType
tdd-PhysicalChannelOffset
repetitionPeriod
repetitionLength
pagingIndicatorLength
pICH-Power
iE-Extensions
OPTIONAL,
    ...
}

PICH-ParametersItem-CTCH-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

PICH-LCR-Parameters-CTCH-SetupRqstTDD ::= SEQUENCE {
    commonPhysicalChannelID           CommonPhysicalChannelID,
    tdd-ChannelisationCodeLCR         TDD-ChannelisationCodeLCR,
    timeSlotLCR                      TimeSlotLCR,
    midambleShiftLCR                 MidambleShiftLCR,
    tdd-PhysicalChannelOffset         TDD-PhysicalChannelOffset,
    repetitionPeriod                  RepetitionPeriod,
    repetitionLength                  RepetitionLength,
    pagingIndicatorLength             PagingIndicatorLength,
    pICH-Power                        PICH-Power,
    second-TDD-ChannelisationCodeLCR TDD-ChannelisationCodeLCR,
    iE-Extensions                     ProtocolExtensionContainer { { PICH-LCR-ParametersItem-CTCH-SetupRqstTDD-ExtIEs} }
    OPTIONAL,
    ...
}

PICH-LCR-ParametersItem-CTCH-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    { ID      id-Tstd-indicator      CRITICALITY reject      EXTENSION      TSTD-Indicator      PRESENCE      optional },
    -- Applicable to 1.28 Mcps TDD only
    ...
}

Secondary-CCPCH-LCR-parameterList-CTCH-SetupRqstTDD ::= SEQUENCE (SIZE (1..maxNrOfSCCPCHLCRs)) OF Secondary-CCPCH-LCR-parameterItem-CTCH-SetupRqstTDD

Secondary-CCPCH-LCR-parameterItem-CTCH-SetupRqstTDD ::= SEQUENCE {
    commonPhysicalChannelID           CommonPhysicalChannelID,
    tdd-ChannelisationCodeLCR         TDD-ChannelisationCodeLCR,
    timeslotLCR                      TimeSlotLCR,
    midambleShiftLCR                 MidambleShiftLCR,
}

```

```

tdd-PhysicalChannelOffset           TDD-PhysicalChannelOffset,
repetitionPeriod                  RepetitionPeriod,
repetitionLength                  RepetitionLength,
s-CCPCH-Power                     DL-Power,
s-CCPCH-TimeSlotFormat-LCR       TDD-DL-DPCH-TimeSlotFormat-LCR,
iE-Extensions                      ProtocolExtensionContainer { { Secondary-CCPCH-LCR-parameterItem-CTCH-SetupRqstTDD-
ExtIEs} }      OPTIONAL,
...
}

Secondary-CCPCH-LCR-parameterItem-CTCH-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
}
/// break ///
-- ****
-- PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST TDD
--
-- ****

PhysicalSharedChannelReconfigurationRequestTDD ::= SEQUENCE {
    protocolIEs      ProtocolIE-Container {{PhysicalSharedChannelReconfigurationRequestTDD-IEs}},
    protocolExtensions  ProtocolExtensionContainer {{PhysicalSharedChannelReconfigurationRequestTDD-Extensions}} OPTIONAL,
...
}

PhysicalSharedChannelReconfigurationRequestTDD-IES NBAP-PROTOCOL-IES ::= {
    { ID     id-C-ID          CRITICALITY   reject   TYPE   C-ID
        PRESENCE   mandatory    } |
    { ID     id-SFN           CRITICALITY   reject   TYPE   SFN
        PRESENCE   optional     } |
    { ID     id-PDSCHSets-AddList-PSCH-ReconfRqst  CRITICALITY   reject   TYPE   PDSCHSets-AddList-PSCH-ReconfRqst
        PRESENCE   optional     } |
    { ID     id-PDSCHSets-ModifyList-PSCH-ReconfRqst  CRITICALITY   reject   TYPE   PDSCHSets-ModifyList-PSCH-ReconfRqst
        PRESENCE   optional     } |
    { ID     id-PDSCHSets-DeleteList-PSCH-ReconfRqst  CRITICALITY   reject   TYPE   PDSCHSets-DeleteList-PSCH-ReconfRqst
        PRESENCE   optional     } |
    { ID     id-PUSCHSets-AddList-PSCH-ReconfRqst  CRITICALITY   reject   TYPE   PUSCHSets-AddList-PSCH-ReconfRqst
        PRESENCE   optional     } |
    { ID     id-PUSCHSets-ModifyList-PSCH-ReconfRqst  CRITICALITY   reject   TYPE   PUSCHSets-ModifyList-PSCH-ReconfRqst
        PRESENCE   optional     } |
    { ID     id-PUSCHSets-DeleteList-PSCH-ReconfRqst  CRITICALITY   reject   TYPE   PUSCHSets-DeleteList-PSCH-ReconfRqst
        PRESENCE   optional     },
...
}

```

```

PhysicalSharedChannelReconfigurationRequestTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

PDSCHSets-AddList-PSCH-ReconfRqst ::= SEQUENCE (SIZE (1..maxNrOfPDSCHSets)) OF PDSCHSets-AddItem-PSCH-ReconfRqst

PDSCHSets-AddItem-PSCH-ReconfRqst ::= SEQUENCE {
    pDSCHSet-ID                               PDSCHSet-ID,
    pDSCH-InformationList                     PDSCH-Information-AddList-PSCH-ReconfRqst OPTIONAL,
    iE-Extensions                            ProtocolExtensionContainer { {PDSCHSets-AddItem-PSCH-ReconfRqst-ExtIEs} } OPTIONAL,
    ...
}

PDSCHSets-AddItem-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    {ID id-PDSCH-AddInformation-LCR-PSCH-ReconfRqst CRITICALITY reject EXTENSION PDSCH-AddInformation-LCR-AddItem-PSCH-
ReconfRqst PRESENCE optional}, -- Mandatory for 1.28Mcps TDD only
    ...
}

PDSCH-Information-AddList-PSCH-ReconfRqst ::= ProtocolIE-Single-Container {{ PDSCH-Information-AddListIEs-PSCH-ReconfRqst }}
-- Mandatory for 3.84Mcps TDD, Not Applicable to 1.28Mcps TDD

PDSCH-Information-AddListIEs-PSCH-ReconfRqst NBAP-PROTOCOL-IES ::= {
    {ID id-PDSCH-Information-AddListIE-PSCH-ReconfRqst CRITICALITY reject TYPE PDSCH-Information-AddItem-PSCH-ReconfRqst
    PRESENCE mandatory}
}

PDSCH-Information-AddItem-PSCH-ReconfRqst ::= SEQUENCE {
    repetitionPeriod           RepetitionPeriod,
    repetitionLength          RepetitionLength,
    tdd-PhysicalChannelOffset TDD-PhysicalChannelOffset,
    dL-Timeslot-InformationAddList-PSCH-ReconfRqst   DL-Timeslot-InformationAddList-PSCH-ReconfRqst,
    iE-Extensions              ProtocolExtensionContainer { {PDSCH-Information-AddItem-PSCH-ReconfRqst-ExtIEs} }
    OPTIONAL,
    ...
}

PDSCH-Information-AddItem-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

DL-Timeslot-InformationAddList-PSCH-ReconfRqst ::= SEQUENCE (SIZE (1.. maxNrOfDLTSS)) OF DL-Timeslot-InformationAddItem-PSCH-
ReconfRqst

DL-Timeslot-InformationAddItem-PSCH-ReconfRqst ::= SEQUENCE {
    timeSlot                      TimeSlot,
    midambleShiftAndBurstType     MidambleShiftAndBurstType,
    ...
}

```

```

tFCI-Presence                               TFCI-Presence,
dL-Code-InformationAddList-PSCH-ReconfRqst   DL-Code-InformationAddList-PSCH-ReconfRqst,
iE-Extensions                                ProtocolExtensionContainer { { DL-Timeslot-InformationAddItem-PSCH-ReconfRqst-ExtIEs } }
OPTIONAL,
...
}

DL-Timeslot-InformationAddItem-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
...
}

DL-Code-InformationAddList-PSCH-ReconfRqst ::= SEQUENCE (SIZE (1..maxNrOfPDSCHs)) OF DL-Code-InformationAddItem-PSCH-ReconfRqst

DL-Code-InformationAddItem-PSCH-ReconfRqst ::= SEQUENCE {
  pDSCH-ID                                     PDSCH-ID,
  tdd-ChannelisationCode                      TDD-ChannelisationCode,
  iE-Extensions                                ProtocolExtensionContainer { { DL-Code-InformationAddItem-PSCH-ReconfRqst-ExtIEs } }
OPTIONAL,
...
}

DL-Code-InformationAddItem-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
...
}

PDSCH-AddInformation-LCR-AddItem-PSCH-ReconfRqst ::= SEQUENCE {
  repetitionPeriod                RepetitionPeriod,
  repetitionLength                RepetitionLength,
  tdd-PhysicalChannelOffset      TDD-PhysicalChannelOffset,
  dl-Timeslot-InformationAddList-LCR-PSCH-ReconfRqst   DL-Timeslot-InformationAddList-LCR-PSCH-ReconfRqst,
  iE-Extensions                  ProtocolExtensionContainer { { PDSCH-AddInformation-LCR-AddItem-PSCH-ReconfRqst-ExtIEs } }
} OPTIONAL,
...
}

PDSCH-AddInformation-LCR-AddItem-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
{ID id-Tstd-indicator CRITICALITY reject EXTENSION TSTD-Indicator PRESENCE optional },
-- Applicable to 1.28Mcps TDD only
}
...
}

DL-Timeslot-InformationAddList-LCR-PSCH-ReconfRqst ::= SEQUENCE (SIZE (1.. maxNrOfDLTSLCRs)) OF DL-Timeslot-InformationAddItem-LCR-
PSCH-ReconfRqst

```

/// break ///

### 9.3.6 Constant Definitions

```
-- ****
-- IEs
-- ****
id-AICH-Information                               ProtocolIE-ID ::= 0
id-AICH-InformationItem-ResourceStatusInd        ProtocolIE-ID ::= 1
id-BCH-Information                                ProtocolIE-ID ::= 7
id-BCH-InformationItem-ResourceStatusInd          ProtocolIE-ID ::= 8
/// break ///

id-Tstd-indicator                         ProtocolIE-ID ::= 627
```

## CHANGE REQUEST

# 25.433 CR 1018 # rev 2 # Current version: 5.9.0 #

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the # symbols.

**Proposed change affects:** UICC apps #  ME #  Radio Access Network  Core Network

|                        |   |   |
|------------------------|---|---|
| <b>Title:</b>          | # Addition of TSTD for S-CCPCH, PICH and PDSCH in 1.28 Mcps TDD |   |
| <b>Source:</b>         | # RAN3  |   |
| <b>Work item code:</b> | # TEI4  | <b>Date:</b> # 20/08/04   |
| <b>Category:</b>       | # A   | <b>Release:</b> # Rel-5<br>Use one of the following releases:<br>F (correction)<br>A (corresponds to a correction in an earlier release)<br>B (addition of feature),<br>C (functional modification of feature)<br>D (editorial modification)<br>Detailed explanations of the above categories can be found in 3GPP <a href="#">TR 21.900</a> .<br>Ph2 (GSM Phase 2)<br>R96 (Release 1996)<br>R97 (Release 1997)<br>R98 (Release 1998)<br>R99 (Release 1999)<br>Rel-4 (Release 4)<br>Rel-5 (Release 5)<br>Rel-6 (Release 6)<br>Rel-7 (Release 7) |

|   |   |
|---|---|
| <b>Reason for change:</b>   | # The TSTD form of transmit diversity for S-CCPCH, PICH and PDSCH in LCR TDD has been introduced in RAN1 in Release 4. But this could not be enabled via the lub until now. This CR introduces a mechanism to enable or disable it at the Node B via the lub.   |
| <b>Summary of change:</b>   | A TSTD Indicator IE is added in COMMON TRANSPORT CHANNEL SETUP REQUEST for S-CCPCH and PICH respectively in 1.28 Mcps TDD. This is applicable to S-CCPCHs and PICH that are not beacon channels.<br><br>A TSTD Indicator IE is added in PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST for PDSCH set in 1.28 Mcps TDD. This is applicable to PDSCH set that is not beacon channel. |
| <u>Impact assessment towards the previous version of the specification (same release):</u><br><br>This CR has isolated impact towards the previous version of the specification (same release).<br><br>This CR has an impact under functional point of view.<br><br>The impact can be considered isolated because it only affects the use of TSTD transmit diversity in LCR TDD mode. |   |

**Consequences if not approved:** # The RNC will be unable to control the use of TSTD transmit diversity for S-CCPCH, PICH and PDSCH in LCR TDD.

|                              |  |  |   |   |   |  |  |   |  |   |
|------------------------------|--|--|---|---|---|--|--|---|--|---|
| <b>Clauses affected:</b>     | ⌘  | 8.2.1.2, 8.2.18.2, 9.1.3.2, 9.1.62, 9.3.3, 9.3.6   |   |   |   |  |  |   |  |   |
| <b>Other specs affected:</b> | ⌘  | <table border="1" style="display: inline-table; vertical-align: middle;"> <tr> <td>Y</td> <td>N</td> </tr> <tr> <td>X</td> <td></td> </tr> <tr> <td></td> <td>X</td> </tr> <tr> <td></td> <td>X</td> </tr> </table> Other core specifications<br>Test specifications<br>O&M Specifications | Y | N | X |  |  | X |  | X |
|                              | Y  | N  |   |   |   |  |  |   |  |   |
| X                            |  |  |   |   |   |  |  |   |  |   |
|                              | X  |  |   |   |   |  |  |   |  |   |
|                              | X  |  |   |   |   |  |  |   |  |   |
| ⌘                            | 25.433 CR1017r2 Rel-4<br>25.433 CR1019r2 Rel-6 |  |   |   |   |  |  |   |  |   |
| <b>Other comments:</b>       | ⌘  |  |   |   |   |  |  |   |  |   |

**How to create CRs using this form:**

Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.


## 8.2 NBAP Common Procedures

### 8.2.1 Common Transport Channel Setup

#### 8.2.1.1 General

This procedure is used for establishing the necessary resources in Node B, regarding Secondary CCPCH, PICH, PRACH, PCPCH [FDD], AICH [FDD], AP\_AICH [FDD], CD/CA-ICH [FDD], FACH, PCH, RACH, FPACH [1.28Mcps TDD] and CPCH [FDD].

#### 8.2.1.2 Successful Operation

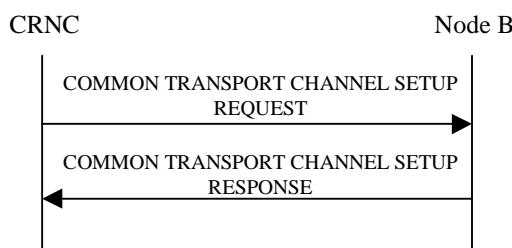

**Figure 1: Common Transport Channel Setup procedure, Successful Operation**

The procedure is initiated with a COMMON TRANSPORT CHANNEL SETUP REQUEST message sent from the CRNC to the Node B using the Node B Control Port.

One message can configure only one of the following combinations:

- [FDD - one Secondary CCPCH, and FACHs, PCH and PICH related to that Secondary CCPCH], or
- [TDD - one CCTrCH consisting of Secondary CCPCHs and FACHs, PCH with the corresponding PICH related to that group of Secondary CCPCHs], or
- one [1.28Mcps TDD - or more] PRACH, one RACH and one AICH [FDD] and one FPACH[1.28Mcps TDD] related to that PRACH.
- [FDD - PCPCHs, one CPCH, one AP\_AICH and one CD/CA-ICH related to that group of PCPCHs.]

#### Secondary CCPCH:

[FDD - When the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains the *Secondary CCPCH IE*, the Node B shall configure and activate the indicated Secondary CCPCH according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message.]

[TDD - When the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains the *Secondary CCPCH IE*, the Node B shall configure and activate the indicated Secondary CCPCH(s) according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message.]

[TDD - FACHs and PCH may be mapped onto a CCTrCH which may consist of several Secondary CCPCHs]

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains the *FACH Parameters IE*, the Node B shall configure and activate the indicated FACH(s) according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message.

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains the *PCH Parameters* IE, the Node B shall configure and activate the concerned PCH and the associated PICH according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message.

[1.28Mcps TDD - If the *PCH Power* IE is included in the *PCH Parameters* IE of the COMMON TRANSPORT CHANNEL SETUP REQUEST, the Node B shall use this value as the power at which the PCH shall be transmitted.]

[1.28Mcps TDD - If the *TSTD Indicator* IE for the S-CCPCH is included and is set to "active" in the COMMON TRANSPORT CHANNEL SETUP REQUEST, the Node B shall activate TSTD diversity for all S-CCPCHs defined in the message that are not beacon channels [19,21]. If the *TSTD Indicator* IE is set to "not active" or *TSTD Indicator* IE is not included for the S-CCPCH in the COMMON TRANSPORT CHANNEL SETUP REQUEST, the Node B shall not activate TSTD diversity for the S-CCPCHs defined in the message.]

[1.28Mcps TDD - If the *TSTD Indicator* IE for the PICH is included and is set to "active" in the COMMON TRANSPORT CHANNEL SETUP REQUEST message, the Node B shall activate TSTD diversity for the PICH if it is not a beacon channel [19,21]. If the *TSTD Indicator* IE is set to "not active" or the *TSTD Indicator* IE is not included for the PICH in the COMMON TRANSPORT CHANNEL SETUP REQUEST message, the Node B shall not activate TSTD diversity for the PICH.]

#### PRACH:

When the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains the *PRACH* IE, the Node B shall configure and activate the indicated PRACH and the associated RACH [FDD - and the associated AICH] according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message.

#### [1.28Mcps TDD - FPACH]:

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains the *FPACH* IE, the Node B shall configure and activate the indicated FPACH according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message.

#### [FDD - PCPCHs]:

When the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains the *CPCH Parameters* IE, the Node B shall configure and activate the indicated CPCH and the associated PCPCH(s), AP-AICH and CD/CA-ICH according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message.

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message includes *CD Signatures* IE, the Node B may use only the given CD signatures on CD/CA-ICH. Otherwise, the Node B may use all the CD signatures on CD/CA-ICH.

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message includes *CD Sub Channel Numbers* IE, the Node B may use only the given CD Sub Channels on CD/CA-ICH. Otherwise, the Node B may use all the CD Sub Channels on CD/CA-ICH.

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message includes *Channel Request Parameters* IE, the Node B shall use the parameters to distinguish the PCPCHs.

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message includes *AP Sub Channel Number* IE in *Channel Request Parameters* IE, the Node B shall use only these AP sub channel number to distinguish the configured PCPCH. Otherwise all AP subchannel numbers are used to distinguish the configured PCPCH.

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message includes *AP Sub Channel Number* IE in *SF Request Parameters* IE, the Node B shall use only these AP sub channel number to

distinguish the requested Spreading Factors. Otherwise all AP subchannel numbers are used to distinguish the configured Spreading Factor.

**General:**

After successfully configuring the requested common transport channels and the common physical channels , the Node B shall store the value of *Configuration Generation ID* IE and it shall respond with the COMMON TRANSPORT CHANNEL SETUP RESPONSE message with the *Common Transport Channel ID* IE, the *Binding ID* IE and the *Transport Layer Address* IE for the configured common transport channels.

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message includes the *Transport Layer Address* and *Binding ID* IEs, the Node B may use the transport layer address and the binding identifier received from the CRNC when establishing a transport bearer for the indicated common transport channels.

After a successful procedure and once the transport bearers are established, the configured common transport channels and the common physical channels shall adopt the state Enabled [6] in the Node B and the common physical channels exist on the Uu interface.

## 8.2.18 Physical Shared Channel Reconfiguration


### 8.2.18.1 General

This procedure is used to assign HS-DSCH related resources to the Node B.

[TDD - This procedure is also used for handling PDSCH Sets and PUSCH Sets in the Node B, i.e.

- Adding new PDSCH Sets and/or PUSCH Sets,
- Modifying these, and
- Deleting them.]

### 8.2.18.2 Successful Operation

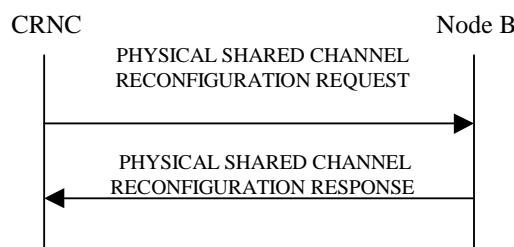

**Figure 26: Physical Shared Channel Reconfiguration, Successful Operation**

The procedure is initiated with a PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message sent from the CRNC to the Node B using the Node B Control Port.

Upon reception, the Node B shall activate the new configuration at the head boundary of the SFN according to the parameters given in the message.

If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message includes an *SFN IE*, the Node B shall activate the new configuration at the head boundary of that specified SFN. If no *SFN IE* is included Node B shall activate the new configuration immediately.

#### HS-DSCH Resources:

[FDD - If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message includes *HS-PDSCH And HS-SCCH Total Power IE*, the Node B shall not exceed this maximum transmission power on all HS-PDSCH and HS-SCCH codes in the cell. If a value has never been set or if the value of the *HS-PDSCH And HS-SCCH Total Power IE* is equal to or greater than the maximum transmission power of the cell the Node B may use all unused power for HS-PDSCH and HS-SCCH codes.]

[FDD - If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message includes *HS-PDSCH And HS-SCCH Scrambling Code IE*, the Node B shall use this as the scrambling code for all HS-PDSCHs and HS-SCCHs. If a value has never been set, the Node B shall use the primary scrambling code for all HS-PDSCH and HS-SCCH codes.]

[FDD - If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message includes *HS-PDSCH FDD Code Information IE*, the Node B shall:

- if the *Number Of HS-PDSCH Codes IE* is set to "0", delete any existing HS-PDSCH resources from the cell.

- if the *Number Of HS-PDSCH Codes* IE is set to any value other than "0" and HS-PDSCH resources are not currently configured in the cell, use this list as the range of codes for HS-PDSCH channels.
- if the *Number Of HS-PDSCH Codes* IE is set to any value other than "0" and HS-PDSCH resources are currently configured in the cell, replace the current range of codes with this new range of codes for HS-PDSCH channels.]

[FDD - If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message includes *HS-SCCH FDD Code Information* IE, the Node B shall:

- If the *HS-SCCH FDD Code Information* IE contains no codes, delete any existing HS-SCCH resources from the cell.
- If the *HS-SCCH FDD Code Information* IE contains one or more codes and HS-SCCH resources are not currently configured in the cell, use this list of codes as the list of codes for HS-SCCH channels.
- If the *HS-SCCH FDD Code Information* IE contains one or more codes and HS-SCCH resources are currently configured in the cell, replace the current list of codes with this new list of codes for HS-SCCH channels.]

[TDD - If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message includes *HS-PDSCH and HS-SCCH Total Power* IE for a particular timeslot, the Node B shall not exceed this maximum transmission power on all HS-PDSCH and HS-SCCH codes in that timeslot. If a value has never been set for that timeslot or if the value of the *HS-PDSCH and HS-SCCH Total Power* IE for that timeslot is equal to or greater than the maximum transmission power of the cell the Node B may use all unused power in that timeslot for HS-PDSCH and HS-SCCH codes.]

[TDD - If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message includes *HS-PDSCH TDD Information* IE, the Node B shall:

- If the *HS-PDSCH TDD Information* IE contains no [3.84 Mcps TDD - *DL Timeslot and Code Information* IE] [1.28 Mcps TDD - *DL Timeslot and Code Information LCR* IE], delete any existing HS-PDSCH resources from the cell.
- If the *HS-PDSCH TDD Information* IE contains [3.84 Mcps TDD - *DL Timeslot and Code Information* IE] [1.28 Mcps TDD - *DL Timeslot and Code Information LCR* IE] and HS-PDSCH resources are not currently configured in the cell, use this IE as the list of timeslots / codes for HS-PDSCH channels.
- If the *HS-PDSCH TDD Information* IE contains [3.84 Mcps TDD - *DL Timeslot and Code Information* IE] [1.28 Mcps TDD - *DL Timeslot and Code Information LCR* IE] and HS-PDSCH resources are currently configured in the cell, replace the current list of timeslots / codes with this new list of timeslots / codes for HS-PDSCH channels.]

[TDD - If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message includes *Add to HS-SCCH Resource Pool* IE, the Node B shall add this resource to the HS-SCCH resource pool to be used to assign HS-SCCH sets.]

[TDD - If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message includes any *Modify HS-SCCH Resource Pool* IEs and includes any of [3.84Mcps TDD - *TDD Channelisation Code* IE, *Midamble Shift and Burst Type* IE, *Time Slot* IE], [1.28Mcps TDD - *First TDD Channelisation Code* IE, *Second TDD Channelisation Code* IE, *Midamble Shift LCR* IE, *Time Slot LCR* IE, *TDD Channelisation Code* IE], for either HS-SCCH or HS-SICH channels, the Node B shall apply these as the new values, otherwise the old values specified for this set are still applicable.]

[TDD - If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message includes any *Modify HS-SCCH Resource Pool* IEs and includes the *HS-SCCH Maximum Power* IE, the Node B shall apply this value for the specified HS-SCCH code otherwise the old value is still applicable.]

[TDD - If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message includes any *Delete from HS-SCCH Resource Pool* IEs, the Node B shall delete these resources from the HS-SCCH resource pool.]

**[TDD - PDSCH/PUSCH Addition]:**

[TDD - If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message includes any PDSCH sets or PUSCH sets to be added, the Node B shall add these new sets to its PDSCH/PUSCH configuration.]

[\[1.28Mcps TDD - If the \*TSTD Indicator\* IE is included in \*PDSCH To Add Information LCR\* IE and is set to "active", the Node B shall activate \*TSTD\* diversity for \*PDSCH\* transmissions using the specified \*PDSCH Set\* that are not beacon channels \[19,21\]. If the \*TSTD Indicator\* IE is set to "not active" or the \*TSTD Indicator\* IE is not included in \*PDSCH To Add Information LCR\* IE, the Node B shall not activate \*TSTD\* diversity for the \*PDSCH Set\*.\]](#)

**[TDD - PDSCH/PUSCH Modification]:**

[TDD - If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message includes any PDSCH sets or PUSCH sets to be modified, and includes any of [3.84Mcps TDD - *DL/UL Code Information* IE, *Midamble Shift And Burst Type* IE, *Time Slot* IE], [1.28Mcps TDD - *DL/UL Code Information* LCR IE, *Midamble Shift LCR* IE, *Time Slot LCR* IE], *TDD Physical Channel Offset* IE, *Repetition Period* IE, *Repetition Length* IE, or *TFCI Presence* IE, the Node B shall apply these as the new values, otherwise the old values specified for this set are still applicable.]

**[TDD - PDSCH/PUSCH Deletion]:**

[TDD - If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message includes any PDSCH sets or PUSCH sets to be deleted the Node B shall delete these sets from its PDSCH/PUSCH configuration.]

**Response Message:**

**HS-DSCH/HS-SCCH Resources:**

In the successful case involving HS-PDSCH or HS-SCCH resources, the Node B shall store the value of *Configuration Generation ID* IE and it shall make these resources available to all the current and future HS-DSCH transport channels; and shall respond with PHYSICAL SHARED CHANNEL RECONFIGURATION RESPONSE message.

**[TDD - PDSCH/PUSCH Addition/Modification/Deletion]:**

[TDD - In the successful case involving PDSCH/PUSCH addition, modification or deletion, the Node B shall add, modify and delete the PDSCH Sets and PUSCH Sets in the Common Transport Channel data base, as requested in the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message, and shall make these available to all the current and future DSCH and USCH transport channels. The Node B shall respond with the PHYSICAL SHARED CHANNEL RECONFIGURATION RESPONSE message.]

### 9.1.3 COMMON TRANSPORT CHANNEL SETUP REQUEST

#### 9.1.3.2 TDD Message

| IE/Group Name  | Presence | Range                        | IE Type and Reference | Semantics Description   | Criticality | Assigned Criticality |
|--|----------|------------------------------|-----------------------|---|-------------|----------------------|
| Message Discriminator                                  | M        |                              | 9.2.1.45              |   | –           |                      |
| Message Type   | M        |                              | 9.2.1.46              |   | YES         | reject               |
| Transaction ID   | M        |                              | 9.2.1.62              |   | –           |                      |
| C-ID   | M        |                              | 9.2.1.9               |   | YES         | reject               |
| Configuration Generation ID                            | M        |                              | 9.2.1.16              |   | YES         | reject               |
| <i>CHOICE Common Physical Channel To Be Configured</i> | M        |                              |                       |   | YES         | ignore               |
| >Secondary CCPCHs                                      |          |                              |                       |   | –           |                      |
| >>SCCPCH CCTrCH ID                                     | M        |                              | CCTrCH ID<br>9.2.3.3  | For DL<br>CCTrCH<br>supporting one<br>or several<br>Secondary<br>CCPCHs | –           |                      |
| >>TFCS   | M        |                              | 9.2.1.58              | For DL<br>CCTrCH<br>supporting one<br>or several<br>Secondary<br>CCPCHs | –           |                      |
| >>TFCI Coding  | M        |                              | 9.2.3.22              |   | –           |                      |
| >>Puncture Limit                                       | M        |                              | 9.2.1.50              |   | –           |                      |
| >>CHOICE HCR or LCR                                    | M        |                              |                       | See note 1<br>below   | –           |                      |
| >>>3.84Mcps TDD  |          |                              |                       |   | –           |                      |
| >>>Secondary CCPCH                                     |          | 1..<maxno<br>ofSCCPCH<br>Hs> |                       |   | GLOBAL      | reject               |
| >>>>Common Physical Channel ID                         | M        |                              | 9.2.1.13              |   | –           |                      |
| >>>>TDD Channelisation Code                            | M        |                              | 9.2.3.19              |   | –           |                      |
| >>>>Time Slot  | M        |                              | 9.2.3.23              |   | –           |                      |
| >>>>Midamble Shift And Burst Type                      | M        |                              | 9.2.3.7               |   | –           |                      |
| >>>>TDD Physical Channel Offset                        | M        |                              | 9.2.3.20              |   | –           |                      |
| >>>>Repetition Period                                  | M        |                              | 9.2.3.16              |   | –           |                      |
| >>>>Repetition Length                                  | M        |                              | 9.2.3.15              |   | –           |                      |
| >>>>SCCPCH Power                                       | M        |                              | DL Power<br>9.2.1.21  |   | –           |                      |
| >>>1.28Mcps TDD  |          |                              |                       |   | –           |                      |
| >>>Secondary   |          | 1..<maxno                    |                       |   | GLOBAL      | reject               |

|                                  |   |                                     |  |  |        |        |
|----------------------------------|---|-------------------------------------|--|--|--------|--------|
| <b>CCPCH LCR</b>                 |   | <i>ofSCCPCH<br/>HsLCR&gt;</i>       |  |  |        |        |
| >>>>Common Physical Channel ID   | M |                                     | 9.2.1.13   |  | -      |        |
| >>>>TDD Channelisation Code LCR  | M |                                     | 9.2.3.19a  |  | -      |        |
| >>>>Time Slot LCR                | M |                                     | 9.2.3.24A  |  | -      |        |
| >>>>Midamble Shift LCR           | M |                                     | 9.2.3.7A   |  | -      |        |
| >>>>TDD Physical Channel Offset  | M |                                     | 9.2.3.20   |  | -      |        |
| >>>>Repetition Period            | M |                                     | 9.2.3.16   |  | -      |        |
| >>>>Repetition Length            | M |                                     | 9.2.3.15   |  | -      |        |
| >>>>SCCPCH Power                 | M |                                     | DL Power<br>9.2.1.21                             |  | -      |        |
| >>>> SCCPCH Time Slot Format LCR | M |                                     | TDD DL<br>DPCH Time Slot Format LCR<br>9.2.3.19D |  | -      |        |
| <b>&gt;&gt;FACH Parameters</b>   |   | <i>0..&lt;maxno<br/>ofFACHs&gt;</i> |  |  | GLOBAL | reject |
| >>Common Transport Channel ID    | M |                                     | 9.2.1.14   |  | -      |        |
| >>FACH CCTrCH ID                 | M |                                     | CCTrCH ID<br>9.2.3.3                             |  | -      |        |
| >>Transport Format Set           | M |                                     | 9.2.1.59   | For the DL.  | -      |        |
| >>ToAWS                          | M |                                     | 9.2.1.61   |  | -      |        |
| >>ToAWE                          | M |                                     | 9.2.1.60   |  | -      |        |
| >>Max FACH Power                 | O |                                     | DL Power<br>9.2.1.21                             | Applicable to 1.28Mcps TDD only                      | YES    | reject |
| >>Binding ID                     | O |                                     | 9.2.1.4  | Shall be ignored if bearer establishment with ALCAP. | YES    | ignore |
| >>Transport Layer Address        | O |                                     | 9.2.1.63   | Shall be ignored if bearer establishment with ALCAP. | YES    | ignore |
| <b>&gt;&gt;PCH Parameters</b>    |   | <i>0..1</i>                         |  |  | YES    | reject |
| >>Common Transport Channel ID    | M |                                     | 9.2.1.14   |  | -      |        |
| >>PCH CCTrCH ID                  | M |                                     | CCTrCH ID<br>9.2.3.3                             |  | -      |        |
| >>Transport Format               | M |                                     | 9.2.1.59   | For the DL.  | -      |        |

|                                    |   |      |           |                  |     |        |
|------------------------------------|---|------|-----------|------------------|-----|--------|
| Set                                |   |      |           |                  |     |        |
| >>>ToAWS                           | M |      | 9.2.1.61  |                  | –   |        |
| >>>ToAWE                           | M |      | 9.2.1.60  |                  | –   |        |
| >>>CHOICE <i>HCR or LCR</i>        | M |      |           | See note 1 below | –   |        |
| >>>>3.84Mcps TDD                   |   |      |           |                  | –   |        |
| >>>> <b>PICH Parameters</b>        |   | 0..1 |           |                  | YES | reject |
| >>>>>Common Physical Channel ID    | M |      | 9.2.1.13  |                  | –   |        |
| >>>>>TDD Channelisation Code       | M |      | 9.2.3.19  |                  | –   |        |
| >>>>>Time Slot                     | M |      | 9.2.3.23  |                  | –   |        |
| >>>>>Midamble Shift And Burst Type | M |      | 9.2.3.7   |                  | –   |        |
| >>>>>TDD Physical Channel Offset   | M |      | 9.2.3.20  |                  | –   |        |
| >>>>>Repetition Period             | M |      | 9.2.3.16  |                  | –   |        |
| >>>>>Repetition Length             | M |      | 9.2.3.15  |                  | –   |        |
| >>>>>Paging Indicator Length       | M |      | 9.2.3.8   |                  | –   |        |
| >>>>>PICH Power                    | M |      | 9.2.1.49A |                  | –   |        |
| >>>>1.28Mcps TDD                   |   |      |           |                  | –   |        |
| >>>> <b>PICH Parameters LCR</b>    |   | 1    |           |                  | YES | reject |
| >>>>>Common Physical Channel ID    | M |      | 9.2.1.13  |                  | –   |        |
| >>>>>TDD Channelisation Code LCR   | M |      | 9.2.3.19a |                  | –   |        |
| >>>>>Time Slot LCR                 | M |      | 9.2.3.24A |                  | –   |        |
| >>>>>Midamble Shift LCR            | M |      | 9.2.3.7A  |                  | –   |        |
| >>>>>TDD Physical Channel Offset   | M |      | 9.2.3.20  |                  | –   |        |
| >>>>>Repetition Period             | M |      | 9.2.3.16  |                  | –   |        |
| >>>>>Repetition Length             | M |      | 9.2.3.15  |                  | –   |        |
| >>>>>Paging Indicator Length       | M |      | 9.2.3.8   |                  | –   |        |
| >>>>>PICH                          | M |      | 9.2.1.49A |                  | –   |        |

|   |   |   |                                       |  |                            |                               |
|---|---|---|---------------------------------------|--|----------------------------|-------------------------------|
| Power   |   |   |                                       |  |                            |                               |
| >>>>Second TDD Channelisation Code LCR                | M |   | TDD Channelisation Code LCR 9.2.3.19a |  | -                          |                               |
| <a href="#"><u>&gt;&gt;&gt;&gt;TSTD Indicator</u></a> | O |   | <a href="#"><u>9.2.1.64</u></a>       |  | <a href="#"><u>YES</u></a> | <a href="#"><u>reject</u></a> |
| >>PCH Power   | O |   | DL Power 9.2.1.21                     | Applicable to 1.28Mcps TDD only                        | YES                        | reject                        |
| >>>Binding ID   | O |   | 9.2.1.4                               | Shall be ignored if bearer establishment with ALCAP.   | YES                        | ignore                        |
| >>>Transport Layer Address                            | O |   | 9.2.1.63                              | Shall be ignored if bearer establishment with ALCAP.   | YES                        | ignore                        |
| <a href="#"><u>&gt;&gt;TSTD Indicator</u></a>         | O |   | <a href="#"><u>9.2.1.64</u></a>       | <a href="#"><u>Applicable to 1.28Mcps TDD only</u></a> | <a href="#"><u>YES</u></a> | <a href="#"><u>reject</u></a> |
| >PRACH  |   |   |                                       |  | -                          |                               |
| >>CHOICE HCR or LCR                                   | M |   |                                       | See note 1 below                                       | -                          |                               |
| >>>3.84Mcps TDD                                       |   |   |                                       |  | -                          |                               |
| >>>PRACH  |   | 1 |                                       |  | YES                        | reject                        |
| >>>>Common Physical Channel ID                        | M |   | 9.2.1.13                              |  | -                          |                               |
| >>>>TFCS  | M |   | 9.2.1.58                              |  | -                          |                               |
| >>>>Time Slot   | M |   | 9.2.3.23                              |  | -                          |                               |
| >>>>TDD Channelisation Code                           | M |   | 9.2.3.19                              |  | -                          |                               |
| >>>>Max PRACH Midamble Shifts                         | M |   | 9.2.3.6                               |  | -                          |                               |
| >>>>PRACH Midamble                                    | M |   | 9.2.3.14                              |  | -                          |                               |
| >>>>RACH  |   | 1 |                                       |  | YES                        | reject                        |
| >>>>>Common Transport Channel ID                      | M |   | 9.2.1.14                              |  | -                          |                               |
| >>>>>Transport Format Set                             | M |   | 9.2.1.59                              | For the UL   | -                          |                               |
| >>>>>Binding ID                                       | O |   | 9.2.1.4                               | Shall be ignored if bearer establishment with ALCAP.   | YES                        | ignore                        |
| >>>>>Transport Layer Address                          | O |   | 9.2.1.63                              | Shall be ignored if bearer establishment               | YES                        | ignore                        |

|                                 |   |                               |           |   |        |        |
|---------------------------------|---|-------------------------------|-----------|---|--------|--------|
|                                 |   |                               |           | with ALCAP.   |        |        |
| >>>1.28Mcps TDD                 |   |                               |           |   | —      |        |
| >>>>PRACH LCR                   |   | 1..<maxno<br>ofPRACHL<br>CRs> |           |   | GLOBAL | reject |
| >>>>Common Physical Channel ID  | M |                               | 9.2.1.13  |   | —      |        |
| >>>>TFCS                        | M |                               | 9.2.1.58  |   | —      |        |
| >>>>Time Slot LCR               | M |                               | 9.2.3.24A |   | —      |        |
| >>>>TDD Channelisation Code LCR | M |                               | 9.2.3.19a |   | —      |        |
| >>>>Midamble Shift LCR          | M |                               | 9.2.3.7A  |   | —      |        |
| >>>>RACH                        |   | 1                             |           |   | YES    | reject |
| >>>>Common Transport Channel ID | M |                               | 9.2.1.14  |   | —      |        |
| >>>>Transport Format Set        | M |                               | 9.2.1.59  | For the UL  | —      |        |
| >>>>Binding ID                  | O |                               | 9.2.1.4   | Shall be ignored if bearer establishment with ALCAP.        | YES    | ignore |
| >>>>Transport Layer Address     | O |                               | 9.2.1.63  | Shall be ignored if bearer establishment with ALCAP.        | YES    | ignore |
| >>FPACH                         |   | 0..1                          |           | Mandatory for 1.28Mcps TDD. Not Applicable to 3.84Mcps TDD. | YES    | reject |
| >>Common Physical Channel ID    | M |                               | 9.2.1.13  |   | —      |        |
| >>TDD Channelisation Code LCR   | M |                               | 9.2.3.19a |   | —      |        |
| >>Time Slot LCR                 | M |                               | 9.2.3.24A |   | —      |        |
| >>Midamble Shift LCR            | M |                               | 9.2.3.7A  |   | —      |        |
| >>Max FPACH Power               | M |                               | 9.2.3.5E  |   | —      |        |

Note 1: This information element is a simplified representation of the ASN.1. The choice is in reality performed through the use of ProtocolIE-Single-Container within the ASN.1.

| Range Bound          | Explanation   |
|----------------------|---|
| $\maxnoofSCCPCHs$    | Maximum number of Secondary CCPCHs per CCTrCH for 3.84Mcps TDD              |
| $\maxnoofSCCPCHsLCR$ | Maximum number of Secondary CCPCHs per CCTrCH for 1.28Mcps TDD              |
| $\maxnoofFACHs$      | Maximum number of FACHs that can be defined on a Secondary CCPCH            |
| $\maxnoofPRACHLCRs$  | Maximum number of PRACHs LCR that can be defined on a RACH for 1.28Mcps TDD |

## 9.1.62 PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST

### 9.1.62.2 TDD Message

| IE/Group Name                         | Presence | Range                                | IE Type and Reference | Semantics Description                                       | Criticality | Assigned Criticality |
|---------------------------------------|----------|--------------------------------------|-----------------------|---|-------------|----------------------|
| Message Discriminator                 | M        |                                      | 9.2.1.45              |   | -           |                      |
| Message Type                          | M        |                                      | 9.2.1.46              |   | YES         | reject               |
| Transaction ID                        | M        |                                      | 9.2.1.62              |   | -           |                      |
| C-ID                                  | M        |                                      | 9.2.1.9               |   | YES         | reject               |
| SFN                                   | O        |                                      | 9.2.1.53A             |   | YES         | reject               |
| <b>PDSCH Sets To Add</b>              |          | <i>0..&lt;maxno ofPDSCH Sets&gt;</i> |                       |   | GLOBAL      | reject               |
| >PDSCH Set ID                         | M        |                                      | 9.2.3.11              |   | -           |                      |
| > <b>PDSCH To Add Information</b>     |          | <i>0..1</i>                          |                       | Mandatory for 3.84Mcps TDD. Not Applicable to 1.28Mcps TDD. | YES         | reject               |
| >>Repetition Period                   | M        |                                      | 9.2.3.16              |   | -           |                      |
| >>Repetition Length                   | M        |                                      | 9.2.3.15              |   | -           |                      |
| >>TDD Physical Channel Offset         | M        |                                      | 9.2.3.20              |   | -           |                      |
| >> <b>DL Timeslot Information</b>     |          | <i>1..&lt;maxno ofDLts&gt;</i>       |                       |   | -           |                      |
| >>>Time Slot                          | M        |                                      | 9.2.3.23              |   | -           |                      |
| >>>Midamble Shift And Burst Type      | M        |                                      | 9.2.3.7               |   | -           |                      |
| >>>TFCI Presence                      | M        |                                      | 9.2.1.57              |   | -           |                      |
| >>> <b>DL Code Information</b>        |          | <i>1..&lt;maxno ofPDSCHs &gt;</i>    |                       |   | -           |                      |
| >>>>PDSCH ID                          | M        |                                      | 9.2.3.10              |   | -           |                      |
| >>>>TDD Channelisation Code           | M        |                                      | 9.2.3.19              |   | -           |                      |
| > <b>PDSCH To Add Information LCR</b> |          | <i>0..1</i>                          |                       | Mandatory for 1.28Mcps TDD. Not Applicable to 3.84Mcps TDD. | YES         | reject               |
| >>Repetition Period                   | M        |                                      | 9.2.3.16              |   | -           |                      |
| >>Repetition Length                   | M        |                                      | 9.2.3.15              |   | -           |                      |
| >>TDD Physical Channel Offset         | M        |                                      | 9.2.3.20              |   | -           |                      |
| >> <b>DL Timeslot Information LCR</b> |          | <i>1..&lt;maxno ofDLtsLCR &gt;</i>   |                       |   | -           |                      |
| >>>Time Slot LCR                      | M        |                                      | 9.2.3.24A             |   | -           |                      |
| >>>Midamble Shift LCR                 | M        |                                      | 9.2.3.7A              |   | -           |                      |
| >>>TFCI Presence                      | M        |                                      | 9.2.1.57              |   | -           |                      |

|  |   |                                      |                          |                  |                     |                        |
|--|---|--------------------------------------|--------------------------|------------------|---------------------|------------------------|
| <b>&gt;&gt;&gt;DL Code Information LCR</b>         |   | <i>1..&lt;maxno ofPDSCHs &gt;</i>    |                          |                  | —                   |                        |
| >>>>PDSCH ID                                       | M |                                      | 9.2.3.10                 |                  | —                   |                        |
| >>>>TDD Channelisation Code LCR                    | M |                                      | 9.2.3.19a                |                  | —                   |                        |
| <b>&gt;&gt;TSTD Indicator</b>                      | O |                                      | <a href="#">9.2.1.64</a> |                  | <a href="#">YES</a> | <a href="#">reject</a> |
| <b>PDSCH Sets To Modify</b>                        |   | <i>0..&lt;maxno of PDSCHSets&gt;</i> |                          |                  | GLOBAL              | <a href="#">reject</a> |
| >PDSCH Set ID                                      | M |                                      | 9.2.3.11                 |                  | —                   |                        |
| >CHOICE HCR or LCR                                 | M |                                      |                          | See note 1 below | —                   |                        |
| >>3.84Mcps TDD                                     |   |                                      |                          |                  | —                   |                        |
| <b>&gt;&gt;&gt;PDSCH To Modify Information</b>     |   | 1                                    |                          |                  | YES                 | <a href="#">reject</a> |
| >>>>Repetition Period                              | O |                                      | 9.2.3.16                 |                  | —                   |                        |
| >>>>Repetition Length                              | O |                                      | 9.2.3.15                 |                  | —                   |                        |
| >>>>TDD Physical Channel Offset                    | O |                                      | 9.2.3.20                 |                  | —                   |                        |
| <b>&gt;&gt;&gt;&gt;DL Timeslot Information</b>     |   | <i>0..&lt;maxno ofDLts&gt;</i>       |                          |                  | —                   |                        |
| >>>>>Time Slot                                     | M |                                      | 9.2.3.23                 |                  | —                   |                        |
| >>>>>Midamble Shift And Burst Type                 | O |                                      | 9.2.3.7                  |                  | —                   |                        |
| >>>>>TFCI Presence                                 | O |                                      | 9.2.1.57                 |                  | —                   |                        |
| <b>&gt;&gt;&gt;&gt;&gt;DL Code Information</b>     |   | <i>0..&lt;maxno ofPDSCHs &gt;</i>    |                          |                  | —                   |                        |
| >>>>>>PDSCH ID                                     | M |                                      | 9.2.3.10                 |                  | —                   |                        |
| >>>>>>TDD Channelisation Code                      | M |                                      | 9.2.3.19                 |                  | —                   |                        |
| >>1.28Mcps TDD                                     |   |                                      |                          |                  | —                   |                        |
| <b>&gt;&gt;&gt;PDSCH To Modify Information LCR</b> |   | 1                                    |                          |                  | YES                 | <a href="#">reject</a> |
| >>>>Repetition Period                              | O |                                      | 9.2.3.16                 |                  | —                   |                        |
| >>>>Repetition Length                              | O |                                      | 9.2.3.15                 |                  | —                   |                        |
| >>>>TDD Physical Channel Offset                    | O |                                      | 9.2.3.20                 |                  | —                   |                        |
| <b>&gt;&gt;&gt;&gt;DL Timeslot Information LCR</b> |   | <i>0..&lt;maxno ofDLtsLCR &gt;</i>   |                          |                  | —                   |                        |
| >>>>>Time Slot LCR                                 | M |                                      | 9.2.3.24A                |                  | —                   |                        |
| >>>>>Midamble Shift LCR                            | O |                                      | 9.2.3.7A                 |                  | —                   |                        |
| >>>>>TFCI Presence                                 | O |                                      | 9.2.1.57                 |                  | —                   |                        |

|  |   |                                      |           |   |        |        |
|--|---|--------------------------------------|-----------|---|--------|--------|
| <b>&gt;&gt;&gt;&gt;DL Code Information LCR</b>     |   | <i>0..&lt;maxno ofPDSCHs &gt;</i>    |           |   | —      |        |
| <b>&gt;&gt;&gt;&gt;PDSCH ID</b>                    | M |                                      | 9.2.3.10  |   | —      |        |
| <b>&gt;&gt;&gt;&gt;TDD Channelisation Code LCR</b> | M |                                      | 9.2.3.19a |   | —      |        |
| <b>PDSCH Sets To Delete</b>                        |   | <i>0..&lt;maxno of PDSCHSets&gt;</i> |           |   | GLOBAL | reject |
| <b>&gt;PDSCH Set ID</b>                            | M |                                      | 9.2.3.11  |   | —      |        |
| <b>PUSCH Sets To Add</b>                           |   | <i>0..&lt;maxno of PUSCHSets&gt;</i> |           |   | GLOBAL | reject |
| <b>&gt;PUSCH Set ID</b>                            | M |                                      | 9.2.3.13  |   | —      |        |
| <b>&gt;PUSCH To Add Information</b>                |   | 0..1                                 |           | Mandatory for 3.84Mcps TDD. Not Applicable to 1.28Mcps TDD. | YES    | reject |
| <b>&gt;&gt;Repetition Period</b>                   | M |                                      | 9.2.3.16  |   | —      |        |
| <b>&gt;&gt;Repetition Length</b>                   | M |                                      | 9.2.3.15  |   | —      |        |
| <b>&gt;&gt;TDD Physical Channel Offset</b>         | M |                                      | 9.2.3.20  |   | —      |        |
| <b>&gt;&gt;UL Timeslot Information</b>             |   | <i>1..&lt;maxno ofULts&gt;</i>       |           |   | —      |        |
| <b>&gt;&gt;&gt;Time Slot</b>                       | M |                                      | 9.2.3.23  |   | —      |        |
| <b>&gt;&gt;&gt;Midamble Shift And Burst Type</b>   | M |                                      | 9.2.3.7   |   | —      |        |
| <b>&gt;&gt;&gt;TFCI Presence</b>                   | M |                                      | 9.2.1.57  |   | —      |        |
| <b>&gt;&gt;&gt;UL Code Information</b>             |   | <i>1..&lt;maxno ofPUSCHs &gt;</i>    |           |   | —      |        |
| <b>&gt;&gt;&gt;PUSCH ID</b>                        | M |                                      | 9.2.3.12  |   | —      |        |
| <b>&gt;&gt;&gt;TDD Channelisation Code</b>         | M |                                      | 9.2.3.19  |   | —      |        |
| <b>&gt;PUSCH To Add Information LCR</b>            |   | 0..1                                 |           | Mandatory for 1.28Mcps TDD. Not Applicable to 3.84Mcps TDD. | YES    | reject |
| <b>&gt;&gt;Repetition Period</b>                   | M |                                      | 9.2.3.16  |   | —      |        |
| <b>&gt;&gt;Repetition Length</b>                   | M |                                      | 9.2.3.15  |   | —      |        |
| <b>&gt;&gt;TDD Physical Channel Offset</b>         | M |                                      | 9.2.3.20  |   | —      |        |
| <b>&gt;&gt;UL Timeslot Information LCR</b>         |   | <i>1..&lt;maxno ofULtsLCR &gt;</i>   |           |   | —      |        |
| <b>&gt;&gt;&gt;Time Slot LCR</b>                   | M |                                      | 9.2.3.24A |   | —      |        |
| <b>&gt;&gt;&gt;Midamble Shift LCR</b>              | M |                                      | 9.2.3.7A  |   | —      |        |
| <b>&gt;&gt;&gt;TFCI Presence</b>                   | M |                                      | 9.2.1.57  |   | —      |        |
| <b>&gt;&gt;&gt;UL Code Information LCR</b>         |   | <i>1..&lt;maxno ofPUSCHs LCR&gt;</i> |           |   | —      |        |
| <b>&gt;&gt;&gt;PUSCH ID</b>                        | M |                                      | 9.2.3.12  |   | —      |        |

|  |   |                                      |           |                  |        |        |
|--|---|--------------------------------------|-----------|------------------|--------|--------|
| >>>TDD Channelisation Code LCR                 | M |                                      | 9.2.3.19a |                  | -      |        |
| <b>PUSCH Sets To Modify</b>                    |   | <i>0..&lt;maxno of PUSCHSets&gt;</i> |           |                  | GLOBAL | reject |
| >PUSCH Set ID                                  | M |                                      | 9.2.3.13  |                  | -      |        |
| >CHOICE <i>HCR or LCR</i>                      | M |                                      |           | See note 1 below | -      |        |
| >>3.84Mcps TDD                                 |   |                                      |           |                  | -      |        |
| <b>&gt;&gt;PUSCH To Modify Information</b>     |   | 1                                    |           |                  | YES    | reject |
| >>>Repetition Period                           | O |                                      | 9.2.3.16  |                  | -      |        |
| >>>Repetition Length                           | O |                                      | 9.2.3.15  |                  | -      |        |
| >>>TDD Physical Channel Offset                 | O |                                      | 9.2.3.20  |                  | -      |        |
| <b>&gt;&gt;&gt;UL Timeslot Information</b>     |   | <i>0..&lt;maxno ofULTs&gt;</i>       |           |                  | -      |        |
| >>>>Time Slot                                  | M |                                      | 9.2.3.23  |                  | -      |        |
| >>>>Midamble Shift And Burst Type              | O |                                      | 9.2.3.7   |                  | -      |        |
| >>>>TFCI Presence                              | O |                                      | 9.2.1.57  |                  | -      |        |
| <b>&gt;&gt;&gt;&gt;UL Code Information</b>     |   | <i>0..&lt;maxno ofPUSCHs&gt;</i>     |           |                  | -      |        |
| >>>>>PUSCH ID                                  | M |                                      | 9.2.3.12  |                  | -      |        |
| >>>>TDD Channelisation Code                    | M |                                      | 9.2.3.19  |                  | -      |        |
| >>1.28Mcps TDD                                 |   |                                      |           |                  | -      |        |
| <b>&gt;&gt;PUSCH To Modify Information LCR</b> |   | 1                                    |           |                  | YES    | reject |
| >>>Repetition Period                           | O |                                      | 9.2.3.16  |                  | -      |        |
| >>>Repetition Length                           | O |                                      | 9.2.3.15  |                  | -      |        |
| >>>TDD Physical Channel Offset                 | O |                                      | 9.2.3.20  |                  | -      |        |
| <b>&gt;&gt;&gt;UL Timeslot Information LCR</b> |   | <i>0..&lt;maxno ofULTsLCR&gt;</i>    |           |                  | -      |        |
| >>>>Time Slot LCR                              | M |                                      | 9.2.3.24A |                  | -      |        |
| >>>>Midamble Shift LCR                         | O |                                      | 9.2.3.7A  |                  | -      |        |
| >>>>TFCI Presence                              | O |                                      | 9.2.1.57  |                  | -      |        |
| <b>&gt;&gt;&gt;&gt;UL Code Information LCR</b> |   | <i>0..&lt;maxno ofPUSCHsLCR&gt;</i>  |           |                  | -      |        |
| >>>>>PUSCH ID                                  | M |                                      | 9.2.3.12  |                  | -      |        |

|   |   |                         |                                     |   |        |        |
|---|---|-------------------------|-------------------------------------|---|--------|--------|
| >>>>TDD Channelisation Code LCR                 | M |                         | 9.2.3.19a                           |   | –      |        |
| <b>PUSCH Sets To Delete</b>                     |   | 0..<maxno ofPUSCH Sets> |                                     |   | GLOBAL | reject |
| >PUSCH Set ID                                   | M |                         | 9.2.3.13                            |   | –      |        |
| <b>HS-PDSCH TDD Information</b>                 |   | 0..1                    |                                     |   | GLOBAL | reject |
| <b>&gt;DL Timeslot and Code Information</b>     |   | 0..<maxno ofDLts>       |                                     | Mandatory for 3.84Mcps TDD. Not Applicable to 1.28Mcps TDD.                             | –      |        |
| >>Time Slot                                     | M |                         | 9.2.3.23                            |   | –      |        |
| >>Midamble Shift And Burst Type                 | M |                         | 9.2.3.7                             |   | –      |        |
| <b>&gt;&gt;Codes</b>                            |   | 1..<maxno ofHSPDS CHs>  |                                     |   | –      |        |
| >>>TDD Channelisation Code                      | M |                         | 9.2.3.19                            |   | –      |        |
| >>HS-PDSCH and HS-SCCH Total Power              | O |                         | Maximum Transmission Power 9.2.1.40 | Maximum transmission power to be allowed for HS-PDSCH and HS-SCCH codes in the timeslot | YES    | reject |
| <b>&gt;DL Timeslot and Code Information LCR</b> |   | 0..<maxno ofDLtsLCR >   |                                     | Mandatory for 1.28Mcps TDD. Not Applicable to 3.84Mcps TDD.                             | –      |        |
| >>Time Slot LCR                                 | M |                         | 9.2.3.24a                           |   | –      |        |
| >>Midamble Shift LCR                            | M |                         | 9.2.3.7A                            |   | –      |        |
| <b>&gt;&gt;Codes LCR</b>                        |   | 1..<maxno ofHSPDS CHs>  |                                     |   | –      |        |
| >>>TDD Channelisation Code                      | M |                         | 9.2.3.19                            |   | –      |        |
| >>HS-PDSCH and HS-SCCH Total Power              | O |                         | Maximum Transmission Power 9.2.1.40 | Maximum transmission power to be allowed for HS-PDSCH and HS-SCCH codes in the timeslot | YES    | reject |
| <b>Add to HS-SCCH Resource Pool</b>             |   | 0..1                    |                                     |   | GLOBAL | reject |
| <b>&gt;HS-SCCH Information</b>                  |   | 0..<maxno ofHSSCC Hs>   |                                     | Applicable to 3.84Mcps TDD only   | –      |        |
| >>HS-SCCH ID                                    | M |                         | 9.2.3.5Ga                           |   | –      |        |
| >>Time Slot                                     | M |                         | 9.2.3.23                            |   | –      |        |

|  |   |                       |                                     |                                 |        |        |
|--|---|-----------------------|-------------------------------------|---------------------------------|--------|--------|
| >>Midamble Shift And Burst Type        | M |                       | 9.2.3.7                             |                                 | -      |        |
| >>TDD Channelisation Code              | M |                       | 9.2.3.19                            |                                 | -      |        |
| >>Maximum HS-SCCH Power                | M |                       | DL Power<br>9.2.1.21                |                                 | -      |        |
| <b>&gt;&gt;HS-SICH Information</b>     |   | 1                     |                                     |                                 | -      |        |
| >>>HS-SICH ID                          | M |                       | 9.2.3.5Gb                           |                                 | -      |        |
| >>>Time Slot                           | M |                       | 9.2.3.23                            |                                 | -      |        |
| >>>Midamble Shift And Burst Type       | M |                       | 9.2.3.7                             |                                 | -      |        |
| >>>TDD Channelisation Code             | M |                       | 9.2.3.19                            |                                 | -      |        |
| <b>&gt;HS-SCCH Information LCR</b>     |   | 0..<maxno ofHSSCC Hs> |                                     | Applicable to 1.28Mcps TDD only | GLOBAL | reject |
| >>HS-SCCH ID                           | M |                       | 9.2.3.5Ga                           |                                 | -      |        |
| >>Time Slot LCR                        | M |                       | 9.2.3.24a                           |                                 | -      |        |
| >>Midamble Shift LCR                   | M |                       | 9.2.3.7A                            |                                 | -      |        |
| >>First TDD Channelisation Code        | M |                       | TDD Channelisation Code<br>9.2.3.19 |                                 | -      |        |
| >>Second TDD Channelisation Code       | M |                       | TDD Channelisation Code<br>9.2.3.19 |                                 | -      |        |
| >>Maximum HS-SCCH Power                | M |                       | DL Power<br>9.2.1.21                |                                 | -      |        |
| <b>&gt;&gt;HS-SICH Information LCR</b> |   | 1                     |                                     |                                 | -      |        |
| >>>HS-SICH ID                          | M |                       | 9.2.3.5Gb                           |                                 | -      |        |
| >>>Time Slot LCR                       | M |                       | 9.2.3.24a                           |                                 | -      |        |
| >>>Midamble Shift LCR                  | M |                       | 9.2.3.7A                            |                                 | -      |        |
| >>>TDD Channelisation Code             | M |                       | 9.2.3.19                            |                                 | -      |        |
| <b>Modify HS-SCCH Resource Pool</b>    |   | 0..1                  |                                     |                                 | GLOBAL | reject |
| <b>&gt;HS-SCCH Information</b>         |   | 0..<maxno ofHSSCC Hs> |                                     | Applicable to 3.84Mcps TDD only | -      |        |
| >>HS-SCCH ID                           | M |                       | 9.2.3.5Ga                           |                                 | -      |        |
| >>Time Slot                            | O |                       | 9.2.3.23                            |                                 | -      |        |
| >>Midamble Shift And Burst Type        | O |                       | 9.2.3.7                             |                                 | -      |        |
| >>TDD Channelisation Code              | O |                       | 9.2.3.19                            |                                 | -      |        |
| >>Maximum HS-SCCH Power                | O |                       | DL Power<br>9.2.1.21                |                                 | -      |        |
| <b>&gt;&gt;HS-SICH Information</b>     |   | 0..1                  |                                     |                                 | -      |        |
| >>>HS-SICH ID                          | M |                       | 9.2.3.5Gb                           |                                 | -      |        |
| >>>Time Slot                           | O |                       | 9.2.3.23                            |                                 | -      |        |
| >>>Midamble Shift And Burst Type       | O |                       | 9.2.3.7                             |                                 | -      |        |

|  |   |                       |                                  |                                 |        |        |
|--|---|-----------------------|----------------------------------|---------------------------------|--------|--------|
| >>>TDD Channelisation Code               | O |                       | 9.2.3.19                         |                                 | -      |        |
| >>HS-SCCH Information LCR                |   | 0..<maxno ofHSSCC Hs> |                                  | Applicable to 1.28Mcps TDD only | GLOBAL | reject |
| >>HS-SCCH ID                             | M |                       | 9.2.3.5Ga                        |                                 | -      |        |
| >>Time Slot LCR                          | O |                       | 9.2.3.24a                        |                                 | -      |        |
| >>Midamble Shift LCR                     | O |                       | 9.2.3.7A                         |                                 | -      |        |
| >>First TDD Channelisation Code          | O |                       | TDD Channelisation Code 9.2.3.19 |                                 | -      |        |
| >>Second TDD Channelisation Code         | O |                       | TDD Channelisation Code 9.2.3.19 |                                 |        |        |
| >>Maximum HS-SCCH Power                  | O |                       | DL Power 9.2.1.21                |                                 | -      |        |
| >>HS-SICH Information LCR                |   | 0..1                  |                                  |                                 | -      |        |
| >>>HS-SICH ID                            | M |                       | 9.2.3.5Gb                        |                                 | -      |        |
| >>>Time Slot LCR                         | O |                       | 9.2.3.24a                        |                                 | -      |        |
| >>Midamble Shift LCR                     | O |                       | 9.2.3.7A                         |                                 | -      |        |
| >>>TDD Channelisation Code               | O |                       | 9.2.3.19                         |                                 | -      |        |
| <b>Delete from HS-SCCH Resource Pool</b> |   | 0..<maxno of HSSCCs > |                                  |                                 | GLOBAL | reject |
| >HS-SCCH ID                              | M |                       | 9.2.3.5Ga                        |                                 | -      |        |
| Configuration Generation ID              | O |                       | 9.2.1.16                         |                                 | YES    | reject |

Note 1: This information element is a simplified representation of the ASN.1. The choice is in reality performed through the use of ProtocolIE-Single-Container within the ASN.1.

| Range Bound             | Explanation   |
|-------------------------|---|
| <i>maxnoofPDSCHSets</i> | Maximum number of PDSCH Sets in a cell.                           |
| <i>maxnoofPDSCHs</i>    | Maximum number of PDSCH in a cell.                                |
| <i>maxnoofPUSCHSets</i> | Maximum number of PUSCH Sets in a cell.                           |
| <i>maxnoofPUSCHs</i>    | Maximum number of PUSCH in a cell.                                |
| <i>maxnoofDLts</i>      | Maximum number of Downlink time slots in a cell for 3.84Mcps TDD. |
| <i>maxnoofDLtsLCR</i>   | Maximum number of Downlink time slots in a cell for 1.28Mcps TDD. |
| <i>maxnoofULts</i>      | Maximum number of Uplink time slots in a cell for 3.84Mcps TDD.   |
| <i>maxnoofULtsLCR</i>   | Maximum number of Uplink time slots in a cell for 1.28Mcps TDD    |
| <i>maxnoofHSSCCs</i>    | Maximum number of HS-SCCHs in a Cell                              |
| <i>maxnoofHSPDSCHs</i>  | Maximum number of HS-PDSCHs in one time slot of a Cell            |

### 9.3.3 PDU Definitions

```
-- ****
-- IE parameter types from other modules.
--
-- ****

IMPORTS

/// break ///

FROM NBAP-Containers
    id-Active-Pattern-Sequence-Information,
    id-AdjustmentRatio,
    id-AICH-Information,
    id-AICH-ParametersListIE-CTCH-ReconfRqstFDD,
    id-AP-AICH-Information,
    id-AP-AICH-ParametersListIE-CTCH-ReconfRqstFDD,
/// break ///

    id-T-Cell,
    id-TargetCommunicationControlPortID,
    id-TFCI2-Bearer-Information-RL-SetupRqstFDD,
    id-TFCI2-BearerInformationResponse,
    id-TFCI2BearerRequestIndicator,
    id-TFCI2-BearerSpecificInformation-RL-ReconfPrepFDD,
    id-Transmission-Gap-Pattern-Sequence-Information,
    id-TimeSlotConfigurationList-Cell-ReconfRqstTDD,
    id-TimeSlotConfigurationList-Cell-SetupRqstTDD,
    id-timeslotInfo-CellSyncInitiationRqstTDD,
    id-TimeslotISCPInfo,
    id-TimingAdvanceApplied,
    id-TnlQos,
    id-TransmissionDiversityApplied,
    id-transportlayeraddress,
    id-Tstd-indicator,
    id-UARFCNforNt,
    id-UARFCNforNd,
    id-UARFCNforNu,
```

```

-- ****
-- COMMON TRANSPORT CHANNEL SETUP REQUEST TDD
-- ****

CommonTransportChannelSetupRequestTDD ::= SEQUENCE {
    protocolIEs      ProtocolIE-Container   {{CommonTransportChannelSetupRequestTDD-IES}},
    protocolExtensions  ProtocolExtensionContainer {{CommonTransportChannelSetupRequestTDD-Extensions}} OPTIONAL,
    ...
}

CommonTransportChannelSetupRequestTDD-IES NBAP-PROTOCOL-IES ::= {
    { ID id-C-ID } CRITICALITY reject TYPE C-ID PRESENCE
    mandatory }
    { ID id-ConfigurationGenerationID } CRITICALITY reject TYPE ConfigurationGenerationID PRESENCE
    mandatory }
    { ID id-CommonPhysicalChannelType-CTCH-SetupRqstTDD } CRITICALITY ignore TYPE CommonPhysicalChannelType-CTCH-SetupRqstTDD
    PRESENCE mandatory },
    ...
}

CommonTransportChannelSetupRequestTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

CommonPhysicalChannelType-CTCH-SetupRqstTDD ::= CHOICE {
    secondary-CCPCH-parameters Secondary-CCPCH-CTCH-SetupRqstTDD,
    pRACH-parameters PRACH-CTCH-SetupRqstTDD,
    ...
}

Secondary-CCPCH-CTCH-SetupRqstTDD ::= SEQUENCE {
    sCCPCH-CCTrCH-ID CCTrCH-ID, -- For DL CCTrCH supporting one or several Secondary CCPCHs
    tFCs TFCS, -- For DL CCTrCH supporting one or several Secondary CCPCHs
    tFCI-Coding TFCI-Coding,
    punctureLimit PunctureLimit,
    secondaryCCPCH-parameterList Secondary-CCPCH-parameterList-CTCH-SetupRqstTDD,
    fACH-ParametersList FACH-ParametersList-CTCH-SetupRqstTDD OPTIONAL,
    pCH-Parameters PCH-Parameters-CTCH-SetupRqstTDD OPTIONAL,
    ie-Extensions ProtocolExtensionContainer {{Secondary-CCPCHItem-CTCH-SetupRqstTDD-ExtIES}}
    OPTIONAL,
    ...
}

Secondary-CCPCHItem-CTCH-SetupRqstTDD-ExtIES NBAP-PROTOCOL-EXTENSION ::= {
    { ID id-Tstd-indicator } CRITICALITY reject EXTENSION TSTD-Indicator PRESENCE optional },

```

```

|   -- Applicable to 1.28Mcps TDD only
|   ...
}

Secondary-CCPCH-parameterList-CTCH-SetupRqstTDD ::= ProtocolIE-Single-Container {{ Secondary-CCPCH-parameterListIES-CTCH-SetupRqstTDD
} }

Secondary-CCPCH-parameterListIES-CTCH-SetupRqstTDD NBAP-PROTOCOL-IES ::= {
    { ID id-Secondary-CCPCH-parameterListIE-CTCH-SetupRqstTDD CRITICALITY reject TYPE Secondary-CCPCH-parameterListIE-CTCH-
SetupRqstTDD PRESENCE optional }|
    { ID id-Secondary-CCPCH-LCR-parameterList-CTCH-SetupRqstTDD CRITICALITY reject TYPE Secondary-CCPCH-LCR-parameterList-CTCH-
SetupRqstTDD PRESENCE optional }
}

Secondary-CCPCH-parameterListIE-CTCH-SetupRqstTDD ::= SEQUENCE (SIZE (1..maxNrOfSCCPCHs)) OF Secondary-CCPCH-parameterItem-CTCH-
SetupRqstTDD

Secondary-CCPCH-parameterItem-CTCH-SetupRqstTDD ::= SEQUENCE {
    commonPhysicalChannelID CommonPhysicalChannelID,
    tdd-ChannelisationCode TDD-ChannelisationCode,
    timeslot TimeSlot,
    midambleShiftandBurstType MidambleShiftAndBurstType,
    tdd-PhysicalChannelOffset TDD-PhysicalChannelOffset,
    repetitionPeriod RepetitionPeriod,
    repetitionLength RepetitionLength,
    s-CCPCH-Power DL-Power,
    iE-Extensions ProtocolExtensionContainer { { Secondary-CCPCH-parameterItem-CTCH-SetupRqstTDD-ExtIES }
} OPTIONAL,
    ...
}

Secondary-CCPCH-parameterItem-CTCH-SetupRqstTDD-ExtIES NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

FACH-ParametersList-CTCH-SetupRqstTDD ::= ProtocolIE-Single-Container {{ FACH-ParametersListIES-CTCH-SetupRqstTDD }}
```

FACH-ParametersListIES-CTCH-SetupRqstTDD NBAP-PROTOCOL-IES ::= {  
 { ID id-FACH-ParametersListIE-CTCH-SetupRqstTDD CRITICALITY reject TYPE FACH-ParametersListIE-CTCH-SetupRqstTDD PRESENCE  
 mandatory }  
}

FACH-ParametersListIE-CTCH-SetupRqstTDD ::= SEQUENCE (SIZE (1..maxNrOfFACHs)) OF FACH-ParametersItem-CTCH-SetupRqstTDD

FACH-ParametersItem-CTCH-SetupRqstTDD ::= SEQUENCE {  
 commonTransportChannelID CommonTransportChannelID,  
 fACH-CCTrCH-ID CCTrCH-ID,

```

dl-TransportFormatSet           TransportFormatSet,
toAWS                          ToAWS,
toAWE                          ToAWE,
iE-Extensions                  ProtocolExtensionContainer { { FACH-ParametersItem-CTCH-SetupRqstTDD-ExtIEs} }
OPTIONAL,
...
}

FACH-ParametersItem-CTCH-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
{ ID   id-maxFACH-Power-LCR-CTCH-SetupRqstTDD  CRITICALITY reject  EXTENSION DL-Power
}| PRESENCE optional
-- Applicable to 1.28Mcps TDD only
{ ID   id-bindingID          CRITICALITY ignore   EXTENSION BindingID
}| PRESENCE optional
-- Shall be ignored if bearer establishment with ALCAP.
{ ID   id-transportlayeraddress  CRITICALITY ignore  EXTENSION TransportLayerAddress
},
-- Shall be ignored if bearer establishment with ALCAP.
...
}

PCH-Parameters-CTCH-SetupRqstTDD ::= ProtocolIE-Single-Container {{ PCH-ParametersIE-CTCH-SetupRqstTDD }}

PCH-ParametersIE-CTCH-SetupRqstTDD NBAP-PROTOCOL-IES ::= {
{ ID id-PCH-ParametersItem-CTCH-SetupRqstTDD  CRITICALITY reject  TYPE PCH-ParametersItem-CTCH-SetupRqstTDD  PRESENCE mandatory
}
}

PCH-ParametersItem-CTCH-SetupRqstTDD ::= SEQUENCE {
commonTransportChannelID        CommonTransportChannelID,
pCH-CCTrCH-ID                 CCTrCH-ID,
dl-TransportFormatSet          TransportFormatSet, -- For the DL.
toAWS                          ToAWS,
toAWE                          ToAWE,
pICH-Parameters                PICH-Parameters-CTCH-SetupRqstTDD,
iE-Extensions                  ProtocolExtensionContainer { { PCH-ParametersItem-CTCH-SetupRqstTDD-ExtIEs} }
OPTIONAL,
...
}

PCH-ParametersItem-CTCH-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
{ ID   id-PCH-Power-LCR-CTCH-SetupRqstTDD  CRITICALITY reject  EXTENSION DL-Power
}| PRESENCE optional
{ ID   id-bindingID          CRITICALITY ignore   EXTENSION BindingID
}| PRESENCE optional
-- Shall be ignored if bearer establishment with ALCAP.

```

```

{ ID      id-transportlayeraddress          CRITICALITY ignore EXTENSION TransportLayerAddress      PRESENCE optional
},
-- Shall be ignored if bearer establishment with ALCAP.
...
}

PICH-Parameters-CTCH-SetupRqstTDD ::= ProtocolIE-Single-Container {{ PICH-ParametersIE-CTCH-SetupRqstTDD }}
```

PICH-ParametersIE-CTCH-SetupRqstTDD NBAP-PROTOCOL-IES ::= {  
  { ID id-PICH-ParametersItem-CTCH-SetupRqstTDD CRITICALITY reject TYPE PICH-ParametersItem-CTCH-SetupRqstTDD PRESENCE optional  
}|  
  { ID id-PICH-LCR-Parameters-CTCH-SetupRqstTDD CRITICALITY reject TYPE PICH-LCR-Parameters-CTCH-SetupRqstTDD PRESENCE optional }  
}

PICH-ParametersItem-CTCH-SetupRqstTDD ::= SEQUENCE {  
  commonPhysicalChannelID CommonPhysicalChannelID,  
  tdd-ChannelisationCode TDD-ChannelisationCode,  
  timeSlot TimeSlot,  
  midambleShiftAndBurstType MidambleShiftAndBurstType,  
  tdd-PhysicalChannelOffset TDD-PhysicalChannelOffset,  
  repetitionPeriod RepetitionPeriod,  
  repetitionLength RepetitionLength,  
  pagingIndicatorLength PagingIndicatorLength,  
  pICH-Power PICH-Power,  
  iE-Extensions ProtocolExtensionContainer { { PICH-ParametersItem-CTCH-SetupRqstTDD-ExtIEs } }  
  OPTIONAL,  
...
}

PICH-ParametersItem-CTCH-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {  
...
}

PICH-LCR-Parameters-CTCH-SetupRqstTDD ::= SEQUENCE {  
  commonPhysicalChannelID CommonPhysicalChannelID,  
  tdd-ChannelisationCodeLCR TDD-ChannelisationCodeLCR,  
  timeSlotLCR TimeSlotLCR,  
  midambleShiftLCR MidambleShiftLCR,  
  tdd-PhysicalChannelOffset TDD-PhysicalChannelOffset,  
  repetitionPeriod RepetitionPeriod,  
  repetitionLength RepetitionLength,  
  pagingIndicatorLength PagingIndicatorLength,  
  pICH-Power PICH-Power,  
  second-TDD-ChannelisationCodeLCR TDD-ChannelisationCodeLCR,  
  iE-Extensions ProtocolExtensionContainer { { PICH-LCR-ParametersItem-CTCH-SetupRqstTDD-ExtIEs } }  
  OPTIONAL,  
...
}

```

}

PICH-LCR-ParametersItem-CTCH-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
  { ID      id-Tstd-indicator          CRITICALITY reject      EXTENSION      TSTD-Indicator      PRESENCE           optional },
  -- Applicable to 1.28 Mcps TDD only
  ...
}

Secondary-CCPCH-LCR-parameterList-CTCH-SetupRqstTDD ::= SEQUENCE (SIZE (1..maxNrOfSCCPCHLCRs)) OF Secondary-CCPCH-LCR-parameterItem-CTCH-SetupRqstTDD

Secondary-CCPCH-LCR-parameterItem-CTCH-SetupRqstTDD ::= SEQUENCE {
  commonPhysicalChannelID                  CommonPhysicalChannelID,
  tdd-ChannelisationCodeLCR              TDD-ChannelisationCodeLCR,
  timeslotLCR                           TimeSlotLCR,
  midambleShiftLCR                      MidambleShiftLCR,
  tdd-PhysicalChannelOffset             TDD-PhysicalChannelOffset,
  repetitionPeriod                      RepetitionPeriod,
  repetitionLength                      RepetitionLength,
  s-CCPCH-Power                         DL-Power,
  s-CCPCH-TimeSlotFormat-LCR           TDD-DL-DPCH-TimeSlotFormat-LCR,
  iE-Extensions                          ProtocolExtensionContainer { { Secondary-CCPCH-LCR-parameterItem-CTCH-SetupRqstTDD-ExtIEs } } OPTIONAL,
  ...
}

Secondary-CCPCH-LCR-parameterItem-CTCH-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

/// break ///

-- *****
-- 
-- PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST TDD
-- 
-- *****

PhysicalSharedChannelReconfigurationRequestTDD ::= SEQUENCE {
  protocolIEs        ProtocolIE-Container { {PhysicalSharedChannelReconfigurationRequestTDD-IEs} },
  protocolExtensions ProtocolExtensionContainer { {PhysicalSharedChannelReconfigurationRequestTDD-Extensions} } OPTIONAL,
  ...
}

PhysicalSharedChannelReconfigurationRequestTDD-IEs NBAP-PROTOCOL-IES ::= {
  { ID id-C-ID          CRITICALITY reject      TYPE C-ID
  mandatory } |
  ...
}
  PRESENCE

```

```

    { ID id-SFN
optional }|
    { ID id-PDSCHSets-AddList-PSCH-ReconfRqst
optional }|
    { ID id-PDSCHSets-ModifyList-PSCH-ReconfRqst
optional }|
    { ID id-PDSCHSets-DeleteList-PSCH-ReconfRqst
optional }|
    { ID id-PUSCHSets-AddList-PSCH-ReconfRqst
optional }|
    { ID id-PUSCHSets-ModifyList-PSCH-ReconfRqst
optional }|
    { ID id-PUSCHSets-DeleteList-PSCH-ReconfRqst
optional },
    ...
}

PhysicalSharedChannelReconfigurationRequestTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    { ID id-HS-PDSCH-TDD-Information-PSCH-ReconfRqst
        PRESENCE optional } |
    { ID id-Add-To-HS-SCCH-Resource-Pool-PSCH-ReconfRqst
        PRESENCE optional } |
    { ID id-Modify-HS-SCCH-Resource-Pool-PSCH-ReconfRqst
        PRESENCE optional } |
    { ID id-Delete-From-HS-SCCH-Resource-Pool-PSCH-ReconfRqst
        PRESENCE optional } |
    { ID id-ConfigurationGenerationID
        optional },
    ...
}

PDSCHSets-AddList-PSCH-ReconfRqst ::= SEQUENCE (SIZE (1..maxNrOfPDSCHSets)) OF PDSCHSets-AddItem-PSCH-ReconfRqst

PDSCHSets-AddItem-PSCH-ReconfRqst ::= SEQUENCE {
    pDSCHSet-ID,
    pDSCH-InformationList
        PDSCH-Information-AddList-PSCH-ReconfRqst OPTIONAL,
        -- Mandatory for
3.84Mcps TDD. Not Applicable to 1.28Mcps TDD
    ie-Extensions
        ProtocolExtensionContainer { {PDSCHSets-AddItem-PSCH-ReconfRqst-ExtIEs} } OPTIONAL,
    ...
}

PDSCHSets-AddItem-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    {ID id-PDSCH-AddInformation-LCR-PSCH-ReconfRqst
        CRITICALITY reject
        EXTENSION PDSCH-AddInformation-LCR-AddItem-PSCH-
ReconfRqst
        PRESENCE optional}, -- Mandatory for 1.28Mcps TDD. Not Applicable to 3.84Mcps TDD
    ...
}

```

```

PDSCH-Information-AddList-PSCH-ReconfRqst ::= ProtocolIE-Single-Container {{ PDSCH-Information-AddListIEs-PSCH-ReconfRqst }}
-- Mandatory for 3.84Mcps TDD, Not Applicable to 1.28Mcps TDD

PDSCH-Information-AddListIEs-PSCH-ReconfRqst    NBAP-PROTOCOL-IES ::= {
  {ID id-PDSCH-Information-AddListIE-PSCH-ReconfRqst  CRITICALITY reject      TYPE      PDSCH-Information-AddItem-PSCH-ReconfRqst
  PRESENCE     mandatory}
}

PDSCH-Information-AddItem-PSCH-ReconfRqst ::= SEQUENCE {
  repetitionPeriod          RepetitionPeriod,
  repetitionLength          RepetitionLength,
  tdd-PhysicalChannelOffset TDD-PhysicalChannelOffset,
  dL-Timeslot-InformationAddList-PSCH-ReconfRqst   DL-Timeslot-InformationAddList-PSCH-ReconfRqst,
  ie-Extensions             ProtocolExtensionContainer { {PDSCH-Information-AddItem-PSCH-ReconfRqst-ExtIEs} }
  OPTIONAL,
  ...
}

PDSCH-Information-AddItem-PSCH-ReconfRqst-ExtIEs  NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

DL-Timeslot-InformationAddList-PSCH-ReconfRqst ::= SEQUENCE (SIZE (1.. maxNrOfDLTSS)) OF DL-Timeslot-InformationAddItem-PSCH-
ReconfRqst

DL-Timeslot-InformationAddItem-PSCH-ReconfRqst ::= SEQUENCE {
  timeSlot                  TimeSlot,
  midambleShiftAndBurstType MidambleShiftAndBurstType,
  tFCI-Presence              TFCI-Presence,
  dL-Code-InformationAddList-PSCH-ReconfRqst   DL-Code-InformationAddList-PSCH-ReconfRqst,
  ie-Extensions               ProtocolExtensionContainer { { DL-Timeslot-InformationAddItem-PSCH-ReconfRqst-ExtIEs} }
  OPTIONAL,
  ...
}

DL-Timeslot-InformationAddItem-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

DL-Code-InformationAddList-PSCH-ReconfRqst ::= SEQUENCE (SIZE (1..maxNrOfPDSCHs)) OF DL-Code-InformationAddItem-PSCH-ReconfRqst

DL-Code-InformationAddItem-PSCH-ReconfRqst ::= SEQUENCE {
  pDSCH-ID                  PDSCH-ID,
  tdd-ChannelisationCode    TDD-ChannelisationCode,
  ie-Extensions              ProtocolExtensionContainer { { DL-Code-InformationAddItem-PSCH-ReconfRqst-ExtIEs} }
  OPTIONAL,
  ...
}

```

```

}

DL-Code-InformationAddItem-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

PDSCH-AddInformation-LCR-AddItem-PSCH-ReconfRqst ::= SEQUENCE {
  repetitionPeriod           RepetitionPeriod,
  repetitionLength          RepetitionLength,
  tdd-PhysicalChannelOffset TDD-PhysicalChannelOffset,
  dl-Timeslot-InformationAddList-LCR-PSCH-ReconfRqst      DL-Timeslot-InformationAddList-LCR-PSCH-ReconfRqst,
  ie-Extensions             ProtocolExtensionContainer { {PDSCH-AddInformation-LCR-AddItem-PSCH-ReconfRqst-ExtIEs}
}   OPTIONAL,
  ...
}

PDSCH-AddInformation-LCR-AddItem-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
  id-Tstd-indicator          CRITICALITY reject      EXTENSION      TSTD-Indicator      PRESENCE          optional },
  -- Applicable to 1.28Mcps TDD only
}
  ...
}

DL-Timeslot-InformationAddList-LCR-PSCH-ReconfRqst ::= SEQUENCE (SIZE (1.. maxNrOfDLTSLCRs)) OF DL-Timeslot-InformationAddItem-LCR-
PSCH-ReconfRqst

/// break ///

```

### 9.3.6 Constant Definitions

```

-- *****
-- 
-- IEs
-- 
-- *****

id-AICH-Information                               ProtocolIE-ID ::= 0
id-AICH-InformationItem-ResourceStatusInd        ProtocolIE-ID ::= 1
id-BCH-Information                                ProtocolIE-ID ::= 7
id-BCH-InformationItem-ResourceStatusInd          ProtocolIE-ID ::= 8

/// break ///

```

|  |  |
|--|--|
| <u><a href="#">id-Tstd-indicator</a></u> | <u><a href="#">ProtocolIE-ID ::= 627</a></u> |
|--|--|



## CHANGE REQUEST

# 25.433 CR 1019 # rev 2 # Current version: 6.2.0 #

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the # symbols.

**Proposed change affects:** UICC apps # ME # Radio Access Network  Core Network #

|   |   |   |
|---|---|---|
| <b>Title:</b>   | # Addition of TSTD for S-CCPCH, PICH and PDSCH in 1.28 Mcps TDD |   |
| <b>Source:</b>  | # RAN3  |   |
| <b>Work item code:</b>  | # TEI4  | <b>Date:</b> # 20/08/04   |
| <b>Category:</b>  | # A   | <b>Release:</b> # Rel-6<br><small>Use one of the following releases:</small><br>Ph2 (GSM Phase 2)<br>R96 (Release 1996)<br>R97 (Release 1997)<br>R98 (Release 1998)<br>R99 (Release 1999)<br>Rel-4 (Release 4)<br>Rel-5 (Release 5)<br>Rel-6 (Release 6)<br>Rel-7 (Release 7) |
| <small>Use one of the following categories:</small><br><b>F</b> (correction)<br><b>A</b> (corresponds to a correction in an earlier release)<br><b>B</b> (addition of feature),<br><b>C</b> (functional modification of feature)<br><b>D</b> (editorial modification)<br>Detailed explanations of the above categories can be found in 3GPP <a href="#">TR 21.900</a> . |   |   |

|                           |  |
|---------------------------|--|
| <b>Reason for change:</b> | # The TSTD form of transmit diversity for S-CCPCH, PICH and PDSCH in LCR TDD has been introduced in RAN1 in Release 4. But this could not be enabled via the lub until now. This CR introduces a mechanism to enable or disable it at the Node B via the lub.  |
| <b>Summary of change:</b> | The TSTD Indicator IE in COMMON TRANSPORT CHANNEL SETUP REQUEST is made applicable to LCR TDD, as well as to its existing use for HCR TDD.<br><br>A TSTD Indicator IE is added in COMMON TRANSPORT CHANNEL SETUP REQUEST for PICH in 1.28 Mcps TDD. This is applicable to PICH that is not beacon channel.<br><br>A TSTD Indicator IE is added in PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST for PDSCH set in 1.28 Mcps TDD. This is applicable to PDSCH set that is not beacon channel.<br><br><u>Impact assessment towards the previous version of the specification (same release):</u><br><br>This CR has isolated impact towards the previous version of the specification (same release).<br><br>This CR has an impact under functional point of view.<br><br>The impact can be considered isolated because it only affects the use of TSTD transmit diversity in LCR TDD mode. |

|                                      |   |  |
|--------------------------------------|---|--|
| <b>Consequences if not approved:</b> | ⌘ | The RNC will be unable to control the use of TSTD transmit diversity for S-CCPCH, PICH and PDSCH in LCR TDD. |
|--------------------------------------|---|--|

|                          |   |  |
|--------------------------|---|--|
| <b>Clauses affected:</b> | ⌘ | 8.2.1.2, 8.2.18.2, 9.1.3.2, 9.1.62.2, 9.3.3, 9.3.6 |
|--------------------------|---|--|

|                                     |   |   |   |   |                                     |  |  |   |  |   |  |   |
|-------------------------------------|---|---|---|---|-------------------------------------|--|--|---|--|---|--|---|
| <b>Other specs affected:</b>        | ⌘ | <table border="1" style="display: inline-table; vertical-align: middle;"> <tr> <td style="text-align: center;">Y</td> <td style="text-align: center;">N</td> </tr> <tr> <td style="text-align: center;"><input checked="" type="checkbox"/></td> <td></td> </tr> <tr> <td></td> <td style="text-align: center;">X</td> </tr> </table> Other core specifications ⌘ 25.433 CR1017r2 Rel-4<br>Test specifications ⌘ 25.433 CR1018r2 Rel-5<br><table border="1" style="display: inline-table; vertical-align: middle;"> <tr> <td style="text-align: center;"></td> <td style="text-align: center;">X</td> </tr> <tr> <td style="text-align: center;"></td> <td style="text-align: center;">X</td> </tr> </table> O&M Specifications | Y | N | <input checked="" type="checkbox"/> |  |  | X |  | X |  | X |
| Y                                   | N |   |   |   |                                     |  |  |   |  |   |  |   |
| <input checked="" type="checkbox"/> |   |   |   |   |                                     |  |  |   |  |   |  |   |
|                                     | X |   |   |   |                                     |  |  |   |  |   |  |   |
|                                     | X |   |   |   |                                     |  |  |   |  |   |  |   |
|                                     | X |   |   |   |                                     |  |  |   |  |   |  |   |

|                        |   |
|------------------------|---|
| <b>Other comments:</b> | ⌘ |
|------------------------|---|

### How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/>. For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.


## 8.2 NBAP Common Procedures

### 8.2.1 Common Transport Channel Setup

#### 8.2.1.1 General

This procedure is used for establishing the necessary resources in Node B, regarding Secondary CCPCH, PICH, PRACH, PCPCH [FDD], AICH [FDD], AP\_AICH [FDD], CD/CA-ICH [FDD], FACH, PCH, RACH, FPACH [1.28Mcps TDD] and CPCH [FDD].

#### 8.2.1.2 Successful Operation

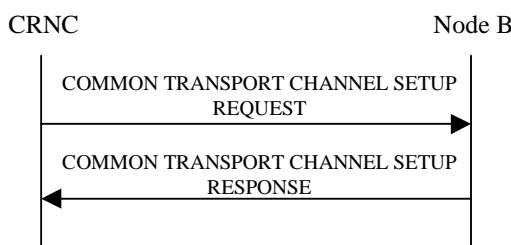

**Figure 1: Common Transport Channel Setup procedure, Successful Operation**

The procedure is initiated with a COMMON TRANSPORT CHANNEL SETUP REQUEST message sent from the CRNC to the Node B using the Node B Control Port.

One message can configure only one of the following combinations:

- [FDD - one Secondary CCPCH, and FACHs, PCH and PICH related to that Secondary CCPCH], or
- [TDD - one CCTrCH consisting of Secondary CCPCHs and FACHs, PCH with the corresponding PICH related to that group of Secondary CCPCHs], or
- one [1.28Mcps TDD - or more] PRACH, one RACH and one AICH [FDD] and one FPACH[1.28Mcps TDD] related to that PRACH.
- [FDD - PCPCHs, one CPCH, one AP\_AICH and one CD/CA-ICH related to that group of PCPCHs.]

#### Secondary CCPCH:

[FDD - When the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains the *Secondary CCPCH IE*, the Node B shall configure and activate the indicated Secondary CCPCH according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message.]

[TDD - When the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains the *Secondary CCPCH IE*, the Node B shall configure and activate the indicated Secondary CCPCH(s) according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message.]

[TDD - FACHs and PCH may be mapped onto a CCTrCH which may consist of several Secondary CCPCHs]

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains the *FACH Parameters IE*, the Node B shall configure and activate the indicated FACH(s) according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message.

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains the *PCH Parameters* IE, the Node B shall configure and activate the concerned PCH and the associated PICH according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message.

[1.28Mcps TDD - If the *PCH Power* IE is included in the *PCH Parameters* IE of the COMMON TRANSPORT CHANNEL SETUP REQUEST, the Node B shall use this value as the power at which the PCH shall be transmitted.]

| [3.84Meps TDD - If the *TSTD Indicator* IE for the S-CCPCH is included and is set to "active" in the COMMON TRANSPORT CHANNEL SETUP REQUEST, the Node B shall activate TSTD diversity for all S-CCPCHs defined in the message that are not beacon channels [19,21]. If the *TSTD Indicator* IE is not included or is set to "not active" in the COMMON TRANSPORT CHANNEL SETUP REQUEST, the Node B shall not activate TSTD diversity for the S-CCPCHs defined in the message.]

| [1.28Mcps TDD - If the *TSTD Indicator* IE for the PICH is included and is set to "active" in the COMMON TRANSPORT CHANNEL SETUP REQUEST message, the Node B shall activate TSTD diversity for the PICH if it is not a beacon channel [19,21]. If the *TSTD Indicator* IE is set to "not active" or the *TSTD Indicator* IE is not included for the PICH in the COMMON TRANSPORT CHANNEL SETUP REQUEST message, the Node B shall not activate TSTD diversity for the PICH.]

#### **PRACH:**

When the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains the *PRACH* IE, the Node B shall configure and activate the indicated PRACH and the associated RACH [FDD - and the associated AICH] according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message.

#### **[1.28Mcps TDD - FPACH]:**

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains the *FPACH* IE, the Node B shall configure and activate the indicated FPACH according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message.

#### **[FDD - PCPCHs]:**

When the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains the *CPCH Parameters* IE, the Node B shall configure and activate the indicated CPCH and the associated PCPCH(s), AP-AICH and CD/CA-ICH according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message.

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message includes *CD Signatures* IE, the Node B may use only the given CD signatures on CD/CA-ICH. Otherwise, the Node B may use all the CD signatures on CD/CA-ICH.

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message includes *CD Sub Channel Numbers* IE, the Node B may use only the given CD Sub Channels on CD/CA-ICH. Otherwise, the Node B may use all the CD Sub Channels on CD/CA-ICH.

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message includes *Channel Request Parameters* IE, the Node B shall use the parameters to distinguish the PCPCHs.

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message includes *AP Sub Channel Number* IE in *Channel Request Parameters* IE, the Node B shall use only these AP sub channel number to distinguish the configured PCPCH. Otherwise all AP subchannel numbers are used to distinguish the configured PCPCH.

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message includes *AP Sub Channel Number* IE in *SF Request Parameters* IE, the Node B shall use only these AP sub channel number to distinguish the requested Spreading Factors. Otherwise all AP subchannel numbers are used to distinguish the configured Spreading Factor.

**General:**

After successfully configuring the requested common transport channels and the common physical channels , the Node B shall store the value of *Configuration Generation ID* IE and it shall respond with the COMMON TRANSPORT CHANNEL SETUP RESPONSE message with the *Common Transport Channel ID* IE, the *Binding ID* IE and the *Transport Layer Address* IE for the configured common transport channels.

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message includes the *Transport Layer Address* and *Binding ID* IEs, the Node B may use the transport layer address and the binding identifier received from the CRNC when establishing a transport bearer for the indicated common transport channels.

After a successful procedure and once the transport bearers are established, the configured common transport channels and the common physical channels shall adopt the state Enabled [6] in the Node B and the common physical channels exist on the Uu interface.

## 8.2.18 Physical Shared Channel Reconfiguration


### 8.2.18.1 General

This procedure is used to assign HS-DSCH related resources to the Node B.

[TDD - This procedure is also used for handling PDSCH Sets and PUSCH Sets in the Node B, i.e.

- Adding new PDSCH Sets and/or PUSCH Sets,
- Modifying these, and
- Deleting them.]

### 8.2.18.2 Successful Operation

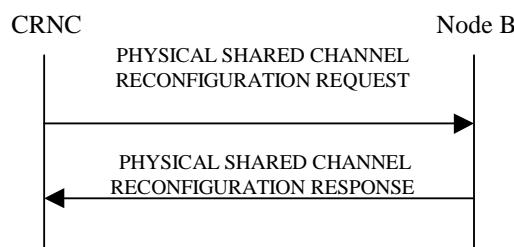

**Figure 26: Physical Shared Channel Reconfiguration, Successful Operation**

The procedure is initiated with a PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message sent from the CRNC to the Node B using the Node B Control Port.

Upon reception, the Node B shall activate the new configuration at the head boundary of the SFN according to the parameters given in the message.

If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message includes an *SFN IE*, the Node B shall activate the new configuration at the head boundary of that specified SFN. If no *SFN IE* is included Node B shall activate the new configuration immediately.

#### HS-DSCH Resources:

[FDD - If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message includes *HS-PDSCH And HS-SCCH Total Power IE*, the Node B shall not exceed this maximum transmission power on all HS-PDSCH and HS-SCCH codes in the cell. If a value has never been set or if the value of the *HS-PDSCH And HS-SCCH Total Power IE* is equal to or greater than the maximum transmission power of the cell the Node B may use all unused power for HS-PDSCH and HS-SCCH codes.]

[FDD - If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message includes *HS-PDSCH And HS-SCCH Scrambling Code IE*, the Node B shall use this as the scrambling code for all HS-PDSCHs and HS-SCCHs. If a value has never been set, the Node B shall use the primary scrambling code for all HS-PDSCH and HS-SCCH codes.]

[FDD - If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message includes *HS-PDSCH FDD Code Information IE*, the Node B shall:

- if the *Number Of HS-PDSCH Codes IE* is set to "0", delete any existing HS-PDSCH resources from the cell.

- if the *Number Of HS-PDSCH Codes* IE is set to any value other than "0" and HS-PDSCH resources are not currently configured in the cell, use this list as the range of codes for HS-PDSCH channels.
- if the *Number Of HS-PDSCH Codes* IE is set to any value other than "0" and HS-PDSCH resources are currently configured in the cell, replace the current range of codes with this new range of codes for HS-PDSCH channels.]

[FDD - If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message includes *HS-SCCH FDD Code Information* IE, the Node B shall:

- If the *HS-SCCH FDD Code Information* IE contains no codes, delete any existing HS-SCCH resources from the cell.
- If the *HS-SCCH FDD Code Information* IE contains one or more codes and HS-SCCH resources are not currently configured in the cell, use this list of codes as the list of codes for HS-SCCH channels.
- If the *HS-SCCH FDD Code Information* IE contains one or more codes and HS-SCCH resources are currently configured in the cell, replace the current list of codes with this new list of codes for HS-SCCH channels.]

[TDD - If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message includes *HS-PDSCH and HS-SCCH Total Power* IE for a particular timeslot, the Node B shall not exceed this maximum transmission power on all HS-PDSCH and HS-SCCH codes in that timeslot. If a value has never been set for that timeslot or if the value of the *HS-PDSCH and HS-SCCH Total Power* IE for that timeslot is equal to or greater than the maximum transmission power of the cell the Node B may use all unused power in that timeslot for HS-PDSCH and HS-SCCH codes.]

[TDD - If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message includes *HS-PDSCH TDD Information* IE, the Node B shall:

- If the *HS-PDSCH TDD Information* IE contains no [3.84 Mcps TDD - *DL Timeslot and Code Information* IE] [1.28 Mcps TDD - *DL Timeslot and Code Information LCR* IE], delete any existing HS-PDSCH resources from the cell.
- If the *HS-PDSCH TDD Information* IE contains [3.84 Mcps TDD - *DL Timeslot and Code Information* IE] [1.28 Mcps TDD - *DL Timeslot and Code Information LCR* IE] and HS-PDSCH resources are not currently configured in the cell, use this IE as the list of timeslots / codes for HS-PDSCH channels.
- If the *HS-PDSCH TDD Information* IE contains [3.84 Mcps TDD - *DL Timeslot and Code Information* IE] [1.28 Mcps TDD - *DL Timeslot and Code Information LCR* IE] and HS-PDSCH resources are currently configured in the cell, replace the current list of timeslots / codes with this new list of timeslots / codes for HS-PDSCH channels.]

[TDD - If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message includes *Add to HS-SCCH Resource Pool* IE, the Node B shall add this resource to the HS-SCCH resource pool to be used to assign HS-SCCH sets.]

[TDD - If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message includes any *Modify HS-SCCH Resource Pool* IEs and includes any of [3.84Mcps TDD - *TDD Channelisation Code* IE, *Midamble Shift and Burst Type* IE, *Time Slot* IE], [1.28Mcps TDD - *First TDD Channelisation Code* IE, *Second TDD Channelisation Code* IE, *Midamble Shift LCR* IE, *Time Slot LCR* IE, *TDD Channelisation Code* IE], for either HS-SCCH or HS-SICH channels, the Node B shall apply these as the new values, otherwise the old values specified for this set are still applicable.]

[TDD - If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message includes any *Modify HS-SCCH Resource Pool* IEs and includes the *HS-SCCH Maximum Power* IE, the Node B shall apply this value for the specified HS-SCCH code otherwise the old value is still applicable.]

[TDD - If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message includes any *Delete from HS-SCCH Resource Pool* IEs, the Node B shall delete these resources from the HS-SCCH resource pool.]

**[TDD - PDSCH/PUSCH Addition]:**

[TDD - If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message includes any PDSCH sets or PUSCH sets to be added, the Node B shall add these new sets to its PDSCH/PUSCH configuration.]

[1.28Mcps TDD - If the *TSTD Indicator* IE is included in *PDSCH To Add Information LCR* IE and is set to "active", the Node B shall activate *TSTD* diversity for *PDSCH* transmissions using the specified *PDSCH Set* that are not beacon channels [19,21]. If the *TSTD Indicator* IE is set to "not active" or the *TSTD Indicator* IE is not included in *PDSCH To Add Information LCR* IE, the Node B shall not activate *TSTD* diversity for the *PDSCH Set*.]

**[TDD - PDSCH/PUSCH Modification]:**

[TDD - If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message includes any PDSCH sets or PUSCH sets to be modified, and includes any of [3.84Mcps TDD - *DL/UL Code Information* IE, *Midamble Shift And Burst Type* IE, *Time Slot* IE], [1.28Mcps TDD - *DL/UL Code Information* LCR IE, *Midamble Shift LCR* IE, *Time Slot LCR* IE], *TDD Physical Channel Offset* IE, *Repetition Period* IE, *Repetition Length* IE, or *TFCI Presence* IE, the Node B shall apply these as the new values, otherwise the old values specified for this set are still applicable.]

**[TDD - PDSCH/PUSCH Deletion]:**

[TDD - If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message includes any PDSCH sets or PUSCH sets to be deleted the Node B shall delete these sets from its PDSCH/PUSCH configuration.]

**Response Message:**

**HS-DSCH/HS-SCCH Resources:**

In the successful case involving HS-PDSCH or HS-SCCH resources, the Node B shall store the value of *Configuration Generation ID* IE and it shall make these resources available to all the current and future HS-DSCH transport channels; and shall respond with PHYSICAL SHARED CHANNEL RECONFIGURATION RESPONSE message.

**[TDD - PDSCH/PUSCH Addition/Modification/Deletion]:**

[TDD - In the successful case involving PDSCH/PUSCH addition, modification or deletion, the Node B shall add, modify and delete the PDSCH Sets and PUSCH Sets in the Common Transport Channel data base, as requested in the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message, and shall make these available to all the current and future DSCH and USCH transport channels. The Node B shall respond with the PHYSICAL SHARED CHANNEL RECONFIGURATION RESPONSE message.]

### 9.1.3 COMMON TRANSPORT CHANNEL SETUP REQUEST

#### 9.1.3.2 TDD Message

| IE/Group Name  | Presence | Range                        | IE Type and Reference | Semantics Description   | Criticality | Assigned Criticality |
|--|----------|------------------------------|-----------------------|---|-------------|----------------------|
| Message Discriminator                                  | M        |                              | 9.2.1.45              |   | –           |                      |
| Message Type   | M        |                              | 9.2.1.46              |   | YES         | reject               |
| Transaction ID   | M        |                              | 9.2.1.62              |   | –           |                      |
| C-ID   | M        |                              | 9.2.1.9               |   | YES         | reject               |
| Configuration Generation ID                            | M        |                              | 9.2.1.16              |   | YES         | reject               |
| <i>CHOICE Common Physical Channel To Be Configured</i> | M        |                              |                       |   | YES         | ignore               |
| >Secondary CCPCHs                                      |          |                              |                       |   | –           |                      |
| >>SCCPCH CCTrCH ID                                     | M        |                              | CCTrCH ID<br>9.2.3.3  | For DL<br>CCTrCH<br>supporting one<br>or several<br>Secondary<br>CCPCHs | –           |                      |
| >>TFCS   | M        |                              | 9.2.1.58              | For DL<br>CCTrCH<br>supporting one<br>or several<br>Secondary<br>CCPCHs | –           |                      |
| >>TFCI Coding  | M        |                              | 9.2.3.22              |   | –           |                      |
| >>Puncture Limit                                       | M        |                              | 9.2.1.50              |   | –           |                      |
| >>CHOICE HCR or LCR                                    | M        |                              |                       | See note 1<br>below   | –           |                      |
| >>>3.84Mcps TDD  |          |                              |                       |   | –           |                      |
| >>>Secondary CCPCH                                     |          | 1..<maxno<br>ofSCCPCH<br>Hs> |                       |   | GLOBAL      | reject               |
| >>>>Common Physical Channel ID                         | M        |                              | 9.2.1.13              |   | –           |                      |
| >>>>TDD Channelisation Code                            | M        |                              | 9.2.3.19              |   | –           |                      |
| >>>>Time Slot  | M        |                              | 9.2.3.23              |   | –           |                      |
| >>>>Midamble Shift And Burst Type                      | M        |                              | 9.2.3.7               |   | –           |                      |
| >>>>TDD Physical Channel Offset                        | M        |                              | 9.2.3.20              |   | –           |                      |
| >>>>Repetition Period                                  | M        |                              | 9.2.3.16              |   | –           |                      |
| >>>>Repetition Length                                  | M        |                              | 9.2.3.15              |   | –           |                      |
| >>>>SCCPCH Power                                       | M        |                              | DL Power<br>9.2.1.21  |   | –           |                      |
| >>>1.28Mcps TDD  |          |                              |                       |   | –           |                      |
| >>>Secondary   |          | 1..<maxno                    |                       |   | GLOBAL      | reject               |

|                                  |   |                                     |  |  |        |        |
|----------------------------------|---|-------------------------------------|--|--|--------|--------|
| <b>CCPCH LCR</b>                 |   | <i>ofSCCPCH<br/>HsLCR&gt;</i>       |  |  |        |        |
| >>>>Common Physical Channel ID   | M |                                     | 9.2.1.13   |  | -      |        |
| >>>>TDD Channelisation Code LCR  | M |                                     | 9.2.3.19a  |  | -      |        |
| >>>>Time Slot LCR                | M |                                     | 9.2.3.24A  |  | -      |        |
| >>>>Midamble Shift LCR           | M |                                     | 9.2.3.7A   |  | -      |        |
| >>>>TDD Physical Channel Offset  | M |                                     | 9.2.3.20   |  | -      |        |
| >>>>Repetition Period            | M |                                     | 9.2.3.16   |  | -      |        |
| >>>>Repetition Length            | M |                                     | 9.2.3.15   |  | -      |        |
| >>>>SCCPCH Power                 | M |                                     | DL Power<br>9.2.1.21                             |  | -      |        |
| >>>> SCCPCH Time Slot Format LCR | M |                                     | TDD DL<br>DPCH Time Slot Format LCR<br>9.2.3.19D |  | -      |        |
| <b>&gt;&gt;FACH Parameters</b>   |   | <i>0..&lt;maxno<br/>ofFACHs&gt;</i> |  |  | GLOBAL | reject |
| >>Common Transport Channel ID    | M |                                     | 9.2.1.14   |  | -      |        |
| >>FACH CCTrCH ID                 | M |                                     | CCTrCH ID<br>9.2.3.3                             |  | -      |        |
| >>Transport Format Set           | M |                                     | 9.2.1.59   | For the DL.  | -      |        |
| >>ToAWS                          | M |                                     | 9.2.1.61   |  | -      |        |
| >>ToAWE                          | M |                                     | 9.2.1.60   |  | -      |        |
| >>Max FACH Power                 | O |                                     | DL Power<br>9.2.1.21                             | Applicable to 1.28Mcps TDD only                      | YES    | reject |
| >>Binding ID                     | O |                                     | 9.2.1.4  | Shall be ignored if bearer establishment with ALCAP. | YES    | ignore |
| >>Transport Layer Address        | O |                                     | 9.2.1.63   | Shall be ignored if bearer establishment with ALCAP. | YES    | ignore |
| <b>&gt;&gt;PCH Parameters</b>    |   | <i>0..1</i>                         |  |  | YES    | reject |
| >>Common Transport Channel ID    | M |                                     | 9.2.1.14   |  | -      |        |
| >>PCH CCTrCH ID                  | M |                                     | CCTrCH ID<br>9.2.3.3                             |  | -      |        |
| >>Transport Format               | M |                                     | 9.2.1.59   | For the DL.  | -      |        |

|                                    |   |      |           |                  |     |        |
|------------------------------------|---|------|-----------|------------------|-----|--------|
| Set                                |   |      |           |                  |     |        |
| >>>ToAWS                           | M |      | 9.2.1.61  |                  | –   |        |
| >>>ToAWE                           | M |      | 9.2.1.60  |                  | –   |        |
| >>>CHOICE <i>HCR or LCR</i>        | M |      |           | See note 1 below | –   |        |
| >>>>3.84Mcps TDD                   |   |      |           |                  | –   |        |
| >>>> <b>PICH Parameters</b>        |   | 0..1 |           |                  | YES | reject |
| >>>>>Common Physical Channel ID    | M |      | 9.2.1.13  |                  | –   |        |
| >>>>>TDD Channelisation Code       | M |      | 9.2.3.19  |                  | –   |        |
| >>>>>Time Slot                     | M |      | 9.2.3.23  |                  | –   |        |
| >>>>>Midamble Shift And Burst Type | M |      | 9.2.3.7   |                  | –   |        |
| >>>>>TDD Physical Channel Offset   | M |      | 9.2.3.20  |                  | –   |        |
| >>>>>Repetition Period             | M |      | 9.2.3.16  |                  | –   |        |
| >>>>>Repetition Length             | M |      | 9.2.3.15  |                  | –   |        |
| >>>>>Paging Indicator Length       | M |      | 9.2.3.8   |                  | –   |        |
| >>>>>PICH Power                    | M |      | 9.2.1.49A |                  | –   |        |
| >>>>1.28Mcps TDD                   |   |      |           |                  | –   |        |
| >>>> <b>PICH Parameters LCR</b>    |   | 1    |           |                  | YES | reject |
| >>>>>Common Physical Channel ID    | M |      | 9.2.1.13  |                  | –   |        |
| >>>>>TDD Channelisation Code LCR   | M |      | 9.2.3.19a |                  | –   |        |
| >>>>>Time Slot LCR                 | M |      | 9.2.3.24A |                  | –   |        |
| >>>>>Midamble Shift LCR            | M |      | 9.2.3.7A  |                  | –   |        |
| >>>>>TDD Physical Channel Offset   | M |      | 9.2.3.20  |                  | –   |        |
| >>>>>Repetition Period             | M |      | 9.2.3.16  |                  | –   |        |
| >>>>>Repetition Length             | M |      | 9.2.3.15  |                  | –   |        |
| >>>>>Paging Indicator Length       | M |      | 9.2.3.8   |                  | –   |        |
| >>>>>PICH                          | M |      | 9.2.1.49A |                  | –   |        |

|  |   |   |                                       |  |            |               |
|--|---|---|---------------------------------------|--|------------|---------------|
| Power                                  |   |   |                                       |  |            |               |
| >>>>Second TDD Channelisation Code LCR | M |   | TDD Channelisation Code LCR 9.2.3.19a |  | -          |               |
| >>>> <u>TSTD Indicator</u>             | O |   | <u>9.2.1.64</u>                       |  | <u>YES</u> | <u>reject</u> |
| >>PCH Power                            | O |   | DL Power 9.2.1.21                     | Applicable to 1.28Mcps TDD only                      | YES        | reject        |
| >>>Binding ID                          | O |   | 9.2.1.4                               | Shall be ignored if bearer establishment with ALCAP. | YES        | ignore        |
| >>>Transport Layer Address             | O |   | 9.2.1.63                              | Shall be ignored if bearer establishment with ALCAP. | YES        | ignore        |
| >>TSTD Indicator                       | O |   | 9.2.1.64                              | <b>Applicable to 3.84 Mcps-TDD only</b>              | YES        | reject        |
| >PRACH                                 |   |   |                                       |  | -          |               |
| >>CHOICE HCR or LCR                    | M |   |                                       | See note 1 below                                     | -          |               |
| >>>3.84Mcps TDD                        |   |   |                                       |  | -          |               |
| >>>>PRACH                              |   | 1 |                                       |  | YES        | reject        |
| >>>>Common Physical Channel ID         | M |   | 9.2.1.13                              |  | -          |               |
| >>>>TFCS                               | M |   | 9.2.1.58                              |  | -          |               |
| >>>>Time Slot                          | M |   | 9.2.3.23                              |  | -          |               |
| >>>>TDD Channelisation Code            | M |   | 9.2.3.19                              |  | -          |               |
| >>>>Max PRACH Midamble Shifts          | M |   | 9.2.3.6                               |  | -          |               |
| >>>>PRACH Midamble                     | M |   | 9.2.3.14                              |  | -          |               |
| >>>>RACH                               |   | 1 |                                       |  | YES        | reject        |
| >>>>>Common Transport Channel ID       | M |   | 9.2.1.14                              |  | -          |               |
| >>>>>Transport Format Set              | M |   | 9.2.1.59                              | For the UL   | -          |               |
| >>>>>Binding ID                        | O |   | 9.2.1.4                               | Shall be ignored if bearer establishment with ALCAP. | YES        | ignore        |
| >>>>>Transport Layer Address           | O |   | 9.2.1.63                              | Shall be ignored if bearer establishment             | YES        | ignore        |

|                                 |   |                               |           |   |        |        |
|---------------------------------|---|-------------------------------|-----------|---|--------|--------|
|                                 |   |                               |           | with ALCAP.   |        |        |
| >>>1.28Mcps TDD                 |   |                               |           |   | —      |        |
| >>>>PRACH LCR                   |   | 1..<maxno<br>ofPRACHL<br>CRs> |           |   | GLOBAL | reject |
| >>>>Common Physical Channel ID  | M |                               | 9.2.1.13  |   | —      |        |
| >>>>TFCS                        | M |                               | 9.2.1.58  |   | —      |        |
| >>>>Time Slot LCR               | M |                               | 9.2.3.24A |   | —      |        |
| >>>>TDD Channelisation Code LCR | M |                               | 9.2.3.19a |   | —      |        |
| >>>>Midamble Shift LCR          | M |                               | 9.2.3.7A  |   | —      |        |
| >>>>RACH                        |   | 1                             |           |   | YES    | reject |
| >>>>Common Transport Channel ID | M |                               | 9.2.1.14  |   | —      |        |
| >>>>Transport Format Set        | M |                               | 9.2.1.59  | For the UL  | —      |        |
| >>>>Binding ID                  | O |                               | 9.2.1.4   | Shall be ignored if bearer establishment with ALCAP.        | YES    | ignore |
| >>>>Transport Layer Address     | O |                               | 9.2.1.63  | Shall be ignored if bearer establishment with ALCAP.        | YES    | ignore |
| >>FPACH                         |   | 0..1                          |           | Mandatory for 1.28Mcps TDD. Not Applicable to 3.84Mcps TDD. | YES    | reject |
| >>Common Physical Channel ID    | M |                               | 9.2.1.13  |   | —      |        |
| >>TDD Channelisation Code LCR   | M |                               | 9.2.3.19a |   | —      |        |
| >>Time Slot LCR                 | M |                               | 9.2.3.24A |   | —      |        |
| >>Midamble Shift LCR            | M |                               | 9.2.3.7A  |   | —      |        |
| >>Max FPACH Power               | M |                               | 9.2.3.5E  |   | —      |        |

Note 1: This information element is a simplified representation of the ASN.1. The choice is in reality performed through the use of ProtocolIE-Single-Container within the ASN.1.

| Range Bound          | Explanation   |
|----------------------|---|
| $\maxnoofSCCPCHs$    | Maximum number of Secondary CCPCHs per CCTrCH for 3.84Mcps TDD              |
| $\maxnoofSCCPCHsLCR$ | Maximum number of Secondary CCPCHs per CCTrCH for 1.28Mcps TDD              |
| $\maxnoofFACHs$      | Maximum number of FACHs that can be defined on a Secondary CCPCH            |
| $\maxnoofPRACHLCRs$  | Maximum number of PRACHs LCR that can be defined on a RACH for 1.28Mcps TDD |

## 9.1.62 PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST

### 9.1.62.2 TDD Message

| IE/Group Name                    | Presence | Range                                | IE Type and Reference | Semantics Description                                       | Criticality | Assigned Criticality |
|----------------------------------|----------|--------------------------------------|-----------------------|---|-------------|----------------------|
| Message Discriminator            | M        |                                      | 9.2.1.45              |   | -           |                      |
| Message Type                     | M        |                                      | 9.2.1.46              |   | YES         | reject               |
| Transaction ID                   | M        |                                      | 9.2.1.62              |   | -           |                      |
| C-ID                             | M        |                                      | 9.2.1.9               |   | YES         | reject               |
| SFN                              | O        |                                      | 9.2.1.53A             |   | YES         | reject               |
| <b>PDSCH Sets To Add</b>         |          | <i>0..&lt;maxno ofPDSCH Sets&gt;</i> |                       |   | GLOBAL      | reject               |
| >PDSCH Set ID                    | M        |                                      | 9.2.3.11              |   | -           |                      |
| >PDSCH To Add Information        |          | <i>0..1</i>                          |                       | Mandatory for 3.84Mcps TDD. Not Applicable to 1.28Mcps TDD. | YES         | reject               |
| >>Repetition Period              | M        |                                      | 9.2.3.16              |   | -           |                      |
| >>Repetition Length              | M        |                                      | 9.2.3.15              |   | -           |                      |
| >>TDD Physical Channel Offset    | M        |                                      | 9.2.3.20              |   | -           |                      |
| >>DL Timeslot Information        |          | <i>1..&lt;maxno ofDLts&gt;</i>       |                       |   | -           |                      |
| >>>Time Slot                     | M        |                                      | 9.2.3.23              |   | -           |                      |
| >>>Midamble Shift And Burst Type | M        |                                      | 9.2.3.7               |   | -           |                      |
| >>>TFCI Presence                 | M        |                                      | 9.2.1.57              |   | -           |                      |
| >>>DL Code Information           |          | <i>1..&lt;maxno ofPDSCHs &gt;</i>    |                       |   | -           |                      |
| >>>>PDSCH ID                     | M        |                                      | 9.2.3.10              |   | -           |                      |
| >>>>TDD Channelisation Code      | M        |                                      | 9.2.3.19              |   | -           |                      |
| >PDSCH To Add Information LCR    |          | <i>0..1</i>                          |                       | Mandatory for 1.28Mcps TDD. Not Applicable to 3.84Mcps TDD. | YES         | reject               |
| >>Repetition Period              | M        |                                      | 9.2.3.16              |   | -           |                      |
| >>Repetition Length              | M        |                                      | 9.2.3.15              |   | -           |                      |
| >>TDD Physical Channel Offset    | M        |                                      | 9.2.3.20              |   | -           |                      |
| >>DL Timeslot Information LCR    |          | <i>1..&lt;maxno ofDLtsLCR &gt;</i>   |                       |   | -           |                      |
| >>>Time Slot LCR                 | M        |                                      | 9.2.3.24A             |   | -           |                      |
| >>>Midamble Shift LCR            | M        |                                      | 9.2.3.7A              |   | -           |                      |
| >>>TFCI Presence                 | M        |                                      | 9.2.1.57              |   | -           |                      |

|  |   |                                      |                          |                  |                     |                        |
|--|---|--------------------------------------|--------------------------|------------------|---------------------|------------------------|
| <b>&gt;&gt;&gt;DL Code Information LCR</b>         |   | <i>1..&lt;maxno ofPDSCHs &gt;</i>    |                          |                  | –                   |                        |
| >>>>PDSCH ID                                       | M |                                      | 9.2.3.10                 |                  | –                   |                        |
| >>>>TDD Channelisation Code LCR                    | M |                                      | 9.2.3.19a                |                  | –                   |                        |
| <b>&gt;&gt;TSTD Indicator</b>                      | O |                                      | <a href="#">9.2.1.64</a> |                  | <a href="#">YES</a> | <a href="#">reject</a> |
| <b>PDSCH Sets To Modify</b>                        |   | <i>0..&lt;maxno of PDSCHSets&gt;</i> |                          |                  | GLOBAL              | <a href="#">reject</a> |
| >PDSCH Set ID                                      | M |                                      | 9.2.3.11                 |                  | –                   |                        |
| >CHOICE HCR or LCR                                 | M |                                      |                          | See note 1 below | –                   |                        |
| <b>&gt;&gt;3.84Mcps TDD</b>                        |   |                                      |                          |                  | –                   |                        |
| <b>&gt;&gt;&gt;PDSCH To Modify Information</b>     |   | 1                                    |                          |                  | YES                 | <a href="#">reject</a> |
| >>>>Repetition Period                              | O |                                      | 9.2.3.16                 |                  | –                   |                        |
| >>>>Repetition Length                              | O |                                      | 9.2.3.15                 |                  | –                   |                        |
| >>>>TDD Physical Channel Offset                    | O |                                      | 9.2.3.20                 |                  | –                   |                        |
| <b>&gt;&gt;&gt;&gt;DL Timeslot Information</b>     |   | <i>0..&lt;maxno ofDLts&gt;</i>       |                          |                  | –                   |                        |
| >>>>>Time Slot                                     | M |                                      | 9.2.3.23                 |                  | –                   |                        |
| >>>>>Midamble Shift And Burst Type                 | O |                                      | 9.2.3.7                  |                  | –                   |                        |
| >>>>>TFCI Presence                                 | O |                                      | 9.2.1.57                 |                  | –                   |                        |
| <b>&gt;&gt;&gt;&gt;&gt;DL Code Information</b>     |   | <i>0..&lt;maxno ofPDSCHs &gt;</i>    |                          |                  | –                   |                        |
| >>>>>>PDSCH ID                                     | M |                                      | 9.2.3.10                 |                  | –                   |                        |
| >>>>>>TDD Channelisation Code                      | M |                                      | 9.2.3.19                 |                  | –                   |                        |
| <b>&gt;&gt;1.28Mcps TDD</b>                        |   |                                      |                          |                  | –                   |                        |
| <b>&gt;&gt;&gt;PDSCH To Modify Information LCR</b> |   | 1                                    |                          |                  | YES                 | <a href="#">reject</a> |
| >>>>Repetition Period                              | O |                                      | 9.2.3.16                 |                  | –                   |                        |
| >>>>Repetition Length                              | O |                                      | 9.2.3.15                 |                  | –                   |                        |
| >>>>TDD Physical Channel Offset                    | O |                                      | 9.2.3.20                 |                  | –                   |                        |
| <b>&gt;&gt;&gt;&gt;DL Timeslot Information LCR</b> |   | <i>0..&lt;maxno ofDLtsLCR &gt;</i>   |                          |                  | –                   |                        |
| >>>>>Time Slot LCR                                 | M |                                      | 9.2.3.24A                |                  | –                   |                        |

|  |   |                                      |           |   |        |        |
|--|---|--------------------------------------|-----------|---|--------|--------|
| >>>>Midamble Shift LCR                         | O |                                      | 9.2.3.7A  |   | -      |        |
| >>>>TFCI Presence                              | O |                                      | 9.2.1.57  |   | -      |        |
| <b>&gt;&gt;&gt;&gt;DL Code Information LCR</b> |   | <i>0..&lt;maxno ofPDSCHs &gt;</i>    |           |   | -      |        |
| >>>>>PDSCH ID                                  | M |                                      | 9.2.3.10  |   | -      |        |
| >>>>>TDD Channelisation Code LCR               | M |                                      | 9.2.3.19a |   | -      |        |
| <b>PDSCH Sets To Delete</b>                    |   | <i>0..&lt;maxno of PDSCHSets&gt;</i> |           |   | GLOBAL | reject |
| >PDSCH Set ID                                  | M |                                      | 9.2.3.11  |   | -      |        |
| <b>PUSCH Sets To Add</b>                       |   | <i>0..&lt;maxno of PUSCHSets&gt;</i> |           |   | GLOBAL | reject |
| >PUSCH Set ID                                  | M |                                      | 9.2.3.13  |   | -      |        |
| <b>&gt;PUSCH To Add Information</b>            |   | <i>0..1</i>                          |           | Mandatory for 3.84Mcps TDD. Not Applicable to 1.28Mcps TDD. | YES    | reject |
| >>Repetition Period                            | M |                                      | 9.2.3.16  |   | -      |        |
| >>Repetition Length                            | M |                                      | 9.2.3.15  |   | -      |        |
| >>TDD Physical Channel Offset                  | M |                                      | 9.2.3.20  |   | -      |        |
| <b>&gt;&gt;UL Timeslot Information</b>         |   | <i>1..&lt;maxno ofULts&gt;</i>       |           |   | -      |        |
| >>>Time Slot                                   | M |                                      | 9.2.3.23  |   | -      |        |
| >>>Midamble Shift And Burst Type               | M |                                      | 9.2.3.7   |   | -      |        |
| >>>TFCI Presence                               | M |                                      | 9.2.1.57  |   | -      |        |
| <b>&gt;&gt;&gt;UL Code Information</b>         |   | <i>1..&lt;maxno ofPUSCHs &gt;</i>    |           |   | -      |        |
| >>>PUSCH ID                                    | M |                                      | 9.2.3.12  |   | -      |        |
| >>>>TDD Channelisation Code                    | M |                                      | 9.2.3.19  |   | -      |        |
| <b>&gt;PUSCH To Add Information LCR</b>        |   | <i>0..1</i>                          |           | Mandatory for 1.28Mcps TDD. Not Applicable to 3.84Mcps TDD. | YES    | reject |
| >>Repetition Period                            | M |                                      | 9.2.3.16  |   | -      |        |
| >>Repetition Length                            | M |                                      | 9.2.3.15  |   | -      |        |
| >>TDD Physical Channel Offset                  | M |                                      | 9.2.3.20  |   | -      |        |
| <b>&gt;&gt;UL Timeslot Information LCR</b>     |   | <i>1..&lt;maxno ofULtsLCR &gt;</i>   |           |   | -      |        |
| >>>Time Slot LCR                               | M |                                      | 9.2.3.24A |   | -      |        |

|  |   |                                      |           |                  |        |        |
|--|---|--------------------------------------|-----------|------------------|--------|--------|
| >>>Midamble Shift LCR                              | M |                                      | 9.2.3.7A  |                  | –      |        |
| >>>TFCI Presence                                   | M |                                      | 9.2.1.57  |                  | –      |        |
| <b>&gt;&gt;&gt;UL Code Information LCR</b>         |   | <i>1..&lt;maxno ofPUSCHs LCR&gt;</i> |           |                  | –      |        |
| >>>>PUSCH ID                                       | M |                                      | 9.2.3.12  |                  | –      |        |
| >>>>TDD Channelisation Code LCR                    | M |                                      | 9.2.3.19a |                  | –      |        |
| <b>PUSCH Sets To Modify</b>                        |   | <i>0..&lt;maxno of PUSCHSets&gt;</i> |           |                  | GLOBAL | reject |
| >PUSCH Set ID                                      | M |                                      | 9.2.3.13  |                  | –      |        |
| >CHOICE HCR or LCR                                 | M |                                      |           | See note 1 below | –      |        |
| >>3.84Mcps TDD                                     |   |                                      |           |                  | –      |        |
| <b>&gt;&gt;&gt;PUSCH To Modify Information</b>     |   | 1                                    |           |                  | YES    | reject |
| >>>>Repetition Period                              | O |                                      | 9.2.3.16  |                  | –      |        |
| >>>>Repetition Length                              | O |                                      | 9.2.3.15  |                  | –      |        |
| >>>>TDD Physical Channel Offset                    | O |                                      | 9.2.3.20  |                  | –      |        |
| <b>&gt;&gt;&gt;&gt;UL Timeslot Information</b>     |   | <i>0..&lt;maxno ofULTs&gt;</i>       |           |                  | –      |        |
| >>>>>Time Slot                                     | M |                                      | 9.2.3.23  |                  | –      |        |
| >>>>>Midamble Shift And Burst Type                 | O |                                      | 9.2.3.7   |                  | –      |        |
| >>>>>TFCI Presence                                 | O |                                      | 9.2.1.57  |                  | –      |        |
| <b>&gt;&gt;&gt;&gt;&gt;UL Code Information</b>     |   | <i>0..&lt;maxno ofPUSCHs &gt;</i>    |           |                  | –      |        |
| >>>>>>PUSCH ID                                     | M |                                      | 9.2.3.12  |                  | –      |        |
| >>>>>>TDD Channelisation Code                      | M |                                      | 9.2.3.19  |                  | –      |        |
| >>1.28Mcps TDD                                     |   |                                      |           |                  | –      |        |
| <b>&gt;&gt;&gt;PUSCH To Modify Information LCR</b> |   | 1                                    |           |                  | YES    | reject |
| >>>>Repetition Period                              | O |                                      | 9.2.3.16  |                  | –      |        |
| >>>>Repetition Length                              | O |                                      | 9.2.3.15  |                  | –      |        |
| >>>>TDD Physical Channel Offset                    | O |                                      | 9.2.3.20  |                  | –      |        |
| <b>&gt;&gt;&gt;&gt;UL Timeslot Information LCR</b> |   | <i>0..&lt;maxno ofULtsLCR &gt;</i>   |           |                  | –      |        |

|                                       |   |                                      |                                     |   |        |        |
|---------------------------------------|---|--------------------------------------|-------------------------------------|---|--------|--------|
| >>>>Time Slot LCR                     | M |                                      | 9.2.3.24A                           |   | –      |        |
| >>>>Midamble Shift LCR                | O |                                      | 9.2.3.7A                            |   | –      |        |
| >>>>TFCI Presence                     | O |                                      | 9.2.1.57                            |   | –      |        |
| >>>> <b>UL Code Information LCR</b>   |   | <i>0..&lt;maxno ofPUSCHs LCR&gt;</i> |                                     |   | –      |        |
| >>>>>PUSCH ID                         | M |                                      | 9.2.3.12                            |   | –      |        |
| >>>>>TDD Channelisation Code LCR      | M |                                      | 9.2.3.19a                           |   | –      |        |
| <b>PUSCH Sets To Delete</b>           |   | <i>0..&lt;maxno ofPUSCH Sets&gt;</i> |                                     |   | GLOBAL | reject |
| >PUSCH Set ID                         | M |                                      | 9.2.3.13                            |   | –      |        |
| <b>HS-PDSCH TDD Information</b>       |   | <i>0..1</i>                          |                                     |   | GLOBAL | reject |
| >DL Timeslot and Code Information     |   | <i>0..&lt;maxno ofDLts&gt;</i>       |                                     | Mandatory for 3.84Mcps TDD. Not Applicable to 1.28Mcps TDD.                             | –      |        |
| >>Time Slot                           | M |                                      | 9.2.3.23                            |   | –      |        |
| >>Midamble Shift And Burst Type       | M |                                      | 9.2.3.7                             |   | –      |        |
| >> <b>Codes</b>                       |   | <i>1..&lt;maxno ofHSPDS CHs&gt;</i>  |                                     |   | –      |        |
| >>>TDD Channelisation Code            | M |                                      | 9.2.3.19                            |   | –      |        |
| >>HS-PDSCH and HS-SCCH Total Power    | O |                                      | Maximum Transmission Power 9.2.1.40 | Maximum transmission power to be allowed for HS-PDSCH and HS-SCCH codes in the timeslot | YES    | reject |
| >DL Timeslot and Code Information LCR |   | <i>0..&lt;maxno ofDLtsLCR &gt;</i>   |                                     | Mandatory for 1.28Mcps TDD. Not Applicable to 3.84Mcps TDD.                             | –      |        |
| >>Time Slot LCR                       | M |                                      | 9.2.3.24a                           |   | –      |        |
| >>Midamble Shift LCR                  | M |                                      | 9.2.3.7A                            |   | –      |        |
| >> <b>Codes LCR</b>                   |   | <i>1..&lt;maxno ofHSPDS CHs&gt;</i>  |                                     |   | –      |        |
| >>>TDD Channelisation Code            | M |                                      | 9.2.3.19                            |   | –      |        |

|                                     |   |                       |  |   |        |        |
|-------------------------------------|---|-----------------------|--|---|--------|--------|
| >>HS-PDSCH and HS-SCCH Total Power  | O |                       | Maximum Transmission Power<br>9.2.1.40 | Maximum transmission power to be allowed for HS-PDSCH and HS-SCCH codes in the timeslot | YES    | reject |
| <b>Add to HS-SCCH Resource Pool</b> |   | 0..1                  |  |   | GLOBAL | reject |
| <b>&gt;HS-SCCH Information</b>      |   | 0..<maxno ofHSSCC Hs> |  | Applicable to 3.84Mcps TDD only   | -      |        |
| >>HS-SCCH ID                        | M |                       | 9.2.3.5Ga                              |   | -      |        |
| >>Time Slot                         | M |                       | 9.2.3.23                               |   | -      |        |
| >>Midamble Shift And Burst Type     | M |                       | 9.2.3.7                                |   | -      |        |
| >>TDD Channelisation Code           | M |                       | 9.2.3.19                               |   | -      |        |
| >>Maximum HS-SCCH Power             | M |                       | DL Power<br>9.2.1.21                   |   | -      |        |
| <b>&gt;HS-SICH Information</b>      |   | 1                     |  |   | -      |        |
| >>HS-SICH ID                        | M |                       | 9.2.3.5Gb                              |   | -      |        |
| >>Time Slot                         | M |                       | 9.2.3.23                               |   | -      |        |
| >>Midamble Shift And Burst Type     | M |                       | 9.2.3.7                                |   | -      |        |
| >>TDD Channelisation Code           | M |                       | 9.2.3.19                               |   | -      |        |
| <b>&gt;HS-SCCH Information LCR</b>  |   | 0..<maxno ofHSSCC Hs> |  | Applicable to 1.28Mcps TDD only   | GLOBAL | reject |
| >>HS-SCCH ID                        | M |                       | 9.2.3.5Ga                              |   | -      |        |
| >>Time Slot LCR                     | M |                       | 9.2.3.24a                              |   | -      |        |
| >>Midamble Shift LCR                | M |                       | 9.2.3.7A                               |   | -      |        |
| >>First TDD Channelisation Code     | M |                       | TDD Channelisation Code<br>9.2.3.19    |   | -      |        |
| >>Second TDD Channelisation Code    | M |                       | TDD Channelisation Code<br>9.2.3.19    |   | -      |        |
| >>Maximum HS-SCCH Power             | M |                       | DL Power<br>9.2.1.21                   |   | -      |        |
| <b>&gt;HS-SICH Information LCR</b>  |   | 1                     |  |   | -      |        |
| >>HS-SICH ID                        | M |                       | 9.2.3.5Gb                              |   | -      |        |
| >>Time Slot LCR                     | M |                       | 9.2.3.24a                              |   | -      |        |
| >>Midamble Shift LCR                | M |                       | 9.2.3.7A                               |   | -      |        |
| >>TDD Channelisation Code           | M |                       | 9.2.3.19                               |   | -      |        |

|  |   |                       |                                  |                                 |        |        |
|--|---|-----------------------|----------------------------------|---------------------------------|--------|--------|
| <b>Modify HS-SCCH Resource Pool</b>      |   | 0..1                  |                                  |                                 | GLOBAL | reject |
| <b>&gt;HS-SCCH Information</b>           |   | 0..<maxno ofHSSCC Hs> |                                  | Applicable to 3.84Mcps TDD only | -      |        |
| >>HS-SCCH ID                             | M |                       | 9.2.3.5Ga                        |                                 | -      |        |
| >>Time Slot                              | O |                       | 9.2.3.23                         |                                 | -      |        |
| >>Midamble Shift And Burst Type          | O |                       | 9.2.3.7                          |                                 | -      |        |
| >>TDD Channelisation Code                | O |                       | 9.2.3.19                         |                                 | -      |        |
| >>Maximum HS-SCCH Power                  | O |                       | DL Power 9.2.1.21                |                                 | -      |        |
| <b>&gt;&gt;HS-SICH Information</b>       |   | 0..1                  |                                  |                                 | -      |        |
| >>>HS-SICH ID                            | M |                       | 9.2.3.5Gb                        |                                 | -      |        |
| >>>Time Slot                             | O |                       | 9.2.3.23                         |                                 | -      |        |
| >>>Midamble Shift And Burst Type         | O |                       | 9.2.3.7                          |                                 | -      |        |
| >>>TDD Channelisation Code               | O |                       | 9.2.3.19                         |                                 | -      |        |
| <b>&gt;HS-SCCH Information LCR</b>       |   | 0..<maxno ofHSSCC Hs> |                                  | Applicable to 1.28Mcps TDD only | GLOBAL | reject |
| >>HS-SCCH ID                             | M |                       | 9.2.3.5Ga                        |                                 | -      |        |
| >>Time Slot LCR                          | O |                       | 9.2.3.24a                        |                                 | -      |        |
| >>Midamble Shift LCR                     | O |                       | 9.2.3.7A                         |                                 | -      |        |
| >>First TDD Channelisation Code          | O |                       | TDD Channelisation Code 9.2.3.19 |                                 | -      |        |
| >>Second TDD Channelisation Code         | O |                       | TDD Channelisation Code 9.2.3.19 |                                 |        |        |
| >>Maximum HS-SCCH Power                  | O |                       | DL Power 9.2.1.21                |                                 | -      |        |
| <b>&gt;&gt;HS-SICH Information LCR</b>   |   | 0..1                  |                                  |                                 | -      |        |
| >>>HS-SICH ID                            | M |                       | 9.2.3.5Gb                        |                                 | -      |        |
| >>>Time Slot LCR                         | O |                       | 9.2.3.24a                        |                                 | -      |        |
| >>>Midamble Shift LCR                    | O |                       | 9.2.3.7A                         |                                 | -      |        |
| >>>TDD Channelisation Code               | O |                       | 9.2.3.19                         |                                 | -      |        |
| <b>Delete from HS-SCCH Resource Pool</b> |   | 0..<maxno of HSSCCs > |                                  |                                 | GLOBAL | reject |
| >HS-SCCH ID                              | M |                       | 9.2.3.5Ga                        |                                 | -      |        |
| Configuration Generation ID              | O |                       | 9.2.1.16                         |                                 | YES    | reject |

Note 1: This information element is a simplified representation of the ASN.1. The choice is in reality performed through the use of ProtocolIE-Single-Container within the ASN.1.

| Range Bound             | Explanation   |
|-------------------------|---|
| <i>maxnoofPDSCHSets</i> | Maximum number of PDSCH Sets in a cell.                           |
| <i>maxnoofPDSCHs</i>    | Maximum number of PDSCH in a cell.                                |
| <i>maxnoofPUSCHSets</i> | Maximum number of PUSCH Sets in a cell.                           |
| <i>maxnoofPUSCHs</i>    | Maximum number of PUSCH in a cell.                                |
| <i>maxnoofDLts</i>      | Maximum number of Downlink time slots in a cell for 3.84Mcps TDD. |
| <i>maxnoofDLtsLCR</i>   | Maximum number of Downlink time slots in a cell for 1.28Mcps TDD. |
| <i>maxnoofULts</i>      | Maximum number of Uplink time slots in a cell for 3.84Mcps TDD.   |
| <i>maxnoofULtsLCR</i>   | Maximum number of Uplink time slots in a cell for 1.28Mcps TDD    |
| <i>maxnoofHSSCCHs</i>   | Maximum number of HS-SCCHs in a Cell                              |
| <i>maxnoofHSPDSCHs</i>  | Maximum number of HS-PDSCHs in one time slot of a Cell            |

### 9.3.3 PDU Definitions

```
-- ****
-- IE parameter types from other modules.
--
-- ****
IMPORTS
/// break ///

FROM NBAP-Containers
    id-Active-Pattern-Sequence-Information,
    id-AdjustmentRatio,
    id-AICH-Information,
    id-AICH-ParametersListIE-CTCH-ReconfRqstFDD,
    id-AP-AICH-Information,
    id-AP-AICH-ParametersListIE-CTCH-ReconfRqstFDD,
/// break ///

    id-T-Cell,
    id-TargetCommunicationControlPortID,
    id-TFCI2-Bearer-Information-RL-SetupRqstFDD,
    id-TFCI2-BearerInformationResponse,
    id-TFCI2BearerRequestIndicator,
    id-TFCI2-BearerSpecificInformation-RL-ReconfPrepFDD,
    id-Transmission-Gap-Pattern-Sequence-Information,
    id-TimeSlotConfigurationList-Cell-ReconfRqstTDD,
    id-TimeSlotConfigurationList-Cell-SetupRqstTDD,
    id-timeslotInfo-CellSyncInitiationRqstTDD,
    id-TimeslotISCPInfo,
    id-TimingAdvanceApplied,
    id-TnlQos,
    id-TransmissionDiversityApplied,
    id-transportlayeraddress,
    id-Tstd-indicator-CTCH-SetupRqstTDD,
    id-UARFCNforNt,
    id-UARFCNforNd,
    id-UARFCNforNu,
-- ****
--
```

```

-- COMMON TRANSPORT CHANNEL SETUP REQUEST TDD
--
-- ****
CommonTransportChannelSetupRequestTDD ::= SEQUENCE {
    protocolIES          ProtocolIE-Container   {{CommonTransportChannelSetupRequestTDD-IES}},
    protocolExtensions    ProtocolExtensionContainer {{CommonTransportChannelSetupRequestTDD-Extensions}}           OPTIONAL,
    ...
}

CommonTransportChannelSetupRequestTDD-IES NBAP-PROTOCOL-IES ::= {
    { ID      id-C-ID                                CRITICALITY reject   TYPE C-ID                  PRESENCE
mandatory }|
    { ID      id-ConfigurationGenerationID           CRITICALITY reject   TYPE ConfigurationGenerationID   PRESENCE
mandatory }|
    { ID      id-CommonPhysicalChannelType-CTCH-SetupRqstTDD  CRITICALITY ignore   TYPE CommonPhysicalChannelType-CTCH-SetupRqstTDD
PRESENCE mandatory },
    ...
}

CommonTransportChannelSetupRequestTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

CommonPhysicalChannelType-CTCH-SetupRqstTDD ::= CHOICE {
    secondary-CCPCH-parameters           Secondary-CCPCH-CTCH-SetupRqstTDD,
    pRACH-parameters                     PRACH-CTCH-SetupRqstTDD,
    ...
}

Secondary-CCPCH-CTCH-SetupRqstTDD ::= SEQUENCE {
    sCCPCH-CCTrCH-ID                   CCTrCH-ID,   -- For DL CCTrCH supporting one or several Secondary CCPCHs
    tFCS                               TFCS,        -- For DL CCTrCH supporting one or several Secondary CCPCHs
    tFCI-Coding                        TFCI-Coding,
    punctureLimit                      PunctureLimit,
    secondaryCCPCH-parameterList       Secondary-CCPCH-parameterList-CTCH-SetupRqstTDD,
    fACH-ParametersList                FACH-ParametersList-CTCH-SetupRqstTDD      OPTIONAL,
    pCH-Parameters                      PCH-Parameters-CTCH-SetupRqstTDD      OPTIONAL,
    iE-Extensions                       ProtocolExtensionContainer {{Secondary-CCPCHItem-CTCH-SetupRqstTDD-ExtIES}}
    OPTIONAL,
    ...
}

Secondary-CCPCHItem-CTCH-SetupRqstTDD-ExtIES NBAP-PROTOCOL-EXTENSION ::= {
    { ID      id-Tstd-indicator-CTCH-SetupRqstTDD           CRITICALITY reject   EXTENSION   TSTD-Indicator      PRESENCE
optional },
    | Applicable to 3.84 Meps TDD only
}

```

```

}
}

Secondary-CCPCH-parameterList-CTCH-SetupRqstTDD ::= ProtocolIE-Single-Container {{ Secondary-CCPCH-parameterListIEs-CTCH-SetupRqstTDD
} }

Secondary-CCPCH-parameterListIEs-CTCH-SetupRqstTDD NBAP-PROTOCOL-IES ::= {
    { ID id-Secondary-CCPCH-parameterListIE-CTCH-SetupRqstTDD CRITICALITY reject TYPE Secondary-CCPCH-parameterListIE-CTCH-
SetupRqstTDD PRESENCE optional } |
    { ID id-Secondary-CCPCH-LCR-parameterList-CTCH-SetupRqstTDD CRITICALITY reject TYPE Secondary-CCPCH-LCR-parameterList-CTCH-
SetupRqstTDD PRESENCE optional }
}

Secondary-CCPCH-parameterListIE-CTCH-SetupRqstTDD ::= SEQUENCE (SIZE (1..maxNrOfSCCPCHs)) OF Secondary-CCPCH-parameterItem-CTCH-
SetupRqstTDD

Secondary-CCPCH-parameterItem-CTCH-SetupRqstTDD ::= SEQUENCE {
    commonPhysicalChannelID CommonPhysicalChannelID,
    tdd-ChannelisationCode TDD-ChannelisationCode,
    timeslot TimeSlot,
    midambleShiftAndBurstType MidambleShiftAndBurstType,
    tdd-PhysicalChannelOffset TDD-PhysicalChannelOffset,
    repetitionPeriod RepetitionPeriod,
    repetitionLength RepetitionLength,
    s-CCPCH-Power DL-Power,
    iE-Extensions ProtocolExtensionContainer { { Secondary-CCPCH-parameterItem-CTCH-SetupRqstTDD-ExtIEs
    } OPTIONAL,
    ...
}
}

Secondary-CCPCH-parameterItem-CTCH-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
}

FACH-ParametersList-CTCH-SetupRqstTDD ::= ProtocolIE-Single-Container {{ FACH-ParametersListIEs-CTCH-SetupRqstTDD }}
```

FACH-ParametersListIEs-CTCH-SetupRqstTDD NBAP-PROTOCOL-IES ::= {  
 { ID id-FACH-ParametersListIE-CTCH-SetupRqstTDD CRITICALITY reject TYPE FACH-ParametersListIE-CTCH-SetupRqstTDD PRESENCE  
 mandatory }
}

FACH-ParametersListIE-CTCH-SetupRqstTDD ::= SEQUENCE (SIZE (1..maxNrOfFACHs)) OF FACH-ParametersItem-CTCH-SetupRqstTDD

FACH-ParametersItem-CTCH-SetupRqstTDD ::= SEQUENCE {  
 commonTransportChannelID CommonTransportChannelID,  
 fACH-CCTrCH-ID CCTrCH-ID,  
 dl-TransportFormatSet TransportFormatSet,

```

toAWS
ToAWS,
toAWE
ToAWE,
iE-Extensions
ProtocolExtensionContainer { { FACH-ParametersItem-CTCH-SetupRqstTDD-ExtIEs} }
OPTIONAL,
...
}

FACH-ParametersItem-CTCH-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
{ ID id-maxFACH-Power-LCR-CTCH-SetupRqstTDD CRITICALITY reject EXTENSION DL-Power
}| PRESENCE optional
-- Applicable to 1.28Mcps TDD only
{ ID id-bindingID CRITICALITY ignore EXTENSION BindingID
}| PRESENCE optional
-- Shall be ignored if bearer establishment with ALCAP.
{ ID id-transportlayeraddress CRITICALITY ignore EXTENSION TransportLayerAddress
},
-- Shall be ignored if bearer establishment with ALCAP.
...
}

PCH-Parameters-CTCH-SetupRqstTDD ::= ProtocolIE-Single-Container {{ PCH-ParametersIE-CTCH-SetupRqstTDD }}

PCH-ParametersIE-CTCH-SetupRqstTDD NBAP-PROTOCOL-IES ::= {
{ ID id-PCH-ParametersItem-CTCH-SetupRqstTDD CRITICALITY reject TYPE PCH-ParametersItem-CTCH-SetupRqstTDD PRESENCE mandatory
}
}

PCH-ParametersItem-CTCH-SetupRqstTDD ::= SEQUENCE {
commonTransportChannelID CommonTransportChannelID,
pCCH-CCTrCH-ID CCTrCH-ID,
dl-TransportFormatSet TransportFormatSet, -- For the DL.
toAWS,
toAWE,
pICH-Parameters,
PICH-Parameters-CTCH-SetupRqstTDD,
iE-Extensions
ProtocolExtensionContainer { { PCH-ParametersItem-CTCH-SetupRqstTDD-ExtIEs} }
OPTIONAL,
...
}

PCH-ParametersItem-CTCH-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
{ ID id-PCH-Power-LCR-CTCH-SetupRqstTDD CRITICALITY reject EXTENSION DL-Power
}| PRESENCE optional
{ ID id-bindingID CRITICALITY ignore EXTENSION BindingID
}| PRESENCE optional
-- Shall be ignored if bearer establishment with ALCAP.
{ ID id-transportlayeraddress CRITICALITY ignore EXTENSION TransportLayerAddress
},

```

```

-- Shall be ignored if bearer establishment with ALCAP.
...
}

PICH-Parameters-CTCH-SetupRqstTDD ::= ProtocolIE-Single-Container {{ PICH-ParametersIE-CTCH-SetupRqstTDD }}

PICH-ParametersIE-CTCH-SetupRqstTDD NBAP-PROTOCOL-IES ::= {
  { ID id-PICH-ParametersItem-CTCH-SetupRqstTDD  CRITICALITY reject  TYPE PICH-ParametersItem-CTCH-SetupRqstTDD  PRESENCE optional
}|
  { ID id-PICH-LCR-Parameters-CTCH-SetupRqstTDD  CRITICALITY reject  TYPE PICH-LCR-Parameters-CTCH-SetupRqstTDD  PRESENCE optional }
}

PICH-ParametersItem-CTCH-SetupRqstTDD ::= SEQUENCE {
  commonPhysicalChannelID          CommonPhysicalChannelID,
  tdd-ChannelisationCode          TDD-ChannelisationCode,
  timeSlot                         TimeSlot,
  midambleShiftAndBurstType       MidambleShiftAndBurstType,
  tdd-PhysicalChannelOffset        TDD-PhysicalChannelOffset,
  repetitionPeriod                 RepetitionPeriod,
  repetitionLength                 RepetitionLength,
  pagingIndicatorLength           PagingIndicatorLength,
  pICH-Power                      PICH-Power,
  iE-Extensions                    ProtocolExtensionContainer {{ PICH-ParametersItem-CTCH-SetupRqstTDD-ExtIEs}}
  OPTIONAL,
  ...
}

PICH-ParametersItem-CTCH-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

PICH-LCR-Parameters-CTCH-SetupRqstTDD ::= SEQUENCE {
  commonPhysicalChannelID          CommonPhysicalChannelID,
  tdd-ChannelisationCodeLCR        TDD-ChannelisationCodeLCR,
  timeSlotLCR                     TimeSlotLCR,
  midambleShiftLCR                MidambleShiftLCR,
  tdd-PhysicalChannelOffset        TDD-PhysicalChannelOffset,
  repetitionPeriod                 RepetitionPeriod,
  repetitionLength                 RepetitionLength,
  pagingIndicatorLength           PagingIndicatorLength,
  pICH-Power                      PICH-Power,
  second-TDD-ChannelisationCodeLCR TDD-ChannelisationCodeLCR,
  iE-Extensions                    ProtocolExtensionContainer {{ PICH-LCR-ParametersItem-CTCH-SetupRqstTDD-ExtIEs}}
  OPTIONAL,
  ...
}

```

```

PICH-LCR-ParametersItem-CTCH-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
{ ID id-Tstd-indicator CRITICALITY reject EXTENSION TSTD-Indicator PRESENCE optional },
-- Applicable to 1.28 Mcps TDD only
}
...
}

Secondary-CCPCH-LCR-parameterList-CTCH-SetupRqstTDD ::= SEQUENCE (SIZE (1..maxNrOfSCCPCHLCRs)) OF Secondary-CCPCH-LCR-parameterItem-CTCH-SetupRqstTDD

Secondary-CCPCH-LCR-parameterItem-CTCH-SetupRqstTDD ::= SEQUENCE {
    commonPhysicalChannelID CommonPhysicalChannelID,
    tdd-ChannelisationCodeLCR TDD-ChannelisationCodeLCR,
    timeslotLCR TimeSlotLCR,
    midambleShiftLCR MidambleShiftLCR,
    tdd-PhysicalChannelOffset TDD-PhysicalChannelOffset,
    repetitionPeriod RepetitionPeriod,
    repetitionLength RepetitionLength,
    s-CCPCH-Power DL-Power,
    s-CCPCH-TimeSlotFormat-LCR TDD-DL-DPCP-TimeSlotFormat-LCR,
    iE-Extensions ProtocolExtensionContainer { { Secondary-CCPCH-LCR-parameterItem-CTCH-SetupRqstTDD-ExtIEs } } OPTIONAL,
}
...
}

Secondary-CCPCH-LCR-parameterItem-CTCH-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
}
...
}

/// break ///

-- *****
-- PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST TDD
-- *****
PhysicalSharedChannelReconfigurationRequestTDD ::= SEQUENCE {
    protocolIEs ProtocolIE-Container {{PhysicalSharedChannelReconfigurationRequestTDD-IEs}},
    protocolExtensions ProtocolExtensionContainer {{PhysicalSharedChannelReconfigurationRequestTDD-Extensions}} OPTIONAL,
}
...

PhysicalSharedChannelReconfigurationRequestTDD-IEs NBAP-PROTOCOL-IES ::= {
{ ID id-C-ID CRITICALITY reject TYPE C-ID PRESENCE },
mandatory }|
{ ID id-SFN CRITICALITY reject TYPE SFN PRESENCE },
optional }|

```

```

    { ID id-PDSCHSets-AddList-PSCH-ReconfRqst   CRITICALITY reject  TYPE PDSCHSets-AddList-PSCH-ReconfRqst   PRESENCE
optional }|
    { ID id-PDSCHSets-ModifyList-PSCH-ReconfRqst CRITICALITY reject  TYPE PDSCHSets-ModifyList-PSCH-ReconfRqst   PRESENCE
optional }|
    { ID id-PDSCHSets-DeleteList-PSCH-ReconfRqst CRITICALITY reject  TYPE PDSCHSets-DeleteList-PSCH-ReconfRqst   PRESENCE
optional }|
    { ID id-PUSCHSets-AddList-PSCH-ReconfRqst   CRITICALITY reject  TYPE PUSCHSets-AddList-PSCH-ReconfRqst   PRESENCE
optional }|
    { ID id-PUSCHSets-ModifyList-PSCH-ReconfRqst CRITICALITY reject  TYPE PUSCHSets-ModifyList-PSCH-ReconfRqst   PRESENCE
optional }|
    { ID id-PUSCHSets-DeleteList-PSCH-ReconfRqst CRITICALITY reject  TYPE PUSCHSets-DeleteList-PSCH-ReconfRqst   PRESENCE
optional },
    ...
}

PhysicalSharedChannelReconfigurationRequestTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    { ID id-HS-PDSCH-TDD-Information-PSCH-ReconfRqst           CRITICALITY reject  EXTENSION HS-PDSCH-TDD-Information-PSCH-ReconfRqst
        PRESENCE optional } |
    { ID id-Add-To-HS-SCCH-Resource-Pool-PSCH-ReconfRqst       CRITICALITY reject  EXTENSION Add-To-HS-SCCH-Resource-Pool-PSCH-
ReconfRqst          PRESENCE optional } |
    { ID id-Modify-HS-SCCH-Resource-Pool-PSCH-ReconfRqst       CRITICALITY reject  EXTENSION Modify-HS-SCCH-Resource-Pool-PSCH-
ReconfRqst          PRESENCE optional } |
    { ID id-Delete-From-HS-SCCH-Resource-Pool-PSCH-ReconfRqst  CRITICALITY reject  EXTENSION Delete-From-HS-SCCH-Resource-Pool-PSCH-
ReconfRqst          PRESENCE optional } |
    { ID id-ConfigurationGenerationID                         CRITICALITY reject  EXTENSION ConfigurationGenerationID      PRESENCE
optional },
    ...
}

PDSCHSets-AddList-PSCH-ReconfRqst ::= SEQUENCE (SIZE (1..maxNrOfPDSCHSets)) OF PDSCHSets-AddItem-PSCH-ReconfRqst

PDSCHSets-AddItem-PSCH-ReconfRqst ::= SEQUENCE {
    pDSCHSet-ID                           PDSCHSet-ID,
    pDSCH-InformationList                 PDSCH-Information-AddList-PSCH-ReconfRqst OPTIONAL,           -- Mandatory for
3.84Mcps TDD. Not Applicable to 1.28Mcps TDD
    iE-Extensions                         ProtocolExtensionContainer { {PDSCHSets-AddItem-PSCH-ReconfRqst-ExtIEs} } OPTIONAL,
    ...
}

PDSCHSets-AddItem-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    {ID id-PDSCH-AddInformation-LCR-PSCH-ReconfRqst   CRITICALITY reject  EXTENSION PDSCH-AddInformation-LCR-AddItem-PSCH-
ReconfRqst      PRESENCE optional}, -- Mandatory for 1.28Mcps TDD. Not Applicable to 3.84Mcps TDD
    ...
}

PDSCH-Information-AddList-PSCH-ReconfRqst ::= ProtocolIE-Single-Container {{ PDSCH-Information-AddListIEs-PSCH-ReconfRqst }}
```

```

-- Mandatory for 3.84Mcps TDD, Not Applicable to 1.28Mcps TDD

PDSCH-Information-AddListIEs-PSCH-ReconfRqst   NBAP-PROTOCOL-IES ::= {
    {ID id-PDSCH-Information-AddListIE-PSCH-ReconfRqst  CRITICALITY reject
     PRESENCE mandatory}
}

PDSCH-Information-AddItem-PSCH-ReconfRqst ::= SEQUENCE {
    repetitionPeriod           RepetitionPeriod,
    repetitionLength           RepetitionLength,
    tdd-PhysicalChannelOffset TDD-PhysicalChannelOffset,
    dL-Timeslot-InformationAddList-PSCH-ReconfRqst      DL-Timeslot-InformationAddList-PSCH-ReconfRqst,
    iE-Extensions              ProtocolExtensionContainer { {PDSCH-Information-AddItem-PSCH-ReconfRqst-ExtIEs} }
    OPTIONAL,
    ...
}

PDSCH-Information-AddItem-PSCH-ReconfRqst-ExtIEs  NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

DL-Timeslot-InformationAddList-PSCH-ReconfRqst ::= SEQUENCE (SIZE (1.. maxNrOfDLTSS)) OF DL-Timeslot-InformationAddItem-PSCH-
ReconfRqst

DL-Timeslot-InformationAddItem-PSCH-ReconfRqst ::= SEQUENCE {
    timeSlot                  TimeSlot,
    midambleShiftAndBurstType MidambleShiftAndBurstType,
    tFCI-Presence             TFCI-Presence,
    dL-Code-InformationAddList-PSCH-ReconfRqst      DL-Code-InformationAddList-PSCH-ReconfRqst,
    iE-Extensions              ProtocolExtensionContainer { {DL-Timeslot-InformationAddItem-PSCH-ReconfRqst-ExtIEs} }
    OPTIONAL,
    ...
}

DL-Timeslot-InformationAddItem-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

DL-Code-InformationAddList-PSCH-ReconfRqst ::= SEQUENCE (SIZE (1..maxNrOfPDSCHs)) OF DL-Code-InformationAddItem-PSCH-ReconfRqst

DL-Code-InformationAddItem-PSCH-ReconfRqst ::= SEQUENCE {
    pDSCH-ID                 PDSCH-ID,
    tdd-ChannelisationCode   TDD-ChannelisationCode,
    iE-Extensions             ProtocolExtensionContainer { {DL-Code-InformationAddItem-PSCH-ReconfRqst-ExtIEs} }
    OPTIONAL,
    ...
}

```

```

DL-Code-InformationAddItem-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

PDSCH-AddInformation-LCR-AddItem-PSCH-ReconfRqst ::= SEQUENCE {
    repetitionPeriod           RepetitionPeriod,
    repetitionLength          RepetitionLength,
    tdd-PhysicalChannelOffset TDD-PhysicalChannelOffset,
    dL-Timeslot-InformationAddList-LCR-PSCH-ReconfRqst      DL-Timeslot-InformationAddList-LCR-PSCH-ReconfRqst,
    iE-Extensions             ProtocolExtensionContainer { {PDSCH-AddInformation-LCR-AddItem-PSCH-ReconfRqst-ExtIEs}
}     OPTIONAL,
    ...
}

PDSCH-AddInformation-LCR-AddItem-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
{ID id-Tstd-indicator      CRITICALITY reject      EXTENSION      TSTD-Indicator      PRESENCE      optional},
-- Applicable to 1.28Mcps TDD only
    ...
}

DL-Timeslot-InformationAddList-LCR-PSCH-ReconfRqst ::= SEQUENCE (SIZE (1.. maxNrOfDLTSLCRs)) OF DL-Timeslot-InformationAddItem-LCR-
PSCH-ReconfRqst

```

/// break ///

### 9.3.6 Constant Definitions

```

-- ****
-- IES
-- ****
id-AICH-Information                                ProtocolIE-ID ::= 0
id-AICH-InformationItem-ResourceStatusInd          ProtocolIE-ID ::= 1
id-BCH-Information                                 ProtocolIE-ID ::= 7
id-BCH-InformationItem-ResourceStatusInd            ProtocolIE-ID ::= 8
/// break /**

```

| id-Tstd-indicator-~~CTCH-SetupRqstTDD~~

ProtocolIE-ID ::= 627

## CHANGE REQUEST

# 25.433 CR 1027 # rev - # Current version: 4.12.0 #

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the # symbols.

**Proposed change affects:** UICC apps # ME # Radio Access Network  Core Network #

|                        |   |   |
|------------------------|---|---|
| <b>Title:</b>          | # Review on NBAP  |   |
| <b>Source:</b>         | # RAN3  |   |
| <b>Work item code:</b> | # TEI4  | <b>Date:</b> # 16/08/2004   |
| <b>Category:</b>       | # <b>F</b><br>Use <u>one</u> of the following categories:<br><b>F</b> (correction)<br><b>A</b> (corresponds to a correction in an earlier release)<br><b>B</b> (addition of feature),<br><b>C</b> (functional modification of feature)<br><b>D</b> (editorial modification)<br>Detailed explanations of the above categories can be found in 3GPP <a href="#">TR 21.900</a> . | <b>Release:</b> # Rel-4<br>Use <u>one</u> of the following releases:<br>Ph2 (GSM Phase 2)<br>R96 (Release 1996)<br>R97 (Release 1997)<br>R98 (Release 1998)<br>R99 (Release 1999)<br>Rel-4 (Release 4)<br>Rel-5 (Release 5)<br>Rel-6 (Release 6)<br>Rel-7 (Release 7) |

|   |
|---|
| <b>Reason for change:</b> # In current specification, there are some inconsistency between the IE name used in the procedure text and the tabular format. And Some IEs need to be clarified in the Semantics Description of the tabular format.   |
| <b>Summary of change:</b> #<br>8.2.17.2 Radio Link Setup: Alignment the IE name to the tabular format (1.28 Mcps TDD: <i>DL Time Slot ISCP Info LCR IE</i> ).<br><br>8.3.1.2 Radio Link Addition: Clarification to some description of DL Power Control for TDD in the text.<br><br>8.3.5.2 Unsynchronised Radio Link Reconfiguration: Clarification on description in the text.<br><br>8.3.6 Radio Link Deletion: Alignment the IE name to the tabular format( <i>Node B Communication Context ID IE</i> , <i>CRNC Communication Context ID IE</i> ).<br><br>8.3.8.2 Dedicated Measurement Initiation: Alignment the DEDICATED MEASUREMENT INITIATION RESPONSE message name to the tabular format.<br><br>9.1.17 AUDIT RESPONSE: Clarification to the Semantics Description. There are some IEs that are only used for FDD ( <i>Primary SCH Information IE</i> , <i>Secondary SCH Information IE</i> , <i>Primary CPICH Information IE</i> , <i>Secondary CPICH Information IE</i> , <i>AICH Information IE</i> , <i>PCPCH Information IE</i> , <i>CPCH Information IE</i> , <i>AP-AICH Information IE</i> , <i>CD/CA-ICH Information IE</i> ), and <i>SCH Information IE</i> is only used for 3.84Mcps TDD. |

9.1.27.2 CELL RECONFIGURATION REQUEST: Clarification to the Semantics Description. It would indicate that *IPDL Parameter Information* IE is only used for 3.84Mcps TDD in Rel-4 specification.

9.1.37.2 RADIO LINK SETUP RESPONSE: *USCH Information Response* IE refers to 9.2.3.29 instead of 9.2.3.28.

9.1.45 RADIO LINK RECONFIGURATION COMMIT: Clarification to the Semantics Description. It would indicate that *Active Pattern Sequence Information* IE is only used for FDD.

9.2.1.44 Measurement Threshold: Add a “>” before Rx Timing Deviation LCR.

9.2.3.5A DSCH TDD Information: *CCTrCH ID* IE refers to 9.2.3.3 instead of 9.2.3.2.

**Impact Analysis:**

Impact assessment towards the previous version of the specification (same release):

The impact can be considered isolated because the change affects only some clarifications to the specification.

**Consequences if not approved:** ☺ The specification will remain unclear to some procedure text and some IEs.

**Clauses affected:** ☺ 8.2.17.2, 8.3.1.2, 8.3.5.2, 8.3.6, 8.3.8.2, 9.1.17, 9.1.27.2, 9.1.37.2, 9.1.45, 9.2.1.44, 9.2.3.5A

|                              |   |                           |
|------------------------------|---|---------------------------|
| <b>Other specs affected:</b> | Y | N                         |
|                              | X | Other core specifications |
|                              | X | Test specifications       |
|                              | X | O&M Specifications        |

☺ CR1028 TS 25.433 Rel-5  
CR1029 TS 25.433 Rel-6

**Other comments:** ☺

**How to create CRs using this form:**


Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ☺ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

## 8.2.17 Radio Link Setup

/\* partly omitted \*/

### 8.2.17.2 Successful Operation

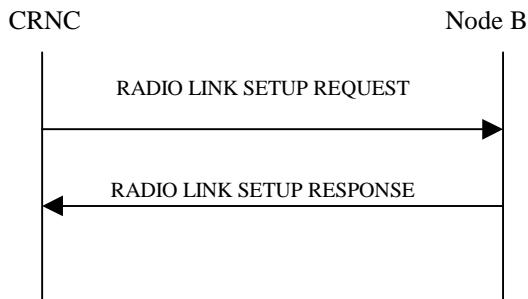

**Figure 24: Radio Link Setup procedure, Successful Operation**

/\* partly omitted \*/

## DL Power Control:

[FDD – The Node B shall start the DL transmission using the initial DL power specified in the message on each DL DPCH of the RL until either UL synchronisation on the Uu interface is achieved for the RLS or Power Balancing is activated. No inner loop power control or balancing shall be performed during this period. The DL power shall then vary according to the inner loop power control (see ref.[10], subclause 5.2.1.2) and the power control procedure (see subclause 8.3.7), but shall always be kept within the maximum and minimum limit specified in the RADIO LINK SETUP REQUEST message. During compressed mode, the  $\delta P_{curr}$ , as described in ref.[10] subclause 5.2.1.3, shall be added to the maximum DL power for the associated compressed frame.]

[FDD - If the *DPC Mode* IE is present in the RADIO LINK SETUP REQUEST message, the Node B shall apply the DPC mode indicated in the message and be prepared that the DPC mode may be changed during the life time of the RL. If the *DPC Mode* IE is not present in the RADIO LINK SETUP REQUEST message, DPC mode 0 shall be applied (see ref. [10]).]

[TDD – The Node B shall start the DL transmission using the initial DL power specified in the message on each DL DPCH and on each Time Slot of the RL until the UL synchronisation on the Uu interface is achieved for the RL. No inner loop power control shall be performed during this period. The DL power shall then vary according to the inner loop power control (see ref.[22], subclause 4.2.3.3), but shall always be kept within the maximum and minimum limit specified in the RADIO LINK SETUP REQUEST message.]


[TDD – If the [3.84Mcps TDD - *DL Time Slot ISCP Info IE*] or [1.28Mcps TDD - *DL Time slot Slot ISCP Info LCR IE*] is present, the Node B shall use the indicated value when deciding the initial DL TX Power for each timeslot as specified in [21], i.e. it shall reduce the DL TX power in those downlink timeslots of the radio link where the interference is low, and increase the DL TX power in those timeslots where the interference is high, while keeping the total downlink power in the radio link unchanged].

/\* partly omitted \*/

### 8.3.1 Radio Link Addition

/\* partly omitted \*/

### 8.3.1.2 Successful Operation

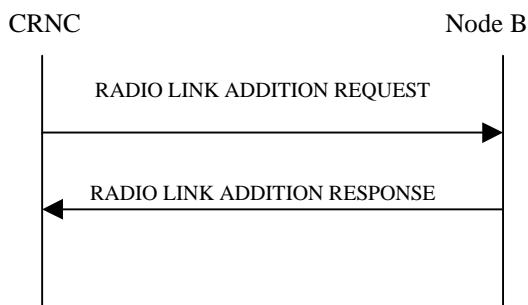

**Figure: 28 Radio Link Addition procedure, Successful Operation**

/\* partly omitted \*/

## **DL Power Control:**

[FDD – If the RADIO LINK ADDITION REQUEST message includes the *Initial DL Transmission Power* IE, the Node B shall apply the given power to the transmission on each DL DPCH of the RL when starting transmission until either UL synchronisation on the Uu interface is achieved for the RLS or Power Balancing is activated. If no *Initial DL Transmission Power* IE is included, the Node B shall use any transmission power level currently used on already existing RLs for this Node B Communication Context. No inner loop power control or balancing shall be performed during this period. The DL power shall then vary according to the inner loop power control (see ref.[10], subclause 5.2.1.2) with DPC MODE currently configured for the relevant Node B Communication Context and the downlink power control procedure (see subclause 8.3.7).]

[TDD – If the RADIO LINK ADDITION REQUEST message includes the ~~3.84Meps TDD – Initial DL Transmission Power IE~~~~1.28Meps TDD – DL Time Slot ISCP Info LCR IE~~, the Node B shall apply the given power to the transmission on each DL DPCH and on each Time Slot of the RL when starting transmission until the UL synchronisation on the Uu interface is achieved for the RL. If no *Initial DL Transmission Power IE* is included, the Node B shall use any transmission power level currently used on already existing RLs for this Node B Communication Context. No inner loop power control shall be performed during this period. The DL power shall then vary according to the inner loop power control (see ref.[22], subclause 4.2.3.3).]

If the RADIO LINK ADDITION REQUEST message includes the *Maximum DL Power* IE, the Node B shall store this value and not transmit with a higher power on any DL DPCH of the RL. If no *Maximum DL Power* IE is included, any Maximum DL power stored for already existing RLs for this Node B Communication Context shall be applied. [FDD - During compressed mode, the  $\delta P_{curr}$ , as described in ref.[10] subclause 5.2.1.3, shall be added to the maximum DL power for the associated compressed frame.]

If the **RADIO LINK ADDITION REQUEST** message includes the *Minimum DL Power IE*, the Node B shall store this value and never transmit with a lower power on any DL DPCP of the RL. If no *Minimum DL Power IE* is included, any Minimum DL power stored for already existing RLs for this Node B Communication Context shall be applied.


[TDD – If the RADIO LINK ADDITION REQUEST message includes the [\[3.84Mcps TDD – DL Time Slot ISCP Info IE\]](#)[\[1.28Mcps TDD – DL Time Slot ISCP Info LCR IE\]](#), the Node B shall use the indicated value when deciding the DL TX Power for each timeslot as specified in ref. [21], i.e. it shall reduce the DL TX power in those downlink timeslots of the radio link where the interference is low, and increase the DL TX power in those timeslots where the interference is high, while keeping the total downlink power in the radio link unchanged].

/\* partly omitted \*/

### 8.3.5 Un同步 Radio Link Reconfiguration

/\* partly omitted \*/

### 8.3.5.2 Successful Operation

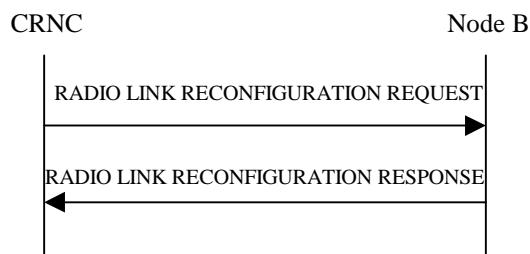

**Figure 34: Unsynchronised Radio Link Reconfiguration Procedure, Successful Operation**

The Unsynchronised Radio Link Reconfiguration procedure is initiated by the CRNC by sending the RADIO LINK RECONFIGURATION REQUEST message to the Node B. The message shall use the Communication Control Port assigned for this Node B Communication Context.

Upon reception, the Node B shall modify the configuration of the Radio Link(s) according to the parameters given in the message. Unless specified below, the meaning of parameters is specified in other specifications.

The Node B shall prioritise resource allocation for the RL(s) to be modified according to Annex A.

/\* partly omitted \*/

#### RL Information:

If the RADIO LINK RECONFIGURATION REQUEST message includes the *RL Information* IE, the Node B shall treat it as follows:


- If the *RL Information* IE includes the *Maximum DL Power* IE, the Node B shall apply this value to the new configuration and not transmit with a higher power on any Downlink DPCH of the Radio Link once the new configuration is being used. [FDD - During compressed mode, the  $\delta P_{curr}$ , as described in ref.[10] subclause 5.2.1.3, shall be added to the maximum DL power for the associated compressed frame.]
- If the *RL Information* IE includes the *Minimum DL Power* IE, the Node B shall apply this value to the new configuration and never transmit with a lower power on any Downlink ~~DPCH~~Channelisation Code of the Radio Link once the new configuration is being used.
- [FDD - If the *RL Information* IE contains the *Transmission Gap Pattern Sequence Code Information* IE in the *DL Code Information* IE for any of the allocated DL Channelisation Codes, the Node B shall apply the alternate scrambling code as indicated whenever the downlink compressed mode method SF/2 is active in the new configuration.]
- [1.28Mcps TDD - If the RADIO LINK RECONFIGURATION REQUEST message contains the *Uplink Synchronisation Parameters LCR* IE, the Node B shall use the indicated values of *Uplink Synchronisation Stepsize* IE and *Uplink Synchronisation Frequency* IE when evaluating the timing of the UL synchronisation.]

/\* partly omitted \*/

### 8.3.6 Radio Link Deletion

/\* partly omitted \*/

### 8.3.6.2 Successful Operation

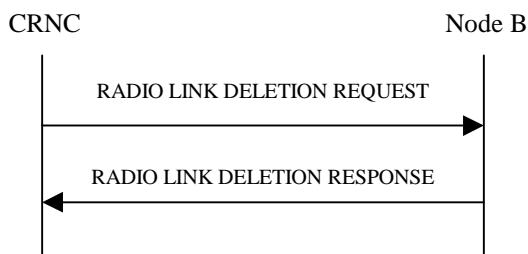

**Figure 36: Radio Link Deletion procedure, Successful Operation**

The procedure is initiated with a RADIO LINK DELETION REQUEST message sent from the CRNC to the Node B using the Communication Control Port assigned to the concerned Node B Communication Context.

Upon receipt of this message, the Node B shall delete the radio link(s) identified by the *RL ID IE*, *Node B Communication Context ID IE* and *CRNC Communication Context ID IE* and release all associated resources and respond to the CRNC with a RADIO LINK DELETION RESPONSE message. [FDD – Resources associated with the TFCI2 bearer shall be released only if all the RLs in the Node B Communication Context are deleted].

[FDD – After deletion of the RL(s), the UL out-of-sync algorithm defined in ref. [10] shall for each of the remaining RL Set(s) use the maximum value of the parameters N\_OUTSYNC\_IND and T\_RLFAILURE that are configured in the cells supporting the radio links of the RL Set and the UL in-sync algorithm defined in ref. [10] shall for each of the remaining RL Set(s) use the minimum value of the parameters N\_INSYNC\_IND that are configured in the cells supporting the radio links of the RL Set].

/\* partly omitted \*/

### 8.3.6.4 Abnormal Conditions


If the RL indicated by the *RL ID IE*, *Node B Communication Context ID IE* and *CRNC Communication Context ID IE* does not exist, the Node B shall respond with the RADIO LINK DELETION RESPONSE message and use the *CRNC Communication Context ID IE* received in the RADIO LINK DELETION REQUEST message.

/\* partly omitted \*/

### 8.3.8 Dedicated Measurement Initiation

/\* partly omitted \*/

#### 8.3.8.2 Successful Operation

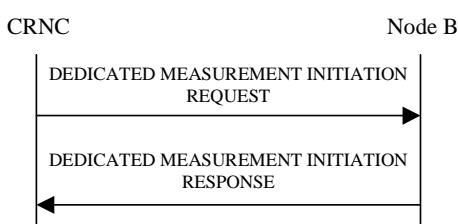

**Figure 38: Dedicated Measurement Initiation procedure, Successful Operation**

The procedure is initiated with a DEDICATED MEASUREMENT INITIATION REQUEST message sent from the CRNC to the Node B using the Communication Control Port assigned to the Node B Communication Context.

Upon reception, the Node B shall initiate the requested measurement according to the parameters given in the request. Unless specified below the meaning of the parameters are given in other specifications.

If the *Node B Communication Context ID* IE equals the reserved value "All NBCC", this measurement request shall apply for all current and future Node B Communication Contexts controlled via the Communication Control Port on which the DEDICATED MEASUREMENT INITIATION REQUEST message was received. Otherwise, this measurement request shall apply for the requested Node B Communication Context ID only.

If the *Node B Communication Context ID* IE equals the reserved value "All NBCC", the measurement request shall be treated as a single measurement, despite applying to multiple contexts. This means that it may only be terminated or failed on "All NBCC".

If the *Node B Communication Context ID* IE equals the reserved value "All NBCC", the measurement shall be initiated only for those Node B Communication Contexts handling a mode (FDD, 3.84Mcps TDD or 1.28Mcps TDD) for which the concerned measurement is specified in [4] and [5].

If the Dedicated Measurement Object Type is indicated as being "RL" in the DEDICATED MEASUREMENT INITIATION REQUEST message, measurement results shall be reported for all indicated Radio Links.

[FDD – If the Dedicated Measurement Object Type is indicated as being "RLS" in the DEDICATED MEASUREMENT INITIATION REQUEST message, measurement results shall be reported for all indicated Radio Link Sets.]

[FDD - If the Dedicated Measurement Object Type is indicated as being "ALL RL" in the DEDICATED MEASUREMENT INITIATION REQUEST message, measurement results shall be reported for all current and future Radio Links within the Node B Communication Context.]

[TDD - If the Dedicated Measurement Object Type is indicated as being "ALL RLS" in the DEDICATED MEASUREMENT INITIATION REQUEST message, measurement results shall be reported for one existing DPCH per CCTrCH in each used time slot of current and future Radio Links within the Node B Communication Context, provided the measurement type is applicable to the respective DPCH.]

[FDD – If the Dedicated Measurement Object Type is indicated as being "ALL RLS" in the DEDICATED MEASUREMENT INITIATION REQUEST message, measurement results shall be reported for all existing and future Radio Link Sets within the Node B Communication Context.]

[TDD – If the *DPCH ID* IE is provided within the RL Information, the measurement request shall apply for the requested physical channel individually. If no *DPCH ID* IE and no *PUSCH Information* IE is provided within the RL Information, the measurement request shall apply for one existing physical channel per CCTrCH in each used time slot of the Radio Link, provided the measurement type is applicable to this physical channel.]

[TDD – If the *PUSCH Information* IE is provided within the RL Information, the measurement request shall apply for the requested physical channel individually.]

If the *CFN Reporting Indicator* IE is set to "FN Reporting Required", the *CFN* IE shall be included in the DEDICATED MEASUREMENT REPORT message or in the DEDICATED MEASUREMENT INITIATION RESPONSE message, the latter only in the case the *Report Characteristics* IE is set to "On-Demand". The reported CFN shall be the CFN at the time when the measurement value was reported by the layer 3 filter, referred to as point C in the measurement model [25].

/\* partly omitted \*/

### 9.1.17 AUDIT RESPONSE

| IE/Group Name                            | Presence | Range                                     | IE Type and Reference                                 | Semantics Description                         | Criticality | Assigned Criticality |
|--|----------|---|---|---|-------------|----------------------|
| Message Discriminator                    | M        |   | 9.2.1.45  |   | –           |                      |
| Message Type                             | M        |   | 9.2.1.46  |   | YES         | reject               |
| Transaction ID                           | M        |   | 9.2.1.62  |   | –           |                      |
| End Of Audit Sequence Indicator          | M        |   | 9.2.1.29A   |   | YES         | ignore               |
| <b>Cell Information</b>                  |          | <i>0..&lt;maxCe<br/>llinNodeB&gt;</i>     |   |   | EACH        | ignore               |
| >C-ID                                    | M        |   | 9.2.1.9   |   | –           |                      |
| >Configuration Generation ID             | M        |   | 9.2.1.16  |   | –           |                      |
| >Resource Operational State              | M        |   | 9.2.1.52  |   | –           |                      |
| >Availability Status                     | M        |   | 9.2.1.2   |   | –           |                      |
| >Local Cell ID                           | M        |   | 9.2.1.38  | The local cell that the cell is configured on | –           |                      |
| >Primary SCH Information                 | O        |   | Common Physical Channel Status Information 9.2.1.13A  | <a href="#">Applicable to FDD only</a>        | YES         | ignore               |
| >Secondary SCH Information               | O        |   | Common Physical Channel Status Information 9.2.1.13A  | <a href="#">Applicable to FDD only</a>        | YES         | ignore               |
| >Primary CPICH Information               | O        |   | Common Physical Channel Status Information 9.2.1.13A  | <a href="#">Applicable to FDD only</a>        | YES         | ignore               |
| <b>&gt;Secondary CPICH Information</b>   |          | <i>0..&lt;maxS<br/>CPICHCell<br/>&gt;</i> |   | <a href="#">Applicable to FDD only</a>        | EACH        | ignore               |
| >>Secondary CPICH Individual Information | M        |   | Common Physical Channel Status Information 9.2.1.13A  |   | –           |                      |
| >Primary CCPCH Information               | O        |   | Common Physical Channel Status Information 9.2.1.13A  |   | YES         | ignore               |
| >BCH Information                         | O        |   | Common Transport Channel Status Information 9.2.1.14B |   | YES         | ignore               |
| <b>&gt;Secondary CCPCH</b>               |          | <i>0..&lt;maxS</i>                        |   |   | EACH        | ignore               |

| Information                              |   | CCPCHCe<br>II>      |   |  |      |        |
|--|---|---------------------|---|--|------|--------|
| >>Secondary CCPCH Individual Information | M |                     | Common Physical Channel Status Information 9.2.1.13A  |  | -    |        |
| >PCH Information                         | O |                     | Common Transport Channel Status Information 9.2.1.14B |  | YES  | ignore |
| >PICH Information                        | O |                     | Common Physical Channel Status Information 9.2.1.13A  |  | YES  | ignore |
| >FACH Information                        |   | 0..<maxFA CHCell>   |   |  | EACH | ignore |
| >>FACH Individual Information            | M |                     | Common Transport Channel Status Information 9.2.1.14B |  | -    |        |
| >PRACH Information                       |   | 0..<maxP RACHCell > |   |  | EACH | ignore |
| >>PRACH Individual Information           | M |                     | Common Physical Channel Status Information 9.2.1.13A  |  | -    |        |
| >RACH Information                        |   | 0..<maxR ACHCell>   |   |  | EACH | ignore |
| >>RACH Individual Information            | M |                     | Common Transport Channel Status Information 9.2.1.14B |  | -    |        |
| >AICH Information                        |   | 0..<maxP RACHCell > |   | <a href="#">Applicable to FDD only</a> | EACH | ignore |
| >>AICH Individual Information            | M |                     | Common Physical Channel Status Information 9.2.1.13A  |  | -    |        |
| >PCPCH Information                       |   | 0..<maxP CPCHCell > |   | <a href="#">Applicable to FDD only</a> | EACH | ignore |
| >>PCPCH Individual Information           | M |                     | Common Physical Channel                               |  | -    |        |

|   |   |                           |   |   |      |        |
|---|---|---------------------------|---|---|------|--------|
|   |   |                           | Status Information 9.2.1.13A                          |   |      |        |
| <b>&gt;CPCH Information</b>                   |   | 0..<maxC PCHCell>         |   | <a href="#">Applicable to FDD only</a>                              | EACH | ignore |
| >>CPCH Individual Information                 | M |                           | Common Transport Channel Status Information 9.2.1.14B |   | —    |        |
| <b>&gt;AP-AICH Information</b>                |   | 0..<maxC PCHCell>         |   | <a href="#">Applicable to FDD only</a>                              | EACH | ignore |
| >>AP-AICH Individual Information              | M |                           | Common Physical Channel Status Information 9.2.1.13A  |   | —    |        |
| <b>&gt;CD/CA-ICH Information</b>              |   | 0..<maxC PCHCell>         |   | <a href="#">Applicable to FDD only</a>                              | EACH | ignore |
| >>CD/CA-ICH Individual Information            | M |                           | Common Physical Channel Status Information 9.2.1.13A  |   | —    |        |
| >SCH Information                              | O |                           | Common Physical Channel Status Information 9.2.1.13A  | TDD Sync Channel<br><a href="#">Applicable to 3.84Mcps TDD only</a> | YES  | ignore |
| <b>&gt;FPACH Information</b>                  |   | 0..<maxFP ACHCell>        |   | Applicable to 1.28Mcps TDD only                                     | EACH | ignore |
| >>FPACH Individual Information                | M |                           | Common Physical Channel Status Information 9.2.1.13A  |   | —    |        |
| >DwPCH Information                            | O |                           | Common Physical Channel Status Information 9.2.1.13A  | Applicable to 1.28Mcps TDD only                                     | YES  | ignore |
| <b>Communication Control Port Information</b> |   | 0..<maxC CPinNode B>      |   |   | EACH | ignore |
| >Communication Control Port ID                | M |                           | 9.2.1.15  |   | —    |        |
| >Resource Operational State                   | M |                           | 9.2.1.52  |   | —    |        |
| >Availability Status                          | M |                           | 9.2.1.2   |   | —    |        |
| <b>Local Cell Information</b>                 |   | 0..<maxLocallCellinNodeB> |   |   | EACH | ignore |

|  |   |                                       |           |          |      |        |
|--|---|---------------------------------------|-----------|----------|------|--------|
| >Local Cell ID                               | M |                                       | 9.2.1.38  |          | –    |        |
| >DL or Global Capacity Credit                | M |                                       | 9.2.1.20B |          | –    |        |
| >UL Capacity Credit                          | O |                                       | 9.2.1.65A |          | –    |        |
| >Common Channels Capacity Consumption Law    | M |                                       | 9.2.1.9A  |          | –    |        |
| >Dedicated Channels Capacity Consumption Law | M |                                       | 9.2.1.20A |          | –    |        |
| >Maximum DL Power Capability                 | O |                                       | 9.2.1.39  |          | –    |        |
| >Minimum Spreading Factor                    | O |                                       | 9.2.1.47  |          | –    |        |
| >Minimum DL Power Capability                 | O |                                       | 9.2.1.46A |          | –    |        |
| >Local Cell Group ID                         | O |                                       | 9.2.1.37A |          | –    |        |
| >Reference Clock Availability                | O |                                       | 9.2.3.14A | TDD only | YES  | ignore |
| <b>Local Cell Group Information</b>          |   | <i>0..&lt;maxLocalCellInNodeB&gt;</i> |           |          | EACH | ignore |
| >Local Cell Group ID                         | M |                                       | 9.2.1.37A |          | –    |        |
| >DL or Global Capacity Credit                | M |                                       | 9.2.1.20B |          | –    |        |
| >UL Capacity Credit                          | O |                                       | 9.2.1.65A |          | –    |        |
| >Common Channels Capacity Consumption Law    | M |                                       | 9.2.1.9A  |          | –    |        |
| >Dedicated Channels Capacity Consumption Law | M |                                       | 9.2.1.20A |          | –    |        |
| Criticality Diagnostics                      | O |                                       | 9.2.1.17  |          | YES  | ignore |

## 9.1.27 CELL RECONFIGURATION REQUEST

### 9.1.27.2 TDD Message

| IE/Group Name                        | Presence | Range | IE Type and Reference | Semantics Description                                       | Criticality | Assigned Criticality |
|--------------------------------------|----------|-------|-----------------------|---|-------------|----------------------|
| Message Discriminator                | M        |       | 9.2.1.45              |   | —           |                      |
| Message Type                         | M        |       | 9.2.1.46              |   | YES         | reject               |
| Transaction ID                       | M        |       | 9.2.1.62              |   | —           |                      |
| C-ID                                 | M        |       | 9.2.1.9               |   | YES         | reject               |
| Configuration Generation ID          | M        |       | 9.2.1.16              |   | YES         | reject               |
| <b>Synchronisation Configuration</b> |          | 0..1  |                       |   | YES         | reject               |
| >N_INSYNC_IND                        | M        |       | 9.2.1.47A             |   | —           |                      |
| >N_OUTSYNC_IND                       | M        |       | 9.2.1.47B             |   | —           |                      |
| >T_RLFAILURE                         | M        |       | 9.2.1.56A             |   | —           |                      |
| Timing Advance Applied               | O        |       | 9.2.3.22A             |   | YES         | reject               |
| <b>SCH Information</b>               |          | 0..1  |                       | Applicable to 3.84Mcps TDD only                             | YES         | reject               |
| >Common Physical Channel ID          | M        |       | 9.2.1.13              |   | —           |                      |
| >SCH Power                           | M        |       | DL Power 9.2.1.21     |   | —           |                      |
| <b>PCCPCH Information</b>            |          | 0..1  |                       |   | YES         | reject               |
| >Common Physical Channel ID          | M        |       | 9.2.1.13              |   | —           |                      |
| >PCCPCH Power                        | M        |       | 9.2.3.9               |   | —           |                      |
| Maximum Transmission Power           | O        |       | 9.2.1.40              |   | YES         | reject               |
| DPCH Constant Value                  | O        |       | Constant Value        |   | YES         | reject               |
| PUSCH Constant Value                 | O        |       | Constant Value        |   | YES         | reject               |
| PRACH Constant Value                 | O        |       | Constant Value        |   | YES         | reject               |
| <b>Time Slot Configuration</b>       |          | 0..15 |                       | Mandatory for 3.84Mcps TDD. Not Applicable to 1.28Mcps TDD. | GLOBAL      | reject               |
| >Time Slot                           | M        |       | 9.2.3.23              |   | —           |                      |
| >Time Slot Status                    | M        |       | 9.2.3.25              |   | —           |                      |
| >Time Slot Direction                 | M        |       | 9.2.3.24              |   | —           |                      |
| <b>Time Slot Configuration LCR</b>   |          | 0..7  |                       | Mandatory for 1.28Mcps TDD. Not Applicable to 3.84Mcps TDD. | GLOBAL      | reject               |
| >Time Slot LCR                       | M        |       | 9.2.3.24A             |   | —           |                      |
| >Time Slot Status                    | M        |       | 9.2.3.25              |   | —           |                      |
| >Time Slot Direction                 | M        |       | 9.2.3.24              |   | —           |                      |
| <b>DwPCH Information</b>             |          | 0..1  |                       | Applicable to 1.28Mcps TDD only.                            | YES         | reject               |
| >Common Physical Channel ID          | M        |       | 9.2.1.13              |   | —           |                      |
| >DwPCH Power                         | M        |       | 9.2.3.5B              |   | —           |                      |
| <b>IPDL Parameter Information</b>    |          | 0..1  |                       | <a href="#">Applicable to 3.84Mcps TDD only.</a>            | YES         | reject               |
| >IPDL TDD Parameters                 | O        |       | 9.2.3.5D              |   | —           |                      |
| >IPDL Indicator                      | M        |       | 9.2.1.36F             |   | —           |                      |

## 9.1.37 RADIO LINK SETUP RESPONSE

### 9.1.37.2 TDD Message

| IE/Group Name                      | Presence | Range | IE Type and Reference | Semantics Description                                       | Criticality | Assigned Criticality |
|------------------------------------|----------|-------|-----------------------|---|-------------|----------------------|
| Message Discriminator              | M        |       | 9.2.1.45              |   | —           |                      |
| Message Type                       | M        |       | 9.2.1.46              |   | YES         | reject               |
| Transaction ID                     | M        |       | 9.2.1.62              |   | —           |                      |
| CRNC Communication Context ID      | M        |       | 9.2.1.18              | The reserved value “All CRNCCC” shall not be used.          | YES         | ignore               |
| Node B Communication Context ID    | M        |       | 9.2.1.48              | The reserved value “All NBCC” shall not be used.            | YES         | ignore               |
| Communication Control Port ID      | M        |       | 9.2.1.15              |   | YES         | ignore               |
| <b>RL Information Response</b>     |          | 0..1  |                       | Mandatory For 3.84Mcps TDD. Not Applicable to 1.28Mcps TDD. | YES         | ignore               |
| >RL ID                             | M        |       | 9.2.1.53              |   | —           |                      |
| >UL Time Slot ISCP Info            | M        |       | 9.2.3.26D             |   | —           |                      |
| >UL PhysCH SF Variation            | M        |       | 9.2.3.26B             |   | —           |                      |
| >DCH Information Response          | O        |       | 9.2.1.20C             |   | YES         | ignore               |
| >DSCH Information Response         | O        |       | 9.2.1.27A             |   | YES         | ignore               |
| >USCH Information Response         | O        |       | 9.2.3.28              |   | YES         | ignore               |
| <b>RL Information Response LCR</b> |          | 0..1  |                       | Mandatory For 1.28Mcps TDD. Not Applicable to 3.84Mcps TDD. | YES         | ignore               |
| >RL ID                             | M        |       | 9.2.1.53              |   | —           |                      |
| >UL Time Slot ISCP Info LCR        | M        |       | 9.2.3.26F             |   | —           |                      |
| >UL PhysCH SF Variation            | M        |       | 9.2.3.26B             |   | —           |                      |
| >DCH Information Response          | O        |       | 9.2.1.20C             |   | YES         | ignore               |
| >DSCH Information Response         | O        |       | 9.2.1.27A             |   | YES         | ignore               |
| >USCH Information Response         | O        |       | 9.2.3.29 <del>8</del> |   | YES         | ignore               |
| Criticality Diagnostics            | O        |       | 9.2.1.17              |   | YES         | ignore               |

### 9.1.45 RADIO LINK RECONFIGURATION COMMIT

| IE/Group Name                       | Presence | Range | IE Type and Reference | Semantics Description                            | Criticality | Assigned Criticality |
|-------------------------------------|----------|-------|-----------------------|--|-------------|----------------------|
| Message Discriminator               | M        |       | 9.2.1.45              |  | –           |                      |
| Message type                        | M        |       | 9.2.1.46              |  | YES         | ignore               |
| Transaction ID                      | M        |       | 9.2.1.62              |  | –           |                      |
| Node B Communication Context ID     | M        |       | 9.2.1.48              | The reserved value “All NBCC” shall not be used. | YES         | ignore               |
| CFN                                 | M        |       | 9.2.1.7               |  | YES         | ignore               |
| Active Pattern Sequence Information | O        |       | 9.2.2.A               | <a href="#">FDD only</a>                         | YES         | ignore               |

#### 9.2.1.44 Measurement Threshold

The Measurement Threshold defines which threshold that shall trigger Event A, B, E, F or On Modification.

| IE/Group Name  | Presence | Range | IE Type and Reference | Semantics Description                 | Criticality | Assigned Criticality |
|--|----------|-------|-----------------------|---------------------------------------|-------------|----------------------|
| <i>CHOICE Measurement Threshold</i>                                |          |       |                       |                                       | –           |                      |
| > <i>Received Total Wide Band Power</i>                            |          |       |                       |                                       | –           |                      |
| >>Received Total Wide Band Power                                   | M        |       | INTEGER (0..621)      | According to mapping in [22] and [23] | –           |                      |
| > <i>Transmitted Carrier Power</i>                                 |          |       |                       |                                       | –           |                      |
| >>Transmitted Carrier Power  | M        |       | INTEGER (0..100)      | According to mapping in [22] and [23] | –           |                      |
| > <i>Acknowledged PRACH Preambles</i>                              |          |       |                       | FDD only                              | –           |                      |
| >>Acknowledged PRACH Preambles                                     | M        |       | INTEGER (0..240,...)  | According to mapping in [22]          | –           |                      |
| > <i>UL Timeslot ISCP</i>  |          |       |                       | TDD only                              | –           |                      |
| >>UL Timeslot ISCP   | M        |       | INTEGER (0..127)      | According to mapping in [23]          | –           |                      |
| > <i>SIR</i>   |          |       |                       |                                       | –           |                      |
| >>SIR  | M        |       | INTEGER (0..63)       | According to mapping in [22] and [23] | –           |                      |
| > <i>SIR Error</i>   |          |       |                       | FDD only                              | –           |                      |
| >>SIR Error  | M        |       | INTEGER (0..125)      | According to mapping in [22]          | –           |                      |
| > <i>Transmitted Code Power</i>                                    |          |       |                       |                                       | –           |                      |
| >>Transmitted Code Power   | M        |       | INTEGER (0..127)      | According to mapping in [22] and [23] | –           |                      |
| > <i>RSCP</i>  |          |       |                       | TDD only                              | –           |                      |
| >>RSCP   | M        |       | INTEGER (0..127)      | According to mapping in [23]          | –           |                      |
| > <i>Rx Timing Deviation</i>                                       |          |       |                       | Applicable to 3.84Mcps TDD only       | –           |                      |
| >>Rx Timing Deviation  | M        |       | INTEGER (0..8191)     | According to mapping in [23]          | –           |                      |
| > <i>Round Trip Time</i>   |          |       |                       | FDD only                              | –           |                      |
| >>Round Trip Time  | M        |       | INTEGER (0..32767)    | According to mapping in [22]          | –           |                      |
| > <i>Acknowledged PCPCH Access Preambles</i>                       |          |       |                       | FDD only                              | –           |                      |
| >>Acknowledged PCPCH Access Preambles                              | M        |       | INTEGER (0..15,...)   | According to mapping in [22]          | –           |                      |
| > <i>Detected PCPCH Access Preambles</i>                           |          |       |                       | FDD only                              | –           |                      |
| >>Detected PCPCH Access Preambles                                  | M        |       | INTEGER (0..240,...)  | According to mapping in [22]          | –           |                      |
| > <i>Additional Measurement Thresholds</i>                         |          |       |                       |                                       | –           |                      |
| >> <i>UTRAN GPS Timing of Cell Frames for UE Positioning</i>       |          |       |                       |                                       | –           |                      |
| >>> <i>T<sub>UTRAN-GPS</sub> Measurement Threshold Information</i> | M        |       | 9.2.1.64B             |                                       | YES         | reject               |
| >>> <i>SFN-SFN Observed Time Difference</i>                        |          |       |                       |                                       | –           |                      |
| >>> <i>SFN-SFN Measurement Threshold</i>                           | M        |       | 9.2.1.53C             |                                       | YES         | reject               |

| Information                       |   |  |                  |                                 |     |        |
|-----------------------------------|---|--|------------------|---------------------------------|-----|--------|
| > <u>Rx Timing Deviation LCR</u>  |   |  |                  | Applicable to 1.28Mcps TDD Only | -   |        |
| >> <u>Rx Timing Deviation LCR</u> | M |  | INTEGER (0..511) | According to mapping in [23]    | YES | reject |

### 9.2.3.5A DSCH TDD Information

The *DSCH TDD Information* IE provides information for DSCHs to be established.

| IE/Group Name                  | Presence | Range              | IE Type and Reference | Semantics Description                 |
|--------------------------------|----------|--------------------|-----------------------|---------------------------------------|
| <b>DSCH TDD Information</b>    |          | 1..<maxno ofDSCHs> |                       |                                       |
| >DSCH ID                       | M        |                    | 9.2.1.27              |                                       |
| >CCTrCH ID                     | M        |                    | 9.2.3. <u>32</u>      | DL CCTrCH in which the DSCH is mapped |
| >Transport Format Set          | M        |                    | 9.2.1.59              | For DSCH                              |
| >Allocation/Retention Priority | M        |                    | 9.2.1.1A              |                                       |
| >Frame Handling Priority       | M        |                    | 9.2.1.30              |                                       |
| >ToAWS                         | M        |                    | 9.2.1.61              |                                       |
| >ToAWE                         | M        |                    | 9.2.1.60              |                                       |

| Range Bound         | Explanation                       |
|---------------------|-----------------------------------|
| <i>maxnoofDSCHs</i> | Maximum number of DSCH for one UE |

## CHANGE REQUEST

# 25.433 CR 1028 # rev - # Current version: 5.9.0 #

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the # symbols.

**Proposed change affects:** UICC apps #  ME  Radio Access Network  Core Network

|  |                  |                           |
|--|------------------|---------------------------|
| <b>Title:</b>  | # Review on NBAP |                           |
| <b>Source:</b>   | # RAN3           |                           |
| <b>Work item code:</b>   | # TEI4           | <b>Date:</b> # 16/08/2004 |
| <b>Category:</b>   | # A              | <b>Release:</b> # Rel-5   |
| Use one of the following categories:<br><b>F</b> (correction)<br><b>A</b> (corresponds to a correction in an earlier release)<br><b>B</b> (addition of feature),<br><b>C</b> (functional modification of feature)<br><b>D</b> (editorial modification) |                  |                           |
| Detailed explanations of the above categories can be found in 3GPP <a href="#">TR 21.900</a> .   |                  |                           |
| Use one of the following releases:<br>Ph2 (GSM Phase 2)<br>R96 (Release 1996)<br>R97 (Release 1997)<br>R98 (Release 1998)<br>R99 (Release 1999)<br>Rel-4 (Release 4)<br>Rel-5 (Release 5)<br>Rel-6 (Release 6)<br>Rel-7 (Release 7)                    |                  |                           |

|                           |  |
|---------------------------|--|
| <b>Reason for change:</b> | # In current specification, there are some inconsistency between the IE name used in the procedure text and the tabular format. And Some IEs need to be clarified in the Semantics Description of the tabular format.  |
| <b>Summary of change:</b> | #<br>8.3.6 Radio Link Deletion: Alignment the IE name to the tabular format( <i>Node B Communication Context ID IE, CRNC Communication Context ID IE</i> ).<br><br>8.3.8.2 Dedicated Measurement Initiation: Alignment the DEDICATED MEASUREMENT INITIATION RESPONSE message name to the tabular format<br><br>9.1.17 AUDIT RESPONSE: Clarification to the Semantics Description. There are some IEs that are only used for FDD ( <i>Primary SCH Information IE, Secondary SCH Information IE, Primary CPICH Information IE, Secondary CPICH Information IE, AICH Information IE, PCPCH Information IE, CPCH Information IE, AP-AICH Information IE, CD/CA-ICH Information IE</i> ), and <i>SCH Information IE</i> is only used for 3.84Mcps TDD.<br><br>9.1.37.2 RADIO LINK SETUP RESPONSE (TDD): <i>USCH Information Response IE</i> refers to 9.2.3.29 instead of 9.2.3.28.<br><br>Impact Analysis:<br>Impact assessment towards the previous version of the specification (same release):<br>The impact can be considered isolated because the change affects only some clarifications to the specification. |

**Consequences if not approved:** ☺ The specification will remain unclear to some procedure text and some IEs.

**Clauses affected:** ☺ 8.3.6, 8.3.8.2, 9.1.17, 9.1.37

|                              |                                     |                          |  |  |
|------------------------------|-------------------------------------|--------------------------|--|--|
| <b>Other specs affected:</b> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | Other core specifications<br>Test specifications<br>O&M Specifications | ☺ CR1027 TS 25.433 Rel-4<br>CR1029 TS 25.433 Rel-6 |
|                              | <input checked="" type="checkbox"/> | <input type="checkbox"/> |  |  |
|                              | <input checked="" type="checkbox"/> | <input type="checkbox"/> |  |  |

**Other comments:** ☺

### How to create CRs using this form:


Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ☺ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

### 8.3.6 Radio Link Deletion

/\* partly omitted \*/

#### 8.3.6.2 Successful Operation

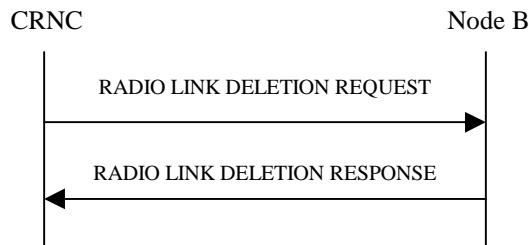

**Figure 36: Radio Link Deletion procedure, Successful Operation**

The procedure is initiated with a RADIO LINK DELETION REQUEST message sent from the CRNC to the Node B using the Communication Control Port assigned to the concerned Node B Communication Context.

Upon receipt of this message, the Node B shall delete the radio link(s) identified by the *RL ID IE*, *Node B Communication Context ID IE* and *CRNC Communication Context ID IE* and release all associated resources and respond to the CRNC with a RADIO LINK DELETION RESPONSE message. [FDD – Resources associated with the TFCI2 bearer shall be released only if all the RLs in the Node B Communication Context are deleted].

[FDD – After deletion of the RL(s), the UL out-of-sync algorithm defined in ref. [10] shall for each of the remaining RL Set(s) use the maximum value of the parameters N\_OUTSYNC\_IND and T\_RLFAILURE that are configured in the cells supporting the radio links of the RL Set and the UL in-sync algorithm defined in ref. [10] shall for each of the remaining RL Set(s) use the minimum value of the parameters N\_INSYNC\_IND that are configured in the cells supporting the radio links of the RL Set.]

#### 8.3.6.3 Unsuccessful Operation

#### 8.3.6.4 Abnormal Conditions


If the RL indicated by the *RL ID IE*, *Node B Communication Context ID IE* and *CRNC Communication Context ID IE* does not exist, the Node B shall respond with the RADIO LINK DELETION RESPONSE message and use the *CRNC Communication Context ID IE* received in the RADIO LINK DELETION REQUEST message.

/\* partly omitted \*/

### 8.3.8 Dedicated Measurement Initiation

/\* partly omitted \*/

### 8.3.8.2 Successful Operation

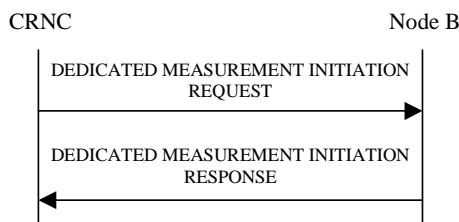

**Figure 38: Dedicated Measurement Initiation procedure, Successful Operation**

The procedure is initiated with a DEDICATED MEASUREMENT INITIATION REQUEST message sent from the CRNC to the Node B using the Communication Control Port assigned to the Node B Communication Context.

Upon reception, the Node B shall initiate the requested measurement according to the parameters given in the DEDICATED MEASUREMENT INITIATION REQUEST message. Unless specified below the meaning of the parameters are given in other specifications.

If the *Node B Communication Context ID* IE equals the reserved value "All NBCC", this measurement request shall apply for all current and future Node B Communication Contexts controlled via the Communication Control Port on which the DEDICATED MEASUREMENT INITIATION REQUEST message was received. Otherwise, this measurement request shall apply for the requested Node B Communication Context ID only.

If the *Node B Communication Context ID* IE equals the reserved value "All NBCC", the measurement request shall be treated as a single measurement, despite applying to multiple contexts. This means that it may only be terminated or failed on "All NBCC".

If the *Node B Communication Context ID* IE equals the reserved value "All NBCC", the measurement shall be initiated only for those Node B Communication Contexts handling a mode (FDD, 3.84Mcps TDD or 1.28Mcps TDD) for which the concerned measurement is specified in [4] and [5]. The initiation of the measurement for a Node B Communication Context may be delayed until the Reconfiguration CFN has elapsed if either a Prepared Reconfiguration exists or a Prepared Reconfiguration no longer exists but the Reconfiguration CFN has not yet elapsed.

If the Dedicated Measurement Object Type is indicated as being "RL" in the DEDICATED MEASUREMENT INITIATION REQUEST message, measurement results shall be reported for all indicated Radio Links.

[FDD – If the Dedicated Measurement Object Type is indicated as being "RLS" in the DEDICATED MEASUREMENT INITIATION REQUEST message, measurement results shall be reported for all indicated Radio Link Sets.]

[FDD - If the Dedicated Measurement Object Type is indicated as being "ALL RL" in the DEDICATED MEASUREMENT INITIATION REQUEST message, measurement results shall be reported for all current and future Radio Links within the Node B Communication Context.]

[TDD - If the Dedicated Measurement Object Type is indicated as being "ALL RLS" in the DEDICATED MEASUREMENT INITIATION REQUEST message, measurement results shall be reported for one existing DPCH per CCTrCH in each used time slot of current and future Radio Links within the Node B Communication Context, provided the measurement type is applicable to the respective DPCH.]

[FDD – If the Dedicated Measurement Object Type is indicated as being "ALL RLS" in the DEDICATED MEASUREMENT INITIATION REQUEST message, measurement results shall be reported for all existing and future Radio Link Sets within the Node B Communication Context.]

[TDD – If the *DPCH ID* IE is provided within the RL Information, the measurement request shall apply for the requested physical channel individually. If no *DPCH ID* IE, *HS-SICH ID* IE and no *PUSCH Information* IE is provided within the RL Information, the measurement request shall apply for one existing physical channel per CCTrCH in each used time slot of the Radio Link, provided the measurement type is applicable to this physical channel.]

[TDD – If the *PUSCH Information* IE is provided within the RL Information, the measurement request shall apply for the requested physical channel individually.]

[TDD – If the *HS-SICH Information* IE is provided within the RL Information, the measurement request shall apply for the requested physical channel individually.]

[TDD - If the *Dedicated Measurement Type* IE is set to "HS-SICH reception quality ", the Node B shall initiate measurements of the failed, missed and total HS-SICH transmissions on all of the HS-SICH assigned to this Node B Communication Context. If either the failed or missed HS-SICH transmission satisfies the requested report characteristics, the Node B shall report the result of both failed and missed transmission measurements along with the total number of transmissions.]

If the *CFN Reporting Indicator* IE is set to "FN Reporting Required", the *CFN* IE shall be included in the DEDICATED MEASUREMENT REPORT message or in the DEDICATED MEASUREMENT [INITIATION](#) RESPONSE message, the latter only in the case the *Report Characteristics* IE is set to "On Demand". The reported CFN shall be the CFN at the time when the measurement value was reported by the layer 3 filter, referred to as point C in the measurement model [25].

[FDD – If the *Number Of Reported Cell Portions* IE is included in the DEDICATED MEASUREMENT INITIATION REQUEST message, the value shall be used to determine how many *Cell Portion ID* IEs and *SIR Value* IEs shall be included in *Best Cell Portions* IE in the DEDICATED MEASUREMENT REPORT message or in the DEDICATED MEASUREMENT [INITIATION](#) RESPONSE message.]

/\* partly omitted \*/

### 9.1.17 AUDIT RESPONSE

| IE/Group Name                            | Presence | Range                                     | IE Type and Reference                                 | Semantics Description                         | Criticality | Assigned Criticality |
|--|----------|---|---|---|-------------|----------------------|
| Message Discriminator                    | M        |   | 9.2.1.45  |   | –           |                      |
| Message Type                             | M        |   | 9.2.1.46  |   | YES         | reject               |
| Transaction ID                           | M        |   | 9.2.1.62  |   | –           |                      |
| End Of Audit Sequence Indicator          | M        |   | 9.2.1.29A   |   | YES         | ignore               |
| <b>Cell Information</b>                  |          | <i>0..&lt;maxCe<br/>llinNodeB&gt;</i>     |   |   | EACH        | ignore               |
| >C-ID                                    | M        |   | 9.2.1.9   |   | –           |                      |
| >Configuration Generation ID             | M        |   | 9.2.1.16  |   | –           |                      |
| >Resource Operational State              | M        |   | 9.2.1.52  |   | –           |                      |
| >Availability Status                     | M        |   | 9.2.1.2   |   | –           |                      |
| >Local Cell ID                           | M        |   | 9.2.1.38  | The local cell that the cell is configured on | –           |                      |
| >Primary SCH Information                 | O        |   | Common Physical Channel Status Information 9.2.1.13A  | <a href="#">Applicable to FDD only</a>        | YES         | ignore               |
| >Secondary SCH Information               | O        |   | Common Physical Channel Status Information 9.2.1.13A  | <a href="#">Applicable to FDD only</a>        | YES         | ignore               |
| >Primary CPICH Information               | O        |   | Common Physical Channel Status Information 9.2.1.13A  | <a href="#">Applicable to FDD only</a>        | YES         | ignore               |
| <b>&gt;Secondary CPICH Information</b>   |          | <i>0..&lt;maxS<br/>CPICHCell<br/>&gt;</i> |   | <a href="#">Applicable to FDD only</a>        | EACH        | ignore               |
| >>Secondary CPICH Individual Information | M        |   | Common Physical Channel Status Information 9.2.1.13A  |   | –           |                      |
| >Primary CCPCH Information               | O        |   | Common Physical Channel Status Information 9.2.1.13A  |   | YES         | ignore               |
| >BCH Information                         | O        |   | Common Transport Channel Status Information 9.2.1.14B |   | YES         | ignore               |
| <b>&gt;Secondary CCPCH</b>               |          | <i>0..&lt;maxS</i>                        |   |   | EACH        | ignore               |

| Information                              |   | CCPCHCe<br>II>      |   |  |      |        |
|--|---|---------------------|---|--|------|--------|
| >>Secondary CCPCH Individual Information | M |                     | Common Physical Channel Status Information 9.2.1.13A  |  | -    |        |
| >PCH Information                         | O |                     | Common Transport Channel Status Information 9.2.1.14B |  | YES  | ignore |
| >PICH Information                        | O |                     | Common Physical Channel Status Information 9.2.1.13A  |  | YES  | ignore |
| >FACH Information                        |   | 0..<maxFA CHCell>   |   |  | EACH | ignore |
| >>FACH Individual Information            | M |                     | Common Transport Channel Status Information 9.2.1.14B |  | -    |        |
| >PRACH Information                       |   | 0..<maxP RACHCell > |   |  | EACH | ignore |
| >>PRACH Individual Information           | M |                     | Common Physical Channel Status Information 9.2.1.13A  |  | -    |        |
| >RACH Information                        |   | 0..<maxR ACHCell>   |   |  | EACH | ignore |
| >>RACH Individual Information            | M |                     | Common Transport Channel Status Information 9.2.1.14B |  | -    |        |
| >AICH Information                        |   | 0..<maxP RACHCell > |   | <a href="#">Applicable to FDD only</a> | EACH | ignore |
| >>AICH Individual Information            | M |                     | Common Physical Channel Status Information 9.2.1.13A  |  | -    |        |
| >PCPCH Information                       |   | 0..<maxP CPCHCell > |   | <a href="#">Applicable to FDD only</a> | EACH | ignore |
| >>PCPCH Individual Information           | M |                     | Common Physical Channel                               |  | -    |        |

|   |   |                      |   |   |      |        |
|---|---|----------------------|---|---|------|--------|
|   |   |                      | Status Information 9.2.1.13A                          |   |      |        |
| <b>&gt;CPCH Information</b>                   |   | 0..<maxC PCHCell>    |   | <a href="#">Applicable to FDD only</a>                              | EACH | ignore |
| >>CPCH Individual Information                 | M |                      | Common Transport Channel Status Information 9.2.1.14B |   | —    |        |
| <b>&gt;AP-AICH Information</b>                |   | 0..<maxC PCHCell>    |   | <a href="#">Applicable to FDD only</a>                              | EACH | ignore |
| >>AP-AICH Individual Information              | M |                      | Common Physical Channel Status Information 9.2.1.13A  |   | —    |        |
| <b>&gt;CD/CA-ICH Information</b>              |   | 0..<maxC PCHCell>    |   | <a href="#">Applicable to FDD only</a>                              | EACH | ignore |
| >>CD/CA-ICH Individual Information            | M |                      | Common Physical Channel Status Information 9.2.1.13A  |   | —    |        |
| >SCH Information                              | O |                      | Common Physical Channel Status Information 9.2.1.13A  | TDD Sync Channel<br><a href="#">Applicable to 3.84Mcps TDD only</a> | YES  | ignore |
| <b>&gt;FPACH Information</b>                  |   | 0..<maxFP ACHCell>   |   | Applicable to 1.28Mcps TDD only                                     | EACH | ignore |
| >>FPACH Individual Information                | M |                      | Common Physical Channel Status Information 9.2.1.13A  |   | —    |        |
| >DwPCH Information                            | O |                      | Common Physical Channel Status Information 9.2.1.13A  | Applicable to 1.28Mcps TDD only                                     | YES  | ignore |
| <b>&gt;HS-DSCH Resources Information</b>      |   | 0..1                 |   |   | YES  | ignore |
| >>Resource Operational State                  | M |                      | 9.2.1.52  |   | —    |        |
| >>Availability Status                         | M |                      | 9.2.1.2   |   | —    |        |
| <b>Communication Control Port Information</b> |   | 0..<maxC CPinNode B> |   |   | EACH | ignore |
| >Communication Control Port ID                | M |                      | 9.2.1.15  |   | —    |        |
| >Resource Operational                         | M |                      | 9.2.1.52  |   | —    |        |

| State  |   |                                       |            |          |      |        |
|--|---|---------------------------------------|------------|----------|------|--------|
| >Availability Status                         | M |                                       | 9.2.1.2    |          | —    |        |
| <b>Local Cell Information</b>                |   | <i>0..&lt;maxLocalCellInNodeB&gt;</i> |            |          | EACH | ignore |
| >Local Cell ID                               | M |                                       | 9.2.1.38   |          | —    |        |
| >DL Or Global Capacity Credit                | M |                                       | 9.2.1.20B  |          | —    |        |
| >UL Capacity Credit                          | O |                                       | 9.2.1.65A  |          | —    |        |
| >Common Channels Capacity Consumption Law    | M |                                       | 9.2.1.9A   |          | —    |        |
| >Dedicated Channels Capacity Consumption Law | M |                                       | 9.2.1.20A  |          | —    |        |
| >Maximum DL Power Capability                 | O |                                       | 9.2.1.39   |          | —    |        |
| >Minimum Spreading Factor                    | O |                                       | 9.2.1.47   |          | —    |        |
| >Minimum DL Power Capability                 | O |                                       | 9.2.1.46A  |          | —    |        |
| >Local Cell Group ID                         | O |                                       | 9.2.1.37A  |          | —    |        |
| >Reference Clock Availability                | O |                                       | 9.2.3.14A  | TDD only | YES  | ignore |
| >Power Local Cell Group ID                   | O |                                       | 9.2.1.49B  |          | YES  | ignore |
| >HSDPA Capability                            | O |                                       | 9.2.1.31Ga |          | YES  | ignore |
| <b>Local Cell Group Information</b>          |   | <i>0..&lt;maxLocalCellInNodeB&gt;</i> |            |          | EACH | ignore |
| >Local Cell Group ID                         | M |                                       | 9.2.1.37A  |          | —    |        |
| >DL Or Global Capacity Credit                | M |                                       | 9.2.1.20B  |          | —    |        |
| >UL Capacity Credit                          | O |                                       | 9.2.1.65A  |          | —    |        |
| >Common Channels Capacity Consumption Law    | M |                                       | 9.2.1.9A   |          | —    |        |
| >Dedicated Channels Capacity Consumption Law | M |                                       | 9.2.1.20A  |          | —    |        |
| Criticality Diagnostics                      | O |                                       | 9.2.1.17   |          | YES  | ignore |
| <b>Power Local Cell Group Information</b>    |   | <i>0..&lt;maxLocalCellInNodeB&gt;</i> |            |          | EACH | ignore |
| >Power Local Cell Group ID                   | M |                                       | 9.2.1.49B  |          | —    |        |
| >Maximum DL Power Capability                 | M |                                       | 9.2.1.39   |          | —    |        |

## 9.1.37 RADIO LINK SETUP RESPONSE

### 9.1.37.2 TDD Message

| IE/Group Name                      | Presence | Range | IE Type and Reference                     | Semantics Description                                       | Criticality | Assigned Criticality |
|------------------------------------|----------|-------|---|---|-------------|----------------------|
| Message Discriminator              | M        |       | 9.2.1.45                                  |   | –           |                      |
| Message Type                       | M        |       | 9.2.1.46                                  |   | YES         | reject               |
| Transaction ID                     | M        |       | 9.2.1.62                                  |   | –           |                      |
| CRNC Communication Context ID      | M        |       | 9.2.1.18                                  | The reserved value "All CRNCCC" shall not be used.          | YES         | ignore               |
| Node B Communication Context ID    | M        |       | 9.2.1.48                                  | The reserved value "All NBCC" shall not be used.            | YES         | ignore               |
| Communication Control Port ID      | M        |       | 9.2.1.15                                  |   | YES         | ignore               |
| <b>RL Information Response</b>     |          | 0..1  |   | Mandatory for 3.84Mcps TDD. Not Applicable to 1.28Mcps TDD. | YES         | ignore               |
| >RL ID                             | M        |       | 9.2.1.53                                  |   | –           |                      |
| >UL Time Slot ISCP Info            | M        |       | 9.2.3.26D                                 |   | –           |                      |
| >UL PhysCH SF Variation            | M        |       | 9.2.3.26B                                 |   | –           |                      |
| >DCH Information Response          | O        |       | 9.2.1.20C                                 |   | YES         | ignore               |
| >DSCH Information Response         | O        |       | 9.2.1.27A                                 |   | YES         | ignore               |
| >USCH Information Response         | O        |       | 9.2.3.29 <del>B</del>                     |   | YES         | ignore               |
| Criticality Diagnostics            | O        |       | 9.2.1.17                                  |   | YES         | ignore               |
| <b>RL Information Response LCR</b> |          | 0..1  |   | Mandatory for 1.28Mcps TDD. Not Applicable to 3.84Mcps TDD. | YES         | ignore               |
| >RL ID                             | M        |       | 9.2.1.53                                  |   | –           |                      |
| >UL Time Slot ISCP Info LCR        | M        |       | 9.2.3.26F                                 |   | –           |                      |
| >UL PhysCH SF Variation            | M        |       | 9.2.3.26B                                 |   | –           |                      |
| >DCH Information Response          | O        |       | 9.2.1.20C                                 |   | YES         | ignore               |
| >DSCH Information Response         | O        |       | 9.2.1.27A                                 |   | YES         | ignore               |
| >USCH Information Response         | O        |       | 9.2.3.29 <del>B</del>                     |   | YES         | ignore               |
| HS-DSCH Information Response       | O        |       | HS-DSCH TDD Information Response 9.2.3.5G |   | YES         | ignore               |

## CHANGE REQUEST

# 25.433 CR 1029 # rev - # Current version: 6.2.0 #

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the # symbols.

**Proposed change affects:** UICC apps #  ME  Radio Access Network  Core Network

|  |                  |                           |
|--|------------------|---------------------------|
| <b>Title:</b>  | # Review on NBAP |                           |
| <b>Source:</b>   | # RAN3           |                           |
| <b>Work item code:</b>   | # TEI4           | <b>Date:</b> # 16/08/2004 |
| <b>Category:</b>   | # A              | <b>Release:</b> # Rel-6   |
| Use <u>one</u> of the following categories:<br><input type="checkbox"/> F (correction)<br><input type="checkbox"/> A (corresponds to a correction in an earlier release)<br><input type="checkbox"/> B (addition of feature),<br><input type="checkbox"/> C (functional modification of feature)<br><input type="checkbox"/> D (editorial modification)<br>Detailed explanations of the above categories can be found in 3GPP <a href="#">TR 21.900</a> .<br>Use <u>one</u> of the following releases:<br><input type="checkbox"/> Ph2 (GSM Phase 2)<br><input type="checkbox"/> R96 (Release 1996)<br><input type="checkbox"/> R97 (Release 1997)<br><input type="checkbox"/> R98 (Release 1998)<br><input type="checkbox"/> R99 (Release 1999)<br><input type="checkbox"/> Rel-4 (Release 4)<br><input type="checkbox"/> Rel-5 (Release 5)<br><input type="checkbox"/> Rel-6 (Release 6)<br><input type="checkbox"/> Rel-7 (Release 7) |                  |                           |

|                             |   |
|-----------------------------|---|
| <b>Reason for change:</b> # | In current specification, there are some inconsistency between the IE name used in the procedure text and the tabular format. And Some IEs need to be clarified in the Semantics Description of the tabular format.   |
| <b>Summary of change:</b> # | <p>8.3.6 Radio Link Deletion: Alignment the IE name to the tabular format(<i>Node B Communication Context ID IE, CRNC Communication Context ID IE</i>).</p> <p>8.3.8.2 Dedicated Measurement Initiation: Alignment the DEDICATED MEASUREMENT INITIATION RESPONSE message name to the tabular format</p> <p>9.1.17 AUDIT RESPONSE: Clarification to the Semantics Description. There are some IEs that are only used for FDD (<i>Primary SCH Information IE, Secondary SCH Information IE, Primary CPICH Information IE, Secondary CPICH Information IE, AICH Information IE, PCPCH Information IE, CPCH Information IE, AP-AICH Information IE, CD/CA-ICH Information IE</i>), and <i>SCH Information IE</i> is only used for 3.84Mcps TDD.</p> <p>9.1.37.2 RADIO LINK SETUP RESPONSE (TDD): <i>USCH Information Response IE</i> refers to 9.2.3.29 instead of 9.2.3.28.</p> <p><b>Impact Analysis:</b><br/>           Impact assessment towards the previous version of the specification (same release):<br/>           The impact can be considered isolated because the change affects only some clarifications to the specification.</p> |

**Consequences if not approved:** ☺ The specification will remain unclear to some procedure text and some IEs.

**Clauses affected:** ☺ 8.3.6, 8.3.8.2, 9.1.17, 9.1.37

|                              |          |          |  |  |
|------------------------------|----------|----------|--|--|
| <b>Other specs affected:</b> | <b>Y</b> | <b>N</b> | Other core specifications<br>Test specifications<br>O&M Specifications | ☺ CR1027 TS 25.433 Rel-4<br>CR1028 TS 25.433 Rel-5 |
|                              | <b>X</b> |          |  |  |
|                              |          | <b>X</b> |  |  |

**Other comments:** ☺

### How to create CRs using this form:


Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ☺ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

### 8.3.6 Radio Link Deletion

/\* partly omitted \*/

#### 8.3.6.2 Successful Operation

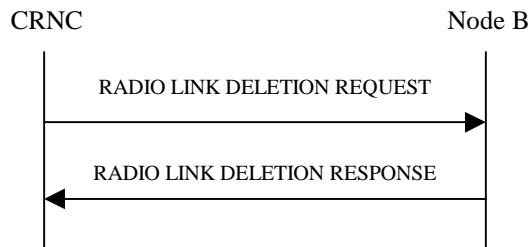

**Figure 36: Radio Link Deletion procedure, Successful Operation**

The procedure is initiated with a RADIO LINK DELETION REQUEST message sent from the CRNC to the Node B using the Communication Control Port assigned to the concerned Node B Communication Context.

Upon receipt of this message, the Node B shall delete the radio link(s) identified by the *RL ID IE*, *Node B Communication Context ID IE* and *CRNC Communication Context ID IE* and release all associated resources and respond to the CRNC with a RADIO LINK DELETION RESPONSE message. [FDD – Resources associated with the TFCI2 bearer shall be released only if all the RLs in the Node B Communication Context are deleted].

[FDD – After deletion of the RL(s), the UL out-of-sync algorithm defined in ref. [10] shall for each of the remaining RL Set(s) use the maximum value of the parameters N\_OUTSYNC\_IND and T\_RLFAILURE that are configured in the cells supporting the radio links of the RL Set and the UL in-sync algorithm defined in ref. [10] shall for each of the remaining RL Set(s) use the minimum value of the parameters N\_INSYNC\_IND that are configured in the cells supporting the radio links of the RL Set.]

#### 8.3.6.3 Unsuccessful Operation

#### 8.3.6.4 Abnormal Conditions


If the RL indicated by the *RL ID IE*, *Node B Communication Context ID IE* and *CRNC Communication Context ID IE* does not exist, the Node B shall respond with the RADIO LINK DELETION RESPONSE message and use the *CRNC Communication Context ID IE* received in the RADIO LINK DELETION REQUEST message.

/\* partly omitted \*/

### 8.3.8 Dedicated Measurement Initiation

/\* partly omitted \*/

### 8.3.8.2 Successful Operation

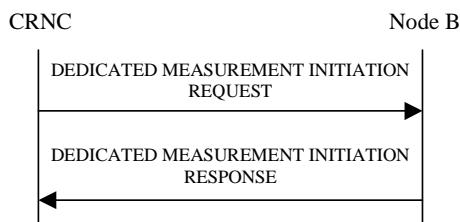

**Figure 38: Dedicated Measurement Initiation procedure, Successful Operation**

The procedure is initiated with a DEDICATED MEASUREMENT INITIATION REQUEST message sent from the CRNC to the Node B using the Communication Control Port assigned to the Node B Communication Context.

Upon reception, the Node B shall initiate the requested measurement according to the parameters given in the DEDICATED MEASUREMENT INITIATION REQUEST message. Unless specified below the meaning of the parameters are given in other specifications.

If the *Node B Communication Context ID* IE equals the reserved value "All NBCC", this measurement request shall apply for all current and future Node B Communication Contexts controlled via the Communication Control Port on which the DEDICATED MEASUREMENT INITIATION REQUEST message was received. Otherwise, this measurement request shall apply for the requested Node B Communication Context ID only.

If the *Node B Communication Context ID* IE equals the reserved value "All NBCC", the measurement request shall be treated as a single measurement, despite applying to multiple contexts. This means that it may only be terminated or failed on "All NBCC".

If the *Node B Communication Context ID* IE equals the reserved value "All NBCC", the measurement shall be initiated only for those Node B Communication Contexts handling a mode (FDD, 3.84Mcps TDD or 1.28Mcps TDD) for which the concerned measurement is specified in [4] and [5]. The initiation of the measurement for a Node B Communication Context may be delayed until the Reconfiguration CFN has elapsed if either a Prepared Reconfiguration exists or a Prepared Reconfiguration no longer exists but the Reconfiguration CFN has not yet elapsed.

If the Dedicated Measurement Object Type is indicated as being "RL" in the DEDICATED MEASUREMENT INITIATION REQUEST message, measurement results shall be reported for all indicated Radio Links.

[FDD – If the Dedicated Measurement Object Type is indicated as being "RLS" in the DEDICATED MEASUREMENT INITIATION REQUEST message, measurement results shall be reported for all indicated Radio Link Sets.]

[FDD - If the Dedicated Measurement Object Type is indicated as being "ALL RL" in the DEDICATED MEASUREMENT INITIATION REQUEST message, measurement results shall be reported for all current and future Radio Links within the Node B Communication Context.]

[TDD - If the Dedicated Measurement Object Type is indicated as being "ALL RLS" in the DEDICATED MEASUREMENT INITIATION REQUEST message, measurement results shall be reported for one existing DPCH per CCTrCH in each used time slot of current and future Radio Links within the Node B Communication Context, provided the measurement type is applicable to the respective DPCH.]

[FDD – If the Dedicated Measurement Object Type is indicated as being "ALL RLS" in the DEDICATED MEASUREMENT INITIATION REQUEST message, measurement results shall be reported for all existing and future Radio Link Sets within the Node B Communication Context.]

[TDD – If the *DPCH ID* IE is provided within the RL Information, the measurement request shall apply for the requested physical channel individually. If no *DPCH ID* IE, *HS-SICH ID* IE and no *PUSCH Information* IE is provided within the RL Information, the measurement request shall apply for one existing physical channel per CCTrCH in each used time slot of the Radio Link, provided the measurement type is applicable to this physical channel.]

[TDD – If the *PUSCH Information* IE is provided within the RL Information, the measurement request shall apply for the requested physical channel individually.]

[TDD – If the *HS-SICH Information* IE is provided within the RL Information, the measurement request shall apply for the requested physical channel individually.]

[TDD - If the *Dedicated Measurement Type* IE is set to "HS-SICH reception quality ", the Node B shall initiate measurements of the failed, missed and total HS-SICH transmissions on all of the HS-SICH assigned to this Node B Communication Context. If either the failed or missed HS-SICH transmission satisfies the requested report characteristics, the Node B shall report the result of both failed and missed transmission measurements along with the total number of transmissions.]

If the *CFN Reporting Indicator* IE is set to "FN Reporting Required", the *CFN* IE shall be included in the DEDICATED MEASUREMENT REPORT message or in the DEDICATED MEASUREMENT [INITIATION](#) RESPONSE message, the latter only in the case the *Report Characteristics* IE is set to "On Demand". The reported CFN shall be the CFN at the time when the measurement value was reported by the layer 3 filter, referred to as point C in the measurement model [25].

[FDD – If the *Number Of Reported Cell Portions* IE is included in the DEDICATED MEASUREMENT INITIATION REQUEST message, the value shall be used to determine how many *Cell Portion ID* IEs and *SIR Value* IEs shall be included in *Best Cell Portions* IE in the DEDICATED MEASUREMENT REPORT message or in the DEDICATED MEASUREMENT [INITIATION](#) RESPONSE message.]

/\* partly omitted \*/

### 9.1.17 AUDIT RESPONSE

| IE/Group Name                            | Presence | Range                                     | IE Type and Reference                                 | Semantics Description                         | Criticality | Assigned Criticality |
|--|----------|---|---|---|-------------|----------------------|
| Message Discriminator                    | M        |   | 9.2.1.45  |   | –           |                      |
| Message Type                             | M        |   | 9.2.1.46  |   | YES         | reject               |
| Transaction ID                           | M        |   | 9.2.1.62  |   | –           |                      |
| End Of Audit Sequence Indicator          | M        |   | 9.2.1.29A   |   | YES         | ignore               |
| <b>Cell Information</b>                  |          | <i>0..&lt;maxCe<br/>llinNodeB&gt;</i>     |   |   | EACH        | ignore               |
| >C-ID                                    | M        |   | 9.2.1.9   |   | –           |                      |
| >Configuration Generation ID             | M        |   | 9.2.1.16  |   | –           |                      |
| >Resource Operational State              | M        |   | 9.2.1.52  |   | –           |                      |
| >Availability Status                     | M        |   | 9.2.1.2   |   | –           |                      |
| >Local Cell ID                           | M        |   | 9.2.1.38  | The local cell that the cell is configured on | –           |                      |
| >Primary SCH Information                 | O        |   | Common Physical Channel Status Information 9.2.1.13A  | <a href="#">Applicable to FDD only</a>        | YES         | ignore               |
| >Secondary SCH Information               | O        |   | Common Physical Channel Status Information 9.2.1.13A  | <a href="#">Applicable to FDD only</a>        | YES         | ignore               |
| >Primary CPICH Information               | O        |   | Common Physical Channel Status Information 9.2.1.13A  | <a href="#">Applicable to FDD only</a>        | YES         | ignore               |
| <b>&gt;Secondary CPICH Information</b>   |          | <i>0..&lt;maxS<br/>CPICHCell<br/>&gt;</i> |   | <a href="#">Applicable to FDD only</a>        | EACH        | ignore               |
| >>Secondary CPICH Individual Information | M        |   | Common Physical Channel Status Information 9.2.1.13A  |   | –           |                      |
| >Primary CCPCH Information               | O        |   | Common Physical Channel Status Information 9.2.1.13A  |   | YES         | ignore               |
| >BCH Information                         | O        |   | Common Transport Channel Status Information 9.2.1.14B |   | YES         | ignore               |
| <b>&gt;Secondary CCPCH</b>               |          | <i>0..&lt;maxS</i>                        |   |   | EACH        | ignore               |

| Information                              |   | CCPCHCe<br>II>      |   |  |      |        |
|--|---|---------------------|---|--|------|--------|
| >>Secondary CCPCH Individual Information | M |                     | Common Physical Channel Status Information 9.2.1.13A  |  | -    |        |
| >PCH Information                         | O |                     | Common Transport Channel Status Information 9.2.1.14B |  | YES  | ignore |
| >PICH Information                        | O |                     | Common Physical Channel Status Information 9.2.1.13A  |  | YES  | ignore |
| >FACH Information                        |   | 0..<maxFA CHCell>   |   |  | EACH | ignore |
| >>FACH Individual Information            | M |                     | Common Transport Channel Status Information 9.2.1.14B |  | -    |        |
| >PRACH Information                       |   | 0..<maxP RACHCell > |   |  | EACH | ignore |
| >>PRACH Individual Information           | M |                     | Common Physical Channel Status Information 9.2.1.13A  |  | -    |        |
| >RACH Information                        |   | 0..<maxR ACHCell>   |   |  | EACH | ignore |
| >>RACH Individual Information            | M |                     | Common Transport Channel Status Information 9.2.1.14B |  | -    |        |
| >AICH Information                        |   | 0..<maxP RACHCell > |   | <a href="#">Applicable to FDD only</a> | EACH | ignore |
| >>AICH Individual Information            | M |                     | Common Physical Channel Status Information 9.2.1.13A  |  | -    |        |
| >PCPCH Information                       |   | 0..<maxP CPCHCell > |   | <a href="#">Applicable to FDD only</a> | EACH | ignore |
| >>PCPCH Individual Information           | M |                     | Common Physical Channel                               |  | -    |        |

|   |   |                      |   |   |      |        |
|---|---|----------------------|---|---|------|--------|
|   |   |                      | Status Information 9.2.1.13A                          |   |      |        |
| <b>&gt;CPCH Information</b>                   |   | 0..<maxC PCHCell>    |   | <a href="#">Applicable to FDD only</a>                              | EACH | ignore |
| >>CPCH Individual Information                 | M |                      | Common Transport Channel Status Information 9.2.1.14B |   | —    |        |
| <b>&gt;AP-AICH Information</b>                |   | 0..<maxC PCHCell>    |   | <a href="#">Applicable to FDD only</a>                              | EACH | ignore |
| >>AP-AICH Individual Information              | M |                      | Common Physical Channel Status Information 9.2.1.13A  |   | —    |        |
| <b>&gt;CD/CA-ICH Information</b>              |   | 0..<maxC PCHCell>    |   | <a href="#">Applicable to FDD only</a>                              | EACH | ignore |
| >>CD/CA-ICH Individual Information            | M |                      | Common Physical Channel Status Information 9.2.1.13A  |   | —    |        |
| >SCH Information                              | O |                      | Common Physical Channel Status Information 9.2.1.13A  | TDD Sync Channel<br><a href="#">Applicable to 3.84Mcps TDD only</a> | YES  | ignore |
| <b>&gt;FPACH Information</b>                  |   | 0..<maxFP ACHCell>   |   | Applicable to 1.28Mcps TDD only                                     | EACH | ignore |
| >>FPACH Individual Information                | M |                      | Common Physical Channel Status Information 9.2.1.13A  |   | —    |        |
| >DwPCH Information                            | O |                      | Common Physical Channel Status Information 9.2.1.13A  | Applicable to 1.28Mcps TDD only                                     | YES  | ignore |
| <b>&gt;HS-DSCH Resources Information</b>      |   | 0..1                 |   |   | YES  | ignore |
| >>Resource Operational State                  | M |                      | 9.2.1.52  |   | —    |        |
| >>Availability Status                         | M |                      | 9.2.1.2   |   | —    |        |
| <b>Communication Control Port Information</b> |   | 0..<maxC CPinNode B> |   |   | EACH | ignore |
| >Communication Control Port ID                | M |                      | 9.2.1.15  |   | —    |        |
| >Resource Operational                         | M |                      | 9.2.1.52  |   | —    |        |

|  |   |                                  |            |          |      |        |
|--|---|----------------------------------|------------|----------|------|--------|
| State  |   |                                  |            |          |      |        |
| >Availability Status                         | M |                                  | 9.2.1.2    |          | —    |        |
| <b>Local Cell Information</b>                |   | 0..<maxLo<br>calCellinN<br>odeB> |            |          | EACH | ignore |
| >Local Cell ID                               | M |                                  | 9.2.1.38   |          | —    |        |
| >DL Or Global Capacity Credit                | M |                                  | 9.2.1.20B  |          | —    |        |
| >UL Capacity Credit                          | O |                                  | 9.2.1.65A  |          | —    |        |
| >Common Channels Capacity Consumption Law    | M |                                  | 9.2.1.9A   |          | —    |        |
| >Dedicated Channels Capacity Consumption Law | M |                                  | 9.2.1.20A  |          | —    |        |
| >Maximum DL Power Capability                 | O |                                  | 9.2.1.39   |          | —    |        |
| >Minimum Spreading Factor                    | O |                                  | 9.2.1.47   |          | —    |        |
| >Minimum DL Power Capability                 | O |                                  | 9.2.1.46A  |          | —    |        |
| >Local Cell Group ID                         | O |                                  | 9.2.1.37A  |          | —    |        |
| >Reference Clock Availability                | O |                                  | 9.2.3.14A  | TDD only | YES  | ignore |
| >Power Local Cell Group ID                   | O |                                  | 9.2.1.49B  |          | YES  | ignore |
| >HSDPA Capability                            | O |                                  | 9.2.1.31Ga |          | YES  | ignore |
| <b>Local Cell Group Information</b>          |   | 0..<maxLo<br>calCellinN<br>odeB> |            |          | EACH | ignore |
| >Local Cell Group ID                         | M |                                  | 9.2.1.37A  |          | —    |        |
| >DL Or Global Capacity Credit                | M |                                  | 9.2.1.20B  |          | —    |        |
| >UL Capacity Credit                          | O |                                  | 9.2.1.65A  |          | —    |        |
| >Common Channels Capacity Consumption Law    | M |                                  | 9.2.1.9A   |          | —    |        |
| >Dedicated Channels Capacity Consumption Law | M |                                  | 9.2.1.20A  |          | —    |        |
| Criticality Diagnostics                      | O |                                  | 9.2.1.17   |          | YES  | ignore |
| <b>Power Local Cell Group Information</b>    |   | 0..<maxLo<br>calCellinN<br>odeB> |            |          | EACH | ignore |
| >Power Local Cell Group ID                   | M |                                  | 9.2.1.49B  |          | —    |        |
| >Maximum DL Power Capability                 | M |                                  | 9.2.1.39   |          | —    |        |

## 9.1.37 RADIO LINK SETUP RESPONSE

### 9.1.37.2 TDD Message

| IE/Group Name                   | Presence | Range | IE Type and Reference | Semantics Description                              | Criticality | Assigned Criticality |
|---------------------------------|----------|-------|-----------------------|--|-------------|----------------------|
| Message Discriminator           | M        |       | 9.2.1.45              |  | —           |                      |
| Message Type                    | M        |       | 9.2.1.46              |  | YES         | reject               |
| Transaction ID                  | M        |       | 9.2.1.62              |  | —           |                      |
| CRNC Communication Context ID   | M        |       | 9.2.1.18              | The reserved value "All CRNCCC" shall not be used. | YES         | ignore               |
| Node B Communication Context ID | M        |       | 9.2.1.48              | The reserved value "All NBCC" shall                | YES         | ignore               |

|                                    |   |      |   |   |            |
|------------------------------------|---|------|---|---|------------|
|                                    |   |      | not be used.                              |   |            |
| Communication Control Port ID      | M |      | 9.2.1.15                                  |   | YES ignore |
| <b>RL Information Response</b>     |   | 0..1 |   | Mandatory for 3.84Mcps TDD. Not Applicable to 1.28Mcps TDD. | YES ignore |
| >RL ID                             | M |      | 9.2.1.53                                  | –   |            |
| >UL Time Slot ISCP Info            | M |      | 9.2.3.26D                                 | –   |            |
| >UL PhysCH SF Variation            | M |      | 9.2.3.26B                                 | –   |            |
| >DCH Information Response          | O |      | 9.2.1.20C                                 |   | YES ignore |
| >DSCH Information Response         | O |      | 9.2.1.27A                                 |   | YES ignore |
| >USCH Information Response         | O |      | 9.2.3.29 <sup>8</sup>                     |   | YES ignore |
| Criticality Diagnostics            | O |      | 9.2.1.17                                  |   | YES ignore |
| <b>RL Information Response LCR</b> |   | 0..1 |   | Mandatory for 1.28Mcps TDD. Not Applicable to 3.84Mcps TDD. | YES ignore |
| >RL ID                             | M |      | 9.2.1.53                                  | –   |            |
| >UL Time Slot ISCP Info LCR        | M |      | 9.2.3.26F                                 | –   |            |
| >UL PhysCH SF Variation            | M |      | 9.2.3.26B                                 | –   |            |
| >DCH Information Response          | O |      | 9.2.1.20C                                 |   | YES ignore |
| >DSCH Information Response         | O |      | 9.2.1.27A                                 |   | YES ignore |
| >USCH Information Response         | O |      | 9.2.3.29 <sup>8</sup>                     |   | YES ignore |
| HS-DSCH Information Response       | O |      | HS-DSCH TDD Information Response 9.2.3.5G |   | YES ignore |