

**3GPP TSG RAN WG1 Meeting #9  
Dresden, Germany, 30 Nov - 3 Dec 1999**

**Document R1-99J28**

e.g. for 3GPP use the format TP-99xxx  
or for SMG, use the format P-99-xxx

|   |  |   |
|---|--|---|
| <h2 style="margin: 0;">CHANGE REQUEST</h2>  |  | <i>Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.</i> |
| <b>25.222</b>   | <b>CR 008rev1</b>  | Current Version: <b>3.0.0</b>   |
| <small>GSM (AA.BB) or 3G (AA.BBB) specification number ↑</small>                              | <small>↑ CR number as allocated by MCC support team</small>      |   |
| For submission to: <b>TAG-RAN#6</b><br><small>list expected approval meeting # here ↑</small> | for approval for information <input checked="" type="checkbox"/> | strategic <input type="checkbox"/><br>non-strategic <input type="checkbox"/> <small>(for SMG use only)</small>          |

Form: CR cover sheet, version 2 for 3GPP and SMG      The latest version of this form is available from: <ftp://ftp.3gpp.org/Information/CR-Form-v2.doc>

**Proposed change affects:**      (U)SIM       ME       UTRAN / Radio       Core Network   
(at least one should be marked with an X)

**Source:**      Siemens      **Date:**      1999-11-25

**Subject:**      TFCI coding in TDD

**Work item:**      \_\_\_\_\_

|                  |  |                 |  |
|------------------|--|-----------------|--|
| <b>Category:</b> | F Correction <input checked="" type="checkbox"/><br>A Corresponds to a correction in an earlier release <input type="checkbox"/><br>B Addition of feature <input type="checkbox"/><br>C Functional modification of feature <input type="checkbox"/><br>D Editorial modification <input type="checkbox"/> | <b>Release:</b> | Phase 2 <input type="checkbox"/><br>Release 96 <input type="checkbox"/><br>Release 97 <input type="checkbox"/><br>Release 98 <input type="checkbox"/><br>Release 99 <input checked="" type="checkbox"/><br>Release 00 <input type="checkbox"/> |
|------------------|--|-----------------|--|

(only one category shall be marked with an X)

**Reason for change:**      Description of TFCI coding for normal and short length cases is quite different and does not specify coding process completely. Also dependency on OVFS sequences defined externally which should be removed.  
 Remove narrative text in 4.3.1  
 Change 4.3.1.1 to more specification-like form  
 Add 4.3.1.2.1, 4.3.1.2.2 section headings to make clearer different rules

**Clauses affected:**      4.2.13, 4.3.1, 4.3.1.1, 4.3.1.2

|                              |  |  |
|------------------------------|--|--|
| <b>Other specs affected:</b> | Other 3G core specifications <input type="checkbox"/> → List of CRs:<br>Other GSM core specifications <input type="checkbox"/> → List of CRs:<br>MS test specifications <input type="checkbox"/> → List of CRs:<br>BSS test specifications <input type="checkbox"/> → List of CRs:<br>O&M specifications <input type="checkbox"/> → List of CRs: |  |
|------------------------------|--|--|

**Other comments:**      Due to a limitation of MS-Word the original 4.3.1-1 cannot be deleted in markup mode.

## 4.2.13 Transport format detection

Transport format detection can be performed both with and without Transport Format Combination Indicator (TFCI). If a TFCI is transmitted, the receiver detects the transport format combination from the TFCI. When no TFCI is transmitted, so called blind transport format detection may be used, i.e. the receiver side uses the possible transport format combinations as a priori information.

### 4.2.13.1 Blind transport format detection

Blind transport format detection may be performed in the receiver by trying all possible combinations of the transport format.

### 4.2.13.2 Explicit transport format detection based on TFCI

#### 4.2.13.2.1 Transport Format Combination Indicator (TFCI)

The Transport Format Combination Indicator (TFCI) informs the receiver of the transport format combination of the CCTrCHs. As soon as the TFCI is detected, the transport format combination, and hence the individual transport channels' transport formats are known, and decoding of the transport channels can be performed.


## 4.3 Coding for layer 1 control

### 4.3.1 Coding of transport format combination indicator (TFCI)

~~The number of TFCI bits is variable and is set at the beginning of the call via higher layer signalling. Encoding of the TFCI bits depends on the number of them. If there are 6-10 bits of TFCI the channel encoding is done as described in section 4.3.1.1. Also specific coding of less than 6 bits is possible as explained in section 4.3.1.23. For improved TFCI detection reliability repetition is used to increase the number of TFCI bits. Additionally, with any TFCI coding scheme it is assumed that in the receiver Combining of two successive TFCI words shall will be performed if the shortest transmission time interval of any constituent TrCH is at least 20 ms.~~

#### 4.3.1.1 ~~Default TFCI word~~ Coding of long TFCI lengths

The TFCI bits are encoded using a (32, 10) sub-code of the second order Reed-Muller code. The coding procedure is as shown in figure 4.3.3.1-1.

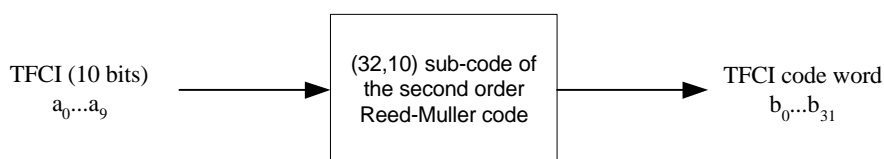

**Figure 4.3.3.1-1: Channel coding of TFCI bits**

TFCI is encoded by the (32,10) sub-code of second order Reed-Muller code. The code words of the (32,10) sub-code of second order Reed-Muller code are linear combination of some among 10 basis sequences: ~~all 1's, 5 OVSP codes (~~  $C_3(1), C_3(2), C_3(4), C_3(8), C_3(16)$ ), ~~and 4 masks (Mask1, Mask2, Mask3, Mask4). The basis~~ 4 mask sequences are as follows in table 4.3.1-1.

**Table 4.3.1-1: BasisMask sequences for (32,10) TFCI code**


| i  | M <sub>i,0</sub> | M <sub>i,1</sub> | M <sub>i,2</sub> | M <sub>i,2</sub> | M <sub>i,4</sub> | M <sub>i,5</sub> | M <sub>i,6</sub> | M <sub>i,7</sub> | M <sub>i,8</sub> | M <sub>i,9</sub> |
|----|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| 0  | 1                | 0                | 0                | 0                | 0                | 0                | 0                | 0                | 0                | 0                |
| 1  | 1                | 0                | 0                | 0                | 0                | 1                | 0                | 0                | 0                | 0                |
| 2  | 1                | 0                | 0                | 0                | 1                | 0                | 1                | 0                | 0                | 0                |
| 3  | 1                | 0                | 0                | 0                | 1                | 1                | 0                | 0                | 0                | 1                |
| 4  | 1                | 0                | 0                | 1                | 0                | 0                | 1                | 0                | 1                | 1                |
| 5  | 1                | 0                | 0                | 1                | 0                | 1                | 0                | 0                | 0                | 1                |
| 6  | 1                | 0                | 0                | 1                | 1                | 0                | 0                | 0                | 1                | 0                |
| 7  | 1                | 0                | 0                | 1                | 1                | 1                | 0                | 1                | 0                | 0                |
| 8  | 1                | 0                | 1                | 0                | 0                | 0                | 0                | 1                | 1                | 0                |
| 9  | 1                | 0                | 1                | 0                | 0                | 1                | 1                | 1                | 1                | 0                |
| 10 | 1                | 0                | 1                | 0                | 1                | 0                | 1                | 0                | 1                | 1                |
| 11 | 1                | 0                | 1                | 0                | 1                | 1                | 0                | 0                | 1                | 1                |
| 12 | 1                | 0                | 1                | 1                | 0                | 0                | 0                | 1                | 1                | 0                |
| 13 | 1                | 0                | 1                | 1                | 0                | 1                | 0                | 1                | 0                | 1                |
| 14 | 1                | 0                | 1                | 1                | 1                | 0                | 1                | 0                | 0                | 1                |
| 15 | 1                | 0                | 1                | 1                | 1                | 1                | 1                | 1                | 1                | 1                |
| 16 | 1                | 1                | 0                | 0                | 0                | 0                | 1                | 0                | 0                | 0                |
| 17 | 1                | 1                | 0                | 0                | 0                | 1                | 1                | 1                | 0                | 0                |
| 18 | 1                | 1                | 0                | 0                | 1                | 0                | 1                | 1                | 0                | 1                |
| 19 | 1                | 1                | 0                | 0                | 1                | 1                | 1                | 0                | 1                | 0                |
| 20 | 1                | 1                | 0                | 1                | 0                | 0                | 0                | 1                | 1                | 1                |
| 21 | 1                | 1                | 0                | 1                | 0                | 1                | 0                | 1                | 0                | 1                |
| 22 | 1                | 1                | 0                | 1                | 1                | 0                | 0                | 0                | 1                | 1                |
| 23 | 1                | 1                | 0                | 1                | 1                | 1                | 0                | 1                | 1                | 1                |
| 24 | 1                | 1                | 1                | 0                | 0                | 0                | 0                | 1                | 0                | 0                |
| 25 | 1                | 1                | 1                | 0                | 0                | 1                | 1                | 1                | 0                | 1                |
| 26 | 1                | 1                | 1                | 0                | 1                | 0                | 1                | 0                | 1                | 0                |
| 27 | 1                | 1                | 1                | 0                | 1                | 1                | 1                | 0                | 0                | 1                |
| 28 | 1                | 1                | 1                | 1                | 0                | 0                | 0                | 0                | 1                | 0                |
| 29 | 1                | 1                | 1                | 1                | 0                | 1                | 1                | 1                | 0                | 0                |
| 30 | 1                | 1                | 1                | 1                | 1                | 0                | 1                | 1                | 1                | 0                |
| 31 | 1                | 1                | 1                | 1                | 1                | 1                | 1                | 1                | 1                | 1                |

|        |                                  |
|--------|----------------------------------|
| Mask 1 | 00101000011000111111000001110111 |
| Mask 2 | 00000001110011010110110111000111 |
| Mask 3 | 00001010111110010001101100101011 |
| Mask 4 | 00011100001101110010111101010001 |

For TFCI information bits  $a_0, a_1, a_2, a_3, a_4, a_5, a_6, a_7, a_8, a_9$  ( $a_0$  is LSB and  $a_9$  is MSB), the encoder structure is as follows in figure 4-7. output code word bits  $b_i$  are given by:

$$b_i = \sum_{n=0}^9 (a_n \times M_{i,n}) \text{ mod } 2$$

where  $i=0...31$ .

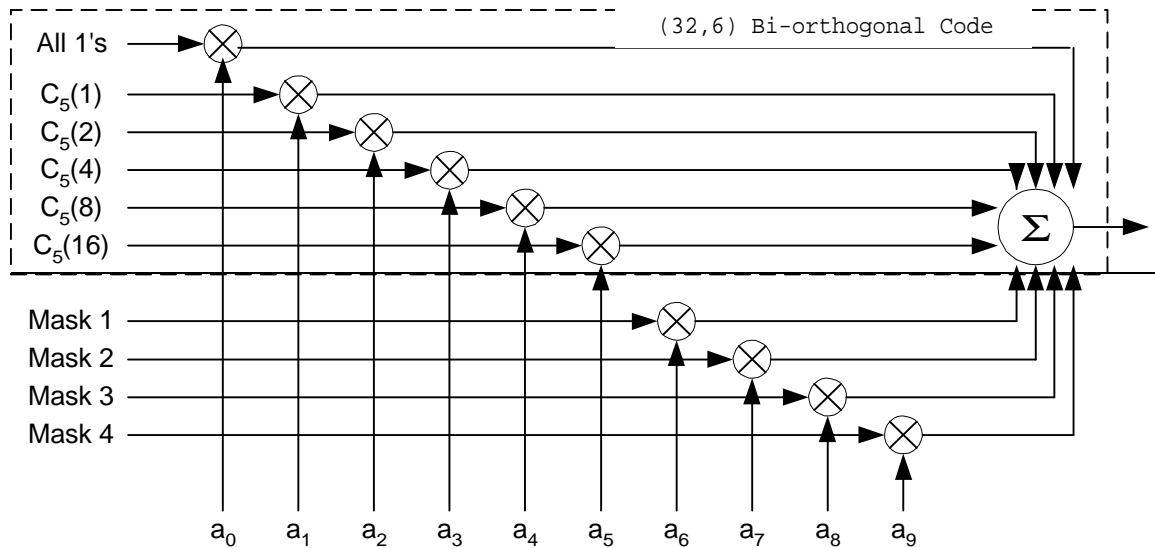

**Figure 4-7: Encoder structure for (32,10) sub-code of second order Reed-Muller code**

4.3.1.2 Coding of short TFCI lengths

4.3.1.2.1 Coding very short TFCIs by repetition

If the number of TFCI bits is 1 or 2, then repetition will be used for coding. In this case each bit is repeated to a total of 43 times giving 4-bit transmission for a single TFCI bit and 8-bit transmission for 2 TFCI bits.

4.3.1.2.2 Coding short TFCIs using bi-orthogonal codes


If the number of TFCI bits is in the range of 3 to 5, then one word of the biorthogonal (16,5) block code will be used.

The code words of the biorthogonal (16, 5) code are from two mutually biorthogonal sets,  $S_{C_4} = \{C_4(0), C_4(1), \dots, C_4(15)\}$  and its binary complement,  $\bar{S}_{C_4} = \{\bar{C}_4(0), \bar{C}_4(1), \dots, \bar{C}_4(15)\}$ . Words of set  $S_{C_4}$  are from the level 4 of the code three, which is generated, using the short code generation method defined in TS 25.223. The mapping of information bits to code words is shown in the table 4.3.1-2.

**Table 4.3.1-2: Mapping of information bits to code words for biorthogonal (16, 5) code**

| Information bits | Code word       |
|------------------|-----------------|
| 00000            | $C_4(0)$        |
| 00001            | $\bar{C}_4(0)$  |
| 00010            | $C_4(1)$        |
| ...              | ...             |
| 11101            | $\bar{C}_4(14)$ |
| 11110            | $C_4(15)$       |
| 11111            | $\bar{C}_4(15)$ |

If the number of TFCI bits is in the range 3 to 5 the TFCI bits are encoded using a (16, 5) bi-orthogonal (or first order Reed-Muller) code. The coding procedure is as shown in figure 4-8.

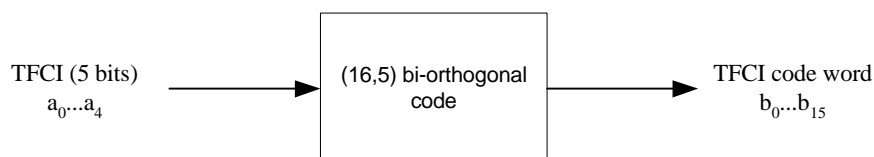

**Figure 4-8: Channel coding of short length TFCI bits**

The code words of the (16,5) bi-orthogonal code are linear combinations of 5 basis sequences as defined in table 4.3.1-2 below.

**Table 4.3.1-2: Basis sequences for (16,5) TFCI code**

| $i$ | $M_{i,0}$ | $M_{i,1}$ | $M_{i,2}$ | $M_{i,3}$ | $M_{i,4}$ |
|-----|-----------|-----------|-----------|-----------|-----------|
| 0   | 1         | 0         | 0         | 0         | 0         |
| 1   | 1         | 0         | 0         | 0         | 1         |
| 2   | 1         | 0         | 0         | 1         | 0         |
| 3   | 1         | 0         | 0         | 1         | 1         |
| 4   | 1         | 0         | 1         | 0         | 0         |
| 5   | 1         | 0         | 1         | 0         | 1         |
| 6   | 1         | 0         | 1         | 1         | 0         |
| 7   | 1         | 0         | 1         | 1         | 1         |
| 8   | 1         | 1         | 0         | 0         | 0         |
| 9   | 1         | 1         | 0         | 0         | 1         |
| 10  | 1         | 1         | 0         | 1         | 0         |
| 11  | 1         | 1         | 0         | 1         | 1         |
| 12  | 1         | 1         | 1         | 0         | 0         |
| 13  | 1         | 1         | 1         | 0         | 1         |
| 14  | 1         | 1         | 1         | 1         | 0         |
| 15  | 1         | 1         | 1         | 1         | 1         |

For TFCI information bits  $a_0, a_1, a_2, a_3, a_4$  ( $a_0$  is LSB and  $a_4$  is MSB), the output code word bits  $b_i$  are given by:

$$b_i = \sum_{n=0}^4 (a_n \times M_{i,n}) \bmod 2$$

where  $i=0 \dots 15$  ( $i=15$  corresponds to the MSB).