

CHANGE REQUEST

Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.

25.223 CR

xxx

Current Version: **3.4.0**

GSM (AA.BB) or 3G (AA.BBB) specification number ?

? CR number as allocated by MCC support team

For submission to: **RAN#10**
list expected approval meeting # here ?

for approval
for information

strategic (for SMG use only)
non-strategic

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: <http://ftp.3gpp.org/Information/CR-Formv2.doc>

Proposed change affects:

(at least one should be marked with an X)

(U)SIM ME UTRAN / Radio Core Network

Source:

CWTS

Date:

Subject:

CR for TS25.223 regarding 1.28 Mcps TDD

Work item:

Low Chip Rate TDD option, Physical Layer

Category:

(only one category shall be marked with an X)

F Correction
A Corresponds to a correction in an earlier release
B Addition of feature
C Functional modification of feature
D Editorial modification

Release:

Phase 2
Release 96
Release 97
Release 98
Release 99
Release 00

Reason for change:

This CR collects the principally agreed wording of the changes necessary for introducing the feature 'Low Chip Rate TDD option' in the TS25.223. In its last revision it should be editorially changed to reflect the correct changes needed for the latest approved version of this specification.

Clauses affected:

Other specs affected:

Other 3G core specifications ? List of CRs:
Other GSM core specifications ? List of CRs:
MS test specifications ? List of CRs:
BSS test specifications ? List of CRs:
O&M specifications ? List of CRs:

Other comments:

In this first version, a proposed structure has been included in this CR. The structure was copied from TS25.223 vers. 3.3.0. In addition to that the proposals that were agreed in principle from WG1#14 to WG1#15 were included in this CR.



help.doc

<----- double-click here for help and instructions on how to create a CR.

2 References

<For clarity, this chapter will currently collect only the references that are needed in addition to the already existing abbreviations. In its last version this chapter has to be modified, so that it includes the revisions with respect to the latest versions of TS25.223.>

3 Symbols and abbreviations

<For clarity, this chapter will currently collect only the symbols and abbreviations that are needed in addition to the already existing ones. In its last version this chapter has to be modified, so that it includes the revisions with respect to the latest versions of TS25.223.>

3.1 Symbols

3.2 Abbreviations

MIB Master Information Block

4 General

In the following, a separation between the data modulation and the spreading modulation has been made. The data modulation for 3.84Mcps TDD is defined in clause 5 'Data modulation for the 3.84 Mcps option', the data modulation for 1.28Mcps TDD is defined in clause 6 'Data modulation for the 1.28 Mcps option' and the spreading modulation in clause 67 'Spreading modulation'.

Table 1: Basic modulation parameters

Chip rate	same as FDD basic chiprate: 3.84 Mchip/s	Low chiprate: 1.28 Mchip/s
Data modulation	QPSK	QPSK, <u>8PSK</u>
Spreading characteristics	Orthogonal Q chips/symbol, where $Q = 2^p$, $0 \leq p \leq 4$	Orthogonal Q chips/symbol, where $Q = 2^p$, $0 \leq p \leq 4$

5 Data modulation for the 3.84 Mcps option

<No changes will be made in this chapter in this CR, only the title has to be changed. >

6 Data modulation for the 1.28 Mcps option

6.1 Symbol rate

The symbol duration T_S depends on the spreading factor O and the chip duration T_C : $T_S = O \cdot T_C$, where $T_C = \frac{1}{\text{chiprate}}$.

6.2 Mapping of bits onto signal point constellation

6.2.1 QPSK modulation

The mapping of bits onto the signal point constellation for QPSK modulation is the same like in the 3.84Mcps TDD cf. [5.2.1 Mapping for burst type 1 and 2].

6.2.2 8PSK modulation

The data modulation is performed to the bits from the output of the physical channel mapping procedure. In case of 8PSK modulation 3 consecutive binary bits are represented by one complex valued data symbol. Each user burst has two data carrying parts, termed data blocks:

$$\underline{d}^{(k,i)} = (d_{1,n}^{(k,i)}, d_{2,n}^{(k,i)}, \dots, d_{N_k}^{(k,i)})^T \quad i = 1, 2; k = 1, \dots, K. \quad (1)$$

N_k is the number of symbols per data field for the user k . This number is linked to the spreading factor Q_k .

Data block $\underline{d}^{(k,1)}$ is transmitted before the midamble and data block $\underline{d}^{(k,2)}$ after the midamble. Each of the N_k data symbols $d_n^{(k,i)}$; $i = 1, 2; k = 1, \dots, K; n = 1, \dots, N_k$; of equation 1 has the symbol duration $T_s^{(k)} = Q_k \cdot T_c$ as already given.

The data modulation is 8PSK, thus the data symbols $d_n^{(k,i)}$ are generated from 3 consecutive data bits from the output of the physical channel mapping procedure:

using the following mapping to complex symbols:

Consecutive binary bit pattern	complex symbol
$b_{1,n}^{(k,i)} \ b_{2,n}^{(k,i)} \ b_{3,n}^{(k,i)}$	$d_n^{(k,i)}$
000	$\cos(11\pi/8) + j\sin(11\pi/8)$
001	$\cos(9\pi/8) + j\sin(9\pi/8)$
010	$\cos(5\pi/8) + j\sin(5\pi/8)$
011	$\cos(7\pi/8) + j\sin(7\pi/8)$
100	$\cos(13\pi/8) + j\sin(13\pi/8)$
101	$\cos(15\pi/8) + j\sin(15\pi/8)$
110	$\cos(3\pi/8) + j\sin(3\pi/8)$
111	$\cos(\pi/8) + j\sin(\pi/8)$

The mapping corresponds to a 8PSK modulation of the interleaved and encoded data bits $b_{l,n}^{(k,i)}$ of the table above and $d_n^{(k,i)}$ of equation 1.

6.7 Spreading modulation

<The numbering has to be changed. >

7.5 Modulation for the 3.84 Mcps option

<No changes will be made in this chapter in this CR, only the title and numbering have to be changed. >

7.6 Modulation for the 1.28 Mcps option

The complex-valued chip sequence is modulated as shown in figure [X3].

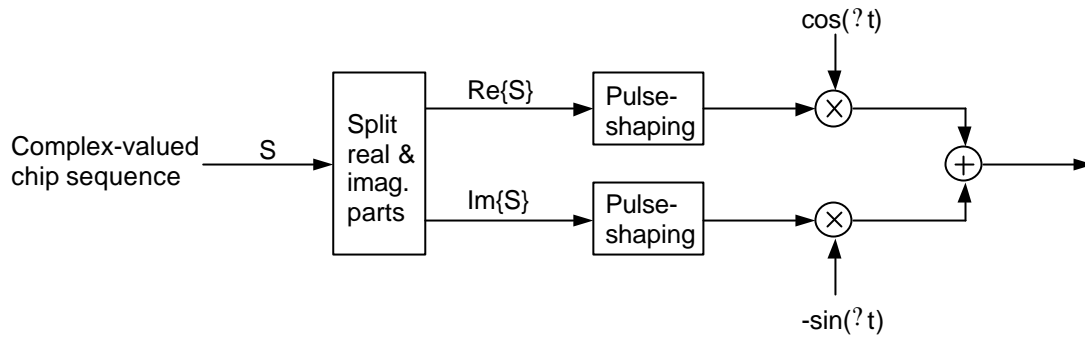


Figure [X3]: Modulation of complex valued chip sequences

The pulse-shaping characteristics are described in [9] and [10].

7.6.1 Combination of physical channels in uplink

The combination of physical channels in uplink is the same as in the 3.84 Mcps TDD cf. [6.5.1 Combination of physical channels in uplink]

7.6.2 Combination of physical channels in downlink

Figure X4 illustrates how different physical downlink channels are combined within one timeslot. Each spread channel is separately weighted by a weight factor G_i . All downlink physical channels are then combined using complex addition.

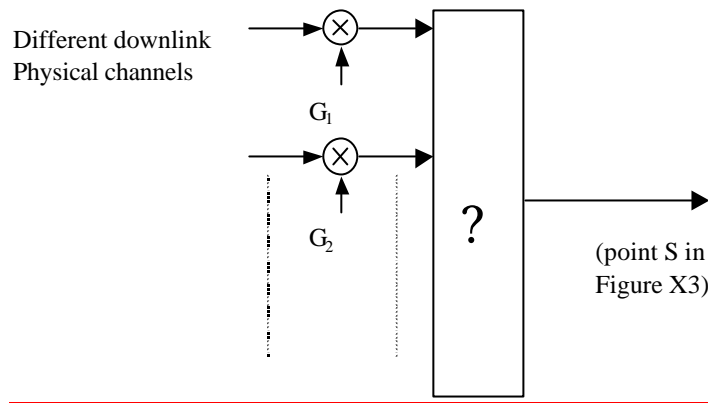


Figure X4: Combination of different physical channels in downlink

78 Synchronisation codes for the 3.84 Mcps option

<No changes will be made in this chapter in this CR, only the title and numbering have to be changed. >

9 Synchronisation codes for the 1.28 Mcps option

9.1 The downlink pilot timeslot (DwPTS)

The contents of DwPTS is composed of 64 chips of a SYNC-DL sequence, cf. [B.1 Basic SYNC-DL sequence] and 32 chips of guard period (GP). The SYNC-DL code is not scrambled

There should be 32 different basic SYNC-DL codes for the whole system.

For the generation of the complex valued SYNC-DL codes of length 64, the basic binary SYNC-DL codes

s_1, s_2, \dots, s_{64} of length 64 shown in Table A are used. The relation between the elements \underline{s}_i and \underline{s}_j is given by:

$$\underline{s}_i = (j)^i \cdot s_i \quad s_i = \{1, -1\} \quad i=1, \dots, 64 \quad (1)$$

Hence, the elements \underline{s}_i of the complex SYNC-DL code \underline{s} are alternating real and imaginary.

The burst in the DwPTS is QPSK modulated and the phase of the SYNC-DL is used to signal the position of the MIB of the BCH in P-CCPCH in multi-frame.

9.2 The uplink pilot timeslot (UpPTS)

The contents in UpPTS is composed of 128 chips of a SYNC-UL sequence, cf. [B.2 Basic SYNC-UL sequence], and 32 chips of guard period (GP). The SYNC-UL code is not scrambled.

There should be 256 different basic SYNC-UL codes (see Table B) for the whole system.

For the generation of the complex valued SYNC-UL codes of length 128, the basic binary SYNC-UL codes

$s = \{s_1, s_2, \dots, s_{128}\}$ of length 128 shown in Table B are used. The relation between the elements \underline{s} and \underline{s} is given by:

$$\underline{s}_i = (j)^i s_i \quad s_i = \{1, -1\}; i=1, \dots, 128 \quad (2)$$

Hence, the elements \underline{s}_i of the complex SYNC-UL code \underline{s} are alternating real and imaginary.

9.3 Code Allocation

Relationship between the SYNC-DL and SYNC-UL sequences, the scrambling codes and the midamble codes

Code Group	Associated Codes			
	SYNC-DLID	SYNC-UL ID (coding criteria)	Scrambling Code ID (coding criteria)	Basic Midamble Code ID (coding criteria)
Group 1	0	0~7 (000~111)	0	0
			1	1
			2	2
			3	3
Group 2	1	8~15 (000~111)	4	4
			5	5
			6	6
			7	7
-				
Group 32	31	248~255 (000~111)	124	124
			125	125
			126	126
			127	127

Annex B (Normative) Synchronisation sequence

B.1 Basic SYNC-DL sequence

Table A Basic SYNC-DL Codes

<u>Code ID</u>	<u>SYNC-DL Codes of length 64</u>
<u>0</u>	<u>B3A7CC05A98688E4</u>
<u>1</u>	<u>9D559BD290606791</u>
<u>2</u>	<u>2CE7BA12A017C3A2</u>
<u>3</u>	<u>34511D20672F4712</u>
<u>4</u>	<u>9A772841474603F2</u>
<u>5</u>	<u>9109B1A5CE01F228</u>
<u>6</u>	<u>8FD429B3594501C0</u>
<u>7</u>	<u>25251354AA3F8C19</u>
<u>8</u>	<u>C9A3B8E0C043EA56</u>
<u>9</u>	<u>BA04B888E5BC1802</u>
<u>10</u>	<u>A735354299370207</u>
<u>11</u>	<u>74C3C8DA4415AE51</u>
<u>12</u>	<u>F4FD0458A0124663</u>
<u>13</u>	<u>A011D4E16C3D6064</u>
<u>14</u>	<u>BDA0661B0CAA8C68</u>
<u>15</u>	<u>8E31123F28928698</u>
<u>16</u>	<u>F095C1632E2906AB</u>
<u>17</u>	<u>B60B4A8A664071CF</u>
<u>18</u>	<u>AA094DCCE91E041A</u>
<u>19</u>	<u>C0C31CDA8A256807</u>
<u>20</u>	<u>D516964FB18C1890</u>
<u>21</u>	<u>30DE01834F4AACCE</u>
<u>22</u>	<u>8F700323BA5CAD34</u>
<u>23</u>	<u>1B50F4DEE0C1380C</u>
<u>24</u>	<u>443382164F56F2D1</u>
<u>25</u>	<u>E1E4005D49B846B4</u>

<u>26</u>	<u>040A97165330BFAA</u>
<u>27</u>	<u>C48E26881693AD78</u>
<u>28</u>	<u>D4354B2FE02361CC</u>
<u>29</u>	<u>5383AB6C8A10CE84</u>
<u>30</u>	<u>D417A730F2F12244</u>
<u>31</u>	<u>ABF0A0D905A939C4</u>

B.2 Basic SYNC-UL Codes

Table B Basic SYNC-UL Codes

<u>Code ID</u>	<u>SYNC-UL Codes of length 128</u>
<u>0</u>	<u>C11C20F0D1807DB8859175B798EC094A</u>
<u>1</u>	<u>91278068081EC8E74543DBC1C9AD4235</u>
<u>2</u>	<u>38F5AEE2E513DB12A663BA04160103E5</u>
<u>3</u>	<u>7AA8A0A210F12A1E4332F2EDD33011FC</u>
<u>4</u>	<u>C180EA3B9BA1774EB9611BD249C4A508</u>
<u>5</u>	<u>B072A2C839489D496B98CE9D0132FBC9</u>
<u>6</u>	<u>B2723EAC6EB01667F2B33961C8074234</u>
<u>7</u>	<u>C4144AD060F0EC095E227B92CF7C8280</u>
<u>8</u>	<u>653036A10D3054146FCF815986C63A14</u>
<u>9</u>	<u>F899CA61435D64DC07FDF04C4A0C053A</u>
<u>10</u>	<u>B56F2D6893A8051407F4C341D88DC7DC</u>
<u>11</u>	<u>DC0BE838242142EDE6413A72C88D74AA</u>
<u>12</u>	<u>22A2FD86E4086C70A4860B13C76E579F</u>
<u>13</u>	<u>A3CBC21322C97D2A02728E7875F39588</u>
<u>14</u>	<u>D4EC4F694A082CB38E3B1558A0FCC89F</u>
<u>15</u>	<u>CC891141C4E216D235C15CF5D3F9B002</u>
<u>16</u>	<u>A1993114C50B77CB0C0725D1E22FD016</u>
<u>17</u>	<u>24F73A979DE52F82E8800CCB93842A59</u>
<u>18</u>	<u>8F878FA04659842E294D8DEAB20BA2FD</u>
<u>19</u>	<u>AC90B0442D70662B028CF76A6BECDF09</u>
<u>20</u>	<u>D94A284DF64D7B0102F0E084C29C88C8</u>
<u>21</u>	<u>8603200C7596F24E865FD3815693358D</u>

<u>22</u>	<u>B466B12CF433642BD8B08F1F452E0550</u>
<u>23</u>	<u>86A3A1772C1C99FCA7DBBA0C312E34A0</u>
<u>24</u>	<u>622A1889F72A9A2C042D46F08EFEE1AC</u>
<u>25</u>	<u>BF220A362BC0D3B0D7CE400954C6CFAE</u>
<u>26</u>	<u>D28D73C52E89CF57905C502244F63616</u>
<u>27</u>	<u>AD4E1C2103697D64D8B9D4C035D90548</u>
<u>28</u>	<u>8F081A9BA12B6C6BD024531AA984D21C</u>
<u>29</u>	<u>E4092429BE82988E1E3585BF6A6AE550</u>
<u>30</u>	<u>08BD36E0A9C061782CB38B35B335CA56</u>
<u>31</u>	<u>1CDFF3CC2685D1C44F4A1059AB03F40A</u>
<u>32</u>	<u>506ED4E88FB1CECE3243F2A27A0221A4</u>
<u>33</u>	<u>846CF58A7AB613C83A24130B5778C0E2</u>
<u>34</u>	<u>A2711A99E26A0C75AC026F4CFAECE893</u>
<u>35</u>	<u>D846EEEBA2432AC05A01043C62579DCF</u>
<u>36</u>	<u>6B16B4E851CAF2121FC4CF88820C89E7</u>
<u>37</u>	<u>AA4889A78207674A74E10C6F2BE11D48</u>
<u>38</u>	<u>8534CF8145BC991052814ED5C72709EE</u>
<u>39</u>	<u>01AEF15D2290A84A607425746D9963C7</u>
<u>40</u>	<u>999188F758245D5164FE16D852942C71</u>
<u>41</u>	<u>CF71C008599287E446E30745BD56E2D2</u>
<u>42</u>	<u>248414BA0DF8CDC4711FE7C8707ED0AD</u>
<u>43</u>	<u>EB2E263EC016191C81AB714BFE4D2B30</u>
<u>44</u>	<u>862082A7482FAC1C499793A0D8CED670</u>
<u>45</u>	<u>DE2C22B2783AB75A7342608DE413840A</u>
<u>46</u>	<u>E31AA60B727F2CA2A78DAAC10665011D</u>
<u>47</u>	<u>CEF6CD06509870AC9E0177ACD550921D</u>
<u>48</u>	<u>E52C84D499FFCDC287581691471540F2</u>
<u>49</u>	<u>B33BF6551A4322504BEE0930BCA1EC68</u>
<u>50</u>	<u>555BE6886D0FC43D72315E6C6D384148</u>
<u>51</u>	<u>8444F67451EE23CE1240C90F0B52A492</u>
<u>52</u>	<u>5C290D28E84060E69D09788A261B10FF</u>
<u>53</u>	<u>337E0C35E83CD38CCC5D45804241F952</u>
<u>54</u>	<u>A7879F0D31A8982A01EE6AC4952984DC</u>

<u>55</u>	<u>A37F506508928C70A83D69A2373781B9</u>
<u>56</u>	<u>42F55208EE12909803A7CBEB19B5419E</u>
<u>57</u>	<u>57E5E268A328FCC9ED04B9E5420AC702</u>
<u>58</u>	<u>EB033AD1222F84D8642C4E3FAAD28206</u>
<u>59</u>	<u>98EE1415F026AC0E862C520451697DD0</u>
<u>60</u>	<u>6A0528AEA4B7CD6702660D81F8821E19</u>
<u>61</u>	<u>763D626A87C603BCB09E1A4C800A378F</u>
<u>62</u>	<u>EEA61897879289340C23F669D6A03762</u>
<u>63</u>	<u>A6571B3CC2D0E04F017ACC808B92DCE7</u>
<u>64</u>	<u>DDF88B52EA1831D293A803CF23C8C471</u>
<u>65</u>	<u>6CA4D333A2684140475DAB491F61C17A</u>
<u>66</u>	<u>A7D2AD23043989A13289F7C3E135580A</u>
<u>67</u>	<u>B1C752FA66B41C81904EDE27EA000E2E</u>
<u>68</u>	<u>8694BE3CC1CB36BE2A095F89CC619080</u>
<u>69</u>	<u>9C20334E1BBC596B25E151180BF99940</u>
<u>70</u>	<u>484256214F81070DD9C49A2B05A43DCE</u>
<u>71</u>	<u>401A20BCBE29B7438A7AEE44635A9E23</u>
<u>72</u>	<u>8858585C3239CBF628033FA0DF189378</u>
<u>73</u>	<u>EFA36404C1BA5118CC5F9052FD28D9C3</u>
<u>74</u>	<u>155609873D8A042D496E6477B747C4F8</u>
<u>75</u>	<u>8446077883A6D7D2549CC9742E3FD023</u>
<u>76</u>	<u>E630142B189AA209371A6F0FFDBC30A7</u>
<u>77</u>	<u>C46060535AC6DBB2095F1D7826D0CD5C</u>
<u>78</u>	<u>E00D19E48797148B28DEDA9D429362E2</u>
<u>79</u>	<u>645DE447E938485489416CAFCC1C571F</u>
<u>80</u>	<u>DA10AFBF2AE61C593A1D88584DE30598</u>
<u>81</u>	<u>BB248AEA5FD3FE210CD48FC401E1A686</u>
<u>82</u>	<u>A89F146BD9191F445301C081CB6F5625</u>
<u>83</u>	<u>15BBF04F247C59150208949EB6B9CC58</u>
<u>84</u>	<u>08F48BFA7804B5B2CC2E96510232E062</u>
<u>85</u>	<u>9AA2BE74005A3679C626B209580B8D03</u>
<u>86</u>	<u>9D40664A2C808F2F293E255398B37E6A</u>
<u>87</u>	<u>6869C98A8AAD81CAE41A23C83FF9EEA0</u>

<u>88</u>	<u>576E8948E61BD0927C4140C3C04C4CF3</u>
<u>89</u>	<u>0F942C67A1137B6EAA058C2A74872C73</u>
<u>90</u>	<u>9D058E27ED546C10632684BBC84E5BC1</u>
<u>91</u>	<u>79D4B840E20148B134F90B51164BCBD0</u>
<u>92</u>	<u>0E35E1D8D1214C05FAC790B69B239150</u>
<u>93</u>	<u>FFA1BB0232CD71480BE5CA1C2A269F89</u>
<u>94</u>	<u>B2956F5F4E270446F9211584792628DB</u>
<u>95</u>	<u>F56CCA23421C8EC8F8A41F7DA4A41EA2</u>
<u>96</u>	<u>0B5ECA04F1789A7148C80C39D57D05F6</u>
<u>97</u>	<u>A10B538E8A8CFC8F8925C485F2A88660</u>
<u>98</u>	<u>9925C2C715001D9FC78ACCC51DA1AF34</u>
<u>99</u>	<u>0DAC9CFDEA40429A8B12C7D320D60F70</u>
<u>100</u>	<u>377FC9A097017958440914E83118E39D</u>
<u>101</u>	<u>8421096FA8B47E4E943B6473671955CC</u>
<u>102</u>	<u>574086183477C4F68540CB7E858263B1</u>
<u>103</u>	<u>895B6A8980C6703C779F49F40C5CFC19</u>
<u>104</u>	<u>D0D253E157BC19262150CEA668679E71</u>
<u>105</u>	<u>B8889C60EBA812BD7F0B6498823296D2</u>
<u>106</u>	<u>A13FB9F3A08528E44B13C12CF0D461AA</u>
<u>107</u>	<u>8D4DCFBE43D6E2024B1F8470224AA330</u>
<u>108</u>	<u>536D159E119E0893838657B12A074E64</u>
<u>109</u>	<u>DCFD49C504AD3A2F049A0CB70238EC8A</u>
<u>110</u>	<u>D363DB4C46C11757FA8FB18139789102</u>
<u>111</u>	<u>424A1E8A1D4DA256E4CA3BC8C2201BE3</u>
<u>112</u>	<u>417B619ED30FEB0A847CC3A191A20398</u>
<u>113</u>	<u>843FBBC95453C61786D1332612B45B4D</u>
<u>114</u>	<u>F26CACCC0732CF8ED0C5BC1462B1620B4</u>
<u>115</u>	<u>88E0FE440C70E9249A92A7AF94638880</u>
<u>116</u>	<u>99A52B7D8C950308057E0661D7459960</u>
<u>117</u>	<u>A5C28218BF5D16E63E42698A0A6B0896</u>
<u>118</u>	<u>B2763BEEC784A12E8C50778536921806</u>
<u>119</u>	<u>987B2B6A3A77A059B30A082457AB84E0</u>
<u>120</u>	<u>820DB500F1B206358D7A7F210AB85AA8</u>

<u>121</u>	<u>97760A5CFC5E03EB439C914590045938</u>
<u>122</u>	<u>896A720E8857C8708A59F8C94DE0841E</u>
<u>123</u>	<u>2D101F0CF95263843412577340DEBB11</u>
<u>124</u>	<u>E8E5214B4DCF5D11A245B0149D49C87C</u>
<u>125</u>	<u>51224EAA10099ACDE384834A5ADF03D8</u>
<u>126</u>	<u>64E51253554A230C186FDE4E8781BC09</u>
<u>127</u>	<u>A499E391E69ED08890AC1A82A6115BEC</u>
<u>128</u>	<u>EE54C6E1834210D3EC1B07A456B92AA8</u>
<u>129</u>	<u>949DB5CA82420B54C1E0BCC111E704D9</u>
<u>130</u>	<u>9439EE9A9E4C447D1AA350926495047F</u>
<u>131</u>	<u>AD095CC0E7438AECE38D60980B3F2D00</u>
<u>132</u>	<u>83089C254C5EE9788072BC3D9282F798</u>
<u>133</u>	<u>A27DC1A457BC5A56563D8A9B11203615</u>
<u>134</u>	<u>713053A9C0B1B08B14705FF5A7244DB4</u>
<u>135</u>	<u>D36D4B9F4007354E0EC1B0CA8C8C7124</u>
<u>136</u>	<u>82E7C990612114F1CCE1BD9509FD4386</u>
<u>137</u>	<u>C8D83FF0B48B14830D2015D53F8C0672</u>
<u>138</u>	<u>08AF223C869A36B169148FDDABB7D120</u>
<u>139</u>	<u>B6C284C600AD0A99F86C449F8F4C53A6</u>
<u>140</u>	<u>DC741B320C07682AF92AC4DBDE0C28C2</u>
<u>141</u>	<u>89B8D84FA902265850C0FA6FF0EB2C4F</u>
<u>142</u>	<u>A69445B3A52201DB984BC03D1956D7F3</u>
<u>143</u>	<u>0FE0F7224B7AD72E4D4530D0223F590C</u>
<u>144</u>	<u>1B8C06F051434048EB925133AD3BD3F9</u>
<u>145</u>	<u>E133D4C3C942726A351300C37E55D0DF</u>
<u>146</u>	<u>9E09481D1881A66F562D8B453BC83AB2</u>
<u>147</u>	<u>2397B04B60A3C5700907BDBBA4E818C8</u>
<u>148</u>	<u>8F81F7A08CC6C8DA3D692AD34F50C012</u>
<u>149</u>	<u>9AB325352981BCCFA072F8FDE3009221</u>
<u>150</u>	<u>4FA88B7F1F8A620C31B0D486C52AC2F6</u>
<u>151</u>	<u>097AF0ADD16D7D39851049F0130EE444</u>
<u>152</u>	<u>A5027732DACFF11C388D5820A4A9BA49</u>
<u>153</u>	<u>1CD981EA2EDB46218A407C7E20D4BE84</u>

154	D0FD94279FA67EC61A3904C0AD8ACA04
155	EA73A9415EC2004D49E9D0F645961C75
156	005AF0614A7552041194DEECBF8DD016
157	B514481533DA0A731705B93CF634E40D
158	983054521841A6E4FF34B2C07B5684FE
159	C46D927D0FD2B2F509550025677C6871
160	2AD85C08127487C87ECE014D65169102
161	0F617852FA3930AA7EE74B400B2CC831
162	AE9D395004C6E27540C378625D36E0D6
163	DC4FA55750F10B0636248F12C212FFE4
164	D3602B8D6CBF1809C88B827185631ECF
165	A94825850708E7723EA8F22C44BF78B2
166	A62D231C16AEFFE0B0026B306662945A
167	9C7BE810A86465A50551F89125D93B12
168	9712D9338B9CC60485C10172F50F121F
169	A3902CE0E0B9912591FF28C695728257
170	4167057891AB29473A9E0F67F3658921
171	B3368B91EC12A284BC414C8F0D7F8D20
172	EE21888101ABF06C1175828CB58B598D
173	E43923A00ECC32CCC2D162A4A44BD7F4
174	CC9E30B8538AD51703EEB6F70801AB22
175	B908AD2F1501DA1C156811736CD798CD
176	2B46302ACCC2F808797FC648A614326D
177	8A54494F1BE27235B8764023AA0FBCFA
178	BC1041E6F636421E89277DC154439103
179	275B39A63029B974E3561AE0A8FC8032
180	9283F6FE819B80492A22B85CE5CE5DC4
181	4CCB52C0CE058A78022C22DF5788CBCC
182	B0DF9608DE549A6F6C581516919A81E6
183	2CA185163CC36060D1E85BB0A7FBB988
184	66101D2846155CAC986FC790D2124EFC
185	8016E3904644D2093579B83BD7AB5071
186	531CAB7085BEC14257439658023647CF

187	DF2910165AA5051E41F6EB198E4D491C
188	BA32052042B0FB2188DE7857DA1B6788
189	9E6D075AFF0EA4153615E140BF380666
190	9ACC5A037902534642A3BE391AA40F9B
191	4D741A3B4499843010D7E5FA8988DC80
192	FA1421C96EDC6092726154560B1C2FC8
193	882946076223CAE0B0BFE3EDA59826D5
194	CEBB288C28B7472A0D3917012276C034
195	BD35A6E00C9528DB38289CF823C34F30
196	E2C93618B6B2800D51171A5F85746A55
197	B43EF39A1A64F0E220AF740F9494291B
198	AC537817C2612744A58132A8AFBC44A3
199	98A321249A821DDBF81C38235A371A14
200	AE1D46069090D81BB6B08FED9E687285
201	7EAE2415DC2CD60AE083249A33B56E05
202	3D942AAA9BC9F27289421CE0B301FB98
203	1548BA6D08530727AC6D059C005C6C42
204	FF47C21142C65B502DA70647BAE831D1
205	C83AA7FEAC5E51A08091E10DB0C233D9
206	E86EDD2EC2DAA3104229EDC43471A16A
207	22FAFB9C184B78B56EE91B6602C03244
208	E45631DC509B1290C08D2C1A1F15DBFE
209	D203C51207092B56568FDAD9E2D44473
210	2AA87F31A7D1AB1C90024F936006C4A5
211	913136153593DEABC7305BF0C5A62180
212	D8DA5FE401F2758642A082C53A6A5CB8
213	23C2295213147F324DE8EC1C103BAE88
214	883AF097FCDE82B366A1844245E0D727
215	79E5E9F8C933159ACADC22A06F900A70
216	FE40502B44A9E44B2C336250D47538CC
217	670452E19172C843176F1278FE41D584
218	B7EAA436078E6886A3024F593AD57580
219	1044D4CDD7230E7B1953AD1232DF07E2

220	4D821ECAC3D845A2E1011695624576FF
221	96622ED2FBD44D1B859D70601999F438
222	CCC31C3D6D5B41B8D82FF4522A4C0146
223	4A84F7CD62E0C712980E6A0C89BF394F
224	10E56751F000927284DBE174E68ECC4C
225	A3DE70921356F026E084CFE302A210A9
226	B12DA0621B343A8C3FE941A32EA5D571
227	D653135DE825A74B743E275C19020C71
228	5CAD301BF846B2EE921D33A3D4BB1220
229	1292445ACBB548C668FC3853578474E6
230	B94B4B89C0654688C9E007D9061DF5FE
231	75A2C91E76061A8680884E8BFD14A64A
232	83726F3070B47ECE21504A5065D74A36
233	964A471444A270840919F7FE07382D14
234	A582701EBFCA899B8497088C3560F300
235	64FCB63E21CAC63002D1E09FD1543274
236	B1E1C83F689ADF422C865F98D288838A
237	A06A0D822165D3F3416B47419ECCB547
238	1D2068039A32B7EF728914ECE07CB416
239	64C0CF81F78E8823ECC8661A5295422A
240	902A7243F593F2180E5A306A8438E6A9
241	A4CCED356D56BF1B41C28E1504301FE8
242	82AE90E2F76B3055A2E3A966025CC01A
243	8B90D5A62364E18574145C5895CEFF60
244	43F7EA1AB0D19032551AD9DE21307353
245	DD5D8424AC60360B1C14E65815C9B15E
246	C632A67382ECB2681DFB8525140E2878
247	3A6ACF212B6F8B9C53FF224C2E00C16C
248	86A90C267B1171093F362FE5CB14E3A0
249	EA262EC36E6589C3BB005426AF2590F4
250	200F03126C5B0D7B901128E7757C5F70
251	68FC090C2221AA98BF0D24E85066EFC2
252	9E26CEC67832FC42A87E92FA1015212E

<u>253</u>	<u>ACD889634F79506F2582EA03240F2A07</u>
<u>254</u>	<u>AA65407E1F4A33BF9A62860A3D6A4CC0</u>
<u>255</u>	<u>B1B950AC76A608AA32D04B03C7FF24D3</u>