
Source: SA5 (Telecom Management)
Title: 2 Rel-5/6 CR 32.111-4 Align with the IS 32.111-2 the possibility to apply filters to notification parameters
Document for: Approval
Agenda Item: 7.5.3

Doc-1 st -Level	Doc-2 nd -Level	Spec	CR	Rev	Phase	Subject	Cat	Ver-Cur	Wi
SP-040561	S5-046856	32.111-4	027	--	Rel-5	Align with the IS 32.111-2 the possibility to apply filters to notification parameters	F	5.7.1	OAM-NIM
SP-040561	S5-046858	32.111-4	028	--	Rel-6	Align with the IS 32.111-2 the possibility to apply filters to notification parameters	A	6.1.0	OAM-NIM

CHANGE REQUEST

⌘ **32.111-4 CR 027** ⌘ rev - ⌘ Current version: **5.7.1** ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

Proposed change affects: | UICC apps ⌘ ME Radio Access Network Core Network

Title:	⌘ Align with the IS 32.111-2 the possibility to apply filters to notification parameters		
Source:	⌘ SA5 (olaf.pollakowski@siemens.com)		
Work item code:	⌘ OAM-NIM	Date:	⌘ 20/08/2004
Category:	⌘ F	Release:	⌘ Rel-5
	Use <u>one</u> of the following categories: F (correction) A (corresponds to a correction in an earlier release) B (addition of feature), C (functional modification of feature) D (editorial modification) Detailed explanations of the above categories can be found in 3GPP TR 21.900 .		Use <u>one</u> of the following releases: 2 (GSM Phase 2) R96 (Release 1996) R97 (Release 1997) R98 (Release 1998) R99 (Release 1999) Rel-4 (Release 4) Rel-5 (Release 5) Rel-6 (Release 6)

Reason for change:	⌘ According to the IS some parameters of the notifications are filterable. This capability is not fully reflected in the CMIP SS
Summary of change:	⌘ The capability to filter on certain parameters is added to the notifications <i>notifyAlarmListRebuilt</i> , <i>notifyPotentialFaultyAlarmList</i> and <i>notifyAlarmAlignmentEnd</i> . In addition to this the <i>NotifyAlarmAlignmentEndInfo</i> is extended by <i>alarmAlignmentEndStatus</i> .
Consequences if not approved:	⌘ The CMIP SS of the Alarm IRP would not be aligned with the IS.

Clauses affected:	⌘ 4, 5, 6, Annex A, Annex B										
Other specs affected:	<table border="1" style="display: inline-table; border-collapse: collapse;"> <tr> <td style="width: 20px; text-align: center;">Y</td> <td style="width: 20px; text-align: center;">N</td> </tr> <tr> <td style="text-align: center;">⌘</td> <td style="text-align: center;">X</td> </tr> <tr> <td style="text-align: center;">⌘</td> <td style="text-align: center;">X</td> </tr> <tr> <td style="text-align: center;">⌘</td> <td style="text-align: center;">X</td> </tr> </table> Other core specifications ⌘ Test specifications ⌘ O&M Specifications ⌘	Y	N	⌘	X	⌘	X	⌘	X		
Y	N										
⌘	X										
⌘	X										
⌘	X										
Other comments:	⌘										

Change in Clause 4, 5, 6, Annex A, Annex B

4 Basic aspects

The present document provides all the GDMO and ASN.1 definitions necessary to implement the Alarm IRP Information Service (3GPP TS 32.111-2 [9]) for the CMIP interface.

4.1 Architectural aspects

The Alarm IRP Information Service description is based on Information Object Classes (IOC), Relationships among IOC and Interfaces (used or implemented by IOC) which include Operations and/or Notifications.

In the present document, for the CMIP interfaces the IOC are modelled as GDMO "Managed Object Classes" (MOC) defined specifically for alarm management, the Operations are modelled as GDMO "Actions" of a MOC while the Notifications are modelled as GDMO "Notifications" included in MOCs that need to report events to the Manager. In more detail, the Notifications related to alarm management are included in a MOC defined in the present document while the Notifications defined for alarm reporting are not included in any MOC defined in the present document. They will be included in other MOCs defined in other CMIP Solution Set or in other CMIP Information Models.

Regarding the Notifications, the present document is based on the Notification IRP CMIP Solution Set (3GPP TS 32.304 [10]).

4.1.1 Reporting new alarms

In case of an alarm occurrence the Agent notifies all subscribed Managers that a new alarm has occurred and has been added into the alarm list of the Agent.

For this purpose the standardised alarm notifications defined in ITU-T Recommendations X.721 [4], X.733 [5] and X.736 [12] are used.

4.1.2 Reporting changed alarms

Although in the Alarm IRP Information Service (3GPP TS 32.111-2 [9]) there is a notification specifically defined to report the event of alarm attribute changes, on the CMIP interfaces such events are reported according to ITU-T Recommendations X.721 [4], X.733 [5] and X.736 [12], i.e. the original alarm is first cleared (by means of a clear alarm notification) and then a new alarm notification with the changed parameter values is generated by the Agent.

4.1.3 Reporting cleared alarms

On the CMIP interfaces the clearing of alarms is reported by the Agent to the Managers in accordance with the mechanisms defined in ITU-T Recommendation X.733 [5], X.736 [12] and ITU-T Recommendation Q.821 [7].

4.1.4 Acknowledgment of alarms

This clause relates to the co-operative alarm acknowledgment managed on Itf-N, which implies that the acknowledgment of alarms can be done on both NM and EM.

The acknowledgment of alarms is managed by means of the MOC `alarmControl`, which includes:

- one action to acknowledge alarms (*acknowledgeAlarms*);
- one action to unacknowledge alarms (*unacknowledgeAlarms*);
- ITU-T Recommendation X.721 [4] compliant alarm notifications to inform Managers about changes of acknowledgment state.

In case an alarm is acknowledged by an operator or automatically by a management system, the `ackUserId`, `ackSystemId`, `ackState` and `ackTime` information is stored in the *additionalInformation* field of the alarm present in the alarm list.

4.1.5 Management of comments associated to alarms

This feature provides the NM and EM operators with the capability to add comments to an alarm and to share such information among all the OS (EM and NM) that are involved in the network management. This implies that a synchronisation of the comments between the EM and NM shall be possible. An OS shall have the capability to record more than one comment for each alarm.

The management of the comments associated to alarms is similar to the management of the acknowledgment of alarms and is achieved by means of the same MOC `alarmControl`. For the management of the comments, the MOC `alarmControl` includes

- one action (*setComment*) allowing the NM operator to add a comment to one or several alarms;
- ITU-T Recommendation X.721 [4] compliant alarm notifications to inform the IRPManagers about changes of alarm related comments. Such notifications are generated by the Agent towards all connected Managers either if the comment is made by an NM operator (i.e. after the completion of a previous *setComment* request) or if the comment is made by an EM operator.

4.1.6 Alignment of alarm conditions over the Itf-N

The IRP Manager is able to trigger the alarm conditions alignment using the Action *getAlarmList*

The following specifies the logical steps of the alignment procedure, by describing a possible implementation. Any other implementation showing the same behaviour on the Itf-N interface is compliant with the present document.

- The Manager sends to the Agent a *getAlarmList* request containing the following information:
 - *alarmAckState*, used to select the alarms from the Agent's alarm list for the current alignment (e.g. all active alarms).
 - *destination*, identifying the destination to which event reports that have passed the filter conditions are sent.
 - *filter*, this optional parameter defines the conditions an alarm notification shall fulfil in order to be forwarded to the Manager. It applies only for the current alignment request.
- After evaluation of the request, the Agent first generates an *alignmentId* value, which unambiguously identifies this alignment process. This value is used by the Manager to correlate alarm reports to the corresponding alignment requests, in case this Manager issues several alarm alignments in parallel.
- The Agent creates a temporary Event Forwarding Discriminator (EFD) instance for the purpose of this alarm alignment, using the parameters *destination* and *filter* received in the request. If the *filter* parameter is absent in the alarm synchronisation request, all alarm notifications are forwarded to the Manager through this EFD, taking into account both the *filter* constraint currently active for the event reporting to the manager having invoked the synchronisation request and the value of the parameter *alarmAckState*.
The filter is set by the Agent automatically in order to forward only those alarm notifications containing, at the beginning of the field *additionalText*, the string "(ALIGNMENT-<alignmentId>)". The filter must also forward the notification *notifyAlarmAlignmentEnd* indicating the end of the alarm alignment process. The alarm alignment end notifications of other alignment processes shall be filtered out using the *alignmentId* carried by the event information parameter of *notifyAlarmAlignmentEnd*.
- The Agent sends back a *getAlarmList* response, which contains the *alignmentId* described above and the *status* information, indicating the result of the request. (see the message flow in Figure 1).
- The Agent scans now its alarm list. For every alarm, which matches the criteria defined by the *alarmAckState* parameter [and the filter parameter](#), the Agent inserts, at the beginning of the field *additionalText*, the string "(ALIGNMENT-<alignmentId>)". According to ITU-T Recommendation X.734 [6], the Agent forwards these alarm notifications towards all EFDs.

NOTE: These alarm notifications can reach the current Manager only via the temporary EFD created for the current alignment. They are filtered out:

- a) By all the EFD instances used for "real-time" alarm reporting, due to the presence of the sub-string "ALIGNMENT" in the field *additionalText* (see 3GPP TS 32.304 [10]).

- b) By all temporary EFD instances possibly created for parallel alignments, due to the presence of the unambiguous sub-string "<alignmentId>" in the *additionalText* field.
- At the end of the alarm alignment process the Agent shall send the dedicated notification *notifyAlarmAlignmentEnd* in order to indicate the end of the current alignment process (unambiguously identified by the *alignmentId*). In case the alarm list is empty or no alarm matches the the criteria defined by the *alarmAckState* parameter and the *filter* paramter the notification *notifyAlarmAlignmentEnd* shall be emitted directly after the the agent has send the *getAlarmList* response.
- The temporary EFD of the current alarm alignment process shall forward only alarm alignment end notifications carrying in the event information field the *alignmmentId* of this alignment process. All other alarm alignment end notifications shall be filtered out.
- After sending the notification *notifyAlarmAlignmentEnd* the Agent automatically deletes the temporary EFD instance (see figure 1).

At the end of the alarm conditions alignment the acknowledgement state and the comments assigned to each alarm are implicitly synchronised between the IRPAgent and the IRPManager that has requested the alignment.

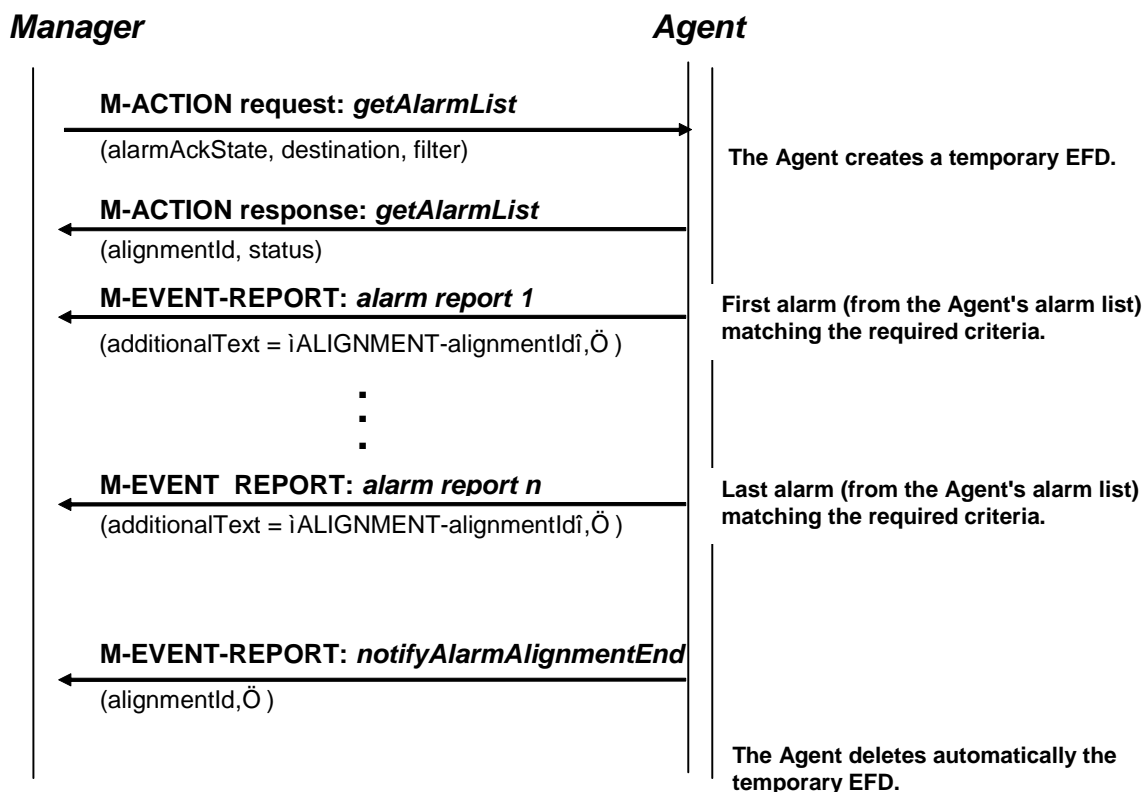


Figure 1: Alignment arrow diagram

Figure 2 shows the handling of a "real-time" alarm notification (occurred during the execution of the *getAlarmList* operation), which is forwarded by the Agent (according to ITU-T Recommendation X.734 [6]) to all currently available EFD instances. Dependent on the *discriminatorConstruct* setting of every EFD, such an alarm may or may not reach the related Manager. In any case, this alarm is filtered out by the temporary EFD assigned to the Manager, which triggered the *getAlarmList* request.

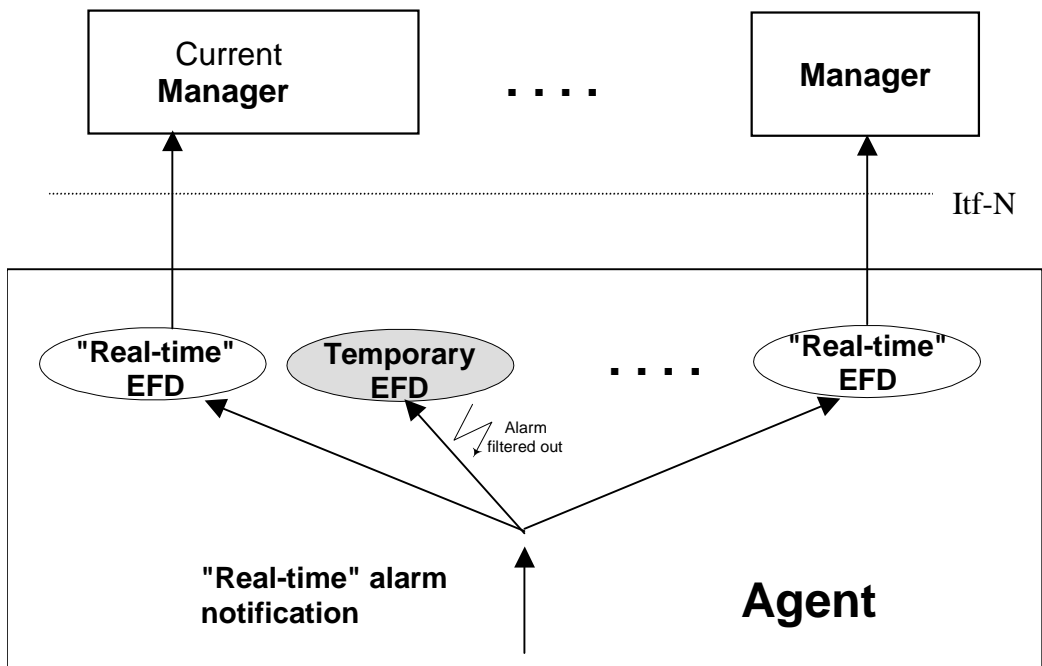


Figure 2: Treatment of "real time" alarms

Figure 3 shows the handling of an alarm notification from the alarm list, matching the criteria defined in the parameters *alarmAckState* of the *getAlarmList* request and forwarded by the Agent to all EFD instances as well. This alarm is filtered out by all EFD instances in charge of discrimination of "real-time" alarms and can reach only the Manager, which triggered the *getAlarmList* request, because it passes the temporary EFD instance assigned to this Manager.

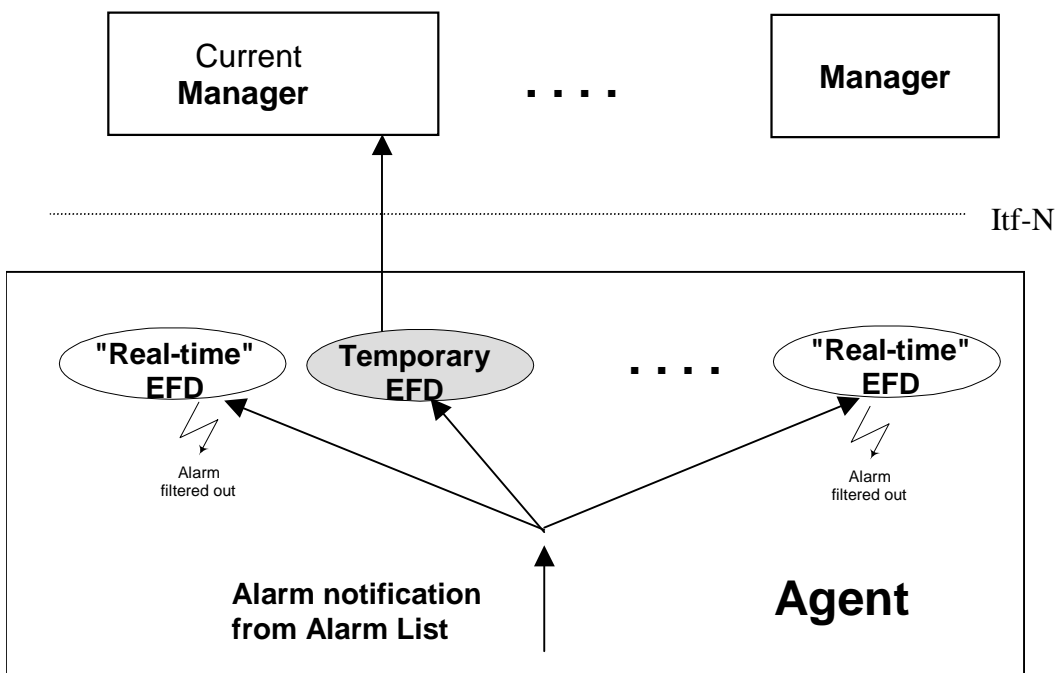


Figure 3: Treatment of "alignment" alarms

4.2 Mapping

The semantics of the Alarm IRP is defined in 3GPP TS 32.111-2 [9]. The definitions of the management information defined there are independent of any implementation technology and protocol. This clause maps these protocol-independent definitions onto the equivalences of the CMIP solution set of Alarm IRP.

4.2.1 Mapping of Information Object Classes

For this Alarm IRP CMIP Solution Sets, the Information Object Classes (IOC) and the Interfaces defined in 3GPP TS 32.111-2 [9] are mapped to a Managed Object Classes (MOC) named `alarmControl` which includes all the Attributes, Actions and Notifications necessary to model the management described in (3GPP TS 32.111-2 [9]).

4.2.2 Mapping of Operations

Table 1 maps the Interface/Operations defined in the IS of the Alarm IRP to their equivalents in the CMIP SS. The equivalents are qualified as Mandatory (M) or Optional (O).

Table 1: Mapping of Operations

IS Interface	IS Operation	CMIP SS Equivalent	Qualifier
AlarmIRPOperations_1	acknowledgeAlarms	CMISE M-ACTION service, action type: acknowledgeAlarms	M
	getAlarmList	CMISE M-ACTION service, action type: getAlarmList environmentAlarm ITU-T X.721 [4] equipmentAlarm ITU-T X.721 [4] qualityofServiceAlarm ITU-T X.721 [4] processingErrorAlarm ITU-T X.721 [4] communicationsAlarm ITU-T X.721 [4] integrityViolation ITU-T X.721 [4] operationalViolation ITU-T X.721 [4] physicalViolation ITU-T X.721 [4] securityServiceOrMechanismViolation ITU-T X.721 [4] timeDomainViolation ITU-T X.721 [4] CMISE M-EVENT-REPORT service, event type: notifyAlarmAlignmentEndR0602	M
AlarmIRPOperations_2	getAlarmCount	CMISE M-ACTION service, action type: getAlarmCount	O
AlarmIRPOperations_3	unacknowledgeAlarms	CMISE M-ACTION service, action type: unacknowledgeAlarms	O
AlarmIRPOperations_4	setComment	CMISE M-ACTION service, action type: setComment	O
AlarmIRPOperations_5	clearAlarms	CMISE M-ACTION service, action type: clearAlarms	O
GenericIRPVersionOperation	getIRPVersion	CMISE M-ACTION service, action type: getAlarmIRPVersion	M
GenericIRPPProfileOperation	getNotificationProfile	CMISE M-ACTION service, action type: getAlarmIRPNotificationProfile	O
	getOperationProfile	CMISE M-ACTION service, action type: getAlarmIRPOperationProfile	O

NOTE: The Interfaces `GenericIRPVersionOperation` and `GenericIRPPProfileOperation` are defined in 3GPP TS 32.312 [11].

4.2.3 Mapping of Operation Parameters

The tables in the following clauses show the parameters of each operations defined in the IS 3GPP TS 32.111-2 [9] and their equivalents in this CMIP SS.

The input parameters of the operations are mapped into "Action information" (see GDMO and ASN.1 definitions for more details).

The output parameters of the operations are mapped into "Action response" (see GDMO and ASN.1 definitions for more details).

Table 2: Parameter mapping of the operation *acknowledgeAlarms*

IS Parameter	IN/OUT	CMIP SS Equivalent	Qualifier
alarmInformationAndSeverityReferenceList	IN	M-ACTION parameter 'Action information' (AckOrUnackAlarmsInfo): alarmReferenceList (note)	M
alarmInformationAndSeverityReferenceList	IN	M-ACTION parameter 'Action information' (AckOrUnackAlarmsInfo): AlarmReferenceList (note)	M
ackUserId	IN	M-ACTION parameter 'Action information' (AckOrUnackAlarmsInfo): ackUserId	M
ackSystemId	IN	M-ACTION parameter 'Action information' (AckOrUnackAlarmsInfo): ackSystemId	O
badAlarmInformationReferenceList	OUT	M-ACTION parameter 'Action reply' (AckOrUnackAlarmsReply): errorAlarmReferenceList	M
status	OUT	M-ACTION parameter 'Action reply' (AckOrUnackAlarmsReply): status	M
NOTE: severity verification not required in CMIP solution set.			

Table 3: Parameter mapping of the operation *getAlarmCount*

IS Parameter	IN/OUT	CMIP SS Equivalent	Qualifier
filter	IN	M-ACTION parameter 'Action information' (GetAlarmCountInfo): filter	O
alarmAckState	IN	M-ACTION parameter 'Action information' (GetAlarmCountInfo): alarmAckState	O
criticalCount	OUT	M-ACTION parameter 'Action reply' (GetAlarmCountReply): criticalCount	M
majorCount	OUT	M-ACTION parameter 'Action reply' (GetAlarmCountReply): majorCount	M
minorCount	OUT	M-ACTION parameter 'Action reply' (GetAlarmCountReply): minorCount	M
warningCount	OUT	M-ACTION parameter 'Action reply' (GetAlarmCountReply): warningCount	M
indeterminateCount	OUT	M-ACTION parameter 'Action reply' (GetAlarmCountReply): indeterminateCount	M
clearedCount	OUT	M-ACTION parameter 'Action reply' (GetAlarmCountReply): clearedCount	M
status	OUT	M-ACTION parameter 'Action reply' (GetAlarmCountReply): status	M

Table 4: Parameter mapping of the operation *getAlarmList*

IS Parameter	IN/OUT	CMIP SS Equivalent	Qualifier
filter	IN	M-ACTION parameter 'Action information' (GetAlarmListInfo): filter	O
alarmAckState	IN	M-ACTION parameter 'Action information' (GetAlarmListInfo): alarmAckState	O
--	IN	M-ACTION parameter 'Action information' (GetAlarmListInfo): destination (see note 1)	M
alarmInformationList	OUT	sequence of alarm notifications, see subclause 4.1.6	M
status	OUT	M-ACTION parameter 'Action reply' (GetAlarmListReply): status	M
--	OUT	M-ACTION parameter 'Action reply' (GetAlarmListReply): alignmentId (see note 2)	M
NOTE 1: Destination is a CMIP specific parameter and is determined by the Manager.			
NOTE 2: AlignmentId is a CMIP specific parameter and is determined by the Agent.			

Table 5: Parameter mapping of the operation *getAlarmIRPVersion*

IS Parameter	IN/OUT	CMIP SS Equivalent	Qualifier
versionNumberSet	OUT	M-ACTION parameter 'Action reply' (GetAlarmIRPVersionReply): versionNumberList	M
status	OUT	M-ACTION parameter 'Action reply' (GetAlarmIRPVersionReply): status	M

Table 6: Parameter mapping of the operation *getOperationProfile*

IS Parameter	IN/OUT	CMIP SS Equivalent	Qualifier
irpVersion	IN	M-ACTION parameter 'Action information': irpVersionNumber	M
operationNameProfile	OUT	M-ACTION parameter 'Action reply' (GetOperationProfileReply): operationNameProfile	M
operationParameterProfile	OUT	M-ACTION parameter 'Action reply' (GetOperationProfileReply): operationParameterProfile	M
status	OUT	M-ACTION parameter 'Action reply' (GetOperationProfileReply): status	M

Table 7: Parameter mapping of the operation *getNotificationProfile*

IS Parameter	IN/OUT	CMIP SS Equivalent	Qualifier
irpVersion	IN	M-ACTION parameter 'Action information': irpVersionNumber	M
notificationNameProfile	OUT	M-ACTION parameter 'Action reply' (GetNotificationProfileReply): notificationNameProfile	M
notificationParameterProfile	OUT	M-ACTION parameter 'Action reply' (GetNotificationProfileReply): notificationParameterProfile	M
status	OUT	M-ACTION parameter 'Action reply' (GetNotificationProfileReply): status	M

Table 8: Parameter mapping of the operation *setComment*

IS Parameter	IN/OUT	CMIP SS Equivalent	Qualifier
alarmInformationReferenceList	IN	M-ACTION parameter 'Action information' (SetCommentInfo): alarmReferenceList	M
commentUserId	IN	M-ACTION parameter 'Action information' (SetCommentInfo): commentUserId	M
commentSystemId	IN	M-ACTION parameter 'Action information' (SetCommentInfo): commentSystemId	O
commentText	IN	M-ACTION parameter 'Action information' (SetCommentInfo): commentText	M
badAlarmInformationReferenceList	OUT	M-ACTION parameter 'Action reply' (SetCommentReply): errorAlarmReferenceList	M
status	OUT	M-ACTION parameter 'Action reply' (SetCommentReply): status	M

Table 9: Parameter mapping of the operation *unacknowledgeAlarms*

IS Parameter	IN/OUT	CMIP SS Equivalent	Qualifier
alarmInformationReferenceList	IN	M-ACTION parameter 'Action information' (AckOrUnackAlarmsInfo): alarmReferenceList	M
ackUserId	IN	M-ACTION parameter 'Action information' (AckOrUnackAlarmsInfo): ackUserId	M
ackSystemId	IN	M-ACTION parameter 'Action information' (AckOrUnackAlarmsInfo): ackSystemId	O
badAlarmInformationReferenceList	OUT	M-ACTION parameter 'Action information' (AckOrUnackAlarmsReply): errorAlarmReferenceList	M
status	OUT	M-ACTION parameter 'Action information' (AckOrUnackAlarmsReply): status	M

Table 10: Parameter mapping of the operation *clearAlarms*

IS Parameter	IN/OUT	CMIP SS Equivalent	Qualifier
alarmInformationReferenceList	IN	M-ACTION parameter 'Action information' (ClearAlarmsInfo): alarmReferenceList	M
clearUserId	IN	M-ACTION parameter 'Action information' (ClearAlarmsInfo): clearUserId	M
clearSystemId	IN	M-ACTION parameter 'Action information' (ClearAlarmsInfo): clearSystemId	O
badAlarmInformationReferenceList	OUT	M-ACTION parameter 'Action reply' (ClearAlarmsReply): errorAlarmReferenceList	M
status	OUT	M-ACTION parameter 'Action reply' (ClearAlarmsReply): status	M

4.2.4 Mapping of Notifications

Table 11 maps the Notifications defined in the Information Service of the Alarm IRP to the equivalent Notifications of the CMIP solution set for the Alarm IRP. The CMIP Notifications are qualified as Mandatory (M) or Optional (O).

Table 11: Mapping of Notifications

IS Notification	CMIP SS Equivalent	Qualifier
notifyNewAlarm	environmentalAlarm ITU-T X.721 [4] equipmentAlarm ITU-T X.721 [4] qualityofServiceAlarm ITU-T X.721 [4] processingErrorAlarm ITU-T X.721 [4] communicationsAlarm ITU-T X.721 [4] integrityViolation ITU-T X.721 [4] operationalViolation ITU-T X.721 [4] physicalViolation ITU-T X.721 [4] securityServiceOrMechanismViolation ITU-T X.721 [4] timeDomainViolation ITU-T X.721 [4]	M
notifyChangedAlarm	notifyClearedAlarm notifyNewAlarm which are in turn mapped into environmentalAlarm ITU-T X.721 [4] equipmentAlarm ITU-T X.721 [4] qualityofServiceAlarm ITU-T X.721 [4] processingErrorAlarm ITU-T X.721 [4] communicationsAlarm ITU-T X.721 [4] integrityViolation ITU-T X.721 [4] operationalViolation ITU-T X.721 [4] physicalViolation ITU-T X.721 [4] securityServiceOrMechanismViolation ITU-T X.721 [4] timeDomainViolation ITU-T X.721 [4]	O
notifyClearedAlarm	environmentalAlarm ITU-T X.721 [4] equipmentAlarm ITU-T X.721 [4] qualityofServiceAlarm ITU-T X.721 [4] processingErrorAlarm ITU-T X.721 [4] communicationsAlarm ITU-T X.721 [4] integrityViolation ITU-T X.721 [4] operationalViolation ITU-T X.721 [4] physicalViolation ITU-T X.721 [4] securityServiceOrMechanismViolation ITU-T X.721 [4] timeDomainViolation ITU-T X.721 [4]	M
notifyAckStateChanged	environmentalAlarm ITU-T X.721 [4] equipmentAlarm ITU-T X.721 [4] qualityofServiceAlarm ITU-T X.721 [4] processingErrorAlarm ITU-T X.721 [4] communicationsAlarm ITU-T X.721 [4] integrityViolation ITU-T X.721 [4] operationalViolation ITU-T X.721 [4] physicalViolation ITU-T X.721 [4] securityServiceOrMechanismViolation ITU-T X.721 [4] timeDomainViolation ITU-T X.721 [4]	M
notifyAlarmListRebuilt	notifyAlarmListRebuilt R0602	M
notifyComments	environmentalAlarm ITU-T X.721 [4] equipmentAlarm ITU-T X.721 [4] qualityofServiceAlarm ITU-T X.721 [4] processingErrorAlarm ITU-T X.721 [4] communicationsAlarm ITU-T X.721 [4] integrityViolation ITU-T X.721 [4] operationalViolation ITU-T X.721 [4] physicalViolation ITU-T X.721 [4] securityServiceOrMechanismViolation ITU-T X.721 [4] timeDomainViolation ITU-T X.721 [4]	O
notifyPotentialFaultyAlarmList	notifyPotentialFaultyAlarmList R0602	O

4.2.5 Mapping of Notification Parameters

In the CMIP Solution Set, all the notifications originated within the Agent are reported to the Managers by means of the CMISE "M-EVENT-REPORT" primitive, which is implemented by means of the "m-EventReport OPERATION" (see ITU-T Recommendations X.710 [2] and X.711 [3]). The argument of m-EventReport OPERATION is defined in ITU-T Recommendation X.711 [3] as follows:

```
EventReportArgument ::= SEQUENCE {
    managedObjectClass      ObjectClass,
    managedObjectInstance   ObjectInstance,
    eventTime                [5] IMPLICIT GeneralizedTime OPTIONAL,
    eventType                EventTypeId,
    eventInfo                [8] ANY DEFINED BY eventType OPTIONAL
}
```

where *eventInfo* is further specified, for each specific notification, by means of specific GDMO/ASN.1 definitions.

In the following tables, for the notifications defined in [9], all parameters are mapped to their CMIP SS equivalents. Note that the parameter mapping for the notification *notifyChangedAlarm* is not given. This is because in the CMIP SS the notifications *notifyClearedAlarm* and *notifyNewAlarm* are emitted instead of the notification *notifyChangedAlarm*.

The IS parameter *systemDN* defined in [9] (Alarm IRP: Information Services) is conditional and not used in the CMIP SS.

The IS parameter *alarmType* has no direct CMIP SS equivalent. Instead the value of this parameter is reflected by the type of the emitted notification. More specifically:

- If the alarm type is equal to 'Communications Alarm' the notification *communicationsAlarm* is emitted;
- If the alarm type is equal to 'Processing Error Alarm' the notification *processingErrorAlarm* is emitted;
- If the alarm type is equal to 'Environmental Alarm' the notification *environmentalAlarm* is emitted;
- If the alarm type is equal to 'Quality of Service Alarm' the notification *qualityofServiceAlarm* is emitted;
- If the alarm type is equal to 'Equipment Alarm' the notification *equipmentAlarm* is emitted.
- If the alarm type is equal to 'Integrity Violation ' the notification *integrityViolation* is emitted.
- If the alarm type is equal to 'Operational Violation ' the notification *operationalViolation* is emitted.
- If the alarm type is equal to 'Physical Violation ' the notification *physicalViolation* is emitted.
- If the alarm type is equal to 'Security Violation ' the notification *securityServiceOrMechanismViolation* is emitted.
- If the alarm type is equal to 'Time Domain Violation ' the notification *timeDomainViolation* is emitted.

Also the IS parameter *alarmId* is not mapped directly to a parameter in the CMIP SS. This is not required because an alarm is identified unambiguously by the notification identifier of the notification reporting the alarm the first time and, if the notification identifier is not unique across the IRP Agent, by the instance of the managed object emitting this notification. Notifications referring to an alarm already reported (e.g. *notifyClearedAlarm*, *notifyAckStateChanged*, *notifyComments*) do so by specifying in the M-EVENT REPORT parameter 'Event information': *correlatedNotifications* (ITU-T Recommendations X.721 [4], X.733 [5] and X.736 [12]) the notification identifier of the notification having reported the new alarm and, if required, the instance of the object having emitted this notification.

Most parameters are mapped to the M-EVENT report parameter 'Event information'. For the notifications *notifyNewAlarm* (when reporting alarms not related to security), *notifyClearedAlarm*, *notifyAckStateChanged* and *notifyComments* the syntax and semantics of this structured parameter are defined in ITU-T X.721 [4] by the ASN.1 definition *AlarmInfo*. In case *notifyNewAlarm* reports a security alarm, the 'Event information' parameter is described by *SecurityAlarmInfo*, defined in ITU-T X.721 [4] as well. For the other notifications (*notifyAlarmListRebuilt*, *notifyPotentialFaultyAlarmList*) the 'Event information' parameter is described by ASN.1 definitions defined in this document.

Table 12: Parameter mapping of the notification *notifyNewAlarm* for alarms not related to security

IS Parameter	CMIP SS Equivalent	Qualifier
objectclass	M-EVENT-REPORT parameter <i>Managed object class</i>	M
objectInstance	M-EVENT-REPORT parameter <i>Managed object instance</i>	M
notificationId	M-EVENT-REPORT parameter <i>Event information</i> (AlarmInfo): notificationIdentifier	M
eventTime	M-EVENT-REPORT parameter <i>Event time</i>	M
systemDN	This IS parameter is conditional and not used in the CMIP SS.	--
notificationType	M-EVENT-REPORT parameter <i>Event type</i>	M
probableCause	M-EVENT-REPORT parameter <i>Event information</i> (AlarmInfo): probableCause	M
specificProblems	M-EVENT-REPORT parameter <i>Event information</i> (AlarmInfo): specificProblems	O
perceivedSeverity	M-EVENT-REPORT parameter <i>Event information</i> (AlarmInfo): perceivedSeverity	M
alarmType	The semantics of this parameter is conveyed by the notification type.	--
backedUpStatus	M-EVENT-REPORT parameter <i>Event information</i> (AlarmInfo): backedUpStatus	O
backUpObject	M-EVENT-REPORT parameter <i>Event information</i> (AlarmInfo): backUpObject	O
trendIndication	M-EVENT-REPORT parameter <i>Event information</i> (AlarmInfo): trendIndication	O
thresholdInfo	M-EVENT-REPORT parameter <i>Event information</i> (AlarmInfo): thresholdInfo	O
correlatedNotifications	M-EVENT-REPORT parameter <i>Event information</i> (AlarmInfo): correlatedNotifications	O
stateChangeDefinition	M-EVENT-REPORT parameter <i>Event information</i> (AlarmInfo): stateChangeDefinition	O
monitoredAttributes	M-EVENT-REPORT parameter <i>Event information</i> (AlarmInfo): monitoredAttributes	O
proposedRepairActions	M-EVENT-REPORT parameter <i>Event information</i> (AlarmInfo): proposedRepairActions	O
additionalText	M-EVENT-REPORT parameter <i>Event information</i> (AlarmInfo): additionalText	O
alarmId	M-EVENT-REPORT parameter <i>Event information</i> (AlarmInfo): notificationIdentifier M-EVENT-REPORT parameter <i>Managed object instance</i>	M

Table 12a: Parameter mapping of the notification *notifyNewAlarm* for alarms related to security

IS Parameter	CMIP SS Equivalent	Qualifier
objectclass	M-EVENT-REPORT parameter <i>Managed object class</i>	M
objectInstance	M-EVENT-REPORT parameter <i>Managed object instance</i>	M
notificationId	M-EVENT-REPORT parameter <i>Event information</i> (SecurityAlarmInfo): notificationIdentifier	M
eventTime	M-EVENT-REPORT parameter <i>Event time</i>	M
systemDN	This IS parameter is conditional and not used in the CMIP SS.	--
notificationType	M-EVENT-REPORT parameter <i>Event type</i>	M
probableCause	M-EVENT-REPORT parameter <i>Event information</i> (SecurityAlarmInfo): securityAlarmCause	M
perceivedSeverity	M-EVENT-REPORT parameter <i>Event information</i> (SecurityAlarmInfo): securityAlarmSeverity	M
alarmType	The semantics of this parameter is conveyed by the notification type.	--
correlatedNotifications	M-EVENT-REPORT parameter <i>Event information</i> (SecurityAlarmInfo): correlatedNotifications	O
additionalText	M-EVENT-REPORT parameter <i>Event information</i> (SecurityAlarmInfo): additionalText	O
serviceUser	serviceUser	M
serviceProvider	serviceProvider	M
securityAlarmDetector	securityAlarmDetector	M
alarmId	M-EVENT-REPORT parameter <i>Event information</i> (SecurityAlarmInfo): notificationIdentifier M-EVENT-REPORT parameter <i>Managed object instance</i>	M

Table 13: Parameter mapping of the notification *notifyClearedAlarm*

IS Parameter	CMIP SS Equivalent	Qualifier
objectclass	M-EVENT-REPORT parameter 'Managed object class'	M
objectInstance	M-EVENT-REPORT parameter 'Managed object instance'	M
notificationId	M-EVENT-REPORT parameter 'Event information' (AlarmInfo): notificationIdentifier	M
eventTime	M-EVENT-REPORT parameter 'Event time'	M
systemDN	This IS parameter is conditional and not used in the CMIP SS.	--
notificationType	M-EVENT-REPORT parameter 'Event type'	M
probableCause	M-EVENT-REPORT parameter 'Event information' (AlarmInfo): probableCause	M
perceivedSeverity	M-EVENT-REPORT parameter 'Event information' (AlarmInfo): perceivedSeverity	M
alarmType	The semantics of this parameter is conveyed by the notification type.	--
clearUserId	M-EVENT-REPORT parameter 'Event information' (AlarmInfo): additionalInformation: clearUserIdParameter	O
clearSystemId	M-EVENT-REPORT parameter 'Event information' (AlarmInfo): additionalInformation: clearSystemIdParameter	O
correlatedNotifications	M-EVENT-REPORT parameter 'Event information' (AlarmInfo): correlatedNotifications	O
alarmId	M-EVENT-REPORT parameter 'Event information' (AlarmInfo): correlatedNotifications	M

Table 14: Parameter mapping of the notification *notifyAckStateChanged*

IS Parameter	CMIP SS Equivalent	Qualifier
objectclass	M-EVENT-REPORT parameter 'Managed object class'	M
objectInstance	M-EVENT-REPORT parameter 'Managed object instance'	M
notificationId	M-EVENT-REPORT parameter 'Event information' (AlarmInfo): notificationIdentifier	M
eventTime	M-EVENT-REPORT parameter 'Event time'	M
systemDN	This IS parameter is conditional and not used in the CMIP SS.	--
notificationType	M-EVENT-REPORT parameter 'Event type'	M
probableCause	M-EVENT-REPORT parameter 'Event information' (AlarmInfo): probableCause	M
perceivedSeverity	M-EVENT-REPORT parameter 'Event information' (AlarmInfo): perceivedSeverity	M
alarmType	The semantics of this parameter is conveyed by the notification type.	--
alarmId	M-EVENT-REPORT parameter 'Event information' (AlarmInfo): correlatedNotifications	--
ackTime	M-EVENT-REPORT parameter 'Event information' (AlarmInfo): additionalInformation: ackTimeParameter	M
ackState	M-EVENT-REPORT parameter 'Event information' (AlarmInfo): additionalInformation: ackStateParameter	M
ackUserId	M-EVENT-REPORT parameter 'Event information' (AlarmInfo): additionalInformation: ackUserIdParameter	M
ackSystemId	M-EVENT-REPORT parameter 'Event information' (AlarmInfo): additionalInformation: ackSystemIdParameter	O

Table 15: Parameter mapping of the notification *notifyAlarmListRebuilt*

IS Parameter	CMIP SS Equivalent	Qualifier
objectClass	M-EVENT-REPORT parameter 'Event information' (NotifyAlarmListRebuiltInfo): rebuiltObjectClass	M
objectInstance	M-EVENT-REPORT parameter 'Event information' (NotifyAlarmListRebuiltInfo): rebuiltObjectInstance	M
notificationId	M-EVENT-REPORT parameter 'Event information' (NotifyAlarmListRebuiltInfo): notificationIdentifier	M
eventTime	M-EVENT-REPORT parameter 'Event time'	M
systemDN	This IS parameter is conditional and not used in the CMIP SS.	--
notificationType	M-EVENT-REPORT parameter 'Event type'	M
reason	M-EVENT-REPORT parameter 'Event information' (NotifyAlarmListRebuiltInfo): reason	M
AlarmListAlignment Requirement	M-EVENT-REPORT parameter 'Event information' (NotifyAlarmListRebuiltInfo): alarmListAlignmentRequirement (see note)	O
NOTE: This parameter shall be supported only, if the IRPAgent supports the notification <i>notifyPotentialFaultyAlarmList</i> .		

Table 16: Parameter mapping of the notification *notifyComments*

IS Parameter	CMIP SS Equivalent	Qualifier
objectClass	M-EVENT-REPORT parameter δ Managed object class <i>i</i>	M
objectInstance	M-EVENT-REPORT parameter δ Managed object instance <i>i</i>	M
notificationId	M-EVENT-REPORT parameter δ Event information <i>i</i> (AlarmInfo): notificationIdentifier	M
eventTime	M-EVENT-REPORT parameter δ Event time <i>i</i>	M
systemDN	This IS parameter is conditional and not used in the CMIP SS.	--
notificationType	M-EVENT-REPORT parameter δ Event type <i>i</i>	M
alarmType	The semantics of this parameter is conveyed by the notification type.	M
probableCause	M-EVENT-REPORT parameter δ Event information <i>i</i> (AlarmInfo): probableCause	M
perceivedSeverity	M-EVENT-REPORT parameter δ Event information <i>i</i> (AlarmInfo): perceivedSeverity	M
comments	M-EVENT-REPORT parameter δ Event information <i>i</i> (AlarmInfo): additionalInformation: commentsParameter	M
alarmId	M-EVENT-REPORT parameter δ Event information <i>i</i> (AlarmInfo): correlatedNotifications	M

Table 17: Parameter mapping of the notification *notifyPotentialFaultyAlarmList*

IS Parameter	CMIP SS Equivalent	Qualifier
objectClass	M-EVENT-REPORT parameter 'Event information' (NotifyPotentialFaultyAlarmListInfo): potentialFaultyObjectClass	M
objectInstance	M-EVENT-REPORT parameter 'Event information' (NotifyPotentialFaultyAlarmListInfo): potentialFaultyObjectInstance	M
notificationId	M-EVENT-REPORT parameter 'Event information' (NotifyPotentialFaultyAlarmListInfo): notificationIdentifier	M
eventTime	M-EVENT-REPORT parameter 'Event time'	M
systemDN	This IS parameter is conditional and not used in the CMIP SS.	--
notificationType	M-EVENT-REPORT parameter: 'Event type'	M
reason	M-EVENT-REPORT parameter 'Event information' (NotifyPotentialFaultyAlarmListInfo): reason	M

5 GDMO definitions

5.1 Managed Object Classes

5.1.1 alarmControl

```
alarmControlR0508 MANAGED OBJECT CLASS
  DERIVED FROM
    "Rec. X.721 | ISO/IEC 10165-2 : 1992":top;
  CHARACTERIZED BY
    alarmControlBasicPackageR0508,
    alarmAcknowledgementPackage,
    alarmIRPVersionPackage;
  CONDITIONAL PACKAGES
    alarmCountPackage          PRESENT IF "an instance supports it",
    alarmCommentPackage        PRESENT IF "an instance supports it",
    alarmProfilePackage         PRESENT IF "an instance supports it",
    alarmUnacknowledgementPackage PRESENT IF "an instance supports it",
    alarmPotentialFaultyAlarmListPackageR0602 PRESENT IF "an instance supports it",
    alarmClearPackage           PRESENT IF "an instance supports it";
  REGISTERED AS {ts32-111AlarmObjectClass 10508};
```

5.2 Packages

5.2.1 alarmControlBasicPackage

```
alarmControlBasicPackageR0508 PACKAGE
  BEHAVIOUR
    alarmControlBasicPackageR0508Behaviour;
  ATTRIBUTES
    alarmControlId      GET,
    alarmsCountSummary GET;
  ACTIONS
    getAlarmList;
  NOTIFICATIONS
    notifyAlarmListRebuiltR0602,
    notifyAlarmAlignmentEndR0602;
  REGISTERED AS {ts32-111AlarmPackage 10508};
```

```
alarmControlBasicPackageR0508Behaviour BEHAVIOUR
  DEFINED AS
```

"The MOC alarmControl has been defined to provide information to the Manager about the currently alarms controlled by the Agent.
An instance of the 'alarmControl' MOC is identified by the value of the attribute 'alarmControlId'.
The attribute 'alarmsCountSummary' provides a summary of the number of alarms managed in the Agent's alarm list (including the number of cleared but not yet acknowledged alarms).
The action 'getAlarmList' is the means, for the Manager, to trigger an alarm alignment procedure in accordance with the parameter specified in the action request (this may be needed e.g. for first time alignment or after a link interruption between the Agent and the Manager). The alarm list is sent as a sequence of single alarm reports.
The notification 'notifyAlarmListRebuilt' is sent by the Agent to the Manager to inform that the alarm list has changed. It is recommended that the Manager subsequently triggers an alarm alignment.
The notification 'notifyAlarmAlignmentEnd' is sent by the Agent to the Manager to inform that the alarm alignment process identified by the 'alignmentId' is completed.";

5.2.2 alarmCountPackage

```
alarmCountPackage PACKAGE
  BEHAVIOUR
    alarmCountPackageBehaviour;
  ACTIONS
    getAlarmCount;
  REGISTERED AS {ts32-111AlarmPackage 2};
```

```
alarmCountPackageBehaviour BEHAVIOUR
```


DEFINED AS

"This package has been defined to allow the Managers to get information from the Agent about the number of alarms currently present in the alarm list.";

5.2.3 alarmAcknowledgementPackage

alarmAcknowledgementPackage **PACKAGE**

BEHAVIOUR

alarmAcknowledgementPackageBehaviour;

ACTIONS

acknowledgeAlarms;

NOTIFICATIONS

"Rec. X.721 | ISO/IEC 10165-2 : 1992": communicationsAlarm,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": environmentalAlarm,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": equipmentAlarm,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": processingErrorAlarm,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": qualityofServiceAlarm,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": integrityViolation,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": operationalViolation,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": physicalViolation,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": securityServiceOrMechanismViolation,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": timeDomainViolation;

REGISTERED AS {ts32-111AlarmPackage 3};

alarmAcknowledgementPackageBehaviour **BEHAVIOUR**

DEFINED AS

"This package has been defined to provide information to the Manager about the acknowledgement status of the alarms controlled by the Agent.

The action 'acknowledgeAlarms' allows the NM operator to acknowledge one or several alarms previously sent by the Agent as alarm notifications.

The ITU-T Recommendation X.721 [4] compliant alarm notifications are sent by the Agent to the Manager to inform that one alarm has been acknowledged. The acknowledgement related information is carried in the *additionalInformation* attribute.";

5.2.4 alarmUnacknowledgementPackage

alarmUnacknowledgementPackage **PACKAGE**

BEHAVIOUR

alarmUnacknowledgementPackageBehaviour;

ACTIONS

unacknowledgeAlarms;

NOTIFICATIONS

"Rec. X.721 | ISO/IEC 10165-2 : 1992": communicationsAlarm,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": environmentalAlarm,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": equipmentAlarm,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": processingErrorAlarm,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": qualityofServiceAlarm,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": integrityViolation,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": operationalViolation,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": physicalViolation,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": securityServiceOrMechanismViolation,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": timeDomainViolation;

REGISTERED AS {ts32-111AlarmPackage 4};

alarmUnacknowledgementPackageBehaviour **BEHAVIOUR**

DEFINED AS

"This package has been defined to provide the Manager with the capability to un-acknowledge alarms.

The action 'unacknowledgeAlarms' allows the NM operator to un-acknowledge one or several alarms previously acknowledged by him.

The ITU-T Recommendation X.721 [4] compliant alarm notifications are sent by the Agent to the Manager to inform that one alarm has been unacknowledged. The acknowledgement related information is carried in the *additionalInformation* attribute.";

5.2.5 alarmCommentPackage

alarmCommentPackage **PACKAGE**

BEHAVIOUR

alarmCommentPackageBehaviour;

ACTIONS

setComment;

NOTIFICATIONS

"Rec. X.721 | ISO/IEC 10165-2 : 1992": communicationsAlarm,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": environmentalAlarm,

```

"Rec. X.721 | ISO/IEC 10165-2 : 1992": equipmentAlarm,
"Rec. X.721 | ISO/IEC 10165-2 : 1992": processingErrorAlarm,
"Rec. X.721 | ISO/IEC 10165-2 : 1992": qualityofServiceAlarm,
"Rec. X.721 | ISO/IEC 10165-2 : 1992": integrityViolation,
"Rec. X.721 | ISO/IEC 10165-2 : 1992": operationalViolation,
"Rec. X.721 | ISO/IEC 10165-2 : 1992": physicalViolation,
"Rec. X.721 | ISO/IEC 10165-2 : 1992": securityServiceOrMechanismViolation,
"Rec. X.721 | ISO/IEC 10165-2 : 1992": timeDomainViolation;

```

```
REGISTERED AS {ts32-111AlarmPackage 5};
```

```
alarmCommentPackageBehaviour BEHAVIOUR
```

```
DEFINED AS
```

"This package has been defined to allow the management of comments related to alarms. The action *setComment* allows the IRPManager to add a comment to one or several alarms. Also the IRPAgent may add comments to alarms. ITU-T Recommendation X.721 [4] compliant alarm notifications are generated once a comment is added to an alarm. The information in all comments associated to an alarm is carried in the attribute *additionalInformation*."

5.2.6 alarmIRPVersionPackage

```
alarmIRPVersionPackage PACKAGE
```

```
BEHAVIOUR
```

```
alarmIRPVersionPackageBehaviour;
```

```
ATTRIBUTES
```

```
supportedAlarmIRPVersions GET;
```

```
ACTIONS
```

```
getAlarmIRPVersion;
```

```
REGISTERED AS {ts32-111AlarmPackage 6};
```

```
alarmIRPVersionPackageBehaviour BEHAVIOUR
```

```
DEFINED AS
```

"This package has been defined to allow the Manager to get information about the Alarm IRP versions supported by the Agent. The attribute 'supportedAlarmIRPVersions' indicates all versions of the Alarm IRP currently supported by the Agent. The action 'getAlarmIRPVersion' may be invoked by the Manager to get information about the Alarm IRP versions supported by the Agent. Such Alarm IRP versions must be compatible to each other. This means that the Manager may use any one of such Alarm IRP versions";

5.2.7 alarmProfilePackage

```
alarmProfilePackage PACKAGE
```

```
BEHAVIOUR
```

```
alarmProfilePackageBehaviour;
```

```
ACTIONS
```

```
getAlarmIRPOperationProfile,
getAlarmIRPNotificationProfile;
```

```
REGISTERED AS {ts32-111AlarmPackage 7};
```

```
alarmProfilePackageBehaviour BEHAVIOUR
```

```
DEFINED AS
```

"This package has been defined to allow the Manager to get detailed information about the profile of Alarm IRP. The action 'getOperationProfile' is invoked by the Manager to get detailed information about the operations supported by Alarm IRP. The action 'getNotificationProfile' is invoked by the Manager to get detailed information about the notifications supported by Alarm IRP.";

5.2.8 alarmPotentialFaultyAlarmListPackage

```
alarmPotentialFaultyAlarmListPackageR0602 PACKAGE
```

```
BEHAVIOUR
```

```
alarmPotentialFaultyAlarmListPackageR0602Behaviour;
```

```
NOTIFICATIONS
```

```
notifyPotentialFaultyAlarmListR0602;
```

```
REGISTERED AS {ts32-111AlarmPackage 8R0602};
```

```
alarmPotentialFaultyAlarmListPackageR0602Behaviour BEHAVIOUR
```

```
DEFINED AS
```

"This package allows the IRPAgent to inform the IRPManager that the alarm list held by the IRPAgent might be faulty.";

5.2.9 alarmClearPackage

```
alarmClearPackage PACKAGE
  BEHAVIOUR
    alarmClearPackageBehaviour;
  ACTIONS
    clearAlarms;
REGISTERED AS {ts32-111AlarmPackage 9};

alarmClearPackageBehaviour BEHAVIOUR
DEFINED AS
  "This package allows the IRPManager to clear one or multiple alarms in the IRPAgent.";
```

5.2.10 x721AlarmNotificationsPackage

```
x721AlarmNotificationsPackage PACKAGE
  BEHAVIOUR
    x721AlarmNotificationsPackageBehaviour;
  NOTIFICATIONS
    "Rec. X.721 | ISO/IEC 10165-2 : 1992": communicationsAlarm,
    "Rec. X.721 | ISO/IEC 10165-2 : 1992": environmentalAlarm,
    "Rec. X.721 | ISO/IEC 10165-2 : 1992": equipmentAlarm,
    "Rec. X.721 | ISO/IEC 10165-2 : 1992": processingErrorAlarm,
    "Rec. X.721 | ISO/IEC 10165-2 : 1992": qualityofServiceAlarm,
    "Rec. X.721 | ISO/IEC 10165-2 : 1992": integrityViolation,
    "Rec. X.721 | ISO/IEC 10165-2 : 1992": operationalViolation,
    "Rec. X.721 | ISO/IEC 10165-2 : 1992": physicalViolation,
    "Rec. X.721 | ISO/IEC 10165-2 : 1992": securityServiceOrMechanismViolation,
    "Rec. X.721 | ISO/IEC 10165-2 : 1992": timeDomainViolation;
REGISTERED AS {ts32-111AlarmPackage 10};

x721AlarmNotificationsPackageBehaviour BEHAVIOUR
DEFINED AS
  "This package contains all alarm notifications defined in ITU-T X.721.";
```

5.3 Actions

5.3.1 acknowledgeAlarms (M)

```
acknowledgeAlarms ACTION
  BEHAVIOUR
    acknowledgeAlarmsBehaviour;
  MODE
    CONFIRMED;
  WITH INFORMATION SYNTAX
    TS32-111-4TypeModule.AckOrUnackAlarmsInfo;
  WITH REPLY SYNTAX
    TS32-111-4TypeModule.AckOrUnackAlarmsReply;
REGISTERED AS {ts32-111AlarmAction 1};

acknowledgeAlarmsBehaviour BEHAVIOUR
DEFINED AS
  "The behaviour of this functionality is defined within 32.111-2 - below provides an overview and CMIP specific semantics.
  This action is invoked by the Manager to indicate to the Agent that one or several alarms (previously sent by the Agent as alarm notifications) have to be acknowledged. In the action request the NM supplies the parameter ackUserId and ackSystemId. The other acknowledgement history parameters, i.e. alarm acknowledgement state (in this case acknowledged) and the acknowledgement time are set by the Agent itself.
  The 'Action information' field contains the following data:
  • alarmReferenceList
    This parameter contains a set of MOI (Managed Object Instance) and notificationIdentifier. Each pair identifies unambiguously in the scope of the Agent an alarm (previously received by the NM) that have to be now acknowledged. MOI can be absent if scope of uniqueness of notificationIdentifier is across the IRPagent.
  • ackUserId
    It contains the name of the operator who acknowledged the alarm or a generic name (dependent on the operational concept). It may have also the value NULL.
  • ackSystemId
    It indicates the management system where the acknowledgment is triggered. It may have also the value NULL.
  The 'Action response' contains the following data:
```

- *status*
This parameter contains the results of the NM acknowledgement action. Possible values: noError (0, all alarms found and ack state changed according to the manager request), ackPartlySuccessful (some alarms not found / not changeable, see next parameter), error (value indicates the reason why the complete operation failed).
- *errorAlarmReferenceList*
This parameter (significant only if *status* = ackPartlySuccessful) contains the list of moi (managed object instance) and notificationIdentifier pairs of the alarms which could not be acknowledged and, for each alarm, also the reason of the error.";

5.3.2 getAlarmCount (O)

```
getAlarmCount ACTION
  BEHAVIOUR
    getAlarmCountBehaviour;
  MODE
    CONFIRMED;
  WITH INFORMATION SYNTAX
    TS32-111-4TypeModule.GetAlarmCountInfo;
  WITH REPLY SYNTAX
    TS32-111-4TypeModule.GetAlarmCountReply;
REGISTERED AS {ts32-111AlarmAction 2};
```

```
getAlarmCountBehaviour BEHAVIOUR
DEFINED AS
```

"The behaviour of this functionality is defined within 32.111-2 - below provides an overview and CMIP specific semantics.

The NM invokes this action to receive the number of available alarms in the Agent' alarm list according to the specification in the action request. The Manager may use this action to find out the number of alarms in the alarm list before invoking a synchronisation by means of the *getAlarmList* operation. The request is possible also before the Manager creates an own event forwarding discriminator instance within the Agent.

The 'Action information' field contains the following data:

- *alarmAckState*
Depending on this optional parameter value, the NM gets the number of alarms of each *perceivedSeverity* value according to the following possible choices:
 - all alarms
 - all active alarms (acknowledged or not yet acknowledged)
 - all active and acknowledged alarms
 - all active and unacknowledged alarms
 - all cleared and unacknowledged alarms.
 If the parameter is absent, all alarms from the Agent's alarm list are taken into consideration.
- *filter*
The handling of this optional parameter is as follows:
 - if present and not NULL, it indicates a filter constraint which shall apply in the calculation of the results
 - if its value is NULL, no filter shall be considered and the Agent shall return the number of all alarms according to the value of the parameter *alarmAckState* (see above)
 - if absent, the handling depends on the availability of an event forwarding discriminator instance within the Agent. If this instance is valid, the filter construct of the event forwarding discriminator shall apply. If no EFD instance is available, the Agent shall return the number of all alarms according to the value of the above-mentioned parameter *alarmAckState*.

The 'Action response' is composed of:

- The numbers of alarms for each *perceivedSeverity* value (if applicable).
- The parameter *status* containing the results of the NM action. Possible values: noError (0), error (the value indicates the reason of the error).";

5.3.3 getAlarmList (M)

```
getAlarmList ACTION
  BEHAVIOUR
    getAlarmListBehaviour;
  MODE
    CONFIRMED;
  WITH INFORMATION SYNTAX
    TS32-111-4TypeModule.GetAlarmListInfo;
  WITH REPLY SYNTAX
    TS32-111-4TypeModule.GetAlarmListReply;
REGISTERED AS {ts32-111AlarmAction 3};
```

```
getAlarmListBehaviour BEHAVIOUR
```

DEFINED AS

"This action starts an alarm alignment procedure between a NM and Agent, which takes into account the acknowledgment state of the alarms and a dedicated filter (valid only for the current request).

The 'Action information' field contains the following data:

- *alarmAckState*
Depending on this optional parameter value, the NM gets the alarm reports according to the following possible choices:
 - all alarms
 - all active alarms (acknowledged or not yet acknowledged)
 - all active and acknowledged alarms
 - all active and unacknowledged alarms
 - all cleared and unacknowledged alarms.
 If the parameter is absent, all alarms from the Agent's alarm list are taken into consideration.
- *destination*
This parameter identifies the destination to which the alarm reports that have passed the test conditions specified in the parameter 'filter' are sent. According to ITU-T Recommendation X.721 [4], if no destination is specified in the request, then the discriminator is created with the destination defaulted to the AE-Title of the invoker.
- *filter*
The handling of this optional parameter (valid only for the current alignment request) is as follows:
 - if present and not NULL, it indicates a filter constraint which shall apply in the forwarding of the alignment-related alarm reports
 - if its value is NULL, no real filter shall be considered and the Manager receives the alarms according to the value of the parameter *alarmAckState* (see above).

The 'Action response' contains the following data:

- *alignmentId*
The parameter is defined by the Agent and identifies unambiguously the current alarm alignment procedure. It allows the Manager to distinguish between alarm reports sent as consequence of several own alignment requests triggered in parallel.
- *status*
The parameter contains the results of the NM action. Possible values: noError (0), error (the value indicates the reason of the error).
After the action response is forwarded to the NM, the Agent sends the alarm list as a sequence of single alarm notifications in accordance with the values of the request parameters. Every alarm notification contains all fields of the alarm stored in the alarm list. In particular:
 - The field *additionalText* contains at the beginning the string '(ALIGNMENTEND-alignmentId)' to allow a Manager to recognise that this alarm report is sent due to a previous *getAlarmList* request.
 - ~~The field *additionalText* contains at the beginning a string to allow a Manager to recognise that this alarm report is sent due to a previous *getAlarmList* request. The structure of this string is:

 - '(ALIGNMENT-alignmentId)' for every alarm report except the last one or
 - '(ALIGNMENTEND-alignmentId)' for the last alarm report sent by the Agent due to the current *getAlarmList* request.~~
- If available, the data related to the acknowledgment history (i.e. *ackState*, *ackTime*, *ackUserId*, *ackSystemId*) are provided in the field *additionalInformation*. Further details about the implementation of this operation are provided in the 'Introduction'."

5.3.4 setComment (O)

```
setComment ACTION
  BEHAVIOUR
    setCommentBehaviour;
  MODE
    CONFIRMED;
  WITH INFORMATION SYNTAX
    TS32-111-4TypeModule.SetCommentInfo;
  WITH REPLY SYNTAX
    TS32-111-4TypeModule.SetCommentReply;
REGISTERED AS {ts32-111AlarmAction 4};
```

setCommentBehaviour BEHAVIOUR

DEFINED AS

"The behaviour of this functionality is defined within 32.111-2 - below provides an overview and CMIP specific semantics.

The NM invokes this action to associate a comment to one or more alarms.

The 'Action information' field contains:

- *alarmReferenceList*
Contains a list of alarm identifiers to which the comment must be associated.
- *commentUserId*

- Contains the identity of the NM User that invokes this operation.
 - *commentSystemId*
Contains the identity of the NM that invokes this operation.
 - *commentText*
Contains the text of the comment.
- The 'Action response' is composed of the following data:
- *errorAlarmReferenceList*
List of pair of alarmId and failure reason.
 - *status*
It contains the results of the NM action. Possible values: actionSucceeded (0), actionPartiallyFailed (12) or another value indicating the reason of the error.";

5.3.5 getAlarmIRPVersion (M)

```
getAlarmIRPVersion ACTION
  BEHAVIOUR
    getAlarmIRPVersionBehaviour;
  MODE
    CONFIRMED;
  WITH REPLY SYNTAX
    TS32-111-4TypeModule.GetAlarmIRPVersionReply;
REGISTERED AS {ts32-111AlarmAction 5};
```

```
getAlarmIRPVersionBehaviour BEHAVIOUR
DEFINED AS
  "The behaviour of this functionality is defined within 32.111-2 - below provides an overview and CMIP specific semantics. The NM invokes this action to get information about the Alarm IRP versions supported by the Agent. The 'Action information' field contains no data. The 'Action response' is composed of the following data:
  • versionNumbersList
    It defines a list of Alarm IRP versions supported by the Agent. A list containing no element, i.e. a NULL list means that the concerned Agent doesn't support any version of the Notification IRP.
  • status
    It contains the results of the NM action. Possible values: noError (0), error (the value indicates the reason of the error).";
```

5.3.6 getAlarmIRPNotificationProfile (O)

```
getAlarmIRPNotificationProfile ACTION
  BEHAVIOUR
    getAlarmIRPNotificationProfileBehaviour;
  MODE
    CONFIRMED;
  WITH INFORMATION SYNTAX
    TS32-111-4TypeModule.IRPVersionNumber;
  WITH REPLY SYNTAX
    TS32-111-4TypeModule.GetNotificationProfileReply;
REGISTERED AS {ts32-111AlarmAction 6};
```

```
getAlarmIRPNotificationProfileBehaviour BEHAVIOUR
DEFINED AS
  "The behaviour of this functionality is defined within 32.111-2 - below provides an overview and CMIP specific semantics. A Manager invokes this action to enquiry about the notification profile (supported notifications and supported parameters) for this specific Alarm IRP version. The 'Action information' contains the following data:
  • irpVersionNumber
    This mandatory parameter identifies the Alarm IRP version.
  The 'Action response' is composed of the following data:
  • notificationNameProfile
    It contains a list of notification names, i.e. a NULL list means that the Alarm IRP doesn't support any notification.
  • notificationParameterProfile.
    It contains a set of elements, each element corresponds to a notification name and is composed by a set of parameter names.
  • status
    It contains the results of this action. Possible values: noError (0), error (the value indicates the reason of the error).";
```

5.3.7 getAlarmIRPOperationProfile (O)

getAlarmIRPOperationProfile **ACTION**

BEHAVIOUR

getAlarmIRPOperationProfileBehaviour;

MODE

CONFIRMED;

WITH INFORMATION SYNTAX

TS32-111-4TypeModule.IRPVersionNumber;

WITH REPLY SYNTAX

TS32-111-4TypeModule.GetOperationProfileReply;

REGISTERED AS {ts32-111AlarmAction 7};

getAlarmIRPOperationProfileBehaviour **BEHAVIOUR**

DEFINED AS

"The behaviour of this functionality is defined within 32.111-2 - below provides an overview and CMIP specific semantics.

A Manager invokes this action to enquiry about the operation profile (supported operations and supported parameters) for this specific Alarm IRP version.

The 'Action information' contains the following data:

- *irpVersionNumber*
This mandatory parameter identifies the Alarm IRP version.

The 'Action response' is composed of the following data:

- *operationNameProfile*
It contains a list of operation names.
- *operationParameterProfile*.
It contains a set of elements, each element corresponds to an operation name and is composed by a set of parameter names.
- *status*
It contains the results of this action. Possible values: noError (0), error (the value indicates the reason of the error).";

5.3.8 unacknowledgeAlarms (O)

unacknowledgeAlarms **ACTION**

BEHAVIOUR

unacknowledgeAlarmsBehaviour;

MODE

CONFIRMED;

WITH INFORMATION SYNTAX

TS32-111-4TypeModule.AckOrUnackAlarmsInfo;

WITH REPLY SYNTAX

TS32-111-4TypeModule.AckOrUnackAlarmsReply;

REGISTERED AS {ts32-111AlarmAction 8};

unacknowledgeAlarmsBehaviour **BEHAVIOUR**

DEFINED AS

"The behaviour of this functionality is defined within 32.111-2 - below provides an overview and CMIP specific semantics.

This action is used by the Manager to indicate to the Agent that one or several alarms (previously acknowledged) have to be unacknowledged. Subsequently the 'acknowledgement history' information of these alarms in the Agent's alarm list is completely removed (this operation may be used by operators in case of a previous acknowledgement by mistake).

The 'Action information' field contains the following data:

- *alarmReferenceList*
This parameter contains a set of MOI (Managed Object Instance) and *notificationIdentifier* pair. Each of them identifies unambiguously in the scope of the Agent an alarm (previously acknowledged by the NM) that have to be now unacknowledged. MOI can be absent if scope of uniqueness of notificationIdentifier is across the IRPagent.
- *ackUserId*
It contains the name of the operator who unacknowledged the alarm or a generic name (dependent on the operational concept). It may have also the value NULL. Note that only the user who previously acknowledged the alarm is allowed to un-acknowledge it later.
- *ackSystemId*
It indicates the management system where the acknowledgment is triggered. It may have also the value NULL. Note that the un-acknowledgement is allowed only at the management system where previously the acknowledgement took place.

The 'Action response' contains the following data:

- *status*
This parameter contains the results of the NM un-acknowledgement action. Possible values: noError (0, all alarms found and ack state changed according to the manager request), unackPartlySuccessful (some alarms not found / not changeable, see next response parameter), error (value indicates the reason why the complete operation failed).
- *errorAlarmReferenceList*

This parameter (significant only if *status* = *unackPartlySuccessful*) contains the list of MOI (Managed Object Instance) and *notificationIdentifier* pairs of the alarms which could not be unacknowledged and, for each alarm, also the reason of the error. MOI can be absent if scope of uniqueness of *notificationIdentifier* is across the IRPAgent. ";

5.3.9 clearAlarms (O)

```
clearAlarms ACTION
  BEHAVIOUR
    clearAlarmsBehaviour;
  MODE
    CONFIRMED;
  WITH INFORMATION SYNTAX
    TS32-111-4TypeModule.ClearAlarmsInfo;
  WITH REPLY SYNTAX
    TS32-111-4TypeModule.ClearAlarmsReply;
REGISTERED AS {ts32-111AlarmAction 9};
```

```
clearAlarmsBehaviour BEHAVIOUR
DEFINED AS
```

"The behaviour of this functionality is defined within 32.111-2 - below provides an overview and CMIP specific semantics.

This action is invoked by the IRPManager to clear manually one or multiple alarms. The M-ACTION request parameter 'Action information' *ClearAlarmsInfo* is composed of the following fields:

- *alarmReferenceList*
This mandatory parameter identifies the alarms to be cleared. Each alarm is identified by the notification identifier of the notification that reported the alarm the first time and, if the notification identifier is not unique across the IRPAgent, by the instance of the managed object that emitted this notification.
- *clearUserId*
This mandatory parameter identifies the user that has invoked the *clearAlarms* operation.
- *clearSystemId*
This optional parameter identifies the system on which the IRPManager, where the *clearAlarms* operation has been invoked, is running. This parameter may be absent.

The M-ACTION response parameter 'Action Reply' *ClearAlarmsReply* is composed of the following fields

- *errorAlarmReferenceList*
This mandatory parameter identifies alarms that are specified in the *alarmReferenceList*, but which could not be cleared. The alarms are specified by the notification identifier of the notification that reported the alarm the first time and, if required, the instance of the managed object that emitted this notification. In addition to this, the parameter specifies for every alarm that could not be cleared the error reason. If all alarms specified in the *alarmReferenceList* exist and could be cleared, this parameter contains no information. If the operation failed completely due to a general error, this parameter is not significant.
- *status*
This mandatory parameter provides informations about the result of the operation. If all alarms specified in the *alarmReferenceList* exist and are cleared, the value *noError* (0) is returned. If some alarms specified do not exist or could not be cleared, the value *clearPartlySuccessful* () is returned. In this case the parameter *errorAlarmReferenceList* provides additional information. If the operation failed completely due to a general error, this parameter returns the error reason.";

5.4 Notifications

5.4.1 notifyAlarmListRebuilt (M)

```
notifyAlarmListRebuiltR0602 NOTIFICATION
  BEHAVIOUR
    notifyAlarmListRebuiltR0602Behaviour;
  WITH INFORMATION SYNTAX
    TS32-111-4TypeModule.NotifyAlarmListRebuiltInfo;
  AND ATTRIBUTE IDS
    rebuiltObjectClass rebuiltObjectClass,
    rebuiltObjectInstance rebuiltObjectInstance;
REGISTERED AS {ts32-111AlarmNotification 10602};
```

```
notifyAlarmListRebuiltR0602Behaviour BEHAVIOUR
DEFINED AS
```

"This notification is used by the Agent to inform the NM that the alarm list has been rebuilt. The 'Event Information' field contains the following data:

- *notificationIdentifier*

This ITU-T X.721 standardised parameter, together with MOI (Managed Object Instance), unambiguously identifies this notification.

- *rebuiltObjectClass*
This parameter carries the IRPAgent MOC when the entire AlarmList has been rebuilt. It carries a different MOC when the AlarmList has been partially rebuilt.
- *rebuiltObjectInstance*
This parameter carries DN of the IRPAgent when the entire AlarmList has been rebuilt. It carries the DN of another MOI when the AlarmList has been partially rebuilt and only the MOIs subordinate of this rebuilt MOI may be affected by this partial rebuilt.
- *reason*
The parameter indicates the reason for alarm list rebuilding (if applicable).
- *alarmListAlignmentRequirement*
This parameter indicates, if the IRPManager has to align its alarm list with the IRPAgent. Absence of this parameter means, that an alignment is required. ";

5.4.2 notifyPotentialFaultyAlarmList (O)

```
notifyPotentialFaultyAlarmListR0602 NOTIFICATION
  BEHAVIOUR
    notifyPotentialFaultyAlarmListR0602Behaviour;
  WITH INFORMATION SYNTAX
    TS32-111-4TypeModule.NotifyPotentialFaultyAlarmListInfo+
  AND ATTRIBUTE IDS
    potentialFaultyObjectClass    potentialFaultyObjectClass,
    potentialFaultyObjectInstance potentialFaultyObjectInstance;
REGISTERED AS {ts32-111AlarmNotification 30602};
```

```
notifyPotentialFaultyAlarmListR0602Behaviour BEHAVIOUR
DEFINED AS
  "This notification is used by the IRPAgent to inform the IRPManager that the IRPAgent has lost confidence in the integrity of its alarm list.
  The 'Event information' field contains the following data:
  • potentialFaultyObjectClass
    This parameter specifies together with the parameter potentialFaultyObjectInstance the unreliable alarm information instances in the alarm list.
    If this parameter carries the MOC of the IRPAgent, then the entire alarm list is unreliable.
    If this parameter carries the MOC of another MO, then only a part of the alarm list is unreliable. The mechanism for identifying the unreliable part is described below.
  • potentialFaultyObjectInstance
    This parameter specifies together with the parameter potentialFaultyObjectClass the unreliable alarm information instances in the alarm list.
    If potentialFaultyObjectClass carries the MOC of the IRPAgent, then this parameter carries the DN of the IRPAgent and the entire alarm list is unreliable.
    If potentialFaultyObjectClass carries the MOC of another MO, then this parameter carries the DN of an instance of this class. All alarm information instances representing alarms raised by this MOI and its subordinates may be unreliable in this case.
  • notificationIdentifier
    This parameter specifies the notification identifier (ITU-T X.733 [5]), which, together with the instance of the object emitting this notification, unambiguously identifies this notification.
  • reason
    This parameter specifies the reason why the IRPAgent has lost confidence in the integrity of its alarm list and needs to rebuild it.";
```

5.4.3 notifyAlarmAlignmentEnd (M)

```
notifyAlarmAlignmentEndR0602 NOTIFICATION
  BEHAVIOUR
    notifyAlarmAlignmentEndR0602Behaviour;
  WITH INFORMATION SYNTAX
    TS32-111-4TypeModule.NotifyAlarmAlignmentEndInfoR0602+
  AND ATTRIBUTE IDS
    notificationIdentifier "Rec. X.721 | ISO/IEC 10165-2 : 1992":notificationIdentifier,
    alignmentId            alignmentId,
    alarmAlignmentEndStatus alarmAlignmentEndStatus;
REGISTERED AS {ts32-111AlarmNotification 40602};
```

```
notifyAlarmAlignmentEndR0602Behaviour BEHAVIOUR
DEFINED AS
  "This notification is used by the Agent to inform the NM that the alarm alignment related to the current alignmentId value is completed.
  The 'Event Information' field contains the following data:
  • notificationIdentifier
```

This ITU-T X.721 standardised parameter, together with MOI (Managed Object Instance), unambiguously identifies this notification.

- *alignmentId*
The parameter is defined by the Agent (in the getAlarmList response) and identifies unambiguously the current alarm alignment process. It allows the Manager to distinguish between alarm reports sent as consequence of several own alignment requests triggered in parallel.";

5.5 Attributes

5.5.1 alarmControlId

```
alarmControlId ATTRIBUTE
WITH ATTRIBUTE SYNTAX
    TS32-111-4TypeModule.GeneralObjectId;
MATCHES FOR
    EQUALITY;
BEHAVIOUR
    alarmControlIdBehaviour;
REGISTERED AS {ts32-111AlarmAttribute 1};

alarmControlIdBehaviour BEHAVIOUR
DEFINED AS
    "This attribute names an instance of a 'alarmControl' object class.";
```

5.5.2 alarmsCountSummary

```
alarmsCountSummary ATTRIBUTE
WITH ATTRIBUTE SYNTAX
    TS32-111-4TypeModule.AlarmsCountSummary;
MATCHES FOR
    EQUALITY;
BEHAVIOUR
    alarmsCountSummaryBehaviour;
REGISTERED AS {ts32-111AlarmAttribute 2};

alarmsCountSummaryBehaviour BEHAVIOUR
DEFINED AS
    "This attribute indicates a summary of number of alarms managed in the Agent's alarm list sorted according to the perceived severity (including the number of cleared but not yet acknowledged alarms). Additionally the number of all currently active alarms is provided.";
```

5.5.3 supportedAlarmIRPVersions

```
supportedAlarmIRPVersions ATTRIBUTE
WITH ATTRIBUTE SYNTAX
    TS32-111-4TypeModule.SupportedAlarmIRPVersions;
MATCHES FOR
    EQUALITY;
BEHAVIOUR
    supportedAlarmIRPVersionsBehaviour;
REGISTERED AS {ts32-111AlarmAttribute 3};

supportedAlarmIRPVersionsBehaviour BEHAVIOUR
DEFINED AS
    "This attribute provides the information concerning the Alarm IRP versions currently supported by the Agent.";
```

5.5.4 rebuiltObjectClass

```
rebuiltObjectClass ATTRIBUTE
WITH ATTRIBUTE SYNTAX
    TS32-111-4TypeModule.ObjectClass;
MATCHES FOR
    EQUALITY;
BEHAVIOUR
    rebuiltObjectClassBehaviour;
REGISTERED AS {ts32-111AlarmAttribute 40602};

rebuiltObjectClassBehaviour BEHAVIOUR
```

DEFINED AS

"The rebuiltObjectClass attribute type is specified to allow filtering of the rebuiltObjectClass parameter in the notification notifyAlarmListRebuilt.";

5.5.5 rebuiltObjectInstance

rebuiltObjectInstance ATTRIBUTE**WITH ATTRIBUTE SYNTAX**

TS32-111-4TypeModule.ObjectInstance;

MATCHES FOR

EQUALITY;

BEHAVIOUR

rebuiltObjectInstanceBehaviour;

REGISTERED AS {ts32-111AlarmAttribute 50602};

rebuiltObjectInstanceBehaviour BEHAVIOUR**DEFINED AS**

"The rebuiltObjectInstance attribute type is specified to allow filtering of the rebuiltObjectInstance parameter in the notification notifyAlarmListRebuilt.";

5.5.6 potentialFaultyObjectClass

potentialFaultyObjectClass ATTRIBUTE**WITH ATTRIBUTE SYNTAX**

TS32-111-4TypeModule.ObjectClass;

MATCHES FOR

EQUALITY;

BEHAVIOUR

potentialFaultyObjectClassBehaviour;

REGISTERED AS {ts32-111AlarmAttribute 60602};

potentialFaultyObjectClassBehaviour BEHAVIOUR**DEFINED AS**

"The potentialFaultyObjectClass attribute type is specified to allow filtering of the potentialFaultyObjectClass parameter in the notification notifyPotentialFaultyAlarmList.";

5.5.7 potentialFaultyObjectInstance

potentialFaultyObjectInstance ATTRIBUTE**WITH ATTRIBUTE SYNTAX**

TS32-111-4TypeModule.ObjectInstance;

MATCHES FOR

EQUALITY;

BEHAVIOUR

potentialFaultyObjectInstanceBehaviour;

REGISTERED AS {ts32-111AlarmAttribute 70602};

potentialFaultyObjectInstanceBehaviour BEHAVIOUR**DEFINED AS**

"The potentialFaultyObjectInstance attribute type is specified to allow filtering of the potentialFaultyObjectInstance parameter in the notification notifyPotentialFaultyAlarmList.";

5.5.8 alignmentId

alignmentId ATTRIBUTE**WITH ATTRIBUTE SYNTAX**

TS32-111-4TypeModule.AlignmentId;

MATCHES FOR

EQUALITY;

BEHAVIOUR

alignmentIdBehaviour;

REGISTERED AS {ts32-111AlarmAttribute 80602};

alignmentIdBehaviour BEHAVIOUR**DEFINED AS**

"The alignmentId attribute type is specified to allow filtering of the alignmentId parameter in the notification notifyAlarmAlignmentEnd.";

5.5.9 alarmAlignmentEndStatus

alarmAlignmentEndStatus ATTRIBUTE

```

WITH ATTRIBUTE SYNTAX
  TS32-111-4TypeModule.AlarmAlignmentEndStatus;
MATCHES FOR
  EQUALITY;
BEHAVIOUR
  alarmAlignmentEndStatusBehaviour;
REGISTERED AS {ts32-111AlarmAttribute 90602};

```

```

alarmAlignmentEndStatusBehaviour BEHAVIOUR
DEFINED AS
  "The alarmAlignmentEndStatus attribute type is specified to allow filtering of the
  alarmAlignmentEndStatus parameter in the notification notifyAlarmAlignmentEnd.";

```

5.6 Parameters

5.6.1 ackStateParameter

```

ackStateParameter PARAMETER
  CONTEXT
    TS32-111-4TypeModule.AlarmInfo.additionalInformation;
  WITH SYNTAX
    TS32-111-4TypeModule.AckState;
  BEHAVIOUR
    ackStateParameterBehaviour;
REGISTERED AS {ts32-111AlarmParameter 1};

```

```

ackStateParameterBehaviour BEHAVIOUR
DEFINED AS
  "This parameter models the optional additionalInformation field of the alarm notification. If
  present, it informs the NM about the current acknowledgement state of the present alarm.";

```

5.6.2 ackSystemIdParameter

```

ackSystemIdParameter PARAMETER
  CONTEXT
    TS32-111-4TypeModule.AlarmInfo.additionalInformation;
  WITH SYNTAX
    TS32-111-4TypeModule.SystemId;
  BEHAVIOUR
    ackSystemIdParameterBehaviour;
REGISTERED AS {ts32-111AlarmParameter 2};

```

```

ackSystemIdParameterBehaviour BEHAVIOUR
DEFINED AS
  "This parameter models the optional additionalInformation field of the alarm notification. If
  present, it informs the NM about the identifier of the management system where the present alarm
  has been acknowledged.";

```

5.6.3 ackTimeParameter

```

ackTimeParameter PARAMETER
  CONTEXT
    TS32-111-4TypeModule.AlarmInfo.additionalInformation;
  WITH SYNTAX
    TS32-111-4TypeModule.AckTime;
  BEHAVIOUR
    ackTimeParameterBehaviour;
REGISTERED AS {ts32-111AlarmParameter 3};

```

```

ackTimeParameterBehaviour BEHAVIOUR
DEFINED AS
  "This parameter models the optional additionalInformation field of the alarm notification. If
  present, it informs the NM about the time the present alarm has been acknowledged by the Agent.";

```

5.6.4 ackUserIdParameter

```

ackUserIdParameter PARAMETER
  CONTEXT
    TS32-111-4TypeModule.AlarmInfo.additionalInformation;
  WITH SYNTAX
    TS32-111-4TypeModule.UserId;

```

BEHAVIOUR

```
ackUserIdParameterBehaviour;
```

```
REGISTERED AS {ts32-111AlarmParameter 4};
```

```
ackUserIdParameterBehaviour BEHAVIOUR
```

DEFINED AS

```
"This parameter models the optional additionalInformation field of the alarm notification. If present, it informs the NM about the identifier of the user who acknowledged the present alarm.";
```

5.6.5 clearUserIdParameter

```
clearUserIdParameter PARAMETER
```

CONTEXT

```
TS32-111-4TypeModule.AlarmInfo.additionalInformation;
```

WITH SYNTAX

```
TS32-111-4TypeModule.UserId;
```

BEHAVIOUR

```
clearUserIdParameterBehaviour;
```

```
REGISTERED AS {ts32-111AlarmParameter 5};
```

```
clearUserIdParameterBehaviour BEHAVIOUR
```

DEFINED AS

```
"This parameter is carried by additionalInformation in the notification reporting the clearance of an alarm. It identifies the user that has invoked the clearAlarms operation, that has led to the clearance of the reported alarm clearance.";
```

5.6.6 clearSystemIdParameter

```
clearSystemIdParameter PARAMETER
```

CONTEXT

```
TS32-111-4TypeModule.AlarmInfo.additionalInformation;
```

WITH SYNTAX

```
TS32-111-4TypeModule.UserId;
```

BEHAVIOUR

```
clearSystemIdParameterBehaviour;
```

```
REGISTERED AS {ts32-111AlarmParameter 6};
```

```
clearSystemIdParameterBehaviour BEHAVIOUR
```

DEFINED AS

```
"This parameter is carried by additionalInformation in the notification reporting the clearance of an alarm. It identifies the system on which the IRPManager, where the clearAlarms operation that has led to the clearance of the reported alarm, is running";
```

5.6.7 commentsParameter

```
commentsParameter PARAMETER
```

CONTEXT

```
TS32-111-4TypeModule.AlarmInfo.additionalInformation;
```

WITH SYNTAX

```
TS32-111-4TypeModule.AlarmComments;
```

BEHAVIOUR

```
commentsParameterBehaviour;
```

```
REGISTERED AS {ts32-111AlarmParameter 7};
```

```
commentsParameterBehaviour BEHAVIOUR
```

DEFINED AS

```
"This parameter is carried by the attribute additionalInformation in alarm notifications. If present, it informs the IRPManager about the comments assigned to an alarm. Every single comment includes the following data: commentText, commentTime, commentUserId and (optionally) commentSystemId.";
```

6 ASN.1 definitions for Alarm IRP

```
TS32-111-4TypeModule {itu-t(0) identified-organization(4) etsi(0) mobileDomain(0) umts-Operation-
Maintenance(3) ts-32-111(111) part4(4) informationModel(0) asn1Module(2) version1(1)}
```

```
DEFINITIONS IMPLICIT TAGS ::=
```

```
BEGIN
```

```
--EXPORTS everything
```

```
IMPORTS
```

```
NotificationIdentifier, Destination, EventTime, ProbableCause, PerceivedSeverity
  FROM Attribute-ASN1Module {joint-iso-ccitt ms(9) smi(3) part2(2) asn1Module(2) 1}
```

```
AlarmInfo
  FROM Notification-ASN1Module {joint-iso-ccitt ms(9) smi(3) part2(2) asn1Module(2) 2}
```

```
CMISFilter, ObjectInstance, ObjectClass, EventTypeId
  FROM CMIP-1 {joint-iso-ccitt ms(9) cmip(1) modules(0) protocol(3)};
```

```
baseNodeUMTS          OBJECT IDENTIFIER ::= {itu-t (0) identified-organization (4)
                                etsi (0) mobileDomain (0)
                                umts-Operation-Maintenance (3)}
```

```
ts32-111Prefix        OBJECT IDENTIFIER ::= {baseNodeUMTS ts-32-111(111)}
ts32-111Part4         OBJECT IDENTIFIER ::= {ts32-111Prefix part4(4)}
ts32-111-4InfoModel   OBJECT IDENTIFIER ::= {ts32-111Part4 informationModel(0)}
```

```
ts32-111AlarmObjectClass OBJECT IDENTIFIER ::= {ts32-111-4InfoModel managedObjectClass(3)}
ts32-111AlarmPackage     OBJECT IDENTIFIER ::= {ts32-111-4InfoModel package(4)}
ts32-111AlarmParameter   OBJECT IDENTIFIER ::= {ts32-111-4InfoModel parameter(5)}
ts32-111AlarmAttribute   OBJECT IDENTIFIER ::= {ts32-111-4InfoModel attribute(7)}
ts32-111AlarmAction      OBJECT IDENTIFIER ::= {ts32-111-4InfoModel action(9)}
ts32-111AlarmNotification OBJECT IDENTIFIER ::= {ts32-111-4InfoModel notification(10)}
```

```
-- Start of 3GPP SA5 own definitions
```

```
AckErrorList ::= SET OF ErrorInfo
```

```
AlarmReference ::= SEQUENCE
```

```
{
  moi          ObjectInstance OPTIONAL, -- absent if scope of uniqueness of
                                         -- notificationId is across IRPAgent
  notificationIdentifier NotificationIdentifier
}
```

```
AckOrUnackAlarmsInfo ::= SEQUENCE
```

```
{
  alarmReferenceList SET OF AlarmReference,
  ackUserId          UserId,
  ackSystemId       SystemId OPTIONAL
}
```

```
AckOrUnackAlarmsReply ::= SEQUENCE
```

```
{
  status          ErrorCauses,
  errorAlarmReferenceList AckErrorList
}
```

```
AckState ::= ENUMERATED
```

```
{
  acknowledged (0),
  unacknowledged (1)
}
```

```
AckTime ::= GeneralizedTime
```

```
AlarmChoice ::= ENUMERATED
```

```
{
  allAlarms (0),
  allActiveAlarms (1),
}
```

```

allActiveAndAckAlarms      (2),
allActiveAndUnackAlarms    (3),
allClearedAndUnackAlarms   (4),
allUnackAlarms             (5)
}

```

AlarmComments ::= SET OF SingleAlarmComment

AlarmAlignmentEndStatus ::= ENUMERATED

```

{
successfulCompletion (0), -- the alarm alignment has been completed successfully
aborted              (1), -- the alarm alignment has been aborted via the invocation
                      -- of the operation abortGetAlarmList
error                (255) -- the alarm alignment has been aborted due to an internal error
}

```

AlarmsCountSummary ::= SEQUENCE

```

{
activeAlarmsCount      INTEGER, -- this is the sum of criticalCount, majorCount,
                             -- minorCount, warningCount and indeterminateCount

criticalCount          INTEGER,
majorCount             INTEGER,
minorCount             INTEGER,
warningCount           INTEGER,
indeterminateCount     INTEGER,
clearedCount           INTEGER
}

```

AlarmListAlignmentRequirement ::= ENUMERATED

```

{
alignmentRequired      (0), -- An alarm alignment is required.
alignmentNotRequired   (1)  -- An alarm alignment is not required.
}

```

AlignmentId ::= INTEGER

ClearAlarmsInfo ::= SEQUENCE

```

{
alarmReferenceList     SET OF AlarmReference,
clearUserId            UserId,
clearSystemId          SystemId OPTIONAL
}

```

ClearAlarmsReply ::= SEQUENCE

```

{
status                 ErrorCauses,
errorAlarmReferenceList ClearErrorList
}

```

ClearErrorList ::= SET OF ErrorInfo

CommentText ::= GraphicString

CommentTime ::= GeneralizedTime

ErrorCauses ::= ENUMERATED

```

{
noError                (0), -- operation / notification successfully performed
wrongFilter            (1), -- the value of the filter parameter is not valid
wrongAlarmAckState     (2), -- the value of the alarmAckState parameter (e.g.
                             -- getAlarmCount) is not valid
ackPartlySuccessful    (3), -- acknowledgment request partly successful
unackPartlySuccessful  (4), -- unacknowledgment request partly successful
wrongAlarmReference     (5), -- alarm identifier used in the alarm reference list not
                             -- found (e.g. in case of acknowledgement request)
wrongAlarmReferenceList (6), -- the alarm reference list (e.g. in case of
                             -- acknowledgement request) is empty or completely wrong
alarmAlreadyAck         (7), -- alarm to be acknowledged is already in this state
alarmAlreadyUnack       (8), -- alarm to be acknowledged is already in this state
wrongUserId            (9), -- the user identifier in the unacknowledgement operation
                             -- is not the same as in the previous
                             -- acknowledgementAlarms request
wrongSystemId          (10), -- the system identifier in the unacknowledgement
                             -- operation is not the same as in the previous
                             -- acknowledgementAlarms request
alarmAckNotAllowed      (11), -- current management system not allowed to acknowledge the
                             -- alarm (e.g. due to acknowledgement competence rules)
setCommentPartlySuccessful (12), -- the setComment action partly successful (e.g. some

```

```

-- alarmId are not in the alarmList)
clearAlarmsPartlySuccessful      (13), -- only some alarms to be cleared could be cleared
clearAlarmsNotAllowed           (14), -- current management system not allowed to clear the alarm
clearAlarmsAlarmAlreadyCleared (15), -- alarm to be cleared is already cleared
unspecifiedErrorReason          (255) -- operation failed, specific error unknown
}

```

ErrorInfo ::= SEQUENCE

```

{
  moi                ObjectInstance OPTIONAL, -- absent if uniqueness of
                                                           -- notificationIdentifier is across
                                                           -- IRPAgent
  notificationIdentifier NotificationIdentifier, -- ITU-T X.721
  reason              ErrorCauses
}

```

GeneralObjectId ::= INTEGER

GetAlarmCountInfo ::= SEQUENCE

```

{
  alarmAckState      AlarmChoice OPTIONAL,
  filter             CMISFilter OPTIONAL -- ITU-T X.711
}

```

GetAlarmCountReply ::= SEQUENCE

```

{
  criticalCount      INTEGER,
  majorCount         INTEGER,
  minorCount         INTEGER,
  warningCount       INTEGER,
  indeterminateCount INTEGER,
  clearedCount       INTEGER,
  status              ErrorCauses
}

```

GetAlarmIRPVersionReply ::= SEQUENCE

```

{
  versionNumberList SupportedAlarmIRPVersions,
  status              ErrorCauses
}

```

GetAlarmListInfo ::= SEQUENCE

```

{
  alarmAckState      AlarmChoice OPTIONAL,
  destination        Destination, -- ITU-T X.721
  filter             CMISFilter OPTIONAL -- ITU-T X.711
}

```

GetAlarmListReply ::= SEQUENCE

```

{
  alignmentId        INTEGER,
  status              ErrorCauses
}

```

GetNotificationProfileReply ::= SEQUENCE

```

{
  notificationNameProfile NotificationList,
  notificationParameterProfile ParameterListOfList,
  status                  ErrorCauses
}

```

GetOperationProfileReply ::= SEQUENCE

```

{
  operationNameProfile OperationList,
  operationParameterProfile ParameterListOfList,
  status                  ErrorCauses
}

```

IRPVersionNumber ::= GraphicString

NotificationList ::= SET OF NotificationName

NotificationName ::= GraphicString

NotifyAlarmAlignmentEndInfo[R0602](#) ::= SEQUENCE

```

{
  notificationIdentifier NotificationIdentifier, -- ITU-T X.721
  alignmentId            AlignmentId, INTEGER
}

```



```

| alarmAlignmentEndStatus AlarmAlignmentEndStatus OPTIONAL
| }

NotifyAlarmListRebuiltInfo ::= SEQUENCE
{
    notificationIdentifier      NotificationIdentifier,      -- ITU-T X.721
    rebuiltObjectClass          ObjectClass,                    -- ITU-T X.721
    rebuiltObjectInstance       ObjectInstance,                  -- ITU-T X.721
    reason                      ReasonAlarmListRebuilt,
    alarmListAlignmentRequirement AlarmListAlignmentRequirement OPTIONAL
}

NotifyPotentialFaultyAlarmListInfo ::= SEQUENCE
{
    potentialFaultyObjectClass   ObjectClass,                    -- ITU-T X.711
    potentialFaultyObjectInstance ObjectInstance,                -- ITU-T X.711
    notificationIdentifier       NotificationIdentifier,          -- ITU-T X.721
    reason                      ReasonPotentialFaultyAlarmList
}

OperationList ::= SET OF OperationName

OperationName ::= GraphicString

ParameterList ::= SET OF ParameterName

ParameterListOfList ::= SET OF ParameterList

ParameterName ::= GraphicString

ReasonAlarmListRebuilt ::= ENUMERATED
{
    agentNetworkEntityCommunicationError (0),
    agentRestart (1),
    indeterminate (2)
}

ReasonPotentialFaultyAlarmList ::= ENUMERATED
{
    communicationErrorNEAgent (0), -- A communication error between a NE and the agent has occurred.
    agentRestart (1), -- The agent has restarted and not yet updated its alarm list.
    indeterminate (2) -- The reason could not be determined.
}

SetCommentInfo ::= SEQUENCE
{
    alarmReferenceList SET OF AlarmReference,
    commentUserId      UserId,
    commentSystemId    [2] SystemId OPTIONAL,
    commentText        CommentText
}

SetCommentReply ::= SEQUENCE
{
    errorAlarmReferenceList SET OF ErrorInfo,
    status                  ErrorCauses
}

SingleAlarmComment ::= SEQUENCE
{
    commentText      CommentText,
    commentTime      CommentTime,
    commentUserId    UserId,
    commentSystemId SystemId OPTIONAL
}

SystemId ::= GraphicString

SupportedAlarmIRPVersions ::= SET OF IRPVersionNumber

UserId ::= GraphicString

END -- of module TS32-111-4TypeModule

```

Annex A (informative): List of assigned Object Identifiers

This annex provides a list with all object identifiers that have been assigned in TS 32.111-4 up to the latest version of Release 5. These object identifiers shall not be assigned to new objects.

<u>Basic Object Name</u>	<u>Name and OID of the current TS Version</u>	<u>Name and OIDs of previous TS Versions</u>
<u>Managed Object Classes</u>		
alarmControl	Name: alarmControlR0508 OID : ts32-111AlarmObjectClass 10508	Name: alarmControl OID : ts32-111AlarmObjectClass 1
<u>Packages</u>		
alarmControlBasicPackage	Name: alarmControlBasicPackageR0508 OID : ts32-111AlarmPackage 10508	Name: alarmControlBasicPackage OID : ts32-111AlarmPackage 1
alarmCountPackage	Name: alarmCountPackage OID : ts32-111AlarmPackage 2	--
alarmAcknowledgementPackage	Name: alarmAcknowledgementPackage OID : ts32-111AlarmPackage 3	--
alarmUnacknowledgementPackage	Name: alarmUnacknowledgementPackage OID : ts32-111AlarmPackage 4	--
alarmCommentPackage	Name: alarmCommentPackage OID : ts32-111AlarmPackage 5	--
alarmIRPVersionPackage	Name: alarmIRPVersionPackage OID : ts32-111AlarmPackage 6	--
alarmProfilePackage	Name: alarmProfilePackage OID : ts32-111AlarmPackage 7	--
alarmPotentialFaultyAlarmListPackage	Name: alarmPotentialFaultyAlarmListPackageR80602 OID : ts32-111AlarmPackage 80602	Name: alarmPotentialFaultyAlarmListPackage OID : ts32-111AlarmPackage 8
alarmClearPackage	Name: alarmClearPackage OID : ts32-111AlarmPackage 9	--
x721AlarmNotificationsPackage	Name: x721AlarmNotificationsPackage OID : ts32-111AlarmPackage 10	--
<u>Actions</u>		
acknowledgeAlarms	Name: acknowledgeAlarms OID : ts32-111AlarmAction 1	--
getAlarmCount	Name: getAlarmCount OID : ts32-111AlarmAction 2	--
getAlarmList	Name: getAlarmList OID : ts32-111AlarmAction 3	--
setComment	Name: setComment OID : ts32-111AlarmAction 4	--
getAlarmIRPVersion	Name: getAlarmIRPVersion OID : ts32-111AlarmAction 5	--
getAlarmIRPNotificationProfile	Name: getAlarmIRPNotificationProfile OID : ts32-111AlarmAction 6	--
getAlarmIRPOperationProfile	Name: getAlarmIRPOperationProfile OID : ts32-111AlarmAction 7	--
unacknowledgeAlarms	Name: unacknowledgeAlarms OID : ts32-111AlarmAction 8	--
clearAlarms	Name: clearAlarms OID : ts32-111AlarmAction 9	--
<u>Notifications</u>		
notifyAlarmListRebuilt	Name: notifyAlarmListRebuiltR0602 OID : ts32-111AlarmNotification 10602	Name: notifyAlarmListRebuilt OID : ts32-111AlarmNotification 1
notifyComments	--	Name: notifyComments OID : ts32-111AlarmNotification 2
notifyPotentialFaultyAlarmList	Name: notifyPotentialFaultyAlarmListR0602 OID : ts32-111AlarmNotification 30602	Name: notifyPotentialFaultyAlarmList OID : ts32-111AlarmNotification 3
notifyAlarmAlignmentEnd	Name: notifyAlarmAlignmentEndR0602 OID : ts32-111AlarmNotification 40602	Name: notifyAlarmAlignmentEnd OID : ts32-111AlarmNotification 4
<u>Attributes</u>		

alarmControlId	Name: alarmControlId OID : ts32-111AlarmAttribute 1	==
alarmsCountSummary	Name: alarmsCountSummary OID : ts32-111AlarmAttribute 2	==
supportedAlarmIRPVersions	Name: supportedAlarmIRPVersions OID : ts32-111AlarmAttribute 3	==
rebuiltObjectClass	Name: rebuiltObjectClass OID : ts32-111AlarmAttribute 40602	==
rebuiltObjectInstance	Name: rebuiltObjectInstance OID : ts32-111AlarmAttribute 50602	==
potentialFaultyObjectClass	Name: potentialFaultyObjectClass OID : ts32-111AlarmAttribute 60602	==
potentialFaultyObjectInstance	Name: potentialFaultyObjectInstance OID : ts32-111AlarmAttribute 70602	==
alignmentId	Name: alignmentId OID : ts32-111AlarmAttribute 80602	==
alarmAlignmentEndStatus	Name: alarmAlignmentEndStatus OID : -111AlarmAttribute 90602	==
<u>Parameters</u>		
ackStateParameter	Name: ackStateParameter OID : ts32-111AlarmParameter 1	==
ackSystemIdParameter	Name: ackSystemIdParameter OID : ts32-111AlarmParameter 2	==
ackTimeParameter	Name: ackTimeParameter OID : ts32-111AlarmParameter 3	==
ackUserIdParameter	Name: ackUserIdParameter OID : ts32-111AlarmParameter 4	==
clearUserIdParameter	Name: clearUserIdParameter OID : ts32-111AlarmParameter 5	==
clearSystemIdParameter	Name: clearSystemIdParameter OID : ts32-111AlarmParameter 6	==
commentsParameter	Name: commentsParameter OID : ts32-111AlarmParameter 7	==
<u>Name Bindings</u>		

Annex BA (informative): Change history

Change history							
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New
Mar 2000	S_07	SP-000012	--	--	Approved at TSG SA #7 and placed under Change Control	2.0.0	3.0.0
Mar 2000	--	--	--	--	cosmetic	3.0.0	3.0.1
Jun 2000	S_08	SP-000254	005	--	Split of TS - Part 4: Alarm Integration Reference Point (IRP): CMIP Solution Set (SS)	3.0.1	3.1.0
Sep 2000	--	--	--	--	cosmetic	3.1.0	3.1.1
Jun 2001	S_12	SP-010282	001	--	Alarm IRP: CMIP SS Rel4 - Addition of feature. As SA5 had not reviewed this part, it is submitted to SA#12 for Information only.	3.1.1	--
Sep 2001	S_13	SP-010470	001	1	Addition of features	3.1.1	4.0.0
Dec 2001	S_14	SP-010640	003	--	Change of qualifier for setComment and notifyComment	4.0.0	4.1.0
Dec 2001	S_14	SP-010640	004	--	Addition of missing parameter in notifyComments	4.0.0	4.1.0
Mar 2002	S_15	SP-020028	005	--	Addition of "perceivedSeverity" as parameter to "acknowledgeAlarms" operation (CMIP SS)	4.1.0	4.2.0
Mar 2002	S_15	--	--	--	Automatic upgrade to Rel-5 (no Rel-5 CR)	4.2.0	5.0.0
Jun 2002	S_16	SP-020283	007	--	Correction of errors and ambiguities in the Parameter Mapping Tables and ASN.1 Definitions	5.0.0	5.1.0
Jun 2002	S_16	SP-020284	008	--	Addition of the parameter alarmListAlignmentRequirement to the notification notifyAlarmListRebuilt in the CMIP SS (32.111-4)	5.0.0	5.1.0
Jun 2002	S_16	SP-020284	009	--	Adding the notification notifyPotentialFaultyAlarmList in the CMIP SS (32.111-4)	5.0.0	5.1.0
Jun 2002	S_16	SP-020284	010	--	Introduction of SS (32.111-4) to IS (32.111-2) relation and correction of Foreword	5.0.0	5.1.0
Sep 2002	S_17	SP-020480	011	--	Alignment with 32.111-2 on Alarm Clearance Functionality	5.1.0	5.2.0
Dec 2002	S_18	SP-020751	013	--	Add the additionalInformation parameter in notifyNewAlarms to the Alarm IRP CMIP SS (Alignment with Information Service in Rel-5 32111-2)	5.2.0	5.3.0
Dec 2002	S_18	SP-020753	014	--	Addition of Security Alarm Support to the Alarm IRP CMIP SS (Alignment with Information Service in Rel-5 32111-2)	5.2.0	5.3.0
Mar 2003	S_19	SP-030063	016	--	Correction to Alarm Comments- alignment with 32.111-1	5.3.0	5.4.0
Mar 2003	S_19	SP-030138	017	--	Add missing x721AlarmNotificationsPackage	5.3.0	5.4.0
Mar 2003	S_19	SP-030138	018	--	Corrections to GDMO and ASN.1 definitions in the Alarm IRP CMIP SS	5.3.0	5.4.0
Jun 2003	S_20	SP-030277	019	--	Correction of Compilation Errors	5.4.0	5.5.0
Jun 2003	S_20	SP-030277	020	--	Addition of missing reasons for the emission of notifyAlarmListRebuilt	5.4.0	5.5.0
Sep 2003	S_21	SP-030416	022	--	Correction of syntax error in type SetCommentInfo	5.5.0	5.6.0
Dec 2003	S_22	SP-030627	023	--	Add missing parts for the support of security alarms	5.6.0	5.7.0
Dec 2003	S_22	SP-030627	024	--	Mapping completion of getAlarmList	5.6.0	5.7.0
Jan 2004	--	--	--	--	Editorial (Tables & CMIP code cosmetics)	5.7.0	5.7.1

End of Change in Clause 4, 5, 6, Annex A, annex B

CHANGE REQUEST

⌘ **32.111-4 CR 028** ⌘ rev - ⌘ Current version: **6.1.0** ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

Proposed change affects: | UICC apps ⌘ ME Radio Access Network Core Network

Title:	⌘ Align with the IS 32.111-2 the possibility to apply filters to notification parameters		
Source:	⌘ SA5 (olaf.pollakowski@siemens.com)		
Work item code:	⌘ OAM-NIM	Date:	⌘ 20/08/2004
Category:	⌘ A	Release:	⌘ Rel-6
	Use <u>one</u> of the following categories: <i>F</i> (correction) <i>A</i> (corresponds to a correction in an earlier release) <i>B</i> (addition of feature), <i>C</i> (functional modification of feature) <i>D</i> (editorial modification) Detailed explanations of the above categories can be found in 3GPP TR 21.900 .		Use <u>one</u> of the following releases: 2 (GSM Phase 2) R96 (Release 1996) R97 (Release 1997) R98 (Release 1998) R99 (Release 1999) Rel-4 (Release 4) Rel-5 (Release 5) Rel-6 (Release 6)

Reason for change:	⌘ According to the IS some parameters of the notifications are filterable. This capability is not fully reflected in the CMIP SS		
Summary of change:	⌘ The capability to filter on certain parameters is added to the notifications <i>notifyAlarmListRebuilt</i> , <i>notifyPotentialFaultyAlarmList</i> and <i>notifyAlarmAlignmentEnd</i> . In addition to this the <i>NotifyAlarmAlignmentEndInfo</i> is extended by <i>alarmAlignmentEndStatus</i> .		
Consequences if not approved:	⌘ The CMIP SS of the Alarm IRP would not be aligned with the IS.		

Clauses affected:	⌘ 1, 4, 5, 6, Annex A, Annex B										
Other specs affected:	<table border="1" style="display: inline-table; border-collapse: collapse;"> <tr> <td style="width: 20px; text-align: center;">Y</td> <td style="width: 20px; text-align: center;">N</td> </tr> <tr> <td style="text-align: center;">⌘</td> <td style="text-align: center;">X</td> </tr> <tr> <td style="text-align: center;">⌘</td> <td style="text-align: center;">X</td> </tr> <tr> <td style="text-align: center;">⌘</td> <td style="text-align: center;">X</td> </tr> </table>	Y	N	⌘	X	⌘	X	⌘	X	Other core specifications ⌘ Test specifications ⌘ O&M Specifications ⌘	
Y	N										
⌘	X										
⌘	X										
⌘	X										
Other comments:	⌘										

Change in Clause 1

1 Scope

The present document defines the alarm integration reference point for the CMIP solution set. In detail:

- clause 4 contains an introduction to some basic concepts of the CMIP interfaces;
- clause 5 contains the GDMO definitions for the Alarm Management over the CMIP interfaces;
- clause 6 contains the ASN.1 definitions supporting the GDMO definitions provided in clause 5.

This Solution Set specification is related to 3GPP TS 32.111-2 (V6.2+.X).

End of Change in Clause 1

Change in Clause 4, 5, 6, Annex A, Annex B

4 Basic aspects

The present document provides all the GDMO and ASN.1 definitions necessary to implement the Alarm IRP Information Service (3GPP TS 32.111-2 [9]) for the CMIP interface.

4.1 Architectural aspects

The Alarm IRP Information Service description is based on Information Object Classes (IOC), Relationships among IOC and Interfaces (used or implemented by IOC) which include Operations and/or Notifications.

In the present document, for the CMIP interfaces the IOC are modelled as GDMO "Managed Object Classes" (MOC) defined specifically for alarm management, the Operations are modelled as GDMO "Actions" of a MOC while the Notifications are modelled as GDMO "Notifications" included in MOCs that need to report events to the Manager. In more detail, the Notifications related to alarm management are included in a MOC defined in the present document while the Notifications defined for alarm reporting are not included in any MOC defined in the present document. They will be included in other MOCs defined in other CMIP Solution Set or in other CMIP Information Models.

Regarding the Notifications, the present document is based on the Notification IRP CMIP Solution Set (3GPP TS 32.304 [10]).

4.1.1 Reporting new alarms

In case of an alarm occurrence the Agent notifies all subscribed Managers that a new alarm has occurred and has been added into the alarm list of the Agent.

For this purpose the standardised alarm notifications defined in ITU-T Recommendations X.721 [4], X.733 [5] and X.736 [12] are used.

4.1.2 Reporting changed alarms

Although in the Alarm IRP Information Service (3GPP TS 32.111-2 [9]) there is a notification specifically defined to report the event of alarm attribute changes, on the CMIP interfaces such events are reported according to ITU-T Recommendations X.721 [4], X.733 [5] and X.736 [12], i.e. the original alarm is first cleared (by means of a clear alarm notification) and then a new alarm notification with the changed parameter values is generated by the Agent.

4.1.3 Reporting cleared alarms

On the CMIP interfaces the clearing of alarms is reported by the Agent to the Managers in accordance with the mechanisms defined in ITU-T Recommendation X.733 [5], X.736 [12] and ITU-T Recommendation Q.821 [7].

4.1.4 Acknowledgment of alarms

This clause relates to the co-operative alarm acknowledgment managed on Itf-N, which implies that the acknowledgment of alarms can be done on both NM and EM.

The acknowledgment of alarms is managed by means of the MOC `alarmControl`, which includes:

- one action to acknowledge alarms (*acknowledgeAlarms*);
- one action to unacknowledge alarms (*unacknowledgeAlarms*);
- ITU-T Recommendation X.721 [4] compliant alarm notifications to inform Managers about changes of acknowledgment state.

In case an alarm is acknowledged by an operator or automatically by a management system, the `ackUserId`, `ackSystemId`, `ackState` and `ackTime` information is stored in the *additionalInformation* field of the alarm present in the alarm list.

4.1.5 Management of comments associated to alarms

This feature provides the NM and EM operators with the capability to add comments to an alarm and to share such information among all the OS (EM and NM) that are involved in the network management. This implies that a synchronisation of the comments between the EM and NM shall be possible. An OS shall have the capability to record more than one comment for each alarm.

The management of the comments associated to alarms is similar to the management of the acknowledgment of alarms and is achieved by means of the same MOC `alarmControl`. For the management of the comments, the MOC `alarmControl` includes

- one action (*setComment*) allowing the NM operator to add a comment to one or several alarms;
- ITU-T Recommendation X.721 [4] compliant alarm notifications to inform the IRPManagers about changes of alarm related comments. Such notifications are generated by the Agent towards all connected Managers either if the comment is made by an NM operator (i.e. after the completion of a previous *setComment* request) or if the comment is made by an EM operator.

4.1.6 Alignment of alarm conditions over the Itf-N

The IRP Manager is able to trigger the alarm conditions alignment using the Action *getAlarmList*

The following specifies the logical steps of the alignment procedure, by describing a possible implementation. Any other implementation showing the same behaviour on the Itf-N interface is compliant with the present document.

- The Manager sends to the Agent a *getAlarmList* request containing the following information:
 - *alarmAckState*, used to select the alarms from the Agent's alarm list for the current alignment (e.g. all active alarms).
 - *baseObjectClass*, *baseObjectInstance*, identifies the part of the alarm list to be uploaded.
 - *destination*, identifying the destination to which event reports that have passed the filter conditions are sent.
 - *filter*, this optional parameter defines the conditions an alarm notification shall fulfil in order to be forwarded to the Manager. It applies only for the current alignment request.
- After evaluation of the request, the Agent first generates an *alignmentId* value, which unambiguously identifies this alignment process. This value is used by the Manager to correlate alarm reports to the corresponding alignment requests, in case this Manager issues several alarm alignments in parallel.

- The Agent creates a temporary Event Forwarding Discriminator (EFD) instance for the purpose of this alarm alignment, using the parameters *destination* and *filter* received in the request. If the *filter* parameter is absent in the alarm synchronisation request, all alarm notifications are forwarded to the Manager through this EFD, taking into account both the *filter* constraint currently active for the event reporting to the manager having invoked the synchronisation request and the value of the parameter *alarmAckState*.
The filter is set by the Agent automatically in order to forward only those alarm notifications containing, at the beginning of the field *additionalText*, the string "(ALIGNMENT-<alignmentId>)". The filter must also forward the notification *notifyAlarmAlignmentEnd* indicating the end of the alarm alignment process. The alarm alignment end notifications of other alignment processes shall be filtered out using the *alignmentId* carried by the event information parameter of *notifyAlarmAlignmentEnd*.
- The Agent sends back a *getAlarmList* response, which contains the *alignmentId* described above and the *status* information, indicating the result of the request. (see the message flow in Figure 1).
- The Agent scans now its alarm list. For every alarm, which matches the criteria defined by the *alarmAckState* parameter [and the filter parameter](#), the Agent inserts, at the beginning of the field *additionalText*, the string "(ALIGNMENT-<alignmentId>)". According to ITU-T Recommendation X.734 [6], the Agent forwards these alarm notifications towards all EFDs.

NOTE: These alarm notifications can reach the current Manager only via the temporary EFD created for the current alignment. They are filtered out:

- a) By all the EFD instances used for "real-time" alarm reporting, due to the presence of the sub-string "ALIGNMENT" in the field *additionalText* (see 3GPP TS 32.304 [10]).
 - b) By all temporary EFD instances possibly created for parallel alignments, due to the presence of the unambiguous sub-string "<alignmentId>" in the *additionalText* field.
- At the end of the alarm alignment process the Agent shall send the dedicated notification *notifyAlarmAlignmentEnd* in order to indicate the end of the current alignment process (unambiguously identified by the *alignmentId*). [In case the alarm list is empty or no alarm matches the criteria defined by the *alarmAckState* parameter and the filter parameter the notification *notifyAlarmAlignmentEnd* shall be emitted directly after the agent has send the *getAlarmList* response.](#)
 - The temporary EFD of the current alarm alignment process shall forward only alarm alignment end notifications carrying in the event information field the *alignmentId* of this alignment process. All other alarm alignment end notifications shall be filtered out.
 - After sending the notification *notifyAlarmAlignmentEnd* the Agent automatically deletes the temporary EFD instance (see figure 1).

At the end of the alarm conditions alignment the acknowledgement state and the comments assigned to each alarm are implicitly synchronised between the IRP Agent and the IRP Manager that has requested the alignment.

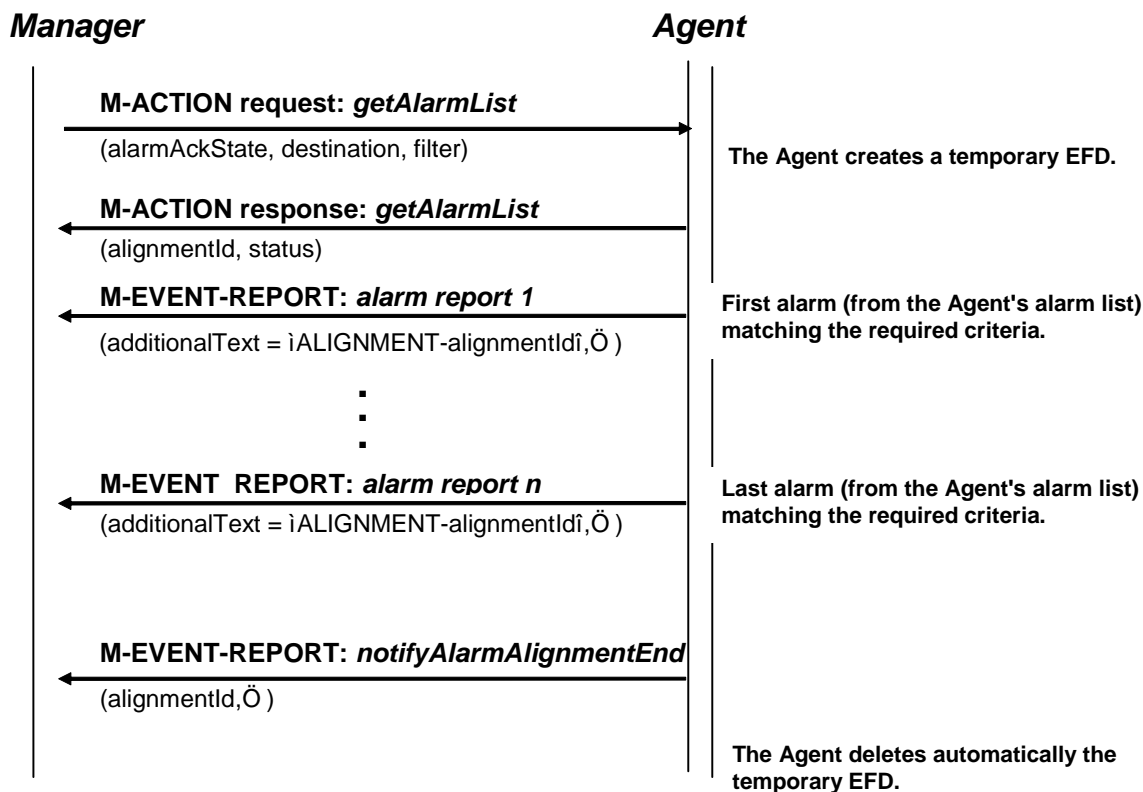


Figure 1: Alignment arrow diagram

Figure 2 shows the handling of a "real-time" alarm notification (occurred during the execution of the *getAlarmList* operation), which is forwarded by the Agent (according to ITU-T Recommendation X.734 [6]) to all currently available EFD instances. Dependent on the *discriminatorConstruct* setting of every EFD, such an alarm may or may not reach the related Manager. In any case, this alarm is filtered out by the temporary EFD assigned to the Manager, which triggered the *getAlarmList* request.

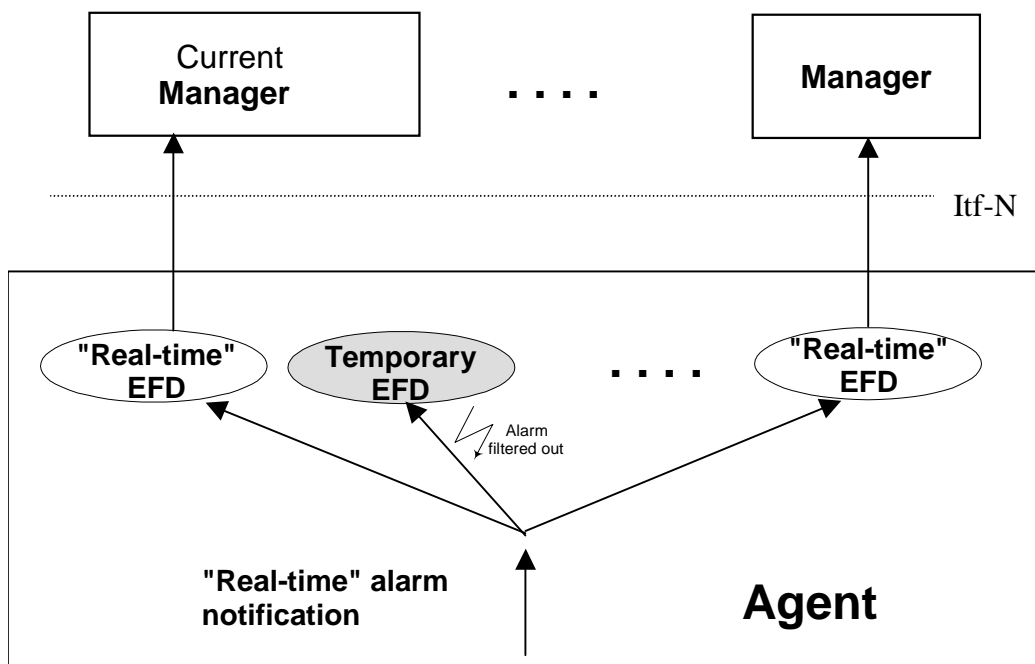


Figure 2: Treatment of "real time" alarms

Figure 3 shows the handling of an alarm notification from the alarm list, matching the criteria defined in the parameters *alarmAckState* of the *getAlarmList* request and forwarded by the Agent to all EFD instances as well. This alarm is filtered out by all EFD instances in charge of discrimination of "real-time" alarms and can reach only the Manager, which triggered the *getAlarmList* request, because it passes the temporary EFD instance assigned to this Manager.

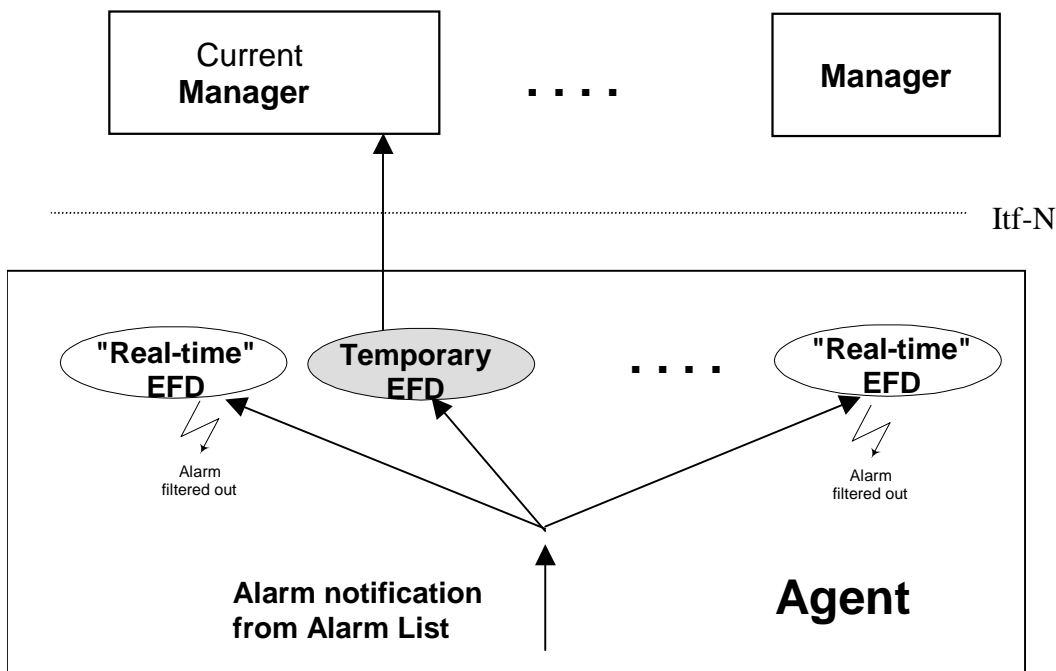


Figure 3: Treatment of "alignment" alarms

It is possible to abort an ongoing alarm alignment process by invoking the action *abortGetAlarmList*. Also in this case the notification *notifyAlarmAlignmentEnd* is emitted.

4.2 Mapping

The semantics of the Alarm IRP is defined in 3GPP TS 32.111-2 [9]. The definitions of the management information defined there are independent of any implementation technology and protocol. This clause maps these protocol-independent definitions onto the equivalences of the CMIP solution set of Alarm IRP.

4.2.1 Mapping of Information Object Classes

For this Alarm IRP CMIP Solution Sets, the Information Object Classes (IOC) and the Interfaces defined in 3GPP TS 32.111-2 [9] are mapped to a Managed Object Classes (MOC) named *alarmControl* which includes all the Attributes, Actions and Notifications necessary to model the management described in (3GPP TS 32.111-2 [9]).

4.2.2 Mapping of Operations

Table 1 maps the Interface/Operations defined in the IS of the Alarm IRP to their equivalents in the CMIP SS. The equivalents are qualified as Mandatory (M) or Optional (O).

Table 1: Mapping of Operations

IS Interface	IS Operation	CMIP SS Equivalent	Qualifier
AlarmIRPOperations_1	acknowledgeAlarms	CMISE M-ACTION service, action type: acknowledgeAlarms	M
	getAlarmList	CMISE M-ACTION service, action type: getAlarmList environmentalAlarm ITU-T X.721 [4] equipmentAlarm ITU-T X.721 [4] qualityofServiceAlarm ITU-T X.721 [4] processingErrorAlarm ITU-T X.721 [4] communicationsAlarm ITU-T X.721 [4] integrityViolation ITU-T X.721 [4] operationalViolation ITU-T X.721 [4] physicalViolation ITU-T X.721 [4] securityServiceOrMechanismViolation ITU-T X.721 [4] timeDomainViolation ITU-T X.721 [4] CMISE M-EVENT-REPORT service, event type: notifyAlarmAlignmentEnd R0602	M
	Method to abort an ongoing alarm alignment process	abortGetAlarmList	M
AlarmIRPOperations_2	getAlarmCount	CMISE M-ACTION service, action type: getAlarmCount	O
AlarmIRPOperations_3	unacknowledgeAlarms	CMISE M-ACTION service, action type: unacknowledgeAlarms	O
AlarmIRPOperations_4	setComment	CMISE M-ACTION service, action type: setComment	O
AlarmIRPOperations_5	clearAlarms	CMISE M-ACTION service, action type: clearAlarms	O
GenericIRPVersionOperation	getIRPVersion	CMISE M-ACTION service, action type: getAlarmIRPVersion	M
GenericIRPProfileOperation	getNotificationProfile	CMISE M-ACTION service, action type: getAlarmIRPNotificationProfile	O
	getOperationProfile	CMISE M-ACTION service, action type: getAlarmIRPOperationProfile	O

NOTE: The Interfaces GenericIRPVersionOperation and GenericIRPProfileOperation are defined in 3GPP TS 32.312 [11].

4.2.3 Mapping of Operation Parameters

The tables in the following clauses show the parameters of each operations defined in the IS 3GPP TS 32.111-2 [9] and their equivalents in this CMIP SS.

The input parameters of the operations are mapped into "Action information" (see GDMO and ASN.1 definitions for more details).

The output parameters of the operations are mapped into "Action response" (see GDMO and ASN.1 definitions for more details).

Table 2: Parameter mapping of the operation *acknowledgeAlarms*

IS Parameter	IN/OUT	CMIP SS Equivalent	Qualifier
alarmInformationAndSeverityReferenceList	IN	M-ACTION parameter 'Action information' (AckOrUnackAlarmsInfo): alarmReferenceList (note)	M
alarmInformationAndSeverityReferenceList	IN	M-ACTION parameter 'Action information' (AckOrUnackAlarmsInfo): AlarmReferenceList (note)	M
ackUserId	IN	M-ACTION parameter 'Action information' (AckOrUnackAlarmsInfo): ackUserId	M
ackSystemId	IN	M-ACTION parameter 'Action information' (AckOrUnackAlarmsInfo): ackSystemId	O
badAlarmInformationReferenceList	OUT	M-ACTION parameter 'Action reply' (AckOrUnackAlarmsReply): errorAlarmReferenceList	M
status	OUT	M-ACTION parameter 'Action reply' (AckOrUnackAlarmsReply): status	M
NOTE: severity verification not required in CMIP solution set.			

Table 3: Parameter mapping of the operation *getAlarmCount*

IS Parameter	IN/OUT	CMIP SS Equivalent	Qualifier
filter	IN	M-ACTION parameter 'Action information' (GetAlarmCountInfo): filter	O
alarmAckState	IN	M-ACTION parameter 'Action information' (GetAlarmCountInfo): alarmAckState	O
criticalCount	OUT	M-ACTION parameter 'Action reply' (GetAlarmCountReply): criticalCount	M
majorCount	OUT	M-ACTION parameter 'Action reply' (GetAlarmCountReply): majorCount	M
minorCount	OUT	M-ACTION parameter 'Action reply' (GetAlarmCountReply): minorCount	M
warningCount	OUT	M-ACTION parameter 'Action reply' (GetAlarmCountReply): warningCount	M
indeterminateCount	OUT	M-ACTION parameter 'Action reply' (GetAlarmCountReply): indeterminateCount	M
clearedCount	OUT	M-ACTION parameter 'Action reply' (GetAlarmCountReply): clearedCount	M
status	OUT	M-ACTION parameter 'Action reply' (GetAlarmCountReply): status	M

Table 4: Parameter mapping of the operation *getAlarmList*

IS Parameter	IN/OUT	CMIP SS Equivalent	Qualifier
filter	IN	M-ACTION parameter 'Action information' (GetAlarmListInfo): filter	O
alarmAckState	IN	M-ACTION parameter 'Action information' (GetAlarmListInfo): alarmAckState	O
baseObjectClass	IN	M-ACTION parameter 'Action information' (GetAlarmListInfo): baseObjectClass	O
baseObjectInstance	IN	M-ACTION parameter 'Action information' (GetAlarmListInfo): baseObjectInstance	O
--	IN	M-ACTION parameter 'Action information' (GetAlarmListInfo): destination (see note 1)	M
alarmInformationList	OUT	sequence of alarm notifications, see subclause 4.1.6	M
status	OUT	M-ACTION parameter 'Action reply' (GetAlarmListReply): status status	M
--	OUT	M-ACTION parameter 'Action reply' (GetAlarmListReply): alignmentId (see note 2)	M
NOTE 1: Destination is a CMIP specific parameter and is determined by the Manager.			
NOTE 2: AlignmentId is a CMIP specific parameter and is determined by the Agent.			

Table 5: Parameter mapping of the operation *getAlarmIRPVersion*

IS Parameter	IN/OUT	CMIP SS Equivalent	Qualifier
versionNumberSet	OUT	M-ACTION parameter 'Action reply' (GetAlarmIRPVersionReply): versionNumberList	M
status	OUT	M-ACTION parameter 'Action reply' (GetAlarmIRPVersionReply): status	M

Table 6: Parameter mapping of the operation *getOperationProfile*

IS Parameter	IN/OUT	CMIP SS Equivalent	Qualifier
irpVersion	IN	M-ACTION parameter 'Action information': irpVersionNumber	M
operationNameProfile	OUT	M-ACTION parameter 'Action reply' (GetOperationProfileReply): operationNameProfile	M
operationParameterProfile	OUT	M-ACTION parameter 'Action reply' (GetOperationProfileReply): operationParameterProfile	M
status	OUT	M-ACTION parameter 'Action reply' (GetOperationProfileReply): status	M

Table 7: Parameter mapping of the operation *getNotificationProfile*

IS Parameter	IN/OUT	CMIP SS Equivalent	Qualifier
irpVersion	IN	M-ACTION parameter 'Action information': irpVersionNumber	M
notificationNameProfile	OUT	M-ACTION parameter 'Action reply' (GetNotificationProfileReply): notificationNameProfile	M
notificationParameterProfile	OUT	M-ACTION parameter 'Action reply' (GetNotificationProfileReply): notificationParameterProfile	M
status	OUT	M-ACTION parameter 'Action reply' (GetNotificationProfileReply): status	M

Table 8: Parameter mapping of the operation *setComment*

IS Parameter	IN/OUT	CMIP SS Equivalent	Qualifier
alarmInformationReferenceList	IN	M-ACTION parameter 'Action information' (SetCommentInfo): alarmReferenceList	M
commentUserId	IN	M-ACTION parameter 'Action information' (SetCommentInfo): commentUserId	M
commentSystemId	IN	M-ACTION parameter 'Action information' (SetCommentInfo): commentSystemId	O
commentText	IN	M-ACTION parameter 'Action information' (SetCommentInfo): commentText	M
badAlarmInformationReferenceList	OUT	M-ACTION parameter 'Action reply' (SetCommentReply): errorAlarmReferenceList	M
status	OUT	M-ACTION parameter 'Action reply' (SetCommentReply): status	M

Table 9: Parameter mapping of the operation *unacknowledgeAlarms*

IS Parameter	IN/OUT	CMIP SS Equivalent	Qualifier
alarmInformationReferenceList	IN	M-ACTION parameter 'Action information' (AckOrUnackAlarmsInfo): alarmReferenceList	M
ackUserId	IN	M-ACTION parameter 'Action information' (AckOrUnackAlarmsInfo): ackUserId	M
ackSystemId	IN	M-ACTION parameter 'Action information' (AckOrUnackAlarmsInfo): ackSystemId	O
badAlarmInformationReferenceList	OUT	M-ACTION parameter 'Action information' (AckOrUnackAlarmsReply): errorAlarmReferenceList	M
status	OUT	M-ACTION parameter 'Action information' (AckOrUnackAlarmsReply): status	M

Table 10: Parameter mapping of the operation *clearAlarms*

IS Parameter	IN/OUT	CMIP SS Equivalent	Qualifier
alarmInformationReferenceList	IN	M-ACTION parameter 'Action information' (ClearAlarmsInfo): alarmReferenceList	M
clearUserId	IN	M-ACTION parameter 'Action information' (ClearAlarmsInfo): clearUserId	M
clearSystemId	IN	M-ACTION parameter 'Action information' (ClearAlarmsInfo): clearSystemId	O
badAlarmInformationReferenceList	OUT	M-ACTION parameter 'Action reply' (ClearAlarmsReply): errorAlarmReferenceList	M
status	OUT	M-ACTION parameter 'Action reply' (ClearAlarmsReply): status	M

4.2.4 Mapping of Notifications

Table 11 maps the Notifications defined in the Information Service of the Alarm IRP to the equivalent Notifications of the CMIP solution set for the Alarm IRP. The CMIP Notifications are qualified as Mandatory (M) or Optional (O).

Table 11: Mapping of Notifications

IS Notification	CMIP SS Equivalent	Qualifier
notifyNewAlarm	environmentalAlarm ITU-T X.721 [4] equipmentAlarm ITU-T X.721 [4] qualityofServiceAlarm ITU-T X.721 [4] processingErrorAlarm ITU-T X.721 [4] communicationsAlarm ITU-T X.721 [4] integrityViolation ITU-T X.721 [4] operationalViolation ITU-T X.721 [4] physicalViolation ITU-T X.721 [4] securityServiceOrMechanismViolation ITU-T X.721 [4] timeDomainViolation ITU-T X.721 [4]	M
notifyChangedAlarm	notifyClearedAlarm notifyNewAlarm which are in turn mapped into environmentalAlarm ITU-T X.721 [4] equipmentAlarm ITU-T X.721 [4] qualityofServiceAlarm ITU-T X.721 [4] processingErrorAlarm ITU-T X.721 [4] communicationsAlarm ITU-T X.721 [4] integrityViolation ITU-T X.721 [4] operationalViolation ITU-T X.721 [4] physicalViolation ITU-T X.721 [4] securityServiceOrMechanismViolation ITU-T X.721 [4] timeDomainViolation ITU-T X.721 [4]	O
notifyClearedAlarm	environmentalAlarm ITU-T X.721 [4] equipmentAlarm ITU-T X.721 [4] qualityofServiceAlarm ITU-T X.721 [4] processingErrorAlarm ITU-T X.721 [4] communicationsAlarm ITU-T X.721 [4] integrityViolation ITU-T X.721 [4] operationalViolation ITU-T X.721 [4] physicalViolation ITU-T X.721 [4] securityServiceOrMechanismViolation ITU-T X.721 [4] timeDomainViolation ITU-T X.721 [4]	M
notifyAckStateChanged	environmentalAlarm ITU-T X.721 [4] equipmentAlarm ITU-T X.721 [4] qualityofServiceAlarm ITU-T X.721 [4] processingErrorAlarm ITU-T X.721 [4] communicationsAlarm ITU-T X.721 [4] integrityViolation ITU-T X.721 [4] operationalViolation ITU-T X.721 [4] physicalViolation ITU-T X.721 [4] securityServiceOrMechanismViolation ITU-T X.721 [4] timeDomainViolation ITU-T X.721 [4]	M
notifyAlarmListRebuilt	notifyAlarmListRebuilt R0602	M
notifyComments	environmentalAlarm ITU-T X.721 [4] equipmentAlarm ITU-T X.721 [4] qualityofServiceAlarm ITU-T X.721 [4] processingErrorAlarm ITU-T X.721 [4] communicationsAlarm ITU-T X.721 [4] integrityViolation ITU-T X.721 [4] operationalViolation ITU-T X.721 [4] physicalViolation ITU-T X.721 [4] securityServiceOrMechanismViolation ITU-T X.721 [4] timeDomainViolation ITU-T X.721 [4]	O
notifyPotentialFaultyAlarmList	notifyPotentialFaultyAlarmList R0602	O

4.2.5 Mapping of Notification Parameters

In the CMIP Solution Set, all the notifications originated within the Agent are reported to the Managers by means of the CMISE "M-EVENT-REPORT" primitive, which is implemented by means of the "m-EventReport OPERATION" (see ITU-T Recommendations X.710 [2] and X.711 [3]). The argument of m-EventReport OPERATION is defined in ITU-T Recommendation X.711 [3] as follows:

```
EventReportArgument ::= SEQUENCE {
    managedObjectClass      ObjectClass,
    managedObjectInstance   ObjectInstance,
    eventTime                [5] IMPLICIT GeneralizedTime OPTIONAL,
    eventType                EventTypeId,
    eventInfo                [8] ANY DEFINED BY eventType OPTIONAL
}
```

where `eventInfo` is further specified, for each specific notification, by means of specific GDMO/ASN.1 definitions.

In the following tables, for the notifications defined in [9], all parameters are mapped to their CMIP SS equivalents. Note that the parameter mapping for the notification `notifyChangedAlarm` is not given. This is because in the CMIP SS the notifications `notifyClearedAlarm` and `notifyNewAlarm` are emitted instead of the notification `notifyChangedAlarm`.

The IS parameter `systemDN` defined in [9] (Alarm IRP: Information Services) is conditional and not used in the CMIP SS.

The IS parameter `alarmType` has no direct CMIP SS equivalent. Instead the value of this parameter is reflected by the type of the emitted notification. More specifically:

- If the alarm type is equal to 'Communications Alarm' the notification *communicationsAlarm* is emitted;
- If the alarm type is equal to 'Processing Error Alarm' the notification *processingErrorAlarm* is emitted;
- If the alarm type is equal to 'Environmental Alarm' the notification *environmentalAlarm* is emitted;
- If the alarm type is equal to 'Quality of Service Alarm' the notification *qualityofServiceAlarm* is emitted;
- If the alarm type is equal to 'Equipment Alarm' the notification *equipmentAlarm* is emitted.
- If the alarm type is equal to 'Integrity Violation ' the notification *integrityViolation* is emitted.
- If the alarm type is equal to 'Operational Violation ' the notification *operationalViolation* is emitted.
- If the alarm type is equal to 'Physical Violation ' the notification *physicalViolation* is emitted.
- If the alarm type is equal to 'Security Violation ' the notification *securityServiceOrMechanismViolation* is emitted.
- If the alarm type is equal to 'Time Domain Violation ' the notification *timeDomainViolation* is emitted.

Also the IS parameter `alarmId` is not mapped directly to a parameter in the CMIP SS. This is not required because an alarm is identified unambiguously by the notification identifier of the notification reporting the alarm the first time and, if the notification identifier is not unique across the IRPAgent, by the instance of the managed object emitting this notification. Notifications referring to an alarm already reported (e.g. *notifyClearedAlarm*, *notifyAckStateChanged*, *notifyComments*) do so by specifying in the M-EVENT REPORT parameter 'Event information': *correlatedNotifications* (ITU-T Recommendations X.721 [4], X.733 [5] and X.736 [12]) the notification identifier of the notification having reported the new alarm and, if required, the instance of the object having emitted this notification.

Most parameters are mapped to the M-EVENT report parameter 'Event information'. For the notifications *notifyNewAlarm* (when reporting alarms not related to security), *notifyClearedAlarm*, *notifyAckStateChanged* and *notifyComments* the syntax and semantics of this structured parameter are defined in ITU-T X.721 [4] by the ASN.1 definition *AlarmInfo*. In case *notifyNewAlarm* reports a security alarm, the 'Event information' parameter is described by *SecurityAlarmInfo*, defined in ITU-T X.721 [4] as well. For the other notifications (*notifyAlarmListRebuilt*, *notifyPotentialFaultyAlarmList*) the 'Event information' parameter is described by ASN.1 definitions defined in this document.

Table 12: Parameter mapping of the notification *notifyNewAlarm* for alarms not related to security

IS Parameter	CMIP SS Equivalent	Qualifier
objectclass	M-EVENT-REPORT parameter <i>Managed object class</i>	M
objectInstance	M-EVENT-REPORT parameter <i>Managed object instance</i>	M
notificationId	M-EVENT-REPORT parameter <i>Event information</i> (AlarmInfo): notificationIdentifier	M
eventTime	M-EVENT-REPORT parameter <i>Event time</i>	M
systemDN	This IS parameter is conditional and not used in the CMIP SS.	--
notificationType	M-EVENT-REPORT parameter <i>Event type</i>	M
probableCause	M-EVENT-REPORT parameter <i>Event information</i> (AlarmInfo): probableCause	M
specificProblems	M-EVENT-REPORT parameter <i>Event information</i> (AlarmInfo): specificProblems	O
perceivedSeverity	M-EVENT-REPORT parameter <i>Event information</i> (AlarmInfo): perceivedSeverity	M
alarmType	The semantics of this parameter is conveyed by the notification type.	--
backedUpStatus	M-EVENT-REPORT parameter <i>Event information</i> (AlarmInfo): backedUpStatus	O
backUpObject	M-EVENT-REPORT parameter <i>Event information</i> (AlarmInfo): backUpObject	O
trendIndication	M-EVENT-REPORT parameter <i>Event information</i> (AlarmInfo): trendIndication	O
thresholdInfo	M-EVENT-REPORT parameter <i>Event information</i> (AlarmInfo): thresholdInfo	O
correlatedNotifications	M-EVENT-REPORT parameter <i>Event information</i> (AlarmInfo): correlatedNotifications	O
stateChangeDefinition	M-EVENT-REPORT parameter <i>Event information</i> (AlarmInfo): stateChangeDefinition	O
monitoredAttributes	M-EVENT-REPORT parameter <i>Event information</i> (AlarmInfo): monitoredAttributes	O
proposedRepairActions	M-EVENT-REPORT parameter <i>Event information</i> (AlarmInfo): proposedRepairActions	O
additionalText	M-EVENT-REPORT parameter <i>Event information</i> (AlarmInfo): additionalText	O
alarmId	M-EVENT-REPORT parameter <i>Event information</i> (AlarmInfo): notificationIdentifier M-EVENT-REPORT parameter <i>Managed object instance</i>	M

Table 12a: Parameter mapping of the notification *notifyNewAlarm* for alarms related to security

IS Parameter	CMIP SS Equivalent	Qualifier
objectclass	M-EVENT-REPORT parameter <i>Managed object class</i>	M
objectInstance	M-EVENT-REPORT parameter <i>Managed object instance</i>	M
notificationId	M-EVENT-REPORT parameter <i>Event information</i> (SecurityAlarmInfo): notificationIdentifier	M
eventTime	M-EVENT-REPORT parameter <i>Event time</i>	M
systemDN	This IS parameter is conditional and not used in the CMIP SS.	--
notificationType	M-EVENT-REPORT parameter <i>Event type</i>	M
probableCause	M-EVENT-REPORT parameter <i>Event information</i> (SecurityAlarmInfo): securityAlarmCause	M
perceivedSeverity	M-EVENT-REPORT parameter <i>Event information</i> (SecurityAlarmInfo): securityAlarmSeverity	M
alarmType	The semantics of this parameter is conveyed by the notification type.	--
correlatedNotifications	M-EVENT-REPORT parameter <i>Event information</i> (SecurityAlarmInfo): correlatedNotifications	O
additionalText	M-EVENT-REPORT parameter <i>Event information</i> (SecurityAlarmInfo): additionalText	O
serviceUser	serviceUser	M
serviceProvider	serviceProvider	M
securityAlarmDetector	securityAlarmDetector	M
alarmId	M-EVENT-REPORT parameter <i>Event information</i> (SecurityAlarmInfo): notificationIdentifier M-EVENT-REPORT parameter <i>Managed object instance</i>	M

Table 13: Parameter mapping of the notification *notifyClearedAlarm*

IS Parameter	CMIP SS Equivalent	Qualifier
objectclass	M-EVENT-REPORT parameter 'Managed object class'	M
objectInstance	M-EVENT-REPORT parameter 'Managed object instance'	M
notificationId	M-EVENT-REPORT parameter 'Event information' (AlarmInfo): notificationIdentifier	M
eventTime	M-EVENT-REPORT parameter 'Event time'	M
systemDN	This IS parameter is conditional and not used in the CMIP SS.	--
notificationType	M-EVENT-REPORT parameter 'Event type'	M
probableCause	M-EVENT-REPORT parameter 'Event information' (AlarmInfo): probableCause	M
perceivedSeverity	M-EVENT-REPORT parameter 'Event information' (AlarmInfo): perceivedSeverity	M
alarmType	The semantics of this parameter is conveyed by the notification type.	--
clearUserId	M-EVENT-REPORT parameter 'Event information' (AlarmInfo): additionalInformation: clearUserIdParameter	O
clearSystemId	M-EVENT-REPORT parameter 'Event information' (AlarmInfo): additionalInformation: clearSystemIdParameter	O
correlatedNotifications	M-EVENT-REPORT parameter 'Event information' (AlarmInfo): correlatedNotifications	O
alarmId	M-EVENT-REPORT parameter 'Event information' (AlarmInfo): correlatedNotifications	M

Table 14: Parameter mapping of the notification *notifyAckStateChanged*

IS Parameter	CMIP SS Equivalent	Qualifier
objectclass	M-EVENT-REPORT parameter 'Managed object class'	M
objectInstance	M-EVENT-REPORT parameter 'Managed object instance'	M
notificationId	M-EVENT-REPORT parameter 'Event information' (AlarmInfo): notificationIdentifier	M
eventTime	M-EVENT-REPORT parameter 'Event time'	M
systemDN	This IS parameter is conditional and not used in the CMIP SS.	--
notificationType	M-EVENT-REPORT parameter 'Event type'	M
probableCause	M-EVENT-REPORT parameter 'Event information' (AlarmInfo): probableCause	M
perceivedSeverity	M-EVENT-REPORT parameter 'Event information' (AlarmInfo): perceivedSeverity	M
alarmType	The semantics of this parameter is conveyed by the notification type.	--
alarmId	M-EVENT-REPORT parameter 'Event information' (AlarmInfo): correlatedNotifications	--
ackTime	M-EVENT-REPORT parameter 'Event information' (AlarmInfo): additionalInformation: ackTimeParameter	M
ackState	M-EVENT-REPORT parameter 'Event information' (AlarmInfo): additionalInformation: ackStateParameter	M
ackUserId	M-EVENT-REPORT parameter 'Event information' (AlarmInfo): additionalInformation: ackUserIdParameter	M
ackSystemId	M-EVENT-REPORT parameter 'Event information' (AlarmInfo): additionalInformation: ackSystemIdParameter	O

Table 15: Parameter mapping of the notification *notifyAlarmListRebuilt*

IS Parameter	CMIP SS Equivalent	Qualifier
objectClass	M-EVENT-REPORT parameter 'Event information' (NotifyAlarmListRebuiltInfo): rebuiltObjectClass	M
objectInstance	M-EVENT-REPORT parameter 'Event information' (NotifyAlarmListRebuiltInfo): rebuiltObjectInstance	M
notificationId	M-EVENT-REPORT parameter 'Event information' (NotifyAlarmListRebuiltInfo): notificationIdentifier	M
eventTime	M-EVENT-REPORT parameter 'Event time'	M
systemDN	This IS parameter is conditional and not used in the CMIP SS.	--
notificationType	M-EVENT-REPORT parameter 'Event type'	M
reason	M-EVENT-REPORT parameter 'Event information' (NotifyAlarmListRebuiltInfo): reason	M
AlarmListAlignment Requirement	M-EVENT-REPORT parameter 'Event information' (NotifyAlarmListRebuiltInfo): alarmListAlignmentRequirement (see note)	O
NOTE: This parameter shall be supported only, if the IRPAgent supports the notification <i>notifyPotentialFaultyAlarmList</i> .		

Table 16: Parameter mapping of the notification *notifyComments*

IS Parameter	CMIP SS Equivalent	Qualifier
objectClass	M-EVENT-REPORT parameter <i>Managed object class</i>	M
objectInstance	M-EVENT-REPORT parameter <i>Managed object instance</i>	M
notificationId	M-EVENT-REPORT parameter <i>Event information</i> (AlarmInfo): notificationIdentifier	M
eventTime	M-EVENT-REPORT parameter <i>Event time</i>	M
systemDN	This IS parameter is conditional and not used in the CMIP SS.	--
notificationType	M-EVENT-REPORT parameter <i>Event type</i>	M
alarmType	The semantics of this parameter is conveyed by the notification type.	M
probableCause	M-EVENT-REPORT parameter <i>Event information</i> (AlarmInfo): probableCause	M
perceivedSeverity	M-EVENT-REPORT parameter <i>Event information</i> (AlarmInfo): perceivedSeverity	M
comments	M-EVENT-REPORT parameter <i>Event information</i> (AlarmInfo): additionalInformation: commentsParameter	M
alarmId	M-EVENT-REPORT parameter <i>Event information</i> (AlarmInfo): correlatedNotifications	M

Table 17: Parameter mapping of the notification *notifyPotentialFaultyAlarmList*

IS Parameter	CMIP SS Equivalent	Qualifier
objectClass	M-EVENT-REPORT parameter 'Event information' (NotifyPotentialFaultyAlarmListInfo): potentialFaultyObjectClass	M
objectInstance	M-EVENT-REPORT parameter 'Event information' (NotifyPotentialFaultyAlarmListInfo): potentialFaultyObjectInstance	M
notificationId	M-EVENT-REPORT parameter 'Event information' (NotifyPotentialFaultyAlarmListInfo): notificationIdentifier	M
eventTime	M-EVENT-REPORT parameter 'Event time'	M
systemDN	This IS parameter is conditional and not used in the CMIP SS.	--
notificationType	M-EVENT-REPORT parameter: 'Event type'	M
reason	M-EVENT-REPORT parameter 'Event information' (NotifyPotentialFaultyAlarmListInfo): reason	M

5 GDMO definitions

5.1 Managed Object Classes

5.1.1 alarmControl

```
alarmControlR0602 MANAGED OBJECT CLASS
  DERIVED FROM
    "Rec. X.721 | ISO/IEC 10165-2 : 1992":top;
  CHARACTERIZED BY
    alarmControlBasicPackageR0602,
    alarmAcknowledgementPackage,
    alarmIRPVersionPackage;
  CONDITIONAL PACKAGES
    alarmCountPackage          PRESENT IF "an instance supports it",
    alarmCommentPackage        PRESENT IF "an instance supports it",
    alarmProfilePackage         PRESENT IF "an instance supports it",
    alarmUnacknowledgementPackage PRESENT IF "an instance supports it",
    alarmPotentialFaultyAlarmListPackageR0602 PRESENT IF "an instance supports it",
    alarmClearPackage          PRESENT IF "an instance supports it";
  REGISTERED AS {ts32-111AlarmObjectClass 10602};
```

5.2 Packages

5.2.1 alarmControlBasicPackage

```
alarmControlBasicPackageR0602 PACKAGE
  BEHAVIOUR
    alarmControlBasicPackageR0602Behaviour;
  ATTRIBUTES
    alarmControlId      GET,
    alarmsCountSummary  GET;
  ACTIONS
    getAlarmList,
    abortGetAlarmList;
  NOTIFICATIONS
    notifyAlarmListRebuiltR0602,
    notifyAlarmAlignmentEndR0602;
  REGISTERED AS {ts32-111AlarmPackage 10602};
```

```
alarmControlBasicPackageR0602Behaviour BEHAVIOUR
  DEFINED AS
```

"The MOC alarmControl has been defined to provide information to the Manager about the currently alarms controlled by the Agent.
An instance of the 'alarmControl' MOC is identified by the value of the attribute 'alarmControlId'.
The attribute 'alarmsCountSummary' provides a summary of the number of alarms managed in the Agent's alarm list (including the number of cleared but not yet acknowledged alarms).
The action 'getAlarmList' is the means, for the Manager, to trigger an alarm alignment procedure in accordance with the parameter specified in the action request (this may be needed e.g. for first time alignment or after a link interruption between the Agent and the Manager). The alarm list is sent as a sequence of single alarm reports.
The notification 'notifyAlarmListRebuilt' is sent by the Agent to the Manager to inform that the alarm list has changed. It is recommended that the Manager subsequently triggers an alarm alignment.
The notification 'notifyAlarmAlignmentEnd' is sent by the Agent to the Manager to inform that the alarm alignment process identified by the 'alignmentId' is completed.";

5.2.2 alarmCountPackage

```
alarmCountPackage PACKAGE
  BEHAVIOUR
    alarmCountPackageBehaviour;
  ACTIONS
    getAlarmCount;
  REGISTERED AS {ts32-111AlarmPackage 2};
```

alarmCountPackageBehaviour **BEHAVIOUR**

DEFINED AS

"This package has been defined to allow the Managers to get information from the Agent about the number of alarms currently present in the alarm list.";

5.2.3 alarmAcknowledgementPackage

alarmAcknowledgementPackage **PACKAGE**

BEHAVIOUR

alarmAcknowledgementPackageBehaviour;

ACTIONS

acknowledgeAlarms;

NOTIFICATIONS

"Rec. X.721 | ISO/IEC 10165-2 : 1992": communicationsAlarm,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": environmentalAlarm,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": equipmentAlarm,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": processingErrorAlarm,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": qualityofServiceAlarm,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": integrityViolation,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": operationalViolation,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": physicalViolation,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": securityServiceOrMechanismViolation,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": timeDomainViolation;

REGISTERED AS {ts32-111AlarmPackage 3};

alarmAcknowledgementPackageBehaviour **BEHAVIOUR**

DEFINED AS

"This package has been defined to provide information to the Manager about the acknowledgement status of the alarms controlled by the Agent.

The action 'acknowledgeAlarms' allows the NM operator to acknowledge one or several alarms previously sent by the Agent as alarm notifications.

The ITU-T Recommendation X.721 [4] compliant alarm notifications are sent by the Agent to the Manager to inform that one alarm has been acknowledged. The acknowledgement related information is carried in the *additionalInformation* attribute.";

5.2.4 alarmUnacknowledgementPackage

alarmUnacknowledgementPackage **PACKAGE**

BEHAVIOUR

alarmUnacknowledgementPackageBehaviour;

ACTIONS

unacknowledgeAlarms;

NOTIFICATIONS

"Rec. X.721 | ISO/IEC 10165-2 : 1992": communicationsAlarm,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": environmentalAlarm,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": equipmentAlarm,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": processingErrorAlarm,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": qualityofServiceAlarm,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": integrityViolation,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": operationalViolation,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": physicalViolation,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": securityServiceOrMechanismViolation,
 "Rec. X.721 | ISO/IEC 10165-2 : 1992": timeDomainViolation;

REGISTERED AS {ts32-111AlarmPackage 4};

alarmUnacknowledgementPackageBehaviour **BEHAVIOUR**

DEFINED AS

"This package has been defined to provide the Manager with the capability to un-acknowledge alarms.

The action 'unacknowledgeAlarms' allows the NM operator to un-acknowledge one or several alarms previously acknowledged by him.

The ITU-T Recommendation X.721 [4] compliant alarm notifications are sent by the Agent to the Manager to inform that one alarm has been unacknowledged. The acknowledgement related information is carried in the *additionalInformation* attribute.";

5.2.5 alarmCommentPackage

alarmCommentPackage **PACKAGE**

BEHAVIOUR

alarmCommentPackageBehaviour;

ACTIONS

setComment;

NOTIFICATIONS

"Rec. X.721 | ISO/IEC 10165-2 : 1992": communicationsAlarm,

```

"Rec. X.721 | ISO/IEC 10165-2 : 1992": environmentalAlarm,
"Rec. X.721 | ISO/IEC 10165-2 : 1992": equipmentAlarm,
"Rec. X.721 | ISO/IEC 10165-2 : 1992": processingErrorAlarm,
"Rec. X.721 | ISO/IEC 10165-2 : 1992": qualityofServiceAlarm,
"Rec. X.721 | ISO/IEC 10165-2 : 1992": integrityViolation,
"Rec. X.721 | ISO/IEC 10165-2 : 1992": operationalViolation,
"Rec. X.721 | ISO/IEC 10165-2 : 1992": physicalViolation,
"Rec. X.721 | ISO/IEC 10165-2 : 1992": securityServiceOrMechanismViolation,
"Rec. X.721 | ISO/IEC 10165-2 : 1992": timeDomainViolation;
REGISTERED AS {ts32-111AlarmPackage 5};

```

```

alarmCommentPackageBehaviour BEHAVIOUR
DEFINED AS

```

"This package has been defined to allow the management of comments related to alarms. The action *setComment* allows the IRPManager to add a comment to one or several alarms. Also the IRPAgent may add comments to alarms. ITU-T Recommendation X.721 [4] compliant alarm notifications are generated once a comment is added to an alarm. The information in all comments associated to an alarm is carried in the attribute *additionalInformation*."

5.2.6 alarmIRPVersionPackage

```

alarmIRPVersionPackage PACKAGE
BEHAVIOUR
  alarmIRPVersionPackageBehaviour;
ATTRIBUTES
  supportedAlarmIRPVersions GET;
ACTIONS
  getAlarmIRPVersion;
REGISTERED AS {ts32-111AlarmPackage 6};

```

```

alarmIRPVersionPackageBehaviour BEHAVIOUR
DEFINED AS

```

"This package has been defined to allow the Manager to get information about the Alarm IRP versions supported by the Agent. The attribute 'supportedAlarmIRPVersions' indicates all versions of the Alarm IRP currently supported by the Agent. The action 'getAlarmIRPVersion' may be invoked by the Manager to get information about the Alarm IRP versions supported by the Agent. Such Alarm IRP versions must be compatible to each other. This means that the Manager may use any one of such Alarm IRP versions";

5.2.7 alarmProfilePackage

```

alarmProfilePackage PACKAGE
BEHAVIOUR
  alarmProfilePackageBehaviour;
ACTIONS
  getAlarmIRPOperationProfile,
  getAlarmIRPNotificationProfile;
REGISTERED AS {ts32-111AlarmPackage 7};

```

```

alarmProfilePackageBehaviour BEHAVIOUR
DEFINED AS

```

"This package has been defined to allow the Manager to get detailed information about the profile of Alarm IRP. The action 'getOperationProfile' is invoked by the Manager to get detailed information about the operations supported by Alarm IRP. The action 'getNotificationProfile' is invoked by the Manager to get detailed information about the notifications supported by Alarm IRP."

5.2.8 alarmPotentialFaultyAlarmListPackage

```

alarmPotentialFaultyAlarmListPackageR0602 PACKAGE
BEHAVIOUR
  alarmPotentialFaultyAlarmListPackageR0602Behaviour;
NOTIFICATIONS
  notifyPotentialFaultyAlarmListR0602;
REGISTERED AS {ts32-111AlarmPackage 80602};

```

```

alarmPotentialFaultyAlarmListPackageR0602Behaviour BEHAVIOUR
DEFINED AS

```

"This package allows the IRPAgent to inform the IRPManager that the alarm list held by the IRPAgent might be faulty.";

5.2.9 alarmClearPackage

```
alarmClearPackage PACKAGE
  BEHAVIOUR
    alarmClearPackageBehaviour;
  ACTIONS
    clearAlarms;
REGISTERED AS {ts32-111AlarmPackage 9};

alarmClearPackageBehaviour BEHAVIOUR
DEFINED AS
  "This package allows the IRPManager to clear one or multiple alarms in the IRPAgent.";
```

5.2.10 x721AlarmNotificationsPackage

```
x721AlarmNotificationsPackage PACKAGE
  BEHAVIOUR
    x721AlarmNotificationsPackageBehaviour;
  NOTIFICATIONS
    "Rec. X.721 | ISO/IEC 10165-2 : 1992": communicationsAlarm,
    "Rec. X.721 | ISO/IEC 10165-2 : 1992": environmentalAlarm,
    "Rec. X.721 | ISO/IEC 10165-2 : 1992": equipmentAlarm,
    "Rec. X.721 | ISO/IEC 10165-2 : 1992": processingErrorAlarm,
    "Rec. X.721 | ISO/IEC 10165-2 : 1992": qualityofServiceAlarm,
    "Rec. X.721 | ISO/IEC 10165-2 : 1992": integrityViolation,
    "Rec. X.721 | ISO/IEC 10165-2 : 1992": operationalViolation,
    "Rec. X.721 | ISO/IEC 10165-2 : 1992": physicalViolation,
    "Rec. X.721 | ISO/IEC 10165-2 : 1992": securityServiceOrMechanismViolation,
    "Rec. X.721 | ISO/IEC 10165-2 : 1992": timeDomainViolation;
REGISTERED AS {ts32-111AlarmPackage 10};

x721AlarmNotificationsPackageBehaviour BEHAVIOUR
DEFINED AS
  "This package contains all alarm notifications defined in ITU-T X.721.";
```

5.3 Actions

5.3.1 acknowledgeAlarms (M)

```
acknowledgeAlarms ACTION
  BEHAVIOUR
    acknowledgeAlarmsBehaviour;
  MODE
    CONFIRMED;
  WITH INFORMATION SYNTAX
    TS32-111-4TypeModule.AckOrUnackAlarmsInfo;
  WITH REPLY SYNTAX
    TS32-111-4TypeModule.AckOrUnackAlarmsReply;
REGISTERED AS {ts32-111AlarmAction 1};

acknowledgeAlarmsBehaviour BEHAVIOUR
DEFINED AS
  "The behaviour of this functionality is defined within 32.111-2 - below provides an overview and CMIP specific semantics.
  This action is invoked by the Manager to indicate to the Agent that one or several alarms (previously sent by the Agent as alarm notifications) have to be acknowledged. In the action request the NM supplies the parameter ackUserId and ackSystemId. The other acknowledgement history parameters, i.e. alarm acknowledgement state (in this case acknowledged) and the acknowledgement time are set by the Agent itself.
  The 'Action information' field contains the following data:
  • alarmReferenceList
    This parameter contains a set of MOI (Managed Object Instance) and notificationIdentifier. Each pair identifies unambiguously in the scope of the Agent an alarm (previously received by the NM) that have to be now acknowledged. MOI can be absent if scope of uniqueness of notificationIdentifier is across the IRPAgent.
  • ackUserId
    It contains the name of the operator who acknowledged the alarm or a generic name (dependent on the operational concept). It may have also the value NULL.
  • ackSystemId
    It indicates the management system where the acknowledgment is triggered. It may have also the value NULL.
  The 'Action response' contains the following data:
```

- *status*
This parameter contains the results of the NM acknowledgement action. Possible values: noError (0, all alarms found and ack state changed according to the manager request), ackPartlySuccessful (some alarms not found / not changeable, see next parameter), error (value indicates the reason why the complete operation failed).
- *errorAlarmReferenceList*
This parameter (significant only if *status* = ackPartlySuccessful) contains the list of moi (managed object instance) and notificationIdentifier pairs of the alarms which could not be acknowledged and, for each alarm, also the reason of the error.";

5.3.2 getAlarmCount (O)

```
getAlarmCount ACTION
  BEHAVIOUR
    getAlarmCountBehaviour;
  MODE
    CONFIRMED;
  WITH INFORMATION SYNTAX
    TS32-111-4TypeModule.GetAlarmCountInfo;
  WITH REPLY SYNTAX
    TS32-111-4TypeModule.GetAlarmCountReply;
  REGISTERED AS {ts32-111AlarmAction 2};
```

```
getAlarmCountBehaviour BEHAVIOUR
  DEFINED AS
```

"The behaviour of this functionality is defined within 32.111-2 - below provides an overview and CMIP specific semantics.

The NM invokes this action to receive the number of available alarms in the Agent' alarm list according to the specification in the action request. The Manager may use this action to find out the number of alarms in the alarm list before invoking a synchronisation by means of the *getAlarmList* operation. The request is possible also before the Manager creates an own event forwarding discriminator instance within the Agent.

The 'Action information' field contains the following data:

- *alarmAckState*
Depending on this optional parameter value, the NM gets the number of alarms of each *perceivedSeverity* value according to the following possible choices:
 - all alarms
 - all active alarms (acknowledged or not yet acknowledged)
 - all active and acknowledged alarms
 - all active and unacknowledged alarms
 - all cleared and unacknowledged alarms.
 If the parameter is absent, all alarms from the Agent's alarm list are taken into consideration.
- *filter*
The handling of this optional parameter is as follows:
 - if present and not NULL, it indicates a filter constraint which shall apply in the calculation of the results
 - if its value is NULL, no filter shall be considered and the Agent shall return the number of all alarms according to the value of the parameter *alarmAckState* (see above)
 - if absent, the handling depends on the availability of an event forwarding discriminator instance within the Agent. If this instance is valid, the filter construct of the event forwarding discriminator shall apply. If no EFD instance is available, the Agent shall return the number of all alarms according to the value of the above-mentioned parameter *alarmAckState*.

The 'Action response' is composed of:

- The numbers of alarms for each *perceivedSeverity* value (if applicable).
- The parameter *status* containing the results of the NM action. Possible values: noError (0), error (the value indicates the reason of the error).";

5.3.3 getAlarmList (M)

```
getAlarmList ACTION
  BEHAVIOUR
    getAlarmListBehaviour;
  MODE
    CONFIRMED;
  WITH INFORMATION SYNTAX
    TS32-111-4TypeModule.GetAlarmListInfo;
  WITH REPLY SYNTAX
    TS32-111-4TypeModule.GetAlarmListReply;
  REGISTERED AS {ts32-111AlarmAction 3};
```

```
getAlarmListBehaviour BEHAVIOUR
```


DEFINED AS

"This action starts an alarm alignment procedure between a NM and Agent, which takes into account the acknowledgment state of the alarms and a dedicated filter (valid only for the current request).

The 'Action information' field contains the following data:

- *alarmAckState*
Depending on this optional parameter value, the NM gets the alarm reports according to the following possible choices:
 - all alarms
 - all active alarms (acknowledged or not yet acknowledged)
 - all active and acknowledged alarms
 - all active and unacknowledged alarms
 - all cleared and unacknowledged alarms.
 If the parameter is absent, all alarms from the Agent's alarm list are taken into consideration.
- *baseObjectClass*
This parameter carries the object class of the managed object instance identified by the *baseObjectInstance* parameter.
- *baseObjectInstance*
This parameter carries the DN of a certain managed object instance. Only alarm information instances related to this managed object and its subordinate objects shall be provided.
- *destination*
This parameter identifies the destination to which the alarm reports that have passed the test conditions specified in the parameter 'filter' are sent. According to ITU-T Recommendation X.721 [4], if no destination is specified in the request, then the discriminator is created with the destination defaulted to the AE-Title of the invoker.
- *filter*
The handling of this optional parameter (valid only for the current alignment request) is as follows:
 - if present and not NULL, it indicates a filter constraint which shall apply in the forwarding of the alignment-related alarm reports
 - if its value is NULL, no real filter shall be considered and the Manager receives the alarms according to the value of the parameter *alarmAckState* (see above).

The 'Action response' contains the following data:

- *alignmentId*
The parameter is defined by the Agent and identifies unambiguously the current alarm alignment procedure. It allows the Manager to distinguish between alarm reports sent as consequence of several own alignment requests triggered in parallel.
- *status*
The parameter contains the results of the NM action. Possible values: noError (0), error (the value indicates the reason of the error).
After the action response is forwarded to the NM, the Agent sends the alarm list as a sequence of single alarm notifications in accordance with the values of the request parameters. Every alarm notification contains all fields of the alarm stored in the alarm list. In particular:
 - The field *additionalText* contains at the beginning the string '(ALIGNMENTEND-alignmentId)' to allow a Manager to recognise that this alarm report is sent due to a previous *getAlarmList* request.
 - ~~• The field *additionalText* contains at the beginning a string to allow a Manager to recognise that this alarm report is sent due to a previous *getAlarmList* request. The structure of this string is:

 - '(ALIGNMENT-alignmentId)' for every alarm report except the last one or
 - '(ALIGNMENTEND-alignmentId)' for the last alarm report sent by the Agent due to the current *getAlarmList* request.~~
- If available, the data related to the acknowledgment history (i.e. *ackState*, *ackTime*, *ackUserId*, *ackSystemId*) are provided in the field *additionalInformation*.
Further details about the implementation of this operation are provided in the 'Introduction'.";

5.3.4 setComment (O)

setComment **ACTION**

BEHAVIOUR

setCommentBehaviour;

MODE

CONFIRMED;

WITH INFORMATION SYNTAX

TS32-111-4TypeModule.SetCommentInfo;

WITH REPLY SYNTAX

TS32-111-4TypeModule.SetCommentReply;

REGISTERED AS {ts32-111AlarmAction 4};

setCommentBehaviour **BEHAVIOUR**

DEFINED AS

"The behaviour of this functionality is defined within 32.111-2 - below provides an overview and CMIP specific semantics.

The NM invokes this action to associate a comment to one or more alarms.

The 'Action information' field contains:

- *alarmReferenceList*
Contains a list of alarm identifiers to which the comment must be associated.
- *commentUserId*
Contains the identity of the NM User that invokes this operation.
- *commentSystemId*
Contains the identity of the NM that invokes this operation.
- *commentText*
Contains the text of the comment.

The 'Action response' is composed of the following data:

- *errorAlarmReferenceList*
List of pair of alarmId and failure reason.
- *status*
It contains the results of the NM action. Possible values: actionSucceeded (0), actionPartiallyFailed (12) or another value indicating the reason of the error.";

5.3.5 getAlarmIRPVersion (M)

getAlarmIRPVersion **ACTION**

BEHAVIOUR

getAlarmIRPVersionBehaviour;

MODE

CONFIRMED;

WITH REPLY SYNTAX

TS32-111-4TypeModule.GetAlarmIRPVersionReply;

REGISTERED AS {ts32-111AlarmAction 5};

getAlarmIRPVersionBehaviour **BEHAVIOUR**

DEFINED AS

"The behaviour of this functionality is defined within 32.111-2 - below provides an overview and CMIP specific semantics.

The NM invokes this action to get information about the Alarm IRP versions supported by the Agent.

The 'Action information' field contains no data.

The 'Action response' is composed of the following data:

- *versionNumbersList*
It defines a list of Alarm IRP versions supported by the Agent. A list containing no element, i.e. a NULL list means that the concerned Agent doesn't support any version of the Notification IRP.
- *status*
It contains the results of the NM action. Possible values: noError (0), error (the value indicates the reason of the error).";

5.3.6 getAlarmIRPNotificationProfile (O)

getAlarmIRPNotificationProfile **ACTION**

BEHAVIOUR

getAlarmIRPNotificationProfileBehaviour;

MODE

CONFIRMED;

WITH INFORMATION SYNTAX

TS32-111-4TypeModule.IRPVersionNumber;

WITH REPLY SYNTAX

TS32-111-4TypeModule.GetNotificationProfileReply;

REGISTERED AS {ts32-111AlarmAction 6};

getAlarmIRPNotificationProfileBehaviour **BEHAVIOUR**

DEFINED AS

"The behaviour of this functionality is defined within 32.111-2 - below provides an overview and CMIP specific semantics.

A Manager invokes this action to enquiry about the notification profile (supported notifications and supported parameters) for this specific Alarm IRP version.

The 'Action information' contains the following data:

- *irpVersionNumber*
This mandatory parameter identifies the Alarm IRP version.

The 'Action response' is composed of the following data:

- *notificationNameProfile*
It contains a list of notification names, i.e. a NULL list means that the Alarm IRP doesn't support any notification.
- *notificationParameterProfile*.
It contains a set of elements, each element corresponds to a notification name and is composed by a set of parameter names.
- *status*

It contains the results of this action. Possible values: noError (0), error (the value indicates the reason of the error).";

5.3.7 getAlarmIRPOperationProfile (O)

```
getAlarmIRPOperationProfile ACTION
  BEHAVIOUR
    getAlarmIRPOperationProfileBehaviour;
  MODE
    CONFIRMED;
  WITH INFORMATION SYNTAX
    TS32-111-4TypeModule.IRPVersionNumber;
  WITH REPLY SYNTAX
    TS32-111-4TypeModule.GetOperationProfileReply;
REGISTERED AS {ts32-111AlarmAction 7};
```

```
getAlarmIRPOperationProfileBehaviour BEHAVIOUR
DEFINED AS
```

"The behaviour of this functionality is defined within 32.111-2 - below provides an overview and CMIP specific semantics.

A Manager invokes this action to enquiry about the operation profile (supported operations and supported parameters) for this specific Alarm IRP version.

The 'Action information' contains the following data:

- *irpVersionNumber*
This mandatory parameter identifies the Alarm IRP version.

The 'Action response' is composed of the following data:

- *operationNameProfile*
It contains a list of operation names.
- *operationParameterProfile*.
It contains a set of elements, each element corresponds to an operation name and is composed by a set of parameter names.
- *status*
It contains the results of this action. Possible values: noError (0), error (the value indicates the reason of the error).";

5.3.8 unacknowledgeAlarms (O)

```
unacknowledgeAlarms ACTION
  BEHAVIOUR
    unacknowledgeAlarmsBehaviour;
  MODE
    CONFIRMED;
  WITH INFORMATION SYNTAX
    TS32-111-4TypeModule.AckOrUnackAlarmsInfo;
  WITH REPLY SYNTAX
    TS32-111-4TypeModule.AckOrUnackAlarmsReply;
REGISTERED AS {ts32-111AlarmAction 8};
```

```
unacknowledgeAlarmsBehaviour BEHAVIOUR
DEFINED AS
```

"The behaviour of this functionality is defined within 32.111-2 - below provides an overview and CMIP specific semantics.

This action is used by the Manager to indicate to the Agent that one or several alarms (previously acknowledged) have to be unacknowledged. Subsequently the 'acknowledgement history' information of these alarms in the Agent's alarm list is completely removed (this operation may be used by operators in case of a previous acknowledgement by mistake).

The 'Action information' field contains the following data:

- *alarmReferenceList*
This parameter contains a set of MOI (Managed Object Instance) and *notificationIdentifier* pair. Each of them identifies unambiguously in the scope of the Agent an alarm (previously acknowledged by the NM) that have to be now unacknowledged. MOI can be absent if scope of uniqueness of notificationIdentifier is across the IRPAgent.
- *ackUserId*
It contains the name of the operator who unacknowledged the alarm or a generic name (dependent on the operational concept). It may have also the value NULL. Note that only the user who previously acknowledged the alarm is allowed to un-acknowledge it later.
- *ackSystemId*
It indicates the management system where the acknowledgment is triggered. It may have also the value NULL. Note that the un-acknowledgement is allowed only at the management system where previously the acknowledgement took place.

The 'Action response' contains the following data:

- *status*
This parameter contains the results of the NM un-acknowledgement action. Possible values: noError (0, all alarms found and ack state changed according to the manager request),

unackPartlySuccessful (some alarms not found / not changeable, see next response parameter), error (value indicates the reason why the complete operation failed).

- *errorAlarmReferenceList*
This parameter (significant only if *status* = unackPartlySuccessful) contains the list of MOI (Managed Object Instance) and notificationIdentifier pairs of the alarms which could not be unacknowledged and, for each alarm, also the reason of the error. MOI can be absent if scope of uniqueness of notificationIdentifier is across the IRPAgent. ";

5.3.9 clearAlarms (O)

```
clearAlarms ACTION
  BEHAVIOUR
    clearAlarmsBehaviour;
  MODE
    CONFIRMED;
  WITH INFORMATION SYNTAX
    TS32-111-4TypeModule.ClearAlarmsInfo;
  WITH REPLY SYNTAX
    TS32-111-4TypeModule.ClearAlarmsReply;
REGISTERED AS {ts32-111AlarmAction 9};
```

```
clearAlarmsBehaviour BEHAVIOUR
DEFINED AS
```

"The behaviour of this functionality is defined within 32.111-2 - below provides an overview and CMIP specific semantics.

This action is invoked by the IRPManager to clear manually one or multiple alarms. The M-ACTION request parameter 'Action information' *ClearAlarmsInfo* is composed of the following fields:

- *alarmReferenceList*
This mandatory parameter identifies the alarms to be cleared. Each alarm is identified by the notification identifier of the notification that reported the alarm the first time and, if the notification identifier is not unique across the IRPAgent, by the instance of the managed object that emitted this notification.
- *clearUserId*
This mandatory parameter identifies the user that has invoked the *clearAlarms* operation.
- *clearSystemId*
This optional parameter identifies the system on which the IRPManager, where the *clearAlarms* operation has been invoked, is running. This parameter may be absent.

The M-ACTION response parameter 'Action Reply' *ClearAlarmsReply* is composed of the following fields

- *errorAlarmReferenceList*
This mandatory parameter identifies alarms that are specified in the *alarmReferenceList*, but which could not be cleared. The alarms are specified by the notification identifier of the notification that reported the alarm the first time and, if required, the instance of the managed object that emitted this notification. In addition to this, the parameter specifies for every alarm that could not be cleared the error reason. If all alarms specified in the *alarmReferenceList* exist and could be cleared, this parameter contains no information. If the operation failed completely due to a general error, this parameter is not significant.
- *status*
This mandatory parameter provides informations about the result of the operation. If all alarms specified in the *alarmReferenceList* exist and are cleared, the value *noError* (0) is returned. If some alarms specified do not exist or could not be cleared, the value *clearPartlySuccessful* () is returned. In this case the parameter *errorAlarmReferenceList* provides additional information. If the operation failed completely due to a general error, this parameter returns the error reason.";

5.3.10 abortGetAlarmList (M)

```
abortGetAlarmList ACTION
  BEHAVIOUR
    abortGetAlarmListBehaviour;
  MODE
    CONFIRMED;
  WITH INFORMATION SYNTAX
    TS32-111-4TypeModule.AbortGetAlarmListInfo;
  WITH REPLY SYNTAX
    TS32-111-4TypeModule.AbortGetAlarmListReply;
REGISTERED AS {ts32-111AlarmAction 10};
```

```
abortGetAlarmListBehaviour BEHAVIOUR
DEFINED AS
```

"This action is invoked by the IRPManager to abort an ongoing alarm alignment process. The M-ACTION request parameter 'Action information' *AbortGetAlarmListInfo* is composed of the following fields:

- *alignmentIdReferenceList*
This parameter specifies the alarm alignment processes to be aborted. Each alarm alignment process is identified by its *alignmentId*.

The M-ACTION response parameter 'Action Reply' *AbortGetAlarmListReply* is composed of the following fields

- *errorAlignmentIdReferenceList*
This mandatory parameter identifies alarm alignment processes that are specified in the *alignmentIdReferenceList*, but which could not be aborted. In addition to this, the parameter specifies for every process that could not be aborted the error reason. If all alarm alignment processes specified in the *alignmentIdReferenceList* exist and could be aborted, this parameter contains no information. If the operation failed completely due to a general error, this parameter is not significant.
- *status*
This mandatory parameter provides informations about the result of the operation. If all alarm alignment processes specified in the *alignmentIdReferenceList* exist and are aborted, the value *noError* (0) is returned. If some processes specified do not exist or could not be aborted, the value *abortGetAlarmListPartlySuccessful* (16) is returned. In this case the parameter *errorAlignmentIdReferenceList* provides additional information. If the operation failed completely due to a general error, this parameter returns the error reason.";

5.4 Notifications

5.4.1 notifyAlarmListRebuilt (M)

```
notifyAlarmListRebuiltR0602 NOTIFICATION
  BEHAVIOUR
    notifyAlarmListRebuiltR0602Behaviour;
  WITH INFORMATION SYNTAX
    TS32-111-4TypeModule.NotifyAlarmListRebuiltInfo+
  AND ATTRIBUTE IDS
    rebuiltObjectClass      rebuiltObjectClass,
    rebuiltObjectInstance   rebuiltObjectInstance;
REGISTERED AS {ts32-111AlarmNotification 10602};
```

```
notifyAlarmListRebuiltBehaviour BEHAVIOUR
DEFINED AS
```

"This notification is used by the Agent to inform the NM that the alarm list has been rebuilt. The 'Event Information' field contains the following data:

- *notificationIdentifier*
This ITU-T X.721 standardised parameter, together with MOI (Managed Object Instance), unambiguously identifies this notification.
- *rebuiltObjectClass*
This parameter carries the IRPAgent MOC when the entire AlarmList has been rebuilt. It carries a different MOC when the AlarmList has been partially rebuilt.
- *rebuiltObjectInstance*
This parameter carries DN of the IRPAgent when the entire AlarmList has been rebuilt. It carries the DN of another MOI when the AlarmList has been partially rebuilt and only the MOIs subordinate of this rebuilt MOI may be affected by this partial rebuilt.
- *reason*
The parameter indicates the reason for alarm list rebuilding (if applicable).
- *alarmListAlignmentRequirement*
This parameter indicates, if the IRPManager has to align its alarm list with the IRPAgent. Absence of this parameter means, that an alignment is required. ";

5.4.2 notifyPotentialFaultyAlarmList (O)

```
notifyPotentialFaultyAlarmListR0602 NOTIFICATION
  BEHAVIOUR
    notifyPotentialFaultyAlarmListR0602Behaviour;
  WITH INFORMATION SYNTAX
    TS32-111-4TypeModule.NotifyPotentialFaultyAlarmListInfo+
  AND ATTRIBUTE IDS
    potentialFaultyObjectClass   potentialFaultyObjectClass,
    potentialFaultyObjectInstance potentialFaultyObjectInstance;
REGISTERED AS {ts32-111AlarmNotification 30602};
```

```
notifyPotentialFaultyAlarmListR0602Behaviour BEHAVIOUR
DEFINED AS
```

"This notification is used by the IRPAgent to inform the IRPManager that the IRPAgent has lost confidence in the integrity of its alarm list.

The 'Event information' field contains the following data:

- *potentialFaultyObjectClass*

This parameter specifies together with the parameter *potentialFaultyObjectInstance* the unreliable alarm information instances in the alarm list.

If this parameter carries the MOC of the IRPAgent, then the entire alarm list is unreliable.

If this parameter carries the MOC of another MO, then only a part of the alarm list is unreliable. The mechanism for identifying the unreliable part is described below.

- *potentialFaultyObjectInstance*
This parameter specifies together with the parameter *potentialFaultyObjectClass* the unreliable alarm information instances in the alarm list.
If *potentialFaultyObjectClass* carries the MOC of the IRPAgent, then this parameter carries the DN of the IRPAgent and the entire alarm list is unreliable.
If *potentialFaultyObjectClass* carries the MOC of another MO, then this parameter carries the DN of an instance of this class. All alarm information instances representing alarms raised by this MOI and its subordinates may be unreliable in this case.
- *notificationIdentifier*
This parameter specifies the notification identifier (ITU-T X.733 [5]), which, together with the instance of the object emitting this notification, unambiguously identifies this notification.
- *reason*
This parameter specifies the reason why the IRPAgent has lost confidence in the integrity of its alarm list and needs to rebuild it.";

5.4.3 notifyAlarmAlignmentEnd (M)

notifyAlarmAlignmentEndR0602 NOTIFICATION

BEHAVIOUR

notifyAlarmAlignmentEndR0602Behaviour;

WITH INFORMATION SYNTAX

TS32-111-4TypeModule.NotifyAlarmAlignmentEndInfoR0602+

AND ATTRIBUTE IDS

notificationIdentifier "Rec. X.721 | ISO/IEC 10165-2 : 1992":notificationIdentifier,

alignmentId alignmentId,

alarmAlignmentEndStatus alarmAlignmentEndStatus;

REGISTERED AS {ts32-111AlarmNotification 40602};

notifyAlarmAlignmentEndR0602Behaviour BEHAVIOUR

DEFINED AS

"This notification is used by the Agent to inform the NM that the alarm alignment related to the current *alignmentId* value is completed or has been aborted before completion by *abortGetAlarmList*.

The 'Event Information' field contains the following data:

- *notificationIdentifier*
This ITU-T X.721 standardised parameter, together with MOI (Managed Object Instance), unambiguously identifies this notification.
- *alignmentId*
The parameter is defined by the Agent (in the *getAlarmList* response) and identifies unambiguously the current alarm alignment process. It allows the Manager to distinguish between alarm reports sent as consequence of several own alignment requests triggered in parallel."*i*

5.5 Attributes

5.5.1 alarmControlId

alarmControlId ATTRIBUTE

WITH ATTRIBUTE SYNTAX

TS32-111-4TypeModule.GeneralObjectId;

MATCHES FOR

EQUALITY;

BEHAVIOUR

alarmControlIdBehaviour;

REGISTERED AS {ts32-111AlarmAttribute 1};

alarmControlIdBehaviour BEHAVIOUR

DEFINED AS

"This attribute names an instance of a 'alarmControl' object class.";

5.5.2 alarmsCountSummary

alarmsCountSummary ATTRIBUTE

WITH ATTRIBUTE SYNTAX

```

    TS32-111-4TypeModule.AlarmsCountSummary;
MATCHES FOR
    EQUALITY;
BEHAVIOUR
    alarmsCountSummaryBehaviour;
REGISTERED AS {ts32-111AlarmAttribute 2};

```

```

alarmsCountSummaryBehaviour BEHAVIOUR
DEFINED AS

```

"This attribute indicates a summary of number of alarms managed in the Agent's alarm list sorted according to the perceived severity (including the number of cleared but not yet acknowledged alarms). Additionally the number of all currently active alarms is provided.";

5.5.3 supportedAlarmIRPVersions

```

supportedAlarmIRPVersions ATTRIBUTE
WITH ATTRIBUTE SYNTAX
    TS32-111-4TypeModule.SupportedAlarmIRPVersions;
MATCHES FOR
    EQUALITY;
BEHAVIOUR
    supportedAlarmIRPVersionsBehaviour;
REGISTERED AS {ts32-111AlarmAttribute 3};

```

```

supportedAlarmIRPVersionsBehaviour BEHAVIOUR
DEFINED AS

```

"This attribute provides the information concerning the Alarm IRP versions currently supported by the Agent.";

5.5.4 rebuiltObjectClass

```

rebuiltObjectClass ATTRIBUTE
WITH ATTRIBUTE SYNTAX
    TS32-111-4TypeModule.ObjectClass;
MATCHES FOR
    EQUALITY;
BEHAVIOUR
    rebuiltObjectClassBehaviour;
REGISTERED AS {ts32-111AlarmAttribute 40602};

```

```

rebuiltObjectClassBehaviour BEHAVIOUR
DEFINED AS

```

"The rebuiltObjectClass attribute type is specified to allow filtering of the rebuiltObjectClass parameter in the notification notifyAlarmListRebuilt.";

5.5.5 rebuiltObjectInstance

```

rebuiltObjectInstance ATTRIBUTE
WITH ATTRIBUTE SYNTAX
    TS32-111-4TypeModule.ObjectInstance;
MATCHES FOR
    EQUALITY;
BEHAVIOUR
    rebuiltObjectInstanceBehaviour;
REGISTERED AS {ts32-111AlarmAttribute 50602};

```

```

rebuiltObjectInstanceBehaviour BEHAVIOUR
DEFINED AS

```

"The rebuiltObjectInstance attribute type is specified to allow filtering of the rebuiltObjectInstance parameter in the notification notifyAlarmListRebuilt.";

5.5.6 potentialFaultyObjectClass

```

potentialFaultyObjectClass ATTRIBUTE
WITH ATTRIBUTE SYNTAX
    TS32-111-4TypeModule.ObjectClass;
MATCHES FOR
    EQUALITY;
BEHAVIOUR
    potentialFaultyObjectClassBehaviour;
REGISTERED AS {ts32-111AlarmAttribute 60602};

```

```

potentialFaultyObjectClassBehaviour BEHAVIOUR

```

DEFINED AS

"The potentialFaultyObjectClass attribute type is specified to allow filtering of the potentialFaultyObjectClass parameter in the notification notifyPotentialFaultyAlarmList.";

5.5.7 potentialFaultyObjectInstance

potentialFaultyObjectInstance ATTRIBUTE**WITH ATTRIBUTE SYNTAX**

TS32-111-4TypeModule.ObjectInstance;

MATCHES FOR

EQUALITY;

BEHAVIOUR

potentialFaultyObjectInstanceBehaviour;

REGISTERED AS {ts32-111AlarmAttribute 70602};

potentialFaultyObjectInstanceBehaviour BEHAVIOUR**DEFINED AS**

"The potentialFaultyObjectInstance attribute type is specified to allow filtering of the rebuiltObjectInstance parameter in the notification notifyPotentialFaultyAlarmList.";

5.5.8 alignmentId

alignmentId ATTRIBUTE**WITH ATTRIBUTE SYNTAX**

TS32-111-4TypeModule.AlignmentId;

MATCHES FOR

EQUALITY;

BEHAVIOUR

alignmentIdBehaviour;

REGISTERED AS {ts32-111AlarmAttribute 80602};

alignmentIdBehaviour BEHAVIOUR**DEFINED AS**

"The alignmentId attribute type is specified to allow filtering of the alignmentId parameter in the notification notifyAlarmAlignmentEnd.";

5.5.9 alarmAlignmentEndStatus

alarmAlignmentEndStatus ATTRIBUTE**WITH ATTRIBUTE SYNTAX**

TS32-111-4TypeModule.AlarmAlignmentEndStatus;

MATCHES FOR

EQUALITY;

BEHAVIOUR

alarmAlignmentEndStatusBehaviour;

REGISTERED AS {ts32-111AlarmAttribute 90602};

alarmAlignmentEndStatusBehaviour BEHAVIOUR**DEFINED AS**

"The alarmAlignmentEndStatus attribute type is specified to allow filtering of the alarmAlignmentEndStatus parameter in the notification notifyAlarmAlignmentEnd.";

5.6 Parameters

5.6.1 ackStateParameter

ackStateParameter PARAMETER**CONTEXT**

TS32-111-4TypeModule.AlarmInfo.additionalInformation;

WITH SYNTAX

TS32-111-4TypeModule.AckState;

BEHAVIOUR

ackStateParameterBehaviour;

REGISTERED AS {ts32-111AlarmParameter 1};

ackStateParameterBehaviour BEHAVIOUR**DEFINED AS**

"This parameter models the optional *additionalInformation* field of the alarm notification. If present, it informs the NM about the current acknowledgement state of the present alarm.";

5.6.2 ackSystemIdParameter

ackSystemIdParameter **PARAMETER**

CONTEXT

TS32-111-4TypeModule.AlarmInfo.additionalInformation;

WITH SYNTAX

TS32-111-4TypeModule.SystemId;

BEHAVIOUR

ackSystemIdParameterBehaviour;

REGISTERED AS {ts32-111AlarmParameter 2};

ackSystemIdParameterBehaviour **BEHAVIOUR**

DEFINED AS

"This parameter models the optional *additionalInformation* field of the alarm notification. If present, it informs the NM about the identifier of the management system where the present alarm has been acknowledged.";

5.6.3 ackTimeParameter

ackTimeParameter **PARAMETER**

CONTEXT

TS32-111-4TypeModule.AlarmInfo.additionalInformation;

WITH SYNTAX

TS32-111-4TypeModule.AckTime;

BEHAVIOUR

ackTimeParameterBehaviour;

REGISTERED AS {ts32-111AlarmParameter 3};

ackTimeParameterBehaviour **BEHAVIOUR**

DEFINED AS

"This parameter models the optional *additionalInformation* field of the alarm notification. If present, it informs the NM about the time the present alarm has been acknowledged by the Agent.";

5.6.4 ackUserIdParameter

ackUserIdParameter **PARAMETER**

CONTEXT

TS32-111-4TypeModule .AlarmInfo.additionalInformation;

WITH SYNTAX

TS32-111-4TypeModule.UserId;

BEHAVIOUR

ackUserIdParameterBehaviour;

REGISTERED AS {ts32-111AlarmParameter 4};

ackUserIdParameterBehaviour **BEHAVIOUR**

DEFINED AS

"This parameter models the optional *additionalInformation* field of the alarm notification. If present, it informs the NM about the identifier of the user who acknowledged the present alarm.";

5.6.5 clearUserIdParameter

clearUserIdParameter **PARAMETER**

CONTEXT

TS32-111-4TypeModule .AlarmInfo.additionalInformation;

WITH SYNTAX

TS32-111-4TypeModule.UserId;

BEHAVIOUR

clearUserIdParameterBehaviour;

REGISTERED AS {ts32-111AlarmParameter 5};

clearUserIdParameterBehaviour **BEHAVIOUR**

DEFINED AS

"This parameter is carried by *additionalInformation* in the notification reporting the clearance of an alarm. It identifies the user that has invoked the *clearAlarms* operation, that has led to the clearance of the reported alarm clearance.";

5.6.6 clearSystemIdParameter

clearSystemIdParameter **PARAMETER**

CONTEXT

TS32-111-4TypeModule.AlarmInfo.additionalInformation;

WITH SYNTAX

```
TS32-111-4TypeModule.UserId;  
BEHAVIOUR  
clearSystemIdParameterBehaviour;  
REGISTERED AS {ts32-111AlarmParameter 6};
```

```
clearSystemIdParameterBehaviour BEHAVIOUR  
DEFINED AS
```

"This parameter is carried by *additionalInformation* in the notification reporting the clearance of an alarm. It identifies the system on which the IRPManager, where the *clearAlarms* operation that has led to the clearance of the reported alarm, is running";

5.6.7 commentsParameter

```
commentsParameter PARAMETER
```

```
CONTEXT
```

```
TS32-111-4TypeModule.AlarmInfo.additionalInformation;
```

```
WITH SYNTAX
```

```
TS32-111-4TypeModule.AlarmComments;
```

```
BEHAVIOUR
```

```
commentsParameterBehaviour;
```

```
REGISTERED AS {ts32-111AlarmParameter 7};
```

```
commentsParameterBehaviour BEHAVIOUR
```

```
DEFINED AS
```

"This parameter is carried by the attribute *additionalInformation* in alarm notifications. If present, it informs the IRPManager about the comments assigned to an alarm. Every single comment includes the following data: *commentText*, *commentTime*, *commentUserId* and (optionally) *commentSystemId*.";

6 ASN.1 definitions for Alarm IRP

```
TS32-111-4TypeModule {itu-t(0) identified-organization(4) etsi(0) mobileDomain(0) umts-Operation-
Maintenance(3) ts-32-111(111) part4(4) informationModel(0) asn1Module(2) version1(1)}
```

```
DEFINITIONS IMPLICIT TAGS ::=
```

```
BEGIN
```

```
--EXPORTS everything
```

```
IMPORTS
```

```
NotificationIdentifier, Destination, EventTime, ProbableCause, PerceivedSeverity
FROM Attribute-ASN1Module {joint-iso-ccitt ms(9) smi(3) part2(2) asn1Module(2) 1}
```

```
AlarmInfo
FROM Notification-ASN1Module {joint-iso-ccitt ms(9) smi(3) part2(2) asn1Module(2) 2}
```

```
CMISFilter, ObjectInstance, ObjectClass, EventTypeId
FROM CMIP-1 {joint-iso-ccitt ms(9) cmip(1) modules(0) protocol(3)};
```

```
baseNodeUMTS OBJECT IDENTIFIER ::= {itu-t (0) identified-organization (4)
etsi (0) mobileDomain (0)
umts-Operation-Maintenance (3)}
```

```
ts32-111Prefix OBJECT IDENTIFIER ::= {baseNodeUMTS ts-32-111(111)}
ts32-111Part4 OBJECT IDENTIFIER ::= {ts32-111Prefix part4(4)}
ts32-111-4InfoModel OBJECT IDENTIFIER ::= {ts32-111Part4 informationModel(0)}
```

```
ts32-111AlarmObjectClass OBJECT IDENTIFIER ::= {ts32-111-4InfoModel managedObjectClass(3)}
ts32-111AlarmPackage OBJECT IDENTIFIER ::= {ts32-111-4InfoModel package(4)}
ts32-111AlarmParameter OBJECT IDENTIFIER ::= {ts32-111-4InfoModel parameter(5)}
ts32-111AlarmAttribute OBJECT IDENTIFIER ::= {ts32-111-4InfoModel attribute(7)}
ts32-111AlarmAction OBJECT IDENTIFIER ::= {ts32-111-4InfoModel action(9)}
ts32-111AlarmNotification OBJECT IDENTIFIER ::= {ts32-111-4InfoModel notification(10)}
```

```
-- Start of 3GPP SA5 own definitions
```

```
AbortGetAlarmListInfo ::= SEQUENCE
{
alignmentIdReferenceList SET OF INTEGER
}
```

```
AbortGetAlarmListReply ::= SEQUENCE
{
errorAlignmentIdReferenceList SET OF ErrorInfoAbortGetAlarmList,
status ErrorCauses
}
```

```
AckErrorList ::= SET OF ErrorInfo
```

```
AlarmReference ::= SEQUENCE
{
moi ObjectInstance OPTIONAL, -- absent if scope of uniqueness of
-- notificationId is across IRPAgent
notificationIdentifier NotificationIdentifier
}
```

```
AckOrUnackAlarmsInfo ::= SEQUENCE
{
alarmReferenceList SET OF AlarmReference,
ackUserId UserId,
ackSystemId SystemId OPTIONAL
}
```

```
AckOrUnackAlarmsReply ::= SEQUENCE
{
status ErrorCauses,
errorAlarmReferenceList AckErrorList
}
```

AckState ::= ENUMERATED

```
{
  acknowledged      (0),
  unacknowledged    (1)
}
```

AckTime ::= GeneralizedTime

AlarmChoice ::= ENUMERATED

```
{
  allAlarms                (0),
  allActiveAlarms          (1),
  allActiveAndAckAlarms    (2),
  allActiveAndUnackAlarms  (3),
  allClearedAndUnackAlarms (4),
  allUnackAlarms           (5)
}
```

AlarmComments ::= SET OF SingleAlarmComment

AlarmAlignmentEndStatus ::= ENUMERATED

```
{
  successfulCompletion (0), -- the alarm alignment has been completed successfully
  aborted              (1), -- the alarm alignment has been aborted via the invocation
                        -- of the operation abortGetAlarmList
  error                (255) -- the alarm alignment has been aborted due to an internal error
}
```

AlarmsCountSummary ::= SEQUENCE

```
{
  activeAlarmsCount    INTEGER, -- this is the sum of criticalCount, majorCount,
                                -- minorCount, warningCount and indeterminateCount
  criticalCount         INTEGER,
  majorCount            INTEGER,
  minorCount            INTEGER,
  warningCount          INTEGER,
  indeterminateCount    INTEGER,
  clearedCount          INTEGER
}
```

AlarmListAlignmentRequirement ::= ENUMERATED

```
{
  alignmentRequired      (0), -- An alarm alignment is required.
  alignmentNotRequired   (1)  -- An alarm alignment is not required.
}
```

AlignmentId ::= INTEGER

ClearAlarmsInfo ::= SEQUENCE

```
{
  alarmReferenceList      SET OF AlarmReference,
  clearUserId             UserId,
  clearSystemId           SystemId OPTIONAL
}
```

ClearAlarmsReply ::= SEQUENCE

```
{
  status                  ErrorCauses,
  errorAlarmReferenceList ClearErrorList
}
```

ClearErrorList ::= SET OF ErrorInfo

CommentText ::= GraphicString

CommentTime ::= GeneralizedTime

ErrorCauses ::= ENUMERATED

```
{
  noError                (0), -- operation / notification successfully performed
  wrongFilter             (1), -- the value of the filter parameter is not valid
  wrongAlarmAckState     (2), -- the value of the alarmAckState parameter (e.g.
                                -- getAlarmCount) is not valid
  ackPartlySuccessful    (3), -- acknowledgment request partly successful
  unackPartlySuccessful  (4), -- unacknowledgment request partly successful
  wrongAlarmReference    (5), -- alarm identifier used in the alarm reference list not
                                -- found (e.g. in case of acknowledgement request)
  wrongAlarmReferenceList (6), -- the alarm reference list (e.g. in case of
```

```

-- acknowledgement request) is empty or completely wrong
alarmAlreadyAck          (7), -- alarm to be acknowledged is already in this state
alarmAlreadyUnack        (8), -- alarm to be acknowledged is already in this state
wrongUserId              (9), -- the user identifier in the unacknowledgement operation
-- is not the same as in the previous
-- acknowledgementAlarms request
wrongSystemId           (10), -- the system identifier in the unacknowledgement
-- operation is not the same as in the previous
-- acknowledgementAlarms request
alarmAckNotAllowed       (11), -- current management system not allowed to acknowledge the
-- alarm (e.g. due to acknowledgement competence rules)
setCommentPartlySuccessful (12), -- the setComment action partly successful (e.g. some
-- alarmId are not in the alarmList)
clearAlarmsPartlySuccessful (13), -- only some alarms to be cleared could be cleared
clearAlarmsNotAllowed     (14), -- current management system not allowed to clear the alarm
clearAlarmsAlarmAlreadyCleared (15), -- alarm to be cleared is already cleared
abortGetAlarmListPartlySuccessful (16), -- only some alarm alignment processes to be aborted
-- could be aborted
abortGetAlarmListNotAllowed (17), -- current management system not allowed to abort
-- alarm alignment processes
abortGetAlarmListProcessNotExist (18), -- alarm alignment process to be aborted does
-- not exist
unspecifiedErrorReason    (255) -- operation failed, specific error unknown
}

```

ErrorInfo ::= SEQUENCE

```

{
  moi                ObjectInstance OPTIONAL, -- absent if uniqueness of
-- notificationIdentifier is across
-- IRPAgent
  notificationIdentifier NotificationIdentifier, -- ITU-T X.721
  reason             ErrorCauses
}

```

ErrorInfoAbortGetAlarmList ::= SEQUENCE

```

{
  alignmentId        INTEGER,
  reason             ErrorCauses
}

```

GeneralObjectId ::= INTEGER

GetAlarmCountInfo ::= SEQUENCE

```

{
  alarmAckState      AlarmChoice OPTIONAL,
  filter             CMISFilter OPTIONAL -- ITU-T X.711
}

```

GetAlarmCountReply ::= SEQUENCE

```

{
  criticalCount      INTEGER,
  majorCount         INTEGER,
  minorCount         INTEGER,
  warningCount       INTEGER,
  indeterminateCount INTEGER,
  clearedCount       INTEGER,
  status             ErrorCauses
}

```

GetAlarmIRPVersionReply ::= SEQUENCE

```

{
  versionNumberList SupportedAlarmIRPVersions,
  status             ErrorCauses
}

```

GetAlarmListInfo ::= SEQUENCE

```

{
  alarmAckState      AlarmChoice OPTIONAL,
  baseObjectClass    ObjectClass OPTIONAL, -- ITU-T X.711
  baseObjectInstance ObjectInstance OPTIONAL, -- ITU-T X.711
  destination        Destination, -- ITU-T X.721
  filter             CMISFilter OPTIONAL -- ITU-T X.711
}

```

GetAlarmListReply ::= SEQUENCE

```

{
  alignmentId        INTEGER,
  status             ErrorCauses
}

```

```

}

GetNotificationProfileReply ::= SEQUENCE
{
  notificationNameProfile      NotificationList,
  notificationParameterProfile ParameterListOfList,
  status                       ErrorCauses
}

GetOperationProfileReply ::= SEQUENCE
{
  operationNameProfile      OperationList,
  operationParameterProfile ParameterListOfList,
  status                    ErrorCauses
}

IRPVersionNumber ::= GraphicString

NotificationList ::= SET OF NotificationName

NotificationName ::= GraphicString

NotifyAlarmAlignmentEndInfoR0602 ::= SEQUENCE
{
  notificationIdentifier      NotificationIdentifier,      -- ITU-T X.721
  alignmentId                AlignmentId, INTEGER
  alarmAlignmentEndStatus    AlarmAlignmentEndStatus OPTIONAL
}

NotifyAlarmListRebuiltInfo ::= SEQUENCE
{
  notificationIdentifier      NotificationIdentifier,      -- ITU-T X.721
  rebuiltObjectClass         ObjectClass,                -- ITU-T X.721
  rebuiltObjectInstance      ObjectInstance,             -- ITU-T X.721
  reason                    ReasonAlarmListRebuilt,
  alarmListAlignmentRequirement AlarmListAlignmentRequirement OPTIONAL
}

NotifyPotentialFaultyAlarmListInfo ::= SEQUENCE
{
  potentialFaultyObjectClass ObjectClass,                -- ITU-T X.711
  potentialFaultyObjectInstance ObjectInstance,          -- ITU-T X.711
  notificationIdentifier      NotificationIdentifier,     -- ITU-T X.721
  reason                    ReasonPotentialFaultyAlarmList
}

OperationList ::= SET OF OperationName

OperationName ::= GraphicString

ParameterList ::= SET OF ParameterName

ParameterListOfList ::= SET OF ParameterList

ParameterName ::= GraphicString

ReasonAlarmListRebuilt ::= ENUMERATED
{
  agentNetworkEntityCommunicationError (0),
  agentRestart (1),
  indeterminate (2)
}

ReasonPotentialFaultyAlarmList ::= ENUMERATED
{
  communicationErrorNEAgent (0), -- A communication error between a NE and the agent has occurred.
  agentRestart (1), -- The agent has restarted and not yet updated its alarm list.
  indeterminate (2) -- The reason could not be determined.
}

SetCommentInfo ::= SEQUENCE
{
  alarmReferenceList      SET OF AlarmReference,
  commentUserId           UserId,
  commentSystemId        [2] SystemId OPTIONAL,
  commentText            CommentText
}

```

```
SetCommentReply ::= SEQUENCE
{
  errorAlarmReferenceList    SET OF ErrorInfo,
  status                     ErrorCauses
}

SingleAlarmComment ::= SEQUENCE
{
  commentText                CommentText,
  commentTime                CommentTime,
  commentUserId              UserId,
  commentSystemId           SystemId OPTIONAL
}

SystemId ::= GraphicString

SupportedAlarmIRPVersions ::= SET OF IRPVersionNumber

UserId ::= GraphicString

END -- of module TS32-111-4TypeModule
```

Annex A (informative): List of assigned Object Identifiers

This annex provides a list with all object identifiers that have been assigned in TS 32.111-4 in Release 5 up to V5.7.0 and in Release 6 up to the latest version. These object identifiers shall not be assigned to new objects.

<u>Basic Object Name</u>	<u>Name and OID of the current TS Version</u>	<u>Name and OIDs of previous TS Versions</u>
Managed Object Classes		
alarmControl	Name: alarmControlR0602 OID : ts32-111AlarmObjectClass 10602	Name: alarmControl OID : ts32-111AlarmObjectClass 1
Packages		
alarmControlBasicPackage	Name: alarmControlBasicPackageR0602 OID : ts32-111AlarmPackage 10602	Name: alarmControlBasicPackage OID : ts32-111AlarmPackage 1
alarmCountPackage	Name: alarmCountPackage OID : ts32-111AlarmPackage 2	--
alarmAcknowledgementPackage	Name: alarmAcknowledgementPackage OID : ts32-111AlarmPackage 3	--
alarmUnacknowledgementPackage	Name: alarmUnacknowledgementPackage OID : ts32-111AlarmPackage 4	--
alarmCommentPackage	Name: alarmCommentPackage OID : ts32-111AlarmPackage 5	--
alarmIRPVersionPackage	Name: alarmIRPVersionPackage OID : ts32-111AlarmPackage 6	--
alarmProfilePackage	Name: alarmProfilePackage OID : ts32-111AlarmPackage 7	--
alarmPotentialFaultyAlarmListPackage	Name: alarmPotentialFaultyAlarmListPackageR0602 OID : ts32-111AlarmPackage 80602	Name: alarmPotentialFaultyAlarmListPackage OID : ts32-111AlarmPackage 8
alarmClearPackage	Name: alarmClearPackage OID : ts32-111AlarmPackage 9	--
x721AlarmNotificationsPackage	Name: x721AlarmNotificationsPackage OID : ts32-111AlarmPackage 10	--
Actions		
<u>Basic Action name</u>	<u>Name and OID of the current TS version</u>	<u>Name and OIDs of previous TS versions</u>
acknowledgeAlarms	Name: acknowledgeAlarms OID : ts32-111AlarmAction 1	--
getAlarmCount	Name: getAlarmCount OID : ts32-111AlarmAction 2	--
getAlarmList	Name: getAlarmList OID : ts32-111AlarmAction 3	--
setComment	Name: setComment OID : ts32-111AlarmAction 4	--
getAlarmIRPVersion	Name: getAlarmIRPVersion OID : ts32-111AlarmAction 5	--
getAlarmIRPNotificationProfile	Name: getAlarmIRPNotificationProfile OID : ts32-111AlarmAction 6	--
getAlarmIRPOperationProfile	Name: getAlarmIRPOperationProfile OID : ts32-111AlarmAction 7	--
unacknowledgeAlarms	Name: unacknowledgeAlarms OID : ts32-111AlarmAction 8	--
clearAlarms	Name: clearAlarms OID : ts32-111AlarmAction 9	--
abortGetAlarmList	Name: abortGetAlarmList OID : ts32-111AlarmAction 10	--
Notifications		
notifyAlarmListRebuilt	Name: notifyAlarmListRebuiltR0602 OID : ts32-111AlarmNotification 10602	Name: notifyAlarmListRebuilt OID : ts32-111AlarmNotification 1
notifyComments	--	Name: notifyComments OID : ts32-111AlarmNotification 2
notifyPotentialFaultyAlarmList	Name: notifyPotentialFaultyAlarmListR0602 OID : ts32-111AlarmNotification 30602	Name: notifyPotentialFaultyAlarmList OID : ts32-111AlarmNotification 3
notifyAlarmAlignmentEnd	Name: notifyAlarmAlignmentEndR0602 OID : ts32-111AlarmNotification 40602	Name: notifyAlarmAlignmentEnd OID : ts32-111AlarmNotification 4
Attributes		
alarmControlId	Name: alarmControlId OID : ts32-111AlarmAttribute 1	--
alarmsCountSummary	Name: alarmsCountSummary OID : ts32-111AlarmAttribute 2	--
supportedAlarmIRPVersions	Name: supportedAlarmIRPVersions OID : ts32-111AlarmAttribute 3	--
rebuiltObjectClass	Name: rebuiltObjectClass OID : ts32-111AlarmAttribute 40602	--
rebuiltObjectInstance	Name: rebuiltObjectInstance OID : ts32-111AlarmAttribute 50602	--
potentialFaultyObjectClass	Name: potentialFaultyObjectClass OID : ts32-111AlarmAttribute 60602	--
potentialFaultyObjectInstance	Name: potentialFaultyObjectInstance OID : ts32-111AlarmAttribute 70602	--

alignmentId	Name: alignmentId OID : ts32-111AlarmAttribute 80602	--
alarmAlignmentEndStatus	Name: alarmAlignmentEndStatus OID : ts32-111AlarmAttribute 90602	--
Parameters		
ackStateParameter	Name: ackStateParameter OID : ts32-111AlarmParameter 1	--
ackSystemIdParameter	Name: ackSystemIdParameter OID : ts32-111AlarmParameter 2	--
ackTimeParameter	Name: ackTimeParameter OID : ts32-111AlarmParameter 3	--
ackUserIdParameter	Name: ackUserIdParameter OID : ts32-111AlarmParameter 4	--
clearUserIdParameter	Name: clearUserIdParameter OID : ts32-111AlarmParameter 5	--
clearSystemIdParameter	Name: clearSystemIdParameter OID : ts32-111AlarmParameter 6	--
commentsParameter	Name: commentsParameter OID : ts32-111AlarmParameter 7	--
Name Bindings		

Annex **BA** (informative): Change history

Change history							
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New
Dec 2003	S_22	SP-030627	024	--	Mapping completion of getAlarmList	5.6.0	5.7.0
Dec 2003	S_22	SP-030629	025	--	Align operation getAlarmList with the notification notifyAlarmListRebuilt	5.7.0	6.0.0
Jan 2004	--	--	--	--	Editorial (Tables & CMIP code cosmetics)	6.0.0	6.0.1
Mar 2004	S_23	SP-040120	026	--	Addition of a method to abort an ongoing alarm alignment process in the asynchronous mode of the operation getAlarmList	6.0.1	6.1.0