

**TSG-RAN Meeting #6  
Nice, France, 13 – 15 December 1999**

**TSGRP#6(99)699**

**Title:** Agreed CRs of category "B" (New features) to TS 25.224

**Source:** TSG-RAN WG1

**Agenda item:**5.1.3

Spec	CR	Rev	Phase	Subject	Cat	Version-Current	Version-New	Doc
25.224	004	1	R99	STTD capability for P-CCPCH, TDD component	B	3.0.0	3.1.0	R1-99k84

**NOTE:** The source of this document is TSG-RAN WG1. The source shown on each CR cover sheet is the originating organisation.

<b>CHANGE REQUEST</b>		Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.
<b>25.224 CR 004r1</b>	Current Version: <b>3.0.0</b>	
GSM (AA.BB) or 3G (AA.BBB) specification number ↑	↑ CR number as allocated by MCC support team	
For submission to: <b>TSG RAN#6</b> <small>list expected approval meeting # here ↑</small>	for approval <input checked="" type="checkbox"/> for information <input type="checkbox"/>	strategic <input type="checkbox"/> non-strategic <input type="checkbox"/> <small>(for SMG use only)</small>

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: <http://ftp.3gpp.org/Information/CR-Form.v2.doc>

**Proposed change affects:** (U)SIM  ME  UTRAN / Radio  Core Network   
(at least one should be marked with an X)

**Source:** Motorola **Date:** November 9<sup>th</sup> 99

**Subject:** STTD capability for P-CCPCH, TDD component.

**Work item:**

<b>Category:</b>	F Correction <input type="checkbox"/> A Corresponds to a correction in an earlier release <input type="checkbox"/> B Addition of feature <input checked="" type="checkbox"/> C Functional modification of feature <input type="checkbox"/> D Editorial modification <input type="checkbox"/>	<b>Release:</b>	Phase 2 <input type="checkbox"/> Release 96 <input type="checkbox"/> Release 97 <input type="checkbox"/> Release 98 <input type="checkbox"/> Release 99 <input checked="" type="checkbox"/> Release 00 <input type="checkbox"/>
------------------	--	-----------------	--

(only one category shall be marked with an X)

**Reason for change:** Minor editorial modifications during AH01.

**Clauses affected:** 4.7.3

<b>Other specs affected:</b>	Other 3G core specifications <input checked="" type="checkbox"/> Other GSM core specifications <input type="checkbox"/> MS test specifications <input type="checkbox"/> BSS test specifications <input type="checkbox"/> O&M specifications <input type="checkbox"/>	→ List of CRs: 25.221-001r2 25.225-002r1 → List of CRs: → List of CRs: → List of CRs: → List of CRs:
------------------------------	--	---

**Other comments:**



help.doc

<----- double-click here for help and instructions on how to create a CR.

### 4.7.3 Transmit Diversity for P-CCPCH

Block Space Time Transmit Diversity (Block STTD) may be employed as transmit diversity scheme for the Primary Common Control Physical Channels (P-CCPCH).

#### 4.7.3.1.1 P-CCPCH Transmission Scheme


The open loop downlink transmit diversity employs a Block Space Time Transmit Diversity scheme (Block STTD).

A block diagram of the Block STTD transmitter is shown in Figure 6. Before Block STTD encoding, channel coding, rate matching, interleaving and bit-to-symbol mapping are performed as in the non-diversity mode.


Block STTD encoding is separately performed for each of the two data fields present in a burst (each data field contains N data symbols). For each data field at the encoder input, 2 data fields are generated at its output, corresponding to each of the diversity antennas. The Block STTD encoding operation is illustrated in Figure 7, where the superscript \* stands for complex conjugate. If N is an odd number, the first symbol of the block shall not be STTD encoded and the same symbol will be transmitted with equal power from both antennas.

After Block STTD encoding both branches are separately spread and scrambled as in the non-diversity mode.

The use of Block STTD encoding will be indicated by higher layers.

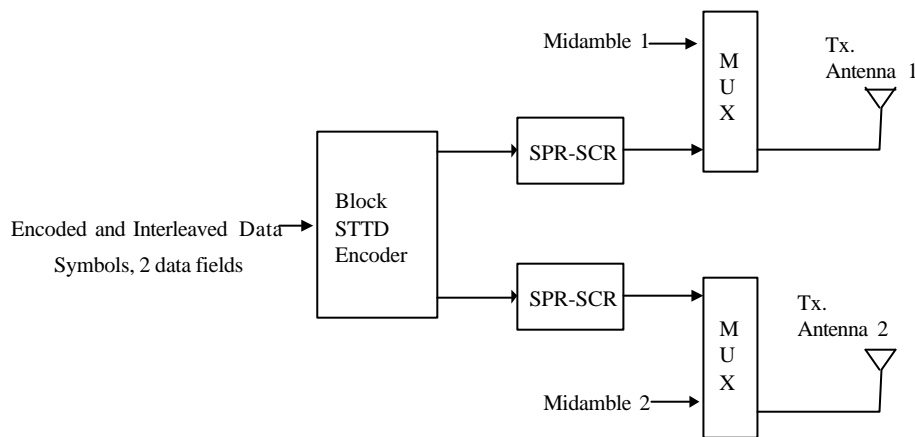

**Figure 6: Block Diagram of the transmitter (STTD)**



**Figure 7: Block Diagram of Block STTD encoder. The symbols  $S_i$  are QPSK. N is the length of the block to be encoded**