

**TSG-RAN Meeting #6  
Nice, France, 13 – 15 December 1999**

**TSGRP#6(99)689**

**Title:** Agreed CRs of category "B" (New features) to TS 25.215

**Source:** TSG-RAN WG1

**Agenda item:** 5.1.3

Spec	CR	Rev	Phase	Subject	Cat	Version-Current	Version-New	Doc
25.215	002	-	R99	Definition of PCCPCH RSCP	B	3.0.0	3.1.0	R1-99i68
25.215	003	-	R99	Definition of observed time difference to GSM cell	B	3.0.0	3.1.0	R1-99i69
25.215	005	1	R99	Physical channel BER on DPCCH	B	3.0.0	3.1.0	R1-99k81
25.215	007	2	R99	Ranges and resolution of timing measurements	B	3.0.0	3.1.0	R1-99l01
25.215	010	2	R99	New sections: 5.1.15 - UE GPS Timing of Cell	B	3.0.0	3.1.0	R1-99l09

**NOTE:** The source of this document is TSG-RAN WG1. The source shown on each CR cover sheet is the originating organisation.

TSG-RAN Working Group 1 meeting #9  
Dresden, Germany  
November 30 – December 3, 1999

**TSGR1#9(99)i68**

**Agenda item:** AH 16  
**Source:** Ericsson  
**Title:** CR 25.215-002: Definition of PCCPCH RSCP  
**Document for:** Decision

---

The aim of this CR is to incorporate the measurement, “PCCPCH RSCP” in the UE in the layer 1 specification 25.215.

To support cell selection/re-selection and handover from FDD to TDD, measurement of the RSCP on the PCCPCH for TDD cells has to be supported by multimode FDD/TDD terminals.

The RSCP can either be measured on the data part or the midamble of a burst, since there is no power difference between these two parts. However, in order to have a common reference, measurement on the midamble is assumed.

<b>CHANGE REQUEST</b>		Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.
<b>25.215</b>	<b>CR 002</b>	Current Version: <b>3.0.0</b>
GSM (AA.BB) or 3G (AA.BBB) specification number ↑	↑ CR number as allocated by MCC support team	
For submission to: <b>TSG-RAN #6</b> <i>list expected approval meeting # here ↑</i>	for approval <input checked="" type="checkbox"/> for information <input type="checkbox"/>	strategic <input type="checkbox"/> non-strategic <input type="checkbox"/> <i>(for SMG use only)</i>

Form: CR cover sheet, version 2 for 3GPP and SMG    The latest version of this form is available from: <ftp://ftp.3gpp.org/Information/CR-Form-v2.doc>

**Proposed change affects:** (U)SIM     ME     UTRAN / Radio     Core Network   
*(at least one should be marked with an X)*

**Source:** Ericsson    **Date:** 1999-10-25

**Subject:** Definition of PCCPCH RSCP

**Work item:**

<b>Category:</b>	F Correction <input type="checkbox"/> A Corresponds to a correction in an earlier release <input type="checkbox"/> B Addition of feature <input checked="" type="checkbox"/> C Functional modification of feature <input type="checkbox"/> D Editorial modification <input type="checkbox"/>	<b>Release:</b>	Phase 2 <input type="checkbox"/> Release 96 <input type="checkbox"/> Release 97 <input type="checkbox"/> Release 98 <input type="checkbox"/> Release 99 <input checked="" type="checkbox"/> Release 00 <input type="checkbox"/>
------------------	--	-----------------	--

*(only one category shall be marked with an X)*

**Reason for change:** To support cell selection/re-selection and handover from FDD to TDD, measurement of the RSCP on the PCCPCH for TDD cells has to be supported by multimode FDD/TDD terminals. The RSCP can either be measured on the data part or the midamble of a burst, since there is no power difference between these two parts. However, in order to have a common reference, measurement on the midamble is assumed.

**Clauses affected:** 5.1 UE measurement abilities

**Other specs affected:**

Other 3G core specifications	"> <input type="checkbox"/>	→ List of CRs:	
Other GSM core specifications	<input type="checkbox"/>	→ List of CRs:	
MS test specifications	<input type="checkbox"/>	→ List of CRs:	
BSS test specifications	<input type="checkbox"/>	→ List of CRs:	
O&M specifications	<input type="checkbox"/>	→ List of CRs:	

**Other comments:**



<----- double-click here for help and instructions on how to create a CR.

### 5.1.11 CFN-SFN observed time difference

Definition	<p>The CFN-SFN observed time difference to cell is defined as: <math>OFF \times 38400 + T_m</math>, where:</p> <p><math>T_m = T_{RxSFN} - (T_{UETx} - T_0)</math>, given in chip units with the range [0, 1, ..., 38399] chips</p> <p><math>T_{UETx}</math> is the time when the UE transmits an uplink DPCCH/DPDCH frame.</p> <p><math>T_0</math> is defined in TS 25.211 section 7.1.3.</p> <p><math>T_{RxSFN}</math> is time at the beginning of the next received neighbouring P-CCPCH frame after the time instant <math>T_{UETx} - T_0</math> in the UE. If the next neighbouring P-CCPCH frame is received exactly at <math>T_{UETx} - T_0</math> then <math>T_{RxSFN} = T_{UETx} - T_0</math> (which leads to <math>T_m = 0</math>).</p> <p>and</p> <p><math>OFF = (CFN_{Tx} - SFN) \bmod 256</math>, given in number of frames with the range [0, 1, ..., 255] frames</p> <p><math>CFN_{Tx}</math> is the connection frame number for the UE transmission of an uplink DPCCH/DPDCH frame at the time <math>T_{UETx}</math>.</p> <p><math>SFN</math> = the system frame number for the neighbouring P-CCPCH frame received in the UE at the time <math>T_{RxSFN}</math>.</p>
Applicable for	Connected Inter, Connected Intra
Range/mapping	Time difference is given with the resolution of one chip with the range [0, ..., 9830399] chips.

### 5.1.12 SFN-SFN observed time difference

Definition	<p><b>Type 1:</b></p> <p>The SFN-SFN observed time difference to cell is defined as: <math>OFF \times 38400 + T_m</math>, where:</p> <p><math>T_m = T_{RxSFNj} - T_{RxSFNi}</math>, given in chip units with the range [0, 1, ..., 38399] chips</p> <p><math>T_{RxSFNj}</math> is the time at the beginning of a received neighbouring P-CCPCH frame from cell j.</p> <p><math>T_{RxSFNi}</math> is time at the beginning of the next received neighbouring P-CCPCH frame from cell i after the time instant <math>T_{RxSFNj}</math> in the UE. If the next neighbouring P-CCPCH frame is received exactly at <math>T_{RxSFNj}</math> then <math>T_{RxSFNj} = T_{RxSFNi}</math> (which leads to <math>T_m = 0</math>).</p> <p>and</p> <p><math>OFF = (SFN_j - SFN_i) \bmod 256</math>, given in number of frames with the range [0, 1, ..., 255] frames</p> <p><math>SFN_j</math> = the system frame number for downlink P-CCPCH frame from cell j in the UE at the time <math>T_{RxSFNj}</math>.</p> <p><math>SFN_i</math> = the system frame number for the P-CCPCH frame from cell i received in the UE at the time <math>T_{RxSFNi}</math>.</p> <p><b>Type 2:</b></p> <p>The relative timing difference between cell j and cell i, defined as <math>T_{CPICHRxj} - T_{CPICHRxi}</math>, where:</p> <p><math>T_{CPICHRxj}</math> is the time when the UE receives one CPICH slot from cell j</p> <p><math>T_{CPICHRxi}</math> is the time when the UE receives the CPICH slot from cell i that is closest in time to the CPICH slot received from cell j</p>
Applicable for	<p><b>Type 1:</b> Idle, Connected Intra</p> <p><b>Type 2:</b> Idle, Connected Intra, Connected Inter</p>
Range/mapping	<p><b>Type 1:</b> Time difference is given with a resolution of one chip with the range [0, ..., 9830399] chips.</p> <p><b>Type 2:</b> Time difference is given with a resolution of 0.5 chip with the range [-1279, ..., 1280] chips.</p>

### 5.1.13 UE Rx-Tx time difference

Definition	<p>The difference in time between the UE uplink DPCCH/DPDCH frame transmission and the first significant path, of the downlink DPCH frame from the measured radio link. Measurement shall be made for each cell included in the active set.</p> <p>Note: The definition of "first significant path" needs further elaboration.</p>
Applicable for	Connected Intra
Range/mapping	Always positive.

### 5.1.14 PCCPCH RSCP

<b>Definition</b>	<u>Received Signal Code Power, the received power on one code measured on the PCCPCH from a TDD cell. The reference point for the RSCP is the antenna connector at the UE.</u>  <u>Note:</u> <u>The RSCP can either be measured on the data part or the midamble of a burst, since there is no power difference between these two parts. However, in order to have a common reference, measurement on the midamble is assumed.</u>
<b>Applicable for</b>	<u>Idle, Connected Inter</u>
<b>Range/mapping</b>	

**Agenda item:** AH 16  
**Source:** Ericsson  
**Title:** CR 25.215-003: Definition of observed time difference to GSM cell  
**Document for:** Decision

The aim of this CR is to incorporate the measurement “Observed time difference to GSM cell” for the UE in the layer 1 specification 25.215.


This measurement shall be supported by multimode FDD/GSM and FDD/TDD/GSM terminals. The measurement of “Observed time difference to GSM cell” is defined by WG2 in TS 25.302 as: Time difference between the Primary CCPCH of the current cell and the timing of the GSM cell.

The measurement of “Observed time difference to GSM cell” is shown in figure 1, where:

$$T_{\text{GSM-SFN}} = T_{\text{RxGSMj}} - T_{\text{RxSFNi}}$$

$T_{\text{RxSFNi}}$  is the time at the beginning of the P-CCPCH frame with SFN=0 from cell i.

$T_{\text{RxGSMj}}$  is the time at the beginning the GSM BCCH 51-multiframe from GSM frequency j received closest in time after the time  $T_{\text{RxSFNi}}$ .

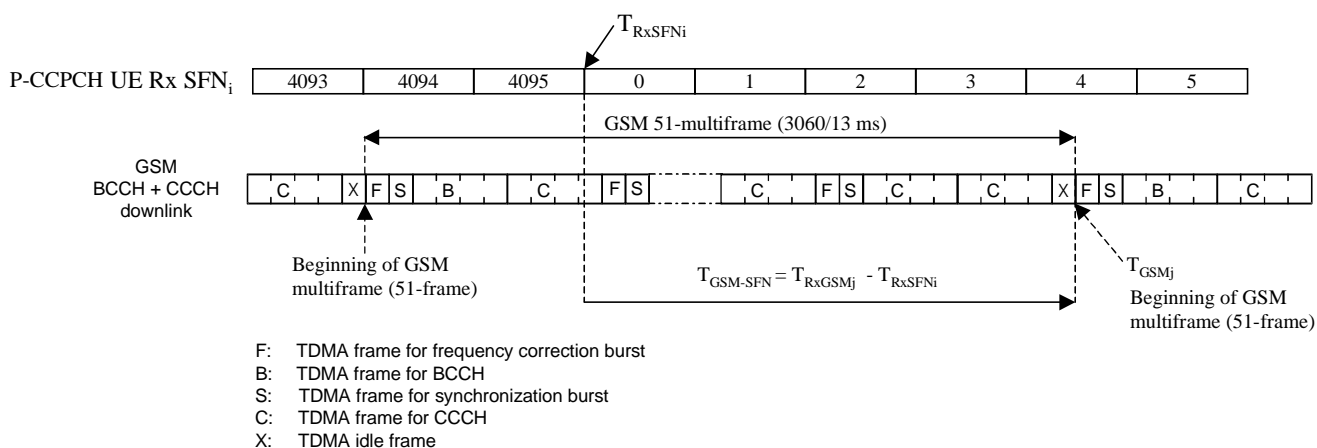

**Figure 1 Measuring the “Observed time difference to GSM cell”**

The UE can be requested to perform this measurement at any SFN and it is not necessary for the UE to wait until SFN=0 to perform the measurement. As the frame structures between UMTS and GSM is sliding in time it is however important to define if it is the previous or the next occurrence of SFN=0 that the measurement shall refer to if the UE measures the timing at any other SFN. It is proposed that the timing measurement shall reflect the timing situation when the most recent (in time) P-CCPCH with SFN=0 was received in the UE.

The information signalled to perform measurements on a GSM cell is specified by WG2 in TS 25.331. Regarding the handling of BSIC in combination with measurements on a GSM frequency, WG2 is currently proposing that UTRAN should be able to control whether or not the UE shall read the BSIC on a GSM frequency that it is requested to measure. More information can be found in the draft WG2 liaison R2-99f71 “Proposed liaison – Response to liaison on GSM measurement abilities for the UE”.

# CHANGE REQUEST

Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.

**25.215 CR 003**

Current Version: **3.0.0**

GSM (AA.BB) or 3G (AA.BBB) specification number ↑

↑ CR number as allocated by MCC support team

For submission to: **TSG-RAN #6**  
list expected approval meeting # here ↑

for approval   
for information

strategic   
non-strategic  (for SMG use only)

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: ftp://ftp.3gpp.org/Information/CR-Form-v2.doc

**Proposed change affects:**  
(at least one should be marked with an X)

(U)SIM  ME  UTRAN / Radio  Core Network

**Source:** Ericsson **Date:** 1999-11-10

**Subject:** Definition of observed time difference to GSM cell

**Work item:**

**Category:**  
(only one category shall be marked with an X)

- F Correction
- A Corresponds to a correction in an earlier release
- B Addition of feature
- C Functional modification of feature
- D Editorial modification

**Release:**

Phase 2	<input type="checkbox"/>
Release 96	<input type="checkbox"/>
Release 97	<input type="checkbox"/>
Release 98	<input type="checkbox"/>
Release 99	<input checked="" type="checkbox"/>
Release 00	<input type="checkbox"/>

**Reason for change:**

The aim of this CR is to incorporate the measurement "Observed time difference to GSM cell" for the UE in the layer 1 specification 25.215. This measurement shall be supported by multimode FDD/GSM and FDD/TDD/GSM terminals. The requirement to measure "Observed time difference to GSM cell" by layer 1 is defined by WG2 in TS 25.302 .

**Clauses affected:** 5.1 UE measurement abilities

**Other specs affected:**

- Other 3G core specifications  → List of CRs:
- Other GSM core specifications  → List of CRs:
- MS test specifications  → List of CRs:
- BSS test specifications  → List of CRs:
- O&M specifications  → List of CRs:

**Other comments:**



help.doc

<----- double-click here for help and instructions on how to create a CR.

### 5.1.11 CFN-SFN observed time difference

Definition	<p>The CFN-SFN observed time difference to cell is defined as: <math>OFF \times 38400 + T_m</math>, where:</p> <p><math>T_m = T_{RxSFN} - (T_{UETx} - T_0)</math>, given in chip units with the range [0, 1, ..., 38399] chips</p> <p><math>T_{UETx}</math> is the time when the UE transmits an uplink DPCCH/DPDCH frame.</p> <p><math>T_0</math> is defined in TS 25.211 section 7.1.3.</p> <p><math>T_{RxSFN}</math> is time at the beginning of the next received neighbouring P-CCPCH frame after the time instant <math>T_{UETx} - T_0</math> in the UE. If the next neighbouring P-CCPCH frame is received exactly at <math>T_{UETx} - T_0</math> then <math>T_{RxSFN} = T_{UETx} - T_0</math> (which leads to <math>T_m = 0</math>).</p> <p>and</p> <p><math>OFF = (CFN_{Tx} - SFN) \bmod 256</math>, given in number of frames with the range [0, 1, ..., 255] frames</p> <p><math>CFN_{Tx}</math> is the connection frame number for the UE transmission of an uplink DPCCH/DPDCH frame at the time <math>T_{UETx}</math>.</p> <p><math>SFN</math> = the system frame number for the neighbouring P-CCPCH frame received in the UE at the time <math>T_{RxSFN}</math>.</p>
Applicable for	Connected Inter, Connected Intra
Range/mapping	Time difference is given with the resolution of one chip with the range [0, ..., 9830399] chips.

### 5.1.12 SFN-SFN observed time difference

Definition	<p><b>Type 1:</b></p> <p>The SFN-SFN observed time difference to cell is defined as: <math>OFF \times 38400 + T_m</math>, where:</p> <p><math>T_m = T_{RxSFNj} - T_{RxSFNi}</math>, given in chip units with the range [0, 1, ..., 38399] chips</p> <p><math>T_{RxSFNj}</math> is the time at the beginning of a received neighbouring P-CCPCH frame from cell j.</p> <p><math>T_{RxSFNi}</math> is time at the beginning of the next received neighbouring P-CCPCH frame from cell i after the time instant <math>T_{RxSFNj}</math> in the UE. If the next neighbouring P-CCPCH frame is received exactly at <math>T_{RxSFNj}</math> then <math>T_{RxSFNj} = T_{RxSFNi}</math> (which leads to <math>T_m = 0</math>).</p> <p>and</p> <p><math>OFF = (SFN_j - SFN_i) \bmod 256</math>, given in number of frames with the range [0, 1, ..., 255] frames</p> <p><math>SFN_j</math> = the system frame number for downlink P-CCPCH frame from cell j in the UE at the time <math>T_{RxSFNj}</math>.</p> <p><math>SFN_i</math> = the system frame number for the P-CCPCH frame from cell i received in the UE at the time <math>T_{RxSFNi}</math>.</p> <p><b>Type 2:</b></p> <p>The relative timing difference between cell j and cell i, defined as <math>T_{CPICHRxj} - T_{CPICHRxi}</math>, where:</p> <p><math>T_{CPICHRxj}</math> is the time when the UE receives one CPICH slot from cell j</p> <p><math>T_{CPICHRxi}</math> is the time when the UE receives the CPICH slot from cell i that is closest in time to the CPICH slot received from cell j</p>
Applicable for	<p><b>Type 1:</b> Idle, Connected Intra</p> <p><b>Type 2:</b> Idle, Connected Intra, Connected Inter</p>
Range/mapping	<p><b>Type 1:</b> Time difference is given with a resolution of one chip with the range [0, ..., 9830399] chips.</p> <p><b>Type 2:</b> Time difference is given with a resolution of 0.5 chip with the range [-1279, ..., 1280] chips.</p>

### 5.1.13 UE Rx-Tx time difference

Definition	<p>The difference in time between the UE uplink DPCCH/DPDCH frame transmission and the first significant path, of the downlink DPCH frame from the measured radio link. Measurement shall be made for each cell included in the active set.</p> <p>Note: The definition of "first significant path" needs further elaboration.</p>
Applicable for	Connected Intra
Range/mapping	Always positive.



### 5.1.15 Observed time difference to GSM cell

<b>Definition</b>	The Observed time difference to GSM cell is defined as: $T_{RxGSMj} - T_{RxSFNi}$ , where: $T_{RxSFNi}$ is the time at the beginning of the P-CCPCH frame with SFN=0 from cell $i$ . $T_{RxGSMj}$ is the time at the beginning of the GSM BCCH 51-multiframe from GSM frequency $j$ received closest in time after the time $T_{RxSFNi}$ . If the next GSM multiframe is received exactly at $T_{RxSFNi}$ then $T_{RxGSMj} = T_{RxSFNi}$ (which leads to $T_{RxGSMj} - T_{RxSFNi} = 0$ ). The timing measurement shall reflect the timing situation when the most recent (in time) P-CCPCH with SFN=0 was received in the UE.
<b>Applicable for</b>	Idle, Connected Inter
<b>Range/mapping</b>	

TSG-RAN Working Group 1 meeting #9  
Dresden, Germany  
November 30 – December 3, 1999

**TSGR1#9(99)k81**

**Agenda item:** AH 16  
**Source:** Ericsson  
**Title:** CR 25.215-005r01: Physical channel BER on DPCCH  
**Document for:** Decision

---

This is a revised version of R1-99i71. It was updated according to a measurement drafting setting during WG1#9.

The aim of this document is to incorporate one new measurement, Physical channel BER on DPCCH for UTRAN in TS 25.215.

During the WG1#8 meeting in New York document “R1-99g80 Physical channel BER on DPCCH in UTRA/FDD” was presented, proposing to introduce the Physical channel BER measured on DPCCH for UTRAN.

At the New York meeting support was given for the proposal. However, some concerns and questions on the measurement were also raised. These concerns and questions have now been addressed in offline discussions, so hopefully the measurement can be agreed at this meeting.

# CHANGE REQUEST

Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.

**25.215 CR 005r01**

Current Version: **3.0.0**

GSM (AA.BB) or 3G (AA.BBB) specification number ↑

↑ CR number as allocated by MCC support team

For submission to: **TSG-RAN #6**  
list expected approval meeting # here ↑

for approval   
for information

strategic  (for SMG use only)  
non-strategic

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: ftp://ftp.3gpp.org/Information/CR-Form-v2.doc

**Proposed change affects:**

(at least one should be marked with an X)

(U)SIM  ME  UTRAN / Radio  Core Network

**Source:**

Ericsson

**Date:**

1999-12-03

**Subject:**

Physical channel BER on DPCCH

**Work item:**

**Category:**

(only one category shall be marked with an X)

- F Correction
- A Corresponds to a correction in an earlier release
- B Addition of feature
- C Functional modification of feature
- D Editorial modification

**Release:**

- Phase 2
- Release 96
- Release 97
- Release 98
- Release 99
- Release 00

**Reason for change:**

When no uplink data is sent on the uplink (uplink DTX ) there will be periods where no physical channel BER on DPDCH or CRC for BLER calculation is available for the outer loop power control to adjust the SIR target. During DTX the control channel (DPCCH) is transmitted and it is possible to estimate the physical channel BER on the DPCCH. Since the DPDCH BER and DPCCH BER are correlated it will be possible to adjust the SIR target during DTX. This CR proposes the possibility to measure physical channel BER on DPCCH.

**Clauses affected:**

5.2.6 Physical channel BER

**Other specs affected:**

- Other 3G core specifications  → List of CRs:
- Other GSM core specifications  → List of CRs:
- MS test specifications  → List of CRs:
- BSS test specifications  → List of CRs:
- O&M specifications  → List of CRs:

**Other comments:**



help.doc

<----- double-click here for help and instructions on how to create a CR.

Column field	Comment
<b>Definition</b>	Contains the definition of the measurement.
<b>Range/mapping</b>	Gives the range and mapping to bits for the measurements quantity.

### 5.2.1 RSSI

Definition	Received Signal Strength Indicator, the wide-band received power within the UTRAN uplink carrier channel bandwidth in an UTRAN access point. The reference point for the RSSI measurements shall be the antenna connector.
<b>Range/mapping</b>	

### 5.2.2 SIR

Definition	Signal to Interference Ratio, is defined as the RSCP divided by the ISCP. Measurement shall be performed on the DPCCH after RL combination in Node B. The reference point for the SIR measurements shall be the antenna connector.
<b>Range/mapping</b>	

### 5.2.3 Transmitted carrier power

Definition	Transmitted carrier power, is the total transmitted power on one carrier from one UTRAN access point. Measurement shall be possible on any carrier transmitted from the UTRAN access point. The reference point for the total transmitted power measurement shall be the antenna connector. In case of Tx diversity the total transmitted power for each branch shall be measured.
<b>Range/mapping</b>	

### 5.2.4 Transmitted code power

Definition	Transmitted code power, is the transmitted power on one carrier, one scrambling code and one channelisation code. Measurement shall be possible on any channelisation code transmitted from the UTRAN access point. The reference point for the transmitted code power measurement shall be the antenna connector. In case of Tx diversity the transmitted code power for each branch shall be measured.
<b>Range/mapping</b>	

### 5.2.5 Transport channel BLER

Definition	Estimation of the transport channel block error rate (BLER). The BLER estimation shall be based on evaluating the CRC on each transport block. Measurement shall be possible to perform on any transport channel after RL combination in Node B. BLER estimation is only required for transport channels containing CRC.
<b>Range/mapping</b>	

## 5.2.6 Physical channel BER

Definition	<p><u>Type 1:</u> <u>Measured on the DPDCH:</u> The physical channel BER is an estimation of the average bit error rate (BER) before channel decoding of the DPDCH data after RL combination in Node B.</p> <p><u>Type 2:</u> <u>Measured on the DPCCH:</u> The Physical channel BER is an estimation of the average bit error rate (BER) on the DPCCH after RL combination in Node B.</p> <p>It shall be possible to report a physical channel BER estimate <u>of type 1 or of type 2 or of both types</u> at the end of each TTI for the transferred TrCh's, e.g. for TrCh's with a TTI of x ms a x ms averaged physical channel BER shall be possible to report every x ms.</p>
Range/mapping	

TSG-RAN Working Group 1 meeting #9  
Dresden, Germany  
November 30 – December 3, 1999

**TSGR1#9(99)I01**

**Agenda item:** AH 16

**Source:** Ericsson

**Title:** CR 25.215-007r02: Ranges and resolution of timing measurements

**Document for:** Decision

---

## 1. Introduction

**This CR is a revised version of the CR in R1-99j41. See R1-99j41 for a background of the selected ranges. After discussions in WG1#9 AH17 it was decided that the measurements related to location services shall have a reporting resolution of 0.25 chip. The attached CR incorporates this together with the, in R1-99j41 ,proposed ranges in TS 25.215.**

## CHANGE REQUEST

Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.

### 25.215 CR 007r02

GSM (AA.BB) or 3G (AA.BBB) specification number ↑

### Current Version: 3.0.0

↑ CR number as allocated by MCC support team

For submission to: TSG-RAN #6 for approval  strategic  (for SMG use only)

list expected approval meeting # here ↑ for information  non-strategic

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: ftp://ftp.3gpp.org/Information/CR-Form-v2.doc

**Proposed change affects:** (U)SIM  ME  UTRAN / Radio  Core Network   
 (at least one should be marked with an X)

**Source:** Ericsson **Date:** 1999-12-02

**Subject:** Ranges and resolution of timing measurements

**Work item:**

<b>Category:</b>	F Correction <input type="checkbox"/> A Corresponds to a correction in an earlier release <input type="checkbox"/> B Addition of feature <input checked="" type="checkbox"/> C Functional modification of feature <input type="checkbox"/> D Editorial modification <input type="checkbox"/>		<b>Release:</b>	Phase 2 <input type="checkbox"/> Release 96 <input type="checkbox"/> Release 97 <input type="checkbox"/> Release 98 <input type="checkbox"/> Release 99 <input checked="" type="checkbox"/> Release 00 <input type="checkbox"/>
------------------	--	--	-----------------	--

(only one category shall be marked with an X)

**Reason for change:** Define range and resolution for four timing measurements in TS 25.215, namely UE SFN-SFN observed time difference, Rx-Tx time difference, Round trip time and Observed time difference to GSM cell.

**Clauses affected:** 5.1 UE measurement abilities  
 5.1.12 SFN-SFN observed time difference  
 5.1.13 UE Rx-Tx time difference  
 5.2.7 Round trip time

**Other specs affected:**

Other 3G core specifications	<input type="checkbox"/>	→ List of CRs:
Other GSM core specifications	<input type="checkbox"/>	→ List of CRs:
MS test specifications	<input type="checkbox"/>	→ List of CRs:
BSS test specifications	<input type="checkbox"/>	→ List of CRs:
O&M specifications	<input type="checkbox"/>	→ List of CRs:

**Other comments:**



help.doc

<----- double-click here for help and instructions on how to create a CR.

### 5.1.11 CFN-SFN observed time difference

Definition	<p>The CFN-SFN observed time difference to cell is defined as: <math>OFF \times 38400 + T_m</math>, where:</p> <p><math>T_m = T_{RxSFN} - (T_{UETx} - T_0)</math>, given in chip units with the range [0, 1, ..., 38399] chips</p> <p><math>T_{UETx}</math> is the time when the UE transmits an uplink DPCCH/DPDCH frame.</p> <p><math>T_0</math> is defined in TS 25.211 section 7.1.3.</p> <p><math>T_{RxSFN}</math> is time at the beginning of the next received neighbouring P-CCPCH frame after the time instant <math>T_{UETx} - T_0</math> in the UE. If the next neighbouring P-CCPCH frame is received exactly at <math>T_{UETx} - T_0</math> then <math>T_{RxSFN} = T_{UETx} - T_0</math> (which leads to <math>T_m = 0</math>).</p> <p>and</p> <p><math>OFF = (CFN_{Tx} - SFN) \bmod 256</math>, given in number of frames with the range [0, 1, ..., 255] frames</p> <p><math>CFN_{Tx}</math> is the connection frame number for the UE transmission of an uplink DPCCH/DPDCH frame at the time <math>T_{UETx}</math>.</p> <p><math>SFN</math> = the system frame number for the neighbouring P-CCPCH frame received in the UE at the time <math>T_{RxSFN}</math>.</p>
Applicable for	Connected Inter, Connected Intra
Range/mapping	Time difference is given with the resolution of one chip with the range [0, ..., 9830399] chips.

### 5.1.12 SFN-SFN observed time difference

Definition	<p><b>Type 1:</b></p> <p>The SFN-SFN observed time difference to cell is defined as: <math>OFF \times 38400 + T_m</math>, where:</p> <p><math>T_m = T_{RxSFNj} - T_{RxSFNi}</math>, given in chip units with the range [0, 1, ..., 38399] chips</p> <p><math>T_{RxSFNj}</math> is the time at the beginning of a received neighbouring P-CCPCH frame from cell j.</p> <p><math>T_{RxSFNi}</math> is time at the beginning of the next received neighbouring P-CCPCH frame from cell i after the time instant <math>T_{RxSFNj}</math> in the UE. If the next neighbouring P-CCPCH frame is received exactly at <math>T_{RxSFNj}</math> then <math>T_{RxSFNj} = T_{RxSFNi}</math> (which leads to <math>T_m = 0</math>).</p> <p>and</p> <p><math>OFF = (SFN_j - SFN_i) \bmod 256</math>, given in number of frames with the range [0, 1, ..., 255] frames</p> <p><math>SFN_j</math> = the system frame number for downlink P-CCPCH frame from cell j in the UE at the time <math>T_{RxSFNj}</math>.</p> <p><math>SFN_i</math> = the system frame number for the P-CCPCH frame from cell i received in the UE at the time <math>T_{RxSFNi}</math>.</p> <p><b>Type 2:</b></p> <p>The relative timing difference between cell j and cell i, defined as <math>T_{CPICHRxj} - T_{CPICHRxi}</math>, where:</p> <p><math>T_{CPICHRxj}</math> is the time when the UE receives one CPICH slot from cell j</p> <p><math>T_{CPICHRxi}</math> is the time when the UE receives the CPICH slot from cell i that is closest in time to the CPICH slot received from cell j</p>
Applicable for	<p><b>Type 1:</b> Idle, Connected Intra</p> <p><b>Type 2:</b> Idle, Connected Intra, Connected Inter</p>
Range/mapping	<p><b>Type 1:</b> Time difference is given with a resolution of one chip with the range [0, ..., 9830399] chips.</p> <p><b>Type 2:</b> Time difference is given with a resolution of 0.25 chip with the range [-1279.75, ..., 1280] chips.</p>

### 5.1.13 UE Rx-Tx time difference

Definition	<p>The difference in time between the UE uplink DPCCH/DPDCH frame transmission and the first significant path, of the downlink DPCH frame from the measured radio link. Measurement shall be made for each cell included in the active set.</p> <p>Note: The definition of "first significant path" needs further elaboration.</p>
Applicable for	Connected Intra
Range/mapping	<del>Always positive.</del> The UE Rx-Tx time difference is given with the resolution of 0.25 chip with the range [876, ..., 1172] chips.



### 5.1.15 Observed time difference to GSM cell

<b>Definition</b>	The Observed time difference to GSM cell is defined as: $T_{RxGSMj} - T_{RxSFNi}$ , where: $T_{RxSFNi}$ is the time at the beginning of the P-CCPCH frame with SFN=0 from cell i. $T_{RxGSMj}$ is the time at the beginning of the GSM BCCH 51-multiframe from GSM frequency j received closest in time after the time $T_{RxSFNi}$ . If the next GSM multiframe is received exactly at $T_{RxSFNi}$ then $T_{RxGSMj} = T_{RxSFNi}$ (which leads to $T_{RxGSMj} - T_{RxSFNi} = 0$ ). The timing measurement shall reflect the timing situation when the most recent (in time) P-CCPCH with SFN=0 was received in the UE.
<b>Applicable for</b>	Idle, Connected Inter
<b>Range/mapping</b>	The Observed time difference to GSM cell is given with the resolution of $3060/(4096*13)$ ms with the range $[0, \dots, 3060/13-3060/(4096*13)]$ ms.

## 5.2 UTRAN measurement abilities

The structure of the table defining a UTRAN measurement quantity is shown below:

Column field	Comment
<b>Definition</b>	Contains the definition of the measurement.
<b>Range/mapping</b>	Gives the range and mapping to bits for the measurements quantity.

### 5.2.1 RSSI

<b>Definition</b>	Received Signal Strength Indicator, the wide-band received power within the UTRAN uplink carrier channel bandwidth in an UTRAN access point. The reference point for the RSSI measurements shall be the antenna connector.
<b>Range/mapping</b>	

### 5.2.2 SIR

<b>Definition</b>	Signal to Interference Ratio, is defined as the RSCP divided by the ISCP. Measurement shall be performed on the DPCCCH after RL combination in Node B. The reference point for the SIR measurements shall be the antenna connector.
<b>Range/mapping</b>	

### 5.2.3 Transmitted carrier power

<b>Definition</b>	Transmitted carrier power, is the total transmitted power on one carrier from one UTRAN access point. Measurement shall be possible on any carrier transmitted from the UTRAN access point. The reference point for the total transmitted power measurement shall be the antenna connector. In case of Tx diversity the total transmitted power for each branch shall be measured.
<b>Range/mapping</b>	

### 5.2.4 Transmitted code power

<b>Definition</b>	Transmitted code power, is the transmitted power on one carrier, one scrambling code and one channelisation code. Measurement shall be possible on any channelisation code transmitted from the UTRAN access point. The reference point for the transmitted code power measurement shall be the antenna connector. In case of Tx diversity the transmitted code power for each branch shall be measured.
<b>Range/mapping</b>	

## 5.2.5 Transport channel BLER

Definition	Estimation of the transport channel block error rate (BLER). The BLER estimation shall be based on evaluating the CRC on each transport block. Measurement shall be possible to perform on any transport channel after RL combination in Node B. BLER estimation is only required for transport channels containing CRC.
Range/mapping	

## 5.2.6 Physical channel BER

Definition	The physical channel BER is an estimation of the average bit error rate (BER) before channel decoding of the DPDCH data after RL combination in Node B. It shall be possible to report a physical channel BER estimate at the end of each TTI for the transferred TrCh's, e.g. for TrCh's with a TTI of x ms a x ms averaged physical channel BER shall be possible to report every x ms.
Range/mapping	

## 5.2.7 Round trip time

**Note: The relation between this measurement and the TOA measurement defined by WG2 needs clarification.**

Definition	<p>Round trip time (RTT), is defined as</p> $RTT = T_{RX} - T_{TX},$ <p>where</p> <p><math>T_{TX}</math> = The time of transmission of the beginning of a downlink DPCH frame to a UE.</p> <p><math>T_{RX}</math> = The time of reception of the beginning (the first significant path) of the corresponding uplink DPCCH/DPDCH frame from the UE.</p> <p>Note: The definition of "first significant path" needs further elaboration.</p> <p>Measurement shall be possible on DPCH for each RL transmitted from an UTRAN access point and DPDCH/DPCCH for each RL received in the same UTRAN access point.</p>
Range/mapping	<u>The Round trip time is given with the resolution of 0.25 chip with the range [876, ..., 2923.75] chips.</u>

Source: Lucent Technologies, Ericsson, Nokia  
Title: Revised CR010 (Rev2) to 25.215  
Document for: Approval

---

## 1. Introduction

During the RAN WG2 Ad Hoc on LCS (Sophia Antipolis; 25-26 November 1999), there was discussion on Layer 1 inter-system measurements for assisted GPS methods and it was concluded that WG1 needs to specify the inter-system timing. This is endorsed in the LS from RAN WG2 #9 to RAN WG1 #9 [1].

WG1 #9 AH17 agreed that the TS25.215-CR010 text originally presented in R1-99i03 should be in alignment with the latest version of TS25.305.

CR010 Revision 2 (25.215) is presented here to accord with the agreement made in WG1 #9 AH17.

---

## 2. References

[1] Tdoc R2-99J47: "Liaison on LCS"; RAN WG2 #9; 29 Nov – 3 Dec 1999.

<h2 style="margin: 0;">CHANGE REQUEST</h2>		<small>Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.</small>
<b>25.215</b>	<b>CR 010r2</b>	Current Version: <b>V 3.0.0</b>
<small>GSM (AA.BB) or 3G (AA.BBB) specification number ↑</small>	<small>↑ CR number as allocated by MCC support team</small>	
For submission to: <b>RAN #6</b> <small>list expected approval meeting # here ↑</small>	for approval <input checked="" type="checkbox"/> for information <input type="checkbox"/>	strategic <input type="checkbox"/> non-strategic <input type="checkbox"/> <small>(for SMG use only)</small>

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: ftp://ftp.3gpp.org/Information/CR-Form-v2.doc

**Proposed change affects:** (U)SIM  ME  UTRAN / Radio  Core Network   
(at least one should be marked with an X)

**Source:** Lucent Technologies **Date:** 2 Dec 1999

**Subject:** New sections: 5.1.15 – UE GPS Timing of Cell Frames for LCS; 5.2.8 UTRAN GPS Timing of Cell Frames for LCS

**Work item:** TS 25.215

<b>Category:</b>	F Correction <input type="checkbox"/> A Corresponds to a correction in an earlier release <input type="checkbox"/> B Addition of feature <input checked="" type="checkbox"/> C Functional modification of feature <input type="checkbox"/> D Editorial modification <input type="checkbox"/>	<b>Release:</b>	Phase 2 <input type="checkbox"/> Release 96 <input type="checkbox"/> Release 97 <input type="checkbox"/> Release 98 <input type="checkbox"/> Release 99 <input checked="" type="checkbox"/> Release 00 <input type="checkbox"/>
------------------	--	-----------------	--

(only one category shall be marked with an X)

**Reason for change:** Inclusion of UE and UTRAN measurement parameters to support assisted GPS LCS method. The requirement to measure these parameters has been defined by RAN WG2 in LS R299J47. These measurements are optional.

**Clauses affected:** New clause

**Other specs affected:**

Other 3G core specifications	"> <input type="checkbox"/>	→	List of CRs:
Other GSM core specifications	<input type="checkbox"/>	→	List of CRs:
MS test specifications	<input type="checkbox"/>	→	List of CRs:
BSS test specifications	<input type="checkbox"/>	→	List of CRs:
O&M specifications	<input type="checkbox"/>	→	List of CRs:

**Other comments:**

<----- double-click here for help and instructions on how to create a CR.

### 5.1.13 UE Rx-Tx time difference

<b>Definition</b>	The difference in time between the UE uplink DPCCH/DPDCH frame transmission and the first significant path, of the downlink DPCH frame from the measured radio link. Measurement shall be made for each cell included in the active set. Note: The definition of "first significant path" needs further elaboration.
<b>Applicable for</b>	Connected Intra
<b>Range/mapping</b>	Always positive.

### 5.1.14 UE GPS Timing of Cell Frames for LCS

<b><u>Definition</u></b>	<u>The timing between cell j and GPS Time Of Week. <math>T_{UE-GPSj}</math> is defined as the time of occurrence of a specified UTRAN event according to GPS time. The specified UTRAN event is the beginning of a particular frame (identified through its SFN) in the first significant multipath of the cell j CPICH, where cell j is a cell within the active set.</u>
<b><u>Applicable for</u></b>	<u>Connected Intra, Connected Inter</u>
<b><u>Range/mapping</u></b>	<u>The resolution of <math>T_{UE-GPSj}</math> is <math>1\mu S</math>. The range is from 0 to <math>6.04 \times 10^{11} \mu S</math>.</u>

### 5.2.7 Round trip time

**Note: The relation between this measurement and the TOA measurement defined by WG2 needs clarification.**

<b>Definition</b>	<p>Round trip time (RTT), is defined as  <math>RTT = T_{RX} - T_{TX}</math>, where  <math>T_{TX}</math> = The time of transmission of the beginning of a downlink DPCH frame to a UE.  <math>T_{RX}</math> = The time of reception of the beginning (the first significant path) of the corresponding uplink DPCH/DPDCH frame from the UE.            Note: The definition of "first significant path" needs further elaboration.            Measurement shall be possible on DPCH for each RL transmitted from an UTRAN access point and DPDCH/DPCH for each RL received in the same UTRAN access point.</p>
<b>Range/mapping</b>	

### 5.2.8 UTRAN GPS Timing of Cell Frames for LCS

<b><u>Definition</u></b>	<u>The timing between cell j and GPS Time Of Week. <math>T_{UTRAN-GPSj}</math> is defined as the time of occurrence of a specified UTRAN event according to GPS time. The specified UTRAN event is the beginning of a particular frame (identified through its SFN) in the first significant multipath of the cell j CPICH, where cell j is a cell within the active set.</u>
<b><u>Applicable for</u></b>	<u>Connected Intra, Connected Inter</u>
<b><u>Range/mapping</u></b>	<u>The resolution of <math>T_{UTRAN-GPSj}</math> is 1<math>\mu</math>S. The range is from 0 to <math>6.04 \times 10^{11}</math> <math>\mu</math>S.</u>