

TSG-SA

TSGS#4 (99) SP-99261

Miami, June 21-23, 1999

Source: AirTouch Communications

Subject: OHG Agreement

Document for: Approval

Introduction

AirTouch Communications, as a member of the leadership team of the Operators Harmonization Group (OHG), is submitting the following two documents: 1) Harmonized Global 3G (G3G) Technical Framework document and 2) Open Letter to Standards Organizations, in order to inform the TSG SA about the OHG agreement and request support, as outlined below.

Highlights of the OHG Agreement

The attached Technical Framework document represents the agreement reached by 38 operators and supported by 13 manufacturers, at the OHG meeting held in Toronto, May 25-26. The document contains a description of the key technical parameters for the G3G CDMA specification, a proposal for the protocol layers, including harmonization requirements, and guidelines and principles. In addition it proposes a process for achieving the G3G CDMA specification. The attached Open Letter to Standard Organizations was sent to ITU-T TG8/1 to recommend specific actions from the Beijing TG8/1 meeting. In addition to the Technical Framework and the Open Letter, in Toronto the OHG agreed to establish a Transition Team to assist SDOs with queries and facilitate the implementation of the agreement.

Actions Proposed

On behalf of the OHG, AirTouch would like to ask that 3GPP TSG SA, in its Project Management role, endorses the process agreed by the OHG. Specifically, AirTouch asks that the 3GPP TSG SA undertakes the following actions:

1. Encourage cooperation between appropriate technical experts to ensure that ANSI 41 and GSM MAP based services can be fully supported over the radio access network associated with all three 3G CDMA modes
2. Direct TSG RAN to host an experts meeting with appropriate representation from concerned SDOs as soon as possible to ensure that required hooks and extensions are identified without causing any delays to the schedule for 1999 releases.

Contact: Paola Tonelli, OHG Working Chair (replaces Peter Barry)

**Open Letter to Standard Organizations
From
Operators Harmonization Group
on
Global 3G (G3G) CDMA Standard**

Introduction

During the last six months, many global wireless operators have been meeting to determine how the various CDMA proposals for the ITU's IMT 2000 System for 3rd Generation Wireless could be harmonized. At their first full fledged meeting held in Beijing, they approved two documents, an open letter to the ITU on IPR issues and the "Harmonized Global 3G (G3G) Specification Framework for ITU IMT-2000 CDMA Proposal". Subsequently they held three other meetings in each of London, Tokyo and Toronto to discuss key parameters – **Chip Rate, Pilot Structure and Synchronization Method**.

GENERAL

As a result of these efforts, the Operators Harmonization Group (OHG) has now agreed to a harmonized G3G CDMA standard framework. This agreement represents a major achievement for the global wireless industry. The harmonized G3G CDMA standard should have a positive impact on the growth of wireless industry and should serve its customers well. This historical agreement is attached and is entitled "Harmonized Global 3G (G3G) Technical Framework for ITU IMT-2000 CDMA Proposal." The agreement is supported by many operators as well as major manufacturers. It is anticipated that additional operators and manufacturers will respond very shortly in support of the document as they complete their internal assessments. These additional names will become available over the next few days.

The operators supporting the attached harmonization agreement request that the relevant organizations immediately undertake the following actions to ensure that the desires of the manufacturers and operators are realized.

Recommended Action

ITU – TG8/1

The members of the OHG supporting the attached harmonization agreement request that the necessary modifications to Recommendation [RKEY] be agreed to at the Beijing TG8/1 Meeting in order to make RKEY consistent with the harmonization agreement. The members of the OHG further request that ITU TG8/1 take appropriate action to meet the requirements of the "Harmonized Global 3G (G3G) Technical Framework for ITU IMT-2000 CDMA Proposal".

SDO, 3GPP & 3GPP2

The members of the OHG request that ITU TG8/1 take the steps necessary to implement the technical framework outlined in the attached “Harmonized Global 3G (G3G) Technical Framework for ITU IMT-2000 CDMA Proposal”.

Dated June 2nd, 1999

Contact Point

Vino Vinodrai
Bell Mobility
Tel: +1 905 282 3302
FAX: +1 905 282 3337
E-Mail: cvinodra@mobility.com

Peter Barry
AirTouch
Tel: +1 925 210 3448
FAX: +1 925 210 3419
E-Mail: peter.barry@airtouch.com

**Harmonized Global 3G
(G3G)
Technical Framework
for
ITU IMT-2000 CDMA Proposal**

TABLE OF CONTENTS

1 INTRODUCTION..... 4

2 TECHNICAL PARAMETERS 5

2.1 Global 3G (G3G) Specification.....5

2.2 Global 3G (G3G) Technical Specification5

2.2.1 Inter Base Station Synchronization5

2.2.2 Forward Link Pilot Structure.....6

 2.2.2.1 Common Pilots and Common Channels6

 2.2.2.2 Common CDM Pilot6

 2.2.2.3 SCCPCH structure7

 2.2.2.4 Dedicated Pilots **Error! Bookmark not defined.**

2.2.3 Chip Rate..... Error! Bookmark not defined.

2.2.4 RF Parameters Error! Bookmark not defined.

**3 CDMA HARMONIZATION (G3G) PROPOSAL FOR PROTOCOL LAYERSERROR!
BOOKMARK NOT DEFINED.**

3.1 Harmonization Requirements Error! Bookmark not defined.

3.2 Harmonization Approach Error! Bookmark not defined.

3.3 Phased Approach..... Error! Bookmark not defined.

4 GUIDELINES AND PRINCIPLES ERROR! BOOKMARK NOT DEFINED.

5 PROCESS..... ERROR! BOOKMARK NOT DEFINED.

APPENDIX A – OHG TRANSITION TEAM ERROR! BOOKMARK NOT DEFINED.

Table of Figures

| | |
|--|-------------------------------------|
| FIGURE 1: PROPOSED COMMON CHANNEL STRUCTURE (POSITION OF PILOT BITS TO BE IN ACCORDANCE WITH WCDMA REQUIREMENTS) | 6 |
| FIGURE 2: MODULAR 3G HARMONIZATION PROPOSAL..... | ERROR! BOOKMARK NOT DEFINED. |
| FIGURE 3: PROTOCOL STRUCTURE FOR IMPLEMENTING THE MODULAR CONCEPT..... | ERROR! |
| FIGURE 4: DETAIL OF DIRECT SPREAD STACK..... | ERROR! BOOKMARK NOT DEFINED. |

1. Introduction

The Operators Harmonization Group (OHG) Technical Framework document outlines the key technical parameters which can meet the requirements of commercial wireless operators from around the world, who desire a common global specification for 3G CDMA systems. The harmonization framework draws heavily on the Wideband Code Division Multiple Access (WCDMA) and cdma2000 submissions made to ITU for IMT-2000 and described in an earlier OHG document entitled “Harmonized Global 3G (G3G) Specification Framework for ITU IMT-2000 CDMA Proposal” (Beijing Output 2).

The majority of operators and manufacturers worldwide support this goal. The technical framework proposed for achieving a common global specification seeks to:

- Provide the foundation for accelerated growth in the mobile industry in the 3G millennium and to create a single integrated 3G CDMA specification and process from the separate WCDMA and cdma2000 proposals being developed by 3GPP and 3GPP2.

The technical parameters contained in this document build upon the very successful CDMA harmonization activities undertaken to date between TTA, ARIB, ETSI, TTC and TTC. However, the proposal contained herein is strongly focused on a solution that would meet operators’ needs based on available technical information on the merits of the various techniques without regard to IPR. The wireless operators have been assured that the manufacturing community will cross license intellectual property on fair, reasonable and non-discriminatory terms for the good of the wireless industry. This assurance was exemplified by the recent agreement on IPR cross licensing between Ericsson and Qualcomm.

Greatest care has been taken in selecting technical parameters that protect every operator’s present infrastructure investment and enable their 2nd generation systems evolve towards 3rd generation services to the greatest extent possible. It is recognized that high speed multi-media services will place different requirements on the infrastructure which will drive the development of new capabilities in both the radio access and core network systems.

The philosophy behind the development of this OHG technical proposal is to allow each operator the choice of implementing a subset of a harmonized global specification depending on their market and business needs. This document specifies several key radio parameters which form the basis for a harmonized Global 3G (G3G) CDMA standard.

This document does not address either the UWC-136 or DECT IMT 2000 RTT submissions. Their architectures are significantly different as to fall outside of the scope of harmonization addressed in this document. Their omission should not be construed as to reflect negatively on their suitability for IMT 2000 systems.

2. Technical Parameters

The operators are interested in having a harmonized Global 3G (G3G) CDMA standard consisting of three modes: Multi Carrier (MC), Direct Spread (DS) and Time Division Duplex (TDD).

2.1 *Global 3G (G3G) Specification*

A harmonized G3G specification should:

1. Be focused on customer needs for widespread availability of voice and high speed non-voice services.
2. Maximize ability of customers to roam with their services across regions, countries and systems.
3. Minimize 3G costs for the mobile industry.
4. Maximize the ability of the Information Technology, Internet and Personal Computer industries to provide mobile applications, solutions, and subscriber devices.
5. Provide a smooth and compatible evolution path from existing infrastructure.
6. Be completed in time to meet the commercialization plans of all countries/regions.
7. Recognize that there are two well established core network architectures.
8. Minimize the IPR impact on the industry.
9. Promote the free flow of IPRs to accelerate innovation and create greater customer choice.
10. Accommodate regional needs for different spectrum allocations.
11. Use technical approaches and parameters that meet customer requirements.

2.2 *Global 3G (G3G) Technical Specification*

The key parameters are outlined below:

- The harmonized standard for DS will be based on the W-CDMA proposal.
- The harmonized standard for MC will be based on the cdma2000 proposal.
- The key parameters for the harmonized standard for the TDD mode have not been considered in detail with the exception of a recommendation on the chip rate.

2.2.1 *Inter Base Station Synchronization*

The inter base station synchronization will be as follows:

- The W-CDMA asynchronous and synchronous approach shall be used for the DS mode. This

approach uses different codes to identify base stations.

- The cdma2000 approach shall be used for the Multi-Carrier mode.

2.2.2 Forward Link Pilot Structure

The structure for the MC mode shall be as defined in cdma2000.

The operators support the harmonized forward link pilot structure described below for the DS mode.

2.2.2.1 Common Pilots and Common Channels

Figure 1 presents the common channel structure. The objective is to introduce a common CDM pilot in the current W-CDMA channel structure and in particular on how to multiplex the pilot, primary common control channel (PCCCH) and SCH streams. Consensus was reached on the following structure:

- 100% duty cycle common CDM pilot channel (CPICH) on one code
- 90% duty cycle PCCPCH on a separate code without TDM pilot symbols
- 10% duty cycle SCH codes are transmitted during the PCCPCH idle period

Due to the revised chip rate, some parameters indicated in Figure 1 may need to be adjusted, for example the slot time.

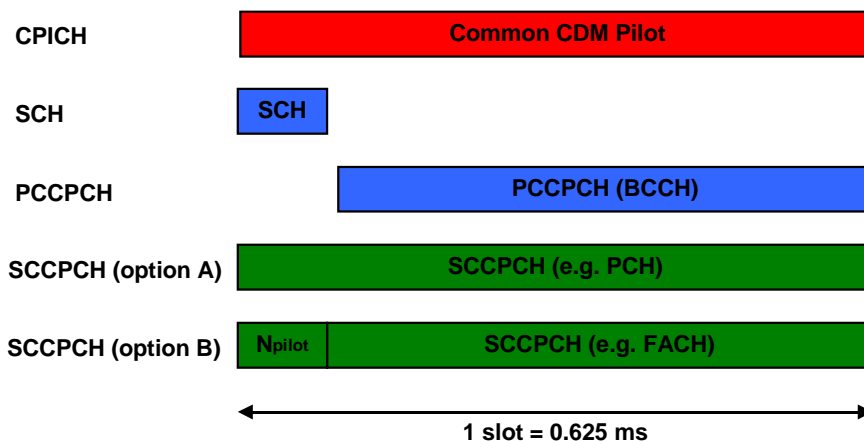


Figure 1: Proposed common channel structure (position of pilot bits to be in accordance with WCDMA requirements)

2.2.2.2 Common CDM Pilot

A common CDM pilot is broadcast throughout a cell or sector on a code multiplexed channel with 100% duty cycle. Additional common CDM pilot channels may be broadcast, also with 100% duty cycle, to support scenarios where multiple shall also be specified which share an additional pilot reference. These additional common CDM pilots could be used to support

transmit diversity techniques and spot beams.

2.2.2.3 SCCPCH structure

Due to the Common CDM Pilot, the SCCPCH requires modification. At this time there are two cases to consider:

- the SCCPCH does not always require TDM pilot bits,
- the SCCPCH requires TDM pilot bits when beam forming techniques (FACH) are employed.

Thus the recommendation is optional insertion of TDM pilot bits, where the pilot bits (when applied) are to be used for support of beam forming techniques. Consequently, the SCCPCH would support 0 to 16 pilot bits ($N_{pilot} \in \{0,2,\dots,16\}$).

```

*****
*****
*****
*****
*****
*****
*****
**posals are under consideration:

```

Harmonized Global 3G
(G3G)
Technical Framework
for
ITU IMT-2000 CDMA Proposal

TABLE OF CONTENTS

| | |
|---|-----------|
| 1 INTRODUCTION..... | 3 |
| 2 TECHNICAL PARAMETERS | 4 |
| 2.1 Global 3G (G3G) Specification..... | 4 |
| 2.2 Global 3G (G3G) Technical Specification | 4 |
| 2.2.1 Inter Base Station Synchronization | 4 |
| 2.2.2 Forward Link Pilot Structure..... | 5 |
| 2.2.2.1 Common Pilots and Common Channels | 5 |
| 2.2.2.2 Common CDM Pilot..... | 5 |
| 2.2.2.3 SCCPCH structure | 6 |
| 2.2.2.4 Dedicated Pilots | 6 |
| 2.2.3 Chip Rate..... | 6 |
| 2.2.4 RF Parameters..... | 6 |
| 3 CDMA HARMONIZATION (G3G) PROPOSAL FOR PROTOCOL LAYERS..... | 7 |
| 3.1 Harmonization Requirements | 8 |
| 3.2 Harmonization Approach..... | 8 |
| 3.3 Phased Approach..... | 9 |
| 4 GUIDELINES AND PRINCIPLES | 10 |
| 5 PROCESS..... | 11 |
| APPENDIX A – OHG TRANSITION TEAM | 14 |

Table of Figures

| | |
|--|----|
| FIGURE 1: PROPOSED COMMON CHANNEL STRUCTURE (POSITION OF PILOT BITS TO BE IN ACCORDANCE WITH WCDMA REQUIREMENTS) | 5 |
| FIGURE 2: MODULAR 3G HARMONIZATION PROPOSAL..... | 7 |
| FIGURE 3: PROTOCOL STRUCTURE FOR IMPLEMENTING THE MODULAR CONCEPT..... | 9 |
| FIGURE 4: DETAIL OF DIRECT SPREAD STACK..... | 10 |

1. Introduction

The Operators Harmonization Group (OHG) Technical Framework document outlines the key technical parameters which can meet the requirements of commercial wireless operators from around the world, who desire a common global specification for 3G CDMA systems. The harmonization framework draws heavily on the Wideband Code Division Multiple Access (WCDMA) and cdma2000 submissions made to ITU for IMT-2000 and described in an earlier OHG document entitled “Harmonized Global 3G (G3G) Specification Framework for ITU IMT-2000 CDMA Proposal” (Beijing Output 2).

The majority of operators and manufacturers worldwide support this goal. The technical framework proposed for achieving a common global specification seeks to:

- Provide the foundation for accelerated growth in the mobile industry in the 3G millennium and to create a single integrated 3G CDMA specification and process from the separate WCDMA and cdma2000 proposals being developed by 3GPP and 3GPP2.

The technical parameters contained in this document build upon the very successful CDMA harmonization activities undertaken to date between TTA, ARIB, ETSI, TTC and TTC. However, the proposal contained herein is strongly focused on a solution that would meet operators’ needs based on available technical information on the merits of the various techniques without regard to IPR. The wireless operators have been assured that the manufacturing community will cross license intellectual property on fair, reasonable and non-discriminatory terms for the good of the wireless industry. This assurance was exemplified by the recent agreement on IPR cross licensing between Ericsson and Qualcomm.

Greatest care has been taken in selecting technical parameters that protect every operator’s present infrastructure investment and enable their 2nd generation systems evolve towards 3rd generation services to the greatest extent possible. It is recognized that high speed multi-media services will place different requirements on the infrastructure which will drive the development of new capabilities in both the radio access and core network systems.

The philosophy behind the development of this OHG technical proposal is to allow each operator the choice of implementing a subset of a harmonized global specification depending on their market and business needs. This document specifies several key radio parameters which form the basis for a harmonized Global 3G (G3G) CDMA standard.

This document does not address either the UWC-136 or DECT IMT 2000 RTT submissions. Their architectures are significantly different as to fall outside of the scope of harmonization addressed in this document. Their omission should not be construed as to reflect negatively on their suitability for IMT 2000 systems.

2. Technical Parameters

The operators are interested in having a harmonized Global 3G (G3G) CDMA standard consisting of three modes: Multi Carrier (MC), Direct Spread (DS) and Time Division Duplex (TDD).

2.1 *Global 3G (G3G) Specification*

A harmonized G3G specification should:

1. Be focused on customer needs for widespread availability of voice and high speed non-voice services.
2. Maximize ability of customers to roam with their services across regions, countries and systems.
3. Minimize 3G costs for the mobile industry.
4. Maximize the ability of the Information Technology, Internet and Personal Computer industries to provide mobile applications, solutions, and subscriber devices.
5. Provide a smooth and compatible evolution path from existing infrastructure.
6. Be completed in time to meet the commercialization plans of all countries/regions.
7. Recognize that there are two well established core network architectures.
8. Minimize the IPR impact on the industry.
9. Promote the free flow of IPRs to accelerate innovation and create greater customer choice.
10. Accommodate regional needs for different spectrum allocations.
11. Use technical approaches and parameters that meet customer requirements.

2.2 *Global 3G (G3G) Technical Specification*

The key parameters are outlined below:

- The harmonized standard for DS will be based on the W-CDMA proposal.
- The harmonized standard for MC will be based on the cdma2000 proposal.
- The key parameters for the harmonized standard for the TDD mode have not been considered in detail with the exception of a recommendation on the chip rate.

2.2.1 *Inter Base Station Synchronization*

The inter base station synchronization will be as follows:

- The W-CDMA asynchronous and synchronous approach shall be used for the DS mode. This

approach uses different codes to identify base stations.

- The cdma2000 approach shall be used for the Multi-Carrier mode.

2.2.2 Forward Link Pilot Structure

The structure for the MC mode shall be as defined in cdma2000.

The operators support the harmonized forward link pilot structure described below for the DS mode.

2.2.2.1 Common Pilots and Common Channels

Figure 1 presents the common channel structure. The objective is to introduce a common CDM pilot in the current W-CDMA channel structure and in particular on how to multiplex the pilot, primary common control channel (PCCCH) and SCH streams. Consensus was reached on the following structure:

- 100% duty cycle common CDM pilot channel (CPICH) on one code
- 90% duty cycle PCCPCH on a separate code without TDM pilot symbols
- 10% duty cycle SCH codes are transmitted during the PCCPCH idle period

Due to the revised chip rate, some parameters indicated in Figure 1 may need to be adjusted, for example the slot time.

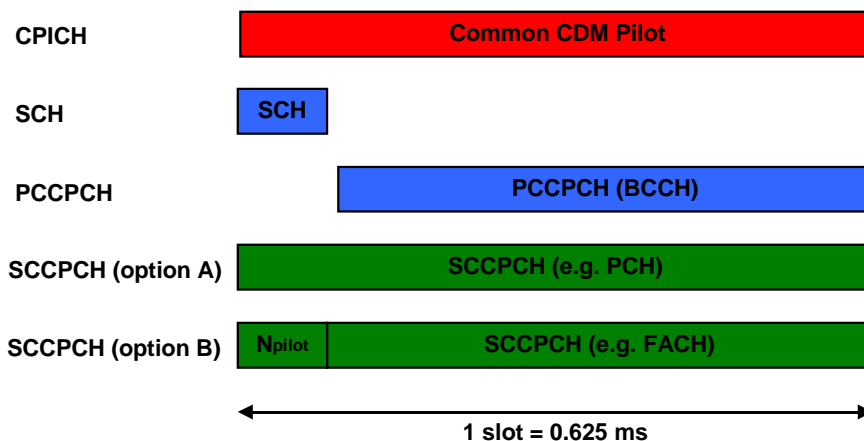


Figure 1: Proposed common channel structure (position of pilot bits to be in accordance with WCDMA requirements)

2.2.2.2 Common CDM Pilot

A common CDM pilot is broadcast throughout a cell or sector on a code multiplexed channel with 100% duty cycle. Additional common CDM pilot channels may be broadcast, also with 100% duty cycle, to support scenarios where multiple shall also be specified which share an additional pilot reference. These additional common CDM pilots could be used to support

transmit diversity techniques and spot beams.

2.2.2.3 SCCPCH structure

Due to the Common CDM Pilot, the SCCPCH requires modification. At this time there are two cases to consider:

- the SCCPCH does not always require TDM pilot bits,
- the SCCPCH requires TDM pilot bits when beam forming techniques (FACH) are employed.

Thus the recommendation is optional insertion of TDM pilot bits, where the pilot bits (when applied) are to be used for support of beam forming techniques. Consequently, the SCCPCH would support 0 to 16 pilot bits ($N_{\text{pilot}} \in \{0, 2, \dots, 16\}$).

2.2.2.4. Dedicated Pilots

In order to efficiently support low rate data services (e.g., 8kbps voice services, with a rate 1/3 FEC code and a spreading factor of 256 the number of pilot bits applied to the dedicated traffic channel is under consideration.

Two proposals are under consideration:

- the DCH shall support insertion (TDM) of 0 to 16 pilot bits ($N_{\text{pilot}} \in \{0, 2, \dots, 16\}$),
- the DCH shall support insertion (TDM) of 2 to 16 pilot bits ($N_{\text{pilot}} \in \{2, 4, \dots, 16\}$).

Two potential issues have been raised regarding the case of no pilot bits ($N_{\text{pilot}} = 0$). One possible issue regards the power control algorithm design and another regards timing. The operators supporting this document request that 3GPP and 3GPP2 resolve this issue.

2.2.3 Chip Rate

The chip rate will be 3.84 Mcps for Direct Spread, 3.6864 Mcps for Multi Carrier and 3.84 Mcps for Time Division Duplex for the CDMA radio access modes.

2.2.4 RF Parameters

The RF parameters should be harmonized between the modes to the greatest extent possible to encourage economy of scale in RF components that could significantly reduce overall costs.

3. CDMA Harmonization (G3G) Proposal for Protocol Layers

The first Operators Harmonization Group (OHG) meeting agreed to the following modular system block diagram (see Figure 2.). This modular system was subsequently also supported by Trans-Atlantic Business Dialogue (TABD) meeting held in Washington D.C. during February 1999.

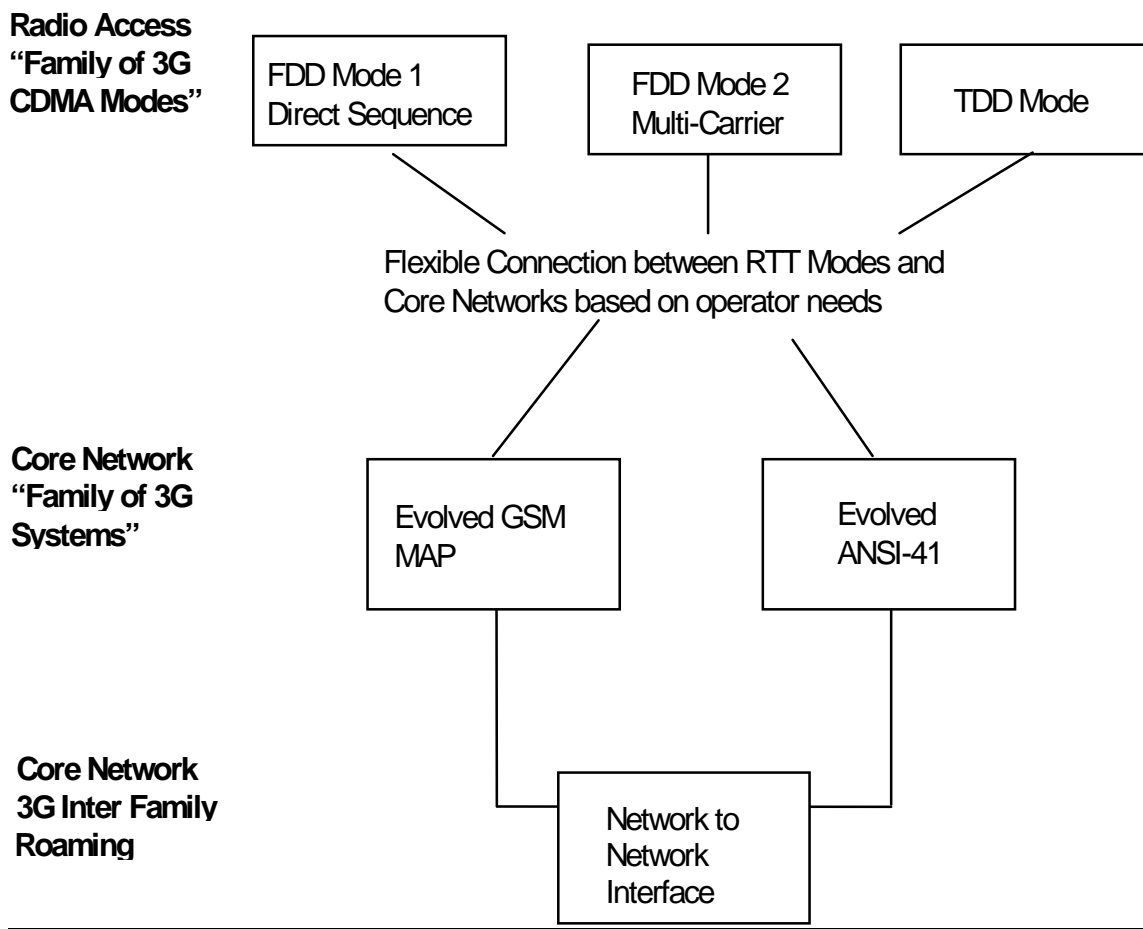


Figure 2: MODULAR 3G HARMONIZATION PROPOSAL

A 3G Operator may select one or more radio access modules together with one or more core network modules to implement a G3G system subject to the regulatory requirements of their nation or region.

The global ITU specification for G3G must be sufficiently detailed to enable 3G operators to implement systems incorporating various harmonized radio access modes and core networks. As a consequence, it will be necessary to define the protocol layers associated with interconnecting

the radio access modes and core networks: each community of interest will determine combination(s) in which they are interested and take on the task to specify them.

3.1 Harmonization Requirements

The requirements for harmonization are listed below.

1. ANSI 41 and GSM MAP based services should be fully supported in the Radio Access Network associated with all three 3G CDMA modes.
2. Supports functionality based on synchronous operation such as location calculation, etc.
3. Supports seamless handoff between the harmonized DS and MC including IS-95 for ANSI 41 and the equivalent to this for UMTS/GSM.
4. Minimize the complexity of dual-mode and multi-band terminals and equipment.

3.2 Harmonization Approach

A conceptual diagram of the harmonization required to achieve these requirements for the DS and MC modes is shown in Figure 3. Note that this figure includes potential changes to the physical layer L1 needed to support the requirements outlined in Section 3.1

The harmonization approach shown in Figure 3 has the following components:

- a) For the DS mode the baseline starting point for supporting both core networks is:
 - L1 as per Section 2
 - W-CDMA L2
 - W-CDMA L3 Radio Resource Control (RRC)
- b) For the MC mode the baseline starting point for supporting both core networks is:
 - L1 as per Section 2
 - cdma2000 L2
 - cdma2000 L3 Radio Resource Control (RRC)
- c) For the TDD mode the baseline starting point for supporting both core networks is:
 - TDD Mode L2 as per 3GPP
 - TDD L3 Radio Resource Control (RRC) as per 3GPP
- d) The concept of “Hooks” as shown in Figure 3 is defined as any functionality that is specified for the initial release of the standards so that the extensions needed to satisfy the requirements Section 3.1 above can be defined in detail. These “Hooks” are defined using the guiding principles in the Section 4.

- e) The concept of “Extensions” as shown in Figure 3 is defined as any additional functionality at any layer which needs to be specified in detail to meet the Section 3.1 requirements above, assuming the appropriate “Hooks” are in place to enable the “Extensions” to be defined without major changes to the baseline protocols. These “Extensions” are defined using the guiding principles in the following Section 4.

3.3 Phased Approach


Given the events to date and current commercialization time schedule it is not possible to completely harmonize all aspects of the upper layers for a unified Global Specification. Protocol Layer 2&3 for Direct Spread, Multi-Carrier, and TDD will be developed in two phases outlined below (including any consequential impacts on the physical layers). The timing of Phase 1 and 2 may be different depending for a particular mode depending on market requirements. The timing goals agreed by the operators is outlined in Section 4.

Phase 1

The baseline parameters in all three radio layers including the hooks as defined above will be completed to meet the Release 99 timeframes of 3GPP and 3GPP2.

Phase 2

Completion of all the detailed specification of all the extensions to Phase 1 necessary to fully support of ANSI 41 and GSM core networks.

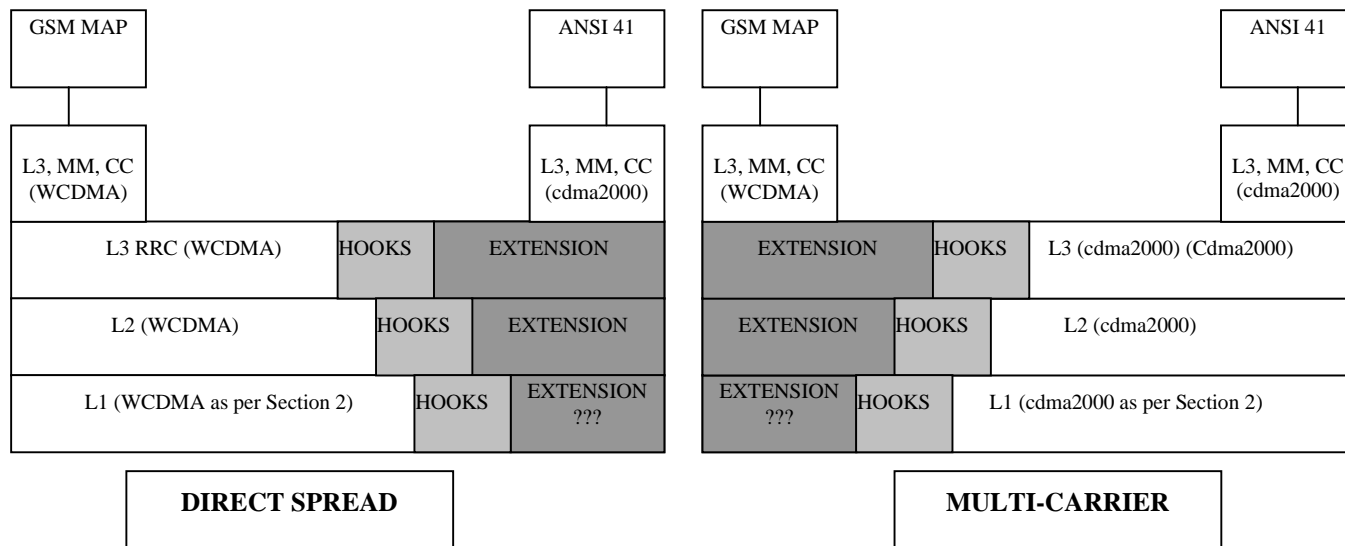

Note: ?? – Areas for further analysis

Figure 3: Protocol Structure for Implementing the Modular Concept

A more detailed view of the protocol architecture for the DS mode connected to an ANSI 41 network based on the principles of Figure 3 is shown in Figure 4.

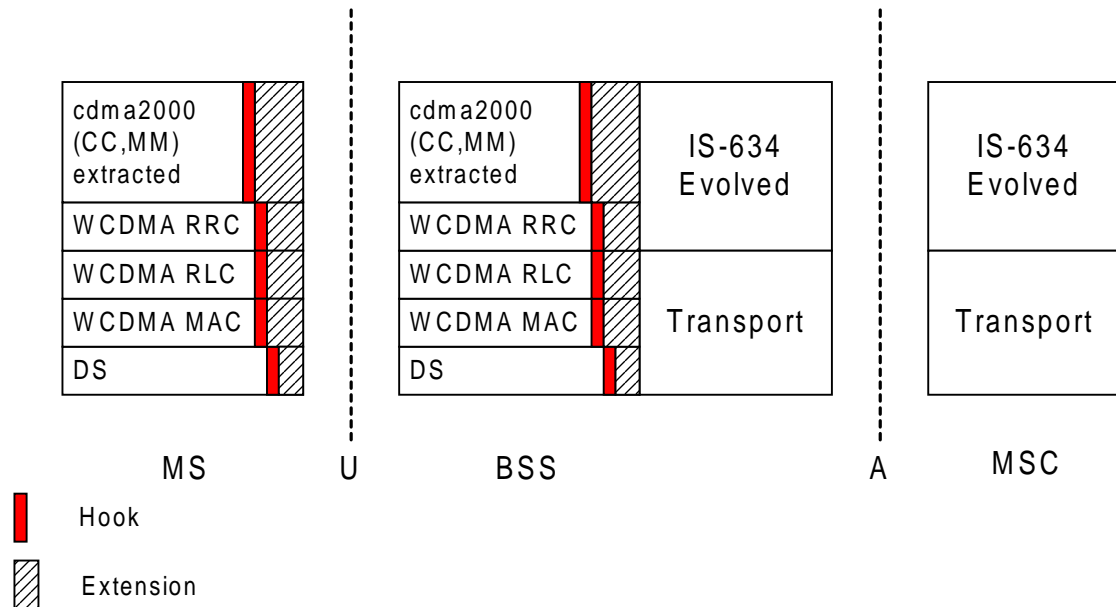


Figure 4: Detail of Direct Spread Protocol Stack

A 3G Operator may select combinations of the above protocol stacks subject to the requirements of their nation or regions. The global specification for G3G must be sufficiently detailed to enable operators to flexibly choose between the various harmonized radio access and core networks.

ITU and SDOs are advised that maximum commonality is required between these protocols. The mobile terminal will have the ability to determine the network environment it is accessing or operating in.

4. Guidelines and Principles

In developing the harmonized Global 3G CDMA standard, the following principles and guidelines must be followed:

- 3GPP and 3GPP2 shall maintain their 1999 release schedules.
- The Hooks required to implement the harmonized CDMA standard must be identified as soon as possible to allow prioritization of work for inclusion in Release 99 and to ensure completion of the work in Phase 2 is facilitated.
- The objective is for all Hooks to be specified by the end of 1999.
- All Hooks specified by the end of 1999 should be included in Release 1999.
- Changes to L1 should be minimized.
- Changes to the core networks (see Figure 4) should be minimized.
- The location of each change should be based on engineering judgment on a case by case basis taking into consideration the full set of guidelines.

The operators recommend the timing goals in Figure 5 below for the availability of the Harmonized Global CDMA 3G standard based on the current market needs.

| Harmonized DS and TDD Mode | Timing Goals |
|---|---------------------|
| <ul style="list-style-type: none"> • Specification with “Hooks” completed as required for implementation of Phase 2. | December 1999 |
| <ul style="list-style-type: none"> • Extensions specified to support ANSI-41 core networks. | February 2000 |

| Harmonized MC Mode | Timing Goals |
|---|---------------------|
| <ul style="list-style-type: none"> • Specification with “Hooks” completed as required for implementation of Phase 2. | March 2000 |
| <ul style="list-style-type: none"> • Extensions specified to support GSM core networks. | June 2000 |

Figure 5: G3G Standards Timetable

5. Process

The objective of the process is to ensure the OHG Harmonization Agreement can be implemented in a timely manner.

The OHG Toronto Output Documents to be submitted to the following:

| | | |
|-------|-------------------|--|
| TG8/1 | Beijing Meeting | May 31 st – June 11 th |
| 3GPP | RAN WG 1 | June 1 st – 4 th |
| 3GPP2 | TSG-R, San Diego | June 22 nd |
| ARIB | | |
| ETSI | | |
| TTA | | |
| TTC | | |
| TIA | TR45, Kansas City | June 2 nd - 3 rd |
| TIP1 | | |

OHG requests that Layer 1 – 3 experts within 3GPP and 3GPP2 jointly determine the Hooks in the 1999 release of the 3GPP specifications needed for the extensions to meet the service requirements specified in the OHG Technical Framework Document. A similar process should be carried out for Multi-Carrier. It will also help the valuable human resources of 3GPP and 3GPP2 to work together to achieve common goal as opposed to working on two separate directions.

OHG further request that there should be minimal delay in achieving this goal. To support these efforts, the OHG and the manufacturers are be willing to host extra 3G standard

meetings and provide the necessary resources. Progress reports should be given to OHG after every 3GPP/3GPP2 meeting.

OHG has carried out its primary mission and therefore does not see a need for further meetings at this time. However, operators want to ensure that their recommendations are implemented in 3GPP & 3GPP2 in a timely fashion.

The OHG & MHG (Manufacturers Harmonization Group) Ad-Hoc plans to form transition teams to support this document and navigate it through the standard bodies. The members of this transition team is still to be finalised but a proposed list is shown in Appendix A.

OHG also feels that for complete harmonization, 3GPP & 3GPP2 should consider merging into a single body no later than December 2000. This merger will provide focus in developing a unified core network for the future as well as ensuring that Air Interfaces and the associated protocol layers in the future will be completely harmonized. To achieve this goal, the OHG will assist in the merger process. OHG is willing to sponsor a meeting between the two 3GPP leadership to facilitate the merger discussions.

The following Service Providers support this document:

AirTouch
Ameritech
Bell Atlantic Mobile
Bell Mobility
BellSouth Cellular Corp
Cable & Wireless
China Telecom
DDI
GTE Wireless
Hansol PCS Co.Ltd.
IDO
Japan Telecom
KDD Inc.
Korea Telecom Freetel
LG Telecom
Microcell Connexions
New Zealand Telecom
Nissan Communication System Ltd.
NTT DoCoMo
Omnipoint Corporation
Omnitel Pronto Italia
SBC Communications
Shinsegi Telecomm, Inc
SingTel Mobile
SK Telecom
Telia
Telstra
TIM (CSELT)
T-Mobil
Vodafone

Operators invited some manufacturers to assist in their decision process, these manufacturers have expressed their support for this document and are listed below:

LGIC

Lucent Technologies Inc.

Matsushita Communication Industrial Co., Ltd.

Motorola

NEC Corporation

Nokia

Nortel Networks

Samsung Electronics Company

Siemens

Sony Corporation

Telefonaktiebolaget LM Ericsson

Appendix A – OHG Transition Team (PROVISIONAL LIST)

| | |
|--------------------|-----------------|
| Dean Prochaska | Sprint Spectrum |
| Fumio Watanabe | KDD |
| Gary Jones | Omnipoint |
| Gerry Flynn | Bell Atlantic |
| Li Mofang | China Telecom |
| Matthias Schroeter | T - Mobil |
| Mel Frerking | Bell South |
| Peter Barry | AirTouch |
| Giovanni Romano | CSELT (TIM) |
| Seizo Onoe | NTT DoCoMo |
| Thomas Beier | Telia |
| Vino Vinodrai | Bell Mobility |
| YK Kim | LG Telecom |



OHG Agreement

Presented By:

Paola Tonelli

3GPP, TSG SA

Miami, June 21th 1999

Presentation Summary

- **What is OHG?**
- **Benefits of Harmonization**
- **OHG Documents**
- **Highlights of Agreement**
- **Way Forward**

Who is OHG?


- **Initiated in Beijing October 1998 at China Telecom Harmonization workshop**
- **Agreed to form a group in November 1998 in London**
- **First Meeting in Beijing - January 1999**
 - Harmonized Global 3G (G3G) Specification Framework for ITU IMT-2000 CDMA Proposal
 - IPR Letter
- **Meetings in San Francisco, London, Tokyo & Toronto**
- **OHG is a diverse group of global operators with a common desire to increase the wireless subscriber base**
- **Started with ten operators from Europe, Asia and North America**
- **Today membership stands at 38**

Leadership

- **Chairman**
Madame Li Mofang
- **Working Chairs**
**Paola Tonelli (replaces
Peter Barry)**
Vino Vinodrai
- **Supporting Editors**
Gerry Flynn
Fumio Watanabe
Mel Frerking
Matthias Schroeter

GLOBAL 3G SUBSCRIBER FORECAST


The Ovum Forecast (Oct 1997)*

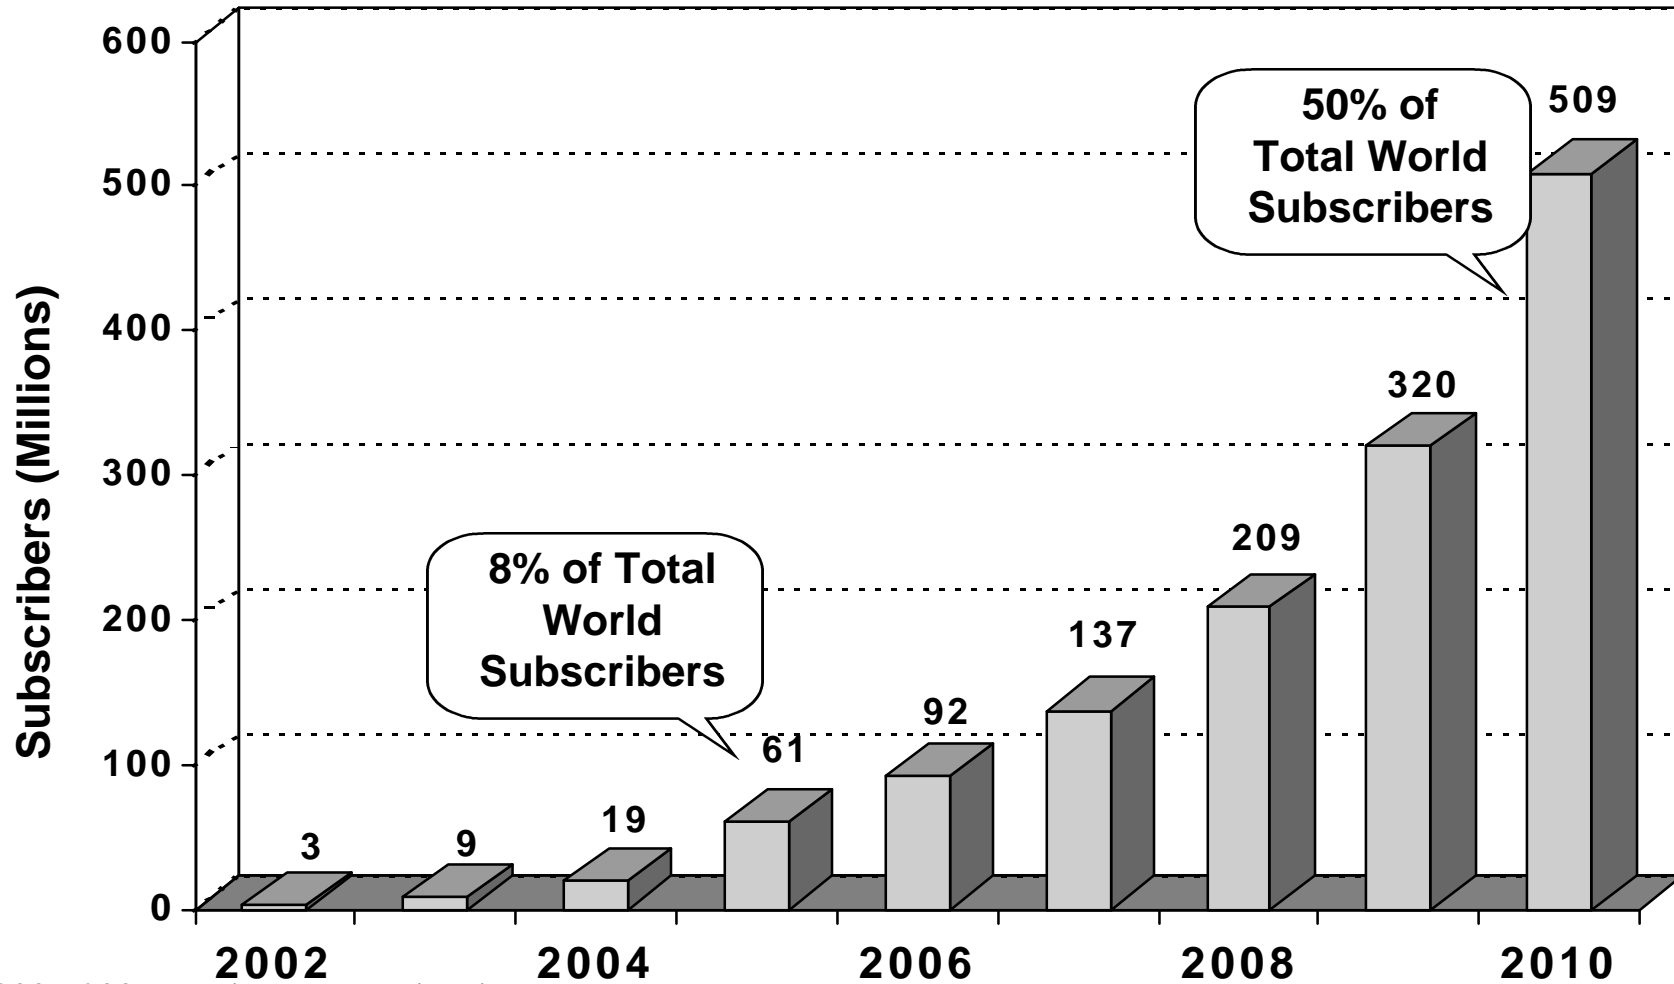

*2006-2009 numbers extrapolated

Changed U.S. and Western Europe numbers to assumed initial penetration in 2003 (1% at 2003, 3% at 2004)

G3G CDMA Standard

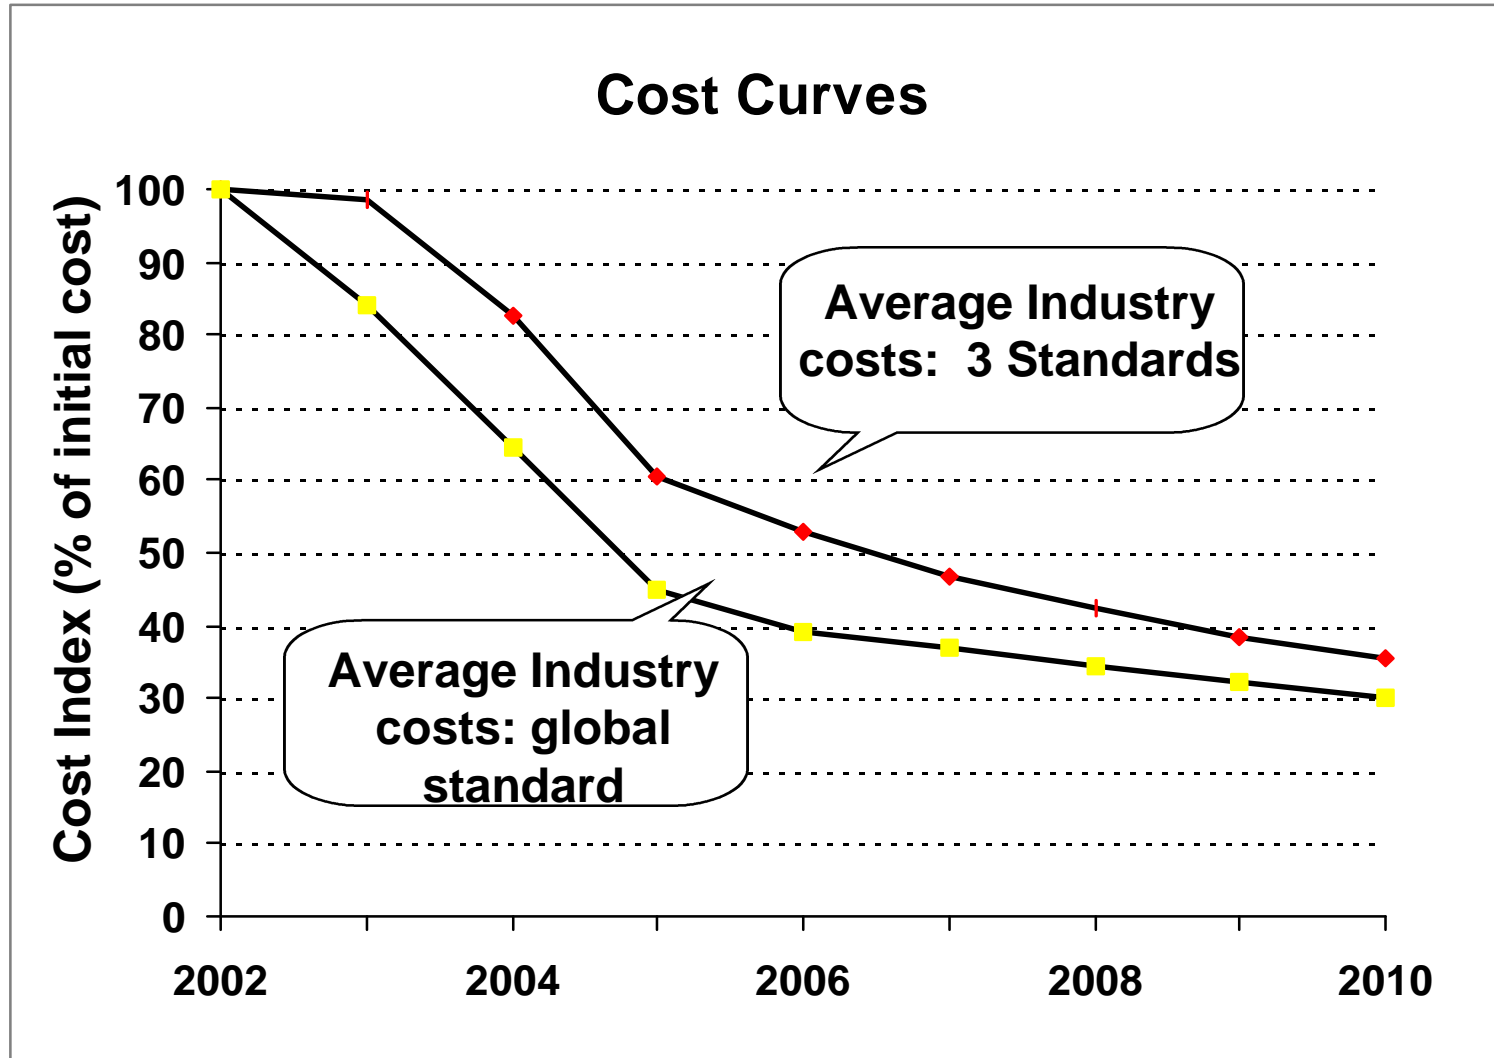


G3G CDMA STANDARD

- **There is one unified CDMA Standard for 3G**
 - manufacturers can treat them as variations of one product as industry co-operation makes the various FDD modes more similar over time,
 - IS 136 operators converge with GSM operators and deploy G3G CDMA for 3G so that manufacturers can address a combined market for 3G
 - Because of the convergence between GSM, IS 136, PDC and IS 95 for 3G, the global volumes for 3G are combined and makes it easier to realize scale benefits between modes as a result of harmonization e.g: PA's are common, channel elements are common etc.
 - This probably idealizes the situation but does provide a perspective of what the maximum benefits could be


BENEFITS OF A G3G CDMA STANDARD

- **The potential economic benefits to the operators of a unified standard are:**
 - increased penetration and usage because operators can achieve the same cash flows at lower prices to users
 - more rapid introduction of new services as these development costs are spread across a larger installed base
 - easier global roaming for 3G which can stimulate demand
 - potential for a unified ANSI-41/GSM Map direction in the long term
- **The following graphs try to quantify the cost savings (NPV of total capital cost savings and savings in terminal subsidies) and increased penetration that could arise from a global standard.**
- **It should be noted however that the strategic implications of the other benefits cannot be ignored and may also be sufficient to justify support of harmonization even in their own right.**

GLOBAL STANDARD: INCREASED SUBSCRIBER PENETRATION

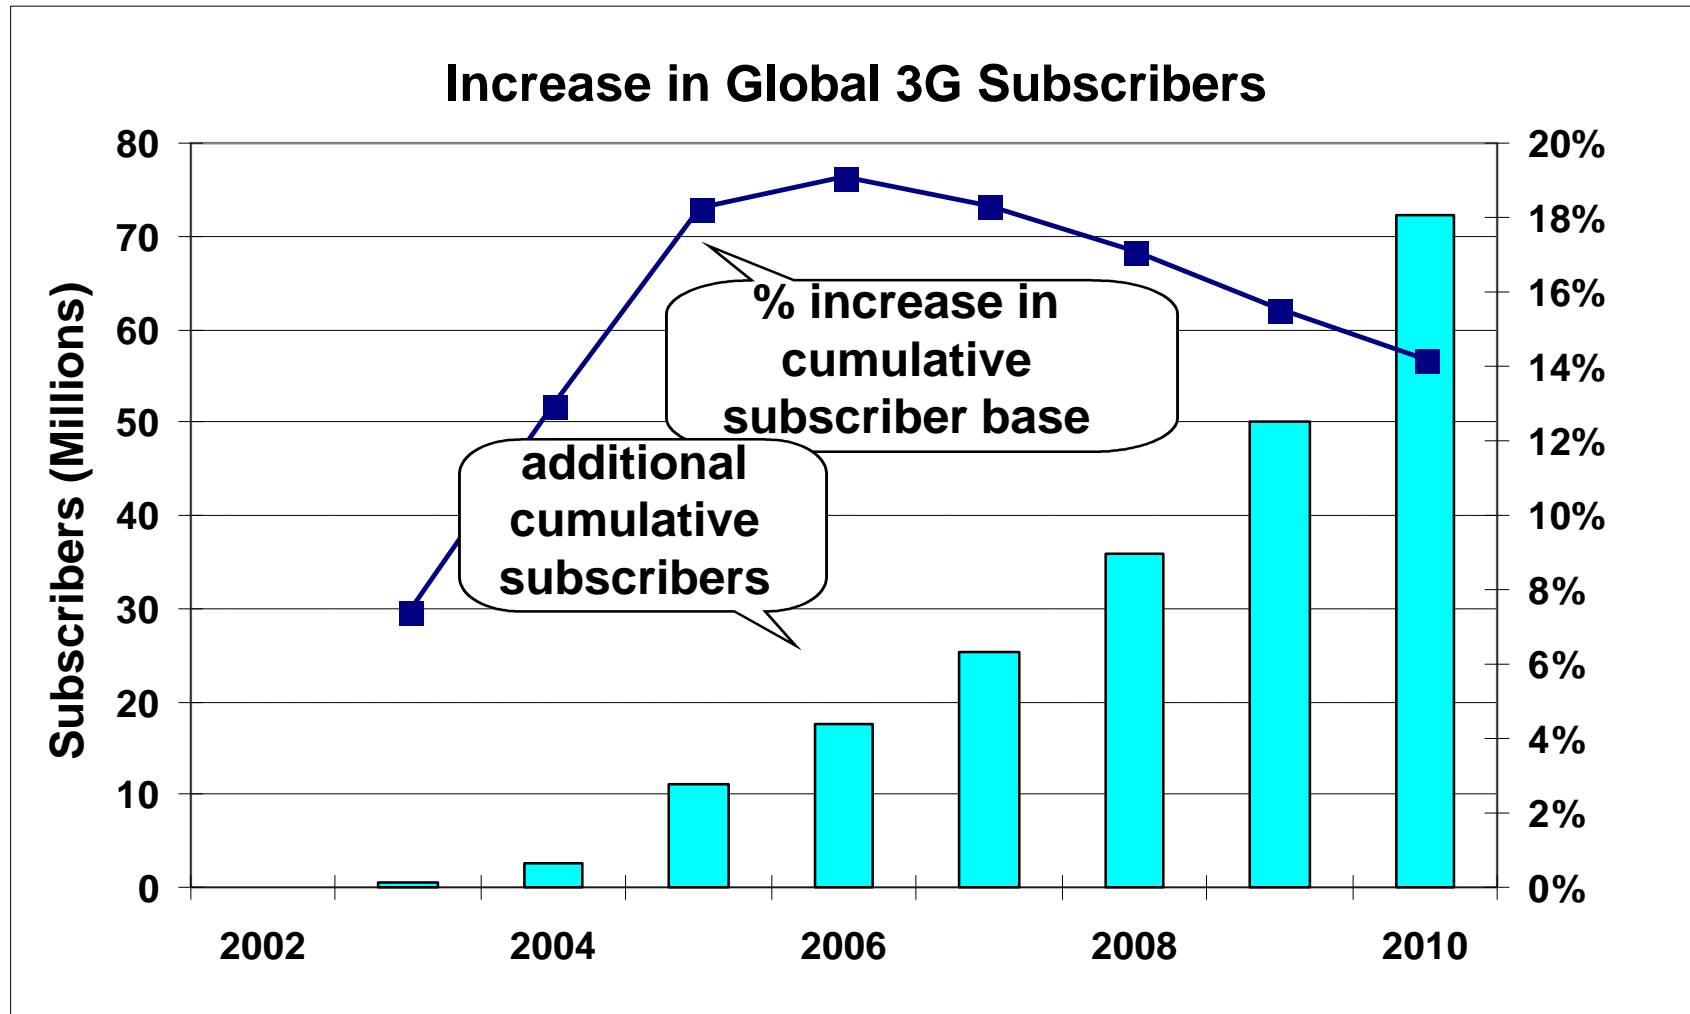

GLOBAL STANDARD: POTENTIAL FOR INCREASED USAGE

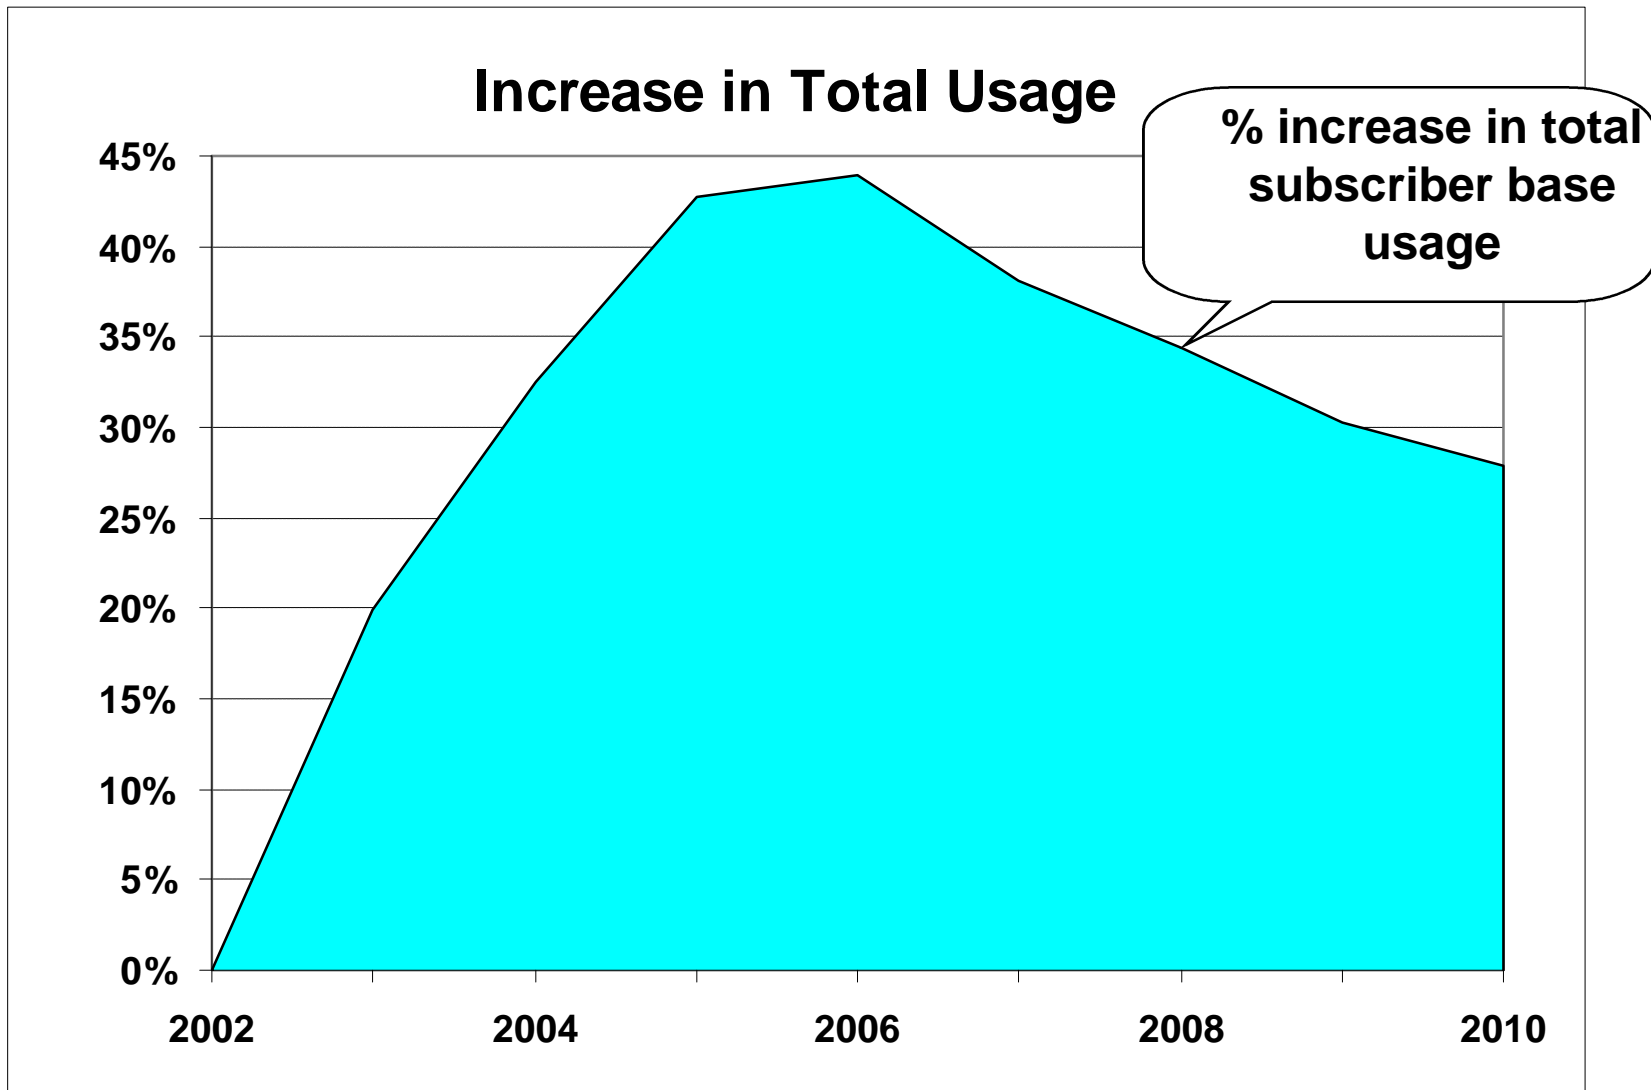

BENEFITS OF A GLOBAL STANDARD

| Global Standard Benefits | 2005 | 2010 |
|--|-------------------|-------------------|
| % Cost benefit to industry | 26% | 15% |
| % Cost benefit to Operators | 33% | 18% |
| Additional subscribers | 11 Million | 72 Million |
| % increase in total subscriber base | 18% | 14% |
| % increase in total usage | 43% | 28% |


There is significant upside benefit for the industry from a global 3G (G3G) standard for the operators

Specification Framework: Guiding Principles

- Be focused on customer needs for widespread availability of voice and high speed non-voice services.
- Maximize ability of customers to roam with their services across regions, countries and systems.
- Minimize 3G costs for the mobile industry.
- Maximize the ability of the Information Technology, Internet and Personal Computer industries to provide mobile applications, solutions, and subscriber devices.
- Provide a smooth and compatible evolution path from existing infrastructure.
- Be completed in time to meet the commercialization plans of all countries/regions.
- Recognize that there are two well established core network architectures evolving towards a common 3G core network over the next 5 – 10 years (i.e. 2008).
- The IPR impact on the industry should be minimum.
- There should be free flow of IPRs to allow innovation and greater customer choice.
- Accommodate regional needs for different spectrum allocations.
- Use technical approaches and parameters that meet customer requirements.

ITU RTT Proposals & Harmonization

ITU-R CDMA RTT Submissions as of
June 30, 1998

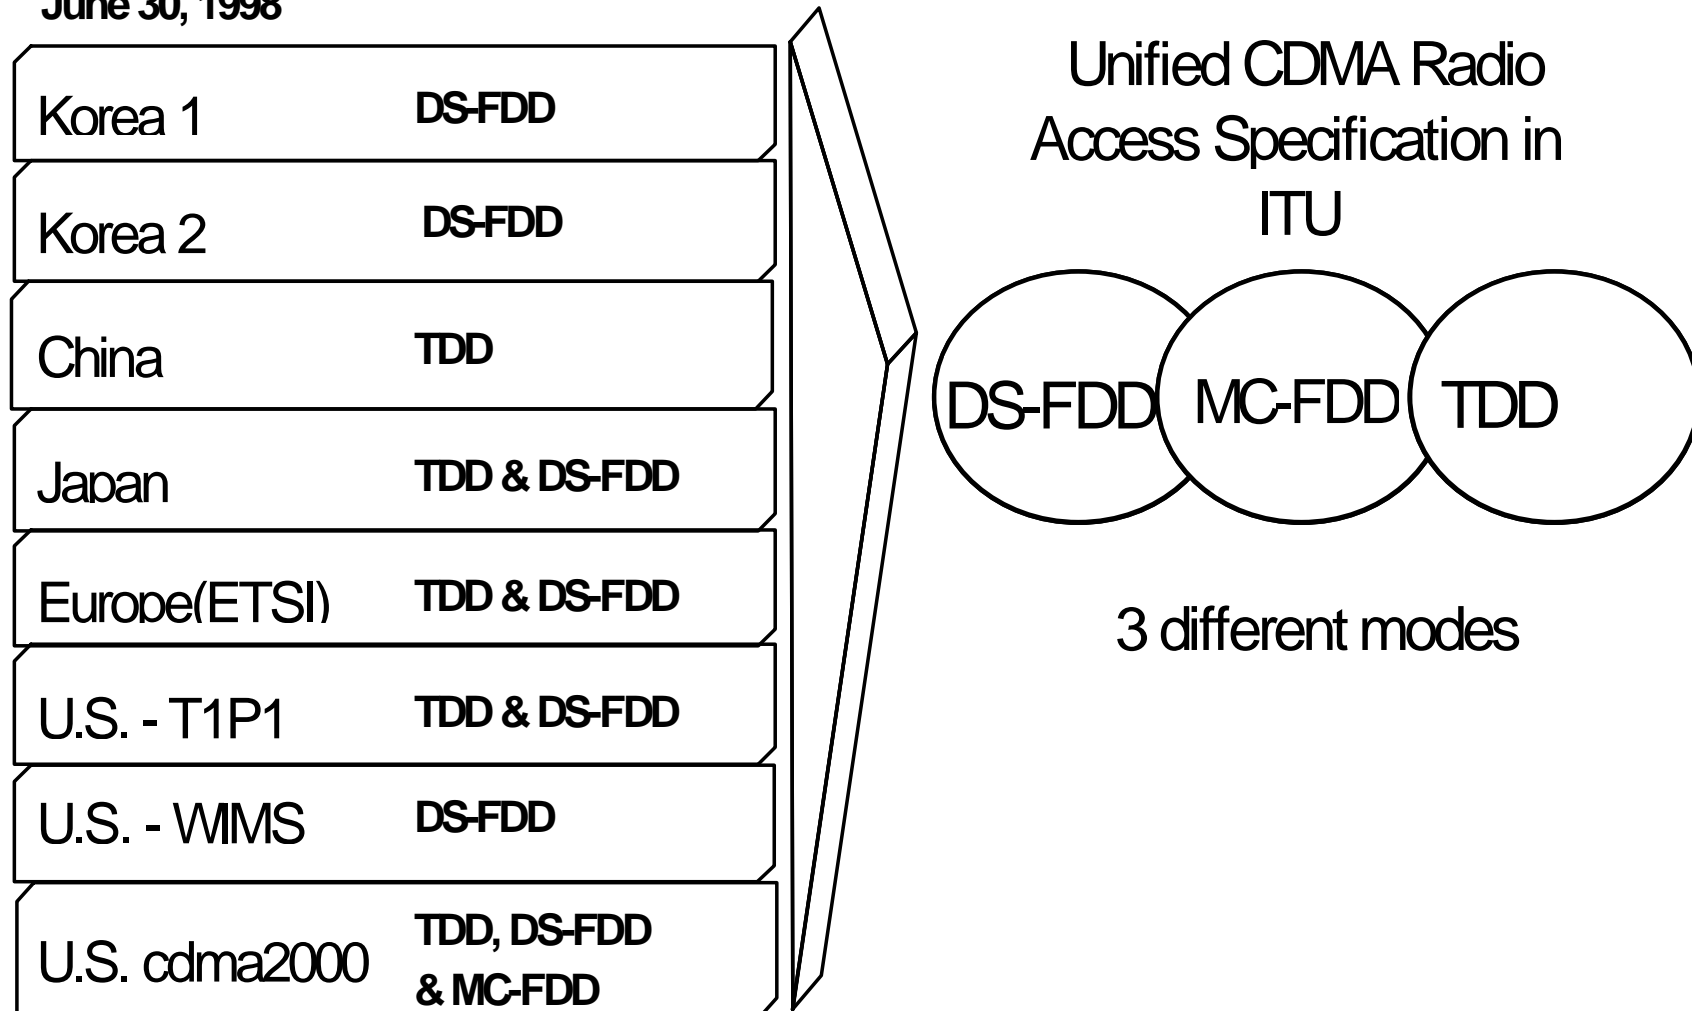

Three Modes

- **There will be only THREE MODES of operation**
 - **Direct Spread i.e 5,10, MHz etc.**
 - **Multi Carrier i.e. 1x, 3x, etc**
 - **TDD**
- **The objective is a single CDMA standard with three modes of operation**
- **Direct Spread from cdma2000 and WCDMA will be merged into a SINGLE standard operating at a COMMON CHIP RATE**
- **TDMA is a separate issue and is addressed as a candidate for IMT 2000**

G3G Harmonization Proposal

Radio Access
"Family of 3G
CDMA Modes"

FDD Mode 1
Direct Sequence

FDD Mode 2
Multi-Carrier

TDD Mode

Flexible Connection between RTT Modes and
Core Networks based on operator needs


Core Network
"Family of 3G
Systems"

Evolved GSM
MAP

Evolved
ANSI-41

Core Network
3G Inter Family
Roaming

Network to
Network
Interface

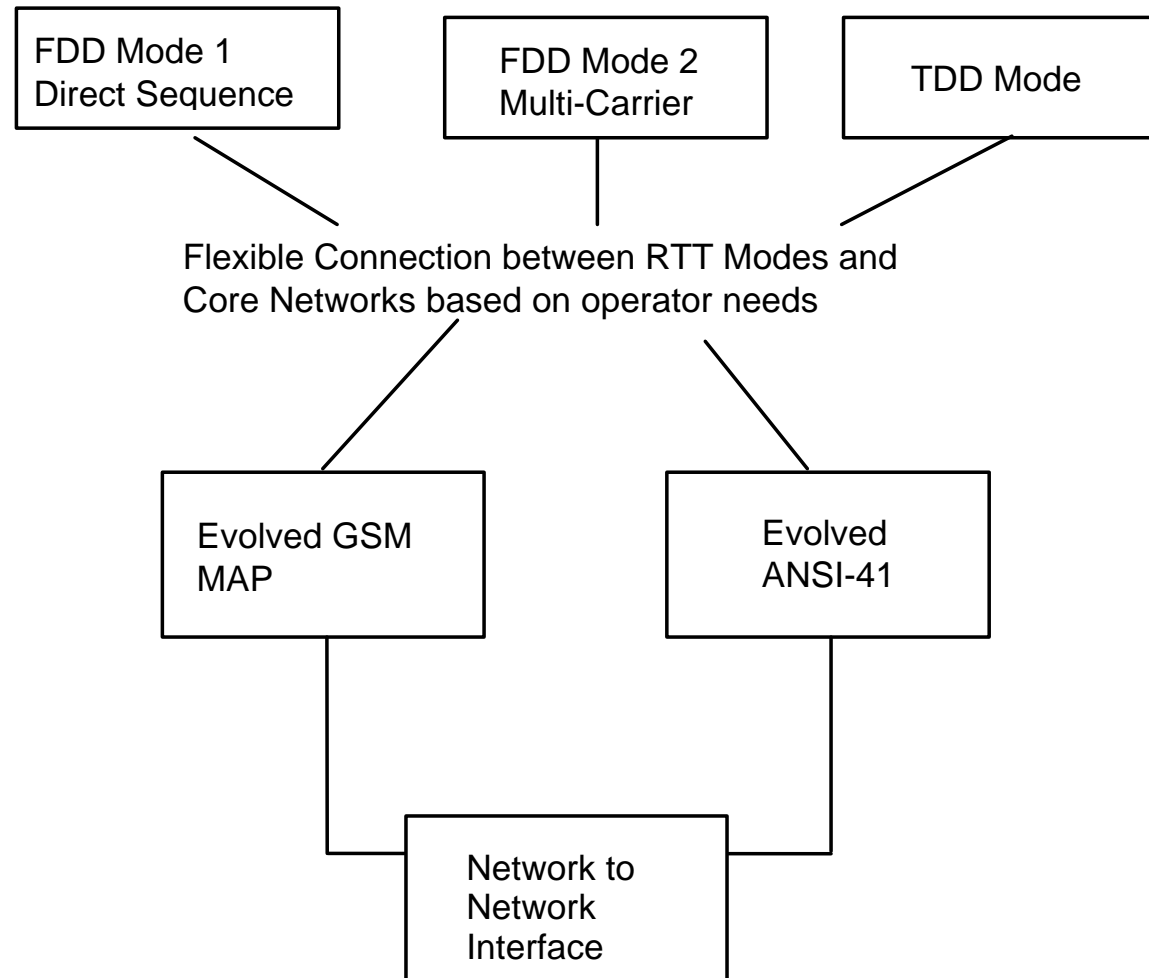

G3G CDMA Technical Specification

- **Key Parameters are as follows:**
 - The harmonized standard for DS will be based on the W-CDMA proposal.
 - The harmonized standard for MC will be based on the cdma2000 proposal.
 - The key parameters for the harmonized standard for the TDD mode have not been considered in detail with the exception of a recommendation on the chip rate.

Inter Base Station Synchronization

- **The W-CDMA asynchronous and synchronous approach shall be used for the DS mode. This approach uses different codes to identify base stations**
- **The cdma2000 approach shall be used for the Multi-Carrier mode**

Forward Link Pilot Structure

- **Common CDM Pilot**
- **Dedicated TDM Pilot**


Chip Rate

- **3.84 Mcps for Direct Spread**
- **3.6864 Mcps for Multi-Carrier**
- **3.84 Mcps for TDD**

Harmonization Requirements

- **ANSI 41 and GSM MAP based services should be fully supported in the Radio Access Network associated with all three 3G CDMA modes.**
- **Supports functionality based on synchronous operation such as location calculation, etc.**
- **Supports seamless handoff between the harmonized DS and MC including IS-95 for ANSI 41 and the equivalent to this for UMTS/GSM.**
- **Minimize the complexity of dual-mode and multi-band terminals and equipment.**

Protocol Structure

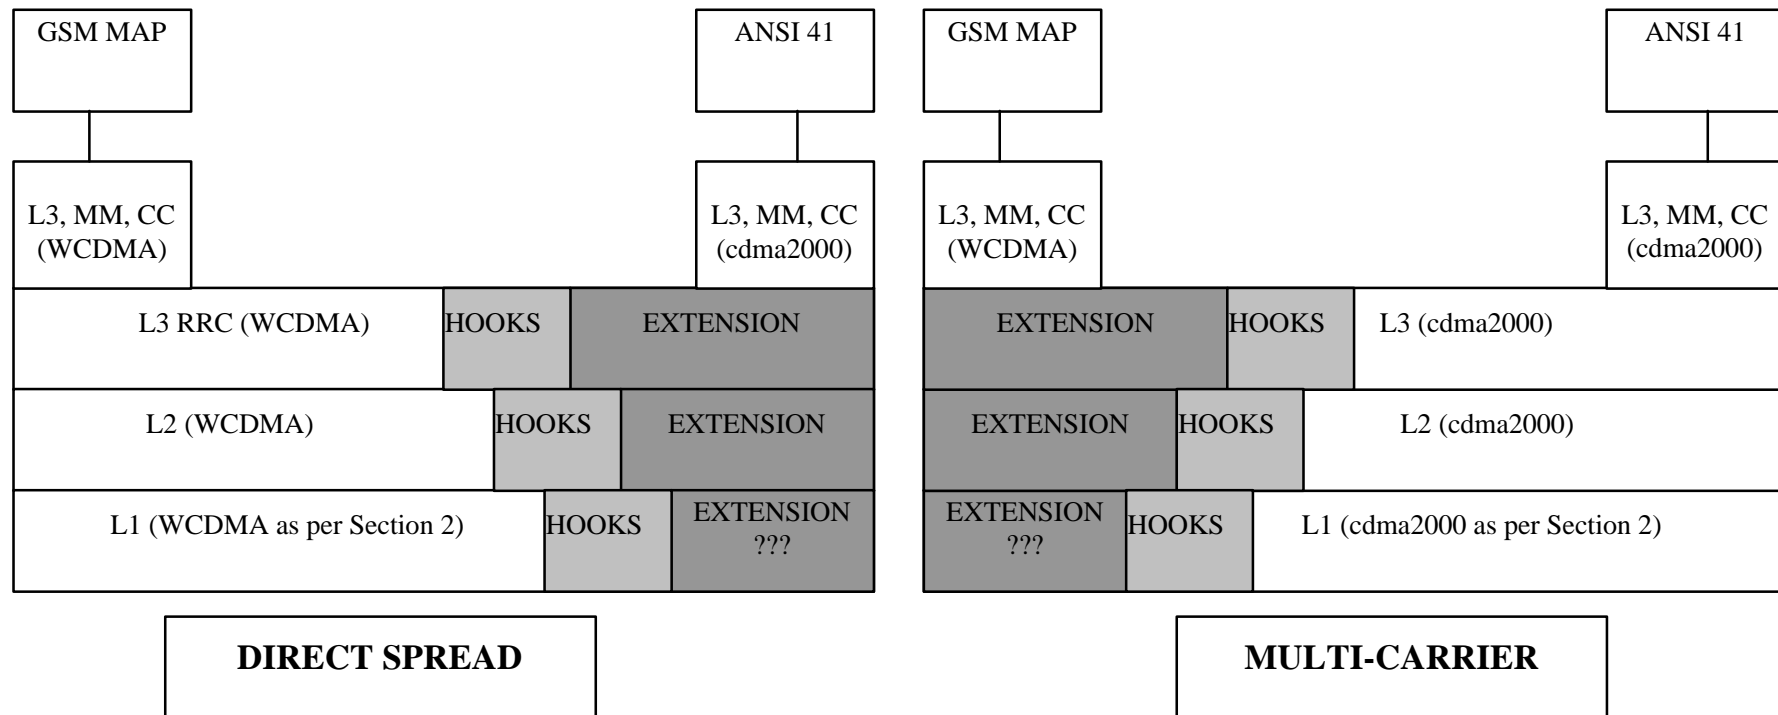

Guiding Principles

- **3GPP and 3GPP2 shall maintain their 1999 release schedules**
- **The Hooks required to implement the harmonized CDMA standard must be identified as soon as possible to allow prioritization of work for inclusion in Release 99 and to ensure completion of the work in Phase 2 is facilitated**
- **The objective is for all Hooks to be specified by the end of 1999**
- **All Hooks specified by the end of 1999 should be included in Release 1999**
- **Changes to L1 should be minimized**
- **Changes to the core networks should be minimized**
- **The location of each change should be based on engineering judgment on a case by case basis taking into consideration the full set of guidelines**

G3G Timetable

| Harmonized DS and TDD Mode | Timing Goals |
|---|---------------------|
| <ul style="list-style-type: none">• Specification with “Hooks” completed as required for implementation of Phase 2. | December 1999 |
| <ul style="list-style-type: none">• Extensions specified to support ANSI-41 core networks. | February 2000 |

| Harmonized MC Mode | Timing Goals |
|---|---------------------|
| <ul style="list-style-type: none">• Specification with “Hooks” completed as required for implementation of Phase 2. | March 2000 |
| <ul style="list-style-type: none">• Extensions specified to support GSM core networks. | June 2000 |

Process

- **Layers 1 - 3 experts in 3GPP & 3GPP2 to meet jointly to determine Hooks for both DS & MC**
- **Speed is of essence to maintain 1999 Release targets**
- **OHG Transition Team to assist SDO for queries**
- **OHG is willing to host extra meetings to meet the targets**
- **Hold more joint meetings of 3GPP & 3GPP2**
- **3GPP & 3GPP2 should merge by December 2000**
 - Preference will be for earlier merger,
- **Leadership meeting should be held to start the merger process**

Operator Support

AirTouch Communications

Bell Atlantic Mobile

BellSouth Cellular Corp

British Telecommunications plc

China Telecom

DDI

GTE Wireless

IDO

KDD Corporation

LG Telecom

New Zealand Telecom

NTT DoCoMo

Omnitel Pronto Italia

Shinsegi Telecomm, Inc

SK Telecom

Telia

TIM (CSELT)

Vodafone

Ameritech

Bell Mobility

BT Cellnet

Cable & Wireless

Cleartel

France Telecom Mobiles

Hansol PCS Co.Ltd.

Japan Telecom

Korea Telecom Freetel

Microcell Connexions

Nissan Communication System Ltd

Omnipoint Corporation

SBC Communications

SingTel Mobile

Sprint PCS

Telstra

T-Mobil

Manufacturer Support

LG Information & Communications, Ltd.

Lucent Technologies Inc.

Matsushita Communication Industrial Co., Ltd.

Motorola

NEC Corporation

Nokia

Nortel Networks

Qualcomm

Samsung Electronics Company

Sharp

Siemens

Sony Corporation

Telefonaktiebolaget LM Ericsson