

Agenda Item: 7.3 – NDS session
Source: Ericsson
Title: MAP DOI Status
Document for: Discussion and decision

1 Scope and objectives

The main objective of this document is to report on the status of the MAPsec DOI in the IETF, the process forward, and the recent modifications.

The following is proposed in this document:

1. SA3 continues with MAP DOI and IKE as the approach for KAC-KAC protocol.
 2. Process-wise, SA3 first makes a final agreement on the MAP DOI contents, put the MAP DOI document as an informational appendix in the technical specifications produced by 3GPP, proceed with the IETF publication (editorial process only for Informational RFCs). During this process the necessary number for the DOI is gotten from IANA. When the RFC is official, SA3 replaces the appendix with a reference.
 3. A set of small modifications to the MAP DOI are accepted as defined in the –01 version of the Internet-Draft. These include limiting the full scope of the IKE protocol to a certain profile.
-

2 Introduction

The proposed architecture for MAPSEC and its key management is shown in Figure 1. The following interfaces have been defined for MAPSec:

Zd (KAC-KAC): used to negotiate MAPSec SAs between MAP security domains. The traffic over Zd consists only of IKE negotiations, and employs the MAPSec DOI (being standardised). The SAs negotiated are valid for all the MAP nodes within the security domain.

Ze (KAC-NE): used for transport MAPSec SAs from the KAC to the MAP-NE.

Zf (NE-NE): used for actual secured MAP communication .

This document deals with the details of the Zd Interface.

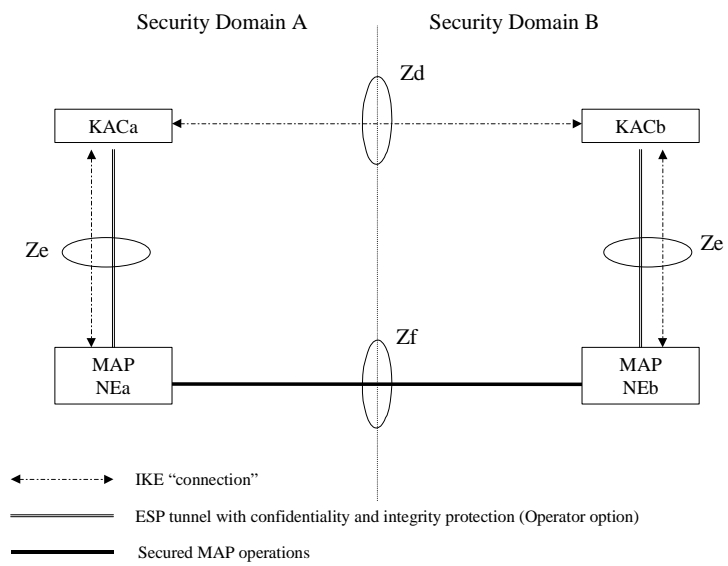


Figure 1. Security Architecture proposed for MAPSec

3 Status in the IETF

This presents the status of the MAP DOI in the IETF.

The MAP DOI has been submitted as an Internet-Draft, and is intended to be progressed as an Informational RFC. This means that it is handled by the IETF as for information only, may be presented to a working group, is checked for conflicts with existing IETF work, and is subject to the editorial process of the IETF. But it is not subject to the normal IETF working group processing. Nevertheless, the DOI has been announced to the mailing list of the IP Security WG, and has been presented in the December 2000 IETF meeting in San Diego. The presentation described the MAP DOI and asked for technical and administrative feedback. The comments that were received were:

- A comment by Hugh Daniel (open source and crypto activist) asked why we didn't select something better than IKE, e.g. Photuris as a base. (Photuris isn't as widely available as IKE, may be better but is also unproven, and would not create any synergy effects for securing IP traffic with IPsec/IKE.)
- A comment by Hilarie Orman noted that the way we reuse ISAKMP was exactly as was intended in the original specification.
- The chairman of the group, Ted Tso, told that the process for an Informational RFC is an easy one, and is not hampered by any ban on new IPsec features. The allocation of a DOI number from IANA should be simple, even if the space is small: there aren't that many possible DOI candidates. Any further numbers within the Informational RFC can be allocated as specified by the authors, e.g. from the 3GPP as SA3 would like to do in this case.
- Siemens said that there had been work on TCAP security, but that work is no longer alive (which is one of the reasons for doing it at the MAP level).
- Several people commented later that the KAC mode was left out from the presentation. Yes it was, for reasons that it doesn't affect the protocol on the wire and might have raised some unnecessary opposition in the IETF who want pure end-to-end solutions. Siemens commented that the KAC mode is more scalable than the node-to-node mode, due to reasons of addressing mappings between SS7 and IP.
- There have been no comments since then on the mailing list.

4 Process Forward

This section describes how Ericsson understands the process should go forward from this point. The following quote has been taken from RFC 2026:

4.2 Non-Standards Track Maturity Levels

Not every specification is on the standards track. A specification may not be intended to be an Internet Standard, or it may be intended for eventual standardization but not yet ready to enter the standards track. A specification may have been superseded by a more recent Internet Standard, or have otherwise fallen into disuse or disfavor.

Specifications that are not on the standards track are labeled with one of three "off-track" maturity levels: "Experimental", "Informational", or "Historic". The documents bearing these labels are not Internet Standards in any sense.

...

4.2.2 Informational

An "Informational" specification is published for the general information of the Internet community, and does not represent an Internet community consensus or recommendation. The Informational designation is intended to provide for the timely publication of a very broad range of responsible informational documents from many sources, subject only to editorial considerations and to verification that there has been adequate coordination with the standards process (see section 4.2.3).

Specifications that have been prepared outside of the Internet community and are not incorporated into the Internet Standards Process by any of the provisions of section 10 may be published as Informational RFCs, with the permission of the owner and the concurrence of the RFC Editor.

4.2.3 Procedures for Experimental and Informational RFCs

Unless they are the result of IETF Working Group action, documents intended to be published with Experimental or Informational status should be submitted directly to the RFC Editor. The RFC Editor will publish any such documents as Internet-Drafts which have not already been so published. In order to differentiate these Internet-Drafts they will be labeled or grouped in the I-D directory so they are easily recognizable. The RFC Editor will wait two weeks after this publication for comments before proceeding further. The RFC Editor is expected to exercise his or her judgment concerning the editorial suitability of a document for publication with Experimental or Informational status, and may refuse to publish a document which, in the expert opinion of the RFC Editor, is unrelated to Internet activity or falls below the technical and/or editorial standard for RFCs.

To ensure that the non-standards track Experimental and Informational designations are not misused to circumvent the Internet Standards Process, the IESG and the RFC Editor have agreed that the RFC Editor will refer to the IESG any document submitted for Experimental or Informational publication which, in the opinion of the RFC Editor, may be related to work being done, or expected to be done, within the IETF community. The IESG shall review such a referred document within a reasonable period of time, and recommend either that it be published as originally submitted or referred to the IETF as a contribution to the Internet Standards Process.

If (a) the IESG recommends that the document be brought within the IETF and progressed within the IETF context, but the author declines to do so, or (b) the IESG considers that the document proposes something that conflicts with, or is actually inimical to, an established IETF effort, the document may still be published as an Experimental or Informational RFC. In these cases, however, the IESG may insert appropriate "disclaimer" text into the RFC either in or immediately following the "Status of this Memo" section in order to make the circumstances of its publication clear to readers.

Documents proposed for Experimental and Informational RFCs by IETF Working Groups go through IESG review. The review is initiated using the process described in section 6.1.1.

As an informational RFC, the first priority is to have a final 3GPP agreement on what the MAP DOI is, in all of its details. Then we can start the IETF process. This will be an editorial process only – if there are conflicts with ongoing IETF work it is possible that Informational RFCs have get IESG (Internet Engineering Steering Group) or WG treatment. Ericsson doesn't believe this is the case in this situation, however.

Starting the IETF publication process happens by agreeing that the latest revision of the Internet-Draft is the final one, and then submitting that to be published by the RFC Editor. This will take some months.

During the RFC editing process IANA, the number registry in IETF, will assign the single new number that is needed for this DOI: the DOI number, to differentiate it from e.g. IPsec DOI and to allow 3GPP to define the interpretation of the remaining numbers.

The ISAKMP RFC states that the DOI numbers can only be allocated for standards track IETF RFCs. However, given that the field size is 32 bits, and it only has few existing or foreseeable values, and that the IPsec WG chairman has said that getting the number should not be a problem leads us to think that getting the number should not be a problem. Nevertheless, we have asked IANA for an opinion in this matter. As of now, there is no answer.

In conclusion, we propose the following process:

1. Agree on the DOI Internet Draft in 3GPP SA3.
2. Put the DOI to an appendix of the technical specification 33.200 or publish it as a separate technical report by the 3GPP. The purpose of this action is to provide a temporary specification that is used while step 3 is progressing. Also, it is possible to use this method as a fallback in case of unforeseen problems in the IETF; note that as the current KAC is a single node it would be possible for 3GPP to unanimously decide to "misuse" the DOI numbers without any danger of real conflicts.
3. Send the Internet Draft to the RFC Editor.
4. When Step 3 is ready, replace the appendix in the TS with a reference to the RFC.

5 MAP DOI Modifications

This section describes the modifications in the -01 version of the MAP DOI document, and presents the motivation for these modifications. The modifications are as follows:

- IKE has been profiled in section 3.5 to simplify the requirements for KACs; not all IKE features and algorithms need to be supported.
- All MAPSEC-specific phase 2 notifications have been removed for simplicity.
- AES-MAC has been specified instead of HMAC_SHA1. Note that Phase 1 has been specified to use 3DES and SHA1 since no RFC exists yet to define the use of AES and especially AES-MAC for IKE Phase 1.
- Attribute parsing requirements were simplified since only a single kind of lifetimes are supported.
- MAP_BLOWFISH has been removed since 3GPP hasn't defined it.
- MAP_NULL has been removed and protection profiles are expected to be used instead to signify that no security is needed.
- Rules for assigning new numbers within this DOI have been clarified.

6 Conclusion and Discussion

Ericsson proposes that the outlined process to acquire necessary DOI numbers and publish the Informational RFC are initiated, and that the modifications to the MAP DOI are accepted.

Network Working Group
INTERNET-DRAFT
Category: Informational
<draft-arkko-map-doi-01.txt>

J. Arkko
R. Blom
Ericsson
22 February 2001

The MAP Security Domain of Interpretation for ISAKMP

Status of this Memo

This document is an Internet Draft and is in full conformance with all provisions of Section 10 of RFC2026 [Bra96]. Internet Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and working groups. Note that other groups may also distribute working documents as Internet Drafts.

Internet Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at
<http://www.ietf.org/ietf/lid-abstracts.txt>

The list of Internet-Draft Shadow Directories can be accessed at
<http://www.ietf.org/shadow.html>.

To learn the current status of any Internet Draft, please check the "lid-abstracts.txt" listing contained in the Internet Drafts Shadow Directories on ftp.is.co.za (Africa), nic.nordu.net (Europe), munnari.oz.au (Australia), ds.internic.net (US East Coast), or ftp.isi.edu (US West Coast).

The distribution of this memo is unlimited. It is filed as <draft-arkko-map-doi-01.txt>, and expires August 15, 2001. Please send comments to the authors.

Contents

1. Abstract
2. Terms and Definitions
3. Introduction
 - 3.1. MAP
 - 3.2. Requirements for a DOI
 - 3.3. MAP Security
 - 3.4. Network Architecture
 - 3.5. Reuse of IPSEC DOI and IKE
 - 3.6. Reuse of KKMP
4. Definition

- 4.1 Naming Scheme
- 4.2 MAPSEC Situation Definition
 - 4.2.1 SIT_IDENTITY_ONLY
- 4.3 IPSEC Security Policy Requirements
 - 4.3.1 Protection profiles
 - 4.3.2 Key Management Issues
 - 4.3.3 Static Keying Issues
 - 4.3.4 Host Policy Issues
 - 4.3.5 Certificate Management
- 4.4 MAPSEC Assigned Numbers
 - 4.4.1 MAPSEC DOI Number
 - 4.4.1.1 MAPSEC Security Protocol Identifier
 - 4.4.1.1.1 PROTO_ISAKMP
 - 4.4.1.1.2 PROTO_MAPSEC_MAPSEC
 - 4.4.2 MAPSEC ISAKMP Transform Identifiers
 - 4.4.2.1 KEY_IKE
 - 4.4.3 MAPSEC Transform Identifiers
 - 4.4.3.1 MAPSEC_AES
- 4.5 MAPSEC Security Association Attributes
 - 4.5.1 Required Attribute Support
 - 4.5.2 Attribute Negotiation
 - 4.5.3 Lifetime Matching
- 4.6 MAP Security Payload Content
 - 4.6.1 Identification Payload Content
 - 4.6.2 IPSEC Notify Message Types
- 4.7 MAPSEC Key Exchange Requirements
- 5. Security Considerations
- 6. IANA Considerations
 - 6.1 MAPSEC Situation Definition
 - 6.2 MAPSEC Security Protocol Identifiers
 - 6.3 MAPSEC ISAKMP Transform Identifiers
 - 6.4 MAPSEC MAP Security Transform Identifiers
 - 6.5 MAPSEC Security Association Attributes
 - 6.6 MAPSEC Identification Type
 - 6.7 MAPSEC Notify Message Types
 - 6.8 MAPSEC Protection Profiles
- 7. Key Derivation for MAP Security
- 8. Modification History
- 9. Intellectual property rights
- 10. Acknowledgments
- 11. References
- 12. Author's Address

1. Abstract

In the Global Mobile System (GSM) and Universal Mobile Telecommunication System (UMTS) networks, the MAP protocol plays a central role in the signaling communications between

the Network Elements (NEs). The Internet Security Association and Key Management Protocol (ISAKMP) defines a framework for security association management and cryptographic key establishment for the Internet. This framework consists of defined exchanges, payloads, and processing guidelines that occur within a given Domain of Interpretation (DOI). This document defines the MAP Security DOI (MAPSEC DOI), which instantiates ISAKMP for use with MAP when MAP uses ISAKMP to negotiate security associations.

2. Terms and Definitions

The keywords MUST, MUST NOT, REQUIRED, SHALL, SHALL NOT, SHOULD, SHOULD NOT, RECOMMENDED, MAY, and OPTIONAL, when they appear in this document, are to be interpreted as described in [RFC 2119].

3. Introduction

3.1. MAP

In the Global Mobile System (GSM) and Universal Mobile Telecommunication System (UMTS) networks, the MAP protocol plays a central role in the signaling communications between the Network Elements (NEs). User profiles, authentication, and mobility management are performed using MAP. MAP is an SS7 protocol and runs over the TCAP, SCCP, and MTP protocol layers, typically using dedicated PCM links.

The mobile networks are moving towards IP-based solutions, and completely IP based networks and new protocols such as SIP will in few years time replace MAP. However, MAP and SS7 signaling networks have to be supported during the transition time, and beyond, due to the need to retain legacy equipment in networks.

3.2. Requirements for a DOI

Within ISAKMP, a Domain of Interpretation is used to group related protocols using ISAKMP to negotiate security associations. Security protocols sharing a DOI choose security protocol and cryptographic transforms from a common namespace and share key exchange protocol identifiers. They also share a common interpretation of DOI-specific payload data content, including the Security Association and Identification payloads.

Overall, ISAKMP places the following requirements on a DOI definition:

- o define the naming scheme for DOI-specific protocol identifiers

- o define the interpretation for the Situation field
- o define the set of applicable security policies
- o define the syntax for DOI-specific SA Attributes (Phase II)
- o define the syntax for DOI-specific payload contents
- o define additional Key Exchange types, if needed
- o define additional Notification Message types, if needed

For instance, the IP Security DOI [IPDOI] describes the use of ISAKMP in the context of IP Security AH and ESP and the IP Compression protocols. The IP Security DOI also includes the details for how phase 1 authentication and protection of ISAKMP itself is performed between two IP nodes.

3.3. MAP Security

Due to the role of MAP in the authentication process of GSM phones, operators are concerned about its lack of cryptographic security support. For this reason a new protocol header has been developed to protect MAP messages, much in the same way as IPsec ESP protects IP packets. Also similarly, a key management mechanism is needed for MAP. The intention of the standardization entities working on MAP is to reuse an existing key management mechanism, namely ISAKMP, and parts of IKE and the IPsec DOI. The reasons for wishing to reuse ISAKMP include the following:

- o Avoiding the security and complexity pitfalls involved in new protocol design
- o Benefits of using the same protocol that IP-based (especially IPv6) nodes already use for other purposes.

The use of IKE and IPsec DOI for MAP Security is possible since the networks employing MAP Security will always have also network-to-network IP connectivity even if MAP and SS7 are still used for the signaling.

The remainder of this document details the instantiation of these requirements for using the GSM MAP protocol and its security to provide authentication, integrity, and/or confidentiality for MAP messages sent between cooperating Network Elements.

For a description of the GSM and MAP architecture, see [???] and [???].

3.4. Network Architecture

The MAP Security protocol may provide confidentiality, integrity, and replay protection services to the MAP messages it transports. The purpose of the MAP Security header in the protocol is to provide enough information to determine the MAP SA and Protection Modes used in securing the MAP operation that follows the header.

Typically, two NEs belong to two different operator networks. The arrangement is shown in Figure 1.

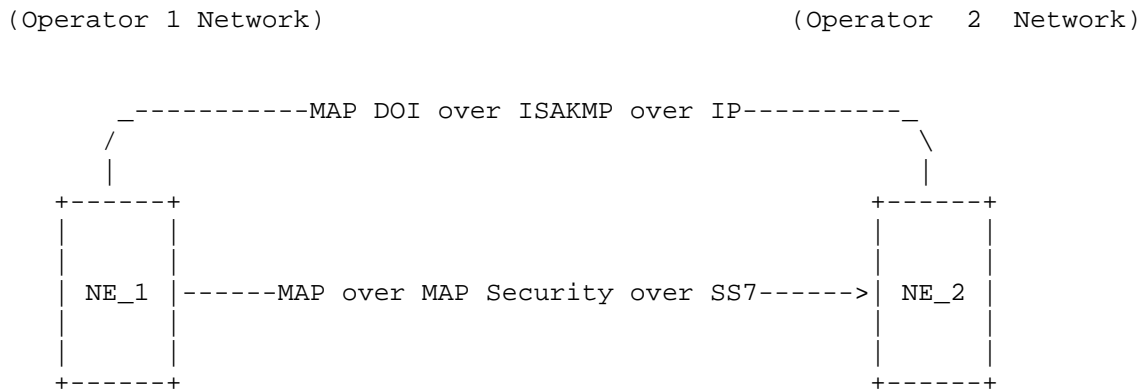
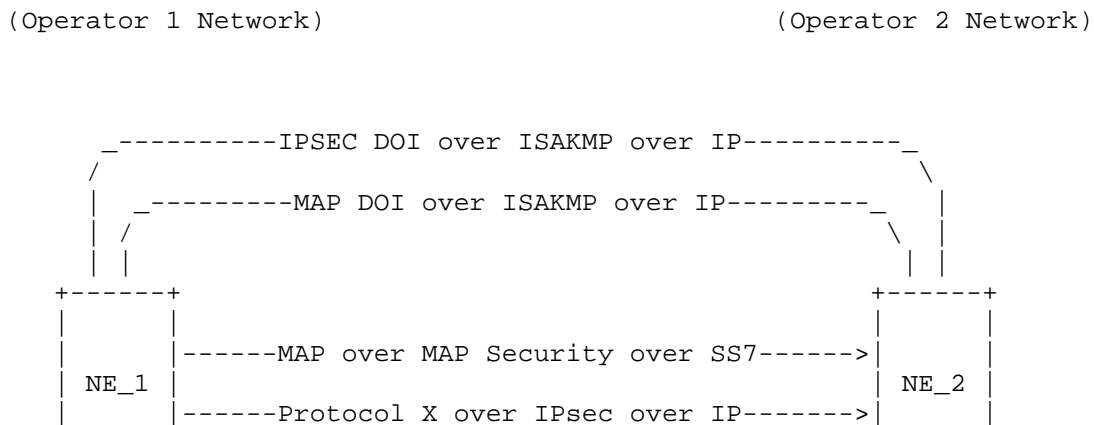


Figure 1. Simple network architecture for MAP Security







Figure 2. Use of IKE for two purposes.

One benefit of using IKE can be seen in Figure 2. As the network elements use both MAP and another, IP-based protocol X they can use ISAKMP/IKE to negotiate keys for both. In this case, IKE phase 1 needs to be run just once.

In an alternative network arrangement, the Network Elements do not have key management support or direct IP connections to other networks. In this case a Key Administration Center (KAC) handles the negotiations on the behalf of the NEs. This is shown in Figure 2.

(Operator 1 Network)

(Operator 2 Network)

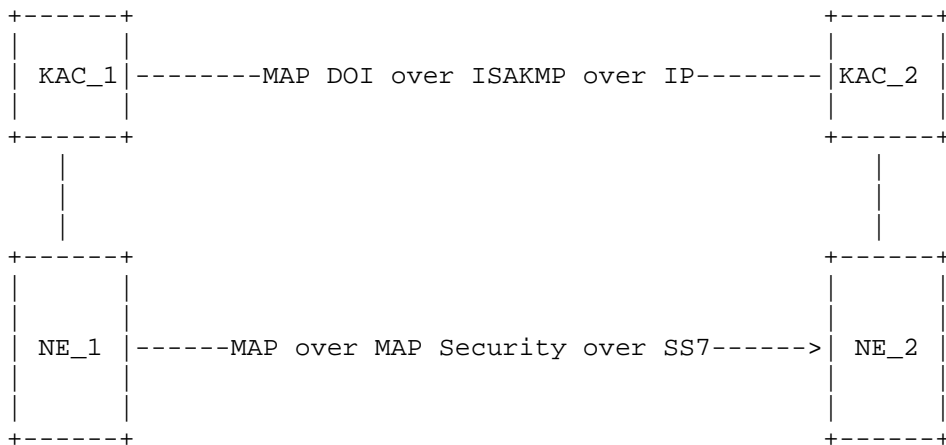


Figure 3. Complex network architecture for MAP Security

In this arrangement, the security of the communications between the NEs and the KAC is of great importance. Security mechanisms or transport protocols for that purpose are, however,

not discussed in this document though as an example, IPsec/IKE, IPsec/KINK, MPLS VPNs [MPLS], or ATM Permanent Virtual Connections could be used.

Only one SA (pair) needs to exist between two networks in this arrangement, even if there is a large number of NEs communicating to the NEs of the other network. (Note that MAP Security employs time stamps instead of sequence numbers, making the simultaneous use of the same SA in multiple NEs possible.)

3.5. Reuse of IPSEC DOI and IKE

The MAP DOI for ISAKMP is always used in devices that have IP connectivity to the peer device. There are no additional requirements set forth by the MAP Security or MAP protocols regarding the identification and authentication of the communicating peers. Therefore, all IPSEC DOI definitions and IKE procedures regarding phase 1 of IKE are used unchanged in the MAPSEC DOI.

Furthermore, the IKE procedures regarding phase 2 are used unchanged, with the following exceptions:

- o Identity types used in phase 2 are different.
- o SA payloads are different.
- o There are no MAPSEC-specific phase 2 notifications.
- o The procedure for creating keys for MAP Security is different than that for IPsec.

Systems implementing the MAP Security DOI MUST support this DOI using ISAKMP/IKE. However, MAP Security DOI does not require the implementations to support full ISAKMP/IKE. Specific MAP Security ISAKMP/IKE profile is given below.

The requirements set forth in the IKE [ISAKMP, IKE] and IPsec DOI [IPSDOI] MUST be followed with the exception of the following:

- o Perfect Forward Secrecy (PFS) SHOULD be supported in Phase 2.
- o In contrast to the requirements set in [IKE], Aggressive Mode MUST be implemented and Main Mode SHOULD be implemented.
- o Only one identity type, ID_FQDN, MUST be

- o specified in [IPSDOI] SHOULD be implemented.
- o Only the 3DES encryption algorithm SHA1 algorithms MUST be implemented as ISAKMP encryption and hash operations.
- o SA lifetime notifications will not be allowed [see section 4.5.3].
- o SA deletion will not be allowed (this is required in order to ensure that pull-based schemes can be used between network elements and the KAC when the architecture in Figure 3 is used.)

Note that IKE [IKE] specifies that all implementations MUST support authentication through pre-shared secrets and SHOULD support public key based authentication.

3.6. Reuse of KKMP

The KINK protocol [KINK] uses centralized authentication from Kerberos to bypass IKE phase 1 and offer a faster alternative to IKE phase 2. KINK uses directly ISAKMP and IPSEC DOI payload formats, and therefore anything negotiable normally

Systems implementing the MAP Security DOI SHOULD support this DOI using KINK.

4. Definition

4.1 Naming Scheme

Within ISAKMP, all DOI's MUST be registered with the IANA in the "Assigned Numbers" RFC [STD-2]. The IANA Assigned Number for the MAP Security DOI (MAPSEC DOI) is TBD (N). Within the MAP Security DOI, all well-known identifiers MUST be registered with the IANA under the MAPSEC DOI. Unless otherwise noted, all tables within this document refer to IANA Assigned Numbers for the MAPSEC DOI. See Section 6 for further information relating to the IANA registry for the MAPSEC DOI.

All multi-octet binary values are stored in network byte order.

4.2 MAPSEC Situation Definition

Within ISAKMP, the Situation provides information that can be used by the responder to make a policy determination about how to process the incoming Security Association request. For the MAPSEC DOI, the

Situation field is a four (4) octet bitmask with the following value.

Situation	Value
-----	-----
SIT_IDENTITY_ONLY	0x01

4.2.1 SIT_IDENTITY_ONLY

The SIT_IDENTITY_ONLY type specifies that the security association will be identified by source identity information present in an associated Identification Payload. See Section 4.6.2 for a complete description of the various Identification types. All MAPSEC DOI implementations MUST support SIT_IDENTITY_ONLY by including an Identification Payload in at least one of the Phase I Oakley exchanges ([IKE], Section 5) and MUST abort any association setup that does not include an Identification Payload.

4.3 MAPSEC Security Policy Requirements

The MAPSEC DOI does not impose specific security policy requirements on any implementation. Host system policy issues are outside of the scope of this document.

However, the following sections touch on some of the issues that must be considered when designing a MAPSEC DOI host implementation. This section should be considered only informational in nature.

4.3.1 Protection Profiles

In order to make it possible to establish as small number of SAs as possible in large meshed operator network, and to limit the protection to the most critical MAP messages, the concept of MAP protection profiles has been introduced. For instance, one profile could mandates the use of MAP Security for all MAP messages, while another could require the use of MAP Security only for all messages containing mobile terminal authentication vectors, and no security for other messages.

These actual profiles are numbered and standardized by the 3GPP [NDSEC] and are not listed here.

During the IKE phase 2 negotiations between two nodes or networks, they agree on a common protection profile and create a single SA (pair) between themselves. The SA is then either used or not used for individual MAP messages, based on the standardized rules in the particular selected profile.

Note that this is in contrast to the mechanisms used in the IPSEC DOI, where several SA (pairs) may be negotiated, one for each different class of traffic.

The protection profile mechanism is also used to provide a way for two nodes to agree that they will not use security at all. A protection profile that doesn't use MAPSEC for any MAP message is defined in [NDSEC].

4.3.2 Key Management Issues

It is expected that many systems choosing to implement ISAKMP will strive to provide a protected domain of execution for a combined IKE key management daemon. On protected-mode multiuser operating systems, this key management daemon will likely exist as a separate privileged process.

In such an environment, a formalized API to introduce keying material into the TCP/IP kernel may be desirable. The IP Security architecture does not place any requirements for structure or flow between a host TCP/IP kernel and its key management provider.

4.3.3 Static Keying Issues

Static keying is not supported in MAP Security.

4.3.4 Host Policy Issues

It is not realistic to assume that the transition to MAP Security will occur overnight. Host systems must be prepared to implement flexible policy lists that describe which systems they desire to speak securely with and which systems they require to speak securely to them. Some notion of proxy firewall addresses may also be required.

A minimal approach is probably a static list of Public Land Mobile Network Identities (PLMN IDs). A PLMN ID is constructed by concatenating the Mobile Country Code (MCC) and by the Mobile Network Code (MNC).

4.3.5 Certificate Management

Host systems implementing a certificate-based authentication scheme will need a mechanism for obtaining and managing a database of certificates.

Secure DNS is to be one certificate distribution mechanism, however the pervasive availability of secure DNS zones, in the short term, is

doubtful for many reasons. What's far more likely is that hosts will need an ability to import certificates that they acquire through secure, out-of-band mechanisms, as well as an ability to export their own certificates for use by other systems.

However, manual certificate management should not be done so as to preclude the ability to introduce dynamic certificate discovery mechanisms and/or protocols as they become available.

4.4 MAPSEC Assigned Numbers

The following sections list the Assigned Numbers for the MAPSEC DOI: Protocol Identifiers, MAPSEC Transform Identifiers, Security Association Attribute Type Values, ID Payload Type Values, and Notify Message Type Values.

4.4.1 MAPSEC DOI Number

This number is TBD.

4.4.1 MAPSEC Security Protocol Identifier

The ISAKMP proposal syntax was specifically designed to allow for the simultaneous negotiation of multiple Phase II security protocol suites within a single negotiation. As a result, the protocol suites listed below form the set of protocols that can be negotiated at the same time. It is a host policy decision as to what protocol suites might be negotiated together.

The following table lists the values for the Security Protocol Identifiers referenced in an ISAKMP Proposal Payload for the MAPSEC DOI.

Protocol ID	Value
-----	-----
RESERVED	0
PROTO_ISAKMP	1
PROTO_MAPSEC_MAPSEC	TBD

4.4.1.1 PROTO_ISAKMP

The PROTO_ISAKMP type specifies message protection required during Phase I of the ISAKMP protocol. The specific protection mechanism used for the MAPSEC DOI is described in [IKE]. All implementations within the MAPSEC DOI MUST support PROTO_ISAKMP.

NB: ISAKMP reserves the value one (1) across all DOI definitions.

This is exactly as it is in the IPSEC DOI.

4.4.1.2 PROTO_MAPSEC_MAPSEC

The PROTO_MAPSEC_MAPSEC type specifies the use of the MAP

Security to protect MAP messages.

4.4.2 MAPSEC ISAKMP Transform Identifiers

As part of an ISAKMP Phase I negotiation, the initiator's choice of Key Exchange offerings is made using some host system policy description. The actual selection of Key Exchange mechanism is made using the standard ISAKMP Proposal Payload. The following table lists the defined ISAKMP Phase I Transform Identifiers for the Proposal Payload for the MAPSEC DOI.

Transform -----	Value -----
RESERVED	0
KEY_IKE	1

Implementor's note: This is exactly as it is in the IPSEC DOI.

4.4.2.1 KEY_IKE

The KEY_IKE type specifies the hybrid ISAKMP/Oakley Diffie-Hellman key exchange (IKE) as defined in the [IKE] document. All implementations within the MAPSEC DOI MUST support KEY_IKE.

4.4.3 MAPSEC Transform Identifiers

The following table lists the defined MAPSEC AES Transform Identifiers.

Transform ID -----	Value -----
RESERVED	0-1
MAPSEC_AES	TBD

4.4.3.1 MAPSEC_AES

The MAPSEC_AES type specifies a generic MAP Security transform using AES. The actual protection suite is determined in concert with an associated SA attribute list.

All implementations within the MAPSEC DOI MUST support this transform. The MAPSEC_AES transform is defined in [NDSEC].

4.5 MAPSEC Security Association Attributes

The following SA attribute definitions are used in Phase II of an IKE negotiation. Attribute types can be either Basic (B) or Variable-Length (V). Encoding of these attributes is defined in the base ISAKMP specification.

Attributes described as basic MUST NOT be encoded as variable. Variable length attributes MAY be encoded as basic attributes if their value can fit into two octets. See [IKE] for further information on attribute encoding in the MAPSEC DOI. All restrictions listed in [IKE] also apply to the MAPSEC DOI.

Implementor's note: In general, the attributes describe here behave exactly as the corresponding ones in the IPSEC DOI. The attributes Encapsulation Mode, Compression Dictionary Size, and Compression Private Algorithm are not supported by MAPSEC DOI.

Attribute Types

class	value	type
SA Life Type	1	B
SA Life Duration	2	V
Group Description	3	B
Encapsulation Mode	4	B
Authentication Algorithm	5	B
Key Length	6	B
Key Rounds	7	B
Compress Dictionary Size	8	B
Compress Private Algorithm	9	V
MAP Protection Profile	TBD	B

Class Values

SA Life Type
SA Duration

Specifies the time-to-live for the overall security association. When the SA expires, all keys negotiated under the association (AH or ESP) must be renegotiated. The life type values are:

RESERVED	0
seconds	1

Values 3-61439 are reserved to IANA. Values 61440-65535 are for private use. For a given Life Type, the value of the

Life Duration attribute defines the actual length of the component lifetime -- in number of seconds.

If unspecified, the default value shall be assumed to be 28800 seconds (8 hours).

An SA Life Duration attribute MUST always follow an SA Life

Type which describes the units of duration.

See Section 4.5.3 for additional information relating to lifetime notification.

Implementor's note: The semantics and values for these attributes are exactly as they are in the IPSEC DOI, except that kilobyte lifetimes are not supported.

Group Description

Specifies the Oakley Group to be used in a PFS QM negotiation. For a list of supported values, see Appendix A of [IKE].

Implementor's note: The semantics and values for these attributes are exactly as they are in the IPSEC DOI.

Authentication Algorithm

RESERVED	0
HMAC-MD5	1
HMAC-SHA	2
DES-MAC	3
KPDK	4
AES-MAC	5

Values 5-61439 are reserved to IANA. Values 61440-65535 are for private use.

There is no default value for Auth Algorithm, as it must be specified to correctly identify the applicable transform.

Implementor's note: The semantics of the first five values for this attribute is exactly as they are in the IPSEC DOI.

This specification requires additionally that only AES-MAC and the omission of the algorithm are mandatory for all MAP Security implementations. The semantics of the AES-MAC are defined in [NDSEC].

Key Length

RESERVED	0
----------	---

There is no default value for Key Length, as it must be specified for transforms using ciphers with variable key lengths. For fixed length ciphers, the Key Length attribute MUST NOT be sent.

Implementor's note: The semantics and values for this attribute is exactly as it is in the IPSEC DOI.

Key Rounds

RESERVED 0

There is no default value for Key Rounds, as it must be specified for transforms using ciphers with varying numbers of rounds.

Implementor's note: The semantics and values for this attribute is exactly as it is in the IPSEC DOI.

MAP Protection Profile

The value of this attribute is as defined in [NDSEC].

4.5.1 Required Attribute Support

To ensure basic interoperability, all implementations MUST be prepared to negotiate all of the following attributes.

SA Life Type
SA Duration
Auth Algorithm
MAP Protection Profile

4.5.2 Attribute Negotiation

If an implementation receives a defined MAPSEC DOI attribute (or attribute value) which it does not support, an ATTRIBUTES-NOT-SUPPORTED SHOULD be sent and the security association setup MUST be aborted, unless the attribute value is in the reserved range.

If an implementation receives an attribute value in the reserved range, an implementation MAY chose to continue based on local policy.

Implementor's note: This is exactly as it is in the IPSEC DOI.

However, there are no special lifetime attribute parsing requirements as only time-based lifetimes are supported.

4.5.3 Lifetime Matching

Offered and locally acceptable SA lifetimes must match exactly under MAPSEC in order for the responder to select an SA.

Implementor's note: This is simplified from the IPSEC DOI which required notifications.

4.6 MAP Security Payload Content

The following sections describe those ISAKMP payloads whose data representations are dependent on the applicable DOI.

4.6.1 Identification Payload Content

The Identification Payload is used to identify the initiator of the Security Association. The identity of the initiator SHOULD be used by the responder to determine the correct host system security policy requirement for the association.

During Phase I negotiations, the ID port and protocol fields MUST be set to zero or to UDP port 500. If an implementation receives any other values, this MUST be treated as an error and the security association setup MUST be aborted. This event SHOULD be auditable.

The following diagram illustrates the content of the Identification Payload.

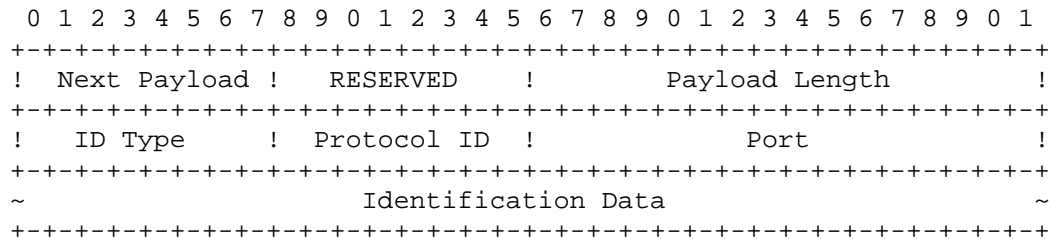


Figure 2: Identification Payload Format

The Identification Payload fields are defined as follows:

- o Next Payload (1 octet) - Identifier for the payload type of the next payload in the message. If the current payload is the last in the message, this field will be zero (0).

- o RESERVED (1 octet) - Unused, must be zero (0).
- o Payload Length (2 octets) - Length, in octets, of the identification data, including the generic header.
- o Identification Type (1 octet) - Value describing the identity information found in the Identification Data field.
- o Protocol ID (1 octet) - Value specifying an associated IP protocol ID (e.g. UDP/TCP). A value of zero means that the

Protocol ID field should be ignored.

- o Port (2 octets) - Value specifying an associated port. A value of zero means that the Port field should be ignored.
- o Identification Data (variable length) - Value, as indicated by the Identification Type.

The legal Identification Type field values in phase 1 are as defined in the IPSEC DOI. However, phase 2 identities should MUST conform to the following. The table lists the assigned values for the Identification Type field found in the Identification Payload.

ID Type	Value
-----	-----
RESERVED	0
ID_KEY_ID	11

For types where the ID entity is variable length, the size of the ID entity is computed from size in the ID payload header.

The ID_KEY_ID type specifies an opaque byte stream. In MAPSEC DOI, the contents of the data MUST be the the PLMN ID of the initiating or responding party.

4.6.2 IPSEC Notify Message Types

The IPSEC DOI Notify Message types are used in phase 1. In phase 2, no new notify messages are specified beyond those provided by ISAKMP. Implementor's note: MAPSEC does not allow turning replay protection on or off which make the use of REPLAY-STATUS unnecessary. Responder lifetimes are required to be exactly the same as the initiator lifetimes, which makes the use of RESPONDER-LIFETIME unnecessary.

4.7 MAPSEC Key Exchange Requirements

The MAPSEC DOI introduces no additional Key Exchange types.

5. Security Considerations

This entire memo pertains to the Internet Key Exchange protocol ([IKE]), which combines ISAKMP ([ISAKMP]) and Oakley ([OAKLEY]) to provide for the derivation of cryptographic keying material in a secure and authenticated manner. Specific discussion of the various security protocols and transforms identified in this document can be found in the associated base documents and in the cipher references.

6. IANA Considerations

This document contains many "magic" numbers to be maintained by the standardization bodies. In the case of the MAPSEC DOI, the 3GPP handles the assignment of numbers instead of IANA. This section explains the criteria to be used by the 3GPP to assign additional numbers in each of these lists. All values not explicitly defined in previous sections are reserved to 3GPP. (IANA will still define the DOI numbers, including the DOI number for this DOI.)

6.1 MAPSEC Situation Definition

The Situation Definition is a 32-bit bitmask which represents the environment under which the IPSEC SA proposal and negotiation is carried out. Requests for assignments of new situations must be accompanied by a 3GPP contribution which describes the interpretation for the associated bit.

The upper two bits are reserved for private use amongst cooperating systems.

6.2 MAPSEC Security Protocol Identifiers

The Security Protocol Identifier is an 8-bit value which identifies a security protocol suite being negotiated. Requests for assignments of new security protocol identifiers must be accompanied by a 3GPP contribution which describes the requested security protocol.

The values 249-255 are reserved for private use amongst cooperating systems.

6.3 MAPSEC ISAKMP Transform Identifiers

The ISAKMP Transform Identifier is an 8-bit value which identifies a key exchange protocol to be used for the negotiation. Requests for assignments of new ISAKMP transform identifiers must be

accompanied by a 3GPP contribution which describes the requested key exchange protocol.

The values 249-255 are reserved for private use amongst cooperating systems.

6.4 MAPSEC MAP Security Transform Identifiers

The MAP Security Transform Identifier is an 8-bit value which identifies a particular algorithm to be used to provide security protection for MAP messages. Requests for assignments of new transform

identifiers must be accompanied by a 3GPP contribution which describes how to use the algorithm within the framework.

The values 249-255 are reserved for private use amongst cooperating systems.

6.5 MAPSEC Security Association Attributes

The MAPSEC Security Association Attribute consists of a 16-bit type and its associated value. MAPSEC SA attributes are used to pass miscellaneous values between ISAKMP peers. Requests for assignments of new MAPSEC SA attributes must be accompanied by an Internet Draft which describes the attribute encoding (Basic/Variable-Length) and its legal values. Section 4.5 of this document provides an example of such a description.

The values 32001-32767 are reserved for private use amongst cooperating systems.

6.6 MAPSEC Identification Type

The MAPSEC Identification Type is an 8-bit value which is used as a discriminant for interpretation of the variable-length Identification Payload. Requests for assignments of new Identification Types must be accompanied by a 3GPP contribution which describes how to use the identification type.

The values 249-255 are reserved for private use amongst cooperating systems.

6.7 MAPSEC Notify Message Types

The MAPSEC Notify Message Type is a 16-bit value taken from the range of values reserved by ISAKMP for each DOI. There is one range for error messages (8192-16383) and a different range for status messages

(24576-32767). Requests for assignments of new Notify Message Types must be accompanied by a 3GPP contribution which describes how to use the identification type.

The values 16001-16383 and the values 32001-32767 are reserved for private use amongst cooperating systems.

6.8 MAPSEC Protection Profiles

The MAPSEC Protection Profile values are 8-bit values used in decisions regarding actual protection of individual MAP messages. The values are defined [NDSEC] and new values must be accompanied by a 3GPP contribution which describes the

semantics of the profile.

The values 64-255 are reserved for private use amongst cooperating systems.

7. Key Derivation for MAP Security

7.1 IKE

MAP Security requires two sets of keys, one for each direction, just as in the case of IPSEC SAs. Both need authentication and encryption keys. For one direction of an SA, these two keys are taken from the key material as follows (see also Figure 4.)

- o The authentication key is taken first and then the encryption key.




Figure 4. Use of derived key material for MAPSEC

Furthermore, it is possible that the Key Administration Centers (KACs) are used. Then just one key is negotiated on behalf of the whole set of NEs. Note that MAP Security uses timestamps instead of sequence numbers in order to prevent replay attacks, so the same SAs can be used by multiple senders.

If PFS is not needed, and KE payloads are not exchanged, the new keying material is defined as

$$\text{KEYMAT} = \text{prf}(\text{SKEYID}_d, \text{protocol} \mid \text{SPI} \mid \text{Ni}_b \mid \text{Nr}_b).$$

If PFS is desired and KE payloads were exchanged, the new keying material is defined as

$$\text{KEYMAT} = \text{prf}(\text{SKEYID}_d, g(\text{qm})^{\text{xy}} \mid \text{protocol} \mid \text{SPI} \mid \text{Ni}_b \mid \text{Nr}_b)$$

The referenced symbols are defined as follows:

- o prf is the negotiated, keyed pseudo-random function-- often a keyed hash function-- used to generate a deterministic output

that appears pseudo-random.

- o SKEYID_d is defined by IKE [IKE].
- o $g(qm)^{xy}$ is the shared secret from the ephemeral Diffie-Hellman exchange of this Quick Mode.
- o "protocol" and "SPI" are from the ISAKMP Proposal Payload that contained the negotiated Transform.
- o Ni_b indicates the body of the initiator's Nonce payload from IKE [IKE].
- o Nr_b indicates the body of the responder's Nonce payload from IKE [IKE].

A single SA negotiation results in two security associations-- one inbound and one outbound. Different SPIs for each SA (one chosen by the initiator, the other by the responder) guarantee a different key for each direction. The SPI chosen by the destination of the SA is used to derive KEYMAT for that SA.

For situations where the amount of keying material desired is greater than that supplied by the prf, KEYMAT is expanded by feeding the results of the prf back into itself and concatenating results until the required keying material has been reached. In other words,

KEYMAT = K1 | K2 | K3 | ...

where

K1 = prf(SKEYID_d, [$g(qm)^{xy}$ |] protocol | SPI | Ni_b | Nr_b)

K2 = prf(SKEYID_d, K1 | [$g(qm)^{xy}$ |] protocol | SPI | Ni_b | Nr_b)

K3 = prf(SKEYID_d, K2 | [$g(qm)^{xy}$ |] protocol | SPI | Ni_b | Nr_b)

etc.

This keying material (whether with PFS or without, and whether derived directly or through concatenation) MUST be used with the negotiated SA.

7.2 KINK

In KINK, during the establishment of SAs the initiator and responder each provide random nonces that add entropy to the KDC supplied session key in order to derive the SA keying material (KEYMAT).

KEYMAT = prf(Secret, Ni [| Nr])

where

- o prf is as presented in section 7.1.
- o Secret is the secret derived from the Kerberos ticket. It is as defined in KINK [KINK].
- o Ni and Nr are the nonces of the initiator and responder, respectively.

The function is initially called with the session key found in the service ticket used for Secret and is called recursively with the resulting KEYMAT until it has generated a proper number of bits. Rules regarding the optionality of the Nr are as defined in KINK [KINK].

8. Modification History

The following modifications have been made to the -01 version of this draft:

- o Sections 3.5-3.6 now specify a profile for the use of IKE and KINK.
- o All MAPSEC-specific phase 2 notifications have been removed for simplicity.
- o AES-MAC has been specified instead of HMAC_SHA1. Note that Phase 1 has been specified to use 3DES and SHA1 since no RFC exists yet to define the use of AES and especially AES-MAC for IKE Phase 1.
- o Some formatting modifications have been made.
- o Attribute parsing requirements were simplified since only a single kind of lifetimes are supported.
- o MAP_BLOWFISH has been removed since 3GPP hasn't defined it.
- o MAP_NULL has been removed and protection profiles are

expected to be used instead to signify that no security is needed.

- o Rules for assigning new numbers within this DOI have been clarified.

9. Intellectual property rights

Ericsson has patent applications which may cover parts of this technology. Should such applications become actual patents and be determined to cover parts of this specification, Ericsson intends to provide licensing when implementing, using or distributing the technology under openly specified, reasonable, non-discriminatory terms.

10. Acknowledgments

This document is derived from the work done by David Castellanos-Zamora, Krister Boman, Anders Liljekvist, Eeva Munter and others at Ericsson, and Tatu Ylonen and others at SSH Communications Security Corp.

11. References

- [AH] Kent, S., and R. Atkinson, "IP Authentication Header", RFC 2402, November 1998.
- [ARCH] Kent, S., and R. Atkinson, "Security Architecture for the Internet Protocol", RFC 2401, November 1998.
- [ESP] Kent, S., and R. Atkinson, "IP Encapsulating Security Payload (ESP)", RFC 2406, November 1998.
- [IKE] Harkins, D., and D. Carrel, D., "The Internet Key Exchange (IKE)", RFC 2409, November 1998.
- [ISAKMP] Maughan, D., Schertler, M., Schneider, M., and J. Turner, "Internet Security Association and Key Management Protocol (ISAKMP)", RFC 2408, November 1998.
- [IPSDOI] D. Piper, "The Internet IP Security Domain of Interpretation for ISAKMP", RFC 2407, November 1998.
- [KINK] M. Froh, M. Hur, D. McGrew, S. Medvinsky, M. Thomas, J. Vilhuber, "Kerberized Internet Negotiation of Keys (KINK)", draft-ietf-kink-kink-00.txt, Cybersafe, Motorola, Cisco. Work In Progress, September 2000

Arkko & Blom

Informational

[Page 23]

INTERNET-DRAFT

MAPSEC DOI

22 February 2001

- [OAKLEY] Orman, H., "The OAKLEY Key Determination Protocol", RFC 2412, November 1998.
- [NDSEC] 3rd Generation Partnership Project, Technical Specification Group SA3, Security "Network Domain Security (Release 4)", 3GPP TS 33.200, (Work In Progress), January, 2001.
- [MPLS] E. Rosen, Y. Rekhter, "BGP/MPLS VPNs", RFC 2547, March 1999.

12. Authors' Addresses

Jari Arkko
Oy LM Ericsson Ab
02420 Jorvas
Finland

Phone: +358 40 5079256
EMail: jari.arkko@ericsson.com

Rolf Blom
Ericsson Radio Systems AB
SE-16480 Stockholm
Sweden

Phone: +46 8 58531707
EMail: rolf.blom@era.ericsson.se

Full Copyright Statement

Copyright (C) The Internet Society (1998). All Rights Reserved.

This document and translations of it may be copied and furnished to others, and derivative works that comment on or otherwise explain it or assist in its implementation may be prepared, copied, published and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice and this paragraph are included on all such copies and derivative works. However, this document itself may not be modified in any way, such as by removing the copyright notice or references to the Internet Society or other Internet organizations, except as needed for the purpose of developing Internet standards in which case the procedures for copyrights defined in the Internet Standards process must be followed, or as required to translate it into languages other than English.

The limited permissions granted above are perpetual and will not be revoked by the Internet Society or its successors or assigns.

This document and the information contained herein is provided on an "AS IS" basis and THE INTERNET SOCIETY AND THE INTERNET ENGINEERING TASK FORCE DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

MAP DOI: Modifications and Status

Contributions #27 and #102

Jari Arkko
Ericsson

Jari.Arkko@ericsson.com

Contents

- MAP DOI
- Modifications in the –01 Internet Draft
- IKE profile
- Status in the IETF
- Process forward


The Key Management Problem

- How do we set up the security associations between the NEs?
- Lifetimes for security associations
- Capabilities negotiation, algorithms etc
- How to authenticate peers in a scalable manner
- Avoid the NxN configuration problem

=> A key management protocol is also needed

Network for MAP KM

IKE Phase 1 + MAPSec DOI over ISAKMP/IKE phase 2

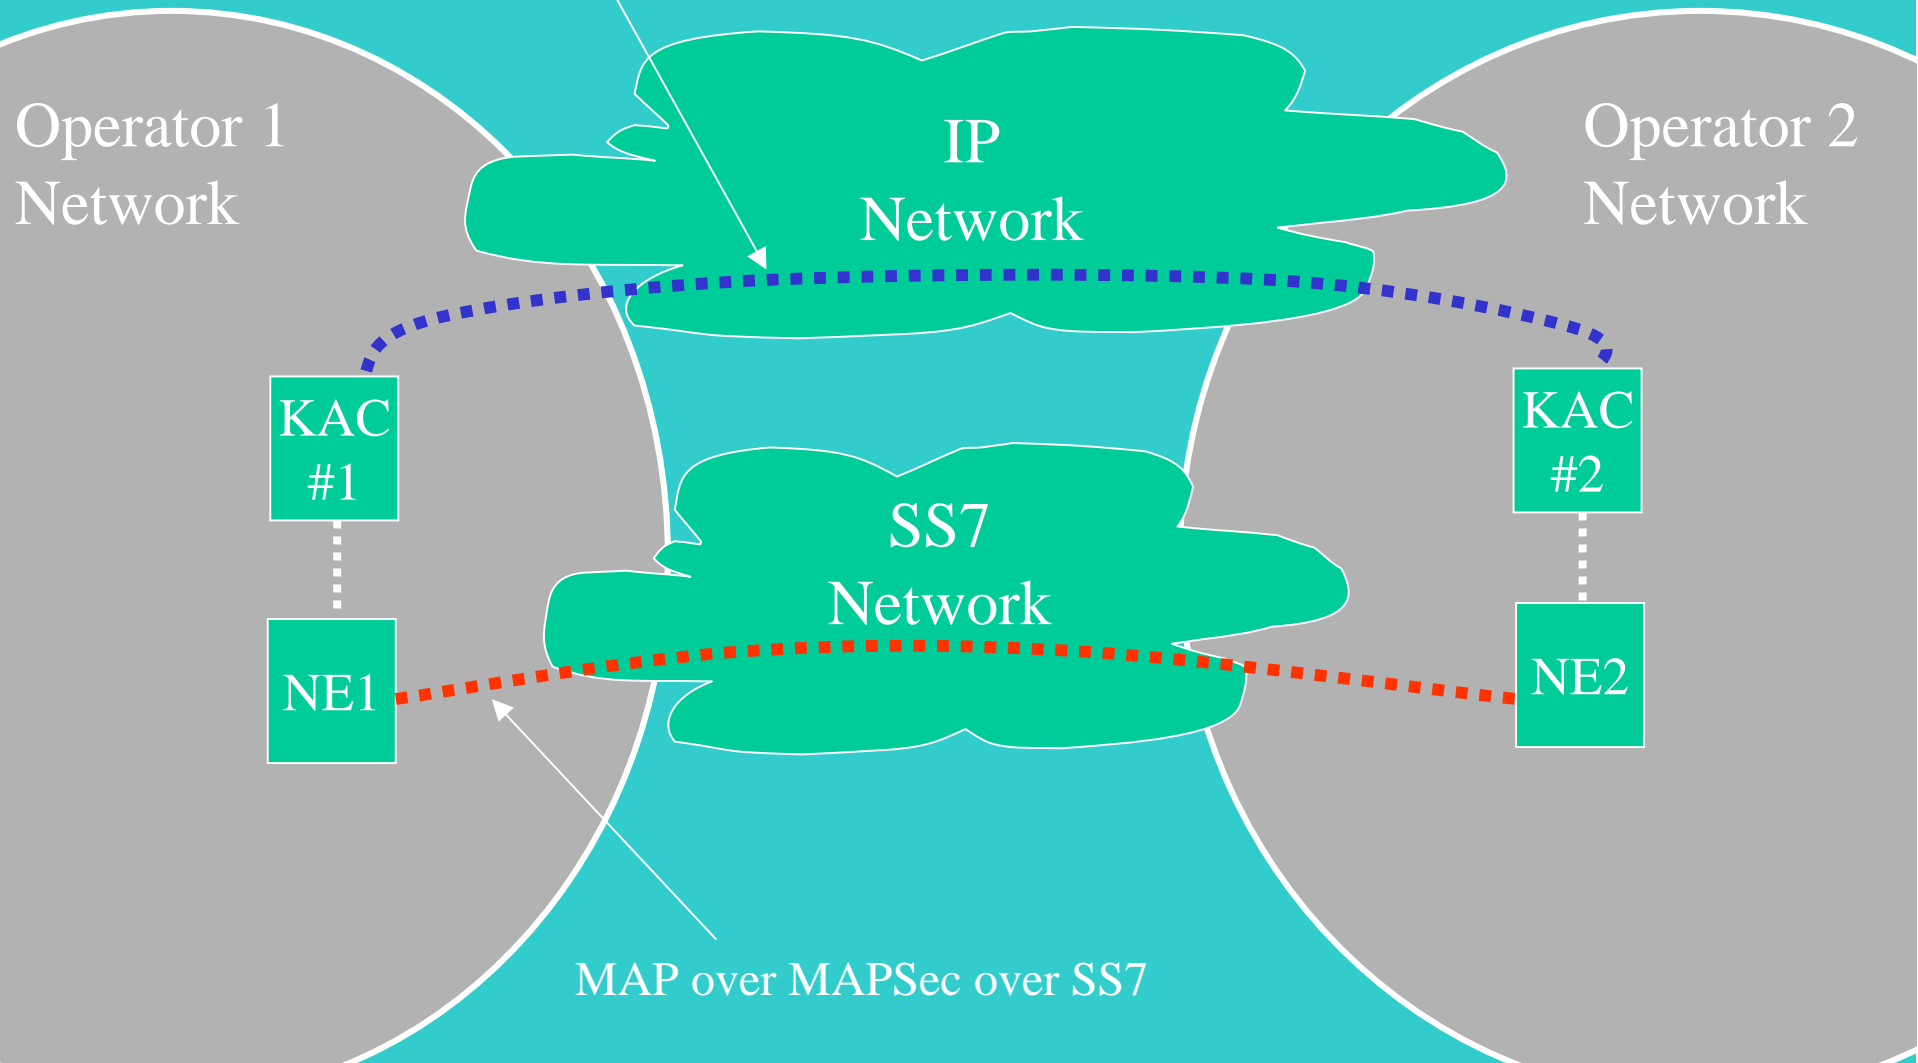

MAPSec DOI

- Provides **key management for MAPsec** via IP networks
 - Negotiate algorithms, periodic key refresh, ...
 - Reuses IKE technology (code reuse, in the network anyway, avoid tricky protocol design)
- Run **phase 1 exactly as in IKE** (or KINK)
- Run **phase 2 logically equivalently** with IKE (or KINK), but **with different data** and attributes:
 - PROTO_IPSEC_ESP => PROTO_MAPSEC_MAPSEC
 - IPSEC_DES => MAPSEC_AES
 - Identities are not IP addresses, network or node addresses instead
 - ...

Modifications in draft-arkko-map-doi-01.txt

- IKE has been profiled
- Phase 2 notifications have been removed
- AES-MAC - not HMAC_SHA1 - for MAPSEC
- (Phase 1 to use AES, SHA1)
- Attribute parsing requirements were simplified
- MAP_BLOWFISH has been removed
- MAP_NULL has been removed (pp used instead)
- Rules for assigning new numbers within this DOI have been clarified

IKE Profile

- Only **Phase 1 of IKE** is used, the rest is MAP DOI
- Only **IPv6** is mandatory
- Perfect Forward Secrecy (**PFS**) optional: Limits CPU requirements
- **Aggressive** mode to be mandatory, main mode optional: Limits complexity, loses some security against DoS
- Only **FQDN** identities to be mandatory: Limits complexity

IKE Profile Cont'd

- **AES, SHA1** used for protection of IKE: No AES-based hash yet in the IETF
- SA **lifetime notifications** will not be allowed: Limits complexity, ensures simultaneous timeout
- SA **deletion** will not be allowed: Allows pull-based mode to work
- Also note that IKE mandates **preshared secrets**, public-key based mechanisms are optional

Status in the IETF

- Is an **Internet-Draft** (2nd version)
- Is submitted for **Informational category**
- Formally, **does not require WG handling**
- Has been **presented to the IPsec WG, however**. Main comments:
 - Why select IKE, not e.g. Photuris
 - MAP DOI reuses ISAKMP exactly as intended by the original specification
 - Informational RFC process, magic number allocation from IANA shouldn't be problems
 - Long time ago there was work on TCAP security, but it was abandoned
 - KAC vs node-to-node modes weren't discussed in the presentation

Process Forward

1. Final **agreement** on this in **SA3**.
 - Can we make this happen by Friday (IETF submission)?
2. Put this document to an **appendix of 33.200**.
 - Acts as a temporary place until RFC status
 - Acts as a backup plan in case there are problems in the IETF
3. In parallel with the above, **publish the DOI via IETF**.
 - Requires a submission to the RFC Editor
 - This is an editorial process only, no WG
 - At this stage we also get the IANA number for the DOI
 - Technically, the ISAKMP RFC says DOI numbers only for standards track RFCs; in practise we don't believe this is a problem
4. When the DOI RFC comes out, **replace appendix with a reference to the RFC**.