
Draft **TR 27.901** V1.0.0 (1999-10)

Technical Report

**3rd Generation Partnership Project (3GPP);
Technical Specification Group Terminals (TSG-T);
Report on Terminal Interfaces – An Overview;**

3GPP

Reference

<Workitem> (<Shortfilename>.PDF)

Keywords

<keyword[, keyword]>

3GPP

Postal address

Office address

Internet

secretariat@3gpp.org
Individual copies of this deliverable
can be downloaded from
<http://www.3gpp.org>

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

©
All rights reserved.

Contents

Intellectual Property Rights	Error! Bookmark not defined.
Foreword.....	4
1 Scope	5
2 References.....	5
3 Definitions and abbreviations.....	5
3.1 Definitions.....	5
3.2 Abbreviations	5
4 Assumptions of the technical specification work for terminal interfaces.....	7
4.1 General.....	7
4.1.1 The 3GPP terminal model	7
4.1.2 Requirements	7
4.2 Conclusions	7
4.2.1 AT-commands.....	8
5 Examples of external interfaces.....	9

Foreword

This Technical Report has been produced by the 3rd Generation Partnership Project, Technical Specification Group Terminals (TSG-T)

The contents of this TR may be subject to continuing work within the 3GPP and may change following formal TSG-T approval. Should the TSG modify the contents of this TR, it will be re-released with an identifying change of release date and an increase in version number as follows:

Version m.t.e

where:

- m indicates [major version number]
- x the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- y the third digit is incremented when editorial only changes have been incorporated into the specification.

1 Scope

The present document discusses external and internal interfaces of a terminal, with the exception of the radio and USIM interfaces. The focus of the study has been on external interfaces, to identify where existing industry standards can be used and whether there would be a need for specifications to be produced within 3GPP.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

No references were identified.

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the following definitions apply.

ME	Mobile Equipment
MT	Mobile Termination
TA	Terminal Adaptation
TE	Terminal Equipment

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

AT Commands	ATtention Commands
EIA	Electronics Industry Association
FCC	Federal Communications Commission
IEC	International Electrotechnical Commission
IEEE	Institute of Electrical and Electronics Engineers
IR	Infrared
IrDA	Infrared Data Association
ISDN	Integrated Services Digital Network
ISO	International Standardisation Organization
ITU-T	International Telecommunications Union – Telecom sector
RF	Radio Frequency
TIA	Telecommunication Industry Association
UART	Universal Asynchronous Receiver and Transmitter
USB	Universal Serial Bus
USIM	Universal Subscriber Identity Module

4 Assumptions of the technical specification work for terminal interfaces

4.1 General

4.1.1 The 3GPP terminal model

The area of external and internal interfaces for 3GPP MEs have been studied and Figure 1 shows the model that has been used. The external interface, other than the radio and USIM interfaces, is the TE-ME interface. An example of an internal interface is the TA-MT interface, as illustrated.

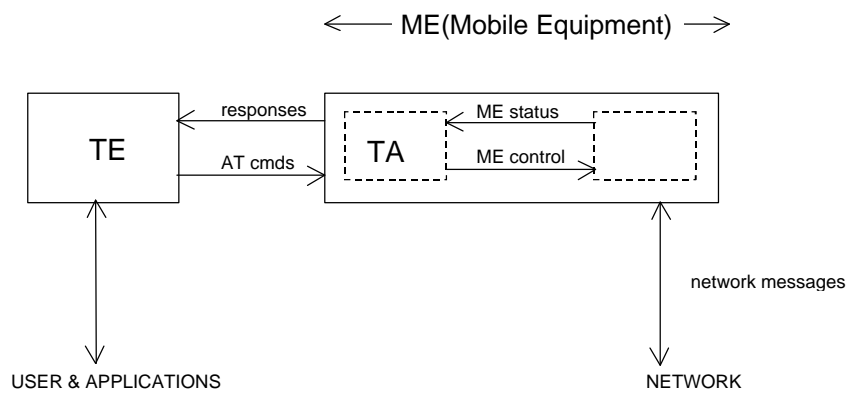


Figure 1: The 3GPP terminal model.

4.1.2 Requirements

There is a vast variety of market expectations, depending on end-users' and operators' demands and needs, and the 3GPP terminal design choice must be made under full influence from these market requirements.

The goal is to find a way to minimize the time-to-market of new, evolved interface solutions, at the same time allowing for the widest possible service diversity, that can be provided by a variety of terminal designs.

The success of 3GPP requires that an efficient and flexible approach is found to give a timely and dynamic development of many kinds of terminals, each type optimized relative to its own specific target of market requirements, while at the same time not imposing restrictions on the global circulation of terminals.

4.2 Conclusions

It has been concluded that 3GPP should not produce any technical specifications for terminal interfaces (neither external, i.e. ME-TE, nor internal, e.g. MT-TA) other than the radio interface and the USIM interface. This includes optional as well as mandatory mechanical, electrical and logical specifications for interfaces. As an exception, optional protocols that are necessary for 3GPP terminals and that are *not defined elsewhere* could be standardised. One agreed example is AT commands.

Instead of specifying external interfaces in 3GPP, appropriate open standards should be used for external interfaces for 3GPP terminals. A list of potential examples of such interfaces is shown in Table 1. It should be noted that the list of interfaces in Table 1 is not exhaustive and that new examples are likely to be added in the future as technical development advances. It should also be noted that proprietary external interfaces may be used in the 3GPP terminals. It is then up to the manufacturer to handle the adoption to standard interfaces.

Since the terminal external interfaces (other than the radio interface, the USIM interface and AT commands), are out of scope of 3GPP, the SDO:s can develop their own physical connector specification based on their market requirements. Such specifications should be optional to allow for other terminal interface options to exist on those markets.

4.2.1 AT-commands

One important aspect for 3GPP terminals is not being specified in any other specification forum, namely the AT commands. The AT commands are necessary for 3GPP terminals and should therefore be specified in 3GPP. AT commands can be commonly used as a common protocol specification, regardless of whether a wired or wireless connection (IR or RF) is used.

Most of the AT commands will be needed both in GSM and 3GPP. For this reason there is a need to have full access in 3GPP to the GSM defined AT commands.

Examples of external interfaces

Below some potential examples of external interface specifications are given.

Interface Standard	(connector)	Data Rate	Topology	Standard
EIA-232F	Nine wires	Up to 115kbps	Point to point	TIA/EIA-232-F UART (Intel 8251A Industry Standard)
EPP Enhanced Parallel Port	IEEE 1284 –connector with 25 or 36 wires	Up to 1.5Mbps	Point to point	IEEE Std 1284-1994
ISDN S-Interface	Eight wires	2X64kbps + 16kbps	Point to point	ISO/IEC 8877:1992. ITU-T I.430
IEEE 802.3 Ethernet	Four wires	10Mbps	Multimaster	ISO/IEC 8877:1992. IEEE Std. 802.3 1998 Edition
USB	Four wires (USB Connector)	Up to 12Mbps	Master to slave devices	USB Specification 1.1
IEEE 1394	Four wires (iLink connector)	100Mbps – 400Mbps	Multimaster	IEEE Std. 1394 - 1995
IrDA-SIR	Infra red transceiver (line of sight)	Up to 115kbps	Point to point(s)	Infrared Data Association Serial Infrared Physical Layer Specification v1.3
IrDA-MIR	Infra red transceiver (line of sight)	Up to 1Mbps	Point to point(s)	Infrared Data Association Serial Infrared Physical Layer Specification v1.3
IrDA-FIR	Infra red transceiver (line of sight)	Up to 4Mbps	Point to point(s)	Infrared Data Association Serial Infrared Physical Layer Specification v1.3
802.11 – IR	Infra red transceiver (diffused IR)	Up to 2Mbps	Multimaster	IEEE Std 802.11-1997
802.11-FHSS	Frequency-Hopping Spread Spectrum RF	Up to 2Mbps	Multimaster	IEEE Std 802.11-1997
802.11- DSSS	Direct Sequence Spread Spectrum RF	Up to 2Mbps	Multimaster	IEEE Std 802.11-1997
Bluetooth	Frequency-Hopping Spread Spectrum RF	721kbs + 57.6kbs or 2x432.6kbs	Point to point(s)	Bluetooth Specification 1.0

History

Document history		
V 1.0.0	October 1999	Presented for information to TSG-T#5

