

## CHANGE REQUEST

CR-Form-v7

⌘ **23.040 CR 72** ⌘ rev **1** ⌘ Current version: **6.3.0** ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

**Proposed change affects:** UICC apps  ME  Radio Access Network  Core Network

|  |                                   |   |              |
|--|-----------------------------------|---|--------------|
| <b>Title:</b>  | ⌘ Enhanced Voice Mail Information |   |              |
| <b>Source:</b>   | ⌘ RIM                             |   |              |
| <b>Work item code:</b>   | ⌘ TEI6                            | <b>Date:</b>                              | ⌘ 20/05/2004 |
| <b>Category:</b>   | ⌘ <b>B</b>                        | <b>Release:</b>                           | ⌘ Rel-6      |
| <i>Use one of the following categories:</i>  |                                   | <i>Use one of the following releases:</i> |              |
| <b>F</b> (correction)  |                                   | 2 (GSM Phase 2)                           |              |
| <b>A</b> (corresponds to a correction in an earlier release)                                   |                                   | R96 (Release 1996)                        |              |
| <b>B</b> (addition of feature),  |                                   | R97 (Release 1997)                        |              |
| <b>C</b> (functional modification of feature)  |                                   | R98 (Release 1998)                        |              |
| <b>D</b> (editorial modification)  |                                   | R99 (Release 1999)                        |              |
| Detailed explanations of the above categories can be found in 3GPP <a href="#">TR 21.900</a> . |                                   | Rel-4 (Release 4)                         |              |
|  |                                   | Rel-5 (Release 5)                         |              |
|  |                                   | Rel-6 (Release 6)                         |              |

|                                      |   |
|--------------------------------------|---|
| <b>Reason for change:</b>            | ⌘ Although SMS has been used for Voice mail notification in many operators networks for some years, the current Voice Mail Notification via SMS is somewhat limited in the information conveyed to the mobile. This CR allows voice mail systems to convey via SMS to the user enhanced information regarding voice mail messages and voice mail box status such as a list of voice messages, the time a particular voice message was left, who it was from – if known, message duration etc. |
| <b>Summary of change:</b>            | ⌘ Enhanced Voice Mail Information is an option using Information Element Identifiers in the User Data Header already being used for optional features such as interaction with e-mail systems.<br>One new IEI value is defined together with a number of sub parameters that convey more detailed information concerning Voice Mail box status and individual Voice mail messages.  |
| <b>Consequences if not approved:</b> | ⌘ An opportunity to increase SMS revenue and improve a users experience using SMS for voice mail notification will have been lost   |

|                          |  |
|--------------------------|--|
| <b>Clauses affected:</b> | ⌘ Table of IEI values 9.2.3.24 and new sub section 9.2.3.24.13 |
|--------------------------|--|

|                              |   |   |   |   |  |   |  |   |  |   |                           |   |  |
|------------------------------|---|---|---|---|--|---|--|---|--|---|---------------------------|---|--|
| <b>Other specs affected:</b> | ⌘ | <table border="1"><tr><td>Y</td><td>N</td></tr><tr><td></td><td>X</td></tr><tr><td></td><td>X</td></tr><tr><td></td><td>X</td></tr></table>               | Y | N |  | X |  | X |  | X | Other core specifications | ⌘ |  |
|                              | Y | N   |   |   |  |   |  |   |  |   |                           |   |  |
|                              |   | X   |   |   |  |   |  |   |  |   |                           |   |  |
|                              | X |   |   |   |  |   |  |   |  |   |                           |   |  |
|                              | X |   |   |   |  |   |  |   |  |   |                           |   |  |
|                              |   | Test specifications   |   |   |  |   |  |   |  |   |                           |   |  |
|                              |   | O&M Specifications  |   |   |  |   |  |   |  |   |                           |   |  |
| <b>Other comments:</b>       | ⌘ | The existing simpler Voice Mail Notifications currently specified in 23.040 have been left unchanged to avoid the risk of problems for existing products. |   |   |  |   |  |   |  |   |                           |   |  |

### 9.2.3.23 TP-User-Data-Header-Indicator (TP-UDHI)

The TP-User-Data-Header-Indicator is a 1 bit field within bit 6 of the first octet of the following six PDUs:

- SMS-SUBMIT,
- SMS-SUBMIT-REPORT
- SMS-DELIVER,
- SMS-DELIVER-REPORT,
- SMS-STATUS-REPORT,
- SMS-COMMAND.

TP-UDHI has the following values.

|           |   |  |
|-----------|---|--|
| Bit no. 6 | 0 | The TP-UD field contains only the short message                                      |
|           | 1 | The beginning of the TP-UD field contains a Header in addition to the short message. |

### 9.2.3.24 TP-User Data (TP-UD)

The length of the TP-User-Data field is defined in the PDU's of the SM-TL (see clause 9.2.2).

The length of the TP-User-Data field is defined in the PDU's of the SM-TL (see clause 9.2.2).

The TP-User-Data field may comprise just the short message itself or a Header in addition to the short message depending upon the setting of TP-UDHI.

Where the TP-UDHI value is set to 0 the TP-User-Data field comprises the short message only, where the user data can be 7 bit (default alphabet) data, 8 bit data, or 16 bit (UCS2 [24]) data.


Where the TP-UDHI value is set to 1 the first octets of the TP-User-Data field contains a Header in the following order starting at the first octet of the TP-User-Data field.

Irrespective of whether any part of the User Data Header is ignored or discarded, the MS shall always store the entire TPDU exactly as received.

| FIELD                              | LENGTH          |
|------------------------------------|-----------------|
| Length of User Data Header         | 1 octet         |
| Information-Element-Identifier "A" | 1 octet         |
| Length of Information-Element "A"  | 1 octet         |
| Information-Element "A" Data       | 0 to "n" octets |
| Information-Element-Identifier "B" | 1 octet         |
| Length of Information-Element "B"  | 1 octet         |
| Information-Element "B" Data       | 0 to "n" octets |
| Information-Element-Identifier "X" | 1 octet         |


|                                   |                 |
|-----------------------------------|-----------------|
| Length of Information-Element "X" | 1 octet         |
| Information-Element "X" Data      | 0 to "n" octets |

The diagram below shows the layout of the TP-User-Data-Length and the TP-User-Data for uncompressed GSM 7 bit default alphabet data. The UDHL field is the first octet of the TP-User-Data content of the Short Message.

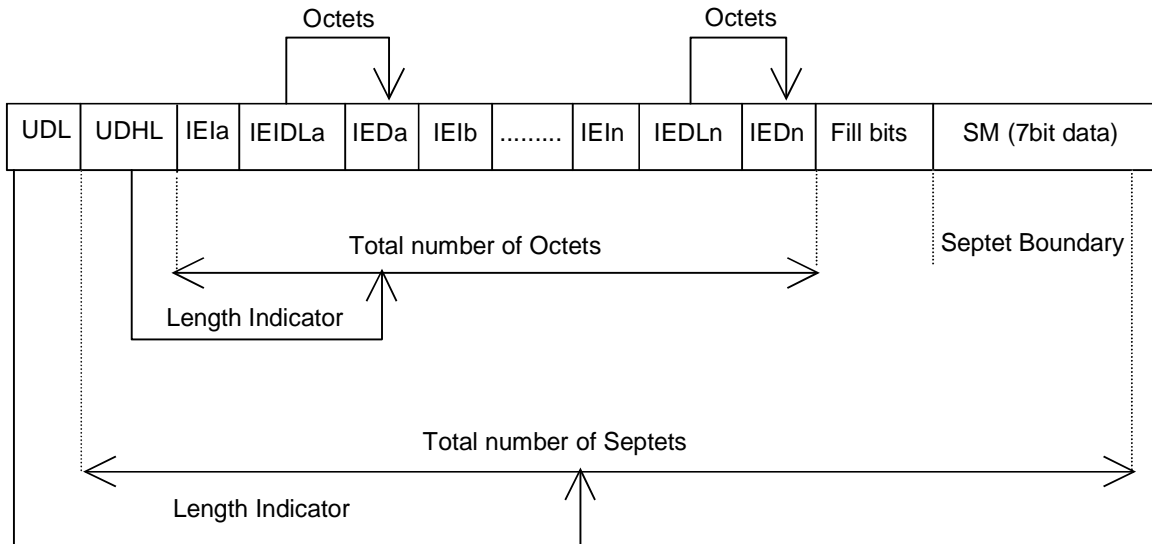


**Figure 9.2.3.24 (a)**

The diagram below shows the layout of the TP-User-Data-Length and the TP-User-Data for uncompressed 8 bit data or uncompressed UCS2 data. The UDHL field is the first octet of the TP-User-Data content of the Short Message.

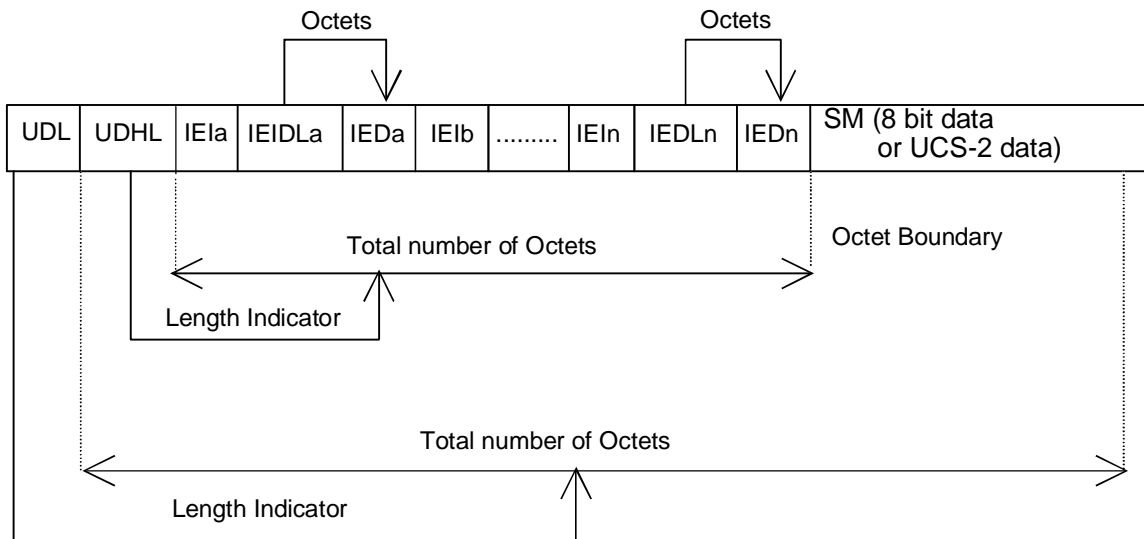

**Figure 9.2.3.24 (b)**

The diagram below shows the layout of the TP-User-Data-Length and the TP-User-Data for compressed GSM 7 bit default alphabet data, compressed 8 bit data or compressed UCS2 data. The UDHL field is the first octet of the TP-User-Data content of the Short Message.

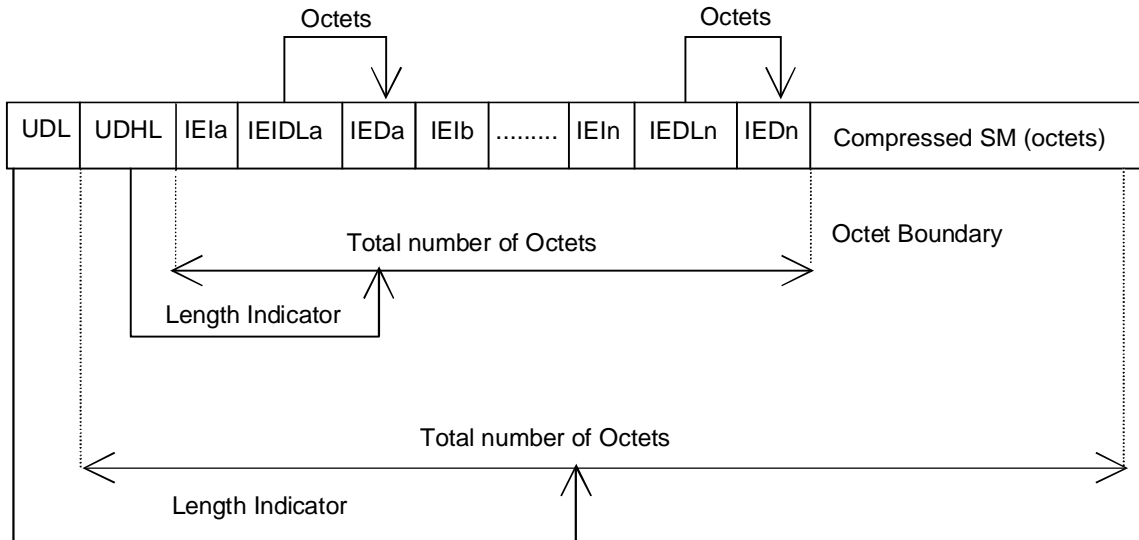

**Figure 9.2.3.24 (c)**

The definition of the TP-User-Data-Length field which immediately precedes the "Length of User Data Header" is unchanged and shall therefore be the total length of the TP-User-Data field including the Header, if present. (see 9.2.3.16).

The "Length-of-Information-Element" fields shall be the integer representation of the number of octets within its associated "Information-Element-Data" field which follows and shall not include itself in its count value.

The "Length-of-User-Data-Header" field shall be the integer representation of the number of octets within the "User-Data-Header" information fields which follow and shall not include itself in its count or any fill bits which may be present (see text below).

Information Elements may appear in any order and need not follow the order used in the present document. Information Elements are classified into 3 categories as described below.

- SMS Control – identifies those IEIs which have the capability of dictating SMS functionality.
- EMS Control – identifies those IEIs which manage EMS Content IEIs.
- EMS Content – identifies those IEIs containing data of a unique media format.

It is permissible for certain IEs to be repeated within a short message, or within a concatenated message. There is no restriction on the repeatability of IEs in the EMS Content classification. The repeatability of SMS Control and EMS Control IEs is determined on an individual basis. See the IE table below for the repeatability of each IE.

In the event that IEs determined as not repeatable are duplicated, the last occurrence of the IE shall be used. In the event that two or more IEs occur which have mutually exclusive meanings (e.g. an 8bit port address and a 16bit port address), then the last occurring IE shall be used.

If the length of the User Data Header is such that there are too few or too many octets in the final Information Element then the whole User Data Header shall be ignored.

If any reserved values are received within the content of any Information Element then that part of the Information Element shall be ignored.

The Information Element Identifier octet shall be coded as follows:

| VALUE (hex) | MEANING  | Classification              | Repeatability      |
|-------------|--|-----------------------------|--------------------|
| 00          | Concatenated short messages, 8-bit reference number  | SMS Control                 | No                 |
| 01          | Special SMS Message Indication   | SMS Control                 | Yes                |
| 02          | Reserved   | N/A                         | N/A                |
| 03          | Value not used to avoid misinterpretation as <LF> character  | N/A                         | N/A                |
| 04          | Application port addressing scheme, 8 bit address  | SMS Control                 | No                 |
| 05          | Application port addressing scheme, 16 bit address   | SMS Control                 | No                 |
| 06          | SMSC Control Parameters  | SMS Control                 | No                 |
| 07          | UDH Source Indicator   | SMS Control                 | Yes                |
| 08          | Concatenated short message, 16-bit reference number  | SMS Control                 | No                 |
| 09          | Wireless Control Message Protocol  | SMS Control                 | Note 3             |
| 0A          | Text Formatting  | EMS Control                 | Yes                |
| 0B          | Predefined Sound   | EMS Content                 | Yes                |
| 0C          | User Defined Sound (iMelody max 128 bytes)   | EMS Content                 | Yes                |
| 0D          | Predefined Animation   | EMS Content                 | Yes                |
| 0E          | Large Animation (16*16 times 4 = 32*4 =128 bytes)  | EMS Content                 | Yes                |
| 0F          | Small Animation (8*8 times 4 = 8*4 =32 bytes)  | EMS Content                 | Yes                |
| 10          | Large Picture (32*32 = 128 bytes)  | EMS Content                 | Yes                |
| 11          | Small Picture (16*16 = 32 bytes)   | EMS Content                 | Yes                |
| 12          | Variable Picture   | EMS Content                 | Yes                |
| 13          | User prompt indicator  | EMS Control                 | Yes                |
| 14          | Extended Object  | EMS Content                 | Yes                |
| 15          | Reused Extended Object   | EMS Control                 | Yes                |
| 16          | Compression Control  | EMS Control                 | No                 |
| 17          | Object Distribution Indicator  | EMS Control                 | Yes                |
| 18          | Standard WVG object  | EMS Content                 | Yes                |
| 19          | Character Size WVG object  | EMS Content                 | Yes                |
| 1A          | Extended Object Data Request Command   | EMS Control                 | No                 |
| 1B-1F       | Reserved for future EMS features (see subclause 3.10)  | N/A                         | N/A                |
| 20          | RFC 822 E-Mail Header  | SMS Control                 | No                 |
| 21          | Hyperlink format element   | SMS Control                 | Yes                |
| 22          | Reply Address Element  | SMS Control                 | No                 |
| 23          | <a href="#">Enhanced Voice Mail Information</a>  | <a href="#">SMS Control</a> | <a href="#">No</a> |
| 24-6F       | Reserved for future use  | N/A                         | N/A                |
| 70 – 7F     | (U)SIM Toolkit Security Headers  | SMS Control                 | Note 1             |
| 80 – 9F     | SME to SME specific use  | SMS Control                 | Note 2             |
| A0 – BF     | Reserved for future use  | N/A                         | N/A                |
| C0 – DF     | SC specific use  | SMS Control                 | Note 2             |
| E0 – FF     | Reserved for future use  | N/A                         | N/A                |
| Note 1:     | The functionality of these IEIs is defined in 3GPP TSG 23.048 [28], and therefore, the repeatability is not within the scope of this document and will not be determined here. |                             |                    |
| Note 2:     | The functionality of these IEIs is used in a proprietary fashion by different SMSC vendors, and therefore, are not within the scope of this technical specification.           |                             |                    |
| Note 3:     | The functionality of these IEIs is defined by the WAP Forum and therefore the repeatability is not within the scope of this document and will not be determined here.          |                             |                    |

#### [9.2.3.24.13 Enhanced Voice Mail Information](#)

[Enhanced Voice Mail Information allows a Voice Mail system to convey to a mobile subscriber, comprehensive information regarding individual voice mail messages and mailbox status.](#)

[Enhanced Voice Mail Information has two types of Information Element Data](#)

- Enhanced Voice Mail Notification which conveys to the MS information regarding newly deposited Voice Mail messages and Voice Mailbox Status
- Enhanced Voice Mail Delete Confirmation which allows an MS to maintain Voice mailbox status information synchronisation between the MS and the Voice Mailbox in the event of Voice Mail Message deletion.

The first 'bit' of the Enhanced Voice Mail Information Element Data is known as Enhanced Voice Mail PDU Type and discriminates between whether the Enhanced Voice Mail Information PDU is an Enhanced Voice Mail Notification or an Enhanced Voice Mail Delete Confirmation.

#### 9.2.3.24.13.1 Enhanced Voice Mail Notification

The Enhanced Voice Mail Notification Information Element Data has the following format where the parameters are in strict order following the IEDL. The Enhanced Voice Mail Notification IEI and its associated IEDL and IED shall be complete within a single UDH.

In the event of a contradiction between Enhanced Voice Mail Notification and either the DCS (23.038) [9] indicating Voicemail Message Waiting or the Special SMS Message Indication (9.2.3.24.2) indicating Voice Message Waiting or both then the Enhanced Voice Mail Notification specified here shall take precedence.



| <u>Parameter</u>                               | <u>Parameter Length</u>    | <u>Mandatory/Optional/Conditional</u> |
|--|----------------------------|---------------------------------------|
| <u>ENHANCED_VOICE_MAIL_PDU_TYPE</u>            | Bit 0 Octet 1              | <u>M</u>                              |
| <u>RESERVED_FOR_FUTURE_USE</u>                 | Bits 2..3 Octet 1          | <u>M</u>                              |
| <u>SM_STORAGE</u>                              | Bit 4 Octet 1              | <u>M</u>                              |
| <u>VM_MAILBOX_ALMOST_FULL</u>                  | Bit 5 Octet 1              | <u>M</u>                              |
| <u>VM_MAILBOX_FULL</u>                         | Bit 6 Octet 1              | <u>M</u>                              |
| <u>VM_MAILBOX_STATUS_EXTENSION_INDICATOR</u>   | Bit 7 Octet 1              | <u>M</u>                              |
| <u>VM_MAILBOX_ACCESS_ADDRESS</u>               | Octets 2... n+2 (2         | <u>M</u>                              |
| <u>NUMBER_OF_VOICE_MESSAGES</u>                | Bits 0..7 Octet n+3        | <u>M</u>                              |
| <u>NUMBER_OF_VM_NOTIFICATIONS</u>              | Bits 0..4 Octet n+4        | <u>M</u>                              |
| <u>RESERVED_FOR_FUTURE_USE</u>                 | Bits 5..7 Octet n+4        | <u>M</u>                              |
| <u>VM_MAILBOX_STATUS_EXTENSION_LENGTH</u>      | 1 Octet (3                 | <u>C</u>                              |
| <u>VM_MAILBOX_STATUS_EXTENSION_DATA</u>        | 1 or more Octets (3        | <u>C</u>                              |
| <u>VM_MESSAGE_ID</u> (1                        | Bits 0..15 Octets n+5..n+6 | <u>M</u>                              |
| <u>VM_MESSAGE_LENGTH</u> (1                    | Bits 0..7 Octet n+7        | <u>M</u>                              |
| <u>VM_MESSAGE_RETENTION_DAYS</u> (1            | Bits 0..4 Octet n+8        | <u>M</u>                              |
| <u>RESERVED_FOR_FUTURE_USE</u> (1              | Bit 5 Octet n+8            | <u>M</u>                              |
| <u>VM_MESSAGE_PRIORITY_INDICATOR</u> (1        | Bit 6 Octet n+8            | <u>M</u>                              |
| <u>OCTET_VM_MESSAGE_EXTENSION_INDICATOR</u> (1 | Bit 7 Octet n+8            | <u>M</u>                              |
| <u>VM_MESSAGE_CALLING_LINE_IDENTITY</u> (1     | Octets n+9.. n+9+m (2      | <u>M</u>                              |
| <u>VM_MESSAGE_EXTENSION_LENGTH</u> (1          | 1 Octet (3                 | <u>C</u>                              |
| <u>VM_MESSAGE_EXTENSION_DATA</u> (1            | 1 or more Octets (3        | <u>C</u>                              |

NOTE 1. This sequence of parameters are repeated a number of times according to the number of Voice Mail notifications conveyed in this IE.

NOTE:2 'n' and 'm' denote the number of octets required for the VM\_MAILBOX\_ACCESS\_ADDRESS and the

VM CALLING LINE IDENTITY as appropriate including the Address-Length, Type-of-address and Address-value. See 9.1.2.5.

NOTE:3 The Conditional Octets are excluded from the Octet count in the table in this release because no extensions are defined in this release.

ENHANCED VOICE MAIL PDU TYPE This parameter shall be set to 0 to specify that the following Information Element Data Parameters is an Enhanced Voice Mail Notification.

RESERVED FOR FUTURE USE This parameter is set to 0 and is reserved for future use.

SM\_STORAGE This parameter shall be set to 0 to indicate that this SM shall be discarded after evaluating its contents; otherwise it shall be set to a 1 to indicate to the MS that this SM shall be stored in the ME or the USIM.

VM\_MAILBOX\_ALMOST\_FULL This parameter shall be set to 1 if the Voice Mailbox in the Voice Mail system is almost full; otherwise this field shall be set to 0. The point at which the voice mailbox is considered almost full is Voice Mail System specific.

VM\_MAILBOX\_FULL This parameter shall be set to 1 if the Voice Mailbox in the Voice Mail system is full; otherwise this field shall be set to 0.

VM\_MAILBOX\_STATUS\_EXTENSION\_INDICATOR In this release, this parameter shall be set to 0. This parameter shall be set to 1 to indicate that a VM\_MAILBOX\_STATUS\_EXTENSION\_LENGTH parameter is present in this PDU.

VM\_MAILBOX\_ACCESS\_ADDRESS This parameter shall contain the address to be used by the mobile subscriber to access the mobile subscribers Voice Mailbox. This parameter coding shall comply with the the SM-TL address format specified in 9.1.2.5 above.

NUMBER\_OF\_VOICE\_MESSAGES This octet shall contain a value in the range 0 to 255 indicating the current number of Voice Mail messages that are unread. The value 255 shall be taken to mean 255 or greater. The NUMBER\_OF\_VOICE\_MESSAGES shall be stored on the USIM in accordance with the procedure for storage of Message Waiting Indication Status described in Special SMS Message Indication (9.2.3.24.2).

NUMBER\_OF\_VM\_NOTIFICATIONS This parameter has a range 0 to 15. This parameter shall indicate the number of specific Voice Message notifications to follow within this IE.

|   |   |
|---|---|
| <u>RESERVED FOR FUTURE USE</u>            | <u>This parameter shall be set to 0 and is reserved for future use.</u>   |
| <u>VM_MAILBOX_STATUS_EXTENSION_LENGTH</u> | <u>This parameter shall be set to the number of additional octets that immediately follow. This parameter has a value in the range 0 to 255. The presence of this parameter is conditional on the setting of VM_MAILBOX_STATUS_EXTENSION_INDICATOR in this PDU.</u>   |
| <u>VM_MAILBOX_STATUS_EXTENSION_DATA</u>   | <u>This parameter comprises a number of additional octets allowing additional VM mailbox generic status parameters to be conveyed in this PDU. Additional octets are not defined in this release but may be defined later by 3GPP. This parameter is conditional on the presence of VM_MAILBOX_EXTENSION_LENGTH</u>   |
| <u>VM_MESSAGE_ID</u>                      | <u>This parameter shall be set to the message ID of the Voice Mail message in this specific Voice Message notification. This parameter is binary and has a range 0 to 65535, modulus 65536. It is the responsibility of the Voice Mail system to set this parameter to uniquely identify a Voice Mail message within the modulus.</u>   |
| <u>VM_MESSAGE_LENGTH</u>                  | <u>This parameter shall be set to the length of the Voice Mail message in this notification in seconds. This parameter has a range 0 to 255. For voice mail messages that are longer than 255 seconds, this parameter shall be set to its maximum 255.</u>  |
| <u>VM_MESSAGE_RETENTION_DAYS</u>          | <u>This parameter shall be set to the number of days after which the specific Voice Mail message in this notification is anticipated to be automatically deleted from the Voice Mail system timed from the GSM Timestamp (TP-SCTS 9.2.3.11) for this Enhanced Voice Mail Notification. This parameter has a range 0 to 31. For Voice Mail messages that have a longer retention time than 31 days, this parameter shall be set to its maximum 31.</u> |
|   | <u>NOTE: The GSM Timestamp is the time that the SC received the SM from the Voice Mail system which is not necessarily the time that the voice message was deposited into the Voice Mail system.</u>  |
| <u>RESERVED FOR FUTURE USE</u>            | <u>This parameter is set to 0 and is reserved for future use.</u>   |
| <u>VM_MESSAGE_PRIORITY_INDICATION</u>     | <u>This parameter shall be set to 1 to indicate that the specific Voice Mail message in this notification held in the Voice Mailbox is urgent; otherwise the parameter shall be set to 0.</u>   |
| <u>VM_MESSAGE_EXTENSION_INDICATOR</u>     | <u>In this release, this parameter shall be set to 0. This parameter shall be set to a 1 to indicate that a</u>   |

VM MESSAGE EXTENSION LENGTH parameter is present in this PDU.

VM MESSAGE CALLING LINE IDENTITY This parameter shall contain the address to be used by the mobile subscriber to contact the originator of the specific Voice Mail message in this notification. Where the CLI is not available then the coding of this parameter shall indicate that there is no address. i.e The length indicator in this parameter shall be set to 0.

This parameter coding shall comply with the the SM-TL address format specified in 9.1.2.5 above.

VM MESSAGE EXTENSION LENGTH This parameter shall be set to the number of additional octets that immediately follow. This parameter has a value in the range 0 to 255. The presence of this parameter is conditional on the setting of VM MESSAGE EXTENSION INDICATOR in this PDU.

VM MESSAGE EXTENSION DATA This parameter comprises a number of additional octets allowing additional voicemail message specific parameters to be conveyed in this PDU. Additional octets are not defined in this release but may be defined later by 3GPP. This parameter is conditional on the presence of VM MESSAGE EXTENSION LENGTH.

#### 9.2.3.24.13.2 Enhanced Voice Mail Delete Confirmation

The Enhanced Voice Mail Delete Confirmation Information Element Data contains synchronization information. A Voice Mail system may send an Enhanced Voice Mail Delete Confirmation in order to indicate to the ME that certain voice mail messages that have been deleted and to indicate the updated status of the Voice Mailbox.

The Enhanced Voice Mail Delete Confirmation Information Element Data has the following format where the parameters are in strict order following the IEDL. The Enhanced Voice Mail Delete Confirmation IEI and its associated IEDL and IED shall be complete within a single UDH.

⋮

| <u>Parameter</u>                             | <u>Parameter Length</u> | <u>Mandatory/Condition<br/>Optional</u> |
|--|-------------------------|---|
| <u>ENHANCED_VOICE_MAIL_PDU_TYPE</u>          | Bit 0 Octet 1           | <u>M</u>                                |
| <u>RESERVED_FOR_FUTURE_USE</u>               | Bits 1..3 Octet 1       | <u>M</u>                                |
| <u>SM_STORAGE</u>                            | Bit 4 Octet 1           | <u>M</u>                                |
| <u>VM_MAILBOX_ALMOST_FULL</u>                | Bit 5 Octet 1           | <u>M</u>                                |
| <u>VM_MAILBOX_FULL</u>                       | Bit 6 Octet 1           | <u>M</u>                                |
| <u>VM_MAILBOX_STATUS_EXTENSION_INDICATOR</u> | Bit 7 Octet 1           | <u>M</u>                                |
| <u>VM_MAILBOX_ACCESS_ADDRESS</u>             | Octets 2..n+2 (2)       | <u>M</u>                                |
| <u>NUMBER_OF_VOICE_MESSAGES</u>              | Bits 0..7 Octet n+3     | <u>M</u>                                |
| <u>NUMBER_OF_VM_DELETES</u>                  | Bits 0..4 Octet n+4     | <u>M</u>                                |
| <u>RESERVED_FOR_FUTURE_USE</u>               | Bits 5..7 Octet n+4     | <u>M</u>                                |
| <u>VM_MAILBOX_STATUS_EXTENSION_LENGTH</u>    | 1 Octet (3)             | <u>C</u>                                |
| <u>VM_MAILBOX_STATUS_EXTENSION_DATA</u>      | 1 or more Octets (3)    | <u>C</u>                                |
| <u>VM_MESSAGE_ID</u> (1)                     | Octets n+5..n+6         | <u>M</u>                                |
| <u>RESERVED_FOR_FUTURE_USE</u> (1)           | Bits 0..6 Octet n+7     | <u>M</u>                                |
| <u>VM_MESSAGE_EXTENSION_INDICATOR</u> (1)    | Bit 7 Octet n+7         | <u>M</u>                                |
| <u>VM_MESSAGE_EXTENSION_LENGTH</u> (1)       | 1 Octet (3)             | <u>C</u>                                |
| <u>VM_MESSAGE_EXTENSION_DATA</u> (1)         | 1 or more Octets (3)    | <u>C</u>                                |

NOTE 1. This sequence of parameters are repeated a number of times according to the number of Voice Mail Delete Confirmations conveyed in this IE.

NOTE:2 'n' denotes the number of octets required for the VM\_MAILBOX\_ACCESS\_ADDRESS including the Address-Length, Type-of-address and Address-value See 9.1.2.5.

NOTE:3 The Conditional Octets are excluded from the Octet count in the table in this release because no extensions are defined in this release.

ENHANCED\_VOICE\_MAIL\_PDU\_TYPE This parameter shall be set to 1 to specify that the following Information Element Data is an Enhanced Voice Mail Delete Confirmation.

|  |  |
|--|--|
| <u>RESERVED FOR FUTURE USE</u>               | <u>This parameter is set to 0 and is reserved for future use.</u>  |
| <u>SM STORAGE</u>                            | <u>See section 9.2.3.24.13.1</u>   |
| <u>VM MAILBOX ALMOST FULL</u>                | <u>See section 9.2.3.24.13.1</u>   |
| <u>VM MAILBOX FULL</u>                       | <u>See section 9.2.3.24.13.1</u>   |
| <u>VM MAILBOX STATUS EXTENSION INDICATOR</u> | <u>In this release, this parameter shall be set to 0. This parameter shall be set to 1 to indicate that a <u>VM_MAILBOX_STATUS_EXTENSION_LENGTH</u> parameter is present in this PDU.</u>  |
| <u>VM MAILBOX ACCESS ADDRESS</u>             | <u>See section 9.2.3.24.13.1</u>   |
| <u>NUMBER OF VOICE MESSAGES</u>              | <u>See section 9.2.3.24.13.1</u>   |
| <u>NUMBER OF VM DELETES</u>                  | <u>This parameter has a range 0 to 63. This parameter shall indicate the number of <u>VM_MESSAGE_ID</u>'s that follow in this IE</u>   |
| <u>RESERVED FOR FUTURE USE</u>               | <u>This parameter is set to 0 and is reserved for future use.</u>  |
| <u>VM_MAILBOX_STATUS_EXTENSION_LENGTH</u>    | <u>This parameter shall be set to the number of additional octets that immediately follow. This parameter has a value in the range 0 to 255. The presence of this parameter is conditional on the setting of <u>VM_MAILBOX_STATUS_EXTENSION_INDICATOR</u> in this PDU.</u>   |
| <u>VM_MAILBOX_STATUS_EXTENSION_DATA</u>      | <u>This parameter comprises a number of additional octets allowing additional VM mailbox generic status parameters to be conveyed in the PDU. Additional octets are not defined in this release but may be defined later by 3GPP. This parameter is conditional on the presence of <u>VM_MAILBOX_EXTENSION_LENGTH</u></u>  |
| <u>VM_MESSAGE_ID</u>                         | <u>This parameter shall be set to the message ID of the specific voice mail message(s) whose deletion is being confirmed. The range of this parameter is defined in section 9.2.3.24.13.1 and for a specific voice mail message the value of this parameter shall be identical to that used for the VM Notification. This parameter is repeated according to the number of voice mail message deletions being confirmed.</u> |
| <u>RESERVED FOR FUTURE USE</u>               | <u>This parameter is set to 0 and is reserved for future use. This parameter is repeated according to the number of voice mail message deletions being confirmed.</u>  |

VM MESSAGE EXTENSION INDICATOR In this release, this parameter shall be set to 0. This parameter shall be set to a 1 to indicate that a VM MESSAGE EXTENSION LENGTH parameter is present in this PDU.

VM MESSAGE EXTENSION LENGTH This parameter shall be set to the number of additional octets that immediately follow. This parameter has a value in the range 0 to 255. The presence of this parameter is conditional on the setting of VM MESSAGE EXTENSION INDICATOR in this PDU

VM MESSAGE EXTENSION DATA This parameter comprises a number of additional octets allowing additional voicemail message specific parameters to be conveyed in this PDU. Additional octets are not defined in this release but may be defined later by 3GPP. This parameter is conditional on the presence of VM MESSAGE EXTENSION LENGTH

### 9.2.3.25 TP-Reject-Duplicates (TP-RD)

The TP-Reject-Duplicates is a 1 bit field located within bit 2 of the first octet of SMS-SUBMIT and has the following values.

- |            |   |   |
|------------|---|---|
| Bit no. 2: | 0 | Instruct the SC to accept an SMS-SUBMIT for an SM still held in the SC which has the same TP-MR and the same TP-DA as a previously submitted SM from the same OA.   |
|            | 1 | Instruct the SC to reject an SMS-SUBMIT for an SM still held in the SC which has the same TP-MR and the same TP-DA as the previously submitted SM from the same OA. In this case the response returned by the SC is as specified in 9.2.3.6.. |