

3GPP/PCG Meeting#8
New Orleans, United States,
25 April 2002

3GPP/PCG#8(02)28
25 April 2002
page 1 of 23

Source: 3GPP TSG-GERAN

Title: TSG-GERAN Project Schedule

Agenda item: 4.5

Document for:

Decision	
Discussion	
Information	X

3G TR 50.099_{v0.165} (2002-041-11)

Project schedule

GSM/EDGE RAN (GERAN)

Project scheduling and open issues for GERAN



Contents

Foreword	4
Scope	4
General.....	4
Requirements	5
Functional description	5
Technical realisation and amendments.....	6
Work item status and approval time frame.....	7
A-1 GERAN radio requirements	16
A-2 History	23

Foreword

New due to the change to 3GPP

Scope

The purpose of this document is to describe the schedule of the GSM/EDGE radio access network (GERAN) standardisation process and to view it's current state and open issues that are still under discussion. It also lists the new standards and necessary amendments to the 3GPP specifications for the technical realisation of the functions. GERAN is a term used to describe a GSM and EDGE based 200 kHz radio access network. The GERAN is based on GSM/EDGE release 99, and covers all new features for GERAN R4 and subsequent releases, with full backward compatibility to previous releases. This document focuses in the standardization activities around the issues of:

- IP Multimedia (real-time end-to-end IP)
- Alignment with UMTS/UTRAN architecture, bearer services and QoS handling
- Spectrum efficiency and performance improvements
- Specification flexibility for future enhancements

which are seen as the essential parts of the GERAN and have been identified by TSG GERAN. Other activities are handled in separate project plans and are not covered here.

Abbreviations

EDGE	Enhanced data rates for GSM Evolution
GERAN	GSM/EDGE radio access network
COMPACT	Deployment of services in spectrum below 1 MHz

Support of specification work

This document is a 'living document' and permanently updated by the editor. Proposals for change shall be forwarded to editor (direct contact details are on the last page), where the latest version can be obtained at any time. The specification rapporteurs should make sure that this document always reflects the latest status of work.

Latest versions of the material are available to interested parties within 3GPP. Specification and Change Request rapporteurs should ensure the latest versions of their material is made available for review and comment by the following mechanisms:

[3GPP FTP Server \(ftp://ftp.3gpp.org/TSG_GERAN/TSG_GERAN/AD-HOCs/Releases%204-5/\):](ftp://ftp.3gpp.org/TSG_GERAN/TSG_GERAN/AD-HOCs/Releases%204-5/)

• [GERAN adhoc meeting reports, most input and all output documents from the former ad-hoc.](#)

General

The GERAN work item(s) will provide a platform to provide the four UMTS bearer classes: conversational, streaming, interactive and background. This includes IP end to end voice and multimedia services. According to the current plans GERAN will be standardized in two releases:

Release R5:

- IP Multimedia (real-time end-to-end IP)
 - Support for simultaneous, multiple radio access bearers with different QoS profiles
 - New protocol stack to support the four radio access bearer classes
 - Conversational (including optimized voice service using AMR)

- Streaming
- Interactive
- Background
- Development / adaptation of a PDCP-based protocol
- Development / adaptation of a RLC/MAC protocol, including an evaluation of:
 - Separation of the RLC and MAC
 - Fast resource allocation procedures
- Optimized physical layer design for radio bearers (with a priority on voice for existing and future AMR modes)
- Development of a control plane protocol stack
 - Hand over for the PS domain
 - Design of new control channels for hand over signalling
 - Design of new hand over procedures
 - Design of new messages and measurements
 - Apart from the above radio interface related changes, hand over has to be supported in the remainder of the network and is RAN controlled.
 - Development of other RR signaling procedures and support for MM
 - e.g. on attach and access procedures, as well as broadcast messages.
- **Alignment with UMTS/UTRAN architecture, bearer services and QoS handling**
 - The same type of services as offered by UTRAN should be offered with GERAN
 - Alignment of bearer classes with UTRAN
 - Alignment of QoS mechanism with UTRAN.
 - Common RAN – CN interface and functional split for UTRAN and GERAN
 - Support of inter system hand over
- **Spectrum efficiency and performance improvements**
- **Specification flexibility for future enhancements**

Release R6:

It is proposed to perform a feasibility study during 2000/2001 for performance enhancements (e.g. statistical multiplexing, interference cancellation, space time coding).

Requirements

The radio requirements for GERAN have been approved and are attached to appendix 2.

Functional description

The concept proposal for the GERAN is available as a first draft in 43.051, the GERAN stage 2 description. For normative information review the specifications named in the sections below.

Technical realisation and amendments

Documentation Structure Overview

With the introduction of GERAN the bearer concept of UMTS is being introduced. Therefore GERAN will be introduced mainly in the existing specifications and stage descriptions. When it comes to the protocol layers and connection to the core network a few new specifications might be necessary to be introduced.

Phased Introduction of Capability

In order to allow a fast introduction of GERAN in the specifications, GERAN has been split in two phases. Release R5 will establish the new bearer classes and provide basic voice over IP capability, release R6 will provide larger performance enhancements.

Work item status and approval time frame


This list reflects the work items running under the responsibility of TSG GERAN.

Feature	Building block	Work task	Date of completion	Status
Evolution of transport (UTRAN Feature)	Evolution of transport in UTRAN and GERAN	<p>Addition of transport mechanisms other than ATM for Iu</p> <ul style="list-style-type: none"> • Identification of alternative transports • Specification of these alternative transports 	Mar 2002	Ongoing
GERAN/UTRAN interface evolution 1 GP-000481	Evolution of Iu ps	<ul style="list-style-type: none"> • Identification of GERAN requirements on Iu ps • Update of specifications 	Nov 2001 Mar 2002	Ongoing
GERAN/UTRAN interface evolution 2 GP-010417	Evolution of Iu cs GP-000430	<ul style="list-style-type: none"> • Identification of GERAN requirements on Iu cs • Update of specifications 	Apr 2002 Jun-Apr 2002	Ongoing (RAN responsible for approval)
Low chip rate TDD option (UTRAN)	Low chip rate TDD interworking with GERAN GP-000432	<ul style="list-style-type: none"> • Handover and Cell Selection / Reselection to UTRA 1.28Mcps TDD 		Ready for R4. Closed
GERAN improvements 1 GP-000433	Gb over IP GP-000434	<p>IP-fication of Gb</p> <ul style="list-style-type: none"> • Concept • Changes to 08.16, 08.18 		Ready for R4. Closed
GERAN improvements 2 GP-012812	Gb enhancements GP-000436	<p>Intra BSC NACC</p> <ul style="list-style-type: none"> • Concept • Changes in 03.64 • Changes in 04.60 • Changes in 44.008 		Ready for R4. Closed
	MS conformance test for Intra BSC NACC GP-012811	<ul style="list-style-type: none"> • Changes in 51.010 	Jun-Apr 2002	Not started
GERAN improvements 3 GP-010418	Evolution of the transport for A GP-010910	<ul style="list-style-type: none"> • Definition of a new A/Ater Interface Transport Layer option based on the Iu Interface Transport Layer • Adaptation of the Layer 3 BSSMAP procedures as required. 	Apr 2002	Ongoing
GERAN Improvements 4 GP-010363	Gb enhancements 2 GP-010363	<p>Stage 2</p> <p>Stage 3 (changes in 44.060)</p> <ul style="list-style-type: none"> • Definition of enhanced countdown procedure • Definition of enhanced TBF release procedure 		Ready for R4. Closed
GERAN Inter BSC NACC improvements over the Gb Interface GP-012313	Modification of Gb protocols for GERAN Inter BSC NACC over the Gb interface GP-012314	<p>Stage 3 (changes to)</p> <ul style="list-style-type: none"> • 48.018 	Apr 2002	Ongoing
	Modification of core network protocols for GERAN Inter BSC NACC for Gb interface GP-011877	<p>Stage 2</p> <ul style="list-style-type: none"> • Concept • 23.060 change – Definition of Inter BSC NACC <p>Stage 3 (changes to)</p> <ul style="list-style-type: none"> • 29.060 	Nov 2001 Apr 2002	

GERAN support for IP multimedia GP-010420	GERAN Header adaptation GP-010421	Header adaptation: <ul style="list-style-type: none"> • Definition of compression and removal modes for PDCP protocol • Conceptual description in stage 2 • Necessary changes on stage 3 regarding header removal 	Sept 2000 Oct 2001 Dec 2002	Ongoing
	GERAN Radio access bearer design for IP multimedia GP-010422	MuM control signalling for conversational multimedia services. <ul style="list-style-type: none"> • Identification of requirements • Necessary modifications due to SIP 	Feb 2002 Jun 2002	Ongoing
	GERAN MS Conformance test for support of IP multimedia GP-010424	<ul style="list-style-type: none"> • MS test 	Dec 2002	Not started
	GERAN BTS Conformance test for support of IP multimedia GP-010425	<ul style="list-style-type: none"> • BTS test 	Dec 2002	Not started
Alignment of 3G functional split and lu GP-012757	GERAN user / control plane GP-012756	Alignment with UMTS bearer concept <ul style="list-style-type: none"> • Stage 2 	Jun 2001	Ongoing
		<ul style="list-style-type: none"> • Adoption of the UTRAN PDCP 	Dec 2001	
		<ul style="list-style-type: none"> • Development of RLC / MAC 	Jun 2002	
		<ul style="list-style-type: none"> • Development of GERAN RRC 	Jun 2002	
		<ul style="list-style-type: none"> • Ciphering and integrity protection concept paper 	Apr 2002	
		<ul style="list-style-type: none"> • Multiple TBF or equivalent Concept paper 	Feb 2002	
		<ul style="list-style-type: none"> • Paging concept 	Apr 2002	
		<ul style="list-style-type: none"> • Dedicated physical subchannels. Includes traffic and control channels 	Nov 2001	
		<ul style="list-style-type: none"> • lu support and broadcast concept 	Apr 2002	
		<ul style="list-style-type: none"> • Impact of using RLC instead of LAPDm concept 	Feb 2002	
		<ul style="list-style-type: none"> • Contention resolution, mobile-station identity, and access concept 	Nov 2001	
		<ul style="list-style-type: none"> • PDCP concept 	Apr 2002	
		<ul style="list-style-type: none"> • Downlink delayed TBF release 	Oct 2001	
		<ul style="list-style-type: none"> • Add transparent RLC Concept 	Feb 2002	
<ul style="list-style-type: none"> • Handover concept 	Feb 2002			
<ul style="list-style-type: none"> • Physical layer alignment with UMTS bearer concept • Control channels in 45.003 • Receiver performance in 45.005 for PDTCH/TCH and control channels 	Jun 2001			

	<p>Inter BSS interface GP-010428</p>	<p>Inter BSS interface Identification of requirements Stage 2 Adoption of relevant parts from Inter BSS Complementation with GERAN specifics New stage 3</p>	<p>JunApr 2002</p>	<p>Ongoing (RAN responsible for approval)</p>
		<p>Inter BSS-RNS interface Identification of requirements Stage 2 Adoption of relevant parts from Inter BSS Complementation with GERAN specifics New stage 3</p>	<p>JunApr 2002</p>	<p>Ongoing (RAN responsible for approval)</p>
	<p>Voice over GERAN PS and CS concept GP-010432</p>	<p>Voice over GERAN PS and CS concept</p> <ul style="list-style-type: none"> Architecture for A, Inter BSS and Inter BSS PS Handover RTP payload 	<p>Nov 2001</p>	<p>Ongoing</p>
	<p>GERAN MS Conformance test for GERAN interface evolution GP-010434</p>	<ul style="list-style-type: none"> MS test 	<p>Dec 2002</p>	<p>Not started</p>
	<p>GERAN BTS Conformance test for GERAN interface evolution GP-010435</p>	<ul style="list-style-type: none"> BTS test 	<p>Dec 2002</p>	<p>Not started</p>
<p>Enhanced A/Gb feasibility study</p>	<p>Enhanced A/Gb feasibility study</p>	<ul style="list-style-type: none"> Study on A/Gb enhancements 	<p>Jun 2002</p>	<p>Started</p>
<p>Flow control supporting an MS with multiple data flows with different QoS over the Gb interface GP-020964</p>	<p>Update of stage 2 specifications</p>	<ul style="list-style-type: none"> Concept document 23.060 (changes to) – Flow Control 	<p>June 2002</p> <p>June 2002</p>	<p>Started</p>
	<p>Modification of BSSGP protocol</p>	<p>Stage 3 (changes to)</p> <ul style="list-style-type: none"> 48.018 	<p>June 2002</p>	<p>Started</p>
<p>Multiple TBF in A/Gb mode GP-021209</p>	<p>Multiple TBF in A/Gb mode</p>	<ul style="list-style-type: none"> Multiple TBF Concept paper Multiple TBF Stage 2 (43.064) CRs Multiple TBF Stage 3 (44.060) CRs 	<p>June 2002</p>	<p>Started</p>
<p>Flexible Layer One for GERAN</p>	<p>Realisation of a Flexible Layer One</p>	<p>Concept Document Architecture in 45.001 and 43.051 Multiplexing in 45.002 Channel Coding in 45.003 Performance Requirements in 45.005 Radio subsystem link control in 45.008 Requirements in 44.004</p>		<p>Started</p>
	<p>Signalling and protocol support for a Flexible Layer One</p>	<p>Modifications to RLC/MAC in 44.060 and 44.160</p> <p>Modifications to RRC in 44.118 and 44.018</p>		<p>Started</p>
	<p>Security for a Flexible Layer One</p>	<p>Ciphering in 44.160, 44.118, 44.060 and 44.018</p>		

	GERAN MS Conformance test for the Flexible Layer One	MS Test in 51.010		Started
	GERAN BTS Conformance test for the Flexible Layer One	BTS Test in 51.021		Started
Enhanced Power Control GP-012748	Realization of Enhanced power control and signaling support GP-012749	Concept Changes to 43.051 Changes to 44.004 Changes to 44.018 Changes to 48.058 Changes to 45.001 Changes to 45.002 Changes to 45.003 Changes to 45.008	Nov 2001	Closed for Rel 5
	GERAN MS Conformance test for Enhanced Power Control GP-012750	<ul style="list-style-type: none"> MS test 	Jun 2002	Not started
	GERAN BTS Conformance test for Enhanced Power Control GP-012751	<ul style="list-style-type: none"> BTS test 	Jun 2002	Not started
8PSK AMR HR GP-012752	Definition of channel coding, performance requirements and signaling support GP-012753	<ul style="list-style-type: none"> Concept Changes to 44.018 Changes to 45.001 Changes to 45.002 Changes to 45.003 Changes to 45.005 Changes to 24.008 Changes to 48.058 	Jun Feb 2002	Ongoing
	GERAN MS Conformance test for 8PSK HR GP-012754	<ul style="list-style-type: none"> MS test 	Dec Jun 2002	
	GERAN BTS Conformance test for 8PSK HR GP-012755	<ul style="list-style-type: none"> BTS test 	Dec Jun 2002	
GERAN enhancements for streaming services 1 GP-010430	GERAN enhancements for streaming services 1 GP-010430	<ul style="list-style-type: none"> Concept RLC protocol enhancement (SDU Discard) 	Oct 2001 Nov 2001 ????	Ongoing
GERAN enhancements for streaming services 2 GP-010429	GERAN enhancements for streaming services 2 GP-010429	Usage of ECSD Stage 2 Stage 3 <ul style="list-style-type: none"> RLC PDU formats MAC header 	Jun 2001 Jun Apr 2002	Ongoing
Intra Domain Connection of RAN Nodes to Multiple CN Nodes: Overall System Architecture	GERAN work for Intra Domain Connection of RAN Nodes to Multiple CN Nodes GP-020254	Stage 2 (changes to) <ul style="list-style-type: none"> 43.051 Introduction of support for IDNNS in GERAN Iu mode Stage 3 (changes to) <ul style="list-style-type: none"> 48.016 Use of Gb interface concepts when a network applies IDNNS 48.018 Include MSC/HLR identity in CS IMSI paging 	Jun April 2002	Started in TSG GERAN #8
700 MHz spectrum support GP-000449	GERAN support for the 700 MHz band	<ul style="list-style-type: none"> Signaling support Physical layer definitions Receiver performance and RF budget 		Ready for R4. Closed

	GERAN MS Conformance test for 700 MHz band GP-000451	<ul style="list-style-type: none"> MS test 	Jun 2001	Closed
	GERAN BTS Conformance test for GERAN interface evolution GP-000452	<ul style="list-style-type: none"> BTS test 	Jun 2001	Ongoing 
Real Time QoS for packet services including VoIP (UTRAN)	HOs: maintenance of real-time QoS while moving between cells in the PLMN including inter-SGSN change and SRNS relocation or possibly other mechanisms (UTRAN) GP-010431	Handover for the packet switched domain <ul style="list-style-type: none"> Stabile RT handover report 25.936 including header removal Update of stage 2 Update of relevant stage 3 specs 	Nov 2001	Closed
Wideband telephony services (UMTS)	Support of WB AMR in GERAN GP-000453	GMSK and 8PSK WB FR / HR support <ul style="list-style-type: none"> Channel coding in 45.003 Signalling for A interface Signalling for lu Link adaptation in 45.009 Receiver performance in 45.005 	Apr 2002 Nov 2001 Jun 2002	Ongoing
	GERAN MS Conformance test for WB AMR GP-000454	<ul style="list-style-type: none"> MS test 	Dec Jun 2002	Not started
	GERAN BTS Conformance test for WB AMR GP-000455	<ul style="list-style-type: none"> BTS test 	Dec Jun 2002	Not started
Location service (UMTS)	LCS interoperability aspects to GERAN GP-000456	<ul style="list-style-type: none"> Co-ordinated development of GSM LCS Phase 2 and UMTS LCS, S2 and GERAN 		Ongoing
	Location service for GERAN R4 GP-010932	<ul style="list-style-type: none"> Work for aligning LCS R4 CN and GERAN 		Ready for R4. Closed
	Location Services (LCS) for GERAN in A/Gb Mode GP-011925	<ul style="list-style-type: none"> GERAN LCS Stage Two Gb interface support for LCS L3 protocol support for LCS Stage 3 specifications 	Feb. 2002	Ready for Rel-5. Closed Completed: GERAN #8

	Location Services (LCS) for GERAN in Iu Mode GP-011926	<ul style="list-style-type: none"> GERAN LCS stage 2 Iu interface support for LCS Iur-g interface support for LCS RRC protocol support for LCS Additional impacts on Broadcast of LCS data on packet channels Stage 3 specifications 	Stage 2- GERAN #8 Feb. 2002 Stage 3 – GERAN #9 Jun April 2002	Ongoing GERAN LCS Stage 2 IU mode 50% complete Iur-g is FFS Stage 3 specifications needed RRC protocol support for LCS concept was discussed in GERAN(2)bis#6 Broadcast LCS data for IU mode: at GERAN #7 discussed and agreed that the capacity exists on the PBCCH to accommodate LCS Broadcast assistance data.
	GERAN MS Conformance test for LCS GP-000458	<ul style="list-style-type: none"> Develop LCS MS test case work plan (Release 98/99/4) Develop LCS MS test cases 	Dec August 2002 (#11)	Work plan agreed: GERAN #7 Test case development ongoing.
	GERAN BTS Conformance test for LCS GP-000459	<ul style="list-style-type: none"> Develop LCS BTS test case work plan (Release 99/99/4) Develop LCS BTS test cases 	Dec 2002 GERAN #12 November 2002	Work has not started
Uplink feasibility GP-012794	TDOA study GP-012794	<ul style="list-style-type: none"> Performing of a feasibility study 	Jun Apr 2002	Started at GERAN #7

Closed work items

Concept papers

In order to prepare for the CRs planned below concept papers in different areas are established. Companies have been assigned to work with the issues in order to drive things forward.

Concept paper	Responsible company
Multiple TBF or equivalent	Siemens
Paging	AWS
Dedicated physical subchannels. Includes traffic and control channels	Nokia
How do we indicate Iu-mode support in a cell? How does the mobile station select mode? Broadcast message content?	AWS
SDU discard	Nokia
Impact of using RLC instead of LAPDm	Nokia
Contention resolution, mobile-station identity, and access	Alcatel
Ciphering and integrity protection	Nokia
PDCP support. Provide the same services as UTRAN RLC and MAC	AWS
Downlink delayed TBF release	AWS
Add transparent RLC	AWS
Handover	Nokia
Iu rg	Vodafone
Codec renegotiation concept for GERAN	No volunteer yet
Support for ECSD channel coding in RLC/MAC	No volunteer yet

New Specifications

GSM No.	TDOC	CR	Subject	CR Comp. Resp.	TSG	Completion Date
43.051			GERAN overall description	S. Guillaume (Nokia)	GERAN	Nov 00
43.059			Functional Stage 2 Description of Location Services in GERAN	M. Livingston (Nokia)	GERAN	April 2001
44.118			GERAN Iu mode RRC	S. Hamiti	GERAN	June 2002
44.160			GERAN Iu mode RLC/MAC	?	GERAN	June 2002
50.099		TR	GERAN project schedule and open issues	F. Mueller	GERAN	Dec 2002
xx.xxx		TR	Optimized speech in the IMS domain	B. Guarino	GERAN	?

✓ Approved † Set on hold → #29 Send to SMG #29 CR0000A000 CR has been cancelled

Change Requests (GERAN release R5)

Here all change requests being handled on TSG GERAN level are listed below. Note only CRs providing new functionality are listed. Correction CRs from previous releases are not listed.

GSM No.	TDOC	CR	Subject	CR Comp. Resp.	STC	Completion Date	Status
43.051	GP-010041	001	Editorial corrections of sections 2 and 3		GERAN	#3	
	GP-010042	002	Corrections of section on GERAN architecture		GERAN	#3	
	GP-010044	003	Changes to clause 6		GERAN	#3	
	GP-010045	004	Clarification wrt TFI unicity		GERAN	#3	
	GP-010050	005	Definition of the MAC functions		GERAN	#3	
	GP-010051	006	Editorial corrections of sections 2 and 3		GERAN	#3	
	GP-010137	007	RLC/MAC for ECSD channels		GERAN	#3	
	GP-010220	008	Change of MAC modes into MAC states; corrections related to PDTCH on DPSCCH		GERAN	#3	
	GP-010221	009	Clarification of RRC functions		GERAN	#3	
	GP-010319	010	Revision of working assumption on ciphering		GERAN	#3	
	GP-010891	011R1	TFI, RBid, DPSCCH		GERAN	#4	
	GP-010890	012R1	Working assumptions for RRC design		GERAN	#4	
	GP-010632	013	Introduction of RRC connection mobility assumptions for GERAN		GERAN	#4	
	GP-010678	014	014 TBF Establishment and Reconfiguration on DPSCCH – Withdrawn		GERAN	#4	
	GP-010883	015R1	Clarifications and corrections to section 6.3 and Annex C		GERAN	#4	
	GP-010605	016	Removal of physical layer muxing		GERAN	#4	
	GP-010887	017R1	RLC SDU Discard		GERAN	#4	
	GP-010762	018	Removal of the QR		GERAN	#4	
	GP-010603	019	Inclusion of the decision of adopting RLC/MAC as layer 2 on the control plane		GERAN	#4	
GP-011345	027R1	Introduction of area concept in GERAN (Rel 5)		GERAN	#5		
GP-011366	028R1	Changes of references to GERAN Release 4 and editorial changes		GERAN	#5		
GP-011678	030	Alignment with Physical Channel Definition in 45.002		GERAN	#6		
GP-012834	034R2	Inclusion of GERAN Iu Internal Cell Identity CI		GERAN	#7		
GP-012705	035R1	Removal of Fast Random Access from GERAN Rel5 Iu		GERAN	#7		
GP-012822	019R1	Use of TOM signaling to support LCS for Gb Mode		GERAN	#7		
GP-012280	021	Editorial revision definition section for TS 43.059		GERAN	#7		
43.059	GP-012836	012R3	Inter NSE Cell Change for LCS for GPRS		GERAN	#7	
	GP-011993	014	Clean-up CR for LCS for GPRS		GERAN	#7	
44.004	GP-011675	002	Introduction of Enhanced Power Control		GERAN	#6	
	GP-012357	006	Enhanced Power Control Alignment with 48.058		GERAN	#7	
44.008	GP-010875	010R1	Introduction of AMR-WB		GERAN	#3	
	GP-010876	011R1	Circuit pools for AMR-WB		GERAN	#3	
44.018	GP-010880	027R1	Introduction of AMR-WB		GERAN	#4	
	GP-011900	044R2	Clarification of "inconsistent" MultiRate configuration IE		GERAN	#6	
	GP-011950	078R2	Introduction of enhanced power control		GERAN	#6	
	GP-012025	110R2	Introduction of Signalling for Adaptive multi rate speech channel at 8-PSK half rate (O-TCH/AHS)		GERAN	#7	
44.031	GP-012032	019	Assistance data		GERAN	#7	
44.060	GP-010680	023	Paging Procedures for Iu Mode		GERAN	#4	
	GP-010754	029	Section 8: Inclusion of GERAN		GERAN	#4	

	GP-010755	030	RLC SDU Discard		GERAN	#4	
45.001	GP-010240	001	Addition of TCH/WFS		GERAN	#3	
	GP-011917	003R1	Introduction of EPC channels		GERAN	#6	
	GP-012350	004	Introduction of adaptive half rate speech channels with 8-PSK modulation		GERAN	#7	
	GP-012364	006	Correction of description Wideband AMR channel coding		GERAN	#7	
45.002	GP-010241	007	Addition of TCH/WFS		GERAN	#3	
	GP-010761	013	Mapping of HR 8PSK channels		GERAN	#4	
	GP-011918	020R1	Introduction of EPC channels		GERAN	#6	
	GP-012746	025R1	Introduction of adaptive half rate speech channels with 8-PSK modulation		GERAN	#7	
	GP-012762	029	High multislots classes for type 1 mobiles		GERAN	#7	
45.003	GP-010130	044	Coding and Interleaving Proposal for O-FACCH/F and O-FACCH/H		GERAN	#3	
	GP-010333	A046R1	Channel coding for TCH/WFS		GERAN	#3	
	GP-010760	002	Channel coding for O-FACCH		GERAN	#4	
	GP-011264	005	Channel coding of AMR-NB codec on O-TCH/H		GERAN	#5	
45.005	GP-010133	007R3	Introduction of new AMR speech channels and control channels on Half-rate channels with 8-PSK modulation		GERAN	#7	
	GP-011259	022	Introduction of requirements for Wideband AMR FR GMSK modulated speech channels		GERAN	#5	
	GP-012353	062	Introduction of adaptive half rate speech channels with 8-PSK modulation		GERAN	#7	
45.008	GP-010243	014	Changes to link adaptation for TCH/WFS		GERAN	#3	
	GP-011676	059	Introduction of Enhanced Power Control		GERAN	#6	
45.009	GP010332	A017	Changes to link adaptation for TCH/WFS		GERAN	#3	
	GP-012354	003	Introduction of adaptive half rate speech channels with 8-PSK modulation		GERAN	#7	
48.002	GP-011160	001	Addition of the CTM (Cellular Text Telephone Modem) function		GERAN	#5	
48.008	GP-011161	015R1	Addition of CTM (Cellular Text Telephone Modem) indication		GERAN	#5	
	GP-012046	034R1	Introduction of Signalling for Adaptive multi rate speech channel at 8-PSK half rate (O-TCH/AHS)		GERAN	#7	
48.018	GP-011959		CR 48.018-037 rev 5 Introduction of LCS for GPRS to Release 5 (Rel-5)		GERAN	#6	
	GP-012802	047R3	Inter NSE Cell Change for LCS for GPRS		GERAN	#7	
	GP-012048	050	Cleanup for LCS for GPRS		GERAN	#7	
	GP-012304	056	LCS Capabilities refer to 24.008		GERAN	#7	
48.058	GP-010938	A059R2	Changes due to WB-AMR		GERAN	#4	
	GP-011449	001R1	Introduction of AMR-WB		GERAN	#5	
	GP-011894	002R2	Introduction of Enhanced Power Control		GERAN	#6	
	GP-012050	003	Introduction of Signalling for Adaptive multi rate speech channel at 8-PSK half rate (O-TCH/AHS)		GERAN	#7	
49.031	GP-011927	003R2	Introduction of LCS for GPRS to BSSAP-LE		GERAN	#6	
	GP-012803	011R3	Inter NSE Cell Change for LCS for GPRS				
	GP-012568	013	Adding of Cell Identifier List related to Packet Measurement report information				

✓ Approved † Set on hold ~~CR0000A000~~ CR has been cancelled

Possible CRs required (GERAN release R5)

The darkened fields indicate, that these CR's are already handled and approved by the responsible TSG. The textured fields indicate, that the work on these CRs have been started on workshop or TSG level.

Note, this list is a first draft and has to be reviewed in more detail.

Name	Title	Resp. TSG	Target date	Resource Names	Changes
CR Stage 2					
23.002	Network architecture	S2			Small: Inclusion of the GERAN architecture
23.003					GERAN identities
23.009	MSC				Handover scenarios
23.034	Highspeed circuit switched data – Stage 2	S2			?
23.060	GPRS stage 2	S2			Handover and cell reselection scenarios
23.221	Architectural requirements for release 5				
43.051	GERAN overall description	SMG2		Nokia,	Major: Protocol modes and

				Guillaume Sebire	mapping on the physical layer, GERAN RAB requirements, sim to 03.60, 03.64 Handover and cell reselection scenarios
23.107	Quality of service, Concept and Architecture	S2			Optimized speech?
23.110	UMTS Access stratum	S2			?
23.821	Service principles?	S2			
33.102	Security architecture	S3			GERAN Mac I, PCU placement
23.228	IMS	S2			Optimized speech
CR Stage 3					
02.07	Mobile station capability				
24.008	Mobile radio interface layer 3 specification	N1			MS RAC, PDP context activation, class mark, SIP call control
04.04	Layer one: General requirements			Siemens, Jean-Michel Traynard	Update Physical layer primitives
44.018	Mobile radio interface layer 3 specification	GERAN		Nokia, Shkumbin Hamiti	Major: Handover, RR enhancements GERAN Identities
44.060	"General Packet Radio Service; MS – BSS interface; Radio Link Control/Medium Access Control (RLC/MAC) protocol"	GERAN		Lucent, Al Sacuta (MAC)	Major: MAC procedures RLC procedures RR enhancements Block formats New messages Should we have a new spec for RLC, with separated MAC GERAN Identities
25.323	Description of the Packet Data Conversion protocol (PDCP)	R2		Motorola, Sandji Gubde	Minor, if any
25.413	UTRAN Iu interface RANAP signalling	R3			Renegotiation for GERAN BSS
25.420-25.427	UTRAN Iu-r Interface	R3			Depending on the scope of Iu-r the Iu-r specs have to be modified or alternatively a new spec has to be created
45.001	Physical layer on the radio path General description	GERAN			General GERAN impacts on 05 series
45.002	Multiplexing and multiple access on the radio path	GERAN			Major: New channel combinations and mapping of logical channels
45.003	Channel coding	GERAN		Ericsson, David Bladsjö	Major: Coding, Puncturing and interleaving for new bearers
45.005	Radio receiver performance	GERAN		Ericsson, Mats Samuelsson	Major: Receiver performance due to new coding and puncturing schemes. Need to specify all?
45.008	Radio subsystem link control	GERAN		Nortel, David Choukroun	Minor: New measurements?
05.09	Link Adaptation	GERAN			
11.10	Mobile test spec	GERAN			Testing of RF parameters
11.21	BTS test spec	GERAN			Testing of BTS RF parameters

1) Depending on what is planned for UTRAN Rel 5

Possible CRs required (GERAN release R6)

The darkened fields indicate, that these CR's are already handled and approved by the responsible STC. The textured fields indicate, that the work on these CRs have been started on workshop or STC level

Name	Title	Resp. STC	Target SMG	Resource_Names	Changes

A-1 GERAN radio requirements

A-1.1 Introduction

The GERAN provides a range of bearer services to mobile and stationary users in a variety of application areas and operating environments. The radio access network will be connected to the third generation core network and will as far as possible extend the services of the fixed networks to mobile users.

This document outlines the overall requirements for GERAN release 2000, which includes all GSM/EDGE work items of release 2000. More specific radio requirements, such as radio requirements for the AMR wide band speech codec, are included as references, if available, and are not discussed in this document. The requirements should be used as guidelines for the design of the radio access network. The requirements should be aligned with the requirements on UTRAN.

A-1.2 Definitions and Abbreviations

A-1.2.1 Definitions

GSM/EDGE RAN GERAN is a term used to describe a GSM and EDGE based 200 kHz radio access network. The GERAN is based on GSM/EDGE release 99, and covers all new features for GSM Release 2000 and subsequent releases, with full backward compatibility to previous releases.

A-1.2.2 Abbreviations

3G	Third Generation
BER	Bit Error Rate
CN	Core network
CS	Circuit Switched
GERAN	GSM/EDGE Radio Access Network
RAN	Radio Access Network
RAB	Radio Access Bearer
RB	Radio Bearer
QoS	Quality of Service
PS	Packet Switched
UMTS	Universal Mobile Telecommunications System
UTRAN	UMTS Terrestrial Radio Access Network

A-1.3 High Level Requirements

The following high level requirements have been initially identified for the GERAN in responsibility of SMG2:

- All bearer classes (conversational, streaming, interactive and background) as defined for UTRAN shall be provided
- The same quality of service handling and radio access bearer service attributes shall be supported as required for UTRAN (as described in TS 23.107). Whether the same range of values of the service attributes as supported by UTRAN shall be supported by GERAN in Release 2000 is for further study
- Support for multiple QoS profiles in parallel shall be provided in the GERAN.

A-1.4 Bearer Definition

A-1.4.1 Radio Access Bearers

GERAN shall provide the same radio access bearers as UTRAN. However, voice is foreseen to be important future service and therefore it is seen as important to optimize the conversational radio access bearer class for IP voice services.

It is required to have the GERAN support Adaptive Multi-Rate (AMR) CODEC speech and to be consistent with S2 requirements. Further, it is desired to have the GERAN support Tandem Free

Operation (TFO) services. Further, voice radio access bearers should be provided with quality and delay comparable to current digital cellular systems.

Figure 1 shows the UMTS QoS architecture. As illustrated in the figure the Radio Access Bearer Service is realized by a Radio Bearer Service and an Iu-Bearer Service.

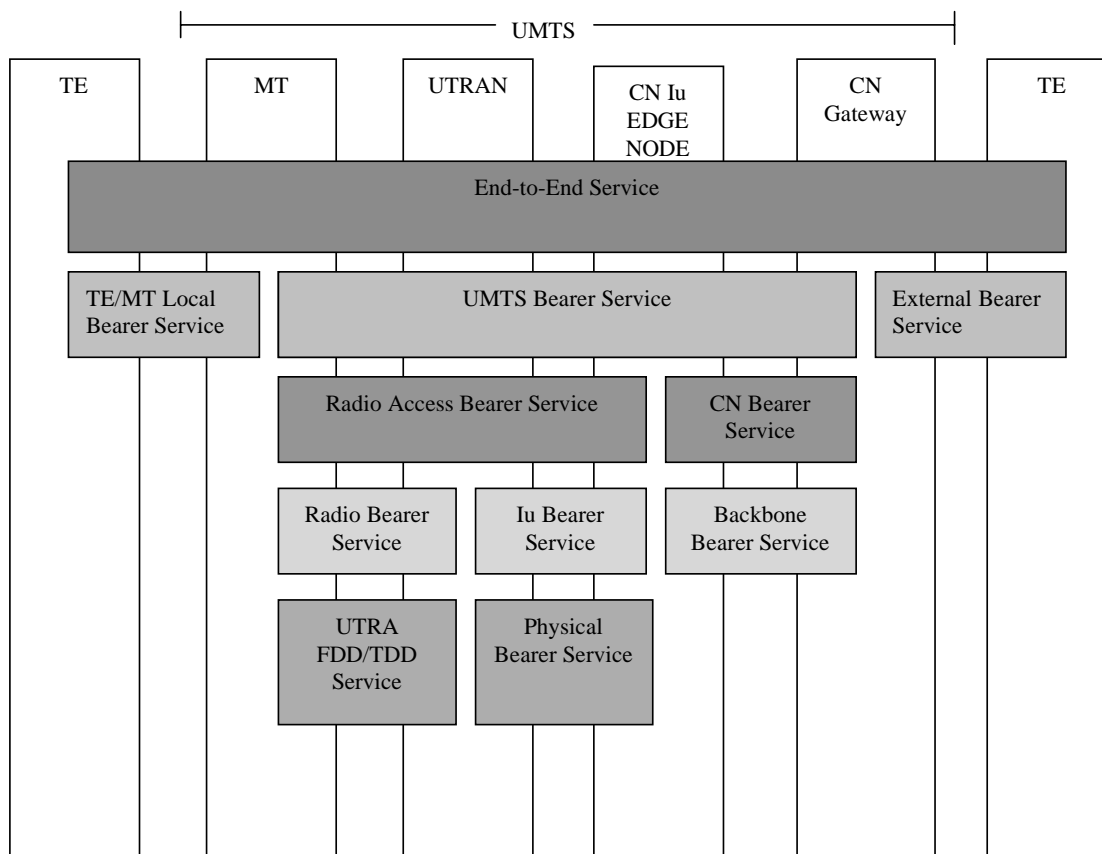


Figure 1. UMTS QoS architecture.

A-1.4.1.1 Radio Access Bearer Attributes

A set of attributes and their possible values are used to describe a radio access bearer capability. This set has been chosen so that a radio access bearer capability can be entirely defined by giving a value to each attribute of the set. In particular, the set and the associated allowed values enable characterization of future (not yet used or foreseen) transfer needs. For the GERAN the same set of attributes are chosen as for the UTRAN, which are defined in 23.107 [1]. The support of the different values may vary from the radio environment the user is in (indoor, urban, rural and etc.), see section A-1.4.2.1.

The values used by the 3G CN are as follows:

Table 1. Value ranges of the radio access bearer service attributes in UMTS.

Traffic class	Conversational class	Streaming class	Interactive class	Background class
Maximum bitrate [kbps]	<2000 (1) (2)	<2000 (1) (2)	< 2000 – overhead (2) (3)	<2000 – overhead (2) (3)
Delivery order	Yes/No	Yes/No	Yes/No	Yes/No
Maximum SDU size [octets]	<1500 (4)	<1500 (4)	<1500 (4)	<1500 (4)

SDU format information	(5)	(5)		
Delivery of erroneous SDUs	Yes/No/-	Yes/No/-	Yes/No/-	Yes/No/-
Residual BER	$5 \cdot 10^{-2}$, 10^{-2} , 10^{-3} , 10^{-4} (6)	$5 \cdot 10^{-2}$, 10^{-2} , 10^{-3} , 10^{-4} , 10^{-5} , 10^{-6} (6)	$4 \cdot 10^{-3}$, 10^{-5} , $6 \cdot 10^{-8}$ (6) (7)	$4 \cdot 10^{-3}$, 10^{-5} , $6 \cdot 10^{-8}$ (6) (7)
SDU error ratio	10^{-2} , 10^{-3} , 10^{-4} , 10^{-5} (6)	10^{-2} , 10^{-3} , 10^{-4} , 10^{-5} (6)	10^{-3} , 10^{-4} , 10^{-6} (6)	10^{-3} , 10^{-4} , 10^{-6} (6)
Transfer delay [ms]	80 – maximum value(6)	500 – maximum value (6)		
Guaranteed bit rate [kbps]	<2000 (1) (2)	<2000 (1) (2)		
Traffic handling priority			1,2,3 (8)	
Allocation/Retention priority	1,2,3 (8)	1,2,3 (8)	1,2,3 (8)	1,2,3 (8)
Source statistic descriptor	Speech/unknown	Speech/unknown	Speech/unknown	Speech/unknown

- 1) Bitrate of 2000 kbps requires that UTRAN operates in transparent RLC protocol mode, in this case the overhead from layer 2 protocols is negligible.
- 2) The granularity of the bit rate parameters must be studied. Although the UMTS network has capability to support a large number of different bitrate values, the number of possible values must be limited not to unnecessarily increase the complexity of for example terminals, charging and interworking functions. Exact list of supported values shall be defined together with S1, N1, N3 and R2.
- 3) Impact from layer 2 protocols on maximum bitrate in non-transparent RLC protocol mode shall be estimated.
- 4) Maximum SDU size shall at least allow UMTS network to support external PDUs having as high MTU as Internet/Ethernet (1500 octets). The need for higher values must be investigated by N1, N3, S1, R2, R3.
- 5) Definition of possible values of exact SDU sizes for which UTRAN can support transparent RLC protocol mode, is the task of RAN WG3.
- 6) Values are indicative. Exact values on Residual BER, SDU error ratio and transfer delay shall defined together with S1, N1, N3 and R2.
- 7) Values are derived from CRC lengths of 8, 16 and 24 bits on layer 1.
- 8) Number of priority levels shall be further analysed by S1, N1 and N3.

A-1.4.2 Radio Bearers

Mapping of radio access bearers onto radio bearers is up to the RAN as long as the requested QoS is achieved.

Each radio bearer will be mapped to one or more radio interface logical channels for the purposes of transmission over the GERAN. Suggested properties of the GERAN:

- The design of GERAN should allow for several radio bearers to be used simultaneously with single user equipment. This could be used for instance to provide support for multiple QoS profiles in parallel

- The design of GERAN should allow for optimised voice radio bearers in both the PS and the CS domain. The handling of TFO is for further study.

The design of GERAN should allow efficient support of the wide variety of services, including future services, which have yet to be defined.

A-1.4.2.1 Minimum radio bearer capabilities

Giving one of the possible values to each RAB service attribute defines a possible radio access bearer service. However, not all combinations are necessarily supported by the GERAN system. The following table shows potential combinations for the attributes that are expected to change dependent on the radio environment. The values given under the different QoS classes are Maximum bitrate/BER/Max Transfer Delay ¹.

Table 2. Minimum radio bearer capabilities.

Operating environment	Propagation conditions	Conversational	Streaming	Background	Interactive
Rural outdoor (Terminal relative speed to ground up to 250 km/h)	HT100 850/900 Mhz: RA250 1800/1900 Mhz: RA130	T.B.D.	T.B.D.	T.B.D.	T.B.D.
Urban/ Suburban outdoor (Terminal relative speed to ground up to 120 km/h)	HT100 TU50	T.B.D.	T.B.D.	T.B.D.	T.B.D.
Indoor/ Low range outdoor (Terminal relative speed to ground up to 10 km/h)	Indoor TU3	T.B.D.	T.B.D.	T.B.D.	T.B.D.

A-1.4.2.2 RTP/UDP/IP Header adaptation

GERAN shall support header adaptation in order to provide an increase in spectral efficiency. In particular the header adaptation mechanism should not degrade the hand over performance and user perceived quality (e.g. header adaptation mechanism should not degrade the speech quality). Error propagation due to header adaptation should be kept to a minimum or avoided, if at all possible. In addition the header adaptation mechanism should operate under all expected BER and delay conditions.

A-1.5 Handover requirements

This section deals with both intra and inter GERAN handover and cell re-selection requirements. Cell re-selection refers to cell change when in idle mode or ready state, whereas handover refers to change of physical channel (in the same or possibly in a new cell) when in non-idle state.

The overall requirements on GERAN handover and cell re-selection are:

- For support of pre release 2000 terminals the GERAN should provide cell re-selection in the same way as (E)GPRS;

¹ To complete the requirements the percentile for the values given in the table should be defined.

- For support of pre release 2000 terminals the GERAN should provide handover in the same way as GSM;
- Cell re-selection and handover should be in the responsibility of the radio access network²;
- GERAN should support intra- (within a cell) and inter- (between cells) cell handovers;
- For the GERAN release 2000, handover performance should be no worse than for GSM circuit switched services. In particular, the transmission gap should be no more than 150 ms;
- In GERAN release 2000, other requirements related to the HO function shall be of same quality as in GSM release 99 (e.g. neighbourcell measurement rate).

Table on Intra GERAN handover and cell reselection

	GERAN R00 PS	GERAN R99 PS	GERAN R00 CS	GERAN R99 CS
GERAN R00 PS	HO CRS	CRS	No	No
GERAN R99 PS	CRS	CRS	No	No
GERAN R00 CS	No	No	HO	HO
GERAN R99 CS	No	No	HO	HO

HO is for RT services

CRS is for NRT services

„No“ means neither HO or CRS is supported

A-1.5.1 Interworking with other systems

Specific requirements are expected from SA2. The following table should be seen as the working assumption on required handover scenarios between different systems while waiting input from SA2.

Table on Inter GERAN handover and cell reselection

	ANSI 136	UTRAN R99 PS	UTRAN R99 CS	UTRAN R00 PS	UTRAN R00 CS
GERAN R00 PS	No	CRS	No	HO CRS	No
GERAN R00 CS	FFS	No	HO	No	HO

HO is for RT services

CRS is for NRT services

„No“ means neither HO or CRS is supported

A-1.6 Security issues

Specific requirements are expected from SMG10.

A-1.7 Operational requirements

A-1.7.1 Architecture requirements

Specific requirements are expected from SA2.

² Network controlled cell re-selection refers to cell re-selection as in GSM, where the cell selection procedure is controlled by broadcasted parameters.

A-1.7.2 Radio operation environments

GERAN should support all Radio Access Bearers in the radio environments specified in current GSM 05.05.

A-1.7.3 Radio access network planning

For a comparable services, GERAN should provide cell range at least as good as GSM Release 99. GERAN systems should not affect the performance of existing EGPRS/GSM systems.

GERAN should support frequency planning similar to GSM Release 99.

Note: Coverage for RT services of GERAN needs to be defined.

A-1.7.4 Interference Management

GERAN should support interference management at least similar to GSM Release 99. The GERAN solution should not preclude the use of smart antennas.

A-1.7.5 Frequency bands and licensing

GERAN systems should be deployable in at least those frequency bands defined in GSM 05.05 release 99.

A-1.8 Efficient spectrum usage

A-1.8.1 Spectral efficiency

For comparable services, GERAN systems should have significantly higher spectral efficiency as compared to Release 99. It is understood that implementation of increased spectral efficiency may be restricted by the requirement of creating a Release 2000 Standard.

A-1.8.2 Spectrum utilization

For initial deployment GERAN shall support all services in at least 2.4 MHz of spectrum. GERAN shall support all packet domain services (real and non real time) in COMPACT mode deployment. It is recognized that spectrum efficiency may be greater with larger spectrum deployments.

A-1.9 Deployment requirements

A-1.9.1 Deployment

GERAN should be flexible to support a variety of initial deployments.

It should be possible to deploy GERAN with a minimum of upgrades to GSM Release 99 radio equipment. GSM/EDGE RAN may be deployed as a contiguous coverage, Island coverage, or Spot coverage system. It is anticipated that GERAN will also be deployed on a city-by-city basis.

A-1.9.2 Backward compatibility

It should be possible to deploy GERAN in spectrum shared with GSM Release 99, as well as other GSM systems. GERAN should be deployable in carriers and time slots adjacent to those supporting GSM Release 99, at least with fixed division of time slots between GERAN and the other systems.

It is recognized that there may be advantages to dedicating radio resources system-wide to some types of GERAN operation.

A-1.9.3 Complexity / cost

It should be possible to provide a variety of MS as well as Base Station types of varying complexity, cost and capabilities in order to satisfy the needs of different types of operator and user scenarios. The Release 2000 is expected to imply the same RF properties as a Release 1999.

A-1.9.4 Terminal

GERAN systems should support a variety of terminal types, including advanced feature phones, PDA's, PCMCIA cards, and other terminal types. Hand portables and PCMCIA card sized GERAN terminals should be optimized in terms of size, weight, operating time, range, and the effective radiated power and cost/performance ratio.

A-1.9.5 Network

For further study

A-1.10 Requirements from bodies outside SMG**A-1.10.1 Electromagnetic compatibility**

GERAN systems should cause no more interference to other equipment than current GSM-based systems.

A-1.10.2 RF radiation

GERAN systems should operate at RF emission power levels consistent with applicable recommendations and specifications for electromagnetic radiation.

A-1.10.3 Security

For further study

A-1.11 Evolution of GERAN

Release 2000 of GERAN should include efficient support of RT services in the PS domain and it should be aligned with UMTS. The GERAN shall be defined so that it can be implemented in phases with increasing functionality (for example making use of new technology), while allowing the maximum possible backwards compatibility. The introduction of new functions should be done in a manner that maximizes forward compatibility with enhancements expected in subsequent releases. The definition of GERAN should allow evolution to higher bit rates.

A-1.12 Open Issues

This section summarizes the open issues that have been identified in this document.

1. Is there support for multiple QoS profiles in parallel in R99
2. A discussion on the relation of TFO to the Transcoder (TRAU) position in the architecture highlighted the issue of how UTRAN deals with TFO. The following questions arose:
 1. Clarification on how TFO is handled in UMTS (This is a question for 3GPP TSG S4))
 2. What voice requirements will come from S2
3. Input from SA2 is expected on the RAB attribute value ranges.
4. The T.B.D. in table 2 need to be resolved. Another open issue in the table is whether other propagation models should be included, e.g. BUx.
5. Verify that the speech gap during handover should be no more than 150 ms is a GSM requirement.
6. The delay and data loss requirements on different handovers and cell re-selection shall be specified further. The requirements depend on the service and that should be reflected as well.

A-1.13 References

- [1] TSG SA2, 23.107, "QoS Concept and Architecture".

A-2 History

Document history	
23 th February 2000	First draft (V0.0.1)
2 nd April 2000	Updated after GERAN #1 and EDGE WS #13 (V0.0.2)
8 th May 2000	Updated after SMG2 #35 (V0.0.3)
22 nd May 2000	Updated after SMG2 GERAN WS #2 (V0.0.4)
24 th May 2000	Updated during SMG2 #36 (V0.0.5)
2 nd August 2000	Updated for 3GPP S3 meeting (V0.0.6)
28 th August 2000	Updated after SMG2 GERAN release 2000 and beyond Adhoc #1
9 th October 2000	Updated after TSG GERAN #1 as 50.099 (V0.0.1)
6 th November 2000	Updated after TSG GERAN Adhoc on release 2000 and beyond #2 as 50.099 (V0.0.2)
12 th February 2001	Updated after TSG GERAN #3 (V0.0.5)
April 2001	Updated for TSG GERAN #4 (V0.06)
7 th May 2001	Updated for TSG GERAN Adhoc on released 2000 and beyond #5 (V0.07)
11 th May 2001	Updated during TSG GERAN Adhoc on release 2000 and beyond #5 (V0.08)
28 th May 2001	Updated for TSG GERAN #5 (V0.09)
27 th August 2001	Updated for TSG GERAN #6 (V0.10)
26 th Nov 2001	Updated for TSG GERAN #7 (V0.11)
30 th Nov 2001	Updated for TSG GERAN #7 (V0.12)
30 th Nov 2001	Updated for TSG GERAN #7 (V0.13)
15 th April, 2002	Updated for TSG-GERAN #9 (v0.15)
<p>Editor: Frank Mueller, Ericsson</p> <p>Email: Frank.Muller@era.ericsson.se</p> <p>Tel: +46-8-7570287</p>	