

TSG-RAN Working Group 1 meeting #12  
Seoul, Korea  
April 10 – 13, 2000

**TSGR1#12(00)0504**

**Agenda item:** AH 4 / 8  
**Source:** Nokia  
**Title:** CR 25.215-050: maximum number of CM pattern sequences  
**Document for:** Decision

---

In TS 25.215, a value of 8 was used as an assumption for the maximum number of simultaneous compressed mode pattern sequences.

Further analysis has shown that this value can be reduced to 6 and thus the UE and network complexity can be reduced.

The value of 6 is chosen according to the following scenario:

The following measurements that have different timing alignment requirements and therefore might need separate compressed mode pattern sequences can be required simultaneously:

- GSM RSSI measurements
- GSM cell search for synchronisation
- GSM cell synchronisation refreshing
- FDD inter-frequency measurements
- TDD measurements

With the addition of one pattern sequence reserved for the measurement purpose "other measurements" of TS 25.331, this leads to a total number of 6 parallel compressed mode pattern sequences.

The rules how to allocate these 6 pattern sequences to the different measurement purposes will be documented in TS 25.331.

With these results, the maximum number of simultaneous compressed mode pattern sequences is proposed to be reduced to 6 and the square brackets to be removed.

**3GPP/SMG Meeting #12**  
**Seoul, Korea, 10-13 April 2000**

**Document R1-00-0504**

e.g. for 3GPP use the format TP-99xxx  
 or for SMG, use the format P-99-xxx

<b>CHANGE REQUEST</b>				Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.	
<b>25.215</b>		<b>CR</b>		<b>050</b>	
GSM (AA.BB) or 3G (AA.BBB) specification number ↑		↑ CR number as allocated by MCC support team		Current Version: <b>3.2.0</b>	
For submission to: <b>RAN #8</b> <small>list expected approval meeting # here ↑</small>		for approval <input checked="" type="checkbox"/>		strategic <input type="checkbox"/>	
		for information <input type="checkbox"/>		non-strategic <input type="checkbox"/> <small>(for SMG use only)</small>	

Form: CR cover sheet, version 2 for 3GPP and SMG      The latest version of this form is available from: <http://ftp.3gpp.org/Information/CR-Form-v2.doc>

**Proposed change affects:** (U)SIM     ME     UTRAN / Radio     Core Network   
(at least one should be marked with an X)

**Source:**      **Nokia**      **Date:**    **05-Apr-00**

**Subject:**      **Maximum number of simultaneous compressed mode pattern sequences**

**Work item:**      \_\_\_\_\_

<b>Category:</b>	F Correction <input type="checkbox"/> A Corresponds to a correction in an earlier release <input type="checkbox"/> B Addition of feature <input type="checkbox"/> C Functional modification of feature <input checked="" type="checkbox"/> D Editorial modification <input type="checkbox"/>		<b>Release:</b>	Phase 2 <input type="checkbox"/> Release 96 <input type="checkbox"/> Release 97 <input type="checkbox"/> Release 98 <input type="checkbox"/> Release 99 <input checked="" type="checkbox"/> Release 00 <input type="checkbox"/>
------------------	--	--	-----------------	--

(only one category shall be marked with an X)

**Reason for change:**      The maximum value of simultaneous compressed mode pattern sequences is set to 6 according to the measurement needs.

**Clauses affected:**      **6.1.1.2**

<b>Other specs affected:</b>	Other 3G core specifications <input type="checkbox"/> Other GSM core specifications <input type="checkbox"/> MS test specifications <input type="checkbox"/> BSS test specifications <input type="checkbox"/> O&M specifications <input type="checkbox"/>	→ List of CRs: → List of CRs: → List of CRs: → List of CRs: → List of CRs:	
------------------------------	---	--	--

**Other comments:**      \_\_\_\_\_

## 5.2.10 Propagation delay

<b>Definition</b>	Propagation delay is defined as one-way propagation delay as measured during PRACH access: $\text{Propagation delay} = (T_{RX} - T_{TX} - 2560)/2$ , where $T_{TX}$ = The time of AICH access slot ( $n-2$ -AICH transmission timing), where $0 \leq (n-2\text{-AICH Transmission Timing}) \leq 14$ and AICH_Transmission_Timing can have values 0 or 1. $T_{RX}$ = The time of reception of the beginning (the first significant path) of the PRACH message from the UE at PRACH access slot $n$ . Note: The definition of "first significant path" needs further elaboration.
<b>Range/mapping</b>	The Propagation delay is given with the resolution of 3 chips with the range $[0, \dots, 765]$ chips. The Propagation delay shall be reported in the unit PROP_DELAY where:  PROP_DELAY_000: $0 \text{ chip} \leq \text{Propagation delay} < 3 \text{ chip}$ PROP_DELAY_001: $3 \text{ chip} \leq \text{Propagation delay} < 6 \text{ chip}$ PROP_DELAY_002: $6 \text{ chip} \leq \text{Propagation delay} < 9 \text{ chip}$ ... PROP_DELAY_252: $756 \text{ chip} \leq \text{Propagation delay} < 759 \text{ chip}$ PROP_DELAY_253: $759 \text{ chip} \leq \text{Propagation delay} < 762 \text{ chip}$ PROP_DELAY_254: $762 \text{ chip} \leq \text{Propagation delay} < 765 \text{ chip}$ PROP_DELAY_255: $765 \text{ chip} \leq \text{Propagation delay}$

---

# 6 Measurements for UTRA FDD

## 6.1 UE measurements

### 6.1.1 Compressed mode

#### 6.1.1.1 Use of compressed mode/dual receiver for monitoring

A UE shall, on higher layers commands, monitor cells on other frequencies (FDD, TDD, GSM). To allow the UE to perform measurements, higher layers shall command that the UE enters in compressed mode, depending on the UE capabilities.

In case of compressed mode decision, UTRAN shall communicate to the UE the parameters of the compressed mode.

A UE with a single receiver shall support downlink compressed mode.

Every UE shall support uplink compressed mode, when monitoring frequencies which are close to the uplink transmission frequency (i.e. frequencies in the TDD or GSM 1800/1900 bands).

All fixed-duplex UE shall support both downlink and uplink compressed mode to allow inter-frequency handover within FDD and inter-mode handover from FDD to TDD.

Monitoring frequencies outside TDD and GSM 1800/1900 bands without uplink compressed mode is a UE capability.

UE with dual receivers can perform independent measurements, with the use of a "monitoring branch" receiver, that can operate independently from the UTRA FDD receiver branch. Such UE do not need to support downlink compressed mode.

The UE shall support one single measurement purpose within one compressed mode transmission gap. The measurement purpose of the gap is signalled by higher layers.

The following section provides rules to parametrise the compressed mode.

#### 6.1.1.2 Parameterisation of the compressed mode

In response to a request from higher layers, the UTRAN shall signal to the UE the compressed mode parameters.

A transmission gap pattern sequence consists of alternating transmission gap patterns 1 and 2, each of these patterns in turn consists of one or two transmission gaps. See figure 1.

The following parameters characterize a transmission gap pattern:

- TGSN (Transmission Gap Starting Slot Number): A transmission gap pattern begins in a radio frame, henceforward called first radio frame of the transmission gap pattern, containing at least one transmission gap slot. TGSN is the slot number of the first transmission gap slot within the first radio frame of the transmission gap pattern.
- TGL1 (Transmission Gap Length 1): This is the duration of the first transmission gap within the transmission gap pattern, expressed in number of slots.
- TGL2 (Transmission Gap Length 2): This is the duration of the second transmission gap within the transmission gap pattern, expressed in number of slots. If this parameter is not explicitly set by higher layers, then  $TGL2 = TGL1$ .
- TGD (Transmission Gap start Distance): This is the duration between the starting slots of two consecutive transmission gaps within a transmission gap pattern, expressed in number of slots. The resulting position of the second transmission gap within its radio frame(s) shall comply with the limitations of [2]. If this parameter is not set by higher layers, then there is only one transmission gap in the transmission gap pattern.
- TGPL1 (Transmission Gap Pattern Length): This is the duration of transmission gap pattern 1.
- TGPL2 (Transmission Gap Pattern Length): This is the duration of transmission gap pattern 2. If this parameter is not explicitly set by higher layers, then  $TGPL2 = TGPL1$ .

The following parameters control the transmission gap pattern sequence start and repetition:

- TGPRC (Transmission Gap Pattern Repetition Count): This is the number of transmission gap patterns within the transmission gap pattern sequence.
- TGCFN (Transmission Gap Connection Frame Number): This is the CFN of the first radio frame of the first pattern 1 within the transmission gap pattern sequence.

In addition to the parameters defining the positions of transmission gaps, each transmission gap pattern sequence is characterized by:

- UL/DL compressed mode selection: This parameter specifies whether compressed mode is used in UL only, DL only or both UL and DL.
- UL compressed mode method: The methods for generating the uplink compressed mode gap are spreading factor division by two or higher layer scheduling and are described in [2].
- DL compressed mode method: The methods for generating the downlink compressed mode gap are puncturing, spreading factor division by two or higher layer scheduling and are described in [2].
- Downlink frame type: This parameter defines if frame structure type 'A' or 'B' shall be used in downlink compressed mode. The frame structures are defined in [2].
- Scrambling code change: This parameter indicates whether the alternative scrambling code is used for compressed mode method 'SF/2'. Alternative scrambling codes are described in [3].
- RPP: Recovery Period Power control mode specifies the uplink power control algorithm applied during recovery period after each transmission gap in compressed mode. RPP can take 2 values (0 or 1). The different power control modes are described in [4].
- ITP: Initial Transmit Power mode selects the uplink power control method to calculate the initial transmit power after the gap. ITP can take two values (0 or 1) and is described in [4].

The UE shall support ~~f8~~6 simultaneous compressed mode pattern sequences which can be used for different measurements.

Higher layers will ensure that the compressed mode gaps do not overlap and are not scheduled to overlap the same frame. The behaviour when an overlap occurs is described in [TS 25.302].

In all cases, higher layers have control of individual UE parameters. Any pattern sequence can be stopped on higher layers' command.

The parameters TGSN, TGL1, TGL2, TGD, TGPL1, TGPL2, TGPRC and TGCFN shall all be integers.

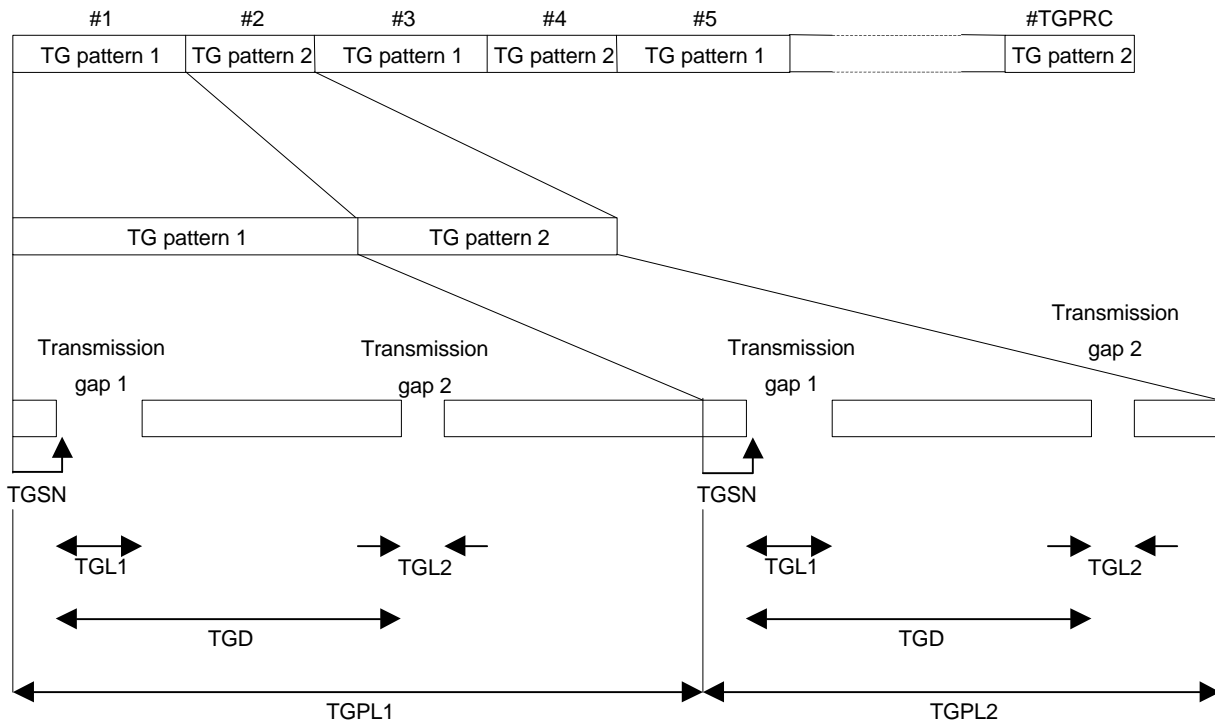


Figure 1: Illustration of compressed mode pattern parameters

### 6.1.1.3 Parameterisation limitations

In the table below the supported values for the TGL1 and TGL2 parameters are shown.

Measurements performed on	Supported TGL1 values, when TGL2 is not set	Supported TGL1 and TGL2 values when both are set (TGL1, TGL2)
FDD inter-frequency cell	7, 14	(10, 5)
TDD cell	4	-
GSM cell	3, 4, 7, 10, 14	-

Multi-mode terminals shall support all TGL1 and TGL2 values for the supported modes.

Further limitations on the transmission gap position within its frame(s) are given in TS 25.212.