

3GPP TSG-RAN-WG3 meeting #6

Document R3-99A32

Sophia Antipolis, France, August 23-27, 1999

Agenda Item : 22

3G CHANGE REQUEST

25.414 CR

Current Version: **3.0.0**

3G specification number ↑

↑ CR number as allocated by 3G support team

For submission to TSG for approval (only one box should be marked with an X)
list TSG meeting no. here ↑ for information

Form: 3G CR cover sheet, version 1.0 The latest version of this form is available from: ftp://ftp.3gpp.org/Information/3GCRF-xx.rtf

Proposed change affects: USIM ME UTRAN Core Network
(at least one should be marked with an X)

Source: Mitsubishi **Date:** Aug 23-27, 1999

Subject:

3G Work item:

Category:
(only one category shall be marked with an X)
F Correction
A Corresponds to a correction in a 2G specification
B Addition of feature
C Functional modification of feature
D Editorial modification

Reason for change: Precise how to map binding Identifier within the current transport network (when using AAL2)

Clauses affected:

Other specs affected:
Other 3G core specifications → List of CRs: 25.424, 25.434, 25.426
Other 2G core specifications → List of CRs:
MS test specifications → List of CRs:
BSS test specifications → List of CRs:
O&M specifications → List of CRs:

Other comments:

Intellectual Property Rights

Foreword

This Technical Specification has been produced by the 3GPP.

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of this TS, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version 3.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 Indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the specification.

1 Scope

The present document specifies the standards for user data transport protocols and related signalling protocols to establish user plane transport bearers over the UTRAN Iu interface.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.
- A non-specific reference to an ETS shall also be taken to refer to later versions published as an EN with the same number.

- [1] ITU-T Recommendation I.361 (2/1999): "B-ISDN ATM Layer Specification".
- [2] ITU-T Recommendation I.363.2 (9/1997): "B-ISDN ATM Adaptation Layer Type 2 Specification".
- [3] ITU-T Recommendation I.363.5 (8/1996): "B-ISDN ATM Adaptation Layer Type 5 Specification".
- [4] ITU-T Recommendation I.366.1 (6/1998): "Segmentation and Reassembly Service Specific Convergence Sublayer for the AAL Type 2".
- [5] ITU-T Recommendation E.164 (5/1997): "Numbering Plan for the ISDN Era".

- [6] ITU-T Recommendation Q.2110 (7/1994): "B-ISDN ATM Adaptation Layer-Service Specific Connection Oriented Protocol (SSCOP)".
- [7] ITU-T Recommendation Q.2140 (2/1995): "B-ISDN ATM Adaptation Layer-Service Specific Coordination Function for Support of Signalling at the Network Node Interface (SSCF-NNI)".
- [8] ITU-T Recommendation Q.2150.1 (1999): "B-ISDN ATM Adaptation Layer-Signalling Transport Converter for the MTP3b".
- [9] ITU-T Recommendation Q.2210 (7/1996): "Message Transfer Part level 3 functions and messages using the services of ITU-T Recommendation Q.2140".
- [10] ITU-T Recommendation Q.2630.1 (1999): "AAL type 2 Signalling Protocol (Capability Set 1)".
- [11] ITU-T Recommendation X.213 (8/1997): "Information Technology-Open Systems Interconnection-Network Service Definitions".
- [12] IETF RFC 768 (8/1980): "User Datagram Protocol".
- [13] IETF RFC 791 (9/1981): "Internet Protocol".
- [14] IETF RFC 1483 (7/1993): "Multiprotocol Encapsulation over ATM Adaptation Layer 5",
- [15] IETF RFC 2225 (4/1998): "Classical IP and ARP over ATM",
- [16] IETF RFC 2460 (12/1998): "Internet Protocol, Version 6 (IPv6) Specification".
- [17] "GTP-U Specification".

3 Definitions, symbols and abbreviations

3.1 Definitions

ALCAP Generic name for the transport signalling protocols used to set-up and teardown transport bearers.

3.2 Symbols

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

| | |
|----------|---|
| AAL | ATM Adaptation Layer |
| AESA | ATM End System Address |
| ALCAP | Access Link Control Application Part |
| ARP | Address Resolution Protocol |
| ATM | Asynchronous Transfer Mode |
| RFC | Request For Comment |
| CN | Core Network |
| GTP | GPRS Tunnelling Protocol |
| IP | Internet Protocol |
| MTP3b | Message Transfer Part level 3 for Q.2140 |
| NSAP | Network Service Access Point |
| PDU | Protocol Data Unit |
| RNC | Radio Network Controller |
| SAR | Segmentation and Reassembly |
| SSCF-NNI | Service Specific Coordination Function-Network Node Interface |
| SSCOP | Service Specific Connection Oriented Protocol |
| SSCS | Service Specific Convergence Sublayer |
| UDP | User Datagram Protocol |
| VC | Virtual Circuit |

4 ATM Layer (I.361)

ATM shall be used in the transport network user plane and the transport network control plane according to I.361[1].

5 Circuit switched domain

5.1 Transport network user plane

5.1.1 General

The following figure shows the protocol stack for the transport network user plane on the Iu interface towards the circuit switched domain.

| |
|-------------------------|
| AAL-2 SAR SCS (I.366.1) |
| AAL2 (I.363.2) |
| ATM |

5.1.2 ATM Adaptation Layer 2

5.1.2.1 AAL2-Segmentation and Reassembly Service Specific Convergence Sublayer (I.366.1)

AAL2 segmentation and reassembly shall be used according to I.366.1[4].

5.1.2.2 AAL2-specification (I.363.2)

AAL2 shall be used according to I.363.2 [2].

5.2 Transport network control plane

5.2.1 General

The following figure shows the protocol stack for the transport network control plane on the Iu interface towards the circuit switched domain.

| |
|---|
| AAL2 connection signalling (Q.2630.1) |
| AAL2 Signalling Transport Converter for MTP3b (Q.2150.1) |
| MTP3b |
| SSCF-NNI |
| SSCOP |
| AAL5 |
| ATM |

5.2.2 Signalling protocol (ALCAP)

5.2.2.1 AAL2 Signalling Protocol (Q.2630.1)

Q.2630.1 [10] shall be used for establishing AAL2 connections towards the circuit switched domain. The AAL2 transport layer uses the embedded E.164 [5] or AESA variants of the NSAP addressing formats [11]. Native E.164 addressing shall not be used.

[Binding ID shall be copied in SUGR parameter of ESTABLISH.request primitive of \[10\]](#)

5.2.3 Signalling transport converter

5.2.3.1 AAL2 MTP3B Signalling Transport Converter (Q.2150.1)

The AAL2 MTP3b Signalling Transport Converter shall be used according to Q.2150.1 [8].

5.2.4 MTP3b (Q.2210)

MTP3b shall be used according to Q.2210 [9].

5.2.5 SSCF-NNI (Q.2140)

SSCF-NNI shall be used according to Q.2140 [7].

5.2.6 SSCOP (Q.2110)

SSCOP shall be used according to Q.2110 [6].

5.2.7 ATM Adaptation Layer Type 5 (I.363.5)


AAL5 shall be used according to I.363.5 [3].

6 Packet switched domain

6.1 Transport network user plane

6.1.1 General

The following figure shows the protocol stack for the transport network user plane on the Iu interface towards the packet switched domain.

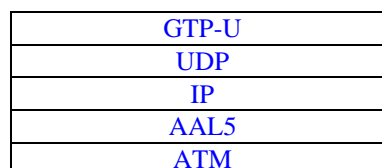

The protocol architecture for the User Plane of the Iu interface towards the packet switched domain shall be GTP-U [17] over UDP over IP over AAL5 over ATM. One or several AAL5/ATM permanent VC's may be used as the common layer 2 resources between the UTRAN and the packet switched domain of the CN.

One switched VC may be used per user flow. The standardisation of the procedures and protocols for use of Switched VC is outside the scope of 3GPP.

Congestion control shall be performed over the Iu user plane toward the packet switched domain using buffer management and no flow control.

6.1.2 GTP-U

The GTP-U [17] protocol shall be used over the Iu interface toward the packet switched domain.

6.1.3 UDP /IP

The path protocol used shall be UDP [12], which is specified in RFC 768. Both the IPv4 [13] and IPv6 [16] IP protocols shall be supported which are specified in RFC 791 (IPv4) or RFC 2460 (IPv6).

The IP addresses for the CN and RNC nodes are exchanged using RANAP signalling. The packet processing function in the CN sends downstream packets to the RNC IP address received in the RANAP signaling. The packet processing function in the RNC sends upstream packets to the CN IP address received in the RANAP signaling.

The GTP UDP port number 3386 is used for the destination port for signalling request messages and T-PDUs. The sending node locally allocates the UDP source port number. For signalling response messages, the UDP destination port is the value of the UDP source port of the corresponding signalling request message. The UDP source port is the value of the UDP destination port of the corresponding signalling request message.

6.1.4 ATM Adaptation Layer Type 5 (I.363.5)

AAL5 shall be used according to I.363.5 [3].

AAL5 virtual circuits are used to transport the IP packets across the Iu interface toward the packet switched domain. Multiple VCs can be used over the interface. There is a one-to-one relationship between the VC and the IP address as required by Classical IP over ATM. An association must be made between a peer node's IP address and a VC. This association can be made using O&M or using ATM Inverse ARP according to Classical IP over ATM.

6.1.5 IP/ATM

Classical IP over ATM protocols are used to carry the IP packets over the ATM transport network. Classical IP over ATM is specified in IETF RFC 2225 [15]. Multiprotocol Encapsulation over AAL5 is specified in IETF RFC 1483 [14].

6.2 Transport network control plane

ALCAP is not required over the Iu interface towards the packet switched domain.

History

| Document history | | |
|--|-------------|--|
| Edition x | <MMMM yyyy> | Publication as <old doctype> <old docnumber> |
| 0.0.1 | Feb 1999 | First draft |
| 0.0.2 | Feb 1999 | Relevant contents from the Merged Description of Iu Interface, v0.0.2, incorporated. |
| 0.0.3 | March 1999 | Modified contents based on comments from 3GPP TSG RAN |
| 0.0.4 | April 1999 | Updated following TSG RAN WG3 #2 meeting |
| 0.1.0 | April 1999 | Updates to packet domain user plane according to report from the 3GPP TSG RAN WG3/SA WG2 joint meeting, March 16 & 18,1999 in Nynäsham. Ready for approval TSG RAN WG3 #3 meeting |
| 1.0.1 | April 1999 | Updates during TSG RAN WG3 #3 meeting. |
| 1.0.2 | April 1999 | Updates during TSG RAN WG3 #3 meeting. Addition of transport for GTP-U data and addressing for AAL2. |
| 1.0.3 | April 1999 | Updates during TSG RAN WG3 #3 meeting. Addition of section and reference to GTP-U specification. |
| 2.0.0 | April 1999 | Updates during TSG RAN WG3 #3 meeting. Moved reference numbers from headings to paragraph text. |
| 3.0.0 | June 1999 | Approved by TSG-RAN by correspondence |
| Rapporteur for TS 25.414 is: | | |
| David Comstock Ericsson Radio Systems AB Tel.: +46 8 585 31226 Fax : +46 8 404 3597 Email : david.comstock@era.ericsson.se | | |
| This document is written in Microsoft Word version 6.0/96. | | |