

3GPP TSG-T (Terminals) Meeting #16
Marco Island, USA, 4 – 6 June 2002

Tdoc TP-020128

Source: T3

Title: TS 53.013 V1.0.0: Test specification for SIM API for Java Card™ (Release 4)

Document for: Information

Please see attached document: TS 51.013 V1.0.0.zip

3GPP TS 51.013 V1.0.0 (2002-05)

Technical Specification

3rd Generation Partnership Project; Technical Specification Group Terminals; Test specification for SIM API for Java Card™ (Release 4)



The present document has been developed within the 3rd Generation Partnership Project (3GPP™) and may be further elaborated for the purposes of 3GPP.

The present document has not been subject to any approval process by the 3GPP Organizational Partners and shall not be implemented. This Specification is provided for future development work within 3GPP only. The Organizational Partners accept no liability for any use of this Specification. Specifications and reports for implementation of the 3GPP™ system should be obtained via the 3GPP Organizational Partners' Publications Offices.

Keywords

GSM, SIM, API

3GPP

Postal address

3GPP support office address

650 Route des Lucioles - Sophia Antipolis
Valbonne - FRANCE
Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Internet

<http://www.3gpp.org>

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© 2002, 3GPP Organizational Partners (ARIB, CWTS, ETSI, T1, TTA, TTC).
All rights reserved.

Contents

| | |
|--|----|
| Contents | 3 |
| Foreword..... | 9 |
| 1 Scope | 10 |
| 2 References | 10 |
| 3 Definitions and abbreviations..... | 11 |
| 3.1 Definitions..... | 11 |
| 3.2 Abbreviations | 11 |
| 4 Test Environment | 12 |
| 4.1 Applicability..... | 12 |
| 4.2 Test environment description..... | 12 |
| 4.3 Tests format..... | 13 |
| 4.3.1 Test Area Reference | 13 |
| 4.3.1.1 Conformance requirements..... | 13 |
| 4.3.1.2 Test Area files | 14 |
| 4.3.1.3 Test Procedure..... | 14 |
| 4.3.1.4 Test Coverage..... | 14 |
| 4.4 Initial Conditions..... | 15 |
| 4.5 Package name..... | 15 |
| 4.6 AID Coding..... | 15 |
| 4.6.1 Specific Test Applet Name for API..... | 16 |
| 4.6.2 Specific Test Applet Name for Framework..... | 16 |
| 4.7 Test Equipment | 17 |
| 4.7.1 APDU tool..... | 17 |
| 4.7.2 Util package..... | 18 |
| 4.7.3 Applet installation parameters..... | 18 |
| 4.7.3.1 Security parameters | 18 |
| 4.7.3.2 Loading components | 18 |
| 4.8 Testing methodology..... | 18 |
| 4.8.1 Test interfaces and facilities | 18 |
| 5 Test plan | 18 |
| 6 API Test Plan..... | 18 |
| 6.1 Package sim.access: | 18 |
| 6.1.1 Interface SIMView | 18 |
| 6.1.1.1 Constants | 18 |
| 6.1.1.2 Method select(short fid, byte[] fci, short fciOffset, short fciLength) | 19 |
| 6.1.1.3 Method select (short fid) | 23 |
| 6.1.1.4 Method status | 26 |
| 6.1.1.5 Method readBinary | 28 |
| 6.1.1.6 Method updateBinary | 30 |
| 6.1.1.7 Method readRecord | 33 |
| 6.1.1.8 Method updateRecord | 39 |
| 6.1.1.9 Method seek | 47 |
| 6.1.1.10 Method increase | 51 |
| 6.1.1.11 Method invalidate | 54 |
| 6.1.1.12 Method rehabilitate | 55 |
| 6.1.2 Class SIMSystem | 57 |
| 6.1.2.1 Method getTheSIMView | 57 |
| 6.1.3 Class SIMViewException | 58 |
| 6.1.3.1 Method throwIt..... | 58 |
| 6.1.3.2 Constructor | 59 |
| 6.2 Package sim.toolkit | 60 |
| 6.2.1 Interface ToolkitConstants | 60 |
| 6.2.1.1 Constants | 60 |
| 6.2.2 Interface ToolkitInterface | 60 |

| | | |
|----------|--|-----|
| 6.2.2.1 | Method processToolkit | 60 |
| 6.2.3 | Class EditHandler | 62 |
| 6.2.4 | Class EnvelopeHandler | 62 |
| 6.2.4.1 | Method getEnvelopeTag | 62 |
| 6.2.4.2 | Method getItemIdentifier | 62 |
| 6.2.4.3 | Method getSecuredDataLength | 64 |
| 6.2.4.4 | Method getSecuredDataOffset | 66 |
| 6.2.4.5 | Method getTheHandler | 68 |
| 6.2.4.6 | Method getTPUDLOffset | 69 |
| 6.2.4.7 | Method getLength | 71 |
| 6.2.4.8 | Method copy | 72 |
| 6.2.4.9 | Method findTLV | 74 |
| 6.2.4.10 | Method getValueLength | 75 |
| 6.2.4.11 | Method getValueByte | 76 |
| 6.2.4.12 | Method copyValue | 78 |
| 6.2.4.13 | Method compareValue | 80 |
| 6.2.4.14 | Method findAndCopyValue(byte tag, byte[] dstBuffer, short dstOffset) | 82 |
| 6.2.4.15 | Method findAndCopyValue(byte tag, byte occurrence, short valueOffset, byte[] dstBuffer, short dstOffset, short dstLength) | 84 |
| 6.2.4.16 | Method findAndCompareValue(byte tag, byte[] compareBuffer, short compareOffset) | 87 |
| 6.2.4.17 | Method findAndCompareValue(byte tag, byte occurrence, short valueOffset, byte[] compareBuffer, short compareOffset, short compareLength) | 89 |
| 6.2.5 | Class EnvelopeResponseHandler | 92 |
| 6.2.5.1 | Method getTheHandler | 92 |
| 6.2.5.2 | Method post | 93 |
| 6.2.5.3 | Method postAsBERTLV | 94 |
| 6.2.5.4 | Method getLength | 96 |
| 6.2.5.5 | Method copy | 97 |
| 6.2.5.6 | Method findTLV | 99 |
| 6.2.5.7 | Method getValueLength | 101 |
| 6.2.5.8 | Method getValueByte | 102 |
| 6.2.5.9 | Method copyValue | 104 |
| 6.2.5.10 | Method compareValue | 106 |
| 6.2.5.11 | Method findAndCopyValue(byte tag, byte[] dstBuffer, short valueOffset) | 108 |
| 6.2.5.12 | Method findAndCopyValue(byte tag, byte occurrence, short valueOffset, byte[] dstBuffer, short dstOffset, short dstLength) | 111 |
| 6.2.5.13 | Method findAndCompareValue(byte tag, byte[] compareBuffer, short compareOffset) | 114 |
| 6.2.5.14 | Method findAndCompareValue(byte tag, byte occurrence, short valueOffset, byte[] compareBuffer, short compareOffset, short compareLength) | 116 |
| 6.2.5.15 | Method appendArray | 120 |
| 6.2.5.16 | Method appendTLV(byte tag, byte value) | 122 |
| 6.2.5.17 | Method appendTLV(byte tag, byte value1, byte value2) | 123 |
| 6.2.5.18 | Method appendTLV(byte tag, byte[] value, short valueoffset, short valuelength) | 125 |
| 6.2.5.19 | Method appendTLV(byte tag, byte value1, byte[] value2, short value2offset, short value2length) | 127 |
| 6.2.5.20 | Method clear | 129 |
| 6.2.6 | Class MEProfile | 130 |
| 6.2.6.1 | Method check (byte index) | 130 |
| 6.2.6.2 | Method check (byte[] mask, short offset, short length) | 131 |
| 6.2.6.3 | Method check (short index) | 133 |
| 6.2.6.4 | Method getValue (short indexMSB, short indexLSB) | 134 |
| 6.2.6.5 | Method copy (short startOffset, byte[] dstBuffer, short dstOffset, short dstLength) | 135 |
| 6.2.7 | Class ProactiveHandler | 138 |
| 6.2.7.1 | Method getTheHandler | 138 |
| 6.2.7.2 | Method init | 139 |
| 6.2.7.3 | Method initDisplayText | 140 |
| 6.2.7.4 | Method initGetInkey | 143 |
| 6.2.7.5 | Method initGetInput | 146 |
| 6.2.7.6 | Method send | 149 |
| 6.2.7.7 | Method getLength | 151 |
| 6.2.7.8 | Method copy | 152 |
| 6.2.7.9 | Method findTLV | 154 |
| 6.2.7.10 | Method getValueLength | 156 |

| | | |
|----------|---|-----|
| 6.2.7.11 | Method getValueByte | 158 |
| 6.2.7.12 | Method copyValue | 159 |
| 6.2.7.13 | Method compareValue | 161 |
| 6.2.7.14 | Method findAndCopyValue(byte tag, byte[] dstBuffer, short valueOffset) | 164 |
| 6.2.7.15 | Method findAndCopyValue(byte tag, byte occurrence, short valueOffset, byte[] dstBuffer, short dstOffset, short dstLength) | 167 |
| 6.2.7.16 | Method findAndCompareValue(byte tag, byte[] compareBuffer, short compareOffset) | 170 |
| 6.2.7.17 | Method findAndCompareValue(byte tag, byte occurrence, short valueOffset, byte[] compareBuffer, short compareOffset, short compareLength) | 172 |
| 6.2.7.18 | Method appendArray | 176 |
| 6.2.7.19 | Method appendTLV(byte tag, byte value) | 178 |
| 6.2.7.20 | Method appendTLV(byte tag, byte value1, byte value2) | 180 |
| 6.2.7.21 | Method appendTLV(byte tag, byte[] value, short valueoffset, short valuelength) | 181 |
| 6.2.7.22 | Method appendTLV(byte tag, byte value1, byte[] value2, short value2offset, short value2length) | 184 |
| 6.2.7.23 | Method clear | 186 |
| 6.2.8 | Class ProactiveResponseHandler | 187 |
| 6.2.8.1 | Method copyAdditionalInformation | 187 |
| 6.2.8.2 | Method copyTextString | 191 |
| 6.2.8.3 | Method getAdditionalInformationLength | 194 |
| 6.2.8.4 | Method getGeneralResult | 196 |
| 6.2.8.5 | Method getItemIdentifier | 198 |
| 6.2.8.6 | Method getTextStringCodingScheme | 200 |
| 6.2.8.7 | Method GetTextStringLength | 202 |
| 6.2.8.8 | Method getTheHandler | 204 |
| 6.2.8.9 | Method getLength | 205 |
| 6.2.8.10 | Method copy | 206 |
| 6.2.8.11 | Method findTLV | 208 |
| 6.2.8.12 | Method getValueLength | 210 |
| 6.2.8.13 | Method getValueByte | 211 |
| 6.2.8.14 | Method copyValue | 213 |
| 6.2.8.15 | Method compareValue | 215 |
| 6.2.8.16 | Method findAndCopyValue(byte tag, byte[] dstBuffer, short valueOffset) | 218 |
| 6.2.8.17 | Method findAndCopyValue(byte tag, byte occurrence, short valueOffset, byte[] dstBuffer, short dstOffset, short dstLength) | 220 |
| 6.2.8.18 | Method findAndCompareValue(byte tag, byte[] compareBuffer, short compareOffset) | 223 |
| 6.2.8.19 | Method findAndCompareValue(byte tag, byte occurrence, short valueOffset, byte[] compareBuffer, short compareOffset, short compareLength) | 225 |
| 6.2.9 | Class ToolkitRegistry | 229 |
| 6.2.9.1 | Method allocateTimer | 229 |
| 6.2.9.2 | Method changeMenuEntry | 231 |
| 6.2.9.3 | Method clearEvent | 238 |
| 6.2.9.4 | Method disableMenuEntry | 240 |
| 6.2.9.5 | Method enableMenuEntry | 242 |
| 6.2.9.6 | Method getEntry | 244 |
| 6.2.9.7 | Method getPollInterval | 244 |
| 6.2.9.8 | Method initMenuEntry | 246 |
| 6.2.9.9 | Method isEventSet | 251 |
| 6.2.9.10 | Method releaseTimer | 253 |
| 6.2.9.11 | Method requestPollInterval | 254 |
| 6.2.9.12 | Method setEvent | 256 |
| 6.2.9.13 | Method setEventList | 258 |
| 6.2.10 | Class ViewHandler | 262 |
| 6.2.11 | Class ToolkitException | 262 |
| 6.2.11.1 | Exception Constants | 262 |
| 6.2.11.2 | Constructor ToolkitException | 263 |
| 6.2.11.3 | Method throwIt | 263 |
| 6.3 | SIM Toolkit Framework | 265 |
| 6.3.1 | Minimum Handler Availability | 265 |
| 6.3.1.1 | ProactiveHandler | 265 |
| 6.3.1.2 | ProactiveResponseHandler | 272 |
| 6.3.1.3 | EnvelopeHandler | 284 |
| 6.3.1.4 | EnvelopeResponseHandler | 293 |

Note: Due to an inconsistency in [7] specification it is not possible to cover the test case when an applet, which is not the first toolkit applet triggered, try to post data in multitrigging.....303

| | | |
|-----------|--|-----|
| 6.3.2 | Handler Integrity | 303 |
| 6.3.2.1 | ProactiveHandler | 303 |
| 6.3.2.2 | ProactiveResponseHandler | 305 |
| 6.3.2.3 | EnvelopeHandler | 306 |
| 6.3.3 | Applet Triggering | 321 |
| 6.3.3.1 | EVENT_PROFILE_DOWNLOAD | 321 |
| 6.3.3.2 | EVENT_MENU_SELECTION | 323 |
| 6.3.3.3 | EVENT_MENU_SELECTION_HELP_REQUEST | 324 |
| 6.3.3.4 | EVENT_FORMATTED_SMS_PP_ENV | 325 |
| 6.3.3.5 | EVENT_UNFORMATTED_SMS_PP_ENV | 327 |
| 6.3.3.6 | EVENT_CALL_CONTROL_BY_SIM | 328 |
| 6.3.3.7 | EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM | 330 |
| 6.3.3.8 | EVENT_TIMER_EXPIRATION | 332 |
| 6.3.3.9 | EVENT_UNFORMATTED_SMS_CB | 333 |
| 6.3.3.10 | EVENT_EVENT_DOWNLOAD_MT_CALL | 334 |
| 6.3.3.11 | EVENT_EVENT_DOWNLOAD_CALL_CONNECTED | 335 |
| 6.3.3.12 | EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED | 336 |
| 6.3.3.13 | EVENT_EVENT_DOWNLOAD_LOCATION_STATUS | 338 |
| 6.3.3.14 | EVENT_EVENT_DOWNLOAD_USER_ACTIVITY | 339 |
| 6.3.3.15 | EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE | 340 |
| 6.3.3.16 | EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS | 341 |
| 6.3.3.17 | EVENT_UNRECOGNIZED_ENVELOPE | 343 |
| 6.3.3.18 | EVENT_STATUS_COMMAND | 344 |
| 6.3.3.19 | EVENT_FORMATTED_SMS_CB | 346 |
| 6.3.3.20 | EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION | 347 |
| 6.3.3.21 | EVENT_EVENT_DOWNLOAD_BROWSER_TERMINATION | 348 |
| 6.3.4 | Proactive Command Sending by the STF | 350 |
| 6.3.4.1 | System Proactive Commands | 350 |
| 6.3.4.2 | Interaction with GSM commands | 351 |
| 6.3.5 | Exception Handling | 353 |
| 6.3.5.1 | Hide Exceptions from the ME | 353 |
| 6.3.5.2 | Interaction with Multiple Triggering | 353 |
| 6.3.6 | Framework Security Management | 355 |
| 6.3.6.1 | Input Data | 355 |
| 6.3.6.2 | Output Data | 357 |
| Test Area | Reference: FWK_FWS_OUDA | 357 |
| 6.3.7 | Envelope Response Posting | 359 |
| 6.3.7.1 | EVENT_CALL_CONTROL_BY_SIM | 359 |
| 6.3.7.2 | EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM | 361 |
| 6.3.7.3 | EVENT_UNRECOGNIZED_ENVELOPE | 363 |
| 6.3.8 | Toolkit Installation | 364 |
| 6.3.8.1 | Timers Allocation | 364 |
| 6.3.8.2 | Item Identifier | 365 |
| 6.3.8.3 | Item Position | 368 |
| 6.3.8.4 | Maximum Text Length for a menu entry | 369 |
| 6.3.8.5 | Maximum number of menu entries | 371 |
| 6.3.8.6 | Access Domain | 372 |
| 6.3.8.7 | Priority Level | 376 |
| 6.3.9 | File System Context | 380 |
| 6.3.9.1 | Initial Context | 380 |
| 6.3.9.2 | Context Preservation (current file) | 381 |
| 6.3.9.3 | Context Preservation (current record pointer) | 383 |
| 6.3.10 | Other parts transferred to framework from API | 385 |
| 6.3.10.1 | A handler is a temporary JCRE Entry Point object | 385 |
| 6.3.10.2 | Transaction | 386 |
| 6.3.10.3 | Timer Id between Applets | 387 |

| | |
|--|------------|
| Annex A (normative): Class and Methods AID numbering and acronyms | 388 |
| A.1 Sim.access | 388 |
| A.1.1 SIMView methods..... | 388 |
| A.1.2 SIMSystem methods..... | 388 |
| A.1.3 SIMViewException methods..... | 388 |
| A.2 Sim.toolkit | 389 |
| A.2.1 ToolkitConstants | 389 |
| A.2.2 ToolkitInterface methods..... | 389 |
| A.2.3 EditHandler methods | 389 |
| A.2.4 EnvelopeHandler methods..... | 389 |
| A.2.5 EnvelopeResponseHandler methods | 390 |
| A.2.6 MEProfile methods..... | 391 |
| A.2.7 ProactiveHandler methods..... | 391 |
| A.2.8 ProactiveResponseHandler methods | 392 |
| A.2.9 ToolkitRegistry methods | 393 |
| A.2.10 ViewHandler methods | 393 |
| A.2.11 ToolkitException methods..... | 393 |
| Annex B (normative): Script file syntax and format description..... | 394 |
| B.1 Syntax description | 394 |
| B.2 Semantics..... | 394 |
| B.3 Example..... | 395 |
| B.4 Style and formatting | 396 |
| Annex C (normative): Default Prepersonalisation | 397 |
| C.1 General Default Prepersonalisation..... | 397 |
| C.2 Sim.Access.SimView test default prepersonalisation | 398 |
| C.2.1 DF _{SIMTEST} (SIM Test) | 398 |
| C.2.2 EF _{TNR} (Transparent Never Read)..... | 398 |
| C.2.3 EF _{TNU} (Transparent Never Update)..... | 398 |
| C.2.4 EF _{TARU} (Transparent Always Read and Update)..... | 398 |
| C.2.5 EF _{CNR} (Cyclic Never Read) | 399 |
| C.2.6 EF _{CNU} (Cyclic Never Update)..... | 399 |
| C.2.7 EF _{CNIC} (Cyclic Never Increase) | 399 |
| C.2.8 EF _{CNIV} (Cyclic Never Invalidate) | 400 |
| C.2.9 EF _{CNRH} (Cyclic Never Rehabilitate) | 400 |
| C.2.10 EF _{CARU} (Cyclic Always Read and Update)..... | 400 |
| C.2.11 EF _{LNR} (Linear Fixed Never Read) | 401 |
| C.2.12 EF _{LNU} (Linear Fixed Never Update)..... | 401 |
| C.2.13 EF _{LARU} (Linear Fixed Always Read and Update)..... | 401 |
| C.2.14 EF _{CINA} (Cyclic Increase Not Allowed) | 402 |
| C.2.15 EF _{TRAC} (Transparent Read Access Condition CHV2) | 402 |
| C.2.16 EF _{TIAC} (Transparent Invalidate Access Condition CHV1) | 402 |
| C.2.17 EF _{CIAC} (Cyclic Increase Access Condition CHV2) | 403 |
| C.2.18 EF _{CIAA} (Cyclic Increase Access Condition ADM)..... | 403 |
| C.2.19 EF _{CNRI} (Cyclic Never Rehabilitate Invalidated) | 403 |

| | |
|---|------------|
| Annex D (normative): sim.test.util package and loading , testing and cleaning script examples..... | 404 |
| Annex E (normative): Test Area files. | 405 |
| Annex F (Normative): AID numbering and acronyms for Framework tests..... | 406 |
| F.1 Toolkit Installation Parameters (TIN) | 406 |
| F.2 Minimum Handler Availability (MHA) | 406 |
| F.3 Handler Integrity (HIN)..... | 407 |
| F.4 Applet Triggering (APT)..... | 407 |
| F.5 Proactive Command Sending (PCS) | 407 |
| F.6 Envelope Response Posting (ERP)..... | 407 |
| F.7 Framework Security (FWS) | 408 |
| F.8 File System Context (FSC)..... | 408 |
| F.9 Exception Handling (EXH) | 408 |
| F.10 Other parts transferred to framework from API (API) | 408 |
| Annex G (Normative): Configuration Parameters File..... | 409 |
| G.1 Syntax | 409 |
| G.2 File Contents and Organisation | 409 |
| G.2.1 Default values, order and processing..... | 410 |
| G.2.2 CONVERT Section | 410 |
| G.2.3 INSTALL(load) Section | 410 |
| G.2.4 LOAD Section | 410 |
| G.2.5 INSTALL(install) Section | 410 |
| G.3 Full example | 411 |
| Annex H (informative): Change history | 413 |

Foreword

This Technical Specification (TS) has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The present document covers the minimum characteristics considered necessary in order to provide compliance to GSM 03.19 "SIM API for Java Card™" [7].

The present document describes the technical characteristics and methods of test for testing the SIM API for Java Card (TM) [7] implemented in the subscriber identity modules (SIMs) for GSM. It specifies the following parts:

- test applicability
- test environment description
- tests format
- test area reference
- conformance requirements
- test suite files
- test procedure
- test coverage and,
- a description of the associated testing tools that shall be used.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] (void)
- [2] (void)
- [3] GSM 11.11: "Digital cellular telecommunication system (Phase 2+); Specification of the Subscriber Identity Module - Mobile Equipment (SIM - ME) interface".
- [4] GSM 11.14: "Digital cellular telecommunications system (Phase 2+); Specification of the SIM application toolkit for the Subscriber Identity Module – Mobile Equipment (SIM – ME) interface".
- [5] GSM 11.17: "Subscriber Identity Module" (SIM) conformance test specification".
- [6] (void)
- [7] GSM 03.19 Rel-98: "Digital cellular telecommunications system (Phase 2+); Subscriber Identity Module Application Programming Interface (SIM API); SIM API for Java Card™; Stage 2".
- [8] GSM 03.48 Rel-99: "Digital cellular telecommunications system (Phase 2+); Security Mechanisms for the SIM application toolkit; Stage 2"
- [9] ISO/IEC 7816-3 (1997) " Identification cards - Integrated circuit(s) cards with contacts, Part 3: Electronic signals and transmission protocols".

- [10] GSM 02.19 "Digital cellular telecommunications system (Phase 2+, Release 98); Subscriber Identity Module Application Programming Interface (SIM API); Service description; Stage 1".
- [11] SUN Java Card Specification "Java Card 2.1 API Specification".
- [12] SUN Java Card Specification "Java Card 2.1 Runtime Environment Specification".
- [13] SUN Java Card Specification "Java Card 2.1 VM Architecture Specification".
- [14] ETSI TS 101 220 v3.0.0 "Numbering System for Telecommunication IC card applications".
- [15] GSM 11.10-1: "Digital cellular telecommunication system (Phase 2+); Mobile Station (MS) conformance specification; Part 1: Conformance specification".

3 Definitions and abbreviations

3.1 Definitions

The definitions specified in GSM 11.10-1 [15] clause 3.3 shall apply, unless otherwise specified in the present clause.

Applet: An Applet is an application built up using a number of classes which will run under the control of the Java Card virtual machine.

Applet installation parameters: Default values for applet installation parameters.

Applet loading script: File containing the APDU commands that will load and install the test applet in the card.

CleanUp Script file: File containing the APDU commands that will restore the Default Initial Conditions on the SIM

Conformance Requirement Reference: Description of the expected card behaviour according to 03.19 specification.

Expected state: the state in which the SIM is supposed to be after the execution of the test procedure applied on the relevant initial conditions

Security parameters: Minimum security requirements defined for the applet installation process.

Test Area: Set of Test Cases applicable to a specific part (class method, framework behaviour,...) of the 03.19 specification.

Test Case: Elementary test that checks for compliance with one or more Conformance Requirement References.

Test Output file: TBD.

Test procedure: the sequence of actions/commands to perform all the test cases defined in a test area.

Test Script file: File containing the APDU commands that will execute and verify the test results.

Test Toolkit Applet: Applet designed to test a specific functionality of the SIM API 03.19 specification.

3.2 Abbreviations

For the purpose of the present document, the following abbreviations apply, in addition to those listed in GSM 01.04 [2]:

| | |
|------|-----------------------------------|
| AC | Application Code |
| AID | Application Identifier |
| APDU | Application Protocol Data Unit |
| API | Application Programming Interface |
| CAD | Card Acceptance Device |
| FFS | For Further Study |
| IFD | Interface Device |
| JCRE | Java Card™ Run Time Environment |

| | |
|-----|----------------------------|
| JVM | Java Virtual Machine |
| SIM | Subscriber Identity Module |
| SE | Sending Entity |

4 Test Environment

This clause specifies requirements that shall be met and the testing rules that shall be followed during the test procedure.

4.1 Applicability


The tests defined in this specification shall be performed taking into account the services supported by the card as specified in the EF_{SST} file.

This specification contains tests that test interoperability at the API level. This specification does not currently contain tests for interoperability at the SIM API framework and at the byte code level. These are for further study.

The test defined in this specification are applicable to cards implementing TS 03.19 [7] version 7.4.0 unless otherwise stated.

4.2 Test environment description

The general architecture for the test environment is:

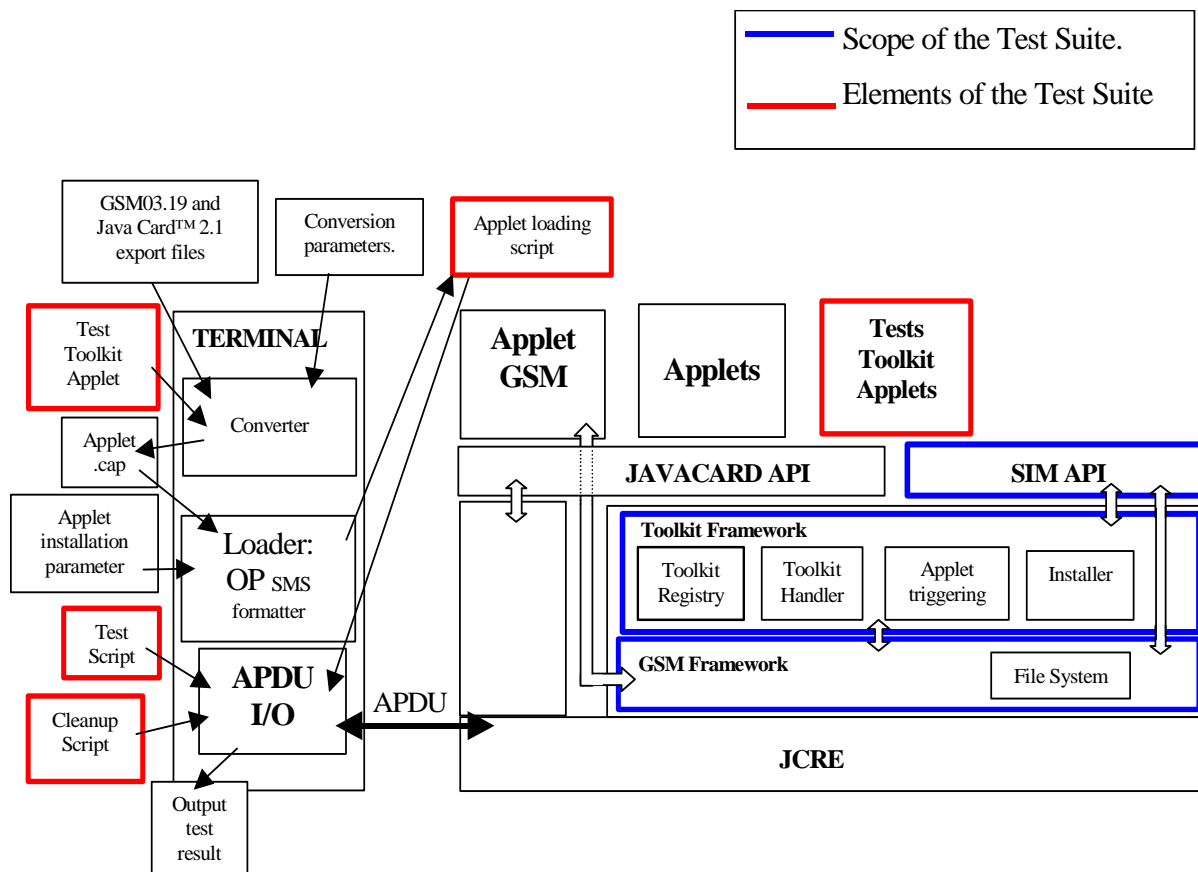

Note: This diagram shows the test architecture required to test interoperability at both API and bytecode level. The latter is currently not included in the current specification. The diagram is for information.

4.3 Tests format

4.3.1 Test Area Reference

Each test area is referenced as follows:

API Testing:: 'API_[package name]_[classname]_[methodname]' where

package name:

sim.access package: '1'

sim.toolkit package: '2'

class name:

yyy: 3 letters for each class.

See Annex A for full classes acronyms list.

method name:

zzzz[input parameters]:

See Annex A for full methods name acronyms list.

FWK: framework testing

Chapter name:

xxx: 3 letters for each chapter

See annex F for full chapter acronyms list

Subchapter name

yyyy: : 4 letters for each subchapter

See annex F for full subchapter acronyms list

LDR: loader testing

[TBD]

4.3.1.1 Conformance requirements

The conformance requirements are expressed in the following way:

- Method prototype as listed in GSM 03.19 [7]specification.
- Normal execution:
 - Contains normal execution and correct parameters limit values, each referenced as a Conformance Requirement Reference Normal (CRRN)
- Parameters error:
 - Contains parameter errors and incorrect parameter limit values, each referenced as a Conformance Requirement Reference Parameter Error (CRRP)
- Context error:
 - Contains errors due to the context the method is used in, each referenced as a Conformance Requirement Reference Context Error (CRRC)

4.3.1.2 Test Area files

The files included in the Test Area use the following naming convention:

- Test Script: [Test Area Reference]_[Test script number].scr
- Test Applet: [Test Area Reference]_[Test applet number].java
- Load Script: [Test Area Reference]_[Load Script number].ldr
- Cleanup Script: [Test Area Reference]_[Cleanup Script number].clr
- Parameter File: [Test Area Reference]_[Parameter File number].par

The test script, applet, installation parameters, load script, cleanup script and conversion parameters numbers start from '1'.

The test script, load script and cleanup script shall share a common syntax and format (see Annex B).

The parameter file has an own syntax (see Annex G) and contains parameters to be used for CAP-file conversion and loading/cleanup script generation.

Scripts file shall be run in the following order:

```
[Test Area Reference]_1.ldr
[Test Area Reference]_1.scr
[Test Area Reference]_1.clr
[Test Area Reference]_2.ldr
[Test Area Reference]_2.scr
[Test Area Reference]_2.clr
....
[Test Area Reference]_n.ldr
[Test Area Reference]_n.scr
[Test Area Reference]_n.clr
```

In case that one of the files is not needed, it shall be skipped during the tests execution.

4.3.1.3 Test Procedure

Each test procedure contains a table to indicate the expected responses form the API and/or the APDU level as follows:

| Test Case | | | |
|-----------|---------------------------------------|-------------------------------|---|
| Id | Description | API Expectation | APDU Expectation |
| | <i>Test Case detailed description</i> | <i>API expected behavior.</i> | <i>Expected response at APDU level.</i> |

4.3.1.4 Test Coverage

The table at the end of each test procedure indicates the correspondence between the Conformance Requirements Reference (CRR) and the different test cases.

4.4 Initial Conditions

The Initial Conditions are a set of general prerequisites for the SIM prior to the execution of testing. For each test procedure described in this document, the following rules apply to the Initial Conditions:

- unless otherwise stated, the file system and the files' content shall fulfil the requirements described in the "Default Prepersonalisation" paragraph;
- unless otherwise stated, before installing the applet(s) relevant to the current test procedure, all packages specific to other test procedures shall not be present.

When both statements apply, a test procedure is said to be in the "Default Initial Conditions" state.

4.5 Package name

Java packages integrating this Test Suite shall follow this naming convention:

sim.test.access.[Test Area Reference]: Java Card packages containing Test Area References for the GSM 03.19 sim.access package.

sim.test.framework.[Test Area Reference]: Java Card packages containing Test Area References for the GSM 03.19 framework.

sim.test.util: for the Test util package defined in this Test Suite.


sim.test.toolkit.[Test Area Reference]: Java Card packages containing Test Area References for the GSM 03.19[7] sim.toolkit package.

Example: The package *../sim.test.access.[Test Area Reference]* creates the following directory structure *../sim/test/access/[Test Area Reference]/API_1_..._1..n.**, where *'API_1_..._1..n.*'* are the different test applets Java source files used in *[Test Area Reference]*.

4.6 AID Coding

The AID coding for the Test Packages, Applet classes and Applet shall be as specified in TS 101 220 [14]. In addition, the following TAR values are defined for use within the present document:

TAR Coding (3 bytes/ 24 bits):

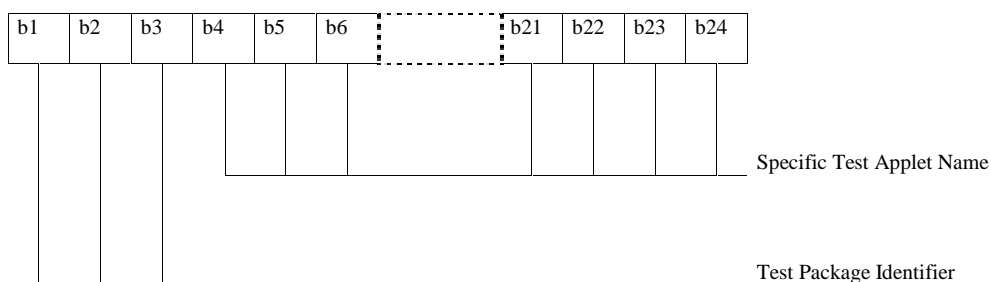

Test package Identifier(bits b1-b3):

000 reserved (as TAR= '00.00.00' is reserved for Card Manager)

001 API

010 Framework

011 Loader

111 sim.test.util

other values are RFU

Application Provider specific data (1 byte):

00' for Package


01' for Applet class

02' for Applet Instance

For example, the AID of Package sim.test.util is 'A0 00 00 00 09 00 02 FF FF FF FF 89 E0 00 00 00'

4.6.1 Specific Test Applet Name for API

Specific applet test name (bits b4-b24):

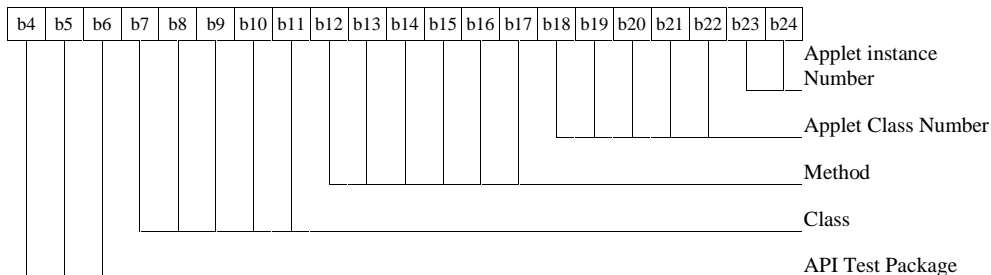

for API Test Package(3 bits)

001 sim.access

010 sim.toolkit

other are RFU

Class (5 bits): need to be assigned specification order see Annex A for the full list


Method (6 bits): need to be assigned specification order see Annex A for the full list

Applet Class Number (5 bits): linked to Test Area, it shall start with 1 for classes and shall be 0 for package.

Applet Instance Number (2 bits) defined in the test procedure it shall start with 01 for applet instance and shall be 00 for package and class.

4.6.2 Specific Test Applet Name for Framework

Specific applet test name (bits b4-b24):

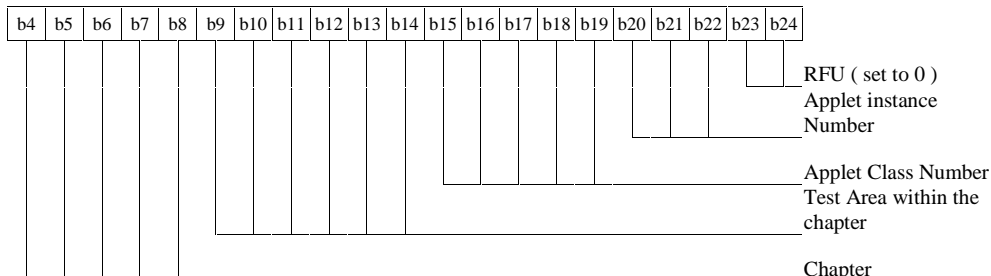

for Chapter (5 bits)

00001 Toolkit Installation Parameters

00010 Minimum Handler Availability

00011 Handler Integrity

00100 Applet Triggering
00101 Proactive Command Sending
00110 Framework Security
00111 Envelope Response Posting
01000 File System Context
01001 Exception Handling
01010 Other parts transferred to framework from API
other are RFU

Test Area within the chapter (6 bits): values are defined in Annex F

Applet Class number (5 bits): linked to Test Area, it shall start with 1 for classes and shall be 0 for package.

Applet Instance number (3 bits) defined in the test procedure it shall start with 01 for applet instance and shall be 00 for package and class.

4.7 Test Equipment

These subclauses recommend a minimum specification for each of the items of test equipment referenced in the tests.

4.7.1 APDU tool

This test tool shall meet the following requirements:

- be able to send command to the card TPDU;
- be able to check none, only a part, or all of the data returned;
- be able to check none, only part, or all of the status returned;
- be able to accept all valid status codes returned;
- be able to support Reader commands;
- be able to generate a log file for each test execution.
- if more data is returned than defined in the test specification, the tool shall continue;
- if less data is returned than defined in the test specification, the tool shall aborts and return an error;
- if there is an error in data or status returned, the tool shall abort and return an error.

The log file produced by the test tool shall include the following information:

- all commands issued;
- all data returned;
- all status returned;
- all errors codes;
- expected data and status in case of error;
- comments from the scripts;
- a log message to report success or failure of the test.

4.7.2 Util package

Annex D includes java source code for the sim.test.util package as well as loading , testing and cleaning script examples.

4.7.3 Applet installation parameters

4.7.3.1 Security parameters

Loading scripts shall use the following security parameters as stated in GSM 03.48 [8] for applet installation:

| Parameter | Value in hexadecimal |
|-----------|-------------------------|
| SPI | 0A 00 |
| KIC | 00 |
| KID | 11 |
| TAR | 00 00 00 |
| CNTR | 00 00 00 00 01 |
| PCNTR | 00 |
| Key | 01 23 45 67 89 AB CD EF |

4.7.3.2 Loading components

Cap files in loading scripts shall not include the descriptor component as described in Java Card 2.1 VM Architecture Specification [13].

4.8 Testing methodology

4.8.1 Test interfaces and facilities

The SIM-ME interface provides the main transport interface for the purpose of performing conformance tests.

The SIM API interface provides the main test interface for the purpose of performing conformance tests.

5 Test plan

The test plan is divided according to the SIM API specification, that way the tests will follow the class hierarchy for the sim.toolkit and sim.access package; for the SIM Toolkit framework this test plan describes the different points that will be tested with the present test specification.

6 API Test Plan

6.1 Package sim.access:

6.1.1 Interface SIMView

Note: The Test applet shall be run on a class that implements this interface.

6.1.1.1 Constants

Test Area Reference: API_1_SVW_CONST

6.1.1.1.1 Conformance Requirements

This section does not describe the conformance requirements for a method, but rather for the constants of the interface.

Normal execution

CRRN1: The constants shall have the same name and value that is defined in GSM 03.19 [7].

6.1.1.1.2 Test Suite Files

None.

6.1.1.1.3 Test Procedure

The constants in Java are resolved at compilation time, therefore a runtime test is not useful. No test of constants will be performed.

6.1.1.2 Method select(short fid, byte[] fci, short fciOffset, short fciLength)

Test Area Reference: API_1_SVW_SLCTS_BSS

6.1.1.2.1 Conformance Requirements

The method with the following header shall be compliant to its definition in the API.

```
public short select(short fid,
                   byte[] fci,
                   short fciOffset,
                   short fciLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           SIMViewException
```

Normal execution

CRRN1: If the desired file is selected, the length of the FCI (File Control Information) which has been written to the array fci is returned.

CRRN2: If the length fciLength is greater than or equal to the length of the FCI structure, the whole FCI structure is copied into the array fci and the length of the FCI which has been written to the array fci is returned.

CRRN3: If the length fciLength is less than the length of the FCI structure, the first part of the FCI structure is copied into the array fci and the length of the FCI which has been written to the array fci is returned.

CRRN4: After selecting a DF/MF no EF is selected.

CRRN5: After selecting a linear fixed EF no record is selected.

CRRN6: After selecting a cyclic EF the first record which is the last updated record is selected.

CRRN7: The current files (file context) of any other applets shall not be changed. See GSM 03.19 [7] - §5.2. This will be tested during the testing of the framework.

CRRN8: The information returned by fci shall be formatted as described in GSM 11.11 [3], §9.2.1.

CRRN9: The file with a File-ID that matches fid shall be found according to the following selection rules:

- 1) An immediate child EF or DF of the current MF/DF can be selected,
- 2) A sibling DF of the current DF can be selected,
- 3) The current MF/DF it self can be selected,
- 4) The parent MF/DF of the current DF can be selected,

- 5) The MF can always be selected.

Parameter errors

CRRP1: If the array fci is null, an instance of NullPointerException shall be thrown.

CRRP2: If fciOffset is less than 0, an instance of ArrayIndexOutOfBoundsException shall be thrown.

CRRP3: If fciLength is less than 0, an instance of ArrayIndexOutOfBoundsException shall be thrown.

CRRP4: If fciOffset plus fciLength is greater than the length of the array fci.length, or fciOffset equals fci.length, an instance of ArrayIndexOutOfBoundsException shall be thrown.

Context errors

CRRC1: If the file with a File-ID which matches fid could not be found according to the selection rules listed in CRRN9, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.FILE_NOT_FOUND.

CRRC2: If the method call causes a memory problem (e.g. memory access error), an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.MEMORY_PROBLEM.

CRRC3: If the method call causes an error to occur that is not expected and thus not handled, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INTERNAL_ERROR.

6.1.1.2.2 Test Suite Files

Additional requirements for the GSM personalisation: None

| | |
|-----------------|----------------------------|
| Test Script: | API_1_SVW_SLCTS_BSS_1.scr |
| Test Applet: | API_1_SVW_SLCTS_BSS_1.java |
| Load Script: | API_1_SVW_SLCTS_BSS_1.ldr |
| Cleanup Script: | API_1_SVW_SLCTS_BSS_1.clr |
| Parameter File: | API_1_SVW_SLCTS_BSS_1.par |

6.1.1.2.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 0 | SIM Initialisation | Responses ignored. | |
| 1 | Select EF_{ICCID} in MF (Transparent EF) fid = SIMView.FID_EF_ICCID byte[] fci = new byte[34] fciOffset = 0 fciLength = 20 select() | No exception shall be thrown. Shall return a value not greater than 20. <Description of fci: XX XX XX XX 2F E2 04 > | |
| 2 | Select EF_{ICCID} in MF (Transparent EF) fid = SIMView.FID_EF_ICCID fciOffset = 0 fciLength = 13 select() | No exception shall be thrown. Shall return 13. fci shall contain the first 13 bytes of the FCI structure. | |
| 3 | Select DF_{GSM} in MF fid = SIMView.FID_DF_GSM fciOffset = 0 fciLength = 7 select() | No exception shall be thrown. Shall return 7. fci shall contain the first 7 bytes of the FCI. <Description of fci: XX XX XX XX 7F 20 02 > | |
| 3 | Select DF_{GSM} in MF fid = SIMView.FID_DF_GSM fciOffset = 0 fciLength = 7 select() | No exception shall be thrown. Shall return 7. fci shall contain the entire FCI structure. <Description of fci: XX XX XX XX 7F 20 02 > | |
| 4 | Select EF_{ACM} in DF_{GSM} (CyclicEF) fid = SIMView.FID_EF_ACM fciOffset = 0 fciLength = 20 select() | No exception shall be thrown. Shall return a value between 15 and 20. (Cyclic EF) fci shall contain the first 15 or more bytes of the FCI structure. fci[14] shall have the value 3 (length of record). | |
| 5 | Select MF fid = SIMView.FID_MF fciOffset = 0 fciLength = 34 select() | No exception shall be thrown. Shall return a value between 22 and 34. fci shall contain the entire FCI structure. | |
| 6 | Select DF_{TELECOM} in MF fid = SIMView.FID_DF_TELECOM fci[0] = fci[1] = '05' fciOffset = 2 fciLength = 20 select() | No exception shall be thrown. Shall return 20. fci shall contain the first 20 bytes of the FCI structure starting at index 2. The first two bytes shall (still) have the value '05'. | |
| 7 | Select EF_{FDN} in DF_{TELECOM} (Linear FixedEF) fid = SIMView.FID_EF_FDN fciOffset = 0 fciLength = 15 select() | No exception shall be thrown. Shall return 15. fci shall contain the first 15 bytes of the FCI structure. fci[14] shall have the value 28 (length of record). | |
| 8 | fci is null fid = SIMView.FID_EF_FDN byte[] nullBuffer = null fciOffset = 0 fciLength = 15 select() | Shall throw java.lang.NullPointerException. | |

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|------------------|
| 9 | fciOffset < 0 fid = SIMView.FID_EF_FDN fciOffset = -1 fciLength = 15 select() | Shall throw java.lang.ArrayIndexOutOfBoundsException. | |
| 10 | fciLength < 0 fid = SIMView.FID_EF_FDN fciOffset = 0 fciLength = -1 select() | Shall throw java.lang.ArrayIndexOutOfBoundsException. | |
| 11 | fciOffset + fciLength > fci.length fid = SIMView.FID_EF_FDN fciOffset = 20 fciLength = 15 select() | Shall throw java.lang.ArrayIndexOutOfBoundsException. | |
| 12 | fciOffset >= fci.length fid = SIMView.FID_EF_FDN fciOffset = 34 fciLength = 1 select() | Shall throw java.lang.ArrayIndexOutOfBoundsException. | |
| 13 | Selection possibilities 1 - fid = SIMView.FID_MF fciOffset = 0 fciLength = 15 select() 2 - fid = SIMView.FID_DF_TELECOM select() 3 - fid = SIMView.FID_DF_GRAPHICS select() 4 - fid = SIMView.FID_DF_TELECOM select() 5 - fid = SIMView.FID_DF_GRAPHICS select() 6 - fid = SIMView.FID_MF select() 7 - fid = SIMView.FID_DF_GSM select() 8 - fid = SIMView.FID_DF_TELECOM select() 9 - fid = SIMView.FID_DF_TELECOM select() - | 1 – No exception shall be thrown. 2 – No exception shall be thrown. 3 – No exception shall be thrown. 4 – No exception shall be thrown. 5 – No exception shall be thrown. 6 – No exception shall be thrown. 7 – No exception shall be thrown. 8 – No exception shall be thrown. 9 – No exception shall be thrown. | |
| 14 | EF not selected after MF/DF selection 1 - fid = SIMView.FID_MF select() fid = SIMView.FID_EF_ICCID select() 2 - fid = SIMView.FID_MF select() readBinary() | 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code NO_EF_SELECTED. | |
| 15 | No selection of non-reachable file 1 - fid = SIMView.FID_MF select() 2 - fid = SIMView.FID_EF_ACM select() | 1 – No exception shall be thrown. 2 – Shall throw sim.access.SIMViewException with reason code FILE_NOT_FOUND. | |
| 16 | No record is selected after selecting linear fixed EF 1 - fid = SIMView.FID_MF select() 2 - fid = FID_DF_SIMTEST select() 3 - fid = FID_EF_LARU select() 4 - recNumber = 0 mode = REC_ACC_MODE_ABSOLUTE_CURRENT readRecord() | 1 – No exception shall be thrown. 2 – No exception shall be thrown. 3 – No exception shall be thrown. 4 – Shall throw sim.access.SIMViewException with reason code RECORD_NUMBER_NOT_AVAILABLE. | |

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 17 | <p>Record pointer in selected cyclic EF</p> <pre> 1 - fid = SIMView.FID_MF select() 2 - fid = FID_DF_SIMTEST select() 3 - fid = FID_EF_CARU select() 4 - byte[] data1 = { 1,2,3 } mode = REC_ACC_MODE_PREVIOUS updateRecord(data1) 5 - fid = FID_EF_CARU select() readRecord(data2) compare data1 to data2 </pre> | <p>1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - No exception shall be thrown. 4 - No exception shall be thrown. 5 - The contents of data1 and data2 shall be identical.</p> | |

6.1.1.2.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| N1 | 1-7 |
| N2 | 3, 5 |
| N3 | 1, 2, 4, 6, 7 |
| N4 | 14 |
| N5 | 16 |
| N6 | 17 |
| N8 | 1, 3 |
| N9 | 1-7, 13 |
| P1 | 8 |
| P2 | 9 |
| P3 | 10 |
| P4 | 11, 12 |
| C1 | 15 |
| C2, C3 | Not Tested |

6.1.1.3 Method select (short fid)

Test Area Reference: API_1_SVW_SLCTS

6.1.1.3.1 Conformance Requirements

The method with the following header shall be compliant to its definition in the API.

```

public void select(short fid)
    throws SIMViewException
    
```

Normal execution

- CRRN1: If the desired file is selected, no exception is thrown.
- CRRN2: After selecting a DF/MF no EF is selected.
- CRRN3: After selecting a linear fixed EF no record is selected.
- CRRN4: After selecting a cyclic EF the first record which is the last updated record is selected.
- CRRN5: The current files (file context) of any other applets shall not be changed [03.19 - §5.2]. This will be tested during the testing of the framework.
- CRRN6: The file with a File-ID that matches fid shall be found according to the following selection rules:
 - 1) An immediate child EF or DF of the current MF/DF can be selected,
 - 2) A sibling DF of the current DF can be selected,
 - 3) The current MF/DF it self can be selected,
 - 4) The parent MF/DF of the current DF can be selected,

5) The MF can always be selected.

Parameter errors

No requirements.

Context errors

CRRC1: If the file with a File-ID which matches fid could not be found according to the selection rules listed in CCRN6, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.FILE_NOT_FOUND.

CRRC2: If the method call causes a memory problem (e.g. memory access error), an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.MEMORY_PROBLEM.

CRRC3: If the method call causes an error to occur that is not expected and thus not handled, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INTERNAL_ERROR.

6.1.1.3.2 Test Suite Files

Additional requirements for the GSM personalisation: None

| | |
|-----------------|------------------------|
| Test Script: | API_1_SVW_SLCTS_1.scr |
| Test Applet: | API_1_SVW_SLCTS_1.java |
| Load Script: | API_1_SVW_SLCTS_1.ldr |
| Cleanup Script: | API_1_SVW_SLCTS_1.clr |
| Parameter File: | API_1_SVW_SLCTS_1.par |

6.1.1.3.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|------------------|
| 0 | SIM Initialisation | Responses ignored. | |
| 1 | Select EF_{ICCID} in MF (Transparent EF) fid = SIMView.FID_EF_ICCID select() | No exception shall be thrown. | |
| 2 | EF not selected after MF/DF selection 1 - fid = SIMView.FID_MF select() fid = SIMView.FID_EF_ICCID select() 2 - fid = SIMView.FID_MF select() readBinary() | 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code NO_EF_SELECTED. | |
| 3 | No record is selected after selecting linear fixed EF 1 - fid = SIMView.FID_MF select() 2 - fid = FID_DF_SIMTEST select() 3 - fid =FID_EF_LARU select() 4 - recNumber = 0 mode = REC_ACC_MODE_ABSOLUTE_CURRENT readRecord() | 1 – No exception shall be thrown. 2 – No exception shall be thrown. 3 – No exception shall be thrown. 4 – Shall throw sim.access.SIMViewException with reason code RECORD_NUMBER_NOT_AVAILABLE. | |
| 4 | Record pointer in selected cyclic EF 1 - fid = SIMView.FID_MF select() 2 - fid =FID_DF_SIMTEST select() 3 - fid = FID_EF_CARU select() 4 - byte[] data1 = { 1,2,3 } updateRecord(data1) 5 - fid = FID_EF_CARU select() readRecord(data2) compare data1 to data2 | 1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - No exception shall be thrown. 4 - No exception shall be thrown. 5 - The contents of data1 and data2 shall be identical. | |
| 5 | Selection possibilities 1 - fid = SIMView.FID_MF select() 2 - fid = SIMView.FID_DF_TELECOM select() 3 - fid = SIMView.FID_DF_GRAPHICS select() 4 - fid = SIMView.FID_DF_TELECOM select() 5 - fid = SIMView.FID_DF_GRAPHICS select() 6 - fid = SIMView.FID_MF select() 7 - fid = SIMView.FID_DF_GSM select() 8 - fid = SIMView.FID_DF_TELECOM select() 9 - fid = SIMView.FID_DF_TELECOM select() | 1 – No exception shall be thrown. 2 – No exception shall be thrown. 3 – No exception shall be thrown. 4 – No exception shall be thrown. 5 – No exception shall be thrown. 6 – No exception shall be thrown. 7 – No exception shall be thrown. 8 – No exception shall be thrown. 9 – No exception shall be thrown. | |
| 6 | No selection of unreachable file 1 - fid = SIMView.FID_MF select() 2 - fid = SIMView.FID_EF_ACM select() | 1 – No exception shall be thrown. 2 – Shall throw sim.access.SIMViewException with reason code FILE_NOT_FOUND. | |

6.1.1.3.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| N1 | 1 |
| N2 | 2 |
| N3 | 3 |
| N4 | 4 |
| N6 | 5 |
| C1 | 6 |
| C2, C3 | Not Tested |

6.1.1.4 Method status

Test Area Reference: API_1_SVW_STAT_BSS

6.1.1.4.1 Conformance Requirements

The method with the following header shall be compliant to its definition in the API.

```
public short status(byte[] fci,
                   short fciOffset,
                   short fciLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           SIMViewException
```

Normal execution

CRRN1: The FCI (File Control Information) of the current DF (or MF) is returned in the same format as for a SELECT command in case of selecting an MF/DF (described in GSM 03.19 [7], §9.2.1).

CRRN2: If the length fciLength is greater than or equal to the length of the FCI structure, the whole FCI structure is copied into the array fci and the length of the FCI which has been written to the array fci is returned.

CRRN3: If the length fciLength is less than the length of the FCI structure, the first part of the FCI structure is copied into the array fci and the length of the FCI which has been written to the array fci is returned.

Parameter errors

CRRP1: If the array fci is null, an instance of NullPointerException shall be thrown.

CRRP2: If fciOffset is less than 0, an instance of ArrayIndexOutOfBoundsException shall be thrown.

CRRP3: If fciLength is less than 0, an instance of ArrayIndexOutOfBoundsException shall be thrown.

CRRP4: If fciOffset plus fciLength is greater than the length of the array fci.length, or fciOffset equals fci.length, an instance of ArrayIndexOutOfBoundsException shall be thrown.

Context errors

CRRC1: If the method call causes a memory problem (e.g. memory access error), an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.MEMORY_PROBLEM.

CRRC2: If the method call causes an error to occur that is not expected and thus not handled, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INTERNAL_ERROR.

6.1.1.4.2 Test Suite Files

Additional requirements for the GSM personalisation:

| | |
|-----------------|---------------------------|
| Test Script: | API_1_SVW_STAT_BSS_1.scr |
| Test Applet: | API_1_SVW_STAT_BSS_1.java |
| Load Script: | API_1_SVW_STAT_BSS_1.ldr |
| Cleanup Script: | API_1_SVW_STAT_BSS_1.clr |
| Parameter File: | API_1_SVW_STAT_BSS_1.par |

6.1.1.4.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 0 | SIM Initialisation | Responses ignored. | |
| 1 | Status of MF <pre>byte[] fci = new byte[34] fciOffset = 0 fciLength = 7 status()</pre> | No exception shall be thrown. Shall return 7. fci shall contain the entire FCI structure. <i><Description of fci:</i> XX XX XX XX 3F 00 01 > | |
| 2 | Status after select EF_{ICCID} in MF <pre>1 - fid = SIMView.FID_DF_GSM fciOffset = 0 fciLength = 34 len = select() 2 - byte[] fci2 = new byte[34] len2 = status() 3 - Compare len and len2 4 - Compare the len bytes of fci and fci2</pre> | 1 - No exception shall be thrown. Shall return a value between 22 and 34. 2 - No exception shall be thrown. Shall return 22 or more. 3 - len and len2 shall be identical 4 - fci and fci2 shall be identical | |
| 3 | Status of DF_{Telecom} <pre>1 - fid = SIMView.FID_DF_TELECOM select() 2 - fciOffset = 0 fciLength = 100 status()</pre> | 1 - No exception shall be thrown. Shall return a value between 22 and 34. 2 - No exception shall be thrown. Shall return a value between 22 and 34. fci shall contain the entire FCI structure (check that returned value is equal to 13 plus the "length of following data" - fci[12]). FID of the returned fci (fci[4:5]) is FID_DF_TELECOM. | |
| 4 | Status DF_{TELECOM} <pre>fciOffset = 0 fciLength = 7 status()</pre> | No exception shall be thrown. Shall return 7. fci shall contain the first 7 bytes of the FCI structure starting at index 0. FID of the returned fci (fci[4:5]) is FID_DF_TELECOM. | |
| 5 | fci is null <pre>byte[] nullBuffer = null fciOffset = 0 fciLength = 34 status()</pre> | Shall throw java.lang.NullPointerException. | |
| 6 | fciOffset < 0 <pre>fciOffset = -1 fciLength = 34 status()</pre> | Shall throw java.lang.ArrayIndexOutOfBoundsException. | |
| 7 | fciLength < 0 <pre>fciOffset = 0 fciLength = -1 status()</pre> | Shall throw java.lang.ArrayIndexOutOfBoundsException. | |
| 8 | fciOffset + fciLength > fci.length <pre>fciOffset = 20 fciLength = 15 status()</pre> | Shall throw java.lang.ArrayIndexOutOfBoundsException. | |
| 9 | fciOffset >= fci.length <pre>fciOffset = 34 fciLength = 1 status()</pre> | Shall throw java.lang.ArrayIndexOutOfBoundsException. | |

6.1.1.4.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| N1 | 1-4 |
| N2 | 2, 3 |
| N3 | 1, 4 |
| P1 | 5 |
| P2 | 6 |
| P3 | 7 |
| P4 | 8, 9 |
| C1, C2 | Not Tested |

6.1.1.5 Method readBinary

Test Area Reference: API_1_SVW_REDBS_BSS

6.1.1.5.1 Conformance Requirements

The method with the following header shall be compliant to its definition in the API.

```
public short readBinary(short fileOffset,
    byte[] resp,
    short respOffset,
    short respLength)
    throws java.lang.NullPointerException,
    java.lang.ArrayIndexOutOfBoundsException,
    SIMViewException
```

Normal execution

CRRN1: If data can be accessed at the specified offset, the value respOffset plus respLength are returned and the data bytes of the currently selected transparent file are returned in resp.

Parameter errors

CRRP1: If fileOffset is less than 0, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.OUT_OF_FILE_BOUNDARIES.

CRRP2: If fileOffset plus respLength exceeds the length of the file, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.OUT_OF_FILE_BOUNDARIES.

CRRP3: If the array resp is null, an instance of NullPointerException shall be thrown.

CRRP4: If respOffset is less than 0, an instance of ArrayIndexOutOfBoundsException shall be thrown.

CRRP5: If respLength is less than 0, an instance of ArrayIndexOutOfBoundsException shall be thrown.

CRRP6: If respOffset plus respLength is greater than the length of the array resp.length, an instance of ArrayIndexOutOfBoundsException shall be thrown.

Context errors

CRRC1: If the calling applet has currently no EF selected, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.NO_EF_SELECTED.

CRRC2: If the currently selected EF is not transparent, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.FILE_INCONSISTENT.

CRRC3: If the calling applet does not fulfil the access condition, READ, to perform this function, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.AC_NOT_FULFILLED.

CRRC4: If the currently selected EF is invalidated and the file status of the EF does not allow for the reading of an invalidated file, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INVALIDATION_STATUS_CONTRADICTION.

CRRC5: If the method call causes a memory problem (e.g. memory access error), an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.MEMORY_PROBLEM.

CRRC6: If the method call causes an error to occur that is not expected and thus not handled, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INTERNAL_ERROR.

6.1.1.5.2 Test Suite Files

Additional requirements for the GSM personalisation: none.

Test Script: API_1_SVW_REDBS_BSS_1.scr
 Test Applet: API_1_SVW_REDBS_BSS_1.java
 Load Script: API_1_SVW_REDBS_BSS_1.ldr
 Cleanup Script: API_1_SVW_REDBS_BSS_1.clr
 Parameter File: API_1_SVW_REDBS_BSS_1.par

6.1.1.5.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|------------------|
| 0 | SIM Initialisation | Responses ignored | |
| 1 | Read from EFICCID in MF (Transparent EF) <pre>1 - fid = SIMView.FID_EF_ICCID select() 2 - fileOffset = 0 byte[] resp = new byte[20] resp[0:19] = '55' respOffset = 10 respLength = 10 readBinary()</pre> | 1 - No exception shall be thrown. 2 - No exception shall be thrown. Shall return 20. resp shall contain the entire contents of EFICCID starting at index 10. <Description of resp: 55 55 55 55 55 55 55 55 55 55 0F FF FF FF FF FF FF FF FF FF > | |
| 2 | Read from EFICCID in MF <pre>resp[0:19] = '55' fileOffset = 5 respOffset = 10 respLength = 5 readBinary()</pre> | No exception shall be thrown. Shall return 15. resp shall contain the last 5 bytes of EFICCID starting at index 10. <Description of resp: 55 55 55 55 55 55 55 55 55 55 FF FF FF FF FF 55 55 55 55 55 > | |
| 3 | Offset into File out of bounds <pre>fileOffset = -1 respOffset = 0 respLength = 10 readBinary()</pre> | Shall throw sim.access.SIMViewException with reason code OUT_OF_FILE_BOUNDARIES. | |
| 4 | fileOffset + respLength > EF length <pre>fileOffset = 9 respOffset = 0 respLength = 2 readBinary()</pre> | Shall throw sim.access.SIMViewException with reason code OUT_OF_FILE_BOUNDARIES. | |
| 5 | resp is null <pre>byte[] nullBuffer = null fileOffset = 0 respOffset = 0 respLength = 10 readBinary()</pre> | Shall throw java.lang.NullPointerException. | |
| 6 | respOffset < 0 <pre>fileOffset = 0 respOffset = -1 respLength = 10 readBinary()</pre> | Shall throw java.lang. ArrayIndexOutOfBoundsException. | |
| 7 | respLength < 0 <pre>fileOffset = 0 respOffset = 0 respLength = -1 readBinary()</pre> | Shall throw java.lang. ArrayIndexOutOfBoundsException. | |

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|------------------|
| 8 | respOffset + respLength > resp.length fileOffset = 0 respOffset = 10 respLength = 11 readBinary() | Shall throw java.lang. ArrayIndexOutOfBoundsException. | |
| 9 | EF is not Transparent 1 - fid = FID_DF_SIMTEST select() 2 - fid = FID_EF_LARU select() 3 - fileOffset = 0 respOffset = 0 respLength = 1 readBinary() | 1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - Shall throw sim.access.SIMViewException with reason code FILE_INCONSISTENT. | |
| 10 | Access condition not fulfilled 1 - fid = DFSIMTEST select() 2 - fid = EFTNR select() 3 - fileOffset = 0 respOffset = 0 respLength = 1 readBinary() | Shall throw sim.access.SIMViewException with reason code AC_NOT_FULFILLED. | |
| 11 | EF is invalidated 1 - fid = EFTNU invalidate() 2 - readBinary() 3 - rehabilitate() | 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code INVALIDATION_STATUS_CONTR ADITION. 3 - No exception shall be thrown. | |
| 12 | No EF selected 1- fid = SIMView.FID_MF select() 2 readBinary() | 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code NO_EF_SELECTED. | |

6.1.1.5.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| N1 | 1-2 |
| P1 | 3 |
| P2 | 4 |
| P3 | 5 |
| P4 | 6 |
| P5 | 7 |
| P6 | 8, |
| C1 | 12 |
| C2 | 9 |
| C3 | 10 |
| C4 | 11 |
| C5, C6 | Not Tested |

6.1.1.6 Method updateBinary

Test Area Reference: API_1_SVW_UPDBS_BSS

6.1.1.6.1 Conformance Requirements

The method with the following header shall be compliant to its definition in the API.

```
public void updateBinary(short fileOffset,
                        byte[] data,
                        short dataOffset,
                        short dataLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           SIMViewException
```


Normal execution

CRRN1: The currently selected transparent file is updated starting at fileOffset, with the string of dataLength bytes in the array data starting at dataOffset.

Parameter errors

CRRP1: If fileOffset is less than 0, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.OUT_OF_FILE_BOUNDARIES.

CRRP2: If fileOffset plus dataLength exceeds the length of the file, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.OUT_OF_FILE_BOUNDARIES.

CRRP3: If the array data is null, an instance of NullPointerException shall be thrown.

CRRP4: If dataOffset is less than 0, an instance of ArrayIndexOutOfBoundsException shall be thrown.

CRRP5: If dataLength is less than 0, an instance of ArrayIndexOutOfBoundsException shall be thrown.

CRRP6: If dataOffset plus dataLength greater than the length of the array data.length an instance of ArrayIndexOutOfBoundsException shall be thrown.

Context errors

CRRC1: If the calling applet has currently no EF selected, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.NO_EF_SELECTED.

CRRC2: If the currently selected EF is not transparent, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.FILE_INCONSISTENT.

CRRC3: If the calling applet does not fulfil the access condition, UPDATE, to perform this function, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.AC_NOT_FULFILLED.

CRRC4: If the currently selected EF is invalidated and the file status of the EF does not allow for updating of an invalidated file, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INVALIDATION_STATUS_CONTRADICTION.

CRRC5: If the method call causes a memory problem (e.g. memory access error), an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.MEMORY_PROBLEM.

CRRC6: If the method call causes an error to occur that is not expected and thus not handled, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INTERNAL_ERROR.

6.1.1.6.2 Test Suite Files

Additional requirements for the GSM personalisation: None

Test Script: API_1_SVW_UPDBS_BSS_1.scr

Test Applet: API_1_SVW_UPDBS_BSS_1.java

Load Script: API_1_SVW_UPDBS_BSS_1.ldr

Cleanup Script: API_1_SVW_UPDBS_BSS_1.clr

Parameter File: API_1_SVW_UPDBS_BSS_1.par

6.1.1.6.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 0 | SIM Initialisation | Responses ignored. | |
| 1 | No EF selected fileOffset = 0 byte[] data = new byte[20] data[0] = '55' dataOffset = 0 dataLength = 10 updateBinary() | Shall throw sim.access.SIMViewException with reason code NO_EF_SELECTED. | |
| 2 | Update Transparent EF 1 - fid = DFSIMTEST select() 2 - fid = EFTARU select() 3 - fileOffset = 3 data[0] = '55' dataOffset = 0 dataLength = 1 updateBinary() 4 - fileOffset = 3 respOffset = 0 respLength = 1 readBinary() | 1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - No exception shall be thrown. 4 - No exception shall be thrown. Data in resp[0] shall be '55'. | |
| 3 | 1 - fileOffset = 254 data[0] = '55' data[1] = 'AA' data[2] = '66' dataOffset = 0 dataLength = 3 updateBinary() 2 - fileOffset = 254 respOffset = 0 respLength = 3 readBinary() | 1 - No exception shall be thrown. 2 - No exception shall be thrown. Data in resp shall be resp[0] = '55' resp[1] = 'AA' resp[2] = '66' | |
| 4 | Offset into File out of bounds fileOffset = -1 dataOffset = 0 dataLength = 10 updateBinary() | Shall throw sim.access.SIMViewException with reason code OUT_OF_FILE_BOUNDARIES. | |
| 5 | fileOffset + dataLength > EF length fileOffset = 259 dataOffset = 0 dataLength = 2 updateBinary() | Shall throw sim.access.SIMViewException with reason code OUT_OF_FILE_BOUNDARIES. | |
| 6 | data is null byte[] nullBuffer = null fileOffset = 0 dataOffset = 0 dataLength = 10 updateBinary() | Shall throw java.lang.NullPointerException. | |
| 7 | dataOffset < 0 fileOffset = 0 dataOffset = -1 dataLength = 10 updateBinary() | Shall throw java.lang. ArrayIndexOutOfBoundsException. | |
| 8 | dataLength < 0 fileOffset = 0 dataOffset = 0 dataLength = -1 updateBinary() | Shall throw java.lang. ArrayIndexOutOfBoundsException. | |
| 9 | dataOffset + dataLength > data.length fileOffset = 0 dataOffset = 10 dataLength = 11 updateBinary() | Shall throw java.lang. ArrayIndexOutOfBoundsException. | |

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 10 | EF is not Transparent 1 - fid = FID_DF_SIMTEST select() 2 - fid = FID_EF_LARU select() 3 - fileOffset = 0 data[0] = '55' dataOffset = 0 dataLength = 1 updateBinary() | 1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - Shall throw sim.access.SIMViewException with reason code FILE_INCONSISTENT. | |
| 11 | Access condition not fulfilled 1 - fid = DFSIMTEST select() fid = EFTNU select() 2 - fileOffset = 0 data[0] = '55' dataOffset = 0 dataLength = 1 updateBinary() | 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code AC_NOT_FULFILLED. | |
| 12 | EF is invalidated 1 - fid = EFTNR invalidate() 2 - fileOffset = 0 data[0] = '55' dataOffset = 0 dataLength = 1 updateBinary() 3 - rehabilitate() | 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code INVALIDATION_STATUS_CONTR ADICTION. 3 - No exception shall be thrown. | |

6.1.1.6.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| N1 | 2, 3 |
| P1 | 4 |
| P2 | 5 |
| P3 | 6 |
| P4 | 7 |
| P5 | 8 |
| P6 | 9 |
| C1 | 1 |
| C2 | 10 |
| C3 | 11 |
| C4 | 12 |
| C5, C6 | Not Tested |

6.1.1.7 Method readRecord

Test Area Reference: API_1_SVW_REDRSBS_BSS

6.1.1.7.1 Conformance Requirements

The method with the following header shall be compliant to its definition in the API.

```
public short readRecord(short recNumber,
    byte mode,
    short recOffset,
    byte[] resp,
    short respOffset,
    short respLength)
    throws java.lang.NullPointerException,
    java.lang.ArrayIndexOutOfBoundsException,
    SIMViewException
```

Normal execution

CRRN1: The data bytes from the record, specified by mode and recNumber of the currently selected linear fixed or cyclic EF, is read at recOffset. A total of respLength bytes of this data is copied to the array resp at respOffset.

CRRN2: If the access mode is REC_ACC_MODE_ABSOLUTE_CURRENT:

- if recNumber is not 0, the record addressed by recNumber will be read;
- if recNumber is 0 the current selected record will be read; and
- the current record pointer shall not change.

CRRN3: If the access mode is REC_ACC_MODE_NEXT:

- the next record relative to the current selected record will be selected and read;
- if no current record is selected, the first record will be selected and read;
- if the current record pointer is set to the last record for a cyclic EF the record pointer is set to the first record and the record is read;
- the current record pointer of any other applet shall not be changed.

CRRN4: If the access mode is REC_ACC_MODE_PREVIOUS:

- the previous record relative to the current selected record will be selected and read;
- if no current record is selected, the last record will be selected and read;
- if the current record pointer is set to the first record, for a linear fixed EF the method responses with an error exception and for a cyclic EF the record pointer is set to the last record and the record is read;
- the current record pointer of any other applet shall not be changed.

Parameter errors

CRRP1: If the currently selected EF is linear fixed and the access mode is REC_ACC_MODE_ABSOLUTE_CURRENT and recNumber is less than 0 or greater than records available, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.RECORD_NUMBER_NOT_AVAILABLE.

CRRP2: If the currently selected EF is linear fixed and the access mode is REC_ACC_MODE_ABSOLUTE_CURRENT, recNumber is 0 and there is no current record selected, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.RECORD_NUMBER_NOT_AVAILABLE.

CRRP3: If the currently selected EF is linear fixed and the access mode is REC_ACC_MODE_NEXT and the current record pointer is set to the last record, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.RECORD_NUMBER_NOT_AVAILABLE.

CRRP4: If the currently selected EF is linear fixed and the access mode is REC_ACC_MODE_PREVIOUS and the current record pointer is set to the first record, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.RECORD_NUMBER_NOT_AVAILABLE.

CRRP5: If the specified offset into the selected record recOffset is less than 0, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.OUT_OF_RECORD_BOUNDARIES.

CRRP6: If recOffset plus respLength is greater than the record length, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.OUT_OF_RECORD_BOUNDARIES.

CRRP7: If the access mode is not between 2 and 4 inclusive (2 = REC_ACC_MODE_NEXT, etc.), an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INVALID_MODE.

CRRP8: If the array resp is null, an instance of NullPointerException shall be thrown.

CRRP9: If respOffset is less than 0, an instance of ArrayIndexOutOfBoundsException shall be thrown.

CRRP10: If respLength is less than 0, an instance of ArrayIndexOutOfBoundsException shall be thrown.

CRRP11: If respOffset plus respLength is greater than the length of the array resp.length, or respOffset equals resp.length, an instance of ArrayIndexOutOfBoundsException shall be thrown.

Context errors

CRRC1: If the calling applet has currently no EF selected, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.NO_EF_SELECTED.

CRRC2: If the currently selected EF is neither linear fixed nor cyclic, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.FILE_INCONSISTENT.

CRRC3: If the calling applet does not fulfil the access condition, READ, to perform this function, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.AC_NOT_FULFILLED.

CRRC4: If the currently selected EF is invalidated and the file status of the EF does not allow for reading an invalidated file, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INVALIDATION_STATUS_CONTRADICTION.

CRRC5: If the method call causes a memory problem (e.g. memory access error), an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.MEMORY_PROBLEM.

CRRC6: If the method call causes an error to occur that is not expected and thus not handled, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INTERNAL_ERROR.

6.1.1.7.2 Test Suite Files

Additional requirements for the GSM personalisation: None

Test Script: API_1_SVW_REDRSBS_BSS_1.scr
 Test Applet: API_1_SVW_REDRSBS_BSS_1.java
 Load Script: API_1_SVW_REDRSBS_BSS_1.ldr
 Cleanup Script: API_1_SVW_REDRSBS_BSS_1.clr
 Parameter File: API_1_SVW_REDRSBS_BSS_1.par

6.1.1.7.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 0 | SIM Initialisation | Responses ignored. | |
| 1 | No EF selected <pre> recNumber = 1 mode = REC_ACC_MODE_ABSOLUTE_CURRENT recOffset = 0 byte[] resp = new byte[20] respOffset = 0 respLength = 10 readRecord() </pre> | Shall throw sim.access.SIMViewException with reason code NO_EF_SELECTED. | |

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|------------------|
| 2 | <p>Read Absolute and Current from Linear Fixed EF</p> <pre> 1 - fid = DFSIMTEST select() 2 - fid = EFLARU select() // Record pointer not set. 3 - recNumber = 0 mode = REC_ACC_MODE_NEXT recOffset = 0 respOffset = 0 respLength = 4 readRecord() 4 - recNumber = 2 mode = REC_ACC_MODE_ABSOLUTE_CURRENT readRecord() 5 - recNumber = 1 readRecord() 6 - recNumber = 0 resp[0] = resp[1] = resp[2] = resp[3] = '00' readRecord() </pre> | <p>1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - No exception shall be thrown. resp shall be: resp[0] = '55' resp[1] = '55' resp[2] = '55' resp[3] = '55' 4 - No exception shall be thrown. resp shall be: resp[0] = 'AA' resp[1] = 'AA' resp[2] = 'AA' resp[3] = 'AA' 5 - No exception shall be thrown. resp shall be: resp[0] = '55' resp[1] = '55' resp[2] = '55' resp[3] = '55' 6 - No exception shall be thrown. resp shall be: resp[0] = '55' resp[1] = '55' resp[2] = '55' resp[3] = '55'</p> | |
| 3 | <p>Read Next from Linear Fixed EF</p> <pre> recNumber = 0 mode = REC_ACC_MODE_NEXT recOffset = 0 respOffset = 0 respLength = 4 readRecord() </pre> | <p>No exception shall be thrown. resp shall be: resp[0] = 'AA' resp[1] = 'AA' resp[2] = 'AA' resp[3] = 'AA'</p> | |
| 4 | <p>Read Next from Linear Fixed EF</p> <pre> recNumber = 0 mode = REC_ACC_MODE_NEXT recOffset = 0 respOffset = 0 respLength = 4 readRecord() </pre> | <p>Shall throw sim.access.SIMViewException with reason code RECORD_NUMBER_NOT_AVAILABLE.</p> | |
| 5 | <p>Read Previous from Linear Fixed EF</p> <pre> recNumber = 0 mode = REC_ACC_MODE_PREVIOUS recOffset = 0 respOffset = 0 respLength = 4 readRecord() </pre> | <p>No exception shall be thrown. resp shall be: resp[0] = '55' resp[1] = '55' resp[2] = '55' resp[3] = '55'</p> | |
| 6 | <p>Read Previous from Linear Fixed EF</p> <pre> recNumber = 0 mode = REC_ACC_MODE_PREVIOUS recOffset = 0 respOffset = 0 respLength = 4 readRecord() </pre> | <p>Shall throw sim.access.SIMViewException with reason code RECORD_NUMBER_NOT_AVAILABLE.</p> | |

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 7 | Read Absolute and Current from Cyclic EF 1 - fid = EFCARU select() 2 - recNumber = 2 mode = REC_ACC_MODE_ABSOLUTE_CURRENT recOffset = 0 respOffset = 0 respLength = 3 readRecord() 3 - recNumber = 1 readRecord() 4 - recNumber = 0 resp[0] = resp[1] = resp[2] = '00' readRecord() | 1 - No exception shall be thrown. 2 - No exception shall be thrown. resp shall be: resp[0] = 'AA' resp[1] = 'AA' resp[2] = 'AA' 3 - No exception shall be thrown. resp shall be: resp[0] = '55' resp[1] = '55' resp[2] = '55' 4 - No exception shall be thrown. resp shall be: resp[0] = '55' resp[1] = '55' resp[2] = '55' | |
| 8 | Read Next from Cyclic EF recNumber = 0 mode = REC_ACC_MODE_NEXT recOffset = 0 respOffset = 0 respLength = 3 readRecord() | No exception shall be thrown. resp shall be: resp[0] = 'AA' resp[1] = 'AA' resp[2] = 'AA' | |
| 9 | Read Next from Cyclic EF recNumber = 0 mode = REC_ACC_MODE_NEXT recOffset = 0 respOffset = 0 respLength = 3 readRecord() | No exception shall be thrown. resp shall be: resp[0] = '55' resp[1] = '55' resp[2] = '55' | |
| 10 | Read Previous from Cyclic EF recNumber = 0 mode = REC_ACC_MODE_PREVIOUS recOffset = 0 respOffset = 0 respLength = 3 readRecord() | No exception shall be thrown. resp shall be: resp[0] = 'AA' resp[1] = 'AA' resp[2] = 'AA' | |
| 11 | Read Previous from Cyclic EF recNumber = 0 mode = REC_ACC_MODE_PREVIOUS recOffset = 0 respOffset = 0 respLength = 3 readRecord() | No exception shall be thrown. resp shall be: resp[0] = '55' resp[1] = '55' resp[2] = '55' | |
| 12 | Read Absolute from Linear Fixed EF beyond Records 1 - fid = EFLARU select() 2 - recNumber = -1 mode = REC_ACC_MODE_ABSOLUTE_CURRENT recOffset = 0 respOffset = 0 respLength = 4 readRecord() 3 - recNumber = 3 readRecord() | 1 - No exceptions shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code RECORD_NUMBER_NOT_AVAILABLE. 3 - Shall throw sim.access.SIMViewException with reason code RECORD_NUMBER_NOT_AVAILABLE. | |
| 13 | No current record in linear fixed EF, read current 1 - fid = EFLARU select() // No curr rec 2 - recNumber = 0 // curr rec mode = REC_ACC_MODE_ABSOLUTE_CURRENT recOffset = 0 respOffset = 0 respLength = 4 readRecord() | 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code RECORD_NUMBER_NOT_AVAILABLE. | |

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|------------------|
| 14 | <p align="center">recOffset < 0</p> <pre> 1 - fid = EFLARU select() 2 - recNumber = 1 // rec 1 mode = REC_ACC_MODE_ABSOLUTE_CURRENT recOffset = -1 respOffset = 0 respLength = 4 readRecord()</pre> | <pre> 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code OUT_OF_RECORD_BOUNDARIE S.</pre> | |
| 15 | <p align="center">recOffset + respLength > Record Length</p> <pre> 1 - fid = EFLARU select() 2 - recNumber = 1 mode = REC_ACC_MODE_ABSOLUTE_CURRENT recOffset = 2 respOffset = 0 respLength = 4 readRecord()</pre> | <pre> 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code OUT_OF_RECORD_BOUNDARIE S.</pre> | |
| 16 | <p align="center">Reading with invalid mode</p> <pre> 1 - fid = EFLARU select() 2 - recNumber = 0 mode = 1 recOffset = 0 respOffset = 0 respLength = 4 readRecord() 3 - mode = 5 readRecord()</pre> | <pre> 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code INVALID_MODE. 3 - Shall throw sim.access.SIMViewException with reason code INVALID_MODE.</pre> | |
| 17 | <p align="center">resp is null</p> <pre> byte[] nullBuffer = null mode = REC_ACC_MODE_ABSOLUTE_CURRENT respOffset = 0 respLength = 10 readRecord()</pre> | <pre> Shall throw java.lang.NullPointerException.</pre> | |
| 18 | <p align="center">respOffset < 0</p> <pre> respOffset = -1 respLength = 10 readRecord ()</pre> | <pre> Shall throw java.lang. ArrayIndexOutOfBoundsException.</pre> | |
| 19 | <p align="center">respLength < 0</p> <pre> respOffset = 0 respLength = -1 readRecord ()</pre> | <pre> Shall throw java.lang. ArrayIndexOutOfBoundsException.</pre> | |
| 20 | <p align="center">respOffset + respLength > resp.length</p> <pre> respOffset = 10 respLength = 11 readRecord ()</pre> | <pre> Shall throw java.lang. ArrayIndexOutOfBoundsException.</pre> | |
| 21 | <p align="center">EF is neither Cyclic nor Linear Fixed</p> <pre> 1 - fid = DFSIMTEST select() 2 - fid = EFTNU select() 3 - respOffset = 0 respLength = 4 readRecord()</pre> | <pre> 1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - Shall throw sim.access.SIMViewException with reason code FILE_INCONSISTENT.</pre> | |
| 22 | <p align="center">Access condition not fulfilled</p> <pre> 1 - fid = EFCNR select() 2 - respLength = 3 readRecord()</pre> | <pre> 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code AC_NOT_FULFILLED.</pre> | |
| 23 | <p align="center">EF is invalidated</p> <pre> 1 - fid = EFCNU invalidate() 2 - readRecord() 3 - rehabilitate()</pre> | <pre> 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code INVALIDATION_STATUS_CONTR ADICTION. 3 - No exception shall be thrown.</pre> | |

6.1.1.7.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| N1 | 2-5, 7-11 |
| N2 | 2, 7 |
| N3 | 3, 8, 9 |
| N4 | 5, 10, 11 |
| P1 | 12 |
| P2 | 13 |
| P3 | 4 |
| P4 | 6 |
| P5 | 14 |
| P6 | 15 |
| P7 | 16 |
| P8 | 17 |
| P9 | 18 |
| P10 | 19 |
| P11 | 20 |
| C1 | 1 |
| C2 | 21 |
| C3 | 22 |
| C4 | 23 |
| C5, C6 | Not Tested |

6.1.1.8 Method updateRecord

Test Area Reference: API_1_SVW_UPDRSBS_BSS

6.1.1.8.1 Conformance Requirements

The method with the following header shall be compliant to its definition in the API.

```
public void updateRecord(short recNumber,
                        byte mode,
                        short recOffset,
                        byte[] data,
                        short dataOffset,
                        short dataLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           SIMViewException
```

Normal execution

CRRN1: dataLength bytes of the record specified by mode and recNumber of the current selected linear fixed or cyclic EF are updated at recOffset, by using the string of bytes in the array data starting at dataOffset.

CRRN2: If the access mode is REC_ACC_MODE_ABSOLUTE_CURRENT and the file is a linear fixed EF:

- the record addressed by recNumber will be updated;
- if recNumber is 0 the current selected record will be updated; and
- the current record pointer shall not change.

CRRN3: If the access mode is REC_ACC_MODE_NEXT and the file is a linear fixed EF:

- the next record relative to the current selected record will be selected and updated;
- if no current record is selected, the first record will be selected and updated;
- the current record pointer of any other applet shall not be changed.

CRRN4: If the access mode is REC_ACC_MODE_PREVIOUS:

- the previous record relative to the current selected record will be selected and updated;

- if no current record is selected, the last record will be selected and updated;
- if a cyclic EF is updated, the oldest record will be updated independent of the current record pointer and this record becomes record number 1 and the current record;
- the current record pointer of any other applet shall not be changed in case of a linear fixed EF.

Parameter errors

CRRP1: If the currently selected EF is linear fixed and the access mode is REC_ACC_MODE_ABSOLUTE_CURRENT and recNumber is less than 0 or greater than records available, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.RECORD_NUMBER_NOT_AVAILABLE.

CRRP2: If the currently selected EF is linear fixed and the access mode is REC_ACC_MODE_ABSOLUTE_CURRENT, recNumber is 0 and there is no current record selected, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.RECORD_NUMBER_NOT_AVAILABLE.

CRRP3: If the currently selected EF is linear fixed and the access mode is REC_ACC_MODE_NEXT and the current record pointer is set to the last record, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.RECORD_NUMBER_NOT_AVAILABLE.

CRRP4: If the currently selected EF is linear fixed and the access mode is REC_ACC_MODE_PREVIOUS and the current record pointer is set to the first record; an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.RECORD_NUMBER_NOT_AVAILABLE.

CRRP5: If the specified offset into the selected record recOffset is less than 0, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.OUT_OF_RECORD_BOUNDARIES.

CRRP6: If recOffset plus dataLength is greater than the record length, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.OUT_OF_RECORD_BOUNDARIES.

CRRP7: If the access mode is not between 2 and 4 inclusive (2 = REC_ACC_MODE_NEXT, etc.), an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INVALID_MODE.

CRRP8: If the currently selected EF is cyclic and the mode of record access mode is not REC_ACC_MODE_PREVIOUS, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INVALID_MODE.

CRRP9: If the array data is null, an instance of NullPointerException shall be thrown.

CRRP10: If dataOffset is less than 0, an instance of ArrayIndexOutOfBoundsException shall be thrown.

CRRP11: If dataLength is less than 0, an instance of ArrayIndexOutOfBoundsException shall be thrown.

CRRP12: If dataOffset plus dataLength, is greater than the length of the array data.length, or dataOffset equals data.length, an instance of ArrayIndexOutOfBoundsException shall be thrown.

Context errors

CRRC1: If the calling applet has currently no EF selected, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.NO_EF_SELECTED.

CRRC2: If the currently selected EF is neither linear fixed nor cyclic, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.FILE_INCONSISTENT.

CRRC3: If the calling applet does not fulfil the access condition, UPDATE, to perform this function, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.AC_NOT_FULFILLED.

CRRC4: If the currently selected EF is invalidated and the file status of the EF does not allow for updating an invalidated file, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INVALIDATION_STATUS_CONTRADICTION.

CRRC5: If the method call causes a memory problem (e.g. memory access error), an instance of `SIMViewException` shall be thrown. The reason code shall be `SIMViewException.MEMORY_PROBLEM`.

CRRC6: If the method call causes an error to occur that is not expected and thus not handled, an instance of `SIMViewException` shall be thrown. The reason code shall be `SIMViewException.INTERNAL_ERROR`.

6.1.1.8.2 Test Suite Files

Additional requirements for the GSM personalisation: This test is based on the assumption that the contents of the EFs in `DFSIMTEST` are identical to those defined in the default pre-personalisation and the current record pointers have not been altered.

| | |
|-----------------|---|
| Test Script: | <code>API_1_SVW_UPDRSBS_BSS_1.scr</code> |
| Test Applet: | <code>API_1_SVW_UPDRSBS_BSS_1.java</code> |
| Load Script: | <code>API_1_SVW_UPDRSBS_BSS_1.ldr</code> |
| Cleanup Script: | <code>API_1_SVW_UPDRSBS_BSS_1.clr</code> |
| Parameter File: | <code>API_1_SVW_UPDRSBS_BSS_1.par</code> |

6.1.1.8.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 0 | SIM Initialisation | Responses ignored. | |
| 1 | No EF selected <pre> recNumber = 1 mode = REC_ACC_MODE_ABSOLUTE_CURRENT recOffset = 0 byte[] data = new byte[20] dataOffset = 0 dataLength = 10 updateRecord() </pre> | Shall throw sim.access.SIMViewException with reason code NO_EF_SELECTED. | |
| 2 | Update Absolute and Current from Linear Fixed EF <pre> 1 - fid = DFSIMTEST select() 2 - fid = EFLARU select() // Record pointer not set. 3 - recNumber = 2 mode = REC_ACC_MODE_ABSOLUTE_CURRENT data[0:3] = '11' recOffset = 0 dataOffset = 0 dataLength = 4 updateRecord() respOffset = 0 respLength = 0 readRecord() </pre> | 1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - No exception shall be thrown. Resp shall be: Resp[0] = '11' Resp[1] = '11' Resp[2] = '11' Resp[3] = '11' | = 4 |
| 3 | Update Current from Linear Fixed EF <pre> 1 - fid = DFSIMTEST select() 2 - fid = EFLARU select() // Set record pointer with mode "next". 3 - recNumber = 0 mode = REC_ACC_MODE_NEXT recOffset = 0 data[0:3] = '00' dataOffset = 0 dataLength = 4 updateRecord() // write data with mode "current" 4 - recNumber = 0 data[0:3] = '22' mode = REC_ACC_MODE_ABSOLUTE_CURRENT updateRecord() // read result with mode "absolute" respOffset = 0 respLength = 4 recNumber = 1 mode = REC_ACC_MODE_ABSOLUTE_CURRENT readRecord() </pre> | 1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - No exception shall be thrown. 4 - No exception shall be thrown. resp shall be: resp[0] = '22' resp[1] = '22' resp[2] = '22' resp[3] = '22' | |
| 4 | Update Next from Linear Fixed EF, no record pointer set <pre> 1 - fid = FID_DF_SIMTEST select() 2 - fid = FID_EF_LARU select 3 - recNumber = 0 mode = REC_ACC_MODE_NEXT recOffset = 0 data[0:3] = '33' dataOffset = respOffset = 0 dataLength = respLength = 4 updateRecord() mode = REC_ACC_MODE_ABSOLUTE_CURRENT readRecord() </pre> | 1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - No exception shall be thrown. Resp shall be: Resp[0] = '33' Resp[1] = '33' Resp[2] = '33' Resp[3] = '33' | |
| 5 | Update Next from Linear Fixed EF, record pointer set <pre> 1 - recNumber = 0 mode = REC_ACC_MODE_NEXT recOffset = 0 data[0:3] = '44' </pre> | 1 - No exception shall be thrown. 2 - No exception shall be thrown. resp shall be: resp[0] = '44' resp[1] = '44' resp[2] = '44' | |

| Id | Description | API Expectation | APDU Expectation |
|----|--|-----------------|------------------|
| | dataOffset = 0 dataLength = 4 updateRecord() 2 - mode = REC_ACC_MODE_ABSOLUTE_CURRENT readRecord() | resp[3] = '44' | |

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|------------------|
| 6 | <p>Update Next from Linear Fixed EF, no more records</p> <pre> recNumber = 0 mode = REC_ACC_MODE_NEXT recOffset = 0 data[0:3] = '55' dataOffset = 0 dataLength = 4 updateRecord() </pre> | <p>Shall throw <code>sim.access.SIMViewException</code> with reason code <code>RECORD_NUMBER_NOT_AVAILABLE</code>.</p> | |
| 7 | <p>Update Previous from Linear Fixed EF, no record pointer set</p> <pre> 1 - fid = DFSIMTEST select() 2 - fid = EFLARU select() 3 - recNumber = 0 mode = REC_ACC_MODE_PREVIOUS recOffset = 0 data[0:3] = '66' dataOffset = respOffset = 0 dataLength = respLength = 4 updateRecord() 4 - mode = REC_ACC_MODE_ABSOLUTE_CURRENT readRecord() </pre> | <p>1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - No exception shall be thrown. 4 - No exception shall be thrown. resp shall be: resp[0] = '66' resp[1] = '66' resp[2] = '66' resp[3] = '66'</p> | |
| 8 | <p>Update Previous from Linear Fixed EF, record pointer set</p> <pre> 1 - recNumber = 0 mode = REC_ACC_MODE_PREVIOUS recOffset = 0 data[0:3] = '77' dataOffset = respOffset = 0 dataLength = respLength = 4 updateRecord() readRecord() 2 - mode = REC_ACC_MODE_ABSOLUTE_CURRENT </pre> | <p>1 - No exception shall be thrown 2 - No exception shall be thrown. Resp shall be: Resp[0] = '7744' Resp[1] = '7744' Resp[2] = '7744' Resp[3] = '7744'</p> | |
| 9 | <p>Update Previous from Linear Fixed EF , no more records</p> <pre> recNumber = 0 mode = REC_ACC_MODE_PREVIOUS recOffset = 0 data[0:3] = '88' dataOffset = respOffset = 0 dataLength = respLength = 4 updateRecord() </pre> | <p>Shall throw <code>sim.access.SIMViewException</code> with reason code <code>RECORD_NUMBER_NOT_AVAILABLE</code>.</p> | |
| 10 | <p>Update Previous from Cyclic EF</p> <pre> 1 - fid = FID_DF_SIMTEST select() 2 - fid = FID_EF_CARU select() 3 - recNumber = 2 mode = REC_ACC_MODE_ABSOLUTE_CURRENT recOffset = 0 respOffset = 0 respLength = 3 readRecord() 4 - recNumber = 2 mode = REC_ACC_MODE_PREVIOUS data[0:2] = resp[0:2] ^ 'FF' dataOffset = 0 dataLength = 3 updateRecord() 5 - recNumber = 0 mode = REC_ACC_MODE_ABSOLUTE_CURRENT respOffset = 0 respLength = 3 readRecord() </pre> | <p>1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - No exception shall be thrown. 4 - No exception shall be thrown. 5 - No exception shall be thrown. resp shall be: resp[0] = data[0] resp[1] = data[1] resp[2] = data[2]</p> | |
| 11 | <p>Update Absolute from Linear Fixed EF beyond Records</p> <pre> 1 - fid = EFLARU select() 2 -recNumber = -1 mode = REC_ACC_MODE_ABSOLUTE_CURRENT recOffset = 0 dataOffset = 0 dataLength = 4 </pre> | <p>1 - No exception shall be thrown. 2 - Shall throw <code>sim.access.SIMViewException</code> with reason code <code>RECORD_NUMBER_NOT_AVAILABLE</code>. 3 - Shall throw <code>sim.access.SIMViewException</code> with</p> | |

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|------------------|
| | updateRecord() 2 - recNumber = 3 updateRecord() | reason code RECORD_NUMBER_NOT_AVAIL ABLE. | |

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|------------------|
| 12 | <p>No current record in linear fixed EF, update current</p> <pre> 1 - fid = EFLARU select() // No curr rec 2 - recNumber = 0 // curr rec mode = REC_ACC_MODE_ABSOLUTE_CURRENT recOffset = 0 dataOffset = 0 dataLength = 4 updateRecord()</pre> | <p>1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code RECORD_NUMBER_NOT_AVAILABLE.</p> | |
| 13 | <p>recOffset < 0</p> <pre> 1 - fid = EFLARU select() 2 - recNumber = 1 // rec 1 mode = REC_ACC_MODE_ABSOLUTE_CURRENT recOffset = -1 dataOffset = 0 dataLength = 4 updateRecord()</pre> | <p>1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code OUT_OF_RECORD_BOUNDARIES.</p> | |
| 14 | <p>recOffset + dataLength > Record Length</p> <pre> 1 - fid = EFLARU select() 2 - recNumber = 1 mode = REC_ACC_MODE_ABSOLUTE_CURRENT recOffset = 2 dataOffset = 0 dataLength = 4 updateRecord()</pre> | <p>1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code OUT_OF_RECORD_BOUNDARIES.</p> | |
| 15 | <p>Updating with invalid mode</p> <pre> 1 - fid = EFLARU select() 2 - recNumber = 0 mode = 1 recOffset = 0 dataOffset = 0 dataLength = 4 updateRecord() 3 - mode = 5 updateRecord()</pre> | <p>1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code INVALID_MODE. 3 - Shall throw sim.access.SIMViewException with reason code INVALID_MODE.</p> | |
| 16 | <p>Updating Cyclic EF with invalid mode</p> <pre> 1 - fid = DFSIMTEST select() 2 - fid = EFCARU select() 3 - recNumber = 0 mode = REC_ACC_MODE_NEXT recOffset = 0 data[0:2] = '00' dataOffset = 0 dataLength = 3 updateRecord() 4 - recNumber = 0 mode = REC_ACC_MODE_ABSOLUTE_CURRENT updateRecord() 5 - recNumber = 2 mode = REC_ACC_MODE_ABSOLUTE_CURRENT updateRecord()</pre> | <p>1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - Shall throw sim.access.SIMViewException with reason code INVALID_MODE. 4 - Shall throw sim.access.SIMViewException with reason code INVALID_MODE. 5 - Shall throw sim.access.SIMViewException with reason code INVALID_MODE.</p> | |
| 17 | <p>data is null</p> <pre> byte[] nullBuffer = null dataOffset = 0 dataLength = 10 updateRecord()</pre> | <p>Shall throw java.lang.NullPointerException.</p> | |
| 18 | <p>dataOffset < 0</p> <pre> dataOffset = -1 dataLength = 10 updateRecord()</pre> | <p>Shall throw java.lang.ArrayIndexOutOfBoundsException.</p> | |
| 19 | <p>dataLength < 0</p> <pre> dataOffset = 0 dataLength = -1 updateRecord()</pre> | <p>Shall throw java.lang.ArrayIndexOutOfBoundsException.</p> | |
| 20 | <p>dataOffset + dataLength > data.length</p> <pre> dataOffset = 10 dataLength = 11 updateRecord()</pre> | <p>Shall throw java.lang.ArrayIndexOutOfBoundsException.</p> | |
| 21 | <p>EF is neither Cyclic nor Linear Fixed</p> | <p>1 - No exception shall be thrown.</p> | |

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| | 1 - fid = DFSIMTEST select() 2 - fid = EFTNR select() 3 - dataOffset = 0 dataLength = 4 updateRecord() | 2 - No exception shall be thrown. 3 - Shall throw sim.access.SIMViewException with reason code FILE_INCONSISTENT. | |
| 22 | Access condition not fulfilled 1 - fid = EFCNU select() 2 - recOffset = 0 dataOffset = 0 dataLength = 1 mode = REC_ACC_MODE_PREVIOUS updateRecord() 3 - fid = EFLNU select() 4 - recNumber = 1 mode = REC_ACC_MODE_ABSOLUTE_CURRENT recOffset = 0 dataOffset = 0 dataLength = 1 updateRecord() | 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code AC_NOT_FULFILLED. 3 - No exception shall be thrown. 4 - Shall throw sim.access.SIMViewException with reason code AC_NOT_FULFILLED. | |
| 23 | EF is invalidated 1 - fid = EFCNR invalidate() 2 - updateRecord() 3 - rehabilitate() | 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code INVALIDATION_STATUS_CONTR ADICTION. 3 - No exception shall be thrown. | |

6.1.1.8.4 Test Coverage

| CRR Number | Test Case Number |
|------------|----------------------|
| N1 | 2, 3, 4, 5, 7, 8, 10 |
| N2 | 2, 3 |
| N3 | 5, 6 |
| N4 | 7, 8, 9, 10 |
| P1 | 11 |
| P2 | 12 |
| P3 | 6 |
| P4 | 9 |
| P5 | 13 |
| P6 | 14 |
| P7 | 15 |
| P8 | 16 |
| P9 | 17 |
| P10 | 18 |
| P11 | 19 |
| P12 | 20 |
| C1 | 1 |
| C2 | 21 |
| C3 | 22 |
| C4 | 23 |
| C5, C6 | Not Tested |

6.1.1.9 Method seek

Test Area Reference: API_1_SVW_SEEK_BSS

6.1.1.9.1 Conformance Requirements

The method with the following header shall be compliant to its definition in the API.

```
public short seek(byte mode,
                 byte[] patt,
```

```

        short pattOffset,
        short pattLength)
throws java.lang.NullPointerException,
       java.lang.ArrayIndexOutOfBoundsException,
       SIMViewException

```

Normal execution

CRRN1: If the pattern in `patt` with the length `pattLength` at offset `pattOffset` is found in the record being specified by `mode`, the current record pointer is set to that record and the record number is returned. The record pointer of any other applet is not changed. This will be tested during the testing of the framework.

CRRN2: If `mode` is `SEEK_FROM_BEGINNING_FORWARD`, the search starts with the first record forward towards the end of the file.

CRRN3: If `mode` is `SEEK_FROM_END_BACKWARD`, the search starts with the last record backward towards the beginning of the file.

CRRN4: If `mode` is `SEEK_FROM_NEXT_FORWARD`, the search starts from the next record after the current record pointer forward towards the end of file. If no current record pointer is selected, the search starts with the first record.

CRRN5: If `mode` is `SEEK_FROM_PREVIOUS_BACKWARD`, the search starts from the previous record before the current record pointer backward towards the beginning of the file. If no current record pointer is selected the search starts with the last record.

CRRN6: If pattern in `patt` is not found, an instance of `SIMViewException` shall be thrown. The reason code shall be `SIMViewException.PATTERN_NOT_FOUND`.

CRRN7: If `mode` is `SEEK_FROM_NEXT_FORWARD` and the record pointer is at the last record, an instance of `SIMViewException` shall be thrown. The reason code shall be `SIMViewException.PATTERN_NOT_FOUND`.

CRRN8: If `mode` is `SEEK_FROM_PREVIOUS_BACKWARD` and the record pointer is at the first record, an instance of `SIMViewException` shall be thrown. The reason code shall be `SIMViewException.PATTERN_NOT_FOUND`.

Parameter errors

CRRP1: If `mode` is not between 0 and 3 inclusive (0 = `SEEK_FROM_BEGINNING_FORWARD`, etc.), an instance of `SIMViewException` shall be thrown. The reason code shall be `SIMViewException.INVALID_MODE`.

CRRP2: If the pattern array `patt` is null, an instance of `NullPointerException` shall be thrown.

CRRP3: If `pattOffset` is less than 0, an instance of `ArrayIndexOutOfBoundsException` shall be thrown.

CRRP4: If `pattLength` is less than 0, an instance of `ArrayIndexOutOfBoundsException` shall be thrown.

CRRP5: If `pattLength` is greater than the size of the record of the currently selected EF, an instance of `SIMViewException` shall be thrown. The reason code shall be `SIMViewException.OUT_OF_RECORD_BOUNDARIES`.

CRRP6: If `pattOffset` plus `pattLength` is greater than the length of the pattern array `patt.length`, an instance of `ArrayIndexOutOfBoundsException` shall be thrown.

Context errors

CRRC1: If the calling applet has currently no EF selected, an instance of `SIMViewException` shall be thrown. The reason code shall be `SIMViewException.NO_EF_SELECTED`.

CRRC2: If the currently selected EF is not linear fixed, an instance of `SIMViewException` shall be thrown. The reason code shall be `SIMViewException.FILE_INCONSISTENT`.

CRRC3: If the calling applet does not fulfil the access condition, `READ`, to perform this function, an instance of `SIMViewException` shall be thrown. The reason code shall be `SIMViewException.AC_NOT_FULFILLED`.

CRRC4: If the currently selected EF is invalidated and the file status of the EF does not allow for reading an invalidated file, an instance of `SIMViewException` shall be thrown. The reason code shall be `SIMViewException.INVALIDATION_STATUS_CONTRADICTION`.

CRRC5: If the method call causes a memory problem (e.g. memory access error), an instance of `SIMViewException` shall be thrown. The reason code shall be `SIMViewException.MEMORY_PROBLEM`.

CRRC6: If the method call causes an error to occur that is not expected and thus not handled, an instance of `SIMViewException` shall be thrown. The reason code shall be `SIMViewException.INTERNAL_ERROR`.

6.1.1.9.2 Test Suite Files

Additional requirements for the GSM personalisation: None

Test Script: API_1_SVW_SEEKB_BSS_1.scr
 Test Applet: API_1_SVW_SEEKB_BSS_1.java
 Load Script: API_1_SVW_SEEKB_BSS_1.ldr
 Cleanup Script: API_1_SVW_SEEKB_BSS_1.ldr
 Parameter File: API_1_SVW_SEEKB_BSS_1.par

6.1.1.9.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 0 | SIM Initialisation | Responses ignored. | |
| 1 | No EF selected <pre>Byte[] patt = new byte[20] pattOffset = 0 pattLength = 10 mode = SEEK_FROM_BEGINNING_FORWARD seek()</pre> | Shall throw <code>sim.access.SIMViewException</code> with reason code <code>NO_EF_SELECTED</code> . | |
| 2 | Pattern not Found <pre>1 - fid = DFSIMTEST select() 2 - fid = EFLARU select() 3 - patt[0] = 'DA' pattOffset = 0 pattLength = 1 mode = SEEK_FROM_BEGINNING_FORWARD seek()</pre> | 1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - Shall throw <code>sim.access.SIMViewException</code> with reason code <code>PATTERN_NOT_FOUND</code> . | |
| 3 | Seek from Beginning Forward <pre>patt[0:2] = '55' pattOffset = 0 pattLength = 3 mode = SEEK_FROM_BEGINNING_FORWARD seek()</pre> | No exception shall be thrown. Shall return 1 | |
| 4 | Seek from End Backward <pre>patt[0:2] = '55' pattOffset = 0 pattLength = 3 mode = SEEK_FROM_END_BACKWARD seek()</pre> | No exception shall be thrown. Shall return 1 | |
| 5 | Seek from Next Forward <pre>patt[0:2] = 'AA' pattOffset = 0 pattLength = 3 mode = SEEK_FROM_NEXT_FORWARD seek()</pre> | No exception shall be thrown. Shall return 2 | |
| 6 | Last Record, Seek from Next Forward <pre>mode = SEEK_FROM_NEXT_FORWARD seek()</pre> | Shall throw <code>sim.access.SIMViewException</code> with reason code <code>PATTERN_NOT_FOUND</code> . | |
| 7 | Seek from Previous Backward <pre>patt[0:2] = '55' pattOffset = 0 pattLength = 3 mode = SEEK_FROM_PREVIOUS_BACKWARD</pre> | No exception shall be thrown. Shall return 1 | |

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|------------------|
| 8 | First Record, Seek from Previous Backward SEEK_FROM_PREVIOUS_BACKWARD seek() | Shall throw sim.access.SIMViewException with reason code PATTERN_NOT_FOUND. | |
| 9 | Pattern not Found (out of reach) patt[0:2] = '55' pattOffset = 0 pattLength = 3 mode = SEEK_FROM_NEXT_FORWARD seek() | Shall throw sim.access.SIMViewException with reason code PATTERN_NOT_FOUND. | |
| 10 | Invalid mode 1 - mode = 4 seek() 2 - mode = -1 seek() | 1 - Shall throw sim.access.SIMViewException with reason code INVALID_MODE 2 - Shall throw sim.access.SIMViewException with reason code INVALID_MODE | |
| 11 | patt is null byte[] nullBuffer = null mode = SEEK_FROM_BEGINNING_FORWARD seek () | Shall throw java.lang.NullPointerException. | |
| 12 | pattOffset < 0 patt[0:2] = '55' pattOffset = -1 pattLength = 3 mode = SEEK_FROM_BEGINNING_FORWARD seek() | Shall throw java.lang. ArrayIndexOutOfBoundsException | |
| 13 | pattLength < 0 patt[0:2] = '55' pattOffset = 0 pattLength = -1 mode = SEEK_FROM_BEGINNING_FORWARD seek() | Shall throw java.lang. ArrayIndexOutOfBoundsException | |
| 14 | pattLength > size of record patt[0:4] = '55' pattOffset = 0 pattLength = 4 mode = SEEK_FROM_BEGINNING_FORWARD seek() | Shall throw sim.access.SIMViewException with reason code OUT_OF_RECORD_BOUNDARIE S | |
| 15 | pattOffset + pattLength > patt.length patt[0:2] = '55' pattOffset = 1 pattLength = 3 mode = SEEK_FROM_BEGINNING_FORWARD seek() | Shall throw java.lang. ArrayIndexOutOfBoundsException | |
| 16 | EF is not Linear Fixed 1 - fid = EFTNU select() 2 - pattOffset = 0 pattLength = 3 mode = SEEK_FROM_BEGINNING_FORWARD seek() 3 - fid = EFCNU select() seek() | 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code FILE_INCONSISTENT 3 - Shall throw sim.access.SIMViewException with reason code FILE_INCONSISTENT | |
| 17 | Access condition not fulfilled 1 - fid = EFLNR select() 2 - patt[0] = '55' pattOffset = 0 pattLength = 1 mode = SEEK_FROM_BEGINNING_FORWARD seek() | 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code AC_NOT_FULFILLED. | |
| 18 | EF is invalidated 1 - fid = EFLARU select() 2 - invalidate() 3 - patt[0] = '55' pattOffset = 0 pattLength = 1 mode = SEEK_FROM_BEGINNING_FORWARD seek() 4 - rehabilitate() | 1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - Shall throw sim.access.SIMViewException with reason code INVALIDATION_STATUS_CONTR ADICTION. 4 - No exception shall be thrown. | |

6.1.1.9.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| N1 | 2, 3 - 6, 7 |
| N2 | 3 |
| N3 | 4 |
| N4 | 5 |
| N5 | 7 |
| N6 | 2, 6, 8, 9 |
| N7 | 6 |
| N8 | 8 |
| P1 | 10 |
| P2 | 11 |
| P3 | 12 |
| P4 | 13 |
| P5 | 14 |
| P6 | 15 |
| C1 | 1 |
| C2 | 16 |
| C3 | 17 |
| C4 | 18 |
| C5, C6 | Not Tested |

6.1.1.10 Method increase

Test Area Reference: API_1_SVW_INCR_BS_BS

6.1.1.10.1 Conformance Requirements

The method with the following header shall be compliant to its definition in the API.

```
public short increase(byte[] incr,
                    short incrOffset,
                    byte[] resp,
                    short respOffset)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           SIMViewException
```

Normal execution

CRRN1: The value in the array incr is added to the value of the last increased / updated record in the currently selected cyclic EF. The result is stored in the oldest record and returned in the array resp. The updated record becomes record number 1 and is selected as current record. The number of bytes of valid data in resp is returned.

Parameter errors

CRRP1: If the array incr is null, an instance of NullPointerException shall be thrown.

CRRP2: If incrOffset is less than 0, an instance of ArrayIndexOutOfBoundsException shall be thrown.

CRRP3: If incrOffset plus the value 3, is greater than the length of the array incr.length, an instance of ArrayIndexOutOfBoundsException shall be thrown.

CRRP4: If the result of the addition is greater than the maximum value of the record (represented by all bytes set to FF), an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.MAX_VALUE_REACHED.

CRRP5: If the array resp is null, an instance of NullPointerException shall be thrown.

CRRP6: If respOffset is less than 0, an instance of ArrayIndexOutOfBoundsException shall be thrown.

CRRP7: If the remaining length of the array resp at the offset respOffset is less than the length of the record, an instance of ArrayIndexOutOfBoundsException shall be thrown.

Context errors

CRRC1: If the calling applet has currently no EF selected, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.NO_EF_SELECTED.

CRRC2: If the currently selected EF is not cyclic, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.FILE_INCONSISTENT.

CRRC3: If increase is not allowed as indicated by the FCI byte 8 (GSM 11.11: FCI structure of an EF returned by the SELECT command), an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.FILE_INCONSISTENT.

CRRC4: If the calling applet does not fulfil the access condition, INCREASE, to perform this function, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.AC_NOT_FULFILLED.

CRRC5: If the currently selected EF is invalidated, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INVALIDATION_STATUS_CONTRADICTION.

CRRC6: If the method call causes a memory problem (e.g. memory access error), an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.MEMORY_PROBLEM.

CRRC7: If the method call causes an error to occur that is not expected and thus not handled, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INTERNAL_ERROR.

6.1.1.10.2 Test Suite Files

Additional requirements for the GSM personalisation: None

Test Script: API_1_SVW_INCR_BS_BS_1.scr
 Test Applet: API_1_SVW_INCR_BS_BS_1.java
 Load Script: API_1_SVW_INCR_BS_BS_1.ldr
 Cleanup Script: API_1_SVW_INCR_BS_BS_1.clr
 Parameter File: API_1_SVW_INCR_BS_BS_1.par

6.1.1.10.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|------------------|
| 0 | SIM Initialisation | Responses ignored. | |
| 1 | No EF selected <pre>byte[] incr = new byte[4] byte[] resp = new byte[4] incrOffset = 0 respOffset = 0 increase()</pre> | Shall throw sim.access.SIMViewException with reason code NO_EF_SELECTED. | |
| 2 | Increase , verify response <pre>1 - fid = DFSIMTEST select() 2 - fid = EFCARU select() 3 - //Set both records to 00 00 00 mode = REC_ACC_MODE_PREVIOUS data[0:3] = 0 dataOffset = 0 dataLength = 3 updateRecord() updateRecord() 4 - incrOffset = 0 incr[2] = 1 respOffset = 0 increase()</pre> | 1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - No exception shall be thrown. 4 - No exception shall be thrown. resp[] shall contain {0,0,1,0}. | |
| 3 | Increase, verify file <pre>1 - incrOffset = 1 incr[2] = 0, incr[3] = 2 respOffset = 1 increase() 2 - resp[3] = 0</pre> | 1 - No exception shall be thrown. resp[] shall contain {0,0,0,3}. 2 - No exception shall be thrown. resp[] shall contain {0,0,3,0}. | |

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| | <pre>recNumber = 0 mode = REC_ACC_MODE_ABSOLUTE_CURRENT recOffset = 0 respOffset = 0 respLength = 0 readRecord()</pre> | | |
| 4 | <p style="text-align: center;">incr is null</p> <pre>byte[] nullBuffer = null incrOffset = 0 respOffset = 0 increase()</pre> | Shall throw java.lang.NullPointerException. | |
| 5 | <p style="text-align: center;">incrOffset < 0</p> <pre>incrOffset = -1 respOffset = 0 increase()</pre> | Shall throw java.lang. ArrayIndexOutOfBoundsException. | |
| 6 | <p style="text-align: center;">incrOffset + 3 > incr.length</p> <pre>incrOffset = 2 respOffset = 0 increase()</pre> | Shall throw java.lang. ArrayIndexOutOfBoundsException. | |
| 7 | <p style="text-align: center;">Reach Maximum Value</p> <pre>incr[0] = incr[1] = incr[2] = 'FF' incrOffset = 0 respOffset = 0 increase()</pre> | Shall throw sim.access.SIMViewException with reason code MAX_VALUE_REACHED. | |
| 8 | <p style="text-align: center;">resp is null</p> <pre>incr[0] = incr[1] = 0x00' incr[2] = '02' incrOffset = 0 byte[] respNull = null respOffset = 0 increase()</pre> | Shall throw java.lang.NullPointerException. | |
| 9 | <p style="text-align: center;">respOffset < 0</p> <pre>incrOffset = 0 respOffset = -1 increase()</pre> | Shall throw java.lang. ArrayIndexOutOfBoundsException. | |
| 10 | <p style="text-align: center;">respOffset + recordLength > resp.length</p> <pre>incrOffset = 0 respOffset = 2 increase()</pre> | Shall throw java.lang. ArrayIndexOutOfBoundsException. | |
| 11 | <p style="text-align: center;">EF is not Cyclic</p> <pre>1 - fid = EFTARU select() 2 - incrOffset = 0 respOffset = 0 increase() 3 - fid = EFLARU select() 4 - incrOffset = 0 respOffset = 0 increase()</pre> | 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code FILE_INCONSISTENT. 3 - No exception shall be thrown. 4 - Shall throw sim.access.SIMViewException with reason code FILE_INCONSISTENT. | |
| 12 | <p style="text-align: center;">Access condition not fulfilled</p> <pre>1 - fid = EFCNIC select() 2 - incrOffset = 0 respOffset = 0 increase()</pre> | 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code AC_NOT_FULFILLED. | |
| 13 | <p style="text-align: center;">EF is invalidated</p> <pre>1 - fid = EFCARU select() 2 - invalidate() 3 - incrOffset = 0 respOffset = 0 increase() 4 - rehabilitate()</pre> | 1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - Shall throw sim.access.SIMViewException with reason code INVALIDATION_STATUS_CONTR ADICTION. 4 - No exception shall be thrown. | |
| 14 | <p style="text-align: center;">Check increase not allowed from FCI</p> <pre>1 - fciOffset = 0 fciLength = 8 select (FID_EF_CINA, fci...) Verify FCI byte 8 (fci[7]) 2 - incrOffset = 0 respOffset = 0 increase()</pre> | 1 - No exception shall be thrown. Bit 7 of resp[7] shall not be set (0), indicating that increase is not allowed. 2 - Shall throw sim.access.SIMViewException with reason code FILE_INCONSISTENT | |

6.1.1.10.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| N1 | 2, 3 |
| P1 | 4 |
| P2 | 5 |
| P3 | 6 |
| P4 | 7 |
| P5 | 8 |
| P6 | 9 |
| P7 | 10 |
| C1 | 1 |
| C2 | 11 |
| C3 | 14 |
| C4 | 12 |
| C5 | 13 |
| C6, C7 | Not Tested |

6.1.1.11 Method invalidate

Test Area Reference: API_1_SVW_INVL

6.1.1.11.1 Conformance Requirements

The method with the following header shall be compliant to its definition in the API.

```
public void invalidate()
    throws SIMViewException
```

Normal execution

CRRN1: The currently selected EF of the calling applet shall be invalidated, i.e. the flag in the EF file status shall be changed accordingly.

Parameter errors

No requirements.

Context errors

CRRC1: If the calling applet has currently no EF selected, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.NO_EF_SELECTED.

CRRC2: If the calling applet does not fulfil the access condition, INVALIDATE, to perform this function, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.AC_NOT_FULFILLED.

CRRC3: If the currently selected EF is already invalidated, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INVALIDATION_STATUS_CONTRADICTION.

CRRC4: If the method call causes a memory problem (e.g. memory access error), an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.MEMORY_PROBLEM.

CRRC5: If the method call causes an error to occur that is not expected and thus not handled, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INTERNAL_ERROR.

6.1.1.11.2 Test Suite Files

Additional requirements for the GSM personalisation: None

Test Script: API_1_SVW_INVL_1.scr

Test Applet: API_1_SVW_INVL_1.java
 Load Script: API_1_SVW_INVL_1.ldr
 Cleanup Script: API_1_SVW_INVL_1.clr
 Parameter File: API_1_SVW_INVL_1.par

6.1.1.11.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|------------------|
| 0 | SIM Initialisation | Responses ignored. | |
| 1 | No EF is selected 1 - invalidate() | 1 - Shall throw sim.access.SIMViewException with reason code NO_EF_SELECTED. | |
| 2 | Invalidate EF 1 - fid = DFSIMTEST select() 2 - fid = EFTNR select() 3 - invalidate() 4 - rehabilitate() | 1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - No exception shall be thrown. 4 - No exception shall be thrown. | |
| 3 | Access condition not fulfilled 1 - fid = EFCNIV select() 2 - invalidate() | 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code AC_NOT_FULFILLED. | |
| 4 | EF is already invalidated 1 - fid = EFTNR select() 2 - invalidate() 3 - invalidate() | 1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - Shall throw sim.access.SIMViewException with reason code INVALIDATION_STATUS_CONTRADICTION. | |

6.1.1.11.4 Test Coverage

| CRR number | Test Case Number |
|------------|------------------|
| N1 | 2 |
| C1 | 1 |
| C2 | 3 |
| C3 | 4 |
| C4, C5 | Not Tested |

6.1.1.12 Method rehabilitate

Test Area Reference: API_1_SVW_REHA

6.1.1.12.1 Conformance Requirements

The method with the following header shall be compliant to its definition in the API.

```
public void rehabilitate()
    throws SIMViewException
```

Normal execution

CRRN1: The currently selected EF of the calling applet shall be rehabilitated, i.e. the flag in the EF file status shall be changed accordingly.

Parameter errors

No requirements.

Context errors

CRRC1: If the calling applet has currently no EF selected, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.NO_EF_SELECTED.

CRRC2: If the calling applet does not fulfil the access condition, REHABILITATE, to perform this function, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.AC_NOT_FULFILLED.

CRRC3: If the currently selected EF is not invalidated, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INVALIDATION_STATUS_CONTRADICTION.

CRRC4: If the method call causes a memory problem (e.g. memory access error), an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.MEMORY_PROBLEM.

CRRC5: If the method call causes an error to occur that is not expected and thus not handled, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INTERNAL_ERROR.

6.1.1.12.2 Test Suite Files

Additional requirements for the GSM personalisation: None

Test Script: API_1_SVW_REHA_1.scr
 Test Applet: API_1_SVW_REHA_1.java
 Load Script: API_1_SVW_REHA_1.ldr
 Cleanup Script: API_1_SVW_REHA_1.clr
 Parameter File: API_1_SVW_REHA_1.par

6.1.1.12.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 0 | SIM Initialisation | Responses ignored. | |
| 1 | No EF is selected 1 - rehabilitate() | 1 - Shall throw sim.access.SIMViewException with reason code NO_EF_SELECTED. | |
| 2 | Rehabilitate invalidated File 1 - fid = DFSIMTEST select() 2 - fid = EFCNR select() 3 - invalidate() 4 - rehabilitate() 5 - byte[] incr = new byte[3] = {0,0,1} incrOffset = 0 byte[] resp = new byte[1] = 1 respOffset = 0 increase() | 1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - No exception shall be thrown. 4 - No exception shall be thrown. 5 - No exception shall be thrown. resp[] shall contain {0,0,1}. | |
| 3 | Access condition not fulfilled 1 - fid = EFCNRH select() 2 - rehabilitate() | 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code AC_NOT_FULFILLED.. | |
| 4 | Rehabilitate validated File 1 - fid = EFCNR select() 2 - rehabilitate() | 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code INVALIDATION_STATUS_CONTRADICTION. | |

6.1.1.12.4 Test Coverage

| CRR number | Test Case Number |
|------------|------------------|
| N1 | 2 |
| C1 | 1 |
| C2 | 3 |
| C3 | 4 |
| C4, C5 | Not Tested |

6.1.2 Class SIMSystem

6.1.2.1 Method getTheSIMView

Test Area Reference: API_1_SSY_GETS

6.1.2.1.1 Conformance Requirement:

The method with following header shall compliant to its definition in the API.

```
public static SIMView getTheSIMView()
```

Normal execution

CRRN1: returns a reference to class which implements the SIMView interface

Parameters error

No requirements

Context errors

No requirements

6.1.2.1.2 Test suite files

No additional requirements for the GSM personalisation:

Test Script: API_1_SSY_GETS_1.scr

Test Applet: API_1_SSY_GETS_1.java

Load Script: API_1_SSY_GETS_1.ldr

Cleanup Script: API_1_SSY_GETS_1.clr

Parameter File: API_1_SSY_GETS_1.par

6.1.2.1.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | reference not equal null after execute | The returned reference shall be not null after execute | |
| 2 | reference to the GSM interface | Returned a reference to the GSM interface | |

6.1.2.1.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 1,2 |

6.1.3 Class SIMViewException

6.1.3.1 Method throwIt

Test Area Reference: API_1_SVE_THITS

6.1.3.1.1 Conformance Requirement:

The method with following header shall be compliant to its definition in the API.

```
public static void throwIt(short reason)
    throws SIMViewException
```

Normal execution

CRRN1: Throws the JCRE instance of SIMViewException with the specified reason

CRRN2: Extends javacard.framework.CardRuntimeException

Parameter errors

No requirements

Context errors

No requirements

6.1.3.1.2 Test Suite Files

No additional requirements for the GSM personalisation

Test Script: API_1_SVE_THITS_1.scr

Test Applet: API_1_SVE_THITS_1.java

Load Script: API_1_SVE_THITS_1.ldr

Cleanup Script: API_1_SVE_THITS_1.clr

Parameter File: API_1_SVE_THITS_1.par

6.1.3.1.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|-----------------|------------------|
| 1 | Throws the JCRE instance of SIMViewException with the specified reason | Reason = 0 | |
| 2 | Throws the JCRE instance of SIMViewException with the specified reason | Reason = 1 | |
| 3 | Throws the JCRE instance of SIMViewException with the specified reason | Reason = 15 | |
| 4 | SIMViewException extends javacard.framework.CardRuntimeException | Reason = 0 | |
| 5 | SIMViewException extends javacard.framework.CardRuntimeException | Reason = 1 | |
| 6 | SIMViewException extends javacard.framework.CardRuntimeException | Reason = 15 | |

6.1.3.1.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 1,2,3 |
| N2 | 4,5,6 |

6.1.3.2 Constructor

Test Area Reference: API_1_SVE_COORS

6.1.3.2.1 Conformance Requirement:

The method with following header shall compliant to its definition in the API.

```
public SIMViewException(short reason)
    throws SIMViewException
```

Normal execution

CRRN1: Construct a SIMViewException with the specified reason

Parameters error

No requirements

Context errors

No requirements

6.1.3.2.2 Test suite files

No additional requirements for the GSM personalisation

Test Script: API_1_SVE_COORS_1.scr
 Test Applet: API_1_SVE_COORS_1.java
 Load Script: API_1_SVE_COORS.ldr
 Cleanup Script: API_1_SVE_COORS.clr
 Parameter File: API_1_SVE_COORS.par

6.1.3.2.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--------------------|------------------|
| 1 | SIMViewException with the specified reason (The reason shall set with setReason and compare the Exception with getReason) | Reason (specified) | |

6.1.3.2.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 1 |

6.1.3.3 Reason Codes

Test Area Reference: API_1_SVE_CONS

6.1.3.3.1 Conformance Requirement:

There is no API, only constants. This constants shall compliant to its definition in the API.

Normal execution

CRRN1: The Constants of the class SIMViewException shall all have the same name and value defined in the GSM03.19

CRRN2: Constructs SIMViewException a Exception with the specified reason

Parameters error

No requirements

Context errors

No requirements

6.1.3.3.2 Test suite files

None

6.1.3.3.3 Test Procedure

The constants in Java are resolved at compilation time, therefore a runtime test is not useful. No test of constants will be performed

6.2 Package sim.toolkit

6.2.1 Interface ToolkitConstants

6.2.1.1 Constants

Test Area Reference: API_2_TKC_CONS

6.2.1.1.1 Conformance Requirement:

There is no API, only constants. This constants shall be compare to its definition in the API.

Normal execution

CRRN1: The Toolkit Constants shall all have the same name and value defined in the GSM03.19 normalization.

Parameters error

No requirements

Context errors

No requirements

6.2.1.1.2 Test suite files

None

6.2.1.1.3 Test Procedure

The constants in Java are resolved at compilation time, therefore a runtime test is not useful. No test of constants will be performed.

6.2.2 Interface ToolkitInterface

6.2.2.1 Method processToolkit

Test Area Reference: API_2_TKI_PRTKB

6.2.2.1.1 Conformance Requirement:

The method with following prototype shall be compliant to its definition in the API.

```
public void processToolkit(byte event)
    throws ToolkitException
```

Normal execution

CRRN1: This interface must be implemented by a Toolkit applet (which extends the javacard.framework.Applet class) so that it can be triggered by the Toolkit Handler according to the registration information.

CRRN2: The Toolkit applet will have to implement the processToolkit shared method so that the following events can be notified:

| Event | Description |
|--|---|
| EVENT_PROFILE_DOWNLOAD | Terminal Profile command reception |
| EVENT_FORMATTED_SMS_PP_ENV | 03.48 formatted envelope SMS-PP Data Download reception |
| EVENT_FORMATTED_SMS_PP_UPD | 03.48 formatted Update Record EF SMS |
| EVENT_FORMATTED_SMS_CB | 03.48 formatted envelope Cell Broadcast Data Download command reception |
| EVENT_UNFORMATTED_SMS_PP_ENV | Unformatted Envelope SMS-PP Data Download reception |
| EVENT_UNFORMATTED_SMS_PP_UPD | Unformatted Update Record EF SMS |
| EVENT_UNFORMATTED_SMS_CB | Unformatted Cell Broadcast Data Download command reception |
| EVENT_MENU_SELECTION | Envelope Menu Selection command reception |
| EVENT_MENU_SELECTION_HELP_REQUEST | Envelope Menu Selection Help Request command reception |
| EVENT_CALL_CONTROL_BY_SIM | Envelope Call Control by SIM command reception |
| EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM | Envelope MO Short Message Control by SIM command reception |
| EVENT_TIMER_EXPIRATION | Envelope Timer Expiration |
| EVENT_EVENT_DOWNLOAD_MT_CALL | Envelope Event Download - MT call |
| EVENT_EVENT_DOWNLOAD_CALL_CONNECTED | Envelope Event Download - Call connected |
| EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED | Event Download - Call disconnected |
| EVENT_EVENT_DOWNLOAD_LOCATION_STATUS | Envelope Event Download - Location status |
| EVENT_EVENT_DOWNLOAD_USER_ACTIVITY | Envelope Event Download - User activity |
| EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE | Envelope Event Download - Idle screen available |
| EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS | Envelope Event Download - Card Reader Status |
| EVENT_STATUS_COMMAND | Status APDU command event |
| EVENT_UNRECOGNIZED_ENVELOPE | Unrecognized Envelope command reception |

Parameters error

No requirements

Context errors

No requirements

6.2.2.1.2 Test suite files

The method is tested in the Framework

6.2.2.1.3 Test Coverage

| CRR number | Test case number |
|------------|---------------------|
| N1 | Tested in Framework |
| N2 | Tested in Framework |

6.2.3 Class EditHandler

It is not possible to test the methods provided by this class as it is declared 'abstract'; it will be done in the class inheriting it: EnvelopeResponseHandler, ProactiveHandler.

6.2.4 Class EnvelopeHandler

6.2.4.1 Method getEnvelopeTag

Test Area Reference: API_2_ENH_GENT

6.2.4.1.1 Conformance Requirement:

The method with following header shall be compliant to its definition in the API.

```
public byte getEnvelopeTag()
```

Normal execution

CRRN1: The method shall return the Envelope BER-TLV tag.

CRRN2: The Envelope BER TAG is available for all triggered toolkit applets from the invocation to the termination of their processToolkit method if the EnvelopeHandler is available.

Parameters error

Context errors

6.2.4.1.2 Test suite files

Test Script: API_2_ENH_GENT_1.scr
 Test Applet: API_2_ENH_GENT_1.java
 Load Script: API_2_ENH_GENT_1.ldr
 Cleanup Script: API_2_ENH_GENT_1.clr
 Parameter File: API_2_ENH_GENT_1.par

6.2.4.1.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|-----------------|------------------|
| 1 | getEnvelopeTag called just after triggering of the application. | Returns 0xD1 | |
| 2 | getEnvelopeTag called after a proactive command. | Returns 0xD1 | |
| 3 | getEnvelopeTag called after a second proactive command. | Returns 0xD1 | |

6.2.4.1.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 1, 2, 3 |
| N2 | 1, 2, 3 |

6.2.4.2 Method getItemIdentifier

Test Area Reference: API_2_ENH_GIID

6.2.4.2.1 Conformance Requirement:

The method with following header shall be compliant to its definition in the API.

```
public byte getItemIdentifier()
    throws ToolkitException
```

Normal execution

CRRN1: The method shall return the item identifier byte value.

CRRN2: The item identifier byte value returned shall be from the first Item Identifier TLV element.

CRRN3: If the element is available it becomes the TLV selected.

CRRN4: The item identifier is available for all triggered toolkit applets from the invocation to the termination of their processToolkit method if the EnvelopeHandler is available.

Parameters error

No requirements.

Context errors

CRRC1: The method shall throw ToolkitException (UNAVAILABLE_ELEMENT) if the item identifier TLV is not present.

CRRC2: The method shall throw ToolkitException (OUT_OF_TLV_BOUNDARIES) if the item identifier byte is missing in the Item Identifier Simple TLV.

6.2.4.2.2 Test suite files

Test Script: API_2_ENH_GIID_1.scr
 Test Applet: API_2_ENH_GIID_1.java
 Load Script: API_2_ENH_GIID_1.ldr
 Cleanup Script: API_2_ENH_GIID_1.clr
 Parameter File: API_2_ENH_GIID_1.par

6.2.4.2.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | Send envelope SMS-PP Formatted with item identifier TLV and identifier value of 03 | Returns 03 | |
| 2 | Send envelope SMS-PP Formatted with two item identifier TLV with first value FF and second 44 | Returns FF | |
| 3 | Send envelope SMS-PP Formatted with two item identifier TLV with first value 81 and second 44, call twice the method getItemIdentifier | Returns 81 Returns 81 | |
| 4 | Send envelope SMS-PP Formatted with item identifier TLV and value of 66. FindTLV with TAG 02. getItemIdentifier and then getValueByte with offset 0 | getItemIdentifier=getValueByte | |
| 5 | Send envelope SMS-PP Formatted without item identifier TLV and getItemIdentifier | ToolkitException (UNAVAILABLE_ELEMENT) | |
| 6 | Send Envelope SMS-PP Formatted with item identifier TLV (66), send proactive command. Then getItemIdentifier | Returns 66 | |
| 7 | Send Envelope SMS-PP Formatted with item identifier TLV but without item number | ToolkitException (OUT_OF_TLV_BOUNDARIES) | |

6.2.4.2.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 1, 2, 3 |
| N2 | 2, 3 |
| N3 | 4 |
| N4 | 6 |
| C1 | 5 |
| C2 | 7 |

6.2.4.3 Method `getSecuredDataLength`

Test Area Reference: API_2_ENH_GSDL

6.2.4.3.1 Conformance Requirement:

The method with following header shall be compliant to its definition in the API.

```
public short getSecuredDataLength()
    throws ToolkitException
```

Normal execution

CRRN1: The method shall return the length of the secured data contained in a SMS TPDU TLV.

CRRN2: The length is from the first SMS TPDU TLV.

CRRN3: The length should not include padding bytes.

CRRN4: The method can be used if the event is `EVENT_FORMATTED_SMS_PP_ENV` and if the SMS TP-UD is formatted according to GSM03.48.

CRRN5: The method can be used if the event is `EVENT_FORMATTED_SMS_PP_UPD` and if the SMS TP-UD is formatted according to GSM03.48.

CRRN6: The method can be used if the event is `EVENT_FORMATTED_SMS_CB` and if the Cell Broadcast Page is formatted according to [8].

CRRN7: If the method is successful and if the event is `EVENT_FORMATTED_SMS_PP_ENV`, the selected TLV should be the SMS TPDU TLV.

CRRN8: If the method is successful and if the event is `EVENT_FORMATTED_SMS_CB`, the selected TLV should be the Cell Broadcast Page TLV.

Parameters error

No requirements

Context errors

CRRC1: The method shall throw `ToolkitException (UNAVAILABLE_ELEMENT)` in case of unavailable SMS TPDU TLV element.

CRRC2: The method shall throw `ToolkitException (UNAVAILABLE_ELEMENT)` in case of missing Secured Data.

6.2.4.3.2 Test suite files

Specific triggering:

- FORMATTED SMS CB
- UNFORMATTED SMS CB

- FORMATTED SMS PP UPD
- UNFORMATED SMS PP ENV
- For Formatted triggering if CC/RC/DS is used, the security parameters are the one used for downloading applications.

Test Script: API_2_ENH_GSDL_1.scr
 Test Applet: API_2_ENH_GSDL_1.java
 Load Script: API_2_ENH_GSDL_1.ldr
 Cleanup Script: API_2_ENH_GSLD_1.clr
 Parameter File: API_2_ENH_GSLD_1.par

6.2.4.3.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|-----------------|------------------|
| 1 | Test with FORMATTED_SMS_PP_ENV and TP-OA length of 2 | Returns 0x2A | |
| 2 | Test with TP-OA length of 6 | Returns 0x2A | |
| 3 | Test with TP-OA length of 12 | Returns 0x2A | |
| 4 | Test with RC/CC/DS length of 0 | Returns 0x10 | |
| 5 | Test with RC/CC/DS length of 8 | Returns 0x10 | |
| 6 | Test with PCNTR = 0 | Returns 0x10 | |
| 7 | Test with PCNTR = 7 | Returns 0x05 | |
| 8 | Test with SecuredDataLength = 00 | Returns 0x00 | |
| 9 | Test with UserDataLength = 0x33 | Returns 0x33 | |
| 10 | Test with UserDataLength = 0x 6C | Returns 0x 6C | |
| 11 | Test with UserDataLength = 0x 6D | Returns 0x 6D | |
| 12 | Test with UserDataLength = maximum length: 0x79 | Returns 0x 79 | |
| 13 | Verify it is the first TPDU TLV: Send a SMS PP with 2 TPDU TLV and inside two different secured data lengths: 5 and 10 | Returns 0x05 | |
| 14 | Same test as 1 but with FORMATTED_SMS_PP_UPD | Returns 0x2A | |
| 15 | Same test as 2 but with FORMATTED_SMS_PP_UPD | Returns 0x2A | |
| 16 | Same test as 3 but with FORMATTED_SMS_PP_UPD | Returns 0x2A | |
| 17 | Same test as 4 but with FORMATTED_SMS_PP_UPD | Returns 0x10 | |
| 18 | Same test as 5 but with FORMATTED_SMS_PP_UPD | Returns 0x10 | |
| 19 | Same test as 6 but with FORMATTED_SMS_PP_UPD | Returns 0x10 | |
| 20 | Same test as 7 but with FORMATTED_SMS_PP_UPD | Returns 0x05 | |
| 21 | Same test as 8 but with FORMATTED_SMS_PP_UPD | Returns 0x00 | |
| 22 | Same test as 9 but with FORMATTED_SMS_PP_UPD | Returns 0x33 | |
| 23 | Same test as 10 but with FORMATTED_SMS_PP_UPD | Returns 0x 6C | |
| 24 | Same test as 11 but with FORMATTED_SMS_PP_UPD | Returns 0x 6D | |
| 25 | Same test as 12 but with FORMATTED_SMS_PP_UPD | Returns 0x 79 | |
| 26 | Same test as 13 but with FORMATTED_SMS_PP_UPD | Returns 0x05 | |
| 27 | Same test as 4 but with FORMATTED_SMS_CB | Returns 0x10 | |
| 28 | Same test as 5 but with FORMATTED_SMS_CB | Returns 0x10 | |
| 29 | Same test as 6 but with FORMATTED_SMS_CB | Returns 0x10 | |

| | | | |
|----|--|---|--|
| 30 | Same test as 7 but with FORMATTED_SMS_CB | Returns 0x05 | |
| 31 | Same test as 8 but with FORMATTED_SMS_CB | Returns 0x00 | |
| 32 | Same test as 9 but with FORMATTED_SMS_CB | Returns 0x33 | |
| 33 | Same test as 12 but with maximum length: 0x42, and FORMATTED_SMS_CB | Returns 0x 42 | |
| 34 | Test with FORMATTED_SMS_PP_ENV Verify after call of the method the current TLV is the TPDU TLV: findTLV device identities, getSecuredDataLength and then getValueByte to verify that the current TLV is the TPDU TLV | getValueByte returns 0x40 | |
| 35 | Test with FORMATTED_SMS_CB Verify after call of the method the current TLV is the Cell Broadcast Page TLV: findTLV device identities, getSecuredDataLength and then getValueByte to verify that the current TLV is the Cell Broadcast Page TLV | getValueByte returns 0x58 | |
| 36 | Send an envelope SMS CB, getSecuredDataLength | ToolkitException UNAVAILABLE_ELEMENT | |
| 37 | Send an envelope SMS PP unformatted | ToolkitException UNAVAILABLE_ELEMENT | |

6.2.4.3.4 Test Coverage

This method has only been tested with call control and the tests shall be improved during 03.48 tests.

| CRR number | Test case number |
|------------|---|
| N1 | 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13 |
| N2 | 13 |
| N3 | 6, 7 |
| N4 | 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 25 |
| N5 | 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26 |
| N6 | 27, 28, 29, 30, 31, 32, 33 |
| N7 | 34 |
| N8 | 35 |
| C1 | 36 |
| C2 | 37 |

6.2.4.4 Method getSecuredDataOffset

Test Area Reference: API_2_ENH_GSDO

6.2.4.4.1 Conformance Requirement:

The method with following header shall be compliant to its definition in the API.

```
public short getSecuredDataOffset()
    throws ToolkitException
```

Normal execution

CRRN1: The method shall return the offset of the secured data first byte contained in a SMS TPDU TLV.

CRRN2: The offset is from the first SMS TPDU TLV.

CRRN3: The method can be used if the event is EVENT_FORMATTED_SMS_PP_ENV and if the SMS TP-UD is formatted according to GSM03.48.

CRRN4: The method can be used if the event is EVENT_FORMATTED_SMS_PP_UPD and if the SMS TP-UD is formatted according to GSM03.48.

CRRN5: The method can be used if the event is EVENT_FORMATTED_SMS_CB and if the Cell Broadcast Page is formatted according to [8].

CRRN6: If the method is successful and if the event is EVENT_FORMATTED_SMS_PP_ENV, the selected TLV should be the SMS TPDU TLV.

CRRN7: If the method is successful and if the event is EVENT_FORMATTED_SMS_CB, the selected TLV should be the Cell Broadcast Page TLV.

Parameters error

No requirements

Context errors

CRRC1: The method shall thrown ToolkitException (UNAVAILABLE_ELEMENT) in case of unavailable SMS TPDU TLV element.

CRRC2: The method shall thrown ToolkitException (UNAVAILABLE_ELEMENT) in case of missing Secured Data.

6.2.4.4.2 Test suite files

Specific triggering:

- FORMATTED SMS CB
- UNFORMATTED SMS CB
- FORMATTED SMS PP UPD
- UNFORMATTED SMS PP ENV
- For Formatted triggering if CC/RC/DS is used, the security parameters are the one used for downloading applications.

Test Script: API_2_ENH_GSDO_1.scr

Test Applet: API_2_ENH_GSDO_1.java

Load Script: API_2_ENH_GSDO_1.ldr

Cleanup Script: API_2_ENH_GSDO_1.clr

Parameter File: API_2_ENH_GSDO_1.par

6.2.4.4.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|-----------------------------------|------------------|
| 1 | Test with TP-OA length of 2 | Returns 0x21 | |
| 2 | Test with TP-OA length of 6 | Returns 0x23 | |
| 3 | Test with TP-OA length of 12 | Returns 0x26 | |
| 4 | Test with RC/CC/DS length of 0 | Returns 0x21 | |
| 5 | Test with RC/CC/DS length of 8 | Returns 0x29 | |
| 6 | Send a SMS PP with 2 TPDU TLV and inside two different secured data offsets | Returns 0x24 (the first offset) | |
| 7 | Same test as 1 but with FORMATTED_SMS_PP_UPD | Returns 0x21 | |
| 8 | Same test as 2 but with FORMATTED_SMS_PP_UPD | Returns 0x23 | |
| 9 | Same test as 3 but with FORMATTED_SMS_PP_UPD | Returns 0x26 | |
| 10 | Same test as 4 but with FORMATTED_SMS_PP_UPD | Returns 0x21 | |
| 11 | Same test as 5 but with FORMATTED_SMS_PP_UPD | Returns 0x29 | |

| | | | |
|----|--|---|--|
| 12 | Same test as 6 but with FORMATTED_SMS_PP_UPD | Returns 0x24 (the first offset) | |
| 13 | Test with FORMATTED_SMS_PP ENV Verify after call of the method the current TLV is the TPDU TLV: findTLV device identities, getSecuredDataOffset and then getValueByte to verify that the current TLV is the TPDU TLV | Returns 0x40 | |
| 14 | Same test as 4 but with FORMATTED_SMS_CB | Returns 0x16 | |
| 15 | Same test as 5 but with FORMATTED_SMS_CB | Returns 0x1E | |
| 16 | Test with FORMATTED_SMS_CB Verify after call of the method the current TLV is the Cell Broadcast Page TLV: findTLV device identities, getSecuredDataOffset and then getValueByte to verify that the current TLV is the Cell Broadcast Page TLV | Returns 0x58 | |
| 17 | Send an UNFORMATTED SMS CB envelope, getSecuredDataOffset | ToolkitException UNAVAILABLE_ELEMENT | |
| 18 | Send an UNFORMATTED SMS PP envelope | ToolkitException UNAVAILABLE_ELEMENT | |
| 19 | Send an FORMATTED SMS-PP envelope with no secured data , getSecuredDataOffset | Returns 0x21 | |

6.2.4.4.4 Test Coverage

This method has only been tested with call control and the tests shall be improved during 03.48 tests.

| CRR number | Test case number |
|------------|----------------------|
| N1 | 1, 2, 3, 4, 5, 6, 19 |
| N2 | 6, 12 |
| N3 | 1, 2, 3, 4, 5, 6, 19 |
| N4 | 7, 8, 9, 10, 11 |
| N5 | 14,15 |
| N6 | 13 |
| N7 | 16 |
| C1 | 17 |
| C2 | 18 |

6.2.4.5 Method getTheHandler

Test Area Reference: API_2_ENH_GTHD

6.2.4.5.1 Conformance Requirements

The method with following header shall be compliant to its definition in the API.

```
public static EnvelopeHandler getTheHandler()
    throws ToolkitException
```

Normal execution

CRRN1: The method shall return the single system instance of the EnvelopeHandler class.

CRRN2: The EnvelopeHandler is a Temporary JCRE Entry Point Object (see Javacard 2.1 Runtime Environment (JCRE) Specification [12])

Parameters error

No requirements

Context errors

CRR1: The method shall throw ToolkitException (HANDLER_NOT_AVAILABLE) if the handler is busy.

6.2.4.5.2 Test suite files

Test Script: API_2_ENH_GTHD_1.scr
 Test Applet: API_2_ENH_GTHD_1.java
 Load Script: API_2_ENH_GTHD_1.ldr
 Cleanup Script: API_2_ENH_GTHD_1.clr
 Parameter File: API_2_ENH_GTHD_1.par

6.2.4.5.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | getTheHandler twice | The returned objects shall be the same | |
| 2 | Verify that getTheHandler returns an EnvelopeHandler GetTheHandler | The reference returned shall be an EnvelopeHandler (checkcast) | |
| 3 | Verify the returned value is not null GetTheHandler | The reference returned shall not be null. | |

6.2.4.5.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 1, 2, 3 |
| N2 | To be checked in Framework tests and insert here cross reference |
| C1 | To be checked in Framework tests and insert here cross reference |

6.2.4.6 Method getTPUDLOffset

Test Area Reference: API_2_ENH_GTPO

6.2.4.6.1 Conformance Requirement:

The method with following header shall be compliant to its definition in the API.

```
public short getTPUDLOffset()
    throws ToolkitException
```

Normal execution

CRRN1: The method shall return the TPUDL offset in a SMS TPDU TLV.

CRRN2: The offset is from the first SMS TPDU TLV.

CRRN3: The method can be used if the event is EVENT_FORMATTED_SMS_PP_ENV.

CRRN4: The method can be used if the event is EVENT_FORMATTED_SMS_PP_UPD.

CRRN5: The method can be used if the event is EVENT_UNFORMATTED_SMS_PP_ENV.

CRRN6: The method can be used if the event is EVENT_UNFORMATTED_SMS_PP_UPD.

CRRN7: If the method is successful, the selected TLV should be the SMS TPDU TLV.

Parameters error

No requirements

Context errors

CRRC1: The method shall thrown ToolkitException (UNAVAILABLE_ELEMENT) in case of unavailable SMS TPDU TLV element.

CRRC2: The method shall thrown ToolkitException (UNAVAILABLE_ELEMENT) if the TPUDL field does not exist.

6.2.4.6.2 Test suite files

Specific triggering:

```

FORMATTED SMS PP UPD
UNFORMATTED SMS PP UPD
UNFORMATTED SMS PP ENV
SMS CB

```

Test Script: API_2_ENH_GTPO_1.scr
 Test Applet: API_2_ENH_GTPO_1.java
 Load Script: API_2_ENH_GTPO_1.ldr
 Cleanup Script: API_2_ENH_GTPO_1.clr
 Parameter ile: API_2_ENH_GTPO_1.par

6.2.4.6.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|-----------------------------------|------------------|
| 1 | Test with TP-OA length of 2 | Returns 0x0D | |
| 2 | Test with TP-OA length of 6 | Returns 0x0F | |
| 3 | Test with TP-OA length of 12 | Returns 0x12 | |
| 4 | Send a SMS PP with 2 TPDU TLV and inside two different UDL offsets | Returns 0x10 (the first offset) | |
| 5 | Same test as 1 but with FORMATTED_SMS_PP_UPD | Returns 0x0D | |
| 6 | Same test as 2 but with FORMATTED_SMS_PP_UPD | Returns 0x0F | |
| 7 | Same test as 3 but with FORMATTED_SMS_PP_UPD | Returns 0x12 | |
| 8 | Same test as 4 but with FORMATTED_SMS_PP_UPD | Returns 0x10 (the first offset) | |
| 9 | Same test as 1 but with UNFORMATTED_SMS_PP_UPD | Returns 0x0D | |
| 10 | Same test as 2 but with UNFORMATTED_SMS_PP_UPD | Returns 0x0F | |
| 11 | Same test as 3 but with UNFORMATTED_SMS_PP_UPD | Returns 0x12 | |
| 12 | Same test as 4 but with UNFORMATTED_SMS_PP_UPD | Returns 0x12 (the first offset) | |
| 13 | Same test as 1 but with UNFORMATTED_SMS_PP_ENV | Returns 0x0D | |
| 14 | Same test as 2 but with UNFORMATTED_SMS_PP_ENV | Returns 0x0F | |
| 15 | Same test as 3 but with UNFORMATTED_SMS_PP_ENV | Returns 0x12 | |
| 16 | Same test as 4 but with | Returns 0x10 (the first offset) | |

| | UNFORMATTED_SMS_PP_ENV | | |
|----|--|---|--|
| 17 | Verify after call of the method the current TLV is the TPDU TLV: findTLV device identities, getTPUDLOffset and then getValueByte to verify that the current TLV is the TPDU TLV | Returns 0x40 | |
| 18 | Send an envelope SMS CB, getTPUDLOffset | ToolkitException UNAVAILABLE_ELEMENT | |

6.2.4.6.4 Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17 |
| N2 | 4 |
| N3 | 1, 2, 3, 4, 17 |
| N4 | 5, 6, 7, 8 |
| N5 | 13, 14, 15, 16 |
| N6 | 9, 10, 11, 12 |
| N7 | 17 |
| C1 | 18 |
| C2 | Don't no how to test |

6.2.4.7 Method getLength

Test Area Reference: API_2_ENH_GLEN

6.2.4.7.1 Conformance Requirement

The method with following header shall be compliant to its definition in the API.

```
public short getLength()
    throws ToolkitException
```

Normal execution

CRRN1: returns the length in bytes of the TLV list.

Parameter Error

No requirements

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException.HANDLER_NOT_AVAILABLE.

6.2.4.7.2 Test Suite files

Specific triggering: None

Test Script: API_2_ENH_GLEN_1.scr
 Test Applet: API_2_ENH_GLEN_1.java
 Load Script: API_2_ENH_GLEN_1.ldr
 Cleanup Script: API_2_ENH_GLEN_1.clr
 Parameter File: API_2_ENH_GLEN_1.par

6.2.4.7.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|----------------------------------|------------------|
| 1 | Send an envelope SMS PP with BER length of 0x31 | Result of getLength() is 0x0031 | |
| 2 | Send an envelope SMS PP with BER length of 0x7F | Result of getLength() is 0x007Fh | |
| 3 | Send an envelope SMS PP with BER length of 81 80 | Result of getLength() is 0x0080h | |
| 4 | Send an envelope SMS PP with BER length of 81 FC | Result of getLength() is 0x00FCh | |

6.2.4.7.4 Test Coverage

| CRR number | Test case number |
|------------|------------------------------------|
| N1 | 1, 2, 3, 4 |
| C1 | Does not apply for EnvelopeHandler |

6.2.4.8 Method copy

Test Area Reference: API_2_ENH_COPY_BSS

6.2.4.8.1 Conformance Requirement

The method with following header shall be compliant to its definition in the API.

```
public short copy(byte[] dstBuffer,
                 short dstOffset,
                 short dstLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: copies the simple TLV list contained in the handler to the destination byte array.

CRRN2: returns dstOffset + dstLength.

Parameter errors

CRRP1: if dstBuffer is null a NullPointerException is thrown.

CRRP2: if dstOffset or dstLength or both would cause access outside array bounds, or if dstLength is negative, an ArrayIndexOutOfBoundsException is thrown.

CRRP3: if dstLength is grater than the length of the simple TLV List, an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException. OUT_OF_TLV_BOUNDARIES.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.4.8.2 Test Suite files

Specific triggering: None

Test Script: API_2_ENH_COPY_BSS_1.scr

Test Applet: API_2_ENH_COPY_BSS_1.java

Load Script: API_2_ENH_COPY_BSS_1.ldr

Cleanup Script: API_2_ENH_COPY_BSS_1.clr

Parameter File: API_2_ENH_COPY_BSS_1.par

6.2.4.8.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | NULL as parameter to dstBuffer | NullPointerException is thrown | |
| 2 | dstOffset ≥ dstBuffer.length dstBuffer.length = 5 dstOffset = 5 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | dstOffset < 0 dstBuffer.length = 5 dstOffset = -1 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 0 dstLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | DstOffset + dstLength > dstBuffer.length DstBuffer.length = 5 DstOffset = 3 DstLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | dstLength < 0 dstBuffer.length = 5 dstOffset = 0 dstLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | DstLength > length of the simple TLV list DstBuffer.length = 48 DstOffset = 0 DstLength = 48 | ToolkitException.OUT_OF_TLV_BOUNDS is thrown | |
| 8 | Successful call, dstBuffer is the whole buffer DstBuffer.length = 47 DstOffset = 0 DstLength = 47 | Result of copy() is 0X0047 | |
| 9 | Compare the buffer | Result of arrayCompare() is 0 | |
| 10 | Successful call, dstBuffer is part of a buffer DstBuffer.length = 50 dstOffset = 3 dstLength = 47 | Result of copy() is 0X0032 | |
| 11 | Compare the whole buffer | Result of arrayCompare() is 0 | |
| 12 | Successful call, dstBuffer is part of a buffer dstBuffer.length = 15 dstOffset = 3 dstLength = 6 | Result of copy() is 0X0009 | |
| 13 | Compare the whole buffer | Result of arrayCompare() is 0 | |
| 14 | Successful call, dstBuffer is part of a buffer dstBuffer.length = 260 dstOffset = 257 dstLength = 3 | Result of copy() is 0X0104 | |
| 15 | Compare the whole buffer | Result of arrayCompare() is 0 | |
| 16 | Successful call, copy with length =0 dstBuffer.length = 260 dstOffset = 260 dstLength = 0 | Result of copy() is 0x104 | |

6.2.4.8.4 Test Coverage

| CRR number | Test case number |
|------------|------------------------------------|
| N1 | 9, 11, 13, 15 |
| N2 | 8, 10, 12, 14, 16 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7 |
| C1 | Does not apply for EnvelopeHandler |

6.2.4.9 Method findTLV

Test Area Reference: API_2_ENH_FINDBB

6.2.4.9.1 Conformance Requirement

The method with following header shall be compliant to its definition in the API.

```
public byte findTLV(byte tag, byte occurrence)
    throws ToolkitException
```

Normal execution

Looks for the indicated occurrence of a TLV element from the beginning of the TLV list (handler buffer):

CRRN1: the method is successful if the required occurrence exists then the corresponding TLV becomes current.

CRRN2: if the method is successful then it returns TLV_FOUND_CR_SET when Comprehension Required flag is set.

CRRN3: if the method is successful then it returns TLV_FOUND_CR_NOT_SET when Comprehension Required flag is not set.

CRRN4: if the required occurrence of the TLV element does not exist, the current TLV is no longer defined and TLV_NOT_FOUND is returned.

CRRN5: The search method is comprehension required flag independent.

Parameter errors

CRRP1: if an input parameter is not valid (e.g. occurrence = 0) an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException BAD_INPUT_PARAMETER.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.4.9.2 Test Suite files

Specific triggering: None

Test Script: API_2_ENH_ENH_FINDBB_1.scr
 Test Applet: API_2_ENH_ENH_FINDBB_1.java
 Load Script: API_2_ENH_ENH_FINDBB_1.ldr
 Cleanup Script: API_2_ENH_FINDBB_1.clr
 Parameter File: API_2_ENH_FINDBB_1.par

6.2.4.9.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|------------------|
| | Trig the applet with SMS PP including one more tag 02 and one TAG 04 | | |
| 1 | Invalid input parameter Occurrence = 0 | ToolkitException.BAD_INPUT_PARAMETER is thrown | |
| 2 | Search 1st TLV Tag = 02h Occurrence = 1 | Result is TLV_FOUND_CR_SET | |
| 3 | Call the getValueLength() method | Result is 0x02 | |
| 4 | Search 2nd TLV Tag = 06h Occurrence = 1 | Result is TLV_FOUND_CR_SET | |
| 5 | Call the getValueLength() method | Result is 0x05h | |
| 6 | Select a TLV (tag 02h) | | |
| | Search a wrong tag Tag = 03h Occurrence = 1 | Result is TLV_NOT_FOUND | |
| 7 | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 8 | Search a tag with wrong occurrence Tag = 02h Occurrence = 3 | Result is TLV_NOT_FOUND | |
| 9 | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 10 | Search the TLV Tag = 02h Occurrence = 2 | Result is TLV_FOUND_CR_NOT_SET | |
| 11 | Search the TLV Tag = 04h Occurrence = 1 | Result is TLV_FOUND_CR_NOT_SET | |
| 12 | Search tag 81h Tag = 86h Occurrence = 1 | Result is TLV_FOUND_CR_SET | |
| 13 | Search tag 84h Tag = 84h Occurrence = 1 | Result is TLV_FOUND_CR_NOT_SET | |

6.2.4.9.4 Test Coverage

| CRR number | Test case number |
|------------|------------------------------------|
| N1 | 3, 5 |
| N2 | 2, 4 |
| N3 | 10, 11 |
| N4 | 6, 7, 8, 9 |
| N5 | 12, 13 |
| P1 | 1 |
| C1 | Does not apply for EnvelopeHandler |

6.2.4.10 Method getValueLength

Test Area Reference: API_2_ENH_GVLE

6.2.4.10.1 Conformance Requirement

The method with following header shall be compliant to its definition in the API.

```
public short getValueLength()
    throws ToolkitException
```

Normal execution

CRRN1: gets and returns the binary length of the value field for the last TLV element which has been found in the handler.

Parameter errors

No requirements

Context errors

CRR1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

CRR2: in case of unavailable TLV element an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException UNAVAILABLE_ELEMENT.

6.2.4.10.2 Test Suite files

Specific triggering: None

Test Script: API_2_ENH_GVLE_1.scr
 Test Applet: API_2_ENH_GVLE_1.java
 Load Script: API_2_ENH_GVLE_1.ldr
 Cleanup Script: API_2_ENH_GVLE_1.clr
 Parameter File: API_2_ENH_GVLE_1.par

6.2.4.10.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| | Fill the SMS PP with TLV: Tag 33, Length C8 | | |
| 1 | getValueLength() | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| 2 | Search TLV 02h | | |
| | getValueLength() | Result is 0X0002 | |
| 3 | Search TLV 0Bh | | |
| | getValueLength() | Result is 0X0024 | |
| 4 | Search TLV 33h | | |
| | getValueLength() | Result is 0X00C8 | |

6.2.4.10.4 Test Coverage

| CRR number | Test case number |
|------------|------------------------------------|
| N1 | 2, 3, 4 |
| C1 | Does not apply for EnvelopeHandler |
| C2 | 1 |

6.2.4.11 Method getValueByte

Test Area Reference: API_2_ENH_GVBYS

6.2.4.11.1 Conformance Requirement

The method with following header shall be compliant to its definition in the API.

```
public byte getValueByte(short valueOffset)
    throws ToolkitException
```

Normal execution

CRRN1: Gets a byte from the last TLV element which has been found in the handler and returns its value (1 byte).

Parameter errors

CRRP1: if valueOffset is out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

CRRC2: in case of unavailable TLV element an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException UNAVAILABLE_ELEMENT.

6.2.4.11.2 Test Suite files

Specific triggering: None

Test Script: API_2_ENH_GVBY.scr
 Test Applet: API_2_ENH_GVBY_1.java
 Load Script: API_2_ENH_GVBY.ldr
 Cleanup Script: API_2_ENH_GVBY_1.clr
 Parameter File: API_2_ENH_GVBY_1.par

6.2.4.11.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| | Fill the SMS PP with TLV: Tag 33, Length C8 Value 01 02 ... | | |
| 1 | getValueByte(0) | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| 2 | Search TLV 02h getValueByte(2) | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 3 | Search TLV 02h getValueByte(1) | Result is 0x81 | |
| 4 | Search TLV 02h (Device Identities TLV) getValueByte(0) | Result is 83h (Source) | |
| 5 | Search TLV 33h getValueByte(7E) | Result is 0x7F | |
| 6 | Search TLV 33h getValueByte(80) | Result is 0x81 | |
| 7 | getValueByte(7F) | Result is 0x80 | |
| 8 | Search TLV B3h getValueByte(C7) | Result is 0xC8 | |

6.2.4.11.4 Test Coverage

| CRR number | Test case number |
|------------|------------------------------------|
| N1 | 3, 4, 5, 6, 7, 8 |
| P1 | 2 |
| C1 | Does not apply for EnvelopeHandler |
| C2 | 1 |

6.2.4.12 Method copyValue

Test Area Reference: API_2_ENH_CPYVS_BSS

6.2.4.12.1 Conformance Requirement

The method with following header shall be compliant with its definition in the API.

```
public short copyValue(short valueOffset,
                      byte[] dstBuffer,
                      short dstOffset,
                      short dstLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: copies a part of the last TLV element which has been found, into a destination. buffer.

CRRN2: returns dstOffset + dstLength.

Parameter errors

CRRP1: if dstBuffer is null NullPointerException is thrown.

CRRP2: if dstOffset or dstLength or both would cause access outside array bounds, or if dstLength is negative ArrayIndexOutOfBoundsException is thrown.

CRRP3: if valueOffset, dstLength or both are out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

CRRC2: in case of unavailable TLV element an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException UNAVAILABLE_ELEMENT.

6.2.4.12.3 Test Suite files

Specific triggering: None

Test Script: API_2_ENH_CPYVS_BSS_1.scr
 Test Applet: API_2_ENH_CPYVS_BSS_1.java
 Load Script: API_2_ENH_CPYVS_BSS_1.ldr
 Cleanup Script: API_2_ENH_CPYVS_BSS_1.clr
 Parameter File: API_2_ENH_CPYVS_BSS_1.par

6.2.4.12.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | Search TLV 02h copyValue() with a null dstBuffer | NullPointerException is thrown | |
| 2 | Search TLV 0Bh dstOffset ≥ dstBuffer.length dstBuffer.length = 5 dstOffset = 5 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | dstOffset < 0 dstBuffer.length = 5 | ArrayIndexOutOfBoundsException is thrown | |

| | | | |
|----|--|--|--|
| | dstOffset = -1 dstLength = 1 | | |
| 4 | dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 0 dstLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | dstOffset + dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 3 dstLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | dstLength < 0 dstBuffer.length = 5 dstOffset = 0 dstLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | Search TLV 06h | | |
| | valueOffset ≥ TLV Length valueOffset = 6 dstBuffer.length = 15 dstOffset = 0 dstLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 8 | valueOffset < 0 valueOffset = -1 dstBuffer.length = 15 dstOffset = 0 dstLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 9 | dstLength > TLV length valueOffset = 0 dstBuffer.length = 15 dstOffset = 0 dstLength = 7 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 10 | valueOffset + dstLength > TLV length valueOffset = 2 dstBuffer.length = 15 dstOffset = 0 dstLength = 5 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 11 | Search TLV 01h copyValue() | ToolkitException.UNAVAILABLE_ELEMENT is thrown on the copyValue() method | |
| 12 | Search TLV 06h Successful call valueOffset = 0 dstBuffer.length = 6 dstOffset = 0 dstLength = 6 | Result of copyValue() is 0x0006 | |
| 13 | Compare buffer buffer = 81 11 22 33 44 F5 | Result is 00h | |
| 14 | initialise dstBuffer dstBuffer = 55 55 ... 55 | | |
| | Successful call valueOffset = 1 dstBuffer.length = 20 dstOffset = 3 dstLength = 4 | Result of copyValue() is 0x0007 | |
| 15 | Compare buffer buffer = 55 55 55 11 22 33 44 55 55 55 55 55 55 55 55 55 55 55 55 55 | Result is 00h | |
| 16 | Successful call, copy with length =0 dstBuffer.length = 20 dstOffset = 20 dstLength = 0 | Result of copyValue() is 20 | |

6.2.4.12.4 Test Coverage

| CRR number | Test case number |
|------------|---------------------------------------|
| N1 | 13, 15 |
| N2 | 12, 14, 16 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7, 8, 9, 10 |
| C1 | Does not apply for EnvelopeHandler |
| C2 | 11 |

6.2.4.13 Method compareValue

Test Area Reference: API_2_ENH_CPRVS_BSS

6.2.4.13.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte compareValue(short valueOffset,
                        byte[] compareBuffer,
                        short compareOffset,
                        short compareLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

Compares the last found TLV element with a buffer:

CRRN1: returns 0 if identical.

CRRN2: returns -1 if the first miscomparing byte in simple TLV List is less than that in compareBuffer.

CRRN3: returns 1 if the first miscomparing byte in simple TLV List is greater than that in compareBuffer.

Parameter errors

CRRP1: if compareBuffer is null NullPointerException shall be thrown.

CRRP2: if compareOffset or compareLength or both would cause access outside array bounds, or if compareLength is negative ArrayIndexOutOfBoundsException shall be thrown.

CRRP3: if valueOffset, dstLength or both are out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

CRRC2: in case of unavailable TLV element an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException UNAVAILABLE_ELEMENT.

6.2.4.13.3 Test Suite files

Specific triggering: None

Test Script: API_2_ENH_CPRVS_BSS_1.scr

Test Applet: API_2_ENH_CPRVS_BSS_1.java

Load Script: API_2_ENH_CPRVS_BSS_1.ldr

Cleanup Script: API_2_ENH_CPRVS_BSS_1.clr

Parameter File: API_2_ENH_CPRVS_BSS_1.par

6.2.4.13.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | Search TLV 02h | | |
| | compareValue() with a null compareBuffer | NullPointerException is thrown | |
| 2 | Search TLV 0Bh | | |
| | compareOffset ≥ compareBuffer.length compareBuffer.length = 5 compareOffset = 5 compareLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | compareOffset < 0 compareBuffer.length = 5 compareOffset = -1 compareLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | compareLength > compareBuffer.length compareBuffer.length = 5 compareOffset = 0 compareLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | compareOffset + compareLength > compareBuffer.length compareBuffer.length = 5 compareOffset = 3 compareLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | compareLength < 0 compareBuffer.length = 5 compareOffset = 0 compareLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | Search TLV 06h | | |
| | valueOffset ≥ TLV Length valueOffset = 6 compareBuffer.length = 15 compareOffset = 0 compareLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 8 | valueOffset < 0 valueOffset = -1 compareBuffer.length = 15 compareOffset = 0 compareLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 9 | compareLength > TLV length valueOffset = 0 compareBuffer.length = 15 compareOffset = 0 compareLength = 7 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 10 | valueOffset + compareLength > TLV length valueOffset = 2 compareBuffer.length = 15 compareOffset = 0 compareLength = 5 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 11 | Search TLV 01h | Result is TLV_NOT_FOUND | |
| | compareValue() | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| 12 | Search TLV 06h | | |
| | Initialise compareBuffer compareBuffer = 81 11 22 33 44 F5 | | |
| | Compare buffers valueOffset = 0 compareOffset = 0 compareLength = 6 | Result is 00h | |
| 13 | Initialise compareBuffer compareBuffer = 7F 11 22 33 44 F5 | | |
| | Compare buffers with same parameters | Result is -1 | |
| 14 | Initialise compareBuffer compareBuffer = | | |

| | | | |
|----|---|-------------------------------|--|
| | 83 11 22 33 44 F5 | | |
| | Compare buffers with same parameters | Result is -1 | |
| 15 | Initialise compareBuffer compareBuffer = 55 55 55 81 11 22 33 44 F5 55 55 55 55 55 | | |
| | Compare buffers valueOffset = 1 compareOffset = 4 compareLength = 5 | Result is 00h | |
| 16 | Initialise compareBuffer compareBuffer = 55 55 55 81 10 22 33 44 F5 55 55 55 55 55 | | |
| | Compare buffers with same parameters | Result is +1 | |
| 17 | Initialise compareBuffer compareBuffer = 55 55 55 81 12 22 33 44 F5 55 55 55 55 55 | | |
| | Compare buffers with same parameters | Result is -1 | |
| 18 | Successful call, compareValue with length =0 CompareBuffer.length = 15 CompareOffset = 15 CompareLength = 0 | Result of compareValue() is 0 | |

6.2.4.13.4 Test Coverage

| CRR number | Test case number |
|------------|------------------------------------|
| N1 | 12, 15 |
| N2 | 13, 16, 18 |
| N3 | 14, 17 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7, 8, 9, 10 |
| C1 | Does not apply for EnvelopeHandler |
| C2 | 11 |

6.2.4.14 Method findAndCopyValue(byte tag, byte[] dstBuffer, short dstOffset)

Test Area Reference: API_2_ENH_FACYB_BS

6.2.4.14.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short findAndCopyValue(byte tag,
                             byte[] dstBuffer,
                             short dstOffset)
throws java.lang.NullPointerException,
       java.lang.ArrayIndexOutOfBoundsException,
       ToolkitException
```

Normal execution

CRRN1: looks for the first occurrence of a TLV element from the beginning of a TLV list and copy its value into a destination buffer.

CRRN2: if no TLV element is found, the UNAVAILABLE_ELEMENT exception is thrown and the current TLV is no longer defined.

CRRN3: if the method is successful then the corresponding TLV becomes current and dstOffset + length of the copied value is returned.

CRRN4: The search method is comprehension required flag independent.

Parameter errors

CRRP1: if dstBuffer is null NullPointerException shall be thrown.

CRRP2: if dstOffset would cause access outside array bounds ArrayIndexOutOfBoundsException shall be thrown.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.4.14.3 Test Suite files

Specific triggering: None

Test Script: API_2_ENH_FACYB_BS_1.scr
 Test Applet: API_2_ENH_FACYB_BS_1.java
 Load Script: API_2_ENH_FACYB_BS_1.ldr
 Cleanup Script: API_2_ENH_FACYB_BS_1.clr
 Parameter File: API_2_ENH_FACYB_BS_1.par

6.2.4.14.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|------------------|
| | Fill the SMS PP with TLV: Tag 02 Value 22 44 Tag 33, Length C4 Value 01 02 ... | | |
| 1 | FindAndCopyValue() with a null dstBuffer | NullPointerException is thrown | |
| 2 | dstOffset ≥ dstBuffer.length tag = 06h dstBuffer.length = 06 dstOffset = 06 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | dstOffset < 0 dstBuffer.length = 06 dstOffset = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | length > dstBuffer.length dstBuffer.length = 05 dstOffset = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | DstOffset + length > dstBuffer.length DstBuffer.length = 06 DstOffset = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | Select a TLV (tag 02h) findAndCopyValue() tag = 03h | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 7 | Successful call Tag = 06h DstBuffer.length = 06 DstOffset = 0 | Result of findAndCopyValue () is 0006 | |
| 8 | Compare buffer buffer = 81 11 22 33 44 F5 | Result is 00h | |
| 9 | initialise dstBuffer dstBuffer = 55 55 ... 55 | | |
| | Successful call dstBuffer.length = 12 dstOffset = 2 | Result of findAndCopyValue () is 0008 | |
| 10 | Compare buffer buffer = 55 55 81 11 22 33 44 F5 55 55 55 55 | Result is 00h | |
| 11 | Successful call tag = 02h dstBuffer.length = 2 dstOffset = 0 | Result of findAndCopyValue () is 0002 | |

| | | | |
|----|--|---------------------------------------|--|
| 12 | Compare buffer buffer = 83 81 | Result is 00h | |
| 13 | Successful call (with tag 82h) tag = 82h dstBuffer.length = 02 dstOffset = 0 | Result of findAndCopyValue () is 0002 | |
| 14 | Compare buffer buffer = 83 81 | Result is 00h | |
| 15 | Successful call (with tag B3h) tag = B3h dstBuffer.length = C4 dstOffset = 0 | Result of findAndCopyValue () is 00C4 | |
| 16 | Compare buffer buffer = 01 02 ... C4 | Result is 00h | |

6.2.4.14.4 Test Coverage

| CRR number | Test case number |
|------------|------------------------------------|
| N1 | 8, 10, 12 |
| N2 | 6 |
| N3 | 7, 9, 11 |
| N4 | 13, 14, 15, 16 |
| P1 | 1 |
| P2 | 2, 3, 4, 5 |
| C1 | Does not apply for EnvelopeHandler |

6.2.4.15 Method findAndCopyValue(byte tag, byte occurrence, short valueOffset, byte[] dstBuffer, short dstOffset, short dstLength)

Test Area Reference: API_2_ENH_FACYBS_BSS

6.2.4.15.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short findAndCopyValue(byte tag,
                             byte occurrence,
                             short valueOffset,
                             byte[] dstBuffer,
                             short dstOffset,
                             short dstLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: looks for the indicated occurrence of a TLV element from the beginning of a TLV list and copy its value into a destination buffer.

CRRN2: if no TLV element is found, the UNAVAILABLE_ELEMENT exception is thrown and the current TLV is no longer defined.

CRRN3: if the method is successful then the corresponding TLV becomes current and dstOffset + dstLength is returned.

CRRN4: The search method is comprehension required flag independent.

Parameter errors

CRRP1: if dstBuffer is null NullPointerException shall be thrown.

CRRP2: if dstOffset or dstLength or both would cause access outside array bounds, or if dstLength is negative ArrayIndexOutOfBoundsException shall be thrown.

CRRP3: if valueOffset, dstLength or both are out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.4.15.3 Test Suite files

Test Script: API_2_ENH_FACYBS_BSS_1.scr
 Test Applet: API_2_ENH_FACYBS_BSS_1.java
 Load Script: API_2_ENH_FACYBS_BSS_1.ldr
 Cleanup Script: API_2_ENH_FACYBS_BSS_1.clr
 Parameter File: API_2_ENH_FACYBS_BSS_1.par

6.2.4.15.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| | Fill the SMS PP with TLV: Tag 02 Value 22 44 Tag 33, Length C4 Value 01 02 ... | | |
| 1 | findAndCopyValue() with a null dstBuffer | NullPointerException is thrown | |
| 2 | dstOffset ≥ dstBuffer.length tag = 06h, occurrence = 1 valueOffset = 0 dstBuffer.length = 5 dstOffset = 5 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | dstOffset < 0 dstBuffer.length = 5 dstOffset = -1 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 0 dstLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | dstOffset + dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 3 dstLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | dstLength < 0 dstBuffer.length = 5 dstOffset = 0 dstLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | valueOffset ≥ Value Length tag = 06h, occurrence = 1 valueOffset = 6 dstBuffer.length = 15 dstOffset = 0 dstLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 8 | valueOffset < 0 valueOffset = -1 dstBuffer.length = 15 dstOffset = 0 dstLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 9 | dstLength > Value length valueOffset = 0 dstBuffer.length = 15 dstOffset = 0 dstLength = 7 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 10 | valueOffset + dstLength > Text String length valueOffset = 2 dstBuffer.length = 15 dstOffset = 0 dstLength = 5 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |

| | | | |
|----|---|---|--|
| 11 | Select a TLV (tag 02h) findAndCopyValue() tag = 06h occurrence = 2 | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 12 | Successful call tag = 06h, occurrence = 1 valueOffset = 0 dstBuffer.length = 06 dstOffset = 0 dstLength = 06 | Result of findAndCopyValue() is 6 | |
| 13 | Compare buffer buffer = 81 11 22 33 44 F5 | Result is 00h | |
| 14 | initialise dstBuffer dstBuffer = 55 55 ... 55 | | |
| | Successful call tag = 06h, occurrence = 1 valueOffset = 2 dstBuffer.length = 12 dstOffset = 3 dstLength = 04 | Result of findAndCopyValue () is 0007 | |
| 15 | Compare buffer buffer = 55 55 55 22 33 44 F5 55 55 55 55 55 | Result is 00h | |
| 16 | Successful call tag = 02h, occurrence = 1 valueOffset = 0 dstBuffer.length = 12 dstOffset = 0 dstLength = 2 | Result of findAndCopyValue() is 0002 | |
| 17 | Compare buffer buffer = 83 81 55 ... 55 | Result is 00h | |
| 18 | Successful call tag = 02h, occurrence = 2 valueOffset = 0 dstBuffer.length = 12 dstOffset = 0 dstLength = 2 | Result of findAndCopyValue() is 0002 | |
| 19 | Compare buffer buffer = 22 44 55 ... 55 | Result is 00h | |
| 20 | Successful call (with tag 82h) tag = 82h occurrence = 1 valueOffset = 0 dstBuffer.length = 12 dstOffset = 0 dstLength = 02 | Result of findAndCopyValue () is 0002 | |
| 21 | Compare buffer buffer = 83 81 55 ... 55 | Result is 00h | |
| 22 | Successful call (with tag 82h) tag = 82h occurrence = 2 valueOffset = 0 dstBuffer.length = 12 dstOffset = 0 dstLength = 02 | Result of findAndCopyValue () is 0002 | |
| 23 | Compare buffer Buffer = 22 44 55 ... 55 | Result is 00h | |
| 24 | Successful call, findAndCopyValue with length =0 DstBuffer.length = 12 dstOffset = 12 dstLength = 0 | Result of findAndCopyValue () is 12 | |

6.2.4.15.4 Test Coverage

| CRR number | Test case number |
|------------|------------------------------------|
| N1 | 13, 15, 17, 19 |
| N2 | 11 |
| N3 | 12, 14, 16, 18, 24 |
| N4 | 20, 21, 22, 23 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7, 8, 9, 10 |
| C1 | Does not apply for EnvelopeHandler |

6.2.4.16 Method findAndCompareValue(byte tag, byte[] compareBuffer, short compareOffset)

Test Area Reference: API_2_ENH_FACRB_BS

6.2.4.16.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte findAndCompareValue(byte tag,
                               byte[] compareBuffer,
                               short compareOffset)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

Looks for the first occurrence of a TLV element from beginning of a TLV list and compare its value with a buffer:

CRRN1: if no TLV element is found, the UNAVAILABLE_ELEMENT exception is thrown and the current TLV is no longer defined.

CRRN2: if the method is successful then the corresponding TLV becomes current.

CRRN3: if identical returns 0.

CRRN4: if the first miscomparing byte in simple TLV is less than that in compareBuffer returns -1.

CRRN5: if the first miscomparing byte in simple TLV is greater than that in compareBuffer returns 1.

CRRN6: The search method is comprehension required flag independent.

Parameter errors

CRRP1: if compareBuffer is null NullPointerException shall be thrown.

CRRP2: if compareOffset would cause access outside array bounds ArrayIndexOutOfBoundsException shall be thrown.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.4.16.3 Test Suite files

Test Script: API_2_ENH_FACRB_BS_1.scr

Test Applet: API_2_ENH_FACRB_BS_1.java

Load Script: API_2_ENH_FACRB_BS_1.ldr

Cleanup Script: API_2_ENH_FACRB_BS_1.clr

Parameter File: API_2_ENH_FACRB_BS_1.par

6.2.4.16.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|------------------|
| | Fill the SMS PP with TLV: Tag 02 Value 22 44 Tag 33, Length C4 Value 01 02 ... | | |
| 1 | findAndCompareValue() with a null dstBuffer | NullPointerException is thrown | |
| 2 | compareOffset ≥ compareBuffer.length tag = 06h compareBuffer.length = 12 compareOffset = 12 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | compareOffset < 0 compareBuffer.length = 12 compareOffset = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | length > compareBuffer.length compareBuffer.length = 05 compareOffset = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | compareOffset + length > compareBuffer.length compareBuffer.length = 12 compareOffset = 7 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | Select a TLV (tag 02h) findAndCompareValue() tag = 03h | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 7 | Initialise compareBuffer compareBuffer = 81 11 22 33 44 F5 | | |
| | Compare buffers tag = 06h compareOffset = 0 | Result is 00h | |
| 8 | Verify current TLV getValueLength() | Result is 06 | |
| 9 | Initialise compareBuffer compareBuffer = 81 11 22 33 44 F4 | | |
| | Compare buffers with same parameters | Result is +1 | |
| 10 | Initialise compareBuffer compareBuffer = 81 11 22 33 44 F6 | | |
| | Compare buffers with same parameters | Result is -1 | |
| 11 | Initialise compareBuffer compareBuffer = 55 55 81 11 22 33 44 F5 55 55 55 55 | | |
| | Compare buffers compareOffset = 2 | Result is 00h | |
| 12 | Initialise compareBuffer compareBuffer = 55 55 83 81 55 55 55 55 55 55 55 55 | | |
| | Compare buffers compareOffset = 2 | Result is 00h | |
| 13 | Initialise compareBuffer compareBuffer = 55 55 83 80 55 55 55 55 55 55 55 55 | | |
| | Compare buffers compareOffset = 2 | Result is +1 | |
| 14 | Initialise compareBuffer compareBuffer = 55 55 83 82 55 55 55 55 55 55 55 55 | | |
| | Compare buffers compareOffset = 2 | Result is -1 | |
| 15 | Initialise compareBuffer compareBuffer = 83 81 55 55 55 55 55 55 55 55 55 55 | | |
| | Successful call (with tag 02h) tag = 02h compareBuffer.length = 12 compareOffset = 0 | Result is 00h | |

| | | | |
|----|--|---------------|--|
| 16 | Initialise compareBuffer CompareBuffer = 01 02 ... C4 | | |
| | Successful call (with tag B3h) Tag = B3h CompareBuffer.length = C4 CompareOffset = 0 | Result is 00h | |

6.2.4.16.4 Test Coverage

| CRR number | Test case number |
|------------|---------------------------------------|
| N1 | 6 |
| N2 | 8 |
| N3 | 7, 11, 12 |
| N4 | 9, 13 |
| N5 | 10, 14 |
| N6 | 15, 16 |
| P1 | 1 |
| P2 | 2, 3, 4, 5 |
| C1 | Does not apply for EnvelopeHandler |

6.2.4.17 Method findAndCompareValue(byte tag, byte occurrence, short valueOffset, byte[] compareBuffer, short compareOffset, short compareLength)

Test Area Reference: API_2_ENH_FACRBBS_BSS

6.2.4.17.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte findAndCompareValue(byte tag,
                               byte occurrence,
                               short valueOffset,
                               byte[] compareBuffer,
                               short compareOffset,
                               short compareLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

Looks for the indicated occurrence of a TLV element from the beginning of a TLV list and compare its value with a buffer:

- CRRN1: if no TLV element is found, the UNAVAILABLE_ELEMENT exception is thrown and the current TLV is no longer defined.
- CRRN2: if the method is successful then the corresponding TLV becomes current.
- CRRN3: if identical 0 is returned.
- CRRN4: if the first miscomparing byte in simple TLV is less than that in compareBuffer -1 is returned.
- CRRN5: if the first miscomparing byte in simple TLV is greater than that in compareBuffer 1 is returned
- CRRN6: The search method is comprehension required flag independent.

Parameter errors

- CRRP1: if compareBuffer is null NullPointerException shall be thrown.
- CRRP2: if compareOffset or compareLength or both would cause access outside array bounds, or if compareLength is negative ArrayIndexOutOfBoundsException shall be thrown.

CRRP3: if valueOffset, compareLength or both are out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.

CRRP4: if an input parameter is not valid (e.g. occurrence = 0) an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException BAD_INPUT_PARAMETER.

Context errors

CRR1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.4.17.3 Test Suite files

Test Script: API_2_ENH_FACRBBS_BSS_1.scr
 Test Applet: API_2_ENH_FACRBBS_BSS_1.java
 Load Script: API_2_ENH_FACRBBS_BSS_1.ldr
 Cleanup Script: API_2_ENH_FACRBBS_BSS_1.clr
 Parameter File: API_2_ENH_FACRBBS_BSS_1.par

6.2.4.17.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| | Fill the SMS PP with TLV: Tag 02 Value 22 44 Tag 33, Length C4 Value 01 02 ... | | |
| 1 | findAndCompareValue() with a null compareBuffer | NullPointerException is thrown | |
| 2 | compareOffset ≥ compareBuffer.length tag = 06h, occurrence = 1 valueOffset = 0 compareBuffer.length = 6 compareOffset = 6 compareLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | compareOffset < 0 compareBuffer.length = 6 compareOffset = -1 compareLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | compareLength > compareBuffer.length compareBuffer.length = 5 compareOffset = 0 compareLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | compareOffset + compareLength > compareBuffer.length compareBuffer.length = 5 compareOffset = 3 compareLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | compareLength < 0 compareBuffer.length = 5 compareOffset = 0 compareLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | valueOffset ≥ Value Length tag = 06h, occurrence = 1 valueOffset = 6 compareBuffer.length = 15 compareOffset = 0 compareLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 8 | valueOffset < 0 valueOffset = -1 compareBuffer.length = 15 compareOffset = 0 compareLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 9 | compareLength > Value length valueOffset = 0 compareBuffer.length = 15 compareOffset = 0 compareLength = 7 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 10 | valueOffset + compareLength > Value length | ToolkitException.OUT_OF_TLV_ | |

| | | | |
|----|---|---|--|
| | valueOffset = 2 compareBuffer.length = 15 compareOffset = 0 compareLength = 5 | BOUNDARIES is thrown | |
| 11 | Invalid parameter occurrence = 0 | ToolkitException.BAD_INPUT_PARAMETER is thrown | |
| 12 | Select a TLV (tag 02h) findAndCompareValue() tag = 06h occurrence = 2 | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 13 | Initialise compareBuffer compareBuffer = 81 11 22 33 44 F5 findAndCompareValue() tag = 06h, occurrence = 1 valueOffset = 0 compareOffset = 0 compareLength = 6 | Result is 00h | |
| 14 | Verify current TLV getValueLength() | Result is 0006 | |
| 15 | Initialise compareBuffer compareBuffer = 81 11 22 33 44 F4 Compare buffers with same parameters | Result is +1 | |
| 16 | Initialise compareBuffer compareBuffer = 81 11 22 33 44 F6 Compare buffers with same parameters | Result is -1 | |
| 17 | Initialise compareBuffer compareBuffer = 55 55 55 22 33 44 F5 55 55 55 55 Compare buffers valueOffset = 2 compareOffset = 3 compareLength = 4 | Result is 00h | |
| 18 | Initialise compareBuffer compareBuffer = 55 55 55 22 33 45 F5 55 55 55 55 Compare buffers with same parameters | Result is -1 | |
| 19 | Initialise compareBuffer compareBuffer = 55 55 55 22 33 43 F5 55 55 55 55 Compare buffers with same parameters | Result is +1 | |
| 20 | Initialise compareBuffer compareBuffer = 83 81 55 55 55 55 55 55 55 55 55 55 findAndCompareValue() tag = 02h, occurrence = 1 valueOffset = 0 compareOffset = 0 compareLength = 2 | Result is 00h | |
| 21 | Initialise compareBuffer compareBuffer = 22 44 55 55 55 55 55 55 55 55 55 55 findAndCompareValue() tag = 02h, occurrence = 2 valueOffset = 0 compareOffset = 0 compareLength = 2 | Result is 00h | |
| 22 | Initialise compareBuffer compareBuffer = 22 45 55 55 55 55 55 55 55 55 55 55 findAndCompareValue() tag = 02h, occurrence = 2 valueOffset = 0 compareOffset = 0 compareLength = 2 | Result is -1 | |
| 23 | Initialise compareBuffer compareBuffer = 83 81 55 55 55 55 55 55 55 55 55 55 Successful call (with tag 02h) tag = 02h, occurrence = 1 valueOffset = 0 compareBuffer.length = 12 | Result is 00h | |

| | | | |
|----|---|--|--|
| | compareOffset = 0 compareLength = 2 | | |
| 24 | Initialise compareBuffer compareBuffer = 01 02 ... C4 | | |
| | Successful call (with tag B3h) tag = B3h, occurrence = 1 valueOffset = 0 compareBuffer.length = 00C4 compareOffset = 0 compareLength = 00C4 | Result is 00h | |
| 25 | Successful call, findAndCompareValue with length =0 DstBuffer.length = C4 DstOffset = C4 DstLength = 0 | Result of findAndCompareValue() is 00h | |

6.2.4.17.4

Test Coverage

| CRR number | Test case number |
|------------|------------------------------------|
| N1 | 12 |
| N2 | 14 |
| N3 | 13, 17, 20, 21, 25 |
| N4 | 19, 15 |
| N5 | 16, 18, 22 |
| N6 | 23, 24 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7, 8, 9, 10 |
| P4 | 11 |
| C1 | Does not apply for EnvelopeHandler |

6.2.5 Class EnvelopeResponseHandler

6.2.5.1 Method getTheHandler

Test Area Reference: API_2_ERH_GTHD

6.2.5.1.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
public static EnvelopeResponseHandler getTheHandler()
    throws ToolkitException
```

Normal execution

CRRN1: The method shall return the single system instance of the EnvelopeResponseHandler class.

CRRN2: The EnvelopeResponseHandler is a Temporary JCRE Entry Point Object (see Javacard 2.1 Runtime Environment (JCRE) Specification [12])

Parameter errors

No requirements

Context errors

CRRC1: The method shall thrown ToolkitException (HANDLER_NOT_AVAILABLE) if the handler is busy.

CRRC2: After the first invocation of the ProactiveHandler.send method the EnvelopeResponseHandler is no more available

6.2.5.1.2 Test suite files

Test Script: API_2_ERH_GTHD_1.scr
 Test Applet: API_2_ERH_GTHD_1.java
 Load Script: API_2_ERH_GTHD_1.ldr
 Cleanup Script: API_2_ERH_GTHD_1.clr
 Parameter File: API_2_ERH_GTHD_1.par

6.2.5.1.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | getTheHandler twice | The returned objects shall be the same | |
| 2 | Verify that getTheHandler returns an EnvelopeHandler getTheHandler | The reference returned shall be an EnvelopeResponseHandler (checkcast) | |
| 3 | Verify the returned value is not null getTheHandler | The reference returned shall not be null. | |
| 4 | getTheHandler, then send a proactive command, and then, appendTLV | ToolkitException HANDLER_NOT_AVAILABLE is thrown | |

6.2.5.1.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 1, 2, 3 |
| N2 | To be checked in Framework tests and insert here cross reference |
| C1 | To be checked in Framework tests and insert here cross reference |
| C2 | 4 |

6.2.5.2 Method post

Test Area Reference: API_2_ERH_POSTB

6.2.5.2.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public void post(byte statusType)
    throws ToolkitException
```

Normal execution

CRRN1: When the method is called, the toolkit applet can continue it's processing (e.g. prepare a proactive command).

CRRN2: The byte statusType is SW1 of the status.

CRRN3: If the send method is called after a post method, the posted data are the first sent to the ME.

CRRN4: The SIM Toolkit Framework shall take the optional Application Data posted by the triggered toolkit applet if present, secure and send the response packet the SIM Toolkit Framework will return the response APDU defined by the toolkit applet.

Parameter error

No requirements

Context errors

CRRC1: The method shall thrown ToolkitException (HANDLER_NOT_AVAILABLE) if the handler is busy.

6.2.5.2.2 Test suite files

Specific triggering: Call control

- Test Script: API_2_ERH_POSTB_1.scr
- Test Applet: API_2_ERH_POSTB_1.java
- Load Script: API_2_ERH_POSTB_1.ldr
- Cleanup Script: API_2_ERH_POSTB_1.clr
- Parameter File: API_2_ERH_POSTB_1.par

6.2.5.2.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|---|
| 1 | getTheHandler and then post (the handler is empty) | | 9000 |
| 2 | Fill the handler (appendTLV to have bytes in it)and then post data with status 9F | | 9FFD data are retrieved with GET RESPONSE command |
| 3 | Verify that after a post the handler is no more available appendTLV, post and then appendTLV | ToolkitException HANDLER_NOT_AVAILABLE is thrown on the second appendTLV | |
| 4 | construct the response (appendTLV with 0x10 data) and post it with status 9E and then send a display text | | 9E12 and posted data retrieved by a GET RESPONSE with status 9113 and display text retrieved by a FETCH |
| 5 | Verify that it is possible to send a proactive command after a post getTheHandler and post , then send a display text | | 91 13 and display text is retrieved by a FETCH |
| 6 | Verify it is not possible to post after a proactive command getTheHandler, appendTLV, send a display text, post. | ToolkitException HANDLER_NOT_AVAILABLE is thrown | |
| 7 | Verify that the handler is no more available after a post getTheHandler, appendTLV, post with status 9E, post with status 9F | ToolkitException HANDLER_NOT_AVAILABLE is thrown | 9E12 and posted data retrieved by a GET RESPONSE |

6.2.5.2.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 3, 4, 7 |
| N2 | 1, 2, 4, 7 |
| N3 | 4, 5 |
| N4 | To be checked in Framework tests and insert here cross reference |
| C1 | 6 |

6.2.5.3 Method postAsBERTLV

Test Area Reference:API_2_ERH_POSTBB

6.2.5.3.1 Conformance Requirement

The method with following header shall be compliant to its definition in the API.

```
public void postAsBERTLV(byte statusType,  
                        byte tag)  
    throws ToolkitException
```

Normal execution

CRRN1: When the method is called, the toolkit applet can continue it's processing (e.g. prepare a proactive command) the SIM Toolkit Framework will return the response APDU defined by the toolkit applet.

CRRN2: The byte statusType is SW1 of the status

CRRN3: If the send method is called after a postAsBERTLV method, the posted data are the first sent to the ME.

CRRN4: The byte tag is the BER Tag at the beginning of the simple TLV list.

Parameter errors

No requirements

Context errors

CRR1: The method shall thrown ToolkitException (HANDLER_NOT_AVAILABLE) if the handler is busy.

6.2.5.3.2 Test suite files

Specific triggering: Call control

| | |
|-----------------|-------------------------|
| Test Script: | API_2_ERH_POSTBB_1.scr |
| Test Applet: | API_2_ERH_POSTBB_1.java |
| Load Script: | API_2_ERH_POSTBB_1.ldr |
| Cleanup Script: | API_2_ERH_POSTBB_1.clr |
| Parameter File: | API_2_ERH_POSTBB_1.par |

6.2.5.3.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|---|
| 1 | getTheHandler and then postAsBERTLV (the handler is empty) | | 9F02 data are retrieved with GET RESPONSE command, the tag shall be 33 and the length is 00 |
| 2 | Fill the handler and then postAsBERTLV the data with status 9F, and tag 33 | | 9FFF data are retrieved with GET RESPONSE command, the tag shall be 33 |
| 3 | appendTLV, postAsBERTLV and then appendTLV | ToolkitException HANDLER_NOT_AVAILABLE is thrown on the second appendTLV | |
| 4 | construct the response (appendTLV with 0x10 data) and postAsBERTLV it with status 9E, tag 75 and then send a display text | | 9E14 and posted data retrieved by a GET RESPONSE the tag shall be 75 with status 9113 and display text retrieved by a FETCH |
| 5 | getTheHandler and postAsBERTLV, then send a display text | | 9E02 and posted data retrieved by a GET RESPONSE the tag 33 (and the length 00) with status 9113 and display text is retrieved by a FETCH |
| 6 | Verify it is not possible to postAsBERTLV after a proactive command getTheHandler, appendTLV, send a display text, postAsBERTLV. | ToolkitException HANDLER_NOT_AVAILABLE is thrown on the postAsBERTLV | |
| 7 | Verify that the handler is no more available after a postAsBERTLV getTheHandler, appendTLV(with data length = 0x10, postAsBERTLV with status 9E, tag 56, postAsBERTLV with status 9F, tag 28 | ToolkitException HANDLER_NOT_AVAILABLE is thrown on the second postAsBERTLV | 9E14 and posted data retrieved by a GET RESPONSE the tag shall be 56 with status 9000 |

6.2.5.3.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 3, 4, 7 |
| N2 | 1, 2, 4, 7 |
| N3 | 4, 5 |
| N4 | 2, 4, 7 |
| C1 | 6 |

6.2.5.4 Method getLength

Test Area Reference: API_2_ERH_GLEN

6.2.5.4.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short getLength()
    throws ToolkitException
```

Normal execution

CRRN1: returns the length in bytes of the TLV list.

Parameter errors

No requirements

Context errors

CRR1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException.HANDLER_NOT_AVAILABLE.

6.2.5.4.3 Test Suite files

Specific triggering: Unrecognized Envelope

Test Script: API_2_ERH_GLEN_1.scr
 Test Applet: API_2_ERH_GLEN_1.java
 Load Script: API_2_ERH_GLEN_1.ldr
 Cleanup Script: API_2_ERH_GLEN_1.clr
 Parameter File: API_2_ERH_GLEN_1.par

6.2.5.4.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|------------------------------|------------------|
| 1 | Clear the handler getLength() | Result of getLength() is 0 | |
| 2 | appendTLV with length of 7 getLength() | Result of getLength() is 9 | |
| 3 | Clear the handler and appendTLV with Length of 250 getLength() | Result of getLength() is 253 | |
| 4 | Build a 7Fh Envelope response handler getLength() | Result of getLength() is 81h | |
| 5 | Build a 80h Envelope response handler getLength() | Result of getLength() is 83h | |

Note : Test case 3 is limited to 253 and not 256 because the current 03.19 [7] is not clear enough on this point. So this test allows the two possible implementations.

6.2.5.4.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 1, 2, 3, 4, 5 |
| C1 | Does not apply for Envelope response handler |

6.2.5.5 Method copy

Test Area Reference: API_2_ERH_COPY_BSS

6.2.5.5.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short copy(byte[] dstBuffer,
                 short dstOffset,
                 short dstLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: copies the simple TLV list contained in the handler to the destination byte array.

CRRN2: returns dstOffset + dstLength.

Parameter errors

CRRP1: if dstBuffer is null a NullPointerException is thrown.

CRRP2: if dstOffset or dstLength or both would cause access outside array bounds, or if dstLength is negative, an ArrayIndexOutOfBoundsException is thrown.

CRRP3: if dstLength is greater than the length of the simple TLV List, an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException. OUT_OF_TLV_BOUNDARIES.

Context errors

CRR1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.5.5.3 Test Suite files

Specific triggering: Unrecognized Envelope

Test Script: API_2_ERH_COPY_BSS_1.scr

Test Applet: API_2_ERH_COPY_BSS_1.java

Load Script: API_2_ERH_COPY_BSS_1.ldr

Cleanup Script: API_2_ERH_COPY_BSS_1.clr

Parameter File: API_2_ERH_COPY_BSS_1.par

6.2.5.5.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | appendTLV with value length of 7 NULL as parameter to dstBuffer | NullPointerException is thrown | |
| 2 | | | |
| | dstOffset ≥ dstBuffer.length dstBuffer.length = 5 dstOffset = 5 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | dstOffset < 0 dstBuffer.length = 5 dstOffset = -1 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 0 dstLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | dstOffset + dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 3 dstLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | dstLength < 0 dstBuffer.length = 5 dstOffset = 0 dstLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | dstLength > length of the simple TLV list dstBuffer.length = 10 dstOffset = 0 dstLength = 10 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 8 | Successful call, dstBuffer is the whole buffer dstBuffer.length = 9 dstOffset = 0 dstLength = 9 | Result of copy() is 9 | |
| 9 | Compare the buffer | Result of arrayCompare() is 0 | |
| 10 | Successful call, dstBuffer is part of a buffer dstBuffer.length = 15 dstOffset = 3 dstLength = 9 | Result of copy() is 12 | |
| 11 | Compare the whole buffer | Result of arrayCompare() is 0 | |
| 12 | Successful call, dstBuffer is part of a buffer dstBuffer.length = 15 dstOffset = 3 dstLength = 6 | Result of copy() is 9 | |
| 13 | Compare the whole buffer | Result of arrayCompare() is 0 | |
| 14 | Successful call, copy with length =0 dstBuffer.length = 15 dstOffset = 15 dstLength = 0 | Result of copy() is 15 | |

6.2.5.5.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 9, 11, 13 |
| N2 | 8, 10, 12, 14 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7 |
| C1 | Does not apply for Envelope response handler |

6.2.5.6 Method findTLV

Test Area Reference: API_2_ERH_FINDBB

6.2.5.6.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte findTLV(byte tag, byte occurrence)
    throws ToolkitException
```

Normal execution

Looks for the indicated occurrence of a TLV element from the beginning of the TLV list (handler buffer):

CRRN1: the method is successful if the required occurrence exists then the corresponding TLV becomes current.

CRRN2: if the method is successful then it returns TLV_FOUND_CR_SET when Comprehension Required flag is set.

CRRN3: if the method is successful then it returns TLV_FOUND_CR_NOT_SET when Comprehension Required flag is not set.

CRRN4: if the required occurrence of the TLV element does not exist, the current TLV is no longer defined and TLV_NOT_FOUND is returned.

CRRN5: The search method is comprehension required flag independent.

Parameter errors

CRRP1: if an input parameter is not valid (e.g. occurrence = 0) an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException BAD_INPUT_PARAMETER.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.5.6.3 Test Suite files

Specific triggering: Unrecognized Envelope

Test Script: API_2_ERH_FINDBB_1.scr

Test Applet: API_2_ERH_FINDBB_1.java

Load Script: API_2_ERH_FINDBB_1.ldr

Cleanup Script: API_2_ERH_FINDBB_1.clr

Parameter File: API_2_ERH_FINDBB_1.par

6.2.5.6.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | append the handler with TLVs: 81 03 11 22 33 82 02 99 77 | | |
| | Invalid input parameter Occurrence = 0 | ToolkitException.BAD_INPUT_PARAMETER is thrown | |
| 2 | Search 1st TLV Tag = 01h Occurrence = 1 | Result is TLV_FOUND_CR_SET | |
| 3 | Call the getValueLength() method | Result is 03h | |
| 4 | Search 2nd TLV Tag = 02h Occurrence = 1 | Result is TLV_FOUND_CR_SET | |
| 5 | Call the getValueLength() method | Result is 02h | |

| | | | |
|----|---|---|--|
| 6 | Select a TLV (tag 02h) Search a wrong tag Tag = 03h Occurrence = 1 | Result is TLV_NOT_FOUND | |
| 7 | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 8 | Search a tag with wrong occurrence Tag = 01h Occurrence = 2 | Result is TLV_NOT_FOUND | |
| 9 | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 10 | Append a TLV with tag=02h Search the TLV Tag = 02h Occurrence = 2 | Result is TLV_FOUND_CR_NOT_SET | |
| 11 | Append a TLV with tag=04h Search the TLV Tag = 04h Occurrence = 1 | Result is TLV_FOUND_CR_NOT_SET | |
| 12 | Search tag 81h Tag = 81h Occurrence = 1 | Result is TLV_FOUND_CR_SET | |
| 13 | Search tag 84h Tag = 84h Occurrence = 1 | Result is TLV_FOUND_CR_NOT_SET | |

6.2.5.6.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 3, 5 |
| N2 | 2, 4 |
| N3 | 10, 11 |
| N4 | 6, 7, 8, 9 |
| N5 | 12, 13 |
| P1 | 1 |
| C1 | Does not apply for Envelope response handler |

6.2.5.7 Method getValueLength

Test Area Reference: API_2_ERH_GVLE

6.2.5.7.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short getValueLength()
    throws ToolkitException
```

Normal execution

CRRN1: gets and returns the binary length of the value field for the last TLV element which has been found in the handler.

Parameter errors

No requirements

Context errors

CRR1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

CRRC2: in case of unavailable TLV element an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException UNAVAILABLE_ELEMENT.

6.2.5.7.3 Test Suite files

Specific triggering: Unrecognized Envelope

Test Script: API_2_ERH_GVLE_1.scr
 Test Applet: API_2_ERH_GVLE_1.java
 Load Script: API_2_ERH_GVLE_1.ldr
 Cleanup Script: API_2_ERH_GVLE_1.clr
 Parameter File: API_2_ERH_GVLE_1.par

6.2.5.7.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | appendTLV 02 02 02 02 findTLV with TAG 03 getValueLength() | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| 2 | appendTLV with TAG 0D and length 00 Search TLV 0Dh getValueLength() | Result is 00h | |
| 3 | Clear the handler and append TLV with TAG 0D and length 02 Search TLV 0Dh getValueLength() | Result is 02h | |
| 4 | Clear the handler and append TLV with TAG 0D and length 0x7F Search TLV 0Dh getValueLength() | Result is 7Fh | |
| 5 | Clear the handler and append TLV with TAG 0D and length 0x80 Search TLV 0Dh getValueLength() | Result is 80h | |
| 6 | Clear the handler and append TLV with TAG 0D and length 0xF1 Search TLV 0Dh getValueLength() | Result is F1h | |

6.2.5.7.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 2, 3, 4, 5, 6 |
| C1 | Does not apply for EnvelopeResponseHandler |
| C2 | 1 |

6.2.5.8 Method getValueByte

Test Area Reference: API_2_ERH_GVBYS

6.2.5.8.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.


```
public byte getValueByte(short valueOffset)
    throws ToolkitException
```

Normal execution

CRRN1: Gets a byte from the last TLV element which has been found in the handler and returns its value (1 byte).

Parameter errors

CRRP1: if valueOffset is out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

CRRC2: in case of unavailable TLV element an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException UNAVAILABLE_ELEMENT.

6.2.5.8.3 Test Suite files

Specific triggering: Unrecognized Envelope

Test Script: API_2_ERH_GVBYS_1.scr
 Test Applet: API_2_ERH_GVBYS_1.java
 Load Script: API_2_ERH_GVBYS_1.ldr
 Cleanup Script: API_2_ERH_GVBYS_1.clr
 Parameter File: API_2_ERH_GVBYS_1.par

6.2.5.8.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | appendTLV 82 02 81 82, appendTLV 81 03 11 22 FE findTLV with TAG 03 | | |
| | getValueByte(0) | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| 2 | Search TLV 01h | | |
| | getValueByte(3) | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 3 | Search TLV 01h | | |
| | getValueByte(2) | Result is FEh | |
| 4 | Search TLV 02h | | |
| | getValueByte(0) | Result is 81h | |
| 5 | appendTLV with TAG 0D, Length 0x7E, Value: 00, 01, ..., 7D | | |
| | getValueByte(7D) | Result is 7Dh | |
| 6 | clear the handler, appendTLV with TAG 0D, Length 0x80, Value: 00, 01, ..., 7F | | |
| | getValueByte(7E) | Result is 7Eh | |
| | getValueByte(7F) | Result is 7Fh | |
| 7 | clear the handler, appendTLV with TAG 0D, Length 0xF1, Value: 00, 01, ..., F0 | | |
| | getValueByte(F0) | Result is F0h | |

6.2.5.8.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 3, 4, 5, 6, 7, 8 |
| P1 | 2 |
| C1 | Does not apply for EnvelopeResponseHandler |
| C2 | 1 |

6.2.5.9 Method copyValue

Test Area Reference: API_2_ERH_CPYVS_BSS

6.2.5.9.1 Conformance requirement

The method with following header shall be compliant with its definition in the API.

```
public short copyValue(short valueOffset,
                      byte[] dstBuffer,
                      short dstOffset,
                      short dstLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: copies a part of the last TLV element which has been found, into a destination. buffer.

CRRN2: returns dstOffset + dstLength.

Parameter errors

CRRP1: if dstBuffer is null NullPointerException is thrown.

CRRP2: if dstOffset or dstLength or both would cause access outside array bounds, or if dstLength is negative ArrayIndexOutOfBoundsException is thrown.

CRRP3: if valueOffset, dstLength or both are out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

CRRC2: in case of unavailable TLV element an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException UNAVAILABLE_ELEMENT.

6.2.5.9.3 Test Suite files

Specific triggering: Unrecognized Envelope

Test Script: API_2_ERH_CPYVS_BSS_1.scr

Test Applet: API_2_ERH_CPYVS_BSS_1.java

Load Script: API_2_ERH_CPYVS_BSS_1.ldr

Cleanup Script: API_2_ERH_CPYVS_BSS_1.clr

Parameter File: API_2_ERH_CPYVS_BSS_1.par

6.2.5.9.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | appendTLV with TAG: 0D and length 16 Select Text String TLV | | |
| | copyValue() with a null dstBuffer | NullPointerException is thrown | |
| 2 | | | |
| | dstOffset ≥ dstBuffer.length dstBuffer.length = 5 dstOffset = 5 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | dstOffset < 0 dstBuffer.length = 5 dstOffset = -1 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 0 dstLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | dstOffset + dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 3 dstLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | dstLength < 0 dstBuffer.length = 5 dstOffset = 0 dstLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | clear the handler, appendTLV with TAG: 0D and length 6 Select Text String TLV | | |
| | valueOffset ≥ Text String Length valueOffset = 6 dstBuffer.length = 15 dstOffset = 0 dstLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 8 | valueOffset < 0 valueOffset = -1 dstBuffer.length = 15 dstOffset = 0 dstLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 9 | dstLength > Text String length valueOffset = 0 dstBuffer.length = 15 dstOffset = 0 dstLength = 7 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 10 | valueOffset + dstLength > Text String length valueOffset = 2 dstBuffer.length = 15 dstOffset = 0 dstLength = 5 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 11 | Initialise the handler | | |
| | copyValue() | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| 12 | clear the handler, appendTLV with TAG: 0D and value: 04 00 01 ... 0F Select Text String TLV | | |
| | Successful call valueOffset = 0 dstBuffer.length = 17 dstOffset = 0 dstLength = 17 | Result of copyValue() is 17 | |
| 13 | Compare buffer buffer = 04 00 01 ... 0F | Result is 00h | |
| 14 | initialise dstBuffer dstBuffer = 55 55 ... 55 | | |
| | Successful call valueOffset = 2 dstBuffer.length = 20 dstOffset = 3 dstLength = 12 | Result of copyValue() is 15 | |

| | | | |
|----|--|-----------------------------|--|
| 15 | Compare buffer buffer = 55 55 55 01 02 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55 | Result is 00h | |
| 16 | Successful call, copyValue with length =0 dstBuffer.length = 20 dstOffset = 20 dstLength = 0 | Result of copyValue() is 20 | |

6.2.5.9.4 Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | 13, 15 |
| N2 | 12, 14, 16 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7, 8, 9, 10 |
| C1 | Does not apply for EnvelopeResponseHandl er |
| C2 | 11 |

6.2.5.10 Method compareValue

Test Area Reference: API_2_ERH_CPRVS_BSS

6.2.5.10.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte compareValue(short valueOffset,
                        byte[] compareBuffer,
                        short compareOffset,
                        short compareLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

Compares the last found TLV element with a buffer:

CRRN1: returns 0 if identical.

CRRN2: returns -1 if the first miscomparing byte in simple TLV List is less than that in compareBuffer.

CRRN3: returns 1 if the first miscomparing byte in simple TLV List is greater than that in compareBuffer.

Parameter errors

CRRP1: if compareBuffer is null NullPointerException shall be thrown.

CRRP2: if compareOffset or compareLength or both would cause access outside array bounds, or if compareLength is negative ArrayIndexOutOfBoundsException shall be thrown.

CRRP3: if valueOffset, dstLength or both are out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

CRRC2: in case of unavailable TLV element an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException UNAVAILABLE_ELEMENT.

6.2.5.10.3 Test Suite files

Specific triggering: Unrecognized Envelope

Test Script: API_2_ERH_CPRVS_BSS_1.scr

Test Applet: API_2_ERH_CPRVS_BSS_1.java

Load Script: API_2_ERH_CPRVS_BSS_1.ldr

Cleanup Script: API_2_ERH_CPRVS_BSS_1.clr

Parameter File: API_2_ERH_CPRVS_BSS_1.par

6.2.5.10.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | appendTLV with TAG: 0D and length 16 Select Text String TLV | | |
| | compareValue() with a null compareBuffer | NullPointerException is thrown | |
| 2 | | | |
| | compareOffset ≥ compareBuffer.length compareBuffer.length = 5 compareOffset = 5 compareLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | compareOffset < 0 compareBuffer.length = 5 compareOffset = -1 compareLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | compareLength > compareBuffer.length compareBuffer.length = 5 compareOffset = 0 compareLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | compareOffset + compareLength > compareBuffer.length compareBuffer.length = 5 compareOffset = 3 compareLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | compareLength < 0 compareBuffer.length = 5 compareOffset = 0 compareLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | appendTLV with TAG: 0D and length 6 Select Text String TLV | | |
| | valueOffset ≥ Text String Length valueOffset = 6 compareBuffer.length = 15 compareOffset = 0 compareLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 8 | valueOffset < 0 valueOffset = -1 compareBuffer.length = 15 compareOffset = 0 compareLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 9 | compareLength > Text String length valueOffset = 0 compareBuffer.length = 15 compareOffset = 0 compareLength = 7 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 10 | valueOffset + compareLength > Text String length valueOffset = 2 compareBuffer.length = 15 compareOffset = 0 compareLength = 5 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 11 | Initialise the handler | | |
| | compareValue() | ToolkitException.UNAVAILABLE | |

| | | | |
|----|--|---------------------------------|--|
| | | <code>_ELEMENT</code> is thrown | |
| 12 | appendTLV with TAG: 0D and value: 04 00 01 ... 0F Select Text String TLV Initialise compareBuffer compareBuffer = 04 00 01 ... 0F | | |
| | Compare buffers valueOffset = 0 compareOffset = 0 compareLength = 17 | Result is 00h | |
| 13 | Initialise compareBuffer compareBuffer = 04 00 01 02 03 04 05 06 07 08 05 0A 0B 0C 0D 0E 10 | | |
| | Compare buffers with same parameters | Result is -1 | |
| 14 | Initialise compareBuffer compareBuffer = 03 00 01 ... 0F | | |
| | Compare buffers with same parameters | Result is +1 | |
| 15 | Initialise compareBuffer compareBuffer = 55 55 55 01 02 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55 | | |
| | Compare buffers valueOffset = 2 compareOffset = 3 compareLength = 12 | Result is 00h | |
| 16 | Initialise compareBuffer compareBuffer = 55 55 55 02 01 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55 | | |
| | Compare buffers with same parameters | Result is -1 | |
| 17 | Initialise compareBuffer compareBuffer = 55 55 55 01 02 03 04 05 06 07 08 09 0A 0A 0D 55 55 55 55 55 | | |
| | Compare buffers with same parameters | Result is +1 | |
| 18 | Successful call, compareValue with length =0 compareBuffer.length = 15 compareOffset = 15 compareLength = 0 | Result of compareValue() is 0 | |

6.2.5.10.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 12, 15, 18 |
| N2 | 13, 16 |
| N3 | 14, 17 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7, 8, 9, 10 |
| C1 | Does not apply for EnvelopeResponseHandler |
| C2 | 11 |

6.2.5.11 Method findAndCopyValue(byte tag, byte[] dstBuffer, short valueOffset)

Test Area Reference: API_2_ERH_FACYB_BS

6.2.5.11.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short findAndCopyValue(byte tag,
                             byte[] dstBuffer,
                             short dstOffset)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: looks for the first occurrence of a TLV element from the beginning of a TLV list and copy its value into a destination buffer.

CRRN2: if no TLV element is found, the UNAVAILABLE_ELEMENT exception is thrown and the current TLV is no longer defined.

CRRN3: if the method is successful then the corresponding TLV becomes current and dstOffset + length of the copied value is returned.

CRRN4: The search method is comprehension required flag independent.

Parameter errors

CRRP1: if dstBuffer is null NullPointerException shall be thrown.

CRRP2: if dstOffset would cause access outside array bounds ArrayIndexOutOfBoundsException shall be thrown.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.5.11.3 Test Suite files

Specific triggering: Unrecognized Envelope

Test Script: API_2_ERH_FACYB_BS_1.scr

Test Applet: API_2_ERH_FACYB_BS_1.java

Load Script: API_2_ERH_FACYB_BS_1.ldr

Cleanup Script: API_2_ERH_FACYB_BS_1.clr

Parameter File: API_2_ERH_FACYB_BS_1.par

6.2.5.11.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | Initialise the handler | | |
| | findAndCopyValue() with a null dstBuffer | NullPointerException is thrown | |
| 2 | appendTLV with TAG: 0D and length 16 Select Text String TLV | | |
| | dstOffset ≥ dstBuffer.length tag = 0Dh dstBuffer.length = 20 dstOffset = 20 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | dstOffset < 0 dstBuffer.length = 20 dstOffset = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | dstOffset + length > dstBuffer.length dstBuffer.length = 20 dstOffset = 5 | ArrayIndexOutOfBoundsException is thrown | |

| | | | |
|----|---|---|--|
| 5 | length > dstBuffer.length dstBuffer.length = 15 dstOffset = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | clear the handler, appendTLV with TAG 02 and Length 02 Select a TLV (tag 02h) | | |
| | findAndCopyValue() tag = 03h | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 7 | appendTLV with TAG: 0D and value: 04 00 01 ... 0F | | |
| | Successful call Tag = 0Dh dstBuffer.length = 17 dstOffset = 0 | Result of findAndCopyValue() is 17 | |
| 8 | Compare buffer buffer = 04 00 01 ... 0F | Result is 00h | |
| 9 | initialise dstBuffer dstBuffer = 55 55 ... 55 | | |
| | Successful call dstBuffer.length = 20 dstOffset = 2 | Result of findAndCopyValue() is 19 | |
| 10 | Compare buffer buffer = 55 55 04 00 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0E 0F 55 | Result is 00h | |
| 11 | clear the handler, appendTLV with TAG: 0D and value: 04 00 01 ... 0F append a 2nd Text String TLV | | |
| | Successful call tag = 0Dh dstBuffer.length = 17 dstOffset = 0 | Result of findAndCopyValue() is 17 | |
| 12 | Compare buffer buffer = 04 00 01 ... 0F | Result is 00h | |
| 13 | clear the handler, appendTLV with TAG: 0D and value: 04 00 01 ... 0F | | |
| | Successful call (with tag 8Dh) tag = 8Dh dstBuffer.length = 17 dstOffset = 0 | Result of findAndCopyValue() is 17 | |
| 14 | Compare buffer buffer = 04 00 01 ... 0F | Result is 00h | |
| 15 | Append tag 0Fh buffer = 00 01 ... 0F | | |
| | Successful call (with tag 8Fh) tag = 8Fh dstBuffer.length = 16 dstOffset = 0 | Result of findAndCopyValue() is 16 | |
| 16 | Compare buffer buffer = 00 01 ... 0F | Result is 00h | |

6.2.5.11.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 8, 10, 12 |
| N2 | 6 |
| N3 | 7, 9, 11 |
| N4 | 13, 14, 15, 16 |
| P1 | 1 |
| P2 | 2, 3, 4, 5 |
| C1 | Does not apply for EnvelopeResponseHandler |

6.2.5.12 Method findAndCopyValue(byte tag, byte occurrence, short valueOffset, byte[] dstBuffer, short dstOffset, short dstLength)

Test Area Reference: API_2_ERH_FACYBBS_BSS

6.2.5.12.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short findAndCopyValue(byte tag,
                             byte occurrence,
                             short valueOffset,
                             byte[] dstBuffer,
                             short dstOffset,
                             short dstLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: looks for the indicated occurrence of a TLV element from the beginning of a TLV list and copy its value into a destination buffer.

CRRN2: if no TLV element is found, the UNAVAILABLE_ELEMENT exception is thrown and the current TLV is no longer defined.

CRRN3: if the method is successful then the corresponding TLV becomes current and dstOffset + dstLength is returned.

CRRN4: The search method is comprehension required flag independent.

Parameter errors

CRRP1: if dstBuffer is null NullPointerException shall be thrown.

CRRP2: if dstOffset or dstLength or both would cause access outside array bounds, or if dstLength is negative ArrayIndexOutOfBoundsException shall be thrown.

CRRP3: if valueOffset, dstLength or both are out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.5.12.3 Test Suite files

Specific triggering: Unrecognized Envelope

Test Script: API_2_ERH_FACYBBS_BSS_1.scr
 Test Applet: API_2_ERH_FACYBBS_BSS_1.java
 Load Script: API_2_ERH_FACYBBS_BSS_1.ldr
 Cleanup Script: API_2_ERH_FACYBBS_BSS_1.clr
 Parameter File: API_2_ERH_FACYBBS_BSS_1.par

6.2.5.12.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | Initialise the handler | | |
| | findAndCopyValue() with a null dstBuffer | NullPointerException is thrown | |
| 2 | appendTLV with TAG: 0D and length 16 | | |
| | dstOffset ≥ dstBuffer.length tag = 0Dh, occurrence = 1 valueOffset = 0 dstBuffer.length = 5 dstOffset = 5 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | dstOffset < 0 dstBuffer.length = 5 dstOffset = -1 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 0 dstLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | dstOffset + dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 3 dstLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | dstLength < 0 dstBuffer.length = 5 dstOffset = 0 dstLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | appendTLV with TAG: 0D and length 6 | | |
| | valueOffset ≥ Text String Length tag = 0Dh, occurrence = 1 valueOffset = 6 dstBuffer.length = 15 dstOffset = 0 dstLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 8 | valueOffset < 0 valueOffset = -1 dstBuffer.length = 15 dstOffset = 0 dstLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 9 | dstLength > Text String length valueOffset = 0 dstBuffer.length = 15 dstOffset = 0 dstLength = 7 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 10 | valueOffset + dstLength > Text String length valueOffset = 2 dstBuffer.length = 15 dstOffset = 0 dstLength = 5 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 11 | clear the handler, appendTLV with TAG 02 and Length 02 | | |
| | Select a TLV (tag 02h) | | |
| | findAndCopyValue() tag = 0Dh occurrence = 2 | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 12 | clear the handler and appendTLV with TAG: 0D and value: 04 00 01 ... 0F | | |
| | Successful call tag = 0Dh, occurrence = 1 | Result of findAndCopyValue() is 17 | |

| | | | |
|----|---|-------------------------------------|--|
| | valueOffset = 0 dstBuffer.length = 17 dstOffset = 0 dstLength = 17 | | |
| 13 | Compare buffer buffer = 04 00 01 ... 0F | Result is 00h | |
| 14 | initialise dstBuffer dstBuffer = 55 55 ... 55 | | |
| | Successful call tag = 0Dh, occurrence = 1 valueOffset = 2 dstBuffer.length = 20 dstOffset = 3 dstLength = 12 | Result of findAndCopyValue() is 15 | |
| 15 | Compare buffer buffer = 55 55 55 01 02 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55 | Result is 00h | |
| 16 | Append a Text String TLV tag = 0D buffer = 00 11 22 33 44 55 (no specific DCS byte) | | |
| | Successful call tag = 0Dh, occurrence = 1 valueOffset = 0 dstBuffer.length = 20 dstOffset = 0 dstLength = 17 | Result of findAndCopyValue() is 17 | |
| 17 | Compare buffer buffer = 04 00 01 ... 0F | Result is 00h | |
| 18 | Successful call tag = 0Dh, occurrence = 2 valueOffset = 0 dstBuffer.length = 6 dstOffset = 0 dstLength = 6 | Result of findAndCopyValue() is 6 | |
| 19 | Compare buffer buffer = 00 11 22 33 44 55 | Result is 00h | |
| 20 | clear the handler and appendTLV with TAG: 0D and value: 04 00 01 ... 0F | | |
| | Successful call (with tag 8Dh) tag = 8Dh occurrence = 1 valueOffset = 0 dstBuffer.length = 17 dstOffset = 0 dstLength = 17 | Result of findAndCopyValue () is 17 | |
| 21 | Compare buffer buffer = 04 00 01 ... 0F | Result is 00h | |
| 22 | Append tag 0Fh buffer = 00 01 ... 0F | | |
| | Successful call (with tag 8Fh) tag = 8Fh occurrence = 1 valueOffset = 0 dstBuffer.length = 16 dstOffset = 0 dstLength = 16 | Result of findAndCopyValue () is 16 | |
| 23 | Compare buffer buffer = 00 01 ... 0F | Result is 00h | |
| 24 | Successful call, findAndCopyValue with length =0 dstBuffer.length = 16 dstOffset = 16 dstLength = 0 | Result of findAndCopyValue () is 16 | |

6.2.5.12.4 Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | 13, 15, 17, 19 |
| N2 | 11 |
| N3 | 12, 14, 16, 18, 24 |
| N4 | 20, 21, 22, 23 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7, 8, 9, 10 |
| C1 | Does not apply for EnvelopeResponseHandl er |

6.2.5.13 Method findAndCompareValue(byte tag, byte[] compareBuffer, short compareOffset)

Test Area Reference: API_2_ERH_FACRB_BS

6.2.5.13.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte findAndCompareValue(byte tag,
                               byte[] compareBuffer,
                               short compareOffset)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

Looks for the first occurrence of a TLV element from beginning of a TLV list and compare its value with a buffer:

CRRN1: if no TLV element is found, the UNAVAILABLE_ELEMENT exception is thrown and the current TLV is no longer defined.

CRRN2: if the method is successful then the corresponding TLV becomes current.

CRRN3: if identical returns 0.

CRRN4: if the first miscomparing byte in simple TLV is less than that in compareBuffer returns -1.

CRRN5: if the first miscomparing byte in simple TLV is greater than that in compareBuffer returns 1.

CRRN6: The search method is comprehension required flag independent.

Parameter errors

CRRP1: if compareBuffer is null NullPointerException shall be thrown.

CRRP2: if compareOffset would cause access outside array bounds ArrayIndexOutOfBoundsException shall be thrown.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.5.13.3 Test Suite files

Specific triggering: Unrecognized Envelope

Test Script: API_2_ERH_FACRB_BS_1.scr

Test Applet: API_2_ERH_FACRB_BS_1.java
 Load Script: API_2_ERH_FACRB_BS_1.ldr
 Cleanup Script: API_2_ERH_FACRB_BS_1.clr
 Parameter File: API_2_ERH_FACRB_BS_1.par

6.2.5.13.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|------------------|
| 1 | appendTLV with TAG: 0D and length 16 | | |
| | findAndCompareValue() with a null dstBuffer and tag 0Dh | NullPointerException is thrown | |
| 2 | compareOffset ≥ compareBuffer.length tag = 0Dh compareBuffer.length = 20 compareOffset = 20 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | compareOffset < 0 compareBuffer.length = 20 compareOffset = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | compareOffset + length > compareBuffer.length compareBuffer.length = 20 compareOffset = 5 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | length > compareBuffer.length compareBuffer.length = 15 compareOffset = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | clear the handler, appendTLV with TAG 02 and Length 02 Select a TLV (tag 02h) | | |
| | findAndCompareValue() tag = 03h | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| 7 | Verify current TLV getValueLength() | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 8 | clear the handler and appendTLV with TAG: 0D and value: 04 00 01 ... 0F Initialise compareBuffer compareBuffer = 04 00 01 ... 0F | | |
| | Compare buffers tag = 0Dh compareOffset = 0 | Result is 00h | |
| 9 | Verify current TLV getValueLength() | Result is 17 | |
| 10 | Initialise compareBuffer compareBuffer = 04 00 01 ... 10 | | |
| | Compare buffers with same parameters | Result is -1 | |
| 11 | Initialise compareBuffer compareBuffer = 03 00 01 ... 0F | | |
| | Compare buffers with same parameters | Result is +1 | |
| 12 | Initialise compareBuffer compareBuffer = 55 55 04 00 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0E 0F 55 | | |
| | Compare buffers compareOffset = 2 | Result is 00h | |
| 13 | append a Text String TLV tag = 0Dh buffer = 00 11 22 33 44 55 | | |
| | Initialise compareBuffer compareBuffer = 55 55 04 00 01 02 03 04 05 06 07 08 09 0A 0B | | |

| | | | |
|----|--|---------------|--|
| | 0C 0D 0E 0F 55 | | |
| | Compare buffers compareOffset = 2 | Result is 00h | |
| 14 | Initialise compareBuffer compareBuffer = 55 55 04 01 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0E 0F 55 | | |
| | Compare buffers compareOffset = 2 | Result is -1 | |
| 15 | Initialise compareBuffer compareBuffer = 55 55 04 00 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0D 10 55 | | |
| | Compare buffers compareOffset = 2 | Result is +1 | |
| 16 | clear the handler and appendTLV with TAG: 0D and value: 04 00 01 ... 0F | | |
| | Initialise compareBuffer compareBuffer = 04 00 01 ... 0F | | |
| | Successful call (with tag 8Dh) tag = 8Dh compareBuffer.length = 17 compareOffset = 0 | Result is 00h | |
| 17 | Append tag 0Fh buffer = 00 01 ... 0F | | |
| | Initialise compareBuffer compareBuffer = 00 01 ... 0F | | |
| | Successful call (with tag 8Fh) tag = 8Fh compareBuffer.length = 16 compareOffset = 0 | Result is 00h | |

6.2.5.13.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 6,7 |
| N2 | 7,9 |
| N3 | 8, 13, 12 |
| N4 | 10, 14 |
| N5 | 11, 15 |
| N6 | 17, 16 |
| P1 | 1 |
| P2 | 2, 3, 4, 5 |
| C1 | Does not apply for Envelope response handler |

6.2.5.14 Method findAndCompareValue(byte tag, byte occurrence, short valueOffset, byte[] compareBuffer, short compareOffset, short compareLength)

Test Area Reference: API_2_ERH_FACRBBS_BSS

6.2.5.14.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte findAndCompareValue(byte tag,
                               byte occurrence,
                               short valueOffset,
                               byte[] compareBuffer,
                               short compareOffset,
                               short compareLength)
    throws java.lang.NullPointerException,
```

```
java.lang.ArrayIndexOutOfBoundsException,  
ToolkitException
```

Normal execution

Looks for the indicated occurrence of a TLV element from the beginning of a TLV list and compare its value with a buffer:

CRRN1: if no TLV element is found, the UNAVAILABLE_ELEMENT exception is thrown and the current TLV is no longer defined.

CRRN2: if the method is successful then the corresponding TLV becomes current.

CRRN3: if identical 0 is returned.

CRRN4: if the first miscomparing byte in simple TLV is less than that in compareBuffer -1 is returned.

CRRN5: if the first miscomparing byte in simple TLV is greater than that in compareBuffer 1 is returned

CRRN6: The search method is comprehension required flag independent.

Parameter errors

CRRP1: if compareBuffer is null NullPointerException shall be thrown.

CRRP2: if compareOffset or compareLength or both would cause access outside array bounds, or if compareLength is negative ArrayIndexOutOfBoundsException shall be thrown.

CRRP3: if valueOffset, compareLength or both are out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.

CRRP4: if an input parameter is not valid (e.g. occurrence = 0) an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException BAD_INPUT_PARAMETER.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.5.14.3 Test Suite files

Specific triggering: Unrecognized Envelope

| | |
|-----------------|------------------------------|
| Test Script: | API_2_ERH_FACRBBS_BSS_1.scr |
| Test Applet: | API_2_ERH_FACRBBS_BSS_1.java |
| Load Script: | API_2_ERH_FACRBBS_BSS_1.ldr |
| Cleanup Script: | API_2_ERH_FACRBBS_BSS_1.clr |
| Parameter File: | API_2_ERH_FACRBBS_BSS_1.par |

6.2.5.14.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | Initialise the handler | | |
| | findAndCompareValue() with a null compareBuffer | NullPointerException is thrown | |
| 2 | clear the handler and appendTLV with TAG: 0D and value: 04 00 01 ... 0F | | |
| | compareOffset ≥ compareBuffer.length tag = 0Dh, occurrence = 1 valueOffset = 0 compareBuffer.length = 5 compareOffset = 5 compareLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | compareOffset < 0 compareBuffer.length = 5 compareOffset = -1 compareLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | compareLength > compareBuffer.length compareBuffer.length = 5 compareOffset = 0 compareLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | compareOffset + compareLength > compareBuffer.length compareBuffer.length = 5 compareOffset = 3 compareLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | compareLength < 0 compareBuffer.length = 5 compareOffset = 0 compareLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | clear the handler and appendTLV with TAG and length of 6 | | |
| | valueOffset ≥ Text String Length tag = 0Dh, occurrence = 1 valueOffset = 6 compareBuffer.length = 15 compareOffset = 0 compareLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 8 | valueOffset < 0 valueOffset = -1 compareBuffer.length = 15 compareOffset = 0 compareLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 9 | compareLength > Text String length valueOffset = 0 compareBuffer.length = 15 compareOffset = 0 compareLength = 7 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 10 | valueOffset + compareLength > Text String length valueOffset = 2 compareBuffer.length = 15 compareOffset = 0 compareLength = 5 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 11 | Invalid parameter occurrence = 0 | ToolkitException.BAD_INPUT_PARAMETER is thrown | |
| 12 | appendTLV with TAG 02 and length 02 | | |
| | Select a TLV (tag 02h) | | |
| | findAndCompareValue() tag = 0Dh occurrence = 2 | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| 13 | Verify current TLV getValueLength() | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 14 | clear the handler and appendTLV with TAG: 0D and value: 04 00 01 ... 0F | | |
| | Initialise compareBuffer compareBuffer = 04 00 01 ... 0F | | |
| | findAndCompareValue() tag = 0Dh, occurrence = 1 | Result is 00h | |

| | | | |
|----|---|---------------|--|
| | valueOffset = 0 compareOffset = 0 compareLength = 17 | | |
| 15 | Verify current TLV getValueLength() | Result is 17 | |
| 16 | Initialise compareBuffer compareBuffer = 04 00 01 ... 10 | | |
| | Compare buffers with same parameters | Result is -1 | |
| 17 | Initialise compareBuffer compareBuffer = 03 00 01 ... 0F | | |
| | Compare buffers with same parameters | Result is +1 | |
| 18 | Initialise compareBuffer compareBuffer = 55 55 55 01 02 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55 | | |
| | Compare buffers valueOffset = 2 compareOffset = 3 compareLength = 12 | Result is 00h | |
| 19 | Initialise compareBuffer compareBuffer = 55 55 55 02 01 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55 | | |
| | Compare buffers with same parameters | Result is -1 | |
| 20 | Initialise compareBuffer compareBuffer = 55 55 55 01 02 03 04 05 06 07 08 09 0A 0A 0D 55 55 55 55 55 | | |
| | Compare buffers with same parameters | Result is +1 | |
| 21 | append a Text String TLV tag = 0Dh buffer = 00 11 22 33 44 55 | | |
| | Initialise compareBuffer compareBuffer = 04 00 01 ... 0F | | |
| | findAndCompareValue() tag = 0Dh, occurrence = 1 valueOffset = 0 compareOffset = 0 compareLength = 17 | Result is 00h | |
| 22 | Initialise compareBuffer compareBuffer = 00 11 22 33 44 55 | | |
| | findAndCompareValue() tag = 0Dh, occurrence = 2 valueOffset = 0 compareOffset = 0 compareLength = 6 | Result is 00h | |
| 23 | Initialise compareBuffer compareBuffer = 00 11 22 33 44 66 | | |
| | findAndCompareValue() tag = 0Dh, occurrence = 2 valueOffset = 0 compareOffset = 0 compareLength = 6 | Result is -1 | |
| 24 | clear the handler and appendTLV with TAG: 0D and value: 04 00 01 ... 0F | | |
| | Initialise compareBuffer compareBuffer = 04 00 01 ... 0F | | |
| | Successful call (with tag 8Dh) tag = 8Dh, occurrence = 1 valueOffset = 0 compareBuffer.length = 17 compareOffset = 0 compareLength = 17 | Result is 00h | |

| | | | |
|----|---|--|--|
| 25 | Append tag 0Fh buffer = 00 01 ... 0F | | |
| | Initialise compareBuffer compareBuffer = 00 01 ... 0F | | |
| | Successful call (with tag 8Fh) tag = 8Fh, occurrence = 1 valueOffset = 0 compareBuffer.length = 16 compareOffset = 0 compareLength = 16 | Result is 00h | |
| 26 | Successful call, findAndCompareValue with length =0 CompareBuffer.length = 16 compareOffset = 16 compareLength = 0 | Result of findAndCompareValue () is 00 | |

6.2.5.14.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 12,13 |
| N2 | 15,13 |
| N3 | 14, 18, 22, 21, 26 |
| N4 | 16, 19, 23 |
| N5 | 17, 19 |
| N6 | 25, 24 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7, 8, 9, 10 |
| P4 | 11 |
| C1 | Does not apply for EnvelopeResponseHandler |

6.2.5.15 Method appendArray

Test Area Reference: API_2_ERH_APDA_BSS

6.2.5.15.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
void appendArray(byte[] buffer, short offset, short length)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

- CRRN1: appends a buffer into the EditHandler buffer
- CRRN2: a successful append does not modify the TLV selected

Parameters error

- CRRP1: if buffer is null, a java.lang.NullPointerException is thrown
- CRRP2: if offset or length or both would cause access outside the array bounds, or if length is negative, a java.lang.ArrayIndexOutOfBoundsException is thrown.

Context errors

- CRRC1: if the EditHandler buffer is too small to append the requested data, a ToolkitException is thrown with reason code HANDLER_OVERFLOW

CRRC2: if the EditHandler buffer is busy, a ToolkitException is thrown with reason code HANDLER_NOT_AVAILABLE

6.2.5.15.2 Test suite files

Specific triggering: Unrecognized Envelope

Test Script: API_2_ERH_APDA_BSS_1.scr
 Test Applet: API_2_ERH_APDA_BSS_1.java
 Load Script: API_2_ERH_APDA_BSS_1.ldr
 Cleanup Script: API_2_ERH_APDA_BSS_1.clr
 Parameter File: API_2_ERH_APDA_BSS_1.par

6.2.5.15.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|------------------|
| | Initialize the envelope response handler with a TLV of length 1 | | |
| 1 | Null buffer | NullPointerException is thrown | |
| 2 | offset ≥ buffer.length buffer.length = 5 offset = 5 length = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | offset < 0 buffer.length = 5 offset = -1 length = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | length > buffer.length buffer.length = 5 offset = 0 length = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | offset + length > buffer.length buffer.length = 5 offset = 3 length = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | length < 0 buffer.length = 5 offset = 0 length = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | Handler overflow buffer.length = 256 offset = 0 length = 256 | ToolkitException.HANDLER_OVERFLOW is thrown | |
| 8 | append the handler with TLVs: 81 03 11 22 33 82 02 99 77 | | |
| | findTLV 0x81 | | |
| | Successful call buffer = FF FE ... F8 offset = 0 length = 8 | | |
| | Verify Current TLV: Call getValueLength() | Result is 03h | |
| 9 | Clear the handler | | |
| | Successful call buffer = FF FE ... F8 offset = 0 length = 8 | | |
| | Call copy() method | | |
| | Compare handler compareBuffer = FF FE ... F8 | Result is 00h | |
| 10 | Successful call buffer = 00 01 ... 07 offset = 2 length = 6 | | |
| | Call copy() method | | |
| | Compare handler | Result is 00h | |

| | | | |
|----|---|---------------|--|
| | compareBuffer = FF FE ... F8 02 03 ... 07 | | |
| 11 | <p>Successful call</p> <p>buffer = 11 22 ... 88 offset = 2 length = 4</p> | | |
| | <p>Call copy() method</p> <p>Compare handler</p> <p>compareBuffer = FF FE ... F8 02 03 ... 07 33 44 55 66</p> | Result is 00h | |

6.2.5.15.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 9, 10, 11 |
| N2 | 8 |
| N3 | |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| C1 | 7 |
| C2 | Does not apply for EnvelopeResponseHandler |

6.2.5.16 Method appendTLV(byte tag, byte value)

Test Area Reference: API_2_ERH_APTLBB

6.2.5.16.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
void appendTLV (byte tag, byte value)
    throws ToolkitException
```

Normal execution

CRRN1: Appends a TLV element to the current TLV list (1-byte element).

CRRN2: A successful append does not modify the TLV selected.

Parameters error

No requirements

Context errors

CRRC1: if the EditHandler buffer is too small to append the requested data, a ToolkitException is thrown with reason code HANDLER_OVERFLOW

CRRC2: if the EditHandler buffer is busy, a ToolkitException is thrown with reason code HANDLER_NOT_AVAILABLE

6.2.5.16.2 Test suite files

Specific triggering: Unrecognized Envelope

Test Script: API_2_ERH_APTLBB_1.scr

Test Applet: API_2_ERH_APTLBB_1.java

Load Script: API_2_ERH_APTLBB_1.ldr

Cleanup Script: API_2_ERH_APTLBB_1.clr

Parameter File: API_2_ERH_APTLBB_1.par

6.2.5.16.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | Call appendArray() length = 253 | | |
| | Handler Overflow: Call twice the appendTLV() method | ToolkitException.HANDLER_OVERFLOW is thrown by one of the two. | |
| 2 | append the handler with TLVs: 81 03 11 22 33 82 02 99 77 | | |
| | Select Command Details TLV | | |
| | Call the appendTLV() method | | |
| | Verify Current TLV: Call getValueLength() | Result is 03h | |
| 3 | Clear the handler | | |
| | Successful call tag = 84h value = 00h | | |
| | Call copy() method | | |
| | Compare handler compareBuffer = 84 01 00 | Result is 00h | |
| 4 | Successful call tag = 01h value = FEh | | |
| | Call copy() method | | |
| | Compare handler compareBuffer = 84 01 00 01 01 FE | Result is 00h | |

Note : Test case 1 call twice appendTLV because the current 03.19 [7] is not clear enough on this point. So this test allows the two possible implementations.

6.2.5.16.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 3, 4 |
| N2 | 2 |
| C1 | 1 |
| C2 | Does not apply for EnvelopeResponseHandler |

6.2.5.17 Method appendTLV(byte tag, byte value1, byte value2)

Test Area Reference: API_2_ERH_APTLBBB

6.2.5.17.1 Conformance requirements:

The method with following header shall be compliant to its definition in the API.

```
void appendTLV (byte tag, byte value1,byte value2)
    throws ToolkitException
```

Normal execution

CRRN1: Appends a TLV element to the current TLV list (2-byte element).

CRRN2: A successful append does not modify the TLV selected.

Parameters error

No requirements

Context errors

CRRC1: if the EditHandler buffer is too small to append the requested data, a ToolkitException is thrown with reason code HANDLER_OVERFLOW

CRRC2: if the EditHandler buffer is busy, a ToolkitException is thrown with reason code HANDLER_NOT_AVAILABLE

6.2.5.17.2 Test suite files

Specific triggering: Unrecognized Envelope

Test Script: API_2_ERH_APTLBBB_1.scr

Test Applet: API_2_ERH_APTLBBB_1.java

Load Script: API_2_ERH_APTLBBB_1.ldr

Cleanup Script: API_2_ERH_APTLBBB_1.clr

Parameter File: API_2_ERH_APTLBBB_1.par

6.2.5.17.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|------------------|
| 1 | Call the appendArray with length of 253 Handler Overflow: Call the appendTLV() method | ToolkitException.HANDLER_OVERFLOW is thrown | |
| 2 | clear the handler, append the handler with TLVs: 81 03 11 22 33 82 02 99 77 Select Command Details TLV Call the appendTLV() method | | |
| | Verify Current TLV: Call getValueLength() | Result is 03h | |
| 3 | Clear the handler Successful call tag = 84h value1 = 00h value2 = 01h | | |
| | Call copy() method Compare handler compareBuffer = 84 02 00 01 | Result is 00h | |
| 4 | Successful call tag = 01h value1 = FEh value2 = FDh | | |
| | Call copy() method Compare handler compareBuffer = 84 02 00 01 01 02 FE FD | Result is 00h | |

6.2.5.17.4 Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | 3, 4 |
| N2 | 2 |
| C1 | 1 |
| C2 | Does not apply for EnvelopeResponseHandl er |

6.2.5.18 Method appendTLV(byte tag, byte[] value, short valueoffset, short valuelength)

Test Area Reference: API_2_ERH_APTLB_BSS

6.2.5.18.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
void appendTLV (byte tag,
               byte[] value,
               short valueoffset,
               short valuelength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: Appends a TLV element to the current TLV list (byte-array element).

CRRN2: A successful append does not modify the TLV selected.

Parameters error

CRRP1: if value is null, a java.lang.NullPointerException is thrown

CRRP2: if valueoffset or valuelength or both would cause access outside the array bounds, or if length is negative, a java.lang.ArrayIndexOutOfBoundsException is thrown.

Context errors

CRRC1: if the EditHandler buffer is too small to append the requested data, a ToolkitException is thrown with reason code HANDLER_OVERFLOW

CRRC2: if the EditHandler buffer is busy, a ToolkitException is thrown with reason code HANDLER_NOT_AVAILABLE

CRRC3: if valuelength is greater than 255, a ToolkitException is thrown with reason code BAD_INPUT_PARAMETER

6.2.5.18.2 Test suite files

Specific triggering: Unrecognized Envelope

Test Script: API_2_ERH_APTLB_BSS_1.scr

Test Applet: API_2_ERH_APTLB_BSS_1.java

Load Script: API_2_ERH_APTLB_BSS_1.ldr

Cleanup Script: API_2_ERH_APTLB_BSS_1.clr

Parameter File: API_2_ERH_APTLB_BSS_1.par

6.2.5.18.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | Null value | NullPointerException is thrown | |
| 2 | valueOffset ≥ value.length value.length = 5 valueOffset = 5 valueLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | valueOffset < 0 value.length = 5 valueOffset = -1 valueLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | valueLength > value.length value.length = 5 valueOffset = 0 valueLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | ValueOffset + valueLength > value.length value.length = 5 valueOffset = 3 valueLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | valueLength < 0 value.length = 5 valueOffset = 0 valueLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | Handler overflow value.length = 254 valueOffset = 0 valueLength = 254 | ToolkitException.HANDLER_OVERFLOW is thrown | |
| 8 | Bad parameter value.length = 256 valueOffset = 0 valueLength = 256 | ToolkitException.BAD_INPUT_PARAMETER is thrown | |
| 9 | clear the handler, append the handler with TLVs: 81 03 11 22 33 82 02 99 77 | | |
| | Select Command Details TLV | | |
| | Successful call tag = 04 value = FF FE ... F8 valueOffset = 0 valueLength = 8 | | |
| | Verify Current TLV: Call getValueLength() | Result is 03h | |
| 10 | Clear the handler | | |
| | Successful call tag = 04 value = FF FE ... F8 valueOffset = 0 valueLength = 8 | | |
| | Call copy() method | | |
| | Compare handler CompareBuffer = 04 08 FF FE ... F8 | Result is 00 | |
| 11 | Successful call tag = 85h value = 00 01 ... 07 valueOffset = 2 valueLength = 6 | | |
| | Call copy() method | | |
| | Compare handler compareBuffer = 04 08 FF FE ... F8 85 06 02 03 ... 07 | Result is 00 | |
| 12 | Successful call tag = 01 value = 11 22 ... 88 valueOffset = 2 valueLength = 4 | | |
| | Call copy() method | | |
| | Compare handler compareBuffer = 04 08 FF FE ... F8 85 06 02 03 ... 07 01 04 33 44 55 66 | Result is 00 | |
| 13 | Clear the handler | | |
| | Successful call tag = 04 | | |

| | | | |
|--|---|--------------|--|
| | value = 00 01 ... 7F valueOffset = 0 valueLength = 80h | | |
| | Call copy() method | | |
| | Compare handler compareBuffer = 04 81 80 00 01...7F | Result is 00 | |

6.2.5.18.4 Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | 10, 11, 12, 13 |
| N2 | 9 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| C1 | 7 |
| C2 | Does not apply for EnvelopeResponseHandl er |
| C3 | 8 |

6.2.5.19 Method appendTLV(byte tag, byte value1, byte[] value2, short value2offset, short value2length)

Test Area Reference: API_2_ERH_APTLBB_BSS

6.2.5.19.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
void appendTLV (byte tag,
               byte value1,
               byte[] value2,
               short value2offset,
               short value2length)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: Appends a TLV element to the current TLV list (1 byte and a byte-array element).

CRRN2: A successful append does not modify the TLV selected.

Parameters error

CRRP1: if value2 is null, a java.lang.NullPointerException is thrown

CRRP2: if value2offset or value2length or both would cause access outside the array bounds, or if length is negative, a java.lang.ArrayIndexOutOfBoundsException is thrown.

Context errors

CRRC1: if the EditHandler buffer is too small to append the requested data, a ToolkitException is thrown with reason code HANDLER_OVERFLOW

CRRC2: if the EditHandler buffer is busy, a ToolkitException is thrown with reason code HANDLER_NOT_AVAILABLE

CRRC3: if valuelength is greater than 255, a ToolkitException is thrown with reason code BAD_INPUT_PARAMETER

6.2.5.19.2 Test suite files

Specific triggering: Unrecognized Envelope

Test Script: API_2_ERH_APTLBB_BSS_1.scr

Test Applet: API_2_ERH_APTLBB_BSS_1.java

Load Script: API_2_ERH_APTLBB_BSS_1.ldr

Cleanup Script: API_2_ERH_APTLBB_BSS_1.clr

Parameter File: API_2_ERH_APTLBB_BSS_1.par

6.2.5.19.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | Null value2 | NullPointerException is thrown | |
| 2 | value2Offset ≥ value2.length value2.length = 5 value2Offset = 5 value2Length = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | value2Offset < 0 value2.length = 5 value2Offset = -1 value2Length = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | value2Length > value2.length value2.length = 5 value2Offset = 0 value2Length = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | value2Offset + value2Length > value2.length value2.length = 5 value2Offset = 3 value2Length = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | value2Length < 0 value2.length = 5 value2Offset = 0 value2Length = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | Handler overflow value2.length = 254 value2Offset = 0 value2Length = 254 | ToolkitException.HANDLER_OVERFLOW is thrown | |
| 8 | Bad parameter value2.length = 256 value2Offset = 0 value2Length = 256 | ToolkitException.BAD_INPUT_PARAMETER is thrown | |
| 9 | clear the handler, append the handler with TLVs: 81 03 11 22 33 82 02 99 77 | | |
| | Select Command Details TLV | | |
| | Successful call tag = 04 value1 = 05 value2 = FF FE ... F8 value2Offset = 0 value2Length = 8 | | |
| | Verify Current TLV: Call getValueLength() | Result is 03h | |
| 10 | Clear the handler | | |
| | Successful call tag = 04 value1 = 05 value2 = FF FE ... F8 value2Offset = 0 value2Length = 8 | | |
| | Call copy() method | | |
| | Compare handler CompareBuffer = 04 09 05 FF FE ... F8 | Result is 00 | |
| 11 | Successful call tag = 85h value1 = 55h value2 = 00 01 ... 07 | | |

| | | | |
|----|---|--------------|--|
| | value2Offset = 2 value2Length = 6 | | |
| | Call copy() method | | |
| | Compare handler compareBuffer = 04 09 05 FF FE ... F8 85 07 55 02 03 ... 07 | Result is 00 | |
| 12 | Successful call tag = 01 value1 = 44h value2 = 11 22 ... 88 value2Offset = 2 value2Length = 4 | | |
| | Call copy() method | | |
| | Compare handler CompareBuffer = 04 09 05 FF FE ... F8 85 07 55 02 03 ... 07 01 05 44 33 44 55 66 | Result is 00 | |
| 13 | Clear the handler | | |
| | Successful call tag = 04 value1 = 00 value2 = 01 ... 7F value2Offset = 0 value2Length = 7Fh | | |
| | Call copy() method | | |
| | Compare handler compareBuffer = 04 81 80 00 01...7F | Result is 00 | |

6.2.5.19.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 10, 11, 12, 13 |
| N2 | 9 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| C1 | 7 |
| C2 | Does not apply for EnvelopeResponseHandler |
| C3 | 8 |

6.2.5.20 Method clear

Test Area Reference: API_2_ERH_CLER

6.2.5.20.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
void clear()
    throws ToolkitException
```

Normal execution

CRRN1: Clears the TLV list of an EditHandler and resets the current TLV selected.

Parameters error

No requirements

Context errors

CRR1: if the EditHandler buffer is busy, a ToolkitException is thrown with reason code HANDLER_NOT_AVAILABLE

6.2.5.20.2 Test suite files

Specific triggering: Unrecognized Envelope

Test Script: API_2_ERH_CLER_1.scr
 Test Applet: API_2_ERH_CLER_1.java
 Load Script: API_2_ERH_CLER_1.ldr
 Cleanup Script: API_2_ERH_CLER_1.clr
 Parameter File: API_2_ERH_CLER_1.par

6.2.5.20.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|------------------|
| 1 | append the handler with TLVs: 81 03 11 22 33 82 02 99 77 Select Command Details TLV Call the <code>getLength()</code> method | Result of <code>getLength()</code> is not null | |
| | Clear the handler Call the <code>getLength()</code> method | Result of <code>getLength()</code> is 0 | |
| 2 | Call the <code>getValueLength()</code> method | <code>ToolkitException.UNAVAILABLE_ELEMENT</code> is thrown | |

6.2.5.20.4 Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | 1, 2 |
| C1 | Does not apply for <code>EnvelopeResponseHandler</code> |

6.2.6 Class MEProfile

6.2.6.1 Method check (byte index)

Test Area Reference: API_2_MEP_CHECB

6.2.6.1.1 Conformance requirement:

The method with following header shall compliant to its definition in the API.

```
public static boolean check(byte index)
    throws ToolkitException
```

Normal execution

CRRN1: The method checks a facility in the handset profile: returns true if supported and false otherwise.

Parameters error

No requirements

Context errors

CRRC1: The method shall throw `ME_PROFILE_NOT_AVAILABLE` `ToolkitException` if Terminal Profile data are not available

6.2.6.1.2 Test suite files

Specific triggering:

EVENT_STATUS_COMMAND

No Additional requirements for the GSM personalisation:

Test Script: API_2_MEP_CHECB_1.scr
 Test Applet: API_2_MEP_CHECB_1.java
 Load Script: API_2_MEP_CHECB_1.ldr
 Cleanup Script: API_2_MEP_CHECB_1.clr
 Parameter File: API_2_MEP_CHECB_1.par

6.2.6.1.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | No Terminal Profile is registered Triggered by status command index=1 | ME_PROFILE_NOT_AVAILABLE ToolkitException is thrown | |
| 2 | Terminal Profile, Facility is supported index=0 | true is returned by the method | |
| 3 | Terminal Profile, Facility is not supported index=15 | false is returned by the method | |

6.2.6.1.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 2,3 |
| C1 | 1 |

6.2.6.2 Method check (byte [] mask, short offset, short length)

Test Area Reference: API_2_MEP_CHEC_BSS

6.2.6.2.1 Conformance requirement:

The method with following header shall compliant to its definition in the API.

```
public static boolean check(byte[] mask,
                           short offset,
                           short length)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: The method checks all the facilities corresponding to bits set to 1 in the mask buffer: returns true if they are all supported and false if not.

CRRN2: The method returns true if the length to check is 0.

Parameters error

CRRP1: The method shall throw java.lang.NullPointerException if mask is null.

CRRP2: The method shall throw java.lang.ArrayIndexOutOfBoundsException if offset or length or both would cause access outside array bounds.

CRRP3: The method shall throw ME_PROFILE_NOT_AVAILABLE ToolkitException if Terminal Profile data are not available.

Context errors

No requirements

6.2.6.2.2 Test suite files

Specific triggering:

UNFORMATTED_SMS_PP_UPD

No Additional requirements for the GSM personalisation:

Test Script: API_2_MEP_CHEC_BSS_1.scr

Test Applet: API_2_MEP_CHEC_BSS_1.java

Load Script: API_2_MEP_CHEC_BSS_1.ldr (the applet is loaded without INI after the reset (RST))

Cleanup Script: API_2_MEP_CHEC_BSS_1.clr

Parameter File: API_2_MEP_CHEC_BSS_1.par

6.2.6.2.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|------------------|
| 1 | <p>No Terminal Profile is registered Triggered by unformatted SMS Mask = 0xFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF7F Offset = 0 Length = 16</p> | ME_PROFILE_NOT_AVAILABLE ToolkitException is thrown | |
| 2 | <p>NULL as parameter to check mask= NULL</p> | NullPointerException is thrown | |
| 3 | <p>Offset > mask.length mask = 0xFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF7F Offset = 17</p> | ArrayIndexOutOfBoundsException is thrown | |
| 4 | <p>Offset < 0 mask = 0xFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF7F Offset = -1</p> | ArrayIndexOutOfBoundsException is thrown | |
| 5 | <p>Length > mask.length mask = 0xFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF7F Offset = 0 Length = 18</p> | ArrayIndexOutOfBoundsException is thrown | |
| 6 | <p>Offset + length > mask.length Mask = 0xFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF7F Offset = 9 Length = 9</p> | ArrayIndexOutOfBoundsException is thrown | |
| 7 | <p>length = 0 mask = 0xFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF7F Offset = 0 Length = 0</p> | true is returned | |
| 8 | <p>Check all the Terminal Profile mask = 0xFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF7F Offset = 0 Length = 16</p> | false is returned by the method because facility 15 is not supported | |
| 9 | <p>Check a part of the Terminal Profile mask = 0xFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF7F Offset = 15 Length = 2</p> | true is returned by the method: the 16 first facilities except facility 15 have been successfully checked | |
| 10 | <p>Check a part of the Terminal Profile mask = 0x0080 Offset = 0 Length = 2</p> | false is returned by the method only facility 15 is checked and not supported. | |

6.2.6.2.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 8,9,10 |
| N2 | 7 |
| P1 | 2 |
| P2 | 3,4,5,6 |
| P3 | 1 |

6.2.6.3 Method check (short index)

Test Area Reference: API_2_MEP_CHECS

6.2.6.3.1 Conformance requirement:

The method with following header shall compliant to its definition in the API.

```
public static boolean check(short index)
    throws ToolkitException
```

Normal execution

CRRN1: The method checks a facility in the handset profile: returns true if the facility is supported, false if facility is not supported, or if facility-index outside MEProfile data.

Parameters error

No requirements

Context errors

CRRC1: The method shall throw ME_PROFILE_NOT_AVAILABLE ToolkitException if Terminal Profile data are not available

6.2.6.3.2 Test suite files

Specific triggering:

EVENT_STATUS_COMMAND

No Additional requirements for the GSM personalisation:

Test Script: API_2_MEP_CHECS_1.scr
 Test Applet: API_2_MEP_CHECS_1.java
 Load Script: API_2_MEP_CHECS_1.ldr
 Cleanup Script: API_2_MEP_CHECS_1.clr
 Parameter File: API_2_MEP_CHECS_1.par

6.2.6.3.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | No Terminal Profile is registered Triggered by status command index = 1 | ME_PROFILE_NOT_AVAILABLE ToolkitException is thrown | |
| 2 | Terminal Profile, Facility is supported index = 0 | true is returned by the method | |
| 3 | Terminal Profile, Facility is not supported index = 15 | false is returned by the method | |
| 4 | Facility index is outside MEProfile data index = 0x0099 | false is returned by the method | |

6.2.6.3.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 2,3,4 |
| C1 | 1 |

6.2.6.4 Method getValue (short indexMSB, short indexLSB)

Test Area Reference: API_2_MEP_GVALSS

6.2.6.4.1 Conformance requirement:

The method with following header shall compliant to its definition in the API.

```
public static short getValue(short indexMSB, short indexLSB)
    throws ToolkitException
```

Normal execution

CRRN1: The method returns the binary value of a parameter, delimited by two indexes, from the handset profile.

Parameters error

CRRP1: The method shall throw BAD_INPUT_PARAMETER ToolkitException if (indexMSB \geq indexLSB +16) or (indexMSB < indexLSB) or (indexMSB < 0) or (indexLSB < 0).

Context errors

CRRC1: The method shall throw ME_PROFILE_NOT_AVAILABLE ToolkitException if Terminal Profile data are not available.

6.2.6.4.2 Test suite files

Specific triggering:

EVENT_STATUS_COMMAND

No Additional requirements for the GSM personalisation:

Test Script: API_2_MEP_GVALSS_1.scr
 Test Applet: API_2_MEP_GVALSS_1.java
 Load Script: API_2_MEP_GVALSS_1.ldr
 Cleanup Script: API_2_MEP_GVALSS_1.clr
 Parameter File: API_2_MEP_GVALSS_1.par

6.2.6.4.3 Test procedure

TP = FF 01 D2 F0 00 00 00 00 00 00 00 8D FF

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | No Terminal Profile is registered Triggered by status command indexMSB = 15, indexLSB = 0 | ME_PROFILE_NOT_AVAILABLE ToolkitException is thrown | |
| 2 | Retrieve number of character down ME display in Terminal Profile which is 13 indexMSB = 108, indexLSB = 104 | 13 is returned by the method | |
| 3 | Retrieve byte 3 and byte 4 from terminal profile. Byte 3 = 0xD2, Byte 4 = 0xF0 indexMSB = 31, indexLSB = 16 | 0xF0D2 is returned by the method | |
| 4 | indexMSB is negative indexMSB = 0xFFFF, indexLSB = 0xFFFD | BAD_INPUT_PARAMETER ToolkitException is thrown | |
| 5 | indexLSB is negative indexMSB = 0x0002, indexLSB = 0xFFFD | BAD_INPUT_PARAMETER ToolkitException is thrown | |
| 6 | indexMSB < indexLSB indexMSB = 0x0002, indexLSB = 0x0003 | BAD_INPUT_PARAMETER ToolkitException is thrown | |
| 7 | indexMSB > indexLSB + 16 indexMSB = 0x0021, indexLSB = 0x0010 | BAD_INPUT_PARAMETER ToolkitException is thrown | |

6.2.6.4.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 2,3 |
| P1 | 4,5,6,7 |
| C1 | 1 |

6.2.6.5 Method copy (short startOffset, byte[] dstBuffer, short dstOffset, short dstLength)

Test Area Reference: API_2_MEP_COPYS_BSS

6.2.6.5.1 Conformance requirement:

The method with following header shall compliant to its definition in the API.

```
public static short copy(short startOffset, byte[] dstBuffer, short dstOffset, short dstLength)
    throws ToolkitException
```

Normal execution

CRRN1: The method copies a part of the handset profile in a buffer.

CRRN2: The method returns dstOffset + dstLength.

Parameters error

CRRP1: if dstBuffer is null NullPointerException is thrown.

CRRP2 : *If dstOffset or dstLength parameter is negative an ArrayIndexOutOfBoundsException exception is thrown and no copy is performed*

CRRP3: *If dstOffset+dstLength is greater than dstBuffer.length, the length of the dstBuffer array an ArrayIndexOutOfBoundsException exception is thrown and no copy is performed*

Context errors

CRRC1: The method shall throw ME_PROFILE_NOT_AVAILABLE ToolkitException if Terminal Profile data are not available.

6.2.6.5.2 Test suite files

Specific triggering:

EVENT_STATUS_COMMAND

No Additional requirements for the GSM personalisation:

| | |
|-----------------|-----------------------------|
| Test Script: | API_2_MEP_COPYYS_BSS_1.scr |
| Test Applet: | API_2_MEP_COPYYS_BSS_1.java |
| Load Script: | API_2_MEP_COPYYS_BSS_1.ldr |
| Cleanup Script: | API_2_MEP_COPYYS_BSS_1.clr |
| Parameter File: | API_2_MEP_COPYYS_BSS_1.par |

6.2.6.5.3 Test procedure

TP = FF 01 D2 F0 01 02 00 00 00 00 00 00 8D FF

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | No Terminal Profile is registered Triggered by status command startOffset = 0 dstBuffer.length = 6 dstOffset = 0 dstLength = 6 | ME_PROFILE_NOT_AVAILABLE ToolkitException is thrown | |
| 2 | dstBuffer is null | NullPointerException is thrown | |
| 3 | dstOffset ≥ dstBuffer.length startOffset = 0 dstBuffer.length = 5 dstOffset = 5 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | dstOffset < 0 startOffset = 0 dstBuffer.length = 5 dstOffset = -1 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | dstLength < 0 startOffset = 0 dstBuffer.length = 5 dstOffset = 1 dstLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | dstLength > dstBuffer.length startOffset = 0 dstBuffer.length = 5 dstOffset = 0 dstLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | dstOffset + dstLength > dstBuffer.length startOffset = 0 dstBuffer.length = 5 dstOffset = 3 dstLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 8 | Successful call extreme values startOffset = 0 dstBuffer.length = 6 dstOffset = 0 dstLength = 6 | Result of copy() is 6 | |
| 9 | Successful call any values startOffset = 1 dstBuffer.length = 20 dstOffset = 3 dstLength = 4 | Result of copy() is 7 | |
| 10 | Successful call, copy with length =0 startOffset = 0 dstBuffer.length = 20 dstOffset = 20 dstLength = 0 | Result of copy() is 20 | |
| 11 | Value outside MEProfile data available startOffset = 13 dstBuffer.length = 6 dstOffset = 0 dstLength = 6 | Result of copy() is 6 | |

6.2.6.5.4

Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 8,9,10,11 |
| N3 | 8,9,10,11 |
| P1 | 2 |
| P2 | 4,5 |
| P3 | 3,6,7 |
| C1 | 1 |

6.2.7 Class ProactiveHandler

6.2.7.1 Method getTheHandler

Test Area Reference: API_2_PAH_GTHD

6.2.7.1.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public static ProactiveHandler getTheHandler()
    throws ToolkitException
```

Normal execution

CRRN1: The method shall return the single system instance of the ProactiveHandler class.

CRRN2: The EnvelopeHandler is a Temporary JCRE Entry Point Object

Parameter errors

No requirements

Context errors

CRR1: The method shall throw ToolkitException.HANDLER_NOT_AVAILABLE if the handler is busy.

6.2.7.1.2 Test Suite files

Test Script: API_2_PAH_GTHD_1.scr

Test Applet: API_2_PAH_GTHD_1.java

Load Script: API_2_PAH_GTHD_1.ldr

Cleanup Script: API_2_PAH_GTHD_1.clr

Parameter File: API_2_PAH_GTHD_1.par

6.2.7.1.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|------------------------------|---|------------------|
| 1 | getTheHandler() twice | The returned objects shall be the same | |
| 2 | getTheHandler() | The reference shall be a ProactiveHandler | |
| 3 | getTheHandler() | The reference shall not be null | |

6.2.7.1.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 1, 2, 3 |
| N2 | To be checked in Framework tests and insert here cross reference |
| C1 | To be checked in Framework tests and insert here cross reference |

6.2.7.2 Method init

Test Area Reference: API_2_PAH_INITBBB

6.2.7.2.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public void init(byte type,  
                byte qualifier,  
                byte dstDevice)
```

Normal execution

CRRN1: The init() method initialises the next Proactive command in the ProactiveHandler, with Command details and Device Identities TLV. The source device is always the SIM Card (81h). The Comprehension Required flags are set.

CRRN2: The Command number may take any value between 01h and FEh.

CRRN3: The init() method clears the ProactiveHandler before initialising it.

CRRN4: No TLV is selected after a call to the method.

CRRN5: The handler is not sent to the mobile by the init() method.

Parameter errors

No requirements

Context errors

No requirements

6.2.7.2.2 Test Suite files

Test Script: API_2_PAH_INITBBB_1.scr

Test Applet: API_2_PAH_INITBBB_1.java

Load Script: API_2_PAH_INITBBB_1.ldr

Cleanup Script: API_2_PAH_INITBBB_1.clr

Parameter File: API_2_PAH_INITBBB_1.par

6.2.7.2.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | Call the init() method type = 01h qualifier = 02h dstDevice = 03h Copy ProactiveHandler in a byte array (source) Compare the byte array reference = 81h 03h xxh 01h 02h 82h 02h 81h 03h | source and reference are identical | |
| 2 | Verify the command number value | 01h-FEh | |
| 3 | Call the init() method type = FFh qualifier = FEh destination = FDh Copy ProactiveHandler in a byte array (source) Compare the byte array reference = 81h 03h xxh FFh FEh 82h 02h 81h FDh | source and reference are identical | |
| 4 | Select the 1st TLV in the handler Call the init() method with any value Call the getValueLength() method | UNAVAILABLE_ELEMENT ToolkitException is thrown by getValueLength() | |

6.2.7.2.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 1, 3 |
| N2 | 2 |
| N3 | 3 |
| N4 | 4 |
| N5 | 1, 3 |

6.2.7.3 Method initDisplayText

Test Area Reference: API_2_PAH_INDTBB_BSS

6.2.7.3.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public void initDisplayText(byte qualifier,
                           byte dcs,
                           byte[] buffer,
                           short offset,
                           short length)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: The method shall build a DISPLAY TEXT proactive command in the ProactiveHandler, using qualifier, dcs and buffer parameters. Comprehension required flags are set.

CRRN2: A call to this method clears the handler then initialises it.

CRRN3: No TLV is selected after a call to the method.

CRRN4: The DISPLAY TEXT command is not sent by the method.

CRRN5: The Command Number may take any value between 01h and FEh.

Parameter errors

CRRP1: The method shall throw NullPointerException if buffer is null.

CRRP2: If offset or length or both would cause access outside array bounds, an ArrayIndexOutOfBoundsException shall be thrown.

Context errors

CRRC1: A ToolkitException.HANDLER_OVERFLOW shall be thrown if the ProactiveHandler is too small to put the requested data.

6.2.7.3.2 Test Suite files

Test Script: API_2_PAH_INDTBB_BSS_1.scr
 Test Applet: API_2_PAH_INDTBB_BSS_1.java
 Load Script: API_2_PAH_INDTBB_BSS_1.ldr
 Cleanup Script: API_2_PAH_INDTBB_BSS_1.clr
 Parameter File: API_2_PAH_INDTBB_BSS_1.par

6.2.7.3.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|--|
| 1 | NULL as parameter to buffer buffer = NULL | NullPointerException is thrown | |
| 2 | offset > buffer.length buffer = "Text" offset = 5 length = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | offset < 0 buffer = "Text" offset = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | length > buffer.length buffer = "Text" offset = 0 length = 5 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | offset + length > buffer.length buffer = "Text" offset = 3 length = 2 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | length < 0 buffer = "Text" offset = 3 length = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | Successful call, buffer is the whole buffer qualifier = 0 dcs = 4 buffer = "TextA" offset = 0 length = 5 | No exception is thrown | |
| | Verify the command number value | Command number between 01h and FEh | |
| 8 | Send the command | | DISPLAY TEXT Proactive command qualifier = 00h dcs = 4 Text = "TextA" |
| 9 | Successful call, buffer is part of a buffer with | | DISPLAY TEXT Proactive |

| | | | |
|----|--|---|--|
| | <p style="text-align: center;">the end part Send the command</p> <p>qualifier = 0 dcs = 4 buffer = "12TextB" offset = 2 length = 5</p> | | <p>command</p> <p>qualifier = 00h dcs = 4 Text = "TextB"</p> |
| 10 | <p style="text-align: center;">Successful call, buffer is part of a buffer with the first part Send the command</p> <p>qualifier = 0 dcs = 4 buffer = "TextC12" offset = 0 length = 5</p> | | <p>DISPLAY TEXT Proactive command</p> <p>qualifier = 00h dcs = 4 Text = "TextC"</p> |
| 11 | <p style="text-align: center;">Successful call, buffer is part of a buffer Send the command</p> <p>qualifier = 0 dcs = 4 buffer = "12TextD34" offset = 2 length = 5</p> | | <p>DISPLAY TEXT Proactive command</p> <p>qualifier = 00h dcs = 4 Text = "TextD"</p> |
| 12 | <p style="text-align: center;">Successful call, qualifier = 81h Send the command</p> <p>qualifier = 81h dcs = 4 buffer = "TextE" offset = 0 length = 5</p> | | <p>DISPLAY TEXT Proactive command</p> <p>qualifier = 81h dcs = 4 Text = "TextE"</p> |
| 13 | <p style="text-align: center;">Successful call, DCS=0 (7 bits) Send the command</p> <p>qualifier = 0 dcs = 0 buffer = "TextF" offset = 0 length = 5</p> | | <p>DISPLAY TEXT Proactive command</p> <p>qualifier = 00h dcs = 0 Text = "TextF"</p> |
| 14 | <p style="text-align: center;">Successful call, DCS=8 (UCS2) Send the command</p> <p>qualifier = 0 dcs = 8 buffer = "TextG" offset = 0 length = 5</p> | | <p>DISPLAY TEXT Proactive command</p> <p>qualifier = 00h dcs = 8 Text = "TextG"</p> |
| 15 | <p style="text-align: center;">Call the initDisplayText() method with any value Then build and send a DISPLAY TEXT command</p> <p>qualifier = 0 dcs = 4 buffer = "TextHTextH" offset = 0 length = 10</p> | | <p>DISPLAY TEXT Proactive command</p> <p>qualifier = 00h dcs = 4 Text = "TextHTextH"</p> |
| 16 | <p style="text-align: center;">Successful call, text length is null Send the command</p> <p>qualifier = 0 dcs = 4 buffer = "" (not null buffer) offset = 0 length = 0</p> | | <p>DISPLAY TEXT Proactive command</p> <p>qualifier = 00h Text String TLV = 8D 00</p> |
| 17 | <p style="text-align: center;">Select a TLV in the ProactiveHandler Call the initDisplayText() method Call the getValueLength() method</p> | <p>UNAVAILABLE_ELEMENT ToolkitException is thrown by getValueLength()</p> | |
| 18 | <p style="text-align: center;">Successful call, buffer length = 7Eh</p> <p>qualifier = 0 dcs = 4 buffer = "UUU..." offset = 0 length = 7Eh</p> | | <p>DISPLAY TEXT Proactive command</p> <p>Text String TLV = 8D 7F 04 55 55...</p> |
| 19 | <p style="text-align: center;">Successful call, buffer length = 7Fh</p> <p>qualifier = 0 dcs = 4</p> | | <p>DISPLAY TEXT Proactive command</p> <p>Text String TLV = 8D 81</p> |

| | | | |
|----|---|--|---|
| | buffer = "UUU..." offset = 0 length = 7Fh | | 80 04 55 55... |
| 20 | Successful call, buffer length = 240 Qualifier = 0 dcs = 4 buffer = "UUU..." offset = 0 length = 240 | | DISPLAY TEXT Proactive command Text String TLV = 8D 81 F1 04 55 55... |
| 21 | Call the initDisplayText() method with a too long buffer qualifier = 0 dcs = 4 buffer = "XXXX..." offset = 0 length = 241 | HANDLER_OVERFLOW ToolkitException is thrown | |
| 22 | Call the initDisplayText() without sending the command | | No proactive command shall be sent expected status is '9000' |

6.2.7.3.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 8, 9, 10, 11, 12, 13, 14, 15, 16, 18, 19, 20 |
| N2 | 15 |
| N3 | 17 |
| N4 | 22 |
| N5 | 7 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| C1 | 21 |

6.2.7.4 Method initGetInkey

Test Area Reference: API_2_PAH_INGKBB_BSS

6.2.7.4.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public void initGetInkey(byte qualifier,
                        byte dcs,
                        byte[] buffer,
                        short offset,
                        short length)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

- CRRN1: The method shall build a GET INKEY proactive command in the ProactiveHandler, using qualifier, dcs and buffer parameters. Comprehension Required flags are set.
- CRRN2: A call to this method clears the handler then initialises it.
- CRRN3: No TLV is selected after a call to the method.
- CRRN4: The GET INKEY command is not sent by the method.
- CRRN5: The Command Number may take any value between 01h and FEh.

Parameter errors

- CRRP1: The method shall throw NullPointerException if buffer is null.

CRRP1: If offset or length or both would cause access outside array bounds, a `ArrayIndexOutOfBoundsException` shall be thrown.

Context errors

CRRC1: A `ToolkitException.HANDLER_OVERFLOW` shall be thrown if the `ProactiveHandler` is too small to put the requested data.

6.2.7.4.2 Test Suite files

Test Script: API_2_PAH_INGKBB_BSS_1.scr
 Test Applet: API_2_PAH_INGKBB_BSS_1.java
 Load Script: API_2_PAH_INGKBB_BSS_1.ldr
 Cleanup Script: API_2_PAH_INGKBB_BSS_1.clr
 Parameter File: API_2_PAH_INGKBB_BSS_1.par

6.2.7.4.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|---|
| 1 | NULL as parameter to buffer buffer = NULL | NullPointerException is thrown | |
| 2 | offset > buffer.length buffer = "Text" offset = 5 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | offset < 0 buffer = "Text" offset = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | length > buffer.length buffer = "Text" offset = 0 length = 5 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | offset + length > buffer.length buffer = "Text" offset = 3 length = 2 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | length < 0 buffer = "Text" offset = 3 length = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | Successful call, buffer is the whole buffer qualifier = 0 dcs = 4 buffer = "TextA" offset = 0 length = 5 | No exception is thrown | |
| | Verify the command number value | Command number between 01h and FEh | |
| 8 | Send the command | | GET INKEY Proactive command qualifier = 00h dcs = 4 Text = "TextA" |
| 9 | Successful call, buffer is part of a buffer with the end part qualifier = 0 dcs = 4 buffer = "12TextB" offset = 2 length = 5 | | GET INKEY Proactive command qualifier = 00h dcs = 4 Text = "TextB" |
| 10 | Successful call, buffer is part of a buffer with the first part qualifier = 0 dcs = 4 buffer = "TextC12" offset = 0 | | GET INKEY Proactive command qualifier = 00h dcs = 4 Text = "TextC" |

| | | | |
|----|---|---|---|
| | length = 5 | | |
| 11 | <p>Successful call, buffer is part of a buffer Send the command</p> <p>qualifier = 0 dcs = 4 buffer = "12TextD34" offset = 2 length = 5</p> | | <p>GET INKEY Proactive command</p> <p>qualifier = 00h dcs = 4 Text = "TextD"</p> |
| 12 | <p>Successful call, qualifier = 81h</p> <p>qualifier = 81h dcs = 4 buffer = "TextE" offset = 0 length = 5</p> | | <p>GET INKEY Proactive command</p> <p>qualifier = 81h dcs = 4 Text = "TextE"</p> |
| 13 | <p>Successful call, DCS=0 (7 bits)</p> <p>qualifier = 0 dcs = 0 buffer = "TextF" offset = 0 length = 5</p> | | <p>GET INKEY Proactive command</p> <p>qualifier = 00h dcs = 0 Text = "TextF"</p> |
| 14 | <p>Successful call, DCS=8 (UCS2)</p> <p>qualifier = 0 dcs = 8 buffer = "TextG" offset = 0 length = 5</p> | | <p>GET INKEY Proactive command</p> <p>qualifier = 00h dcs = 8 Text = "TextG"</p> |
| 15 | <p>Call the initGetInkey() method with any value Then build and send a GET INKEY command</p> <p>qualifier = 0 dcs = 4 buffer = "TextHTextH" offset = 0 length = 10</p> | | <p>GET INKEY Proactive command</p> <p>qualifier = 00h dcs = 4 Text = "TextHTextH"</p> |
| 16 | <p>Successful call, text length is null Send the command</p> <p>qualifier = 0 dcs = 4 buffer = "" offset = 0 length = 0</p> | | <p>GET INKEY Proactive command</p> <p>qualifier = 00h Text String TLV = 8D 00</p> |
| 17 | <p>Select a TLV in the ProactiveHandler Call the initGetInkey() method Call the getValueLength() method</p> | <p>UNAVAILABLE_ELEMENT ToolkitException is thrown by getValueLength()</p> | |
| 18 | <p>Successful call, buffer length = 7Eh</p> <p>qualifier = 0 dcs = 4 buffer = "UUU..." offset = 0 length = 7Eh</p> | | <p>GET INKEY Proactive command</p> <p>Text String TLV = 8D 7F 04 55 55...</p> |
| 19 | <p>Successful call, buffer length = 7Fh</p> <p>qualifier = 0 dcs = 4 buffer = "UUU..." offset = 0 length = 7Fh</p> | | <p>GET INKEY Proactive command</p> <p>Text String TLV = 8D 81 80 04 55 55...</p> |
| 20 | <p>Successful call, buffer length = 240</p> <p>Qualifier = 0 dcs = 4 buffer = "UUU..." offset = 0 length = 240</p> | | <p>GET INKEY Proactive command</p> <p>Text String TLV = 8D 81 F1 04 55 55...</p> |
| 21 | <p>Call the initGetInkey() method with a too long buffer</p> <p>qualifier = 0 dcs = 4 buffer = "XXXX..." offset = 0</p> | <p>HANDLER_OVERFLOW ToolkitException is thrown</p> | |

| | | | |
|----|---|--|--|
| | length = 241 | | |
| 22 | Call the <code>initGetInkey()</code> without sending the command | | No proactive command shall be sent expected status is '9000' |

6.2.7.4.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 8, 9, 10, 11, 12, 13, 14, 15, 16, 18, 19, 20 |
| N2 | 15 |
| N3 | 17 |
| N4 | 22 |
| N5 | 7 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| C1 | 21 |

6.2.7.5 Method `initGetInput`

Test Area Reference: `API_2_PAH_INGPBB_BSSSS`

6.2.7.5.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public void initGetInput(byte qualifier,
                        byte dcs,
                        byte[] buffer,
                        short offset,
                        short length,
                        short minRespLength,
                        short maxRespLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

- CRRN1: The method shall build a GET INPUT proactive command in the ProactiveHandler, using qualifier, dcs, buffer, minRespLength and maxRespLength parameters. Comprehension Required flags are set.
- CRRN2: A call to this method clears the handler then initialises it.
- CRRN3: No TLV is selected after a call to the method.
- CRRN4: The GET INPUT command is not sent by the method.
- CRRN5: The Command Number may take any value between 01h and FEh.

Parameter errors

- CRRP1: The method shall throw `NullPointerException` if buffer is null.
- CRRP2: If offset or length or both would cause access outside array bounds, a `ArrayIndexOutOfBoundsException` shall be thrown.

Context errors

- CRRC1: A `ToolkitException.HANDLER_OVERFLOW` shall be thrown if the ProactiveHandler is too small to put the requested data.

6.2.7.5.2 Test Suite files

Test Script: API_2_PAH_INGPBB_BSSSS_1.scr
 Test Applet: API_2_PAH_INGPBB_BSSSS_1.java
 Load Script: API_2_PAH_INGPBB_BSSSS_1.ldr
 Cleanup Script: API_2_PAH_INGPBB_BSSSS_1.clr
 Parameter File: API_2_PAH_INGPBB_BSSSS_1.par

6.2.7.5.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|---|
| 1 | NULL as parameter to buffer buffer = NULL | NullPointerException is thrown | |
| 2 | offset > buffer.length buffer = "Text" offset = 5 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | offset < 0 buffer = "Text" offset = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | length > buffer.length buffer = "Text" offset = 0 length = 5 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | offset + length > buffer.length buffer = "Text" offset = 3 length = 2 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | length < 0 buffer = "Text" offset = 3 length = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | Successful call, buffer is the whole buffer qualifier = 0 dcs = 4 buffer = "TextA" offset = 0 length = 5 minRespLength = 00h maxRespLength = FFh | No exception is thrown | |
| | Verify the command number value | Command number between 01h and -FEh | |
| 8 | Send the command | | GET INPUT Proactive command qualifier = 00h dcs = 4 Text = "TextA" Min Length = 00h Max Length = FFh |
| 9 | Successful call, buffer is part of a buffer with the end part Send the command qualifier = 0 dcs = 4 buffer = "12TextB" offset = 2 length = 5 minRespLength = 10h maxRespLength = FFh | | GET INPUT Proactive command qualifier = 00h dcs = 4 Text = "TextB" Min Length = 10h Max Length = FFh |
| 10 | Successful call, buffer is part of a buffer with the first part Send the command qualifier = 0 dcs = 4 buffer = "TextC12" offset = 0 length = 5 minRespLength = FFh | | GET INPUT Proactive command qualifier = 00h dcs = 4 Text = "TextC" Min Length = FFh Max Length = FFh |

| | | | |
|----|--|--|---|
| | maxRespLength = FFh | | |
| 11 | <p>Successful call, buffer is part of a buffer Send the command</p> <p>qualifier = 0 dcs = 4 buffer = "12TextD34" offset = 2 length = 5 minRespLength = 00h maxRespLength = 00h</p> | | <p>GET INPUT Proactive command</p> <p>qualifier = 00h dcs = 4 Text = "TextD" Min Length = 00h Max Length = 00h</p> |
| 12 | <p>Successful call, qualifier = 81h</p> <p>qualifier = 81h dcs = 4 buffer = "TextE" offset = 0 length = 5 minRespLength = 00h maxRespLength = 10h</p> | | <p>GET INPUT Proactive command</p> <p>qualifier = 81h dcs = 4 Text = "TextE" Min Length = 00h Max Length = 10h</p> |
| 13 | <p>Successful call, DCS=0 (7 bits)</p> <p>qualifier = 0 dcs = 0 buffer = "TextF" offset = 0 length = 5 minRespLength = 10h maxRespLength = 10h</p> | | <p>GET INPUT Proactive command</p> <p>qualifier = 00h dcs = 0 Text = "TextF" Min Length = 10h Max Length = 10h</p> |
| 14 | <p>Successful call, DCS=8 (UCS2)</p> <p>qualifier = 0 dcs = 8 buffer = "TextG" offset = 0 length = 5 minRespLength = 00h maxRespLength = FFh</p> | | <p>GET INPUT Proactive command</p> <p>qualifier = 00h dcs = 8 Text = "TextG" Min Length = 00h Max Length = FFh</p> |
| 15 | <p>Call the initGetInput() method with any value Then build and send a GET INPUT command</p> <p>qualifier = 0 dcs = 4 buffer = "TextHTextH" offset = 0 length = 10 minRespLength = 00h maxRespLength = 10h</p> | | <p>GET INPUT Proactive command</p> <p>qualifier = 00h dcs = 4 Text = "TextHTextH" Min Length = 00h Max Length = 10h</p> |
| 16 | <p>Successful call, text length is null Send the command</p> <p>qualifier = 0 dcs = 4 buffer = "" offset = 0 length = 0 minRespLength = 00h maxRespLength = 10h</p> | | <p>GET INPUT Proactive command</p> <p>qualifier = 00h Text String TLV = 8D 00 Min Length = 00h Max Length = 10h</p> |
| 17 | <p>Select a TLV in the ProactiveHandler Call the initGetInput() method Call the getValueLength() method</p> | UNAVAILABLE_ELEMENT ToolkitException is thrown by getValueLength() | |
| 18 | <p>Successful call, buffer length = 7Eh</p> <p>qualifier = 0 dcs = 4 buffer = "UUU..." offset = 0 length = 7Eh minRespLength = 00h maxRespLength = 10h</p> | | <p>GET INPUT Proactive command</p> <p>Text String TLV = 8D 7F 04 55 55.. Min Length = 00h Max Length = 10h</p> |
| 19 | <p>Successful call, buffer length = 7Fh</p> <p>qualifier = 0 dcs = 4 buffer = "UUU..." offset = 0 length = 7Fh</p> | | <p>GET INPUT Proactive command</p> <p>Text String TLV = 8D 81 80 04 55 55.. Min Length = 00h Max Length = 10h</p> |

| | | | |
|----|--|--|--|
| | minRespLength = 00h maxRespLength = 10h | | |
| 20 | Successful call, buffer length = 236 Qualifier = 0 dcs = 4 buffer = "UUU..." offset = 0 length = 236 minRespLength = 00h maxRespLength = 10h | | GET INPUT Proactive command Text String TLV = 8D 81 ED 04 55 55... |
| 21 | Call the initGetInput() method with a too long buffer qualifier = 0 dcs = 4 buffer = "XXXX..." offset = 0 length = 237 minRespLength = 00h maxRespLength = 10h | HANDLER_OVERFLOW ToolkitException is thrown | |
| 22 | Call the initGetInput() without sending the command | | No proactive command shall be sent expected status is '9000' |

6.2.7.5.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 8, 9, 10, 11, 12, 13, 14, 15, 16, 18, 19, 20 |
| N2 | 15 |
| N3 | 17 |
| N4 | 22 |
| N5 | 7 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| C1 | 21 |

6.2.7.6 Method send

Test Area Reference: API_2_PAH_SEND

6.2.7.6.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte send()
```

Normal execution

- CRRN1: The send() method send the current proactive command to the mobile.
- CRRN2: The returned byte is equal to general result of the command (first byte of Result TLV in Terminal Response).
- CRRN3: The handler remains unchanged after a call to send() method until the use of initXX() or appendTLV().
- CRRN4: There is no invocation of select() or deselect() method.
- CRRN5: A pending toolkit applet transaction at the method invocation is aborted.

Parameter errors

No requirements

Context errors

CRRC1: A ToolkitException.UNAVAILABLE_ELEMENT shall be thrown is the Result Simple TLV is missing in Terminal Response.

CRRC2: A ToolkitException.OUT_OF_TLV_BOUNDARIES shall be thrown if the general result byte is missing in the Result Simple TLV in Terminal Response.

6.2.7.6.2 Test Suite files

Test Script: API_2_PAH_SEND_1.scr
 Test Applet: API_2_PAH_SEND_1.java
 Load Script: API_2_PAH_SEND_1.ldr
 Cleanup Script: API_2_PAH_SEND_1.clr
 Parameter File: API_2_PAH_SEND_1.par

6.2.7.6.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|-------------------------|---|
| 1 | Build and send a DISPLAY TEXT command qualifier = 00h dcs = 04h buffer = 'Text' | | DISPLAY TEXT Proactive command |
| 2 | Terminal Response with General Result = 00 Result TLV = 03 01 00 (command performed successfully) | Result of send() is 00h | |
| 3 | Build and send a DISPLAY TEXT command qualifier = 00h dcs = 04h buffer = 'Text' | | DISPLAY TEXT Proactive command |
| 4 | Terminal Response with General Result = 01, without Additional information on result Result TLV = 03 01 01 (command performed with partial comprehension) | Result of send() is 01h | |
| 5 | Build and send a DISPLAY TEXT command qualifier = 00h dcs = 04h buffer = 'Text' | | DISPLAY TEXT Proactive command |
| 6 | Terminal Response with General Result = 01, with Additional information on result Result TLV = 03 02 01 55 (command performed with partial comprehension) | Result of send() is 01h | |
| 7 | Build and send a DISPLAY TEXT command qualifier = 00h dcs = 04h buffer = 'Text' | | DISPLAY TEXT Proactive command |
| 8 | Terminal Response with General Result = 02 Result TLV = 03 04 02 65 43 21 (Missing information) | Result of send() is 02h | |
| 9 | Build and send a 7Fh byte command (DISPLAY TEXT) qualifier = 00h dcs = 04h buffer = "UUUUU..." length = 73h | | DISPLAY TEXT Proactive command BER-TLV = D0 7F Text String TLV = 8D 74 04 55 55 55... |
| 10 | Build and send a 80h byte command (DISPLAY TEXT) qualifier = 00h dcs = 04h buffer = "UUUUU..." length = 74h | | DISPLAY TEXT Proactive command BER-TLV = D0 81 80 Text String TLV = 8D 75 04 55 55 55... |
| 11 | Build and send a maximum length command (length of the handler should be 253) | | DISPLAY TEXT Proactive command |

| | | | |
|----|--|--|---|
| | DISPLAY TEXT: Qualifier = 0 dcs = 4 buffer = "UUU..." offset = 0 length = 240 | | BER-TLV = D0 81 FD Text String TLV = 8D 81 F1 04 55 55... |
| 12 | Verify that the Proactive Handler is not modified after a send() Build a DISPLAY TEXT command Copy ProactiveHandler to source byte array Send command Copy ProactiveHandler to destination byte array Compare source and destination | Source and destination are identical | |
| 13 | Build and send a DISPLAY TEXT command Verify there is no invocation of select() or deselect() method. | | DISPLAY TEXT Proactive command |
| 14 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response with 2 Result TLV 1st Result TLV = 03 02 02 12 2nd Result TLV = 03 03 03 34 56 | Result of send() is 02h | |
| 15 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response without Result Simple TLV | ToolkitException.UNAVAILABLE_ELEMENT is thrown by send() | |
| 16 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response without general result byte in the Simple TLV Result TLV = 03 00 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown by send() | |

6.2.7.6.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 1, 3, 5, 7, 9, 10, 11, 12, 13, 14 |
| N2 | 2, 4, 6, 8, 14 |
| N3 | 12 |
| N4 | 13 |
| N5 | To be checked in Framework tests and insert here cross reference |
| C1 | 15 |
| C2 | 16 |

6.2.7.7 Method getLength

Test Area Reference API_2_PAH_GLEN

6.2.7.7.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short getLength()
```

throws ToolkitException

Normal execution

CRRN1: returns the length in bytes of the TLV list.

Parameter errors

No requirements

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException.HANDLER_NOT_AVAILABLE.

6.2.7.7.2 Test Suite files

Test Script: API_2_PAH_GLEN_1.scr
 Test Applet: API_2_PAH_GLEN_1.java
 Load Script: API_2_PAH_GLEN_1.ldr
 Cleanup Script: API_2_PAH_GLEN_1.clr
 Parameter File: API_2_PAH_GLEN_1.par

6.2.7.7.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|------------------------------|------------------|
| 1 | Clear the handler getLength() | Result of getLength() is 0 | |
| 2 | Call the init() method getLength() | Result of getLength() is 9 | |
| 3 | Call the initDisplayText() method, with buffer length = 240 getLength() | Result of getLength() is 253 | |
| 4 | Build a 7Fh Proactive Handler getLength() | Result of getLength() is 7Fh | |
| 5 | Build a 80h Proactive Handler getLength() | Result of getLength() is 80h | |

6.2.7.7.4 Test Coverage

| CRR number | Test case number |
|------------|--------------------------------------|
| N1 | 1, 2, 3, 4,5 |
| C1 | Does not apply for Proactive Handler |

6.2.7.8 Method copy

Test Area Reference API_2_PAH_COPY_BSS

6.2.7.8.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short copy(byte[] dstBuffer,
```

```
        short dstOffset,  
        short dstLength)  
throws java.lang.NullPointerException,  
       java.lang.ArrayIndexOutOfBoundsException,  
       ToolkitException
```

Normal execution

CRRN1: copies the simple TLV list contained in the handler to the destination byte array.

CRRN2: returns dstOffset + dstLength.

Parameter errors

CRRP1: if dstBuffer is null a NullPointerException is thrown.

CRRP2: if dstOffset or dstLength or both would cause access outside array bounds, or if dstLength is negative, an ArrayIndexOutOfBoundsException is thrown.

CRRP3: if dstLength is greater than the length of the simple TLV List, an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException. OUT_OF_TLV_BOUNDARIES.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.7.8.2

Test Suite files

| | |
|-----------------|---------------------------|
| Test Script: | API_2_PAH_COPY_BSS_1.scr |
| Test Applet: | API_2_PAH_COPY_BSS_1.java |
| Load Script: | API_2_PAH_COPY_BSS_1.ldr |
| Cleanup Script: | API_2_PAH_COPY_BSS_1.clr |
| Parameter File: | API_2_PAH_COPY_BSS_1.par |

6.2.7.8.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | NULL as parameter to dstBuffer | NullPointerException is thrown | |
| 2 | Call the init() method | | |
| | DstOffset > dstBuffer.length dstBuffer.length = 5 dstOffset = 6 dstLength = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | dstOffset < 0 dstBuffer.length = 5 dstOffset = -1 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | DstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 0 dstLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | dstOffset + dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 3 dstLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | dstLength < 0 dstBuffer.length = 5 dstOffset = 0 dstLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | dstLength > length of the simple TLV list dstBuffer.length = 10 dstOffset = 0 dstLength = 10 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 8 | Successful call, dstBuffer is the whole buffer dstBuffer.length = 9 dstOffset = 0 dstLength = 9 | Result of copy() is 9 | |
| 9 | Compare the buffer | Result of arrayCompare() is 0 | |
| 10 | Successful call, dstBuffer is part of a buffer dstBuffer.length = 15 dstOffset = 3 dstLength = 9 | Result of copy() is 12 | |
| 11 | Compare the whole buffer | Result of arrayCompare() is 0 | |
| 12 | Successful call, dstBuffer is part of a buffer dstBuffer.length = 15 dstOffset = 3 dstLength = 6 | Result of copy() is 9 | |
| 13 | Compare the whole buffer | Result of arrayCompare() is 0 | |

6.2.7.8.4 Test Coverage

| CRR number | Test case number |
|------------|-------------------------------------|
| N1 | 9, 11, 13 |
| N2 | 8, 10, 12 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7 |
| C1 | Does not apply for ProactiveHandler |

6.2.7.9 Method findTLV

Test Area Reference API_2_PAH_FINDBB

6.2.7.9.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte findTLV(byte tag, byte occurrence)
    throws ToolkitException
```

Normal execution

Looks for the indicated occurrence of a TLV element from the beginning of the TLV list (handler buffer):

CRRN1: the method is successful if the required occurrence exists then the corresponding TLV becomes current.

CRRN2: if the method is successful then it returns TLV_FOUND_CR_SET when Comprehension Required flag is set.

CRRN3: if the method is successful then it returns TLV_FOUND_CR_NOT_SET when Comprehension Required flag is not set.

CRRN4: if the required occurrence of the TLV element does not exist, the current TLV is no longer defined and TLV_NOT_FOUND is returned.

CRRN5: The search method is comprehension required flag independent.

Parameter errors

CRRP1: if an input parameter is not valid (e.g. occurrence = 0) an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException BAD_INPUT_PARAMETER.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.7.9.2

Test Suite files

| | |
|-----------------|-------------------------|
| Test Script: | API_2_PAH_FINDBB_1.scr |
| Test Applet: | API_2_PAH_FINDBB_1.java |
| Load Script: | API_2_PAH_FINDBB_1.ldr |
| Cleanup Script: | API_2_PAH_FINDBB_1.clr |
| Parameter File: | API_2_PAH_FINDBB_1.par |

6.2.7.9.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|------------------|
| 1 | Initialise the handler Invalid input parameter Occurrence = 0 | ToolkitException.BAD_INPUT_PARAMETER is thrown | |
| 2 | Call the init() method Search 1st TLV Tag = 01h Occurrence = 1 | Result is TLV_FOUND_CR_SET | |
| 3 | Call the getValueLength() method | Result is 03h | |
| 4 | Search 2nd TLV Tag = 02h Occurrence = 1 | Result is TLV_FOUND_CR_SET | |
| 5 | Call the getValueLength() method | Result is 02h | |
| 6 | Select a TLV (tag 02h) Search a wrong tag Tag = 03h Occurrence = 1 | Result is TLV_NOT_FOUND | |
| 7 | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 8 | Search a tag with wrong occurrence Tag = 01h Occurrence = 2 | Result is TLV_NOT_FOUND | |
| 9 | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 10 | Append a TLV with tag=02h Search the TLV Tag = 02h Occurrence = 2 | Result is TLV_FOUND_CR_NOT_SET | |
| 11 | Append a TLV with tag=04h Search the TLV Tag = 04h Occurrence = 1 | Result is TLV_FOUND_CR_NOT_SET | |
| 12 | Search tag 81h Tag = 81h Occurrence = 1 | Result is TLV_FOUND_CR_SET | |
| 13 | Search tag 84h Tag = 84h Occurrence = 1 | Result is TLV_FOUND_CR_NOT_SET | |

6.2.7.9.4 Test Coverage

| CRR number | Test case number |
|------------|--------------------------------------|
| N1 | 3, 5 |
| N2 | 2, 4 |
| N3 | 10, 11 |
| N4 | 6, 7, 8, 9 |
| N5 | 12, 13 |
| P1 | 1 |
| C1 | Does not apply for Proactive Handler |

6.2.7.10 Method getValueLength

Test Area Reference API_2_PAH_GVLE

6.2.7.10.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short getValueLength()
    throws ToolkitException
```

Normal execution

CRRN1: gets and returns the binary length of the value field for the last TLV element which has been found in the handler.

Parameter errors

No requirements

Context errors

CRR1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

CRR2: in case of unavailable TLV element an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException UNAVAILABLE_ELEMENT.

6.2.7.10.2 Test Suite files

Test Script: API_2_PAH_GVLE_1.scr
 Test Applet: API_2_PAH_GVLE_1.java
 Load Script: API_2_PAH_GVLE_1.ldr
 Cleanup Script: API_2_PAH_GVLE_1.clr
 Parameter File: API_2_PAH_GVLE_1.par

6.2.7.10.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | Call the init() method | | |
| | getValueLength() | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| 2 | Call the appendTLV() method tag = 0D valueOffset = 0 valueLength = 0 | | |
| | Search TLV 0Dh (Text String TLV) | | |
| | getValueLength() | Result is 00h | |
| 3 | Call the initDisplayText() method length = 1 (+ dcs byte) | | |
| | Search TLV 0Dh (Text String TLV) | | |
| | getValueLength() | Result is 02h | |
| 4 | Call the initDisplayText() method length = 7Eh (+ dcs byte) | | |
| | Search TLV 0Dh (Text String TLV) | | |
| | getValueLength() | Result is 7Fh | |
| 5 | Call the initDisplayText() method length = 7Fh (+ dcs byte) | | |
| | Search TLV 0Dh (Text String TLV) | | |
| | getValueLength() | Result is 80h | |
| 6 | Call the initDisplayText() method length = F0h (maximum text length) | | |
| | Search TLV 0Dh (Text String TLV) | | |
| | getValueLength() | Result is F1h | |

6.2.7.10.4 Test Coverage

| CRR number | Test case number |
|------------|--------------------------------------|
| N1 | 2, 3, 4, 5, 6 |
| C1 | Does not apply for Proactive Handler |
| C2 | 1 |

6.2.7.11 Method getValueByte

Test Area Reference API_2_PAH_GVBYS

6.2.7.11.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte getValueByte(short valueOffset)
    throws ToolkitException
```

Normal execution

CRRN1: Gets a byte from the last TLV element which has been found in the handler and returns its value (1 byte).

Parameter errors

CRRP1: if valueOffset is out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

CRRC2: in case of unavailable TLV element an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException UNAVAILABLE_ELEMENT.

6.2.7.11.2 Test Suite files

Test Script: API_2_PAH_GVBYS_1.scr
 Test Applet: API_2_PAH_GVBYS_1.java
 Load Script: API_2_PAH_GVBYS_1.ldr
 Cleanup Script: API_2_PAH_GVBYS_1.clr
 Parameter File: API_2_PAH_GVBYS_1.par

6.2.7.11.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | Call the init() method type = FFh qualifier = FEh destination = FDh | | |
| | getValueByte(0) | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| 2 | Search TLV 01h (Command Details TLV) getValueByte(3) | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 3 | Search TLV 01h (Command Details TLV) getValueByte(2) | Result is FEh (qualifier) | |
| 4 | Search TLV 02h (Device Identities TLV) getValueByte(0) | Result is 81h (Source) | |
| 5 | initDisplayText() buffer = 00 01 ... 7D length = 7Eh Search TLV 0Dh (Text String TLV) | | |
| | getValueByte(7E) | Result is 7Dh | |
| 6 | initDisplayText() buffer = 00 01 ... 7D 7E length = 7Fh Search TLV 0Dh (Text String TLV) | | |
| | getValueByte(7E) | Result is 7Dh | |
| 7 | getValueByte(7F) | Result is 7Eh | |
| 8 | initDisplayText() buffer = 00 01 ... EF length = F0h Search TLV 0Dh (Text String TLV) | | |
| | getValueByte(F0) | Result is EFh | |

6.2.7.11.4 Test Coverage

| CRR number | Test case number |
|------------|--------------------------------------|
| N1 | 3, 4, 5, 6, 7, 8 |
| P1 | 2 |
| C1 | Does not apply for Proactive Handler |
| C2 | 1 |

6.2.7.12 Method copyValue

Test Area Reference API_2_PAH_CPYVS_BSS

6.2.7.12.1 Conformance requirement

The method with following header shall be compliant with its definition in the API.

```
public short copyValue(short valueOffset,
    byte[] dstBuffer,
    short dstOffset,
    short dstLength)
    throws java.lang.NullPointerException,
    java.lang.ArrayIndexOutOfBoundsException,
    ToolkitException
```

Normal execution

CRRN1: copies a part of the last TLV element which has been found, into a destination. buffer.

CRRN2: returns `dstOffset + dstLength`.

Parameter errors

CRRP1: if `dstBuffer` is null `NullPointerException` is thrown.

CRRP2: if `dstOffset` or `dstLength` or both would cause access outside array bounds, or if `dstLength` is negative `ArrayIndexOutOfBoundsException` is thrown.

CRRP3: if `valueOffset`, `dstLength` or both are out of the current TLV an instance of `ToolkitException` shall be thrown. The reason code shall be `ToolkitException OUT_OF_TLV_BOUNDARIES`.

Context errors

CRRC1: if the handler is busy an instance of `ToolkitException` shall be thrown. The reason code shall be `ToolkitException HANDLER_NOT_AVAILABLE`.

CRRC2: in case of unavailable TLV element an instance of `ToolkitException` shall be thrown. The reason code shall be `ToolkitException UNAVAILABLE_ELEMENT`.

6.2.7.12.2 Test Suite files

Test Script: `API_2_PAH_CPYVS_BSS_1.scr`

Test Applet: `API_2_PAH_CPYVS_BSS_1.java`

Load Script: `API_2_PAH_CPYVS_BSS_1.ldr`

Cleanup Script: `API_2_PAH_CPYVS_BSS_1.clr`

Parameter File: `API_2_PAH_CPYVS_BSS_1.par`

6.2.7.12.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|------------------|
| 1 | Initialise the handler Select a TLV | | |
| | <code>copyValue()</code> with a null <code>dstBuffer</code> | <code>NullPointerException</code> is thrown | |
| 2 | initDisplayText() with length = 15 Select Text String TLV | | |
| | dstOffset > dstBuffer.length <code>dstBuffer.length = 5</code> <code>dstOffset = 6</code> <code>dstLength = 0</code> | <code>ArrayIndexOutOfBoundsException</code> is thrown | |
| 3 | dstOffset < 0 <code>dstBuffer.length = 5</code> <code>dstOffset = -1</code> <code>dstLength = 1</code> | <code>ArrayIndexOutOfBoundsException</code> is thrown | |
| 4 | dstLength > dstBuffer.length <code>dstBuffer.length = 5</code> <code>dstOffset = 0</code> <code>dstLength = 6</code> | <code>ArrayIndexOutOfBoundsException</code> is thrown | |
| 5 | dstOffset + dstLength > dstBuffer.length <code>dstBuffer.length = 5</code> <code>dstOffset = 3</code> <code>dstLength = 3</code> | <code>ArrayIndexOutOfBoundsException</code> is thrown | |
| 6 | dstLength < 0 <code>dstBuffer.length = 5</code> <code>dstOffset = 0</code> <code>dstLength = -1</code> | <code>ArrayIndexOutOfBoundsException</code> is thrown | |
| 7 | initDisplayText() with length = 5 Select Text String TLV | | |

| | | | |
|----|---|--|--|
| | valueOffset > Text String Length valueOffset = 7 dstBuffer.length = 15 dstOffset = 0 dstLength = 0 | ToolkitException.OUT_OF_TLV_BOUNDS is thrown | |
| 8 | [Select Text String TLV] valueOffset < 0 valueOffset = -1 dstBuffer.length = 15 dstOffset = 0 dstLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDS is thrown | |
| 9 | [Select Text String TLV] dstLength > Text String length valueOffset = 0 dstBuffer.length = 15 dstOffset = 0 dstLength = 7 | ToolkitException.OUT_OF_TLV_BOUNDS is thrown | |
| 10 | [Select Text String TLV] valueOffset + dstLength > Text String length valueOffset = 2 dstBuffer.length = 15 dstOffset = 0 dstLength = 5 | ToolkitException.OUT_OF_TLV_BOUNDS is thrown | |
| 11 | Initialise the handler copyValue() | | |
| | | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| 12 | initDisplayText() dcs = 4 buffer = 00 01 ... 0F Select Text String TLV | | |
| | Successful call valueOffset = 0 dstBuffer.length = 17 dstOffset = 0 dstLength = 17 | Result of copyValue() is 17 | |
| 13 | Compare buffer buffer = 04 00 01 ... 0F | Result is 00h | |
| 14 | initialise dstBuffer dstBuffer = 55 55 ... 55 | | |
| | Successful call valueOffset = 2 dstBuffer.length = 20 dstOffset = 3 dstLength = 12 | Result of copyValue() is 15 | |
| 15 | Compare buffer buffer = 55 55 55 01 02 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55 | Result is 00h | |

6.2.7.12.4 Test Coverage

| CRR number | Test case number |
|------------|--------------------------------------|
| N1 | 13, 15 |
| N2 | 12, 14 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7, 8, 9, 10 |
| C1 | Does not apply for Proactive Handler |
| C2 | 11 |

6.2.7.13 Method compareValue

Test Area Reference API_2_PAH_CPRVS_BSS

6.2.7.13.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte compareValue(short valueOffset,
                        byte[] compareBuffer,
                        short compareOffset,
                        short compareLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

Compares the last found TLV element with a buffer:

CRRN1: returns 0 if identical.

CRRN2: returns -1 if the first miscomparing byte in simple TLV List is less than that in compareBuffer.

CRRN3: returns 1 if the first miscomparing byte in simple TLV List is greater than that in compareBuffer.

Parameter errors

CRRP1: if compareBuffer is null NullPointerException shall be thrown.

CRRP2: if compareOffset or compareLength or both would cause access outside array bounds, or if compareLength is negative ArrayIndexOutOfBoundsException shall be thrown.

CRRP3: if valueOffset, dstLength or both are out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

CRRC2: in case of unavailable TLV element an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException UNAVAILABLE_ELEMENT.

6.2.7.13.2 Test Suite files

| | |
|-----------------|----------------------------|
| Test Script: | API_2_PAH_CPRVS_BSS_1.scr |
| Test Applet: | API_2_PAH_CPRVS_BSS_1.java |
| Load Script: | API_2_PAH_CPRVS_BSS_1.ldr |
| Cleanup Script: | API_2_PAH_CPRVS_BSS_1.clr |
| Parameter File: | API_2_PAH_CPRVS_BSS_1.par |

6.2.7.13.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | Initialise the handler Select a TLV | | |
| | compareValue() with a null compareBuffer | NullPointerException is thrown | |
| 2 | initDisplayText() with length = 15 Select Text String TLV | | |
| | compareOffset > compareBuffer.length compareBuffer.length = 5 compareOffset = 6 compareLength = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | compareOffset < 0 compareBuffer.length = 5 compareOffset = -1 compareLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | compareLength > compareBuffer.length compareBuffer.length = 5 compareOffset = 0 compareLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | compareOffset + compareLength > compareBuffer.length compareBuffer.length = 5 compareOffset = 3 compareLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | compareLength < 0 compareBuffer.length = 5 compareOffset = 0 compareLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | initDisplayText() with length = 5 Select Text String TLV | | |
| | valueOffset > Text String Length valueOffset = 7 compareBuffer.length = 15 compareOffset = 0 compareLength = 0 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 8 | [Select Text String TLV] valueOffset < 0 valueOffset = -1 compareBuffer.length = 15 compareOffset = 0 compareLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 9 | [Select Text String TLV] compareLength > Text String length valueOffset = 0 compareBuffer.length = 15 compareOffset = 0 compareLength = 7 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 10 | [Select Text String TLV] valueOffset + compareLength > Text String length valueOffset = 2 compareBuffer.length = 15 compareOffset = 0 compareLength = 5 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 11 | Initialise the handler compareValue() | | |
| | | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| 12 | initDisplayText() dcs = 4 buffer = 00 01 ... 0F Select Text String TLV | | |
| | Initialise compareBuffer compareBuffer = 04 00 01 ... 0F | | |
| | Compare buffers valueOffset = 0 compareOffset = 0 compareLength = 17 | Result is 00h | |
| 13 | Initialise compareBuffer | | |

| | | | |
|----|--|---------------|--|
| | compareBuffer = 04 00 01 02 03 04 05 06 07 08 05 0A 0B 0C 0D 0E 10 | | |
| | Compare buffers with same parameters | Result is -1 | |
| 14 | Initialise compareBuffer compareBuffer = 03 00 01 ... 0F | | |
| | Compare buffers with same parameters | Result is +1 | |
| 15 | Initialise compareBuffer compareBuffer = 55 55 55 01 02 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55 | | |
| | Compare buffers valueOffset = 2 compareOffset = 3 compareLength = 12 | Result is 00h | |
| 16 | Initialise compareBuffer compareBuffer = 55 55 55 02 01 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55 | | |
| | Compare buffers with same parameters | Result is -1 | |
| 17 | Initialise compareBuffer compareBuffer = 55 55 55 01 02 03 04 05 06 07 08 09 0A 0A 0D 55 55 55 55 55 | | |
| | Compare buffers with same parameters | Result is +1 | |
| 18 | Initialise compareBuffer compareBuffer = 55 55 55 99 03 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55 | | |
| | Compare buffers with same parameters | Result is +1 | |

6.2.7.13.4 Test Coverage

| CRR number | Test case number |
|------------|--------------------------------------|
| N1 | 12, 15 |
| N2 | 13, 16 |
| N3 | 14, 17, 18 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7, 8, 9, 10 |
| C1 | Does not apply for Proactive Handler |
| C2 | 11 |

6.2.7.14 Method findAndCopyValue(byte tag, byte[] dstBuffer, short valueOffset)

Test Area Reference API_2_PAH_FACYB_BS

6.2.7.14.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short findAndCopyValue(byte tag,
```

```

byte[] dstBuffer,
short dstOffset)
throws java.lang.NullPointerException,
java.lang.ArrayIndexOutOfBoundsException,
ToolkitException

```

Normal execution

CRRN1: looks for the first occurrence of a TLV element from the beginning of a TLV list and copy its value into a destination buffer.

CRRN2: if no TLV element is found, the UNAVAILABLE_ELEMENT exception is thrown and the current TLV is no longer defined.

CRRN3: if the method is successful then the corresponding TLV becomes current and dstOffset + length of the copied value is returned.

CRRN4: The search method is comprehension required flag independent.

Parameter errors

CRRP1: if dstBuffer is null NullPointerException shall be thrown.

CRRP2: if dstOffset would cause access outside array bounds ArrayIndexOutOfBoundsException shall be thrown.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.7.14.2 Test Suite files

Test Script: API_2_PAH_FACYB_BS_1.scr
 Test Applet: API_2_PAH_FACYB_BS_1.java
 Load Script: API_2_PAH_FACYB_BS_1.ldr
 Cleanup Script: API_2_PAH_FACYB_BS_1.clr
 Parameter File: API_2_PAH_FACYB_BS_1.par

6.2.7.14.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | Initialise the handler | | |
| | FindAndCopyValue() with a null dstBuffer | NullPointerException is thrown | |
| 2 | InitDisplayText() with length = 15 | | |
| | dstOffset > dstBuffer.length tag = 0Dh dstBuffer.length = 20 dstOffset = 21 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | dstOffset < 0 dstBuffer.length = 20 dstOffset = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | length > dstBuffer.length dstBuffer.length = 15 dstOffset = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | DstOffset + length > dstBuffer.length DstBuffer.length = 20 DstOffset = 5 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | initDisplayText() | | |
| | Select a TLV (tag 02h) | | |
| | findAndCopyValue() tag = 03h | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |

| | | | |
|----|---|---|--|
| | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 7 | initDisplayText() dcs = 4 buffer = 00 01 ... 0F | | |
| | Successful call Tag = 0Dh DstBuffer.length = 17 DstOffset = 0 | Result of findAndcopyValue() is 17 | |
| 8 | Compare buffer buffer = 04 00 01 ... 0F | Result is 00h | |
| 9 | initialise dstBuffer dstBuffer = 55 55 ... 55 | | |
| | Successful call dstBuffer.length = 20 dstOffset = 2 | Result of findAndcopyValue() is 19 | |
| 10 | Compare buffer buffer = 55 55 04 00 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0E 0F 55 | Result is 00h | |
| 11 | initDisplayText() dcs = 4 buffer = 00 01 ... 0F | | |
| | append a 2nd Text String TLV | | |
| | Successful call tag = 0Dh dstBuffer.length = 17 dstOffset = 0 | Result of findAndcopyValue() is 17 | |
| 12 | Compare buffer buffer = 04 00 01 ... 0F | Result is 00h | |
| 13 | initDisplayText() dcs = 4 buffer = 00 01 ... 0F | | |
| | Successful call (with tag 8Dh) tag = 8Dh dstBuffer.length = 17 dstOffset = 0 | Result of findAndcopyValue() is 17 | |
| 14 | Compare buffer buffer = 04 00 01 ... 0F | Result is 00h | |
| 15 | Append tag 0Fh buffer = 00 01 ... 0F | | |
| | Successful call (with tag 8Fh) tag = 8Fh dstBuffer.length = 16 dstOffset = 0 | Result of findAndcopyValue() is 16 | |
| 16 | Compare buffer buffer = 00 01 ... 0F | Result is 00h | |

6.2.7.14.4

Test Coverage

| CRR number | Test case number |
|------------|--------------------------------------|
| N1 | 8, 10, 12 |
| N2 | 6 |
| N3 | 7, 9, 11 |
| N4 | 13, 14, 15, 16 |
| P1 | 1 |
| P2 | 2, 3, 4, 5 |
| C1 | Does not apply for Proactive Handler |

6.2.7.15 Method findAndCopyValue(byte tag, byte occurrence, short valueOffset, byte[] dstBuffer, short dstOffset, short dstLength)

Test Area Reference API_2_PAH_FACYBBS_BSS

6.2.7.15.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short findAndCopyValue(byte tag,
                             byte occurrence,
                             short valueOffset,
                             byte[] dstBuffer,
                             short dstOffset,
                             short dstLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: looks for the indicated occurrence of a TLV element from the beginning of a TLV list and copy its value into a destination buffer.

CRRN2: if no TLV element is found, the UNAVAILABLE_ELEMENT exception is thrown and the current TLV is no longer defined.

CRRN3: if the method is successful then the corresponding TLV becomes current and dstOffset + dstLength is returned.

CRRN4: The search method is comprehension required flag independent.

Parameter errors

CRRP1: if dstBuffer is null NullPointerException shall be thrown.

CRRP2: if dstOffset or dstLength or both would cause access outside array bounds, or if dstLength is negative ArrayIndexOutOfBoundsException shall be thrown.

CRRP3: if valueOffset, dstLength or both are out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.7.15.2 Test Suite files

| | |
|-----------------|------------------------------|
| Test Script: | API_2_PAH_FACYBBS_BSS_1.scr |
| Test Applet: | API_2_PAH_FACYBBS_BSS_1.java |
| Load Script: | API_2_PAH_FACYBBS_BSS_1.ldr |
| Cleanup Script: | API_2_PAH_FACYBBS_BSS_1.clr |
| Parameter File: | API_2_PAH_FACYBBS_BSS_1.par |

6.2.7.15.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | Initialise the handler | | |
| | findAndCopyValue() with a null dstBuffer | NullPointerException is thrown | |
| 2 | initDisplayText() with length = 15 | | |
| | dstOffset > dstBuffer.length tag = 0Dh, occurrence = 1 valueOffset = 0 dstBuffer.length = 5 dstOffset = 6 dstLength = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | dstOffset < 0 dstBuffer.length = 5 dstOffset = -1 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 0 dstLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | dstOffset + dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 3 dstLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | dstLength < 0 dstBuffer.length = 5 dstOffset = 0 dstLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | initDisplayText() with length = 5 | | |
| | valueOffset > Text String Length tag = 0Dh, occurrence = 1 valueOffset = 7 dstBuffer.length = 15 dstOffset = 0 dstLength = 0 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 8 | valueOffset < 0 valueOffset = -1 dstBuffer.length = 15 dstOffset = 0 dstLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 9 | dstLength > Text String length valueOffset = 0 dstBuffer.length = 15 dstOffset = 0 dstLength = 7 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 10 | valueOffset + dstLength > Text String length valueOffset = 2 dstBuffer.length = 15 dstOffset = 0 dstLength = 5 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 11 | InitDisplayText() | | |
| | Select a TLV (tag 02h) | | |
| | findAndCopyValue() tag = 0Dh occurrence = 2 | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 12 | initDisplayText() dcs = 4 buffer = 00 01 ... 0F | | |
| | Successful call tag = 0Dh, occurrence = 1 valueOffset = 0 dstBuffer.length = 17 dstOffset = 0 dstLength = 17 | Result of findAndCopyValue() is 17 | |
| 13 | Compare buffer buffer = 04 00 01 ... 0F | Result is 00h | |
| 14 | initialise dstBuffer | | |

| | | | |
|----|---|------------------------------------|--|
| | dstBuffer = 55 55 ... 55 | | |
| | Successful call tag = 0Dh, occurrence = 1 valueOffset = 2 dstBuffer.length = 20 dstOffset = 3 dstLength = 12 | Result of findAndcopyValue() is 15 | |
| 15 | Compare buffer buffer = 55 55 55 01 02 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55 | Result is 00h | |
| 16 | Append a Text String TLV tag = 0D buffer = 00 11 22 33 44 55 (no specific DCS byte) | | |
| | Successful call tag = 0Dh, occurrence = 1 valueOffset = 0 dstBuffer.length = 17 dstOffset = 0 dstLength = 17 | Result of findAndCopyValue() is 17 | |
| 17 | Compare buffer buffer = 04 00 01 ... 0F | Result is 00h | |
| 18 | Successful call tag = 0Dh, occurrence = 2 valueOffset = 0 dstBuffer.length = 6 dstOffset = 0 dstLength = 6 | Result of findAndCopyValue() is 6 | |
| 19 | Compare buffer buffer = 00 11 22 33 44 55 | Result is 00h | |
| 20 | initDisplayText() dcs = 4 buffer = 00 01 ... 0F | | |
| | Successful call (with tag 8Dh) tag = 8Dh occurrence = 1 valueOffset = 0 dstBuffer.length = 17 dstOffset = 0 dstLength = 17 | Result of findAndcopyValue() is 17 | |
| 21 | Compare buffer buffer = 04 00 01 ... 0F | Result is 00h | |
| 22 | Append tag 0Fh buffer = 00 01 ... 0F | | |
| | Successful call (with tag 8Fh) tag = 8Fh occurrence = 1 valueOffset = 0 dstBuffer.length = 16 dstOffset = 0 dstLength = 16 | Result of findAndcopyValue() is 16 | |
| 23 | Compare buffer buffer = 00 01 ... 0F | Result is 00h | |

6.2.7.15.4 Test Coverage

| CRR number | Test case number |
|------------|-------------------------------------|
| N1 | 13, 15, 17, 19 |
| N2 | 11 |
| N3 | 12, 14, 16, 18 |
| N4 | 20, 21, 22, 23 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7, 8, 9, 10 |
| C1 | Does not apply for ProactiveHandler |

6.2.7.16 Method findAndCompareValue(byte tag, byte[] compareBuffer, short compareOffset)

Test Area Reference API_2_PAH_FACRB_BS

6.2.7.16.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte findAndCompareValue(byte tag,
                               byte[] compareBuffer,
                               short compareOffset)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

Looks for the first occurrence of a TLV element from beginning of a TLV list and compare its value with a buffer:

CRRN1: if no TLV element is found, the UNAVAILABLE_ELEMENT exception is thrown and the current TLV is no longer defined.

CRRN2: if the method is successful then the corresponding TLV becomes current.

CRRN3: if identical returns 0.

CRRN4: if the first miscomparing byte in simple TLV is less than that in compareBuffer returns -1.

CRRN5: if the first miscomparing byte in simple TLV is greater than that in compareBuffer returns 1.

CRRN6: The search method is comprehension required flag independent.

Parameter errors

CRRP1: if compareBuffer is null NullPointerException shall be thrown.

CRRP2: if compareOffset would cause access outside array bounds ArrayIndexOutOfBoundsException shall be thrown.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.7.16.2 Test Suite files

Test Script: API_2_PAH_FACRB_BS_1.scr

Test Applet: API_2_PAH_FACRB_BS_1.java

Load Script: API_2_PAH_FACRB_BS_1.ldr

Cleanup Script: API_2_PAH_FACRB_BS_1.clr

Parameter File: API_2_PAH_FACRB_BS_1.par

6.2.7.16.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|------------------|
| 1 | Initialise the handler | | |
| | findAndCompareValue() with a null dstBuffer | NullPointerException is thrown | |
| 2 | initDisplayText() with length = 15 | | |
| | compareOffset > compareBuffer.length tag = 0Dh compareBuffer.length = 20 compareOffset = 21 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | compareOffset < 0 compareBuffer.length = 20 compareOffset = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | length > compareBuffer.length compareBuffer.length = 15 compareOffset = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | compareOffset + length > compareBuffer.length compareBuffer.length = 20 compareOffset = 5 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | InitDisplayText() | | |
| | Select a TLV (tag 02h) | | |
| | findAndCompareValue() tag = 03h | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 7 | initDisplayText() dcs = 4 buffer = 00 01 ... 0F | | |
| | Initialise compareBuffer compareBuffer = 04 00 01 ... 0F | | |
| | Compare buffers tag = 0Dh compareOffset = 0 | Result is 00h | |
| 8 | Verify current TLV getValueLength() | Result is 17 | |
| 9 | Initialise compareBuffer compareBuffer = 04 00 01 ... 10 | | |
| | Compare buffers with same parameters | Result is -1 | |
| 10 | Initialise compareBuffer compareBuffer = 03 00 01 ... 0F | | |
| | Compare buffers with same parameters | Result is +1 | |
| 11 | Initialise compareBuffer compareBuffer = 55 55 04 00 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0E 0F 55 | | |
| | Compare buffers compareOffset = 2 | Result is 00h | |
| 12 | append a Text String TLV tag = 0Dh buffer = 00 11 22 33 44 55 | | |
| | Initialise compareBuffer compareBuffer = 55 55 04 00 01 02 03 04 05 06 | | |

| | | | |
|----|--|---------------|--|
| | 07 08 09 0A 0B 0C 0D 0E 0F 55 | | |
| | Compare buffers compareOffset = 2 | Result is 00h | |
| 13 | Initialise compareBuffer compareBuffer = 55 55 04 01 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0E 0F 55 | | |
| | Compare buffers compareOffset = 2 | Result is -1 | |
| 14 | Initialise compareBuffer compareBuffer = 55 55 04 00 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0D 10 55 | | |
| | Compare buffers compareOffset = 2 | Result is +1 | |
| 15 | initDisplayText() dcs = 4 buffer = 00 01 ... 0F | | |
| | Initialise compareBuffer CompareBuffer = 04 00 01 ... 0F | | |
| | Successful call (with tag 8Dh) tag = 8Dh compareBuffer.length = 17 compareOffset = 0 | Result is 00h | |
| 16 | Append tag 0Fh buffer = 00 01 ... 0F | | |
| | Initialise compareBuffer compareBuffer = 00 01 ... 0F | | |
| | Successful call (with tag 8Fh) tag = 8Fh compareBuffer.length = 16 compareOffset = 0 | Result is 00h | |
| 17 | Initialise compareBuffer compareBuffer = 00 99 01 03 ... 0F | | |
| | Successful call (with tag 8Fh) tag = 8Fh compareBuffer.length = 16 compareOffset = 0 | Result is +1 | |

6.2.7.16.4 Test Coverage

| CRR number | Test case number |
|------------|--------------------------------------|
| N1 | 6 |
| N2 | 8 |
| N3 | 7, 11, 12, 17 |
| N4 | 9, 13 |
| N5 | 10, 14 |
| N6 | 15, 16 |
| P1 | 1 |
| P2 | 2, 3, 4, 5 |
| C1 | Does not apply for Proactive Handler |

6.2.7.17 Method findAndCompareValue(byte tag, byte occurrence, short valueOffset, byte[] compareBuffer, short compareOffset, short compareLength)

Test Area Reference API_2_PAH_FACRBBS_BSS

6.2.7.17.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte findAndCompareValue(byte tag,
                               byte occurrence,
                               short valueOffset,
                               byte[] compareBuffer,
                               short compareOffset,
                               short compareLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

Looks for the indicated occurrence of a TLV element from the beginning of a TLV list and compare its value with a buffer:

- CRRN1: if no TLV element is found, the UNAVAILABLE_ELEMENT exception is thrown and the current TLV is no longer defined.
- CRRN2: if the method is successful then the corresponding TLV becomes current.
- CRRN3: if identical 0 is returned.
- CRRN4: if the first miscomparing byte in simple TLV is less than that in compareBuffer -1 is returned.
- CRRN5: if the first miscomparing byte in simple TLV is greater than that in compareBuffer 1 is returned
- CRRN6: The search method is comprehension required flag independent.

Parameter errors

- CRRP1: if compareBuffer is null NullPointerException shall be thrown.
- CRRP2: if compareOffset or compareLength or both would cause access outside array bounds, or if compareLength is negative ArrayIndexOutOfBoundsException shall be thrown.
- CRRP3: if valueOffset, compareLength or both are out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.
- CRRP4: if an input parameter is not valid (e.g. occurrence = 0) an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException BAD_INPUT_PARAMETER.

Context errors

- CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.7.17.2 Test Suite files

| | |
|-----------------|------------------------------|
| Test Script: | API_2_PAH_FACRBBS_BSS_1.scr |
| Test Applet: | API_2_PAH_FACRBBS_BSS_1.java |
| Load Script: | API_2_PAH_FACRBBS_BSS_1.ldr |
| Cleanup Script: | API_2_PAH_FACRBBS_BSS_1.clr |
| Parameter File: | API_2_PAH_FACRBBS_BSS_1.par |

6.2.7.17.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | Initialise the handler | | |
| | findAndCompareValue() with a null compareBuffer | NullPointerException is thrown | |
| 2 | initDisplayText() with length = 15 | | |
| | compareOffset > compareBuffer.length tag = 0Dh, occurrence = 1 valueOffset = 0 compareBuffer.length = 5 compareOffset = 6 compareLength = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | compareOffset < 0 compareBuffer.length = 5 compareOffset = -1 compareLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | compareLength > compareBuffer.length compareBuffer.length = 5 compareOffset = 0 compareLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | compareOffset + compareLength > compareBuffer.length compareBuffer.length = 5 compareOffset = 3 compareLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | compareLength < 0 compareBuffer.length = 5 compareOffset = 0 compareLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | initDisplayText() with length = 5 | | |
| | valueOffset > Text String Length tag = 0Dh, occurrence = 1 valueOffset = 7 compareBuffer.length = 15 compareOffset = 0 compareLength = 0 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 8 | valueOffset < 0 valueOffset = -1 compareBuffer.length = 15 compareOffset = 0 compareLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 9 | compareLength > Text String length valueOffset = 0 compareBuffer.length = 15 compareOffset = 0 compareLength = 7 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 10 | valueOffset + compareLength > Text String length valueOffset = 2 compareBuffer.length = 15 compareOffset = 0 compareLength = 5 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 11 | Invalid parameter occurrence = 0 | ToolkitException.BAD_INPUT_PARAMETER is thrown | |
| 12 | InitDisplayText() | | |
| | Select a TLV (tag 02h) | | |
| | findAndCompareValue() tag = 0Dh occurrence = 2 | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 13 | initDisplayText() dcs = 4 buffer = 00 01 ... 0F | | |
| | Initialise compareBuffer compareBuffer = 04 00 01 ... 0F | | |
| | findAndCompareValue() | Result is 00h | |

| | | | |
|----|---|---------------|--|
| | <pre>tag = 0Dh, occurrence = 1 valueOffset = 0 compareOffset = 0 compareLength = 17</pre> | | |
| 14 | <p style="text-align: center;">Verify current TLV</p> <pre>getValueLength()</pre> | Result is 17 | |
| 15 | <p style="text-align: center;">Initialise compareBuffer</p> <pre>compareBuffer = 04 00 01 ... 10</pre> | | |
| | Compare buffers with same parameters | Result is -1 | |
| 16 | <p style="text-align: center;">Initialise compareBuffer</p> <pre>compareBuffer = 03 00 01 ... 0F</pre> | | |
| | Compare buffers with same parameters | Result is +1 | |
| 17 | <p style="text-align: center;">Initialise compareBuffer</p> <pre>compareBuffer = 55 55 55 01 02 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55</pre> | | |
| | <p style="text-align: center;">Compare buffers</p> <pre>valueOffset = 2 compareOffset = 3 compareLength = 12</pre> | Result is 00h | |
| 18 | <p style="text-align: center;">Initialise compareBuffer</p> <pre>compareBuffer = 55 55 55 02 01 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55</pre> | | |
| | Compare buffers with same parameters | Result is -1 | |
| 19 | <p style="text-align: center;">Initialise compareBuffer</p> <pre>compareBuffer = 55 55 55 01 02 03 04 05 06 07 08 09 0A 0A 0D 55 55 55 55 55</pre> | | |
| | Compare buffers with same parameters | Result is +1 | |
| 20 | <p style="text-align: center;">append a Text String TLV</p> <pre>tag = 0Dh buffer = 00 11 22 33 44 55</pre> | | |
| | <p style="text-align: center;">Initialise compareBuffer</p> <pre>compareBuffer = 04 00 01 ... 0F</pre> | | |
| | <p style="text-align: center;">findAndCompareValue()</p> <pre>tag = 0Dh, occurrence = 1 valueOffset = 0 compareOffset = 0 compareLength = 17</pre> | Result is 00h | |
| 21 | <p style="text-align: center;">Initialise compareBuffer</p> <pre>compareBuffer = 00 11 22 33 44 55</pre> | | |
| | <p style="text-align: center;">findAndCompareValue()</p> <pre>tag = 0Dh, occurrence = 2 valueOffset = 0 compareOffset = 0 compareLength = 6</pre> | Result is 00h | |
| 22 | <p style="text-align: center;">Initialise compareBuffer</p> <pre>compareBuffer = 00 11 22 33 44 66</pre> | | |
| | <p style="text-align: center;">findAndCompareValue()</p> <pre>tag = 0Dh, occurrence = 2 valueOffset = 0 compareOffset = 0</pre> | Result is -1 | |

| | | | |
|----|---|---------------|--|
| | compareLength = 6 | | |
| 23 | initDisplayText() dcs = 4 buffer = 00 01 ... 0F | | |
| | Initialise compareBuffer CompareBuffer = 04 00 01 ... 0F | | |
| | Successful call (with tag 8Dh) tag = 8Dh, occurrence = 1 valueOffset = 0 compareBuffer.length = 17 compareOffset = 0 compareLength = 17 | Result is 00h | |
| 24 | Append tag 0Fh buffer = 00 01 ... 0F | | |
| | Initialise compareBuffer compareBuffer = 00 01 ... 0F | | |
| | Successful call (with tag 8Fh) tag = 8Fh, occurrence = 1 valueOffset = 0 compareBuffer.length = 16 compareOffset = 0 compareLength = 16 | Result is 00h | |
| 25 | Initialise compareBuffer compareBuffer = 0099 02 ... 0F | | |
| | findAndCompareValue() tag = 0Dh, occurrence = 1 valueOffset = 0 compareOffset = 0 compareLength = 17 | Result is +1 | |

6.2.7.17.4 Test Coverage

| CRR number | Test case number |
|------------|--------------------------------------|
| N1 | 12 |
| N2 | 14 |
| N3 | 13, 17, 20, 21 |
| N4 | 15, 18, 22 |
| N5 | 16, 19 |
| N6 | 23, 24 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7, 8, 9, 10 |
| P4 | 11 |
| C1 | Does not apply for Proactive Handler |

6.2.7.18 Method appendArray

Test Area Reference: API_2_PAH_APDA_BSS

6.2.7.18.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
void appendArray(byte[] buffer,
                short offset,
                short length)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: appends a buffer into the Edithandler buffer

CRRN2: a successful append does not modify the TLV selected

Parameters error

CRRP1: if buffer is null, a java.lang.NullPointerException is thrown

CRRP2: if offset or length or both would cause access outside the array bounds, or if length is negative, a java.lang.ArrayIndexOutOfBoundsException is thrown.

Context errors

CRRC1: if the EditHandler buffer is too small to append the requested data, a ToolkitException is thrown with reason code HANDLER_OVERFLOW

CRRC2: if the EditHandler buffer is busy, a ToolkitException is thrown with reason code HANDLER_NOT_AVAILABLE

6.2.7.18.2 Test suite files

Test Script: API_2_PAH_APDA_BSS_1.scr

Test Applet: API_2_PAH_APDA_BSS_1.java

Load Script: API_2_PAH_APDA_BSS_1.ldr

Cleanup Script: API_2_PAH_APDA_BSS_1.clr

Parameter File: API_2_PAH_APDA_BSS_1.par

6.2.7.18.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|------------------|
| 1 | Null buffer | NullPointerException is thrown | |
| 2 | offset > buffer.length buffer.length = 5 offset = 6 length = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | offset < 0 buffer.length = 5 offset = -1 length = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | length > buffer.length buffer.length = 5 offset = 0 length = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | offset + length > buffer.length buffer.length = 5 offset = 3 length = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | length < 0 buffer.length = 5 offset = 0 length = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | Handler overflow buffer.length = 256 offset = 0 length = 256 | ToolkitException.HANDLER_OVERFLOW is thrown | |
| 8 | Initialise handler | | |
| | Select Command Details TLV | | |
| | Successful call buffer = FF FE ... F8 offset = 0 length = 8 | | |
| | Verify Current TLV: Call getValueLength() | Result is 03h | |

| | | | |
|----|---|--|--|
| 9 | Clear the handler | | |
| | Successful call buffer = FF FE ... F8 offset = 0 length = 8 | | |
| | Call copy() method | | |
| | Compare the arrays compareBuffer = FF FE ... F8 | Result of javacard.framework.Util.arrayCo mpare() is 00h | |
| 10 | Successful call buffer = 00 01 ... 07 offset = 2 length = 6 | | |
| | Call copy() method | | |
| | Compare the arrays compareBuffer = FF FE ... F8 02 03 ... 07 | Result of javacard.framework.Util.arrayCo mpare() is 00h | |
| 11 | Successful call buffer = 11 22 ... 88 offset = 2 length = 4 | | |
| | Call copy() method | | |
| | Compare the arrays compareBuffer = FF FE ... F8 02 03 ... 07 33 44 55 66 | Result of javacard.framework.Util.arrayCo mpare() is 00h | |
| 12 | Clear the handler | | |
| | Successful call buffer = 00 01 ... FC offset = 0 length = 253 | | |
| | Call getLength() method | result = 253 | |
| | Call copy() method | | |
| | Compare handler compareBuffer = 00 01 ... FC | Result of javacard.framework.Util.arrayCo mpare() is 00h | |

6.2.7.18.4 Test Coverage

| CRR number | Test case number |
|------------|-------------------------------------|
| N1 | 9, 10, 11, 12 |
| N2 | 8 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| C1 | 7 |
| C2 | Does not apply for ProactiveHandler |

6.2.7.19 Method appendTLV(byte tag, byte value)

Test Area Reference: API_2_PAH_APTLBB

6.2.7.19.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
void appendTLV (byte tag, byte value)
               throws ToolkitException
```

Normal execution

CRRN1: Appends a TLV element to the current TLV list (1-byte element).

CRRN2: A successful append does not modify the TLV selected.

Parameters error

No requirements

Context errors

CRRC1: if the EditHandler buffer is too small to append the requested data, a ToolkitException is thrown with reason code HANDLER_OVERFLOW

CRRC2: if the EditHandler buffer is busy, a ToolkitException is thrown with reason code HANDLER_NOT_AVAILABLE

6.2.7.19.2 Test suite files

Test Script: API_2_PAH_APTLBB_1.scr
 Test Applet: API_2_PAH_APTLBB_1.java
 Load Script: API_2_PAH_APTLBB_1.ldr
 Cleanup Script: API_2_PAH_APTLBB_1.clr
 Parameter File: API_2_PAH_APTLBB_1.par

6.2.7.19.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|------------------|
| 1 | Call appendArray() length = 251 | | |
| | Handler Overflow: Call the appendTLV() method | ToolkitException.HANDLER_OVERFLOW is thrown | |
| 2 | Initialise handler | | |
| | Select Command Details TLV | | |
| | Call the appendTLV() method | | |
| | Verify Current TLV: Call getValueLength() | Result is 03h | |
| 3 | Clear the handler | | |
| | Successful call tag = 84h value = 00h | | |
| | Call copy() method | | |
| | Compare the arrays compareBuffer = 84 01 00 | Result of javacard.framework.Util.arrayCompare() is 00h | |
| 4 | Successful call tag = 01h value = FEh | | |
| | Call copy() method | | |
| | Compare the arrays compareBuffer = 84 01 00 01 01 FE | Result of javacard.framework.Util.arrayCompare() is 00h | |
| 5 | Clear the handler | | |
| | Call appendArray() length = 250 buffer = 00 81 F7 03 04 ... F9 | | |
| | Successful call tag = 84h value = 00h | | |
| | Call getLength() method | result = 253 | |
| | Call copy() method | | |
| | Compare the array compareBuffer = 00 81 F7 03 04 ... F9 84 01 00 | Result of javacard.framework.Util.arrayCompare() is 00h | |

6.2.7.19.4 Test Coverage

| CRR number | Test case number |
|------------|--------------------------------------|
| N1 | 3, 4, 5 |
| N2 | 2 |
| C1 | 1 |
| C2 | Does not apply for Proactive Handler |

6.2.7.20 Method appendTLV(byte tag, byte value1, byte value2)

Test Area Reference: API_2_PAH_APTLBBB

6.2.7.20.1 Conformance requirements:

The method with following header shall be compliant to its definition in the API.

```
void appendTLV (byte tag,
               byte value)
               throws ToolkitException
```

Normal execution

CRRN1: Appends a TLV element to the current TLV list (2-byte element).

CRRN2: A successful append does not modify the TLV selected.

Parameters error

No requirements

Context errors

CRRC1: if the EditHandler buffer is too small to append the requested data, a ToolkitException is thrown with reason code HANDLER_OVERFLOW

CRRC2: if the EditHandler buffer is busy, a ToolkitException is thrown with reason code HANDLER_NOT_AVAILABLE

6.2.7.20.2 Test suite files

Test Script: API_2_PAH_APTLBBB_1.scr

Test Applet: API_2_PAH_APTLBBB_1.java

Load Script: API_2_PAH_APTLBBB_1.ldr

Cleanup Script: API_2_PAH_APTLBBB_1.clr

Parameter File: API_2_PAH_APTLBBB_1.par

6.2.7.20.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|------------------|
| 1 | Call the initDisplayText() length = 250 | | |
| | Handler Overflow: Call the appendTLV() method | ToolkitException.HANDLER_OVERFLOW is thrown | |
| 2 | Initialise handler | | |
| | Select Command Details TLV | | |
| | Call the appendTLV() method | | |
| | Verify Current TLV: Call getValueLength() | Result is 03h | |
| 3 | Clear the handler | | |
| | Successful call tag = 84h value1 = 00h value2 = 01h | | |
| | Call copy() method | | |
| | Compare the arrays compareBuffer = 84 02 00 01 | Result of javacard.framework.Util.arrayCompare() is 00h | |
| 4 | Successful call tag = 01h value1 = FEh value2 = FDh | | |
| | Call copy() method | | |
| | Compare the arrays compareBuffer = 84 02 00 01 01 02 FE FD | Result of javacard.framework.Util.arrayCompare() is 00h | |
| 5 | Clear the handler | | |
| | Call appendArray() length = 249 buffer = 00 81 F6 03 04 ... F8 | | |
| | Successful call tag = 84h value1 = 00h value2 = 01h | | |
| | Call getLength() method | result = 253 | |
| | Call copy() method | | |
| | Compare handler compareBuffer = 00 81 F6 03 04 ... F8 84 02 00 01 | Result of javacard.framework.Util.arrayCompare() is 00h | |

6.2.7.20.4 Test Coverage

| CRR number | Test case number |
|------------|--------------------------------------|
| N1 | 3, 4, 5 |
| N2 | 2 |
| C1 | 1 |
| C2 | Does not apply for Proactive Handler |

6.2.7.21 Method appendTLV(byte tag, byte[] value, short valueoffset, short valuelength)

Test Area Reference: API_2_PAH_APTLB_BSS

6.2.7.21.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

void appendTLV (byte tag,

```

        byte[] value,
        short valueoffset,
        short valuelength)
throws java.lang.NullPointerException,
        java.lang.ArrayIndexOutOfBoundsException,
        ToolkitException

```

Normal execution

CRRN1: Appends a TLV element to the current TLV list (byte-array element).

CRRN2: A successful append does not modify the TLV selected.

Parameters error

CRRP1: if value is null, a java.lang.NullPointerException is thrown

CRRP2: if valueoffset or valuelength or both would cause access outside the array bounds, or if length is negative, a java.lang.ArrayIndexOutOfBoundsException is thrown.

Context errors

CRRC1: if the EditHandler buffer is too small to append the requested data, a ToolkitException is thrown with reason code HANDLER_OVERFLOW

CRRC2: if the EditHandler buffer is busy, a ToolkitException is thrown with reason code HANDLER_NOT_AVAILABLE

CRRC3: if valuelength is greater than 255, a ToolkitException is thrown with reason code BAD_INPUT_PARAMETER

6.2.7.21.2 Test suite files

Test Script: API_2_PAH_APTLB_BSS_1.scr

Test Applet: API_2_PAH_APTLB_BSS_1.java

Load Script: API_2_PAH_APTLB_BSS_1.ldr

Cleanup Script: API_2_PAH_APTLB_BSS_1.clr

Parameter File: API_2_PAH_APTLB_BSS_1.par

6.2.7.21.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | Null value | NullPointerException is thrown | |
| 2 | valueOffset > value.length value.length = 5 valueOffset = 6 valueLength = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | valueOffset < 0 value.length = 5 valueOffset = -1 valueLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | valueLength > value.length value.length = 5 valueOffset = 0 valueLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | valueOffset + valueLength > value.length value.length = 5 valueOffset = 3 valueLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | valueLength < 0 value.length = 5 valueOffset = 0 valueLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | Handler overflow | ToolkitException.HANDLER_OV | |

| | | | |
|----|--|--|--|
| | value.length = 254 valueOffset = 0 valueLength = 254 | ERFLOW is thrown | |
| 8 | Bad parameter value.length = 256 valueOffset = 0 valueLength = 256 | ToolkitException.BAD_INPUT_PARAMETER is thrown | |
| 9 | Initialise handler Select Command Details TLV Successful call tag = 04 value = FF FE ... F8 valueOffset = 0 valueLength = 8 | | |
| | Verify Current TLV: Call getValueLength() | Result is 03h | |
| 10 | Clear the handler Successful call tag = 04 value = FF FE ... F8 valueOffset = 0 valueLength = 8 | | |
| | Call copy() method Compare the arrays compareBuffer = 04 08 FF FE ... F8 | Result of javacard.framework.Util.arrayCompare() is 00h | |
| 11 | Successful call tag = 85h value = 00 01 ... 07 valueOffset = 2 valueLength = 6 | | |
| | Call copy() method Compare the arrays compareBuffer = 04 08 FF FE ... F8 85 06 02 03 ... 07 | Result of javacard.framework.Util.arrayCompare() is 00h | |
| 12 | Successful call tag = 01 value = 11 22 ... 88 valueOffset = 2 valueLength = 4 | | |
| | Call copy() method Compare the arrays compareBuffer = 04 08 FF FE ... F8 85 06 02 03 ... 07 01 04 33 44 55 66 | Result of javacard.framework.Util.arrayCompare() is 00h | |
| 13 | Clear the handler Successful call tag = 04 value = 00 01 ... 7F valueOffset = 0 valueLength = 80h | | |
| | Call copy() method Compare the arrays compareBuffer = 04 81 80 00 01...7F | Result of javacard.framework.Util.arrayCompare() is 00h | |
| 14 | Clear the handler Successful call tag = 04 value = 00 01 ... F9 valueOffset = 0 valueLength = 250 | | |
| | Call getLength() method | result = 253 | |
| | Call copy() method Compare handler compareBuffer = 04 81 FA 00 01...F9 | Result of javacard.framework.Util.arrayCompare() is 00h | |

6.2.7.21.4 Test Coverage

| CRR number | Test case number |
|------------|--------------------------------------|
| N1 | 10, 11, 12, 13, 14 |
| N2 | 9 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| C1 | 7 |
| C2 | Does not apply for Proactive Handler |
| C3 | 8 |

6.2.7.22 Method appendTLV(byte tag, byte value1, byte[] value2, short value2offset, short value2length)

Test Area Reference: API_2_PAH_APTLBB_BSS

6.2.7.22.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
void appendTLV (byte tag,
               byte value1,
               byte[] value2,
               short value2offset,
               short value2length)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: Appends a TLV element to the current TLV list (1 byte and a byte-array element).

CRRN2: A successful append does not modify the TLV selected.

Parameters error

CRRP1: if value2 is null, a java.lang.NullPointerException is thrown

CRRP2: if value2offset or value2length or both would cause access outside the array bounds, or if length is negative, a java.lang.ArrayIndexOutOfBoundsException is thrown.

Context errors

CRRC1: if the EditHandler buffer is too small to append the requested data, a ToolkitException is thrown with reason code HANDLER_OVERFLOW

CRRC2: if the EditHandler buffer is busy, a ToolkitException is thrown with reason code HANDLER_NOT_AVAILABLE

CRRC3: if valuelength is greater than 255, a ToolkitException is thrown with reason code BAD_INPUT_PARAMETER

6.2.7.22.2 Test suite files

Test Script: API_2_PAH_APTLBB_BSS_1.scr

Test Applet: API_2_PAH_APTLBB_BSS_1.java

Load Script: API_2_PAH_APTLBB_BSS_1.ldr

Cleanup Script: API_2_PAH_APTLBB_BSS_1.clr

Parameter File: API_2_PAH_APTLBB_BSS_1.par

6.2.7.22.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|------------------|
| 1 | Null value2 | NullPointerException is thrown | |
| 2 | value2Offset > value2.length value2.length = 5 value2Offset = 6 value2Length = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | value2Offset < 0 value2.length = 5 value2Offset = -1 value2Length = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | value2Length > value2.length value2.length = 5 value2Offset = 0 value2Length = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | value2Offset + value2Length > value2.length value2.length = 5 value2Offset = 3 value2Length = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | value2Length < 0 value2.length = 5 value2Offset = 0 value2Length = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | Handler overflow value2.length = 254 value2Offset = 0 value2Length = 254 | ToolkitException.HANDLER_OVERFLOW is thrown | |
| 8 | Bad parameter value2.length = 256 value2Offset = 0 value2Length = 256 | ToolkitException.BAD_INPUT_PARAMETER is thrown | |
| 9 | Initialise handler Select Command Details TLV Successful call tag = 04 value1 = 05 value2 = FF FE ... F8 value2Offset = 0 value2Length = 8 | | |
| | Verify Current TLV: Call getValueLength() | Result is 03h | |
| 10 | Clear the handler Successful call tag = 04 value1 = 05 value2 = FF FE ... F8 value2Offset = 0 value2Length = 8 | | |
| | Call copy() method Compare the arrays CompareBuffer = 04 09 05 FF FE ... F8 | Result of javacard.framework.Util.arrayCompare() is 00h | |
| 11 | Successful call tag = 85h value1 = 55h value2 = 00 01 ... 07 value2Offset = 2 value2Length = 6 | | |
| | Call copy() method Compare the arrays compareBuffer = 04 09 05 FF FE ... F8 85 07 55 02 03 ... 07 | Result of javacard.framework.Util.arrayCompare() is 00h | |
| 12 | Successful call tag = 01 value1 = 44h value2 = 11 22 ... 88 value2Offset = 2 value2Length = 4 | | |
| | Call copy() method | | |

| | | | |
|----|--|---|--|
| | <p>Compare the arrays CompareBuffer = 04 09 05 FF FE ... F8 85 07 55 02 03 ... 07 01 05 44 33 44 55 66</p> | Result of javacard.framework.Util.arrayCompare() is 00h | |
| 13 | <p>Clear the handler Successful call tag = 04 value1 = 00 value2 = 01 ... 7F value2Offset = 0 value2Length = 7Fh</p> | | |
| | <p>Call copy() method</p> | | |
| | <p>Compare the arrays compareBuffer = 04 81 80 00 01...7F</p> | Result of javacard.framework.Util.arrayCompare() is 00h | |
| 14 | <p>Clear the handler Successful call tag = 04 value1 = 00 value2 = 01 ... F9 value2Offset = 0 value2Length = 249</p> | | |
| | Call getLength() method | result = 253 | |
| | <p>Call copy() method</p> | | |
| | <p>Compare handler compareBuffer = 04 81 FA 00 01...F9</p> | Result of javacard.framework.Util.arrayCompare() is 00h | |

6.2.7.22.4 Test Coverage

| CRR number | Test case number |
|------------|--------------------------------------|
| N1 | 10, 11, 12, 13, 14 |
| N2 | 9 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| C1 | 7 |
| C2 | Does not apply for Proactive Handler |
| C3 | 8 |

6.2.7.23 Method clear

Test Area Reference: API_2_PAH_CLER

6.2.7.23.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
void clear()
    throws ToolkitException EditHandler
```

Normal execution

CRRN1: Clears the TLV list of an EditHandler

CRRN2: Resets the current TLV selected.

Parameters error

No requirements

Context errors

CRR1: if the EditHandler buffer is busy, a ToolkitException is thrown with reason code HANDLER_NOT_AVAILABLE

6.2.7.23.2 Test suite files

Test Script: API_2_PAH_CLER_1.scr
 Test Applet: API_2_PAH_CLER_1.java
 Load Script: API_2_PAH_CLER_1.ldr
 Cleanup Script: API_2_PAH_CLER_1.clr
 Parameter File: API_2_PAH_CLER_1.par

6.2.7.23.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | Initialise the handler Select Command Details TLV Call the getLength() method | Result of getLength() is not null | |
| | Clear the handler Call the getLength() method | Result of getLength() is 0 | |
| 2 | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |

6.2.7.23.4 Test Coverage

| CRR number | Test case number |
|------------|--------------------------------------|
| N1 | 1 |
| N2 | 2 |
| C1 | Does not apply for Proactive Handler |

6.2.8 Class ProactiveResponseHandler

6.2.8.1 Method copyAdditionalInformation

Test Area Reference: API_2_PRH_CPAI_BSS

6.2.8.1.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short copyAdditionalInformation(byte[] dstBuffer,
    short dstOffset,
    short dstLength)
    throws java.lang.NullPointerException,
    java.lang.ArrayIndexOutOfBoundsException,
    ToolkitException
```

Normal execution

CRRN1: The copyAdditionalInformation() method shall copy a part of the additional information field from Result TLV element in dstBuffer, using dstOffset and dstLength.

CRRN2: dstBuffer shall only be modified from dstOffset to (dstOffset + dstLength – 1) (included).

CRRN3: The method returns (dstOffset + dstLength).

CRRN4: If a Result TLV element is available, it becomes the TLV selected after a call to the method.

CRRN5: The method shall copy from the first Result TLV.

Parameter errors

CRRP1: A NullPointerException shall be thrown if dstBuffer is null.

CRRP2: An ArrayIndexOutOfBoundsException shall be thrown if dstOffset or dstLength or both would cause access outside array bounds.

Context errors

CRRC1: A ToolkitException.UNAVAILABLE_ELEMENT shall be thrown in case of unavailable Result TLV element.

CRRC2: A ToolkitException.OUT_OF_TLV_BOUNDARIES shall be thrown if dstLength is greater than the value field of the available TLV.

6.2.8.1.2 Test Suite files

Test Script: API_2_PRH_CPAI_BSS_1.scr
 Test Applet: API_2_PRH_CPAI_BSS_1.java
 Load Script: API_2_PRH_CPAI_BSS_1.ldr
 Cleanup Script: API_2_PRH_CPAI_BSS_1.clr
 Parameter File: API_2_PRH_CPAI_BSS_1.par

6.2.8.1.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|--------------------------------|
| 1 | Build and send a DISPLAY TEXT command qualifier = 0 dcs = 4 buffer = "Text" | | DISPLAY TEXT Proactive command |
| | Terminal Response with 11 additional bytes Result TLV = 03 0C 01 01 23 45 67 89 AB CD EF 01 23 45 | | |
| | NULL as parameter to dstBuffer dstBuffer = NULL | NullPointerException is thrown | |
| 2 | dstOffset > dstBuffer.length dstBuffer.length = 10 dstOffset = 11 dstLength = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | dstOffset < 0 dstBuffer.length = 10 dstOffset = -1 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | dstLength > dstBuffer.length dstBuffer.length = 10 dstOffset = 0 dstLength = 11 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | dstOffset + dstLength > dstBuffer.length dstBuffer.length = 10 dstOffset = 6 dstLength = 5 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | dstLength < 0 dstBuffer.length = 10 dstOffset = 6 dstLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |

| | | | |
|----|---|---|--------------------------------|
| | Terminal Response with 5 additional bytes Result TLV = 03 06 01 01 23 45 67 89 | | |
| | Successfull call, dstBuffer is the whole buffer dstBuffer.length = 5 dstOffset = 0 dstLength = 5 | result of copyAdditionalInformation() is 05h. | |
| 8 | Compare dstBuffer using arrayCompare() src = {01, 23, 45, 67, 89} srcOffset = 00 dest = dstBuffer destOffset = 0 length = 5 | result of arrayCompare() is 00h. | |
| 9 | Call the getValueLength() method | Result is 06h. | |
| 10 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response with 6 additional bytes Result TLV = 03 07 01 AB CD EF FE DC BA | | |
| | Successfull call, dstBuffer is part of a buffer dstBuffer.length = 7 dstOffset = 2 dstLength = 5 | result of copyAdditionalInformation() is 07h. | |
| 11 | Compare dstBuffer using arrayCompare() src = {AB, CD, EF, FE, DC} srcOffset = 00 dest = dstBuffer destOffset = 2 length = 5 | result of arrayCompare() is 00h. | |
| 12 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response with 7 additional bytes Result TLV = 03 08 01 FE DC BA 98 76 54 32 | | |
| | Successfull call, dstBuffer is part of a buffer dstBuffer.length = 7 dstOffset = 0 dstLength = 5 | result of copyAdditionalInformation() is 05h. | |
| 13 | Compare dstBuffer using arrayCompare() src = {FE, DC, BA, 98, 76} srcOffset = 00 dest = dstBuffer destOffset = 0 length = 5 | result of arrayCompare() is 00h. | |
| 14 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response with 8 additional bytes Result TLV = 03 09 01 00 11 22 33 44 55 66 77 | | |
| | Successfull call, dstBuffer is the whole buffer dstBuffer.length = 9 dstOffset = 2 dstLength = 5 | result of copyAdditionalInformation() is 07h. | |
| 15 | Compare dstBuffer using arrayCompare() src = {00, 11, 22, 33, 44} srcOffset = 00 dest = dstBuffer destOffset = 2 length = 5 | result of arrayCompare() is 00h. | |
| 16 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response with F2h additional bytes Result TLV = 03 81 F3 01 00 01 02 03... | | |
| | Successfull call to the method dstBuffer.length = F2h | result of copyAdditionalInformation() is | |

| | | | |
|----|--|--|--------------------------------|
| | dstOffset = 0 dstLength = F2h | F2h. | |
| 17 | Compare dstBuffer using arrayCompare() src = {00, 01, 02, 03, 04...} srcOffset = 00 dest = dstBuffer destOffset = 0 length = F2h | result of arrayCompare() is 00h. | |
| 18 | Call the getValueLength() method | Result is F3h. | |
| 19 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response with 5 additional bytes Result TLV = 03 06 01 00 11 22 33 44 | | |
| | dstLength > data available dstBuffer.length = 6 dstOffset = 0 dstLength = 6 | OUT_OF_TLV_BOUNDARIES ToolkitException is thrown | |
| 20 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response with 5 additional bytes Result TLV = 03 06 01 00 11 22 33 44 | | |
| | Initialise dstBuffer dstBuffer = {00h, 01h, 02h, 03h...} | | |
| | Call the copyAdditionalInformation() method dstBuffer.length = 20 dstOffset = 5 dstLength = 5 | | |
| | Compare dstBuffer using arrayCompare() src = { 00h, 01h, 02h, 03h, 04h, 00h, 11h, 22h, 33h, 44h, 0Ah, 0Bh, 0Ch, 0Dh, 0Eh, 0Fh, 10h, 11h, 12h, 13h} srcOffset = 0 dest = dstBuffer destOffset = 0 length = 20 | result of arrayCompare() is 00h | |
| 21 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response with 2 Result TLV elements 1st Result TLV = 03 06 01 01 23 45 67 89 2nd Result TLV = 03 01 00 | | |
| | Successfull call to copyAdditionalInformation() dstBuffer.length = 5 dstOffset = 0 dstLength = 5 | result of copyAdditionalInformation() is 05h. | |
| 22 | Compare dstBuffer using arrayCompare() src = {01, 23, 45, 67, 89} srcOffset = 00 dest = dstBuffer destOffset = 0 length = 5 | result of arrayCompare() is 00h. | |
| 23 | Call the getValueLength() method | Result is 06h. | |
| 24 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response without Result Simple TLV | ToolkitException.UNAVAILABLE_ELEMENT is thrown by send() | |
| | ProactiveResponseHandler, getTheHandler call copyAdditionalInformation() | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |

6.2.8.1.4 Test Coverage

| CRR number | Test case number |
|------------|---------------------------|
| N1 | 8, 11, 13, 15, 17, 20, 22 |
| N2 | 20 |
| N3 | 7, 10, 12, 14, 16, 21 |
| N4 | 9, 18, 23 |
| N5 | 21, 22, 23 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| C1 | 24 |
| C2 | 19 |

6.2.8.2 Method copyTextString

Test Area Reference: API_2_PRH_CPTS_BS

6.2.8.2.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short copyTextString(byte[] dstBuffer,
                             short dstOffset)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: The copyTextString() method copies the text string value from the first Text String TLV element, using dstBuffer and dstOffset.

CRRN2: If a Text String TLV element is available, it becomes the TLV selected.

CRRN3: The method returns (dstOffset + length of copied value).

Parameter errors

CRRP1: A NullPointerException shall be thrown if dstBuffer is null.

CRRP2: A ArrayIndexOutOfBoundsException shall be thrown if dstOffset or dstOffset + (length of the TextString to be copied, without the Data Coding Scheme included), as specified for the returned value, would cause access outside array bounds.

Context errors

CRRC1: A ToolkitException.UNAVAILABLE_ELEMENT shall be thrown in case of unavailable Text String TLV element.

6.2.8.2.2 Test Suite files

Test Script: API_2_PRH_CPTS_BS_1.scr
 Test Applet: API_2_PRH_CPTS_BS_1.java
 Load Script: API_2_PRH_CPTS_BS_1.ldr
 Cleanup Script: API_2_PRH_CPTS_BS_1.clr
 Parameter File: API_2_PRH_CPTS_BS_1.par

6.2.8.2.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|--|
| 1 | Build and send a GET INPUT command qualifier = 00h dcs = 04h buffer = 'Text' minRespLength = 00h maxRespLength = FFh | | GET INPUT Proactive command |
| | Terminal Response Text String TLV = 0D 02 04 41 | | |
| | ProactiveResponseHandler.getTheHandler() ; call the copyTextString() method with a null dstBuffer dstBuffer = null dstOffset = 0 | NullPointerException is thrown | |
| 2 | Build and send a GET INPUT command | | GET INPUT Proactive command Proactive |
| | Terminal Response Text String TLV = 0D 04 04 "ABC" | | |
| | dstOffset + text length > dstBuffer.length dstBuffer.length = 04h dstOffset = 02h | ArrayIndexOutOfBoundsException is thrown | |
| 3 | dstOffset < 0 dstBuffer.length = 04h dstOffset = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | Build and send a DISPLAY TEXT command qualifier = 00h dcs = 04h buffer = 'Text' | | DISPLAY TEXT Proactive command |
| | Terminal Response without Text String TLV | | |
| | ProactiveResponseHandler.getTheHandler() ; call the copyTextString() method | UNAVAILABLE_ELEMENT ToolkitException is thrown | |
| 5 | Build and send a GET INPUT command | | GET INPUT Proactive command Proactive |
| | Terminal Response with a null Text String TLV Text String TLV = 0D 00 | | |
| | Initialise dstBuffer dstBuffer = {F00h, F01h, F02h, F03h} | | |
| | Call the copyTextString() method dstBuffer.length = 04h dstOffset = 02h | Result of copyTextString() is 02h | |
| 6 | Compare dstBuffer using arrayCompare() src = {0F0h, 0F1h, 0F2h, 0F3h} srcOffset = 00h dest = dstBuffer destOffset = 00h length = 04h | Result of arrayCompare() is 00h | |
| 7 | Build and send a GET INPUT command | | GET INPUT Proactive command Proactive |
| | Terminal Response with text length = 01h Text String TLV = 0D 02 04 41 | | |
| | Initialise dstBuffer dstBuffer = {00h, 01h, 02h, 03h} | | |
| | Call the copyTextString() method dstBuffer.length = 04h dstOffset = 00h | Result of copyTextString() is 01h | |

| | | | |
|----|--|-----------------------------------|--|
| 8 | Compare dstBuffer using arrayCompare() src = {41h, 01h, 02h, 03h} srcOffset = 00h dest = dstBuffer destOffset = 00h length = 04h | Result of arrayCompare() is 00h | |
| 9 | Build and send a GET INPUT command | | GET INPUT Proactive command Proactive |
| | Terminal Response with text length = 02h Text String TLV = 0D 03 04 42 43 | | |
| | Initialise dstBuffer dstBuffer = {00h, 01h, 02h, 03h} | | |
| | Call the copyTextString() method dstBuffer.length = 04h dstOffset = 02h | Result of copyTextString() is 04h | |
| 10 | Compare dstBuffer using arrayCompare() src = {00h, 01h, 42h, 43h} srcOffset = 00h dest = dstBuffer destOffset = 00h length = 04h | Result of arrayCompare() is 00h | |
| 11 | Call the getValueLength() method | Result is 03h | |
| 12 | Build and send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response with text length = 7Eh Text String TLV = 0D 7F 04 01 02 ... 7E | | |
| | Initialise dstBuffer dstBuffer = {00h, 00h ... 00h} | | |
| | Call the copyTextString() method dstBuffer.length = 7Eh dstOffset = 00h | Result of copyTextString() is 7Eh | |
| 13 | Compare dstBuffer using arrayCompare() src = {01h, ..., 7Eh} srcOffset = 00h dest = dstBuffer destOffset = 00h length = 7Eh | Result of arrayCompare() is 00h | |
| 14 | Call the getValueLength() method | Result is 7Fh | |
| 15 | Build and send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response with text length = 7Fh Text String TLV = 0D 81 80 04 01 02 ...7F | | |
| | Initialise dstBuffer dstBuffer = {00h, 01h ... FFh} | | |
| | Call the copyTextString() method dstBuffer.length = FFh dstOffset = 10h | Result of copyTextString() is 8Fh | |
| 16 | Compare dstBuffer using arrayCompare() src = {00h, 01h, ... 0Fh, 01h, ...7Fh, 8Fh, ... FFh} srcOffset = 00h dest = dstBuffer destOffset = 00h length = FFh | Result of arrayCompare() is 00h | |
| 17 | Build and send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response with text length = EFh Text String TLV = 0D 81 F0 04 01 02 ... EF | | |
| | Initialise dstBuffer | | |

| | | | |
|----|---|-----------------------------------|-----------------------------|
| | dstBuffer = {00h, 00h ... 00h} | | |
| | Call the copyTextString() method dstBuffer.length = FFh dstOffset = 00h | Result of copyTextString() is EFh | |
| 18 | Compare dstBuffer using arrayCompare() src = {01h, ...EFh, 00h ... 00h } srcOffset = 00h dest = dstBuffer destOffset = 00h length = FFh | Result of arrayCompare() is 00h | |
| 19 | Build and send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response with two Text String TLV 1st Text String TLV = 0D 03 04 42 43 2nd Text String TLV = 0D 02 04 44 | | |
| | Initialise dstBuffer dstBuffer = {00h, 01h, 02h, 03h} | | |
| | Call the copyTextString() method dstBuffer.length = 04h dstOffset = 02h | Result of copyTextString() is 04h | |
| 20 | Compare dstBuffer using arrayCompare() src = {00h, 01h, 42h, 43h} srcOffset = 00h dest = dstBuffer destOffset = 00h length = 04h | Result of arrayCompare() is 00h | |
| 21 | Call the getValueLength() method | Result is 03h | |

6.2.8.2.4 Test Coverage

| CRR number | Test case number |
|------------|--------------------------|
| N1 | 6, 8, 10, 13, 16, 18, 20 |
| N2 | 11, 14, 21 |
| N3 | 5, 7, 9, 12, 15, 17, 19 |
| P1 | 1 |
| P2 | 2, 3 |
| C1 | 4 |

6.2.8.3 Method getAdditionalInformationLength

Test Area Reference: API_2_PRH_GTIL

6.2.8.3.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short getAdditionalInformationLength()
    throws ToolkitException
```

Normal execution

CRRN1: This method returns the length of the additional information field from the first Result TLV in the ProactiveResponseHandler.

CRRN2: After a successful execution of the method, the Result TLV becomes the selected TLV of the ProactiveResponseHandler.

Parameter errors

No requirements

Context errors

CRRC1: A ToolkitException.UNAVAILABLE_ELEMENT shall be thrown in case of unavailable Result TLV element.

6.2.8.3.2 Test Suite files

Test Script: API_2_PRH_GTIL_1.scr
 Test Applet: API_2_PRH_GTIL_1.java
 Load Script: API_2_PRH_GTIL_1.ldr
 Cleanup Script: API_2_PRH_GTIL_1.clr
 Parameter File: API_2_PRH_GTIL_1.par

6.2.8.3.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|-----------------|---|
| 1 | Build and send a DISPLAY TEXT command qualifier = 00h dcs = 04h buffer = 'Text' | | DISPLAY TEXT Proactive command |
| | Terminal Response without additional information | | |
| | ProactiveResponseHandler.getTheHandler() ; call the getAdditionalInformationLength() method | Result is 00h | |
| 2 | Call the getValueLength() method | Result is 01h | |
| 3 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT ProactiveProactive command |
| | Terminal Response with 1 additional byte Result TLV = 03 02 02 55 | | |
| | ProactiveResponseHandler.getTheHandler() ; call the getAdditionalInformationLength() method | Result is 01h | |
| 4 | Call the getValueLength() method | Result is 02h | |
| 5 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT ProactiveProactive command |
| | Terminal Response with 7Eh additional bytes Result TLV = 03 7F 02 55 55 55 ... | | |
| | ProactiveResponseHandler.getTheHandler() ; call the getAdditionalInformationLength() method | Result is 7Eh | |
| 6 | Call the getValueLength() method | Result is 7Fh | |
| 7 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response with 7Fh additional bytes Result TLV = 03 81 80 02 55 55 55 ... | | |
| | ProactiveResponseHandler.getTheHandler() ; call the getAdditionalInformationLength() method | Result is 7Fh | |
| 8 | Call the getValueLength() method | Result is 80h | |
| 9 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response with 80h additional bytes | | |

| | | | |
|----|--|---|-----------------------------------|
| | Result TLV = 03 81 81 02 55 55 55 ... | | |
| | ProactiveResponseHandler.getTheHandler() ; call the getAdditionalInformationLength() method | Result is 80h | |
| 10 | Call the getValueLength() method | Result is 81h | |
| 11 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response with F2h additional bytes Result TLV = 03 81 F3 02 55 55 55 ... | | |
| | ProactiveResponseHandler.getTheHandler() ; call the getAdditionalInformationLength() method | Result is F2h | |
| 12 | Call the getValueLength() method | Result is F3h | |
| 13 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response with 2 Result TLV 1st Result TLV = 03 03 02 01 23 2nd Result TLV = 03 01 00 | | |
| | ProactiveResponseHandler.getTheHandler() ; call the getAdditionalInformationLength() method | Result is 02h | |
| 14 | Call the getValueLength() method | Result is 03h | |
| 15 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response without Result Simple TLV | ToolkitException.UNAVAILABLE_ELEMENT is thrown by send() | |
| | Get ProactiveResponseHandler | | |
| | Call the getAdditionalInformationLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown by getAdditionalInformationLength () | |

6.2.8.3.4 Test Coverage

| CRR number | Test case number |
|------------|------------------------|
| N1 | 1, 3, 5, 7, 9, 11, 13 |
| N2 | 2, 4, 6, 8, 10, 12, 14 |
| C1 | 15 |

6.2.8.4 Method getGeneralResult

Test Area Reference: API_2_PRH_GTGR

6.2.8.4.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte getGeneralResult()
    throws ToolkitException
```

Normal execution

CRRN1: This method returns the general result of a proactive command.

CRRN2: After a successful execution of the method, the Result TLV becomes the selected TLV of the ProactiveResponseHandler.

Parameter errors

No requirements

Context errors

CRRC1: A ToolkitException.UNAVAILABLE_ELEMENT shall be thrown in case of unavailable Result TLV element.

CRRC2: A ToolkitException.OUT_OF_TLV_BOUNDARIES shall be thrown if the general result byte is missing in the Result Simple TLV.

6.2.8.4.2 Test Suite files

Test Script: API_2_PRH_GTGR_1.scr
 Test Applet: API_2_PRH_GTGR_1.java
 Load Script: API_2_PRH_GTGR_1.ldr
 Cleanup Script: API_2_PRH_GTGR_1.clr
 Parameter File: API_2_PRH_GTGR_1.par

6.2.8.4.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|-------------------------------------|--------------------------------|
| 1 | Build and send a DISPLAY TEXT command qualifier = 00h dcs = 04h buffer = 'Text' | | DISPLAY TEXT Proactive command |
| | Terminal Response with General Result = 00 (command performed successfully) | | |
| | ProactiveResponseHandler.getTheHandler() Call the getGeneralResult() method | Result of getGeneralResult() is 00h | |
| 2 | Call the getValueLength() method | Result is 01h | |
| 3 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response with General Result = 01, without Additional information on result (command performed with partial comprehension) | | |
| | ProactiveResponseHandler.getTheHandler() Call the getGeneralResult() method | Result of getGeneralResult() is 01h | |
| 4 | Call the getValueLength() method | Result is 01h | |
| 5 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response with General Result = 01, with Additional information on result Result TLV = 03 02 01 55 (command performed with partial comprehension) | | |
| | ProactiveResponseHandler.getTheHandler() Call the getGeneralResult() method | Result of getGeneralResult() is 01h | |
| 6 | Call the getValueLength() method | Result is 02h | |
| 7 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response with General Result = 02 Result TLV = 03 04 02 65 43 21 (Missing | | |

| | | | |
|----|---|--|--------------------------------|
| | information) | | |
| | ProactiveResponseHandler.getTheHandler() Call the getGeneralResult() method | Result of getGeneralResult() is 02h | |
| 8 | Call the getValueLength() method | Result is 04h | |
| 9 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response with 7Fh additional bytes Result TLV = 03 81 80 02 55 55 55 ... | | |
| | ProactiveResponseHandler.getTheHandler() ; call the getGeneralResult() method | Result is 02h | |
| 10 | Call the getValueLength() method | Result is 80h | |
| 11 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response with 2 Result TLV 1st Result TLV = 03 02 02 12 2nd Result TLV = 03 03 03 34 56 | | |
| | ProactiveResponseHandler.getTheHandler() ; call the getGeneralResult() method | Result is 02h | |
| 12 | Call the getValueLength() method | Result is 02h | |
| 13 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response without Result Simple TLV | ToolkitException.UNAVAILABLE_ELEMENT is thrown by send() | |
| | ProactiveResponseHandler.getTheHandler() ; call the getGeneralResult() method | UNAVAILABLE_ELEMENT ToolkitException is thrown | |
| 14 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response without General Result Byte in Result Simple TLV | ToolkitException.UNAVAILABLE_ELEMENT is thrown by send() | |
| | ProactiveResponseHandler.getTheHandler() ; call the getGeneralResult() method Result TLV = 03 00 | OUT_OF_TLV_BOUNDARIES ToolkitException is thrown | |

6.2.8.4.4 Test Coverage

| CRR number | Test case number |
|------------|--------------------|
| N1 | 1, 3, 5, 7, 9, 11 |
| N2 | 2, 4, 6, 8, 10, 12 |
| C1 | 13 |
| C2 | 14 |

6.2.8.5 Method getItemIdentifier

Test Area Reference: API_2_PRH_GTII

6.2.8.5.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte getItemIdentifier()
```


throws ToolkitException

Normal execution

CRRN1: The method returns the item identifier byte value from the first Item Identifier TLV element.

CRRN2: If an Item Identifier TLV element is available, it becomes the TLV selected.

Parameter errors

No requirements

Context errors

CRRC1: A ToolkitException.UNAVAILABLE_ELEMENT shall be thrown in case of unavailable Item Identifier TLV element.

CRRC2: A ToolkitException.OUT_OF_TLV_BOUNDARIES shall be thrown if the item identifier byte is missing in the Item Identifier Simple TLV.

6.2.8.5.2 Test Suite files

Test Script: API_2_PRH_GTII_1.scr
 Test Applet: API_2_PRH_GTII_1.java
 Load Script: API_2_PRH_GTII_1.ldr
 Cleanup Script: API_2_PRH_GTII_1.clr
 Parameter File: API_2_PRH_GTII_1.par

6.2.8.5.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|--------------------------------|
| 1 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response (no Item Identifier TLV available) | | |
| | Call to getItemIdentifier() with unavailable Item Identifier TLV | UNAVAILABLE_ELEMENT ToolkitException is thrown | |
| 2 | Build and send a SELECT ITEM command with 2 items (ID=01, 02) | | SELECT ITEM Proactive command |
| | Terminal Response with Item 1 selected Item Identifier TLV = 10 01 01 | | |
| | Call the getItemIdentifier() method | Result is 01h | |
| 3 | Call the getValueByte() method valueOffset = 00h | Result is 01h | |
| 4 | Build and send a SELECT ITEM command with 3 items (ID=03, 05, 07) | | SELECT ITEM Proactive command |
| | Terminal Response with Item 5 selected Item Identifier TLV = 10 01 05 | | |
| | Call the getItemIdentifier() method | Result is 05h | |
| 5 | Call the getValueByte() method valueOffset = 00h | Result is 05h | |
| 6 | Build and send a SELECT ITEM command with 3 items (ID=FDh, FEh, FFh) | | SELECT ITEM Proactive command |
| | Terminal Response with Item FFh selected | | |

| | | | |
|----|---|---|--------------------------------|
| | Item Identifier TLV = 10 01 FF | | |
| | Call the getItemIdentifier() method | Result is FFh | |
| 7 | Call the getValueByte() method valueOffset = 00h | Result is FFh | |
| 8 | Build and send a SELECT ITEM command with 3 items (ID=FDh, FEh, FFh) | | SELECT ITEM Proactive command |
| | Terminal Response with 2 Item Identifier TLV 1st Item Identifier TLV = 10 01 FFh 2nd Item Identifier TLV = 10 01 FEh | | |
| | Call the getItemIdentifier() method | Result is FFh | |
| 9 | Call the getValueByte() method valueOffset = 00h | Result is FFh | |
| 10 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response without item identifier in the Item Identifier Simple TLV Item Identifier TLV = 10 00 | | |
| | Call to getItemIdentifier() | OUT_OF_TLV_BOUNDARIES ToolkitException is thrown | |

6.2.8.5.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 2, 4, 6, 8 |
| N2 | 3, 5, 7, 9 |
| C1 | 1 |
| C2 | 10 |

6.2.8.6 Method getTextStringCodingScheme

Test Area Reference: API_2_PRH_GTCS

6.2.8.6.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte getTextStringCodingScheme()
    throws ToolkitException
```

Normal execution

CRRN1: This method returns the data coding scheme from the first Text String TLV element.

CRRN2: If a Text String TLV element is available, it becomes the TLV selected.

Parameter errors

No requirements

Context errors

CRR1: A ToolkitException.UNAVAILABLE_ELEMENT shall be thrown in case of unavailable Text String TLV element.

CRR2: A ToolkitException.OUT_OF_TLV_BOUNDARIES shall be thrown if the Text String TLV is present with a length of 0.

6.2.8.6.2 Test Suite files

Test Script: API_2_PRH_GTCS_1.scr

Test Applet: API_2_PRH_GTCS_1.java
 Load Script: API_2_PRH_GTCS_1.ldr
 Cleanup Script: API_2_PRH_GTCS_1.clr
 Parameter File: API_2_PRH_GTCS_1.par

6.2.8.6.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|--------------------------------|
| 1 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response (no Text String TLV element available) | | |
| | Call to getTextStringCodingScheme() with unavailable Text String TLV | UNAVAILABLE_ELEMENT ToolkitException is thrown | |
| 2 | Build and send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response with a null Text String TLV Text String TLV = 0D 00 | | |
| | Call the getTextStringCodingScheme() method | OUT_OF_TLV_BOUNDARIES ToolkitException is thrown | |
| 3 | Build and send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response with text length = 01h, DCS = 04h Text String TLV = 0D 02 04 "A" | | |
| | Call the getTextStringCodingScheme() method | Result is 04h | |
| 4 | Call the getValueLength() method | Result is 02h | |
| 5 | Build and send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response with text length = 02h, DCS = 00h Text String TLV = 0D 03 00 "BB" | | |
| | Call the getTextStringCodingScheme() method | Result is 00h | |
| 6 | Call the getValueLength() method | Result is 03h | |
| 7 | Build and send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response with text length = 7Eh, DCS = 08h Text String TLV = 0D 7F 08 01 02 ... 7E | | |
| | Call the getTextStringCodingScheme() method | Result is 08h | |
| 8 | Call the getValueLength() method | Result is 7Fh | |
| 9 | Build and send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response with text length = 7Fh, | | |

| | | | |
|----|--|---------------|-----------------------------|
| | DCS = 04h Text String TLV = 0D 81 80 04 01 02 ... 7F | | |
| | Call the getTextStringCodingScheme() method | Result is 04h | |
| 10 | Call the getValueLength() method | Result is 80h | |
| 11 | Build and send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response with text length = EFh, DCS = 08h Text String TLV = 0D 81 F0 08 01 02 ... EE EF | | |
| | Call the getTextStringCodingScheme() method | Result is 08h | |
| 12 | Call the getValueLength() method | Result is F0h | |
| 13 | Build and send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response with 2 Text String TLV 1st Text String TLV = 0D 02 04 41 2nd Text String TLV = 0D 03 08 42 43 | | |
| | Call the getTextStringCodingScheme() method | Result is 04h | |
| 14 | Call the getValueLength() method | Result is 02h | |

6.2.8.6.4 Test Coverage

| CRR number | Test case number |
|------------|---------------------|
| N1 | 3, 5, 7, 9, 11, 13 |
| N2 | 4, 6, 8, 10, 12, 14 |
| C1 | 1 |
| C2 | 2 |

6.2.8.7 Method GetTextStringLength

Test Area Reference: API_2_PRH_GTTL

6.2.8.7.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short getTextStringLength()
    throws ToolkitException
```

Normal execution

CRRN1: The getTextStringLength() method returns the text string length value from the first Text String TLV element.

CRRN2: If a Text String TLV element is available, it becomes the TLV selected.

Parameter errors

No requirements

Context errors

CRRC1: A ToolkitException.UNAVAILABLE_ELEMENT shall be thrown in case of unavailable Text String TLV element.

6.2.8.7.2 Test Suite files

Test Script: API_2_PRH_GTTT_1.scr
 Test Applet: API_2_PRH_GTTT_1.java
 Load Script: API_2_PRH_GTTT_1.ldr
 Cleanup Script: API_2_PRH_GTTT_1.clr
 Parameter File: API_2_PRH_GTTT_1.par

6.2.8.7.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|--------------------------------|
| 1 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response (no Text String TLV element available) | | |
| | Call to getTextStringLength() with unavailable Text String TLV | UNAVAILABLE_ELEMENT ToolkitException is thrown | |
| 2 | Build and send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response with a null Text String TLV Text String TLV = 0D 00 | | |
| | Call the getTextStringLength() method | Result is 00h | |
| 3 | Call the getValueLength() method | Result is 00h | |
| 4 | Build and send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response with text length = 01h, DCS = 04h Text String TLV = 0D 02 04 "A" | | |
| | Call the getTextStringLength() method | Result is 01h | |
| 5 | Call the getValueLength() method | Result is 02h | |
| 6 | Build and send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response with text length = 02h, DCS = 00h Text String TLV = 0D 03 00 "BB" | | |
| | Call the getTextStringLength() method | Result is 02h | |
| 7 | Call the getValueLength() method | Result is 03h | |
| 8 | Build and send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response with text length = 7Eh, DCS = 08h Text String TLV = 0D 7F 08 01 02 ... 7E | | |
| | Call the getTextStringLength() method | Result is 7Eh | |
| 9 | Call the getValueLength() method | Result is 7Fh | |

| | | | |
|----|--|---------------|-----------------------------|
| 10 | Build and send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response with text length = 7Fh, DCS = 04h Text String TLV = 0D 81 80 04 01 02 ... 7F | | |
| | Call the getTextStringLength() method | Result is 7Fh | |
| 11 | Call the getValueLength() method | Result is 80h | |
| 12 | Build and send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response with text length = EFh, DCS = 04h Text String TLV = 0D 81 F0 04 01 02 ... EE EF | | |
| | Call the getTextStringLength() method | Result is EFh | |
| 13 | Call the getValueLength() method | Result is F0h | |
| 14 | Build and send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response with 2 Text String TLV 1st Text String TLV = 0D 02 04 41 2nd Text String TLV = 0D 03 08 42 43 | | |
| | Call the getTextStringLength() method | Result is 01h | |
| 15 | Call the getValueLength() method | Result is 02h | |

6.2.8.7.4 Test Coverage

| CRR number | Test case number |
|------------|------------------------|
| 1 | 2, 4, 6, 8, 10, 12, 14 |
| 2 | 3, 5, 7, 9, 11, 13, 15 |
| 3 | 1 |

6.2.8.8 Method getTheHandler

Test Area Reference: API_2_PRH_GTHD

6.2.8.8.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public static ProactiveResponseHandler getTheHandler()
    throws ToolkitException
```

Normal execution

CRRN1: The method shall return the single system instance of the ProactiveHandler class.

CRRN2: The EnvelopeHandler is a Temporary JCRE Entry Point Object

Parameter errors

No requirements

Context errors

CRR1: The method shall throw ToolkitException.HANDLER_NOT_AVAILABLE if the handler is busy.

6.2.8.8.2 Test Suite files

Test Script: API_2_PRH_GTHD_1.scr
 Test Applet: API_2_PRH_GTHD_1.java
 Load Script: API_2_PRH_GTHD_1.ldr
 Cleanup Script: API_2_PRH_GTHD_1.clr
 Parameter File: API_2_PRH_GTHD_1.par

6.2.8.8.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|-------------------|
| 1 | Build and send a Proactive Command | | Proactive Command |
| | Terminal Response | | |
| | getTheHandler() twice | The returned objects shall be the same | |
| 2 | getTheHandler() | The reference shall be a ProactiveResponseHandler | |
| 3 | getTheHandler() | The reference shall not be null | |

6.2.8.8.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 1, 2, 3 |
| N2 | To be checked in Framework tests and insert here cross reference |
| C1 | To be checked in Framework tests and insert here cross reference |

6.2.8.9 Method getLength

Test Area Reference API_2_PRH_GLEN

6.2.8.9.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short getLength()
    throws ToolkitException
```

Normal execution

CRRN1: returns the length in bytes of the TLV list.

Parameter errors

Context errors

CRR1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException.HANDLER_NOT_AVAILABLE.

6.2.8.9.2 Test Suite files

Test Script: API_2_PRH_GLEN_1.scr
 Test Applet: API_2_PRH_GLEN_1.java
 Load Script: API_2_PRH_GLEN_1.ldr
 Cleanup Script: API_2_PRH_GLEN_1.clr
 Parameter File: API_2_PRH_GLEN_1.par

6.2.8.9.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|------------------------------|--------------------------------|
| 1 | Build and send a Display Text command | | DISPLAY TEXT Proactive command |
| | Terminal Response without additional information in General Result TLV | | |
| | ProactiveResponseHandler.getTheHandler() getLength() | Result of getLength() is 12 | |
| 2 | Build and send a Display Text command | | DISPLAY TEXT Proactive command |
| | Terminal Response with F2h additional information in General Result TLV | | |
| | ProactiveResponseHandler.getTheHandler() getLength() | Result of getLength() is FFh | |

6.2.8.9.4 Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | 1, 2 |
| C1 | Does not apply for Proactive Response Handler |

6.2.8.10 Method copy

Test Area Reference API_2_PRH_COPY_BSS

6.2.8.10.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short copy(byte[] dstBuffer,
                 short dstOffset,
                 short dstLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: copies the simple TLV list contained in the handler to the destination byte array.

CRRN2: returns dstOffset + dstLength.

Parameter errors

CRRP1: if dstBuffer is null a NullPointerException is thrown.

CRRP2: if dstOffset or dstLength or both would cause access outside array bounds, or if dstLength is negative, an ArrayIndexOutOfBoundsException is thrown.

CRRP3: if dstLength is grater than the length of the simple TLV List, an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException. OUT_OF_TLV_BOUNDARIES.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.8.10.2 Test Suite files

Test Script: API_2_PRH_COPY_BSS_1.scr
 Test Applet: API_2_PRH_COPY_BSS_1.java
 Load Script: API_2_PRH_COPY_BSS_1.ldr
 Cleanup Script: API_2_PRH_COPY_BSS_1.clr
 Parameter File: API_2_PRH_COPY_BSS_1.par

6.2.8.10.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|--------------------------------|
| 1 | Send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response without Additional Information in General Result TLV: 81 03 01 21 00 02 02 82 81 03 01 00 | | |
| | ProactiveResponseHandler.getTheHandler() copy() with NULL as parameter to dstBuffer | NullPointerException is thrown | |
| 2 | dstOffset > dstBuffer.length dstBuffer.length = 5 dstOffset = 6 dstLength = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | dstOffset < 0 dstBuffer.length = 5 dstOffset = -1 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 0 dstLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | dstOffset + dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 3 dstLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | dstLength < 0 dstBuffer.length = 5 dstOffset = 0 dstLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | dstLength > length of the simple TLV list dstBuffer.length = 13 dstOffset = 0 dstLength = 13 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 8 | Successful call, dstBuffer is the whole buffer dstBuffer.length = 12 dstOffset = 0 dstLength = 12 | Result of copy() is 12 | |
| 9 | Compare the buffer with buffer: 81 03 01 21 00 02 02 82 81 03 01 00 | Result of arrayCompare() is 0 | |
| 10 | Successful call, dstBuffer is part of a buffer dstBuffer.length = 20 dstOffset = 3 dstLength = 12 | Result of copy() is 15 | |
| 11 | Compare the whole buffer Reference = 00 01 02 81 03 01 21 00 | Result of arrayCompare() is 0 | |

| | | | |
|----|---|-------------------------------|--|
| | 02 02 82 81 03 01 00 0F 10 11 12 13 | | |
| 12 | Initialize dstBuffer dstBuffer = 00h 01h 02h ... 13h | | |
| | Successful call, dstBuffer is part of a buffer dstBuffer.length = 20 dstOffset = 3 dstLength = 9 | Result of copy() is 12 | |
| 13 | Compare the whole buffer Reference = 00 01 02 81 03 01 21 00 02 02 82 81 0C 0D 0E 0F 10 11 12 13 | Result of arrayCompare() is 0 | |

6.2.8.10.4 Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | 9, 11, 13 |
| N2 | 8, 10, 12 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7 |
| C1 | Does not apply for Proactive Response Handler |

6.2.8.11 Method findTLV

Test Area Reference API_2_PRH_FINDBB

6.2.8.11.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte findTLV(byte tag, byte occurrence)
    throws ToolkitException
```

Normal execution

Looks for the indicated occurrence of a TLV element from the beginning of the TLV list (handler buffer):

CRRN1: the method is successful if the required occurrence exists then the corresponding TLV becomes current.

CRRN2: if the method is successful then it returns TLV_FOUND_CR_SET when Comprehension Required flag is set.

CRRN3: if the method is successful then it returns TLV_FOUND_CR_NOT_SET when Comprehension Required flag is not set.

CRRN4: if the required occurrence of the TLV element does not exist, the current TLV is no longer defined and TLV_NOT_FOUND is returned.

CRRN5: The search method is comprehension required flag independent.

Parameter errors

CRRP1: if an input parameter is not valid (e.g. occurrence = 0) an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException BAD_INPUT_PARAMETER.

Context errors

CRR1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.8.11.2 Test Suite files

Test Script: API_2_PRH_FINDBB_1.scr
 Test Applet: API_2_PRH_FINDBB_1.java
 Load Script: API_2_PRH_FINDBB_1.ldr
 Cleanup Script: API_2_PRH_FINDBB_1.clr
 Parameter File: API_2_PRH_FINDBB_1.par

6.2.8.11.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|--------------------------------|
| 1 | Send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response with 2 General Result TLV 81 03 01 21 00 82 02 82 81 03 01 00 03 02 01 12 | | |
| | findTLV() with Invalid input parameter occurrence = 0 | ToolkitException.BAD_INPUT_PARAMETER is thrown | |
| 2 | Search 1st TLV tag = 01h occurrence = 1 | Result is TLV_FOUND_CR_SET | |
| 3 | Call the getValueLength() method | Result is 03h | |
| 4 | Search 2nd TLV tag = 02h occurrence = 1 | Result is TLV_FOUND_CR_SET | |
| 5 | Call the getValueLength() method | Result is 02h | |
| 6 | Select a TLV (tag 02h) | | |
| | Search a wrong tag tag = 04h occurrence = 1 | Result is TLV_NOT_FOUND | |
| 7 | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT shall be thrown | |
| 8 | Search a tag with wrong occurrence tag = 01h occurrence = 2 | Result is TLV_NOT_FOUND | |
| 9 | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT shall be thrown. | |
| 10 | Search 3rd TLV tag = 03h occurrence = 1 | Result is TLV_FOUND_CR_NOT_SET | |
| 11 | Call the getValueLength() method | Result is 01h | |
| 12 | Search 3rd TLV tag = 03h occurrence = 2 | Result is TLV_FOUND_CR_NOT_SET | |
| 13 | Call the getValueLength() method | Result is 02h | |
| 14 | Search tag 83h Tag = 83h Occurrence = 1 | Result is TLV_FOUND_CR_NOT_SET | |
| 15 | Search tag 82h Tag = 82h Occurrence = 1 | Result is TLV_FOUND_CR_SET | |

6.2.8.11.4 Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | 3, 5, 11, 13 |
| N2 | 2, 4 |
| N3 | 10, 12 |
| N4 | 6, 7,8, 9 |
| N5 | 14,15 |
| P1 | 1 |
| C1 | Does not apply for Proactive Response Handler |

6.2.8.12 Method getValueLength

Test Area Reference API_2_PRH_GVLE

6.2.8.12.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short getValueLength()
    throws ToolkitException
```

Normal execution

CRRN1: gets and returns the binary length of the value field for the last TLV element which has been found in the handler.

Parameter errors

No requirements

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

CRRC2: in case of unavailable TLV element an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException UNAVAILABLE_ELEMENT.

6.2.8.12.2 Test Suite files

Test Script: API_2_PRH_GVLE_1.scr
 Test Applet: API_2_PRH_GVLE_1.java
 Load Script: API_2_PRH_GVLE_1.ldr
 Cleanup Script: API_2_PRH_GVLE_1.clr
 Parameter File: API_2_PRH_GVLE_1.par

6.2.8.12.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|-----------------------------|
| 1 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response Text String TLV = 0D 00 | | |
| | ProactiveResponseHandler.getTheHandler() GetValueLength() | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| 2 | Search TLV 0Dh | | |
| | getValueLength() | Result is 00h | |
| 3 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response Text String TLV = 0D 02 04 41 | | |
| | Search TLV 0Dh (Text String TLV) | | |
| | getValueLength() | Result is 02h | |
| 4 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 7Eh Text String TLV = 0D 7F 04 01 02 ... 7E | | |
| | Search TLV 0Dh (Text String TLV) | | |
| | getValueLength() | Result is 7Fh | |
| 5 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 7Fh Text String TLV = 0D 81 80 04 01 02 ... 7E 7F | | |
| | Search TLV 0Dh (Text String TLV) | | |
| | getValueLength() | Result is 80h | |
| 6 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = EFh Text String TLV = 0D 81 F0 04 01 02 ... EF | | |
| | Search TLV 0Dh (Text String TLV) | | |
| | getValueLength() | Result is F0h | |

6.2.8.12.4 Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | 2, 3, 4, 5, 6 |
| C1 | Does not apply for Proactive Response Handler |
| C2 | 1 |

6.2.8.13 Method getValueByte

Test Area Reference API_2_PRH_GVBYS

6.2.8.13.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte getValueByte(short valueOffset)
    throws ToolkitException
```

Normal execution

CRRN1: Gets a byte from the last TLV element which has been found in the handler and returns its value (1 byte).

Parameter errors

CRRP1: if valueOffset is out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

CRRC2: in case of unavailable TLV element an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException UNAVAILABLE_ELEMENT.

6.2.8.13.2 Test Suite files

Test Script: API_2_PRH_GVBYS_1.scr
 Test Applet: API_2_PRH_GVBYS_1.java
 Load Script: API_2_PRH_GVBYS_1.ldr
 Cleanup Script: API_2_PRH_GVBYS_1.clr
 Parameter File: API_2_PRH_GVBYS_1.par

6.2.8.13.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|-----------------------------|
| 1 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 7Eh Text String TLV = 0D 7F 04 01 02 ... 7E | | |
| | ProactiveResponseHandler.getTheHandler() | | |
| | getValueByte(0) | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| 2 | Search TLV 01h (Command Details TLV) | | |
| | getValueByte(3) | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 3 | Search TLV 01h (Command Details TLV) | | |
| | getValueByte(2) | Result is 00h (qualifier) | |
| 4 | Search TLV 02h (Device Identities TLV) | | |
| | getValueByte(0) | Result is 82h (Source) | |
| 5 | Search TLV 0Dh (Text String TLV) | | |
| | getValueByte(7E) | Result is 7Eh | |
| 6 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = EFh Text String TLV = 0D 81 F0 04 01 02 ... 7E 7F ... EF | | |
| | Search TLV 0Dh (Text String TLV) | | |
| | getValueByte(7E) | Result is 7Eh | |
| 7 | GetValueByte(7F) | Result is 7Fh | |
| 8 | GetValueByte(EF) | Result is EFh | |

6.2.8.13.4 Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | 3, 4, 5, 6, 7, 8 |
| P1 | 2 |
| C1 | Does not apply for Proactive Response Handler |
| C2 | 1 |

6.2.8.14 Method copyValue

Test Area Reference API_2_PRH_CPYVS_BSS

6.2.8.14.1 Conformance requirement

The method with following header shall be compliant with its definition in the API.

```
public short copyValue(short valueOffset,
                      byte[] dstBuffer,
                      short dstOffset,
                      short dstLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: copies a part of the last TLV element which has been found, into a destination. buffer.

CRRN2: returns dstOffset + dstLength.

Parameter errors

CRRP1: if dstBuffer is null NullPointerException is thrown.

CRRP2: if dstOffset or dstLength or both would cause access outside array bounds, or if dstLength is negative ArrayIndexOutOfBoundsException is thrown.

CRRP3: if valueOffset, dstLength or both are out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

CRRC2: in case of unavailable TLV element an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException UNAVAILABLE_ELEMENT.

6.2.8.14.2 Test Suite files

Test Script: API_2_PRH_CPYVS_BSS_1.scr
 Test Applet: API_2_PRH_CPYVS_BSS_1.java
 Load Script: API_2_PRH_CPYVS_BSS_1.ldr
 Cleanup Script: API_2_PRH_CPYVS_BSS_1.clr
 Parameter File: API_2_PRH_CPYVS_BSS_1.par

6.2.8.14.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|-----------------------------|
| 1 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 5 Text String TLV = 0D 06 04 01 02 ... 05 | | |
| | ProactiveResponseHandler.getTheHandler() Select Text String TLV | | |
| | CopyValue() with a null dstBuffer | NullPointerException is thrown | |
| 2 | dstOffset > dstBuffer.length dstBuffer.length = 5 dstOffset = 6 dstLength = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | dstOffset < 0 dstBuffer.length = 5 dstOffset = -1 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 0 dstLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | dstOffset + dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 3 dstLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | dstLength < 0 dstBuffer.length = 5 dstOffset = 0 dstLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | valueOffset > Text String Length valueOffset = 7 dstBuffer.length = 15 dstOffset = 0 dstLength = 0 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 8 | valueOffset < 0 valueOffset = -1 dstBuffer.length = 15 dstOffset = 0 dstLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 9 | dstLength > Text String length valueOffset = 0 dstBuffer.length = 15 dstOffset = 0 dstLength = 7 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 10 | ValueOffset + dstLength > Text String length ValueOffset = 2 DstBuffer.length = 15 DstOffset = 0 DstLength = 5 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 11 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 16 Text String TLV = 0D 11 04 00 01 ... 0F | | |
| | ProactiveResponseHandler.getTheHandler | | |
| | CopyValue() | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| 12 | Select Text String TLV | | |
| | Successful call ValueOffset = 0 DstBuffer.length = 17 DstOffset = 0 DstLength = 17 | Result of copyValue() is 17 | |
| 13 | Compare buffer Buffer = 04 00 01 ... 0F | Result is 00h | |
| 14 | initialise dstBuffer dstBuffer = 55 55 ... 55 | | |
| | Successful call ValueOffset = 2 | Result of copyValue() is 15 | |

| | | | |
|----|---|---------------|--|
| | DstBuffer.length = 20 DstOffset = 3 DstLength = 12 | | |
| 15 | Compare buffer Buffer = 55 55 55 01 02 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55 | Result is 00h | |

6.2.8.14.4 Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | 13, 15 |
| N2 | 12, 14 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7, 8, 9, 10 |
| C1 | Does not apply for Proactive Response Handler |
| C2 | 11 |

6.2.8.15 Method compareValue

Test Area Reference API_2_PRH_CPRVS_BSS

6.2.8.15.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte compareValue(short valueOffset,
                        byte[] compareBuffer,
                        short compareOffset,
                        short compareLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

Compares the last found TLV element with a buffer:

CRRN1: returns 0 if identical.

CRRN2: returns -1 if the first miscomparing byte in simple TLV List is less than that in compareBuffer.

CRRN3: returns 1 if the first miscomparing byte in simple TLV List is greater than that in compareBuffer.

Parameter errors

CRRP1: if compareBuffer is null NullPointerException shall be thrown.

CRRP2: if compareOffset or compareLength or both would cause access outside array bounds, or if compareLength is negative ArrayIndexOutOfBoundsException shall be thrown.

CRRP3: if valueOffset, dstLength or both are out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

CRRC2: in case of unavailable TLV element an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException UNAVAILABLE_ELEMENT.

6.2.8.15.2 Test Suite files

Test Script: API_2_PRH_CPRVS_BSS_1.scr
 Test Applet: API_2_PRH_CPRVS_BSS_1.java
 Load Script: API_2_PRH_CPRVS_BSS_1.ldr
 Cleanup Script: API_2_PRH_CPRVS_BSS_1.clr
 Parameter File: API_2_PRH_CPRVS_BSS_1.par

6.2.8.15.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|-----------------------------|
| 1 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 5 Text String TLV = 0D 06 04 01 02 ... 05 | | |
| | ProactiveResponseHandler.getTheHandler() Select Text String TLV | | |
| | compareValue() with a null compareBuffer | NullPointerException is thrown | |
| 2 | compareOffset > compareBuffer.length compareBuffer.length = 5 compareOffset = 6 compareLength = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | compareOffset < 0 compareBuffer.length = 5 compareOffset = -1 compareLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | compareLength > compareBuffer.length compareBuffer.length = 5 compareOffset = 0 compareLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | compareOffset + compareLength > compareBuffer.length compareBuffer.length = 5 compareOffset = 3 compareLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | compareLength < 0 compareBuffer.length = 5 compareOffset = 0 compareLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | valueOffset > Text String Length valueOffset = 7 compareBuffer.length = 15 compareOffset = 0 compareLength = 0 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 8 | valueOffset < 0 valueOffset = -1 compareBuffer.length = 15 compareOffset = 0 compareLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 9 | compareLength > Text String length valueOffset = 0 compareBuffer.length = 15 compareOffset = 0 compareLength = 7 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 10 | valueOffset + compareLength > Text String length valueOffset = 2 compareBuffer.length = 15 compareOffset = 0 compareLength = 5 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 11 | Send a GET INPUT command | | GET INPUT Proactive |

| | | | |
|----|--|--|---------|
| | | | command |
| | Terminal Response, Text String length = 16 Text String TLV = 0D 11 04 00 01 ... 0F | | |
| | ProactiveResponseHandler.getTheHandler() CompareValue() | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| 12 | Select Text String TLV Initialise compareBuffer CompareBuffer = 04 00 01 ... 0F | | |
| | Compare buffers ValueOffset = 0 CompareOffset = 0 CompareLength = 17 | Result is 00h | |
| 13 | Initialise compareBuffer CompareBuffer = 04 00 01 ... 10 | | |
| | Compare buffers with same parameters | Result is -1 | |
| 14 | Initialise compareBuffer CompareBuffer = 03 00 01 ... 0F | | |
| | Compare buffers with same parameters | Result is +1 | |
| 15 | Initialise compareBuffer CompareBuffer = 55 55 55 01 02 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55 | | |
| | Compare buffers ValueOffset = 2 CompareOffset = 3 CompareLength = 12 | Result is 00h | |
| 16 | Initialise compareBuffer CompareBuffer = 55 55 55 02 01 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55 | | |
| | Compare buffers with same parameters | Result is -1 | |
| 17 | Initialise compareBuffer CompareBuffer = 55 55 55 01 02 03 04 05 06 07 08 09 0A 0A 0D 55 55 55 55 55 | | |
| | Compare buffers with same parameters | Result is +1 | |

6.2.8.15.4 Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | 12, 15 |
| N2 | 13, 16 |
| N3 | 14, 17 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7, 8, 9, 10 |
| C1 | Does not apply for Proactive Response Handler |
| C2 | 11 |

6.2.8.16 Method findAndCopyValue(byte tag, byte[] dstBuffer, short valueOffset)

Test Area Reference API_2_PRH_FACYB_BS

6.2.8.16.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short findAndCopyValue(byte tag,
                             byte[] dstBuffer,
                             short dstOffset)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: looks for the first occurrence of a TLV element from the beginning of a TLV list and copy its value into a destination buffer.

CRRN2: if no TLV element is found, the UNAVAILABLE_ELEMENT exception is thrown and the current TLV is no longer defined.

CRRN3: if the method is successful then the corresponding TLV becomes current and dstOffset + length of the copied value is returned.

CRRN4: The search method is comprehension required flag independent.

Parameter errors

CRRP1: if dstBuffer is null NullPointerException shall be thrown.

CRRP2: if dstOffset would cause access outside array bounds ArrayIndexOutOfBoundsException shall be thrown.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.8.16.2 Test Suite files

Test Script: API_2_PRH_FACYB_BS_1.scr
 Test Applet: API_2_PRH_FACYB_BS_1.java
 Load Script: API_2_PRH_FACYB_BS_1.ldr
 Cleanup Script: API_2_PRH_FACYB_BS_1.clr
 Parameter File: API_2_PRH_FACYB_BS_1.par

6.2.8.16.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|-----------------------------|
| 1 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 15 Text String TLV = 0D 10 04 01 02 ... 0F ProactiveResponseHandler.getTheHandler() FindAndCopyValue() with a null dstBuffer | NullPointerException is thrown | |
| 2 | dstOffset > dstBuffer.length tag = 0Dh dstBuffer.length = 20 dstOffset = 21 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | dstOffset < 0 | ArrayIndexOutOfBoundsException | |

| | | | |
|----|---|---|-----------------------------|
| | dstBuffer.length = 20 dstOffset = -1 | n is thrown | |
| 4 | length > dstBuffer.length dstBuffer.length = 15 dstOffset = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | dstOffset + length > dstBuffer.length dstBuffer.length = 20 dstOffset = 5 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 16 Text String TLV = 0D 11 04 00 01 ... 0F | | |
| | ProactiveResponseHandler.getTheHandler() | | |
| | Select a TLV (tag 02h) | | |
| | findAndCopyValue() tag = 04h | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 7 | Successful call Tag = 0Dh DstBuffer.length = 17 DstOffset = 0 | Result of findAndcopyValue() is 17 | |
| 8 | Compare buffer Buffer = 04 00 01 ... 0F | Result is 00h | |
| 9 | initialise dstBuffer dstBuffer = 55 55 ... 55 | | |
| | Successful call DstBuffer.length = 20 DstOffset = 2 | Result of findAndcopyValue() is 19 | |
| 10 | Compare buffer Buffer = 55 55 04 00 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0E 0F 55 | Result is 00h | |
| 11 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, with 2 Text String TLV 0D 11 04 00 01 ... 0F 0D 02 04 41 | | |
| | ProactiveResponseHandler.getTheHandler() | | |
| | Successful call Tag = 0Dh DstBuffer.length = 17 DstOffset = 0 | Result of findAndcopyValue() is 17 | |
| 12 | Compare buffer Buffer = 04 00 01 ... 0F | Result is 00h | |
| 13 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 16 Text String TLV = 0D 11 04 00 01 ... 0F | | |
| | ProactiveResponseHandler.getTheHandler() | | |
| | Successful call (with tag 8Dh) Tag = 8Dh DstBuffer.length = 17 DstOffset = 0 | Result of findAndcopyValue() is 17 | |
| 14 | Compare buffer Buffer = 04 00 01 ... 0F | Result is 00h | |

6.2.8.16.4 Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | 8, 10, 12 |
| N2 | 6 |
| N3 | 7, 9, 11 |
| N4 | 13, 14 |
| P1 | 1 |
| P2 | 2, 3, 4, 5 |
| C1 | Does not apply for Proactive Response Handler |

6.2.8.17 Method findAndCopyValue(byte tag, byte occurrence, short valueOffset, byte[] dstBuffer, short dstOffset, short dstLength)

Test Area Reference API_2_PRH_FACYBBS_BSS

6.2.8.17.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short findAndCopyValue(byte tag,
                             byte occurrence,
                             short valueOffset,
                             byte[] dstBuffer,
                             short dstOffset,
                             short dstLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: looks for the indicated occurrence of a TLV element from the beginning of a TLV list and copy its value into a destination buffer.

CRRN2: if no TLV element is found, the UNAVAILABLE_ELEMENT exception is thrown and the current TLV is no longer defined.

CRRN3: if the method is successful then the corresponding TLV becomes current and dstOffset + dstLength is returned.

CRRN4: The search method is comprehension required flag independent.

Parameter errors

CRRP1: if dstBuffer is null NullPointerException shall be thrown.

CRRP2: if dstOffset or dstLength or both would cause access outside array bounds, or if dstLength is negative ArrayIndexOutOfBoundsException shall be thrown.

CRRP3: if valueOffset, dstLength or both are out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.8.17.2 Test Suite files

Test Script: API_2_PRH_FACYBBS_BSS_1.scr

Test Applet: API_2_PRH_FACYBBS_BSS_1.java
 Load Script: API_2_PRH_FACYBBS_BSS_1.ldr
 Cleanup Script: API_2_PRH_FACYBBS_BSS_1.clr
 Parameter File: API_2_PRH_FACYBBS_BSS_1.par

6.2.8.17.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|-----------------------------|
| 1 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 15 Text String TLV = 0D 10 04 01 02 ... 0F | | |
| | ProactiveResponseHandler.getTheHandler() findAndCopyValue() with a null dstBuffer | NullPointerException is thrown | |
| 2 | dstOffset > dstBuffer.length tag = 0Dh, occurrence = 1 valueOffset = 0 dstBuffer.length = 5 dstOffset = 6 dstLength = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | dstOffset < 0 dstBuffer.length = 5 dstOffset = -1 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 0 dstLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | dstOffset + dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 3 dstLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | dstLength < 0 dstBuffer.length = 5 dstOffset = 0 dstLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 5 Text String TLV = 0D 06 04 01 02 ... 05 | | |
| | ProactiveResponseHandler.getTheHandler() valueOffset > Text String Length tag = 0Dh, occurrence = 1 valueOffset = 7 dstBuffer.length = 15 dstOffset = 0 dstLength = 0 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 8 | valueOffset < 0 valueOffset = -1 dstBuffer.length = 15 dstOffset = 0 dstLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 9 | dstLength > Text String length valueOffset = 0 dstBuffer.length = 15 dstOffset = 0 dstLength = 7 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 10 | valueOffset + dstLength > Text String length valueOffset = 2 dstBuffer.length = 15 dstOffset = 0 dstLength = 5 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 11 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 16 Text String TLV = 0D 11 04 00 01 ... 0F | | |

| | | | |
|----|---|---|-----------------------------|
| | ProactiveResponseHandler.getTheHandler() | | |
| | Select a TLV (tag 02h) | | |
| | findAndCopyValue() tag = 0Dh occurrence = 2 | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 12 | Successful call Tag = 0Dh, occurrence = 1 ValueOffset = 0 DstBuffer.length = 17 DstOffset = 0 DstLength = 17 | Result of findAndCopyValue() is 17 | |
| 13 | Compare buffer Buffer = 04 00 01 ... 0F | Result is 00h | |
| 14 | initialise dstBuffer dstBuffer = 55 55 ... 55 | | |
| | Successful call Tag = 0Dh, occurrence = 1 ValueOffset = 2 DstBuffer.length = 20 DstOffset = 3 DstLength = 12 | Result of findAndcopyValue() is 15 | |
| 15 | Compare buffer Buffer = 55 55 55 01 02 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55 | Result is 00h | |
| 16 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, with 2 Text String TLV 0D 11 04 00 01 02 ... 0F 0D 06 00 11 22 33 44 55 (no specific DCS byte) | | |
| | ProactiveResponseHandler.getTheHandler() | | |
| | Successful call Tag = 0Dh, occurrence = 1 ValueOffset = 0 DstBuffer.length = 17 DstOffset = 0 DstLength = 17 | Result of findAndCopyValue() is 17 | |
| 17 | Compare buffer Buffer = 04 00 01 ... 0F | Result is 00h | |
| 18 | Successful call Tag = 0Dh, occurrence = 2 ValueOffset = 0 DstBuffer.length = 6 DstOffset = 0 DstLength = 6 | Result of findAndCopyValue() is 6 | |
| 19 | Compare buffer Buffer = 00 11 22 33 44 55 | Result is 00h | |
| 20 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 16 Text String TLV = 0D 11 04 00 01 ... 0F | | |
| | ProactiveResponseHandler.getTheHandler() | | |
| | Successful call (with tag 8Dh) Tag = 8Dh, occurrence = 1 ValueOffset = 0 DstBuffer.length = 17 DstOffset = 0 DstLength = 17 | Result of findAndcopyValue() is 17 | |
| 21 | Compare buffer Buffer = 04 00 01 ... 0F | Result is 00h | |

6.2.8.17.4 Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | 13, 15, 17, 19 |
| N2 | 11 |
| N3 | 12, 14, 16, 18 |
| N4 | 20, 21 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7, 8, 9, 10 |
| C1 | Does not apply for Proactive Response Handler |

6.2.8.18 Method findAndCompareValue(byte tag, byte[] compareBuffer, short compareOffset)

Test Area Reference API_2_PRH_FACRB_BS

6.2.8.18.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte findAndCompareValue(byte tag,
                               byte[] compareBuffer,
                               short compareOffset)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

Looks for the first occurrence of a TLV element from beginning of a TLV list and compare its value with a buffer:

CRRN1: if no TLV element is found, the UNAVAILABLE_ELEMENT exception is thrown and the current TLV is no longer defined.

CRRN2: if the method is successful then the corresponding TLV becomes current.

CRRN3: if identical returns 0.

CRRN4: if the first miscomparing byte in simple TLV is less than that in compareBuffer returns -1.

CRRN5: if the first miscomparing byte in simple TLV is greater than that in compareBuffer returns 1.

CRRN6: The search method is comprehension required flag independent.

Parameter errors

CRRP1: if compareBuffer is null NullPointerException shall be thrown.

CRRP2: if compareOffset would cause access outside array bounds ArrayIndexOutOfBoundsException shall be thrown.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.8.18.2 Test Suite files

Test Script: API_2_PRH_FACRB_BS_1.scr

Test Applet: API_2_PRH_FACRB_BS_1.java

Load Script: API_2_PRH_FACRB_BS_1.ldr

Cleanup Script: API_2_PRH_FACRB_BS_1.clr

Parameter File: API_2_PRH_FACRB_BS_1.par

6.2.8.18.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|-----------------------------|
| 1 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 15 Text String TLV = 0D 10 04 01 02 ... 0F | | |
| | ProactiveResponseHandler.getTheHandler() | | |
| | FindAndCompareValue() with a null dstBuffer | NullPointerException is thrown | |
| 2 | compareOffset > compareBuffer.length tag = 0Dh compareBuffer.length = 20 compareOffset = 21 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | compareOffset < 0 compareBuffer.length = 20 compareOffset = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | length > compareBuffer.length compareBuffer.length = 15 compareOffset = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | CompareOffset + length > compareBuffer.length CompareBuffer.length = 20 CompareOffset = 5 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 16 Text String TLV = 0D 11 04 00 01 ... 0F | | |
| | ProactiveResponseHandler.getTheHandler() | | |
| | Select a TLV (tag 02h) | | |
| | findAndCompareValue() tag = 04h | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 7 | Initialise compareBuffer CompareBuffer = 04 00 01 ... 0F | | |
| | Compare buffers Tag = 0Dh CompareOffset = 0 | Result is 00h | |
| 8 | Verify current TLV GetValueLength() | Result is 17 | |
| 9 | Initialise compareBuffer CompareBuffer = 04 00 01 ... 10 | | |
| | Compare buffers with same parameters | Result is -1 | |
| 10 | Initialise compareBuffer CompareBuffer = 03 00 01 ... 0F | | |
| | Compare buffers with same parameters | Result is +1 | |
| 11 | Initialise compareBuffer CompareBuffer = 55 55 04 00 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0E 0F 55 | | |
| | Compare buffers CompareOffset = 2 | Result is 00h | |
| 12 | Send a GET INPUT command | | GET INPUT Proactive command |

| | | | |
|----|--|---------------|-----------------------------|
| | Terminal Response, with 2 Text String TLV 0D 11 04 00 01 ... 0F 0D 06 00 11 22 33 44 55 | | |
| | ProactiveResponseHandler.getTheHandler() | | |
| | Initialise compareBuffer CompareBuffer = 55 55 04 00 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0E 0F 55 | | |
| | Compare buffers CompareOffset = 2 | Result is 00h | |
| 13 | Initialise compareBuffer CompareBuffer = 55 55 04 01 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0E 0F 55 | | |
| | Compare buffers CompareOffset = 2 | Result is -1 | |
| 14 | Initialise compareBuffer CompareBuffer = 55 55 04 00 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0D 10 55 | | |
| | Compare buffers CompareOffset = 2 | Result is +1 | |
| 15 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 16 Text String TLV = 0D 11 04 00 01 ... 0F | | |
| | ProactiveResponseHandler.getTheHandler() | | |
| | Initialise compareBuffer CompareBuffer = 04 00 01 ... 0F | | |
| | Compare buffers (with tag 8Dh) Tag = 8Dh CompareOffset = 0 | Result is 00h | |

6.2.8.18.4 Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | 6 |
| N2 | 8 |
| N3 | 7, 11, 12 |
| N4 | 9, 13 |
| N5 | 10, 14 |
| N6 | 15 |
| P1 | 1 |
| P2 | 2, 3, 4, 5 |
| C1 | Does not apply for Proactive Response Handler |

6.2.8.19 Method findAndCompareValue(byte tag, byte occurrence, short valueOffset, byte[] compareBuffer, short compareOffset, short compareLength)

Test Area Reference API_2_PRH_FACRBBS_BSS

6.2.8.19.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```

public byte findAndCompareValue(byte tag,
                               byte occurrence,
                               short valueOffset,
                               byte[] compareBuffer,
                               short compareOffset,
                               short compareLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException

```

Normal execution

Looks for the indicated occurrence of a TLV element from the beginning of a TLV list and compare its value with a buffer:

CRRN1: if no TLV element is found, the UNAVAILABLE_ELEMENT exception is thrown and the current TLV is no longer defined.

CRRN2: if the method is successful then the corresponding TLV becomes current.

CRRN3: if identical 0 is returned.

CRRN4: if the first miscomparing byte in simple TLV is less than that in compareBuffer -1 is returned.

CRRN5: if the first miscomparing byte in simple TLV is greater than that in compareBuffer 1 is returned

CRRN6: The search method is comprehension required flag independent.

Parameter errors

CRRP1: if compareBuffer is null NullPointerException shall be thrown.

CRRP2: if compareOffset or compareLength or both would cause access outside array bounds, or if compareLength is negative ArrayIndexOutOfBoundsException shall be thrown.

CRRP3: if valueOffset, compareLength or both are out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.

CRRP4: if an input parameter is not valid (e.g. occurrence = 0) an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException BAD_INPUT_PARAMETER.

Context errors

CRR1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.8.19.2

Test Suite files

| | |
|-----------------|------------------------------|
| Test Script: | API_2_PRH_FACRBBS_BSS_1.scr |
| Test Applet: | API_2_PRH_FACRBBS_BSS_1.java |
| Load Script: | API_2_PRH_FACRBBS_BSS_1.ldr |
| Cleanup Script: | API_2_PRH_FACRBBS_BSS_1.clr |
| Parameter File: | API_2_PRH_FACRBBS_BSS_1.par |

6.2.8.19.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|-----------------------------|
| 1 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 15 Text String TLV = 0D 10 04 01 02 ... 0F | | |
| | ProactiveResponseHandler.getTheHandler() | | |
| | findAndCompareValue() with a null compareBuffer | NullPointerException is thrown | |
| 2 | compareOffset > compareBuffer.length tag = 0Dh, occurrence = 1 valueOffset = 0 compareBuffer.length = 5 compareOffset = 6 compareLength = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | compareOffset < 0 compareBuffer.length = 5 compareOffset = -1 compareLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | compareLength > compareBuffer.length compareBuffer.length = 5 compareOffset = 0 compareLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | CompareOffset + compareLength > compareBuffer.length CompareBuffer.length = 5 CompareOffset = 3 CompareLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | compareLength < 0 compareBuffer.length = 5 compareOffset = 0 compareLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 5 Text String TLV = 0D 06 04 01 02 ... 05 | | |
| | ProactiveResponseHandler.getTheHandler() | | |
| | valueOffset ≥ Text String Length tag = 0Dh, occurrence = 1 valueOffset = 7 compareBuffer.length = 15 compareOffset = 0 compareLength = 0 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 8 | valueOffset < 0 valueOffset = -1 compareBuffer.length = 15 compareOffset = 0 compareLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 9 | compareLength > Text String length valueOffset = 0 compareBuffer.length = 15 compareOffset = 0 compareLength = 7 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 10 | valueOffset + compareLength > Text String length valueOffset = 2 compareBuffer.length = 15 compareOffset = 0 compareLength = 5 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 11 | Invalid parameter Occurrence = 0 | ToolkitException.BAD_INPUT_PARAMETER is thrown | |
| 12 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 16 Text String TLV = 0D 11 04 00 01 ... 0F | | |
| | ProactiveResponseHandler.getTheHandler() | | |
| | Select a TLV (tag 02h) | | |

| | | | |
|----|--|---|-----------------------------|
| | findAndCompareValue() tag = 0Dh occurrence = 2 | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 13 | Initialise compareBuffer CompareBuffer = 04 00 01 ... 0F | | |
| | findAndCompareValue() tag = 0Dh, occurrence = 1 valueOffset = 0 compareOffset = 0 compareLength = 17 | Result is 00h | |
| 14 | Verify current TLV GetValueLength() | Result is 17 | |
| 15 | Initialise compareBuffer compareBuffer = 04 00 01 ... 10 | | |
| | Compare buffers with same parameters | Result is -1 | |
| 16 | Initialise compareBuffer compareBuffer = 03 00 01 ... 0F | | |
| | Compare buffers with same parameters | Result is +1 | |
| 17 | Initialise compareBuffer compareBuffer = 55 55 55 01 02 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55 | | |
| | Compare buffers valueOffset = 2 compareOffset = 3 compareLength = 12 | Result is 00h | |
| 18 | Initialise compareBuffer compareBuffer = 55 55 55 02 01 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55 | | |
| | Compare buffers with same parameters | Result is -1 | |
| 19 | Initialise compareBuffer compareBuffer = 55 55 55 01 02 03 04 05 06 07 08 09 0A 0A 0D 55 55 55 55 55 | | |
| | Compare buffers with same parameters | Result is +1 | |
| 20 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, with 2 Text String TLV 0D 11 04 00 01 ... 0F 0D 06 00 11 22 33 44 55 | | |
| | ProactiveResponseHandler.getTheHandler() | | |
| | Initialise compareBuffer compareBuffer = 04 00 01 ... 0F | | |
| | findAndCompareValue() tag = 0Dh, occurrence = 1 valueOffset = 0 compareOffset = 0 compareLength = 17 | Result is 00h | |
| 21 | Initialise compareBuffer compareBuffer = 00 11 22 33 44 55 | | |
| | findAndCompareValue() | Result is 00h | |

| | | | |
|----|--|---------------|-----------------------------|
| | tag = 0Dh, occurrence = 2 valueOffset = 0 compareOffset = 0 compareLength = 6 | | |
| 22 | Initialise compareBuffer compareBuffer = 00 11 22 33 44 66 | | |
| | findAndCompareValue() tag = 0Dh, occurrence = 2 valueOffset = 0 compareOffset = 0 compareLength = 6 | Result is -1 | |
| 23 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 16 Text String TLV = 0D 11 04 00 01 ... 0F | | |
| | ProactiveResponseHandler.getTheHandler() | | |
| | Initialise compareBuffer CompareBuffer = 04 00 01 ... 0F | | |
| | Compare buffers (with tag 8Dh) tag = 8Dh, occurrence = 1 valueOffset = 0 compareOffset = 0 compareLength = 17 | Result is 00h | |

6.2.8.19.4 Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | 12 |
| N2 | 14 |
| N3 | 13, 17, 20, 21 |
| N4 | 15, 18, 22 |
| N5 | 16, 19 |
| N6 | 23 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7, 8, 9, 10 |
| P4 | 11 |
| C1 | Does not apply for Proactive Response Handler |

6.2.9 Class ToolkitRegistry

6.2.9.1 Method allocateTimer

Test Area Reference: API_2_TKR_ATIM

6.2.9.1.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
public byte allocateTimer() throws ToolkitException
```

Normal execution

CRRN1: the returned timer identifier shall be between 01 and 08 inclusive.

CRRN2: the returned timer identifier shall be different from a previously allocated but not released one.

CRRN3: The SIM Toolkit Framework shall trigger the applet when receiving an ENVELOPE(TIMER EXPIRATION) command for the allocated timer.

CRRN4: A call to isEventSet() method for EVENT_TIMER_EXPIRATION should return true if the applet has at least one timer allocated.

Parameters error

No requirements

Context errors

CRRC1: Shall throw a ToolkitException with reason NO_TIMER_AVAILABLE if all the timers are allocated.

CRRC2: Shall throw a ToolkitException with reason NO_TIMER_AVAILABLE if the maximum number of timers have been allocated to this applet according to installation parameter.

6.2.9.1.2 Test suite files

Test Script: API_2_TKR_ATIM_1.scr

Test Applet: API_2_TKR_ATIM_1.java
API_2_TKR_ATIM_2.java
API_2_TKR_ATIM_3.java

Installation parameters:

For this test procedure the non-volatile memory of each instance is 200 (Hexa).

The maximum timer parameter value is as follows for each applet:

- applet 1 (API_2_TKR_ATIM_1): 8 timers
- applet 2 (API_2_TKR_ATIM_2): 4 timers
- applet 3 (API_2_TKR_ATIM_3): 0 timer

Load Script: API_2_TKR_ATIM_1.ldr

The load script installs the 6 instances.

Cleanup Script: API_2_TKR_ATIM_1.clr

Parameter File: API_2_TKR_ATIM_1.par

6.2.9.1.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|------------------|
| 1 | Allocates up to 8 timers (applet 1) 8 * allocateTimer(). | No exception shall be thrown. Timer ID returned shall be between 01 and 08 inclusive. It shall be different after each call. | |
| 2 | Allocate timers more than the maximum (applet 1) The applet 1 allocates 1 more timer. | Shall throw a ToolkitException with reason NO_TIMER_AVAILABLE. | |
| 3 | Check applet is Triggered by ENVELOPE(TIMER_EXPIRATION) command (applet1) Send ENVELOPE(TIMER_EXPIRATION) with all timers id (not in an increase order). Calls releaseTimer(id) each time a timer expires. | Shall trigger each time an ENVELOPE(TIMER_EXPIRATION) is sent to the SIM, for Timer ID = '01' to '08'. | |
| 4 | Allocate up to 4 timers (applet 2) 4 * allocateTimer(). | No exception shall be thrown. Each time, the returned timer identifier shall be between '01' and '08' inclusive. It shall be different after each call. | |
| 5 | Allocate timers more than the maximum (applet 3) The applet 3 allocates 1 more timer. | Shall throw a ToolkitException with reason NO_TIMER_AVAILABLE. | |

6.2.9.1.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 1,4 |
| N2 | 1,4 |
| N3 | 3 |
| N4 | 1 |
| C1 | 2 |
| C2 | 5 |

6.2.9.2 Method changeMenuEntry

Test Area Reference: API_2_TKR_CMETB_BSSBZBS

6.2.9.2.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
public void changeMenuEntry(byte id,
    byte[] menuEntry,
    short offset,
    short length,
    byte nextAction,
    boolean helpSupported,
    byte iconQualifier,
    short iconIdentifier)
    throws
        java.lang.NullPointerException,
        java.lang.ArrayIndexOutOfBoundsException,
        ToolkitException
```

Normal execution

- CRRN1: The SIM Toolkit Framework shall dynamically update the menu stored in the ME by issuing a SET UP MENU proactive command. The later will reflect the changes done for the entry. The SIM Toolkit Framework shall use the data of the EF sume file in order to build the SET UP MENU command.
- CRRN2: The default state of the changed menu entry is 'enabled'.
- CRRN3: a call to isEventSet() method on EVENT_MENU_SELECTION shall return true before and after the call.
- CRRN4: if helpSupported was true then a call to isEventSet() method on EVENT_MENU_SELECTION_HELP_REQUEST event shall return true.
- CRRN5: if helpSupported was true then after the completion of the SETUP MENU command, if an ENVELOPE(MENU_SELECTION_HELP_REQUEST) command is received by the SIM for this entry, then the SIM Toolkit framework shall trigger the applet.
- CRRN6: if help supported was true, the SIM Toolkit Framework shall issue a SETUP MENU command with command qualifier = '80'
- CRRN7: if helpSupported was false and if no entries is supporting help then a call to isEventSet() method on EVENT_MENU_SELECTION_HELP_REQUEST event shall return false .
- CRRN8: if helpSupported was false and if no entries is supporting help then after the completion of the SETUP MENU command, if an ENVELOPE(MENU_SELECTION_HELP_REQUEST) command is received by the SIM, then the SIM Toolkit framework shall not trigger the applet.
- CRRN9: The SIM Toolkit Framework shall supply in the SET UP MENU command with the icon identifier provided in the icon identifier list within the item icon identifier list Simple TLV if all the applets registered to the EVENT_MENU_SELECTION provide it.
- CRRN10: The SIM Toolkit Framework shall set in the SET UP MENU command with the Icon list qualifier transmitted to the ME as 'icon is not self explanatory' if one of the applet registered prefers this qualifier.
- CRRN11: If Next Action Indicator was different from '00', the SIM Toolkit Framework shall issue a SETUP MENU proactive command containing an Items Next Action Indicator simple TLV with the comprehension flag set to 0 as defined in GSM 11.14 [4].

Parameters error

- CRRP1: Shall throw java.lang.NullPointerException - if menuEntry is null
- CRRP2: Shall throw java.lang.ArrayIndexOutOfBoundsException - if offset would cause access outside array bounds
- CRRP3: Shall throw java.lang.ArrayIndexOutOfBoundsException - if length would cause access outside array bounds
- CRRP4: Shall throw java.lang.ArrayIndexOutOfBoundsException - if both offset and length would cause access outside array bounds

Context errors

- CRRC1: Shall throw a ToolkitException with MENU_ENTRY_NOT_FOUND reason if the Menu Identifier isn't associated to the calling applet instance.
- CRRC2: Shall throw ALLOWED_LENGTH_EXCEEDED if the menu entry string is bigger than the allocated space.

6.2.9.2.2 Test suite files

Additional requirements for the GSM personalisation:

- content of EF sume shall be:

- Title Alpha Identifier: "TOOLKIT TEST"

Test Script: API_2_TKR_CMETB_BBSSBZBS_1.scr

Test Applet: API_2_TKR_CMETB_BBSSBZBS_1.java

- entry '01' is "Init1"

- entry '02' is "Init2"

Installation parameter:

Same as default applet but with:

- Maximum text length for a menu entry: 15

- Maximum number of menu entries: 2

- Position / Identifier for each menu entry: '01'/'01','02'/'02'

Load Script: API_2_TKR_CMETB_BBSSBZBS_1.ldr

Cleanup Script: API_2_TKR_CMETB_BBSSBZBS_1.clr

Parameter File: API_2_TKR_CMETB_BBSSBZBS_1.par

6.2.9.2.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|---|
| 1 | <p>Applet changes the entry's title by menuEntry buffer, with a greater length than the initial length</p> <p>1- ChangeMenuEntry()with parameters: Id = '02' MenuEntry = "UseAllBuffer" Offset = 0 Length = menuEntry.length NextAction = 0 HelpSupported = false IconQualifier = 0 IconIdentifier = 0.</p> <p>2- isEventSet(EVENT_MENU_SELECTION).</p> <p>3- isEventSet(EVENT_MENU_SELECTION_HELP_REQUEST).</p> | <p>1- No exception shall be thrown.</p> <p>2- shall return true.</p> <p>3- shall return false.</p> | <p>The SIM shall issue a SETUP MENU proactive command which contains the new text for entry ID '02'.</p> |
| 2 | <p>Changing the title with part of menuEntry buffer</p> <p>1- changeMenuEntry()with parameters: Id = '01' MenuEntry = "UsePartOfBuffer" Offset = 3 Length = 12 NextAction = 0 HelpSupported = false IconQualifier = 0 IconIdentifier = 0.</p> <p>2- isEventSet(EVENT_MENU_SELECTION).</p> <p>3- isEventSet(EVENT_MENU_SELECTION_HELP_REQUEST)</p> | <p>1- No exception shall be thrown.</p> <p>2- Shall return true.</p> <p>3- Shall return false.</p> | <p>The SIM shall issue a SETUP MENU proactive command which contains the new text for entry ID '01'.</p> |
| 3 | <p>Length = 0</p> <p>1- changeMenuEntry() for entry '01' and entry '02', with parameters: Id = '01'/'02' MenuEntry = "LengthEquals0" Offset = 0 Length = 0 NextAction = 0 HelpSupported = false IconQualifier = 0 IconIdentifier = 0.</p> <p>2- isEventSet(EVENT_MENU_SELECTION).</p> <p>3- isEventSet(EVENT_MENU_SELECTION_HELP_REQUEST).</p> | <p>1- No exception shall be thrown.</p> <p>2- Shall return true.</p> <p>3- shall return false.</p> | <p>The SIM shall issue a SETUP MENU proactive command which contains for entry '01'and entry '02', no text part.</p> |
| 4 | <p>Setting a next action indicator != 0</p> <p>1- changeMenuEntry()with parameters: Id = '02' MenuEntry = "NextActionIndic" Offset = 0 Length = menuEntry.length NextAction = '10' (SETUP CALL) HelpSupported = false</p> | <p>1- No exception shall be thrown.</p> <p>2- Shall return true.</p> <p>3- Shall return false.</p> | <p>The SIM shall issue a SETUP MENU proactive command which contains an Items Next Action Indicator list and which contains a command qualifier '80'.</p> |

| | | | |
|---|---|--|---|
| | <pre> IconQualifier = 0 IconIdentifier = 0 2- isEventSet(EVENT_MENU_SELECTION). 3- isEventSet(EVENT_MENU_SELECTION_HELP_R EQUEST). 4- changeMenuEntry()with parameters: Id = '02' MenuEntry = "NextActionIndic" Offset = 0 Length = menuEntry.length NextAction = '10' (SETUP CALL) HelpSupported = true IconQualifier = 0 IconIdentifier = 0 </pre> | | |
| 5 | <p>Checking applet is triggered by a MENU_SELECTION_HELP_REQUEST</p> <pre> Send ENVELOPE(MENU_SELECTION_HELP_REQUEST) with Item Identifier = '02' </pre> | <p>Applet is triggered by a MENU_SELECTION_HELP_REQUEST and the Item Identifier is 02</p> | |
| 6 | <p>help supported=true</p> <pre> 1- changeMenuEntry()with parameters: Id = '01' MenuEntry = "HelpSupported" Offset = 0 Length = menuEntry.length NextAction = 0 HelpSupported = true IconQualifier = 0 IconIdentifier = 0 2- isEventSet(EVENT_MENU_SELECTION). 3- isEventSet(EVENT_MENU_SELECTION_HELP_R EQUEST). </pre> | <p>1- No exception shall be thrown. 2- Shall return true. 3- Shall return true.</p> | <p>The SIM shall issue a SETUP MENU proactive command which contains a command qualifier '80'.</p> |
| 7 | <p>Checking applet is triggered by a MENU_SELECTION_HELP_REQUEST</p> <pre> Send ENVELOPE(MENU_SELECTION_HELP_REQUEST) with Item Identifier = '01' </pre> | <p>Applet is triggered by a MENU_SELECTION_HELP_REQUEST and the Item Identifier is 01</p> | |
| 8 | <p>Setting icons, help supported = false</p> <pre> 1- changeMenuEntry() for entries '01','02', with parameters: Id = '01'/'02' MenuEntry = "IconQualifier" Offset = 0 Length = menuEntry.length NextAction = 0 HelpSupported = false IconQualifier = '01' IconIdentifier = '02' / '01' 2- isEventSet(EVENT_MENU_SELECTION). 3- isEventSet(EVENT_MENU_SELECTION_HELP_R EQUEST). </pre> | <p>1- No exception shall be thrown. 2- Shall return true. 3- Shall return false.</p> | <p>The SIM shall issue a SETUP MENU proactive command which contains an Icon Identifier List.</p> |
| 9 | <p>MenuEntry is disabled</p> <pre> 1- disableMenuEntry('01'). 2- changeMenuEntry()with parameters: </pre> | <p>1- No exception shall be thrown. 2- No exception shall be thrown. 3- Shall return true.</p> | <p>The SIM shall issue a SETUP MENU proactive command which contains the entry. Without Icon identifier List Simple TLV</p> |

| | | | |
|----|--|--|--|
| | <pre> Id = '01' MenuEntry = "EnableEntry" Offset = 0 Length = menuEntry.length NextAction = 0 HelpSupported = false IconQualifier = 0 IconIdentifier = 0 3- isEventSet(EVENT_MENU_SELECTION). 4- isEventSet(EVENT_MENU_SELECTION_HELP_R EQUEST).</pre> | 4- Shall return false. | |
| 10 | <p style="text-align: center;">MenuEntry is null</p> <pre> changeMenuEntry()with: MenuEntry = NULL</pre> | Shall throw java.lang.NullPointerException. | |
| 11 | <p style="text-align: center;">Offset causes access outside array bounds</p> <pre> Id = '01' MenuEntry = "Violation" Offset = menuEntry.length +1 Length = 0 NextAction = 0 HelpSupported = false IconQualifier = 0 IconIdentifier = 0</pre> | Shall throw java.lang.ArrayIndexOutOfBoundsException. | |
| 12 | <p style="text-align: center;">Big Offset causes access outside array bounds</p> <pre> Id = '01' MenuEntry = "Violation" Offset = 255 Length = 1 NextAction = 0 HelpSupported = false IconQualifier = 0 IconIdentifier = 0</pre> | Shall throw java.lang.ArrayIndexOutOfBoundsException. | |
| 13 | <p style="text-align: center;">Offset < 0 causes access outside array bounds</p> <pre> Id = '01' MenuEntry = "Violation" Offset = -1 Length = 1 NextAction = 0 HelpSupported = false IconQualifier = 0 IconIdentifier = 0</pre> | Shall throw java.lang.ArrayIndexOutOfBoundsException. | |
| 14 | <p style="text-align: center;">Length causes access outside array bounds</p> <pre> Id = '01' MenuEntry = "Violation" Offset = 0 Length = MenuEntry.length + 1 NextAction = 0 HelpSupported = false IconQualifier = 0 IconIdentifier = 0.</pre> | Shall throw java.lang.ArrayIndexOutOfBoundsException. | |
| 15 | <p style="text-align: center;">Length < 0 causes access outside array bounds</p> <pre> Id = '01' MenuEntry = "Violation" Offset = 0 Length = -1 NextAction = 0 HelpSupported = false IconQualifier = 0 IconIdentifier = 0.</pre> | Shall throw java.lang.ArrayIndexOutOfBoundsException. | |

| | | | |
|----|--|---|---|
| 16 | <p>Both offset and length causes access outside array bounds</p> <pre> Id = '01' MenuEntry = "Violation" Offset ∈ [1, MenuEntry.length] Length = MenuEntry.length NextAction = 1 HelpSupported = false IconQualifier = 0 IconIdentifier = 0 </pre> | <p>Shall throw <code>java.lang.ArrayIndexOutOfBoundsException</code>.</p> | |
| 17 | <p>Invalid ID used</p> <pre> Id = '00' MenuEntry = contains text, != null Offset = 0 Length = menuEntry.length < 16 NextAction = 0 HelpSupported = false IconQualifier = 0 IconIdentifier = 0 </pre> | <p>Shall throw a <code>ToolkitException</code> with reason code: <code>MENU_ENTRY_NOT_FOUND</code>.</p> | |
| 18 | <p>ID isn't allocated to a menu entry of this applet instance</p> <pre> Id = '0A' MenuEntry = contains text, != null Offset = 0 Length = menuEntry.length < 16 NextAction = 0 HelpSupported = false IconQualifier = 0 IconIdentifier = 0 </pre> | <p>Shall throw a <code>ToolkitException</code> with reason code: <code>MENU_ENTRY_NOT_FOUND</code>.</p> | |
| 19 | <p>The text is bigger than the allocated space</p> <pre> Id = '02' MenuEntry = contains text, != null Offset = 0 Length = menuEntry.length > 15 NextAction = 0 HelpSupported = false IconQualifier = 0 IconIdentifier = 0 </pre> | <p>Shall throw a <code>ToolkitException</code> with reason code: <code>ALLOWED_LENGTH_EXCEEDED</code>.</p> | |
| 20 | <p>With a smaller text length than the initial length</p> <pre> 1. changeMenuEntry()with parameters: Id = '02' MenuEntry = "Init" Offset = 0 Length = menuEntry.length NextAction = 0 HelpSupported = false IconQualifier = 0 IconIdentifier = 0 2. isEventSet(EVENT_MENU_SELECTION) 3. isEventSet(EVENT_MENU_SELECTION_HELP_REQUEST) </pre> | <ol style="list-style-type: none"> 1. No exception shall be thrown. 2. Shall return true. 3. Shall return false. | <p>The SIM shall issue a <code>SETUP MENU</code> proactive command which contains the new text for entry ID '02'.</p> |

6.2.9.2.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 1,2,3,4,6,8,9,20 |
| N2 | 9 |
| N3 | 1,2,3,4,6,8,9,20 |
| N4 | 6 |
| N5 | 7,5 |
| N6 | 6 |
| N7 | 1,2,3,4,8,9,20 |
| N8 | To be checked in framework tests and insert cross reference here |
| N9 | 8, 9 |
| N10 | 8 |
| N11 | 4 |
| P1 | 10 |
| P2 | 11,12,13 |
| P3 | 14,15 |
| P4 | 16 |
| C1 | 17,18 |
| C2 | 19 |

6.2.9.3 Method clearEvent

Test Area Reference: API_2_TKR_CEVTB

6.2.9.3.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
public void clearEvent(byte event)
    throws ToolkitException
```

Normal execution

CRRN1: A call to isEventSet() method for a cleared event should return false after a call to clearEvent.

CRRN2: The SIM Toolkit Framework shall not trigger the applet on the occurrence of the cleared event anymore.

CRRN3: if event was EVENT_CALL_CONTROL_BY_SIM and after the call, no applet is registered to it, The SIM Toolkit Framework shall allow an applet to register to this event.

CRRN4: if event was EVENT_CALL_CONTROL_BY_SIM and one applet is still registered to these event, The SIM Toolkit Framework shall not allow an applet to register to this event.

CRRN5: if event was EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM and after the call, no applet is registered to it, The SIM Toolkit Framework shall allow an applet to register to this event.

CRRN6: if event was EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM and one applet is still registered to these event, The SIM Toolkit Framework shall not allow an applet to set this event.

Parameters error

CRRP1: Shall throw a Toolkit Exception with reason EVENT_NOT_ALLOWED if event was EVENT_MENU_SELECTION.

CRRP2: Shall throw a Toolkit Exception with reason EVENT_NOT_ALLOWED if event was EVENT_MENU_SELECTION_HELP_REQUEST.

CRRP3: Shall throw a Toolkit Exception with reason EVENT_NOT_ALLOWED if event was EVENT_TIMER_EXPIRATION.

CRRP4: Shall throw a Toolkit Exception with reason EVENT_NOT_ALLOWED if event was EVENT_STATUS_COMMAND.

Context errors

No requirements

6.2.9.3.2 Test suite files

Test Script: API_2_TKR_CEVTB_1.scr

Test Applet: API_2_TKR_CEVTB_1.java

As default but applet registers to an event list which contains all defined events in GSM 03.19 [7] excepted those that aren't allowed or supported by setEvent().

Load Script: API_2_TKR_CEVTB_1.ldr

Cleanup script: API_2_TKR_CEVTB_1.clr

Parameter File: API_2_TKR_CEVTB_1.par

6.2.9.3.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|------------------|
| 1 | <p>Clear ALLOWED unregistered events</p> <p>For events ranging from 1 to 127 excepted those that aren't allowed (EVENT_MENU_SELECTION, EVENT_MENU_SELECTION_HELP_REQUEST, EVENT_TIMER_EXPIRATION, EVENT_STATUS_COMMAND), the applet calls:</p> <p>1- clearEvent() method 2- isEventSet() method</p> | <p>1- No exception is thrown each time. 2- Shall return false each time.</p> | |
| 2 | <p>Clear registered events</p> <p>1- For each ALLOWED and SUPPORTED events, the applet calls setEvent() method. 2- For events ranging from 1 to 127 excepted those that aren't allowed, the applet calls:</p> <p>2.1- clearEvent() method 2.2- isEventSet() method</p> | <p>1- No exception shall be thrown. 2.1- No exception shall be thrown. 2.2- Shall return false.</p> | |
| 3 | <p>Clearing NOT ALLOWED events</p> <p>For each event among: EVENT_MENU_SELECTION, EVENT_MENU_SELECTION_HELP_REQUEST, EVENT_TIMER_EXPIRATION, EVENT_STATUS_COMMAND</p> <p>1- The applet calls clearEvent(event) method.</p> | <p>1- Each time, clearEvent shall throw a Toolkit Exception with reason EVENT_NOT_ALLOWED.</p> | |
| 4 | <p>Checking applet isn't triggered by an ENVELOPE(SMS-PP DOWNLOAD) command</p> <p>1 - reset and initialise the card 2 - An ENVELOPE(SMS-PP DOWNLOAD) is sent with a TAR referencing applet.</p> | <p>Applet is not triggered by an ENVELOPE(SMS-PP DOWNLOAD) command</p> | |

6.2.9.3.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 1,2 |
| N2 | 4 |
| N3 | Framework |
| N4 | Framework |
| N5 | Framework |
| N6 | Framework |
| P1 | 3 |
| P2 | 3 |
| P3 | 3 |
| P4 | 3 |

6.2.9.4 Method disableMenuEntry

Test Area Reference: API_2_TKR_DMETB

6.2.9.4.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
public void disableMenuEntry(byte id)
    throws ToolkitException
```

Normal execution

CRRN1: A call to isEventSet() method on EVENT_MENU_SELECTION shall return the same result before and after the call to disableMenuEntry() method.

CRRN2: A call to isEventSet() method on EVENT_MENU_SELECTION_HELP_REQUEST shall return the same result before and after the call to disableMenuEntry() method.

CRRN3: After invocation of this method the SIM Toolkit Framework shall dynamically update the menu stored in the ME .

CRRN4: After invocation of this method, if there is no more enabled menu entries then the SIM Toolkit framework shall issue a SETUP MENU proactive command containing Item Data Object for Item 1 TLV with a length of zero and no value part.

Parameters error

No requirements

Context errors

CRRC1: shall throw a ToolkitException with reason = ENTRY_NOT_FOUND if the menu entry doesn't exist for this applet

6.2.9.4.2 Test suite files

Additional requirements for the GSM personalisation:

- content of EF sume shall be:
- Title Alpha Identifier: "TOOLKIT TEST"

Test Script: API_2_TKR_DMETB_1.scr

Test Applet: API_2_TKR_DMETB_1.java

Installation parameter:

Same as default applet but with:

- Maximum text length for a menu entry: 15
- Maximum number of menu entries: 2
- Position / Identifier for each menu entry: '01'/'01', '02'/'02'

Load Script: API_2_TKR_DMETB_1.ldr

Cleanup script: API_2_TKR_DMETB_1.clr

Parameter File: API_2_TKR_DMETB_1.par

6.2.9.4.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|---|
| 1 | <p>Check the menu state before disabling a previously enabled entry not registered to EVENT_MENU_SELECTION_HELP_REQUEST</p> <p>1- reset and initialise the card 2- isEventSet(EVENT_MENU_SELECTION) 3- isEventSet(EVENT_MENU_SELECTION_HELP_REQUEST)</p> | <p>1- Shall return true 2- Shall return false</p> | <p>1- The SIM shall issue a SET UP MENU proactive command with entry '01' and '02'.</p> |
| 2 | <p>Check the menu state after disabling a previously enabled entry not registered to EVENT_MENU_SELECTION_HELP_REQUEST</p> <p>1- disableMenuEntry('01') 2- isEventSet(EVENT_MENU_SELECTION) 3- isEventSet(EVENT_MENU_SELECTION_HELP_REQUEST)</p> | <p>1- No exception shall be thrown. 2- Shall return true. 3- Shall return false.</p> | <p>3- The SIM shall issue a SET UP MENU proactive command with entry '02' only.</p> |
| 3 | <p>Check the menu before disabling a previously enabled entry registered to EVENT_MENU_SELECTION_HELP_REQUEST</p> <p>1- change Menu Entry '02' to indicate help supported 2- isEventSet(EVENT_MENU_SELECTION) 3- isEventSet(EVENT_MENU_SELECTION_HELP_REQUEST)</p> | <p>2- Shall return true 3- Shall return true</p> | <p>3- The SIM shall issue a SET UP MENU proactive command with entry '02', indicating help supported.</p> |
| 4 | <p>Check the menu after disabling a previously enabled entry registered to EVENT_MENU_SELECTION_HELP_REQUEST</p> <p>1- disableMenuEntry('02') 2- isEventSet(EVENT_MENU_SELECTION) 3- isEventSet(EVENT_MENU_SELECTION_HELP_REQUEST)</p> | <p>1- No exception shall be thrown. 2- Shall return true. 3- Shall return true.</p> | <p>3- The SIM shall issue a SET UP MENU proactive command with 1st Item TLV with a length of 0.</p> |
| 5 | <p>Disabling invalid entries</p> <p>For ID ranging from '00' to 'FF' except '01' and '02', the applet calls disableMenuEntry(ID) method.</p> | <p>Each time a Toolkit Exception with MENU_ENTRY_NOT_FOUND reason code shall be thrown.</p> | |

6.2.9.4.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 1,2,3,4 |
| N2 | 1,2,3,4 |
| N3 | 2,4 |
| N4 | 4 |
| C1 | 5 |

6.2.9.5 Method enableMenuEntry

Test Area Reference: API_2_TKR_EMETB

6.2.9.5.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
public void enableMenuEntry(byte id)
    throws ToolkitException
```

Normal execution

CRRN1: A call to isEventSet() method on EVENT_MENU_SELECTION shall return the same result before and after the call to enableMenuEntry() method.

CRRN2: A call to isEventSet() method on EVENT_MENU_SELECTION_HELP_REQUEST shall return the same result before and after the call to enableMenuEntry() method.

CRRN3: The SIM Toolkit Framework shall dynamically issue a SETUP MENU proactive command which does contain an ITEM SIMPLE TLV object for this entry.

Parameters error

No requirements

Context errors

CRRC1: shall throw a ToolkitException with reason = MENU_ENTRY_NOT_FOUND if the menu entry doesn't exist for this applet

6.2.9.5.2 Test suite files

Additional requirements for the GSM personalisation:

- content of EF sume shall be:
- Title Alpha Identifier: "TOOLKIT TEST"

Test Script: API_2_TKR_EMETB_1.scr

Test Applet: API_2_TKR_EMETB_1.java

Installation parameter:

Same as default applet but with:

- Maximum text length for a menu entry: 15
- Maximum number of menu entries: 2
- Position / Identifier for each menu entry: '01'/'01', '02'/'02'

Load Script: API_2_TKR_EMETB_1.ldr

Cleanup script: API_2_TKR_EMETB_1.clr

Parameter File: API_2_TKR_EMETB_1.par

6.2.9.5.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|--|
| 1 | <p>Check menu state before enabling a previously disabled entry not registered to EVENT_MENU_SELECTION_HELP_REQUEST</p> <p>1- isEventSet(EVENT_MENU_SELECTION) 2- isEventSet(EVENT_MENU_SELECTION_HELP_REQUEST) 3- disableMenuEntry('01')</p> | <p>1- Shall return true 2- Shall return false 3- No exception shall be thrown.</p> | <p>3- The SIM shall issue a SET UP MENU proactive command with entry '02' only.</p> |
| 2 | <p>Check menu state after enabling a previously disabled entry not registered to EVENT_MENU_SELECTION_HELP_REQUEST</p> <p>1- enableMenuEntry('01') 2- isEventSet(EVENT_MENU_SELECTION) 3- isEventSet(EVENT_MENU_SELECTION_HELP_REQUEST)</p> | <p>1- No exception shall be thrown. 2- Shall return true. 3- Shall return false.</p> | <p>3- The SIM shall issue a SET UP MENU proactive command with entry '01' and '02'.</p> |
| 3 | <p>Check menu state before enabling a previously enabled entry registered to EVENT_MENU_SELECTION_HELP_REQUEST</p> <p>1- change Menu Entry '02' to indicate help supported 2- isEventSet(EVENT_MENU_SELECTION) 3- isEventSet(EVENT_MENU_SELECTION_HELP_REQUEST) 4- disableMenuEntry('02')</p> | <p>2- Shall return true 3- Shall return true 4- No exception shall be thrown</p> | <p>4- The SIM shall issue a SET UP MENU proactive command with entry '01'. The help information available flag.is not verified</p> |
| 4 | <p>Check menu state after enabling a previously enabled entry registered to EVENT_MENU_SELECTION_HELP_REQUEST</p> <p>1- enableMenuEntry('02'). 2- isEventSet(EVENT_MENU_SELECTION) 3- isEventSet(EVENT_MENU_SELECTION_HELP_REQUEST)</p> | <p>1- No exception shall be thrown. 2- Shall return true. 3- Shall return true.</p> | <p>3- The SIM shall issue a SET UP MENU proactive command with entries '01' and '02' indicating help supported.</p> |
| 5 | <p>Enabling invalid entries</p> <p>For ID ranging from '00' to 'FF' except '01' and '02', the applet calls enableMenuEntry(ID) method.</p> | <p>Each time a Toolkit Exception with MENU_ENTRY_NOT_FOUND reason code shall be thrown.</p> | |

6.2.9.5.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 1,2,3,4 |
| N2 | 1,2,3,4 |
| N3 | 1,2,3,4 |
| C1 | 5 |

6.2.9.6 Method getEntry

Test Area Reference: API_2_TKR_GETY

6.2.9.6.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
public static ToolkitRegistry getEntry()
    throws ToolkitException
```

Normal execution

CRRN1: returns a reference to the applet ToolkitRegistry object of the calling applet.

CRRN2: Each successive call to getEntry() method shall return the same object.

Parameters error

No requirements

6.2.9.6.2 Test suite files

Test Script: API_2_TKR_GETY_1.scr

Test Applet: API_2_TKR_GETY_1.java

Load Script: API_2_TKR_GETY_1.ldr

Cleanup script: API_2_TKR_GETY_1.clr

Parameter File: API_2_TKR_GETY_1.par

6.2.9.6.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|------------------|
| 1 | <p>Installation</p> <p>In the constructor, the applet instance calls the getEntry() method.</p> | Returns a not null ToolkitRegistry instance. | |
| 2 | <p>Check it returns the same entry</p> <p>The applet calls the getEntry() method again.</p> | Returns the same ToolkitRegistry instance as for test case 1. | |

6.2.9.6.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 1 |
| N2 | 2 |

6.2.9.7 Method getPollInterval

Test Area Reference: API_2_TKR_GPOL

6.2.9.7.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
public short getPollInterval()
```

Normal execution

CRRN1: shall return a value between 1 and 15300 if applet is registered to EVENT_STATUS_COMMAND event.

CRRN2: shall return POLL_NO_DURATION value (0) if the toolkit applet is not registered to EVENT_STATUS_COMMAND event.

Parameters error

No requirements.

Context errors

No requirements.

6.2.9.7.2 Test suite files

- Test Script: API_2_TKR_GPOL_1.scr
- Test Applet: API_2_TKR_GPOL_1.java
- Load Script: API_2_TKR_GPOL_1.ldr
- Cleanup script: API_2_TKR_GPOL_1.clr
- Parameter File: API_2_TKR_GPOL_1.par

6.2.9.7.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | <p style="text-align: center;">Applet isn't registered to EVENT_STATUS_COMMAND</p> <p>getPollInterval().</p> | Shall return 0. | |
| 2 | <p style="text-align: center;">Requesting max duration</p> <p>1- requestPollInterval(15300) 2- Reset and initialize the card 3- getPollInterval()</p> | <p>1- No exception shall be thrown. 3- Shall return a value between 1 and 15300.</p> | |
| 3 | <p style="text-align: center;">Requesting System Duration</p> <p>1- requestPollInterval(POLL_SYSTEM_DURATION) 2- Reset and initialize the card 3- getPollInterval().</p> | <p>1- No exception shall be thrown. 3- Shall return a value between 1 and 15300.</p> | |
| 4 | <p style="text-align: center;">Requesting no Duration</p> <p>1- requestPollInterval(POLL_NO_DURATION) 2- Reset and initialize the card 3- getPollInterval().</p> | <p>1- No exception shall be thrown. 3- Shall return 0.</p> | |

6.2.9.7.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 2,3 |
| N2 | 1,4 |

6.2.9.8 Method initMenuEntry

Test Area Reference: API_2_TKR_IMET_BSSBZBS

6.2.9.8.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
public byte initMenuEntry(byte[] menuEntry,
    short offset,
    short length,
    byte nextAction,
    boolean helpSupported,
    byte iconQualifier,
    short iconIdentifier)
    throws java.lang.NullPointerException,
    java.lang.ArrayIndexOutOfBoundsException,
    ToolkitException
```

Normal execution

CRRN1: The SIM Toolkit Framework shall automatically update the menu stored in the ME by issuing a SETUP MENU proactive command. The later will reflect the changes done for the entry. The SIM Toolkit Framework shall use the data of the EF sume file in order to build the SET UP MENU command.

CRRN2: a call to isEventSet() method on EVENT_MENU_SELECTION shall return true after the 1st successful call (without an exception).

CRRN3: if helpSupported was true then a following call to isEventSet() method on EVENT_MENU_SELECTION_HELP_REQUEST event shall return true .

CRRN4: if helpSupported was true then after the completion of the SETUP MENU command, if an ENVELOPE(MENU_SELECTION_HELP_REQUEST) command is received by the SIM for this entry, then the SIM Toolkit framework shall trigger the applet.

CRRN5: if help supported was true, the SIM Toolkit Framework shall issue a SETUP MENU command with command qualifier = '80'

CRRN6: if helpSupported was false and there isn't any menu entry supporting help then a call to isEventSet() method on EVENT_MENU_SELECTION_HELP_REQUEST event shall return false.

CRRN7: The SIM Toolkit Framework shall supply in the SET UP MENU command with the icon identifier provided in the icon identifier list within the item icon identifier list Simple TLV if all the applets registered to the EVENT_MENU_SELECTION provide it.

CRRN8: The SIM Toolkit Framework shall set in the SET UP MENU command with the Icon list qualifier transmitted to the ME as 'icon is not self explanatory' if one of the applet registered prefers this qualifier.

CRRN9: If Next Action Indicator was different from '00', the SIM Toolkit Framework shall issue a SETUP MENU proactive command containing an Items Next Action Indicator simple TLV with the comprehension flag set to 0.

CRRN10: After the completion of the SETUP MENU command, if an ENVELOPE (MENU_SELECTION) command is received by the SIM for this identifier, then the SIM Toolkit framework shall trigger the applet.

Parameters error

CRRP1: Shall throw java.lang.NullPointerException - if menuEntry is null

CRRP2: Shall throw java.lang.ArrayIndexOutOfBoundsException - if offset would cause access outside array bounds

CRRP3: Shall throw java.lang.ArrayIndexOutOfBoundsException - if length would cause access outside array bounds

CRRP4: Shall throw java.lang.ArrayIndexOutOfBoundsException - if both offset and length would cause access outside array bounds

Context errors

CRRC1: Shall throw ALLOWED_LENGTH_EXCEEDED if the menu entry string is bigger than the allocated space

CRRC2: Shall throw REGISTRY_ERROR if the menu entry cannot be initialised (eg no more item data in applet loading parameter)

6.2.9.8.2 Test suite files

Additional requirements for the GSM personalisation:

- content of EF sume shall be:
 - Title Alpha Identifier: "TOOLKIT TEST"
 - Test case trigger: 1- Applet instantiation
 - 2- Menu selection
 - 3- Menu selection Help Supported

Test Script: API_2_TKR_IMET_BSSBZBS_1.scr

Test Applet: API_2_TKR_IMET_BSSBZBS_1.java

Installation parameter:

Same as default applet but with:

- Maximum text length for a menu entry: 15
- Maximum number of menu entries: 6
- Position / Identifier for each menu entry: '01/'01', '02/'02', '03/'03', '04/'04', '05/'05', and '06/'06'

Load Script: API_2_TKR_IMET_BSSBZBS_1.ldr

Cleanup script: API_2_TKR_IMET_BSSBZBS_1.clr

Parameter File: API_2_TKR_IMET_BSSBZBS_1.par

6.2.9.8.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|------------------|
| 1 | NULL as parameter to menuEntry MenuEntry = NULL | Shall throw a java.lang.NullPointerException. | |
| 2 | Offset > menuEntry.length MenuEntry = "ToolkitTest" Offset = 12 Length = 0 | Shall throw java.lang.ArrayIndexOutOfBoundsException. | |
| 3 | Offset < 0 MenuEntry = "ToolkitTest" Offset = -1 Length = 11 | Shall throw java.lang.ArrayIndexOutOfBoundsException. | |
| 4 | Offset = 255 MenuEntry = "ToolkitTest" Offset = 255 Length = 11 | Shall throw java.lang.ArrayIndexOutOfBoundsException. | |
| 5 | Length = menuEntry.length+1 MenuEntry = "ToolkitTest" Offset = 0 Length = 12 | Shall throw java.lang.ArrayIndexOutOfBoundsException. | |
| 6 | Length < 0 MenuEntry = "ToolkitTest" Offset = 0 Length = -1 | Shall throw java.lang.ArrayIndexOutOfBoundsException. | |
| 7 | Offset + length > menuEntry.length MenuEntry = "ToolkitTest" Offset = 11 Length = 1 | Shall throw java.lang.ArrayIndexOutOfBoundsException. | |
| 8 | MenuEntry.length > size allocated at loading for each menu entry MenuEntry = "ToolkitTest impossible" Offset = 0 Length = 16 | ALLOWED_LENGTH_EXCEEDED ToolkitException is thrown. | |
| 9 | Successful call, menuEntry is the whole buffer 1- initMenuEntry() MenuEntry = "TOOLKIT TEST 1" Offset = 0 Length = 14 NextAction = '00' HelpSupported = false IconQualifier = '00' IconIdentifier = 0 2- isEventSet(EVENT_MENU_SELECTION) | 1- No exception shall be thrown, Shall return ID '01'. 2- Shall return true. | |
| 10 | Successful call, menuEntry part of a buffer 1- initMenuEntry() MenuEntry = "1234567TOOLKIT TEST 2" Offset = 7 Length = 14 NextAction = '00' HelpSupported = false IconQualifier = '00' IconIdentifier = 0 2- isEventSet(EVENT_MENU_SELECTION_HELP_REQUEST) | 1- No exception shall be thrown, Shall return ID '02'. 2- Shall return false. | |

| | | | |
|-----------|--|--|--|
| <p>11</p> | <p>Successful call, menuEntry with help supported</p> <p>1- initMenuEntry() MenuEntry = "TOOLKIT TEST 3" Offset = 0 Length = 14 NextAction = '00' HelpSupported = true IconQualifier = '00' IconIdentifier = 0</p> <p>2- isEventSet(EVENT_MENU_SELECTION_HELP_REQUEST)</p> | <p>1- No exception shall be thrown, Shall return ID '03' 2- Shall return true.</p> | |
| <p>12</p> | <p>Successful call, menuEntry with an Icon</p> <p>MenuEntry = "TOOLKIT TEST 4" Offset = 0 Length = 14 NextAction = '00' HelpSupported = false IconQualifier = '01' [icon not self explanatory] IconIdentifier = 1</p> | <p>1- No exception shall be thrown. 2- Shall return ID '04'</p> | |
| <p>13</p> | <p>Successful call, menuEntry with a next action indication</p> <p>MenuEntry = "TOOLKIT TEST 5" Offset = 0 Length = 14 NextAction = '24' [Select Item] HelpSupported = false IconQualifier = '00' IconIdentifier = 0</p> | <p>1- No exception shall be thrown. 2- Shall return ID '05'</p> | |
| <p>14</p> | <p>Successful call, length = 0</p> <p>initMenuEntry() MenuEntry = "ToolkitTest" Offset = 0 Length = 0 NextAction = '00' HelpSupported = false IconQualifier = '00' IconIdentifier = 0</p> | <p>No exception shall be thrown, Shall return ID '06'.</p> | |
| <p>15</p> | <p>Initialize more entry than allocated at loading</p> <p>MenuEntry = "ToolkitTest" Offset = 0 Length = 11</p> | <p>REGISTRY_ERROR ToolkitException is thrown.</p> | |
| <p>16</p> | <p>Dynamic update of the menu stored by the ME</p> <p>Fetch</p> | | <p>Card shall Send a SetupMenu Proactive command: [CommandQualifier]=help supported [AlphaId]="TOOLKIT TEST" [ItemId=1] = "TOOLKIT TEST 1" [ItemId=2] = "TOOLKIT TEST 2" [ItemId=3] = "TOOLKIT TEST 3" [ItemId=4] = "TOOLKIT TEST 4" [ItemId=5] = "TOOLKIT TEST 5" [ItemId=6] = ""</p> |

| | | | |
|----|---|--|---------------------------------------|
| | | | [[ItemsNextAction]=0600000 0002400 |
| 17 | Check Applet is triggered by ENVELOPE(MENU_SELECTION) command Menu Entry ID = '01' | Applet is triggered by an ENVELOPE(MENU_SELECTION) command & Menu Entry ID = '01' | |
| 18 | Check Applet is triggered by ENVELOPE(MENU_SELECTION) command Menu Entry ID = '02' | Applet is triggered by an ENVELOPE(MENU_SELECTION) command & Menu Entry ID = '02' | |
| 19 | Check Applet is triggered by ENVELOPE(MENU_SELECTION) command Menu Entry ID = '03' | Applet is triggered by an ENVELOPE(MENU_SELECTION) command & Menu Entry ID = '03' | |
| 20 | Check Applet is triggered by ENVELOPE(MENU_SELECTION) command Menu Entry ID = '04' | Applet is triggered by an ENVELOPE(MENU_SELECTION) command & Menu Entry ID = '04' | |
| 21 | Check Applet is triggered by ENVELOPE(MENU_SELECTION) command Menu Entry ID = '05' | Applet is triggered by an ENVELOPE(MENU_SELECTION) command & Menu Entry ID = '05' | |
| 22 | Check Applet is triggered by ENVELOPE (MENU_SELECTION_HELP_REQUEST) command Menu Entry ID = '03' | Applet is triggered by an ENVELOPE(MENU_SELECTION_HELP_REQUEST) command & Menu Entry ID = '03' | |
| 23 | Check Applet is triggered by ENVELOPE(MENU_SELECTION) command Menu Entry ID = '06' | Applet is triggered by an ENVELOPE(MENU_SELECTION) command & Menu Entry ID = '06' | |

6.2.9.8.4

Test Coverage

| CRR number | Test case number |
|------------|------------------------------------|
| N1 | 16 |
| N2 | 9 |
| N3 | 11 |
| N4 | 22 |
| N5 | 11,16 |
| N6 | 10 |
| N7 | 12,16 |
| N8 | 12,16 |
| N9 | 13,16 |
| N10 | 9,10,11,12,13,14,17,18,19,20,21,23 |
| P1 | 1 |
| P2 | 2,3,4 |
| P3 | 5,6 |
| P4 | 7 |
| C1 | 8 |
| C2 | 14 |

6.2.9.9 Method isEventSet

Test Area Reference: API_2_TKR_IEVSB

6.2.9.9.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
public boolean isEventSet(byte event)
```

Normal execution

CRRN1: shall return true if the event is set in the Toolkit Registry for the applet

CRRN2: shall return false if the event isn't set in the Toolkit Registry for the applet

Parameters error

No requirements.

Context errors

No requirements

6.2.9.9.2 Test suite files

Test Script: API_2_TKR_IEVSB_1.scr

Test Applet: API_2_TKR_IEVSB_1.java

Installation parameter:

Same as default applet but with:

- Maximum text length for a menu entry: 15
- Maximum number of menu entries: 1
- Position / Identifier for each menu entry: '01'/'01'
- Maximum number of timers: 1

Load Script: API_2_TKR_IEVSB_1.ldr

Cleanup script: API_2_TKR_IEVSB_1.clr

Parameter File: API_2_TKR_IEVSB_1.par

6.2.9.9.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|------------------|
| 1 | Events aren't set Applet calls isEventSet() for each events ranging from 1 to 127 excepted EVENT_FORMATTED_SMS_PP_ENV and EVENT_MENU_SELECTION. | Shall return false each time. | |
| 2 | For EVENT_FORMATTED_SMS_PP_ENV isEventSet (EVENT_FORMATTED_SMS_PP_ENV) | Shall return true. | |
| 3 | For EVENT_MENU_SELECTION isEventSet (EVENT_MENU_SELECTION) | Shall return true | |
| 4 | After clearing EVENT_FORMATTED_SMS_PP_ENV 1- clearEvent(EVENT_FORMATTED_SMS_PP_ENV) 2- isEventSet(EVENT_FORMATTED_SMS_PP_ENV) . | 1- No exception shall be thrown. 2- Shall return false. | |
| 5 | Setting events 1- For each SUPPORTED and ALLOWED events for setEvent(), applet calls: 1.1- setEvent() method 1.2- isEventSet() method. | 1.1- No exception shall be thrown. 1.2- Shall return true each time. | |
| 6 | For EVENT_MENU_SELECTION_HELP_REQUEST 1- isEventSet (EVENT_MENU_SELECTION_HELP_REQUEST) 2- call changeMenuEntry with help supported 3- isEventSet (EVENT_MENU_SELECTION_HELP_REQUEST) | 1- Shall return false. 3- Shall return true | |
| 7 | For EVENT_TIMER_EXPIRATION 1- isEventSet(EVENT_TIMER_EXPIRATION) 2- call allocateTimer() 3- isEventSet(EVENT_TIMER_EXPIRATION) | 1- Shall return false. 3- Shall return true | |
| 8 | For EVENT_STATUS_COMMAND 1- isEventSet(EVENT_STATUS_COMMAND) 2- call requestPollInterval(POLL_SYSTEM_DURATION) 3- isEventSet(EVENT_STATUS_COMMAND) | 1- Shall return false. 3- Shall return true | |

6.2.9.9.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 2,3,4,5,6,7,8 |
| N2 | 1,5,6,7,8 |

6.2.9.10 Method releaseTimer

Test Area Reference: API_2_TKR_RTIMB

6.2.9.10.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
public void releaseTimer(byte timerIdentifier)
    throws ToolkitException
```

Normal execution

CRRN1: if it was the last allocated timer for the applet then a following call to isEventSet() method for EVENT_TIMER_EXPIRATION should return false.

CRRN2: if applet has timers allocated then a call to isEventSet(EVENT_TIMER_EXPIRATION) shall return true.

CRRN3: After invocation of the method the indicated timer shall be released and available for reallocation.

CRRN4: The applet is deregistered of the EVENT_TIMER_EXPIRATION for the indicated Timer Identifier.

Parameters error

CRRP1: shall throw a ToolkitException with INVALID_TIMER_ID reason if the timer identifier isn't between 1 and 8.

Context errors

CRRC1: shall throw a ToolkitException with INVALID_TIMER_ID reason if the timer is valid but isn't allocated to this applet.

6.2.9.10.2 Test suite files

Test Script: API_2_TKR_RTIMB_1.scr

Test Applet: API_2_TKR_RTIMB_1.java

Installation parameter:

As Default, except max timer which is set to 8.

Load Script: API_2_TKR_RTIMB_1.ldr

Cleanup script: API_2_TKR_RTIMB_1.clr

Parameter File: API_2_TKR_RTIMB_1.par

6.2.9.10.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|------------------|
| 1 | Releasing not allocated timers For each timer ID ranging from '00' to 'FF', applet calls releaseTimer(ID). | Each time, method shall throw a ToolkitException with reason code INVALID_TIMER_ID. | |
| 2 | Releasing allocated timers 1- 8 * allocateTimer() . 2- 7 * releaseTimer(id). 3- isEventSet(EVENT_TIMER_EXPIRATION) | 1- No exception shall be thrown. 2- Each time, no exception shall be thrown. 3- Shall return true | |
| 3 | Releasing invalid timer ID 1- releaseTimer('FF') method 2- isEventSet(EVENT_TIMER_EXPIRATION) | 1- Shall throw a ToolkitException with INVALID_TIMER_ID reason code. 2- Shall return true. | |
| 4 | Releasing last timer 1- releaseTimer(last timer allocated) 2- isEventSet(EVENT_TIMER_EXPIRATION) | 1- No exception shall be thrown. 2- Shall return false. | |
| 5 | Checking we can allocate timers after they have been released 8 * allocateTimer(). | No exception shall be thrown. | |
| 6 | Releasing all timers. For 1 to 8, releaseTimer(id). | No exception shall be thrown. | |
| 7 | Checking applet isn't triggered by ENVELOPE(TIMER_EXPIRATION) command Send ENVELOPE(TIMER_EXPIRATION) | Applet is not triggered by an ENVELOPE(TIMER_EXPIRATION) command | |

6.2.9.10.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 4 |
| N2 | 2,3 |
| N3 | 5,6 |
| N4 | 7 |
| P1 | 1,3 |
| C1 | Framework |

6.2.9.11 Method requestPollInterval

Test Area Reference: API_2_TKR_RPOLs

6.2.9.11.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
public void requestPollInterval(short duration)
    throws ToolkitException
```


Normal execution

CRRN1: If duration is between 1 and 15300 or equal to POLL_SYSTEM_DURATION, the applet registers to EVENT_STATUS_COMMAND.

CRRN2: If duration is POLL_NO_DURATION, the applet is deregistered from EVENT_STATUS_COMMAND.

Parameters error

CRRP1: the method should throw a ToolkitException with REGISTRY_ERROR reason if duration is > 15300 or is < -1 (POLL_SYSTEM_DURATION).

Context errors

No Requirements.

6.2.9.11.2 Test suite files

Test Script: API_2_TKR_RPOLLS_1.scr
 Test Applet: API_2_TKR_RPOLLS_1.java
 Load Script: API_2_TKR_RPOLLS_1.ldr
 Cleanup script: API_2_TKR_RPOLLS_1.clr
 Parameter File: API_2_TKR_RPOLLS_1.par

6.2.9.11.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|------------------|
| 1 | Requesting a value between 1 and 15300 s 1- isEventSet(EVENT_STATUS_COMMAND) 2- requestPollInterval(duration) for boundaries values: 1, 255, 256, 15300. 3- isEventSet(EVENT_STATUS_COMMAND). | 1- Shall return false. 2- No exception shall be thrown. 3- Shall return true. | |
| 2 | Check Applet is triggered by a STATUS command 1- reset and card initialisation 2- Send STATUS command | 2- Applet is triggered by a STATUS command | |
| 3 | Requesting POLL SYSTEM DURATION 1- isEventSet(EVENT_STATUS_COMMAND). 2- RequestPollInterval(POLL_SYSTEM_DURATION). 3- IsEventSet(EVENT_STATUS_COMMAND). | 1- Shall return true. 2- No exception shall be thrown. 3- Shall return true. | |
| 4 | Check Applet is triggered by a STATUS command 1- reset and card initialisation 2- Send STATUS command | 2- Applet is triggered by a STATUS command | |
| 5 | Requesting invalid duration requestPollInterval(duration) for following values: 15301, 32767, -2, -32768 | Each time, a ToolkitException with REGISTRY_ERROR reason code, shall be thrown. | |
| 6 | Requesting POLL NO DURATION | 1- Shall return true. | |

| | | | |
|---|---|--|--|
| | 1- isEventSet(EVENT_STATUS_COMMAND) 2- requestPollInterval(POLL_NO_DURATION) 3- isEventSet(EVENT_STATUS_COMMAND) | 2- No exception shall be thrown. 3- Shall return false. | |
| 7 | Check Applet isn't triggered by an STATUS command. 1- reset and card initialisation 2- Send STATUS command | 2- Applet is not triggered by a STATUS command | |

6.2.9.11.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 1,2,3,4 |
| N2 | 6,7 |
| P1 | 5 |

6.2.9.12 Method setEvent

Test Area Reference: API_2_TKR_SEVTB

6.2.9.12.1 Conformance Requirement:

The method with following header shall be compliant to its definition in the API.

```
public void setEvent(byte id)
    throws ToolkitException
```

Normal execution

CRRN1: a following call to isEventSet() method with the same event id shall answer true for the applet.

CRRN2: the SIM Toolkit Framework shall trigger the applet if an occurrence of the set event happens.

CRRN3: this method shall accept all the events defined in GSM 0319 excepted: EVENT_MENU_SELECTION, EVENT_MENU_SELECTION_HELP_REQUEST, EVENT_TIMER_EXPIRATION, EVENT_STATUS_COMMAND

Parameters error

CRRP1: shall throw a ToolkitException with EVENT_NOT_SUPPORTED reason if event is 0.

CRRP2: shall throw a ToolkitException with EVENT_NOT_ALLOWED reason if event is EVENT_MENU_SELECTION.

CRRP3: shall throw a ToolkitException with EVENT_NOT_ALLOWED reason if event is EVENT_MENU_SELECTION_HELP_REQUEST.

CRRP4: shall throw a ToolkitException with EVENT_NOT_ALLOWED reason if event is EVENT_TIMER_EXPIRATION.

CRRP5: shall throw a ToolkitException with EVENT_NOT_ALLOWED reason if event is EVENT_STATUS_COMMAND.

Context errors

CRRC1: shall throw a ToolkitException with EVENT_ALREADY_REGISTERED if event is EVENT_CALL_CONTROL_BY_SIM but another applet is already registered to it.

CRRC2: shall throw a ToolkitException with EVENT_ALREADY_REGISTERED if event is EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM but another applet is already registered to it.

6.2.9.12.2 Test suite files

Test Script: API_2_TKR_SEVTB_1.scr
 Test Applet: API_2_TKR_SEVTB_1.java
 API_2_TKR_SEVTB_2.java
 Load Script: API_2_TKR_SEVTB_1.ldr

The load script installs the 2 instances.

Cleanup script: API_2_TKR_SEVTB_1.clr
 Parameter File: API_2_TKR_SEVTB_1.par

6.2.9.12.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | <p>Applet 1 is triggered by ENVELOPE(SMS_PP_FORMATTED) command.</p> <p>Send ENVELOPE(SMS_PP_FORMATTED)</p> | Applet 1 shall be triggered | |
| 2 | <p>Setting ALLOWED and SUPPORTED events</p> <p>1- For all events defined in GSM 0319 (from 1 to 19) and allowed: EVENT_PROFILE_DOWNLOAD, EVENT_FORMATTED_SMS_PP_ENV, EVENT_FORMATTED_SMS_PP_UPD, EVENT_FORMATTED_SMS_CB, EVENT_UNFORMATTED_SMS_PP_ENV, EVENT_UNFORMATTED_SMS_PP_UPD, EVENT_UNFORMATTED_SMS_CB, EVENT_CALL_CONTROL_BY_SIM, EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM, EVENT_EVENT_DOWNLOAD_MT_CALL, EVENT_EVENT_DOWNLOAD_CALL_CONNECTED, EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED, EVENT_EVENT_DOWNLOAD_LOCATION_STATUS, EVENT_EVENT_DOWNLOAD_USER_ACTIVITY, EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE, EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS, EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION, EVENT_EVENT_DOWNLOAD_BROWSER_TERMINATION.</p> <p>1.1- clearEvent(event) 1.2- isEventSet(event) 1.3- setEvent(event) 1.4- isEventSet(event) 1.5- clearEvent(event)</p> | <p>1.1- No exception shall be thrown. 1.2- Shall return false. 1.3- No exception shall be thrown. 1.4- Shall return true. 1.5- No exception shall be thrown.</p> | |
| 3 | <p>Event 0</p> <p>Call setEvent(0)</p> | Shall throw a ToolkitException with EVENT_NOT_SUPPORTED reason code. | |
| 4 | <p>Setting EVENT_MENU_SELECTION</p> <p>Call setEvent(EVENT_MENU_SELECTION)</p> | Shall throw a ToolkitException with EVENT_NOT_ALLOWED reason code. | |
| 5 | <p>Setting EVENT_MENU_SELECTION_HELP_REQUEST</p> <p>Call</p> | Shall throw a ToolkitException with EVENT_NOT_ALLOWED reason code. | |

| | | | |
|----|--|---|--|
| | setEvent(EVENT_MENU_SELECTION_HELP_REQUEST) | | |
| 6 | Setting EVENT_TIMER_EXPIRATION Call setEvent(EVENT_TIMER_EXPIRATION) | Shall throw a ToolkitException with EVENT_NOT_ALLOWED reason code. | |
| 7 | Setting EVENT_STATUS_COMMAND Call setEvent(EVENT_STATUS_COMMAND) | Shall throw a ToolkitException with EVENT_NOT_ALLOWED reason code. | |
| 8 | Setting EVENT_CALL_CONTROL_BY_SIM Call setEvent(EVENT_CALL_CONTROL_BY_SIM) | No Exception shall be thrown | |
| 9 | Setting EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM Call setEvent(EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM) | No Exception shall be thrown | |
| 10 | Check applet is triggered by an ENVELOPE(CALL_CONTROL_BY_SIM) Trigger the applet | Applet is triggered by an ENVELOPE(CALL_CONTROL_BY_SIM) | |
| 11 | Check applet is triggered by an ENVELOPE(MO_SHORT_MESSAGE_CONTROL_BY_SIM) Trigger the Applet | Applet is triggered by an ENVELOPE(MO_SHORT_MESSAGE_CONTROL_BY_SIM) | |
| 12 | Applet 2 is triggered by ENVELOPE(SMS_PP_DOWNLOAD) command. Trigger the applet 2 | Applet 2 is triggered by an ENVELOPE(SMS_PP_DOWNLOAD) command | |
| 13 | Applet 2 registers to CALL_CONTROL_BY_SIM but it is already assigned setEvent(EVENT_CALL_CONTROL_BY_SIM) | Shall throw a ToolkitException with EVENT_ALREADY_REGISTERED reason code. | |
| 14 | Applet 2 registers to MO_MESSAGE_CONTROL_BY_SIM but it is already assigned setEvent(EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM) | Shall throw a ToolkitException with EVENT_ALREADY_REGISTERED reason code. | |

6.2.9.12.4 Test Coverage

| CRR number | Test case number |
|------------|-------------------|
| N1 | 2 |
| N2 | 1, 8,9,10, 11, 12 |
| N3 | 2,4,5,6,7 |
| P1 | 3 |
| P2 | 4 |
| P3 | 5 |
| P4 | 6 |
| P5 | 7 |
| C1 | 13 |
| C2 | 14 |

6.2.9.13 Method setEventList

Test Area Reference: API_2_TKR_SEVL_BSS

6.2.9.13.1 Conformance Requirement:

The method with following header shall be compliant to its definition in the API.

```
public void setEventList(byte[] eventList,
                        short offset,
                        short length)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: for all events set successfully by this method, a call to `isEventSet()` method should return true.

CRRN2: the SIM Toolkit Framework shall trigger the applet if an occurrence of one of the successfully registered events happens.

CRRN3: this method shall accept all the events defined in GSM 0319 excepted: `EVENT_MENU_SELECTION`, `EVENT_MENU_SELECTION_HELP_REQUEST`, `EVENT_TIMER_EXPIRATION`, `EVENT_STATUS_COMMAND`.

Parameters error

CRRP1: shall throw a `java.lang.NullPointerException` if `eventList` is null.

CRRP2: shall throw a `java.lang.ArrayIndexOutOfBoundsException` if `offset` would cause access outside array bounds.

CRRP3: shall throw a `java.lang.ArrayIndexOutOfBoundsException` if `length` would cause access outside array bounds.

CRRP4: shall throw a `java.lang.ArrayIndexOutOfBoundsException` if both `offset` and `length` would cause access outside array bounds.

CRRP5: shall throw a `ToolkitException` with `EVENT_NOT_SUPPORTED` reason if event is 0.

CRRP6: shall throw a `ToolkitException` with `EVENT_NOT_ALLOWED` reason if `eventList` contains `EVENT_MENU_SELECTION`.

CRRP7: shall throw a `ToolkitException` with `EVENT_NOT_ALLOWED` reason if `eventList` contains `EVENT_MENU_SELECTION_HELP_REQUEST`.

CRRP8: shall throw a `ToolkitException` with `EVENT_NOT_ALLOWED` reason if `eventList` contains `EVENT_TIMER_EXPIRATION`.

CRRP9: shall throw a `ToolkitException` with `EVENT_NOT_ALLOWED` reason if `eventList` contains `EVENT_STATUS_COMMAND`.

Context errors

CRRC1: shall throw a `ToolkitException` with `EVENT_ALREADY_REGISTERED` if `eventList` contains `EVENT_CALL_CONTROL_BY_SIM` but another applet is already registered to it.

CRRC2: shall throw a `ToolkitException` with `EVENT_ALREADY_REGISTERED` if `eventList` contains `EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM` but another applet is already registered to it.

6.2.9.13.2 Test suite files

Test Script: `API_2_TKR_SEVL_BSS_1.scr`

Test Applet: `API_2_TKR_SEVL_BSS_1.java`
`API_2_TKR_SEVL_BSS_2.java`

Load Script: `API_2_TKR_SEVL_BSS_1.ldr`

The load script installs the 2 instances.

Cleanup script: `API_2_TKR_SEVL_BSS_1.clr`

Parameter File: API_2_TKR_SEVL_BSS_1.par

6.2.9.13.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | <p>Applet 1 Registering all eventList buffer</p> <p>EventList = all allowed events defined in GSM 0319: EVENT_PROFILE_DOWNLOAD, EVENT_FORMATTED_SMS_PP_ENV, EVENT_FORMATTED_SMS_PP_UPD, EVENT_FORMATTED_SMS_CB, EVENT_UNFORMATTED_SMS_PP_ENV, EVENT_UNFORMATTED_SMS_PP_UPD, EVENT_UNFORMATTED_SMS_CB, EVENT_CALL_CONTROL_BY_SIM, EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM, EVENT_EVENT_DOWNLOAD_MT_CALL, EVENT_EVENT_DOWNLOAD_CALL_CONNECTED, EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED, EVENT_EVENT_DOWNLOAD_LOCATION_STATUS, EVENT_EVENT_DOWNLOAD_USER_ACTIVITY, EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE, EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS, EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION, EVENT_EVENT_DOWNLOAD_BROWSER_TERMINATION.</p> <p>1- For each event in EventList clearEvent(event)</p> <p>2- setEventList(eventList)</p> <p>Offset = 0 Length = eventList.length</p> <p>3- For all events in eventList isEventSet(event)</p> <p>4- For each event in EventList clearEvent(event)</p> | <p>1- No exception shall be thrown.</p> <p>2- No exception shall be thrown.</p> <p>3- Each time shall return true.</p> <p>4- No exception shall be thrown.</p> | |
| 2 | <p>Registering part of eventList buffer</p> <p>EventList = all allowed events defined in GSM 0319 (see test case 1).</p> <p>1- For each event in EventList clearEvent(event)</p> <p>2- setEventList(eventList, offset, length)</p> <p>Offset > 0 Length = eventList.length - offset</p> <p>3- For all events in eventList: isEventSet(event)</p> <p>4- For each event in EventList: clearEvent(event)</p> | <p>1- No exception shall be thrown.</p> <p>2- No exception shall be thrown.</p> <p>3- Each time shall return true for events ranging from offset to offset+length else shall return false.</p> <p>4- No exception shall be thrown.</p> | |
| 3 | <p>Null buffer</p> <p>EventList = null</p> | <p>Shall throw a java.lang.NullPointerException</p> | |
| 4 | <p>Out of bounds offset</p> <p>Offset = eventList.length Length = 1</p> | <p>Shall throw a java.lang.ArrayIndexOutOfBoundsException</p> | |
| 5 | <p>Out of bounds and big offset</p> | <p>Shall throw a java.lang.ArrayIndexOutOfBoundsException</p> | |

| | | | |
|----|---|---|--|
| | Offset = 255 Length = 1 | Exception | |
| 6 | Offset < 0 Offset = -1 Length = 1 | Shall throw a java.lang.ArrayIndexOutOfBoundsException | |
| 7 | Out of bounds length Offset = 0 Length = eventList.length + 1 | Shall throw a java.lang.ArrayIndexOutOfBoundsException | |
| 8 | Out of bounds and big length Offset = 0 Length = 255 | Shall throw a java.lang.ArrayIndexOutOfBoundsException | |
| 9 | Length < 0 Offset = 0 Length = -1 | Shall throw a java.lang.ArrayIndexOutOfBoundsException | |
| 10 | Out of bounds offset + Length Offset + length > eventList.length + 1 | Shall throw a java.lang.ArrayIndexOutOfBoundsException | |
| 11 | Event 0 Call setEventList(eventList) with eventList indicating event 0 | Shall throw a ToolkitException with EVENT_NOT_SUPPORTED reason code. | |
| 12 | EVENT_MENU_SELECTION Call setEventList(eventList) with eventList indicating EVENT_MENU_SELECTION | Shall throw a ToolkitException with reason code EVENT_NOT_ALLOWED. | |
| 13 | EVENT_MENU_SELECTION_HELP_REQUEST Call setEventList(eventList) with eventList indicating EVENT_MENU_SELECTION_HELP_REQUEST | Shall throw a ToolkitException with reason code EVENT_NOT_ALLOWED. | |
| 14 | EVENT_TIMER_EXPIRATION Call setEventList(eventList) with eventList indicating EVENT_TIMER_EXPIRATION | Shall throw a ToolkitException with reason code EVENT_NOT_ALLOWED. | |
| 15 | EVENT_STATUS_COMMAND Call setEventList(eventList) with eventList indicating EVENT_STATUS_COMMAND | Shall throw a ToolkitException with reason code EVENT_NOT_ALLOWED. | |
| 16 | Setting EVENT_CALL_CONTROL_BY_SIM setEventList(List, 0, 2) with List containing EVENT_CALL_CONTROL_BY_SIM & EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM | Shall not throw an exception | |
| 17 | Check applet is triggered by an ENVELOPE(CALL_CONTROL_BY_SIM) Reset and initialise the card Trigger the applet | Applet is triggered by an ENVELOPE(CALL_CONTROL_BY_SIM) | |
| 18 | Check applet is triggered by an ENVELOPE(MO_SHORT_MESSAGE_CONTROL_BY_SIM) Trigger the applet | Applet is triggered by an ENVELOPE(MO_SHORT_MESSAGE_CONTROL_BY_SIM) | |
| 19 | Applet 2 registers to CALL_CONTROL_BY_SIM but it is already assigned setEventList(MonoEventList,0,1) with MonoEventList containing | Shall throw a ToolkitException with EVENT_ALREADY_REGISTERED reason code. | |

| | | | |
|----|--|--|--|
| | EVENT_CALL_CONTROL_BY_SIM | | |
| 20 | <p>Applet 2 registers to MO_SHORT_MESSAGE_CONTROL_BY_SIM but it is already assigned setEventList(MonoEventList,0,1) with MonoEventList containing EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM</p> | <p>Shall throw a ToolkitException with EVENT_ALREADY_REGISTERED reason code.</p> | |

6.2.9.13.4 Test Coverage

| CRR number | Test case number |
|------------|---------------------|
| N1 | 1,2 |
| N2 | 16,17,18 |
| N3 | 1,2,11, 12,13,14,15 |
| P1 | 3 |
| P2 | 4,5,6 |
| P3 | 7,8,9 |
| P4 | 10 |
| P5 | 11 |
| P6 | 12 |
| P7 | 13 |
| P8 | 14 |
| P9 | 15 |
| C1 | 19 |
| C2 | 20 |

6.2.10 Class ViewHandler

It is not possible to test the methods provided by this class as it is declared 'abstract'; it will be done in the class inheriting it: EditHandler, EnvelopeHandler, ProactiveResponseHandler, ProactiveHandler.

6.2.11 Class ToolkitException

6.2.11.1 Exception Constants

Test Area Reference: API_2_TKE_CONS

6.2.11.1.1 Conformance requirement:

There is no API, only constants.

Normal execution

CRRN1: The Constants of the class ToolkitException shall all have the same name and value defined in the GSM03.19 .

Parameters error

No requirements

Context errors

No requirements

6.2.11.1.2 Test suite files

None

6.2.11.1.3 Test procedure

The constants in Java are resolved at compilation time, therefore a runtime test is not useful. No test of constants will be performed.

6.2.11.2 Constructor ToolkitException

Test Area Reference: API_2_TKE_COORS

6.2.11.2.1 Conformance requirement:

The constructor with following headers shall compliant to its definition in the API.

```
public ToolkitException(short reason)
```

Normal execution

CRRN1: Construct a ToolkitException instance with the specified reason.

Parameters error

No requirements

Context errors

No requirements

6.2.11.2.2 Test suite files

No additional requirements for the GSM personalisation:

Test Script: API_2_TKE_COORS_1.scr

Test Applet: API_2_TKE_COORS_1.java

Load Script: API_2_TKE_COORS_1.ldr

Cleanup script: API_2_TKE_COORS_1.clr

Parameter File: API_2_TKE_COORS_1.par

6.2.11.2.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---------------------|--|------------------|
| 1 | reason = (short) 19 | ToolkitException.getReason() = (short)19 | |

6.2.11.2.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 1 |

6.2.11.3 Method throwIt

Test Area Reference: API_2_TKE_THITS

6.2.11.3.1 Conformance requirement:

The method with following header shall compliant to its definition in the API.

```
public static void throwIt(short reason)
    throws ToolkitException
```

Normal execution

CRRN1: Throws the JCRE instance of the ToolkitException class with the specified reason.

CRRN2: extends javacard.framework.CardRuntimeException

Parameters error

No requirements

Context errors

No requirements

6.2.11.3.2 Test suite files

No additional requirements for the GSM personalisation:

Test Script: API_2_TKE_THITS_1.scr
 Test Applet: API_2_TKE_THITS_1.java
 Load Script: API_2_TKE_THITS_1.ldr
 Cleanup Script: API_2_TKE_THITS_1.clr
 Parameter File: API_2_TKE_THITS_1.par

6.2.11.3.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|-----------------|------------------|
| 1 | Throws the JCRE instance of ToolkitException with the specified reason | Reason = 0 | |
| 2 | Throws the JCRE instance of ToolkitException with the specified reason | Reason = 1 | |
| 3 | Throws the JCRE instance of ToolkitException with the specified reason | Reason = 15 | |
| 4 | ToolkitException extends javacard.framework.CardRuntimeException | Reason = 0 | |
| 5 | ToolkitException extends javacard.framework.CardRuntimeException | Reason = 1 | |
| 6 | ToolkitException extends javacard.framework.CardRuntimeException | Reason = 15 | |

6.2.11.3.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 1, 2, 3 |
| N2 | 4, 5, 6 |

6.3 SIM Toolkit Framework

6.3.1 Minimum Handler Availability

This test area tests the rules that define the minimum requirements for the availability of the system handlers.

6.3.1.1 ProactiveHandler

Test Area Reference: FWK_MHA_PAHD

6.3.1.1.1 Conformance Requirement

Normal Execution

CRRN1: If a proactive session is not ongoing the ProactiveHandler is available from the invocation to the termination of the processToolkit method for the following events:

EVENT_FORMATTED_SMS_PP_ENV
EVENT_UNFORMATTED_SMS_PP_ENV
EVENT_FORMATTED_SMS_CB
EVENT_UNFORMATTED_SMS_CB
EVENT_MENU_SELECTION
EVENT_MENU_SELECTION_HELP_REQUEST
EVENT_TIMER_EXPIRATION
EVENT_EVENT_DOWNLOAD_MT_CALL
EVENT_EVENT_DOWNLOAD_CALL_CONNECTED
EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED
EVENT_EVENT_DOWNLOAD_LOCATION_STATUS
EVENT_EVENT_DOWNLOAD_USER_ACTIVITY
EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE
EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS
EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION
EVENT_EVENT_DOWNLOAD_BROWSER_TERMINATION
EVENT_UNRECOGNIZED_ENVELOPE
EVENT_STATUS_COMMAND
EVENT_CALL_CONTROL
EVENT_SMS_MO_CONTROL
EVENT_PROFILE_DOWNLOAD

6.3.1.1.2 Test Suite Files

Test Script: FWK_MHA_PAHD_1.scr

Test Applet: FWK_MHA_PAHD_1.java

FWK_MHA_PAHD_2.java
 Load Script: FWK_MHA_PAHD_1.ldr
 Cleanup Script: FWK_MHA_PAHD_1.clr
 Parameter File: FWK_MHA_PAHD_1.par

6.3.1.1.3 Test Procedure

| Id | Description | API /Framework Expectation | APDU Expectation |
|----|--|---|------------------|
| 1 | <p>Applets registration to all events and Proactive Handler availability with EVENT_PROFILE_DOWNLOAD</p> <p>Applet1 is registered to all events defined in [7]. Using the methods initMenuEntry () for EVENT_MENU_SELECTION, requestPollInterval () for EVENT_STATUS_COMMAND, allocateTimer () for EVENT_TIMER_EXPIRATION and setEventList () for the rest of the events.</p> <p>Applet2 is registered to all events defined in [7], except EVENT_CALL_CONTROL_BY_SIM and EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM. Using the methods initMenuEntry () for EVENT_MENU_SELECTION, requestPollInterval () for EVENT_STATUS_COMMAND, allocateTimer () for EVENT_TIMER_EXPIRATION and setEventList () for the rest of the events.</p> <p>The priority of applet1 is higher than priority of applet2 1-Terminal Profile command is sent to SIM without the facility of SET_EVENT_LIST, POLL_INTERVAL,SET UP IDLE MODE TEXT and SET UP MENU.</p> <p>2-Applet1 gets the Proactive Handler Applet1 is deregistered to EVENT_PROFILE_DOWNLOAD</p> <p>3-Applet2 gets the Proactive Handler Applet2 is deregistered to EVENT_PROFILE_DOWNLOAD</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown</p> <p>Applet1 finalizes</p> | |
| 2 | <p>Proactive Handler availability with EVENT_MENU_SELECTION_HELP_REQUEST</p> <p>Perform SIM initialization with all the facilities supported</p> <p>1-Envelope menu selection with help request is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> <p>3-Envelope menu selection with help request is sent to the SIM</p> <p>4-Applet2 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown</p> | |

| Id | Description | API /Framework Expectation | APDU Expectation |
|----|---|--|------------------|
| 3 | <p align="center">Proactive Handler availability with EVENT_MENU_SELECTION</p> <p>1-Envelope menu selection is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> <p>3-Envelope menu selection is sent to the SIM</p> <p>4-Applet2 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown.</p> | |
| 4 | <p align="center">Proactive Handler availability with EVENT_FORMATTED_SMS_PP_ENV</p> <p>1-Envelope dataDownLoad formatted is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> <p>3-Envelope dataDownLoad formatted is sent to the SIM</p> <p>4-Applet2 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown.</p> | |
| 5 | <p align="center">Proactive Handler availability with EVENT_UNFORMATTED_SMS_PP_ENV</p> <p>1-Envelope dataDownLoad unformatted is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> <p>3-Applet2 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown.</p> | |
| 6 | <p align="center">Proactive Handler availability with EVENT_FORMATTED_CELL BROADCAST</p> <p>1-Envelope cell broadcast formatted is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> <p>3-Envelope cell broadcast formatted is sent to the SIM</p> <p>4-Applet2 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2-No exception is thrown</p> <p>Applet1 finalizes</p> <p>3-Applet2 is triggered</p> <p>4-No exception is thrown</p> | |
| 7 | <p align="center">Proactive Handler availability with EVENT_UNFORMATTED_CELL BROADCAST</p> <p>1-Envelope cell broadcast unformatted is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown</p> | |

| Id | Description | API /Framework Expectation | APDU Expectation |
|----|--------------------------------------|---|------------------|
| | 3-Applet2 gets the Proactive Handler | Applet1 finalizes 3- Applet2 is triggered 4- No exception is thrown | |

| Id | Description | API /Framework Expectation | APDU Expectation |
|----|---|---|------------------|
| 8 | <p align="center">Proactive Handler availability with EVENT_TIMER_EXPIRATION</p> <p>1-Timer Id =1 Envelope Timer Expiration is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> <p>3-Timer id=2 Envelope Timer Expiration is sent to the SIM</p> <p>4- Applet2 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>Applet1 finalizes 3- Applet2 is triggered</p> <p>4- No exception is thrown</p> | |
| 9 | <p align="center">Proactive Handler availability with EVENT_CALL_CONTROL_BY_SIM</p> <p>1-Envelope call control by SIM is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> | |
| 10 | <p align="center">Proactive Handler availability with EVENT_MO_SHORT_MESSAGE_CONTROL</p> <p>1-Envelope mo short message control by SIM is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown</p> | |
| 11 | <p align="center">Proactive Handler availability with EVENT_EVENT_DOWNLOAD_MT_CALL</p> <p>1-Envelope event download mt call is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> <p>3-Applet2 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown</p> | |
| 12 | <p align="center">Proactive Handler availability with EVENT_EVENT_DOWNLOAD_CALL_CONNECTED</p> <p>1-Envelope event download call connected is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> <p>3-Applet2 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>Applet1 finalizes 3- Applet2 is triggered</p> <p>4- No exception is thrown</p> | |
| 13 | <p align="center">Proactive Handler availability with EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED</p> <p>1-Envelope event download call disconnected is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> | |

| Id | Description | API /Framework Expectation | APDU Expectation |
|----|--------------------------------------|--|------------------|
| | 3-Applet2 gets the Proactive Handler | Applet1 finalizes 3- Applet2 is triggered 4- No exception is thrown. | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|------------------|
| 14 | <p align="center">Applets triggering with EVENT_EVENT_LOCATION_STATUS</p> <p>1-Envelope event download location status is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> <p>3-Applet2 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown</p> | |
| 15 | <p align="center">Proactive Handler availability with EVENT_EVENT_DOWNLOAD_USER_ACTIVITY</p> <p>1-Envelope event download user activity is sent to SIM</p> <p>2-Applet1 gets the Proactive Handler</p> <p>3-Applet2 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown</p> | |
| 16 | <p align="center">Proactive Handler availability with EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE</p> <p>1-Envelope event download idle screen available is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> <p>3- Applet2 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown</p> | |
| 17 | <p align="center">Proactive Handler availability with EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS</p> <p>1-Envelope event download card reader status is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> <p>3-Applet2 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown</p> | |
| 18 | <p align="center">Proactive Handler availability with EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION</p> <p>1-Envelope event download language selection is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> <p>3-Applet2 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2-No exception is thrown.</p> <p>Applet1 finalizes</p> <p>Applet2 is triggered</p> <p>3-No exception is thrown</p> | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|------------------|
| 19 | <p align="center">Proactive Handler availability with EVENT_EVENT_DOWNLOAD_BROWSER_TERMINATION</p> <p>1-Envelope event download browser termination is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> <p>3-Applet2 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2-No exception is thrown.</p> <p>Applet1 finalizes</p> <p>Applet2 is triggered</p> <p>3-No exception is thrown</p> | |
| 20 | <p align="center">Proactive Handler availability with EVENT_STATUS_COMMAND</p> <p>1-Status command is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> <p>3- Applet2 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown.</p> | |
| 21 | <p align="center">Proactive Handler availability with UNRECOGNIZED_ENVELOPE</p> <p>1-An unrecognized Envelope (BER TLV Tag unrecognized) is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> <p>3-Applet2 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown</p> | |

6.3.1.1.4 Test Coverage

| CRR Number | Test Case Number |
|------------|---|
| CRRN1 | 1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21 |

6.3.1.2 ProactiveResponseHandler

Test Area Reference: FWK_MHA_PRHD

6.3.1.2.1 Conformance Requirement

Normal Execution

CRRN1: The ProactiveResponseHandler is available after the first call to the ProactiveHandler.send method to the termination of the processToolkit method for the following events:

- EVENT_FORMATTED_SMS_PP_ENV
- EVENT_UNFORMATTED_SMS_PP_ENV
- EVENT_FORMATTED_SMS_CB

EVENT_UNFORMATTED_SMS_CB
 EVENT_MENU_SELECTION
 EVENT_MENU_SELECTION_HELP_REQUEST
 EVENT_TIMER_EXPIRATION
 EVENT_EVENT_DOWNLOAD_MT_CALL
 EVENT_EVENT_DOWNLOAD_CALL_CONNECTED
 EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED
 EVENT_EVENT_DOWNLOAD_LOCATION_STATUS
 EVENT_EVENT_DOWNLOAD_USER_ACTIVITY
 EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE
 EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS
 EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION
 EVENT_EVENT_DOWNLOAD_BROWSER_TERMINATION
 EVENT_UNRECOGNIZED_ENVELOPE
 EVENT_STATUS_COMMAND
 EVENT_CALL_CONTROL
 EVENT_SMS_MO_CONTROL
 EVENT_PROFILE_DOWNLOAD

6.3.1.2.2 Test Suite Files

Test Script: FWK_MHA_PRHD_1.scr
 Test Applet: FWK_MHA_PRHD_1.java
 FWK_MHA_PRHD_2.java
 Load Script: FWK_MHA_PRHD_1.ldr
 Cleanup Script: FWK_MHA_PRHD_1.clr
 Parameter File: FWK_MHA_PRHD_1.par

6.3.1.2.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---------------------------|------------------|
| 1 | <p>Applets registration to all events and Proactive Response Handler availability with EVENT_PROFILE_DOWNLOAD</p> <p>1- Applet1 is registered to all events defined in [7], applet2 is registered to all events defined in [7] except EVENT_CALL_CONTROL_BY_SIM and EVENT_MO_SMS_CONTROL_BY_SIM. Using the methods initMenuEntry() for EVENT_MENU_SELECTION, requestPollInterval() for EVENT_STATUS_COMMAND, allocateTimer() for EVENT_TIMER_EXPIRATION and setEventList()</p> | | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|---|
| | <p>for the rest of the events.</p> <p>1-Terminal Profile command is sent to the SIM without the facility of SET_EVENT_LIST and POLL_INTERVAL, ,SET UP IDLE MODE TEXT and SET UP MENU.</p> <p>Applet1 builds a proactive command DISPLAY TEXT.</p> <p>2- ProactiveHandler.send() method is called</p> <p>3- ProactiveResponseHandler.getTheHandler() method is called</p> <p style="padding-left: 40px;">Applet1 is deregistered to EVENT_PROFILE_DOWNLOAD</p> <p>Applet2 builds a proactive command DISPLAY TEXT.</p> <p>4- ProactiveHandler.send() method is called</p> <p>5- ProactiveResponseHandler.getTheHandler() method is called</p> <p>Applet1 is deregistered to EVENT_PROFILE_DOWNLOAD</p> | <p>1-Applet1 is triggered No exception is thrown</p> <p>3- No exception is thrown</p> <p>Applet1 finalizes 4- Applet2 is triggered</p> <p>6- No exception is thrown</p> | <p>2- The proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> <p>5- The proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|---|
| 2 | <p>Proactive Response Handler availability with EVENT_MENU_SELECTION_HELP_REQUEST</p> <p>Perform SIM initialization with all the facilities supported</p> <p>1-Envelope menu selection with help request is sent to the SIM</p> <p>Applet1 builds a proactive command DISPLAY TEXT</p> <p>2- ProactiveHandler.send() method is called</p> <p>3- ProactiveResponseHandler.getTheHandler() method is called</p> <p>Envelope menu selection with help request is sent to the SIM</p> <p>Applet2 builds a proactive command DISPLAY TEXT</p> <p>4- ProactiveHandler.send() method is called</p> <p>5- ProactiveResponseHandler.getTheHandler() method is called</p> | <p>1- Applet1 is triggered</p> <p>3- No exception is thrown</p> <p>Applet1 finalizes</p> <p>4- Applet2 is triggered</p> <p>6- No exception is thrown</p> | <p>2- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> <p>5- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |
| 3 | <p>Proactive Response Handler availability with EVENT_MENU_SELECTION</p> <p>1-Envelope menu selection is sent to the SIM</p> <p>Applet1 builds a proactive command DISPLAY TEXT</p> <p>2- ProactiveHandler.send() method is called</p> <p>3-ProactiveResponseHandler.getTheHandler() method is called</p> <p>4-Envelope menu selection is sent to the SIM</p> <p>Applet2 builds a proactive command DISPLAY TEXT</p> <p>5- ProactiveHandler.send() method is called</p> <p>6-ProactiveResponseHandler.getTheHandler() method is called</p> | <p>1- Applet1 is triggered</p> <p>3- No exception is thrown</p> <p>Applet1 finalizes</p> <p>4- Applet2 is triggered</p> <p>6- No exception is thrown</p> | <p>2- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> <p>5- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|---|
| 4 | <p>Proactive Response Handler availability with EVENT_FORMATTED_SMS_PP_ENV</p> <p>1-Envelope dataDownload formatted is sent to the SIM</p> <p>Applet builds a proactive command DISPLAY TEXT</p> <p>2-ProactiveHandler.send() method is called</p> <p>3-ProactiveResponseHandler.getTheHandler() method is called</p> <p>4-Envelope dataDownload formatted is sent to the SIM</p> <p>Applet2 builds a proactive command DISPLAY TEXT</p> <p>5-ProactiveHandler.send() method is called</p> <p>6-ProactiveResponseHandler.getTheHandler() method is called</p> | <p>1- Applet1 is triggered</p> <p>3- No exception is thrown</p> <p>Applet1 finalizes</p> <p>4- Applet2 is triggered</p> <p>6- No exception is thrown</p> | <p>2- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> <p>5- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |
| 5 | <p>Proactive Response Handler availability with EVENT_UNFORMATTED_SMS_PP_ENV</p> <p>1-Envelope dataDownload unformatted is sent to the SIM</p> <p>Applet1 builds a proactive command DISPLAY TEXT</p> <p>2- ProactiveHandler.send() method is called</p> <p>3- ProactiveResponseHandler.getTheHandler() method is called</p> <p>Applet2 builds a proactive command DISPLAY TEXT</p> <p>4- ProactiveHandler.send() method is called</p> <p>5- ProactiveResponseHandler.getTheHandler() method is called</p> | <p>1- Applet1 is triggered</p> <p>3- No exception is thrown</p> <p>Applet1 finalizes</p> <p>4- Applet2 is triggered</p> <p>6- No exception is thrown</p> | <p>2- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> <p>5- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |
| 6 | <p>Proactive Response Handler availability with EVENT_FORMATTED_SMS_CB</p> <p>1-Envelope cell broadcast formatted is sent to the SIM</p> | <p>1- Applet1 is triggered</p> | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|---|
| | <p>Applet1 builds a proactive command DISPLAY TEXT</p> <p>2-ProactiveHandler.send() method is called</p> <p>3-ProactiveResponseHandler.getTheHandler() method is called.</p> <p>4-Envelope cell broadcast formatted is sent to the SIM</p> <p>Applet2 builds a proactive command DISPLAY TEXT</p> <p>5- ProactiveHandler.send() method is called</p> <p>6-ProactiveResponseHandler.getTheHandler() method is called</p> | <p>3- No exception is thrown</p> <p>Applet1 finalizes</p> <p>4- Applet2 is triggered</p> <p>6- No exception is thrown</p> | <p>2- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> <p>5- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |
| 7 | <p>Proactive Response Handler availability with EVENT_UNFORMATTED_SMS_CB</p> <p>1-Envelope call broadcast unformatted is sent to the SIM</p> <p>Applet1 builds a proactive command DISPLAY TEXT</p> <p>2-ProactiveHandler.send() method is called</p> <p>3-ProactiveResponseHandler.getTheHandler() method is called.</p> <p>Applet2 builds a proactive command DISPLAY TEXT</p> <p>4- ProactiveHandler.send() method is called</p> <p>5-ProactiveResponseHandler.getTheHandler() method is called</p> | <p>1- Applet1 is triggered</p> <p>3- No exception is thrown</p> <p>Applet1 finalizes</p> <p>4- Applet2 is triggered</p> <p>6- No exception is thrown</p> | <p>2- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> <p>5- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |
| 8 | <p>Proactive Response Handler availability with EVENT_TIMER_EXPIRATION</p> <p>Timer id=1</p> <p>1-Envelope Timer Expiration is sent to the SIM</p> <p>Applet builds a proactive command DISPLAY TEXT</p> <p>2-ProactiveHandler.send() method is called</p> | <p>1- Applet1 is triggered</p> | <p>2- A proactive command DISPLAY TEXT is fetched</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|---|
| | <p>3-ProactiveResponseHandler.getTheHandler() method is called</p> <p>Timer id=2 Envelope Timer Expiration is sent to the SIM</p> <p>Applet builds a proactive command DISPLAY TEXT</p> <p>4-ProactiveHandler.send() method is called</p> <p>5-ProactiveResponseHandler.getTheHandler() method is called</p> | <p>3- No exception is thrown</p> <p>Applet1 finalizes</p> <p>4- Applet2 is triggered</p> <p>5- No exception is thrown</p> <p>Applet2 finalizes</p> | <p>TERMINAL RESPONSE</p> <p>6- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |
| 9 | <p>Proactive Response Handler availability with EVENT_CALL_CONTROL_BY_SIM</p> <p>1-Envelope call control by sim is sent to the SIM</p> <p>Applet builds a proactive command DISPLAY TEXT</p> <p>2-ProactiveHandler.send() method is called</p> <p>3-ProactiveResponseHandler.getTheHandler() method is called</p> | <p>1- Applet1 is triggered</p> <p>3- No exception is thrown</p> | <p>2- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |
| 10 | <p>Proactive Response Handler availability with MO_SHORT_MESSAGE_CONTROL_BY_SIM</p> <p>1-Envelope mo short message control by sim is sent to the SIM</p> <p>Applet builds a proactive command DISPLAY TEXT</p> <p>2-ProactiveHandler.send() method is called</p> <p>3-ProactiveResponseHandler.getTheHandler() method is called</p> | <p>1- Applet1 is triggered</p> <p>3- No exception is thrown</p> | <p>2- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|---|
| 11 | <p>Proactive Response Handler availability with EVENT_EVENT_DOWNLOAD_MT_CALL</p> <p>1-Envelope event download mt call is sent to the SIM</p> <p>Applet1 builds a proactive command DISPLAY TEXT</p> <p>2-ProactiveHandler.send() method is called</p> <p>3-ProactiveResponseHandler.getTheHandler() method is called.</p> <p>Applet2 builds a proactive command DISPLAY TEXT</p> <p>4- ProactiveHandler.send() method is called</p> <p>5-ProactiveResponseHandler.getTheHandler() method is called</p> | <p>1- Applet1 is triggered</p> <p>3- No exception is thrown</p> <p>Applet1 finalizes</p> <p>4- Applet2 is triggered</p> <p>6- No exception is thrown</p> | <p>2- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> <p>5- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |
| 12 | <p>Proactive Response Handler availability with EVENT_EVENT_DOWNLOAD_CALL_CONNECTED</p> <p>1-Envelope event download call connected is sent to the SIM</p> <p>Applet1 builds a proactive command DISPLAY TEXT</p> <p>2-ProactiveHandler.send() method is called</p> <p>3-ProactiveResponseHandler.getTheHandler() method is called</p> <p>Applet builds a proactive command DISPLAY TEXT</p> <p>4- ProactiveHandler.send() method is called</p> <p>5-ProactiveResponseHandler.getTheHandler() method is called</p> | <p>1- Applet1 is triggered</p> <p>3- No exception is thrown</p> <p>Applet1 finalizes</p> <p>4- Applet2 is triggered</p> <p>6- No exception is thrown</p> | <p>2- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> <p>5- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|---|
| 13 | <p>Proactive Response Handler availability with EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED</p> <p>1-Envelope event download call disconnected is sent to the SIM</p> <p>Applet1 builds a proactive command DISPLAY TEXT</p> <p>2-ProactiveHandler.send() method is called</p> <p>3-ProactiveResponseHandler.getTheHandler() method is called</p> <p>Applet2 builds a proactive command DISPLAY TEXT</p> <p>4- ProactiveHandler.send() method is called</p> <p>5- ProactiveResponseHandler.getTheHandler() method is called</p> | <p>1- Applet1 is triggered</p> <p>3- No exception is thrown</p> <p>Applet1 finalizes</p> <p>4- Applet2 is triggered</p> <p>6- No exception is thrown</p> | <p>2- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> <p>5- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |
| 14 | <p>Proactive Response Handler availability with EVENT_EVENT_DOWNLOAD_CALL_CONNECTED</p> <p>1-Envelope event download location status is sent to the SIM</p> <p>Applet1 builds a proactive command DISPLAY TEXT</p> <p>2-ProactiveHandler.send() method is called</p> <p>3-ProactiveResponseHandler.getTheHandler() method is called</p> <p>Applet2 builds a proactive command DISPLAY TEXT</p> <p>4- ProactiveHandler.send() method is called</p> <p>5- ProactiveResponseHandler.getTheHandler() method is called</p> | <p>1- Applet1 is triggered</p> <p>3- No exception is thrown</p> <p>Applet1 finalizes</p> <p>4- Applet2 is triggered</p> <p>6- No exception is thrown</p> | <p>2-A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> <p>5- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|---|
| 15 | <p>Proactive Response Handler availability with EVENT_EVENT_DOWNLOAD_USER_ACTIVITY</p> <p>1-Envelope event download user activity is sent to the SIM</p> <p>Applet1 builds a proactive command DISPLAY TEXT</p> <p>2-ProactiveHandler.send() method is called</p> <p>3-ProactiveResponseHandler.getTheHandler() method is called</p> <p>Applet2 builds a proactive command DISPLAY TEXT</p> <p>4- ProactiveHandler.send() method is called</p> <p>5- ProactiveResponseHandler.getTheHandler() method is called</p> | <p>1- Applet1 is triggered</p> <p>3- No exception is thrown</p> <p>Applet1 finalizes</p> <p>4- Applet2 is triggered</p> <p>6- No exception is thrown</p> | <p>2-A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> <p>5- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |
| 16 | <p>Proactive Response Handler availability with EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE</p> <p>1-Envelope event download idle screen available is sent to the SIM</p> <p>Applet1 builds a proactive command DISPLAY TEXT</p> <p>2-ProactiveHandler.send() method is called</p> <p>3-ProactiveResponseHandler.getTheHandler() method is called</p> <p>Applet2 builds a proactive command DISPLAY TEXT</p> <p>4- ProactiveHandler.send() method is called</p> <p>5- ProactiveResponseHandler.getTheHandler() method is called</p> | <p>1- Applet1 is triggered</p> <p>3- No exception is thrown</p> <p>Applet1 finalizes</p> <p>4- Applet2 is triggered</p> <p>6- No exception is thrown</p> | <p>2- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> <p>5- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|--|
| 17 | <p>Proactive Response Handler availability with EVENT_EVENT_DOWNLOAD_CALL_CONNECTED</p> <p>1-Envelope event download card reader status is sent to the SIM</p> <p>Applet1 builds a proactive command DISPLAY TEXT</p> <p>2-ProactiveHandler.send() method is called</p> <p>3-ProactiveResponseHandler.getTheHandler() method is called</p> <p>Applet2 builds a proactive command DISPLAY TEXT</p> <p>4- ProactiveHandler.send() method is called</p> <p>5-ProactiveResponseHandler.getTheHandler() method is called</p> | <p>1- Applet1 is triggered</p> <p>3- No exception is thrown</p> <p>Applet1 finalizes</p> <p>4- Applet2 is triggered</p> <p>6- No exception is thrown</p> | <p>2-A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> <p>5- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |
| 18 | <p>Proactive Response Handler availability with EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION</p> <p>1-Envelope event download language selection is sent to the SIM</p> <p>Applet1 builds a proactive command DISPLAY TEXT</p> <p>2-ProactiveHandler.send() method is called</p> <p>3-ProactiveResponseHandler.getTheHandler() method is called</p> <p>Applet2 builds a proactive command DISPLAY TEXT</p> <p>4- ProactiveHandler.send() method is called</p> <p>5-ProactiveResponseHandler.getTheHandler() method is called</p> | <p>1- Applet1 is triggered</p> <p>3-No exception is thrown</p> <p>Applet1 finalizes</p> <p>Applet2 is triggered</p> | <p>2-A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> <p>4-A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|---|
| 19 | <p>Proactive Response Handler availability with EVENT_EVENT_DOWNLOAD_BROWSER_TERMINATION</p> <p>1-Envelope event download Browser termination is sent to the SIM</p> <p>Applet1 builds a proactive command DISPLAY TEXT</p> <p>2-ProactiveHandler.send() method is called</p> <p>3-ProactiveResponseHandler.getTheHandler() method is called</p> <p>Applet2 builds a proactive command DISPLAY TEXT</p> <p>4- ProactiveHandler.send() method is called</p> <p>5-ProactiveResponseHandler.getTheHandler() method is called</p> | <p>5-No exception is thrown</p> <p>1- Applet1 is triggered</p> <p>3-No exception is thrown</p> <p>Applet1 finalizes</p> <p>Applet2 is triggered</p> <p>5-No exception is thrown</p> | <p>2-A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> <p>4-A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |
| 20 | <p>Proactive Response Handler availability with EVENT_STATUS_COMMAND</p> <p>1-Status command is sent to the SIM</p> <p>Applet1 builds a proactive command DISPLAY TEXT</p> <p>2-ProactiveHandler.send() method is called</p> <p>3-ProactiveResponseHandler.getTheHandler() method is called</p> <p>Applet2 builds a proactive command DISPLAY TEXT</p> <p>4- ProactiveHandler.send() method is called</p> <p>5-</p> | <p>1- Applet1 is triggered</p> <p>3- No exception is thrown</p> <p>Applet1 finalizes</p> <p>4- Applet2 is triggered</p> | <p>2- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> <p>5- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|---|
| | ProactiveResponseHandler.getTheHandler() method is called | 6- No exception is thrown | |
| 21 | <p>Proactive Response Handler availability with UNRECOGNIZED_ENVELOPE</p> <p>1-An unrecognized Envelope is sent to the SIM</p> <p>Applet1 builds a proactive command DISPLAY TEXT</p> <p>2-ProactiveHandler.send() method is called</p> <p>3-ProactiveResponseHandler.getTheHandler() method is called</p> <p>Applet2 builds a proactive command DISPLAY TEXT</p> <p>4- ProactiveHandler.send() method is called</p> <p>5-ProactiveResponseHandler.getTheHandler() method is called</p> | <p>1- Applet1 is triggered</p> <p>3- No exception is thrown</p> <p>Applet1 finalizes</p> <p>4- Applet2 is triggered</p> <p>6- No exception is thrown</p> | <p>2- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> <p>5- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |

6.3.1.2.4 Test Coverage

| CRR Number | Test Case Number |
|------------|---|
| CRRN1 | 1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21 |

6.3.1.3 EnvelopeHandler

Test Area Reference: FWK_MHA_ENHD

6.3.1.3.1 Conformance Requirement

Normal Execution

CRRN1: The EnvelopeHandler and its content are available for all toolkit applets triggered from the invocation to the termination of their processToolkit method for the following events:

- EVENT_FORMATTED_SMS_PP_ENV
- EVENT_UNFORMATTED_SMS_PP_ENV
- EVENT_FORMATTED_SMS_CB
- EVENT_UNFORMATTED_SMS_CB
- EVENT_MENU_SELECTION
- EVENT_MENU_SELECTION_HELP_REQUEST

EVENT_TIMER_EXPIRATION
EVENT_EVENT_DOWNLOAD_MT_CALL
EVENT_EVENT_DOWNLOAD_CALL_CONNECTED
EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED
EVENT_EVENT_DOWNLOAD_LOCATION_STATUS
EVENT_EVENT_DOWNLOAD_USER_ACTIVITY
EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE
EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS
EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION
EVENT_EVENT_DOWNLOAD_BROWSER_TERMINATION
EVENT_UNRECOGNIZED_ENVELOPE
EVENT_CALL_CONTROL
EVENT_SMS_MO_CONTROL

Context Errors

CRRC1: The EnvelopeHandler and its content are not available for any toolkit applet triggered from the invocation to the termination of their processToolkit method for the following events:

EVENT_STATUS_COMMAND
EVENT_PROFILE_DOWNLOAD

6.3.1.3.2 Test Suite Files

Test Script: FWK_MHA_ENHD_1.scr
Test Applet: FWK_MHA_ENHD_1.java
FWK_MHA_ENHD_2.java
Load Script: FWK_MHA_ENHD_1.ldr
Cleanup Script: FWK_MHA_ENHD_1.clr
Parameter File: FWK_MHA_ENHD_1.par

6.3.1.3.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | <p>Applet1 and Applet2 registration and Envelope Handler availability with EVENT_PROFILE_DOWNLOAD</p> <p>1- Applet1 is registered to all events defined [7]. Using the methods initMenuEntry() for EVENT_MENU_SELECTION, requestPollInterval() for EVENT_STATUS_COMMAND, allocateTimer() for EVENT_TIMER_EXPIRATION and setEventList() for the rest of the events.</p> <p>Applet2 is registered to all events defined [7] except EVENT_CALL_CONTROL_BY_SIM and EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM. Using the methods initMenuEntry() for EVENT_MENU_SELECTION, requestPollInterval() for EVENT_STATUS_COMMAND, allocateTimer for EVENT_TIMER_EXPIRATION and setEventList for the rest of the events.</p> <p>2-Terminal Profile command is sent to SIM without the facility of SET_EVENT_LIST ,SETUP_IDLE_MODE_TEXT ,POLL_INTERVAL and SETUP MENU</p> <p>3-EnvelopeHandler.getTheHandler() method is called by Applet1 Applet1 is deregistered to EVENT_PROFILE_DOWNLOAD</p> <p>4-EnvelopeHandler.getTheHandler() method is called by Applet2 Applet2 is deregistered to EVENT_PROFILE_DOWNLOAD</p> | <p>1- No exception is thrown</p> <p>2- Applet1 is triggered</p> <p>3- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown</p> <p>4- Applet2 is triggered</p> <p>5- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown</p> | |
| 2 | <p>Envelope Handler availability with EVENT_MENU_SELECTION_HELP_REQUEST</p> <p>Perform SIM initialization with all the facilities supported</p> <p>Envelope menu selection with help request is sent to the SIM</p> <p>1-EnvelopeHandler.getTheHandler() method is called by Applet1</p> <p>2-Envelope menu selection with help request is sent to the SIM</p> <p>3-EnvelopeHandler.getTheHandler() method is called by Applet2</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown. Applet1 finalizes.</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown.</p> | |
| 3 | <p>Envelope Handler availability with EVENT_MENU_SELECTION</p> <p>1-Envelope menu selection is sent to the SIM</p> | <p>1- Applet1 is triggered</p> | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|------------------|
| | 2-EnvelopeHandler.getTheHandler() method is called by Applet1 3-Envelope menu selection is sent to the SIM 4-EnvelopeHandler.getTheHandler() method is called by Applet2 | 2- No exception is thrown. Applet1 finalizes 3- Applet2 is triggered 4- No exception is thrown. | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|------------------|
| 4 | <p align="center">Envelope Handler availability with EVENT_FORMATTED_SMS_PP_ENV</p> <p>1-A EVENT_FORMATTED_SMS_PP_ENV envelope is sent to the SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called by Applet1</p> <p>3-A EVENT_FORMATTED_SMS_PP_ENV envelope is sent to the SIM</p> <p>4-EnvelopeHandler.getTheHandler() method is called by Applet2</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown.</p> | |
| 5 | <p align="center">Envelope Handler availability with EVENT_UNFORMATTED_SMS_PP_ENV</p> <p>1-An unformatted sms pp envelope is sent to the SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called by Applet1</p> <p>3-EnvelopeHandler.getTheHandler() method is called by Applet2</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown.</p> | |
| 6 | <p align="center">Envelope Handler availability with EVENT_FORMATTED_CB</p> <p>1-Envelope cell broadcast formatted is sent to the SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called by Applet1 Applet1 finalizes.</p> <p>3- Envelope cell broadcast formatted is sent to the SIM</p> <p>4-EnvelopeHandler.getTheHandler() method is called by Applet2</p> | <p>1- Applet1 is triggered</p> <p>2-No exception is thrown</p> <p>3- Applet2 is triggered</p> <p>4-No exception is thrown</p> | |
| 7 | <p align="center">Envelope Handler availability with EVENT_UNFORMATTED_CB</p> <p>1-Envelope cell broadcast unformatted is sent to the SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called by Applet1</p> <p>3-EnvelopeHandler.getTheHandler() method is called by Applet2</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown</p> | |
| 8 | <p align="center">Envelope Handler availability with EVENT_TIMER_EXPIRATION</p> <p>Timer id=1</p> <p>1-Envelope Timer Expiration is sent to the SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called by Applet1</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|------------------|
| | Timer id=2 3-Envelope Timer Expiration is sent to the SIM 4-EnvelopeHandler.getTheHandler() method is called by Applet2 Applet2 finalizes. | Applet1 finalizes 3- Applet2 is triggered 4- No exception is thrown. | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|------------------|
| 9 | <p align="center">Envelope Handler availability with EVENT_CALL_CONTROL_BY_SIM</p> <p>1-Envelope call control by sim is sent to the SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called by Applet1</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> | |
| 10 | <p align="center">Envelope Handler availability with EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM</p> <p>1-Envelope mo short message control by sim is sent to the SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called by Applet1.</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is throw</p> | |
| 11 | <p align="center">Envelope Handler availability with EVENT_EVENT_DOWNLOAD_MT_CALL</p> <p>1-Envelope event download mt call is sent to the SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called by Applet1</p> <p>3-EnvelopeHandler.getTheHandler() method is called by Applet2</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown.</p> | |
| 12 | <p align="center">Envelope Handler availability with EVENT_EVENT_DOWNLOAD_CALL_CONNECTED</p> <p>1-Envelope event download call connected is sent to the SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called by Applet1</p> <p>3-EnvelopeHandler.getTheHandler() method is called by Applet2</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown.</p> | |
| 13 | <p align="center">Envelope Handler availability with EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED</p> <p>1-Envelope event download call disconnected is sent to the SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called by Applet1</p> <p>3-EnvelopeHandler.getTheHandler() method is called by Applet2</p> | <p>1- Applet1 is triggered.</p> <p>2- No exception is thrown.</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown.</p> | |
| 14 | <p align="center">Envelope Handler availability with EVENT_EVENT_DOWNLOAD_LOCATION_STATUS</p> <p>1-Envelope event download location status</p> | | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|------------------|
| | is sent to the SIM 2-EnvelopeHandler.getTheHandler() method is called by Applet1 3-EnvelopeHandler.getTheHandler() method is called by Applet2 | 1- Applet1 is triggered 2- No exception is thrown. Applet1 finalizes 3- Applet2 is triggered 4- No exception is thrown. | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|------------------|
| 15 | <p>Envelope Handler availability with EVENT_EVENT_DOWNLOAD_USER_ACTIVITY</p> <p>1-Envelope event download user activity is sent to the SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called by Applet1</p> <p>3-EnvelopeHandler.getTheHandler() method is called by Applet2</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown</p> | |
| 16 | <p>Envelope Handler availability with EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE</p> <p>1-Envelope event download idle screen available is sent to the SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called by Applet1</p> <p>3-EnvelopeHandler.getTheHandler() method is called by Applet2</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown.</p> | |
| 17 | <p>Envelope Handler availability with EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS</p> <p>1-Envelope event download card reader status is sent to the SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called by Applet1</p> <p>3-EnvelopeHandler.getTheHandler() method is called by Applet2</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown.</p> | |
| 18 | <p>Envelope Handler availability with EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION</p> <p>1-Envelope event download language selection is sent to the SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called by Applet1 Applet1 finalizes.</p> <p>3-EnvelopeHandler.getTheHandler() method is called by Applet2</p> | <p>1- Applet1 is triggered</p> <p>2-No exception is thrown.</p> <p>Applet2 is triggered</p> <p>3-No exception is thrown.</p> | |
| 19 | <p>Envelope Handler availability with EVENT_EVENT_DOWNLOAD_BROWSER_TERMINATION</p> <p>1-Envelope event download browser termination is sent to the SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called by Applet1 Applet1 finalizes.</p> | <p>1- Applet1 is triggered</p> <p>2-No exception is thrown.</p> | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|------------------|
| | 3-EnvelopeHandler.getTheHandler() method is called by Applet2 | Applet2 is triggered 3-No exception is thrown. | |
| 20 | <p align="center">Envelope Handler availability with EVENT_STATUS_COMMAND</p> 1-Status command is sent to the SIM 2-EnvelopeHandler.getTheHandler() method is called by Applet1 3-EnvelopeHandler.getTheHandler() method is called by Applet2 | 1- Applet1 is triggered 2- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown 3- Applet2 is triggered 4- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown | |
| 21 | <p align="center">Envelope Handler availability with EVENT_UNRECOGNIZED_ENVELOPE</p> 1-An unrecognized Envelope is sent to the SIM 2-EnvelopeHandler.getTheHandler() method is called by Applet1 3-EnvelopeHandler.getTheHandler() method is called by Applet2 | 1- Applet1 is triggered 2- No exception is thrown. Applet1 finalizes 3- Applet2 is triggered 4- No exception is thrown. | |

6.3.1.3.4 Test Coverage

| CRR Number | Test Case Number |
|------------|--|
| CRRN1 | 2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19, |
| CRRC1 | 1,20 |

6.3.1.4 EnvelopeResponseHandler

Test Area Reference: FWK_MHA_ERHD

6.3.1.4.1 Conformance Requirement

Normal Execution

CRRN1: The handler is available for all triggered toolkit applets from the invocation of the processToolkit method of the toolkit applet until a toolkit applet has posted an envelope response or the first invocation of the ProactiveHandler.send method for the following events:.

- EVENT_FORMATTED_SMS_PP_ENV
- EVENT_UNFORMATTED_SMS_PP_ENV
- EVENT_CALL_CONTROL

EVENT_SMS_MO_CONTROL

EVENT_UNRECOGNIZED_ENVELOPE

CRRN2: After a call to the post method the handler is not longer available

CRRN3: After a call to the send method the handler is not longer available

Context Errors

CRR1: The handler is not available for the following events:

- EVENT_FORMATTED_SMS_CB
- EVENT_UNFORMATTED_SMS_CB
- EVENT_MENU_SELECTION
- EVENT_MENU_SELECTION_HELP_REQUEST
- EVENT_TIMER_EXPIRATION
- EVENT_EVENT_DOWNLOAD_MT_CALL
- EVENT_EVENT_DOWNLOAD_CALL_CONNECTED
- EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED
- EVENT_EVENT_DOWNLOAD_LOCATION_STATUS
- EVENT_EVENT_DOWNLOAD_USER_ACTIVITY
- EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE
- EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS
- EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION
- EVENT_EVENT_DOWNLOAD_BROWSER_TERMINATION
- EVENT_STATUS_COMMAND
- EVENT_PROFILE_DOWNLOAD

6.3.1.4.2 Test Suite Files

- Test Script: FWK_MHA_ERHD_1.scr
- Test Applet: FWK_MHA_ERHD_1.java
FWK_MHA_ERHD_2.java
- Load Script: FWK_MHA_ERHD_1.ldr
- Cleanup Script: FWK_MHA_ERHD_1.clr
- Parameter File: FWK_MHA_ERHD_1.par

6.3.1.4.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---------------------------|------------------|
| 1 | Toolkit Applet1 and Toolkit Applet2 registration and Envelope Response Handler availability with EVENT_PROFILE_DOWNLOAD | | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|------------------|
| | <p>1- Applet1 Toolkit 1 is registered to all events defined in [7]. Using the methods initMenuEntry() for EVENT_MENU_SELECTION, requestPollInterval() for EVENT_STATUS_COMMAND, allocateTimer() for EVENT_TIMER_EXPIRATION and setEventList() for the rest of the events.</p> <p>Applet2 Toolkit 2 is registered to EVENT_UNFORMATTED_SMS_PP_ENV and EVENT_UNRECOGNIZED_ENVELOPE.</p> <p>2-Terminal Profile command is sent to SIM without the facility of SET_EVENT_LIST, SETUP_IDLE_MODE_TEXT, SETUP_MENU and POLL_INTERVAL.</p> <p>32-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> <p>Applet1 is deregistered to EVENT_PROFILE_DOWNLOAD</p> | <p>1- No exception is thrown</p> <p>2- Applet1 is triggered</p> <p>3- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown</p> | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|------------------|
| 2 | <p>Envelope Response Handler availability with EVENT_MENU_SELECTION_HELP_REQUEST</p> <p>Perform SIM initialization with all the facilities supported</p> <p>1-Envelope menu selection with help request is sent to the SIM</p> <p>2-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> | <p>1- Applet1 is triggered.</p> <p>2- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown</p> | |
| 3 | <p>Envelope Response Handler availability with EVENT_MENU_SELECTION</p> <p>1-A envelope menu selection is sent to the SIM</p> <p>2-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> | <p>1- Applet1 is triggered</p> <p>2- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown</p> | |
| 4 | <p>Envelope Response Handler availability with EVENT_FORMATTED_CB</p> <p>1-Envelope cell broadcast formatted is sent to the SIM</p> <p>2-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> | <p>1- The applet1 is triggered.</p> <p>2-A Toolkit exception HANDLER_NOT_AVAILABLE is thrown</p> | |
| 5 | <p>Envelope Response Handler availability with EVENT_UNFORMATTED_CB</p> <p>1-Envelope cell broadcast unformatted is sent to the SIM</p> <p>2-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> | <p>1- Applet1 is triggered.</p> <p>2- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown</p> | |
| 6 | <p>Envelope Response Handler availability with EVENT_TIMER_EXPIRATION</p> <p>1-Envelope Timer Expiration is sent to the SIM</p> <p>2-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> | <p>1- Applet1 is triggered.</p> <p>2- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown</p> | |
| 7 | <p>Envelope Response Handler availability with EVENT_EVENT_DOWNLOAD_MT_CALL</p> <p>1-Envelope event download mt call is sent to the SIM</p> | <p>1- Applet1 is triggered.</p> | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|------------------|
| | 2-EnvelopeResponseHandler.getTheHandler() method is called by Applet1 | 2 -A Toolkit exception HANDLER_NOT_AVAILABLE is thrown | |
| 8 | <p>Envelope Response Handler availability with EVENT_EVENT_DOWNLOAD_CALL_CONNECTED</p> <p>1-Envelope event download call connected is sent to the SIM</p> <p>2-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> | <p>1- Applet1 is triggered.</p> <p>2- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown</p> | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|------------------|
| 9 | <p>Envelope Response Handler availability with EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED</p> <p>1-Envelope event download call disconnected is sent to the SIM</p> <p>2-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> | <p>1- Applet1 is triggered.</p> <p>2- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown</p> | |
| 10 | <p>Envelope Response Handler availability with EVENT_EVENT_DOWNLOAD_LOCATION_STATUS</p> <p>1-Envelope event download location status is sent to the SIM</p> <p>2-Applet A obtains the Envelope Response Handler</p> | <p>1- Applet1 is triggered.</p> <p>2- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown</p> | |
| 11 | <p>Envelope Response Handler availability with EVENT_EVENT_DOWNLOAD_USER_ACTIVITY</p> <p>1-Envelope event download user activity is sent to the SIM</p> <p>2-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> | <p>1- Applet1 is triggered.</p> <p>2- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown</p> | |
| 12 | <p>Envelope Response Handler availability with EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE</p> <p>1-Envelope event download idle screen available is sent to the SIM</p> <p>2-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> | <p>1- Applet1 is triggered.</p> <p>2- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown</p> | |
| 13 | <p>Envelope Response Handler availability with EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS</p> <p>1-Envelope event download card reader status is sent to the SIM</p> <p>2-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> | <p>1- Applet1 is triggered</p> <p>2- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown</p> | |
| 14 | <p>Envelope Response Handler availability with EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION</p> <p>1-Envelope event download language</p> | | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|---|
| | <p>selection is sent to the SIM</p> <p>2-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> | <p>1- Applet1 is triggered</p> <p>2-A Toolkit exception HANDLER_NOT_AVAILABLE is thrown</p> | |
| 15 | <p>Envelope Response Handler availability with EVENT_EVENT_DOWNLOAD_BROWSER_TERMINATION</p> <p>1-Envelope event download browser termination is sent to the SIM</p> <p>2-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> | <p>1- Applet1 is triggered</p> <p>2-A Toolkit exception HANDLER_NOT_AVAILABLE is thrown</p> | |
| 16 | <p>Envelope Response Handler availability with EVENT_STATUS_COMMAND</p> <p>1-Status command is sent to the SIM</p> <p>2-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> | <p>1- Applet1 is triggered</p> <p>2- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown</p> | |
| 17 | <p>Envelope Response Handler availability with EVENT_FORMATTED_SMS_PP_ENV</p> <p>1-A formatted sms pp envelope is sent to the SIM</p> <p>2-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> <p>3-Applet1 builds an additional information for response packet and it calls the post method</p> <p>4-Applet1 calls all methods of the Envelope Response Handler (including the inherited method)</p> <p>5-A EVENT_FORMATTED_SMS_PP_ENV envelope is sent to the SIM</p> <p>6-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> <p>7-Applet1 builds a proactive command and it calls the send() method</p> <p>8-Applet1 calls all methods of the Envelope Response Handler (including the inherited method)</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>4- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown for each method</p> <p>Applet1 finalizes</p> <p>5- Applet1 is triggered</p> <p>6- No Exception is thrown</p> <p>8- Toolkit exception HANDLER_NOT_AVAILABLE is thrown for each method</p> | <p>3- The response packet is sent</p> <p>7- The proactive command is sent</p> |
| 18 | <p>Envelope Response Handler availability with EVENT_UNFORMATTED_SMS_PP_ENV</p> | | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|---|
| | <p>1-A unformatted sms pp envelope is sent to the SIM</p> <p>2-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> <p>3-Applet1 builds the envelope response and it calls the post() method</p> <p>4- Applet1 calls all methods of the Envelope Response Handler (including the inherited method)</p> <p>5-EnvelopeResponseHandler.getTheHandler() method is called</p> <p>6-A unformatted sms pp envelope is sent to the SIM</p> <p>7-EnvelopeResponseHandler.getTheHandler() method is called.</p> <p>8-Applet1 builds a proactive command and it calls the send() method</p> <p>9-Applet1 calls all methods of the Envelope Response Handler (including the inherited method)</p> <p>10-EnvelopeResponseHandler.getTheHandler() method is called by Applet2</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>4- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown for each method Applet1 finalizes</p> <p>5- Applet2 is triggered.</p> <p>6- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown.</p> <p>Applet2 finalizes</p> <p>7- Applet1 is triggered</p> <p>8- No exception is thrown.</p> <p>10- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown for each method Applet1 finalizes</p> <p>11- Applet2 is triggered</p> <p>12- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown</p> | <p>3- The envelope response is sent</p> <p>9- The proactive command is fetched and the Terminal response is issued.</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|--|
| 19 | <p>Envelope Response Handler availability with EVENT_CALL_CONTROL_BY_SIM</p> <p>1-Envelope call control by sim is sent to the SIM</p> <p>2-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> <p>3-Applet1 builds the envelope response and it calls the postAsBERTLV() method</p> <p>4-Applet1 calls all methods of the Envelope Response Handler (including the inherited method)</p> <p>5-Envelope call control by sim is sent to the SIM</p> <p>6-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> <p>7-Applet1 builds a proactive command and it calls the send() method</p> <p>8-Applet1 calls all methods of the Envelope Response Handler (including the inherited method)</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>4- Toolkit exception HANDLER_NOT_AVAILABLE is thrown for each method Applet1 finalizes</p> <p>5- Applet1 is triggered</p> <p>6- No Exception is thrown</p> <p>8- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown for each method</p> | <p>3- The envelope response is sent</p> <p>7- The proactive command is fetched and the Terminal response is issued</p> |
| 20 | <p>Envelope Response Handler availability with EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM</p> <p>1-Envelope mo short message control by sim is sent to the SIM</p> <p>2-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> <p>3-Applet1 builds the envelope response and it calls the postAsBERTLV() method</p> <p>4-Applet1 calls all methods of the Envelope Response Handler (including the inherited method)</p> <p>5-Envelope mo short message control by sim is sent to the SIM</p> <p>6-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> <p>7-Applet1 builds a proactive command and it calls the send method</p> <p>8-Applet1 calls all methods of the Envelope Response Handler (including the inherited method)</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>4- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown for each method</p> <p>Applet1 finalizes</p> <p>5- Applet1 is triggered</p> <p>6- No exception is thrown</p> <p>8- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown for each method</p> | <p>3-The envelope response is sent</p> <p>7- The proactive command is fetched and the Terminal Response is issued</p> |
| 21 | <p>Envelope Response Handler availability with EVENT_UNRECOGNIZED_ENVELOPE</p> <p>1-An unrecognized Envelope is sent to the SIM</p> <p>2-EnvelopeResponseHandler.getTheHandler()</p> | <p>1- Applet1 is triggered</p> | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|--|
| | <p>method is called by Applet1</p> <p>3-Applet1 builds the envelope response and it calls the postAsBERTLV() or post method</p> <p>4-Applet1 calls all methods of Envelope Response Handler (including the inherited method)</p> <p>54-EnvelopeResponseHandler.getTheHandler() method is called</p> <p>6-An unrecognized Envelope is sent to the SIM</p> <p>7-EnvelopeResponseHandler.getTheHandler() method is called</p> <p>8-Applet1 builds a proactive command and it calls the send() method</p> <p>9-Applet1 calls all methods of the Envelope Response Handler (including the inherited method)</p> <p>10-EnvelopeResponseHandler.getTheHandler() method is called by Applet2</p> | <p>2- No exception is thrown.</p> <p>4- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown for each method</p> <p>Applet1 finalizes</p> <p>5- Applet2 is triggered.</p> <p>6- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown for each method</p> <p>Applet2 finalizes</p> <p>7- Applet1 is triggered.</p> <p>8- No exception is thrown.</p> <p>10- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown for each method</p> <p>Applet1 finalizes</p> <p>11- Applet2 is triggered</p> <p>12- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown for each method</p> | <p>3- The envelope response is sent</p> <p>9- The proactive command is fetched and the Terminal response is issued</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|--|
| 22 | <p>The envelope response is sent when a proactive session is ongoing</p> <p>1-A formatted SMS PP envelope is sent to the SIM.</p> <p>2-Proactive command DISPLAY TEXT is built and it calls the send() method.</p> <p>3-A call control by sim envelope is sent to the SIM.</p> <p>4-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> <p>5-Applet1 builds the envelope response and it calls the postAsBERTLV</p> | <p>1- Applet1 is triggered.</p> <p>3- Applet1 is triggered</p> <p>4- No exception is thrown</p> | <p>2- 91 XX</p> <p>5-The envelope response is sent 9F YY</p> <p>GET RESPONSE Data 91 XX Fetch DISPLAY TEXT</p> <p>Terminal Response DISPLAY TEXT</p> |

Note: Due to an inconsistency in [7] specification it is not possible to cover the test case when an applet, which is not the first toolkit applet triggered, try to post data in multitrigging.

6.3.1.4.4 Test Coverage

| CRR Number | Test Case Number |
|------------|--|
| CRRN1 | 17,18, 19,20,21,22 |
| CRRN2 | 17,18, 19,20,21,22 |
| CRRN3 | 17,18, 19,20,21,22 |
| CRRC1 | 1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16 |

6.3.2 Handler Integrity

6.3.2.1 ProactiveHandler

Test Area Reference: FWK_HIN_PAHD

6.3.2.1.1 Conformance Requirement

Normal Execution

CRRN1: At the processToolkit invocation the TLV-List is cleared.

CRRN2: After a call to ProactiveHandler.send method the handler will remain unchanged until the ProactiveHandler.init or appendTLV method are called.

6.3.2.1.2 Test Suite Files:

Test Script: FWK_HIN_PAHD_1.scr

Test Applet: FWK_HIN_PAHD_1.java

FWK_HIN_PAHD_2.java

Load Script: FWK_HIN_PAHD_1.ldr

Cleanup Script: FWK_HIN_PAHD_1.clr

Parameter File: FWK_HIN_PAHD_1.par

6.3.2.1.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|---|
| 1 | <p>At the processToolkit invocation the TLV-List is cleared</p> <p>Applet1 and Applet2 are registered to EVENT_UNFORMATTED_SMS_PP_ENV.</p> <p>1-An envelope containing an unformatted sms pp is sent to the SIM</p> <p>2-ProactiveHandler.getLength() method is called by Applet1</p> | <p>1- Applet1 is triggered.</p> <p>2- The return value is 0</p> | |
| 2 | <p>TLV-List change after the init method invocation</p> <p>ProactiveHandler.init() method is called by Applet1</p> <p>1-ProactiveHandler.getLength() method is called by Applet1</p> | <p>1- The return value is 9</p> | |
| 3 | <p>The TLV-List remains unchanged after the send() method invocation</p> <p>1-ProactiveHandler.send() method is called by Applet1</p> <p>2-ProactiveHandler.getLength() method is called by Applet1</p> <p>It's checked that the content is the same than before the calling to send method using ProactiveHandler.copyValue and Util.arrayCompare methods</p> | <p>2- The return value is 9, and its contents is the same than before the calling to send method</p> <p>Applet1 finalizes</p> | <p>1- The proactive command is fetched and the terminal response is issued.</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|------------------|
| 4 | <p>At the processToolkit invocation the TLV-List is cleared</p> <p>1-ProactiveHandler.getLength() method is called by Applet2</p> <p>2-ProactiveHandler.getValueLength() method is called by Applet2</p> | <p>1- Applet2 is triggered</p> <p>2- The return value is 0</p> <p>3- ToolkitException UNAVAILABLE_ELEMENT is thrown</p> | |

6.3.2.1.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1, 2, 3, 4 |
| CRRN2 | 3 |

6.3.2.2 ProactiveResponseHandler

Test Area Reference: FWK_HIN_PRHD

6.3.2.2.1 Conformance Requirement

Normal Execution

CRRN1: The ProactiveResponseHandler content is changed after the call to ProactiveHandler.send method and remains unchanged until next call to the ProactiveHandler.send method.

CRRN2: The ProactiveResponseHandler may not be available before the first call to ProactiveHandler.send method, if available the content is cleared.

6.3.2.2.2 Test Suite Files

- Test Script: FWK_HIN_PRHD_1.scr
- Test Applet: FWK_HIN_PRHD_1.java
- Load Script: FWK_HIN_PRHD_1.ldr
- Cleanup Script: FWK_HIN_PRHD_1.clr
- Parameter File: FWK_HIN_PRHD_1.par

6.3.2.2.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|---|
| 1 | <p align="center">Applet registration and ProactiveResponseHandler obtaining</p> <p>1-Applet is registered to all events defined in [7]. Using the methods initMenuEntry for EVENT_MENU_SELECTION, requestPollInterval() for EVENT_STATUS_COMMAND, allocateTimer() for EVENT_TIMER_EXPIRATION and setEventList() for the rest of the events.</p> <p>Terminal Profile command is sent to the SIM without the facilities SET_EVENT_LIST ,SETUP_IDLE_MODE_TEXT, SETUP_MENU and POLL_INTERVAL.</p> <p>For each event:</p> <p>2-ProactiveResponseHandler.getTheHandler() is called</p> <p>If handler is available, ProactiveResponseHandler.getLength() is called</p> | <p>1- No exception is thrown</p> <p>2- Applet is triggered.</p> <p>3- Behaviour 1: Toolkit Exception HANDLER_NOT_AVAILABLE is thrown.</p> <p>Behaviour 2: No exception is thrown, the return value is 0</p> | |
| 2 | <p align="center">The ProactiveResponseHandler remains unchanged after send method invocation until next send method invocation</p> <p>1-Applet builds a proactive command ProactiveHandler.send() method is called</p> <p>2-ProactiveResponseHandler.getLength() method is called</p> <p>3-ProactiveHandler.init() method is called</p> <p>4-ProactiveHandler.send() method is called</p> <p>5-ProactiveResponseHandler.getLength() method is called</p> | <p>1- The ProactiveResponseHandler contains the terminal response</p> <p>3- The return value is 12</p> <p>4- No exception is thrown and the Proactive Response Handler remains unchanged</p> <p>5- The ProactiveResponseHandler contains the terminal response of the second proactive command</p> <p>7- The return value is 15</p> | <p>2- A proactive command is fetched</p> <p>The terminal response is sent with length 12</p> <p>6- A proactive command is fetched</p> <p>The terminal response is sent with length 15</p> |

6.3.2.2.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1,2 |
| CRRN2 | 1 |

6.3.2.3 EnvelopeHandler

Test Area Reference: FWK_HIN_ENHD

6.3.2.3.1 Conformance Requirement

Normal Execution

CRRN1: The EnvelopeHandler and its content are available for all triggered toolkit applets, from the invocation to the termination of their processToolkit method.

CRRN2: The SIM Toolkit Framework guarantees that all triggered toolkit applets receive the data.

6.3.2.3.2 Test Suite Files

Test Script: FWK_HIN_ENHD_1.scr
 Test Applet: FWK_HIN_ENHD_1.java
 Load Script: FWK_HIN_ENHD_1.ldr
 Cleanup Script: FWK_HIN_ENHD_1.clr
 Parameter File: FWK_HIN_ENHD_1.par

6.3.2.3.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|------------------|
| 1 | <p>Applet initialization and Envelope Handler integrity checks with EVENT_MENU_SELECTION_HELP_REQUEST</p> <p>1- Applet is registered to all events defined in [7] except EVENT_PROFILE_DOWNLOAD and EVENT_STATUS_COMMAND. Using the methods initMenuEntry() for EVENT_MENU_SELECTION, allocateTimer() for EVENT_TIMER_EXPIRATION, and setEventList() for the rest of the events. Perform SIM initialization with all the facilities supported</p> <p>2-Envelope menu selection with help request is sent to the SIM</p> <p>3-EnvelopeHandler.getTheHandler() method is called</p> <p>4-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy() The EnvelopeHandler.findTLV() method is called with TAG_HELP_REQUEST</p> <p>5-A proactive command DISPLAY TEXT is sent</p> <p>6-Envelope call control by sim is sent to SIM</p> <p>EnvelopeHandler.getTheHandler() method is called</p> <p>7- It's checked that the contents of the envelope handler is the envelope call control using EnvelopeHandler.copy() and Util.arrayCompare() methods The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES Call Control execution is finished.</p> | <p>1-No exception is thrown</p> <p>2- Applet is triggered</p> <p>3- No exception is thrown.</p> <p>4- No exception is thrown</p> <p>6- Applet is triggered</p> <p>7- No exception is thrown and the handler contains the envelope call control by SIM</p> | <p>5- 91 xx.</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|--|
| | <p>Check that the TAG_HELP_REQUEST is the TLV selected</p> <p>8-The contents of EnvelopeHandler are compared with buffer1 using Util.arrayCompare()</p> | <p>8- The contents of the envelope handler shall be the same as stored in buffer 1</p> | <p>A proactive command Display Text is fetched</p> <p>The terminal Response of DISPLAY TEXT is sent to the SIM</p> |
| 2 | <p>Envelope Handler integrity checks with EVENT_MENU_SELECTION</p> <p>1-An envelope menu selection is sent to SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called</p> <p>3-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy()</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_ITEM_IDENTIFIER</p> <p>4-A proactive command DISPLAY TEXT is sent</p> <p>5-Envelope call control by sim is sent to SIM</p> <p>EnvelopeHandler.getTheHandler() method is called</p> <p>6- It's checked the contents of the envelope handler is the envelope call control using EnvelopeHandler.copy() and Util.arrayCompare() methods</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>Call Control execution is finished.</p> <p>It's checked that the TAG_ITEM_IDENTIFIER is the TLV selected</p> <p>7- The contents of EnvelopeHandler are compared with buffer1 using Util.arrayCompare()</p> | <p>1- Applet is triggered</p> <p>2- No exception is thrown.</p> <p>3- No exception is thrown.</p> <p>5- Applet is triggered</p> <p>6- No exception is thrown and the handler contains the envelope call control by SIM</p> <p>7- The contents of the envelope handler shall be the same as stored in buffer 1</p> | <p>4- 91 XX</p> <p>Proactive command Display Text is fetched</p> <p>The terminal Response of DISPLAY TEXT is sent to the SIM</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|---|
| 3 | <p>Envelope Handler integrity checks with EVENT_FORMATTED_SMS_PP_ENV</p> <p>1-A formatted sms pp envelope is sent to SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called</p> <p>3-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy()</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_SMS_TPDU</p> <p>4-A proactive command DISPLAY TEXT is sent</p> <p>5-Envelope call control by sim is sent to SIM</p> <p>EnvelopeHandler.getTheHandler() method is called</p> <p>6-It's checked that the contents of the envelope handler is the envelope call control using EnvelopeHandler.copy() and Util.arrayCompare methods</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>Call Control execution is finished.</p> <p>It's checked that the TAG_SMS_TPDU is the TLV selected</p> <p>7- The contents of EnvelopeHandler are compared with buffer1 using Util.arrayCompare()</p> | <p>1- Applet is triggered</p> <p>2- No exception is thrown.</p> <p>3- No exception is thrown.</p> <p>5- Applet is triggered</p> <p>6- No exception is thrown and the handler contains the envelope call control by SIM</p> <p>7- The contents of the envelope handler shall be the same as stored in buffer 1</p> | <p>4- 91 XX</p> <p>Proactive command Display Text is fetched The terminal Response of DISPLAY TEXT is sent to the SIM</p> |
| 4 | <p>Envelope Handler integrity checks with EVENT_UNFORMATTED_SMS_PP_ENV</p> <p>1-A unformatted sms pp envelope is sent to SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called</p> <p>3-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy()</p> <p>The EnvelopeHandler.findTLV method is called with TAG_DEVICE_IDENTITIES</p> <p>4-A proactive command DISPLAY TEXT is sent</p> <p>5-Envelope call control by sim is sent to SIM</p> <p>EnvelopeHandler.getTheHandler() method is called</p> <p>6-It's checked that the contents of the</p> | <p>1- Applet is triggered</p> <p>2- No exception is thrown.</p> <p>3- No exception is thrown.</p> <p>5- Applet is triggered</p> | <p>4- 91 XX</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|--|
| | <p>envelope handler is the envelope call control using EnvelopeHandler.copy() and Util.arrayCompare() methods</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>Call Control execution is finished.</p> <p>It's checked that the TAG_DEVICE_IDENTITIES is the TLV selected</p> <p>7- The contents of EnvelopeHandler are compared with buffer1 using Util.arrayCompare()</p> | <p>6- No exception is thrown and the handler contains the envelope call control by SIM</p> <p>7- The contents of the envelope handler shall be the same as stored in buffer 1.</p> | <p>Proactive command Display Text is fetched</p> <p>The terminal Response of DISPLAY TEXT is sent to the SIM</p> |
| 5 | <p>Envelope Handler integrity checks with EVENT_UNFORMATTED_SMS_CB</p> <p>1-A unformatted cellbroadcast envelope is sent to SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called</p> <p>3-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy()</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_CELLBROADCAST_PAGE</p> <p>4-A proactive command DISPLAY TEXT is sent</p> <p>5-Envelope call control by sim is sent to SIM</p> <p>EnvelopeHandler.getTheHandler() method is called</p> <p>6-It's checked that the contents of the envelope handler is the envelope call control using EnvelopeHandler.copy and Util.arrayCompare() methods</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>Call Control execution is finished.</p> <p>It's checked that the TAG_CELLBROADCAST_PAGE is the TLV selected</p> <p>7- The contents of EnvelopeHandler are compared with buffer1 using Util.arrayCompare()</p> | <p>1- Applet is triggered</p> <p>2- No exception is thrown.</p> <p>3- No exception is thrown.</p> <p>5- Applet is triggered</p> <p>6- No exception is thrown and the handler contains the envelope call control by SIM</p> <p>7- The contents of the envelope handler shall be the same as stored in buffer 1.</p> | <p>4- 91 XX</p> <p>Proactive command Display Text is fetched</p> <p>The terminal Response of DISPLAY TEXT is sent to the SIM</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|--|
| 6 | <p align="center">Envelope Handler integrity checks with EVENT_TIMER_EXPIRATION</p> <p>1-A timer expiration envelope is sent to SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called</p> <p>3-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy()</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_TIMER_ID</p> <p>4-A proactive command DISPLAY TEXT is sent</p> <p>5-Envelope call control by sim is sent to SIM</p> <p>EnvelopeHandler.getTheHandler() method is called</p> <p>6-It's checked that the contents of the envelope handler is the envelope call control using EnvelopeHandler.copy() and Util.arrayCompare() methods</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>Call Control execution is finished.</p> <p>It's checked that the TAG_TIMER_ID is the TLV selected</p> <p>7- The contents of EnvelopeHandler are compared with buffer1 using Util.arrayCompare()</p> | <p>1- Applet is triggered</p> <p>2- No exception is thrown.</p> <p>3- No exception is thrown.</p> <p>5- Applet is triggered</p> <p>6- No exception is thrown and the handler contains the envelope call control by SIM</p> <p>7- The contents of the envelope handler shall be the same as stored in buffer 1</p> | <p>4- 91 XX</p> <p>Proactive command Display Text is fetched</p> <p>The terminal Response of DISPLAY TEXT is sent to the SIM</p> |
| 7 | <p align="center">Envelope Handler integrity checks with EVENT_CALL_CONTROL_BY_SIM</p> <p>1-A call control envelope is sent to SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called</p> <p>3-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy()</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_ADDRESS</p> <p>4-A proactive command DISPLAY TEXT is sent</p> <p>5-Envelope call control by sim is sent to SIM</p> <p>EnvelopeHandler.getTheHandler() method is</p> | <p>1- Applet is triggered</p> <p>2- No exception is thrown.</p> <p>3- No exception is thrown.</p> <p>5- Applet is triggered</p> | <p>4- 91 XX</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|--|
| | <p>called</p> <p>6-It's checked that the contents of the envelope handler is the envelope call control using EnvelopeHandler.copy() and Util.arrayCompare() methods</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>Call Control execution is finished.</p> <p>It's checked that the TAG_ADDRESS is the TLV selected</p> <p>7- The contents of EnvelopeHandler are compared with buffer1 using Util.arrayCompare()</p> | <p>6- No exception is thrown and the handler contains the envelope call control by SIM</p> <p>7- The contents of the envelope handler shall be the same as stored in buffer 1</p> | <p>Proactive command Display Text is fetched</p> <p>The terminal Response of DISPLAY TEXT is sent to the SIM</p> |
| 8 | <p>Envelope Handler integrity checks with EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM</p> <p>1-A mo short message control by sim envelope is sent to SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called</p> <p>3-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy()</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_ADDRESS</p> <p>4-A proactive command DISPLAY TEXT is sent</p> <p>5-Envelope call control by sim is sent to SIM</p> <p>EnvelopeHandler.getTheHandler() method is called</p> <p>6-It's checked that the contents of the envelope handler is the envelope call control using EnvelopeHandler.copy() and Util.arrayCompare() methods</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>Call Control execution is finished.</p> <p>It's checked that the TAG_ADDRESS is the TLV selected</p> <p>7- The contents of EnvelopeHandler are compared with buffer1 using Util.arrayCompare()</p> | <p>1- Applet is triggered</p> <p>2- No exception is thrown.</p> <p>3- No exception is thrown.</p> <p>5- Applet is triggered</p> <p>6- No exception is thrown and the handler contains the envelope call control by SIM</p> <p>7- The contents of the envelope handler shall be the same as stored in buffer 1.</p> | <p>4- 91 XX</p> <p>Proactive command Display Text is fetched</p> <p>The terminal Response of DISPLAY TEXT is sent to the SIM</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|--|
| 9 | <p>Envelope Handler integrity checks with EVENT_EVENT_DOWNLOAD_MT_CALL</p> <p>1-A event download mt call envelope is sent to SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called</p> <p>3-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy() The EnvelopeHandler.findTLV() method is called with TAG_ADDRESS</p> <p>4-A proactive command DISPLAY TEXT is sent</p> <p>5-Envelope call control by sim is sent to SIM</p> <p>EnvelopeHandler.getTheHandler() method is called</p> <p>6-It's checked that the contents of the envelope handler is the envelope call control using EnvelopeHandler.copy() and Util.arrayCompare() methods The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>Call Control execution is finished.</p> <p>It's checked that the TAG_ADDRESS is the TLV selected</p> <p>7- The contents of EnvelopeHandler are compared with buffer1 using Util.arrayCompare()</p> | <p>1- Applet is triggered</p> <p>2- No exception is thrown.</p> <p>3- No exception is thrown.</p> <p>5- Applet is triggered</p> <p>6- No exception is thrown and the handler contains the envelope call control by SIM</p> <p>7- The contents of the envelope handler shall be the same as stored in buffer 1</p> | <p>4- 91 XX</p> <p>Proactive command Display Text is fetched</p> <p>The terminal Response of DISPLAY TEXT is sent to the SIM</p> |
| 10 | <p>Envelope Handler integrity checks with EVENT_EVENT_DOWNLOAD_CALL_CONNECTED</p> <p>1-A event download call connected envelope is sent to SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called</p> <p>3-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy() The EnvelopeHandler.findTLV() method is called with TAG_ADDRESS</p> <p>4-A proactive command DISPLAY TEXT is sent</p> <p>5-Envelope call control by sim is sent to SIM</p> | <p>1- Applet is triggered</p> <p>2- No exception is thrown.</p> <p>3- No exception is thrown.</p> <p>5- Applet is triggered</p> | <p>4- 91 XX</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|--|
| | <p>EnvelopeHandler.getTheHandler() method is called</p> <p>6-It's checked that the contents of the envelope handler is the envelope call control using EnvelopeHandler.copy and Util.arrayCompare() methods</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>Call Control execution is finished.</p> <p>It's checked that the TAG_ADDRESS is the TLV selected</p> <p>7- The contents of EnvelopeHandler are compared with buffer1 using Util.arrayCompare()</p> | <p>6- No exception is thrown and the handler contains the envelope call control by SIM</p> <p>7- The contents of the envelope handler shall be the same as stored in buffer 1.</p> | <p>Proactive command Display Text is fetched</p> <p>The terminal Response of DISPLAY TEXT is sent to the SIM</p> |
| 11 | <p>Envelope Handler integrity checks with EVENT_DOWNLOAD_CALL_DISCONNECTED</p> <p>1-A event download call disconnected envelope is sent to SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called</p> <p>3-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy()</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_ADDRESS</p> <p>4-A proactive command DISPLAY TEXT is sent</p> <p>5-Envelope call control by sim is sent to SIM</p> <p>EnvelopeHandler.getTheHandler() method is called</p> <p>6-It's checked that the contents of the envelope handler is the envelope call control using EnvelopeHandler.copy and Util.arrayCompare() methods</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>Call Control execution is finished.</p> <p>It's checked that the TAG_ADDRESS is the TLV selected</p> <p>7- The contents of EnvelopeHandler are compared with buffer1 using</p> | <p>1- Applet is triggered</p> <p>2- No exception is thrown.</p> <p>3- No exception is thrown.</p> <p>5- Applet is triggered</p> <p>6- No exception is thrown and the handler contains the envelope call control by SIM</p> <p>7- The contents of the envelope handler shall be the same as stored</p> | <p>4- 91 XX</p> <p>Proactive command Display Text is fetched</p> <p>The terminal Response of DISPLAY TEXT is sent to the SIM</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|---|
| 12 | <p>Envelope Handler integrity checks with EVENT_ EVENT_DOWNLOAD_LOCATION_STATUS</p> <p>1-A event download location status envelope is sent to SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called</p> <p>3-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy()</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_LOCATION_STATUS</p> <p>4-A proactive command DISPLAY TEXT is sent</p> <p>5-Envelope call control by sim is sent to SIM</p> <p>EnvelopeHandler.getTheHandler() method is called</p> <p>6-It's checked that the contents of the envelope handler is the envelope call control using EnvelopeHandler.copy() and Util.arrayCompare() methods</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>Call Control execution is finished.</p> <p>It's checked that the TAG_LOCATION_STATUS is the TLV selected</p> <p>7- The contents of EnvelopeHandler are compared with buffer1 using Util.arrayCompare()</p> | <p>in buffer 1.</p> <p>1- Applet is triggered</p> <p>2- No exception is thrown.</p> <p>3- No exception is thrown.</p> <p>5- Applet is triggered</p> <p>6- No exception is thrown and the handler contains the envelope call control by SIM</p> <p>7- The contents of the envelope handler shall be the same as stored in buffer 1</p> | <p>4-91 XX</p> <p>Proactive command Display Text is fetched</p> <p>The terminal Response of DISPLAY TEXT is sent to the SIM</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|--|
| 13 | <p>Envelope Handler integrity checks with EVENT_DOWNLOAD_USER_ACTIVITY</p> <p>1-A event download user activity envelope is sent to SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called</p> <p>3-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy() The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>4-A proactive command DISPLAY TEXT is sent</p> <p>5-Envelope call control by sim is sent to SIM EnvelopeHandler.getTheHandler() method is called</p> <p>6-It's checked that the contents of the envelope handler is the envelope call control using EnvelopeHandler.copy() and Util.arrayCompare() methods The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>Call Control execution is finished.</p> <p>It's checked that the TAG_DEVICE_IDENTITIES is the TLV selected</p> <p>7- The contents of EnvelopeHandler are compared with buffer1 using Util.arrayCompare()</p> | <p>1- Applet is triggered</p> <p>2- No exception is thrown.</p> <p>3- No exception is thrown.</p> <p>5- Applet is triggered</p> <p>6- No exception is thrown and the handler contains the envelope call control by SIM</p> <p>7- The contents of the envelope handler shall be the same as stored in buffer 1</p> | <p>4- 91 XX</p> <p>Proactive command Display Text is fetched</p> <p>The terminal Response of DISPLAY TEXT is sent to the SIM</p> |
| 14 | <p>Envelope Handler integrity checks with EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE</p> <p>1-A event download idle screen available envelope is sent to SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called</p> <p>3-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy() The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>4-A proactive command DISPLAY TEXT is sent</p> <p>5-Envelope call control by sim is sent to SIM EnvelopeHandler.getTheHandler() method is called</p> | <p>1- Applet is triggered</p> <p>2- No exception is thrown.</p> <p>3- No exception is thrown.</p> <p>5- Applet is triggered</p> | <p>4- 91 XX</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|---|
| | <p>6-It's checked that the contents of the envelope handler is the envelope call control using EnvelopeHandler.copy() and Util.arrayCompare() methods</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>Call Control execution is finished.</p> <p>It's checked that the TAG_DEVICE_IDENTITIES is the TLV selected</p> <p>7- The contents of EnvelopeHandler are compared with buffer1 using Util.arrayCompare()</p> | <p>6- No exception is thrown and the handler contains the envelope call control by SIM</p> <p>7- The contents of the envelope handler shall be the same as stored in buffer 1</p> | <p>Proactive command Display Text is fetched</p> <p>The terminal Response of DISPLAY TEXT is sent to the SIM</p> |
| 15 | <p>Envelope Handler integrity checks with EVENT_DOWNLOAD_CARD_READER_STATUS</p> <p>1-A event download card reader status envelope is sent to SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called</p> <p>3-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy()</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_CARD_READER_STATUS</p> <p>4-A proactive command DISPLAY TEXT is sent</p> <p>5-Envelope call control by sim is sent to SIM</p> <p>EnvelopeHandler.getTheHandler() method is called</p> <p>6-It's checked that the contents of the envelope handler is the envelope call control using EnvelopeHandler.copy and Util.arrayCompare() methods</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>It's checked that the TAG_CARD_READER_STATUS is the TLV selected</p> <p>7- The contents of EnvelopeHandler are compared with buffer1 using Util.arrayCompare()</p> | <p>1- Applet is triggered</p> <p>2- No exception is thrown.</p> <p>3- No exception is thrown.</p> <p>5- Applet is triggered</p> <p>6- No exception is thrown and the handler contains the envelope call control by SIM</p> <p>7- The contents of the envelope handler shall be the same as stored in buffer 1</p> | <p>4- 91 XX</p> <p>Proactive command Display Text is fetched</p> <p>The terminal Response of DISPLAY TEXT is sent to the SIM</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|--|
| 16 | <p align="center">Envelope Handler integrity checks with UNRECOGNIZED_ENVELOPE</p> <p>1-A unrecognized envelope is sent to SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called</p> <p>3-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy()</p> <p>4-A proactive command DISPLAY TEXT is sent</p> <p>5-Envelope call control by sim is sent to SIM</p> <p>EnvelopeHandler.getTheHandler() method is called The EnvelopeHandler.getValueLength() is called</p> <p>6-It's checked that the contents of the envelope handler is the envelope call control using EnvelopeHandler.copy() and Util.arrayCompare() methods</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>Call Control execution is finished.</p> <p>7- The contents of EnvelopeHandler are compared with buffer1 using Util.arrayCompare()</p> | <p>1- Applet is triggered</p> <p>2- No exception is thrown.</p> <p>3- No exception is thrown.</p> <p>5- Applet is triggered</p> <p>6- No exception is thrown and the handler contains the envelope call control by SIM</p> <p>7- The contents of the envelope handler shall be the same as stored in buffer 1</p> | <p>4- 91 XX</p> <p>Proactive command Display Text is fetched</p> <p>The terminal Response of DISPLAY TEXT is sent to the SIM</p> |
| 17 | <p align="center">Envelope Handler integrity checks with EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION</p> <p>1-A event download language selection envelope is sent to SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called</p> <p>3-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy() The EnvelopeHandler.findTLV() method is called with TAG_EVENT_LIST</p> <p>4-A proactive command DISPLAY TEXT is sent</p> <p>5-Envelope call control by sim is sent to SIM</p> <p>EnvelopeHandler.getTheHandler() method is called</p> <p>6-It's checked that the contents of the envelope handler is the envelope call control using EnvelopeHandler.copy() and Util.arrayCompare() methods</p> | <p>1- Applet is triggered</p> <p>2-No exception is thrown.</p> <p>3-No exception is thrown.</p> <p>5- Applet is triggered</p> <p>6- No exception is thrown and the handler contains the envelope call</p> | <p>4-91 XX</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|---|
| | <p>The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>Call Control execution is finished.</p> <p>It's checked that the TAG_EVENT_LIST is the TLV selected</p> <p>7- The contents of EnvelopeHandler are compared with buffer1 using Util.arrayCompare()</p> | <p>control by SIM</p> <p>7- The contents of the envelope handler shall be the same as stored in buffer 1</p> | <p>Proactive command Display Text is fetched</p> <p>The terminal Response of DISPLAY TEXT is sent to the SIM</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|---|
| 18 | <p align="center">Envelope Handler integrity checks with EVENT_EVENT_DOWNLOAD_BROWSER_TERMINATION</p> <p>1-A event download browser termination envelope is sent to SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called</p> <p>3-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy() The EnvelopeHandler.findTLV() method is called with TAG_EVENT_LIST</p> <p>4-A proactive command DISPLAY TEXT is sent</p> <p>5-Envelope call control by sim is sent to SIM</p> <p>EnvelopeHandler.getTheHandler() method is called</p> <p>6-It's checked that the contents of the envelope handler is the envelope call control using EnvelopeHandler.copy() and Util.arrayCompare() methods The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>Call Control execution is finished.</p> <p>It's checked that the TAG_EVENT_LIST is the TLV selected</p> <p>7- The contents of EnvelopeHandler are compared with buffer1 using Util.arrayCompare()</p> | <p>1- Applet is triggered</p> <p>2-No exception is thrown.</p> <p>3-No exception is thrown.</p> <p>5- Applet is triggered</p> <p>6- No exception is thrown and the handler contains the envelope call control by SIM</p> <p>7- The contents of the envelope handler shall be the same as stored in buffer 1</p> | <p>4-91 XX</p> <p>Proactive command Display Text is fetched</p> <p>The terminal Response of DISPLAY TEXT is sent to the SIM</p> |
| 19 | <p align="center">Envelope Handler integrity checks with EVENT_FORMATTED_SMS_CB</p> <p>1-An envelope SMS-CB formatted according to [8] is sent to the SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called</p> <p>3-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy() The EnvelopeHandler.findTLV() method is called with TAG_CELL_BROADCAST_PAGE</p> <p>4-A proactive command DISPLAY TEXT is sent</p> <p>5-Envelope call control by sim is sent to SIM</p> | <p>1- Applet is triggered</p> <p>2-No exception is thrown.</p> <p>3-No exception is thrown.</p> | <p>4-91 XX</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|--|
| | <p>EnvelopeHandler.getTheHandler() method is called</p> <p>6-It's checked that the contents of the envelope handler is the envelope call control using EnvelopeHandler.copy() and Util.arrayCompare() methods</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>Call Control execution is finished.</p> <p>It's checked that the TAG_CELL_BROADCAST_PAGE is the TLV selected</p> <p>7- The contents of EnvelopeHandler are compared with buffer1 using Util.arrayCompare()</p> | <p>5- Applet is triggered</p> <p>6- No exception is thrown and the handler contains the envelope call control by SIM</p> <p>7- The contents of the envelope handler shall be the same as stored in buffer 1</p> | <p>Proactive command Display Text is fetched</p> <p>The terminal Response of DISPLAY TEXT is sent to the SIM</p> |

6.3.2.3.4 Test Coverage

| CRR Number | Test Case Number |
|------------|--|
| CRRN1 | 1,2,3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16,17,18,19 |
| CRRN2 | 1,2,3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16,17,18,19 |

6.3.3 Applet Triggering

6.3.3.1 EVENT_PROFILE_DOWNLOAD

Test Area Reference: FWK_APT_EPDW

6.3.3.1.1 Conformance Requirement

Normal Execution

CRRN1: Upon the reception of Terminal Profile command by the SIM, the STF stores the ME Profile and then triggers the registered toolkit applets.

CRRN2: The applet is not triggered by the EVENT_PROFILE_DOWNLOAD once it has deregistered from this event.

CRRN3: The STF shall not reply busy to a Terminal Profile command

6.3.3.1.2 Test Suite Files

Test Script: FWK_APT_EPDW_1.scr

Test Applet: FWK_APT_EPDW_1.java

FWK_APT_EPDW_2.java

FWK_APT_EPDW_3.java
 Load Script: FWK_APT_EPDW_1.ldr
 Cleanup Script: FWK_APT_EPDW_1.clr
 Parameter File: FWK_APT_EPDW_1.par

6.3.3.1.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|---|
| 1 | <p>Applets registration to EVENT_PROFILE_DOWNLOAD and triggering</p> <p>Applet1 is registered to the EVENT_PROFILE_DOWNLOAD</p> <p>Applet2 is registered to the EVENT_PROFILE_DOWNLOAD</p> <p>Applet3 is not registered to the EVENT_PROFILE_DOWNLOAD and is registered to EVENT_FORMATTED_SMS_PP_ENV.</p> <p>1-Terminal Profile command is sent to SIM</p> | <p>1- Applet1 is triggered</p> <p>Applet1 finalizes 2- Applet2 is triggered</p> <p>Applet2 finalizes 3- Applet3 is not triggered</p> | |
| 2 | <p>The STF shall not reply busy to a Terminal Profile command</p> <p>1-Formatted sms pp envelope is sent to SIM</p> <p>Applet3 builds a REFRESH proactive command in sim initialization mode 2-ProactiveHandler.send() method is called by applet3</p> <p>3-Terminal Profile command is sent to SIM</p> <p>Applet1 calls Toolkit Registry.clearEvent(EVENT_PROFILE_DOWNLOAD)</p> <p>4-Applet2 calls Toolkit Registry.clearEvent(EVENT_PROFILE_DOWNLOAD)</p> <p>ToolkitRegistry.setEvent(EVENT_PROFILE_DOWNLOAD) method is called</p> | <p>1- Applet3 is triggered by the EVENT_FORMATTED_SMS_PP_ENV</p> <p>Applet3 is suspended until the terminal response</p> <p>3- Applet1 is triggered by EVENT_PROFILE_DOWNLOAD</p> <p>4- Applet2 is triggered by EVENT_PROFILE_DOWNLOAD</p> | <p>2- A proactive command is sent</p> <p>The terminal Response of the proactive command is sent</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|------------------|
| 3 | <p>Deregistered applets are not triggered</p> <p>Terminal Profile command is sent to SIM</p> | <p>Applet3 is triggered (Applet1 and Applet2 are not triggered)</p> | |

6.3.3.1.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1 |
| CRRN2 | 3 |
| CRRN3 | 2 |

6.3.3.2 EVENT_MENU_SELECTION

Test Area Reference: FWK_APT_EMSE

6.3.3.2.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_MENU_SELECTION when an Envelope Menu Selection is received with the item identifier of a menu entry of this applet if no proactive session is ongoing.

6.3.3.2.2 Test Suite Files

Test Script: FWK_APT_EMSE_1.scr

Test Applet: FWK_APT_EMSE_1.java
FWK_APT_EMSE_2.java

Load Script: FWK_APT_EMSE_1.ldr

Cleanup Script: FWK_APT_EMSE_1.clr

Parameter File: FWK_APT_EMSE_1.par

6.3.3.2.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | <p>Applet registration to EVENT_MENU_SELECTION and triggering</p> <p>ToolkitRegistry.initMenuEntry() method is called in the constructor of applet1 and Applet2.</p> <p>For applet1: MenuEntry="Applet1" Offset=0 Length=menuEntry.length HelpSupported=false IconQualifier=0 IconIdentifier=0</p> <p>For applet2: MenuEntry="Applet2" Offset=0 Length=menuEntry.length HelpSupported=false IconQualifier=0 IconIdentifier=0</p> <p>event= EVENT_MENU_SELECTION 1-ToolkitRegistry.isEventSet() is called in constructor.</p> <p>Perform SIM initialization the facility SET UP MENU and without the facilities SET EVENT LIST and POLL INTEVAL features</p> <p>2-Item Identifier = 1 Event Menu Selection envelope is sent to the SIM with the item identifier of a menu entry of applet</p> <p>3-Item Identifier = 2 Event Menu Selection envelope is sent to the SIM with the item identifier of a menu entry of applet</p> | <p>1- The method must return true.</p> <p>2- Applet1 is triggered and applet2 is not triggered</p> <p>3- Applet2 is triggered and applet1 is not triggered</p> | |

6.3.3.2.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1 |

6.3.3.3 EVENT_MENU_SELECTION_HELP_REQUEST

Test Area Reference: FWK_APT_EMESH

6.3.3.3.1 Conformance Requirement

Normal Execution

CRRN1: If and ENVELOPE (MENU_SELECTION_HELP_SUPPORTED) command is received for one entry supporting help, then STF shall trigger the corresponding applet.

6.3.3.3.2 Test Suite Files

Test Script: FWK_APT_EMESH_1.scr

Test Applet: FWK_APT_EMESH_1.java

FWK_APT_EMESH_2.java
 Load Script: FWK_APT_EMESH_1.ldr
 Cleanup Script: FWK_APT_EMESH_1.clr
 Parameter File: FWK_APT_EMESH_1.par

6.3.3.3.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | <p style="text-align: center;">Applet registration to EVENT_MENU_SELECTION_HELP_REQUEST and triggering</p> <p>ToolkitRegistry.InitMenuEntry() method is called in the constructor of applet1 and Applet2.</p> <p>For Applet1: MenuEntry="Applet1" Offset=0 Length=menuEntry.length HelpSupported=true IconQualifier=0 IconIdentifier=0</p> <p>For Applet2: MenuEntry="Applet2" Offset=0 Length=menuEntry.length HelpSupported=true IconQualifier=0 IconIdentifier=0</p> <p>event= EVENT_MENU_SELECTION_HELP_REQUEST 1-ToolkitRegistry.isEventSet() is called in constructor.</p> <p>Perform SIM initialization the facility SET UP MENU and without the facilities SET EVENT LIST and POLL INTEVAL features</p> <p>2-Item identifier =1 Menu Selection Help Request envelope is sent to the SIM with the item identifier of a menu entry of applet</p> <p>3-Item identifier =2 Menu Selection Help Request envelope is sent to the SIM with the item identifier of a menu entry of applet</p> | <p>1-The command must return true.</p> <p>2- Applet1 is triggered and applet2 is not triggered</p> <p>3- Applet2 is triggered and applet1 is not triggered</p> | |

6.3.3.3.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1 |

6.3.3.4 EVENT_FORMATTED_SMS_PP_ENV

Test Area Reference: FWK_APT_EFSE

6.3.3.4.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_FORMATTED_SMS_PP_ENV once:

- it has been registered to this event,
- an envelope APDU carrying an SMS TPDU formatted according to [8], is received,
- the toolkit applet to be triggered is registered with the corresponding TAR in the SMS TPDU, the security is verified

CRRN2: The applet is not triggered by the EVENT_FORMATTED_SMS_PP_ENV once it has deregistered from this event.

6.3.3.4.2 Test Suite Files

- Test Script: FWK_APT_EFSE_1.scr
- Test Applet: FWK_APT_EFSE_1.java
- Load Script: FWK_APT_EFSE_1.ldr
- Cleanup Script: FWK_APT_EFSE_1.clr
- Parameter File: FWK_APT_EFSE_1.par

6.3.3.4.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|------------------|
| 1 | <p>Applet registration to EVENT FORMATTED_SMS_PP_ENV and triggering</p> <p>Applet is registered to EVENT_FORMATTED_SMS_PP_ENV and EVENT_UNRECOGNIZED_ENVELOPE</p> <p>1-An Envelope EVENT_FORMATTED_SMS_PP_ENV is sent to the SIM.</p> | 1- Applet is triggered | |
| 2 | <p>Applet deregistration</p> <p>ToolkitRegistry.clearEvent() method is called for EVENT_FORMATTED_SMS_PP_ENV</p> <p>2-A formatted sms pp envelope is sent to the SIM.</p> <p>An unrecognized envelope is sent to the sim</p> <p>ToolkitRegistry.setEvent() method is called for EVENT_FORMATTED_SMS_PP_ENV</p> <p>3-An Envelope FORMATTED_SMS_PP_ENV is sent to the SIM</p> | <p>2- Applet is not triggered</p> <p>3- Applet is triggered</p> | |

6.3.3.4.4 Test Coverage

| CRR Number | Test Case Number |
|--------------------|------------------|
| CRRN1 (See note 1) | 1, 2 |
| CRRN2 | 2 |

Note 1: The security checks are not relevant to the test designed in this test area; they will be checked in the "Framework Security Management" section.

6.3.3.5 EVENT_UNFORMATTED_SMS_PP_ENV

Test Area Reference: FWK_APT_EUSE

6.3.3.5.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_UNFORMATTED_SMS_PP_ENV once it has registered to this event and an Unformatted Envelope DataDownload is received if no proactive session is ongoing

CRRN2: The applet is not triggered by the EVENT_UNFORMATTED_SMS_PP_ENV once it has deregistered from this event.

6.3.3.5.2 Test Suite Files

Test Script: FWK_APT_EUSE_1.scr
Test Applet: FWK_APT_EUSE_1.java
Load Script: FWK_APT_EUSE_1.ldr
Cleanup Script: FWK_APT_EUSE_1.clr
Parameter File: FWK_APT_EUSE_1.par

6.3.3.5.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|------------------|
| 1 | <p align="center">Applet registration to EVENT_UNFORMATTED_SMS_PP_ENV and triggering</p> <p>Applet is registered to the EVENT_UNFORMATTED_SMS_PP_ENV and ENVENT_FORMATTED_SMS_PP_ENV.</p> <p>1-Toolkit Registry.isEventSet() method is called for EVENT_UNFORMATTED_SMS_PP_ENV</p> <p>2-An Envelope UNFORMATTED_SMS_PP_ENV is sent to the SIM.</p> | <p>1- The method returns true</p> <p>2- Applet is triggered</p> | |
| 2 | <p align="center">Applet deregistration</p> <p>Toolkit Registry.clearEvent()method is called for EVENT_UNFORMATTED_SMS_PP_ENV</p> <p>1-An unformatted sms pp envelope is sent to the SIM.</p> <p>A formatted sms pp envelope is sent to the sim</p> <p>Toolkit Registry.setEvent() method is called for EVENT_UNFORMATTED_SMS_PP_ENV</p> <p>2-An Envelope UNFORMATTED_SMS_PP_ENV is sent to the SIM</p> | <p>1- Applet isn't triggered</p> <p>2- Applet is triggered</p> | |

6.3.3.5.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1, 2 |
| CRRN2 | 2 |

6.3.3.6 EVENT_CALL_CONTROL_BY_SIM

Test Area Reference: FWK_APT_ECCN

6.3.3.6.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_CALL_CONTROL_BY_SIM once it has registered to this event and an Envelope Call Control is received

CRRN2: The applet is not triggered by the EVENT_CALL_CONTROL_BY_SIM once it has deregistered from this event.

6.3.3.6.2 Test Suite Files

Test Script: FWK_APT_ECCN_1.scr

Test Applet: FWK_APT_ECCN_1.java

Load Script: FWK_APT_ECCN_1.ldr
 Cleanup Script: FWK_APT_ECCN_1.clr
 Parameter File: FWK_APT_ECCN_1.par

6.3.3.6.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|--|
| 1 | <p align="center">Applets registration to EVENT_CALL_CONTROL_BY_SIM and triggering</p> <p>Applet1 is registered to EVENT_CALL_CONTROL_BY_SIM.</p> <p>Applet2 is registered to EVENT_FORMATTED_SMS_PP_ENV</p> <p>1-An Envelope Call control by SIM is sent to SIM</p> | <p>1- Applet1 is triggered</p> <p>Applet1 finalizes</p> | |
| 2 | <p align="center">Applet deregistration and registration of the third applet to EVENT_CALL- CONTROL_BY_SIM.</p> <p>1-An Envelope Formatted SMS PP envelope is sent to SIM</p> <p>Applet2 constructs a DISPLAY TEXT proactive command.</p> <p>2-ProactiveHandler.send() method is called</p> <p>3-An Envelope Call control by SIM envelope is sent to SIM</p> <p>ToolkitRegistry.clearEvent() is called for EVENT_CALL_CONTROL_BY_SIM. Applet1 finalizes.</p> <p>ToolkitRegistry.setEvent() method is called for EVENT_CALL_CONTROL_BY_SIM.</p> | <p>1-Applet2 is triggered by EVENT_FORMATTED_SMS_PP_ ENV.</p> <p>3- Applet1 is triggered</p> <p>Applet1 finalizes</p> <p>Applet2 finalizes</p> | <p>2- A proactive command DISPLAY TEXT is sent and applet is suspended until the terminal response</p> <p>TERMINAL RESPONSE of DISPLAY TEXT is sent to the SIM</p> |
| 3 | <p align="center">Applet triggering</p> <p>An Envelope Call control by SIM envelope is sent ot SIM</p> | <p>Applet2 is triggered. (Applet1 is not triggered)</p> | |

6.3.3.6.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1,2,3 |
| CRRN2 | 3 |

6.3.3.7 EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM

Test Area Reference: FWK_APT_EMCN

6.3.3.7.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM once it has registered to this event and an Envelope MO Short Message Control.

CRRN2: The applet is not triggered by the EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM once it has deregistered from this event.

6.3.3.7.2 Test Suite Files

Test Script: FWK_APT_EMCN_1.scr
Test Applet: FWK_APT_EMCN_1.java
FWK_APT_EMCN_2.java
Load Script: FWK_APT_EMCN_1.ldr
Cleanup Script: FWK_APT_EMCN_1.clr
Parameter File: FWK_APT_EMCN_1.par

6.3.3.7.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|--|
| 1 | <p>Applet registration to EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM and triggering</p> <p>Applet1 is registered to EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM.</p> <p>Applet2 is registered to EVENT_FORMATTED_SMS_PP_ENV.</p> <p>1-An Envelope MO short message envelope is sent to SIM</p> | <p>1- Applet1 is triggered.</p> <p>Applet1 finalizes</p> | |
| 2 | <p>Applet deregistration and registration of the third applet to EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM. The STF shall not reply busy to a call control envelope</p> <p>1-An Envelope formatted SMS PP envelope is sent to SIM.</p> <p>Applet2 builds a DISPLAY TEXT proactive command.</p> <p>2-ProactiveHandler.send() method is called.</p> <p>3-An Envelope MO Short message envelope is sent to SIM</p> <p>ToolkitRegistry.clearEvent() for EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM.</p> <p>ToolkitRegistry.setEvent() method is called for EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM.</p> | <p>1- Applet2 is triggered.</p> <p>3- Applet1 is triggered.</p> <p>Applet1 finalizes</p> <p>Applet2 finalizes</p> | <p>2- A Proactive command DISPLAY TEXT is sent and applet is suspended until the terminal response</p> <p>TERMINAL RESPONSE of DISPLAY TEXT is sent to the SIM</p> |
| 3 | <p>Applet3 triggering</p> <p>An Envelope MO SMS control by SIM envelope is sent to SIM</p> | <p>Applet2 is triggered. (Applet1 is not triggered)</p> | |

6.3.3.7.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1,2,3 |
| CRRN2 | 3 |

6.3.3.8 EVENT_TIMER_EXPIRATION

Test Area Reference: FWK_APT_ETEX

6.3.3.8.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_TIMER_EXPIRATION once it has been registered to this event and an Envelope Timer Expiration with a Timer Identifier of the applet is received if no proactive session is ongoing.

CRRN2: The applet is not triggered by the EVENT_TIMER_EXPIRATION once it has been deregistered from this event.

6.3.3.8.2 Test Suite Files

- Test Script: FWK_APT_ETEX_1.scr
- Test Applet: FWK_APT_ETEX_1.java
- Load Script: FWK_APT_ETEX_1.ldr
- Cleanup Script: FWK_APT_ETEX_1.clr
- Parameter File: FWK_APT_ETEX_1.par

6.3.3.8.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | <p>Applet registration to EVENT_TIMER_EXPIRATION and triggering</p> <p>Applet is registered to the EVENT_TIMER_EXPIRATION using the allocateTimer() method and to EVENT_FORMATTED_SMS_PP_ENV.</p> <p>event= EVENT_TIMER_EXPIRATION 1-Toolkit Registry.isEventSet() method is called.</p> <p>2-An Envelope TIMER_EXPIRATION is sent to the SIM.</p> | <p>1- The method returns true</p> <p>2- Applet is triggered.</p> | |
| 2 | <p>Applet deregistration</p> <p>Timer id=1 Toolkit Registry.ReleaseTimer() method is called</p> <p>1-An Envelope timer expiration is sent to the SIM.</p> <p>An Envelope formatted sms pp envelope is sent to the sim</p> <p>Toolkit Registry.AllocateTimer() method is called</p> | <p>1- Applet isn't triggered</p> | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---------------------------|------------------|
| | 2-An Envelope TIMER_EXPIRATION is sent to the SIM. | 2- Applet is triggered | |

6.3.3.8.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1,2 |
| CRRN2 | 2 |

6.3.3.9 EVENT_UNFORMATTED_SMS_CB

Test Area Reference: FWK_APT_EUCB

6.3.3.9.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_UNFORMATTED_SMS_CB once it has registered to this event and an Envelope Cell Broadcast DownLoad is received.

CRRN2: The applet is not triggered by the EVENT_UNFORMATTED_SMS_CB once it has deregistered from this event.

6.3.3.9.2 Test Suite Files

Test Script: FWK_APT_EUCB_1.scr
 Test Applet: FWK_APT_EUCB_1.java
 Load Script: FWK_APT_EUCB_1.ldr
 Cleanup Script: FWK_APT_EUCB_1.clr
 Parameter File: FWK_APT_EUCB_1.par

6.3.3.9.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | <p>Applet registration to EVENT_UNFORMATTED_SMS_CB and triggering</p> <p>Applet is registered to the EVENT_UNFORMATTED_SMS_CB and EVENT_FORMATTED_SMS_PP_ENV.</p> <p>event= EVENT_UNFORMATTED_SMS_CB 1-Toolkit Registry.isEventSet() method is called.</p> <p>2-An Envelope UNFORMATTED_SMS_CB is sent to the SIM.</p> | <p>1- Method returns true.</p> <p>2- Applet is triggered</p> | |
| 2 | <p>Applet deregistration</p> <p>Toolkit Registry.ClearEvent()method is called for EVENT_UNFORMATTED_SMS_CB</p> <p>1-An Envelope UNFORMATTED_SMS_CB is sent to the SIM.</p> | <p>1- Applet isn't triggered</p> | |

| Id | Description | API Expectation | APDU Expectation |
|----|--|------------------------|------------------|
| | An Envelope formatted sms pp envelope is sent to the sim event= EVENT_UNFORMATTED_SMS_CB Toolkit Registry.setEvent() method is called for EVENT_UNFORMATTED_SMS_CB 2-An Envelope UNFORMATTED_SMS_CB is sent to the SIM. | 2- Applet is triggered | |

6.3.3.9.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1,2 |
| CRRN2 | 2 |

6.3.3.10 EVENT_EVENT_DOWNLOAD_MT_CALL

Test Area Reference: FWK_APT_EDMC

6.3.3.10.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_EVENT_DOWNLOAD_MT_CALL once it has registered to this event and an Envelope Event DownLoad MT Call is received.

CRRN2: The applet is not triggered by the EVENT_EVENT_DOWNLOAD_MT_CALL once it has deregistered from this event.

6.3.3.10.2 Test Suite Files

- Test Script: FWK_APT_EMSE_1.scr
- Test Applet: FWK_APT_EMSE_1.java
- Load Script: FWK_APT_EMSE_1.ldr
- Cleanup Script: FWK_APT_EMSE_1.clr
- Parameter File: FWK_APT_EMSE_1.par

6.3.3.10.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|------------------|
| 1 | <p align="center">Applet registration to EVENT_EVENT_DOWNLOAD_MT_CALL and triggering</p> <p>Applet is registered to the EVENT_EVENT_DOWNLOAD_MT_CALL and to EVENT_FORMATTED_SMS_PP_ENV.</p> <p>event= EVENT_EVENT_DOWNLOAD_MT_CALL 1-Toolkit Registry.isEventSet() method is called.</p> <p>2-An Envelope EVENT_DOWNLOAD_MT_CALL is sent to the SIM.</p> | <p>1- The method returns true</p> <p>2- Applet is triggered</p> | |
| 2 | <p align="center">Applet deregistration</p> <p>event= EVENT_EVENT_DOWNLOAD_MT_CALL Toolkit Registry.clearEvent()method is called</p> <p>Perform SIM initialization with all the facilities supported</p> <p>1-An Envelope EVENT_DOWNLOAD_MT_CALL is sent to the SIM.</p> <p>An Envelope formatted sms pp envelope is sent to the sim</p> <p>event= EVENT_EVENT_DOWNLOAD_MT_CALL Toolkit Registry.setEvent() method is called</p> <p>Perform SIM initialization with all the facilities supported</p> <p>2-An Envelope EVENT_DOWNLOAD_MT_CALL is sent to the SIM.</p> | <p>1- Applet isn't triggered</p> <p>2- Applet is triggered</p> | |

6.3.3.10.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1,2 |
| CRRN2 | 2 |

6.3.3.11 EVENT_EVENT_DOWNLOAD_CALL_CONNECTED

Test Area Reference: FWK_APT_EDCC

6.3.3.11.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_EVENT_DOWNLOAD_CALL_CONNECTED once it has registered to this event and an Envelope Event DownLoad Call Connected is received.

CRRN2: The applet is not triggered by the EVENT_EVENT_DOWNLOAD_CALL_CONNECTED once it has deregistered from this event.

6.3.3.11.2 Test Suite Files

Test Script: FWK_APT_EDCC_1.scr
 Test Applet: FWK_APT_EDCC_1.java
 Load Script: FWK_APT_EDCC_1.ldr
 Clean-up Script: FWK_APT_EDCC_1.clr

6.3.3.11.3 Test Procedure

| | | | |
|---|--|--|--|
| 1 | <p>Applet registration to EVENT_EVENT_DOWNLOAD_CALL_CONNECTED and triggering</p> <p>Applet is registered to the EVENT_EVENT_DOWNLOAD_CALL_CONNECTED and to EVENT_FORMATTED_SMS_PP_ENV.</p> <p>event= EVENT_EVENT_DOWNLOAD_CALL_CONNECTED 1-Toolkit Registry.isEventSet() method is called.</p> <p>2-An Envelope EVENT_DOWNLOAD_CALL_CONNECTED is sent to the SIM.</p> | <p>1- Method returns true</p> <p>2- Applet is triggered.</p> | |
| 2 | <p>Applet deregistration</p> <p>event=EVENT_EVENT_DOWNLOAD_CALL_CONNECTED Toolkit Registry.clearEvent()method is called</p> <p>Perform SIM initialization with all the facilities supported</p> <p>1-A call connected event dowload is sent to the SIM.</p> <p>An Envelope formatted sms pp envelope is sent to the sim</p> <p>Event= EVENT_EVENT_DOWNLOAD_CALL_CONNECTED Toolkit Registry.setEvent() method is called</p> <p>Perform SIM initialization with all the facilities supported</p> <p>2-An Envelope EVENT_DOWNLOAD_CALL_CONNECTED is sent to the SIM.</p> | <p>1- Applet isn't triggered</p> <p>2- Applet is triggered</p> | |

6.3.3.11.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1,2 |
| CRRN2 | 2 |

6.3.3.12 EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED

Test Area Reference: FWK_APT_EDCD

6.3.3.12.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED once it has registered to this event and an Envelope Event DownLoad Call Disconnected is received.

CRRN2: The applet is not triggered by the EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED once it has deregistered from this event.

6.3.3.12.2 Test Suite Files

Test Script: FWK_APT_EDCD_1.scr
 Test Applet: FWK_APT_EDCD_1.java
 Load Script: FWK_APT_EDCD_1.ldr
 Cleanup Script: FWK_APT_EDCD_1.clr
 Parameter File: FWK_APT_EDCD_1.par

6.3.3.12.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | <p>Applet registration to EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED and triggering</p> <p>Applet is registered to the EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED and to EVENT_FORMATTED_SMS_PP_ENV.</p> <p>Event=EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED 1-Toolkit Registry.isEventSet() method is called.</p> <p>2-An Envelope EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED is sent to the SIM.</p> | <p>1- Method returns true</p> <p>2- Applet is triggered.</p> | |
| 2 | <p>Applet deregistration</p> <p>Event=EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED Toolkit Registry.clearEvent()method is called</p> <p>Perform SIM initialization with all the facilities supported</p> <p>1-An Envelope EVENT_DOWNLOAD_CALL_DISCONNECTED is sent to the SIM.</p> <p>a formatted sms pp envelope is sent to the sim.</p> <p>Event=EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED Toolkit Registry.setEvent() method is called Perform SIM initialization with all the facilities supported</p> <p>2-An Envelope EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED is</p> | <p>1- Applet isn't triggered</p> <p>2- Applet is triggered</p> | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|------------------|---------------------------|------------------|
| | sent to the SIM. | | |

6.3.3.12.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1,2 |
| CRRN2 | 2 |

6.3.3.13 EVENT_EVENT_DOWNLOAD_LOCATION_STATUS

Test Area Reference: FWK_APT_EDLS

6.3.3.13.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_EVENT_DOWNLOAD_LOCATION_STATUS once it has registered to this event and an Envelope Event DownLoad Location Status is received.

CRRN2: The applet is not triggered by the EVENT_EVENT_DOWNLOAD_LOCATION_STATUS once it has deregistered from this event.

6.3.3.13.2 Test Suite Files

- Test Script: FWK_APT_EDLS_1.scr
- Test Applet: FWK_APT_EDLS_1.java
- Load Script: FWK_APT_EDLS_1.ldr
- Cleanup Script: FWK_APT_EDLS_1.clr
- Parameter File: FWK_APT_EDLS_1.par

6.3.3.13.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | <p>Applet registration to EVENT_EVENT_DOWNLOAD_LOCATION_STATUS and triggering</p> <p>Applet is registered to the EVENT_EVENT_DOWNLOAD_LOCATION_STATUS and to EVENT_FORMATTED_SMS_PP_ENV.</p> <p>Event=EVENT_EVENT_DOWNLOAD_LOCATION_STATUS 1-Toolkit Registry.isEventSet() method is called.</p> <p>2-An Envelope EVENT_EVENT_DOWNLOAD_LOCATION_STATUS is sent to the SIM.</p> | <p>1- Method returns true</p> <p>2- Applet is triggered.</p> | |
| 2 | <p>Applet deregistration</p> <p>Event=EVENT_EVENT_DOWNLOAD_LOCATION_STATUS Toolkit Registry.clearEvent()method is called Perform SIM initialization with all the facilities supported</p> | | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---------------------------|------------------|
| | 1-An Envelope EVENT_DOWNLOAD_LOCATION_STATUS is sent to the SIM. a formatted sms pp envelope is sent to the sim Event= EVENT_EVENT_DOWNLOAD_LOCATION_STATUS Toolkit Registry.setEvent() method is called Perform SIM initialization with all the facilities supported | 1- Applet isn't triggered | |
| | 2-An Envelope EVENT_DOWNLOAD_LOCATION_STATUS is sent to the SIM. | 2- Applet is triggered | |

6.3.3.13.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1,2 |
| CRRN2 | 2 |

6.3.3.14 EVENT_EVENT_DOWNLOAD_USER_ACTIVITY

Test Area Reference: FWK_APT_EDUA

6.3.3.14.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_EVENT_DOWNLOAD_USER_ACTIVITY once it has registered to this event and an Envelope Event DownLoad User Activity is received.

CRRN2: The applet is not triggered by the EVENT_EVENT_DOWNLOAD_USER_ACTIVITY once it has deregistered from this event.

6.3.3.14.2 Test Suite Files

- Test Script: FWK_APT_EDUA_1.scr
- Test Applet: FWK_APT_EDUA_1.java
- Load Script: FWK_APT_EDUA_1.ldr
- Cleanup Script: FWK_APT_EDUA_1.clr
- Parameter File: FWK_APT_EDUA_1.par

6.3.3.14.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | <p>Applet registration to EVENT_EVENT_DOWNLOAD_USER_ACTIVITY and triggering</p> <p>Applet is registered to the EVENT_EVENT_DOWNLOAD_USER_ACTIVITY and to EVENT_FORMATTED_SMS_PP_ENV.</p> <p>Event= EVENT_EVENT_DOWNLOAD_USER_ACTIVITY</p> <p>1-Toolkit Registry.isEventSet() method is called.</p> <p>2-An Envelope EVENT_DOWNLOAD_USER_ACTIVITY is sent to the SIM.</p> | <p>1- Method returns true</p> <p>2- Applet is triggered</p> | |
| 2 | <p>Applet deregistration</p> <p>Event= EVENT_EVENT_DOWNLOAD_USER_ACTIVITY Toolkit Registry.clearEvent()method is called</p> <p>Perform SIM initialization with all the facilities supported</p> <p>1-An Envelope EVENT_DOWNLOAD_USER_ACTIVITY is sent to the SIM.</p> <p>a formatted sms pp envelope is sent to the sim</p> <p>Event= EVENT_EVENT_DOWNLOAD_USER_ACTIVITY Toolkit Registry.setEvent() method is called</p> <p>Perform SIM initialization with all the facilities supported</p> <p>2-An Envelope EVENT_DOWNLOAD_USER_ACTIVITY is sent to the SIM.</p> | <p>1- Applet isn't triggered</p> <p>2- Applet is triggered</p> | |

6.3.3.14.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1,2 |
| CRRN2 | 2 |

6.3.3.15 EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE

Test Area Reference: FWK_APT_EDIS

6.3.3.15.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE once it has registered to this event and an Envelope Event DownLoad Idle Screen Available is received.

CRRN2: The applet is not triggered by the EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE once it has deregistered from this event.

6.3.3.15.2 Test Suite Files

Test Script: FWK_APT_EDIS_1.scr

Test Applet: FWK_APT_EDIS_1.java
 Load Script: FWK_APT_EDIS_1.ldr
 Cleanup Script: FWK_APT_EDIS_1.clr
 Parameter File: FWK_APT_EDIS_1.par

6.3.3.15.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | <p align="center">Applet registration to EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE and triggering</p> <p>Applet is registered to the EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE and to EVENT_FORMATTED_SMS_PP_ENV Event= EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE 1-Toolkit Registry.isEventSet() method is called.</p> <p>2-An Envelope EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE is sent to the SIM.</p> | <p>1- Method returns true</p> <p>2- Applet is triggered</p> | |
| 2 | <p align="center">Applet deregistration</p> <p>Event=EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE</p> <p>Toolkit Registry.clearEvent()method is called Perform SIM initialization with all the facilities supported</p> <p>1-An Envelope EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE is sent to the SIM.</p> <p>a formatted sms pp envelope is sent to the sim</p> <p>Event= EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE</p> <p>Toolkit Registry.setEvent() method is called Perform SIM initialization with all the facilities supported</p> <p>2-An Envelope EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE is sent to the SIM.</p> | <p>1- Applet isn't triggered</p> <p>2- Applet is triggered</p> | |

6.3.3.15.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1,2 |
| CRRN2 | 2 |

6.3.3.16 EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS

Test Area Reference: FWK_APT_EDCR

6.3.3.16.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS once it has registered to this event and Envelope Event Download Card Reader Status is received.

CRRN2: The applet is not triggered by the EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS once it has deregistered from this event.

6.3.3.16.2 Test Suite Files

Test Script: FWK_APT_EDCR_1.scr
 Test Applet: FWK_APT_EDCR_1.java
 Load Script: FWK_APT_EDCR_1.ldr
 Cleanup Script: FWK_APT_EDCR_1.clr
 Parameter File: FWK_APT_EDCR_1.par

6.3.3.16.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|------------------|
| 1 | <p>Applet registration to EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS and triggering</p> <p>Applet is registered to the EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS and to EVENT_FORMATTED_SMS_PP_ENV</p> <p>Event=EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS 1-Toolkit Registry.isEventSet() method is called.</p> <p>2-An Envelope EVENT_DOWNLOAD_CARD_READER_STATUS is sent to the SIM.</p> | <p>1- Method returns true</p> <p>2- Applet is triggered</p> | |
| 2 | <p>Applet deregistration</p> <p>Event=EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS</p> <p>Toolkit Registry.clearEvent()method is called</p> <p>Perform SIM initialization with all the facilities supported</p> <p>1-An Envelope EVENT_DOWNLOAD_CARD_READER_STATUS is sent to the SIM.</p> <p>An Envelope formatted sms pp envelope is sent to the sim</p> <p>Event=EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS</p> <p>Toolkit Registry.setEvent() method is called</p> <p>Perform SIM initialization with all the facilities supported</p> | <p>1- Applet isn't triggered</p> | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---------------------------|------------------|
| | 2-An Envelope EVENT_DOWNLOAD_CARD_READER_STATUS is sent to the SIM. | 2- Applet is triggered | |

6.3.3.16.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1,2 |
| CRRN2 | 2 |

6.3.3.17 EVENT_UNRECOGNIZED_ENVELOPE

Test Area Reference: FWK_APT_EUEV

6.3.3.17.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_UNRECOGNIZED_ENVELOPE once it has registered to this event and an Unrecognized Envelope is received.

CRRN2: The applet is not triggered by the EVENT_UNRECOGNIZED_ENVELOPE once it has deregistered from this event.

6.3.3.17.2 Test Suite Files

Test Script: FWK_APT_EUEN_1.scr
 Test Applet: FWK_APT_EUEN_1.java
 Load Script: FWK_APT_EUEN_1.ldr
 Cleanup Script: FWK_APT_EUEN_1.clr
 Parameter File: FWK_APT_EUEN_1.par

6.3.3.17.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | <p align="center">Applet registration to EVENT_UNRECOGNIZED_ENVELOPE and triggering</p> <p>Applet is registered to the EVENT_UNRECOGNIZED_ENVELOPE and to EVENT_FORMATTED_SMS_PP_ENV</p> <p>Event= EVENT_UNRECOGNIZED_ENVELOPE 1-Toolkit Registry.isEventSet() method is called.</p> <p>2-An Envelope UNRECOGNIZED_ENVELOPE is sent to the SIM.</p> | <p>1- Method returns true</p> <p>2- Applet is triggered</p> | |
| 2 | <p align="center">Applet deregistration</p> <p>Event= EVENT_UNRECOGNIZED_ENVELOPE Toolkit Registry.clearEvent()method is called</p> <p>1-An Envelope UNRECOGNIZED_ENVELOPE is sent to the SIM.</p> <p>a formatted sms pp envelope is sent to the sim</p> <p>Event= EVENT_UNRECOGNIZED_ENVELOPE Toolkit Registry.setEvent() method is called</p> <p>2-An Envelope UNRECOGNIZED_ENVELOPE is sent to the SIM.</p> | <p>1- Applet isn't triggered</p> <p>2- Applet is triggered</p> | |

6.3.3.17.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1,2 |
| CRRN2 | 2 |

6.3.3.18 EVENT_STATUS_COMMAND

Test Area Reference: FWK_APT_ESTC

6.3.3.18.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_STATUS_COMMAND once it has registered to this event and a Status Command is received.

CRRN2: The applet is not triggered by the EVENT_STATUS_COMMAND once it has deregistered from this event.

6.3.3.18.2 Test Suite Files

Test Script: FWK_APT_ESTC_1.scr

Test Applet: FWK_APT_ESTC_1.java

FWK_APT_ESTC_2.java

FWK_APT_ESTC_3.java

Load Script: FWK_APT_ESTC_1.ldr
 Cleanup Script: FWK_APT_ESTC_1.clr
 Parameter File: FWK_APT_ESTC_1.par

6.3.3.18.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|---|
| 1 | <p align="center">Applets registration to EVENT_STATUS_COMMAND and triggering</p> <p>Applet1 is registered to EVENT_STATUS_COMMAND using the requestPollInterval() command.</p> <p>Applet2 is registered to EVENT_STATUS_COMMAND using the RequestPollInterval() command.</p> <p>Applet3 is registered to EVENT_FORMATTED_SMS_PP_ENV.</p> <p>1-A status command is sent to SIM</p> | <p>1- Applet1 is triggered.</p> <p>Applet1 finalizes 2- Applet2 is triggered.</p> <p>Applet2 finalizes 3- Applet 3 is not triggered</p> | |
| 2 | <p align="center">Applet deregistration and registration of the third applet to EVENT_STATUS_COMMAND. The STF shall not reply busy to a call control envelope</p> <p>1-A formatted sms pp envelope is sent to SIM</p> <p>Applet3 builds a DISPLAY TEXT.</p> <p>2- ProactiveHandler.send() is called</p> <p>3-A status command is sent to SIM.</p> <p>requestPollInteval with POLL_NO_DURATION is called</p> <p>requestPollInteval with POLL_NO_DURATION is called Applet2 finalized</p> <p>requestPollInterval() method is called.</p> | <p>1- Applet3 is triggered.</p> <p>3- Applet1 is triggered.</p> <p>Applet1 finalizes 4- Applet2 is triggered.</p> <p>Applet3 finalizes</p> | <p>2- A proactive command DISPLAY TEXT is sent and applet is suspended until the terminal response</p> <p>5- TERMINAL RESPONSE of DISPLAY TEXT is sent to the SIM</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|------------------|
| 3 | <p style="text-align: center;">Applet3 triggering</p> <p>Perform SIM initialization with all the facilities supported</p> <p>Status command is sent to SIM.</p> | <p>Applet3 is triggered. (Applet1 and Applet2 are not triggered)</p> | |

6.3.3.18.4 Test Coverage

| CR Number | Test Case Number |
|-----------|------------------|
| CRRN1 | 1,2,3 |
| CRRN2 | 3 |

6.3.3.19 EVENT_FORMATTED_SMS_CB

Test Area Reference: FWK_APT_EFCB

6.3.3.19.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_FORMATTED_SMS_CB once:

- it has been registered to this event,
- an envelope APDU carrying a Cell Broadcast Page, formatted according to [8], is received,
- the toolkit applet to be triggered is registered with the corresponding TAR in the CB page,
- the security is verified

CRRN2: The applet is not triggered by the EVENT_FORMATTED_SMS_CB once it has deregistered from this event.

6.3.3.19.2 Test Suite Files

Test Script: FWK_APT_EFCB_1.scr

Test Applet: FWK_APT_EFCB_1.java

Load Script: FWK_APT_EFCB_1.ldr

Cleanup Script: FWK_APT_EFCB_1.clr

Parameter File: FWK_APT_EFCB_1.par

6.3.3.19.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|------------------|
| 1 | <p>Applet registration to EVENT_FORMATTED_SMS_CB and triggering</p> <p>Applet is registered to EVENT_FORMATTED_SMS_CB and EVENT_FORMATTED_SMS_PP_ENV</p> <p>1-An Envelope EVENT_FORMATTED_SMS_CB is sent to the SIM.</p> | 1-Applet is triggered | |
| 2 | <p>Applet deregistration</p> <p>ToolkitRegistry.clearEvent() method is called for EVENT_FORMATTED_SMS_CB</p> <p>1-A formatted SMS CB envelope is sent to the SIM.</p> <p>2-An envelope SMS-PP formatted is sent to the SIM</p> <p>ToolkitRegistry.setEvent() method is called for EVENT_FORMATTED_SMS_CB</p> <p>3-An Envelope FORMATTED_SMS_CB is sent to the SIM</p> | <p>1- Applet is not triggered</p> <p>2- Applet is triggered</p> <p>3- Applet is triggered</p> | |

6.3.3.19.4 Test Coverage

| CR Number | Test Case Number |
|--------------------|-------------------------|
| CRRN1 (See note 1) | 1,2 |
| CRRN2 | 2 |

Note 1: The security checks are not relevant to the test designed in this test area; they will be checked in the "Framework Security Management" section.

6.3.3.20 EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION

Test Area Reference: FWK_APT_EDLG

6.3.3.20.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION once it has registered to this event and an Envelope Event DownLoad Language Selection is received.

CRRN2: The applet is not triggered by the EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION once it has deregistered from this event.

6.3.3.20.2 Test Suite Files

Test Script: FWK_APT_EDLG_1.scr

Test Applet: FWK_APT_EDLG_1.java

Load Script: FWK_APT_EDLG_1.ldr

Cleanup Script: FWK_APT_EDLG_1.clr

Parameter File: FWK_APT_EDLG_1.par

6.3.3.20.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | <p align="center">Applet registration to EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION and triggering</p> <p>Applet is registered to the EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION and to EVENT_FORMATTED_SMS_PP_ENV.</p> <p>Event= EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION</p> <p>1-Toolkit Registry.isEventSet() method is called.</p> <p>2-An Envelope EVENT_DOWNLOAD_LANGUAGE_SELECTION is sent to the SIM.</p> | <p>1-Method returns true</p> <p>2- Applet is triggered</p> | |
| 2 | <p align="center">Applet deregistration</p> <p>Event= EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION Toolkit Registry.clearEvent()method is called</p> <p>Perform SIM initialization with Profile Download, SMS PP Data Download, Command Result and Language Selection facilities.</p> <p>1-An Envelope EVENT_DOWNLOAD_LANGUAGE_SELECTION is sent to the SIM.</p> <p>a formatted sms pp envelope is sent to the sim</p> <p>Event= EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION Toolkit Registry.setEvent() method is called</p> <p>Perform SIM initialization with Profile Download, SMS PP Data Download, Command Result and Language Selection facilities.</p> <p>2-An Envelope EVENT_DOWNLOAD_LANGUAGE_SELECTION is sent to the SIM.</p> | <p>1- Applet isn't triggered</p> <p>2- Applet is triggered</p> | |

6.3.3.20.4 Test Coverage

| CR Number | Test Case Number |
|------------------|-------------------------|
| CRRN1 | 1, 2 |
| CRRN2 | 2 |

6.3.3.21 EVENT_EVENT_DOWNLOAD_BROWSER_TERMINATION

Test Area Reference: FWK_APT_EDBT

6.3.3.21.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_EVENT_DOWNLOAD_BROWSER_TERMINATION once it has registered to this event and an Envelope Event DownLoad Browser Termination is received.

CRRN2: The applet is not triggered by the EVENT_EVENT_DOWNLOAD_BROWSER_TERMINATION once it has deregistered from this event.

6.3.3.21.2 Test Suite Files

Test Script: FWK_APT_EDBT_1.scr
Test Applet: FWK_APT_EDBT_1.java
Load Script: FWK_APT_EDBT_1.ldr
Cleanup Script: FWK_APT_EDBT_1.clr
Parameter File: FWK_APT_EDBT_1.par

6.3.3.21.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | <p align="center">Applet registration to EVENT_EVENT_DOWNLOAD_BROWSE ROWSER_TERMINATION and triggering</p> <p>Applet is registered to the EVENT_EVENT_DOWNLOAD_BROWSE ROWSER_TERMINATION and to EVENT_FORMATTED_SMS_PP_ENV</p> <p>Event= EVENT_EVENT_DOWNLOAD_BROWSE ROWSER_TERMINATION</p> <p>1-Toolkit Registry.isEventSet() method is called.</p> <p>2-An Envelope EVENT_DOWNLOAD_BROWSE ROWSER_TERMINATION is sent to the SIM.</p> | <p>1-Method returns true</p> <p>2- Applet is triggered</p> | |
| 2 | <p align="center">Applet deregistration</p> <p>Event= EVENT_EVENT_DOWNLOAD_BROWSE ROWSER_TERMINATION Toolkit Registry.clearEvent() method is called</p> <p>Perform SIM initialization with Profile Download, SMS PP Data Download, Command Result and Browser Termination facilities.</p> <p>1-An Envelope EVENT_DOWNLOAD_BROWSE ROWSER_TERMINATION is sent to the SIM.</p> <p>a formatted sms pp envelope is sent to the sim</p> <p>Event= EVENT_EVENT_DOWNLOAD_BROWSE ROWSER_TERMINATION Toolkit Registry.setEvent() method is called</p> <p>Perform SIM initialization with Profile Download, SMS PP Data Download, Command Result and Browser Termination facilities.</p> <p>2-An Envelope EVENT_DOWNLOAD_BROWSE ROWSER_TERMINATION is sent to the SIM.</p> | <p>1- Applet isn't triggered</p> <p>2- Applet is triggered</p> | |

6.3.3.21.4 Test Coverage

| CR Number | Test Case Number |
|------------------|-------------------------|
| CRRN1 | 1, 2 |
| CRRN2 | 2 |

6.3.4 Proactive Command Sending by the STF

6.3.4.1 System Proactive Commands

Test Area Reference: FWK_PCS_SPCO

6.3.4.1.1 Conformance Requirements

Normal Execution

CRRN1: When a toolkit applet changes a menu entry of its registry object, the SIM Toolkit Framework shall dynamically* update the menu stored in the ME during the current card session

CRRN2: The STF shall use the data of the EFsume file when issuing the SET UP MENU proactive command.

CRRN3: For all EVENT_EVENT_DOWNLOAD_*: When a toolkit applet changes one or more of these requested events of its registry object, the STF shall dynamically* update the event list stored in the ME during the current card session by SET UP EVENT LIST proactive command.

*The STF shall send its system proactive command as soon as no proactive session is pending and all the applets registered to the current events have been triggered and have returned from the processToolkit method invocation.

6.3.4.1.2 Test Suite Files

Test Script: FWK_PCS_SPCO_1.scr

Test Applet: FWK_PCS_SPCO_1.java

Load Script: FWK_PCS_SPCO_1.ldr

Cleanup Script: FWK_PCS_SPCO_1.clr

Parameter File: FWK_PCS_SPCO_1.par

6.3.4.1.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---------------------------|---|
| 1 | <p>Install Applet 1, Registered to the EVENT_EVENT_DOWNLOAD_MT_CALL and EVENT_EVENT_DOWNLOAD_LOCATION_STATUS</p> <p>Perform SIM initialization with EVENT_DOWNLOAD facilities supported</p> | | <p>setEventList proactive command [Event list]= '19020003' or '99020003'</p> |
| 2 | <p>Trigger the applet by ENVELOPE (SMS_FORMATTED_PP) command</p> <p>Clear the events and build a display text command</p> | | <p>1. DISPLAY TEXT Proactive command</p> <p>2. SET UP EVENT LIST Proactive command</p> <p>[CommandQualifier]= 00h</p> |

6.3.4.1.4 Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | see: chapter 6.2.9.2, CRRN1, chapter 6.2.9.4, CRRN3, chapter 6.2.9.5 CRRN4, chapter 6.2.9.8 CRRN1 |
| N2 | see: chapter 6.2.9.2 CRRN1, chapter 6.2.9.8 CRRN1 |
| N3 | 1,2 |

6.3.4.2 Interaction with GSM commands

Test Area Reference: FWK_PCS_IGCO

6.3.4.2.1 Conformance Requirements

Normal Execution

CRRN1: The STF shall process a GSM command even when a proactive command is pending (before and after the FETCH command until the terminal response). The STF shall answer with the SW1 and SW2 described in [3] and [4].

6.3.4.2.2 Test Suite Files

- Test Script: FWK_PCS_IGCO_1.scr
- Test Applet: FWK_PCS_IGCO_1.java
- Load Script: FWK_PCS_IGCO_1.ldr
- Cleanup Script: FWK_PCS_IGCO_1.clr
- Parameter File: FWK_PCS_IGCO_1.par

6.3.4.2.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---------------------------|---|
| 1 | <p>Interaction with GSM Commands after TERMINAL PROFILE in connection with FETCH and TERMINAL RESPONSE</p> <p>Applet is registered to Menu Selection</p> <p>RST TERMINAL PROFILE (Profile: supports all facilities except: SET UP EVENT LIST, POLL INTERVAL and POLLING OFF) 1- System issues a proactive command SETUP_MENU</p> <p>2- SELECT MF 3- GET RESPONSE (6 Bytes) 4- Failed SELECT File 5- FETCH</p> <p>6- SELECT MF 7- GET RESPONSE (6 Bytes) 8- TERMINAL RESPONSE</p> | | <p>1- 91xx</p> <p>2- 9Fxx 3- 91xx 4- 9404 5- Proactive Command: SETUP MENU</p> <p>6- 9Fxx 7- 9000 8- 9000</p> |
| 2 | <p>Interaction with GSM Commands after ENVELOPE (MENU SELECTION) in connection with FETCH and TERMINAL RESPONSE</p> <p>Menu Entry ID = 0x01</p> <p>1- SELECT MF 2- GET RESPONSE (6 Bytes) 3- Failed SELECT File 4- FETCH</p> <p>5- SELECT MF 6- GET RESPONSE (6 Bytes)</p> | | <p>1- 9FXX 2- 91XX 3- 9404 4- Proactive Command: DISPLAY TEXT</p> <p>5- 9FXX</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---------------------------|--|
| | 7- TERMINAL RESPONSE | | 6- 9000 7- 9000 |
| 3 | <p>Interaction with GSM Commands after TERMINAL RESPONSE in proactive command session in connection with FETCH and TERMINAL RESPONSE</p> <p>Menu Entry ID = 0x02</p> <p>1- SELECT MF 2- GET RESPONSE (6 Bytes) 3- FETCH</p> <p>4- SELECT MF 5- GET RESPONSE (6 Bytes) 6- Failed SELECT File 7- TERMINAL RESPONSE</p> <p>8- SELECT MF 9- GET RESPONSE (6 Bytes) 10-Failed SELECT File 11-FETCH</p> <p>12-SELECT MF 13-GET RESPONSE (6 Bytes) 14-TERMINAL RESPONSE</p> | | <p>1- 9FXX 2- 91XX</p> <p>3- Proactive Command: DISPLAY TEXT 4- 9FXX 5- 9000 6- 9404 7- 9000</p> <p>8- 9FXX 9- 91XX 10-9404</p> <p>11-Proactive Command: DISPLAY TEXT</p> <p>12-9FXX 13-9000 14-9000</p> |

6.3.4.2.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 1,2,3 |

6.3.5 Exception Handling

6.3.5.1 Hide Exceptions from the ME

Test Area Reference: FWK_EXH_HEME

6.3.5.1.1 Conformance Requirements

Normal Execution

CRRN1 : A toolkit applet may throw an exception, but this error will not be sent to the ME.

* Because the behaviour of the SIM is not exactly defined for the above CRRN, there are no tests defined here yet.

6.3.5.2 Interaction with Multiple Triggering

Test Area Reference: FWK_EXH_IMTG

6.3.5.2.1 Conformance Requirements

Normal Execution:

CRRN1 : An exception thrown by a toolkit applet, will not influence toolkit applets registered to the same event

6.3.5.2.2 Test Suite Files

Test Script: FWK_EXH_IMTG_1.scr
 Test Applet: : FWK_EXH_IMTG_1.java
 Load Script: : FWK_EXH_IMTG_1.ldr
 Cleanup Script: FWK_EXH_IMTG_1.clr
 Parameter File: FWK_EXH_IMTG_1.par

6.3.5.2.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|------------------|
| 0 | Load/install 2 toolkit applets registered to EVENT_STATUS_COMMAND, EVENT_PROFILE_DOWNLOAD, EVENT_UNRECOGNISED_ENVELOPE, EVENT_EVENT_DOWNLOAD_MT_CALL, EVENT_UNFORMATTED_SMS_PP_ENV, EVENT_UNFORMATTED_SMS_PP_UPD, EVENT_UNFORMATTED_SMS_CB applet1: Priority= 0x01, applet2: Priority= 0x02, (i.e. applet1 is triggered before applet2) | | |
| 1 | Status_Command is sent | 1- Applet1 is triggered : 2- NullPointerException is thrown 3- Applet2 is triggered | |
| 2 | Profile_Download is sent | 1- Applet1 is triggered 2- NullPointerException is thrown 3- Applet2 is triggered | |
| 3 | Unrecognised_Envelope is sent | 1- Applet2 is triggered 2- NullPointerException is thrown 3- Applet2 is triggered | |
| 4 | Event_Download_MT_Call is sent | 1- Applet2 is triggered 2- NullPointerException is thrown 3- Applet2 is triggered | |
| 5 | Unformatted_SMS_PP_Env is sent | 1- Applet1 is triggered NullPointerException is thrown 3- Applet2 is triggered | |
| 6 | Unformatted_SMS_PP_Upd is sent | 1- Applet1 is triggered | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|-----------------------------------|--|------------------|
| | | NullPointerException is thrown 3- Applet2 is triggered | |
| 7 | Unformatted_SMS_CB is sent | 1- Applet1 is triggered NullPointerException is thrown 3- Applet2 is triggered | |

6.3.5.2.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1,2,3,4,5,6,7 |

6.3.6 Framework Security Management

Security Parameters

The table that follows contains the security parameters that shall be used when the 03.48 security is required in the test cases developed in the current section.

| Parameter | Value in hexadecimal |
|-------------------|-------------------------|
| KIC | 11 |
| KID | 11 |
| CNTR | 00 00 00 00 01 |
| Key for ciphering | 01 41 42 7F DA E8 91 A7 |
| Key for RC/CC/DS | 01 23 45 67 89 AB CD EF |

If a parameter is not listed explicitly in the above table, the default values of section 4.7.3.1 apply.

6.3.6.1 Input Data

Test Area Reference: FWK_FWS_INDA

6.3.6.1.1 Conformance Requirements

Normal Execution

CRRN1: If the SIM receives an envelope APDU containing an SMS_PP_DATADOWNLOAD BER TLV formatted according to [8], the SIM Toolkit Framework shall verify the security of the SMS TPDU.

CRRN2: The toolkit applet will only be triggered if the TAR is known and the security verified.

CRRN3: If the SIM receives an envelope APDU containing an SMS_CB_DATADOWNLOAD formatted according to [8], the SIM Toolkit Framework shall verify the security of the cell broadcast page.

6.3.6.1.2 Test Area Files

- Test Script: FWK_FWS_INDA_1.scr
- Test Applet: FWK_FWS_INDA_1.java
- FWK_FWS_INDA_2.java
- FWK_FWS_INDA_3.java

FWK_FWS_INDA_4.java
 Load Script: FWK_FWS_INDA_1.ldr
 Cleanup Script: FWK_FWS_INDA_1.clr
 Parameter File: FWK_FWS_INDA_1.par

6.3.6.1.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|---|
| 1 | <p>Framework checks the Cryptographic checksum and deciphers the data</p> <p>Applet1 is loaded and installed</p> <p>1-Envelope(SMS-PP) formatted is sent to the SIM with this features: Ciphering; Cryptographic checksum; No proof of receipt; Data = 01</p> | The applet is triggered. | |
| 2 | <p>Triggering two different applets with different security</p> <p>Applet2 is installed</p> <p>1-Envelope(SMS-PP) 03.48 formatted is sent to the SIM with this features: Ciphering; Cryptographic checksum; No proof of receipt; TAR of Applet 1 Data = 02</p> <p>2-Envelope(SMS-PP) 03.48 formatted is sent to the SIM with this features: No ciphering; No cryptographic checksum; No proof of receipt; TAR of Applet 2 Data = 03</p> | <p>1- Applet1 is triggered</p> <p>3- Applet2 is triggered</p> | <p>2- The SIM answers to the Envelope with status words 9000</p> <p>4- The SIM answers to the Envelope with status words 9000</p> |
| 3 | <p>Envelope(SMS-PP) formatted with wrong cryptographic checksum</p> <p>No ciphering; Wrong Cryptographic checksum; No proof of receipt; TAR of Applet 1 Data = 04</p> | No applet is triggered | 1- The SIM answers to the Envelope with status words 9000 |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|---|
| 4 | <p>Framework checks the Cryptographic checksum and deciphers the data</p> <p>Applet3 is loaded and installed</p> <p>1-Envelope(SMS-CB) formatted is sent to the SIM with this features: Ciphering; Cryptographic checksum; No proof of receipt; Data = 01</p> | <p>1- Applet3 is triggered.</p> | <p>2- The SIM answers to the Envelope with status words 9000</p> |
| 5 | <p>Triggering two different applets with different security on Envelope(SMS-CB) formatted</p> <p>Applet4 is installed</p> <p>1-Envelope(SMS-CB) formatted is sent to the SIM with this features: Ciphering; Cryptographic checksum; No proof of receipt; TAR of Applet 3 Data = 02</p> <p>2-Envelope(SMS-CB) formatted is sent to the SIM with this features: No ciphering; No cryptographic checksum; No proof of receipt; TAR of Applet 4 Data = 03</p> | <p>1- Applet3 is triggered</p> <p>3- Applet4 is triggered</p> | <p>2- The SIM answers to the Envelope with status words 9000</p> <p>4- The SIM answers to the Envelope with status words 9000</p> |
| 6 | <p>Envelope(SMS-CB) formatted with wrong cryptographic checksum</p> <p>No ciphering; Wrong Cryptographic checksum; No proof of receipt; TAR of Applet 3 Data = 04</p> | <p>No applet is triggered</p> | <p>1- The SIM answers to the Envelope with status words 9000</p> |

6.3.6.1.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1,2,3 |
| CRRN2 | 3,6 |
| CRRN3 | 4,5,6 |

6.3.6.2 Output Data

Test Area Reference: FWK_FWS_OUDA

6.3.6.2.1 Conformance Requirements

Normal Execution

CRRN1: The SIM Toolkit Framework shall secure and send the response packet.

6.3.6.2.2 Test Area Files

Test Script: FWK_FWS_OUDA_1.scr
 Test Applet: FWK_FWS_OUDA_1.java
 Load Script: FWK_FWS_OUDA_1.ldr
 Cleanup Script: FWK_FWS_OUDA_1.clr
 Parameter File: FWK_FWS_OUDA_1.par

6.3.6.2.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|---|
| 1 | Envelope(SMS-PP) formatted Ciphering; Cryptographic checksum; proof of receipt response shall be sent using SMS-Deliver-Report; no security applied to proof of receipt Data in plain text = "APPLET1" | The applet is triggered and sends a "Display Text" proactive command with the data received in the Envelope. | The SIM answers to the Envelope with status words 9Fxx and a PoR is retrieved with a GetResponse command. The PoR has no application data. The SIM answers to the Get Response command with status words 91xx to issue a Display Text "APPLET1". |
| 2 | Envelope(SMS-PP) formatted Ciphering; Cryptographic checksum; proof of receipt response shall be sent using SMS-Deliver-Report; no security applied to proof of receipt Data in plain text = "APPLET1" | The applet posts application data. It does not call the ProactiveHandler.send() method | The SIM answers to the Envelope with status words 9Fxx and a PoR is retrieved with a GetResponse command. The PoR has the application data posted by the application. The SIM answers to the Get Response command with status words 9000. |
| 3 | Envelope(SMS-PP) formatted Ciphering; Cryptographic checksum; proof of receipt response shall be sent using SMS-Deliver-Report; no security applied to proof of receipt Data in plain text = "TEST" | The applet posts application data and calls the ProactiveHandler.send() method to send a "Display Text" proactive command with the data received in the Envelope. | The SIM answers to the Envelope with status words 9Fxx and a PoR is retrieved with a GetResponse command. The PoR has the application data posted by the application. The SIM answers to the Get Response command with status words 91xx to issue the Display Text "TEST". |
| 4 | Envelope(SMS-PP) formatted Ciphering; Cryptographic checksum; proof of receipt response shall be sent using SMS-Deliver-Report; proof of receipt shall be ciphered Data in plain text = "TEST" | The applet posts application data and calls the ProactiveHandler.send() method to send a "Display Text" proactive command with the data received in the Envelope. | The SIM answers to the Envelope with status words 9Fxx and a PoR is retrieved with a GetResponse command. The PoR has the application data posted by the application. The SIM answers to the Get Response command with status words 91xx to issue the Display Text "TEST". |
| 5 | Envelope(SMS-PP) formatted The Terminal Profile command shall be issued with the facility "'9EXX' response code for SIM data download error" enabled The Envelope(SMS-PP) formatted has to be issued with the following features: No ciphering; Wrong Cryptographic checksum; proof of receipt response shall be sent | No applet is triggered | The SIM answers to the Envelope with status words 9Exx and a PoR is retrieved with a GetResponse command. The Response Status Code Octet shall be '01'. |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---------------------------|------------------|
| | using SMS-Deliver-Report; no security applied to proof of receiptData in plain text = "TEST" | | |

6.3.6.2.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1,2,3,4,5 |

6.3.7 Envelope Response Posting

6.3.7.1 EVENT_CALL_CONTROL_BY_SIM

Test Area Reference: FWK_ERP_ECCN

6.3.7.1.1 Conformance Requirements

Normal Execution

CRRN1: The SIM Toolkit Framework can't reply busy when an Envelope(Call Control) is sent to the SIM.

6.3.7.1.1 Test Area Files

Test Script: FWK_ERP_ECCN_1.scr
 Test Applet: FWK_ERP_ECCN_1.java
 FWK_ERP_ECCN_2.java
 FWK_ERP_ECCN_3.java
 Load Script: FWK_ERP_ECCN_1.ldr
 Cleanup Script: FWK_ERP_ECCN_1.clr
 Parameter File: FWK_ERP_ECCN_1.par

6.3.7.1.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|--|
| 1 | <p>Applet 1 is registered on the EVENT_CALL_CONTROL_BY_SIM, Applet2 is registered and triggered on the EVENT_MENU_SELECTION.</p> <p>1-Applet2 invokes the method send()and no fetch is performed</p> <p>2-Envelope(Call Control) is sent to the SIM</p> <p>3-Applet1 calls the method EnvelopeResponseHandler.postASBRTLTV() to change any incoming dialling number into +11 22 33 44.</p> <p>4-A Fetch command is sent to the SIM</p> <p>5-A Terminal Response command is sent to the SIM</p> <p>6-Delete applet1 & applet2</p> <p>7-Install applet3</p> | <p>Applet2 is suspended</p> <p>Applet1 is triggered.</p> <p>Applet2's execution shall continue.</p> | <p>The SIM answer 9Fxx to the Envelope(Call Control)</p> <p>The dialling number is retrieved with a GetResponse command. The SIM answers to the Get Response command with status words 91xx.</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|---|
| 2 | <p>Applet 3 is registered on both the events EVENT_CALL_CONTROL_BY_SIM and EVENT_MENU_SELECTION.</p> <p>1-Envelope Menu Selection is sent to the SIM.</p> <p>2-Applet3 invokes the method send()and no fetch is performed)</p> <p>3-Envelope(Call Control) is sent to the SIM</p> <p>4-Applet3 calls the method EnvelopeResponseHandler.postASBRTLTV() to change any incoming dialling number into +11 22 33 44.</p> <p>5-A Fetch command is sent to the SIM</p> <p>6-A Terminal Response command is sent to the SIM</p> | <p>Applet3 is triggered on the EVENT_MENU_SELECTION</p> <p>Applet3 is suspended on the send() method</p> <p>Applet3 is triggered on the EVENT_CALL_CONTROL_BY_SIM.</p> <p>The Applet3's execution shall continue.</p> | <p>The SIM answer 9Fxx to the Envelope(Call Control)</p> <p>The dialling number is retrieved with a GetResponse command.</p> <p>The SIM answers to the Get Response command with status words 91xx.</p> |

6.3.7.1.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1,2 |

6.3.7.2 EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM

Test Area Reference: FWK_ERP_EMCN

6.3.7.2.1 Conformance Requirements

Normal Execution

CRRN1: The SIM Toolkit Framework can't reply busy when an Envelope(MO-Short Message Control) is sent to the SIM.

6.3.7.2.2 Test Area Files

Test Script: FWK_ERP_EMCN_1.scr

Test Applet: FWK_ERP_EMCN_1.java
 FWK_ERP_EMCN_2.java
 FWK_ERP_EMCN_3.java
 Load Script: FWK_ERP_EMCN_1.ldr
 Cleanup Script: FWK_ERP_EMCN_1.clr
 Parameter File: FWK_ERP_EMCN_1.par

6.3.7.2.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|---|
| 1 | <p>Applet 1 is registered on the EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM; Applet2 is registered and triggered on the EVENT_MENU_SELECTION.</p> <p>.</p> <p>1-Applet2 invokes the method send()and no fetch is performed)</p> <p>2-Envelope(MO-SM control) is sent to the SIM</p> <p>3-Applet1 calls the method EnvelopeResponseHandler.postASBRTLTV() to change any incoming TP_Destination_Address and any RP_Destination_Address of the Service Center into +11 22 33 44</p> <p>4-A Fetch command is sent to the SIM</p> <p>5-A Terminal Response command is sent to the SIM</p> <p>6-Delete applet1 & applet2</p> <p>7-Install applet3</p> | <p>Applet2 is suspended</p> <p>Applet 1 is triggered.</p> <p>The Applet's execution shall continue.</p> | <p>The SIM answers 9Fxx to the Envelope(MO-Short Message Control)</p> <p>The TP_Destination_Address is retrieved with a GetResponse command.</p> <p>The SIM answers to the Get Response command with status words 91xx.</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|---|
| 2 | <p>Applet 3 is registered on both the events EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM and EVENT_MENU_SELECTION.</p> <p>1-Applet3 invokes the method send()and no fetch is performed)</p> <p>2-Envelope(MO-SM control) is sent to the SIM</p> <p>3-Applet3 calls the method EnvelopeResponseHandler.postASBRTLTV() to change any incoming TP_Destination_Address and any RP_Destination_Address of the Service Center into +11 22 33 44.</p> <p>4-A Fetch command is sent to the SIM</p> <p>5-A Terminal Response command is sent to the SIM</p> | <p>Applet 3 is suspended on the send() method</p> <p>Applet3 is triggered on the EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM.</p> <p>The Applet3's execution shall continue.</p> | <p>The SIM answers 9Fxx to the Envelope(MO-Short Message Control)</p> <p>The TP_Destination_Address is retrieved with a GetResponse command.</p> <p>The SIM answers to the Get Response command with status words 91xx.</p> |

6.3.7.2.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1,2 |

6.3.7.3 EVENT_UNRECOGNIZED_ENVELOPE

Test Area Reference: FWK_ERP_EUEN

6.3.7.3.1 Conformance Requirements

Normal Execution

CRRN1: The EnvelopeResponseHandler is available for the EVENT_UNRECOGNIZED_ENVELOPE.

6.3.7.3.2 Test Area Files

- Test Script: FWK_ERP_EUEN_1.scr
- Test Applet: FWK_ERP_EUEN_1.java
- Load Script: FWK_ERP_EUEN_1.ldr
- Cleanup Script: FWK_ERP_EUEN_1.clr
- Parameter File: FWK_ERP_EUEN_1.par

6.3.7.3.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|--|
| 1 | An applet triggered on the EVENT_UNRECOGNIZED_ENVELOPE calls the EnvelopeResponseHandler.post() method | The post() method returns no exception | The SIM answers to the Envelope with status words 9Fxx. The data retrieved with the GetResponse command are the ones posted by the applet. |

6.3.7.3.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1 |

6.3.8 Toolkit Installation

6.3.8.1 Timers Allocation

Test Area Reference: FWK_TIN_TMAL

6.3.8.1.1 Conformance Requirements

Normal execution

CRRN1: One toolkit applet can register to several timers, but a timer can only be allocated to one toolkit applet.

Context errors

CRRC1 : Allocated timers shall not exceed the maximum number of timers allowed for this applet instance defined during installation.

CRRC2 : The total number of timers allocated for all the applets shall not exceed 8.

6.3.8.1.2 Test suite files

- Test Script: FWK_TIN_TMAL_1.scr
- Test Applet: FWK_TIN_TMAL_1.java
FWK_TIN_TMAL_2.java
FWK_TIN_TMAL_3.java
- Load Script: FWK_TIN_TMAL_1.ldr
- Cleanup Script: FWK_TIN_TMAL_1.clr
- Parameter File: FWK_TIN_TMAL_1.par

6.3.8.1.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|---|--|---|--|
| 1 | <p>More than 8 timers at the instantiation of applet1: check that applet1 is not installed or that it is not possible to allocate more than 8 timers.</p> <p>Install for install of applet1 with maximum 9 timers allocated.</p> <p>applet1 is triggered: we allocate 9 timers</p> <p>applet1 is selected</p> | <p>Shall throw a ToolkitException with reason NO_TIMER_AVAILABLE only on the 9th allocateTimer()</p> | <p>The SIM answers to the Envelope with status words 90 00</p> <p>2 behaviours may be expected :</p> <ol style="list-style-type: none"> 1. applet1 is not found, status word 6X XX 2. applet1 has been installed and only 8 timers are allocated |
| Reset the card and delete instance of applet1 | | | |
| 2 | <p>Good installation of applet2</p> <p>Install for install of applet2 (maximum 4 timers allocated).</p> | | <p>The SIM answers to the Envelope with status words 90 00</p> |
| 3 | <p>Allocate 4 timers Applet2</p> | No exception shall be thrown. | |
| 4 | <p>Allocate one more timer Applet2</p> | Shall throw a ToolkitException with reason NO_TIMER_AVAILABLE | |
| 5 | <p>Good installation of applet3</p> <p>Install for install of applet3 (maximum 8 timers allocated).</p> | | <p>The SIM answers to the Envelope with status words 90 00</p> |
| 6 | <p>Allocate 4 timers Applet3</p> | No exception shall be thrown. | |
| 7 | <p>Allocate one more timer Applet3</p> | Shall throw a ToolkitException with reason NO_TIMER_AVAILABLE | |
| 8 | <p>Check that each timerId (allocated by applet2 and applet3) is between 1 and 8 and is different from each other</p> | | |

6.3.8.1.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 2,3,8 |
| C1 | 1, 7 |
| C2 | 4,5,6 |

6.3.8.2 Item Identifier

Test Area Reference: FWK_TIN_ITID

6.3.8.2.1 Conformance Requirements

Normal execution

CRRN1: If the requested item identifier in the range [1-127] is not already allocated, then this item identifier shall be allocated to the current applet.

CRRN2: If the requested item identifier is '00', the card shall take the first free value in the range [128,255].

Parameters error

CRRP1: If the requested item identifier is in the range [128,255], then the card shall reject the install command.

Context errors

CRRC1: If the requested item identifier in the range [1-127] is already allocated, then the card shall reject the install command.

6.3.8.2.2 Test suite files

Test Script: FWK_TIN_ITID_1.scr

Test Applet: FWK_TIN_ITID_1.java

FWK_TIN_ITID_2.java

FWK_TIN_ITID_3.java

Load Script: FWK_TIN_ITID_1.ldr

Cleanup Script: FWK_TIN_ITID_1.clr

Parameter File: FWK_TIN_ITID_1.par

6.3.8.2.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---------------------------|---|
| 1 | <p align="center">Bad installation of applet1</p> <p>Install for install of applet1. The following parameters item Id equal to 128</p> <p>applet1 is selected</p> | | applet1 is not found, status word 6X XX |
| 2 | <p align="center">Good installation of applet1</p> <p>Install for install of applet1. item Id = 1 for the first menu and 127 for the second one</p> <p>A Terminal Profile is sent to the card with only PROFILE_DOWNLOAD, SMS_PP_DOWNLOAD, MENU_SELECTION, SET_UP_MENU and COMMAND_RESULT facilities.</p> | | <p>The SIM answers to the Envelope with status words 91xx to send back to the ME the 2 new menus.</p> <p>The menus are (position/itemId/text) 01/01/menu11 02/127/menu12</p> |
| 3 | <p align="center">Bad installation of applet2 Item identifier already allocated</p> <p>Install for install of applet2. item Id = 127</p> <p>applet2 is selected</p> | | applet2 is not found, status word 6X XX |
| 4 | <p align="center">Good installation of applet2</p> <p>Install for install of applet2. item Id = 0</p> | | <p>The SIM answers to the Envelope with status words 91xx to send back to the ME the 3 menus.</p> <p>The menus are 01/01/menu11 02/127/menu12 03/128/menu21</p> |
| 5 | <p align="center">Good installation of applet3</p> <p>Install for install of applet3. item Id = 0</p> | | <p>The SIM answers to the Envelope with status words 91xx to send back to the ME the 4 menus.</p> <p>The menus are 01/01/menu11 02/127/menu12 03/128/menu21 04/129/menu31</p> |
| 6 | <p align="center">Good delete and installation of applet2</p> <p>Delete instance of applet2</p> <p>Perform a RESET and a Terminal Profile with the facilities of PROFILE_DOWNLOAD, SMS-PP_DATA_DOWNLOAD, MENU_SELECTION, COMMAND_RESULT and SET_UP_MENU</p> | | <p>The SIM answers to the Terminal Profile with status words 91xx to send back to the ME the 3 menus.</p> <p>The menus are 01/01/menu11</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---------------------------|--|
| | Install for install of applet2. item Id = 0 | | 02/127/menu12 03/129/menu31 The SIM answers to the Envelope with status words 91xx to send back to the ME the 4 menus. The menus are 01/01/menu11 02/127/menu12 03/128/menu21 04/129/menu31 |

6.3.8.2.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 2 |
| N2 | 4,5,6 |
| P1 | 1 |
| C1 | 3 |

6.3.8.3 Item Position

Test Area Reference: FWK_TIN_ITPO

6.3.8.3.1 Conformance Requirements

Normal execution

CRRN1: The position of the new menu entries is an absolute position among the existing ones.

CRRN2: If the position identifier is 00h, the menu shall have the last position

6.3.8.3.2 Test suite files

- Test Script: FWK_TIN_ITPO_1.scr
- Test Applet: FWK_TIN_ITPO_1.java
FWK_TIN_ITPO_2.java
FWK_TIN_ITPO_3.java
- Load Script: FWK_TIN_ITPO_1.ldr
- Cleanup Script: FWK_TIN_ITPO_1.clr
- Parameter File: FWK_TIN_ITPO_1.par

6.3.8.3.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---------------------------|--|
| 1 | <p align="center">Installation of applet1</p> Perform Install for install of applet1.Position/ItemId 01/01 02/02 A Terminal Profile is sent to the card | | The menus are (position/itemId/text) 01/01/menu11 02/02/menu12 |
| 2 | <p align="center">Installation of applet2</p> Perform Install for install of applet2. Position/ItemId 03/03 04/04 | | The SIM answers to the Envelope with status words 91xx to send back to the ME the 4 menus. The menus are (position/itemId/text) 01/01/menu11 02/02/menu12 03/03/menu21 04/04/menu22 |
| 3 | <p align="center">Installation of applet3</p> Perform Install for install of applet3. Position/ItemId 00/05 | | The SIM answers to the Envelope with status words 91xx to send back to the ME the 5 menus. The menus are (position/itemId/text) 01/01/menu11 02/02/menu12 03/03/menu21 04/04/menu22 05/05/menu31 |

6.3.8.3.4 Test Coverage

Note : As Item Position management is not fully specified in the [7] or [8] all possible tests cannot be performed.

| CRR number | Test case number |
|------------|------------------|
| N1 | 1,2 |
| N2 | 3 |

6.3.8.4 Maximum Text Length for a menu entry

Test Area Reference: FWK_TIN_MLME

6.3.8.4.1 Conformance Requirements

Normal execution

CRRN1: The maximum length of item text string is defined at the installation of the toolkit applet.

Parameters errors

CRRP1: If initMenuEntry length parameter is greater than the allocated space (Maximum Text Length for a menu entry), then a ToolkitException ALLOWED_LENGTH_EXCEEDED is thrown.

CRRP2: If changeMenuEntry length parameter is greater than the allocated space (Maximum Text Length for a menu entry), then a ToolkitException ALLOWED_LENGTH_EXCEEDED is thrown.

6.3.8.4.2 Test suite files

Test Script: FWK_TIN_MLME_1.scr
 Test Applet: FWK_TIN_MLME_1.java
 Load Script: FWK_TIN_MLME_1.ldr
 Cleanup Script: FWK_TIN_MLME_1.clr
 Parameter File: FWK_TIN_MLME_1.par

6.3.8.4.3 Test Procedure

| Id | Description | API / Framework Expectation | APDU Expectation |
|----|--|--|--|
| 1 | <p>Installation of applet with 2 menus not exceeding the maximum text length</p> <p>Install one applet with 2 menu entries allowed and max. text length equal to 10. initMenuEntry defined at the install (install) command MenuEntry = "MenuEntry1", "MenuEntry2" Offset = 0 Length = 10 NextAction = '00' HelpSupported = false IconQualifier = '00' IconIdentifier = 0</p> | | |
| 2 | <p>initMenuEntry with a too large length</p> <p>initMenuEntry with length equal to 11 MenuEntry = " MenuEntry03" Offset = 0 Length = 11 NextAction = '00' HelpSupported = false IconQualifier = '00' IconIdentifier = 0</p> | ToolkitException ALLOWED_LENGTH_EXCEEDED is thrown | |
| 3 | <p>initMenuEntry with a right length</p> <p>initMenuEntry with length parameter equal to 10 MenuEntry = " MenuEntry3" Offset = 0 Length = 10 NextAction = '00' HelpSupported = false IconQualifier = '00' IconIdentifier = 0</p> | | a SET UP MENU (2 items) is issued with TLV item length equal to 11 (Identifier + Text string of item) |
| 4 | <p>changeMenuEntry with a right length</p> <p>Applet1 is triggered by a EVENT_MENU_SELECTION. changeMenuEntry of menu 1, with length parameter equal to 10 Id = '01' MenuEntry = "MenuEntry4" Offset = 0 Length = menuEntry.length NextAction = 0 HelpSupported = false IconQualifier = 0 IconIdentifier = 0</p> <p>Return from processToolkit</p> | | a SET UP MENU (2 items) is issued with TLV item length equal to 11 (Identifier + Text string of item) |
| 5 | <p>changeMenuEntry with a too large length</p> <p>Applet1 is triggered by a EVENT_MENU_SELECTION.</p> | ToolkitException ALLOWED_LENGTH_EXCEEDED is thrown | Shall not receive a SET UP MENU different from the previous one |

| Id | Description | API / Framework Expectation | APDU Expectation |
|----|---|-----------------------------|------------------|
| | ChangeMenuEntry of menu 1, with length parameter equal to 11 Id = '02' MenuEntry = "MenuEntry05" Offset = 0 Length = menuEntry.length NextAction = 0 HelpSupported = false IconQualifier = 0 IconIdentifier = 0 Return from processToolkit | | |

6.3.8.4.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| CRRN1 | 1, 3, 4 |
| CRRP1 | 2 |
| CRRP2 | 5 |

6.3.8.5 Maximum number of menu entries

Test Area Reference: FWK_TIN_NBME

6.3.8.5.1 Conformance Requirements

Normal execution

CRRN1: The maximum number of menu entries is defined at the installation of the toolkit applet and can be the maximum number of successful invocations of the method initMenuEntry .

Parameters errors

CRRP1: If the menu entry cannot be initialised (e.g. no more item data in applet loading parameter), a ToolkitException with the REGISTRY_ERROR reason code is thrown.

6.3.8.5.2 Test suite files

- Test Script: FWK_TIN_NBME_1.scr
- Test Applet: FWK_TIN_NBME_1.java
FWK_TIN_NBME_2.java
- Load Script: FWK_TIN_NBME_1.ldr
- Cleanup Script: FWK_TIN_NBME_1.clr
- Parameter File: FWK_TIN_NBME_1.par

6.3.8.5.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---------------------------|------------------|
| 1 | <p style="text-align: center;">Installation of applet with 3 menus</p> Install (install) applet with max. number of menu entry is '3', defined at the install (install) command. initMenuEntry for each menu entry allowed (3 times) MenuEntry = "menu1", "menu2", "menu3" Offset = 0 Length = 5 | No Exception is thrown | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|--|
| | NextAction = '00' HelpSupported = false IconQualifier = '00' IconIdentifier = 0 | | |
| 2 | <p style="text-align: center;">init of a 4th menu</p> initMenuEntry one more time MenuEntry = "menu4" Offset = 0 Length = 5 NextAction = '00' HelpSupported = false IconQualifier = '00' IconIdentifier = 0 | ToolkitException REGISTRY_ERROR is thrown | SET UP MENU (3 items) is issued with TLV item length equal to 6 (Identifier + Text string of item) |
| 3 | <p style="text-align: center;">Installation of 2nd applet with 0 menu</p> Install (install) another applet, with max. number of menu entry is '0', defined at the install (install) command. initMenuEntry once MenuEntry = "menu1" Offset = 0 Length = 5 NextAction = '00' HelpSupported = false IconQualifier = '00' IconIdentifier = 0 | ToolkitException REGISTRY_ERROR is thrown | Shall not receive a SET UP MENU different from the previous one |

6.3.8.5.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| CRRN1 | 1 |
| CRRP1 | 2, 3 |

6.3.8.6 Access Domain

Test Area Reference: FWK_TIN_ACDO

6.3.8.6.1 Conformance Requirements

Normal execution

CRRN1: The Access Domain parameter indicates the mechanism used to control the applet instance access to the GSM file System ('00' means full access to the GSM File System, 'FF' means no access to the GSM File System).

Parameters errors

CRRP1: If the Access Domain Parameter requested is not supported, the card shall return the Status Word '6A80', incorrect parameters in data field, to the Install(Install) command.

CRRP2: If an applet with Access Domain Parameter 'FF' (i.e. No Access to the GSM File System) tries to access a GSM file (e.g. invoke the updateBinary(..) method) the framework shall throw a SIMViewException with a AC_NOT_FULFILLED reason.

6.3.8.6.2 Test suite files

- Test Script: FWK_TIN_ACDO_1.scr
- Test Applet: FWK_TIN_ACDO_1.java
- FWK_TIN_ACDO_2.java
- FWK_TIN_ACDO_3.java
- Load Script: FWK_TIN_ACDO_1.ldr

Cleanup Script: FWK_TIN_ACDO_1.clr

Parameter File: FWK_TIN_ACDO_1.par

6.3.8.6.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|------------------|
| 0 | <p>Install (install) applet1 with: - Length of Access Domain field value is '1' - Access Domain Parameter value is '00' (full access to the GSM File System)</p> <p>Install (install) applet2 with: - Length of Access Domain field value is '1' - Access Domain Parameter value is 'FF' (No access to the GSM File System)</p> <p>Install (install) applet3 with: - Length of Access Domain field value is '1' - Access Domain Parameter value is '00' (full access to the GSM File System)</p> | | |
| 1 | <p>readBinary/readRecord method with full Access Domain Parameter</p> <p>1- Select EF-TARU file whose Read access condition is ALWAYS Perform the readBinary method: fileOffset = 0 resp = abRead[] respOffset = 0 respLength = 3</p> <p>2- Select EF-SMS file whose Read access condition is CHV1 Perform the readRecord method: recNumber = 1 mode = REC_ACC_MODE_ABSOLUTE_CURRENT recOffset = 0 resp = abRead[] respOffset = 0 respLength = 3</p> <p>3- Select EF-TRAC file whose Read access condition is CHV2 Perform the readBinary method: fileOffset = 0 resp = abRead[] respOffset = 0 respLength = 3</p> <p>4- Select EF-SUME file Read access condition is ADM0 Perform the readBinary method: fileOffset = 0 resp = abRead[] respOffset = 0 respLength = 3</p> <p>5- Select EF-TNR file whose Read access condition is NEVER Perform the readBinary method: fileOffset = 0 resp = abRead[] respOffset = 0 respLength = 3</p> | <p>1 to 4- no exception is thrown</p> <p>5- SIMViewException AC_NOT_FULFILLED is thrown</p> | |
| 2 | <p>updateBinary/updateRecord method with full Access Domain Parameter</p> | <p>1 to 4- no exception is thrown</p> | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|------------------|
| | <p>For each case, send an Envelope that triggers the applet with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>1- Select EF-TNR file whose Update access condition is ALWAYS Perform the updateBinary method: fileOffset = 0 resp = abUpdate[FFFFFF] respOffset = 0 respLength = 3</p> <p>2- Select EF-SMS file whose Update access condition is CHV1 Perform the updateRecord method: recNumber = 1 mode = REC_ACC_MODE_ABSOLUTE_CURRENT recOffset = 0 resp = abUpdate[] respOffset = 0 respLength = 3</p> <p>3- Select EF-FDN file whose Update access condition is CHV2 Perform the updateBinary method: recNumber = 1 mode = REC_ACC_MODE_ABSOLUTE_CURRENT recOffset = 0 resp = abUpdate[] respOffset = 0 respLength = 3</p> <p>4- Select EF-SUME file Update access condition is ADM0 Perform the updateBinary method: fileOffset = 0 resp = abUpdate[] respOffset = 0 respLength = 3</p> <p>5- Select EF-TNU file whose Update access condition is NEVER Perform the updateBinary method: fileOffset = 0 resp = abUpdate[] respOffset = 0 respLength = 3</p> | <p>5- SIMViewException AC_NOT_FULFILLED is thrown</p> | |
| 3 | <p>invalidate method with full Access Domain Parameter</p> <p>1- Select EF-TNR file whose Invalidate access condition is ALWAYS Perform the invalidate method</p> <p>2- Select EF-TIAC file whose Invalidate access condition is CHV1 Perform the invalidate method</p> <p>3- Select EF-ADN file whose Invalidate access condition is CHV2 Perform the invalidate method</p> <p>4- Select EF-SUME file Invalidate access condition is ADM0 Perform the invalidate method</p> <p>5- Select EF-CNIV file whose Invalidate access condition is NEVER Perform the invalidate method</p> | <p>1 to 4- no exception is thrown</p> <p>5- SIMViewException AC_NOT_FULFILLED is thrown</p> | |
| 4 | <p>rehabilitate method with full Access Domain Parameter</p> <p>1- Select EF-TNR file whose Rehabilitate access condition is ALWAYS</p> | <p>1 to 4- no exception is thrown</p> <p>5- SIMViewException AC_NOT_FULFILLED is thrown</p> | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|------------------|
| | <p>access condition is ALWAYS Perform the rehabilitate method</p> <p>2- Select EF-IMSI file whose Rehabilitate access condition is CHV1 Perform the rehabilitate method</p> <p>3- Select EF-ADN file whose Rehabilitate access condition is CHV2 Perform the rehabilitate method</p> <p>4- Select EF-SUME file Rehabilitate access condition is ADM0 Perform the rehabilitate method</p> <p>5- Select EF-CNRI file whose Rehabilitate access condition is NEVER Perform the rehabilitate method</p> | | |
| 5 | <p>increase method with full Access Domain Parameter</p> <p>1- Select EF-CNU file whose Increase access condition is ALWAYS Perform the increase method: incr = abIncreaseValue[] incrOffset = 0 resp = abRead[] respOffset = 0</p> <p>2- Select EF-ACM file whose Increase access condition is CHV1 Perform the increase method: incr = abIncreaseValue[] incrOffset = 0 resp = abRead[] respOffset = 0</p> <p>3- Select EF-CIAC file whose Increase access condition is CHV2 Perform the increase method: incr = abIncreaseValue[] incrOffset = 0 resp = abRead[] respOffset = 0</p> <p>4- Select EF-CIAA file Increase access condition is ADM0 Perform the increase method: incr = abIncreaseValue[] incrOffset = 0 resp = abRead[] respOffset = 0</p> <p>5- Select EF-CNR file whose Increase access condition is NEVER Perform the increase method</p> | <p>1 to 4- no exception is thrown</p> <p>5- SIMViewException AC_NOT_FULFILLED is thrown</p> <p>Applet1 finalizes</p> | |
| 6 | <p>readBinary method with no Access Domain Parameter</p> <p>Send an Envelope that triggers the applet with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>Select EF-TARU file whose Read access condition is ALWAYS Perform the readBinary method: fileOffset = 0 resp = abRead[] respOffset = 0 respLength = 3 t</p> | <p>SIMViewException AC_NOT_FULFILLED is thrown</p> | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|------------------|
| 7 | <p>updateRecord method with no Access Domain Parameter</p> <p>Send an Envelope that triggers the applet with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>Select EF-SMS file whose Update access condition is CHV1 Perform the updateRecord method: fileOffset = 0 resp = abUpdate[] respOffset = 0 respLength = 3</p> | <p>SIMViewException AC_NOT_FULFILLED is thrown</p> | |
| 8 | <p>invalidate method with no Access Domain Parameter</p> <p>Send an Envelope that triggers the applet with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>Select EF-ADN file whose Invalidate access condition is CHV2 Perform the invalidate method</p> | <p>SIMViewException AC_NOT_FULFILLED is thrown</p> | |
| 9 | <p>rehabilitate method with no Access Domain Parameter</p> <p>Send an Envelope that triggers the applet with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>Select EF-SUME file Rehabilitate access condition is ADM0 Perform the rehabilitate method</p> | <p>SIMViewException AC_NOT_FULFILLED is thrown</p> | |
| 10 | <p>increase method with no Access Domain Parameter</p> <p>Send an Envelope that triggers the applet with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>Select EF-CNR file whose Increase access condition is NEVER Perform the increase method</p> <p>Applet3 restore EF-SUME</p> | <p>SIMViewException AC_NOT_FULFILLED is thrown</p> <p>Applet2 finalizes</p> | |

6.3.8.6.4 Test Coverage

Note : As Item Position management is not fully specified in the [7] or [8] all possible tests cannot be performed.

| CRR number | Test case number |
|------------|------------------|
| CRRN1 | 1, 2, 3, 4, 5 |
| CRRP1 | Not tested |
| CRRP2 | 6, 7, 8, 9, 10 |

6.3.8.7 Priority Level

Test Area Reference: FWK_TIN_PRLV

6.3.8.7.1 Conformance Requirements

Normal execution

CRRN1: The priority specifies the order of activation of an applet compared to the other applet registered to the same event ('01': Highest priority level, 'FF': Lowest priority level)

CRRN2: If two or more applets are registered to the same event and have the same priority level, the applets are activated according to their installation date (i.e. the most recent applet is activated first)

6.3.8.7.2 Test suite files

Test Script: FWK_TIN_PRLV_x.scr, x from 1 to 12

Test Applet: FWK_TIN_PRLV_x.java, x from 1 to 12, 8A, 8B, 9A, 9B, 10A, 10B

Load Script: FWK_TIN_PRLV_x.ldr, x from 1 to 12

Cleanup Script: FWK_TIN_PRLV_x.clr, x from 1 to 12

Parameter File: FWK_TIN_PRLV_x.par, x from 1 to 12, 8A, 8B, 9A, 9B, 10A, 10B

6.3.8.7.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|------------------|
| 0 | All applets are registered on an EVENT_UNFORMATTED_SMS_PP_ENV event | | |
| 1 | <p>Trigger 2 applets with 2 different maximum Priority Levels</p> <p>Install (install) applet1 with priority level '2' and applet2 with priority level '1', from package fwk_tin_prlv_1.</p> <p>Send an Envelope that triggers the 2 applets with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>Delete applets instances and packages</p> | A static variable is used to validate triggering order: applet2 is triggered before applet1 | |
| 2 | <p>Trigger 2 applets with 2 different maximum Priority Levels</p> <p>Install (install) applet1 with priority level '1' and applet2 with priority level '2', from package fwk_tin_prlv_2.</p> <p>Send an Envelope that triggers the 2 applets with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>Delete applets instances and packages</p> | A static variable is used to validate triggering order: applet1 is triggered before applet2. | |
| 3 | <p>Trigger 2 applets with 2 different Priority Levels</p> <p>Install (install) applet1 with priority level '80' and applet2 with priority level '7F', from package fwk_tin_prlv_3.</p> <p>Send an Envelope that triggers the 2 applets with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>Delete applets instances and packages</p> | A static variable is used to validate triggering order: applet2 is triggered before applet1 | |

| | | | |
|----------|--|--|--|
| <p>4</p> | <p>Trigger 2 applets with 2 different Priority Levels</p> <p>Install (install) applet1 with priority level '7F' and applet2 with priority level '80', from package fwk_tin_prlv_4.</p> <p>Send an Envelope that triggers the 2 applets with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>Delete applets instances and packages</p> | <p>A static variable is used to validate triggering order: applet2 is triggered before applet1</p> | |
| <p>5</p> | <p>Trigger 3 applets with the same Priority Level</p> <p>Install (install) applet 1, 2, 3 in this order with same priority level from package fwk_tin_prlv_5.</p> <p>Send an Envelope that triggers the 3 applets with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>Delete applets instances and packages.</p> | <p>A static variable is used to validate triggering order: applet3 is triggered before applet2, and applet2 is triggered before applet1.</p> | |
| <p>6</p> | <p>Trigger 2 applets from 2 classes, with 2 different Priority Level</p> <p>Install (install) applet1 from class A with priority level '2' Install (install) applet2 from class B with priority level '1'</p> <p>Send an Envelope that triggers the 2 applets with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>Delete applets instances and packages</p> | <p>A static variable is used to validate triggering order: applet2 is triggered before applet1</p> | |
| <p>7</p> | <p>Trigger 2 applets from 2 classes, with the same Priority Level</p> <p>Install (install) applet1 from class A with priority level '1' Install (install) applet2 from class B with priority level '1'</p> <p>Send an Envelope that triggers the 2 applets with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>Delete applets instances and packages</p> | <p>A static variable is used to validate triggering order: applet2 is triggered before applet1</p> | |
| <p>8</p> | <p>Trigger 2 applets from 2 packages, with 2 different Priority Level</p> <p>Install package fwk_tin_prlv_8. Install (install) applet1 from package fwk_tin_prlv_8A with priority level '2' Install (install) applet2 from package fwk_tin_prlv_8B with priority level '1'</p> | | |

| | | | |
|----|--|---|--|
| | <p>Send an Envelope that triggers the 2 applets with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>Delete applets instances ad packages</p> | <p>A static variable is used to validate triggering order: applet2 is triggered before applet1</p> | |
| 9 | <p>Trigger 2 applets from 2 packages, with the same Priority Level</p> <p>Install package fwk_tin_prlv_9. Install (install) applets 1 from package fwk_tin_prlv_9A and applet2 from package fwk_tin_prlv_9B in this order, with same priority level</p> <p>Send an Envelope that triggers the 2 applets with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>Delete applets instances and packages</p> | <p>A static variable is used to validate triggering order: applet2 is triggered before applet1</p> | |
| 10 | <p>Trigger 4 applets from 2 packages</p> <p>1-Install packages fwk_tin_prlv_10, fwk_tin_prlv_10A and fwk_tin_prlv_10B. Install (install) 2 applets 1 then 2 from package fwk_tin_prlv_10A, with respectively priority levels 1 and 2.</p> <p>Send an Envelope that triggers the 2 applets with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>2- Install (install) 2 applets 3 then 4 from package fwk_tin_prlv_10B, with respectively priority levels 1 and 2.</p> <p>Send an Envelope that triggers the 4 applets.</p> <p>Delete applets instances and packages</p> | <p>1- A static variable is used to validate triggering order: applet1 is triggered before applet2</p> <p>2- Applet3 is triggered before applets 1, 4, then 2.</p> | |
| 11 | <p>Trigger 4 applets with the same Priority Level then delete them one after another and trigger them each time</p> <p>1- Install (install) applet1, 2, 3, 4 in this order with same priority level from package fwk_tin_prlv_11.</p> <p>Send an Enveloppe that triggers the 4 applets with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>Delete applet instance 4</p> <p>2- Send an Enveloppe that triggers the 3 applets with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>Delete applet instance 3</p> <p>3- Send an Enveloppe that triggers the 2 applets with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> | <p>1- A static variable is used to validate triggering order: applets are triggered in order 4, 3, 2, 1.</p> <p>2- Applets are triggered in order 3, 2, 1.</p> | |

| | | | |
|----|--|--|--|
| | Delete remaining applet instances and packages | 3- Applets are triggered in order 2, 1. | |
| 12 | <p>Trigger 5 applets with different Priority Levels, alternating install and delete</p> <p>1- Install (install) applets 1, 2, 3, 4 in this order with respective priority levels 1, 2, 1, 2</p> <p>Send an Enveloppe that triggers the 4 applets with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>2- Delete applet instance 1 and install (install) applet5 with priority level 2</p> <p>Send an Enveloppe that triggers the 4 applets with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>3- Re-install (install) applet1 with priority level 1</p> <p>Send an Enveloppe that triggers the 5 applets with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> | <p>1- A static variable is used to validate triggering order: applets are triggered in order 3, 1, 4, 2</p> <p>2- Applets are triggered in order 3, 5, 4, 2</p> <p>3- Applets are triggered in order 1, 3, 5, 4, 2</p> | |

6.3.8.7.4 Test Coverage

| CRR number | Test case number |
|------------|--------------------------|
| CRRN1 | 1, 2, 3, 4, 6, 8, 10, 12 |
| CRRN2 | 5, 7, 9, 11 |

6.3.9 File System Context

6.3.9.1 Initial Context

Test Area Reference: FWK_FSC_INIT

6.3.9.1.1 Conformance Requirements

Normal Execution

CRRN1: At the invocation of the processToolkit method of a toolkit applet, the current file is the MF.

6.3.9.1.2 Test Suite Files

- Test Script: FWK_FSC_INIT_1.scr
- Test Applet: FWK_FSC_INIT_1.java
FWK_FSC_INIT_2.java
- Load Script: FWK_FSC_INIT_1.ldr

Cleanup Script: FWK_FSC_INIT_1.clr

FWK_FSC_INIT_2.clr

Parameter File: FWK_FSC_INIT_1.par

6.3.9.1.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|------------------|
| 0 | SIM Initialisation | Responses ignored. | |
| 1 | <p>MF is the selected DF in processToolkit()</p> <p>An ENVELOPE APDU containing a formatted SMS PP for Applet 1 is issued to the SIM</p> <pre>byte[] fci = new byte[10] fciOffset = 0 fciLength = 7 status()</pre> | <p>No exception shall be thrown. Shall return 7.</p> <p>fci shall contain the following part of the FCI structure:</p> <pre>< XX XX XX XX 3F 00 01 ></pre> | |
| 2 | <p>No EF is selected</p> <pre>rehabilitate ()</pre> | SIMView exception shall be thrown with reason NO_EF_SELECTED | |
| 3 | <p>MF is selected even when an applet triggered before selected any other file...</p> <p>Applets 1 and 2 register to EVENT_DOWNLOAD_USER_ACTIVITY. Applet 1 has higher priority than Applet 2.</p> <p>An ENVELOPE "EVENT - USER ACTIVITY" is sent to the SIM</p> <p>1 - Applet 1: - is triggered by event_event_download_user_activity - selects DF_GSM and EF_IMSI</p> <p>2 - Applet 2: - is triggered by event_event_download_user_activity fciOffset = 0 fciLength = 7 status()</p> <p>3 - rehabilitate ()</p> | <p>1 - No exception shall be thrown.</p> <p>2 - No exception shall be thrown. Shall return 7.</p> <p>fci shall contain the following part of the FCI structure:</p> <pre>< XX XX XX XX 3F 00 01 ></pre> <p>3 - SIMView exception shall be thrown with reason NO_EF_SELECTED</p> | |

6.3.9.1.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1, 2, 3 |

6.3.9.2 Context Preservation (current file)

Test Area Reference: FWK_FSC_CUFI

6.3.9.2.1 Conformance Requirements

Normal execution

CRRN1: When calling the method select (), the current files (file context) of any other applets shall not be changed (see GSM 03.19 [] - §5.2).

CRRN2: The select() methods select a file without changing the current file of any other applet or of the subscriber session.

CRRN3: After invocation of ProactiveHandler.send() method: the current file context of the toolkit applet is unchanged (see GSM 03.19 [] - §5.2).

6.3.9.2.2 Test Suite Files

- Test Script: FWK_FSC_CUFI_1.scr
- Test Applet: FWK_FSC_CUFI_1.java
FWK_FSC_CUFI_2.java
- Load Script: FWK_FSC_CUFI_1.ldr
- Cleanup Script: FWK_FSC_CUFI_1.clr
FWK_FSC_CUFI_2.clr
- Parameter File: FWK_FSC_CUFI_1.par

6.3.9.2.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|--|
| 0 | SIM Initialisation | Responses ignored. | |
| 1 | <p>No change to file context by another applet</p> <p>Applet1 registers to EVENT_FORMATTED_SMS_PP_ENV. Applet2 registers to EVENT_CALL_CONTROL_BY_SIM</p> <p>1 - Applet 1: - is triggered by a formatted SMS - selects DF_SIMTEST and EF_TARU - fileOffset = 0; dataLength = 2; dataOffset = 0; - buffer = {0xCA, 0xFE } - updateBinary (): first 2 bytes of EF_TARU are written as 'CA FE'. - issues a proactive command "Get Inkey".</p> <p>2 - An ENVELOPE APDU containing a CALL CONTROL BY SIM is issued to the SIM</p> <p>Applet 2: - is triggered by a CALL CONTROL BY SIM - selects DF_TELECOM and EF_ADN.</p> <p>3 - The terminal response for Get Inkey reactivates Applet 1: - fileOffset = 0; respLength = 2; respOffset = 0; - readBinary () info buffer2</p> | <p>1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - No exception shall be thrown. The value of buffer2 is { 0xCA, 0xFE }</p> | <p>A GET INKEY proactive command is fetched from the SIM</p> |
| 2 | <p>No change to file context by subscriber session</p> <p>1 - Applet 1 - issues a proactive command "Get Inkey".</p> <p>2 - Subscriber session selects DF_TELECOM and EF_ADN.</p> <p>3 - The terminal response for Get Inkey reactivates Applet 1: - fileOffset = 0; respLength = 2; respOffset = 0; - readBinary () info buffer2</p> | <p>1 - No exception shall be thrown. 3 - No exception shall be thrown. The value of buffer2 is { 0xCA, 0xFE }</p> | <p>1 - A GET INKEY proactive command is fetched from the SIM</p> |
| 3 | <p>No change by applet of subscriber session context</p> <p>1 - Applet 1: - selects DF_SIMTEST and EF_TNU - issues a proactive command "Get Inkey".</p> <p>2 - subscriber session reads record 1 of current file (shall be EF_ADN)</p> <p>3 - The terminal response for Get Inkey</p> | <p>1 - No exception shall be thrown. 3 - No exception shall be thrown.</p> | <p>1 - A GET INKEY proactive command is fetched from the SIM</p> <p>2 - READ RECORD absolute number 1 shall read "FF FF</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---------------------------|--|
| | reactivates Applet 1, which terminates execution | | FF FF FF FF FF FF" (from EF _{ADN}) |

6.3.9.2.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1 |
| CRRN2 | 1,2,3 |
| CRRN3 | 1,2 |

6.3.9.3 Context Preservation (current record pointer)

Test Area Reference: FWK_FSC_CURE

6.3.9.3.1 Conformance Requirements

Normal execution

CRRN1: When the seek method is called by one applet, the record pointer of any other applet is not changed.

CRRN2: *updateRecord*: the current record pointer of other applets / subscriber shall not be changed in case of linear fixed EF

CRRN3: *updateRecord*: the record pointer of a cyclic EF shall be changed for all other applets / subscriber to the record number 1.

CRRN4: *readRecord*: read data bytes of the linear fixed or cyclic EF currently selected by the applet without changing the current record pointer of any other applet / subscriber.

CRRN5: *increase*: the last updated record of the cyclic EF currently selected becomes record number 1 for every other applet and subscriber session.

6.3.9.3.2 Test Suite Files

- Test Script: FWK_FSC_CURE_1.scr
- Test Applet: FWK_FSC_CURE_1.java
FWK_FSC_CURE_2.java
- Load Script: FWK_FSC_CURE_1.ldr
- Cleanup Script: FWK_FSC_CURE_1.clr
FWK_FSC_CURE_2.clr
- Parameter File: FWK_FSC_CURE_1.par

6.3.9.3.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|---|
| 0 | SIM Initialisation | Responses ignored. | |
| 1 | Seek without affecting another record pointer Applet1 registers to EVENT_FORMATTED_SMS_PP_ENV Applet 2 registers to EVENT_CALL_CONTROL_BY_SIM 1 - Applet 1: - is triggered by a formatted SMS event - selects DF_SIMTEST and EF_LARU - reads record 2 using NEXT so that the | 1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - No exception shall be thrown. | 1 - A GET INKEY proactive command is fetched from the SIM |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|--|
| | <p>current record pointer is set to record 2 - issues a proactive command, e.g. Get Inkey.</p> <p>2 - An ENVELOPE APDU containing a CALL CONTROL BY SIM is issued to the SIM</p> <p>Applet 2: - is triggered by a CALL CONTROL event - selects DF_SIMTEST and EF_LARU - performs a seek of pattern {0x55} from beginning forward, which finds record 1. - returns from processToolkit</p> <p>3 - The terminal response for Get Inkey reactivates Applet 1: - call readRecord() using CURRENT - the record read should still be record 2 of EF_LARU, containing {0xAA, 0xAA, 0xAA, 0xAA}</p> | | |
| 2 | <p>updateRecord in linear fixed EF without affecting current pointer of others</p> <p>1 - Applet 1: - is triggered by a formatted SMS event - selects DF_SIMTEST and EF_LARU - reads record 2 using NEXT so that the current record pointer is set to record 2 - issues a proactive command, e.g. Get Inkey.</p> <p>2 - An ENVELOPE APDU containing a CALL CONTROL BY SIM is issued to the SIM</p> <p>Applet 2: - is triggered by a CALL CONTROL BY SIM event - selects DF_SIMTEST and EF_LARU - updates record 1, by using mode "NEXT". - returns from processToolkit</p> <p>3 - The terminal response for Get Inkey reactivates Applet 1: - call readRecord() using CURRENT - the record read should still be record 2 of EF_LARU, containing {0xAA, 0xAA, 0xAA, 0xAA}</p> | <p>1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - No exception shall be thrown.</p> | <p>1 - A GET INKEY proactive command is fetched from the SIM</p> |
| 3 | <p>readRecord in linear fixed EF without affecting current pointer of others</p> <p>1 - Applet 1: - is triggered by a formatted SMS event - selects DF_SIMTEST and EF_LARU - reads record 2 using NEXT so that the current record pointer is set to record 2 - issues a proactive command, e.g. Get Inkey.</p> <p>2 - An ENVELOPE APDU containing a CALL CONTROL BY SIM is issued to the SIM</p> <p>Applet 2: - is triggered by a CALL CONTROL BY SIM event - selects DF_SIMTEST and EF_LARU - reads record 1, by using mode "NEXT". - returns from processToolkit</p> <p>3 - The terminal response for Get Inkey reactivates Applet 1: - call readRecord() using CURRENT - the record read should still be record 2 of EF_LARU, containing {0xAA, 0xAA, 0xAA, 0xAA}</p> | <p>1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - No exception shall be thrown.</p> | <p>1 - A GET INKEY proactive command is fetched from the SIM</p> |

6.3.9.3.4 Test Coverage

| CRR Number | Test Case Number |
|------------|-----------------------|
| CRRN1 | 1 |
| CRRN2 | 2 |
| CRRN3 | not tested (see Note) |
| CRRN4 | 3 |
| CRRN5 | not tested (see Note) |

Note: These requirements have not been tested because of an inconsistent behavior in 03.19, which is foreseen to be corrected in future releases.

6.3.10 Other parts transferred to framework from API

6.3.10.1 A handler is a temporary JCRE Entry Point object

Test Area Reference: FWK_API_HEPO

6.3.10.1.1 Conformance Requirement:

Normal execution

CRRN1: The EnvelopeHandler is a Temporary JCRE Entry Point Object (see Javacard 2.1 Runtime Environment (JCRE) Specification [12]).

CRRN2: The EnvelopeResponseHandler is a Temporary JCRE Entry Point Object (see Javacard 2.1 Runtime Environment (JCRE) Specification [12]).

CRRN3: The ProactiveHandler is a Temporary JCRE Entry Point Object (see Javacard 2.1 Runtime Environment (JCRE) Specification [12]).

CRRN4: The ProactiveResponseHandler is a Temporary JCRE Entry Point Object (see Javacard 2.1 Runtime Environment (JCRE) Specification [12]).

Parameters error

Context errors

6.3.10.1.2 Test suite files

Test Script: FWK_API_HEPO_1.scr

Test Applet: FWK_API_HEPO_1.java

Load Script: FWK_API_HEPO_1.ldr

Cleanup Script: FWK_API_HEPO_1.clr

Parameter File: FWK_API_HEPO_1.par

6.3.10.1.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|-----------------------------|------------------|
| 1 | EnvelopeHandler.getTheHandler and store it in a static field of the toolkit applet | SecurityException is thrown | |
| 2 | EnvelopeHandler.getTheHandler and store it in a field of the toolkit applet | SecurityException is thrown | |
| 3 | EnvelopeResponseHandler.getTheHandler and store it in a static field of the toolkit applet | SecurityException is thrown | |
| 4 | EnvelopeResponseHandler.getTheHandler and store it in a field of the toolkit applet | SecurityException is thrown | |

| | | | |
|---|---|-----------------------------|---|
| 5 | ProactiveHandler.getTheHandler and store it in a static field of the toolkit applet | SecurityException is thrown | |
| 6 | ProactiveHandler.getTheHandler and store it in a field of the toolkit applet | SecurityException is thrown | |
| 7 | Build and send a DISPLAY TEXT command to be able to get the reference of the ProactiveReponseHandler ProactiveResponseHandler.getTheHandler and store it in a static field of the toolkit applet | SecurityException is thrown | Proactive command fetched and terminal response is issued |
| 8 | ProactiveResponseHandler.getTheHandler and store it in a field of the toolkit applet | SecurityException is thrown | |

6.3.10.1.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 1, 2 |
| N2 | 3, 4 |
| N3 | 5, 6 |
| N4 | 7, 8 |

6.3.10.2 Transaction

Test Area Reference: FWK_API_TRAN

6.3.10.2.1 Conformance Requirement:

Normal execution

CRRN1: A pending toolkit applet transaction at the ProactiveHandler.send() method invocation is aborted..

6.3.10.2.2 Test suite files

- Test Script: FWK_API_TRAN_1.scr
- Test Applet: FWK_API_TRAN_1.java
- Load Script: FWK_API_TRAN_1.ldr
- Cleanup Script: FWK_API_TRAN_1.clr
- Parameter File: FWK_API_TRAN_1.par

6.3.10.2.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---------------------------|---|
| 1 | Verify that transaction is aborted when a proactive command is sent Initialise a byte field with 0x05 Build a display text proactive command. beginTransaction() Update the byte with 0x02 send the proactive command Verify that the byte value is 0x05 JCSsystem.getTransactionDepth() | Shall return 0 | Proactive command fetched and terminal response is issued |

6.3.10.2.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 1 |

6.3.10.3 Timer Id between Applets

Test Area Reference: FWK_API_TMID

6.3.10.3.1 Conformance Requirement:

Context errors

CRRC1: The method ToolkitRegistry.releaseTimer() shall throw a ToolkitException with INVALID_TIMER_ID reason if the timer is valid but isn't allocated to this applet.

6.3.10.3.2 Test suite files

Test Script: FWK_API_TMID_1.scr
 Test Applet: FWK_API_TMID_1.java
 Load Script: FWK_API_TMID_1.ldr
 Cleanup Script: FWK_API_TMID_1.clr
 Parameter File: FWK_API_TMID_1.par

6.3.10.3.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|------------------|
| 1 | <p>During installation : First instance allocate a timer and store the returned value in a static field. Second instance allocate a timer. Trig second instance and try to releaseTimer() with the static field value.</p> | <p>releaseTimer() shall throw a ToolkitException with INVALID_TIMER_ID reason</p> | |

6.3.10.3.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 1 |

Annex A (normative): Class and Methods AID numbering and acronyms

A.1 Sim.access

| Class Name | Acronyms | Numbering on 5 bits |
|------------------|----------|---------------------|
| SIMView | SVW | 00001 |
| SIMSystem | SSY | 00010 |
| SIMViewException | SVE | 00011 |

A.1.1 SIMView methods

| Method Name | Acronyms | Numbering on 6 bits |
|---|-------------|---------------------|
| static final Constants | | 000001 |
| short increase(byte[] incr, short incrOffset, byte[] resp, short respOffset) | INCR_BS_BS | 000010 |
| void invalidate() | INVL | 000011 |
| void readBinary(short fileOffset, byte[] resp, short respOffset, short respLength) | REDBS_BSS | 000100 |
| short readRecord(short recNumber, byte mode, short recOffset, byte[] resp, short respOffset, short respLength) | REDRSBS_BSS | 000101 |
| void rehabilitate() | REHA | 000110 |
| short seek(byte mode, byte[] patt, short pattOffset, short pattLength) | SEEKB_BSS | 000111 |
| void select(short fid) | SLCTS | 001000 |
| short select(short fid, byte[] fci, short fciOffset, short fciLength) | SLCTS_BSS | 001001 |
| short status(byte[] fci, short fciOffset, short fciLength) | STAT_BSS | 001010 |
| short updateBinary(short fileOffset, byte[] data, short dataOffset, short dataLength) | UPDBS_BSS | 001011 |
| void updateRecord(short recNumber, byte mode, short recOffset, byte[] data, short dataOffset, short dataLength) | UPDRSBS_BSS | 001100 |

A.1.2 SIMSystem methods

| Method Name | Acronyms | Numbering on 6 bits |
|--------------------------------|----------|---------------------|
| static SIMView getTheSIMView() | GETS | 000001 |

A.1.3 SIMViewException methods

| Method Name | Acronyms | Numbering on 6 bits |
|-----------------------------------|----------|---------------------|
| static void throwIt(short reason) | THITS | 000001 |
| SIMViewException(short reason) | COORS | 000010 |
| Constants | CONS | 000011 |

A.2 Sim.toolkit

| Class Name | Acronyms | Numbering on 5 bits |
|--------------------------|----------|---------------------|
| ToolkitConstants | TKC | 00001 |
| ToolkitInterface | TKI | 00010 |
| EditHandler | EDH | 00011 |
| EnvelopeHandler | ENH | 00100 |
| EnvelopeResponseHandler | ERH | 00101 |
| MEProfile | MEP | 00110 |
| ProactiveHandler | PAH | 00111 |
| ProactiveResponseHandler | PRH | 01000 |
| ToolkitRegistry | TKR | 01001 |
| ViewHandler | VWH | 01010 |
| ToolkitException | TKE | 01011 |

A.2.1 ToolkitConstants

| Method Name | Acronyms | Numbering on 6 bits |
|-------------|----------|---------------------|
| Constants | CONS | 000001 |

A.2.2 ToolkitInterface methods

| Method Name | Acronyms | Numbering on 6 bits |
|----------------------------------|----------|---------------------|
| void processToolkit (byte event) | PRTKB | 000001 |

A.2.3 EditHandler methods

The numbering of the EditHandler methods it will be done in the classes inherit it: EnvelopeResponseHandler, ProactiveHandler, because the methods provided by this class as it is declared 'abstract'.

A.2.4 EnvelopeHandler methods

| Method Name | Acronyms | Numbering on 6 bits |
|---|-------------|---------------------|
| byte getEnvelopeTag() | GENT | 000001 |
| byte getItemIdentifier() | GIID | 000010 |
| short getSecuredDataLength() | GSDL | 000011 |
| short getSecuredDataOffset() | GSDO | 000100 |
| EnvelopeHandler getTheHandler() | GTHD | 000101 |
| short getTPUDLOffset() | GTPO | 000110 |
| Inherited Method Name: ViewHandler | | |
| Byte compareValue(short valueOffset,byte[] compareBuffer, short compareOffset, short compareLength) | CPRVS_BSS | 000111 |
| Short copy(byte[] dstBuffer,short dstOffset,short dstLength) | COPY_BSS | 001000 |
| Short copyValue(short valueOffset, byte[] dstBuffer,short dstOffset,short dstLength) | CPYVS_BSS | 001001 |
| Byte findAndCompareValue(byte tag,byte[] compareBuffer,short compareOffset) | FACRB_BS | 001010 |
| Byte findAndCompareValue(byte tag,byte occurrence, short valueOffset,byte[] compareBuffer,short compare Offset,short compareLength) | FACRBBS_BSS | 001011 |
| Short FindAndCopyValue(byte tag,byte occurrence,short value | FACYBBS_BSS | 001100 |

| | | |
|--|----------|--------|
| Offset, byte[] dstBuffer, short dstOffset, short dstLength) | | |
| Short findAndCopyValue(byte tag,byte[] dstBuffer,short dstOffset) | FACYB_BS | 001101 |
| Byte FindTLV(byte tag,byte occurrence) | FINDBB | 001110 |
| Short GetLength() | GLEN | 001111 |
| Byte GetValueByte(short valueOffset) | GVBYS | 010000 |
| Short GetValueLength() | GVLE | 010001 |

A.2.5 EnvelopeResponseHandler methods

| Method Name | Acronym | Numbering on 6 bits |
|--|-------------|---------------------|
| EnvelopeResponseHandler getTheHandler() | GTHD | 000001 |
| Void post(byte statusType) | POSTB | 000010 |
| Void postAsBERTLV(byte statusType, byte tag) | POSTBB | 000011 |
| | | |
| Inherited Method Name: EditHandler | | |
| Void appendArray(byte[] buffer, short offset, short length) | APDA_BSS | 000100 |
| Void appendTLV(byte tag, byte value) | APTLBB | 000101 |
| Void appendTLV(byte tag, byte[] value, short valueOffset, short valueLength) | APTLB_BSS | 000110 |
| Void appendTLV(byte tag, byte value1, byte value2) | APTLBBB | 000111 |
| Void appendTLV(byte tag, byte value1, byte[] value2, short value2Offset, short value2Length) | APTLBB_BSS | 001000 |
| Void clear() | CLER | 001001 |
| | | |
| Inherited Method Name: ViewHandler | | |
| Byte compareValue(short valueOffset,byte[] compareBuffer, short compareOffset, short compareLength) | CPRVS_BSS | 001010 |
| Short Copy(byte[] dstBuffer,short dstOffset,short dstLength) | COPY_BSS | 001011 |
| Short CopyValue(short valueOffset, byte[] dstBuffer,short dstOffset,short dstLength) | CPYVS_BSS | 001100 |
| Byte FindAndCompareValue(byte tag,byte[] compareBuffer,short compareOffset) | FACRB_BS | 001101 |
| Byte findAndCompareValue(byte tag,byte occurrence, short valueOffset,byte[] compareBuffer,short compareOffset,short compareLength) | FACRBBS_BSS | 001110 |
| Short FindAndCopyValue(byte tag,byte occurrence,short valueOffset, byte[] dstBuffer, short dstOffset, short dstLength) | FACYBBS_BSS | 001111 |
| Short findAndCopyValue(byte tag,byte[] dstBuffer,short dstOffset) | FACYB_BS | 010000 |
| Byte FindTLV(byte tag,byte occurrence) | FINDBB | 010001 |
| Short GetLength() | GLEN | 010010 |
| Byte GetValueByte(short valueOffset) | GVBYS | 010011 |
| Short GetValueLength() | GVLE | 010100 |

A.2.6 MEProfile methods

| Method Name | Acronym | Numbering on 6 bits |
|--|-----------|---------------------|
| static boolean check(byte index) | CHECB | 000001 |
| static boolean check(byte[] mask, short offset, short length) | CHECBSS | 000010 |
| static boolean check(short index) | CHECS | 000011 |
| static short copy(short startOffset, byte[] dstBuffer, short dstOffset, short dstLength) | COPYS_BSS | 000100 |
| static short getValue(short indexMSB, short indexLSB) | GVALSS | 000101 |

A.2.7 ProactiveHandler methods

| Method Name | Acronyms | Numbering on 6 bits |
|---|--------------|---------------------|
| GetTheHandler() | GTHD | 000001 |
| Init(byte type, byte qualifier, byte dstDevice) | INITBBB | 000010 |
| InitDisplayText(byte qualifier, byte dcs, byte[] buffer, short offset, short length) | INDTBB_BSS | 000011 |
| InitGetInkey(byte qualifier, byte dcs, byte[] buffer, short offset, short length) | INGKBB_BSS | 000100 |
| InitGetInput(byte qualifier, byte dcs, byte[] buffer, short offset, short length, short minRespLength, short maxRespLength) | INGPBB_BSSSS | 000101 |
| Byte send() | SEND | 000110 |
| Inherited Method Name: EditHandler | | |
| Void appendArray(byte[] buffer, short offset, short length) | APDA_BSS | 000111 |
| Void appendTLV(byte tag, byte value) | APTLBB | 001000 |
| Void appendTLV(byte tag, byte[] value, short valueOffset, short valueLength) | APTLB_BSS | 001001 |
| Void appendTLV(byte tag, byte value1, byte value2) | APTLBBB | 001010 |
| Void appendTLV(byte tag, byte value1, byte[] value2, short value2Offset, short value2Length) | APTLBB_BSS | 001011 |
| Void clear() | CLER | 001100 |
| Inherited Method Name: ViewHandler | | |
| Byte CompareValue(short valueOffset, byte[] compareBuffer, short compareOffset, short compareLength) | CPRVS_BSS | 001101 |
| Short Copy(byte[] dstBuffer, short dstOffset, short dstLength) | COPY_BSS | 001110 |
| Short CopyValue(short valueOffset, byte[] dstBuffer, short dstOffset, short dstLength) | CPYVS_BSS | 001111 |
| Byte FindAndCompareValue(byte tag, byte[] compareBuffer, short compareOffset) | FACRB_BS | 010000 |
| Byte findAndCompareValue(byte tag, byte occurrence, short valueOffset, byte[] compareBuffer, short compareOffset, short compareLength) | FACRBBS_BSS | 010001 |
| Short FindAndCopyValue(byte tag, byte occurrence, short valueOffset, byte[] dstBuffer, short dstOffset, short dstLength) | FACYBBS_BSS | 010010 |
| Short findAndCopyValue(byte tag, byte[] dstBuffer, short dstOffset) | FACYB_BS | 010011 |
| Byte FindTLV(byte tag, byte occurrence) | FINDBB | 010100 |
| Short GetLength() | GLEN | 010101 |
| Byte GetValueByte(short valueOffset) | GVBYS | 010110 |
| Short GetValueLength() | GVLE | 010111 |

A.2.8 ProactiveResponseHandler methods

| Method Name | Acronyms | Numbering on 6 bits |
|--|-------------|---------------------|
| Short CopyAdditionalInformation(byte[] dstBuffer, short dstOffset, short dstLength) | CPAI_BSS | 000001 |
| Short copyTextString(byte[] dstBuffer, short dstOffset) | CPTS_BS | 000010 |
| Short getAdditionalInformationLength() | GTIL | 000011 |
| Byte getGeneralResult() | GTGR | 000100 |
| Byte getItemIdentifier() | GTII | 000101 |
| Byte getTextStringCodingScheme() | GTCS | 000110 |
| Short getTextStringLength() | GTTL | 000111 |
| GetTheHandler() | GTHD | 001000 |
| Inherited Method Name: ViewHandler | | |
| Byte CompareValue(short valueOffset, byte[] compareBuffer, short compareOffset, short compareLength) | CPRVS_BSS | 001001 |
| Short Copy(byte[] dstBuffer, short dstOffset, short dstLength) | COPY_BSS | 001010 |
| Short CopyValue(short valueOffset, byte[] dstBuffer, short dstOffset, short dstLength) | CPYVS_BSS | 001011 |
| Byte FindAndCompareValue(byte tag, byte[] compareBuffer, short compareOffset) | FACRB_BS | 001100 |
| Byte findAndCompareValue(byte tag, byte occurrence, short valueOffset, byte[] compareBuffer, short compareOffset, short compareLength) | FACRBBS_BSS | 001101 |
| Short FindAndCopyValue(byte tag, byte occurrence, short valueOffset, byte[] dstBuffer, short dstOffset, short dstLength) | FACYBBS_BSS | 001110 |
| Short findAndCopyValue(byte tag, byte[] dstBuffer, short dstOffset) | FACYB_BS | 001111 |
| Byte FindTLV(byte tag, byte occurrence) | FINDBB | 010000 |
| Short GetLength() | GLEN | 010001 |
| Byte GetValueByte(short valueOffset) | GVBYS | 010010 |
| Short GetValueLength() | GVLE | 010011 |

A.2.9 ToolkitRegistry methods

| Method Name | Acronyms | Numbering on 6 bits |
|--|---------------|---------------------|
| AllocateTimer() | ATIM | 000001 |
| changeMenuEntry(byte id, byte[] menuEntry, short offset, short length, byte nextAction, boolean helpSupported, byte iconQualifier, short iconIdentifier) | CMETB_BSSBZBS | 000010 |
| clearEvent(byte event) | CEVTB | 000011 |
| disableMenuEntry(byte id) | DMETB | 000100 |
| enableMenuEntry(byte id) | EMETB | 000101 |
| getEntry() | GETY | 000110 |
| getPollInterval() | GPOL | 000111 |
| initMenuEntry(byte[] menuEntry, short offset, short length, byte nextAction, boolean helpSupported, byte iconQualifier, short iconIdentifier) | IMET_BSSBZBS | 001000 |
| isEventSet(byte event) | IEVSB | 001001 |
| releaseTimer(byte timerIdentifier) | RTIM | 001010 |
| requestPollInterval(short duration) | RPOL | 001011 |
| setEvent(byte event) | SEVTB | 001100 |
| setEventList(byte[] eventList, short offset, short length) | SEVL_BSS | 001101 |

A.2.10 ViewHandler methods

The numbering of the ViewHandler methods it will be done in the classes inherit it: EditHandler, EnvelopeHandler, ProactiveResponseHandler, ProactiveHandler, because the methods provided by this class as it is declared 'abstract'.

A.2.11 ToolkitException methods

| Method Name | Acronyms | Numbering on 6 bits |
|-----------------------------------|----------|---------------------|
| Static void throwIt(short reason) | THITS | 000001 |
| ToolkitException(short reason) | COORS | 000010 |
| Constants | CONS | 000011 |

Annex B (normative): Script file syntax and format description

B.1 Syntax description

Following is a syntax description in BNF.

```

<statement list> ::= [ <statement> \n ] +
<statement> ::= <simple> | <switch> | <blank line>
<simple> ::= <reset> | <init> | <command> | <remark>
<reset> ::= RST
<init> ::= INI <hexdata>
<command> ::= CMD <hexdata> [ <response> ] ( <status> )
<response> ::= [ <hexdata> ]
<status> ::= ( <hexdata> )
<remark> ::= REM <text line>
<switch> ::= SWI { [ <labelled list> ] + }
<labelled list> ::= <label> : \n <statement list>

```

Description of syntax metalanguage :

\n represents a linebreak
 [x] means x can appear optionally
 [x] + means 1 or more appearances of x
 x | y means x or y
 [] { } : (bold) these are characters that appear literally in the script files
 <text line> any character until the end of the line
 <blank line> a line containing no text is acceptable
 <hexdata> data written in hexadecimal, each byte separated from the following by a whitespace

Each simple statement beginning with 3 characters different than the ones defined indicates another tool command, and shall be ignored by the parser if not recognised.

' ', '\t' : Can be used as separator

A long statement can be broken into several lines by using the character '\n' at the end of each line which is not the last one in the statement.

For more details refer to the examples in B.3.

B.2 Semantics

Following is the meaning of each of the statements :

CMD : Sends an APDU Command to the card, including (optionally) the expected response data and also (optionally) the expected status words SW1, SW2.

RST : Resets and powers on the card

INI : Performs the terminal profile with the following data. Afterwards, it shall perform all the fetch and terminal response commands until there is no proactive session in progress.

REM : Used for comments

SWI : Activates a switch condition. Every labelled list represents a list of statements to be executed, if the label matches the SW resulting from the previously executed command.

Evaluation of expected response and status in the case of a CMD:

<response> data within [...] has to be checked, it needs to be present for an outgoing command. Bytes written as XX shall not be checked by the APDU tool.

<status> status contained within (...) has to be checked; when several status are valid they shall be separated by commas. Bytes written as XX shall not be checked by the APDU tool.

B.3 Example

```
REM this is an example
```

```
RST
```

```
INI FF FF FF FF FF FF FF FF FF FF FF FF FF FF FF FF
```

```
REM Case 1 example
```

```
CMD A0 C2 00 00 00 (91 33 , 69 XX)
```

```
REM Case 2 example
```

```
CMD A0 B6 00 00 07 \
  [XX XX XX 55 55 XX 55] \
  (91 33 , 67 XX)
```

```
CMD A0 B6 00 00 07 \
  (91 33 , 67 XX)
```

```
CMD A0 C0 00 00 1F \
  [10 A0 00 00 00 09 00 02 FF FF FF FF 89 28 A4 05 \
  02 0D CC CC CC CC CC CC CC CC CC CC CC CC CC ] \
  (90 00)
```

```
REM Case 3 example
```

```
CMD A0 C2 00 00 33 \
  D1 31 82 02 83 81 06 05 80 11 22 33 44 8B 24 40 \
  08 00 24 23 85 18 41 04 51 10 10 00 00 00 00 13 \
  02 70 00 00 0E 0D 00 00 00 00 28 A4 05 00 00 00 \
  00 00 00 \
  (90 00)
```

```
REM Case 4 example with switch statement
```

```
CMD 00 A4 04 00 10 \
  A0 00 00 00 09 00 02 FF FF FF FF 89 41 04 44 02 \
  (61 XX, 6A 82)
```

```
SWI {
```

```
61 XX:
```

```
CMD 00 C0 00 00 14 \
  [10 A0 00 00 00 09 00 02 FF FF FF FF 89 41 04 44 \
  02 02 CC CC] \
  (90 00)
```

```
CMD A0 A4 00 00 02 \
  3F 00
```

```
6A 82:
```

```
RST
```

```
}
```

B.4 Style and formatting

In order to show a common appearance all the scripts shall follow those format rules:

- start always with a 'RST' followed by an 'INI' command.
- The command, data to be checked and status to be checked shall be presented in the following order:
CMD COMMAND [EXPECTED DATA] (EXPECTED STATUS)
- APDU shall be presented with command (CLA INS P1 P2 P3) in one line and data (if present) in next line grouped 16 bytes per line (see example above).
- The expected data (if present) shall be presented in 16 bytes groups per line (see example above).

Annex C (normative): Default Prepersonalisation

C.1 General Default Prepersonalisation

This table shows the default prepersonalisation, the file system and the files' content, that the test SIM cards shall contain unless otherwise stated.

| Name | Identifier | Default Value | Special Features |
|-----------------------|------------|--|--|
| EF _{ICCID} | 2FE2 | 0F FF FF FF FF FF FF FF FF | This value is not compliant with GSM 11.11 |
| EF _{IMSI} | 6F07 | FF FF FF FF FF FF FF FF | This value is not compliant with GSM 11.11 |
| EF _{LP} | 6F05 | 01 FF FF FF | |
| EF _{Kc} | 6F20 | FF FF FF FF FF FF FF FF 07 | |
| EF _{PLMNsel} | 6F30 | FF | |
| EF _{HPLMN} | 6F31 | 05 | |
| EF _{ACMmax} | 6F37 | 00 00 00 | Access condition UPDATE: CHV1 |
| EF _{SST} | 6F38 | FF 3F C3 0F 0C 00 FF 0F 00 33 | |
| EF _{ACM} | 6F39 | 00 00 00 | Access condition UPDATE: CHV1 |
| EF _{PUCT} | 6F41 | FF FF FF 00 00 | Access condition UPDATE: CHV1 |
| EF _{BCCH} | 6F74 | FF FF FF FF FF FF FF FF FF FF FF FF FF FF FF FF | |
| EF _{ACC} | 6F78 | 00 00 | |
| EF _{FPLMN} | 6F7B | FF FF FF FF FF FF FF FF FF FF FF FF | |
| EF _{LOCI} | 6F7E | FF FF FF FF 00 F0 00 00 00 FF 01 | |
| EF _{AD} | 6FAD | 00 FF FF | |
| EF _{Phase} | 6FAE | 03 | |
| EF _{FDN} | 6F3B | Default value in all the records: FF | Records: 5 |
| EF _{SMSP} | 6F42 | FF | Records: 1 |
| EF _{LND} | 6F44 | FF | Records: 1 |
| EF _{SMSS} | 6F43 | FF FF | |
| EF _{SMS} | 6F3C | 1 st record: 00 FF ... FF(length 176) 2 nd record: 00 FF ... FF(length 176) 3 rd record: 00 FF ... FF(length 176) | Records: 3 |
| EF _{ADN} | 6F3A | FF | Records: 1 |
| EF _{CCP} | 6F3D | FF FF FF FF FF FF FF FF FF FF FF FF FF FF | |
| EF _{MSISDN} | 6F40 | FF | Records: 1 |
| EF _{SDN} | 6F49 | FF | Records: 1 |
| EF _{SUME} | 6F54 | 85 0C 54 4F 4F 4C 4B 49 54 20 54 45 53 54 FF FF FF FF | |
| EF _{CBMI} | 6F45 | FF FF | |
| EF _{CBMID} | 6F48 | 10 80 | |
| EF _{CBMIR} | 6F50 | 10 80 10 9F | |
| EF _{IM} | 4F20 | FF FF FF FF FF FF FF FF FF FF FF FF | |

The default value for the CHV1 shall be "0x31 0x31 0x31 0x31 0xFF 0xFF 0xFF 0xFF" and its state shall be 'disabled' during test applets execution.

C.2 Sim.Access.SimView test default prepersonalisation

C.2.1 DF_{SIMTEST} (SIM Test)

Identifier: '0319'

C.2.2 EF_{TNR} (Transparent Never Read)

| Identifier: '6F01' | | Structure: transparent | | Mandatory | | | | | | | | | |
|---|-------------|------------------------|----------------------|-----------|--|------|-------|--------|--------|------------|--------|--------------|--------|
| File size: 3 bytes | | | Update activity: low | | | | | | | | | | |
| Access Conditions: <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">READ</td> <td style="width: 50%;">NEVER</td> </tr> <tr> <td>UPDATE</td> <td>ALWAYS</td> </tr> <tr> <td>INVALIDATE</td> <td>ALWAYS</td> </tr> <tr> <td>REHABILITATE</td> <td>ALWAYS</td> </tr> </table> | | | | | | READ | NEVER | UPDATE | ALWAYS | INVALIDATE | ALWAYS | REHABILITATE | ALWAYS |
| READ | NEVER | | | | | | | | | | | | |
| UPDATE | ALWAYS | | | | | | | | | | | | |
| INVALIDATE | ALWAYS | | | | | | | | | | | | |
| REHABILITATE | ALWAYS | | | | | | | | | | | | |
| Bytes | Description | Default Value | M/O | Length | | | | | | | | | |
| 1 - 3 | Test Data | AA AA AA | M | 3 bytes | | | | | | | | | |

C.2.3 EF_{TNU} (Transparent Never Update)

| Identifier: '6F02' | | Structure: transparent | | Mandatory | | | | | | | | | |
|---|-------------|------------------------|----------------------|-----------|--|------|--------|--------|-------|------------|--------|--------------|--------|
| File size: 3 bytes | | | Update activity: low | | | | | | | | | | |
| Access Conditions: <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">READ</td> <td style="width: 50%;">ALWAYS</td> </tr> <tr> <td>UPDATE</td> <td>NEVER</td> </tr> <tr> <td>INVALIDATE</td> <td>ALWAYS</td> </tr> <tr> <td>REHABILITATE</td> <td>ALWAYS</td> </tr> </table> | | | | | | READ | ALWAYS | UPDATE | NEVER | INVALIDATE | ALWAYS | REHABILITATE | ALWAYS |
| READ | ALWAYS | | | | | | | | | | | | |
| UPDATE | NEVER | | | | | | | | | | | | |
| INVALIDATE | ALWAYS | | | | | | | | | | | | |
| REHABILITATE | ALWAYS | | | | | | | | | | | | |
| Bytes | Description | Default Value | M/O | Length | | | | | | | | | |
| 1 - 3 | Test Data | 55 55 55 | M | 3 bytes | | | | | | | | | |

C.2.4 EF_{TARU} (Transparent Always Read and Update)

| Identifier: '6F03' | | Structure: transparent | | Mandatory | | | | | | | | | |
|--|-------------|------------------------|----------------------|-----------|--|------|--------|--------|--------|------------|--------|--------------|--------|
| File size: 260 bytes | | | Update activity: low | | | | | | | | | | |
| Access Conditions: <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">READ</td> <td style="width: 50%;">ALWAYS</td> </tr> <tr> <td>UPDATE</td> <td>ALWAYS</td> </tr> <tr> <td>INVALIDATE</td> <td>ALWAYS</td> </tr> <tr> <td>REHABILITATE</td> <td>ALWAYS</td> </tr> </table> | | | | | | READ | ALWAYS | UPDATE | ALWAYS | INVALIDATE | ALWAYS | REHABILITATE | ALWAYS |
| READ | ALWAYS | | | | | | | | | | | | |
| UPDATE | ALWAYS | | | | | | | | | | | | |
| INVALIDATE | ALWAYS | | | | | | | | | | | | |
| REHABILITATE | ALWAYS | | | | | | | | | | | | |
| Bytes | Description | Default Value | M/O | Length | | | | | | | | | |
| 1 - 260 | Test Data | FF ... FF | M | 260 bytes | | | | | | | | | |

C.2.5 EF_{CNR} (Cyclic Never Read)

| Identifier: '6F04' | | Structure: cyclic | | Mandatory | | | | | | | | | | | |
|---|-------------|-------------------|-----------------------|-----------|--|------|-------|--------|--------|----------|--------|------------|--------|--------------|--------|
| Record length: 3 bytes | | | Update activity: high | | | | | | | | | | | | |
| <p style="text-align: center;">Access Conditions:</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">READ</td> <td style="width: 50%;">NEVER</td> </tr> <tr> <td>UPDATE</td> <td>ALWAYS</td> </tr> <tr> <td>INCREASE</td> <td>ALWAYS</td> </tr> <tr> <td>INVALIDATE</td> <td>ALWAYS</td> </tr> <tr> <td>REHABILITATE</td> <td>ALWAYS</td> </tr> </table> | | | | | | READ | NEVER | UPDATE | ALWAYS | INCREASE | ALWAYS | INVALIDATE | ALWAYS | REHABILITATE | ALWAYS |
| READ | NEVER | | | | | | | | | | | | | | |
| UPDATE | ALWAYS | | | | | | | | | | | | | | |
| INCREASE | ALWAYS | | | | | | | | | | | | | | |
| INVALIDATE | ALWAYS | | | | | | | | | | | | | | |
| REHABILITATE | ALWAYS | | | | | | | | | | | | | | |
| Logical Record Number | Description | Default Value | M/O | Length | | | | | | | | | | | |
| 1 | Test Data | 00 00 00 | M | 3 bytes | | | | | | | | | | | |
| 2 | Test Data | 00 00 00 | M | 3 bytes | | | | | | | | | | | |

C.2.6 EF_{CNU} (Cyclic Never Update)

| Identifier: '6F05' | | Structure: cyclic | | Mandatory | | | | | | | | | | | |
|--|-------------|-------------------|-----------------------|-----------|--|------|--------|--------|-------|----------|-------|------------|--------|--------------|--------|
| Record length: 3 bytes | | | Update activity: high | | | | | | | | | | | | |
| <p style="text-align: center;">Access Conditions:</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">READ</td> <td style="width: 50%;">ALWAYS</td> </tr> <tr> <td>UPDATE</td> <td>NEVER</td> </tr> <tr> <td>INCREASE</td> <td>NEVER</td> </tr> <tr> <td>INVALIDATE</td> <td>ALWAYS</td> </tr> <tr> <td>REHABILITATE</td> <td>ALWAYS</td> </tr> </table> | | | | | | READ | ALWAYS | UPDATE | NEVER | INCREASE | NEVER | INVALIDATE | ALWAYS | REHABILITATE | ALWAYS |
| READ | ALWAYS | | | | | | | | | | | | | | |
| UPDATE | NEVER | | | | | | | | | | | | | | |
| INCREASE | NEVER | | | | | | | | | | | | | | |
| INVALIDATE | ALWAYS | | | | | | | | | | | | | | |
| REHABILITATE | ALWAYS | | | | | | | | | | | | | | |
| Logical Record Number | Description | Default Value | M/O | Length | | | | | | | | | | | |
| 1 | Test Data | 00 00 00 | M | 3 bytes | | | | | | | | | | | |
| 2 | Test Data | 00 00 00 | M | 3 bytes | | | | | | | | | | | |

C.2.7 EF_{CNIC} (Cyclic Never Increase)

| Identifier: '6F06' | | Structure: cyclic | | Mandatory | | | | | | | | | | | |
|---|-------------|-------------------|-----------------------|-----------|--|------|--------|--------|--------|----------|-------|------------|--------|--------------|--------|
| Record length: 3 bytes | | | Update activity: high | | | | | | | | | | | | |
| <p style="text-align: center;">Access Conditions:</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">READ</td> <td style="width: 50%;">ALWAYS</td> </tr> <tr> <td>UPDATE</td> <td>ALWAYS</td> </tr> <tr> <td>INCREASE</td> <td>NEVER</td> </tr> <tr> <td>INVALIDATE</td> <td>ALWAYS</td> </tr> <tr> <td>REHABILITATE</td> <td>ALWAYS</td> </tr> </table> | | | | | | READ | ALWAYS | UPDATE | ALWAYS | INCREASE | NEVER | INVALIDATE | ALWAYS | REHABILITATE | ALWAYS |
| READ | ALWAYS | | | | | | | | | | | | | | |
| UPDATE | ALWAYS | | | | | | | | | | | | | | |
| INCREASE | NEVER | | | | | | | | | | | | | | |
| INVALIDATE | ALWAYS | | | | | | | | | | | | | | |
| REHABILITATE | ALWAYS | | | | | | | | | | | | | | |
| Logical Record Number | Description | Default Value | M/O | Length | | | | | | | | | | | |
| 1 | Test Data | 00 00 00 | M | 3 bytes | | | | | | | | | | | |
| 2 | Test Data | 00 00 00 | M | 3 bytes | | | | | | | | | | | |

C.2.8 EF_{CNIV} (Cyclic Never Invalidate)

| Identifier: '6F07' | | Structure: cyclic | | Mandatory | | | | | | | | | | | |
|---|-------------|-------------------|-----------------------|-----------|--|------|--------|--------|--------|----------|--------|------------|-------|--------------|--------|
| Record length: 3 bytes | | | Update activity: high | | | | | | | | | | | | |
| <p style="text-align: center;">Access Conditions:</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">READ</td> <td style="width: 50%;">ALWAYS</td> </tr> <tr> <td>UPDATE</td> <td>ALWAYS</td> </tr> <tr> <td>INCREASE</td> <td>ALWAYS</td> </tr> <tr> <td>INVALIDATE</td> <td>NEVER</td> </tr> <tr> <td>REHABILITATE</td> <td>ALWAYS</td> </tr> </table> | | | | | | READ | ALWAYS | UPDATE | ALWAYS | INCREASE | ALWAYS | INVALIDATE | NEVER | REHABILITATE | ALWAYS |
| READ | ALWAYS | | | | | | | | | | | | | | |
| UPDATE | ALWAYS | | | | | | | | | | | | | | |
| INCREASE | ALWAYS | | | | | | | | | | | | | | |
| INVALIDATE | NEVER | | | | | | | | | | | | | | |
| REHABILITATE | ALWAYS | | | | | | | | | | | | | | |
| Logical Record Number | Description | Default Value | M/O | Length | | | | | | | | | | | |
| 1 | Test Data | 00 00 00 | M | 3 bytes | | | | | | | | | | | |
| 2 | Test Data | 00 00 00 | M | 3 bytes | | | | | | | | | | | |

C.2.9 EF_{CNRH} (Cyclic Never Rehabilitate)

| Identifier: '6F08' | | Structure: cyclic | | Mandatory | | | | | | | | | | | |
|---|-------------|-------------------|-----------------------|-----------|--|------|--------|--------|--------|----------|--------|------------|--------|--------------|-------|
| Record length: 3 bytes | | | Update activity: high | | | | | | | | | | | | |
| <p style="text-align: center;">Access Conditions:</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">READ</td> <td style="width: 50%;">ALWAYS</td> </tr> <tr> <td>UPDATE</td> <td>ALWAYS</td> </tr> <tr> <td>INCREASE</td> <td>ALWAYS</td> </tr> <tr> <td>INVALIDATE</td> <td>ALWAYS</td> </tr> <tr> <td>REHABILITATE</td> <td>NEVER</td> </tr> </table> | | | | | | READ | ALWAYS | UPDATE | ALWAYS | INCREASE | ALWAYS | INVALIDATE | ALWAYS | REHABILITATE | NEVER |
| READ | ALWAYS | | | | | | | | | | | | | | |
| UPDATE | ALWAYS | | | | | | | | | | | | | | |
| INCREASE | ALWAYS | | | | | | | | | | | | | | |
| INVALIDATE | ALWAYS | | | | | | | | | | | | | | |
| REHABILITATE | NEVER | | | | | | | | | | | | | | |
| Logical Record Number | Description | Default Value | M/O | Length | | | | | | | | | | | |
| 1 | Test Data | 00 00 00 | M | 3 bytes | | | | | | | | | | | |
| 2 | Test Data | 00 00 00 | M | 3 bytes | | | | | | | | | | | |

C.2.10 EF_{CARU} (Cyclic Always Read and Update)

| Identifier: '6F09' | | Structure: cyclic | | Mandatory | | | | | | | | | | | |
|--|-------------|-------------------|-----------------------|-----------|--|------|--------|--------|--------|----------|--------|------------|--------|--------------|--------|
| Record length: 3 bytes | | | Update activity: high | | | | | | | | | | | | |
| <p style="text-align: center;">Access Conditions:</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">READ</td> <td style="width: 50%;">ALWAYS</td> </tr> <tr> <td>UPDATE</td> <td>ALWAYS</td> </tr> <tr> <td>INCREASE</td> <td>ALWAYS</td> </tr> <tr> <td>INVALIDATE</td> <td>ALWAYS</td> </tr> <tr> <td>REHABILITATE</td> <td>ALWAYS</td> </tr> </table> | | | | | | READ | ALWAYS | UPDATE | ALWAYS | INCREASE | ALWAYS | INVALIDATE | ALWAYS | REHABILITATE | ALWAYS |
| READ | ALWAYS | | | | | | | | | | | | | | |
| UPDATE | ALWAYS | | | | | | | | | | | | | | |
| INCREASE | ALWAYS | | | | | | | | | | | | | | |
| INVALIDATE | ALWAYS | | | | | | | | | | | | | | |
| REHABILITATE | ALWAYS | | | | | | | | | | | | | | |
| Logical Record Number | Description | Default Value | M/O | Length | | | | | | | | | | | |
| 1 | Test Data | 55 55 55 | M | 3 bytes | | | | | | | | | | | |
| 2 | Test Data | AA AA AA | M | 3 bytes | | | | | | | | | | | |

C.2.11 EF_{LNR} (Linear Fixed Never Read)

| Identifier: '6F0A' | | Structure: linear fixed | | Mandatory | |
|---|----------------------|-------------------------|----------------------|-----------|--|
| Record length: 4 bytes | | | Update activity: low | | |
| Access Conditions: READ NEVER UPDATE ALWAYS INVALIDATE ALWAYS REHABILITATE ALWAYS | | | | | |
| Logical Record Number | Description | Default Value | M/O | Length | |
| 1 | Test Data - Record 1 | FF FF FF FF | M | 4 bytes | |
| 2 | Test Data - Record 2 | FF FF FF FF | M | 4 bytes | |

C.2.12 EF_{LNU} (Linear Fixed Never Update)

| Identifier: '6F0B' | | Structure: linear fixed | | Mandatory | |
|---|----------------------|-------------------------|----------------------|-----------|--|
| Record length: 4 bytes | | | Update activity: low | | |
| Access Conditions: READ ALWAYS UPDATE NEVER INVALIDATE ALWAYS REHABILITATE ALWAYS | | | | | |
| Logical Record Number | Description | Default Value | M/O | Length | |
| 1 | Test Data - Record 1 | FF FF FF FF | M | 4 bytes | |
| 2 | Test Data - Record 2 | FF FF FF FF | M | 4 bytes | |

C.2.13 EF_{LARU} (Linear Fixed Always Read and Update)

| Identifier: '6F0C' | | Structure: linear fixed | | Mandatory | |
|--|----------------------|-------------------------|----------------------|-----------|--|
| Record length: 4 bytes | | | Update activity: low | | |
| Access Conditions: READ ALWAYS UPDATE ALWAYS INVALIDATE ALWAYS REHABILITATE ALWAYS | | | | | |
| Logical Record Number | Description | Default Value | M/O | Length | |
| 1 | Test Data - Record 1 | 55 55 55 55 | M | 4 bytes | |
| 2 | Test Data - Record 2 | AA AA AA AA | M | 4 bytes | |

C.2.14 EF_{CINA} (Cyclic Increase Not Allowed)

| Identifier: '6F0D' | | Structure: cyclic | | Mandatory | | | | | | | | | | | |
|---|---------------------|-------------------|-----------------------|-----------|--|------|--------|--------|--------|----------|---------------------|------------|--------|--------------|--------|
| Record length: 3 bytes | | | Update activity: high | | | | | | | | | | | | |
| <p style="text-align: center;">Access Conditions:</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">READ</td> <td style="width: 50%;">ALWAYS</td> </tr> <tr> <td>UPDATE</td> <td>ALWAYS</td> </tr> <tr> <td>INCREASE</td> <td>ALWAYS (see note 1)</td> </tr> <tr> <td>INVALIDATE</td> <td>ALWAYS</td> </tr> <tr> <td>REHABILITATE</td> <td>ALWAYS</td> </tr> </table> | | | | | | READ | ALWAYS | UPDATE | ALWAYS | INCREASE | ALWAYS (see note 1) | INVALIDATE | ALWAYS | REHABILITATE | ALWAYS |
| READ | ALWAYS | | | | | | | | | | | | | | |
| UPDATE | ALWAYS | | | | | | | | | | | | | | |
| INCREASE | ALWAYS (see note 1) | | | | | | | | | | | | | | |
| INVALIDATE | ALWAYS | | | | | | | | | | | | | | |
| REHABILITATE | ALWAYS | | | | | | | | | | | | | | |
| Logical Record Number | Description | Default Value | M/O | Length | | | | | | | | | | | |
| 1 | Test Data | 00 00 00 | M | 3 bytes | | | | | | | | | | | |
| 2 | Test Data | 00 00 00 | M | 3 bytes | | | | | | | | | | | |
| <p>Note 1: This file will be personalised in a way such that increase is not allowed, as indicated by the FCI byte 8, bit 7 (GSM 11.11: FCI structure of an EF returned by the SELECT command)</p> | | | | | | | | | | | | | | | |

C.2.15 EF_{TRAC} (Transparent Read Access Condition CHV2)

| Identifier: '6F0E' | | Structure: transparent | | Mandatory | | | | | | | | | | | |
|--|-------------|------------------------|----------------------|-----------|--|------|------|--------|--------|----------|--------|------------|--------|--------------|--------|
| Record length: 3 bytes | | | Update activity: low | | | | | | | | | | | | |
| <p style="text-align: center;">Access Conditions:</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">READ</td> <td style="width: 50%;">CHV2</td> </tr> <tr> <td>UPDATE</td> <td>ALWAYS</td> </tr> <tr> <td>INCREASE</td> <td>ALWAYS</td> </tr> <tr> <td>INVALIDATE</td> <td>ALWAYS</td> </tr> <tr> <td>REHABILITATE</td> <td>ALWAYS</td> </tr> </table> | | | | | | READ | CHV2 | UPDATE | ALWAYS | INCREASE | ALWAYS | INVALIDATE | ALWAYS | REHABILITATE | ALWAYS |
| READ | CHV2 | | | | | | | | | | | | | | |
| UPDATE | ALWAYS | | | | | | | | | | | | | | |
| INCREASE | ALWAYS | | | | | | | | | | | | | | |
| INVALIDATE | ALWAYS | | | | | | | | | | | | | | |
| REHABILITATE | ALWAYS | | | | | | | | | | | | | | |
| Logical Record Number | Description | Default Value | M/O | Length | | | | | | | | | | | |
| 1 | Test Data | 00 00 00 | M | 3 bytes | | | | | | | | | | | |

C.2.16 EF_{TIAC} (Transparent Invalidate Access Condition CHV1)

| Identifier: '6F0F' | | Structure: transparent | | Mandatory | | | | | | | | | | | |
|--|-------------|------------------------|----------------------|-----------|--|------|--------|--------|--------|----------|--------|------------|------|--------------|--------|
| Record length: 3 bytes | | | Update activity: low | | | | | | | | | | | | |
| <p style="text-align: center;">Access Conditions:</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">READ</td> <td style="width: 50%;">ALWAYS</td> </tr> <tr> <td>UPDATE</td> <td>ALWAYS</td> </tr> <tr> <td>INCREASE</td> <td>ALWAYS</td> </tr> <tr> <td>INVALIDATE</td> <td>CHV1</td> </tr> <tr> <td>REHABILITATE</td> <td>ALWAYS</td> </tr> </table> | | | | | | READ | ALWAYS | UPDATE | ALWAYS | INCREASE | ALWAYS | INVALIDATE | CHV1 | REHABILITATE | ALWAYS |
| READ | ALWAYS | | | | | | | | | | | | | | |
| UPDATE | ALWAYS | | | | | | | | | | | | | | |
| INCREASE | ALWAYS | | | | | | | | | | | | | | |
| INVALIDATE | CHV1 | | | | | | | | | | | | | | |
| REHABILITATE | ALWAYS | | | | | | | | | | | | | | |
| Logical Record Number | Description | Default Value | M/O | Length | | | | | | | | | | | |
| 1 | Test Data | 00 00 00 | M | 3 bytes | | | | | | | | | | | |

C.2.17EF_{CIAc} (Cyclic Increase Access Condition CHV2)

| Identifier: '6F10' | | Structure: cyclic | | Mandatory | |
|---|-------------|-------------------|----------------------|-----------|--|
| Record length: 3 bytes | | | Update activity: low | | |
| Access Conditions: READ ALWAYS UPDATE ALWAYS INCREASE CHV2 INVALIDATE ALWAYS REHABILITATE ALWAYS | | | | | |
| Logical Record Number | Description | Default Value | M/O | Length | |
| 1 | Test Data | 00 00 00 | M | 3 bytes | |
| 2 | Test Data | 00 00 00 | M | 3 bytes | |

C.2.18EF_{CIAA} (Cyclic Increase Access Condition ADM)

| Identifier: '6F11' | | Structure: cyclic | | Mandatory | |
|--|-------------|-------------------|----------------------|-----------|--|
| Record length: 3 bytes | | | Update activity: low | | |
| Access Conditions: READ ALWAYS UPDATE ALWAYS INCREASE ADM INVALIDATE ALWAYS REHABILITATE ALWAYS | | | | | |
| Logical Record Number | Description | Default Value | M/O | Length | |
| 1 | Test Data | 00 00 00 | M | 3 bytes | |
| 2 | Test Data | 00 00 00 | M | 3 bytes | |

C.2.19EF_{CNRI} (Cyclic Never Rehabilitate Invalidated)

| Identifier: '6F12' | | Structure: cyclic | | Mandatory | |
|--|-------------|-------------------|----------------------|-----------|--|
| Record length: 3 bytes | | | Update activity: low | | |
| Access Conditions: READ ALWAYS UPDATE ALWAYS INCREASE ALWAYS INVALIDATE ALWAYS REHABILITATE NEVER | | | | | |
| Logical Record Number | Description | Default Value | M/O | Length | |
| 1 | Test Data | 00 00 00 | M | 3 bytes | |
| 2 | Test Data | 00 00 00 | M | 3 bytes | |

The file status shall be invalidated as defined in [3]

Annex D (normative): sim.test.util package and loading , testing and cleaning script examples.

See attached files:

- Annex_D_SimTestUtil.zip
- Annex_D_Examples.zip

Annex E (normative): Test Area files.

See attached file:

- Annex_E_SourceCode.zip

Annex F (Normative): AID numbering and acronyms for Framework tests

F.1 Toolkit Installation Parameters (TIN)

| Test Area within the chapter | Acronyms | Numbering on 6 bits |
|------------------------------------|----------|---------------------|
| Timer allocation | TMAL | 000001 |
| Item identifier | ITID | 000010 |
| Item position | ITPO | 000011 |
| Access conditions | ACCO | 000100 |
| Priority level | PRLV | 000101 |
| Maximum length for each menu entry | MLME | 000110 |
| Number of menu entries | NBME | 000111 |
| Memory space | MESP | 001000 |

F.2 Minimum Handler Availability (MHA)

| Test Area within the chapter | Acronyms | Numbering on 6 bits |
|------------------------------|----------|---------------------|
| ProactiveHandler | PAHD | 000001 |
| ProactiveResponseHandler | PRHD | 000010 |
| EnvelopeHandler | ENHD | 000011 |
| EnvelopeResponseHandler | ERHD | 000100 |

F.3 Handler Integrity (HIN)

| Test Area within the chapter | Acronyms | Numbering on 6 bits |
|-------------------------------|----------|---------------------|
| ProactiveHandler | PAHD | 000001 |
| ProactiveResponseHandler | PRHD | 000010 |
| EnvelopeHandler | ENHD | 000011 |
| RFU (EnvelopeResponseHandler) | (ERHD) | 000100 |

F.4 Applet Triggering (APT)

| Test Area within the chapter | Acronyms | Numbering on 6 bits |
|--|----------|---------------------|
| EVENT_PROFILE_DOWNLOAD | EPDW | 000001 |
| EVENT_MENU_SELECTION | EMSE | 000010 |
| EVENT_MENU_SELECTION_HELP_REQUEST | EMSH | 000011 |
| EVENT_FORMATTED_SMS_PP_ENV | EFSE | 000100 |
| EVENT_UNFORMATTED_SMS_PP_ENV | EUSE | 000101 |
| EVENT_CALL_CONTROL_BY_SIM | ECCN | 000110 |
| EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM | EMCN | 000111 |
| EVENT_TIMER_EXPIRATION | ETEX | 001000 |
| EVENT_UNFORMATTED_SMS_CB | EUCB | 001001 |
| EVENT_EVENT_DOWNLOAD_MT_CALL | EDMC | 001010 |
| EVENT_EVENT_DOWNLOAD_CALL_CONNECTED | EDCC | 001011 |
| EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED | EDCD | 001100 |
| EVENT_EVENT_DOWNLOAD_LOCATION_STATUS | EDLS | 001101 |
| EVENT_EVENT_DOWNLOAD_USER_ACTIVITY | EDUA | 001110 |
| EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE | EDIS | 001111 |
| EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS | EDCR | 010000 |
| RFU (EVENT_UNRECOGNIZED_ENVELOPE) | (EUEN) | 010001 |
| EVENT_STATUS_COMMAND | ESTC | 010010 |
| EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION | EDLG | 010011 |
| EVENT_EVENT_DOWNLOAD_BROWSER_TERMINATION | EDBT | 010100 |
| EVENT_FORMATTED_SMS_CB | EFCB | 010101 |

F.5 Proactive Command Sending (PCS)

| Test Area within the chapter | Acronyms | Numbering on 6 bits |
|---|----------|---------------------|
| System Proactive commands | SPCO | 000001 |
| Interaction with GSM commands | IGCO | 000010 |
| Errors during proactive command sending | EPCS | 000011 |

F.6 Envelope Response Posting (ERP)

| Test Area within the chapter | Acronyms | Numbering on 6 bits |
|---------------------------------------|----------|---------------------|
| EVENT_CALL_CONTROL_BY_SIM | ECCN | 000001 |
| EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM | EMCN | 000010 |
| EVENT_UNRECOGNIZED_ENVELOPE | EUEN | 000011 |

F.7 Framework Security (FWS)

| Test Area within the chapter | Acronyms | Numbering on 6 bits |
|------------------------------|----------|---------------------|
| Input data | INDA | 000001 |
| Output data | OU DA | 000010 |

F.8 File System Context (FSC)

| Test Area within the chapter | Acronyms | Numbering on 6 bits |
|---|----------|---------------------|
| Initial Context | INIT | 000001 |
| Context Preservation for Current File | CUFI | 000010 |
| Context Preservation for Current Record | CURE | 000011 |

F.9 Exception Handling (EXH)

| Test Area within the chapter | Acronyms | Numbering on 6 bits |
|-----------------------------------|----------|---------------------|
| Hide exception to the mobile | HEME | 000001 |
| Interaction with multi-triggering | IMTG | 000010 |

F.10 Other parts transferred to framework from API (API)

| Test Area within the chapter | Acronyms | Numbering on 6 bits |
|--|----------|---------------------|
| A handler is a temporary JCRE Entry Point object | HEPO | 000001 |
| Transaction | TRAN | 000010 |
| Timer Id between Applets | TMID | 000011 |

Annex G (Normative): Configuration Parameters File

This file describes all the mandatory and optional parameters that are used in order to create the loading script(s) for one test area. The configuration parameters file contains the values for the parameters needed in order to generate the loading and cleanup scripts.

The name of the parameters file will be *<test area reference>_<n>.par*.

The number <n> is associated with the loading/cleanup script number, i.e. API_2_TKR_SEVL_BSS_1.par is used to generate API_2_TKR_SEVL_BSS_1.ldr etc.

G.1 Syntax

The general syntax for this file will be:

```
<file> ::= <section>+
<section> ::= <section heading> <line break> <section body>
<section heading> ::= '[' <name> ']'
<section body> ::= <parameter assignment>+
<parameter assignment> ::= <name> '=' <value> <line break>
```

Where '+' indicates one or more repetitions of the previous syntax element.

Any text included between the symbol ';' and the end of line is considered a comment and ignored by parsing tools.

Empty values are considered valid. They are used to indicate that an optional value is not present.

Names of sections, names of parameters and values are case-sensitive.

Blank spaces and Tabs between tokens are allowed and will be ignored by the parser.

When values represent a sequence of bytes, they are expressed in hexadecimal format, where every 2 digits represent one byte. Blank space between bytes is optional.

Example:

```
; comment

[Section1]
Parameter11 = 00 11 22 33
Parameter12 = 0101 ; another comment

[Section2]
Parameter21 = vvwxyz
```

G.2 File Contents and Organisation

Parameters in this file are organised in the following sections:

| | |
|--------------------|---|
| [CONVERT] | Conversion parameters used during conversion (i.e. CAP file generation) |
| [INSTALL(load)] | Parameters used by the Install for Load command |
| [LOAD] | Parameters used by the Load command |
| [INSTALL(install)] | Parameters used by the Install for Install command |

All sections may appear only once in the file, except for the "INSTALL(install)" section. If that section appears more than once, it will apply to different applet instances, in sequence.

G.2.1 Default values, order and processing

The ordering of the parameters and the sections is relevant, since parameter names may be repeated and apply to different applets.

When one single parameter is repeated within one section, it refers to different applets. The value of the n^{th} appearance of the parameter applies to applet n .

When one section is repeated (INSTALL(install)), then the n^{th} appearance of the section applies to applet n . Parameter/value pairs which are found in one appearance of the section are valid for the subsequent applets as long as they are not overridden. For example, first INSTALL(install) may contain all values for parameters, whereas the subsequent INSTALL(install) sections may only contain parameters whose values change.

If one required parameter is missing from one section, the last defined value of this parameter in a previous section of the same file will be used.

G.2.2 CONVERT Section

These parameters allow configuration of the conversion process of the Java class file(s) into one CAP file.

| Parameter | Description |
|-----------------|-------------------------------------|
| PackageAID | AID of the package |
| PackageName | Fully qualified name of the package |
| PackageVersion | Version of the package |
| AppletClassAID | AID of the applet |
| AppletClassName | Name of the applet |

G.2.3 INSTALL(load) Section

Here are the parameters to be included in the Install(Load) command (as specified in GSM 03.48 [8]).

| Parameter | Description |
|--------------------------------|---|
| PackageAID | AID of the package |
| PackageNonVolatileMemSize | Non Volatile memory space (in bytes) required for package loading |
| InstallationNonVolatileMemSize | Non volatile memory required for installation, in bytes |
| InstallationVolatileMemSize | Volatile memory required for installation, in bytes |

G.2.4 LOAD Section

Here are the parameters to be included in the Load command (as specified in GSM 03.48 [8]).

| Parameter | Description |
|--------------------------|--|
| MaxLoadCommandDataLength | Maximum length of the data provided in the load command (P3 parameter of the LOAD APDU embedded in the command packet) |

G.2.5 INSTALL(install) Section

Here are the parameters to be included in the Install(Install) command (as specified in GSM 03.48 [8]).

| Parameter | Description |
|--------------------------------|--|
| PackageAID | AID of the package |
| AppletClassAID | AID of the applet |
| InstanceAID | AID of the instance of the applet |
| InstallationNonVolatileMemSize | Non volatile memory required for installation, in bytes |
| InstallationVolatileMemSize | Volatile memory required for installation, in bytes |
| AccessDomain | Specify the SIM files that may be accessed by the applet and the operations allowed on these files. This parameter includes the Access Domain Parameter (ADP) and Access Domain Data (ADD) |
| PriorityLevel | Priority level of the Toolkit applet instance |
| MaxNumberOfTimers | Maximum number of timers allowed for this applet instance |
| MaxMenuEntryTextLength | Maximum text length for a menu entry |
| MaxNumberOfMenuEntries | Maximum number of menu entries allowed for this applet instance |
| MenuEntriesPositionIdentifier | For each menu entry: Position and identifier of that menu entry |
| AppletSpecificParameters | Parameters specific to the applet |

The applet shall be installed with install(install and make selectable) command.

G.3 Full example

```
[CONVERT]

PackageAID = A0 00 00 00 30 00 02 FF FF FF FF 89 00 00 01 00

PackageName = sim.test.access.api_1_svw_updrbs

PackageVersion = 1.0

AppletClassAID = A0 00 00 00 30 00 02 FF FF FF FF 89 00 00 01 01

AppletClassName = API_1_SVW_UPDRBS_1

AppletClassAID = A0 00 00 00 30 00 02 FF FF FF FF 89 00 00 01 02

AppletClassName = API_1_SVW_UPDRBS_2

[INSTALL(load)]

PackageNonVolatileMemSize = 0D27

;InstallationNonVolatileMemSize = 0400

;InstallationVolatileMemSize = 0000

[LOAD]

MaxLoadCommandDataLength = 6C ; max value

[INSTALL(install)]

AppletClassAID = A0 00 00 00 30 00 02 FF FF FF FF 89 00 00 01 01

InstanceAID = A0 00 00 00 30 00 02 FF FF FF FF 89 00 00 01 01

InstallationNonVolatileMemSize = 0400

InstallationVolatileMemSize = 0000

AccessDomain = 00

PriorityLevel = FF

MaxNumberOfTimers = 00

MaxMenuEntryTextLength = 10
```

```
MaxNumberOfMenuEntries = 01
MenuEntriesPositionIdentifier = 0001
AppletSpecificParameters =

[INSTALL(install)]
AppletClassAID = A0 00 00 00 30 00 02 FF FF FF FF 89 00 00 01 02
InstanceAID =    A0 00 00 00 30 00 02 FF FF FF FF 89 00 00 01 02
InstallationNonVolatileMemSize = 0200
InstallationVolatileMemSize = 0000
MenuEntriesPositionIdentifier = 0002
```

; rest of INSTALL(install) parameters are taken from previous INSTALL(install)...

Annex H (informative): Change history

The table below indicates all changes that have been made to the present document since drafting work began.

| Change history | | | | | | | | |
|----------------|-------|---------|----|-----|-----|-----------------|-----|-----|
| Date | TSG # | TSG Doc | CR | Rev | Cat | Subject/Comment | Old | New |
| | | | | | | | | |
| | | | | | | | | |

3GPP TS 51.013 V1.0.0 (2002-05)

Technical Specification

3rd Generation Partnership Project; Technical Specification Group Terminals; Test specification for SIM API for Java Card™ (Release 4)



The present document has been developed within the 3rd Generation Partnership Project (3GPP™) and may be further elaborated for the purposes of 3GPP.

The present document has not been subject to any approval process by the 3GPP Organizational Partners and shall not be implemented. This Specification is provided for future development work within 3GPP only. The Organizational Partners accept no liability for any use of this Specification. Specifications and reports for implementation of the 3GPP™ system should be obtained via the 3GPP Organizational Partners' Publications Offices.

Keywords

GSM, SIM, API

3GPP

Postal address

3GPP support office address

650 Route des Lucioles - Sophia Antipolis
Valbonne - FRANCE
Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Internet

<http://www.3gpp.org>

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© 2002, 3GPP Organizational Partners (ARIB, CWTS, ETSI, T1, TTA, TTC).
All rights reserved.

Contents

| | |
|--|----|
| Contents | 3 |
| Foreword..... | 9 |
| 1 Scope | 10 |
| 2 References | 10 |
| 3 Definitions and abbreviations..... | 11 |
| 3.1 Definitions..... | 11 |
| 3.2 Abbreviations | 11 |
| 4 Test Environment | 12 |
| 4.1 Applicability..... | 12 |
| 4.2 Test environment description..... | 12 |
| 4.3 Tests format..... | 13 |
| 4.3.1 Test Area Reference | 13 |
| 4.3.1.1 Conformance requirements..... | 13 |
| 4.3.1.2 Test Area files | 14 |
| 4.3.1.3 Test Procedure..... | 14 |
| 4.3.1.4 Test Coverage..... | 14 |
| 4.4 Initial Conditions..... | 15 |
| 4.5 Package name..... | 15 |
| 4.6 AID Coding..... | 15 |
| 4.6.1 Specific Test Applet Name for API..... | 16 |
| 4.6.2 Specific Test Applet Name for Framework..... | 16 |
| 4.7 Test Equipment | 17 |
| 4.7.1 APDU tool..... | 17 |
| 4.7.2 Util package..... | 18 |
| 4.7.3 Applet installation parameters..... | 18 |
| 4.7.3.1 Security parameters | 18 |
| 4.7.3.2 Loading components | 18 |
| 4.8 Testing methodology..... | 18 |
| 4.8.1 Test interfaces and facilities | 18 |
| 5 Test plan | 18 |
| 6 API Test Plan..... | 18 |
| 6.1 Package sim.access: | 18 |
| 6.1.1 Interface SIMView | 18 |
| 6.1.1.1 Constants | 18 |
| 6.1.1.2 Method select(short fid, byte[] fci, short fciOffset, short fciLength) | 19 |
| 6.1.1.3 Method select (short fid) | 23 |
| 6.1.1.4 Method status | 26 |
| 6.1.1.5 Method readBinary | 28 |
| 6.1.1.6 Method updateBinary | 30 |
| 6.1.1.7 Method readRecord | 33 |
| 6.1.1.8 Method updateRecord | 39 |
| 6.1.1.9 Method seek | 47 |
| 6.1.1.10 Method increase | 51 |
| 6.1.1.11 Method invalidate | 54 |
| 6.1.1.12 Method rehabilitate | 55 |
| 6.1.2 Class SIMSystem | 57 |
| 6.1.2.1 Method getTheSIMView | 57 |
| 6.1.3 Class SIMViewException | 58 |
| 6.1.3.1 Method throwIt..... | 58 |
| 6.1.3.2 Constructor | 59 |
| 6.2 Package sim.toolkit | 60 |
| 6.2.1 Interface ToolkitConstants | 60 |
| 6.2.1.1 Constants | 60 |
| 6.2.2 Interface ToolkitInterface | 60 |

| | | |
|----------|--|-----|
| 6.2.2.1 | Method processToolkit | 60 |
| 6.2.3 | Class EditHandler | 62 |
| 6.2.4 | Class EnvelopeHandler | 62 |
| 6.2.4.1 | Method getEnvelopeTag | 62 |
| 6.2.4.2 | Method getItemIdentifier | 62 |
| 6.2.4.3 | Method getSecuredDataLength | 64 |
| 6.2.4.4 | Method getSecuredDataOffset | 66 |
| 6.2.4.5 | Method getTheHandler | 68 |
| 6.2.4.6 | Method getTPUDLOffset | 69 |
| 6.2.4.7 | Method getLength | 71 |
| 6.2.4.8 | Method copy | 72 |
| 6.2.4.9 | Method findTLV | 74 |
| 6.2.4.10 | Method getValueLength | 75 |
| 6.2.4.11 | Method getValueByte | 76 |
| 6.2.4.12 | Method copyValue | 78 |
| 6.2.4.13 | Method compareValue | 80 |
| 6.2.4.14 | Method findAndCopyValue(byte tag, byte[] dstBuffer, short dstOffset) | 82 |
| 6.2.4.15 | Method findAndCopyValue(byte tag, byte occurrence, short valueOffset, byte[] dstBuffer, short dstOffset, short dstLength) | 84 |
| 6.2.4.16 | Method findAndCompareValue(byte tag, byte[] compareBuffer, short compareOffset) | 87 |
| 6.2.4.17 | Method findAndCompareValue(byte tag, byte occurrence, short valueOffset, byte[] compareBuffer, short compareOffset, short compareLength) | 89 |
| 6.2.5 | Class EnvelopeResponseHandler | 92 |
| 6.2.5.1 | Method getTheHandler | 92 |
| 6.2.5.2 | Method post | 93 |
| 6.2.5.3 | Method postAsBERTLV | 94 |
| 6.2.5.4 | Method getLength | 96 |
| 6.2.5.5 | Method copy | 97 |
| 6.2.5.6 | Method findTLV | 99 |
| 6.2.5.7 | Method getValueLength | 101 |
| 6.2.5.8 | Method getValueByte | 102 |
| 6.2.5.9 | Method copyValue | 104 |
| 6.2.5.10 | Method compareValue | 106 |
| 6.2.5.11 | Method findAndCopyValue(byte tag, byte[] dstBuffer, short valueOffset) | 108 |
| 6.2.5.12 | Method findAndCopyValue(byte tag, byte occurrence, short valueOffset, byte[] dstBuffer, short dstOffset, short dstLength) | 111 |
| 6.2.5.13 | Method findAndCompareValue(byte tag, byte[] compareBuffer, short compareOffset) | 114 |
| 6.2.5.14 | Method findAndCompareValue(byte tag, byte occurrence, short valueOffset, byte[] compareBuffer, short compareOffset, short compareLength) | 116 |
| 6.2.5.15 | Method appendArray | 120 |
| 6.2.5.16 | Method appendTLV(byte tag, byte value) | 122 |
| 6.2.5.17 | Method appendTLV(byte tag, byte value1, byte value2) | 123 |
| 6.2.5.18 | Method appendTLV(byte tag, byte[] value, short valueoffset, short valuelength) | 125 |
| 6.2.5.19 | Method appendTLV(byte tag, byte value1, byte[] value2, short value2offset, short value2length) | 127 |
| 6.2.5.20 | Method clear | 129 |
| 6.2.6 | Class MEProfile | 130 |
| 6.2.6.1 | Method check (byte index) | 130 |
| 6.2.6.2 | Method check (byte[] mask, short offset, short length) | 131 |
| 6.2.6.3 | Method check (short index) | 133 |
| 6.2.6.4 | Method getValue (short indexMSB, short indexLSB) | 134 |
| 6.2.6.5 | Method copy (short startOffset, byte[] dstBuffer, short dstOffset, short dstLength) | 135 |
| 6.2.7 | Class ProactiveHandler | 138 |
| 6.2.7.1 | Method getTheHandler | 138 |
| 6.2.7.2 | Method init | 139 |
| 6.2.7.3 | Method initDisplayText | 140 |
| 6.2.7.4 | Method initGetInkey | 143 |
| 6.2.7.5 | Method initGetInput | 146 |
| 6.2.7.6 | Method send | 149 |
| 6.2.7.7 | Method getLength | 151 |
| 6.2.7.8 | Method copy | 152 |
| 6.2.7.9 | Method findTLV | 154 |
| 6.2.7.10 | Method getValueLength | 156 |

| | | |
|----------|---|-----|
| 6.2.7.11 | Method getValueByte | 158 |
| 6.2.7.12 | Method copyValue | 159 |
| 6.2.7.13 | Method compareValue | 161 |
| 6.2.7.14 | Method findAndCopyValue(byte tag, byte[] dstBuffer, short valueOffset) | 164 |
| 6.2.7.15 | Method findAndCopyValue(byte tag, byte occurrence, short valueOffset, byte[] dstBuffer, short dstOffset, short dstLength) | 167 |
| 6.2.7.16 | Method findAndCompareValue(byte tag, byte[] compareBuffer, short compareOffset) | 170 |
| 6.2.7.17 | Method findAndCompareValue(byte tag, byte occurrence, short valueOffset, byte[] compareBuffer, short compareOffset, short compareLength) | 172 |
| 6.2.7.18 | Method appendArray | 176 |
| 6.2.7.19 | Method appendTLV(byte tag, byte value) | 178 |
| 6.2.7.20 | Method appendTLV(byte tag, byte value1, byte value2) | 180 |
| 6.2.7.21 | Method appendTLV(byte tag, byte[] value, short valueoffset, short valuelength) | 181 |
| 6.2.7.22 | Method appendTLV(byte tag, byte value1, byte[] value2, short value2offset, short value2length) | 184 |
| 6.2.7.23 | Method clear | 186 |
| 6.2.8 | Class ProactiveResponseHandler | 187 |
| 6.2.8.1 | Method copyAdditionalInformation | 187 |
| 6.2.8.2 | Method copyTextString | 191 |
| 6.2.8.3 | Method getAdditionalInformationLength | 194 |
| 6.2.8.4 | Method getGeneralResult | 196 |
| 6.2.8.5 | Method getItemIdentifier | 198 |
| 6.2.8.6 | Method getTextStringCodingScheme | 200 |
| 6.2.8.7 | Method GetTextStringLength | 202 |
| 6.2.8.8 | Method getTheHandler | 204 |
| 6.2.8.9 | Method getLength | 205 |
| 6.2.8.10 | Method copy | 206 |
| 6.2.8.11 | Method findTLV | 208 |
| 6.2.8.12 | Method getValueLength | 210 |
| 6.2.8.13 | Method getValueByte | 211 |
| 6.2.8.14 | Method copyValue | 213 |
| 6.2.8.15 | Method compareValue | 215 |
| 6.2.8.16 | Method findAndCopyValue(byte tag, byte[] dstBuffer, short valueOffset) | 218 |
| 6.2.8.17 | Method findAndCopyValue(byte tag, byte occurrence, short valueOffset, byte[] dstBuffer, short dstOffset, short dstLength) | 220 |
| 6.2.8.18 | Method findAndCompareValue(byte tag, byte[] compareBuffer, short compareOffset) | 223 |
| 6.2.8.19 | Method findAndCompareValue(byte tag, byte occurrence, short valueOffset, byte[] compareBuffer, short compareOffset, short compareLength) | 225 |
| 6.2.9 | Class ToolkitRegistry | 229 |
| 6.2.9.1 | Method allocateTimer | 229 |
| 6.2.9.2 | Method changeMenuEntry | 231 |
| 6.2.9.3 | Method clearEvent | 238 |
| 6.2.9.4 | Method disableMenuEntry | 240 |
| 6.2.9.5 | Method enableMenuEntry | 242 |
| 6.2.9.6 | Method getEntry | 244 |
| 6.2.9.7 | Method getPollInterval | 244 |
| 6.2.9.8 | Method initMenuEntry | 246 |
| 6.2.9.9 | Method isEventSet | 251 |
| 6.2.9.10 | Method releaseTimer | 253 |
| 6.2.9.11 | Method requestPollInterval | 254 |
| 6.2.9.12 | Method setEvent | 256 |
| 6.2.9.13 | Method setEventList | 258 |
| 6.2.10 | Class ViewHandler | 262 |
| 6.2.11 | Class ToolkitException | 262 |
| 6.2.11.1 | Exception Constants | 262 |
| 6.2.11.2 | Constructor ToolkitException | 263 |
| 6.2.11.3 | Method throwIt | 263 |
| 6.3 | SIM Toolkit Framework | 265 |
| 6.3.1 | Minimum Handler Availability | 265 |
| 6.3.1.1 | ProactiveHandler | 265 |
| 6.3.1.2 | ProactiveResponseHandler | 272 |
| 6.3.1.3 | EnvelopeHandler | 284 |
| 6.3.1.4 | EnvelopeResponseHandler | 293 |

Note: Due to an inconsistency in [7] specification it is not possible to cover the test case when an applet, which is not the first toolkit applet triggered, try to post data in multitrigging.....303

| | | |
|-----------|---|-----|
| 6.3.2 | Handler Integrity | 303 |
| 6.3.2.1 | ProactiveHandler | 303 |
| 6.3.2.2 | ProactiveResponseHandler..... | 305 |
| 6.3.2.3 | EnvelopeHandler | 306 |
| 6.3.3 | Applet Triggering | 321 |
| 6.3.3.1 | EVENT_PROFILE_DOWNLOAD | 321 |
| 6.3.3.2 | EVENT_MENU_SELECTION..... | 323 |
| 6.3.3.3 | EVENT_MENU_SELECTION_HELP_REQUEST..... | 324 |
| 6.3.3.4 | EVENT_FORMATTED_SMS_PP_ENV | 325 |
| 6.3.3.5 | EVENT_UNFORMATTED_SMS_PP_ENV | 327 |
| 6.3.3.6 | EVENT_CALL_CONTROL_BY_SIM | 328 |
| 6.3.3.7 | EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM..... | 330 |
| 6.3.3.8 | EVENT_TIMER_EXPIRATION..... | 332 |
| 6.3.3.9 | EVENT_UNFORMATTED_SMS_CB..... | 333 |
| 6.3.3.10 | EVENT_EVENT_DOWNLOAD_MT_CALL..... | 334 |
| 6.3.3.11 | EVENT_EVENT_DOWNLOAD_CALL_CONNECTED..... | 335 |
| 6.3.3.12 | EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED | 336 |
| 6.3.3.13 | EVENT_EVENT_DOWNLOAD_LOCATION_STATUS..... | 338 |
| 6.3.3.14 | EVENT_EVENT_DOWNLOAD_USER_ACTIVITY | 339 |
| 6.3.3.15 | EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE | 340 |
| 6.3.3.16 | EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS | 341 |
| 6.3.3.17 | EVENT_UNRECOGNIZED_ENVELOPE..... | 343 |
| 6.3.3.18 | EVENT_STATUS_COMMAND | 344 |
| 6.3.3.19 | EVENT_FORMATTED_SMS_CB..... | 346 |
| 6.3.3.20 | EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION | 347 |
| 6.3.3.21 | EVENT_EVENT_DOWNLOAD_BROWSER_TERMINATION | 348 |
| 6.3.4 | Proactive Command Sending by the STF..... | 350 |
| 6.3.4.1 | System Proactive Commands | 350 |
| 6.3.4.2 | Interaction with GSM commands..... | 351 |
| 6.3.5 | Exception Handling | 353 |
| 6.3.5.1 | Hide Exceptions from the ME..... | 353 |
| 6.3.5.2 | Interaction with Multiple Triggering..... | 353 |
| 6.3.6 | Framework Security Management..... | 355 |
| 6.3.6.1 | Input Data..... | 355 |
| 6.3.6.2 | Output Data | 357 |
| Test Area | Reference: FWK_FWS_OUDA..... | 357 |
| 6.3.7 | Envelope Response Posting | 359 |
| 6.3.7.1 | EVENT_CALL_CONTROL_BY_SIM | 359 |
| 6.3.7.2 | EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM..... | 361 |
| 6.3.7.3 | EVENT_UNRECOGNIZED_ENVELOPE | 363 |
| 6.3.8 | Toolkit Installation | 364 |
| 6.3.8.1 | Timers Allocation..... | 364 |
| 6.3.8.2 | Item Identifier..... | 365 |
| 6.3.8.3 | Item Position..... | 368 |
| 6.3.8.4 | Maximum Text Length for a menu entry | 369 |
| 6.3.8.5 | Maximum number of menu entries..... | 371 |
| 6.3.8.6 | Access Domain..... | 372 |
| 6.3.8.7 | Priority Level..... | 376 |
| 6.3.9 | File System Context | 380 |
| 6.3.9.1 | Initial Context..... | 380 |
| 6.3.9.2 | Context Preservation (current file) | 381 |
| 6.3.9.3 | Context Preservation (current record pointer) | 383 |
| 6.3.10 | Other parts transferred to framework from API | 385 |
| 6.3.10.1 | A handler is a temporary JCRE Entry Point object..... | 385 |
| 6.3.10.2 | Transaction..... | 386 |
| 6.3.10.3 | Timer Id between Applets..... | 387 |

| | |
|--|------------|
| Annex A (normative): Class and Methods AID numbering and acronyms | 388 |
| A.1 Sim.access | 388 |
| A.1.1 SIMView methods..... | 388 |
| A.1.2 SIMSystem methods..... | 388 |
| A.1.3 SIMViewException methods..... | 388 |
| A.2 Sim.toolkit | 389 |
| A.2.1 ToolkitConstants | 389 |
| A.2.2 ToolkitInterface methods..... | 389 |
| A.2.3 EditHandler methods | 389 |
| A.2.4 EnvelopeHandler methods..... | 389 |
| A.2.5 EnvelopeResponseHandler methods | 390 |
| A.2.6 MEProfile methods..... | 391 |
| A.2.7 ProactiveHandler methods..... | 391 |
| A.2.8 ProactiveResponseHandler methods | 392 |
| A.2.9 ToolkitRegistry methods | 393 |
| A.2.10 ViewHandler methods | 393 |
| A.2.11 ToolkitException methods..... | 393 |
| Annex B (normative): Script file syntax and format description..... | 394 |
| B.1 Syntax description | 394 |
| B.2 Semantics..... | 394 |
| B.3 Example..... | 395 |
| B.4 Style and formatting | 396 |
| Annex C (normative): Default Prepersonalisation | 397 |
| C.1 General Default Prepersonalisation..... | 397 |
| C.2 Sim.Access.SimView test default prepersonalisation | 398 |
| C.2.1 DF _{SIMTEST} (SIM Test) | 398 |
| C.2.2 EF _{TNR} (Transparent Never Read)..... | 398 |
| C.2.3 EF _{TNU} (Transparent Never Update)..... | 398 |
| C.2.4 EF _{TARU} (Transparent Always Read and Update)..... | 398 |
| C.2.5 EF _{CNR} (Cyclic Never Read) | 399 |
| C.2.6 EF _{CNU} (Cyclic Never Update)..... | 399 |
| C.2.7 EF _{CNIC} (Cyclic Never Increase) | 399 |
| C.2.8 EF _{CNIV} (Cyclic Never Invalidate) | 400 |
| C.2.9 EF _{CNRH} (Cyclic Never Rehabilitate) | 400 |
| C.2.10 EF _{CARU} (Cyclic Always Read and Update)..... | 400 |
| C.2.11 EF _{LNR} (Linear Fixed Never Read) | 401 |
| C.2.12 EF _{LNU} (Linear Fixed Never Update)..... | 401 |
| C.2.13 EF _{LARU} (Linear Fixed Always Read and Update)..... | 401 |
| C.2.14 EF _{CINA} (Cyclic Increase Not Allowed) | 402 |
| C.2.15 EF _{TRAC} (Transparent Read Access Condition CHV2) | 402 |
| C.2.16 EF _{TIAC} (Transparent Invalidate Access Condition CHV1) | 402 |
| C.2.17 EF _{CIAC} (Cyclic Increase Access Condition CHV2) | 403 |
| C.2.18 EF _{CIAC} (Cyclic Increase Access Condition ADM)..... | 403 |
| C.2.19 EF _{CNRI} (Cyclic Never Rehabilitate Invalidated) | 403 |

| | |
|---|------------|
| Annex D (normative): sim.test.util package and loading , testing and cleaning script examples..... | 404 |
| Annex E (normative): Test Area files. | 405 |
| Annex F (Normative): AID numbering and acronyms for Framework tests..... | 406 |
| F.1 Toolkit Installation Parameters (TIN) | 406 |
| F.2 Minimum Handler Availability (MHA) | 406 |
| F.3 Handler Integrity (HIN)..... | 407 |
| F.4 Applet Triggering (APT)..... | 407 |
| F.5 Proactive Command Sending (PCS) | 407 |
| F.6 Envelope Response Posting (ERP)..... | 407 |
| F.7 Framework Security (FWS) | 408 |
| F.8 File System Context (FSC)..... | 408 |
| F.9 Exception Handling (EXH) | 408 |
| F.10 Other parts transferred to framework from API (API) | 408 |
| Annex G (Normative): Configuration Parameters File..... | 409 |
| G.1 Syntax | 409 |
| G.2 File Contents and Organisation | 409 |
| G.2.1 Default values, order and processing..... | 410 |
| G.2.2 CONVERT Section | 410 |
| G.2.3 INSTALL(load) Section | 410 |
| G.2.4 LOAD Section | 410 |
| G.2.5 INSTALL(install) Section | 410 |
| G.3 Full example | 411 |
| Annex H (informative): Change history | 413 |

Foreword

This Technical Specification (TS) has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The present document covers the minimum characteristics considered necessary in order to provide compliance to GSM 03.19 "SIM API for Java Card™" [7].

The present document describes the technical characteristics and methods of test for testing the SIM API for Java Card (TM) [7] implemented in the subscriber identity modules (SIMs) for GSM. It specifies the following parts:

- test applicability
- test environment description
- tests format
- test area reference
- conformance requirements
- test suite files
- test procedure
- test coverage and,
- a description of the associated testing tools that shall be used.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] (void)
- [2] (void)
- [3] GSM 11.11: "Digital cellular telecommunication system (Phase 2+); Specification of the Subscriber Identity Module - Mobile Equipment (SIM - ME) interface".
- [4] GSM 11.14: "Digital cellular telecommunications system (Phase 2+); Specification of the SIM application toolkit for the Subscriber Identity Module – Mobile Equipment (SIM – ME) interface".
- [5] GSM 11.17: "Subscriber Identity Module" (SIM) conformance test specification".
- [6] (void)
- [7] GSM 03.19 Rel-98: "Digital cellular telecommunications system (Phase 2+); Subscriber Identity Module Application Programming Interface (SIM API); SIM API for Java Card™; Stage 2".
- [8] GSM 03.48 Rel-99: "Digital cellular telecommunications system (Phase 2+); Security Mechanisms for the SIM application toolkit; Stage 2"
- [9] ISO/IEC 7816-3 (1997) " Identification cards - Integrated circuit(s) cards with contacts, Part 3: Electronic signals and transmission protocols".

- [10] GSM 02.19 "Digital cellular telecommunications system (Phase 2+, Release 98); Subscriber Identity Module Application Programming Interface (SIM API); Service description; Stage 1".
- [11] SUN Java Card Specification "Java Card 2.1 API Specification".
- [12] SUN Java Card Specification "Java Card 2.1 Runtime Environment Specification".
- [13] SUN Java Card Specification "Java Card 2.1 VM Architecture Specification".
- [14] ETSI TS 101 220 v3.0.0 "Numbering System for Telecommunication IC card applications".
- [15] GSM 11.10-1: "Digital cellular telecommunication system (Phase 2+); Mobile Station (MS) conformance specification; Part 1: Conformance specification".

3 Definitions and abbreviations

3.1 Definitions

The definitions specified in GSM 11.10-1 [15] clause 3.3 shall apply, unless otherwise specified in the present clause.

Applet: An Applet is an application built up using a number of classes which will run under the control of the Java Card virtual machine.

Applet installation parameters: Default values for applet installation parameters.

Applet loading script: File containing the APDU commands that will load and install the test applet in the card.

CleanUp Script file: File containing the APDU commands that will restore the Default Initial Conditions on the SIM

Conformance Requirement Reference: Description of the expected card behaviour according to 03.19 specification.

Expected state: the state in which the SIM is supposed to be after the execution of the test procedure applied on the relevant initial conditions

Security parameters: Minimum security requirements defined for the applet installation process.

Test Area: Set of Test Cases applicable to a specific part (class method, framework behaviour,...) of the 03.19 specification.

Test Case: Elementary test that checks for compliance with one or more Conformance Requirement References.

Test Output file: TBD.

Test procedure: the sequence of actions/commands to perform all the test cases defined in a test area.

Test Script file: File containing the APDU commands that will execute and verify the test results.

Test Toolkit Applet: Applet designed to test a specific functionality of the SIM API 03.19 specification.

3.2 Abbreviations

For the purpose of the present document, the following abbreviations apply, in addition to those listed in GSM 01.04 [2]:

| | |
|------|-----------------------------------|
| AC | Application Code |
| AID | Application Identifier |
| APDU | Application Protocol Data Unit |
| API | Application Programming Interface |
| CAD | Card Acceptance Device |
| FFS | For Further Study |
| IFD | Interface Device |
| JCRE | Java Card™ Run Time Environment |

| | |
|-----|----------------------------|
| JVM | Java Virtual Machine |
| SIM | Subscriber Identity Module |
| SE | Sending Entity |

4 Test Environment

This clause specifies requirements that shall be met and the testing rules that shall be followed during the test procedure.

4.1 Applicability


The tests defined in this specification shall be performed taking into account the services supported by the card as specified in the EF_{SST} file.

This specification contains tests that test interoperability at the API level. This specification does not currently contain tests for interoperability at the SIM API framework and at the byte code level. These are for further study.

The test defined in this specification are applicable to cards implementing TS 03.19 [7] version 7.4.0 unless otherwise stated.

4.2 Test environment description

The general architecture for the test environment is:

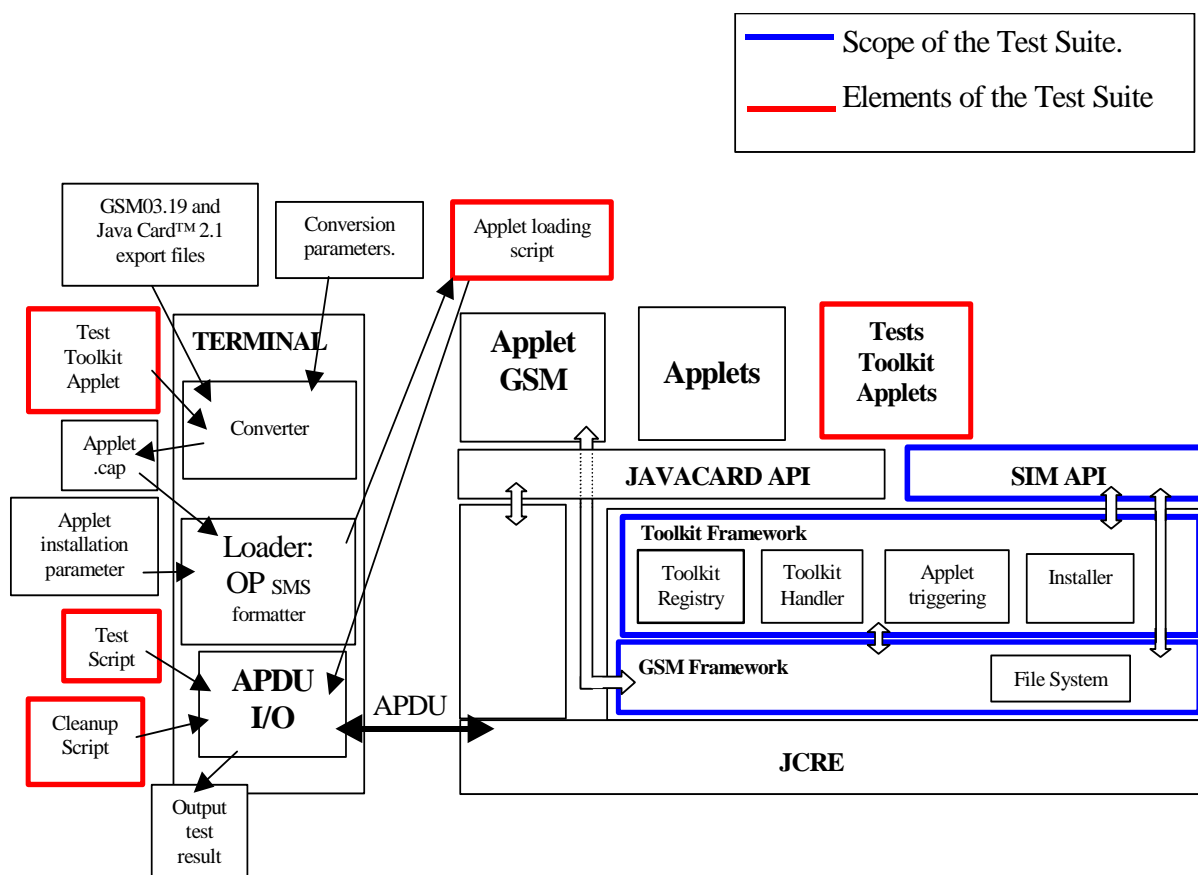

Note: This diagram shows the test architecture required to test interoperability at both API and bytecode level. The latter is currently not included in the current specification. The diagram is for information.

4.3 Tests format

4.3.1 Test Area Reference

Each test area is referenced as follows:

API Testing:: 'API_[package name]_[classname]_[methodname]' where

package name:

sim.access package: '1'

sim.toolkit package: '2'

class name:

yyy: 3 letters for each class.

See Annex A for full classes acronyms list.

method name:

zzzz[input parameters]:

See Annex A for full methods name acronyms list.

FWK: framework testing

Chapter name:

xxx: 3 letters for each chapter

See annex F for full chapter acronyms list

Subchapter name

yyyy: : 4 letters for each subchapter

See annex F for full subchapter acronyms list

LDR: loader testing

[TBD]

4.3.1.1 Conformance requirements

The conformance requirements are expressed in the following way:

- Method prototype as listed in GSM 03.19 [7]specification.
- Normal execution:
 - Contains normal execution and correct parameters limit values, each referenced as a Conformance Requirement Reference Normal (CRRN)
- Parameters error:
 - Contains parameter errors and incorrect parameter limit values, each referenced as a Conformance Requirement Reference Parameter Error (CRRP)
- Context error:
 - Contains errors due to the context the method is used in, each referenced as a Conformance Requirement Reference Context Error (CRRC)

4.3.1.2 Test Area files

The files included in the Test Area use the following naming convention:

- Test Script: [Test Area Reference]_[Test script number].scr
- Test Applet: [Test Area Reference]_[Test applet number].java
- Load Script: [Test Area Reference]_[Load Script number].ldr
- Cleanup Script: [Test Area Reference]_[Cleanup Script number].clr
- Parameter File: [Test Area Reference]_[Parameter File number].par

The test script, applet, installation parameters, load script, cleanup script and conversion parameters numbers start from '1'.

The test script, load script and cleanup script shall share a common syntax and format (see Annex B).

The parameter file has an own syntax (see Annex G) and contains parameters to be used for CAP-file conversion and loading/cleanup script generation.

Scripts file shall be run in the following order:

```
[Test Area Reference]_1.ldr
[Test Area Reference]_1.scr
[Test Area Reference]_1.clr
[Test Area Reference]_2.ldr
[Test Area Reference]_2.scr
[Test Area Reference]_2.clr
....
[Test Area Reference]_n.ldr
[Test Area Reference]_n.scr
[Test Area Reference]_n.clr
```

In case that one of the files is not needed, it shall be skipped during the tests execution.

4.3.1.3 Test Procedure

Each test procedure contains a table to indicate the expected responses form the API and/or the APDU level as follows:

| Test Case | | | |
|-----------|---------------------------------------|-------------------------------|---|
| Id | Description | API Expectation | APDU Expectation |
| | <i>Test Case detailed description</i> | <i>API expected behavior.</i> | <i>Expected response at APDU level.</i> |

4.3.1.4 Test Coverage

The table at the end of each test procedure indicates the correspondence between the Conformance Requirements Reference (CRR) and the different test cases.

4.4 Initial Conditions

The Initial Conditions are a set of general prerequisites for the SIM prior to the execution of testing. For each test procedure described in this document, the following rules apply to the Initial Conditions:

- unless otherwise stated, the file system and the files' content shall fulfil the requirements described in the "Default Prepersonalisation" paragraph;
- unless otherwise stated, before installing the applet(s) relevant to the current test procedure, all packages specific to other test procedures shall not be present.

When both statements apply, a test procedure is said to be in the "Default Initial Conditions" state.

4.5 Package name

Java packages integrating this Test Suite shall follow this naming convention:

sim.test.access.[Test Area Reference]: Java Card packages containing Test Area References for the GSM 03.19 sim.access package.

sim.test.framework.[Test Area Reference]: Java Card packages containing Test Area References for the GSM 03.19 framework.

sim.test.util: for the Test util package defined in this Test Suite.


sim.test.toolkit.[Test Area Reference]: Java Card packages containing Test Area References for the GSM 03.19[7] sim.toolkit package.

Example: The package *../sim.test.access.[Test Area Reference]* creates the following directory structure *../sim/test/access/[Test Area Reference]/API_1_..._1..n.**, where *'API_1_..._1..n.*'* are the different test applets Java source files used in *[Test Area Reference]*.

4.6 AID Coding

The AID coding for the Test Packages, Applet classes and Applet shall be as specified in TS 101 220 [14]. In addition, the following TAR values are defined for use within the present document:

TAR Coding (3 bytes/ 24 bits):

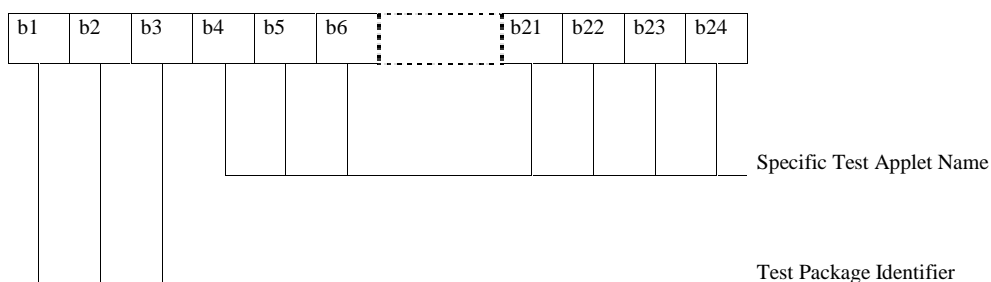

Test package Identifier(bits b1-b3):

000 reserved (as TAR= '00.00.00' is reserved for Card Manager)

001 API

010 Framework

011 Loader

111 sim.test.util

other values are RFU

Application Provider specific data (1 byte):

00' for Package


01' for Applet class

02' for Applet Instance

For example, the AID of Package sim.test.util is 'A0 00 00 00 09 00 02 FF FF FF FF 89 E0 00 00 00'

4.6.1 Specific Test Applet Name for API

Specific applet test name (bits b4-b24):

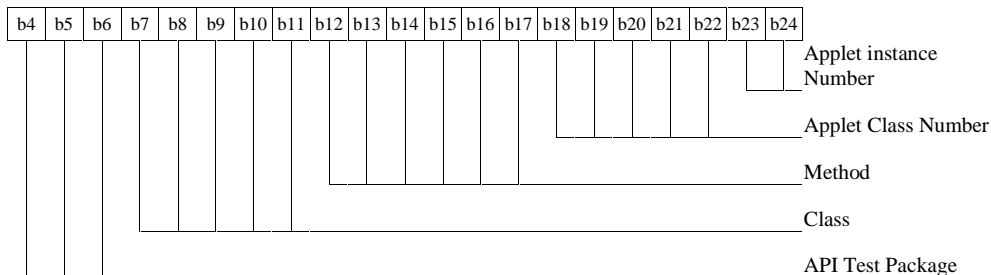

for API Test Package(3 bits)

001 sim.access

010 sim.toolkit

other are RFU

Class (5 bits): need to be assigned specification order see Annex A for the full list


Method (6 bits): need to be assigned specification order see Annex A for the full list

Applet Class Number (5 bits): linked to Test Area, it shall start with 1 for classes and shall be 0 for package.

Applet Instance Number (2 bits) defined in the test procedure it shall start with 01 for applet instance and shall be 00 for package and class.

4.6.2 Specific Test Applet Name for Framework

Specific applet test name (bits b4-b24):

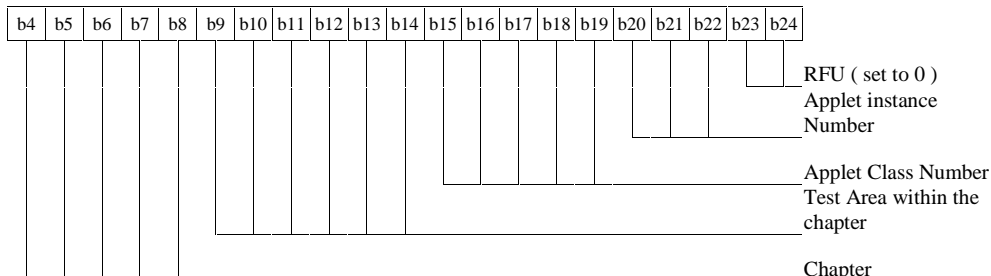

for Chapter (5 bits)

00001 Toolkit Installation Parameters

00010 Minimum Handler Availability

00011 Handler Integrity

00100 Applet Triggering
00101 Proactive Command Sending
00110 Framework Security
00111 Envelope Response Posting
01000 File System Context
01001 Exception Handling
01010 Other parts transferred to framework from API
other are RFU

Test Area within the chapter (6 bits): values are defined in Annex F

Applet Class number (5 bits): linked to Test Area, it shall start with 1 for classes and shall be 0 for package.

Applet Instance number (3 bits) defined in the test procedure it shall start with 01 for applet instance and shall be 00 for package and class.

4.7 Test Equipment

These subclauses recommend a minimum specification for each of the items of test equipment referenced in the tests.

4.7.1 APDU tool

This test tool shall meet the following requirements:

- be able to send command to the card TPDU;
- be able to check none, only a part, or all of the data returned;
- be able to check none, only part, or all of the status returned;
- be able to accept all valid status codes returned;
- be able to support Reader commands;
- be able to generate a log file for each test execution.
- if more data is returned than defined in the test specification, the tool shall continue;
- if less data is returned than defined in the test specification, the tool shall aborts and return an error;
- if there is an error in data or status returned, the tool shall abort and return an error.

The log file produced by the test tool shall include the following information:

- all commands issued;
- all data returned;
- all status returned;
- all errors codes;
- expected data and status in case of error;
- comments from the scripts;
- a log message to report success or failure of the test.

4.7.2 Util package

Annex D includes java source code for the sim.test.util package as well as loading , testing and cleaning script examples.

4.7.3 Applet installation parameters

4.7.3.1 Security parameters

Loading scripts shall use the following security parameters as stated in GSM 03.48 [8] for applet installation:

| Parameter | Value in hexadecimal |
|-----------|-------------------------|
| SPI | 0A 00 |
| KIC | 00 |
| KID | 11 |
| TAR | 00 00 00 |
| CNTR | 00 00 00 00 01 |
| PCNTR | 00 |
| Key | 01 23 45 67 89 AB CD EF |

4.7.3.2 Loading components

Cap files in loading scripts shall not include the descriptor component as described in Java Card 2.1 VM Architecture Specification [13].

4.8 Testing methodology

4.8.1 Test interfaces and facilities

The SIM-ME interface provides the main transport interface for the purpose of performing conformance tests.

The SIM API interface provides the main test interface for the purpose of performing conformance tests.

5 Test plan

The test plan is divided according to the SIM API specification, that way the tests will follow the class hierarchy for the sim.toolkit and sim.access package; for the SIM Toolkit framework this test plan describes the different points that will be tested with the present test specification.

6 API Test Plan

6.1 Package sim.access:

6.1.1 Interface SIMView

Note: The Test applet shall be run on a class that implements this interface.

6.1.1.1 Constants

Test Area Reference: API_1_SVW_CONST

6.1.1.1.1 Conformance Requirements

This section does not describe the conformance requirements for a method, but rather for the constants of the interface.

Normal execution

CRRN1: The constants shall have the same name and value that is defined in GSM 03.19 [7].

6.1.1.1.2 Test Suite Files

None.

6.1.1.1.3 Test Procedure

The constants in Java are resolved at compilation time, therefore a runtime test is not useful. No test of constants will be performed.

6.1.1.2 Method select(short fid, byte[] fci, short fciOffset, short fciLength)

Test Area Reference: API_1_SVW_SLCTS_BSS

6.1.1.2.1 Conformance Requirements

The method with the following header shall be compliant to its definition in the API.

```
public short select(short fid,
                   byte[] fci,
                   short fciOffset,
                   short fciLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           SIMViewException
```

Normal execution

CRRN1: If the desired file is selected, the length of the FCI (File Control Information) which has been written to the array fci is returned.

CRRN2: If the length fciLength is greater than or equal to the length of the FCI structure, the whole FCI structure is copied into the array fci and the length of the FCI which has been written to the array fci is returned.

CRRN3: If the length fciLength is less than the length of the FCI structure, the first part of the FCI structure is copied into the array fci and the length of the FCI which has been written to the array fci is returned.

CRRN4: After selecting a DF/MF no EF is selected.

CRRN5: After selecting a linear fixed EF no record is selected.

CRRN6: After selecting a cyclic EF the first record which is the last updated record is selected.

CRRN7: The current files (file context) of any other applets shall not be changed. See GSM 03.19 [7] - §5.2. This will be tested during the testing of the framework.

CRRN8: The information returned by fci shall be formatted as described in GSM 11.11 [3], §9.2.1.

CRRN9: The file with a File-ID that matches fid shall be found according to the following selection rules:

- 1) An immediate child EF or DF of the current MF/DF can be selected,
- 2) A sibling DF of the current DF can be selected,
- 3) The current MF/DF it self can be selected,
- 4) The parent MF/DF of the current DF can be selected,

- 5) The MF can always be selected.

Parameter errors

CRRP1: If the array fci is null, an instance of NullPointerException shall be thrown.

CRRP2: If fciOffset is less than 0, an instance of ArrayIndexOutOfBoundsException shall be thrown.

CRRP3: If fciLength is less than 0, an instance of ArrayIndexOutOfBoundsException shall be thrown.

CRRP4: If fciOffset plus fciLength is greater than the length of the array fci.length, or fciOffset equals fci.length, an instance of ArrayIndexOutOfBoundsException shall be thrown.

Context errors

CRRC1: If the file with a File-ID which matches fid could not be found according to the selection rules listed in CRRN9, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.FILE_NOT_FOUND.

CRRC2: If the method call causes a memory problem (e.g. memory access error), an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.MEMORY_PROBLEM.

CRRC3: If the method call causes an error to occur that is not expected and thus not handled, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INTERNAL_ERROR.

6.1.1.2.2 Test Suite Files

Additional requirements for the GSM personalisation: None

| | |
|-----------------|----------------------------|
| Test Script: | API_1_SVW_SLCTS_BSS_1.scr |
| Test Applet: | API_1_SVW_SLCTS_BSS_1.java |
| Load Script: | API_1_SVW_SLCTS_BSS_1.ldr |
| Cleanup Script: | API_1_SVW_SLCTS_BSS_1.clr |
| Parameter File: | API_1_SVW_SLCTS_BSS_1.par |

6.1.1.2.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 0 | SIM Initialisation | Responses ignored. | |
| 1 | Select EF_{ICCID} in MF (Transparent EF) fid = SIMView.FID_EF_ICCID byte[] fci = new byte[34] fciOffset = 0 fciLength = 20 select() | No exception shall be thrown. Shall return a value not greater than 20. <Description of fci: XX XX XX XX 2F E2 04 > | |
| 2 | Select EF_{ICCID} in MF (Transparent EF) fid = SIMView.FID_EF_ICCID fciOffset = 0 fciLength = 13 select() | No exception shall be thrown. Shall return 13. fci shall contain the first 13 bytes of the FCI structure. | |
| 3 | Select DF_{GSM} in MF fid = SIMView.FID_DF_GSM fciOffset = 0 fciLength = 7 select() | No exception shall be thrown. Shall return 7. fci shall contain the first 7 bytes of the FCI. <Description of fci: XX XX XX XX 7F 20 02 > | |
| 3 | Select DF_{GSM} in MF fid = SIMView.FID_DF_GSM fciOffset = 0 fciLength = 7 select() | No exception shall be thrown. Shall return 7. fci shall contain the entire FCI structure. <Description of fci: XX XX XX XX 7F 20 02 > | |
| 4 | Select EF_{ACM} in DF_{GSM} (CyclicEF) fid = SIMView.FID_EF_ACM fciOffset = 0 fciLength = 20 select() | No exception shall be thrown. Shall return a value between 15 and 20. (Cyclic EF) fci shall contain the first 15 or more bytes of the FCI structure. fci[14] shall have the value 3 (length of record). | |
| 5 | Select MF fid = SIMView.FID_MF fciOffset = 0 fciLength = 34 select() | No exception shall be thrown. Shall return a value between 22 and 34. fci shall contain the entire FCI structure. | |
| 6 | Select DF_{TELECOM} in MF fid = SIMView.FID_DF_TELECOM fci[0] = fci[1] = '05' fciOffset = 2 fciLength = 20 select() | No exception shall be thrown. Shall return 20. fci shall contain the first 20 bytes of the FCI structure starting at index 2. The first two bytes shall (still) have the value '05'. | |
| 7 | Select EF_{FDN} in DF_{TELECOM} (Linear FixedEF) fid = SIMView.FID_EF_FDN fciOffset = 0 fciLength = 15 select() | No exception shall be thrown. Shall return 15. fci shall contain the first 15 bytes of the FCI structure. fci[14] shall have the value 28 (length of record). | |
| 8 | fci is null fid = SIMView.FID_EF_FDN byte[] nullBuffer = null fciOffset = 0 fciLength = 15 select() | Shall throw java.lang.NullPointerException. | |

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|------------------|
| 9 | fciOffset < 0 fid = SIMView.FID_EF_FDN fciOffset = -1 fciLength = 15 select() | Shall throw java.lang.ArrayIndexOutOfBoundsException. | |
| 10 | fciLength < 0 fid = SIMView.FID_EF_FDN fciOffset = 0 fciLength = -1 select() | Shall throw java.lang.ArrayIndexOutOfBoundsException. | |
| 11 | fciOffset + fciLength > fci.length fid = SIMView.FID_EF_FDN fciOffset = 20 fciLength = 15 select() | Shall throw java.lang.ArrayIndexOutOfBoundsException. | |
| 12 | fciOffset >= fci.length fid = SIMView.FID_EF_FDN fciOffset = 34 fciLength = 1 select() | Shall throw java.lang.ArrayIndexOutOfBoundsException. | |
| 13 | Selection possibilities 1 - fid = SIMView.FID_MF fciOffset = 0 fciLength = 15 select() 2 - fid = SIMView.FID_DF_TELECOM select() 3 - fid = SIMView.FID_DF_GRAPHICS select() 4 - fid = SIMView.FID_DF_TELECOM select() 5 - fid = SIMView.FID_DF_GRAPHICS select() 6 - fid = SIMView.FID_MF select() 7 - fid = SIMView.FID_DF_GSM select() 8 - fid = SIMView.FID_DF_TELECOM select() 9 - fid = SIMView.FID_DF_TELECOM select() - | 1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - No exception shall be thrown. 4 - No exception shall be thrown. 5 - No exception shall be thrown. 6 - No exception shall be thrown. 7 - No exception shall be thrown. 8 - No exception shall be thrown. 9 - No exception shall be thrown. | |
| 14 | EF not selected after MF/DF selection 1 - fid = SIMView.FID_MF select() fid = SIMView.FID_EF_ICCID select() 2 - fid = SIMView.FID_MF select() readBinary() | 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code NO_EF_SELECTED. | |
| 15 | No selection of non-reachable file 1 - fid = SIMView.FID_MF select() 2 - fid = SIMView.FID_EF_ACM select() | 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code FILE_NOT_FOUND. | |
| 16 | No record is selected after selecting linear fixed EF 1 - fid = SIMView.FID_MF select() 2 - fid = FID_DF_SIMTEST select() 3 - fid = FID_EF_LARU select() 4 - recNumber = 0 mode = REC_ACC_MODE_ABSOLUTE_CURRENT readRecord() | 1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - No exception shall be thrown. 4 - Shall throw sim.access.SIMViewException with reason code RECORD_NUMBER_NOT_AVAILABLE. | |

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 17 | <p>Record pointer in selected cyclic EF</p> <pre> 1 - fid = SIMView.FID_MF select() 2 - fid = FID_DF_SIMTEST select() 3 - fid = FID_EF_CARU select() 4 - byte[] data1 = { 1,2,3 } mode = REC_ACC_MODE_PREVIOUS updateRecord(data1) 5 - fid = FID_EF_CARU select() readRecord(data2) compare data1 to data2 </pre> | <p>1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - No exception shall be thrown. 4 - No exception shall be thrown. 5 - The contents of data1 and data2 shall be identical.</p> | |

6.1.1.2.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| N1 | 1-7 |
| N2 | 3, 5 |
| N3 | 1, 2, 4, 6, 7 |
| N4 | 14 |
| N5 | 16 |
| N6 | 17 |
| N8 | 1, 3 |
| N9 | 1-7, 13 |
| P1 | 8 |
| P2 | 9 |
| P3 | 10 |
| P4 | 11, 12 |
| C1 | 15 |
| C2, C3 | Not Tested |

6.1.1.3 Method select (short fid)

Test Area Reference: API_1_SVW_SLCTS

6.1.1.3.1 Conformance Requirements

The method with the following header shall be compliant to its definition in the API.

```

public void select(short fid)
    throws SIMViewException
    
```

Normal execution

- CRRN1: If the desired file is selected, no exception is thrown.
- CRRN2: After selecting a DF/MF no EF is selected.
- CRRN3: After selecting a linear fixed EF no record is selected.
- CRRN4: After selecting a cyclic EF the first record which is the last updated record is selected.
- CRRN5: The current files (file context) of any other applets shall not be changed [03.19 - §5.2]. This will be tested during the testing of the framework.
- CRRN6: The file with a File-ID that matches fid shall be found according to the following selection rules:
 - 1) An immediate child EF or DF of the current MF/DF can be selected,
 - 2) A sibling DF of the current DF can be selected,
 - 3) The current MF/DF it self can be selected,
 - 4) The parent MF/DF of the current DF can be selected,

5) The MF can always be selected.

Parameter errors

No requirements.

Context errors

CRRC1: If the file with a File-ID which matches fid could not be found according to the selection rules listed in CCRN6, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.FILE_NOT_FOUND.

CRRC2: If the method call causes a memory problem (e.g. memory access error), an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.MEMORY_PROBLEM.

CRRC3: If the method call causes an error to occur that is not expected and thus not handled, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INTERNAL_ERROR.

6.1.1.3.2 Test Suite Files

Additional requirements for the GSM personalisation: None

| | |
|-----------------|------------------------|
| Test Script: | API_1_SVW_SLCTS_1.scr |
| Test Applet: | API_1_SVW_SLCTS_1.java |
| Load Script: | API_1_SVW_SLCTS_1.ldr |
| Cleanup Script: | API_1_SVW_SLCTS_1.clr |
| Parameter File: | API_1_SVW_SLCTS_1.par |

6.1.1.3.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|------------------|
| 0 | SIM Initialisation | Responses ignored. | |
| 1 | Select EF_{ICCID} in MF (Transparent EF) fid = SIMView.FID_EF_ICCID select() | No exception shall be thrown. | |
| 2 | EF not selected after MF/DF selection 1 - fid = SIMView.FID_MF select() fid = SIMView.FID_EF_ICCID select() 2 - fid = SIMView.FID_MF select() readBinary() | 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code NO_EF_SELECTED. | |
| 3 | No record is selected after selecting linear fixed EF 1 - fid = SIMView.FID_MF select() 2 - fid = FID_DF_SIMTEST select() 3 - fid =FID_EF_LARU select() 4 - recNumber = 0 mode = REC_ACC_MODE_ABSOLUTE_CURRENT readRecord() | 1 – No exception shall be thrown. 2 – No exception shall be thrown. 3 – No exception shall be thrown. 4 – Shall throw sim.access.SIMViewException with reason code RECORD_NUMBER_NOT_AVAILABLE. | |
| 4 | Record pointer in selected cyclic EF 1 - fid = SIMView.FID_MF select() 2 - fid =FID_DF_SIMTEST select() 3 - fid = FID_EF_CARU select() 4 - byte[] data1 = { 1,2,3 } updateRecord(data1) 5 - fid = FID_EF_CARU select() readRecord(data2) compare data1 to data2 | 1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - No exception shall be thrown. 4 - No exception shall be thrown. 5 - The contents of data1 and data2 shall be identical. | |
| 5 | Selection possibilities 1 - fid = SIMView.FID_MF select() 2 - fid = SIMView.FID_DF_TELECOM select() 3 - fid = SIMView.FID_DF_GRAPHICS select() 4 - fid = SIMView.FID_DF_TELECOM select() 5 - fid = SIMView.FID_DF_GRAPHICS select() 6 - fid = SIMView.FID_MF select() 7 - fid = SIMView.FID_DF_GSM select() 8 - fid = SIMView.FID_DF_TELECOM select() 9 - fid = SIMView.FID_DF_TELECOM select() | 1 – No exception shall be thrown. 2 – No exception shall be thrown. 3 – No exception shall be thrown. 4 – No exception shall be thrown. 5 – No exception shall be thrown. 6 – No exception shall be thrown. 7 – No exception shall be thrown. 8 – No exception shall be thrown. 9 – No exception shall be thrown. | |
| 6 | No selection of unreachable file 1 - fid = SIMView.FID_MF select() 2 - fid = SIMView.FID_EF_ACM select() | 1 – No exception shall be thrown. 2 – Shall throw sim.access.SIMViewException with reason code FILE_NOT_FOUND. | |

6.1.1.3.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| N1 | 1 |
| N2 | 2 |
| N3 | 3 |
| N4 | 4 |
| N6 | 5 |
| C1 | 6 |
| C2, C3 | Not Tested |

6.1.1.4 Method status

Test Area Reference: API_1_SVW_STAT_BSS

6.1.1.4.1 Conformance Requirements

The method with the following header shall be compliant to its definition in the API.

```
public short status(byte[] fci,
                   short fciOffset,
                   short fciLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           SIMViewException
```

Normal execution

CRRN1: The FCI (File Control Information) of the current DF (or MF) is returned in the same format as for a SELECT command in case of selecting an MF/DF (described in GSM 03.19 [7], §9.2.1).

CRRN2: If the length fciLength is greater than or equal to the length of the FCI structure, the whole FCI structure is copied into the array fci and the length of the FCI which has been written to the array fci is returned.

CRRN3: If the length fciLength is less than the length of the FCI structure, the first part of the FCI structure is copied into the array fci and the length of the FCI which has been written to the array fci is returned.

Parameter errors

CRRP1: If the array fci is null, an instance of NullPointerException shall be thrown.

CRRP2: If fciOffset is less than 0, an instance of ArrayIndexOutOfBoundsException shall be thrown.

CRRP3: If fciLength is less than 0, an instance of ArrayIndexOutOfBoundsException shall be thrown.

CRRP4: If fciOffset plus fciLength is greater than the length of the array fci.length, or fciOffset equals fci.length, an instance of ArrayIndexOutOfBoundsException shall be thrown.

Context errors

CRRC1: If the method call causes a memory problem (e.g. memory access error), an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.MEMORY_PROBLEM.

CRRC2: If the method call causes an error to occur that is not expected and thus not handled, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INTERNAL_ERROR.

6.1.1.4.2 Test Suite Files

Additional requirements for the GSM personalisation:

| | |
|-----------------|---------------------------|
| Test Script: | API_1_SVW_STAT_BSS_1.scr |
| Test Applet: | API_1_SVW_STAT_BSS_1.java |
| Load Script: | API_1_SVW_STAT_BSS_1.ldr |
| Cleanup Script: | API_1_SVW_STAT_BSS_1.clr |
| Parameter File: | API_1_SVW_STAT_BSS_1.par |

6.1.1.4.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 0 | SIM Initialisation | Responses ignored. | |
| 1 | Status of MF <pre>byte[] fci = new byte[34] fciOffset = 0 fciLength = 7 status()</pre> | No exception shall be thrown. Shall return 7. fci shall contain the entire FCI structure. <i><Description of fci:</i> XX XX XX XX 3F 00 01 > | |
| 2 | Status after select EF_{ICCID} in MF <pre>1 - fid = SIMView.FID_DF_GSM fciOffset = 0 fciLength = 34 len = select() 2 - byte[] fci2 = new byte[34] len2 = status() 3 - Compare len and len2 4 - Compare the len bytes of fci and fci2</pre> | 1 - No exception shall be thrown. Shall return a value between 22 and 34. 2 - No exception shall be thrown. Shall return 22 or more. 3 - len and len2 shall be identical 4 - fci and fci2 shall be identical | |
| 3 | Status of DF_{Telecom} <pre>1 - fid = SIMView.FID_DF_TELECOM select() 2 - fciOffset = 0 fciLength = 100 status()</pre> | 1 - No exception shall be thrown. Shall return a value between 22 and 34. 2 - No exception shall be thrown. Shall return a value between 22 and 34. fci shall contain the entire FCI structure (check that returned value is equal to 13 plus the "length of following data" - fci[12]). FID of the returned fci (fci[4:5]) is FID_DF_TELECOM. | |
| 4 | Status DF_{TELECOM} <pre>fciOffset = 0 fciLength = 7 status()</pre> | No exception shall be thrown. Shall return 7. fci shall contain the first 7 bytes of the FCI structure starting at index 0. FID of the returned fci (fci[4:5]) is FID_DF_TELECOM. | |
| 5 | fci is null <pre>byte[] nullBuffer = null fciOffset = 0 fciLength = 34 status()</pre> | Shall throw java.lang.NullPointerException. | |
| 6 | fciOffset < 0 <pre>fciOffset = -1 fciLength = 34 status()</pre> | Shall throw java.lang.ArrayIndexOutOfBoundsException. | |
| 7 | fciLength < 0 <pre>fciOffset = 0 fciLength = -1 status()</pre> | Shall throw java.lang.ArrayIndexOutOfBoundsException. | |
| 8 | fciOffset + fciLength > fci.length <pre>fciOffset = 20 fciLength = 15 status()</pre> | Shall throw java.lang.ArrayIndexOutOfBoundsException. | |
| 9 | fciOffset >= fci.length <pre>fciOffset = 34 fciLength = 1 status()</pre> | Shall throw java.lang.ArrayIndexOutOfBoundsException. | |

6.1.1.4.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| N1 | 1-4 |
| N2 | 2, 3 |
| N3 | 1, 4 |
| P1 | 5 |
| P2 | 6 |
| P3 | 7 |
| P4 | 8, 9 |
| C1, C2 | Not Tested |

6.1.1.5 Method readBinary

Test Area Reference: API_1_SVW_REDBS_BSS

6.1.1.5.1 Conformance Requirements

The method with the following header shall be compliant to its definition in the API.

```
public short readBinary(short fileOffset,
    byte[] resp,
    short respOffset,
    short respLength)
    throws java.lang.NullPointerException,
    java.lang.ArrayIndexOutOfBoundsException,
    SIMViewException
```

Normal execution

CRRN1: If data can be accessed at the specified offset, the value respOffset plus respLength are returned and the data bytes of the currently selected transparent file are returned in resp.

Parameter errors

CRRP1: If fileOffset is less than 0, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.OUT_OF_FILE_BOUNDARIES.

CRRP2: If fileOffset plus respLength exceeds the length of the file, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.OUT_OF_FILE_BOUNDARIES.

CRRP3: If the array resp is null, an instance of NullPointerException shall be thrown.

CRRP4: If respOffset is less than 0, an instance of ArrayIndexOutOfBoundsException shall be thrown.

CRRP5: If respLength is less than 0, an instance of ArrayIndexOutOfBoundsException shall be thrown.

CRRP6: If respOffset plus respLength is greater than the length of the array resp.length, an instance of ArrayIndexOutOfBoundsException shall be thrown.

Context errors

CRRC1: If the calling applet has currently no EF selected, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.NO_EF_SELECTED.

CRRC2: If the currently selected EF is not transparent, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.FILE_INCONSISTENT.

CRRC3: If the calling applet does not fulfil the access condition, READ, to perform this function, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.AC_NOT_FULFILLED.

CRRC4: If the currently selected EF is invalidated and the file status of the EF does not allow for the reading of an invalidated file, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INVALIDATION_STATUS_CONTRADICTION.

CRRC5: If the method call causes a memory problem (e.g. memory access error), an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.MEMORY_PROBLEM.

CRRC6: If the method call causes an error to occur that is not expected and thus not handled, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INTERNAL_ERROR.

6.1.1.5.2 Test Suite Files

Additional requirements for the GSM personalisation: none.

Test Script: API_1_SVW_REDBS_BSS_1.scr
 Test Applet: API_1_SVW_REDBS_BSS_1.java
 Load Script: API_1_SVW_REDBS_BSS_1.ldr
 Cleanup Script: API_1_SVW_REDBS_BSS_1.clr
 Parameter File: API_1_SVW_REDBS_BSS_1.par

6.1.1.5.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|------------------|
| 0 | SIM Initialisation | Responses ignored | |
| 1 | Read from EFICCID in MF (Transparent EF) <pre>1 - fid = SIMView.FID_EF_ICCID select() 2 - fileOffset = 0 byte[] resp = new byte[20] resp[0:19] = '55' respOffset = 10 respLength = 10 readBinary()</pre> | 1 - No exception shall be thrown. 2 - No exception shall be thrown. Shall return 20. resp shall contain the entire contents of EFICCID starting at index 10. <Description of resp: 55 55 55 55 55 55 55 55 55 55 0F FF FF FF FF FF FF FF FF FF > | |
| 2 | Read from EFICCID in MF <pre>resp[0:19] = '55' fileOffset = 5 respOffset = 10 respLength = 5 readBinary()</pre> | No exception shall be thrown. Shall return 15. resp shall contain the last 5 bytes of EFICCID starting at index 10. <Description of resp: 55 55 55 55 55 55 55 55 55 55 FF FF FF FF FF 55 55 55 55 55 > | |
| 3 | Offset into File out of bounds <pre>fileOffset = -1 respOffset = 0 respLength = 10 readBinary()</pre> | Shall throw sim.access.SIMViewException with reason code OUT_OF_FILE_BOUNDARIES. | |
| 4 | fileOffset + respLength > EF length <pre>fileOffset = 9 respOffset = 0 respLength = 2 readBinary()</pre> | Shall throw sim.access.SIMViewException with reason code OUT_OF_FILE_BOUNDARIES. | |
| 5 | resp is null <pre>byte[] nullBuffer = null fileOffset = 0 respOffset = 0 respLength = 10 readBinary()</pre> | Shall throw java.lang.NullPointerException. | |
| 6 | respOffset < 0 <pre>fileOffset = 0 respOffset = -1 respLength = 10 readBinary()</pre> | Shall throw java.lang. ArrayIndexOutOfBoundsException. | |
| 7 | respLength < 0 <pre>fileOffset = 0 respOffset = 0 respLength = -1 readBinary()</pre> | Shall throw java.lang. ArrayIndexOutOfBoundsException. | |

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|------------------|
| 8 | respOffset + respLength > resp.length fileOffset = 0 respOffset = 10 respLength = 11 readBinary() | Shall throw java.lang. ArrayIndexOutOfBoundsException. | |
| 9 | EF is not Transparent 1 - fid = FID_DF_SIMTEST select() 2 - fid = FID_EF_LARU select() 3 - fileOffset = 0 respOffset = 0 respLength = 1 readBinary() | 1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - Shall throw sim.access.SIMViewException with reason code FILE_INCONSISTENT. | |
| 10 | Access condition not fulfilled 1 - fid = DFSIMTEST select() 2 - fid = EFTNR select() 3 - fileOffset = 0 respOffset = 0 respLength = 1 readBinary() | Shall throw sim.access.SIMViewException with reason code AC_NOT_FULFILLED. | |
| 11 | EF is invalidated 1 - fid = EFTNU invalidate() 2 - readBinary() 3 - rehabilitate() | 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code INVALIDATION_STATUS_CONTR ADITION. 3 - No exception shall be thrown. | |
| 12 | No EF selected 1- fid = SIMView.FID_MF select() 2 readBinary() | 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code NO_EF_SELECTED. | |

6.1.1.5.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| N1 | 1-2 |
| P1 | 3 |
| P2 | 4 |
| P3 | 5 |
| P4 | 6 |
| P5 | 7 |
| P6 | 8, |
| C1 | 12 |
| C2 | 9 |
| C3 | 10 |
| C4 | 11 |
| C5, C6 | Not Tested |

6.1.1.6 Method updateBinary

Test Area Reference: API_1_SVW_UPDBS_BSS

6.1.1.6.1 Conformance Requirements

The method with the following header shall be compliant to its definition in the API.

```
public void updateBinary(short fileOffset,
                        byte[] data,
                        short dataOffset,
                        short dataLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           SIMViewException
```

Normal execution

CRRN1: The currently selected transparent file is updated starting at fileOffset, with the string of dataLength bytes in the array data starting at dataOffset.

Parameter errors

CRRP1: If fileOffset is less than 0, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.OUT_OF_FILE_BOUNDARIES.

CRRP2: If fileOffset plus dataLength exceeds the length of the file, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.OUT_OF_FILE_BOUNDARIES.

CRRP3: If the array data is null, an instance of NullPointerException shall be thrown.

CRRP4: If dataOffset is less than 0, an instance of ArrayIndexOutOfBoundsException shall be thrown.

CRRP5: If dataLength is less than 0, an instance of ArrayIndexOutOfBoundsException shall be thrown.

CRRP6: If dataOffset plus dataLength greater than the length of the array data.length an instance of ArrayIndexOutOfBoundsException shall be thrown.

Context errors

CRRC1: If the calling applet has currently no EF selected, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.NO_EF_SELECTED.

CRRC2: If the currently selected EF is not transparent, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.FILE_INCONSISTENT.

CRRC3: If the calling applet does not fulfil the access condition, UPDATE, to perform this function, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.AC_NOT_FULFILLED.

CRRC4: If the currently selected EF is invalidated and the file status of the EF does not allow for updating of an invalidated file, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INVALIDATION_STATUS_CONTRADICTION.

CRRC5: If the method call causes a memory problem (e.g. memory access error), an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.MEMORY_PROBLEM.

CRRC6: If the method call causes an error to occur that is not expected and thus not handled, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INTERNAL_ERROR.

6.1.1.6.2 Test Suite Files

Additional requirements for the GSM personalisation: None

Test Script: API_1_SVW_UPDBS_BSS_1.scr

Test Applet: API_1_SVW_UPDBS_BSS_1.java

Load Script: API_1_SVW_UPDBS_BSS_1.ldr

Cleanup Script: API_1_SVW_UPDBS_BSS_1.clr

Parameter File: API_1_SVW_UPDBS_BSS_1.par

6.1.1.6.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 0 | SIM Initialisation | Responses ignored. | |
| 1 | No EF selected fileOffset = 0 byte[] data = new byte[20] data[0] = '55' dataOffset = 0 dataLength = 10 updateBinary() | Shall throw sim.access.SIMViewException with reason code NO_EF_SELECTED. | |
| 2 | Update Transparent EF 1 - fid = DFSIMTEST select() 2 - fid = EFTARU select() 3 - fileOffset = 3 data[0] = '55' dataOffset = 0 dataLength = 1 updateBinary() 4 - fileOffset = 3 respOffset = 0 respLength = 1 readBinary() | 1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - No exception shall be thrown. 4 - No exception shall be thrown. Data in resp[0] shall be '55'. | |
| 3 | 1 - fileOffset = 254 data[0] = '55' data[1] = 'AA' data[2] = '66' dataOffset = 0 dataLength = 3 updateBinary() 2 - fileOffset = 254 respOffset = 0 respLength = 3 readBinary() | 1 - No exception shall be thrown. 2 - No exception shall be thrown. Data in resp shall be resp[0] = '55' resp[1] = 'AA' resp[2] = '66' | |
| 4 | Offset into File out of bounds fileOffset = -1 dataOffset = 0 dataLength = 10 updateBinary() | Shall throw sim.access.SIMViewException with reason code OUT_OF_FILE_BOUNDARIES. | |
| 5 | fileOffset + dataLength > EF length fileOffset = 259 dataOffset = 0 dataLength = 2 updateBinary() | Shall throw sim.access.SIMViewException with reason code OUT_OF_FILE_BOUNDARIES. | |
| 6 | data is null byte[] nullBuffer = null fileOffset = 0 dataOffset = 0 dataLength = 10 updateBinary() | Shall throw java.lang.NullPointerException. | |
| 7 | dataOffset < 0 fileOffset = 0 dataOffset = -1 dataLength = 10 updateBinary() | Shall throw java.lang. ArrayIndexOutOfBoundsException. | |
| 8 | dataLength < 0 fileOffset = 0 dataOffset = 0 dataLength = -1 updateBinary() | Shall throw java.lang. ArrayIndexOutOfBoundsException. | |
| 9 | dataOffset + dataLength > data.length fileOffset = 0 dataOffset = 10 dataLength = 11 updateBinary() | Shall throw java.lang. ArrayIndexOutOfBoundsException. | |

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 10 | EF is not Transparent 1 - fid = FID_DF_SIMTEST select() 2 - fid = FID_EF_LARU select() 3 - fileOffset = 0 data[0] = '55' dataOffset = 0 dataLength = 1 updateBinary() | 1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - Shall throw sim.access.SIMViewException with reason code FILE_INCONSISTENT. | |
| 11 | Access condition not fulfilled 1 - fid = DFSIMTEST select() fid = EFTNU select() 2 - fileOffset = 0 data[0] = '55' dataOffset = 0 dataLength = 1 updateBinary() | 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code AC_NOT_FULFILLED. | |
| 12 | EF is invalidated 1 - fid = EFTNR invalidate() 2 - fileOffset = 0 data[0] = '55' dataOffset = 0 dataLength = 1 updateBinary() 3 - rehabilitate() | 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code INVALIDATION_STATUS_CONTR ADICTION. 3 - No exception shall be thrown. | |

6.1.1.6.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| N1 | 2, 3 |
| P1 | 4 |
| P2 | 5 |
| P3 | 6 |
| P4 | 7 |
| P5 | 8 |
| P6 | 9 |
| C1 | 1 |
| C2 | 10 |
| C3 | 11 |
| C4 | 12 |
| C5, C6 | Not Tested |

6.1.1.7 Method readRecord

Test Area Reference: API_1_SVW_REDRSBS_BSS

6.1.1.7.1 Conformance Requirements

The method with the following header shall be compliant to its definition in the API.

```
public short readRecord(short recNumber,
    byte mode,
    short recOffset,
    byte[] resp,
    short respOffset,
    short respLength)
    throws java.lang.NullPointerException,
    java.lang.ArrayIndexOutOfBoundsException,
    SIMViewException
```

Normal execution

CRRN1: The data bytes from the record, specified by mode and recNumber of the currently selected linear fixed or cyclic EF, is read at recOffset. A total of respLength bytes of this data is copied to the array resp at respOffset.

CRRN2: If the access mode is REC_ACC_MODE_ABSOLUTE_CURRENT:

- if recNumber is not 0, the record addressed by recNumber will be read;
- if recNumber is 0 the current selected record will be read; and
- the current record pointer shall not change.

CRRN3: If the access mode is REC_ACC_MODE_NEXT:

- the next record relative to the current selected record will be selected and read;
- if no current record is selected, the first record will be selected and read;
- if the current record pointer is set to the last record for a cyclic EF the record pointer is set to the first record and the record is read;
- the current record pointer of any other applet shall not be changed.

CRRN4: If the access mode is REC_ACC_MODE_PREVIOUS:

- the previous record relative to the current selected record will be selected and read;
- if no current record is selected, the last record will be selected and read;
- if the current record pointer is set to the first record, for a linear fixed EF the method responses with an error exception and for a cyclic EF the record pointer is set to the last record and the record is read;
- the current record pointer of any other applet shall not be changed.

Parameter errors

CRRP1: If the currently selected EF is linear fixed and the access mode is REC_ACC_MODE_ABSOLUTE_CURRENT and recNumber is less than 0 or greater than records available, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.RECORD_NUMBER_NOT_AVAILABLE.

CRRP2: If the currently selected EF is linear fixed and the access mode is REC_ACC_MODE_ABSOLUTE_CURRENT, recNumber is 0 and there is no current record selected, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.RECORD_NUMBER_NOT_AVAILABLE.

CRRP3: If the currently selected EF is linear fixed and the access mode is REC_ACC_MODE_NEXT and the current record pointer is set to the last record, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.RECORD_NUMBER_NOT_AVAILABLE.

CRRP4: If the currently selected EF is linear fixed and the access mode is REC_ACC_MODE_PREVIOUS and the current record pointer is set to the first record, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.RECORD_NUMBER_NOT_AVAILABLE.

CRRP5: If the specified offset into the selected record recOffset is less than 0, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.OUT_OF_RECORD_BOUNDARIES.

CRRP6: If recOffset plus respLength is greater than the record length, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.OUT_OF_RECORD_BOUNDARIES.

CRRP7: If the access mode is not between 2 and 4 inclusive (2 = REC_ACC_MODE_NEXT, etc.), an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INVALID_MODE.

CRRP8: If the array resp is null, an instance of NullPointerException shall be thrown.

CRRP9: If respOffset is less than 0, an instance of ArrayIndexOutOfBoundsException shall be thrown.

CRRP10: If respLength is less than 0, an instance of ArrayIndexOutOfBoundsException shall be thrown.

CRRP11: If respOffset plus respLength is greater than the length of the array resp.length, or respOffset equals resp.length, an instance of ArrayIndexOutOfBoundsException shall be thrown.

Context errors

CRRC1: If the calling applet has currently no EF selected, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.NO_EF_SELECTED.

CRRC2: If the currently selected EF is neither linear fixed nor cyclic, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.FILE_INCONSISTENT.

CRRC3: If the calling applet does not fulfil the access condition, READ, to perform this function, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.AC_NOT_FULFILLED.

CRRC4: If the currently selected EF is invalidated and the file status of the EF does not allow for reading an invalidated file, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INVALIDATION_STATUS_CONTRADICTION.

CRRC5: If the method call causes a memory problem (e.g. memory access error), an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.MEMORY_PROBLEM.

CRRC6: If the method call causes an error to occur that is not expected and thus not handled, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INTERNAL_ERROR.

6.1.1.7.2 Test Suite Files

Additional requirements for the GSM personalisation: None

Test Script: API_1_SVW_REDRSBS_BSS_1.scr
 Test Applet: API_1_SVW_REDRSBS_BSS_1.java
 Load Script: API_1_SVW_REDRSBS_BSS_1.ldr
 Cleanup Script: API_1_SVW_REDRSBS_BSS_1.clr
 Parameter File: API_1_SVW_REDRSBS_BSS_1.par

6.1.1.7.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 0 | SIM Initialisation | Responses ignored. | |
| 1 | No EF selected <pre> recNumber = 1 mode = REC_ACC_MODE_ABSOLUTE_CURRENT recOffset = 0 byte[] resp = new byte[20] respOffset = 0 respLength = 10 readRecord() </pre> | Shall throw sim.access.SIMViewException with reason code NO_EF_SELECTED. | |

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|------------------|
| 2 | <p>Read Absolute and Current from Linear Fixed EF</p> <pre> 1 - fid = DFSIMTEST select() 2 - fid = EFLARU select() // Record pointer not set. 3 - recNumber = 0 mode = REC_ACC_MODE_NEXT recOffset = 0 respOffset = 0 respLength = 4 readRecord() 4 - recNumber = 2 mode = REC_ACC_MODE_ABSOLUTE_CURRENT readRecord() 5 - recNumber = 1 readRecord() 6 - recNumber = 0 resp[0] = resp[1] = resp[2] = resp[3] = '00' readRecord() </pre> | <p>1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - No exception shall be thrown. resp shall be: resp[0] = '55' resp[1] = '55' resp[2] = '55' resp[3] = '55' 4 - No exception shall be thrown. resp shall be: resp[0] = 'AA' resp[1] = 'AA' resp[2] = 'AA' resp[3] = 'AA' 5 - No exception shall be thrown. resp shall be: resp[0] = '55' resp[1] = '55' resp[2] = '55' resp[3] = '55' 6 - No exception shall be thrown. resp shall be: resp[0] = '55' resp[1] = '55' resp[2] = '55' resp[3] = '55'</p> | |
| 3 | <p>Read Next from Linear Fixed EF</p> <pre> recNumber = 0 mode = REC_ACC_MODE_NEXT recOffset = 0 respOffset = 0 respLength = 4 readRecord() </pre> | <p>No exception shall be thrown. resp shall be: resp[0] = 'AA' resp[1] = 'AA' resp[2] = 'AA' resp[3] = 'AA'</p> | |
| 4 | <p>Read Next from Linear Fixed EF</p> <pre> recNumber = 0 mode = REC_ACC_MODE_NEXT recOffset = 0 respOffset = 0 respLength = 4 readRecord() </pre> | <p>Shall throw sim.access.SIMViewException with reason code RECORD_NUMBER_NOT_AVAILABLE.</p> | |
| 5 | <p>Read Previous from Linear Fixed EF</p> <pre> recNumber = 0 mode = REC_ACC_MODE_PREVIOUS recOffset = 0 respOffset = 0 respLength = 4 readRecord() </pre> | <p>No exception shall be thrown. resp shall be: resp[0] = '55' resp[1] = '55' resp[2] = '55' resp[3] = '55'</p> | |
| 6 | <p>Read Previous from Linear Fixed EF</p> <pre> recNumber = 0 mode = REC_ACC_MODE_PREVIOUS recOffset = 0 respOffset = 0 respLength = 4 readRecord() </pre> | <p>Shall throw sim.access.SIMViewException with reason code RECORD_NUMBER_NOT_AVAILABLE.</p> | |

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 7 | Read Absolute and Current from Cyclic EF 1 - fid = EFCARU select() 2 - recNumber = 2 mode = REC_ACC_MODE_ABSOLUTE_CURRENT recOffset = 0 respOffset = 0 respLength = 3 readRecord() 3 - recNumber = 1 readRecord() 4 - recNumber = 0 resp[0] = resp[1] = resp[2] = '00' readRecord() | 1 - No exception shall be thrown. 2 - No exception shall be thrown. resp shall be: resp[0] = 'AA' resp[1] = 'AA' resp[2] = 'AA' 3 - No exception shall be thrown. resp shall be: resp[0] = '55' resp[1] = '55' resp[2] = '55' 4 - No exception shall be thrown. resp shall be: resp[0] = '55' resp[1] = '55' resp[2] = '55' | |
| 8 | Read Next from Cyclic EF recNumber = 0 mode = REC_ACC_MODE_NEXT recOffset = 0 respOffset = 0 respLength = 3 readRecord() | No exception shall be thrown. resp shall be: resp[0] = 'AA' resp[1] = 'AA' resp[2] = 'AA' | |
| 9 | Read Next from Cyclic EF recNumber = 0 mode = REC_ACC_MODE_NEXT recOffset = 0 respOffset = 0 respLength = 3 readRecord() | No exception shall be thrown. resp shall be: resp[0] = '55' resp[1] = '55' resp[2] = '55' | |
| 10 | Read Previous from Cyclic EF recNumber = 0 mode = REC_ACC_MODE_PREVIOUS recOffset = 0 respOffset = 0 respLength = 3 readRecord() | No exception shall be thrown. resp shall be: resp[0] = 'AA' resp[1] = 'AA' resp[2] = 'AA' | |
| 11 | Read Previous from Cyclic EF recNumber = 0 mode = REC_ACC_MODE_PREVIOUS recOffset = 0 respOffset = 0 respLength = 3 readRecord() | No exception shall be thrown. resp shall be: resp[0] = '55' resp[1] = '55' resp[2] = '55' | |
| 12 | Read Absolute from Linear Fixed EF beyond Records 1 - fid = EFLARU select() 2 - recNumber = -1 mode = REC_ACC_MODE_ABSOLUTE_CURRENT recOffset = 0 respOffset = 0 respLength = 4 readRecord() 3 - recNumber = 3 readRecord() | 1 - No exceptions shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code RECORD_NUMBER_NOT_AVAILABLE. 3 - Shall throw sim.access.SIMViewException with reason code RECORD_NUMBER_NOT_AVAILABLE. | |
| 13 | No current record in linear fixed EF, read current 1 - fid = EFLARU select() // No curr rec 2 - recNumber = 0 // curr rec mode = REC_ACC_MODE_ABSOLUTE_CURRENT recOffset = 0 respOffset = 0 respLength = 4 readRecord() | 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code RECORD_NUMBER_NOT_AVAILABLE. | |

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|------------------|
| 14 | <p style="text-align: center;">recOffset < 0</p> <pre> 1 - fid = EFLARU select() 2 - recNumber = 1 // rec 1 mode = REC_ACC_MODE_ABSOLUTE_CURRENT recOffset = -1 respOffset = 0 respLength = 4 readRecord()</pre> | <pre> 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code OUT_OF_RECORD_BOUNDARIE S.</pre> | |
| 15 | <p style="text-align: center;">recOffset + respLength > Record Length</p> <pre> 1 - fid = EFLARU select() 2 - recNumber = 1 mode = REC_ACC_MODE_ABSOLUTE_CURRENT recOffset = 2 respOffset = 0 respLength = 4 readRecord()</pre> | <pre> 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code OUT_OF_RECORD_BOUNDARIE S.</pre> | |
| 16 | <p style="text-align: center;">Reading with invalid mode</p> <pre> 1 - fid = EFLARU select() 2 - recNumber = 0 mode = 1 recOffset = 0 respOffset = 0 respLength = 4 readRecord() 3 - mode = 5 readRecord()</pre> | <pre> 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code INVALID_MODE. 3 - Shall throw sim.access.SIMViewException with reason code INVALID_MODE.</pre> | |
| 17 | <p style="text-align: center;">resp is null</p> <pre> byte[] nullBuffer = null mode = REC_ACC_MODE_ABSOLUTE_CURRENT respOffset = 0 respLength = 10 readRecord()</pre> | <pre> Shall throw java.lang.NullPointerException.</pre> | |
| 18 | <p style="text-align: center;">respOffset < 0</p> <pre> respOffset = -1 respLength = 10 readRecord ()</pre> | <pre> Shall throw java.lang. ArrayIndexOutOfBoundsException.</pre> | |
| 19 | <p style="text-align: center;">respLength < 0</p> <pre> respOffset = 0 respLength = -1 readRecord ()</pre> | <pre> Shall throw java.lang. ArrayIndexOutOfBoundsException.</pre> | |
| 20 | <p style="text-align: center;">respOffset + respLength > resp.length</p> <pre> respOffset = 10 respLength = 11 readRecord ()</pre> | <pre> Shall throw java.lang. ArrayIndexOutOfBoundsException.</pre> | |
| 21 | <p style="text-align: center;">EF is neither Cyclic nor Linear Fixed</p> <pre> 1 - fid = DFSIMTEST select() 2 - fid = EFTNU select() 3 - respOffset = 0 respLength = 4 readRecord()</pre> | <pre> 1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - Shall throw sim.access.SIMViewException with reason code FILE_INCONSISTENT.</pre> | |
| 22 | <p style="text-align: center;">Access condition not fulfilled</p> <pre> 1 - fid = EFCNR select() 2 - respLength = 3 readRecord()</pre> | <pre> 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code AC_NOT_FULFILLED.</pre> | |
| 23 | <p style="text-align: center;">EF is invalidated</p> <pre> 1 - fid = EFCNU invalidate() 2 - readRecord() 3 - rehabilitate()</pre> | <pre> 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code INVALIDATION_STATUS_CONTR ADICTION. 3 - No exception shall be thrown.</pre> | |

6.1.1.7.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| N1 | 2-5, 7-11 |
| N2 | 2, 7 |
| N3 | 3, 8, 9 |
| N4 | 5, 10, 11 |
| P1 | 12 |
| P2 | 13 |
| P3 | 4 |
| P4 | 6 |
| P5 | 14 |
| P6 | 15 |
| P7 | 16 |
| P8 | 17 |
| P9 | 18 |
| P10 | 19 |
| P11 | 20 |
| C1 | 1 |
| C2 | 21 |
| C3 | 22 |
| C4 | 23 |
| C5, C6 | Not Tested |

6.1.1.8 Method updateRecord

Test Area Reference: API_1_SVW_UPDRSBS_BSS

6.1.1.8.1 Conformance Requirements

The method with the following header shall be compliant to its definition in the API.

```
public void updateRecord(short recNumber,
                        byte mode,
                        short recOffset,
                        byte[] data,
                        short dataOffset,
                        short dataLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           SIMViewException
```

Normal execution

CRRN1: dataLength bytes of the record specified by mode and recNumber of the current selected linear fixed or cyclic EF are updated at recOffset, by using the string of bytes in the array data starting at dataOffset.

CRRN2: If the access mode is REC_ACC_MODE_ABSOLUTE_CURRENT and the file is a linear fixed EF:

- the record addressed by recNumber will be updated;
- if recNumber is 0 the current selected record will be updated; and
- the current record pointer shall not change.

CRRN3: If the access mode is REC_ACC_MODE_NEXT and the file is a linear fixed EF:

- the next record relative to the current selected record will be selected and updated;
- if no current record is selected, the first record will be selected and updated;
- the current record pointer of any other applet shall not be changed.

CRRN4: If the access mode is REC_ACC_MODE_PREVIOUS:

- the previous record relative to the current selected record will be selected and updated;

- if no current record is selected, the last record will be selected and updated;
- if a cyclic EF is updated, the oldest record will be updated independent of the current record pointer and this record becomes record number 1 and the current record;
- the current record pointer of any other applet shall not be changed in case of a linear fixed EF.

Parameter errors

CRRP1: If the currently selected EF is linear fixed and the access mode is REC_ACC_MODE_ABSOLUTE_CURRENT and recNumber is less than 0 or greater than records available, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.RECORD_NUMBER_NOT_AVAILABLE.

CRRP2: If the currently selected EF is linear fixed and the access mode is REC_ACC_MODE_ABSOLUTE_CURRENT, recNumber is 0 and there is no current record selected, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.RECORD_NUMBER_NOT_AVAILABLE.

CRRP3: If the currently selected EF is linear fixed and the access mode is REC_ACC_MODE_NEXT and the current record pointer is set to the last record, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.RECORD_NUMBER_NOT_AVAILABLE.

CRRP4: If the currently selected EF is linear fixed and the access mode is REC_ACC_MODE_PREVIOUS and the current record pointer is set to the first record; an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.RECORD_NUMBER_NOT_AVAILABLE.

CRRP5: If the specified offset into the selected record recOffset is less than 0, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.OUT_OF_RECORD_BOUNDARIES.

CRRP6: If recOffset plus dataLength is greater than the record length, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.OUT_OF_RECORD_BOUNDARIES.

CRRP7: If the access mode is not between 2 and 4 inclusive (2 = REC_ACC_MODE_NEXT, etc.), an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INVALID_MODE.

CRRP8: If the currently selected EF is cyclic and the mode of record access mode is not REC_ACC_MODE_PREVIOUS, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INVALID_MODE.

CRRP9: If the array data is null, an instance of NullPointerException shall be thrown.

CRRP10: If dataOffset is less than 0, an instance of ArrayIndexOutOfBoundsException shall be thrown.

CRRP11: If dataLength is less than 0, an instance of ArrayIndexOutOfBoundsException shall be thrown.

CRRP12: If dataOffset plus dataLength, is greater than the length of the array data.length, or dataOffset equals data.length, an instance of ArrayIndexOutOfBoundsException shall be thrown.

Context errors

CRRC1: If the calling applet has currently no EF selected, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.NO_EF_SELECTED.

CRRC2: If the currently selected EF is neither linear fixed nor cyclic, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.FILE_INCONSISTENT.

CRRC3: If the calling applet does not fulfil the access condition, UPDATE, to perform this function, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.AC_NOT_FULFILLED.

CRRC4: If the currently selected EF is invalidated and the file status of the EF does not allow for updating an invalidated file, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INVALIDATION_STATUS_CONTRADICTION.

CRRC5: If the method call causes a memory problem (e.g. memory access error), an instance of `SIMViewException` shall be thrown. The reason code shall be `SIMViewException.MEMORY_PROBLEM`.

CRRC6: If the method call causes an error to occur that is not expected and thus not handled, an instance of `SIMViewException` shall be thrown. The reason code shall be `SIMViewException.INTERNAL_ERROR`.

6.1.1.8.2 Test Suite Files

Additional requirements for the GSM personalisation: This test is based on the assumption that the contents of the EFs in `DFSIMTEST` are identical to those defined in the default pre-personalisation and the current record pointers have not been altered.

| | |
|-----------------|---|
| Test Script: | <code>API_1_SVW_UPDRSBS_BSS_1.scr</code> |
| Test Applet: | <code>API_1_SVW_UPDRSBS_BSS_1.java</code> |
| Load Script: | <code>API_1_SVW_UPDRSBS_BSS_1.ldr</code> |
| Cleanup Script: | <code>API_1_SVW_UPDRSBS_BSS_1.clr</code> |
| Parameter File: | <code>API_1_SVW_UPDRSBS_BSS_1.par</code> |

6.1.1.8.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 0 | SIM Initialisation | Responses ignored. | |
| 1 | No EF selected <pre> recNumber = 1 mode = REC_ACC_MODE_ABSOLUTE_CURRENT recOffset = 0 byte[] data = new byte[20] dataOffset = 0 dataLength = 10 updateRecord() </pre> | Shall throw sim.access.SIMViewException with reason code NO_EF_SELECTED. | |
| 2 | Update Absolute and Current from Linear Fixed EF <pre> 1 - fid = DFSIMTEST select() 2 - fid = EFLARU select() // Record pointer not set. 3 - recNumber = 2 mode = REC_ACC_MODE_ABSOLUTE_CURRENT data[0:3] = '11' recOffset = 0 dataOffset = 0 dataLength = 4 updateRecord() respOffset = 0 respLength = 0 readRecord() </pre> | 1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - No exception shall be thrown. Resp shall be: Resp[0] = '11' Resp[1] = '11' Resp[2] = '11' Resp[3] = '11' | = 4 |
| 3 | Update Current from Linear Fixed EF <pre> 1 - fid = DFSIMTEST select() 2 - fid = EFLARU select() // Set record pointer with mode "next". 3 - recNumber = 0 mode = REC_ACC_MODE_NEXT recOffset = 0 data[0:3] = '00' dataOffset = 0 dataLength = 4 updateRecord() // write data with mode "current" 4 - recNumber = 0 data[0:3] = '22' mode = REC_ACC_MODE_ABSOLUTE_CURRENT updateRecord() // read result with mode "absolute" respOffset = 0 respLength = 4 recNumber = 1 mode = REC_ACC_MODE_ABSOLUTE_CURRENT readRecord() </pre> | 1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - No exception shall be thrown. 4 - No exception shall be thrown. resp shall be: resp[0] = '22' resp[1] = '22' resp[2] = '22' resp[3] = '22' | |
| 4 | Update Next from Linear Fixed EF, no record pointer set <pre> 1 - fid = FID_DF_SIMTEST select() 2 - fid = FID_EF_LARU select 3 - recNumber = 0 mode = REC_ACC_MODE_NEXT recOffset = 0 data[0:3] = '33' dataOffset = respOffset = 0 dataLength = respLength = 4 updateRecord() mode = REC_ACC_MODE_ABSOLUTE_CURRENT readRecord() </pre> | 1 - No exception shall be thrown. 2- No exception shall be thrown. 3 - No exception shall be thrown. Resp shall be: Resp[0] = '33' Resp[1] = '33' Resp[2] = '33' Resp[3] = '33' | |
| 5 | Update Next from Linear Fixed EF, record pointer set <pre> 1 - recNumber = 0 mode = REC_ACC_MODE_NEXT recOffset = 0 data[0:3] = '44' </pre> | 1 - No exception shall be thrown. 2 - No exception shall be thrown. resp shall be: resp[0] = '44' resp[1] = '44' resp[2] = '44' | |

| Id | Description | API Expectation | APDU Expectation |
|----|--|-----------------|------------------|
| | dataOffset = 0 dataLength = 4 updateRecord() 2 - mode = REC_ACC_MODE_ABSOLUTE_CURRENT readRecord() | resp[3] = '44' | |

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|------------------|
| 6 | <p>Update Next from Linear Fixed EF, no more records</p> <pre> recNumber = 0 mode = REC_ACC_MODE_NEXT recOffset = 0 data[0:3] = '55' dataOffset = 0 dataLength = 4 updateRecord() </pre> | <p>Shall throw sim.access.SIMViewException with reason code RECORD_NUMBER_NOT_AVAILABLE.</p> | |
| 7 | <p>Update Previous from Linear Fixed EF, no record pointer set</p> <pre> 1 - fid = DFSIMTEST select() 2 - fid = EFLARU select() 3 - recNumber = 0 mode = REC_ACC_MODE_PREVIOUS recOffset = 0 data[0:3] = '66' dataOffset = respOffset = 0 dataLength = respLength = 4 updateRecord() 4 - mode = REC_ACC_MODE_ABSOLUTE_CURRENT readRecord() </pre> | <p>1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - No exception shall be thrown. 4 - No exception shall be thrown. resp shall be: resp[0] = '66' resp[1] = '66' resp[2] = '66' resp[3] = '66'</p> | |
| 8 | <p>Update Previous from Linear Fixed EF, record pointer set</p> <pre> 1 - recNumber = 0 mode = REC_ACC_MODE_PREVIOUS recOffset = 0 data[0:3] = '77' dataOffset = respOffset = 0 dataLength = respLength = 4 updateRecord() readRecord() 2 - mode = REC_ACC_MODE_ABSOLUTE_CURRENT </pre> | <p>1 - No exception shall be thrown 2 - No exception shall be thrown. Resp shall be: Resp[0] = '7744' Resp[1] = '7744' Resp[2] = '7744' Resp[3] = '7744'</p> | |
| 9 | <p>Update Previous from Linear Fixed EF , no more records</p> <pre> recNumber = 0 mode = REC_ACC_MODE_PREVIOUS recOffset = 0 data[0:3] = '88' dataOffset = respOffset = 0 dataLength = respLength = 4 updateRecord() </pre> | <p>Shall throw sim.access.SIMViewException with reason code RECORD_NUMBER_NOT_AVAILABLE.</p> | |
| 10 | <p>Update Previous from Cyclic EF</p> <pre> 1 - fid = FID_DF_SIMTEST select() 2 - fid = FID_EF_CARU select() 3 - recNumber = 2 mode = REC_ACC_MODE_ABSOLUTE_CURRENT recOffset = 0 respOffset = 0 respLength = 3 readRecord() 4 - recNumber = 2 mode = REC_ACC_MODE_PREVIOUS data[0:2] = resp[0:2] ^ 'FF' dataOffset = 0 dataLength = 3 updateRecord() 5 - recNumber = 0 mode = REC_ACC_MODE_ABSOLUTE_CURRENT respOffset = 0 respLength = 3 readRecord() </pre> | <p>1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - No exception shall be thrown. 4 - No exception shall be thrown. 5 - No exception shall be thrown. resp shall be: resp[0] = data[0] resp[1] = data[1] resp[2] = data[2]</p> | |
| 11 | <p>Update Absolute from Linear Fixed EF beyond Records</p> <pre> 1 - fid = EFLARU select() 2 -recNumber = -1 mode = REC_ACC_MODE_ABSOLUTE_CURRENT recOffset = 0 dataOffset = 0 dataLength = 4 </pre> | <p>1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code RECORD_NUMBER_NOT_AVAILABLE. 3 - Shall throw sim.access.SIMViewException with</p> | |

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|------------------|
| | updateRecord() 2 - recNumber = 3 updateRecord() | reason code RECORD_NUMBER_NOT_AVAIL ABLE. | |

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|------------------|
| 12 | <p>No current record in linear fixed EF, update current</p> <pre> 1 - fid = EFLARU select() // No curr rec 2 - recNumber = 0 // curr rec mode = REC_ACC_MODE_ABSOLUTE_CURRENT recOffset = 0 dataOffset = 0 dataLength = 4 updateRecord()</pre> | <p>1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code RECORD_NUMBER_NOT_AVAILABLE.</p> | |
| 13 | <p>recOffset < 0</p> <pre> 1 - fid = EFLARU select() 2 - recNumber = 1 // rec 1 mode = REC_ACC_MODE_ABSOLUTE_CURRENT recOffset = -1 dataOffset = 0 dataLength = 4 updateRecord()</pre> | <p>1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code OUT_OF_RECORD_BOUNDARIES.</p> | |
| 14 | <p>recOffset + dataLength > Record Length</p> <pre> 1 - fid = EFLARU select() 2 - recNumber = 1 mode = REC_ACC_MODE_ABSOLUTE_CURRENT recOffset = 2 dataOffset = 0 dataLength = 4 updateRecord()</pre> | <p>1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code OUT_OF_RECORD_BOUNDARIES.</p> | |
| 15 | <p>Updating with invalid mode</p> <pre> 1 - fid = EFLARU select() 2 - recNumber = 0 mode = 1 recOffset = 0 dataOffset = 0 dataLength = 4 updateRecord() 3 - mode = 5 updateRecord()</pre> | <p>1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code INVALID_MODE. 3 - Shall throw sim.access.SIMViewException with reason code INVALID_MODE.</p> | |
| 16 | <p>Updating Cyclic EF with invalid mode</p> <pre> 1 - fid = DFSIMTEST select() 2 - fid = EFCARU select() 3 - recNumber = 0 mode = REC_ACC_MODE_NEXT recOffset = 0 data[0:2] = '00' dataOffset = 0 dataLength = 3 updateRecord() 4 - recNumber = 0 mode = REC_ACC_MODE_ABSOLUTE_CURRENT updateRecord() 5 - recNumber = 2 mode = REC_ACC_MODE_ABSOLUTE_CURRENT updateRecord()</pre> | <p>1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - Shall throw sim.access.SIMViewException with reason code INVALID_MODE. 4 - Shall throw sim.access.SIMViewException with reason code INVALID_MODE. 5 - Shall throw sim.access.SIMViewException with reason code INVALID_MODE.</p> | |
| 17 | <p>data is null</p> <pre> byte[] nullBuffer = null dataOffset = 0 dataLength = 10 updateRecord()</pre> | <p>Shall throw java.lang.NullPointerException.</p> | |
| 18 | <p>dataOffset < 0</p> <pre> dataOffset = -1 dataLength = 10 updateRecord()</pre> | <p>Shall throw java.lang. ArrayIndexOutOfBoundsException.</p> | |
| 19 | <p>dataLength < 0</p> <pre> dataOffset = 0 dataLength = -1 updateRecord()</pre> | <p>Shall throw java.lang. ArrayIndexOutOfBoundsException.</p> | |
| 20 | <p>dataOffset + dataLength > data.length</p> <pre> dataOffset = 10 dataLength = 11 updateRecord()</pre> | <p>Shall throw java.lang. ArrayIndexOutOfBoundsException.</p> | |
| 21 | <p>EF is neither Cyclic nor Linear Fixed</p> | <p>1 - No exception shall be thrown.</p> | |

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| | 1 - fid = DFSIMTEST select() 2 - fid = EFTNR select() 3 - dataOffset = 0 dataLength = 4 updateRecord() | 2 - No exception shall be thrown. 3 - Shall throw sim.access.SIMViewException with reason code FILE_INCONSISTENT. | |
| 22 | Access condition not fulfilled 1 - fid = EFCNU select() 2 - recOffset = 0 dataOffset = 0 dataLength = 1 mode = REC_ACC_MODE_PREVIOUS updateRecord() 3 - fid = EFLNU select() 4 - recNumber = 1 mode = REC_ACC_MODE_ABSOLUTE_CURRENT recOffset = 0 dataOffset = 0 dataLength = 1 updateRecord() | 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code AC_NOT_FULFILLED. 3 - No exception shall be thrown. 4 - Shall throw sim.access.SIMViewException with reason code AC_NOT_FULFILLED. | |
| 23 | EF is invalidated 1 - fid = EFCNR invalidate() 2 - updateRecord() 3 - rehabilitate() | 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code INVALIDATION_STATUS_CONTR ADICTION. 3 - No exception shall be thrown. | |

6.1.1.8.4 Test Coverage

| CRR Number | Test Case Number |
|------------|----------------------|
| N1 | 2, 3, 4, 5, 7, 8, 10 |
| N2 | 2, 3 |
| N3 | 5, 6 |
| N4 | 7, 8, 9, 10 |
| P1 | 11 |
| P2 | 12 |
| P3 | 6 |
| P4 | 9 |
| P5 | 13 |
| P6 | 14 |
| P7 | 15 |
| P8 | 16 |
| P9 | 17 |
| P10 | 18 |
| P11 | 19 |
| P12 | 20 |
| C1 | 1 |
| C2 | 21 |
| C3 | 22 |
| C4 | 23 |
| C5, C6 | Not Tested |

6.1.1.9 Method seek

Test Area Reference: API_1_SVW_SEEK_BSS

6.1.1.9.1 Conformance Requirements

The method with the following header shall be compliant to its definition in the API.

```
public short seek(byte mode,
                 byte[] patt,
```

```

        short pattOffset,
        short pattLength)
throws java.lang.NullPointerException,
       java.lang.ArrayIndexOutOfBoundsException,
       SIMViewException

```

Normal execution

CRRN1: If the pattern in `patt` with the length `pattLength` at offset `pattOffset` is found in the record being specified by `mode`, the current record pointer is set to that record and the record number is returned. The record pointer of any other applet is not changed. This will be tested during the testing of the framework.

CRRN2: If `mode` is `SEEK_FROM_BEGINNING_FORWARD`, the search starts with the first record forward towards the end of the file.

CRRN3: If `mode` is `SEEK_FROM_END_BACKWARD`, the search starts with the last record backward towards the beginning of the file.

CRRN4: If `mode` is `SEEK_FROM_NEXT_FORWARD`, the search starts from the next record after the current record pointer forward towards the end of file. If no current record pointer is selected, the search starts with the first record.

CRRN5: If `mode` is `SEEK_FROM_PREVIOUS_BACKWARD`, the search starts from the previous record before the current record pointer backward towards the beginning of the file. If no current record pointer is selected the search starts with the last record.

CRRN6: If pattern in `patt` is not found, an instance of `SIMViewException` shall be thrown. The reason code shall be `SIMViewException.PATTERN_NOT_FOUND`.

CRRN7: If `mode` is `SEEK_FROM_NEXT_FORWARD` and the record pointer is at the last record, an instance of `SIMViewException` shall be thrown. The reason code shall be `SIMViewException.PATTERN_NOT_FOUND`.

CRRN8: If `mode` is `SEEK_FROM_PREVIOUS_BACKWARD` and the record pointer is at the first record, an instance of `SIMViewException` shall be thrown. The reason code shall be `SIMViewException.PATTERN_NOT_FOUND`.

Parameter errors

CRRP1: If `mode` is not between 0 and 3 inclusive (0 = `SEEK_FROM_BEGINNING_FORWARD`, etc.), an instance of `SIMViewException` shall be thrown. The reason code shall be `SIMViewException.INVALID_MODE`.

CRRP2: If the pattern array `patt` is null, an instance of `NullPointerException` shall be thrown.

CRRP3: If `pattOffset` is less than 0, an instance of `ArrayIndexOutOfBoundsException` shall be thrown.

CRRP4: If `pattLength` is less than 0, an instance of `ArrayIndexOutOfBoundsException` shall be thrown.

CRRP5: If `pattLength` is greater than the size of the record of the currently selected EF, an instance of `SIMViewException` shall be thrown. The reason code shall be `SIMViewException.OUT_OF_RECORD_BOUNDARIES`.

CRRP6: If `pattOffset` plus `pattLength` is greater than the length of the pattern array `patt.length`, an instance of `ArrayIndexOutOfBoundsException` shall be thrown.

Context errors

CRRC1: If the calling applet has currently no EF selected, an instance of `SIMViewException` shall be thrown. The reason code shall be `SIMViewException.NO_EF_SELECTED`.

CRRC2: If the currently selected EF is not linear fixed, an instance of `SIMViewException` shall be thrown. The reason code shall be `SIMViewException.FILE_INCONSISTENT`.

CRRC3: If the calling applet does not fulfil the access condition, `READ`, to perform this function, an instance of `SIMViewException` shall be thrown. The reason code shall be `SIMViewException.AC_NOT_FULFILLED`.

CRRC4: If the currently selected EF is invalidated and the file status of the EF does not allow for reading an invalidated file, an instance of `SIMViewException` shall be thrown. The reason code shall be `SIMViewException.INVALIDATION_STATUS_CONTRADICTION`.

CRRC5: If the method call causes a memory problem (e.g. memory access error), an instance of `SIMViewException` shall be thrown. The reason code shall be `SIMViewException.MEMORY_PROBLEM`.

CRRC6: If the method call causes an error to occur that is not expected and thus not handled, an instance of `SIMViewException` shall be thrown. The reason code shall be `SIMViewException.INTERNAL_ERROR`.

6.1.1.9.2 Test Suite Files

Additional requirements for the GSM personalisation: None

Test Script: API_1_SVW_SEEK_BSS_1.scr
 Test Applet: API_1_SVW_SEEK_BSS_1.java
 Load Script: API_1_SVW_SEEK_BSS_1.ldr
 Cleanup Script: API_1_SVW_SEEK_BSS_1.ldr
 Parameter File: API_1_SVW_SEEK_BSS_1.par

6.1.1.9.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 0 | SIM Initialisation | Responses ignored. | |
| 1 | No EF selected <pre>Byte[] patt = new byte[20] pattOffset = 0 pattLength = 10 mode = SEEK_FROM_BEGINNING_FORWARD seek()</pre> | Shall throw <code>sim.access.SIMViewException</code> with reason code <code>NO_EF_SELECTED</code> . | |
| 2 | Pattern not Found <pre>1 - fid = DFSIMTEST select() 2 - fid = EFLARU select() 3 - patt[0] = 'DA' pattOffset = 0 pattLength = 1 mode = SEEK_FROM_BEGINNING_FORWARD seek()</pre> | 1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - Shall throw <code>sim.access.SIMViewException</code> with reason code <code>PATTERN_NOT_FOUND</code> . | |
| 3 | Seek from Beginning Forward <pre>patt[0:2] = '55' pattOffset = 0 pattLength = 3 mode = SEEK_FROM_BEGINNING_FORWARD seek()</pre> | No exception shall be thrown. Shall return 1 | |
| 4 | Seek from End Backward <pre>patt[0:2] = '55' pattOffset = 0 pattLength = 3 mode = SEEK_FROM_END_BACKWARD seek()</pre> | No exception shall be thrown. Shall return 1 | |
| 5 | Seek from Next Forward <pre>patt[0:2] = 'AA' pattOffset = 0 pattLength = 3 mode = SEEK_FROM_NEXT_FORWARD seek()</pre> | No exception shall be thrown. Shall return 2 | |
| 6 | Last Record, Seek from Next Forward <pre>mode = SEEK_FROM_NEXT_FORWARD seek()</pre> | Shall throw <code>sim.access.SIMViewException</code> with reason code <code>PATTERN_NOT_FOUND</code> . | |
| 7 | Seek from Previous Backward <pre>patt[0:2] = '55' pattOffset = 0 pattLength = 3 mode = SEEK_FROM_PREVIOUS_BACKWARD</pre> | No exception shall be thrown. Shall return 1 | |

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|------------------|
| | seek() | | |
| 8 | First Record, Seek from Previous Backward SEEK_FROM_PREVIOUS_BACKWARD seek() | Shall throw sim.access.SIMViewException with reason code PATTERN_NOT_FOUND. | |
| 9 | Pattern not Found (out of reach) patt[0:2] = '55' pattOffset = 0 pattLength = 3 mode = SEEK_FROM_NEXT_FORWARD seek() | Shall throw sim.access.SIMViewException with reason code PATTERN_NOT_FOUND. | |
| 10 | Invalid mode 1 - mode = 4 seek() 2 - mode = -1 seek() | 1 - Shall throw sim.access.SIMViewException with reason code INVALID_MODE 2 - Shall throw sim.access.SIMViewException with reason code INVALID_MODE | |
| 11 | patt is null byte[] nullBuffer = null mode = SEEK_FROM_BEGINNING_FORWARD seek () | Shall throw java.lang.NullPointerException. | |
| 12 | pattOffset < 0 patt[0:2] = '55' pattOffset = -1 pattLength = 3 mode = SEEK_FROM_BEGINNING_FORWARD seek() | Shall throw java.lang. ArrayIndexOutOfBoundsException | |
| 13 | pattLength < 0 patt[0:2] = '55' pattOffset = 0 pattLength = -1 mode = SEEK_FROM_BEGINNING_FORWARD seek() | Shall throw java.lang. ArrayIndexOutOfBoundsException | |
| 14 | pattLength > size of record patt[0:4] = '55' pattOffset = 0 pattLength = 4 mode = SEEK_FROM_BEGINNING_FORWARD seek() | Shall throw sim.access.SIMViewException with reason code OUT_OF_RECORD_BOUNDARIE S | |
| 15 | pattOffset + pattLength > patt.length patt[0:2] = '55' pattOffset = 1 pattLength = 3 mode = SEEK_FROM_BEGINNING_FORWARD seek() | Shall throw java.lang. ArrayIndexOutOfBoundsException | |
| 16 | EF is not Linear Fixed 1 - fid = EFTNU select() 2 - pattOffset = 0 pattLength = 3 mode = SEEK_FROM_BEGINNING_FORWARD seek() 3 - fid = EFCNU select() seek() | 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code FILE_INCONSISTENT 3 - Shall throw sim.access.SIMViewException with reason code FILE_INCONSISTENT | |
| 17 | Access condition not fulfilled 1 - fid = EFLNR select() 2 - patt[0] = '55' pattOffset = 0 pattLength = 1 mode = SEEK_FROM_BEGINNING_FORWARD seek() | 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code AC_NOT_FULFILLED. | |
| 18 | EF is invalidated 1 - fid = EFLARU select() 2 - invalidate() 3 - patt[0] = '55' pattOffset = 0 pattLength = 1 mode = SEEK_FROM_BEGINNING_FORWARD seek() 4 - rehabilitate() | 1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - Shall throw sim.access.SIMViewException with reason code INVALIDATION_STATUS_CONTR ADICTION. 4 - No exception shall be thrown. | |

6.1.1.9.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| N1 | 2, 3 - 6, 7 |
| N2 | 3 |
| N3 | 4 |
| N4 | 5 |
| N5 | 7 |
| N6 | 2, 6, 8, 9 |
| N7 | 6 |
| N8 | 8 |
| P1 | 10 |
| P2 | 11 |
| P3 | 12 |
| P4 | 13 |
| P5 | 14 |
| P6 | 15 |
| C1 | 1 |
| C2 | 16 |
| C3 | 17 |
| C4 | 18 |
| C5, C6 | Not Tested |

6.1.1.10 Method increase

Test Area Reference: API_1_SVW_INCR_BS_BS

6.1.1.10.1 Conformance Requirements

The method with the following header shall be compliant to its definition in the API.

```
public short increase(byte[] incr,
                    short incrOffset,
                    byte[] resp,
                    short respOffset)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           SIMViewException
```

Normal execution

CRRN1: The value in the array incr is added to the value of the last increased / updated record in the currently selected cyclic EF. The result is stored in the oldest record and returned in the array resp. The updated record becomes record number 1 and is selected as current record. The number of bytes of valid data in resp is returned.

Parameter errors

CRRP1: If the array incr is null, an instance of NullPointerException shall be thrown.

CRRP2: If incrOffset is less than 0, an instance of ArrayIndexOutOfBoundsException shall be thrown.

CRRP3: If incrOffset plus the value 3, is greater than the length of the array incr.length, an instance of ArrayIndexOutOfBoundsException shall be thrown.

CRRP4: If the result of the addition is greater than the maximum value of the record (represented by all bytes set to FF), an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.MAX_VALUE_REACHED.

CRRP5: If the array resp is null, an instance of NullPointerException shall be thrown.

CRRP6: If respOffset is less than 0, an instance of ArrayIndexOutOfBoundsException shall be thrown.

CRRP7: If the remaining length of the array resp at the offset respOffset is less than the length of the record, an instance of ArrayIndexOutOfBoundsException shall be thrown.

Context errors

CRRC1: If the calling applet has currently no EF selected, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.NO_EF_SELECTED.

CRRC2: If the currently selected EF is not cyclic, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.FILE_INCONSISTENT.

CRRC3: If increase is not allowed as indicated by the FCI byte 8 (GSM 11.11: FCI structure of an EF returned by the SELECT command), an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.FILE_INCONSISTENT.

CRRC4: If the calling applet does not fulfil the access condition, INCREASE, to perform this function, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.AC_NOT_FULFILLED.

CRRC5: If the currently selected EF is invalidated, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INVALIDATION_STATUS_CONTRADICTION.

CRRC6: If the method call causes a memory problem (e.g. memory access error), an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.MEMORY_PROBLEM.

CRRC7: If the method call causes an error to occur that is not expected and thus not handled, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INTERNAL_ERROR.

6.1.1.10.2 Test Suite Files

Additional requirements for the GSM personalisation: None

Test Script: API_1_SVW_INCR_BS_BS_1.scr
 Test Applet: API_1_SVW_INCR_BS_BS_1.java
 Load Script: API_1_SVW_INCR_BS_BS_1.ldr
 Cleanup Script: API_1_SVW_INCR_BS_BS_1.clr
 Parameter File: API_1_SVW_INCR_BS_BS_1.par

6.1.1.10.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|------------------|
| 0 | SIM Initialisation | Responses ignored. | |
| 1 | No EF selected <pre>byte[] incr = new byte[4] byte[] resp = new byte[4] incrOffset = 0 respOffset = 0 increase()</pre> | Shall throw sim.access.SIMViewException with reason code NO_EF_SELECTED. | |
| 2 | Increase , verify response <pre>1 - fid = DFSIMTEST select() 2 - fid = EFCARU select() 3 - //Set both records to 00 00 00 mode = REC_ACC_MODE_PREVIOUS data[0:3] = 0 dataOffset = 0 dataLength = 3 updateRecord() updateRecord() 4 - incrOffset = 0 incr[2] = 1 respOffset = 0 increase()</pre> | 1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - No exception shall be thrown. 4 - No exception shall be thrown. resp[] shall contain {0,0,1,0}. | |
| 3 | Increase, verify file <pre>1 - incrOffset = 1 incr[2] = 0, incr[3] = 2 respOffset = 1 increase() 2 - resp[3] = 0</pre> | 1 - No exception shall be thrown. resp[] shall contain {0,0,0,3}. 2 - No exception shall be thrown. resp[] shall contain {0,0,3,0}. | |

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| | <pre>recNumber = 0 mode = REC_ACC_MODE_ABSOLUTE_CURRENT recOffset = 0 respOffset = 0 respLength = 0 readRecord()</pre> | | |
| 4 | <p>incr is null</p> <pre>byte[] nullBuffer = null incrOffset = 0 respOffset = 0 increase()</pre> | Shall throw java.lang.NullPointerException. | |
| 5 | <p>incrOffset < 0</p> <pre>incrOffset = -1 respOffset = 0 increase()</pre> | Shall throw java.lang. ArrayIndexOutOfBoundsException. | |
| 6 | <p>incrOffset + 3 > incr.length</p> <pre>incrOffset = 2 respOffset = 0 increase()</pre> | Shall throw java.lang. ArrayIndexOutOfBoundsException. | |
| 7 | <p>Reach Maximum Value</p> <pre>incr[0] = incr[1] = incr[2] = 'FF' incrOffset = 0 respOffset = 0 increase()</pre> | Shall throw sim.access.SIMViewException with reason code MAX_VALUE_REACHED. | |
| 8 | <p>resp is null</p> <pre>incr[0] = incr[1] = 0x00' incr[2] = '02' incrOffset = 0 byte[] respNull = null respOffset = 0 increase()</pre> | Shall throw java.lang.NullPointerException. | |
| 9 | <p>respOffset < 0</p> <pre>incrOffset = 0 respOffset = -1 increase()</pre> | Shall throw java.lang. ArrayIndexOutOfBoundsException. | |
| 10 | <p>respOffset + recordLength > resp.length</p> <pre>incrOffset = 0 respOffset = 2 increase()</pre> | Shall throw java.lang. ArrayIndexOutOfBoundsException. | |
| 11 | <p>EF is not Cyclic</p> <pre>1 - fid = EFTARU select() 2 - incrOffset = 0 respOffset = 0 increase() 3 - fid = EFLARU select() 4 - incrOffset = 0 respOffset = 0 increase()</pre> | 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code FILE_INCONSISTENT. 3 - No exception shall be thrown. 4 - Shall throw sim.access.SIMViewException with reason code FILE_INCONSISTENT. | |
| 12 | <p>Access condition not fulfilled</p> <pre>1 - fid = EFCNIC select() 2 - incrOffset = 0 respOffset = 0 increase()</pre> | 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code AC_NOT_FULFILLED. | |
| 13 | <p>EF is invalidated</p> <pre>1 - fid = EFCARU select() 2 - invalidate() 3 - incrOffset = 0 respOffset = 0 increase() 4 - rehabilitate()</pre> | 1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - Shall throw sim.access.SIMViewException with reason code INVALIDATION_STATUS_CONTR ADICTION. 4 - No exception shall be thrown. | |
| 14 | <p>Check increase not allowed from FCI</p> <pre>1 - fciOffset = 0 fciLength = 8 select (FID_EF_CINA, fci...) Verify FCI byte 8 (fci[7]) 2 - incrOffset = 0 respOffset = 0 increase()</pre> | 1 - No exception shall be thrown. Bit 7 of resp[7] shall not be set (0), indicating that increase is not allowed. 2 - Shall throw sim.access.SIMViewException with reason code FILE_INCONSISTENT | |

6.1.1.10.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| N1 | 2, 3 |
| P1 | 4 |
| P2 | 5 |
| P3 | 6 |
| P4 | 7 |
| P5 | 8 |
| P6 | 9 |
| P7 | 10 |
| C1 | 1 |
| C2 | 11 |
| C3 | 14 |
| C4 | 12 |
| C5 | 13 |
| C6, C7 | Not Tested |

6.1.1.11 Method invalidate

Test Area Reference: API_1_SVW_INVL

6.1.1.11.1 Conformance Requirements

The method with the following header shall be compliant to its definition in the API.

```
public void invalidate()
    throws SIMViewException
```

Normal execution

CRRN1: The currently selected EF of the calling applet shall be invalidated, i.e. the flag in the EF file status shall be changed accordingly.

Parameter errors

No requirements.

Context errors

CRRC1: If the calling applet has currently no EF selected, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.NO_EF_SELECTED.

CRRC2: If the calling applet does not fulfil the access condition, INVALIDATE, to perform this function, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.AC_NOT_FULFILLED.

CRRC3: If the currently selected EF is already invalidated, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INVALIDATION_STATUS_CONTRADICTION.

CRRC4: If the method call causes a memory problem (e.g. memory access error), an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.MEMORY_PROBLEM.

CRRC5: If the method call causes an error to occur that is not expected and thus not handled, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INTERNAL_ERROR.

6.1.1.11.2 Test Suite Files

Additional requirements for the GSM personalisation: None

Test Script: API_1_SVW_INVL_1.scr

Test Applet: API_1_SVW_INVL_1.java
 Load Script: API_1_SVW_INVL_1.ldr
 Cleanup Script: API_1_SVW_INVL_1.clr
 Parameter File: API_1_SVW_INVL_1.par

6.1.1.11.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|------------------|
| 0 | SIM Initialisation | Responses ignored. | |
| 1 | No EF is selected 1 - invalidate() | 1 - Shall throw sim.access.SIMViewException with reason code NO_EF_SELECTED. | |
| 2 | Invalidate EF 1 - fid = DFSIMTEST select() 2 - fid = EFTNR select() 3 - invalidate() 4 - rehabilitate() | 1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - No exception shall be thrown. 4 - No exception shall be thrown. | |
| 3 | Access condition not fulfilled 1 - fid = EFCNIV select() 2 - invalidate() | 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code AC_NOT_FULFILLED. | |
| 4 | EF is already invalidated 1 - fid = EFTNR select() 2 - invalidate() 3 - invalidate() | 1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - Shall throw sim.access.SIMViewException with reason code INVALIDATION_STATUS_CONTRADICTION. | |

6.1.1.11.4 Test Coverage

| CRR number | Test Case Number |
|------------|------------------|
| N1 | 2 |
| C1 | 1 |
| C2 | 3 |
| C3 | 4 |
| C4, C5 | Not Tested |

6.1.1.12 Method rehabilitate

Test Area Reference: API_1_SVW_REHA

6.1.1.12.1 Conformance Requirements

The method with the following header shall be compliant to its definition in the API.

```
public void rehabilitate()
    throws SIMViewException
```

Normal execution

CRRN1: The currently selected EF of the calling applet shall be rehabilitated, i.e. the flag in the EF file status shall be changed accordingly.

Parameter errors

No requirements.

Context errors

CRRC1: If the calling applet has currently no EF selected, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.NO_EF_SELECTED.

CRRC2: If the calling applet does not fulfil the access condition, REHABILITATE, to perform this function, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.AC_NOT_FULFILLED.

CRRC3: If the currently selected EF is not invalidated, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INVALIDATION_STATUS_CONTRADICTION.

CRRC4: If the method call causes a memory problem (e.g. memory access error), an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.MEMORY_PROBLEM.

CRRC5: If the method call causes an error to occur that is not expected and thus not handled, an instance of SIMViewException shall be thrown. The reason code shall be SIMViewException.INTERNAL_ERROR.

6.1.1.12.2 Test Suite Files

Additional requirements for the GSM personalisation: None

Test Script: API_1_SVW_REHA_1.scr
 Test Applet: API_1_SVW_REHA_1.java
 Load Script: API_1_SVW_REHA_1.ldr
 Cleanup Script: API_1_SVW_REHA_1.clr
 Parameter File: API_1_SVW_REHA_1.par

6.1.1.12.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 0 | SIM Initialisation | Responses ignored. | |
| 1 | No EF is selected 1 - rehabilitate() | 1 - Shall throw sim.access.SIMViewException with reason code NO_EF_SELECTED. | |
| 2 | Rehabilitate invalidated File 1 - fid = DFSIMTEST select() 2 - fid = EFCNR select() 3 - invalidate() 4 - rehabilitate() 5 - byte[] incr = new byte[3] = {0,0,1} incrOffset = 0 byte[] resp = new byte[1] = 1 respOffset = 0 increase() | 1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - No exception shall be thrown. 4 - No exception shall be thrown. 5 - No exception shall be thrown. resp[] shall contain {0,0,1}. | |
| 3 | Access condition not fulfilled 1 - fid = EFCNRH select() 2 - rehabilitate() | 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code AC_NOT_FULFILLED.. | |
| 4 | Rehabilitate validated File 1 - fid = EFCNR select() 2 - rehabilitate() | 1 - No exception shall be thrown. 2 - Shall throw sim.access.SIMViewException with reason code INVALIDATION_STATUS_CONTRADICTION. | |

6.1.1.12.4 Test Coverage

| CRR number | Test Case Number |
|------------|------------------|
| N1 | 2 |
| C1 | 1 |
| C2 | 3 |
| C3 | 4 |
| C4, C5 | Not Tested |

6.1.2 Class SIMSystem

6.1.2.1 Method getTheSIMView

Test Area Reference: API_1_SSY_GETS

6.1.2.1.1 Conformance Requirement:

The method with following header shall compliant to its definition in the API.

```
public static SIMView getTheSIMView()
```

Normal execution

CRRN1: returns a reference to class which implements the SIMView interface

Parameters error

No requirements

Context errors

No requirements

6.1.2.1.2 Test suite files

No additional requirements for the GSM personalisation:

Test Script: API_1_SSY_GETS_1.scr

Test Applet: API_1_SSY_GETS_1.java

Load Script: API_1_SSY_GETS_1.ldr

Cleanup Script: API_1_SSY_GETS_1.clr

Parameter File: API_1_SSY_GETS_1.par

6.1.2.1.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | reference not equal null after execute | The returned reference shall be not null after execute | |
| 2 | reference to the GSM interface | Returned a reference to the GSM interface | |

6.1.2.1.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 1,2 |

6.1.3 Class SIMViewException

6.1.3.1 Method throwIt

Test Area Reference: API_1_SVE_THITS

6.1.3.1.1 Conformance Requirement:

The method with following header shall be compliant to its definition in the API.

```
public static void throwIt(short reason)
    throws SIMViewException
```

Normal execution

CRRN1: Throws the JCRE instance of SIMViewException with the specified reason

CRRN2: Extends javacard.framework.CardRuntimeException

Parameter errors

No requirements

Context errors

No requirements

6.1.3.1.2 Test Suite Files

No additional requirements for the GSM personalisation

Test Script: API_1_SVE_THITS_1.scr

Test Applet: API_1_SVE_THITS_1.java

Load Script: API_1_SVE_THITS_1.ldr

Cleanup Script: API_1_SVE_THITS_1.clr

Parameter File: API_1_SVE_THITS_1.par

6.1.3.1.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|-----------------|------------------|
| 1 | Throws the JCRE instance of SIMViewException with the specified reason | Reason = 0 | |
| 2 | Throws the JCRE instance of SIMViewException with the specified reason | Reason = 1 | |
| 3 | Throws the JCRE instance of SIMViewException with the specified reason | Reason = 15 | |
| 4 | SIMViewException extends javacard.framework.CardRuntimeException | Reason = 0 | |
| 5 | SIMViewException extends javacard.framework.CardRuntimeException | Reason = 1 | |
| 6 | SIMViewException extends javacard.framework.CardRuntimeException | Reason = 15 | |

6.1.3.1.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 1,2,3 |
| N2 | 4,5,6 |

6.1.3.2 Constructor

Test Area Reference: API_1_SVE_COORS

6.1.3.2.1 Conformance Requirement:

The method with following header shall compliant to its definition in the API.

```
public SIMViewException(short reason)
    throws SIMViewException
```

Normal execution

CRRN1: Construct a SIMViewException with the specified reason

Parameters error

No requirements

Context errors

No requirements

6.1.3.2.2 Test suite files

No additional requirements for the GSM personalisation

Test Script: API_1_SVE_COORS_1.scr
 Test Applet: API_1_SVE_COORS_1.java
 Load Script: API_1_SVE_COORS.ldr
 Cleanup Script: API_1_SVE_COORS.clr
 Parameter File: API_1_SVE_COORS.par

6.1.3.2.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--------------------|------------------|
| 1 | SIMViewException with the specified reason (The reason shall set with setReason and compare the Exception with getReason) | Reason (specified) | |

6.1.3.2.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 1 |

6.1.3.3 Reason Codes

Test Area Reference: API_1_SVE_CONS

6.1.3.3.1 Conformance Requirement:

There is no API, only constants. This constants shall compliant to its definition in the API.

Normal execution

CRRN1: The Constants of the class SIMViewException shall all have the same name and value defined in the GSM03.19

CRRN2: Constructs SIMViewException a Exception with the specified reason

Parameters error

No requirements

Context errors

No requirements

6.1.3.3.2 Test suite files

None

6.1.3.3.3 Test Procedure

The constants in Java are resolved at compilation time, therefore a runtime test is not useful. No test of constants will be performed

6.2 Package sim.toolkit

6.2.1 Interface ToolkitConstants

6.2.1.1 Constants

Test Area Reference: API_2_TKC_CONS

6.2.1.1.1 Conformance Requirement:

There is no API, only constants. This constants shall be compare to its definition in the API.

Normal execution

CRRN1: The Toolkit Constants shall all have the same name and value defined in the GSM03.19 normalization.

Parameters error

No requirements

Context errors

No requirements

6.2.1.1.2 Test suite files

None

6.2.1.1.3 Test Procedure

The constants in Java are resolved at compilation time, therefore a runtime test is not useful. No test of constants will be performed.

6.2.2 Interface ToolkitInterface

6.2.2.1 Method processToolkit

Test Area Reference: API_2_TKI_PRTKB

6.2.2.1.1 Conformance Requirement:

The method with following prototype shall be compliant to its definition in the API.

```
public void processToolkit(byte event)
    throws ToolkitException
```

Normal execution

CRRN1: This interface must be implemented by a Toolkit applet (which extends the javacard.framework.Applet class) so that it can be triggered by the Toolkit Handler according to the registration information.

CRRN2: The Toolkit applet will have to implement the processToolkit shared method so that the following events can be notified:

| Event | Description |
|--|---|
| EVENT_PROFILE_DOWNLOAD | Terminal Profile command reception |
| EVENT_FORMATTED_SMS_PP_ENV | 03.48 formatted envelope SMS-PP Data Download reception |
| EVENT_FORMATTED_SMS_PP_UPD | 03.48 formatted Update Record EF SMS |
| EVENT_FORMATTED_SMS_CB | 03.48 formatted envelope Cell Broadcast Data Download command reception |
| EVENT_UNFORMATTED_SMS_PP_ENV | Unformatted Envelope SMS-PP Data Download reception |
| EVENT_UNFORMATTED_SMS_PP_UPD | Unformatted Update Record EF SMS |
| EVENT_UNFORMATTED_SMS_CB | Unformatted Cell Broadcast Data Download command reception |
| EVENT_MENU_SELECTION | Envelope Menu Selection command reception |
| EVENT_MENU_SELECTION_HELP_REQUEST | Envelope Menu Selection Help Request command reception |
| EVENT_CALL_CONTROL_BY_SIM | Envelope Call Control by SIM command reception |
| EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM | Envelope MO Short Message Control by SIM command reception |
| EVENT_TIMER_EXPIRATION | Envelope Timer Expiration |
| EVENT_EVENT_DOWNLOAD_MT_CALL | Envelope Event Download - MT call |
| EVENT_EVENT_DOWNLOAD_CALL_CONNECTED | Envelope Event Download - Call connected |
| EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED | Event Download - Call disconnected |
| EVENT_EVENT_DOWNLOAD_LOCATION_STATUS | Envelope Event Download - Location status |
| EVENT_EVENT_DOWNLOAD_USER_ACTIVITY | Envelope Event Download - User activity |
| EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE | Envelope Event Download - Idle screen available |
| EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS | Envelope Event Download - Card Reader Status |
| EVENT_STATUS_COMMAND | Status APDU command event |
| EVENT_UNRECOGNIZED_ENVELOPE | Unrecognized Envelope command reception |

Parameters error

No requirements

Context errors

No requirements

6.2.2.1.2 Test suite files

The method is tested in the Framework

6.2.2.1.3 Test Coverage

| CRR number | Test case number |
|------------|---------------------|
| N1 | Tested in Framework |
| N2 | Tested in Framework |

6.2.3 Class EditHandler

It is not possible to test the methods provided by this class as it is declared 'abstract'; it will be done in the class inheriting it: EnvelopeResponseHandler, ProactiveHandler.

6.2.4 Class EnvelopeHandler

6.2.4.1 Method getEnvelopeTag

Test Area Reference: API_2_ENH_GENT

6.2.4.1.1 Conformance Requirement:

The method with following header shall be compliant to its definition in the API.

```
public byte getEnvelopeTag()
```

Normal execution

CRRN1: The method shall return the Envelope BER-TLV tag.

CRRN2: The Envelope BER TAG is available for all triggered toolkit applets from the invocation to the termination of their processToolkit method if the EnvelopeHandler is available.

Parameters error

Context errors

6.2.4.1.2 Test suite files

Test Script: API_2_ENH_GENT_1.scr
 Test Applet: API_2_ENH_GENT_1.java
 Load Script: API_2_ENH_GENT_1.ldr
 Cleanup Script: API_2_ENH_GENT_1.clr
 Parameter File: API_2_ENH_GENT_1.par

6.2.4.1.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|-----------------|------------------|
| 1 | getEnvelopeTag called just after triggering of the application. | Returns 0xD1 | |
| 2 | getEnvelopeTag called after a proactive command. | Returns 0xD1 | |
| 3 | getEnvelopeTag called after a second proactive command. | Returns 0xD1 | |

6.2.4.1.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 1, 2, 3 |
| N2 | 1, 2, 3 |

6.2.4.2 Method getItemIdentifier

Test Area Reference: API_2_ENH_GIID

6.2.4.2.1 Conformance Requirement:

The method with following header shall be compliant to its definition in the API.

```
public byte getItemIdentifier()
    throws ToolkitException
```

Normal execution

CRRN1: The method shall return the item identifier byte value.

CRRN2: The item identifier byte value returned shall be from the first Item Identifier TLV element.

CRRN3: If the element is available it becomes the TLV selected.

CRRN4: The item identifier is available for all triggered toolkit applets from the invocation to the termination of their processToolkit method if the EnvelopeHandler is available.

Parameters error

No requirements.

Context errors

CRRC1: The method shall throw ToolkitException (UNAVAILABLE_ELEMENT) if the item identifier TLV is not present.

CRRC2: The method shall throw ToolkitException (OUT_OF_TLV_BOUNDARIES) if the item identifier byte is missing in the Item Identifier Simple TLV.

6.2.4.2.2 Test suite files

Test Script: API_2_ENH_GIID_1.scr
 Test Applet: API_2_ENH_GIID_1.java
 Load Script: API_2_ENH_GIID_1.ldr
 Cleanup Script: API_2_ENH_GIID_1.clr
 Parameter File: API_2_ENH_GIID_1.par

6.2.4.2.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | Send envelope SMS-PP Formatted with item identifier TLV and identifier value of 03 | Returns 03 | |
| 2 | Send envelope SMS-PP Formatted with two item identifier TLV with first value FF and second 44 | Returns FF | |
| 3 | Send envelope SMS-PP Formatted with two item identifier TLV with first value 81 and second 44, call twice the method getItemIdentifier | Returns 81 Returns 81 | |
| 4 | Send envelope SMS-PP Formatted with item identifier TLV and value of 66. FindTLV with TAG 02. getItemIdentifier and then getValueByte with offset 0 | getItemIdentifier=getValueByte | |
| 5 | Send envelope SMS-PP Formatted without item identifier TLV and getItemIdentifier | ToolkitException (UNAVAILABLE_ELEMENT) | |
| 6 | Send Envelope SMS-PP Formatted with item identifier TLV (66), send proactive command. Then getItemIdentifier | Returns 66 | |
| 7 | Send Envelope SMS-PP Formatted with item identifier TLV but without item number | ToolkitException (OUT_OF_TLV_BOUNDARIES) | |

6.2.4.2.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 1, 2, 3 |
| N2 | 2, 3 |
| N3 | 4 |
| N4 | 6 |
| C1 | 5 |
| C2 | 7 |

6.2.4.3 Method getSecuredDataLength

Test Area Reference: API_2_ENH_GSDL

6.2.4.3.1 Conformance Requirement:

The method with following header shall be compliant to its definition in the API.

```
public short getSecuredDataLength()
                throws ToolkitException
```

Normal execution

CRRN1: The method shall return the length of the secured data contained in a SMS TPDU TLV.

CRRN2: The length is from the first SMS TPDU TLV.

CRRN3: The length should not include padding bytes.

CRRN4: The method can be used if the event is EVENT_FORMATTED_SMS_PP_ENV and if the SMS TP-UD is formatted according to GSM03.48.

CRRN5: The method can be used if the event is EVENT_FORMATTED_SMS_PP_UPD and if the SMS TP-UD is formatted according to GSM03.48.

CRRN6: The method can be used if the event is EVENT_FORMATTED_SMS_CB and if the Cell Broadcast Page is formatted according to [8].

CRRN7: If the method is successful and if the event is EVENT_FORMATTED_SMS_PP_ENV, the selected TLV should be the SMS TPDU TLV.

CRRN8: If the method is successful and if the event is EVENT_FORMATTED_SMS_CB, the selected TLV should be the Cell Broadcast Page TLV.

Parameters error

No requirements

Context errors

CRRC1: The method shall throw ToolkitException (UNAVAILABLE_ELEMENT) in case of unavailable SMS TPDU TLV element.

CRRC2: The method shall throw ToolkitException (UNAVAILABLE_ELEMENT) in case of missing Secured Data.

6.2.4.3.2 Test suite files

Specific triggering:

- FORMATTED SMS CB
- UNFORMATTED SMS CB

- FORMATTED SMS PP UPD
- UNFORMATED SMS PP ENV
- For Formatted triggering if CC/RC/DS is used, the security parameters are the one used for downloading applications.

Test Script: API_2_ENH_GSDL_1.scr
 Test Applet: API_2_ENH_GSDL_1.java
 Load Script: API_2_ENH_GSDL_1.ldr
 Cleanup Script: API_2_ENH_GSLD_1.clr
 Parameter File: API_2_ENH_GSLD_1.par

6.2.4.3.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|-----------------|------------------|
| 1 | Test with FORMATTED_SMS_PP_ENV and TP-OA length of 2 | Returns 0x2A | |
| 2 | Test with TP-OA length of 6 | Returns 0x2A | |
| 3 | Test with TP-OA length of 12 | Returns 0x2A | |
| 4 | Test with RC/CC/DS length of 0 | Returns 0x10 | |
| 5 | Test with RC/CC/DS length of 8 | Returns 0x10 | |
| 6 | Test with PCNTR = 0 | Returns 0x10 | |
| 7 | Test with PCNTR = 7 | Returns 0x05 | |
| 8 | Test with SecuredDataLength = 00 | Returns 0x00 | |
| 9 | Test with UserDataLength = 0x33 | Returns 0x33 | |
| 10 | Test with UserDataLength = 0x 6C | Returns 0x 6C | |
| 11 | Test with UserDataLength = 0x 6D | Returns 0x 6D | |
| 12 | Test with UserDataLength = maximum length: 0x79 | Returns 0x 79 | |
| 13 | Verify it is the first TPDU TLV: Send a SMS PP with 2 TPDU TLV and inside two different secured data lengths: 5 and 10 | Returns 0x05 | |
| 14 | Same test as 1 but with FORMATTED_SMS_PP_UPD | Returns 0x2A | |
| 15 | Same test as 2 but with FORMATTED_SMS_PP_UPD | Returns 0x2A | |
| 16 | Same test as 3 but with FORMATTED_SMS_PP_UPD | Returns 0x2A | |
| 17 | Same test as 4 but with FORMATTED_SMS_PP_UPD | Returns 0x10 | |
| 18 | Same test as 5 but with FORMATTED_SMS_PP_UPD | Returns 0x10 | |
| 19 | Same test as 6 but with FORMATTED_SMS_PP_UPD | Returns 0x10 | |
| 20 | Same test as 7 but with FORMATTED_SMS_PP_UPD | Returns 0x05 | |
| 21 | Same test as 8 but with FORMATTED_SMS_PP_UPD | Returns 0x00 | |
| 22 | Same test as 9 but with FORMATTED_SMS_PP_UPD | Returns 0x33 | |
| 23 | Same test as 10 but with FORMATTED_SMS_PP_UPD | Returns 0x 6C | |
| 24 | Same test as 11 but with FORMATTED_SMS_PP_UPD | Returns 0x 6D | |
| 25 | Same test as 12 but with FORMATTED_SMS_PP_UPD | Returns 0x 79 | |
| 26 | Same test as 13 but with FORMATTED_SMS_PP_UPD | Returns 0x05 | |
| 27 | Same test as 4 but with FORMATTED_SMS_CB | Returns 0x10 | |
| 28 | Same test as 5 but with FORMATTED_SMS_CB | Returns 0x10 | |
| 29 | Same test as 6 but with FORMATTED_SMS_CB | Returns 0x10 | |

| | | | |
|----|--|---|--|
| 30 | Same test as 7 but with FORMATTED_SMS_CB | Returns 0x05 | |
| 31 | Same test as 8 but with FORMATTED_SMS_CB | Returns 0x00 | |
| 32 | Same test as 9 but with FORMATTED_SMS_CB | Returns 0x33 | |
| 33 | Same test as 12 but with maximum length: 0x42, and FORMATTED_SMS_CB | Returns 0x 42 | |
| 34 | Test with FORMATTED_SMS_PP_ENV Verify after call of the method the current TLV is the TPDU TLV: findTLV device identities, getSecuredDataLength and then getValueByte to verify that the current TLV is the TPDU TLV | getValueByte returns 0x40 | |
| 35 | Test with FORMATTED_SMS_CB Verify after call of the method the current TLV is the Cell Broadcast Page TLV: findTLV device identities, getSecuredDataLength and then getValueByte to verify that the current TLV is the Cell Broadcast Page TLV | getValueByte returns 0x58 | |
| 36 | Send an envelope SMS CB, getSecuredDataLength | ToolkitException UNAVAILABLE_ELEMENT | |
| 37 | Send an envelope SMS PP unformatted | ToolkitException UNAVAILABLE_ELEMENT | |

6.2.4.3.4 Test Coverage

This method has only been tested with call control and the tests shall be improved during 03.48 tests.

| CRR number | Test case number |
|------------|---|
| N1 | 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13 |
| N2 | 13 |
| N3 | 6, 7 |
| N4 | 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 25 |
| N5 | 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26 |
| N6 | 27, 28, 29, 30, 31, 32, 33 |
| N7 | 34 |
| N8 | 35 |
| C1 | 36 |
| C2 | 37 |

6.2.4.4 Method getSecuredDataOffset

Test Area Reference: API_2_ENH_GSDO

6.2.4.4.1 Conformance Requirement:

The method with following header shall be compliant to its definition in the API.

```
public short getSecuredDataOffset()
    throws ToolkitException
```

Normal execution

CRRN1: The method shall return the offset of the secured data first byte contained in a SMS TPDU TLV.

CRRN2: The offset is from the first SMS TPDU TLV.

CRRN3: The method can be used if the event is EVENT_FORMATTED_SMS_PP_ENV and if the SMS TP-UD is formatted according to GSM03.48.

CRRN4: The method can be used if the event is EVENT_FORMATTED_SMS_PP_UPD and if the SMS TP-UD is formatted according to GSM03.48.

CRRN5: The method can be used if the event is EVENT_FORMATTED_SMS_CB and if the Cell Broadcast Page is formatted according to [8].

CRRN6: If the method is successful and if the event is EVENT_FORMATTED_SMS_PP_ENV, the selected TLV should be the SMS TPDU TLV.

CRRN7: If the method is successful and if the event is EVENT_FORMATTED_SMS_CB, the selected TLV should be the Cell Broadcast Page TLV.

Parameters error

No requirements

Context errors

CRRC1: The method shall thrown ToolkitException (UNAVAILABLE_ELEMENT) in case of unavailable SMS TPDU TLV element.

CRRC2: The method shall thrown ToolkitException (UNAVAILABLE_ELEMENT) in case of missing Secured Data.

6.2.4.4.2 Test suite files

Specific triggering:

- FORMATTED SMS CB
- UNFORMATTED SMS CB
- FORMATTED SMS PP UPD
- UNFORMATTED SMS PP ENV
- For Formatted triggering if CC/RC/DS is used, the security parameters are the one used for downloading applications.

Test Script: API_2_ENH_GSDO_1.scr

Test Applet: API_2_ENH_GSDO_1.java

Load Script: API_2_ENH_GSDO_1.ldr

Cleanup Script: API_2_ENH_GSDO_1.clr

Parameter File: API_2_ENH_GSDO_1.par

6.2.4.4.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|-----------------------------------|------------------|
| 1 | Test with TP-OA length of 2 | Returns 0x21 | |
| 2 | Test with TP-OA length of 6 | Returns 0x23 | |
| 3 | Test with TP-OA length of 12 | Returns 0x26 | |
| 4 | Test with RC/CC/DS length of 0 | Returns 0x21 | |
| 5 | Test with RC/CC/DS length of 8 | Returns 0x29 | |
| 6 | Send a SMS PP with 2 TPDU TLV and inside two different secured data offsets | Returns 0x24 (the first offset) | |
| 7 | Same test as 1 but with FORMATTED_SMS_PP_UPD | Returns 0x21 | |
| 8 | Same test as 2 but with FORMATTED_SMS_PP_UPD | Returns 0x23 | |
| 9 | Same test as 3 but with FORMATTED_SMS_PP_UPD | Returns 0x26 | |
| 10 | Same test as 4 but with FORMATTED_SMS_PP_UPD | Returns 0x21 | |
| 11 | Same test as 5 but with FORMATTED_SMS_PP_UPD | Returns 0x29 | |

| | | | |
|----|--|---|--|
| 12 | Same test as 6 but with FORMATTED_SMS_PP_UPD | Returns 0x24 (the first offset) | |
| 13 | Test with FORMATTED_SMS_PP ENV Verify after call of the method the current TLV is the TPDU TLV: findTLV device identities, getSecuredDataOffset and then getValueByte to verify that the current TLV is the TPDU TLV | Returns 0x40 | |
| 14 | Same test as 4 but with FORMATTED_SMS_CB | Returns 0x16 | |
| 15 | Same test as 5 but with FORMATTED_SMS_CB | Returns 0x1E | |
| 16 | Test with FORMATTED_SMS_CB Verify after call of the method the current TLV is the Cell Broadcast Page TLV: findTLV device identities, getSecuredDataOffset and then getValueByte to verify that the current TLV is the Cell Broadcast Page TLV | Returns 0x58 | |
| 17 | Send an UNFORMATTED SMS CB envelope, getSecuredDataOffset | ToolkitException UNAVAILABLE_ELEMENT | |
| 18 | Send an UNFORMATTED SMS PP envelope | ToolkitException UNAVAILABLE_ELEMENT | |
| 19 | Send an FORMATTED SMS-PP envelope with no secured data , getSecuredDataOffset | Returns 0x21 | |

6.2.4.4.4 Test Coverage

This method has only been tested with call control and the tests shall be improved during 03.48 tests.

| CRR number | Test case number |
|------------|----------------------|
| N1 | 1, 2, 3, 4, 5, 6, 19 |
| N2 | 6, 12 |
| N3 | 1, 2, 3, 4, 5, 6, 19 |
| N4 | 7, 8, 9, 10, 11 |
| N5 | 14,15 |
| N6 | 13 |
| N7 | 16 |
| C1 | 17 |
| C2 | 18 |

6.2.4.5 Method getTheHandler

Test Area Reference: API_2_ENH_GTHD

6.2.4.5.1 Conformance Requirements

The method with following header shall be compliant to its definition in the API.

```
public static EnvelopeHandler getTheHandler()
    throws ToolkitException
```

Normal execution

CRRN1: The method shall return the single system instance of the EnvelopeHandler class.

CRRN2: The EnvelopeHandler is a Temporary JCRE Entry Point Object (see Javacard 2.1 Runtime Environment (JCRE) Specification [12])

Parameters error

No requirements

Context errors

CRR1: The method shall throw ToolkitException (HANDLER_NOT_AVAILABLE) if the handler is busy.

6.2.4.5.2 Test suite files

Test Script: API_2_ENH_GTHD_1.scr
 Test Applet: API_2_ENH_GTHD_1.java
 Load Script: API_2_ENH_GTHD_1.ldr
 Cleanup Script: API_2_ENH_GTHD_1.clr
 Parameter File: API_2_ENH_GTHD_1.par

6.2.4.5.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | getTheHandler twice | The returned objects shall be the same | |
| 2 | Verify that getTheHandler returns an EnvelopeHandler GetTheHandler | The reference returned shall be an EnvelopeHandler (checkcast) | |
| 3 | Verify the returned value is not null GetTheHandler | The reference returned shall not be null. | |

6.2.4.5.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 1, 2, 3 |
| N2 | To be checked in Framework tests and insert here cross reference |
| C1 | To be checked in Framework tests and insert here cross reference |

6.2.4.6 Method getTPUDLOffset

Test Area Reference: API_2_ENH_GTPO

6.2.4.6.1 Conformance Requirement:

The method with following header shall be compliant to its definition in the API.

```
public short getTPUDLOffset()
    throws ToolkitException
```

Normal execution

CRRN1: The method shall return the TPUDL offset in a SMS TPDU TLV.

CRRN2: The offset is from the first SMS TPDU TLV.

CRRN3: The method can be used if the event is EVENT_FORMATTED_SMS_PP_ENV.

CRRN4: The method can be used if the event is EVENT_FORMATTED_SMS_PP_UPD.

CRRN5: The method can be used if the event is EVENT_UNFORMATTED_SMS_PP_ENV.

CRRN6: The method can be used if the event is EVENT_UNFORMATTED_SMS_PP_UPD.

CRRN7: If the method is successful, the selected TLV should be the SMS TPDU TLV.

Parameters error

No requirements

Context errors

CRRC1: The method shall thrown ToolkitException (UNAVAILABLE_ELEMENT) in case of unavailable SMS TPDU TLV element.

CRRC2: The method shall thrown ToolkitException (UNAVAILABLE_ELEMENT) if the TPUDL field does not exist.

6.2.4.6.2 Test suite files

Specific triggering:

```

FORMATTED SMS PP UPD
UNFORMATTED SMS PP UPD
UNFORMATTED SMS PP ENV
SMS CB

```

Test Script: API_2_ENH_GTPO_1.scr
 Test Applet: API_2_ENH_GTPO_1.java
 Load Script: API_2_ENH_GTPO_1.ldr
 Cleanup Script: API_2_ENH_GTPO_1.clr
 Parameter ile: API_2_ENH_GTPO_1.par

6.2.4.6.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|-----------------------------------|------------------|
| 1 | Test with TP-OA length of 2 | Returns 0x0D | |
| 2 | Test with TP-OA length of 6 | Returns 0x0F | |
| 3 | Test with TP-OA length of 12 | Returns 0x12 | |
| 4 | Send a SMS PP with 2 TPDU TLV and inside two different UDL offsets | Returns 0x10 (the first offset) | |
| 5 | Same test as 1 but with FORMATTED_SMS_PP_UPD | Returns 0x0D | |
| 6 | Same test as 2 but with FORMATTED_SMS_PP_UPD | Returns 0x0F | |
| 7 | Same test as 3 but with FORMATTED_SMS_PP_UPD | Returns 0x12 | |
| 8 | Same test as 4 but with FORMATTED_SMS_PP_UPD | Returns 0x10 (the first offset) | |
| 9 | Same test as 1 but with UNFORMATTED_SMS_PP_UPD | Returns 0x0D | |
| 10 | Same test as 2 but with UNFORMATTED_SMS_PP_UPD | Returns 0x0F | |
| 11 | Same test as 3 but with UNFORMATTED_SMS_PP_UPD | Returns 0x12 | |
| 12 | Same test as 4 but with UNFORMATTED_SMS_PP_UPD | Returns 0x12 (the first offset) | |
| 13 | Same test as 1 but with UNFORMATTED_SMS_PP_ENV | Returns 0x0D | |
| 14 | Same test as 2 but with UNFORMATTED_SMS_PP_ENV | Returns 0x0F | |
| 15 | Same test as 3 but with UNFORMATTED_SMS_PP_ENV | Returns 0x12 | |
| 16 | Same test as 4 but with | Returns 0x10 (the first offset) | |

| | UNFORMATTED_SMS_PP_ENV | | |
|----|--|---|--|
| 17 | Verify after call of the method the current TLV is the TPDU TLV: findTLV device identities, getTPUDLOffset and then getValueByte to verify that the current TLV is the TPDU TLV | Returns 0x40 | |
| 18 | Send an envelope SMS CB, getTPUDLOffset | ToolkitException UNAVAILABLE_ELEMENT | |

6.2.4.6.4 Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17 |
| N2 | 4 |
| N3 | 1, 2, 3, 4, 17 |
| N4 | 5, 6, 7, 8 |
| N5 | 13, 14, 15, 16 |
| N6 | 9, 10, 11, 12 |
| N7 | 17 |
| C1 | 18 |
| C2 | Don't no how to test |

6.2.4.7 Method getLength

Test Area Reference: API_2_ENH_GLEN

6.2.4.7.1 Conformance Requirement

The method with following header shall be compliant to its definition in the API.

```
public short getLength()
    throws ToolkitException
```

Normal execution

CRRN1: returns the length in bytes of the TLV list.

Parameter Error

No requirements

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException.HANDLER_NOT_AVAILABLE.

6.2.4.7.2 Test Suite files

Specific triggering: None

Test Script: API_2_ENH_GLEN_1.scr
 Test Applet: API_2_ENH_GLEN_1.java
 Load Script: API_2_ENH_GLEN_1.ldr
 Cleanup Script: API_2_ENH_GLEN_1.clr
 Parameter File: API_2_ENH_GLEN_1.par

6.2.4.7.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|----------------------------------|------------------|
| 1 | Send an envelope SMS PP with BER length of 0x31 | Result of getLength() is 0x0031 | |
| 2 | Send an envelope SMS PP with BER length of 0x7F | Result of getLength() is 0x007Fh | |
| 3 | Send an envelope SMS PP with BER length of 81 80 | Result of getLength() is 0x0080h | |
| 4 | Send an envelope SMS PP with BER length of 81 FC | Result of getLength() is 0x00FCh | |

6.2.4.7.4 Test Coverage

| CRR number | Test case number |
|------------|------------------------------------|
| N1 | 1, 2, 3, 4 |
| C1 | Does not apply for EnvelopeHandler |

6.2.4.8 Method copy

Test Area Reference: API_2_ENH_COPY_BSS

6.2.4.8.1 Conformance Requirement

The method with following header shall be compliant to its definition in the API.

```
public short copy(byte[] dstBuffer,
                 short dstOffset,
                 short dstLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: copies the simple TLV list contained in the handler to the destination byte array.

CRRN2: returns dstOffset + dstLength.

Parameter errors

CRRP1: if dstBuffer is null a NullPointerException is thrown.

CRRP2: if dstOffset or dstLength or both would cause access outside array bounds, or if dstLength is negative, an ArrayIndexOutOfBoundsException is thrown.

CRRP3: if dstLength is grater than the length of the simple TLV List, an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException. OUT_OF_TLV_BOUNDARIES.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.4.8.2 Test Suite files

Specific triggering: None

Test Script: API_2_ENH_COPY_BSS_1.scr

Test Applet: API_2_ENH_COPY_BSS_1.java

Load Script: API_2_ENH_COPY_BSS_1.ldr

Cleanup Script: API_2_ENH_COPY_BSS_1.clr

Parameter File: API_2_ENH_COPY_BSS_1.par

6.2.4.8.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | NULL as parameter to dstBuffer | NullPointerException is thrown | |
| 2 | dstOffset ≥ dstBuffer.length dstBuffer.length = 5 dstOffset = 5 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | dstOffset < 0 dstBuffer.length = 5 dstOffset = -1 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 0 dstLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | DstOffset + dstLength > dstBuffer.length DstBuffer.length = 5 DstOffset = 3 DstLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | dstLength < 0 dstBuffer.length = 5 dstOffset = 0 dstLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | DstLength > length of the simple TLV list DstBuffer.length = 48 DstOffset = 0 DstLength = 48 | ToolkitException.OUT_OF_TLV_BOUNDS is thrown | |
| 8 | Successful call, dstBuffer is the whole buffer DstBuffer.length = 47 DstOffset = 0 DstLength = 47 | Result of copy() is 0X0047 | |
| 9 | Compare the buffer | Result of arrayCompare() is 0 | |
| 10 | Successful call, dstBuffer is part of a buffer DstBuffer.length = 50 dstOffset = 3 dstLength = 47 | Result of copy() is 0X0032 | |
| 11 | Compare the whole buffer | Result of arrayCompare() is 0 | |
| 12 | Successful call, dstBuffer is part of a buffer dstBuffer.length = 15 dstOffset = 3 dstLength = 6 | Result of copy() is 0X0009 | |
| 13 | Compare the whole buffer | Result of arrayCompare() is 0 | |
| 14 | Successful call, dstBuffer is part of a buffer dstBuffer.length = 260 dstOffset = 257 dstLength = 3 | Result of copy() is 0X0104 | |
| 15 | Compare the whole buffer | Result of arrayCompare() is 0 | |
| 16 | Successful call, copy with length =0 dstBuffer.length = 260 dstOffset = 260 dstLength = 0 | Result of copy() is 0x104 | |

6.2.4.8.4 Test Coverage

| CRR number | Test case number |
|------------|------------------------------------|
| N1 | 9, 11, 13, 15 |
| N2 | 8, 10, 12, 14, 16 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7 |
| C1 | Does not apply for EnvelopeHandler |

6.2.4.9 Method findTLV

Test Area Reference: API_2_ENH_FINDBB

6.2.4.9.1 Conformance Requirement

The method with following header shall be compliant to its definition in the API.

```
public byte findTLV(byte tag, byte occurrence)
    throws ToolkitException
```

Normal execution

Looks for the indicated occurrence of a TLV element from the beginning of the TLV list (handler buffer):

CRRN1: the method is successful if the required occurrence exists then the corresponding TLV becomes current.

CRRN2: if the method is successful then it returns TLV_FOUND_CR_SET when Comprehension Required flag is set.

CRRN3: if the method is successful then it returns TLV_FOUND_CR_NOT_SET when Comprehension Required flag is not set.

CRRN4: if the required occurrence of the TLV element does not exist, the current TLV is no longer defined and TLV_NOT_FOUND is returned.

CRRN5: The search method is comprehension required flag independent.

Parameter errors

CRRP1: if an input parameter is not valid (e.g. occurrence = 0) an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException BAD_INPUT_PARAMETER.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.4.9.2 Test Suite files

Specific triggering: None

Test Script: API_2_ENH_ENH_FINDBB_1.scr
 Test Applet: API_2_ENH_ENH_FINDBB_1.java
 Load Script: API_2_ENH_ENH_FINDBB_1.ldr
 Cleanup Script: API_2_ENH_FINDBB_1.clr
 Parameter File: API_2_ENH_FINDBB_1.par

6.2.4.9.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|------------------|
| | Trig the applet with SMS PP including one more tag 02 and one TAG 04 | | |
| 1 | Invalid input parameter Occurrence = 0 | ToolkitException.BAD_INPUT_PARAMETER is thrown | |
| 2 | Search 1st TLV Tag = 02h Occurrence = 1 | Result is TLV_FOUND_CR_SET | |
| 3 | Call the getValueLength() method | Result is 0x02 | |
| 4 | Search 2nd TLV Tag = 06h Occurrence = 1 | Result is TLV_FOUND_CR_SET | |
| 5 | Call the getValueLength() method | Result is 0x05h | |
| 6 | Select a TLV (tag 02h) | | |
| | Search a wrong tag Tag = 03h Occurrence = 1 | Result is TLV_NOT_FOUND | |
| 7 | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 8 | Search a tag with wrong occurrence Tag = 02h Occurrence = 3 | Result is TLV_NOT_FOUND | |
| 9 | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 10 | Search the TLV Tag = 02h Occurrence = 2 | Result is TLV_FOUND_CR_NOT_SET | |
| 11 | Search the TLV Tag = 04h Occurrence = 1 | Result is TLV_FOUND_CR_NOT_SET | |
| 12 | Search tag 81h Tag = 86h Occurrence = 1 | Result is TLV_FOUND_CR_SET | |
| 13 | Search tag 84h Tag = 84h Occurrence = 1 | Result is TLV_FOUND_CR_NOT_SET | |

6.2.4.9.4 Test Coverage

| CRR number | Test case number |
|------------|------------------------------------|
| N1 | 3, 5 |
| N2 | 2, 4 |
| N3 | 10, 11 |
| N4 | 6, 7, 8, 9 |
| N5 | 12, 13 |
| P1 | 1 |
| C1 | Does not apply for EnvelopeHandler |

6.2.4.10 Method getValueLength

Test Area Reference: API_2_ENH_GVLE

6.2.4.10.1 Conformance Requirement

The method with following header shall be compliant to its definition in the API.

```
public short getValueLength()
    throws ToolkitException
```

Normal execution

CRRN1: gets and returns the binary length of the value field for the last TLV element which has been found in the handler.

Parameter errors

No requirements

Context errors

CRR1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

CRR2: in case of unavailable TLV element an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException UNAVAILABLE_ELEMENT.

6.2.4.10.2 Test Suite files

Specific triggering: None

Test Script: API_2_ENH_GVLE_1.scr
 Test Applet: API_2_ENH_GVLE_1.java
 Load Script: API_2_ENH_GVLE_1.ldr
 Cleanup Script: API_2_ENH_GVLE_1.clr
 Parameter File: API_2_ENH_GVLE_1.par

6.2.4.10.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| | Fill the SMS PP with TLV: Tag 33, Length C8 | | |
| 1 | getValueLength() | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| 2 | Search TLV 02h | | |
| | getValueLength() | Result is 0X0002 | |
| 3 | Search TLV 0Bh | | |
| | getValueLength() | Result is 0X0024 | |
| 4 | Search TLV 33h | | |
| | getValueLength() | Result is 0X00C8 | |

6.2.4.10.4 Test Coverage

| CRR number | Test case number |
|------------|------------------------------------|
| N1 | 2, 3, 4 |
| C1 | Does not apply for EnvelopeHandler |
| C2 | 1 |

6.2.4.11 Method getValueByte

Test Area Reference: API_2_ENH_GVBYS

6.2.4.11.1 Conformance Requirement

The method with following header shall be compliant to its definition in the API.

```
public byte getValueByte(short valueOffset)
    throws ToolkitException
```

Normal execution

CRRN1: Gets a byte from the last TLV element which has been found in the handler and returns its value (1 byte).

Parameter errors

CRRP1: if valueOffset is out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

CRRC2: in case of unavailable TLV element an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException UNAVAILABLE_ELEMENT.

6.2.4.11.2 Test Suite files

Specific triggering: None

Test Script: API_2_ENH_GVBY.scr
 Test Applet: API_2_ENH_GVBY_1.java
 Load Script: API_2_ENH_GVBY.ldr
 Cleanup Script: API_2_ENH_GVBY_1.clr
 Parameter File: API_2_ENH_GVBY_1.par

6.2.4.11.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| | Fill the SMS PP with TLV: Tag 33, Length C8 Value 01 02 ... | | |
| 1 | getValueByte(0) | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| 2 | Search TLV 02h getValueByte(2) | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 3 | Search TLV 02h getValueByte(1) | Result is 0x81 | |
| 4 | Search TLV 02h (Device Identities TLV) getValueByte(0) | Result is 83h (Source) | |
| 5 | Search TLV 33h getValueByte(7E) | Result is 0x7F | |
| 6 | Search TLV 33h getValueByte(80) | Result is 0x81 | |
| 7 | getValueByte(7F) | Result is 0x80 | |
| 8 | Search TLV B3h getValueByte(C7) | Result is 0xC8 | |

6.2.4.11.4 Test Coverage

| CRR number | Test case number |
|------------|------------------------------------|
| N1 | 3, 4, 5, 6, 7, 8 |
| P1 | 2 |
| C1 | Does not apply for EnvelopeHandler |
| C2 | 1 |

6.2.4.12 Method copyValue

Test Area Reference: API_2_ENH_CPYVS_BSS

6.2.4.12.1 Conformance Requirement

The method with following header shall be compliant with its definition in the API.

```
public short copyValue(short valueOffset,
                      byte[] dstBuffer,
                      short dstOffset,
                      short dstLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: copies a part of the last TLV element which has been found, into a destination. buffer.

CRRN2: returns dstOffset + dstLength.

Parameter errors

CRRP1: if dstBuffer is null NullPointerException is thrown.

CRRP2: if dstOffset or dstLength or both would cause access outside array bounds, or if dstLength is negative ArrayIndexOutOfBoundsException is thrown.

CRRP3: if valueOffset, dstLength or both are out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

CRRC2: in case of unavailable TLV element an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException UNAVAILABLE_ELEMENT.

6.2.4.12.3 Test Suite files

Specific triggering: None

Test Script: API_2_ENH_CPYVS_BSS_1.scr
 Test Applet: API_2_ENH_CPYVS_BSS_1.java
 Load Script: API_2_ENH_CPYVS_BSS_1.ldr
 Cleanup Script: API_2_ENH_CPYVS_BSS_1.clr
 Parameter File: API_2_ENH_CPYVS_BSS_1.par

6.2.4.12.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | Search TLV 02h copyValue() with a null dstBuffer | NullPointerException is thrown | |
| 2 | Search TLV 0Bh dstOffset ≥ dstBuffer.length dstBuffer.length = 5 dstOffset = 5 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | dstOffset < 0 dstBuffer.length = 5 | ArrayIndexOutOfBoundsException is thrown | |

| | | | |
|----|--|--|--|
| | dstOffset = -1 dstLength = 1 | | |
| 4 | dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 0 dstLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | dstOffset + dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 3 dstLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | dstLength < 0 dstBuffer.length = 5 dstOffset = 0 dstLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | Search TLV 06h | | |
| | valueOffset ≥ TLV Length valueOffset = 6 dstBuffer.length = 15 dstOffset = 0 dstLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 8 | valueOffset < 0 valueOffset = -1 dstBuffer.length = 15 dstOffset = 0 dstLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 9 | dstLength > TLV length valueOffset = 0 dstBuffer.length = 15 dstOffset = 0 dstLength = 7 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 10 | valueOffset + dstLength > TLV length valueOffset = 2 dstBuffer.length = 15 dstOffset = 0 dstLength = 5 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 11 | Search TLV 01h copyValue() | ToolkitException.UNAVAILABLE_ELEMENT is thrown on the copyValue() method | |
| 12 | Search TLV 06h Successful call valueOffset = 0 dstBuffer.length = 6 dstOffset = 0 dstLength = 6 | Result of copyValue() is 0x0006 | |
| 13 | Compare buffer buffer = 81 11 22 33 44 F5 | Result is 00h | |
| 14 | initialise dstBuffer dstBuffer = 55 55 ... 55 | | |
| | Successful call valueOffset = 1 dstBuffer.length = 20 dstOffset = 3 dstLength = 4 | Result of copyValue() is 0x0007 | |
| 15 | Compare buffer buffer = 55 55 55 11 22 33 44 55 55 55 55 55 55 55 55 55 55 55 55 55 | Result is 00h | |
| 16 | Successful call, copy with length =0 dstBuffer.length = 20 dstOffset = 20 dstLength = 0 | Result of copyValue() is 20 | |

6.2.4.12.4 Test Coverage

| CRR number | Test case number |
|------------|---------------------------------------|
| N1 | 13, 15 |
| N2 | 12, 14, 16 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7, 8, 9, 10 |
| C1 | Does not apply for EnvelopeHandler |
| C2 | 11 |

6.2.4.13 Method compareValue

Test Area Reference: API_2_ENH_CPRVS_BSS

6.2.4.13.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte compareValue(short valueOffset,
                        byte[] compareBuffer,
                        short compareOffset,
                        short compareLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

Compares the last found TLV element with a buffer:

CRRN1: returns 0 if identical.

CRRN2: returns -1 if the first miscomparing byte in simple TLV List is less than that in compareBuffer.

CRRN3: returns 1 if the first miscomparing byte in simple TLV List is greater than that in compareBuffer.

Parameter errors

CRRP1: if compareBuffer is null NullPointerException shall be thrown.

CRRP2: if compareOffset or compareLength or both would cause access outside array bounds, or if compareLength is negative ArrayIndexOutOfBoundsException shall be thrown.

CRRP3: if valueOffset, dstLength or both are out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

CRRC2: in case of unavailable TLV element an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException UNAVAILABLE_ELEMENT.

6.2.4.13.3 Test Suite files

Specific triggering: None

Test Script: API_2_ENH_CPRVS_BSS_1.scr

Test Applet: API_2_ENH_CPRVS_BSS_1.java

Load Script: API_2_ENH_CPRVS_BSS_1.ldr

Cleanup Script: API_2_ENH_CPRVS_BSS_1.clr

Parameter File: API_2_ENH_CPRVS_BSS_1.par

6.2.4.13.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | Search TLV 02h | | |
| | compareValue() with a null compareBuffer | NullPointerException is thrown | |
| 2 | Search TLV 0Bh | | |
| | compareOffset ≥ compareBuffer.length compareBuffer.length = 5 compareOffset = 5 compareLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | compareOffset < 0 compareBuffer.length = 5 compareOffset = -1 compareLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | compareLength > compareBuffer.length compareBuffer.length = 5 compareOffset = 0 compareLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | compareOffset + compareLength > compareBuffer.length compareBuffer.length = 5 compareOffset = 3 compareLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | compareLength < 0 compareBuffer.length = 5 compareOffset = 0 compareLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | Search TLV 06h | | |
| | valueOffset ≥ TLV Length valueOffset = 6 compareBuffer.length = 15 compareOffset = 0 compareLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 8 | valueOffset < 0 valueOffset = -1 compareBuffer.length = 15 compareOffset = 0 compareLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 9 | compareLength > TLV length valueOffset = 0 compareBuffer.length = 15 compareOffset = 0 compareLength = 7 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 10 | valueOffset + compareLength > TLV length valueOffset = 2 compareBuffer.length = 15 compareOffset = 0 compareLength = 5 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 11 | Search TLV 01h | Result is TLV_NOT_FOUND | |
| | compareValue() | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| 12 | Search TLV 06h | | |
| | Initialise compareBuffer compareBuffer = 81 11 22 33 44 F5 | | |
| | Compare buffers valueOffset = 0 compareOffset = 0 compareLength = 6 | Result is 00h | |
| 13 | Initialise compareBuffer compareBuffer = 7F 11 22 33 44 F5 | | |
| | Compare buffers with same parameters | Result is -1 | |
| 14 | Initialise compareBuffer compareBuffer = | | |

| | | | |
|----|---|-------------------------------|--|
| | 83 11 22 33 44 F5 | | |
| | Compare buffers with same parameters | Result is -1 | |
| 15 | Initialise compareBuffer compareBuffer = 55 55 55 81 11 22 33 44 F5 55 55 55 55 55 | | |
| | Compare buffers valueOffset = 1 compareOffset = 4 compareLength = 5 | Result is 00h | |
| 16 | Initialise compareBuffer compareBuffer = 55 55 55 81 10 22 33 44 F5 55 55 55 55 55 | | |
| | Compare buffers with same parameters | Result is +1 | |
| 17 | Initialise compareBuffer compareBuffer = 55 55 55 81 12 22 33 44 F5 55 55 55 55 55 | | |
| | Compare buffers with same parameters | Result is -1 | |
| 18 | Successful call, compareValue with length =0 CompareBuffer.length = 15 CompareOffset = 15 CompareLength = 0 | Result of compareValue() is 0 | |

6.2.4.13.4 Test Coverage

| CRR number | Test case number |
|------------|------------------------------------|
| N1 | 12, 15 |
| N2 | 13, 16, 18 |
| N3 | 14, 17 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7, 8, 9, 10 |
| C1 | Does not apply for EnvelopeHandler |
| C2 | 11 |

6.2.4.14 Method findAndCopyValue(byte tag, byte[] dstBuffer, short dstOffset)

Test Area Reference: API_2_ENH_FACYB_BS

6.2.4.14.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short findAndCopyValue(byte tag,
                             byte[] dstBuffer,
                             short dstOffset)
throws java.lang.NullPointerException,
       java.lang.ArrayIndexOutOfBoundsException,
       ToolkitException
```

Normal execution

CRRN1: looks for the first occurrence of a TLV element from the beginning of a TLV list and copy its value into a destination buffer.

CRRN2: if no TLV element is found, the UNAVAILABLE_ELEMENT exception is thrown and the current TLV is no longer defined.

CRRN3: if the method is successful then the corresponding TLV becomes current and dstOffset + length of the copied value is returned.

CRRN4: The search method is comprehension required flag independent.

Parameter errors

CRRP1: if dstBuffer is null NullPointerException shall be thrown.

CRRP2: if dstOffset would cause access outside array bounds ArrayIndexOutOfBoundsException shall be thrown.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.4.14.3 Test Suite files

Specific triggering: None

Test Script: API_2_ENH_FACYB_BS_1.scr
 Test Applet: API_2_ENH_FACYB_BS_1.java
 Load Script: API_2_ENH_FACYB_BS_1.ldr
 Cleanup Script: API_2_ENH_FACYB_BS_1.clr
 Parameter File: API_2_ENH_FACYB_BS_1.par

6.2.4.14.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|------------------|
| | Fill the SMS PP with TLV: Tag 02 Value 22 44 Tag 33, Length C4 Value 01 02 ... | | |
| 1 | FindAndCopyValue() with a null dstBuffer | NullPointerException is thrown | |
| 2 | dstOffset ≥ dstBuffer.length tag = 06h dstBuffer.length = 06 dstOffset = 06 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | dstOffset < 0 dstBuffer.length = 06 dstOffset = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | length > dstBuffer.length dstBuffer.length = 05 dstOffset = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | DstOffset + length > dstBuffer.length DstBuffer.length = 06 DstOffset = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | Select a TLV (tag 02h) findAndCopyValue() tag = 03h | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 7 | Successful call Tag = 06h DstBuffer.length = 06 DstOffset = 0 | Result of findAndCopyValue () is 0006 | |
| 8 | Compare buffer buffer = 81 11 22 33 44 F5 | Result is 00h | |
| 9 | initialise dstBuffer dstBuffer = 55 55 ... 55 | | |
| | Successful call dstBuffer.length = 12 dstOffset = 2 | Result of findAndCopyValue () is 0008 | |
| 10 | Compare buffer buffer = 55 55 81 11 22 33 44 F5 55 55 55 55 | Result is 00h | |
| 11 | Successful call tag = 02h dstBuffer.length = 2 dstOffset = 0 | Result of findAndCopyValue () is 0002 | |

| | | | |
|----|--|---------------------------------------|--|
| 12 | Compare buffer buffer = 83 81 | Result is 00h | |
| 13 | Successful call (with tag 82h) tag = 82h dstBuffer.length = 02 dstOffset = 0 | Result of findAndCopyValue () is 0002 | |
| 14 | Compare buffer buffer = 83 81 | Result is 00h | |
| 15 | Successful call (with tag B3h) tag = B3h dstBuffer.length = C4 dstOffset = 0 | Result of findAndCopyValue () is 00C4 | |
| 16 | Compare buffer buffer = 01 02 ... C4 | Result is 00h | |

6.2.4.14.4 Test Coverage

| CRR number | Test case number |
|------------|------------------------------------|
| N1 | 8, 10, 12 |
| N2 | 6 |
| N3 | 7, 9, 11 |
| N4 | 13, 14, 15, 16 |
| P1 | 1 |
| P2 | 2, 3, 4, 5 |
| C1 | Does not apply for EnvelopeHandler |

6.2.4.15 Method findAndCopyValue(byte tag, byte occurrence, short valueOffset, byte[] dstBuffer, short dstOffset, short dstLength)

Test Area Reference: API_2_ENH_FACYBS_BSS

6.2.4.15.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short findAndCopyValue(byte tag,
                             byte occurrence,
                             short valueOffset,
                             byte[] dstBuffer,
                             short dstOffset,
                             short dstLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: looks for the indicated occurrence of a TLV element from the beginning of a TLV list and copy its value into a destination buffer.

CRRN2: if no TLV element is found, the UNAVAILABLE_ELEMENT exception is thrown and the current TLV is no longer defined.

CRRN3: if the method is successful then the corresponding TLV becomes current and dstOffset + dstLength is returned.

CRRN4: The search method is comprehension required flag independent.

Parameter errors

CRRP1: if dstBuffer is null NullPointerException shall be thrown.

CRRP2: if dstOffset or dstLength or both would cause access outside array bounds, or if dstLength is negative ArrayIndexOutOfBoundsException shall be thrown.

CRRP3: if valueOffset, dstLength or both are out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.4.15.3 Test Suite files

Test Script: API_2_ENH_FACYBS_BSS_1.scr
 Test Applet: API_2_ENH_FACYBS_BSS_1.java
 Load Script: API_2_ENH_FACYBS_BSS_1.ldr
 Cleanup Script: API_2_ENH_FACYBS_BSS_1.clr
 Parameter File: API_2_ENH_FACYBS_BSS_1.par

6.2.4.15.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| | Fill the SMS PP with TLV: Tag 02 Value 22 44 Tag 33, Length C4 Value 01 02 ... | | |
| 1 | findAndCopyValue() with a null dstBuffer | NullPointerException is thrown | |
| 2 | dstOffset ≥ dstBuffer.length tag = 06h, occurrence = 1 valueOffset = 0 dstBuffer.length = 5 dstOffset = 5 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | dstOffset < 0 dstBuffer.length = 5 dstOffset = -1 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 0 dstLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | dstOffset + dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 3 dstLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | dstLength < 0 dstBuffer.length = 5 dstOffset = 0 dstLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | valueOffset ≥ Value Length tag = 06h, occurrence = 1 valueOffset = 6 dstBuffer.length = 15 dstOffset = 0 dstLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 8 | valueOffset < 0 valueOffset = -1 dstBuffer.length = 15 dstOffset = 0 dstLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 9 | dstLength > Value length valueOffset = 0 dstBuffer.length = 15 dstOffset = 0 dstLength = 7 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 10 | valueOffset + dstLength > Text String length valueOffset = 2 dstBuffer.length = 15 dstOffset = 0 dstLength = 5 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |

| | | | |
|----|---|---|--|
| 11 | Select a TLV (tag 02h) findAndCopyValue() tag = 06h occurrence = 2 | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 12 | Successful call tag = 06h, occurrence = 1 valueOffset = 0 dstBuffer.length = 06 dstOffset = 0 dstLength = 06 | Result of findAndCopyValue() is 6 | |
| 13 | Compare buffer buffer = 81 11 22 33 44 F5 | Result is 00h | |
| 14 | initialise dstBuffer dstBuffer = 55 55 ... 55 | | |
| | Successful call tag = 06h, occurrence = 1 valueOffset = 2 dstBuffer.length = 12 dstOffset = 3 dstLength = 04 | Result of findAndCopyValue () is 0007 | |
| 15 | Compare buffer buffer = 55 55 55 22 33 44 F5 55 55 55 55 55 | Result is 00h | |
| 16 | Successful call tag = 02h, occurrence = 1 valueOffset = 0 dstBuffer.length = 12 dstOffset = 0 dstLength = 2 | Result of findAndCopyValue() is 0002 | |
| 17 | Compare buffer buffer = 83 81 55 ... 55 | Result is 00h | |
| 18 | Successful call tag = 02h, occurrence = 2 valueOffset = 0 dstBuffer.length = 12 dstOffset = 0 dstLength = 2 | Result of findAndCopyValue() is 0002 | |
| 19 | Compare buffer buffer = 22 44 55 ... 55 | Result is 00h | |
| 20 | Successful call (with tag 82h) tag = 82h occurrence = 1 valueOffset = 0 dstBuffer.length = 12 dstOffset = 0 dstLength = 02 | Result of findAndCopyValue () is 0002 | |
| 21 | Compare buffer buffer = 83 81 55 ... 55 | Result is 00h | |
| 22 | Successful call (with tag 82h) tag = 82h occurrence = 2 valueOffset = 0 dstBuffer.length = 12 dstOffset = 0 dstLength = 02 | Result of findAndCopyValue () is 0002 | |
| 23 | Compare buffer Buffer = 22 44 55 ... 55 | Result is 00h | |
| 24 | Successful call, findAndCopyValue with length =0 DstBuffer.length = 12 dstOffset = 12 dstLength = 0 | Result of findAndCopyValue () is 12 | |

6.2.4.15.4 Test Coverage

| CRR number | Test case number |
|------------|------------------------------------|
| N1 | 13, 15, 17, 19 |
| N2 | 11 |
| N3 | 12, 14, 16, 18, 24 |
| N4 | 20, 21, 22, 23 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7, 8, 9, 10 |
| C1 | Does not apply for EnvelopeHandler |

6.2.4.16 Method findAndCompareValue(byte tag, byte[] compareBuffer, short compareOffset)

Test Area Reference: API_2_ENH_FACRB_BS

6.2.4.16.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte findAndCompareValue(byte tag,
                               byte[] compareBuffer,
                               short compareOffset)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

Looks for the first occurrence of a TLV element from beginning of a TLV list and compare its value with a buffer:

CRRN1: if no TLV element is found, the UNAVAILABLE_ELEMENT exception is thrown and the current TLV is no longer defined.

CRRN2: if the method is successful then the corresponding TLV becomes current.

CRRN3: if identical returns 0.

CRRN4: if the first miscomparing byte in simple TLV is less than that in compareBuffer returns -1.

CRRN5: if the first miscomparing byte in simple TLV is greater than that in compareBuffer returns 1.

CRRN6: The search method is comprehension required flag independent.

Parameter errors

CRRP1: if compareBuffer is null NullPointerException shall be thrown.

CRRP2: if compareOffset would cause access outside array bounds ArrayIndexOutOfBoundsException shall be thrown.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.4.16.3 Test Suite files

Test Script: API_2_ENH_FACRB_BS_1.scr

Test Applet: API_2_ENH_FACRB_BS_1.java

Load Script: API_2_ENH_FACRB_BS_1.ldr

Cleanup Script: API_2_ENH_FACRB_BS_1.clr

Parameter File: API_2_ENH_FACRB_BS_1.par

6.2.4.16.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|------------------|
| | Fill the SMS PP with TLV: Tag 02 Value 22 44 Tag 33, Length C4 Value 01 02 ... | | |
| 1 | findAndCompareValue() with a null dstBuffer | NullPointerException is thrown | |
| 2 | compareOffset ≥ compareBuffer.length tag = 06h compareBuffer.length = 12 compareOffset = 12 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | compareOffset < 0 compareBuffer.length = 12 compareOffset = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | length > compareBuffer.length compareBuffer.length = 05 compareOffset = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | compareOffset + length > compareBuffer.length compareBuffer.length = 12 compareOffset = 7 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | Select a TLV (tag 02h) findAndCompareValue() tag = 03h | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 7 | Initialise compareBuffer compareBuffer = 81 11 22 33 44 F5 | | |
| | Compare buffers tag = 06h compareOffset = 0 | Result is 00h | |
| 8 | Verify current TLV getValueLength() | Result is 06 | |
| 9 | Initialise compareBuffer compareBuffer = 81 11 22 33 44 F4 | | |
| | Compare buffers with same parameters | Result is +1 | |
| 10 | Initialise compareBuffer compareBuffer = 81 11 22 33 44 F6 | | |
| | Compare buffers with same parameters | Result is -1 | |
| 11 | Initialise compareBuffer compareBuffer = 55 55 81 11 22 33 44 F5 55 55 55 55 | | |
| | Compare buffers compareOffset = 2 | Result is 00h | |
| 12 | Initialise compareBuffer compareBuffer = 55 55 83 81 55 55 55 55 55 55 55 55 | | |
| | Compare buffers compareOffset = 2 | Result is 00h | |
| 13 | Initialise compareBuffer compareBuffer = 55 55 83 80 55 55 55 55 55 55 55 55 | | |
| | Compare buffers compareOffset = 2 | Result is +1 | |
| 14 | Initialise compareBuffer compareBuffer = 55 55 83 82 55 55 55 55 55 55 55 55 | | |
| | Compare buffers compareOffset = 2 | Result is -1 | |
| 15 | Initialise compareBuffer compareBuffer = 83 81 55 55 55 55 55 55 55 55 55 55 | | |
| | Successful call (with tag 02h) tag = 02h compareBuffer.length = 12 compareOffset = 0 | Result is 00h | |

| | | | |
|----|--|---------------|--|
| 16 | Initialise compareBuffer CompareBuffer = 01 02 ... C4 | | |
| | Successful call (with tag B3h) Tag = B3h CompareBuffer.length = C4 CompareOffset = 0 | Result is 00h | |

6.2.4.16.4 Test Coverage

| CRR number | Test case number |
|------------|------------------------------------|
| N1 | 6 |
| N2 | 8 |
| N3 | 7, 11, 12 |
| N4 | 9, 13 |
| N5 | 10, 14 |
| N6 | 15, 16 |
| P1 | 1 |
| P2 | 2, 3, 4, 5 |
| C1 | Does not apply for EnvelopeHandler |

6.2.4.17 Method findAndCompareValue(byte tag, byte occurrence, short valueOffset, byte[] compareBuffer, short compareOffset, short compareLength)

Test Area Reference: API_2_ENH_FACRBBS_BSS

6.2.4.17.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte findAndCompareValue(byte tag,
                               byte occurrence,
                               short valueOffset,
                               byte[] compareBuffer,
                               short compareOffset,
                               short compareLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

Looks for the indicated occurrence of a TLV element from the beginning of a TLV list and compare its value with a buffer:

- CRRN1: if no TLV element is found, the UNAVAILABLE_ELEMENT exception is thrown and the current TLV is no longer defined.
- CRRN2: if the method is successful then the corresponding TLV becomes current.
- CRRN3: if identical 0 is returned.
- CRRN4: if the first miscomparing byte in simple TLV is less than that in compareBuffer -1 is returned.
- CRRN5: if the first miscomparing byte in simple TLV is greater than that in compareBuffer 1 is returned
- CRRN6: The search method is comprehension required flag independent.

Parameter errors

- CRRP1: if compareBuffer is null NullPointerException shall be thrown.
- CRRP2: if compareOffset or compareLength or both would cause access outside array bounds, or if compareLength is negative ArrayIndexOutOfBoundsException shall be thrown.

CRRP3: if valueOffset, compareLength or both are out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.

CRRP4: if an input parameter is not valid (e.g. occurrence = 0) an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException BAD_INPUT_PARAMETER.

Context errors

CRR1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.4.17.3 Test Suite files

Test Script: API_2_ENH_FACRBBS_BSS_1.scr
 Test Applet: API_2_ENH_FACRBBS_BSS_1.java
 Load Script: API_2_ENH_FACRBBS_BSS_1.ldr
 Cleanup Script: API_2_ENH_FACRBBS_BSS_1.clr
 Parameter File: API_2_ENH_FACRBBS_BSS_1.par

6.2.4.17.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| | Fill the SMS PP with TLV: Tag 02 Value 22 44 Tag 33, Length C4 Value 01 02 ... | | |
| 1 | findAndCompareValue() with a null compareBuffer | NullPointerException is thrown | |
| 2 | compareOffset ≥ compareBuffer.length tag = 06h, occurrence = 1 valueOffset = 0 compareBuffer.length = 6 compareOffset = 6 compareLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | compareOffset < 0 compareBuffer.length = 6 compareOffset = -1 compareLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | compareLength > compareBuffer.length compareBuffer.length = 5 compareOffset = 0 compareLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | compareOffset + compareLength > compareBuffer.length compareBuffer.length = 5 compareOffset = 3 compareLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | compareLength < 0 compareBuffer.length = 5 compareOffset = 0 compareLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | valueOffset ≥ Value Length tag = 06h, occurrence = 1 valueOffset = 6 compareBuffer.length = 15 compareOffset = 0 compareLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 8 | valueOffset < 0 valueOffset = -1 compareBuffer.length = 15 compareOffset = 0 compareLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 9 | compareLength > Value length valueOffset = 0 compareBuffer.length = 15 compareOffset = 0 compareLength = 7 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 10 | valueOffset + compareLength > Value length | ToolkitException.OUT_OF_TLV_ | |

| | | | |
|----|---|---|--|
| | valueOffset = 2 compareBuffer.length = 15 compareOffset = 0 compareLength = 5 | BOUNDARIES is thrown | |
| 11 | Invalid parameter occurrence = 0 | ToolkitException.BAD_INPUT_PARAMETER is thrown | |
| 12 | Select a TLV (tag 02h) findAndCompareValue() tag = 06h occurrence = 2 | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 13 | Initialise compareBuffer compareBuffer = 81 11 22 33 44 F5 findAndCompareValue() tag = 06h, occurrence = 1 valueOffset = 0 compareOffset = 0 compareLength = 6 | Result is 00h | |
| 14 | Verify current TLV getValueLength() | Result is 0006 | |
| 15 | Initialise compareBuffer compareBuffer = 81 11 22 33 44 F4 Compare buffers with same parameters | Result is +1 | |
| 16 | Initialise compareBuffer compareBuffer = 81 11 22 33 44 F6 Compare buffers with same parameters | Result is -1 | |
| 17 | Initialise compareBuffer compareBuffer = 55 55 55 22 33 44 F5 55 55 55 55 Compare buffers valueOffset = 2 compareOffset = 3 compareLength = 4 | Result is 00h | |
| 18 | Initialise compareBuffer compareBuffer = 55 55 55 22 33 45 F5 55 55 55 55 Compare buffers with same parameters | Result is -1 | |
| 19 | Initialise compareBuffer compareBuffer = 55 55 55 22 33 43 F5 55 55 55 55 Compare buffers with same parameters | Result is +1 | |
| 20 | Initialise compareBuffer compareBuffer = 83 81 55 55 55 55 55 55 55 55 55 55 findAndCompareValue() tag = 02h, occurrence = 1 valueOffset = 0 compareOffset = 0 compareLength = 2 | Result is 00h | |
| 21 | Initialise compareBuffer compareBuffer = 22 44 55 55 55 55 55 55 55 55 55 55 findAndCompareValue() tag = 02h, occurrence = 2 valueOffset = 0 compareOffset = 0 compareLength = 2 | Result is 00h | |
| 22 | Initialise compareBuffer compareBuffer = 22 45 55 55 55 55 55 55 55 55 55 55 findAndCompareValue() tag = 02h, occurrence = 2 valueOffset = 0 compareOffset = 0 compareLength = 2 | Result is -1 | |
| 23 | Initialise compareBuffer compareBuffer = 83 81 55 55 55 55 55 55 55 55 55 55 Successful call (with tag 02h) tag = 02h, occurrence = 1 valueOffset = 0 compareBuffer.length = 12 | Result is 00h | |

| | | | |
|----|---|--|--|
| | compareOffset = 0 compareLength = 2 | | |
| 24 | Initialise compareBuffer compareBuffer = 01 02 ... C4 | | |
| | Successful call (with tag B3h) tag = B3h, occurrence = 1 valueOffset = 0 compareBuffer.length = 00C4 compareOffset = 0 compareLength = 00C4 | Result is 00h | |
| 25 | Successful call, findAndCompareValue with length =0 DstBuffer.length = C4 DstOffset = C4 DstLength = 0 | Result of findAndCompareValue() is 00h | |

6.2.4.17.4

Test Coverage

| CRR number | Test case number |
|------------|------------------------------------|
| N1 | 12 |
| N2 | 14 |
| N3 | 13, 17, 20, 21, 25 |
| N4 | 19, 15 |
| N5 | 16, 18, 22 |
| N6 | 23, 24 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7, 8, 9, 10 |
| P4 | 11 |
| C1 | Does not apply for EnvelopeHandler |

6.2.5 Class EnvelopeResponseHandler

6.2.5.1 Method getTheHandler

Test Area Reference: API_2_ERH_GTHD

6.2.5.1.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
public static EnvelopeResponseHandler getTheHandler()
    throws ToolkitException
```

Normal execution

CRRN1: The method shall return the single system instance of the EnvelopeResponseHandler class.

CRRN2: The EnvelopeResponseHandler is a Temporary JCRE Entry Point Object (see Javacard 2.1 Runtime Environment (JCRE) Specification [12])

Parameter errors

No requirements

Context errors

CRRC1: The method shall thrown ToolkitException (HANDLER_NOT_AVAILABLE) if the handler is busy.

CRRC2: After the first invocation of the ProactiveHandler.send method the EnvelopeResponseHandler is no more available

6.2.5.1.2 Test suite files

Test Script: API_2_ERH_GTHD_1.scr
 Test Applet: API_2_ERH_GTHD_1.java
 Load Script: API_2_ERH_GTHD_1.ldr
 Cleanup Script: API_2_ERH_GTHD_1.clr
 Parameter File: API_2_ERH_GTHD_1.par

6.2.5.1.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | getTheHandler twice | The returned objects shall be the same | |
| 2 | Verify that getTheHandler returns an EnvelopeHandler getTheHandler | The reference returned shall be an EnvelopeResponseHandler (checkcast) | |
| 3 | Verify the returned value is not null getTheHandler | The reference returned shall not be null. | |
| 4 | getTheHandler, then send a proactive command, and then, appendTLV | ToolkitException HANDLER_NOT_AVAILABLE is thrown | |

6.2.5.1.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 1, 2, 3 |
| N2 | To be checked in Framework tests and insert here cross reference |
| C1 | To be checked in Framework tests and insert here cross reference |
| C2 | 4 |

6.2.5.2 Method post

Test Area Reference: API_2_ERH_POSTB

6.2.5.2.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public void post(byte statusType)
    throws ToolkitException
```

Normal execution

CRRN1: When the method is called, the toolkit applet can continue it's processing (e.g. prepare a proactive command).

CRRN2: The byte statusType is SW1 of the status.

CRRN3: If the send method is called after a post method, the posted data are the first sent to the ME.

CRRN4: The SIM Toolkit Framework shall take the optional Application Data posted by the triggered toolkit applet if present, secure and send the response packet the SIM Toolkit Framework will return the response APDU defined by the toolkit applet.

Parameter error

No requirements

Context errors

CRRC1: The method shall thrown ToolkitException (HANDLER_NOT_AVAILABLE) if the handler is busy.

6.2.5.2.2 Test suite files

Specific triggering: Call control

- Test Script: API_2_ERH_POSTB_1.scr
- Test Applet: API_2_ERH_POSTB_1.java
- Load Script: API_2_ERH_POSTB_1.ldr
- Cleanup Script: API_2_ERH_POSTB_1.clr
- Parameter File: API_2_ERH_POSTB_1.par

6.2.5.2.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|---|
| 1 | getTheHandler and then post (the handler is empty) | | 9000 |
| 2 | Fill the handler (appendTLV to have bytes in it)and then post data with status 9F | | 9FFD data are retrieved with GET RESPONSE command |
| 3 | Verify that after a post the handler is no more available appendTLV, post and then appendTLV | ToolkitException HANDLER_NOT_AVAILABLE is thrown on the second appendTLV | |
| 4 | construct the response (appendTLV with 0x10 data) and post it with status 9E and then send a display text | | 9E12 and posted data retrieved by a GET RESPONSE with status 9113 and display text retrieved by a FETCH |
| 5 | Verify that it is possible to send a proactive command after a post getTheHandler and post , then send a display text | | 91 13 and display text is retrieved by a FETCH |
| 6 | Verify it is not possible to post after a proactive command getTheHandler, appendTLV, send a display text, post. | ToolkitException HANDLER_NOT_AVAILABLE is thrown | |
| 7 | Verify that the handler is no more available after a post getTheHandler, appendTLV, post with status 9E, post with status 9F | ToolkitException HANDLER_NOT_AVAILABLE is thrown | 9E12 and posted data retrieved by a GET RESPONSE |

6.2.5.2.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 3, 4, 7 |
| N2 | 1, 2, 4, 7 |
| N3 | 4, 5 |
| N4 | To be checked in Framework tests and insert here cross reference |
| C1 | 6 |

6.2.5.3 Method postAsBERTLV

Test Area Reference:API_2_ERH_POSTBB

6.2.5.3.1 Conformance Requirement

The method with following header shall be compliant to its definition in the API.

```
public void postAsBERTLV(byte statusType,  
                        byte tag)  
    throws ToolkitException
```

Normal execution

CRRN1: When the method is called, the toolkit applet can continue it's processing (e.g. prepare a proactive command) the SIM Toolkit Framework will return the response APDU defined by the toolkit applet.

CRRN2: The byte statusType is SW1 of the status

CRRN3: If the send method is called after a postAsBERTLV method, the posted data are the first sent to the ME.

CRRN4: The byte tag is the BER Tag at the beginning of the simple TLV list.

Parameter errors

No requirements

Context errors

CRR1: The method shall thrown ToolkitException (HANDLER_NOT_AVAILABLE) if the handler is busy.

6.2.5.3.2 Test suite files

Specific triggering: Call control

| | |
|-----------------|-------------------------|
| Test Script: | API_2_ERH_POSTBB_1.scr |
| Test Applet: | API_2_ERH_POSTBB_1.java |
| Load Script: | API_2_ERH_POSTBB_1.ldr |
| Cleanup Script: | API_2_ERH_POSTBB_1.clr |
| Parameter File: | API_2_ERH_POSTBB_1.par |

6.2.5.3.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|---|
| 1 | getTheHandler and then postAsBERTLV (the handler is empty) | | 9F02 data are retrieved with GET RESPONSE command, the tag shall be 33 and the length is 00 |
| 2 | Fill the handler and then postAsBERTLV the data with status 9F, and tag 33 | | 9FFF data are retrieved with GET RESPONSE command, the tag shall be 33 |
| 3 | appendTLV, postAsBERTLV and then appendTLV | ToolkitException HANDLER_NOT_AVAILABLE is thrown on the second appendTLV | |
| 4 | construct the response (appendTLV with 0x10 data) and postAsBERTLV it with status 9E, tag 75 and then send a display text | | 9E14 and posted data retrieved by a GET RESPONSE the tag shall be 75 with status 9113 and display text retrieved by a FETCH |
| 5 | getTheHandler and postAsBERTLV, then send a display text | | 9E02 and posted data retrieved by a GET RESPONSE the tag 33 (and the length 00) with status 9113 and display text is retrieved by a FETCH |
| 6 | Verify it is not possible to postAsBERTLV after a proactive command getTheHandler, appendTLV, send a display text, postAsBERTLV. | ToolkitException HANDLER_NOT_AVAILABLE is thrown on the postAsBERTLV | |
| 7 | Verify that the handler is no more available after a postAsBERTLV getTheHandler, appendTLV(with data length = 0x10, postAsBERTLV with status 9E, tag 56, postAsBERTLV with status 9F, tag 28 | ToolkitException HANDLER_NOT_AVAILABLE is thrown on the second postAsBERTLV | 9E14 and posted data retrieved by a GET RESPONSE the tag shall be 56 with status 9000 |

6.2.5.3.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 3, 4, 7 |
| N2 | 1, 2, 4, 7 |
| N3 | 4, 5 |
| N4 | 2, 4, 7 |
| C1 | 6 |

6.2.5.4 Method getLength

Test Area Reference: API_2_ERH_GLEN

6.2.5.4.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short getLength()  
    throws ToolkitException
```

Normal execution

CRRN1: returns the length in bytes of the TLV list.

Parameter errors

No requirements

Context errors

CRR1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException.HANDLER_NOT_AVAILABLE.

6.2.5.4.3 Test Suite files

Specific triggering: Unrecognized Envelope

Test Script: API_2_ERH_GLEN_1.scr
 Test Applet: API_2_ERH_GLEN_1.java
 Load Script: API_2_ERH_GLEN_1.ldr
 Cleanup Script: API_2_ERH_GLEN_1.clr
 Parameter File: API_2_ERH_GLEN_1.par

6.2.5.4.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|------------------------------|------------------|
| 1 | Clear the handler getLength() | Result of getLength() is 0 | |
| 2 | appendTLV with length of 7 getLength() | Result of getLength() is 9 | |
| 3 | Clear the handler and appendTLV with Length of 250 getLength() | Result of getLength() is 253 | |
| 4 | Build a 7Fh Envelope response handler getLength() | Result of getLength() is 81h | |
| 5 | Build a 80h Envelope response handler getLength() | Result of getLength() is 83h | |

Note : Test case 3 is limited to 253 and not 256 because the current 03.19 [7] is not clear enough on this point. So this test allows the two possible implementations.

6.2.5.4.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 1, 2, 3, 4, 5 |
| C1 | Does not apply for Envelope response handler |

6.2.5.5 Method copy

Test Area Reference: API_2_ERH_COPY_BSS

6.2.5.5.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short copy(byte[] dstBuffer,
                 short dstOffset,
                 short dstLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: copies the simple TLV list contained in the handler to the destination byte array.

CRRN2: returns dstOffset + dstLength.

Parameter errors

CRRP1: if dstBuffer is null a NullPointerException is thrown.

CRRP2: if dstOffset or dstLength or both would cause access outside array bounds, or if dstLength is negative, an ArrayIndexOutOfBoundsException is thrown.

CRRP3: if dstLength is greater than the length of the simple TLV List, an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException. OUT_OF_TLV_BOUNDARIES.

Context errors

CRR1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.5.5.3 Test Suite files

Specific triggering: Unrecognized Envelope

Test Script: API_2_ERH_COPY_BSS_1.scr

Test Applet: API_2_ERH_COPY_BSS_1.java

Load Script: API_2_ERH_COPY_BSS_1.ldr

Cleanup Script: API_2_ERH_COPY_BSS_1.clr

Parameter File: API_2_ERH_COPY_BSS_1.par

6.2.5.5.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | appendTLV with value length of 7 NULL as parameter to dstBuffer | NullPointerException is thrown | |
| 2 | | | |
| | dstOffset ≥ dstBuffer.length dstBuffer.length = 5 dstOffset = 5 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | dstOffset < 0 dstBuffer.length = 5 dstOffset = -1 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 0 dstLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | dstOffset + dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 3 dstLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | dstLength < 0 dstBuffer.length = 5 dstOffset = 0 dstLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | dstLength > length of the simple TLV list dstBuffer.length = 10 dstOffset = 0 dstLength = 10 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 8 | Successful call, dstBuffer is the whole buffer dstBuffer.length = 9 dstOffset = 0 dstLength = 9 | Result of copy() is 9 | |
| 9 | Compare the buffer | Result of arrayCompare() is 0 | |
| 10 | Successful call, dstBuffer is part of a buffer dstBuffer.length = 15 dstOffset = 3 dstLength = 9 | Result of copy() is 12 | |
| 11 | Compare the whole buffer | Result of arrayCompare() is 0 | |
| 12 | Successful call, dstBuffer is part of a buffer dstBuffer.length = 15 dstOffset = 3 dstLength = 6 | Result of copy() is 9 | |
| 13 | Compare the whole buffer | Result of arrayCompare() is 0 | |
| 14 | Successful call, copy with length =0 dstBuffer.length = 15 dstOffset = 15 dstLength = 0 | Result of copy() is 15 | |

6.2.5.5.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 9, 11, 13 |
| N2 | 8, 10, 12, 14 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7 |
| C1 | Does not apply for Envelope response handler |

6.2.5.6 Method findTLV

Test Area Reference: API_2_ERH_FINDBB

6.2.5.6.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte findTLV(byte tag, byte occurrence)
    throws ToolkitException
```

Normal execution

Looks for the indicated occurrence of a TLV element from the beginning of the TLV list (handler buffer):

CRRN1: the method is successful if the required occurrence exists then the corresponding TLV becomes current.

CRRN2: if the method is successful then it returns TLV_FOUND_CR_SET when Comprehension Required flag is set.

CRRN3: if the method is successful then it returns TLV_FOUND_CR_NOT_SET when Comprehension Required flag is not set.

CRRN4: if the required occurrence of the TLV element does not exist, the current TLV is no longer defined and TLV_NOT_FOUND is returned.

CRRN5: The search method is comprehension required flag independent.

Parameter errors

CRRP1: if an input parameter is not valid (e.g. occurrence = 0) an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException BAD_INPUT_PARAMETER.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.5.6.3 Test Suite files

Specific triggering: Unrecognized Envelope

Test Script: API_2_ERH_FINDBB_1.scr

Test Applet: API_2_ERH_FINDBB_1.java

Load Script: API_2_ERH_FINDBB_1.ldr

Cleanup Script: API_2_ERH_FINDBB_1.clr

Parameter File: API_2_ERH_FINDBB_1.par

6.2.5.6.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | append the handler with TLVs: 81 03 11 22 33 82 02 99 77 | | |
| | Invalid input parameter Occurrence = 0 | ToolkitException.BAD_INPUT_PARAMETER is thrown | |
| 2 | Search 1st TLV Tag = 01h Occurrence = 1 | Result is TLV_FOUND_CR_SET | |
| 3 | Call the getValueLength() method | Result is 03h | |
| 4 | Search 2nd TLV Tag = 02h Occurrence = 1 | Result is TLV_FOUND_CR_SET | |
| 5 | Call the getValueLength() method | Result is 02h | |

| | | | |
|----|---|---|--|
| 6 | Select a TLV (tag 02h) Search a wrong tag Tag = 03h Occurrence = 1 | Result is TLV_NOT_FOUND | |
| 7 | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 8 | Search a tag with wrong occurrence Tag = 01h Occurrence = 2 | Result is TLV_NOT_FOUND | |
| 9 | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 10 | Append a TLV with tag=02h Search the TLV Tag = 02h Occurrence = 2 | Result is TLV_FOUND_CR_NOT_SET | |
| 11 | Append a TLV with tag=04h Search the TLV Tag = 04h Occurrence = 1 | Result is TLV_FOUND_CR_NOT_SET | |
| 12 | Search tag 81h Tag = 81h Occurrence = 1 | Result is TLV_FOUND_CR_SET | |
| 13 | Search tag 84h Tag = 84h Occurrence = 1 | Result is TLV_FOUND_CR_NOT_SET | |

6.2.5.6.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 3, 5 |
| N2 | 2, 4 |
| N3 | 10, 11 |
| N4 | 6, 7,8, 9 |
| N5 | 12, 13 |
| P1 | 1 |
| C1 | Does not apply for Envelope response handler |

6.2.5.7 Method getValueLength

Test Area Reference: API_2_ERH_GVLE

6.2.5.7.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short getValueLength()
    throws ToolkitException
```

Normal execution

CRRN1: gets and returns the binary length of the value field for the last TLV element which has been found in the handler.

Parameter errors

No requirements

Context errors

CRR1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

CRRC2: in case of unavailable TLV element an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException UNAVAILABLE_ELEMENT.

6.2.5.7.3 Test Suite files

Specific triggering: Unrecognized Envelope

Test Script: API_2_ERH_GVLE_1.scr
 Test Applet: API_2_ERH_GVLE_1.java
 Load Script: API_2_ERH_GVLE_1.ldr
 Cleanup Script: API_2_ERH_GVLE_1.clr
 Parameter File: API_2_ERH_GVLE_1.par

6.2.5.7.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | appendTLV 02 02 02 02 findTLV with TAG 03 getValueLength() | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| 2 | appendTLV with TAG 0D and length 00 Search TLV 0Dh getValueLength() | Result is 00h | |
| 3 | Clear the handler and append TLV with TAG 0D and length 02 Search TLV 0Dh getValueLength() | Result is 02h | |
| 4 | Clear the handler and append TLV with TAG 0D and length 0x7F Search TLV 0Dh getValueLength() | Result is 7Fh | |
| 5 | Clear the handler and append TLV with TAG 0D and length 0x80 Search TLV 0Dh getValueLength() | Result is 80h | |
| 6 | Clear the handler and append TLV with TAG 0D and length 0xF1 Search TLV 0Dh getValueLength() | Result is F1h | |

6.2.5.7.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 2, 3, 4, 5, 6 |
| C1 | Does not apply for EnvelopeResponseHandler |
| C2 | 1 |

6.2.5.8 Method getValueByte

Test Area Reference: API_2_ERH_GVBYS

6.2.5.8.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte getValueByte(short valueOffset)
    throws ToolkitException
```

Normal execution

CRRN1: Gets a byte from the last TLV element which has been found in the handler and returns its value (1 byte).

Parameter errors

CRRP1: if valueOffset is out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

CRRC2: in case of unavailable TLV element an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException UNAVAILABLE_ELEMENT.

6.2.5.8.3 Test Suite files

Specific triggering: Unrecognized Envelope

Test Script: API_2_ERH_GVBYS_1.scr
 Test Applet: API_2_ERH_GVBYS_1.java
 Load Script: API_2_ERH_GVBYS_1.ldr
 Cleanup Script: API_2_ERH_GVBYS_1.clr
 Parameter File: API_2_ERH_GVBYS_1.par

6.2.5.8.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | appendTLV 82 02 81 82, appendTLV 81 03 11 22 FE findTLV with TAG 03 | | |
| | getValueByte(0) | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| 2 | Search TLV 01h | | |
| | getValueByte(3) | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 3 | Search TLV 01h | | |
| | getValueByte(2) | Result is FEh | |
| 4 | Search TLV 02h | | |
| | getValueByte(0) | Result is 81h | |
| 5 | appendTLV with TAG 0D, Length 0x7E, Value: 00, 01, ..., 7D | | |
| | getValueByte(7D) | Result is 7Dh | |
| 6 | clear the handler, appendTLV with TAG 0D, Length 0x80, Value: 00, 01, ..., 7F | | |
| | getValueByte(7E) | Result is 7Eh | |
| | getValueByte(7F) | Result is 7Fh | |
| 7 | clear the handler, appendTLV with TAG 0D, Length 0xF1, Value: 00, 01, ..., F0 | | |
| | getValueByte(F0) | Result is F0h | |

6.2.5.8.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 3, 4, 5, 6, 7, 8 |
| P1 | 2 |
| C1 | Does not apply for EnvelopeResponseHandler |
| C2 | 1 |

6.2.5.9 Method copyValue

Test Area Reference: API_2_ERH_CPYVS_BSS

6.2.5.9.1 Conformance requirement

The method with following header shall be compliant with its definition in the API.

```
public short copyValue(short valueOffset,
                      byte[] dstBuffer,
                      short dstOffset,
                      short dstLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: copies a part of the last TLV element which has been found, into a destination. buffer.

CRRN2: returns dstOffset + dstLength.

Parameter errors

CRRP1: if dstBuffer is null NullPointerException is thrown.

CRRP2: if dstOffset or dstLength or both would cause access outside array bounds, or if dstLength is negative ArrayIndexOutOfBoundsException is thrown.

CRRP3: if valueOffset, dstLength or both are out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

CRRC2: in case of unavailable TLV element an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException UNAVAILABLE_ELEMENT.

6.2.5.9.3 Test Suite files

Specific triggering: Unrecognized Envelope

Test Script: API_2_ERH_CPYVS_BSS_1.scr

Test Applet: API_2_ERH_CPYVS_BSS_1.java

Load Script: API_2_ERH_CPYVS_BSS_1.ldr

Cleanup Script: API_2_ERH_CPYVS_BSS_1.clr

Parameter File: API_2_ERH_CPYVS_BSS_1.par

6.2.5.9.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | appendTLV with TAG: 0D and length 16 Select Text String TLV | | |
| | copyValue() with a null dstBuffer | NullPointerException is thrown | |
| 2 | | | |
| | dstOffset ≥ dstBuffer.length dstBuffer.length = 5 dstOffset = 5 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | dstOffset < 0 dstBuffer.length = 5 dstOffset = -1 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 0 dstLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | dstOffset + dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 3 dstLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | dstLength < 0 dstBuffer.length = 5 dstOffset = 0 dstLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | clear the handler, appendTLV with TAG: 0D and length 6 Select Text String TLV | | |
| | valueOffset ≥ Text String Length valueOffset = 6 dstBuffer.length = 15 dstOffset = 0 dstLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 8 | valueOffset < 0 valueOffset = -1 dstBuffer.length = 15 dstOffset = 0 dstLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 9 | dstLength > Text String length valueOffset = 0 dstBuffer.length = 15 dstOffset = 0 dstLength = 7 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 10 | valueOffset + dstLength > Text String length valueOffset = 2 dstBuffer.length = 15 dstOffset = 0 dstLength = 5 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 11 | Initialise the handler | | |
| | copyValue() | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| 12 | clear the handler, appendTLV with TAG: 0D and value: 04 00 01 ... 0F Select Text String TLV | | |
| | Successful call valueOffset = 0 dstBuffer.length = 17 dstOffset = 0 dstLength = 17 | Result of copyValue() is 17 | |
| 13 | Compare buffer buffer = 04 00 01 ... 0F | Result is 00h | |
| 14 | initialise dstBuffer dstBuffer = 55 55 ... 55 | | |
| | Successful call valueOffset = 2 dstBuffer.length = 20 dstOffset = 3 dstLength = 12 | Result of copyValue() is 15 | |

| | | | |
|----|--|-----------------------------|--|
| 15 | Compare buffer buffer = 55 55 55 01 02 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55 | Result is 00h | |
| 16 | Successful call, copyValue with length =0 dstBuffer.length = 20 dstOffset = 20 dstLength = 0 | Result of copyValue() is 20 | |

6.2.5.9.4 Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | 13, 15 |
| N2 | 12, 14, 16 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7, 8, 9, 10 |
| C1 | Does not apply for EnvelopeResponseHandl er |
| C2 | 11 |

6.2.5.10 Method compareValue

Test Area Reference: API_2_ERH_CPRVS_BSS

6.2.5.10.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte compareValue(short valueOffset,
                        byte[] compareBuffer,
                        short compareOffset,
                        short compareLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

Compares the last found TLV element with a buffer:

CRRN1: returns 0 if identical.

CRRN2: returns -1 if the first miscomparing byte in simple TLV List is less than that in compareBuffer.

CRRN3: returns 1 if the first miscomparing byte in simple TLV List is greater than that in compareBuffer.

Parameter errors

CRRP1: if compareBuffer is null NullPointerException shall be thrown.

CRRP2: if compareOffset or compareLength or both would cause access outside array bounds, or if compareLength is negative ArrayIndexOutOfBoundsException shall be thrown.

CRRP3: if valueOffset, dstLength or both are out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

CRRC2: in case of unavailable TLV element an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException UNAVAILABLE_ELEMENT.

6.2.5.10.3 Test Suite files

Specific triggering: Unrecognized Envelope

Test Script: API_2_ERH_CPRVS_BSS_1.scr

Test Applet: API_2_ERH_CPRVS_BSS_1.java

Load Script: API_2_ERH_CPRVS_BSS_1.ldr

Cleanup Script: API_2_ERH_CPRVS_BSS_1.clr

Parameter File: API_2_ERH_CPRVS_BSS_1.par

6.2.5.10.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | appendTLV with TAG: 0D and length 16 Select Text String TLV | | |
| | compareValue() with a null compareBuffer | NullPointerException is thrown | |
| 2 | | | |
| | compareOffset ≥ compareBuffer.length compareBuffer.length = 5 compareOffset = 5 compareLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | compareOffset < 0 compareBuffer.length = 5 compareOffset = -1 compareLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | compareLength > compareBuffer.length compareBuffer.length = 5 compareOffset = 0 compareLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | compareOffset + compareLength > compareBuffer.length compareBuffer.length = 5 compareOffset = 3 compareLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | compareLength < 0 compareBuffer.length = 5 compareOffset = 0 compareLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | appendTLV with TAG: 0D and length 6 Select Text String TLV | | |
| | valueOffset ≥ Text String Length valueOffset = 6 compareBuffer.length = 15 compareOffset = 0 compareLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 8 | valueOffset < 0 valueOffset = -1 compareBuffer.length = 15 compareOffset = 0 compareLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 9 | compareLength > Text String length valueOffset = 0 compareBuffer.length = 15 compareOffset = 0 compareLength = 7 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 10 | valueOffset + compareLength > Text String length valueOffset = 2 compareBuffer.length = 15 compareOffset = 0 compareLength = 5 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 11 | Initialise the handler | | |
| | compareValue() | ToolkitException.UNAVAILABLE | |

| | | | |
|----|--|-------------------------------|--|
| | | _ELEMENT is thrown | |
| 12 | appendTLV with TAG: 0D and value: 04 00 01 ... 0F Select Text String TLV Initialise compareBuffer compareBuffer = 04 00 01 ... 0F | | |
| | Compare buffers valueOffset = 0 compareOffset = 0 compareLength = 17 | Result is 00h | |
| 13 | Initialise compareBuffer compareBuffer = 04 00 01 02 03 04 05 06 07 08 05 0A 0B 0C 0D 0E 10 | | |
| | Compare buffers with same parameters | Result is -1 | |
| 14 | Initialise compareBuffer compareBuffer = 03 00 01 ... 0F | | |
| | Compare buffers with same parameters | Result is +1 | |
| 15 | Initialise compareBuffer compareBuffer = 55 55 55 01 02 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55 | | |
| | Compare buffers valueOffset = 2 compareOffset = 3 compareLength = 12 | Result is 00h | |
| 16 | Initialise compareBuffer compareBuffer = 55 55 55 02 01 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55 | | |
| | Compare buffers with same parameters | Result is -1 | |
| 17 | Initialise compareBuffer compareBuffer = 55 55 55 01 02 03 04 05 06 07 08 09 0A 0A 0D 55 55 55 55 55 | | |
| | Compare buffers with same parameters | Result is +1 | |
| 18 | Successful call, compareValue with length =0 compareBuffer.length = 15 compareOffset = 15 compareLength = 0 | Result of compareValue() is 0 | |

6.2.5.10.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 12, 15, 18 |
| N2 | 13, 16 |
| N3 | 14, 17 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7, 8, 9, 10 |
| C1 | Does not apply for EnvelopeResponseHandler |
| C2 | 11 |

6.2.5.11 Method findAndCopyValue(byte tag, byte[] dstBuffer, short valueOffset)

Test Area Reference: API_2_ERH_FACYB_BS

6.2.5.11.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short findAndCopyValue(byte tag,
                             byte[] dstBuffer,
                             short dstOffset)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: looks for the first occurrence of a TLV element from the beginning of a TLV list and copy its value into a destination buffer.

CRRN2: if no TLV element is found, the UNAVAILABLE_ELEMENT exception is thrown and the current TLV is no longer defined.

CRRN3: if the method is successful then the corresponding TLV becomes current and dstOffset + length of the copied value is returned.

CRRN4: The search method is comprehension required flag independent.

Parameter errors

CRRP1: if dstBuffer is null NullPointerException shall be thrown.

CRRP2: if dstOffset would cause access outside array bounds ArrayIndexOutOfBoundsException shall be thrown.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.5.11.3 Test Suite files

Specific triggering: Unrecognized Envelope

Test Script: API_2_ERH_FACYB_BS_1.scr

Test Applet: API_2_ERH_FACYB_BS_1.java

Load Script: API_2_ERH_FACYB_BS_1.ldr

Cleanup Script: API_2_ERH_FACYB_BS_1.clr

Parameter File: API_2_ERH_FACYB_BS_1.par

6.2.5.11.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | Initialise the handler | | |
| | findAndCopyValue() with a null dstBuffer | NullPointerException is thrown | |
| 2 | appendTLV with TAG: 0D and length 16 Select Text String TLV dstOffset ≥ dstBuffer.length | ArrayIndexOutOfBoundsException is thrown | |
| | tag = 0Dh dstBuffer.length = 20 dstOffset = 20 | | |
| 3 | dstOffset < 0 dstBuffer.length = 20 dstOffset = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | dstOffset + length > dstBuffer.length dstBuffer.length = 20 dstOffset = 5 | ArrayIndexOutOfBoundsException is thrown | |

| | | | |
|----|---|---|--|
| 5 | length > dstBuffer.length dstBuffer.length = 15 dstOffset = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | clear the handler, appendTLV with TAG 02 and Length 02 Select a TLV (tag 02h) | | |
| | findAndCopyValue() tag = 03h | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 7 | appendTLV with TAG: 0D and value: 04 00 01 ... 0F | | |
| | Successful call Tag = 0Dh dstBuffer.length = 17 dstOffset = 0 | Result of findAndCopyValue() is 17 | |
| 8 | Compare buffer buffer = 04 00 01 ... 0F | Result is 00h | |
| 9 | initialise dstBuffer dstBuffer = 55 55 ... 55 | | |
| | Successful call dstBuffer.length = 20 dstOffset = 2 | Result of findAndCopyValue() is 19 | |
| 10 | Compare buffer buffer = 55 55 04 00 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0E 0F 55 | Result is 00h | |
| 11 | clear the handler, appendTLV with TAG: 0D and value: 04 00 01 ... 0F append a 2nd Text String TLV | | |
| | Successful call tag = 0Dh dstBuffer.length = 17 dstOffset = 0 | Result of findAndCopyValue() is 17 | |
| 12 | Compare buffer buffer = 04 00 01 ... 0F | Result is 00h | |
| 13 | clear the handler, appendTLV with TAG: 0D and value: 04 00 01 ... 0F | | |
| | Successful call (with tag 8Dh) tag = 8Dh dstBuffer.length = 17 dstOffset = 0 | Result of findAndCopyValue() is 17 | |
| 14 | Compare buffer buffer = 04 00 01 ... 0F | Result is 00h | |
| 15 | Append tag 0Fh buffer = 00 01 ... 0F | | |
| | Successful call (with tag 8Fh) tag = 8Fh dstBuffer.length = 16 dstOffset = 0 | Result of findAndCopyValue() is 16 | |
| 16 | Compare buffer buffer = 00 01 ... 0F | Result is 00h | |

6.2.5.11.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 8, 10, 12 |
| N2 | 6 |
| N3 | 7, 9, 11 |
| N4 | 13, 14, 15, 16 |
| P1 | 1 |
| P2 | 2, 3, 4, 5 |
| C1 | Does not apply for EnvelopeResponseHandler |

6.2.5.12 Method findAndCopyValue(byte tag, byte occurrence, short valueOffset, byte[] dstBuffer, short dstOffset, short dstLength)

Test Area Reference: API_2_ERH_FACYBBS_BSS

6.2.5.12.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short findAndCopyValue(byte tag,
                             byte occurrence,
                             short valueOffset,
                             byte[] dstBuffer,
                             short dstOffset,
                             short dstLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: looks for the indicated occurrence of a TLV element from the beginning of a TLV list and copy its value into a destination buffer.

CRRN2: if no TLV element is found, the UNAVAILABLE_ELEMENT exception is thrown and the current TLV is no longer defined.

CRRN3: if the method is successful then the corresponding TLV becomes current and dstOffset + dstLength is returned.

CRRN4: The search method is comprehension required flag independent.

Parameter errors

CRRP1: if dstBuffer is null NullPointerException shall be thrown.

CRRP2: if dstOffset or dstLength or both would cause access outside array bounds, or if dstLength is negative ArrayIndexOutOfBoundsException shall be thrown.

CRRP3: if valueOffset, dstLength or both are out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.5.12.3 Test Suite files

Specific triggering: Unrecognized Envelope

Test Script: API_2_ERH_FACYBBS_BSS_1.scr
 Test Applet: API_2_ERH_FACYBBS_BSS_1.java
 Load Script: API_2_ERH_FACYBBS_BSS_1.ldr
 Cleanup Script: API_2_ERH_FACYBBS_BSS_1.clr
 Parameter File: API_2_ERH_FACYBBS_BSS_1.par

6.2.5.12.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | Initialise the handler | | |
| | findAndCopyValue() with a null dstBuffer | NullPointerException is thrown | |
| 2 | appendTLV with TAG: 0D and length 16 | | |
| | dstOffset ≥ dstBuffer.length tag = 0Dh, occurrence = 1 valueOffset = 0 dstBuffer.length = 5 dstOffset = 5 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | dstOffset < 0 dstBuffer.length = 5 dstOffset = -1 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 0 dstLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | dstOffset + dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 3 dstLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | dstLength < 0 dstBuffer.length = 5 dstOffset = 0 dstLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | appendTLV with TAG: 0D and length 6 | | |
| | valueOffset ≥ Text String Length tag = 0Dh, occurrence = 1 valueOffset = 6 dstBuffer.length = 15 dstOffset = 0 dstLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 8 | valueOffset < 0 valueOffset = -1 dstBuffer.length = 15 dstOffset = 0 dstLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 9 | dstLength > Text String length valueOffset = 0 dstBuffer.length = 15 dstOffset = 0 dstLength = 7 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 10 | valueOffset + dstLength > Text String length valueOffset = 2 dstBuffer.length = 15 dstOffset = 0 dstLength = 5 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 11 | clear the handler, appendTLV with TAG 02 and Length 02 | | |
| | Select a TLV (tag 02h) | | |
| | findAndCopyValue() tag = 0Dh occurrence = 2 | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 12 | clear the handler and appendTLV with TAG: 0D and value: 04 00 01 ... 0F | | |
| | Successful call tag = 0Dh, occurrence = 1 | Result of findAndCopyValue() is 17 | |

| | | | |
|----|---|-------------------------------------|--|
| | valueOffset = 0 dstBuffer.length = 17 dstOffset = 0 dstLength = 17 | | |
| 13 | Compare buffer buffer = 04 00 01 ... 0F | Result is 00h | |
| 14 | initialise dstBuffer dstBuffer = 55 55 ... 55 | | |
| | Successful call tag = 0Dh, occurrence = 1 valueOffset = 2 dstBuffer.length = 20 dstOffset = 3 dstLength = 12 | Result of findAndCopyValue() is 15 | |
| 15 | Compare buffer buffer = 55 55 55 01 02 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55 | Result is 00h | |
| 16 | Append a Text String TLV tag = 0D buffer = 00 11 22 33 44 55 (no specific DCS byte) | | |
| | Successful call tag = 0Dh, occurrence = 1 valueOffset = 0 dstBuffer.length = 20 dstOffset = 0 dstLength = 17 | Result of findAndCopyValue() is 17 | |
| 17 | Compare buffer buffer = 04 00 01 ... 0F | Result is 00h | |
| 18 | Successful call tag = 0Dh, occurrence = 2 valueOffset = 0 dstBuffer.length = 6 dstOffset = 0 dstLength = 6 | Result of findAndCopyValue() is 6 | |
| 19 | Compare buffer buffer = 00 11 22 33 44 55 | Result is 00h | |
| 20 | clear the handler and appendTLV with TAG: 0D and value: 04 00 01 ... 0F | | |
| | Successful call (with tag 8Dh) tag = 8Dh occurrence = 1 valueOffset = 0 dstBuffer.length = 17 dstOffset = 0 dstLength = 17 | Result of findAndCopyValue () is 17 | |
| 21 | Compare buffer buffer = 04 00 01 ... 0F | Result is 00h | |
| 22 | Append tag 0Fh buffer = 00 01 ... 0F | | |
| | Successful call (with tag 8Fh) tag = 8Fh occurrence = 1 valueOffset = 0 dstBuffer.length = 16 dstOffset = 0 dstLength = 16 | Result of findAndCopyValue () is 16 | |
| 23 | Compare buffer buffer = 00 01 ... 0F | Result is 00h | |
| 24 | Successful call, findAndCopyValue with length =0 dstBuffer.length = 16 dstOffset = 16 dstLength = 0 | Result of findAndCopyValue () is 16 | |

6.2.5.12.4 Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | 13, 15, 17, 19 |
| N2 | 11 |
| N3 | 12, 14, 16, 18, 24 |
| N4 | 20, 21, 22, 23 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7, 8, 9, 10 |
| C1 | Does not apply for EnvelopeResponseHandl er |

6.2.5.13 Method findAndCompareValue(byte tag, byte[] compareBuffer, short compareOffset)

Test Area Reference: API_2_ERH_FACRB_BS

6.2.5.13.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte findAndCompareValue(byte tag,
                               byte[] compareBuffer,
                               short compareOffset)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

Looks for the first occurrence of a TLV element from beginning of a TLV list and compare its value with a buffer:

CRRN1: if no TLV element is found, the UNAVAILABLE_ELEMENT exception is thrown and the current TLV is no longer defined.

CRRN2: if the method is successful then the corresponding TLV becomes current.

CRRN3: if identical returns 0.

CRRN4: if the first miscomparing byte in simple TLV is less than that in compareBuffer returns -1.

CRRN5: if the first miscomparing byte in simple TLV is greater than that in compareBuffer returns 1.

CRRN6: The search method is comprehension required flag independent.

Parameter errors

CRRP1: if compareBuffer is null NullPointerException shall be thrown.

CRRP2: if compareOffset would cause access outside array bounds ArrayIndexOutOfBoundsException shall be thrown.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.5.13.3 Test Suite files

Specific triggering: Unrecognized Envelope

Test Script: API_2_ERH_FACRB_BS_1.scr

Test Applet: API_2_ERH_FACRB_BS_1.java
 Load Script: API_2_ERH_FACRB_BS_1.ldr
 Cleanup Script: API_2_ERH_FACRB_BS_1.clr
 Parameter File: API_2_ERH_FACRB_BS_1.par

6.2.5.13.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|------------------|
| 1 | appendTLV with TAG: 0D and length 16 | | |
| | findAndCompareValue() with a null dstBuffer and tag 0Dh | NullPointerException is thrown | |
| 2 | compareOffset ≥ compareBuffer.length tag = 0Dh compareBuffer.length = 20 compareOffset = 20 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | compareOffset < 0 compareBuffer.length = 20 compareOffset = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | compareOffset + length > compareBuffer.length compareBuffer.length = 20 compareOffset = 5 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | length > compareBuffer.length compareBuffer.length = 15 compareOffset = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | clear the handler, appendTLV with TAG 02 and Length 02 Select a TLV (tag 02h) | | |
| | findAndCompareValue() tag = 03h | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| 7 | Verify current TLV getValueLength() | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 8 | clear the handler and appendTLV with TAG: 0D and value: 04 00 01 ... 0F Initialise compareBuffer compareBuffer = 04 00 01 ... 0F | | |
| | Compare buffers tag = 0Dh compareOffset = 0 | Result is 00h | |
| 9 | Verify current TLV getValueLength() | Result is 17 | |
| 10 | Initialise compareBuffer compareBuffer = 04 00 01 ... 10 | | |
| | Compare buffers with same parameters | Result is -1 | |
| 11 | Initialise compareBuffer compareBuffer = 03 00 01 ... 0F | | |
| | Compare buffers with same parameters | Result is +1 | |
| 12 | Initialise compareBuffer compareBuffer = 55 55 04 00 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0E 0F 55 | | |
| | Compare buffers compareOffset = 2 | Result is 00h | |
| 13 | append a Text String TLV tag = 0Dh buffer = 00 11 22 33 44 55 | | |
| | Initialise compareBuffer compareBuffer = 55 55 04 00 01 02 03 04 05 06 07 08 09 0A 0B | | |

| | | | |
|----|--|---------------|--|
| | 0C 0D 0E 0F 55 | | |
| | Compare buffers compareOffset = 2 | Result is 00h | |
| 14 | Initialise compareBuffer compareBuffer = 55 55 04 01 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0E 0F 55 | | |
| | Compare buffers compareOffset = 2 | Result is -1 | |
| 15 | Initialise compareBuffer compareBuffer = 55 55 04 00 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0D 10 55 | | |
| | Compare buffers compareOffset = 2 | Result is +1 | |
| 16 | clear the handler and appendTLV with TAG: 0D and value: 04 00 01 ... 0F | | |
| | Initialise compareBuffer compareBuffer = 04 00 01 ... 0F | | |
| | Successful call (with tag 8Dh) tag = 8Dh compareBuffer.length = 17 compareOffset = 0 | Result is 00h | |
| 17 | Append tag 0Fh buffer = 00 01 ... 0F | | |
| | Initialise compareBuffer compareBuffer = 00 01 ... 0F | | |
| | Successful call (with tag 8Fh) tag = 8Fh compareBuffer.length = 16 compareOffset = 0 | Result is 00h | |

6.2.5.13.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 6,7 |
| N2 | 7,9 |
| N3 | 8, 13, 12 |
| N4 | 10, 14 |
| N5 | 11, 15 |
| N6 | 17, 16 |
| P1 | 1 |
| P2 | 2, 3, 4, 5 |
| C1 | Does not apply for Envelope response handler |

6.2.5.14 Method findAndCompareValue(byte tag, byte occurrence, short valueOffset, byte[] compareBuffer, short compareOffset, short compareLength)

Test Area Reference: API_2_ERH_FACRBBS_BSS

6.2.5.14.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte findAndCompareValue(byte tag,
                               byte occurrence,
                               short valueOffset,
                               byte[] compareBuffer,
                               short compareOffset,
                               short compareLength)
    throws java.lang.NullPointerException,
```

```
java.lang.ArrayIndexOutOfBoundsException,  
ToolkitException
```

Normal execution

Looks for the indicated occurrence of a TLV element from the beginning of a TLV list and compare its value with a buffer:

CRRN1: if no TLV element is found, the UNAVAILABLE_ELEMENT exception is thrown and the current TLV is no longer defined.

CRRN2: if the method is successful then the corresponding TLV becomes current.

CRRN3: if identical 0 is returned.

CRRN4: if the first miscomparing byte in simple TLV is less than that in compareBuffer -1 is returned.

CRRN5: if the first miscomparing byte in simple TLV is greater than that in compareBuffer 1 is returned

CRRN6: The search method is comprehension required flag independent.

Parameter errors

CRRP1: if compareBuffer is null NullPointerException shall be thrown.

CRRP2: if compareOffset or compareLength or both would cause access outside array bounds, or if compareLength is negative ArrayIndexOutOfBoundsException shall be thrown.

CRRP3: if valueOffset, compareLength or both are out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.

CRRP4: if an input parameter is not valid (e.g. occurrence = 0) an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException BAD_INPUT_PARAMETER.

Context errors

CRR1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.5.14.3 Test Suite files

Specific triggering: Unrecognized Envelope

| | |
|-----------------|------------------------------|
| Test Script: | API_2_ERH_FACRBBS_BSS_1.scr |
| Test Applet: | API_2_ERH_FACRBBS_BSS_1.java |
| Load Script: | API_2_ERH_FACRBBS_BSS_1.ldr |
| Cleanup Script: | API_2_ERH_FACRBBS_BSS_1.clr |
| Parameter File: | API_2_ERH_FACRBBS_BSS_1.par |

6.2.5.14.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | Initialise the handler | | |
| | findAndCompareValue() with a null compareBuffer | NullPointerException is thrown | |
| 2 | clear the handler and appendTLV with TAG: 0D and value: 04 00 01 ... 0F | | |
| | compareOffset ≥ compareBuffer.length tag = 0Dh, occurrence = 1 valueOffset = 0 compareBuffer.length = 5 compareOffset = 5 compareLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | compareOffset < 0 compareBuffer.length = 5 compareOffset = -1 compareLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | compareLength > compareBuffer.length compareBuffer.length = 5 compareOffset = 0 compareLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | compareOffset + compareLength > compareBuffer.length compareBuffer.length = 5 compareOffset = 3 compareLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | compareLength < 0 compareBuffer.length = 5 compareOffset = 0 compareLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | clear the handler and appendTLV with TAG and length of 6 | | |
| | valueOffset ≥ Text String Length tag = 0Dh, occurrence = 1 valueOffset = 6 compareBuffer.length = 15 compareOffset = 0 compareLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 8 | valueOffset < 0 valueOffset = -1 compareBuffer.length = 15 compareOffset = 0 compareLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 9 | compareLength > Text String length valueOffset = 0 compareBuffer.length = 15 compareOffset = 0 compareLength = 7 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 10 | valueOffset + compareLength > Text String length valueOffset = 2 compareBuffer.length = 15 compareOffset = 0 compareLength = 5 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 11 | Invalid parameter occurrence = 0 | ToolkitException.BAD_INPUT_PARAMETER is thrown | |
| 12 | appendTLV with TAG 02 and length 02 | | |
| | Select a TLV (tag 02h) | | |
| | findAndCompareValue() tag = 0Dh occurrence = 2 | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| 13 | Verify current TLV getValueLength() | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 14 | clear the handler and appendTLV with TAG: 0D and value: 04 00 01 ... 0F | | |
| | Initialise compareBuffer compareBuffer = 04 00 01 ... 0F | | |
| | findAndCompareValue() tag = 0Dh, occurrence = 1 | Result is 00h | |

| | | | |
|----|---|---------------|--|
| | valueOffset = 0 compareOffset = 0 compareLength = 17 | | |
| 15 | Verify current TLV getValueLength() | Result is 17 | |
| 16 | Initialise compareBuffer compareBuffer = 04 00 01 ... 10 | | |
| | Compare buffers with same parameters | Result is -1 | |
| 17 | Initialise compareBuffer compareBuffer = 03 00 01 ... 0F | | |
| | Compare buffers with same parameters | Result is +1 | |
| 18 | Initialise compareBuffer compareBuffer = 55 55 55 01 02 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55 | | |
| | Compare buffers valueOffset = 2 compareOffset = 3 compareLength = 12 | Result is 00h | |
| 19 | Initialise compareBuffer compareBuffer = 55 55 55 02 01 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55 | | |
| | Compare buffers with same parameters | Result is -1 | |
| 20 | Initialise compareBuffer compareBuffer = 55 55 55 01 02 03 04 05 06 07 08 09 0A 0A 0D 55 55 55 55 55 | | |
| | Compare buffers with same parameters | Result is +1 | |
| 21 | append a Text String TLV tag = 0Dh buffer = 00 11 22 33 44 55 | | |
| | Initialise compareBuffer compareBuffer = 04 00 01 ... 0F | | |
| | findAndCompareValue() tag = 0Dh, occurrence = 1 valueOffset = 0 compareOffset = 0 compareLength = 17 | Result is 00h | |
| 22 | Initialise compareBuffer compareBuffer = 00 11 22 33 44 55 | | |
| | findAndCompareValue() tag = 0Dh, occurrence = 2 valueOffset = 0 compareOffset = 0 compareLength = 6 | Result is 00h | |
| 23 | Initialise compareBuffer compareBuffer = 00 11 22 33 44 66 | | |
| | findAndCompareValue() tag = 0Dh, occurrence = 2 valueOffset = 0 compareOffset = 0 compareLength = 6 | Result is -1 | |
| 24 | clear the handler and appendTLV with TAG: 0D and value: 04 00 01 ... 0F | | |
| | Initialise compareBuffer compareBuffer = 04 00 01 ... 0F | | |
| | Successful call (with tag 8Dh) tag = 8Dh, occurrence = 1 valueOffset = 0 compareBuffer.length = 17 compareOffset = 0 compareLength = 17 | Result is 00h | |

| | | | |
|----|---|--|--|
| 25 | Append tag 0Fh buffer = 00 01 ... 0F | | |
| | Initialise compareBuffer compareBuffer = 00 01 ... 0F | | |
| | Successful call (with tag 8Fh) tag = 8Fh, occurrence = 1 valueOffset = 0 compareBuffer.length = 16 compareOffset = 0 compareLength = 16 | Result is 00h | |
| 26 | Successful call, findAndCompareValue with length =0 CompareBuffer.length = 16 compareOffset = 16 compareLength = 0 | Result of findAndCompareValue () is 00 | |

6.2.5.14.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 12,13 |
| N2 | 15,13 |
| N3 | 14, 18, 22, 21, 26 |
| N4 | 16, 19, 23 |
| N5 | 17, 19 |
| N6 | 25, 24 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7, 8, 9, 10 |
| P4 | 11 |
| C1 | Does not apply for EnvelopeResponseHandler |

6.2.5.15 Method appendArray

Test Area Reference: API_2_ERH_APDA_BSS

6.2.5.15.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
void appendArray(byte[] buffer, short offset, short length)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

- CRRN1: appends a buffer into the EditHandler buffer
- CRRN2: a successful append does not modify the TLV selected

Parameters error

- CRRP1: if buffer is null, a java.lang.NullPointerException is thrown
- CRRP2: if offset or length or both would cause access outside the array bounds, or if length is negative, a java.lang.ArrayIndexOutOfBoundsException is thrown.

Context errors

- CRRC1: if the EditHandler buffer is too small to append the requested data, a ToolkitException is thrown with reason code HANDLER_OVERFLOW

CRRC2: if the EditHandler buffer is busy, a ToolkitException is thrown with reason code HANDLER_NOT_AVAILABLE

6.2.5.15.2 Test suite files

Specific triggering: Unrecognized Envelope

Test Script: API_2_ERH_APDA_BSS_1.scr
 Test Applet: API_2_ERH_APDA_BSS_1.java
 Load Script: API_2_ERH_APDA_BSS_1.ldr
 Cleanup Script: API_2_ERH_APDA_BSS_1.clr
 Parameter File: API_2_ERH_APDA_BSS_1.par

6.2.5.15.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|------------------|
| | Initialize the envelope response handler with a TLV of length 1 | | |
| 1 | Null buffer | NullPointerException is thrown | |
| 2 | offset ≥ buffer.length buffer.length = 5 offset = 5 length = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | offset < 0 buffer.length = 5 offset = -1 length = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | length > buffer.length buffer.length = 5 offset = 0 length = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | offset + length > buffer.length buffer.length = 5 offset = 3 length = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | length < 0 buffer.length = 5 offset = 0 length = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | Handler overflow buffer.length = 256 offset = 0 length = 256 | ToolkitException.HANDLER_OVERFLOW is thrown | |
| 8 | append the handler with TLVs: 81 03 11 22 33 82 02 99 77 | | |
| | findTLV 0x81 | | |
| | Successful call buffer = FF FE ... F8 offset = 0 length = 8 | | |
| | Verify Current TLV: Call getValueLength() | Result is 03h | |
| 9 | Clear the handler | | |
| | Successful call buffer = FF FE ... F8 offset = 0 length = 8 | | |
| | Call copy() method | | |
| | Compare handler compareBuffer = FF FE ... F8 | Result is 00h | |
| 10 | Successful call buffer = 00 01 ... 07 offset = 2 length = 6 | | |
| | Call copy() method | | |
| | Compare handler | Result is 00h | |

| | | | |
|----|--|---------------|--|
| | compareBuffer = FF FE ... F8 02 03 ... 07 | | |
| 11 | Successful call buffer = 11 22 ... 88 offset = 2 length = 4 | | |
| | Call copy() method | | |
| | Compare handler compareBuffer = FF FE ... F8 02 03 ... 07 33 44 55 66 | Result is 00h | |

6.2.5.15.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 9, 10, 11 |
| N2 | 8 |
| N3 | |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| C1 | 7 |
| C2 | Does not apply for EnvelopeResponseHandler |

6.2.5.16 Method appendTLV(byte tag, byte value)

Test Area Reference: API_2_ERH_APTLBB

6.2.5.16.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
void appendTLV (byte tag, byte value)
    throws ToolkitException
```

Normal execution

CRRN1: Appends a TLV element to the current TLV list (1-byte element).

CRRN2: A successful append does not modify the TLV selected.

Parameters error

No requirements

Context errors

CRRC1: if the EditHandler buffer is too small to append the requested data, a ToolkitException is thrown with reason code HANDLER_OVERFLOW

CRRC2: if the EditHandler buffer is busy, a ToolkitException is thrown with reason code HANDLER_NOT_AVAILABLE

6.2.5.16.2 Test suite files

Specific triggering: Unrecognized Envelope

Test Script: API_2_ERH_APTLBB_1.scr

Test Applet: API_2_ERH_APTLBB_1.java

Load Script: API_2_ERH_APTLBB_1.ldr

Cleanup Script: API_2_ERH_APTLBB_1.clr

Parameter File: API_2_ERH_APTLBB_1.par

6.2.5.16.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | Call appendArray() length = 253 | | |
| | Handler Overflow: Call twice the appendTLV() method | ToolkitException.HANDLER_OVERFLOW is thrown by one of the two. | |
| 2 | append the handler with TLVs: 81 03 11 22 33 82 02 99 77 | | |
| | Select Command Details TLV | | |
| | Call the appendTLV() method | | |
| | Verify Current TLV: Call getValueLength() | Result is 03h | |
| 3 | Clear the handler | | |
| | Successful call tag = 84h value = 00h | | |
| | Call copy() method | | |
| | Compare handler compareBuffer = 84 01 00 | Result is 00h | |
| 4 | Successful call tag = 01h value = FEh | | |
| | Call copy() method | | |
| | Compare handler compareBuffer = 84 01 00 01 01 FE | Result is 00h | |

Note : Test case 1 call twice appendTLV because the current 03.19 [7] is not clear enough on this point. So this test allows the two possible implementations.

6.2.5.16.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 3, 4 |
| N2 | 2 |
| C1 | 1 |
| C2 | Does not apply for EnvelopeResponseHandler |

6.2.5.17 Method appendTLV(byte tag, byte value1, byte value2)

Test Area Reference: API_2_ERH_APTLBBB

6.2.5.17.1 Conformance requirements:

The method with following header shall be compliant to its definition in the API.

```
void appendTLV (byte tag, byte value1,byte value2)
    throws ToolkitException
```

Normal execution

CRRN1: Appends a TLV element to the current TLV list (2-byte element).

CRRN2: A successful append does not modify the TLV selected.

Parameters error

No requirements

Context errors

CRRC1: if the EditHandler buffer is too small to append the requested data, a ToolkitException is thrown with reason code HANDLER_OVERFLOW

CRRC2: if the EditHandler buffer is busy, a ToolkitException is thrown with reason code HANDLER_NOT_AVAILABLE

6.2.5.17.2 Test suite files

Specific triggering: Unrecognized Envelope

Test Script: API_2_ERH_APTLBBB_1.scr

Test Applet: API_2_ERH_APTLBBB_1.java

Load Script: API_2_ERH_APTLBBB_1.ldr

Cleanup Script: API_2_ERH_APTLBBB_1.clr

Parameter File: API_2_ERH_APTLBBB_1.par

6.2.5.17.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|------------------|
| 1 | Call the appendArray with length of 253 Handler Overflow: Call the appendTLV() method | ToolkitException.HANDLER_OVERFLOW is thrown | |
| 2 | clear the handler, append the handler with TLVs: 81 03 11 22 33 82 02 99 77 Select Command Details TLV Call the appendTLV() method | | |
| | Verify Current TLV: Call getValueLength() | Result is 03h | |
| 3 | Clear the handler Successful call tag = 84h value1 = 00h value2 = 01h | | |
| | Call copy() method Compare handler compareBuffer = 84 02 00 01 | Result is 00h | |
| 4 | Successful call tag = 01h value1 = FEh value2 = FDh | | |
| | Call copy() method Compare handler compareBuffer = 84 02 00 01 01 02 FE FD | Result is 00h | |

6.2.5.17.4 Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | 3, 4 |
| N2 | 2 |
| C1 | 1 |
| C2 | Does not apply for EnvelopeResponseHandl er |

6.2.5.18 Method appendTLV(byte tag, byte[] value, short valueoffset, short valuelength)

Test Area Reference: API_2_ERH_APTLB_BSS

6.2.5.18.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
void appendTLV (byte tag,
               byte[] value,
               short valueoffset,
               short valuelength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: Appends a TLV element to the current TLV list (byte-array element).

CRRN2: A successful append does not modify the TLV selected.

Parameters error

CRRP1: if value is null, a java.lang.NullPointerException is thrown

CRRP2: if valueoffset or valuelength or both would cause access outside the array bounds, or if length is negative, a java.lang.ArrayIndexOutOfBoundsException is thrown.

Context errors

CRRC1: if the EditHandler buffer is too small to append the requested data, a ToolkitException is thrown with reason code HANDLER_OVERFLOW

CRRC2: if the EditHandler buffer is busy, a ToolkitException is thrown with reason code HANDLER_NOT_AVAILABLE

CRRC3: if valuelength is greater than 255, a ToolkitException is thrown with reason code BAD_INPUT_PARAMETER

6.2.5.18.2 Test suite files

Specific triggering: Unrecognized Envelope

Test Script: API_2_ERH_APTLB_BSS_1.scr

Test Applet: API_2_ERH_APTLB_BSS_1.java

Load Script: API_2_ERH_APTLB_BSS_1.ldr

Cleanup Script: API_2_ERH_APTLB_BSS_1.clr

Parameter File: API_2_ERH_APTLB_BSS_1.par

6.2.5.18.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | Null value | NullPointerException is thrown | |
| 2 | valueOffset ≥ value.length value.length = 5 valueOffset = 5 valueLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | valueOffset < 0 value.length = 5 valueOffset = -1 valueLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | valueLength > value.length value.length = 5 valueOffset = 0 valueLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | ValueOffset + valueLength > value.length value.length = 5 valueOffset = 3 valueLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | valueLength < 0 value.length = 5 valueOffset = 0 valueLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | Handler overflow value.length = 254 valueOffset = 0 valueLength = 254 | ToolkitException.HANDLER_OVERFLOW is thrown | |
| 8 | Bad parameter value.length = 256 valueOffset = 0 valueLength = 256 | ToolkitException.BAD_INPUT_PARAMETER is thrown | |
| 9 | clear the handler, append the handler with TLVs: 81 03 11 22 33 82 02 99 77 | | |
| | Select Command Details TLV | | |
| | Successful call tag = 04 value = FF FE ... F8 valueOffset = 0 valueLength = 8 | | |
| | Verify Current TLV: Call getValueLength() | Result is 03h | |
| 10 | Clear the handler | | |
| | Successful call tag = 04 value = FF FE ... F8 valueOffset = 0 valueLength = 8 | | |
| | Call copy() method | | |
| | Compare handler CompareBuffer = 04 08 FF FE ... F8 | Result is 00 | |
| 11 | Successful call tag = 85h value = 00 01 ... 07 valueOffset = 2 valueLength = 6 | | |
| | Call copy() method | | |
| | Compare handler compareBuffer = 04 08 FF FE ... F8 85 06 02 03 ... 07 | Result is 00 | |
| 12 | Successful call tag = 01 value = 11 22 ... 88 valueOffset = 2 valueLength = 4 | | |
| | Call copy() method | | |
| | Compare handler compareBuffer = 04 08 FF FE ... F8 85 06 02 03 ... 07 01 04 33 44 55 66 | Result is 00 | |
| 13 | Clear the handler | | |
| | Successful call tag = 04 | | |

| | | | |
|--|---|--------------|--|
| | value = 00 01 ... 7F valueOffset = 0 valueLength = 80h | | |
| | Call copy() method | | |
| | Compare handler compareBuffer = 04 81 80 00 01...7F | Result is 00 | |

6.2.5.18.4 Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | 10, 11, 12, 13 |
| N2 | 9 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| C1 | 7 |
| C2 | Does not apply for EnvelopeResponseHandl er |
| C3 | 8 |

6.2.5.19 Method appendTLV(byte tag, byte value1, byte[] value2, short value2offset, short value2length)

Test Area Reference: API_2_ERH_APTLBB_BSS

6.2.5.19.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
void appendTLV (byte tag,
               byte value1,
               byte[] value2,
               short value2offset,
               short value2length)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: Appends a TLV element to the current TLV list (1 byte and a byte-array element).

CRRN2: A successful append does not modify the TLV selected.

Parameters error

CRRP1: if value2 is null, a java.lang.NullPointerException is thrown

CRRP2: if value2offset or value2length or both would cause access outside the array bounds, or if length is negative, a java.lang.ArrayIndexOutOfBoundsException is thrown.

Context errors

CRRC1: if the EditHandler buffer is too small to append the requested data, a ToolkitException is thrown with reason code HANDLER_OVERFLOW

CRRC2: if the EditHandler buffer is busy, a ToolkitException is thrown with reason code HANDLER_NOT_AVAILABLE

CRRC3: if valuelength is greater than 255, a ToolkitException is thrown with reason code BAD_INPUT_PARAMETER

6.2.5.19.2 Test suite files

Specific triggering: Unrecognized Envelope

Test Script: API_2_ERH_APTLBB_BSS_1.scr

Test Applet: API_2_ERH_APTLBB_BSS_1.java

Load Script: API_2_ERH_APTLBB_BSS_1.ldr

Cleanup Script: API_2_ERH_APTLBB_BSS_1.clr

Parameter File: API_2_ERH_APTLBB_BSS_1.par

6.2.5.19.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | Null value2 | NullPointerException is thrown | |
| 2 | value2Offset ≥ value2.length value2.length = 5 value2Offset = 5 value2Length = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | value2Offset < 0 value2.length = 5 value2Offset = -1 value2Length = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | value2Length > value2.length value2.length = 5 value2Offset = 0 value2Length = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | value2Offset + value2Length > value2.length value2.length = 5 value2Offset = 3 value2Length = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | value2Length < 0 value2.length = 5 value2Offset = 0 value2Length = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | Handler overflow value2.length = 254 value2Offset = 0 value2Length = 254 | ToolkitException.HANDLER_OVERFLOW is thrown | |
| 8 | Bad parameter value2.length = 256 value2Offset = 0 value2Length = 256 | ToolkitException.BAD_INPUT_PARAMETER is thrown | |
| 9 | clear the handler, append the handler with TLVs: 81 03 11 22 33 82 02 99 77 | | |
| | Select Command Details TLV | | |
| | Successful call tag = 04 value1 = 05 value2 = FF FE ... F8 value2Offset = 0 value2Length = 8 | | |
| | Verify Current TLV: Call getValueLength() | Result is 03h | |
| 10 | Clear the handler | | |
| | Successful call tag = 04 value1 = 05 value2 = FF FE ... F8 value2Offset = 0 value2Length = 8 | | |
| | Call copy() method | | |
| | Compare handler CompareBuffer = 04 09 05 FF FE ... F8 | Result is 00 | |
| 11 | Successful call tag = 85h value1 = 55h value2 = 00 01 ... 07 | | |

| | | | |
|----|---|--------------|--|
| | value2Offset = 2 value2Length = 6 | | |
| | Call copy() method | | |
| | Compare handler compareBuffer = 04 09 05 FF FE ... F8 85 07 55 02 03 ... 07 | Result is 00 | |
| 12 | Successful call tag = 01 value1 = 44h value2 = 11 22 ... 88 value2Offset = 2 value2Length = 4 | | |
| | Call copy() method | | |
| | Compare handler CompareBuffer = 04 09 05 FF FE ... F8 85 07 55 02 03 ... 07 01 05 44 33 44 55 66 | Result is 00 | |
| 13 | Clear the handler | | |
| | Successful call tag = 04 value1 = 00 value2 = 01 ... 7F value2Offset = 0 value2Length = 7Fh | | |
| | Call copy() method | | |
| | Compare handler compareBuffer = 04 81 80 00 01...7F | Result is 00 | |

6.2.5.19.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 10, 11, 12, 13 |
| N2 | 9 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| C1 | 7 |
| C2 | Does not apply for EnvelopeResponseHandler |
| C3 | 8 |

6.2.5.20 Method clear

Test Area Reference: API_2_ERH_CLER

6.2.5.20.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
void clear()
    throws ToolkitException
```

Normal execution

CRRN1: Clears the TLV list of an EditHandler and resets the current TLV selected.

Parameters error

No requirements

Context errors

CRR1: if the EditHandler buffer is busy, a ToolkitException is thrown with reason code HANDLER_NOT_AVAILABLE

6.2.5.20.2 Test suite files

Specific triggering: Unrecognized Envelope

Test Script: API_2_ERH_CLER_1.scr
 Test Applet: API_2_ERH_CLER_1.java
 Load Script: API_2_ERH_CLER_1.ldr
 Cleanup Script: API_2_ERH_CLER_1.clr
 Parameter File: API_2_ERH_CLER_1.par

6.2.5.20.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|------------------|
| 1 | append the handler with TLVs: 81 03 11 22 33 82 02 99 77 Select Command Details TLV Call the <code>getLength()</code> method | Result of <code>getLength()</code> is not null | |
| | Clear the handler Call the <code>getLength()</code> method | Result of <code>getLength()</code> is 0 | |
| 2 | Call the <code>getValueLength()</code> method | <code>ToolkitException.UNAVAILABLE_ELEMENT</code> is thrown | |

6.2.5.20.4 Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | 1, 2 |
| C1 | Does not apply for <code>EnvelopeResponseHandler</code> |

6.2.6 Class MEProfile

6.2.6.1 Method check (byte index)

Test Area Reference: API_2_MEP_CHECB

6.2.6.1.1 Conformance requirement:

The method with following header shall compliant to its definition in the API.

```
public static boolean check(byte index)
    throws ToolkitException
```

Normal execution

CRRN1: The method checks a facility in the handset profile: returns true if supported and false otherwise.

Parameters error

No requirements

Context errors

CRRC1: The method shall throw `ME_PROFILE_NOT_AVAILABLE` `ToolkitException` if Terminal Profile data are not available

6.2.6.1.2 Test suite files

Specific triggering:

EVENT_STATUS_COMMAND

No Additional requirements for the GSM personalisation:

Test Script: API_2_MEP_CHECB_1.scr
 Test Applet: API_2_MEP_CHECB_1.java
 Load Script: API_2_MEP_CHECB_1.ldr
 Cleanup Script: API_2_MEP_CHECB_1.clr
 Parameter File: API_2_MEP_CHECB_1.par

6.2.6.1.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | No Terminal Profile is registered Triggered by status command index=1 | ME_PROFILE_NOT_AVAILABLE ToolkitException is thrown | |
| 2 | Terminal Profile, Facility is supported index=0 | true is returned by the method | |
| 3 | Terminal Profile, Facility is not supported index=15 | false is returned by the method | |

6.2.6.1.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 2,3 |
| C1 | 1 |

6.2.6.2 Method check (byte [] mask, short offset, short length)

Test Area Reference: API_2_MEP_CHEC_BSS

6.2.6.2.1 Conformance requirement:

The method with following header shall compliant to its definition in the API.

```
public static boolean check(byte[] mask,
                           short offset,
                           short length)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: The method checks all the facilities corresponding to bits set to 1 in the mask buffer: returns true if they are all supported and false if not.

CRRN2: The method returns true if the length to check is 0.

Parameters error

CRRP1: The method shall throw java.lang.NullPointerException if mask is null.

CRRP2: The method shall throw java.lang.ArrayIndexOutOfBoundsException if offset or length or both would cause access outside array bounds.

CRRP3: The method shall throw ME_PROFILE_NOT_AVAILABLE ToolkitException if Terminal Profile data are not available.

Context errors

No requirements

6.2.6.2.2 Test suite files

Specific triggering:

UNFORMATTED_SMS_PP_UPD

No Additional requirements for the GSM personalisation:

Test Script: API_2_MEP_CHEC_BSS_1.scr

Test Applet: API_2_MEP_CHEC_BSS_1.java

Load Script: API_2_MEP_CHEC_BSS_1.ldr (the applet is loaded without INI after the reset (RST))

Cleanup Script: API_2_MEP_CHEC_BSS_1.clr

Parameter File: API_2_MEP_CHEC_BSS_1.par

6.2.6.2.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|------------------|
| 1 | <p>No Terminal Profile is registered Triggered by unformatted SMS Mask = 0xFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF7F Offset = 0 Length = 16</p> | ME_PROFILE_NOT_AVAILABLE ToolkitException is thrown | |
| 2 | <p>NULL as parameter to check mask= NULL</p> | NullPointerException is thrown | |
| 3 | <p>Offset > mask.length mask = 0xFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF7F Offset = 17</p> | ArrayIndexOutOfBoundsException is thrown | |
| 4 | <p>Offset < 0 mask = 0xFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF7F Offset = -1</p> | ArrayIndexOutOfBoundsException is thrown | |
| 5 | <p>Length > mask.length mask = 0xFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF7F Offset = 0 Length = 18</p> | ArrayIndexOutOfBoundsException is thrown | |
| 6 | <p>Offset + length > mask.length Mask = 0xFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF7F Offset = 9 Length = 9</p> | ArrayIndexOutOfBoundsException is thrown | |
| 7 | <p>length = 0 mask = 0xFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF7F Offset = 0 Length = 0</p> | true is returned | |
| 8 | <p>Check all the Terminal Profile mask = 0xFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF7F Offset = 0 Length = 16</p> | false is returned by the method because facility 15 is not supported | |
| 9 | <p>Check a part of the Terminal Profile mask = 0xFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF7F Offset = 15 Length = 2</p> | true is returned by the method: the 16 first facilities except facility 15 have been successfully checked | |
| 10 | <p>Check a part of the Terminal Profile mask = 0x0080 Offset = 0 Length = 2</p> | false is returned by the method only facility 15 is checked and not supported. | |

6.2.6.2.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 8,9,10 |
| N2 | 7 |
| P1 | 2 |
| P2 | 3,4,5,6 |
| P3 | 1 |

6.2.6.3 Method check (short index)

Test Area Reference: API_2_MEP_CHECS

6.2.6.3.1 Conformance requirement:

The method with following header shall compliant to its definition in the API.

```
public static boolean check(short index)
    throws ToolkitException
```

Normal execution

CRRN1: The method checks a facility in the handset profile: returns true if the facility is supported, false if facility is not supported, or if facility-index outside MEProfile data.

Parameters error

No requirements

Context errors

CRRC1: The method shall throw ME_PROFILE_NOT_AVAILABLE ToolkitException if Terminal Profile data are not available

6.2.6.3.2 Test suite files

Specific triggering:

EVENT_STATUS_COMMAND

No Additional requirements for the GSM personalisation:

Test Script: API_2_MEP_CHECS_1.scr
 Test Applet: API_2_MEP_CHECS_1.java
 Load Script: API_2_MEP_CHECS_1.ldr
 Cleanup Script: API_2_MEP_CHECS_1.clr
 Parameter File: API_2_MEP_CHECS_1.par

6.2.6.3.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | No Terminal Profile is registered Triggered by status command index = 1 | ME_PROFILE_NOT_AVAILABLE ToolkitException is thrown | |
| 2 | Terminal Profile, Facility is supported index = 0 | true is returned by the method | |
| 3 | Terminal Profile, Facility is not supported index = 15 | false is returned by the method | |
| 4 | Facility index is outside MEProfile data index = 0x0099 | false is returned by the method | |

6.2.6.3.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 2,3,4 |
| C1 | 1 |

6.2.6.4 Method getValue (short indexMSB, short indexLSB)

Test Area Reference: API_2_MEP_GVALSS

6.2.6.4.1 Conformance requirement:

The method with following header shall compliant to its definition in the API.

```
public static short getValue(short indexMSB, short indexLSB)
    throws ToolkitException
```

Normal execution

CRRN1: The method returns the binary value of a parameter, delimited by two indexes, from the handset profile.

Parameters error

CRRP1: The method shall throw BAD_INPUT_PARAMETER ToolkitException if (indexMSB >= indexLSB +16) or (indexMSB < indexLSB) or (indexMSB < 0) or (indexLSB < 0).

Context errors

CRRC1: The method shall throw ME_PROFILE_NOT_AVAILABLE ToolkitException if Terminal Profile data are not available.

6.2.6.4.2 Test suite files

Specific triggering:

EVENT_STATUS_COMMAND

No Additional requirements for the GSM personalisation:

- Test Script: API_2_MEP_GVALSS_1.scr
- Test Applet: API_2_MEP_GVALSS_1.java
- Load Script: API_2_MEP_GVALSS_1.ldr
- Cleanup Script: API_2_MEP_GVALSS_1.clr
- Parameter File: API_2_MEP_GVALSS_1.par

6.2.6.4.3 Test procedure

TP = FF 01 D2 F0 00 00 00 00 00 00 00 8D FF

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | No Terminal Profile is registered Triggered by status command indexMSB = 15, indexLSB = 0 | ME_PROFILE_NOT_AVAILABLE ToolkitException is thrown | |
| 2 | Retrieve number of character down ME display in Terminal Profile which is 13 indexMSB = 108, indexLSB = 104 | 13 is returned by the method | |
| 3 | Retrieve byte 3 and byte 4 from terminal profile. Byte 3 = 0xD2, Byte 4 = 0xF0 indexMSB = 31, indexLSB = 16 | 0xF0D2 is returned by the method | |
| 4 | indexMSB is negative indexMSB = 0xFFFF, indexLSB = 0xFFFD | BAD_INPUT_PARAMETER ToolkitException is thrown | |
| 5 | indexLSB is negative indexMSB = 0x0002, indexLSB = 0xFFFD | BAD_INPUT_PARAMETER ToolkitException is thrown | |
| 6 | indexMSB < indexLSB indexMSB = 0x0002, indexLSB = 0x0003 | BAD_INPUT_PARAMETER ToolkitException is thrown | |
| 7 | indexMSB > indexLSB + 16 indexMSB = 0x0021, indexLSB = 0x0010 | BAD_INPUT_PARAMETER ToolkitException is thrown | |

6.2.6.4.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 2,3 |
| P1 | 4,5,6,7 |
| C1 | 1 |

6.2.6.5 Method copy (short startOffset, byte[] dstBuffer, short dstOffset, short dstLength)

Test Area Reference: API_2_MEP_COPYS_BSS

6.2.6.5.1 Conformance requirement:

The method with following header shall compliant to its definition in the API.

```
public static short copy(short startOffset, byte[] dstBuffer, short dstOffset, short dstLength)
    throws ToolkitException
```

Normal execution

CRRN1: The method copies a part of the handset profile in a buffer.

CRRN2: The method returns dstOffset + dstLength.

Parameters error

CRRP1: if dstBuffer is null NullPointerException is thrown.

CRRP2 : *If dstOffset or dstLength parameter is negative an ArrayIndexOutOfBoundsException exception is thrown and no copy is performed*

CRRP3: *If dstOffset+dstLength is greater than dstBuffer.length, the length of the dstBuffer array an ArrayIndexOutOfBoundsException exception is thrown and no copy is performed*

Context errors

CRRC1: The method shall throw ME_PROFILE_NOT_AVAILABLE ToolkitException if Terminal Profile data are not available.

6.2.6.5.2 Test suite files

Specific triggering:

EVENT_STATUS_COMMAND

No Additional requirements for the GSM personalisation:

| | |
|-----------------|-----------------------------|
| Test Script: | API_2_MEP_COPYYS_BSS_1.scr |
| Test Applet: | API_2_MEP_COPYYS_BSS_1.java |
| Load Script: | API_2_MEP_COPYYS_BSS_1.ldr |
| Cleanup Script: | API_2_MEP_COPYYS_BSS_1.clr |
| Parameter File: | API_2_MEP_COPYYS_BSS_1.par |

6.2.6.5.3 Test procedure

TP = FF 01 D2 F0 01 02 00 00 00 00 00 00 8D FF

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | No Terminal Profile is registered Triggered by status command startOffset = 0 dstBuffer.length = 6 dstOffset = 0 dstLength = 6 | ME_PROFILE_NOT_AVAILABLE ToolkitException is thrown | |
| 2 | dstBuffer is null | NullPointerException is thrown | |
| 3 | dstOffset ≥ dstBuffer.length startOffset = 0 dstBuffer.length = 5 dstOffset = 5 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | dstOffset < 0 startOffset = 0 dstBuffer.length = 5 dstOffset = -1 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | dstLength < 0 startOffset = 0 dstBuffer.length = 5 dstOffset = 1 dstLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | dstLength > dstBuffer.length startOffset = 0 dstBuffer.length = 5 dstOffset = 0 dstLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | dstOffset + dstLength > dstBuffer.length startOffset = 0 dstBuffer.length = 5 dstOffset = 3 dstLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 8 | Successful call extreme values startOffset = 0 dstBuffer.length = 6 dstOffset = 0 dstLength = 6 | Result of copy() is 6 | |
| 9 | Successful call any values startOffset = 1 dstBuffer.length = 20 dstOffset = 3 dstLength = 4 | Result of copy() is 7 | |
| 10 | Successful call, copy with length =0 startOffset = 0 dstBuffer.length = 20 dstOffset = 20 dstLength = 0 | Result of copy() is 20 | |
| 11 | Value outside MEProfile data available startOffset = 13 dstBuffer.length = 6 dstOffset = 0 dstLength = 6 | Result of copy() is 6 | |

6.2.6.5.4

Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 8,9,10,11 |
| N3 | 8,9,10,11 |
| P1 | 2 |
| P2 | 4,5 |
| P3 | 3,6,7 |
| C1 | 1 |

6.2.7 Class ProactiveHandler

6.2.7.1 Method getTheHandler

Test Area Reference: API_2_PAH_GTHD

6.2.7.1.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public static ProactiveHandler getTheHandler()
    throws ToolkitException
```

Normal execution

CRRN1: The method shall return the single system instance of the ProactiveHandler class.

CRRN2: The EnvelopeHandler is a Temporary JCRE Entry Point Object

Parameter errors

No requirements

Context errors

CRR1: The method shall throw ToolkitException.HANDLER_NOT_AVAILABLE if the handler is busy.

6.2.7.1.2 Test Suite files

Test Script: API_2_PAH_GTHD_1.scr
 Test Applet: API_2_PAH_GTHD_1.java
 Load Script: API_2_PAH_GTHD_1.ldr
 Cleanup Script: API_2_PAH_GTHD_1.clr
 Parameter File: API_2_PAH_GTHD_1.par

6.2.7.1.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|------------------------------|---|------------------|
| 1 | getTheHandler() twice | The returned objects shall be the same | |
| 2 | getTheHandler() | The reference shall be a ProactiveHandler | |
| 3 | getTheHandler() | The reference shall not be null | |

6.2.7.1.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 1, 2, 3 |
| N2 | To be checked in Framework tests and insert here cross reference |
| C1 | To be checked in Framework tests and insert here cross reference |

6.2.7.2 Method init

Test Area Reference: API_2_PAH_INITBBB

6.2.7.2.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public void init(byte type,  
                byte qualifier,  
                byte dstDevice)
```

Normal execution

CRRN1: The init() method initialises the next Proactive command in the ProactiveHandler, with Command details and Device Identities TLV. The source device is always the SIM Card (81h). The Comprehension Required flags are set.

CRRN2: The Command number may take any value between 01h and FEh.

CRRN3: The init() method clears the ProactiveHandler before initialising it.

CRRN4: No TLV is selected after a call to the method.

CRRN5: The handler is not sent to the mobile by the init() method.

Parameter errors

No requirements

Context errors

No requirements

6.2.7.2.2 Test Suite files

Test Script: API_2_PAH_INITBBB_1.scr

Test Applet: API_2_PAH_INITBBB_1.java

Load Script: API_2_PAH_INITBBB_1.ldr

Cleanup Script: API_2_PAH_INITBBB_1.clr

Parameter File: API_2_PAH_INITBBB_1.par

6.2.7.2.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | <p>Call the init() method</p> <p>type = 01h qualifier = 02h dstDevice = 03h</p> <p>Copy ProactiveHandler in a byte array (source)</p> <p>Compare the byte array</p> <p>reference = 81h 03h xxh 01h 02h 82h 02h 81h 03h</p> | source and reference are identical | |
| 2 | Verify the command number value | 01h-FEh | |
| 3 | <p>Call the init() method</p> <p>type = FFh qualifier = FEh destination = FDh</p> <p>Copy ProactiveHandler in a byte array (source)</p> <p>Compare the byte array</p> <p>reference = 81h 03h xxh FFh FEh 82h 02h 81h FDh</p> | source and reference are identical | |
| 4 | <p>Select the 1st TLV in the handler</p> <p>Call the init() method with any value</p> <p>Call the getValueLength() method</p> | UNAVAILABLE_ELEMENT ToolkitException is thrown by getValueLength() | |

6.2.7.2.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 1, 3 |
| N2 | 2 |
| N3 | 3 |
| N4 | 4 |
| N5 | 1, 3 |

6.2.7.3 Method initDisplayText

Test Area Reference: API_2_PAH_INDTBB_BSS

6.2.7.3.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public void initDisplayText(byte qualifier,
                           byte dcs,
                           byte[] buffer,
                           short offset,
                           short length)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: The method shall build a DISPLAY TEXT proactive command in the ProactiveHandler, using qualifier, dcs and buffer parameters. Comprehension required flags are set.

CRRN2: A call to this method clears the handler then initialises it.

CRRN3: No TLV is selected after a call to the method.

CRRN4: The DISPLAY TEXT command is not sent by the method.

CRRN5: The Command Number may take any value between 01h and FEh.

Parameter errors

CRRP1: The method shall throw NullPointerException if buffer is null.

CRRP2: If offset or length or both would cause access outside array bounds, an ArrayIndexOutOfBoundsException shall be thrown.

Context errors

CRRC1: A ToolkitException.HANDLER_OVERFLOW shall be thrown if the ProactiveHandler is too small to put the requested data.

6.2.7.3.2 Test Suite files

Test Script: API_2_PAH_INDTBB_BSS_1.scr
 Test Applet: API_2_PAH_INDTBB_BSS_1.java
 Load Script: API_2_PAH_INDTBB_BSS_1.ldr
 Cleanup Script: API_2_PAH_INDTBB_BSS_1.clr
 Parameter File: API_2_PAH_INDTBB_BSS_1.par

6.2.7.3.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|--|
| 1 | NULL as parameter to buffer buffer = NULL | NullPointerException is thrown | |
| 2 | offset > buffer.length buffer = "Text" offset = 5 length = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | offset < 0 buffer = "Text" offset = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | length > buffer.length buffer = "Text" offset = 0 length = 5 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | offset + length > buffer.length buffer = "Text" offset = 3 length = 2 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | length < 0 buffer = "Text" offset = 3 length = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | Successful call, buffer is the whole buffer qualifier = 0 dcs = 4 buffer = "TextA" offset = 0 length = 5 | No exception is thrown | |
| | Verify the command number value | Command number between 01h and FEh | |
| 8 | Send the command | | DISPLAY TEXT Proactive command qualifier = 00h dcs = 4 Text = "TextA" |
| 9 | Successful call, buffer is part of a buffer with | | DISPLAY TEXT Proactive |

| | | | |
|----|--|---|--|
| | <p style="text-align: center;">the end part Send the command</p> <p>qualifier = 0 dcs = 4 buffer = "12TextB" offset = 2 length = 5</p> | | <p>command</p> <p>qualifier = 00h dcs = 4 Text = "TextB"</p> |
| 10 | <p style="text-align: center;">Successfull call, buffer is part of a buffer with the first part Send the command</p> <p>qualifier = 0 dcs = 4 buffer = "TextC12" offset = 0 length = 5</p> | | <p>DISPLAY TEXT Proactive command</p> <p>qualifier = 00h dcs = 4 Text = "TextC"</p> |
| 11 | <p style="text-align: center;">Successfull call, buffer is part of a buffer Send the command</p> <p>qualifier = 0 dcs = 4 buffer = "12TextD34" offset = 2 length = 5</p> | | <p>DISPLAY TEXT Proactive command</p> <p>qualifier = 00h dcs = 4 Text = "TextD"</p> |
| 12 | <p style="text-align: center;">Successfull call, qualifier = 81h Send the command</p> <p>qualifier = 81h dcs = 4 buffer = "TextE" offset = 0 length = 5</p> | | <p>DISPLAY TEXT Proactive command</p> <p>qualifier = 81h dcs = 4 Text = "TextE"</p> |
| 13 | <p style="text-align: center;">Successfull call, DCS=0 (7 bits) Send the command</p> <p>qualifier = 0 dcs = 0 buffer = "TextF" offset = 0 length = 5</p> | | <p>DISPLAY TEXT Proactive command</p> <p>qualifier = 00h dcs = 0 Text = "TextF"</p> |
| 14 | <p style="text-align: center;">Successfull call, DCS=8 (UCS2) Send the command</p> <p>qualifier = 0 dcs = 8 buffer = "TextG" offset = 0 length = 5</p> | | <p>DISPLAY TEXT Proactive command</p> <p>qualifier = 00h dcs = 8 Text = "TextG"</p> |
| 15 | <p style="text-align: center;">Call the initDisplayText() method with any value Then build and send a DISPLAY TEXT command</p> <p>qualifier = 0 dcs = 4 buffer = "TextHTextH" offset = 0 length = 10</p> | | <p>DISPLAY TEXT Proactive command</p> <p>qualifier = 00h dcs = 4 Text = "TextHTextH"</p> |
| 16 | <p style="text-align: center;">Successful call, text length is null Send the command</p> <p>qualifier = 0 dcs = 4 buffer = "" (not null buffer) offset = 0 length = 0</p> | | <p>DISPLAY TEXT Proactive command</p> <p>qualifier = 00h Text String TLV = 8D 00</p> |
| 17 | <p style="text-align: center;">Select a TLV in the ProactiveHandler Call the initDisplayText() method Call the getValueLength() method</p> | <p>UNAVAILABLE_ELEMENT ToolkitException is thrown by getValueLength()</p> | |
| 18 | <p style="text-align: center;">Successful call, buffer length = 7Eh</p> <p>qualifier = 0 dcs = 4 buffer = "UUU..." offset = 0 length = 7Eh</p> | | <p>DISPLAY TEXT Proactive command</p> <p>Text String TLV = 8D 7F 04 55 55...</p> |
| 19 | <p style="text-align: center;">Successful call, buffer length = 7Fh</p> <p>qualifier = 0 dcs = 4</p> | | <p>DISPLAY TEXT Proactive command</p> <p>Text String TLV = 8D 81</p> |

| | | | |
|----|---|--|---|
| | buffer = "UUU..." offset = 0 length = 7Fh | | 80 04 55 55... |
| 20 | Successful call, buffer length = 240 Qualifier = 0 dcs = 4 buffer = "UUU..." offset = 0 length = 240 | | DISPLAY TEXT Proactive command Text String TLV = 8D 81 F1 04 55 55... |
| 21 | Call the initDisplayText() method with a too long buffer qualifier = 0 dcs = 4 buffer = "XXXX..." offset = 0 length = 241 | HANDLER_OVERFLOW ToolkitException is thrown | |
| 22 | Call the initDisplayText() without sending the command | | No proactive command shall be sent expected status is '9000' |

6.2.7.3.4 Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | 8, 9, 10, 11, 12, 13, 14, 15, 16, 18, 19, 20 |
| N2 | 15 |
| N3 | 17 |
| N4 | 22 |
| N5 | 7 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| C1 | 21 |

6.2.7.4 Method initGetInkey

Test Area Reference: API_2_PAH_INGKBB_BSS

6.2.7.4.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public void initGetInkey(byte qualifier,
                        byte dcs,
                        byte[] buffer,
                        short offset,
                        short length)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: The method shall build a GET INKEY proactive command in the ProactiveHandler, using qualifier, dcs and buffer parameters. Comprehension Required flags are set.

CRRN2: A call to this method clears the handler then initialises it.

CRRN3: No TLV is selected after a call to the method.

CRRN4: The GET INKEY command is not sent by the method.

CRRN5: The Command Number may take any value between 01h and FEh.

Parameter errors

CRRP1: The method shall throw NullPointerException if buffer is null.

CRRP1: If offset or length or both would cause access outside array bounds, a `ArrayIndexOutOfBoundsException` shall be thrown.

Context errors

CRRC1: A `ToolkitException.HANDLER_OVERFLOW` shall be thrown if the `ProactiveHandler` is too small to put the requested data.

6.2.7.4.2 Test Suite files

Test Script: API_2_PAH_INGKBB_BSS_1.scr
 Test Applet: API_2_PAH_INGKBB_BSS_1.java
 Load Script: API_2_PAH_INGKBB_BSS_1.ldr
 Cleanup Script: API_2_PAH_INGKBB_BSS_1.clr
 Parameter File: API_2_PAH_INGKBB_BSS_1.par

6.2.7.4.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|---|
| 1 | NULL as parameter to buffer buffer = NULL | <code>NullPointerException</code> is thrown | |
| 2 | offset > buffer.length buffer = "Text" offset = 5 | <code>ArrayIndexOutOfBoundsException</code> is thrown | |
| 3 | offset < 0 buffer = "Text" offset = -1 | <code>ArrayIndexOutOfBoundsException</code> is thrown | |
| 4 | length > buffer.length buffer = "Text" offset = 0 length = 5 | <code>ArrayIndexOutOfBoundsException</code> is thrown | |
| 5 | offset + length > buffer.length buffer = "Text" offset = 3 length = 2 | <code>ArrayIndexOutOfBoundsException</code> is thrown | |
| 6 | length < 0 buffer = "Text" offset = 3 length = -1 | <code>ArrayIndexOutOfBoundsException</code> is thrown | |
| 7 | Successful call, buffer is the whole buffer qualifier = 0 dcs = 4 buffer = "TextA" offset = 0 length = 5 | No exception is thrown | |
| | Verify the command number value | Command number between 01h and FEh | |
| 8 | Send the command | | GET INKEY Proactive command qualifier = 00h dcs = 4 Text = "TextA" |
| 9 | Successful call, buffer is part of a buffer with the end part qualifier = 0 dcs = 4 buffer = "12TextB" offset = 2 length = 5 | | GET INKEY Proactive command qualifier = 00h dcs = 4 Text = "TextB" |
| 10 | Successful call, buffer is part of a buffer with the first part qualifier = 0 dcs = 4 buffer = "TextC12" offset = 0 | | GET INKEY Proactive command qualifier = 00h dcs = 4 Text = "TextC" |

| | | | |
|----|---|---|---|
| | length = 5 | | |
| 11 | <p>Successful call, buffer is part of a buffer Send the command</p> <p>qualifier = 0 dcs = 4 buffer = "12TextD34" offset = 2 length = 5</p> | | <p>GET INKEY Proactive command</p> <p>qualifier = 00h dcs = 4 Text = "TextD"</p> |
| 12 | <p>Successful call, qualifier = 81h</p> <p>qualifier = 81h dcs = 4 buffer = "TextE" offset = 0 length = 5</p> | | <p>GET INKEY Proactive command</p> <p>qualifier = 81h dcs = 4 Text = "TextE"</p> |
| 13 | <p>Successful call, DCS=0 (7 bits)</p> <p>qualifier = 0 dcs = 0 buffer = "TextF" offset = 0 length = 5</p> | | <p>GET INKEY Proactive command</p> <p>qualifier = 00h dcs = 0 Text = "TextF"</p> |
| 14 | <p>Successful call, DCS=8 (UCS2)</p> <p>qualifier = 0 dcs = 8 buffer = "TextG" offset = 0 length = 5</p> | | <p>GET INKEY Proactive command</p> <p>qualifier = 00h dcs = 8 Text = "TextG"</p> |
| 15 | <p>Call the initGetInkey() method with any value Then build and send a GET INKEY command</p> <p>qualifier = 0 dcs = 4 buffer = "TextHTextH" offset = 0 length = 10</p> | | <p>GET INKEY Proactive command</p> <p>qualifier = 00h dcs = 4 Text = "TextHTextH"</p> |
| 16 | <p>Successful call, text length is null Send the command</p> <p>qualifier = 0 dcs = 4 buffer = "" offset = 0 length = 0</p> | | <p>GET INKEY Proactive command</p> <p>qualifier = 00h Text String TLV = 8D 00</p> |
| 17 | <p>Select a TLV in the ProactiveHandler Call the initGetInkey() method Call the getValueLength() method</p> | <p>UNAVAILABLE_ELEMENT ToolkitException is thrown by getValueLength()</p> | |
| 18 | <p>Successful call, buffer length = 7Eh</p> <p>qualifier = 0 dcs = 4 buffer = "UUU..." offset = 0 length = 7Eh</p> | | <p>GET INKEY Proactive command</p> <p>Text String TLV = 8D 7F 04 55 55...</p> |
| 19 | <p>Successful call, buffer length = 7Fh</p> <p>qualifier = 0 dcs = 4 buffer = "UUU..." offset = 0 length = 7Fh</p> | | <p>GET INKEY Proactive command</p> <p>Text String TLV = 8D 81 80 04 55 55...</p> |
| 20 | <p>Successful call, buffer length = 240</p> <p>Qualifier = 0 dcs = 4 buffer = "UUU..." offset = 0 length = 240</p> | | <p>GET INKEY Proactive command</p> <p>Text String TLV = 8D 81 F1 04 55 55...</p> |
| 21 | <p>Call the initGetInkey() method with a too long buffer</p> <p>qualifier = 0 dcs = 4 buffer = "XXXX..." offset = 0</p> | <p>HANDLER_OVERFLOW ToolkitException is thrown</p> | |

| | | | |
|----|--|--|--|
| | length = 241 | | |
| 22 | Call the initGetInkey() without sending the command | | No proactive command shall be sent expected status is '9000' |

6.2.7.4.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 8, 9, 10, 11, 12, 13, 14, 15, 16, 18, 19, 20 |
| N2 | 15 |
| N3 | 17 |
| N4 | 22 |
| N5 | 7 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| C1 | 21 |

6.2.7.5 Method initGetInput

Test Area Reference: API_2_PAH_INGPBB_BSSSS

6.2.7.5.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public void initGetInput(byte qualifier,
                        byte dcs,
                        byte[] buffer,
                        short offset,
                        short length,
                        short minRespLength,
                        short maxRespLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

- CRRN1: The method shall build a GET INPUT proactive command in the ProactiveHandler, using qualifier, dcs, buffer, minRespLength and maxRespLength parameters. Comprehension Required flags are set.
- CRRN2: A call to this method clears the handler then initialises it.
- CRRN3: No TLV is selected after a call to the method.
- CRRN4: The GET INPUT command is not sent by the method.
- CRRN5: The Command Number may take any value between 01h and FEh.

Parameter errors

- CRRP1: The method shall throw NullPointerException if buffer is null.
- CRRP2: If offset or length or both would cause access outside array bounds, a ArrayIndexOutOfBoundsException shall be thrown.

Context errors

- CRRC1: A ToolkitException.HANDLER_OVERFLOW shall be thrown if the ProactiveHandler is too small to put the requested data.

6.2.7.5.2 Test Suite files

Test Script: API_2_PAH_INGPBB_BSSSS_1.scr
 Test Applet: API_2_PAH_INGPBB_BSSSS_1.java
 Load Script: API_2_PAH_INGPBB_BSSSS_1.ldr
 Cleanup Script: API_2_PAH_INGPBB_BSSSS_1.clr
 Parameter File: API_2_PAH_INGPBB_BSSSS_1.par

6.2.7.5.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|---|
| 1 | NULL as parameter to buffer buffer = NULL | NullPointerException is thrown | |
| 2 | offset > buffer.length buffer = "Text" offset = 5 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | offset < 0 buffer = "Text" offset = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | length > buffer.length buffer = "Text" offset = 0 length = 5 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | offset + length > buffer.length buffer = "Text" offset = 3 length = 2 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | length < 0 buffer = "Text" offset = 3 length = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | Successful call, buffer is the whole buffer qualifier = 0 dcs = 4 buffer = "TextA" offset = 0 length = 5 minRespLength = 00h maxRespLength = FFh | No exception is thrown | |
| | Verify the command number value | Command number between 01h and -FEh | |
| 8 | Send the command | | GET INPUT Proactive command qualifier = 00h dcs = 4 Text = "TextA" Min Length = 00h Max Length = FFh |
| 9 | Successful call, buffer is part of a buffer with the end part Send the command qualifier = 0 dcs = 4 buffer = "12TextB" offset = 2 length = 5 minRespLength = 10h maxRespLength = FFh | | GET INPUT Proactive command qualifier = 00h dcs = 4 Text = "TextB" Min Length = 10h Max Length = FFh |
| 10 | Successful call, buffer is part of a buffer with the first part Send the command qualifier = 0 dcs = 4 buffer = "TextC12" offset = 0 length = 5 minRespLength = FFh | | GET INPUT Proactive command qualifier = 00h dcs = 4 Text = "TextC" Min Length = FFh Max Length = FFh |

| | | | |
|----|--|--|---|
| | maxRespLength = FFh | | |
| 11 | <p>Successful call, buffer is part of a buffer Send the command</p> <p>qualifier = 0 dcs = 4 buffer = "12TextD34" offset = 2 length = 5 minRespLength = 00h maxRespLength = 00h</p> | | <p>GET INPUT Proactive command</p> <p>qualifier = 00h dcs = 4 Text = "TextD" Min Length = 00h Max Length = 00h</p> |
| 12 | <p>Successful call, qualifier = 81h</p> <p>qualifier = 81h dcs = 4 buffer = "TextE" offset = 0 length = 5 minRespLength = 00h maxRespLength = 10h</p> | | <p>GET INPUT Proactive command</p> <p>qualifier = 81h dcs = 4 Text = "TextE" Min Length = 00h Max Length = 10h</p> |
| 13 | <p>Successful call, DCS=0 (7 bits)</p> <p>qualifier = 0 dcs = 0 buffer = "TextF" offset = 0 length = 5 minRespLength = 10h maxRespLength = 10h</p> | | <p>GET INPUT Proactive command</p> <p>qualifier = 00h dcs = 0 Text = "TextF" Min Length = 10h Max Length = 10h</p> |
| 14 | <p>Successful call, DCS=8 (UCS2)</p> <p>qualifier = 0 dcs = 8 buffer = "TextG" offset = 0 length = 5 minRespLength = 00h maxRespLength = FFh</p> | | <p>GET INPUT Proactive command</p> <p>qualifier = 00h dcs = 8 Text = "TextG" Min Length = 00h Max Length = FFh</p> |
| 15 | <p>Call the initGetInput() method with any value Then build and send a GET INPUT command</p> <p>qualifier = 0 dcs = 4 buffer = "TextHTextH" offset = 0 length = 10 minRespLength = 00h maxRespLength = 10h</p> | | <p>GET INPUT Proactive command</p> <p>qualifier = 00h dcs = 4 Text = "TextHTextH" Min Length = 00h Max Length = 10h</p> |
| 16 | <p>Successful call, text length is null Send the command</p> <p>qualifier = 0 dcs = 4 buffer = "" offset = 0 length = 0 minRespLength = 00h maxRespLength = 10h</p> | | <p>GET INPUT Proactive command</p> <p>qualifier = 00h Text String TLV = 8D 00 Min Length = 00h Max Length = 10h</p> |
| 17 | <p>Select a TLV in the ProactiveHandler Call the initGetInput() method Call the getValueLength() method</p> | UNAVAILABLE_ELEMENT ToolkitException is thrown by getValueLength() | |
| 18 | <p>Successful call, buffer length = 7Eh</p> <p>qualifier = 0 dcs = 4 buffer = "UUU..." offset = 0 length = 7Eh minRespLength = 00h maxRespLength = 10h</p> | | <p>GET INPUT Proactive command</p> <p>Text String TLV = 8D 7F 04 55 55.. Min Length = 00h Max Length = 10h</p> |
| 19 | <p>Successful call, buffer length = 7Fh</p> <p>qualifier = 0 dcs = 4 buffer = "UUU..." offset = 0 length = 7Fh</p> | | <p>GET INPUT Proactive command</p> <p>Text String TLV = 8D 81 80 04 55 55.. Min Length = 00h Max Length = 10h</p> |

| | | | |
|----|--|--|--|
| | minRespLength = 00h maxRespLength = 10h | | |
| 20 | Successful call, buffer length = 236 Qualifier = 0 dcs = 4 buffer = "UUU..." offset = 0 length = 236 minRespLength = 00h maxRespLength = 10h | | GET INPUT Proactive command Text String TLV = 8D 81 ED 04 55 55... |
| 21 | Call the initGetInput() method with a too long buffer qualifier = 0 dcs = 4 buffer = "XXXX..." offset = 0 length = 237 minRespLength = 00h maxRespLength = 10h | HANDLER_OVERFLOW ToolkitException is thrown | |
| 22 | Call the initGetInput() without sending the command | | No proactive command shall be sent expected status is '9000' |

6.2.7.5.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 8, 9, 10, 11, 12, 13, 14, 15, 16, 18, 19, 20 |
| N2 | 15 |
| N3 | 17 |
| N4 | 22 |
| N5 | 7 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| C1 | 21 |

6.2.7.6 Method send

Test Area Reference: API_2_PAH_SEND

6.2.7.6.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte send()
```

Normal execution

- CRRN1: The send() method send the current proactive command to the mobile.
- CRRN2: The returned byte is equal to general result of the command (first byte of Result TLV in Terminal Response).
- CRRN3: The handler remains unchanged after a call to send() method until the use of initXX() or appendTLV().
- CRRN4: There is no invocation of select() or deselect() method.
- CRRN5: A pending toolkit applet transaction at the method invocation is aborted.

Parameter errors

No requirements

Context errors

CRRC1: A ToolkitException.UNAVAILABLE_ELEMENT shall be thrown is the Result Simple TLV is missing in Terminal Response.

CRRC2: A ToolkitException.OUT_OF_TLV_BOUNDARIES shall be thrown if the general result byte is missing in the Result Simple TLV in Terminal Response.

6.2.7.6.2 Test Suite files

Test Script: API_2_PAH_SEND_1.scr
 Test Applet: API_2_PAH_SEND_1.java
 Load Script: API_2_PAH_SEND_1.ldr
 Cleanup Script: API_2_PAH_SEND_1.clr
 Parameter File: API_2_PAH_SEND_1.par

6.2.7.6.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|-------------------------|---|
| 1 | Build and send a DISPLAY TEXT command qualifier = 00h dcs = 04h buffer = 'Text' | | DISPLAY TEXT Proactive command |
| 2 | Terminal Response with General Result = 00 Result TLV = 03 01 00 (command performed successfully) | Result of send() is 00h | |
| 3 | Build and send a DISPLAY TEXT command qualifier = 00h dcs = 04h buffer = 'Text' | | DISPLAY TEXT Proactive command |
| 4 | Terminal Response with General Result = 01, without Additional information on result Result TLV = 03 01 01 (command performed with partial comprehension) | Result of send() is 01h | |
| 5 | Build and send a DISPLAY TEXT command qualifier = 00h dcs = 04h buffer = 'Text' | | DISPLAY TEXT Proactive command |
| 6 | Terminal Response with General Result = 01, with Additional information on result Result TLV = 03 02 01 55 (command performed with partial comprehension) | Result of send() is 01h | |
| 7 | Build and send a DISPLAY TEXT command qualifier = 00h dcs = 04h buffer = 'Text' | | DISPLAY TEXT Proactive command |
| 8 | Terminal Response with General Result = 02 Result TLV = 03 04 02 65 43 21 (Missing information) | Result of send() is 02h | |
| 9 | Build and send a 7Fh byte command (DISPLAY TEXT) qualifier = 00h dcs = 04h buffer = "UUUUU..." length = 73h | | DISPLAY TEXT Proactive command BER-TLV = D0 7F Text String TLV = 8D 74 04 55 55 55... |
| 10 | Build and send a 80h byte command (DISPLAY TEXT) qualifier = 00h dcs = 04h buffer = "UUUUU..." length = 74h | | DISPLAY TEXT Proactive command BER-TLV = D0 81 80 Text String TLV = 8D 75 04 55 55 55... |
| 11 | Build and send a maximum length command (length of the handler should be 253) | | DISPLAY TEXT Proactive command |

| | | | |
|----|--|--|---|
| | DISPLAY TEXT: Qualifier = 0 dcs = 4 buffer = "UUU..." offset = 0 length = 240 | | BER-TLV = D0 81 FD Text String TLV = 8D 81 F1 04 55 55... |
| 12 | Verify that the Proactive Handler is not modified after a send() Build a DISPLAY TEXT command Copy ProactiveHandler to source byte array Send command Copy ProactiveHandler to destination byte array Compare source and destination | Source and destination are identical | |
| 13 | Build and send a DISPLAY TEXT command Verify there is no invocation of select() or deselect() method. | | DISPLAY TEXT Proactive command |
| 14 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response with 2 Result TLV 1st Result TLV = 03 02 02 12 2nd Result TLV = 03 03 03 34 56 | Result of send() is 02h | |
| 15 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response without Result Simple TLV | ToolkitException.UNAVAILABLE_ELEMENT is thrown by send() | |
| 16 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response without general result byte in the Simple TLV Result TLV = 03 00 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown by send() | |

6.2.7.6.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 1, 3, 5, 7, 9, 10, 11, 12, 13, 14 |
| N2 | 2, 4, 6, 8, 14 |
| N3 | 12 |
| N4 | 13 |
| N5 | To be checked in Framework tests and insert here cross reference |
| C1 | 15 |
| C2 | 16 |

6.2.7.7 Method getLength

Test Area Reference API_2_PAH_GLEN

6.2.7.7.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short getLength()
```

throws ToolkitException

Normal execution

CRRN1: returns the length in bytes of the TLV list.

Parameter errors

No requirements

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException.HANDLER_NOT_AVAILABLE.

6.2.7.7.2 Test Suite files

Test Script: API_2_PAH_GLEN_1.scr
 Test Applet: API_2_PAH_GLEN_1.java
 Load Script: API_2_PAH_GLEN_1.ldr
 Cleanup Script: API_2_PAH_GLEN_1.clr
 Parameter File: API_2_PAH_GLEN_1.par

6.2.7.7.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|------------------------------|------------------|
| 1 | Clear the handler getLength() | Result of getLength() is 0 | |
| 2 | Call the init() method getLength() | Result of getLength() is 9 | |
| 3 | Call the initDisplayText() method, with buffer length = 240 getLength() | Result of getLength() is 253 | |
| 4 | Build a 7Fh Proactive Handler getLength() | Result of getLength() is 7Fh | |
| 5 | Build a 80h Proactive Handler getLength() | Result of getLength() is 80h | |

6.2.7.7.4 Test Coverage

| CRR number | Test case number |
|------------|--------------------------------------|
| N1 | 1, 2, 3, 4,5 |
| C1 | Does not apply for Proactive Handler |

6.2.7.8 Method copy

Test Area Reference API_2_PAH_COPY_BSS

6.2.7.8.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short copy(byte[] dstBuffer,
```

```
        short dstOffset,  
        short dstLength)  
    throws java.lang.NullPointerException,  
           java.lang.ArrayIndexOutOfBoundsException,  
           ToolkitException
```

Normal execution

CRRN1: copies the simple TLV list contained in the handler to the destination byte array.

CRRN2: returns dstOffset + dstLength.

Parameter errors

CRRP1: if dstBuffer is null a NullPointerException is thrown.

CRRP2: if dstOffset or dstLength or both would cause access outside array bounds, or if dstLength is negative, an ArrayIndexOutOfBoundsException is thrown.

CRRP3: if dstLength is greater than the length of the simple TLV List, an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException. OUT_OF_TLV_BOUNDARIES.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.7.8.2

Test Suite files

| | |
|-----------------|---------------------------|
| Test Script: | API_2_PAH_COPY_BSS_1.scr |
| Test Applet: | API_2_PAH_COPY_BSS_1.java |
| Load Script: | API_2_PAH_COPY_BSS_1.ldr |
| Cleanup Script: | API_2_PAH_COPY_BSS_1.clr |
| Parameter File: | API_2_PAH_COPY_BSS_1.par |

6.2.7.8.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | NULL as parameter to dstBuffer | NullPointerException is thrown | |
| 2 | Call the init() method | | |
| | DstOffset > dstBuffer.length dstBuffer.length = 5 dstOffset = 6 dstLength = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | dstOffset < 0 dstBuffer.length = 5 dstOffset = -1 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | DstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 0 dstLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | dstOffset + dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 3 dstLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | dstLength < 0 dstBuffer.length = 5 dstOffset = 0 dstLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | dstLength > length of the simple TLV list dstBuffer.length = 10 dstOffset = 0 dstLength = 10 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 8 | Successful call, dstBuffer is the whole buffer dstBuffer.length = 9 dstOffset = 0 dstLength = 9 | Result of copy() is 9 | |
| 9 | Compare the buffer | Result of arrayCompare() is 0 | |
| 10 | Successful call, dstBuffer is part of a buffer dstBuffer.length = 15 dstOffset = 3 dstLength = 9 | Result of copy() is 12 | |
| 11 | Compare the whole buffer | Result of arrayCompare() is 0 | |
| 12 | Successful call, dstBuffer is part of a buffer dstBuffer.length = 15 dstOffset = 3 dstLength = 6 | Result of copy() is 9 | |
| 13 | Compare the whole buffer | Result of arrayCompare() is 0 | |

6.2.7.8.4 Test Coverage

| CRR number | Test case number |
|------------|-------------------------------------|
| N1 | 9, 11, 13 |
| N2 | 8, 10, 12 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7 |
| C1 | Does not apply for ProactiveHandler |

6.2.7.9 Method findTLV

Test Area Reference API_2_PAH_FINDBB

6.2.7.9.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte findTLV(byte tag, byte occurrence)
    throws ToolkitException
```

Normal execution

Looks for the indicated occurrence of a TLV element from the beginning of the TLV list (handler buffer):

CRRN1: the method is successful if the required occurrence exists then the corresponding TLV becomes current.

CRRN2: if the method is successful then it returns TLV_FOUND_CR_SET when Comprehension Required flag is set.

CRRN3: if the method is successful then it returns TLV_FOUND_CR_NOT_SET when Comprehension Required flag is not set.

CRRN4: if the required occurrence of the TLV element does not exist, the current TLV is no longer defined and TLV_NOT_FOUND is returned.

CRRN5: The search method is comprehension required flag independent.

Parameter errors

CRRP1: if an input parameter is not valid (e.g. occurrence = 0) an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException BAD_INPUT_PARAMETER.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.7.9.2

Test Suite files

| | |
|-----------------|-------------------------|
| Test Script: | API_2_PAH_FINDBB_1.scr |
| Test Applet: | API_2_PAH_FINDBB_1.java |
| Load Script: | API_2_PAH_FINDBB_1.ldr |
| Cleanup Script: | API_2_PAH_FINDBB_1.clr |
| Parameter File: | API_2_PAH_FINDBB_1.par |

6.2.7.9.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|------------------|
| 1 | Initialise the handler Invalid input parameter Occurrence = 0 | ToolkitException.BAD_INPUT_PARAMETER is thrown | |
| 2 | Call the init() method Search 1st TLV Tag = 01h Occurrence = 1 | Result is TLV_FOUND_CR_SET | |
| 3 | Call the getValueLength() method | Result is 03h | |
| 4 | Search 2nd TLV Tag = 02h Occurrence = 1 | Result is TLV_FOUND_CR_SET | |
| 5 | Call the getValueLength() method | Result is 02h | |
| 6 | Select a TLV (tag 02h) Search a wrong tag Tag = 03h Occurrence = 1 | Result is TLV_NOT_FOUND | |
| 7 | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 8 | Search a tag with wrong occurrence Tag = 01h Occurrence = 2 | Result is TLV_NOT_FOUND | |
| 9 | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 10 | Append a TLV with tag=02h Search the TLV Tag = 02h Occurrence = 2 | Result is TLV_FOUND_CR_NOT_SET | |
| 11 | Append a TLV with tag=04h Search the TLV Tag = 04h Occurrence = 1 | Result is TLV_FOUND_CR_NOT_SET | |
| 12 | Search tag 81h Tag = 81h Occurrence = 1 | Result is TLV_FOUND_CR_SET | |
| 13 | Search tag 84h Tag = 84h Occurrence = 1 | Result is TLV_FOUND_CR_NOT_SET | |

6.2.7.9.4 Test Coverage

| CRR number | Test case number |
|------------|--------------------------------------|
| N1 | 3, 5 |
| N2 | 2, 4 |
| N3 | 10, 11 |
| N4 | 6, 7, 8, 9 |
| N5 | 12, 13 |
| P1 | 1 |
| C1 | Does not apply for Proactive Handler |

6.2.7.10 Method getValueLength

Test Area Reference API_2_PAH_GVLE

6.2.7.10.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short getValueLength()
    throws ToolkitException
```

Normal execution

CRRN1: gets and returns the binary length of the value field for the last TLV element which has been found in the handler.

Parameter errors

No requirements

Context errors

CRR1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

CRR2: in case of unavailable TLV element an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException UNAVAILABLE_ELEMENT.

6.2.7.10.2 Test Suite files

Test Script: API_2_PAH_GVLE_1.scr
 Test Applet: API_2_PAH_GVLE_1.java
 Load Script: API_2_PAH_GVLE_1.ldr
 Cleanup Script: API_2_PAH_GVLE_1.clr
 Parameter File: API_2_PAH_GVLE_1.par

6.2.7.10.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | Call the init() method | | |
| | getValueLength() | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| 2 | Call the appendTLV() method tag = 0D valueOffset = 0 valueLength = 0 | | |
| | Search TLV 0Dh (Text String TLV) | | |
| | getValueLength() | Result is 00h | |
| 3 | Call the initDisplayText() method length = 1 (+ dcs byte) | | |
| | Search TLV 0Dh (Text String TLV) | | |
| | getValueLength() | Result is 02h | |
| 4 | Call the initDisplayText() method length = 7Eh (+ dcs byte) | | |
| | Search TLV 0Dh (Text String TLV) | | |
| | getValueLength() | Result is 7Fh | |
| 5 | Call the initDisplayText() method length = 7Fh (+ dcs byte) | | |
| | Search TLV 0Dh (Text String TLV) | | |
| | getValueLength() | Result is 80h | |
| 6 | Call the initDisplayText() method length = F0h (maximum text length) | | |
| | Search TLV 0Dh (Text String TLV) | | |
| | getValueLength() | Result is F1h | |

6.2.7.10.4 Test Coverage

| CRR number | Test case number |
|------------|--------------------------------------|
| N1 | 2, 3, 4, 5, 6 |
| C1 | Does not apply for Proactive Handler |
| C2 | 1 |

6.2.7.11 Method getValueByte

Test Area Reference API_2_PAH_GVBYS

6.2.7.11.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte getValueByte(short valueOffset)
    throws ToolkitException
```

Normal execution

CRRN1: Gets a byte from the last TLV element which has been found in the handler and returns its value (1 byte).

Parameter errors

CRRP1: if valueOffset is out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

CRRC2: in case of unavailable TLV element an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException UNAVAILABLE_ELEMENT.

6.2.7.11.2 Test Suite files

Test Script: API_2_PAH_GVBYS_1.scr
 Test Applet: API_2_PAH_GVBYS_1.java
 Load Script: API_2_PAH_GVBYS_1.ldr
 Cleanup Script: API_2_PAH_GVBYS_1.clr
 Parameter File: API_2_PAH_GVBYS_1.par

6.2.7.11.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | Call the init() method type = FFh qualifier = FEh destination = FDh | | |
| | getValueByte(0) | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| 2 | Search TLV 01h (Command Details TLV) | | |
| | getValueByte(3) | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 3 | Search TLV 01h (Command Details TLV) | | |
| | getValueByte(2) | Result is FEh (qualifier) | |
| 4 | Search TLV 02h (Device Identities TLV) | | |
| | getValueByte(0) | Result is 81h (Source) | |
| 5 | initDisplayText() buffer = 00 01 ... 7D length = 7Eh Search TLV 0Dh (Text String TLV) | | |
| | getValueByte(7E) | Result is 7Dh | |
| 6 | initDisplayText() buffer = 00 01 ... 7D 7E length = 7Fh Search TLV 0Dh (Text String TLV) | | |
| | getValueByte(7E) | Result is 7Dh | |
| 7 | getValueByte(7F) | Result is 7Eh | |
| 8 | initDisplayText() buffer = 00 01 ... EF length = F0h Search TLV 0Dh (Text String TLV) | | |
| | getValueByte(F0) | Result is EFh | |

6.2.7.11.4 Test Coverage

| CRR number | Test case number |
|------------|--------------------------------------|
| N1 | 3, 4, 5, 6, 7, 8 |
| P1 | 2 |
| C1 | Does not apply for Proactive Handler |
| C2 | 1 |

6.2.7.12 Method copyValue

Test Area Reference API_2_PAH_CPYVS_BSS

6.2.7.12.1 Conformance requirement

The method with following header shall be compliant with its definition in the API.

```
public short copyValue(short valueOffset,
    byte[] dstBuffer,
    short dstOffset,
    short dstLength)
    throws java.lang.NullPointerException,
    java.lang.ArrayIndexOutOfBoundsException,
    ToolkitException
```

Normal execution

CRRN1: copies a part of the last TLV element which has been found, into a destination. buffer.

CRRN2: returns `dstOffset + dstLength`.

Parameter errors

CRRP1: if `dstBuffer` is null `NullPointerException` is thrown.

CRRP2: if `dstOffset` or `dstLength` or both would cause access outside array bounds, or if `dstLength` is negative `ArrayIndexOutOfBoundsException` is thrown.

CRRP3: if `valueOffset`, `dstLength` or both are out of the current TLV an instance of `ToolkitException` shall be thrown. The reason code shall be `ToolkitException OUT_OF_TLV_BOUNDARIES`.

Context errors

CRRC1: if the handler is busy an instance of `ToolkitException` shall be thrown. The reason code shall be `ToolkitException HANDLER_NOT_AVAILABLE`.

CRRC2: in case of unavailable TLV element an instance of `ToolkitException` shall be thrown. The reason code shall be `ToolkitException UNAVAILABLE_ELEMENT`.

6.2.7.12.2 Test Suite files

Test Script: `API_2_PAH_CPYVS_BSS_1.scr`

Test Applet: `API_2_PAH_CPYVS_BSS_1.java`

Load Script: `API_2_PAH_CPYVS_BSS_1.ldr`

Cleanup Script: `API_2_PAH_CPYVS_BSS_1.clr`

Parameter File: `API_2_PAH_CPYVS_BSS_1.par`

6.2.7.12.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|------------------|
| 1 | Initialise the handler Select a TLV | | |
| | <code>copyValue()</code> with a null <code>dstBuffer</code> | <code>NullPointerException</code> is thrown | |
| 2 | initDisplayText() with length = 15 Select Text String TLV | | |
| | dstOffset > dstBuffer.length <code>dstBuffer.length = 5</code> <code>dstOffset = 6</code> <code>dstLength = 0</code> | <code>ArrayIndexOutOfBoundsException</code> is thrown | |
| 3 | dstOffset < 0 <code>dstBuffer.length = 5</code> <code>dstOffset = -1</code> <code>dstLength = 1</code> | <code>ArrayIndexOutOfBoundsException</code> is thrown | |
| 4 | dstLength > dstBuffer.length <code>dstBuffer.length = 5</code> <code>dstOffset = 0</code> <code>dstLength = 6</code> | <code>ArrayIndexOutOfBoundsException</code> is thrown | |
| 5 | dstOffset + dstLength > dstBuffer.length <code>dstBuffer.length = 5</code> <code>dstOffset = 3</code> <code>dstLength = 3</code> | <code>ArrayIndexOutOfBoundsException</code> is thrown | |
| 6 | dstLength < 0 <code>dstBuffer.length = 5</code> <code>dstOffset = 0</code> <code>dstLength = -1</code> | <code>ArrayIndexOutOfBoundsException</code> is thrown | |
| 7 | initDisplayText() with length = 5 Select Text String TLV | | |

| | | | |
|----|---|---|--|
| | valueOffset > Text String Length valueOffset = 7 dstBuffer.length = 15 dstOffset = 0 dstLength = 0 | ToolkitException.OUT_OF_TLV_BOUNDSARIES is thrown | |
| 8 | [Select Text String TLV] valueOffset < 0 valueOffset = -1 dstBuffer.length = 15 dstOffset = 0 dstLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDSARIES is thrown | |
| 9 | [Select Text String TLV] dstLength > Text String length valueOffset = 0 dstBuffer.length = 15 dstOffset = 0 dstLength = 7 | ToolkitException.OUT_OF_TLV_BOUNDSARIES is thrown | |
| 10 | [Select Text String TLV] valueOffset + dstLength > Text String length valueOffset = 2 dstBuffer.length = 15 dstOffset = 0 dstLength = 5 | ToolkitException.OUT_OF_TLV_BOUNDSARIES is thrown | |
| 11 | Initialise the handler copyValue() | | |
| | | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| 12 | initDisplayText() dcs = 4 buffer = 00 01 ... 0F Select Text String TLV | | |
| | Successful call valueOffset = 0 dstBuffer.length = 17 dstOffset = 0 dstLength = 17 | Result of copyValue() is 17 | |
| 13 | Compare buffer buffer = 04 00 01 ... 0F | Result is 00h | |
| 14 | initialise dstBuffer dstBuffer = 55 55 ... 55 | | |
| | Successful call valueOffset = 2 dstBuffer.length = 20 dstOffset = 3 dstLength = 12 | Result of copyValue() is 15 | |
| 15 | Compare buffer buffer = 55 55 55 01 02 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55 | Result is 00h | |

6.2.7.12.4 Test Coverage

| CRR number | Test case number |
|------------|--------------------------------------|
| N1 | 13, 15 |
| N2 | 12, 14 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7, 8, 9, 10 |
| C1 | Does not apply for Proactive Handler |
| C2 | 11 |

6.2.7.13 Method compareValue

Test Area Reference API_2_PAH_CPRVS_BSS

6.2.7.13.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte compareValue(short valueOffset,  
                        byte[] compareBuffer,  
                        short compareOffset,  
                        short compareLength)  
    throws java.lang.NullPointerException,  
           java.lang.ArrayIndexOutOfBoundsException,  
           ToolkitException
```

Normal execution

Compares the last found TLV element with a buffer:

CRRN1: returns 0 if identical.

CRRN2: returns -1 if the first miscomparing byte in simple TLV List is less than that in compareBuffer.

CRRN3: returns 1 if the first miscomparing byte in simple TLV List is greater than that in compareBuffer.

Parameter errors

CRRP1: if compareBuffer is null NullPointerException shall be thrown.

CRRP2: if compareOffset or compareLength or both would cause access outside array bounds, or if compareLength is negative ArrayIndexOutOfBoundsException shall be thrown.

CRRP3: if valueOffset, dstLength or both are out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

CRRC2: in case of unavailable TLV element an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException UNAVAILABLE_ELEMENT.

6.2.7.13.2 Test Suite files

| | |
|-----------------|----------------------------|
| Test Script: | API_2_PAH_CPRVS_BSS_1.scr |
| Test Applet: | API_2_PAH_CPRVS_BSS_1.java |
| Load Script: | API_2_PAH_CPRVS_BSS_1.ldr |
| Cleanup Script: | API_2_PAH_CPRVS_BSS_1.clr |
| Parameter File: | API_2_PAH_CPRVS_BSS_1.par |

6.2.7.13.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | Initialise the handler Select a TLV | | |
| | compareValue() with a null compareBuffer | NullPointerException is thrown | |
| 2 | initDisplayText() with length = 15 Select Text String TLV | | |
| | compareOffset > compareBuffer.length compareBuffer.length = 5 compareOffset = 6 compareLength = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | compareOffset < 0 compareBuffer.length = 5 compareOffset = -1 compareLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | compareLength > compareBuffer.length compareBuffer.length = 5 compareOffset = 0 compareLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | compareOffset + compareLength > compareBuffer.length compareBuffer.length = 5 compareOffset = 3 compareLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | compareLength < 0 compareBuffer.length = 5 compareOffset = 0 compareLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | initDisplayText() with length = 5 Select Text String TLV | | |
| | valueOffset > Text String Length valueOffset = 7 compareBuffer.length = 15 compareOffset = 0 compareLength = 0 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 8 | [Select Text String TLV] valueOffset < 0 valueOffset = -1 compareBuffer.length = 15 compareOffset = 0 compareLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 9 | [Select Text String TLV] compareLength > Text String length valueOffset = 0 compareBuffer.length = 15 compareOffset = 0 compareLength = 7 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 10 | [Select Text String TLV] valueOffset + compareLength > Text String length valueOffset = 2 compareBuffer.length = 15 compareOffset = 0 compareLength = 5 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 11 | Initialise the handler compareValue() | | |
| | | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| 12 | initDisplayText() dcs = 4 buffer = 00 01 ... 0F Select Text String TLV | | |
| | Initialise compareBuffer compareBuffer = 04 00 01 ... 0F | | |
| | Compare buffers valueOffset = 0 compareOffset = 0 compareLength = 17 | Result is 00h | |
| 13 | Initialise compareBuffer | | |

| | | | |
|----|--|---------------|--|
| | compareBuffer = 04 00 01 02 03 04 05 06 07 08 05 0A 0B 0C 0D 0E 10 | | |
| | Compare buffers with same parameters | Result is -1 | |
| 14 | Initialise compareBuffer compareBuffer = 03 00 01 ... 0F | | |
| | Compare buffers with same parameters | Result is +1 | |
| 15 | Initialise compareBuffer compareBuffer = 55 55 55 01 02 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55 | | |
| | Compare buffers valueOffset = 2 compareOffset = 3 compareLength = 12 | Result is 00h | |
| 16 | Initialise compareBuffer compareBuffer = 55 55 55 02 01 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55 | | |
| | Compare buffers with same parameters | Result is -1 | |
| 17 | Initialise compareBuffer compareBuffer = 55 55 55 01 02 03 04 05 06 07 08 09 0A 0A 0D 55 55 55 55 55 | | |
| | Compare buffers with same parameters | Result is +1 | |
| 18 | Initialise compareBuffer compareBuffer = 55 55 55 99 03 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55 | | |
| | Compare buffers with same parameters | Result is +1 | |

6.2.7.13.4 Test Coverage

| CRR number | Test case number |
|------------|--------------------------------------|
| N1 | 12, 15 |
| N2 | 13, 16 |
| N3 | 14, 17, 18 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7, 8, 9, 10 |
| C1 | Does not apply for Proactive Handler |
| C2 | 11 |

6.2.7.14 Method findAndCopyValue(byte tag, byte[] dstBuffer, short valueOffset)

Test Area Reference API_2_PAH_FACYB_BS

6.2.7.14.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short findAndCopyValue(byte tag,
```

```
byte[] dstBuffer,
short dstOffset)
throws java.lang.NullPointerException,
java.lang.ArrayIndexOutOfBoundsException,
ToolkitException
```

Normal execution

CRRN1: looks for the first occurrence of a TLV element from the beginning of a TLV list and copy its value into a destination buffer.

CRRN2: if no TLV element is found, the UNAVAILABLE_ELEMENT exception is thrown and the current TLV is no longer defined.

CRRN3: if the method is successful then the corresponding TLV becomes current and dstOffset + length of the copied value is returned.

CRRN4: The search method is comprehension required flag independent.

Parameter errors

CRRP1: if dstBuffer is null NullPointerException shall be thrown.

CRRP2: if dstOffset would cause access outside array bounds ArrayIndexOutOfBoundsException shall be thrown.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.7.14.2 Test Suite files

- Test Script: API_2_PAH_FACYB_BS_1.scr
- Test Applet: API_2_PAH_FACYB_BS_1.java
- Load Script: API_2_PAH_FACYB_BS_1.ldr
- Cleanup Script: API_2_PAH_FACYB_BS_1.clr
- Parameter File: API_2_PAH_FACYB_BS_1.par

6.2.7.14.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | Initialise the handler | | |
| | FindAndCopyValue() with a null dstBuffer | NullPointerException is thrown | |
| 2 | InitDisplayText() with length = 15 | | |
| | dstOffset > dstBuffer.length tag = 0Dh dstBuffer.length = 20 dstOffset = 21 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | dstOffset < 0 dstBuffer.length = 20 dstOffset = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | length > dstBuffer.length dstBuffer.length = 15 dstOffset = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | DstOffset + length > dstBuffer.length DstBuffer.length = 20 DstOffset = 5 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | initDisplayText() | | |
| | Select a TLV (tag 02h) | | |
| | findAndCopyValue() tag = 03h | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |

| | | | |
|----|---|---|--|
| | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 7 | initDisplayText() dcs = 4 buffer = 00 01 ... 0F | | |
| | Successful call Tag = 0Dh DstBuffer.length = 17 DstOffset = 0 | Result of findAndcopyValue() is 17 | |
| 8 | Compare buffer buffer = 04 00 01 ... 0F | Result is 00h | |
| 9 | initialise dstBuffer dstBuffer = 55 55 ... 55 | | |
| | Successful call dstBuffer.length = 20 dstOffset = 2 | Result of findAndcopyValue() is 19 | |
| 10 | Compare buffer buffer = 55 55 04 00 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0E 0F 55 | Result is 00h | |
| 11 | initDisplayText() dcs = 4 buffer = 00 01 ... 0F | | |
| | append a 2nd Text String TLV | | |
| | Successful call tag = 0Dh dstBuffer.length = 17 dstOffset = 0 | Result of findAndcopyValue() is 17 | |
| 12 | Compare buffer buffer = 04 00 01 ... 0F | Result is 00h | |
| 13 | initDisplayText() dcs = 4 buffer = 00 01 ... 0F | | |
| | Successful call (with tag 8Dh) tag = 8Dh dstBuffer.length = 17 dstOffset = 0 | Result of findAndcopyValue() is 17 | |
| 14 | Compare buffer buffer = 04 00 01 ... 0F | Result is 00h | |
| 15 | Append tag 0Fh buffer = 00 01 ... 0F | | |
| | Successful call (with tag 8Fh) tag = 8Fh dstBuffer.length = 16 dstOffset = 0 | Result of findAndcopyValue() is 16 | |
| 16 | Compare buffer buffer = 00 01 ... 0F | Result is 00h | |

6.2.7.14.4

Test Coverage

| CRR number | Test case number |
|------------|--------------------------------------|
| N1 | 8, 10, 12 |
| N2 | 6 |
| N3 | 7, 9, 11 |
| N4 | 13, 14, 15, 16 |
| P1 | 1 |
| P2 | 2, 3, 4, 5 |
| C1 | Does not apply for Proactive Handler |

6.2.7.15 Method findAndCopyValue(byte tag, byte occurrence, short valueOffset, byte[] dstBuffer, short dstOffset, short dstLength)

Test Area Reference API_2_PAH_FACYBBS_BSS

6.2.7.15.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short findAndCopyValue(byte tag,
                             byte occurrence,
                             short valueOffset,
                             byte[] dstBuffer,
                             short dstOffset,
                             short dstLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: looks for the indicated occurrence of a TLV element from the beginning of a TLV list and copy its value into a destination buffer.

CRRN2: if no TLV element is found, the UNAVAILABLE_ELEMENT exception is thrown and the current TLV is no longer defined.

CRRN3: if the method is successful then the corresponding TLV becomes current and dstOffset + dstLength is returned.

CRRN4: The search method is comprehension required flag independent.

Parameter errors

CRRP1: if dstBuffer is null NullPointerException shall be thrown.

CRRP2: if dstOffset or dstLength or both would cause access outside array bounds, or if dstLength is negative ArrayIndexOutOfBoundsException shall be thrown.

CRRP3: if valueOffset, dstLength or both are out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.

Context errors

CRR1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.7.15.2 Test Suite files

| | |
|-----------------|------------------------------|
| Test Script: | API_2_PAH_FACYBBS_BSS_1.scr |
| Test Applet: | API_2_PAH_FACYBBS_BSS_1.java |
| Load Script: | API_2_PAH_FACYBBS_BSS_1.ldr |
| Cleanup Script: | API_2_PAH_FACYBBS_BSS_1.clr |
| Parameter File: | API_2_PAH_FACYBBS_BSS_1.par |

6.2.7.15.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | Initialise the handler | | |
| | findAndCopyValue() with a null dstBuffer | NullPointerException is thrown | |
| 2 | initDisplayText() with length = 15 | | |
| | dstOffset > dstBuffer.length tag = 0Dh, occurrence = 1 valueOffset = 0 dstBuffer.length = 5 dstOffset = 6 dstLength = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | dstOffset < 0 dstBuffer.length = 5 dstOffset = -1 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 0 dstLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | dstOffset + dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 3 dstLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | dstLength < 0 dstBuffer.length = 5 dstOffset = 0 dstLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | initDisplayText() with length = 5 | | |
| | valueOffset > Text String Length tag = 0Dh, occurrence = 1 valueOffset = 7 dstBuffer.length = 15 dstOffset = 0 dstLength = 0 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 8 | valueOffset < 0 valueOffset = -1 dstBuffer.length = 15 dstOffset = 0 dstLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 9 | dstLength > Text String length valueOffset = 0 dstBuffer.length = 15 dstOffset = 0 dstLength = 7 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 10 | valueOffset + dstLength > Text String length valueOffset = 2 dstBuffer.length = 15 dstOffset = 0 dstLength = 5 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 11 | InitDisplayText() | | |
| | Select a TLV (tag 02h) | | |
| | findAndCopyValue() tag = 0Dh occurrence = 2 | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 12 | initDisplayText() dcs = 4 buffer = 00 01 ... 0F | | |
| | Successful call tag = 0Dh, occurrence = 1 valueOffset = 0 dstBuffer.length = 17 dstOffset = 0 dstLength = 17 | Result of findAndCopyValue() is 17 | |
| 13 | Compare buffer buffer = 04 00 01 ... 0F | Result is 00h | |
| 14 | initialise dstBuffer | | |

| | | | |
|----|---|------------------------------------|--|
| | dstBuffer = 55 55 ... 55 | | |
| | Successful call tag = 0Dh, occurrence = 1 valueOffset = 2 dstBuffer.length = 20 dstOffset = 3 dstLength = 12 | Result of findAndcopyValue() is 15 | |
| 15 | Compare buffer buffer = 55 55 55 01 02 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55 | Result is 00h | |
| 16 | Append a Text String TLV tag = 0D buffer = 00 11 22 33 44 55 (no specific DCS byte) | | |
| | Successful call tag = 0Dh, occurrence = 1 valueOffset = 0 dstBuffer.length = 17 dstOffset = 0 dstLength = 17 | Result of findAndCopyValue() is 17 | |
| 17 | Compare buffer buffer = 04 00 01 ... 0F | Result is 00h | |
| 18 | Successful call tag = 0Dh, occurrence = 2 valueOffset = 0 dstBuffer.length = 6 dstOffset = 0 dstLength = 6 | Result of findAndCopyValue() is 6 | |
| 19 | Compare buffer buffer = 00 11 22 33 44 55 | Result is 00h | |
| 20 | initDisplayText() dcs = 4 buffer = 00 01 ... 0F | | |
| | Successful call (with tag 8Dh) tag = 8Dh occurrence = 1 valueOffset = 0 dstBuffer.length = 17 dstOffset = 0 dstLength = 17 | Result of findAndcopyValue() is 17 | |
| 21 | Compare buffer buffer = 04 00 01 ... 0F | Result is 00h | |
| 22 | Append tag 0Fh buffer = 00 01 ... 0F | | |
| | Successful call (with tag 8Fh) tag = 8Fh occurrence = 1 valueOffset = 0 dstBuffer.length = 16 dstOffset = 0 dstLength = 16 | Result of findAndcopyValue() is 16 | |
| 23 | Compare buffer buffer = 00 01 ... 0F | Result is 00h | |

6.2.7.15.4 Test Coverage

| CRR number | Test case number |
|------------|-------------------------------------|
| N1 | 13, 15, 17, 19 |
| N2 | 11 |
| N3 | 12, 14, 16, 18 |
| N4 | 20, 21, 22, 23 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7, 8, 9, 10 |
| C1 | Does not apply for ProactiveHandler |

6.2.7.16 Method findAndCompareValue(byte tag, byte[] compareBuffer, short compareOffset)

Test Area Reference API_2_PAH_FACRB_BS

6.2.7.16.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte findAndCompareValue(byte tag,
                               byte[] compareBuffer,
                               short compareOffset)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

Looks for the first occurrence of a TLV element from beginning of a TLV list and compare its value with a buffer:

CRRN1: if no TLV element is found, the UNAVAILABLE_ELEMENT exception is thrown and the current TLV is no longer defined.

CRRN2: if the method is successful then the corresponding TLV becomes current.

CRRN3: if identical returns 0.

CRRN4: if the first miscomparing byte in simple TLV is less than that in compareBuffer returns -1.

CRRN5: if the first miscomparing byte in simple TLV is greater than that in compareBuffer returns 1.

CRRN6: The search method is comprehension required flag independent.

Parameter errors

CRRP1: if compareBuffer is null NullPointerException shall be thrown.

CRRP2: if compareOffset would cause access outside array bounds ArrayIndexOutOfBoundsException shall be thrown.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.7.16.2 Test Suite files

Test Script: API_2_PAH_FACRB_BS_1.scr

Test Applet: API_2_PAH_FACRB_BS_1.java

Load Script: API_2_PAH_FACRB_BS_1.ldr

Cleanup Script: API_2_PAH_FACRB_BS_1.clr

Parameter File: API_2_PAH_FACRB_BS_1.par

6.2.7.16.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|------------------|
| 1 | Initialise the handler | | |
| | findAndCompareValue() with a null dstBuffer | NullPointerException is thrown | |
| 2 | initDisplayText() with length = 15 | | |
| | compareOffset > compareBuffer.length tag = 0Dh compareBuffer.length = 20 compareOffset = 21 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | compareOffset < 0 compareBuffer.length = 20 compareOffset = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | length > compareBuffer.length compareBuffer.length = 15 compareOffset = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | compareOffset + length > compareBuffer.length compareBuffer.length = 20 compareOffset = 5 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | InitDisplayText() | | |
| | Select a TLV (tag 02h) | | |
| | findAndCompareValue() tag = 03h | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 7 | initDisplayText() dcs = 4 buffer = 00 01 ... 0F | | |
| | Initialise compareBuffer compareBuffer = 04 00 01 ... 0F | | |
| | Compare buffers tag = 0Dh compareOffset = 0 | Result is 00h | |
| 8 | Verify current TLV getValueLength() | Result is 17 | |
| 9 | Initialise compareBuffer compareBuffer = 04 00 01 ... 10 | | |
| | Compare buffers with same parameters | Result is -1 | |
| 10 | Initialise compareBuffer compareBuffer = 03 00 01 ... 0F | | |
| | Compare buffers with same parameters | Result is +1 | |
| 11 | Initialise compareBuffer compareBuffer = 55 55 04 00 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0E 0F 55 | | |
| | Compare buffers compareOffset = 2 | Result is 00h | |
| 12 | append a Text String TLV tag = 0Dh buffer = 00 11 22 33 44 55 | | |
| | Initialise compareBuffer compareBuffer = 55 55 04 00 01 02 03 04 05 06 | | |

| | | | |
|----|--|---------------|--|
| | 07 08 09 0A 0B 0C 0D 0E 0F 55 | | |
| | Compare buffers compareOffset = 2 | Result is 00h | |
| 13 | Initialise compareBuffer compareBuffer = 55 55 04 01 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0E 0F 55 | | |
| | Compare buffers compareOffset = 2 | Result is -1 | |
| 14 | Initialise compareBuffer compareBuffer = 55 55 04 00 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0D 10 55 | | |
| | Compare buffers compareOffset = 2 | Result is +1 | |
| 15 | initDisplayText() dcs = 4 buffer = 00 01 ... 0F | | |
| | Initialise compareBuffer CompareBuffer = 04 00 01 ... 0F | | |
| | Successful call (with tag 8Dh) tag = 8Dh compareBuffer.length = 17 compareOffset = 0 | Result is 00h | |
| 16 | Append tag 0Fh buffer = 00 01 ... 0F | | |
| | Initialise compareBuffer compareBuffer = 00 01 ... 0F | | |
| | Successful call (with tag 8Fh) tag = 8Fh compareBuffer.length = 16 compareOffset = 0 | Result is 00h | |
| 17 | Initialise compareBuffer compareBuffer = 00 99 01 03 ... 0F | | |
| | Successful call (with tag 8Fh) tag = 8Fh compareBuffer.length = 16 compareOffset = 0 | Result is +1 | |

6.2.7.16.4 Test Coverage

| CRR number | Test case number |
|------------|--------------------------------------|
| N1 | 6 |
| N2 | 8 |
| N3 | 7, 11, 12, 17 |
| N4 | 9, 13 |
| N5 | 10, 14 |
| N6 | 15, 16 |
| P1 | 1 |
| P2 | 2, 3, 4, 5 |
| C1 | Does not apply for Proactive Handler |

6.2.7.17 Method findAndCompareValue(byte tag, byte occurrence, short valueOffset, byte[] compareBuffer, short compareOffset, short compareLength)

Test Area Reference API_2_PAH_FACRBBS_BSS

6.2.7.17.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte findAndCompareValue(byte tag,
                               byte occurrence,
                               short valueOffset,
                               byte[] compareBuffer,
                               short compareOffset,
                               short compareLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

Looks for the indicated occurrence of a TLV element from the beginning of a TLV list and compare its value with a buffer:

- CRRN1: if no TLV element is found, the UNAVAILABLE_ELEMENT exception is thrown and the current TLV is no longer defined.
- CRRN2: if the method is successful then the corresponding TLV becomes current.
- CRRN3: if identical 0 is returned.
- CRRN4: if the first miscomparing byte in simple TLV is less than that in compareBuffer -1 is returned.
- CRRN5: if the first miscomparing byte in simple TLV is greater than that in compareBuffer 1 is returned
- CRRN6: The search method is comprehension required flag independent.

Parameter errors

- CRRP1: if compareBuffer is null NullPointerException shall be thrown.
- CRRP2: if compareOffset or compareLength or both would cause access outside array bounds, or if compareLength is negative ArrayIndexOutOfBoundsException shall be thrown.
- CRRP3: if valueOffset, compareLength or both are out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.
- CRRP4: if an input parameter is not valid (e.g. occurrence = 0) an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException BAD_INPUT_PARAMETER.

Context errors

- CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.7.17.2 Test Suite files

| | |
|-----------------|------------------------------|
| Test Script: | API_2_PAH_FACRBBS_BSS_1.scr |
| Test Applet: | API_2_PAH_FACRBBS_BSS_1.java |
| Load Script: | API_2_PAH_FACRBBS_BSS_1.ldr |
| Cleanup Script: | API_2_PAH_FACRBBS_BSS_1.clr |
| Parameter File: | API_2_PAH_FACRBBS_BSS_1.par |

6.2.7.17.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | Initialise the handler | | |
| | findAndCompareValue() with a null compareBuffer | NullPointerException is thrown | |
| 2 | initDisplayText() with length = 15 | | |
| | compareOffset > compareBuffer.length tag = 0Dh, occurrence = 1 valueOffset = 0 compareBuffer.length = 5 compareOffset = 6 compareLength = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | compareOffset < 0 compareBuffer.length = 5 compareOffset = -1 compareLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | compareLength > compareBuffer.length compareBuffer.length = 5 compareOffset = 0 compareLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | compareOffset + compareLength > compareBuffer.length compareBuffer.length = 5 compareOffset = 3 compareLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | compareLength < 0 compareBuffer.length = 5 compareOffset = 0 compareLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | initDisplayText() with length = 5 | | |
| | valueOffset > Text String Length tag = 0Dh, occurrence = 1 valueOffset = 7 compareBuffer.length = 15 compareOffset = 0 compareLength = 0 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 8 | valueOffset < 0 valueOffset = -1 compareBuffer.length = 15 compareOffset = 0 compareLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 9 | compareLength > Text String length valueOffset = 0 compareBuffer.length = 15 compareOffset = 0 compareLength = 7 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 10 | valueOffset + compareLength > Text String length valueOffset = 2 compareBuffer.length = 15 compareOffset = 0 compareLength = 5 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 11 | Invalid parameter occurrence = 0 | ToolkitException.BAD_INPUT_PARAMETER is thrown | |
| 12 | InitDisplayText() | | |
| | Select a TLV (tag 02h) | | |
| | findAndCompareValue() tag = 0Dh occurrence = 2 | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 13 | initDisplayText() dcs = 4 buffer = 00 01 ... 0F | | |
| | Initialise compareBuffer compareBuffer = 04 00 01 ... 0F | | |
| | findAndCompareValue() | Result is 00h | |

| | | | |
|----|---|---------------|--|
| | <pre>tag = 0Dh, occurrence = 1 valueOffset = 0 compareOffset = 0 compareLength = 17</pre> | | |
| 14 | <p style="text-align: center;">Verify current TLV</p> <pre>getValueLength()</pre> | Result is 17 | |
| 15 | <p style="text-align: center;">Initialise compareBuffer</p> <pre>compareBuffer = 04 00 01 ... 10</pre> | | |
| | Compare buffers with same parameters | Result is -1 | |
| 16 | <p style="text-align: center;">Initialise compareBuffer</p> <pre>compareBuffer = 03 00 01 ... 0F</pre> | | |
| | Compare buffers with same parameters | Result is +1 | |
| 17 | <p style="text-align: center;">Initialise compareBuffer</p> <pre>compareBuffer = 55 55 55 01 02 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55</pre> | | |
| | <p style="text-align: center;">Compare buffers</p> <pre>valueOffset = 2 compareOffset = 3 compareLength = 12</pre> | Result is 00h | |
| 18 | <p style="text-align: center;">Initialise compareBuffer</p> <pre>compareBuffer = 55 55 55 02 01 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55</pre> | | |
| | Compare buffers with same parameters | Result is -1 | |
| 19 | <p style="text-align: center;">Initialise compareBuffer</p> <pre>compareBuffer = 55 55 55 01 02 03 04 05 06 07 08 09 0A 0A 0D 55 55 55 55 55</pre> | | |
| | Compare buffers with same parameters | Result is +1 | |
| 20 | <p style="text-align: center;">append a Text String TLV</p> <pre>tag = 0Dh buffer = 00 11 22 33 44 55</pre> | | |
| | <p style="text-align: center;">Initialise compareBuffer</p> <pre>compareBuffer = 04 00 01 ... 0F</pre> | | |
| | <p style="text-align: center;">findAndCompareValue()</p> <pre>tag = 0Dh, occurrence = 1 valueOffset = 0 compareOffset = 0 compareLength = 17</pre> | Result is 00h | |
| 21 | <p style="text-align: center;">Initialise compareBuffer</p> <pre>compareBuffer = 00 11 22 33 44 55</pre> | | |
| | <p style="text-align: center;">findAndCompareValue()</p> <pre>tag = 0Dh, occurrence = 2 valueOffset = 0 compareOffset = 0 compareLength = 6</pre> | Result is 00h | |
| 22 | <p style="text-align: center;">Initialise compareBuffer</p> <pre>compareBuffer = 00 11 22 33 44 66</pre> | | |
| | <p style="text-align: center;">findAndCompareValue()</p> <pre>tag = 0Dh, occurrence = 2 valueOffset = 0 compareOffset = 0</pre> | Result is -1 | |

| | | | |
|----|---|---------------|--|
| | compareLength = 6 | | |
| 23 | initDisplayText() dcs = 4 buffer = 00 01 ... 0F | | |
| | Initialise compareBuffer CompareBuffer = 04 00 01 ... 0F | | |
| | Successful call (with tag 8Dh) tag = 8Dh, occurrence = 1 valueOffset = 0 compareBuffer.length = 17 compareOffset = 0 compareLength = 17 | Result is 00h | |
| 24 | Append tag 0Fh buffer = 00 01 ... 0F | | |
| | Initialise compareBuffer compareBuffer = 00 01 ... 0F | | |
| | Successful call (with tag 8Fh) tag = 8Fh, occurrence = 1 valueOffset = 0 compareBuffer.length = 16 compareOffset = 0 compareLength = 16 | Result is 00h | |
| 25 | Initialise compareBuffer compareBuffer = 0099 02 ... 0F | | |
| | findAndCompareValue() tag = 0Dh, occurrence = 1 valueOffset = 0 compareOffset = 0 compareLength = 17 | Result is +1 | |

6.2.7.17.4 Test Coverage

| CRR number | Test case number |
|------------|--------------------------------------|
| N1 | 12 |
| N2 | 14 |
| N3 | 13, 17, 20, 21 |
| N4 | 15, 18, 22 |
| N5 | 16, 19 |
| N6 | 23, 24 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7, 8, 9, 10 |
| P4 | 11 |
| C1 | Does not apply for Proactive Handler |

6.2.7.18 Method appendArray

Test Area Reference: API_2_PAH_APDA_BSS

6.2.7.18.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
void appendArray(byte[] buffer,
                short offset,
                short length)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: appends a buffer into the Edithandler buffer

CRRN2: a successful append does not modify the TLV selected

Parameters error

CRRP1: if buffer is null, a java.lang.NullPointerException is thrown

CRRP2: if offset or length or both would cause access outside the array bounds, or if length is negative, a java.lang.ArrayIndexOutOfBoundsException is thrown.

Context errors

CRRC1: if the EditHandler buffer is too small to append the requested data, a ToolkitException is thrown with reason code HANDLER_OVERFLOW

CRRC2: if the EditHandler buffer is busy, a ToolkitException is thrown with reason code HANDLER_NOT_AVAILABLE

6.2.7.18.2 Test suite files

Test Script: API_2_PAH_APDA_BSS_1.scr

Test Applet: API_2_PAH_APDA_BSS_1.java

Load Script: API_2_PAH_APDA_BSS_1.ldr

Cleanup Script: API_2_PAH_APDA_BSS_1.clr

Parameter File: API_2_PAH_APDA_BSS_1.par

6.2.7.18.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|------------------|
| 1 | Null buffer | NullPointerException is thrown | |
| 2 | offset > buffer.length buffer.length = 5 offset = 6 length = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | offset < 0 buffer.length = 5 offset = -1 length = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | length > buffer.length buffer.length = 5 offset = 0 length = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | offset + length > buffer.length buffer.length = 5 offset = 3 length = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | length < 0 buffer.length = 5 offset = 0 length = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | Handler overflow buffer.length = 256 offset = 0 length = 256 | ToolkitException.HANDLER_OVERFLOW is thrown | |
| 8 | Initialise handler | | |
| | Select Command Details TLV | | |
| | Successful call buffer = FF FE ... F8 offset = 0 length = 8 | | |
| | Verify Current TLV: Call getValueLength() | Result is 03h | |

| | | | |
|----|---|--|--|
| 9 | Clear the handler | | |
| | Successful call buffer = FF FE ... F8 offset = 0 length = 8 | | |
| | Call copy() method | | |
| | Compare the arrays compareBuffer = FF FE ... F8 | Result of javacard.framework.Util.arrayCo mpare() is 00h | |
| 10 | Successful call buffer = 00 01 ... 07 offset = 2 length = 6 | | |
| | Call copy() method | | |
| | Compare the arrays compareBuffer = FF FE ... F8 02 03 ... 07 | Result of javacard.framework.Util.arrayCo mpare() is 00h | |
| 11 | Successful call buffer = 11 22 ... 88 offset = 2 length = 4 | | |
| | Call copy() method | | |
| | Compare the arrays compareBuffer = FF FE ... F8 02 03 ... 07 33 44 55 66 | Result of javacard.framework.Util.arrayCo mpare() is 00h | |
| 12 | Clear the handler | | |
| | Successful call buffer = 00 01 ... FC offset = 0 length = 253 | | |
| | Call getLength() method | result = 253 | |
| | Call copy() method | | |
| | Compare handler compareBuffer = 00 01 ... FC | Result of javacard.framework.Util.arrayCo mpare() is 00h | |

6.2.7.18.4 Test Coverage

| CRR number | Test case number |
|------------|-------------------------------------|
| N1 | 9, 10, 11, 12 |
| N2 | 8 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| C1 | 7 |
| C2 | Does not apply for ProactiveHandler |

6.2.7.19 Method appendTLV(byte tag, byte value)

Test Area Reference: API_2_PAH_APTLBB

6.2.7.19.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
void appendTLV (byte tag, byte value)
               throws ToolkitException
```

Normal execution

CRRN1: Appends a TLV element to the current TLV list (1-byte element).

CRRN2: A successful append does not modify the TLV selected.

Parameters error

No requirements

Context errors

CRRC1: if the EditHandler buffer is too small to append the requested data, a ToolkitException is thrown with reason code HANDLER_OVERFLOW

CRRC2: if the EditHandler buffer is busy, a ToolkitException is thrown with reason code HANDLER_NOT_AVAILABLE

6.2.7.19.2 Test suite files

Test Script: API_2_PAH_APTLBB_1.scr
 Test Applet: API_2_PAH_APTLBB_1.java
 Load Script: API_2_PAH_APTLBB_1.ldr
 Cleanup Script: API_2_PAH_APTLBB_1.clr
 Parameter File: API_2_PAH_APTLBB_1.par

6.2.7.19.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|------------------|
| 1 | Call appendArray() length = 251 | | |
| | Handler Overflow: Call the appendTLV() method | ToolkitException.HANDLER_OVERFLOW is thrown | |
| 2 | Initialise handler | | |
| | Select Command Details TLV | | |
| | Call the appendTLV() method | | |
| | Verify Current TLV: Call getValueLength() | Result is 03h | |
| 3 | Clear the handler | | |
| | Successful call tag = 84h value = 00h | | |
| | Call copy() method | | |
| | Compare the arrays compareBuffer = 84 01 00 | Result of javacard.framework.Util.arrayCompare() is 00h | |
| 4 | Successful call tag = 01h value = FEh | | |
| | Call copy() method | | |
| | Compare the arrays compareBuffer = 84 01 00 01 01 FE | Result of javacard.framework.Util.arrayCompare() is 00h | |
| 5 | Clear the handler | | |
| | Call appendArray() length = 250 buffer = 00 81 F7 03 04 ... F9 | | |
| | Successful call tag = 84h value = 00h | | |
| | Call getLength() method | result = 253 | |
| | Call copy() method | | |
| | Compare the array compareBuffer = 00 81 F7 03 04 ... F9 84 01 00 | Result of javacard.framework.Util.arrayCompare() is 00h | |

6.2.7.19.4 Test Coverage

| CRR number | Test case number |
|------------|--------------------------------------|
| N1 | 3, 4, 5 |
| N2 | 2 |
| C1 | 1 |
| C2 | Does not apply for Proactive Handler |

6.2.7.20 Method appendTLV(byte tag, byte value1, byte value2)

Test Area Reference: API_2_PAH_APTLBBB

6.2.7.20.1 Conformance requirements:

The method with following header shall be compliant to its definition in the API.

```
void appendTLV (byte tag,
               byte value)
               throws ToolkitException
```

Normal execution

CRRN1: Appends a TLV element to the current TLV list (2-byte element).

CRRN2: A successful append does not modify the TLV selected.

Parameters error

No requirements

Context errors

CRRC1: if the EditHandler buffer is too small to append the requested data, a ToolkitException is thrown with reason code HANDLER_OVERFLOW

CRRC2: if the EditHandler buffer is busy, a ToolkitException is thrown with reason code HANDLER_NOT_AVAILABLE

6.2.7.20.2 Test suite files

Test Script: API_2_PAH_APTLBBB_1.scr

Test Applet: API_2_PAH_APTLBBB_1.java

Load Script: API_2_PAH_APTLBBB_1.ldr

Cleanup Script: API_2_PAH_APTLBBB_1.clr

Parameter File: API_2_PAH_APTLBBB_1.par

6.2.7.20.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|------------------|
| 1 | Call the initDisplayText() length = 250 | | |
| | Handler Overflow: Call the appendTLV() method | ToolkitException.HANDLER_OVERFLOW is thrown | |
| 2 | Initialise handler | | |
| | Select Command Details TLV | | |
| | Call the appendTLV() method | | |
| | Verify Current TLV: Call getValueLength() | Result is 03h | |
| 3 | Clear the handler | | |
| | Successful call tag = 84h value1 = 00h value2 = 01h | | |
| | Call copy() method | | |
| | Compare the arrays compareBuffer = 84 02 00 01 | Result of javacard.framework.Util.arrayCompare() is 00h | |
| 4 | Successful call tag = 01h value1 = FEh value2 = FDh | | |
| | Call copy() method | | |
| | Compare the arrays compareBuffer = 84 02 00 01 01 02 FE FD | Result of javacard.framework.Util.arrayCompare() is 00h | |
| 5 | Clear the handler | | |
| | Call appendArray() length = 249 buffer = 00 81 F6 03 04 ... F8 | | |
| | Successful call tag = 84h value1 = 00h value2 = 01h | | |
| | Call getLength() method | result = 253 | |
| | Call copy() method | | |
| | Compare handler compareBuffer = 00 81 F6 03 04 ... F8 84 02 00 01 | Result of javacard.framework.Util.arrayCompare() is 00h | |

6.2.7.20.4 Test Coverage

| CRR number | Test case number |
|------------|--------------------------------------|
| N1 | 3, 4, 5 |
| N2 | 2 |
| C1 | 1 |
| C2 | Does not apply for Proactive Handler |

6.2.7.21 Method appendTLV(byte tag, byte[] value, short valueoffset, short valuelength)

Test Area Reference: API_2_PAH_APTLB_BSS

6.2.7.21.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
void appendTLV (byte tag,
```

```

        byte[] value,
        short valueoffset,
        short valuelength)
throws java.lang.NullPointerException,
       java.lang.ArrayIndexOutOfBoundsException,
       ToolkitException

```

Normal execution

CRRN1: Appends a TLV element to the current TLV list (byte-array element).

CRRN2: A successful append does not modify the TLV selected.

Parameters error

CRRP1: if value is null, a java.lang.NullPointerException is thrown

CRRP2: if valueoffset or valuelength or both would cause access outside the array bounds, or if length is negative, a java.lang.ArrayIndexOutOfBoundsException is thrown.

Context errors

CRRC1: if the EditHandler buffer is too small to append the requested data, a ToolkitException is thrown with reason code HANDLER_OVERFLOW

CRRC2: if the EditHandler buffer is busy, a ToolkitException is thrown with reason code HANDLER_NOT_AVAILABLE

CRRC3: if valuelength is greater than 255, a ToolkitException is thrown with reason code BAD_INPUT_PARAMETER

6.2.7.21.2 Test suite files

Test Script: API_2_PAH_APTLB_BSS_1.scr
 Test Applet: API_2_PAH_APTLB_BSS_1.java
 Load Script: API_2_PAH_APTLB_BSS_1.ldr
 Cleanup Script: API_2_PAH_APTLB_BSS_1.clr
 Parameter File: API_2_PAH_APTLB_BSS_1.par

6.2.7.21.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | Null value | NullPointerException is thrown | |
| 2 | valueOffset > value.length value.length = 5 valueOffset = 6 valueLength = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | valueOffset < 0 value.length = 5 valueOffset = -1 valueLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | valueLength > value.length value.length = 5 valueOffset = 0 valueLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | valueOffset + valueLength > value.length value.length = 5 valueOffset = 3 valueLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | valueLength < 0 value.length = 5 valueOffset = 0 valueLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | Handler overflow | ToolkitException.HANDLER_OV | |

| | | | |
|----|--|---|--|
| | value.length = 254 valueOffset = 0 valueLength = 254 | ERFLOW is thrown | |
| 8 | Bad parameter value.length = 256 valueOffset = 0 valueLength = 256 | ToolkitException.BAD_INPUT_PARAMETER is thrown | |
| 9 | Initialise handler Select Command Details TLV Successful call tag = 04 value = FF FE ... F8 valueOffset = 0 valueLength = 8 | | |
| | Verify Current TLV: Call getValueLength() | Result is 03h | |
| 10 | Clear the handler Successful call tag = 04 value = FF FE ... F8 valueOffset = 0 valueLength = 8 | | |
| | Call copy() method Compare the arrays compareBuffer = 04 08 FF FE ... F8 | Result of javacard.framework.Util.arrayCompare() is 00h | |
| 11 | Successful call tag = 85h value = 00 01 ... 07 valueOffset = 2 valueLength = 6 | | |
| | Call copy() method Compare the arrays compareBuffer = 04 08 FF FE ... F8 85 06 02 03 ... 07 | Result of javacard.framework.Util.arrayCompare() is 00h | |
| 12 | Successful call tag = 01 value = 11 22 ... 88 valueOffset = 2 valueLength = 4 | | |
| | Call copy() method Compare the arrays compareBuffer = 04 08 FF FE ... F8 85 06 02 03 ... 07 01 04 33 44 55 66 | Result of javacard.framework.Util.arrayCompare() is 00h | |
| 13 | Clear the handler Successful call tag = 04 value = 00 01 ... 7F valueOffset = 0 valueLength = 80h | | |
| | Call copy() method Compare the arrays compareBuffer = 04 81 80 00 01...7F | Result of javacard.framework.Util.arrayCompare() is 00h | |
| 14 | Clear the handler Successful call tag = 04 value = 00 01 ... F9 valueOffset = 0 valueLength = 250 | | |
| | Call getLength() method | result = 253 | |
| | Call copy() method Compare handler compareBuffer = 04 81 FA 00 01...F9 | Result of javacard.framework.Util.arrayCompare() is 00h | |

6.2.7.21.4 Test Coverage

| CRR number | Test case number |
|------------|--------------------------------------|
| N1 | 10, 11, 12, 13, 14 |
| N2 | 9 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| C1 | 7 |
| C2 | Does not apply for Proactive Handler |
| C3 | 8 |

6.2.7.22 Method appendTLV(byte tag, byte value1, byte[] value2, short value2offset, short value2length)

Test Area Reference: API_2_PAH_APTLBB_BSS

6.2.7.22.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
void appendTLV (byte tag,
               byte value1,
               byte[] value2,
               short value2offset,
               short value2length)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: Appends a TLV element to the current TLV list (1 byte and a byte-array element).

CRRN2: A successful append does not modify the TLV selected.

Parameters error

CRRP1: if value2 is null, a java.lang.NullPointerException is thrown

CRRP2: if value2offset or value2length or both would cause access outside the array bounds, or if length is negative, a java.lang.ArrayIndexOutOfBoundsException is thrown.

Context errors

CRRC1: if the EditHandler buffer is too small to append the requested data, a ToolkitException is thrown with reason code HANDLER_OVERFLOW

CRRC2: if the EditHandler buffer is busy, a ToolkitException is thrown with reason code HANDLER_NOT_AVAILABLE

CRRC3: if valuelength is greater than 255, a ToolkitException is thrown with reason code BAD_INPUT_PARAMETER

6.2.7.22.2 Test suite files

Test Script: API_2_PAH_APTLBB_BSS_1.scr

Test Applet: API_2_PAH_APTLBB_BSS_1.java

Load Script: API_2_PAH_APTLBB_BSS_1.ldr

Cleanup Script: API_2_PAH_APTLBB_BSS_1.clr

Parameter File: API_2_PAH_APTLBB_BSS_1.par

6.2.7.22.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|------------------|
| 1 | Null value2 | NullPointerException is thrown | |
| 2 | value2Offset > value2.length value2.length = 5 value2Offset = 6 value2Length = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | value2Offset < 0 value2.length = 5 value2Offset = -1 value2Length = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | value2Length > value2.length value2.length = 5 value2Offset = 0 value2Length = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | value2Offset + value2Length > value2.length value2.length = 5 value2Offset = 3 value2Length = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | value2Length < 0 value2.length = 5 value2Offset = 0 value2Length = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | Handler overflow value2.length = 254 value2Offset = 0 value2Length = 254 | ToolkitException.HANDLER_OVERFLOW is thrown | |
| 8 | Bad parameter value2.length = 256 value2Offset = 0 value2Length = 256 | ToolkitException.BAD_INPUT_PARAMETER is thrown | |
| 9 | Initialise handler | | |
| | Select Command Details TLV | | |
| | Successful call tag = 04 value1 = 05 value2 = FF FE ... F8 value2Offset = 0 value2Length = 8 | | |
| | Verify Current TLV: Call getValueLength() | Result is 03h | |
| 10 | Clear the handler | | |
| | Successful call tag = 04 value1 = 05 value2 = FF FE ... F8 value2Offset = 0 value2Length = 8 | | |
| | Call copy() method | | |
| | Compare the arrays CompareBuffer = 04 09 05 FF FE ... F8 | Result of javacard.framework.Util.arrayCompare() is 00h | |
| 11 | Successful call tag = 85h value1 = 55h value2 = 00 01 ... 07 value2Offset = 2 value2Length = 6 | | |
| | Call copy() method | | |
| | Compare the arrays compareBuffer = 04 09 05 FF FE ... F8 85 07 55 02 03 ... 07 | Result of javacard.framework.Util.arrayCompare() is 00h | |
| 12 | Successful call tag = 01 value1 = 44h value2 = 11 22 ... 88 value2Offset = 2 value2Length = 4 | | |
| | Call copy() method | | |

| | | | |
|----|--|---|--|
| | <p>Compare the arrays CompareBuffer = 04 09 05 FF FE ... F8 85 07 55 02 03 ... 07 01 05 44 33 44 55 66</p> | Result of javacard.framework.Util.arrayCompare() is 00h | |
| 13 | <p>Clear the handler Successful call tag = 04 value1 = 00 value2 = 01 ... 7F value2Offset = 0 value2Length = 7Fh</p> | | |
| | <p>Call copy() method</p> | | |
| | <p>Compare the arrays compareBuffer = 04 81 80 00 01...7F</p> | Result of javacard.framework.Util.arrayCompare() is 00h | |
| 14 | <p>Clear the handler Successful call tag = 04 value1 = 00 value2 = 01 ... F9 value2Offset = 0 value2Length = 249</p> | | |
| | Call getLength() method | result = 253 | |
| | <p>Call copy() method</p> | | |
| | <p>Compare handler compareBuffer = 04 81 FA 00 01...F9</p> | Result of javacard.framework.Util.arrayCompare() is 00h | |

6.2.7.22.4 Test Coverage

| CRR number | Test case number |
|------------|--------------------------------------|
| N1 | 10, 11, 12, 13, 14 |
| N2 | 9 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| C1 | 7 |
| C2 | Does not apply for Proactive Handler |
| C3 | 8 |

6.2.7.23 Method clear

Test Area Reference: API_2_PAH_CLER

6.2.7.23.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
void clear()
    throws ToolkitException EditHandler
```

Normal execution

CRRN1: Clears the TLV list of an EditHandler

CRRN2: Resets the current TLV selected.

Parameters error

No requirements

Context errors

CRR1: if the EditHandler buffer is busy, a ToolkitException is thrown with reason code HANDLER_NOT_AVAILABLE

6.2.7.23.2 Test suite files

Test Script: API_2_PAH_CLER_1.scr
 Test Applet: API_2_PAH_CLER_1.java
 Load Script: API_2_PAH_CLER_1.ldr
 Cleanup Script: API_2_PAH_CLER_1.clr
 Parameter File: API_2_PAH_CLER_1.par

6.2.7.23.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | Initialise the handler Select Command Details TLV Call the getLength() method | Result of getLength() is not null | |
| | Clear the handler Call the getLength() method | Result of getLength() is 0 | |
| 2 | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |

6.2.7.23.4 Test Coverage

| CRR number | Test case number |
|------------|--------------------------------------|
| N1 | 1 |
| N2 | 2 |
| C1 | Does not apply for Proactive Handler |

6.2.8 Class ProactiveResponseHandler

6.2.8.1 Method copyAdditionalInformation

Test Area Reference: API_2_PRH_CPAI_BSS

6.2.8.1.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short copyAdditionalInformation(byte[] dstBuffer,
    short dstOffset,
    short dstLength)
    throws java.lang.NullPointerException,
    java.lang.ArrayIndexOutOfBoundsException,
    ToolkitException
```

Normal execution

CRRN1: The copyAdditionalInformation() method shall copy a part of the additional information field from Result TLV element in dstBuffer, using dstOffset and dstLength.

CRRN2: dstBuffer shall only be modified from dstOffset to (dstOffset + dstLength – 1) (included).

CRRN3: The method returns (dstOffset + dstLength).

CRRN4: If a Result TLV element is available, it becomes the TLV selected after a call to the method.

CRRN5: The method shall copy from the first Result TLV.

Parameter errors

CRRP1: A NullPointerException shall be thrown if dstBuffer is null.

CRRP2: An ArrayIndexOutOfBoundsException shall be thrown if dstOffset or dstLength or both would cause access outside array bounds.

Context errors

CRRC1: A ToolkitException.UNAVAILABLE_ELEMENT shall be thrown in case of unavailable Result TLV element.

CRRC2: A ToolkitException.OUT_OF_TLV_BOUNDARIES shall be thrown if dstLength is greater than the value field of the available TLV.

6.2.8.1.2 Test Suite files

Test Script: API_2_PRH_CPAI_BSS_1.scr

Test Applet: API_2_PRH_CPAI_BSS_1.java

Load Script: API_2_PRH_CPAI_BSS_1.ldr

Cleanup Script: API_2_PRH_CPAI_BSS_1.clr

Parameter File: API_2_PRH_CPAI_BSS_1.par

6.2.8.1.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|--------------------------------|
| 1 | Build and send a DISPLAY TEXT command qualifier = 0 dcs = 4 buffer = "Text" | | DISPLAY TEXT Proactive command |
| | Terminal Response with 11 additional bytes Result TLV = 03 0C 01 01 23 45 67 89 AB CD EF 01 23 45 | | |
| | NULL as parameter to dstBuffer dstBuffer = NULL | NullPointerException is thrown | |
| 2 | dstOffset > dstBuffer.length dstBuffer.length = 10 dstOffset = 11 dstLength = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | dstOffset < 0 dstBuffer.length = 10 dstOffset = -1 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | dstLength > dstBuffer.length dstBuffer.length = 10 dstOffset = 0 dstLength = 11 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | dstOffset + dstLength > dstBuffer.length dstBuffer.length = 10 dstOffset = 6 dstLength = 5 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | dstLength < 0 dstBuffer.length = 10 dstOffset = 6 dstLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |

| | | | |
|----|---|---|--------------------------------|
| | Terminal Response with 5 additional bytes Result TLV = 03 06 01 01 23 45 67 89 | | |
| | Successfull call, dstBuffer is the whole buffer dstBuffer.length = 5 dstOffset = 0 dstLength = 5 | result of copyAdditionalInformation() is 05h. | |
| 8 | Compare dstBuffer using arrayCompare() src = {01, 23, 45, 67, 89} srcOffset = 00 dest = dstBuffer destOffset = 0 length = 5 | result of arrayCompare() is 00h. | |
| 9 | Call the getValueLength() method | Result is 06h. | |
| 10 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response with 6 additional bytes Result TLV = 03 07 01 AB CD EF FE DC BA | | |
| | Successfull call, dstBuffer is part of a buffer dstBuffer.length = 7 dstOffset = 2 dstLength = 5 | result of copyAdditionalInformation() is 07h. | |
| 11 | Compare dstBuffer using arrayCompare() src = {AB, CD, EF, FE, DC} srcOffset = 00 dest = dstBuffer destOffset = 2 length = 5 | result of arrayCompare() is 00h. | |
| 12 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response with 7 additional bytes Result TLV = 03 08 01 FE DC BA 98 76 54 32 | | |
| | Successfull call, dstBuffer is part of a buffer dstBuffer.length = 7 dstOffset = 0 dstLength = 5 | result of copyAdditionalInformation() is 05h. | |
| 13 | Compare dstBuffer using arrayCompare() src = {FE, DC, BA, 98, 76} srcOffset = 00 dest = dstBuffer destOffset = 0 length = 5 | result of arrayCompare() is 00h. | |
| 14 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response with 8 additional bytes Result TLV = 03 09 01 00 11 22 33 44 55 66 77 | | |
| | Successfull call, dstBuffer is the whole buffer dstBuffer.length = 9 dstOffset = 2 dstLength = 5 | result of copyAdditionalInformation() is 07h. | |
| 15 | Compare dstBuffer using arrayCompare() src = {00, 11, 22, 33, 44} srcOffset = 00 dest = dstBuffer destOffset = 2 length = 5 | result of arrayCompare() is 00h. | |
| 16 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response with F2h additional bytes Result TLV = 03 81 F3 01 00 01 02 03... | | |
| | Successfull call to the method dstBuffer.length = F2h | result of copyAdditionalInformation() is | |

| | | | |
|----|--|--|--------------------------------|
| | dstOffset = 0 dstLength = F2h | F2h. | |
| 17 | Compare dstBuffer using arrayCompare() src = {00, 01, 02, 03, 04...} srcOffset = 00 dest = dstBuffer destOffset = 0 length = F2h | result of arrayCompare() is 00h. | |
| 18 | Call the getValueLength() method | Result is F3h. | |
| 19 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response with 5 additional bytes Result TLV = 03 06 01 00 11 22 33 44 | | |
| | dstLength > data available dstBuffer.length = 6 dstOffset = 0 dstLength = 6 | OUT_OF_TLV_BOUNDARIES ToolkitException is thrown | |
| 20 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response with 5 additional bytes Result TLV = 03 06 01 00 11 22 33 44 | | |
| | Initialise dstBuffer dstBuffer = {00h, 01h, 02h, 03h...} | | |
| | Call the copyAdditionalInformation() method dstBuffer.length = 20 dstOffset = 5 dstLength = 5 | | |
| | Compare dstBuffer using arrayCompare() src = { 00h, 01h, 02h, 03h, 04h, 00h, 11h, 22h, 33h, 44h, 0Ah, 0Bh, 0Ch, 0Dh, 0Eh, 0Fh, 10h, 11h, 12h, 13h} srcOffset = 0 dest = dstBuffer destOffset = 0 length = 20 | result of arrayCompare() is 00h | |
| 21 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response with 2 Result TLV elements 1st Result TLV = 03 06 01 01 23 45 67 89 2nd Result TLV = 03 01 00 | | |
| | Successfull call to copyAdditionalInformation() dstBuffer.length = 5 dstOffset = 0 dstLength = 5 | result of copyAdditionalInformation() is 05h. | |
| 22 | Compare dstBuffer using arrayCompare() src = {01, 23, 45, 67, 89} srcOffset = 00 dest = dstBuffer destOffset = 0 length = 5 | result of arrayCompare() is 00h. | |
| 23 | Call the getValueLength() method | Result is 06h. | |
| 24 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response without Result Simple TLV | ToolkitException.UNAVAILABLE_ELEMENT is thrown by send() | |
| | ProactiveResponseHandler, getTheHandler call copyAdditionalInformation() | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |

6.2.8.1.4 Test Coverage

| CRR number | Test case number |
|------------|---------------------------|
| N1 | 8, 11, 13, 15, 17, 20, 22 |
| N2 | 20 |
| N3 | 7, 10, 12, 14, 16, 21 |
| N4 | 9, 18, 23 |
| N5 | 21, 22, 23 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| C1 | 24 |
| C2 | 19 |

6.2.8.2 Method copyTextString

Test Area Reference: API_2_PRH_CPTS_BS

6.2.8.2.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short copyTextString(byte[] dstBuffer,
                             short dstOffset)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: The copyTextString() method copies the text string value from the first Text String TLV element, using dstBuffer and dstOffset.

CRRN2: If a Text String TLV element is available, it becomes the TLV selected.

CRRN3: The method returns (dstOffset + length of copied value).

Parameter errors

CRRP1: A NullPointerException shall be thrown if dstBuffer is null.

CRRP2: A ArrayIndexOutOfBoundsException shall be thrown if dstOffset or dstOffset + (length of the TextString to be copied, without the Data Coding Scheme included), as specified for the returned value, would cause access outside array bounds.

Context errors

CRRC1: A ToolkitException.UNAVAILABLE_ELEMENT shall be thrown in case of unavailable Text String TLV element.

6.2.8.2.2 Test Suite files

Test Script: API_2_PRH_CPTS_BS_1.scr
 Test Applet: API_2_PRH_CPTS_BS_1.java
 Load Script: API_2_PRH_CPTS_BS_1.ldr
 Cleanup Script: API_2_PRH_CPTS_BS_1.clr
 Parameter File: API_2_PRH_CPTS_BS_1.par

6.2.8.2.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|--|
| 1 | Build and send a GET INPUT command qualifier = 00h dcs = 04h buffer = 'Text' minRespLength = 00h maxRespLength = FFh | | GET INPUT Proactive command |
| | Terminal Response Text String TLV = 0D 02 04 41 | | |
| | ProactiveResponseHandler.getTheHandler() ; call the copyTextString() method with a null dstBuffer dstBuffer = null dstOffset = 0 | NullPointerException is thrown | |
| 2 | Build and send a GET INPUT command | | GET INPUT Proactive command Proactive |
| | Terminal Response Text String TLV = 0D 04 04 "ABC" | | |
| | dstOffset + text length > dstBuffer.length dstBuffer.length = 04h dstOffset = 02h | ArrayIndexOutOfBoundsException is thrown | |
| 3 | dstOffset < 0 dstBuffer.length = 04h dstOffset = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | Build and send a DISPLAY TEXT command qualifier = 00h dcs = 04h buffer = 'Text' | | DISPLAY TEXT Proactive command |
| | Terminal Response without Text String TLV | | |
| | ProactiveResponseHandler.getTheHandler() ; call the copyTextString() method | UNAVAILABLE_ELEMENT ToolkitException is thrown | |
| 5 | Build and send a GET INPUT command | | GET INPUT Proactive command Proactive |
| | Terminal Response with a null Text String TLV Text String TLV = 0D 00 | | |
| | Initialise dstBuffer dstBuffer = {F00h, F01h, F02h, F03h} | | |
| | Call the copyTextString() method dstBuffer.length = 04h dstOffset = 02h | Result of copyTextString() is 02h | |
| 6 | Compare dstBuffer using arrayCompare() src = {0F0h, 0F1h, 0F2h, 0F3h} srcOffset = 00h dest = dstBuffer destOffset = 00h length = 04h | Result of arrayCompare() is 00h | |
| 7 | Build and send a GET INPUT command | | GET INPUT Proactive command Proactive |
| | Terminal Response with text length = 01h Text String TLV = 0D 02 04 41 | | |
| | Initialise dstBuffer dstBuffer = {00h, 01h, 02h, 03h} | | |
| | Call the copyTextString() method dstBuffer.length = 04h dstOffset = 00h | Result of copyTextString() is 01h | |

| | | | |
|----|--|-----------------------------------|--|
| 8 | Compare dstBuffer using arrayCompare() src = {41h, 01h, 02h, 03h} srcOffset = 00h dest = dstBuffer destOffset = 00h length = 04h | Result of arrayCompare() is 00h | |
| 9 | Build and send a GET INPUT command | | GET INPUT Proactive command Proactive |
| | Terminal Response with text length = 02h Text String TLV = 0D 03 04 42 43 | | |
| | Initialise dstBuffer dstBuffer = {00h, 01h, 02h, 03h} | | |
| | Call the copyTextString() method dstBuffer.length = 04h dstOffset = 02h | Result of copyTextString() is 04h | |
| 10 | Compare dstBuffer using arrayCompare() src = {00h, 01h, 42h, 43h} srcOffset = 00h dest = dstBuffer destOffset = 00h length = 04h | Result of arrayCompare() is 00h | |
| 11 | Call the getValueLength() method | Result is 03h | |
| 12 | Build and send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response with text length = 7Eh Text String TLV = 0D 7F 04 01 02 ... 7E | | |
| | Initialise dstBuffer dstBuffer = {00h, 00h ... 00h} | | |
| | Call the copyTextString() method dstBuffer.length = 7Eh dstOffset = 00h | Result of copyTextString() is 7Eh | |
| 13 | Compare dstBuffer using arrayCompare() src = {01h, ..., 7Eh} srcOffset = 00h dest = dstBuffer destOffset = 00h length = 7Eh | Result of arrayCompare() is 00h | |
| 14 | Call the getValueLength() method | Result is 7Fh | |
| 15 | Build and send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response with text length = 7Fh Text String TLV = 0D 81 80 04 01 02 ...7F | | |
| | Initialise dstBuffer dstBuffer = {00h, 01h ... FFh} | | |
| | Call the copyTextString() method dstBuffer.length = FFh dstOffset = 10h | Result of copyTextString() is 8Fh | |
| 16 | Compare dstBuffer using arrayCompare() src = {00h, 01h, ... 0Fh, 01h, ...7Fh, 8Fh, ... FFh} srcOffset = 00h dest = dstBuffer destOffset = 00h length = FFh | Result of arrayCompare() is 00h | |
| 17 | Build and send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response with text length = EFh Text String TLV = 0D 81 F0 04 01 02 ... EF | | |
| | Initialise dstBuffer | | |

| | | | |
|----|---|-----------------------------------|-----------------------------|
| | dstBuffer = {00h, 00h ... 00h} | | |
| | Call the copyTextString() method dstBuffer.length = FFh dstOffset = 00h | Result of copyTextString() is EFh | |
| 18 | Compare dstBuffer using arrayCompare() src = {01h, ...EFh, 00h ... 00h } srcOffset = 00h dest = dstBuffer destOffset = 00h length = FFh | Result of arrayCompare() is 00h | |
| 19 | Build and send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response with two Text String TLV 1st Text String TLV = 0D 03 04 42 43 2nd Text String TLV = 0D 02 04 44 | | |
| | Initialise dstBuffer dstBuffer = {00h, 01h, 02h, 03h} | | |
| | Call the copyTextString() method dstBuffer.length = 04h dstOffset = 02h | Result of copyTextString() is 04h | |
| 20 | Compare dstBuffer using arrayCompare() src = {00h, 01h, 42h, 43h} srcOffset = 00h dest = dstBuffer destOffset = 00h length = 04h | Result of arrayCompare() is 00h | |
| 21 | Call the getValueLength() method | Result is 03h | |

6.2.8.2.4 Test Coverage

| CRR number | Test case number |
|------------|--------------------------|
| N1 | 6, 8, 10, 13, 16, 18, 20 |
| N2 | 11, 14, 21 |
| N3 | 5, 7, 9, 12, 15, 17, 19 |
| P1 | 1 |
| P2 | 2, 3 |
| C1 | 4 |

6.2.8.3 Method getAdditionalInformationLength

Test Area Reference: API_2_PRH_GTIL

6.2.8.3.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short getAdditionalInformationLength()
    throws ToolkitException
```

Normal execution

CRRN1: This method returns the length of the additional information field from the first Result TLV in the ProactiveResponseHandler.

CRRN2: After a successful execution of the method, the Result TLV becomes the selected TLV of the ProactiveResponseHandler.

Parameter errors

No requirements

Context errors

CRRC1: A ToolkitException.UNAVAILABLE_ELEMENT shall be thrown in case of unavailable Result TLV element.

6.2.8.3.2 Test Suite files

Test Script: API_2_PRH_GTIL_1.scr
 Test Applet: API_2_PRH_GTIL_1.java
 Load Script: API_2_PRH_GTIL_1.ldr
 Cleanup Script: API_2_PRH_GTIL_1.clr
 Parameter File: API_2_PRH_GTIL_1.par

6.2.8.3.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|-----------------|---|
| 1 | Build and send a DISPLAY TEXT command qualifier = 00h dcs = 04h buffer = 'Text' | | DISPLAY TEXT Proactive command |
| | Terminal Response without additional information | | |
| | ProactiveResponseHandler.getTheHandler() ; call the getAdditionalInformationLength() method | Result is 00h | |
| 2 | Call the getValueLength() method | Result is 01h | |
| 3 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT ProactiveProactive command |
| | Terminal Response with 1 additional byte Result TLV = 03 02 02 55 | | |
| | ProactiveResponseHandler.getTheHandler() ; call the getAdditionalInformationLength() method | Result is 01h | |
| 4 | Call the getValueLength() method | Result is 02h | |
| 5 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT ProactiveProactive command |
| | Terminal Response with 7Eh additional bytes Result TLV = 03 7F 02 55 55 55 ... | | |
| | ProactiveResponseHandler.getTheHandler() ; call the getAdditionalInformationLength() method | Result is 7Eh | |
| 6 | Call the getValueLength() method | Result is 7Fh | |
| 7 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response with 7Fh additional bytes Result TLV = 03 81 80 02 55 55 55 ... | | |
| | ProactiveResponseHandler.getTheHandler() ; call the getAdditionalInformationLength() method | Result is 7Fh | |
| 8 | Call the getValueLength() method | Result is 80h | |
| 9 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response with 80h additional bytes | | |

| | | | |
|----|--|---|-----------------------------------|
| | Result TLV = 03 81 81 02 55 55 55 ... | | |
| | ProactiveResponseHandler.getTheHandler() ; call the getAdditionalInformationLength() method | Result is 80h | |
| 10 | Call the getValueLength() method | Result is 81h | |
| 11 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response with F2h additional bytes Result TLV = 03 81 F3 02 55 55 55 ... | | |
| | ProactiveResponseHandler.getTheHandler() ; call the getAdditionalInformationLength() method | Result is F2h | |
| 12 | Call the getValueLength() method | Result is F3h | |
| 13 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response with 2 Result TLV 1st Result TLV = 03 03 02 01 23 2nd Result TLV = 03 01 00 | | |
| | ProactiveResponseHandler.getTheHandler() ; call the getAdditionalInformationLength() method | Result is 02h | |
| 14 | Call the getValueLength() method | Result is 03h | |
| 15 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response without Result Simple TLV | ToolkitException.UNAVAILABLE_ELEMENT is thrown by send() | |
| | Get ProactiveResponseHandler | | |
| | Call the getAdditionalInformationLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown by getAdditionalInformationLength () | |

6.2.8.3.4 Test Coverage

| CRR number | Test case number |
|------------|------------------------|
| N1 | 1, 3, 5, 7, 9, 11, 13 |
| N2 | 2, 4, 6, 8, 10, 12, 14 |
| C1 | 15 |

6.2.8.4 Method getGeneralResult

Test Area Reference: API_2_PRH_GTGR

6.2.8.4.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte getGeneralResult()
    throws ToolkitException
```

Normal execution

CRRN1: This method returns the general result of a proactive command.

CRRN2: After a successful execution of the method, the Result TLV becomes the selected TLV of the ProactiveResponseHandler.

Parameter errors

No requirements

Context errors

CRRC1: A ToolkitException.UNAVAILABLE_ELEMENT shall be thrown in case of unavailable Result TLV element.

CRRC2: A ToolkitException.OUT_OF_TLV_BOUNDARIES shall be thrown if the general result byte is missing in the Result Simple TLV.

6.2.8.4.2 Test Suite files

Test Script: API_2_PRH_GTGR_1.scr
 Test Applet: API_2_PRH_GTGR_1.java
 Load Script: API_2_PRH_GTGR_1.ldr
 Cleanup Script: API_2_PRH_GTGR_1.clr
 Parameter File: API_2_PRH_GTGR_1.par

6.2.8.4.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|-------------------------------------|--------------------------------|
| 1 | Build and send a DISPLAY TEXT command qualifier = 00h dcs = 04h buffer = 'Text' | | DISPLAY TEXT Proactive command |
| | Terminal Response with General Result = 00 (command performed successfully) | | |
| | ProactiveResponseHandler.getTheHandler() Call the getGeneralResult() method | Result of getGeneralResult() is 00h | |
| 2 | Call the getValueLength() method | Result is 01h | |
| 3 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response with General Result = 01, without Additional information on result (command performed with partial comprehension) | | |
| | ProactiveResponseHandler.getTheHandler() Call the getGeneralResult() method | Result of getGeneralResult() is 01h | |
| 4 | Call the getValueLength() method | Result is 01h | |
| 5 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response with General Result = 01, with Additional information on result Result TLV = 03 02 01 55 (command performed with partial comprehension) | | |
| | ProactiveResponseHandler.getTheHandler() Call the getGeneralResult() method | Result of getGeneralResult() is 01h | |
| 6 | Call the getValueLength() method | Result is 02h | |
| 7 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response with General Result = 02 Result TLV = 03 04 02 65 43 21 (Missing | | |

| | | | |
|----|---|--|--------------------------------|
| | information) | | |
| | ProactiveResponseHandler.getTheHandler() Call the getGeneralResult() method | Result of getGeneralResult() is 02h | |
| 8 | Call the getValueLength() method | Result is 04h | |
| 9 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response with 7Fh additional bytes Result TLV = 03 81 80 02 55 55 55 ... | | |
| | ProactiveResponseHandler.getTheHandler() ; call the getGeneralResult() method | Result is 02h | |
| 10 | Call the getValueLength() method | Result is 80h | |
| 11 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response with 2 Result TLV 1st Result TLV = 03 02 02 12 2nd Result TLV = 03 03 03 34 56 | | |
| | ProactiveResponseHandler.getTheHandler() ; call the getGeneralResult() method | Result is 02h | |
| 12 | Call the getValueLength() method | Result is 02h | |
| 13 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response without Result Simple TLV | ToolkitException.UNAVAILABLE_ELEMENT is thrown by send() | |
| | ProactiveResponseHandler.getTheHandler() ; call the getGeneralResult() method | UNAVAILABLE_ELEMENT ToolkitException is thrown | |
| 14 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response without General Result Byte in Result Simple TLV | ToolkitException.UNAVAILABLE_ELEMENT is thrown by send() | |
| | ProactiveResponseHandler.getTheHandler() ; call the getGeneralResult() method Result TLV = 03 00 | OUT_OF_TLV_BOUNDARIES ToolkitException is thrown | |

6.2.8.4.4 Test Coverage

| CRR number | Test case number |
|------------|--------------------|
| N1 | 1, 3, 5, 7, 9, 11 |
| N2 | 2, 4, 6, 8, 10, 12 |
| C1 | 13 |
| C2 | 14 |

6.2.8.5 Method getItemIdentifier

Test Area Reference: API_2_PRH_GTII

6.2.8.5.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte getItemIdentifier()
```

throws ToolkitException

Normal execution

CRRN1: The method returns the item identifier byte value from the first Item Identifier TLV element.

CRRN2: If an Item Identifier TLV element is available, it becomes the TLV selected.

Parameter errors

No requirements

Context errors

CRRC1: A ToolkitException.UNAVAILABLE_ELEMENT shall be thrown in case of unavailable Item Identifier TLV element.

CRRC2: A ToolkitException.OUT_OF_TLV_BOUNDARIES shall be thrown if the item identifier byte is missing in the Item Identifier Simple TLV.

6.2.8.5.2 Test Suite files

Test Script: API_2_PRH_GTII_1.scr
 Test Applet: API_2_PRH_GTII_1.java
 Load Script: API_2_PRH_GTII_1.ldr
 Cleanup Script: API_2_PRH_GTII_1.clr
 Parameter File: API_2_PRH_GTII_1.par

6.2.8.5.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|--------------------------------|
| 1 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response (no Item Identifier TLV available) | | |
| | Call to getItemIdentifier() with unavailable Item Identifier TLV | UNAVAILABLE_ELEMENT ToolkitException is thrown | |
| 2 | Build and send a SELECT ITEM command with 2 items (ID=01, 02) | | SELECT ITEM Proactive command |
| | Terminal Response with Item 1 selected Item Identifier TLV = 10 01 01 | | |
| | Call the getItemIdentifier() method | Result is 01h | |
| 3 | Call the getValueByte() method valueOffset = 00h | Result is 01h | |
| 4 | Build and send a SELECT ITEM command with 3 items (ID=03, 05, 07) | | SELECT ITEM Proactive command |
| | Terminal Response with Item 5 selected Item Identifier TLV = 10 01 05 | | |
| | Call the getItemIdentifier() method | Result is 05h | |
| 5 | Call the getValueByte() method valueOffset = 00h | Result is 05h | |
| 6 | Build and send a SELECT ITEM command with 3 items (ID=FDh, FEh, FFh) | | SELECT ITEM Proactive command |
| | Terminal Response with Item FFh selected | | |

| | | | |
|----|---|---|--------------------------------|
| | Item Identifier TLV = 10 01 FF | | |
| | Call the getItemIdentifier() method | Result is FFh | |
| 7 | Call the getValueByte() method valueOffset = 00h | Result is FFh | |
| 8 | Build and send a SELECT ITEM command with 3 items (ID=FDh, FEh, FFh) | | SELECT ITEM Proactive command |
| | Terminal Response with 2 Item Identifier TLV 1st Item Identifier TLV = 10 01 FFh 2nd Item Identifier TLV = 10 01 FEh | | |
| | Call the getItemIdentifier() method | Result is FFh | |
| 9 | Call the getValueByte() method valueOffset = 00h | Result is FFh | |
| 10 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response without item identifier in the Item Identifier Simple TLV Item Identifier TLV = 10 00 | | |
| | Call to getItemIdentifier() | OUT_OF_TLV_BOUNDARIES ToolkitException is thrown | |

6.2.8.5.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 2, 4, 6, 8 |
| N2 | 3, 5, 7, 9 |
| C1 | 1 |
| C2 | 10 |

6.2.8.6 Method getTextStringCodingScheme

Test Area Reference: API_2_PRH_GTCS

6.2.8.6.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte getTextStringCodingScheme()
    throws ToolkitException
```

Normal execution

CRRN1: This method returns the data coding scheme from the first Text String TLV element.

CRRN2: If a Text String TLV element is available, it becomes the TLV selected.

Parameter errors

No requirements

Context errors

CRR1: A ToolkitException.UNAVAILABLE_ELEMENT shall be thrown in case of unavailable Text String TLV element.

CRR2: A ToolkitException.OUT_OF_TLV_BOUNDARIES shall be thrown if the Text String TLV is present with a length of 0.

6.2.8.6.2 Test Suite files

Test Script: API_2_PRH_GTCS_1.scr

Test Applet: API_2_PRH_GTCS_1.java
 Load Script: API_2_PRH_GTCS_1.ldr
 Cleanup Script: API_2_PRH_GTCS_1.clr
 Parameter File: API_2_PRH_GTCS_1.par

6.2.8.6.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|--------------------------------|
| 1 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response (no Text String TLV element available) | | |
| | Call to getTextStringCodingScheme() with unavailable Text String TLV | UNAVAILABLE_ELEMENT ToolkitException is thrown | |
| 2 | Build and send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response with a null Text String TLV Text String TLV = 0D 00 | | |
| | Call the getTextStringCodingScheme() method | OUT_OF_TLV_BOUNDARIES ToolkitException is thrown | |
| 3 | Build and send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response with text length = 01h, DCS = 04h Text String TLV = 0D 02 04 "A" | | |
| | Call the getTextStringCodingScheme() method | Result is 04h | |
| 4 | Call the getValueLength() method | Result is 02h | |
| 5 | Build and send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response with text length = 02h, DCS = 00h Text String TLV = 0D 03 00 "BB" | | |
| | Call the getTextStringCodingScheme() method | Result is 00h | |
| 6 | Call the getValueLength() method | Result is 03h | |
| 7 | Build and send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response with text length = 7Eh, DCS = 08h Text String TLV = 0D 7F 08 01 02 ... 7E | | |
| | Call the getTextStringCodingScheme() method | Result is 08h | |
| 8 | Call the getValueLength() method | Result is 7Fh | |
| 9 | Build and send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response with text length = 7Fh, | | |

| | | | |
|----|--|---------------|-----------------------------|
| | DCS = 04h Text String TLV = 0D 81 80 04 01 02 ... 7F | | |
| | Call the getTextStringCodingScheme() method | Result is 04h | |
| 10 | Call the getValueLength() method | Result is 80h | |
| 11 | Build and send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response with text length = EFh, DCS = 08h Text String TLV = 0D 81 F0 08 01 02 ... EE EF | | |
| | Call the getTextStringCodingScheme() method | Result is 08h | |
| 12 | Call the getValueLength() method | Result is F0h | |
| 13 | Build and send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response with 2 Text String TLV 1st Text String TLV = 0D 02 04 41 2nd Text String TLV = 0D 03 08 42 43 | | |
| | Call the getTextStringCodingScheme() method | Result is 04h | |
| 14 | Call the getValueLength() method | Result is 02h | |

6.2.8.6.4 Test Coverage

| CRR number | Test case number |
|------------|---------------------|
| N1 | 3, 5, 7, 9, 11, 13 |
| N2 | 4, 6, 8, 10, 12, 14 |
| C1 | 1 |
| C2 | 2 |

6.2.8.7 Method GetTextStringLength

Test Area Reference: API_2_PRH_GTTL

6.2.8.7.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short getTextStringLength()
    throws ToolkitException
```

Normal execution

CRRN1: The getTextStringLength() method returns the text string length value from the first Text String TLV element.

CRRN2: If a Text String TLV element is available, it becomes the TLV selected.

Parameter errors

No requirements

Context errors

CRRC1: A ToolkitException.UNAVAILABLE_ELEMENT shall be thrown in case of unavailable Text String TLV element.

6.2.8.7.2 Test Suite files

Test Script: API_2_PRH_GTTL_1.scr
 Test Applet: API_2_PRH_GTTL_1.java
 Load Script: API_2_PRH_GTTL_1.ldr
 Cleanup Script: API_2_PRH_GTTL_1.clr
 Parameter File: API_2_PRH_GTTL_1.par

6.2.8.7.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|--------------------------------|
| 1 | Build and send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response (no Text String TLV element available) | | |
| | Call to getTextStringLength() with unavailable Text String TLV | UNAVAILABLE_ELEMENT ToolkitException is thrown | |
| 2 | Build and send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response with a null Text String TLV Text String TLV = 0D 00 | | |
| | Call the getTextStringLength() method | Result is 00h | |
| 3 | Call the getValueLength() method | Result is 00h | |
| 4 | Build and send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response with text length = 01h, DCS = 04h Text String TLV = 0D 02 04 "A" | | |
| | Call the getTextStringLength() method | Result is 01h | |
| 5 | Call the getValueLength() method | Result is 02h | |
| 6 | Build and send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response with text length = 02h, DCS = 00h Text String TLV = 0D 03 00 "BB" | | |
| | Call the getTextStringLength() method | Result is 02h | |
| 7 | Call the getValueLength() method | Result is 03h | |
| 8 | Build and send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response with text length = 7Eh, DCS = 08h Text String TLV = 0D 7F 08 01 02 ... 7E | | |
| | Call the getTextStringLength() method | Result is 7Eh | |
| 9 | Call the getValueLength() method | Result is 7Fh | |

| | | | |
|----|--|---------------|-----------------------------|
| 10 | Build and send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response with text length = 7Fh, DCS = 04h Text String TLV = 0D 81 80 04 01 02 ... 7F | | |
| | Call the getTextStringLength() method | Result is 7Fh | |
| 11 | Call the getValueLength() method | Result is 80h | |
| 12 | Build and send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response with text length = EFh, DCS = 04h Text String TLV = 0D 81 F0 04 01 02 ... EE EF | | |
| | Call the getTextStringLength() method | Result is EFh | |
| 13 | Call the getValueLength() method | Result is F0h | |
| 14 | Build and send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response with 2 Text String TLV 1st Text String TLV = 0D 02 04 41 2nd Text String TLV = 0D 03 08 42 43 | | |
| | Call the getTextStringLength() method | Result is 01h | |
| 15 | Call the getValueLength() method | Result is 02h | |

6.2.8.7.4 Test Coverage

| CRR number | Test case number |
|------------|------------------------|
| 1 | 2, 4, 6, 8, 10, 12, 14 |
| 2 | 3, 5, 7, 9, 11, 13, 15 |
| 3 | 1 |

6.2.8.8 Method getTheHandler

Test Area Reference: API_2_PRH_GTHD

6.2.8.8.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public static ProactiveResponseHandler getTheHandler()
    throws ToolkitException
```

Normal execution

CRRN1: The method shall return the single system instance of the ProactiveHandler class.

CRRN2: The EnvelopeHandler is a Temporary JCRE Entry Point Object

Parameter errors

No requirements

Context errors

CRR1: The method shall throw ToolkitException.HANDLER_NOT_AVAILABLE if the handler is busy.

6.2.8.8.2 Test Suite files

Test Script: API_2_PRH_GTHD_1.scr
 Test Applet: API_2_PRH_GTHD_1.java
 Load Script: API_2_PRH_GTHD_1.ldr
 Cleanup Script: API_2_PRH_GTHD_1.clr
 Parameter File: API_2_PRH_GTHD_1.par

6.2.8.8.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|-------------------|
| 1 | Build and send a Proactive Command | | Proactive Command |
| | Terminal Response | | |
| | getTheHandler() twice | The returned objects shall be the same | |
| 2 | getTheHandler() | The reference shall be a ProactiveResponseHandler | |
| 3 | getTheHandler() | The reference shall not be null | |

6.2.8.8.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 1, 2, 3 |
| N2 | To be checked in Framework tests and insert here cross reference |
| C1 | To be checked in Framework tests and insert here cross reference |

6.2.8.9 Method getLength

Test Area Reference API_2_PRH_GLEN

6.2.8.9.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short getLength()
    throws ToolkitException
```

Normal execution

CRRN1: returns the length in bytes of the TLV list.

Parameter errors

Context errors

CRR1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException.HANDLER_NOT_AVAILABLE.

6.2.8.9.2 Test Suite files

Test Script: API_2_PRH_GLEN_1.scr
 Test Applet: API_2_PRH_GLEN_1.java
 Load Script: API_2_PRH_GLEN_1.ldr
 Cleanup Script: API_2_PRH_GLEN_1.clr
 Parameter File: API_2_PRH_GLEN_1.par

6.2.8.9.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|------------------------------|--------------------------------|
| 1 | Build and send a Display Text command | | DISPLAY TEXT Proactive command |
| | Terminal Response without additional information in General Result TLV | | |
| | ProactiveResponseHandler.getTheHandler() getLength() | Result of getLength() is 12 | |
| 2 | Build and send a Display Text command | | DISPLAY TEXT Proactive command |
| | Terminal Response with F2h additional information in General Result TLV | | |
| | ProactiveResponseHandler.getTheHandler() getLength() | Result of getLength() is FFh | |

6.2.8.9.4 Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | 1, 2 |
| C1 | Does not apply for Proactive Response Handler |

6.2.8.10 Method copy

Test Area Reference API_2_PRH_COPY_BSS

6.2.8.10.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short copy(byte[] dstBuffer,
                 short dstOffset,
                 short dstLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: copies the simple TLV list contained in the handler to the destination byte array.

CRRN2: returns dstOffset + dstLength.

Parameter errors

CRRP1: if dstBuffer is null a NullPointerException is thrown.

CRRP2: if dstOffset or dstLength or both would cause access outside array bounds, or if dstLength is negative, an ArrayIndexOutOfBoundsException is thrown.

CRRP3: if dstLength is greater than the length of the simple TLV List, an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException. OUT_OF_TLV_BOUNDARIES.

Context errors

CRR1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.8.10.2 Test Suite files

Test Script: API_2_PRH_COPY_BSS_1.scr
 Test Applet: API_2_PRH_COPY_BSS_1.java
 Load Script: API_2_PRH_COPY_BSS_1.ldr
 Cleanup Script: API_2_PRH_COPY_BSS_1.clr
 Parameter File: API_2_PRH_COPY_BSS_1.par

6.2.8.10.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|--------------------------------|
| 1 | Send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response without Additional Information in General Result TLV: 81 03 01 21 00 02 02 82 81 03 01 00 | | |
| | ProactiveResponseHandler.getTheHandler() copy() with NULL as parameter to dstBuffer | NullPointerException is thrown | |
| 2 | dstOffset > dstBuffer.length dstBuffer.length = 5 dstOffset = 6 dstLength = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | dstOffset < 0 dstBuffer.length = 5 dstOffset = -1 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 0 dstLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | dstOffset + dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 3 dstLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | dstLength < 0 dstBuffer.length = 5 dstOffset = 0 dstLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | dstLength > length of the simple TLV list dstBuffer.length = 13 dstOffset = 0 dstLength = 13 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 8 | Successful call, dstBuffer is the whole buffer dstBuffer.length = 12 dstOffset = 0 dstLength = 12 | Result of copy() is 12 | |
| 9 | Compare the buffer with buffer: 81 03 01 21 00 02 02 82 81 03 01 00 | Result of arrayCompare() is 0 | |
| 10 | Successful call, dstBuffer is part of a buffer dstBuffer.length = 20 dstOffset = 3 dstLength = 12 | Result of copy() is 15 | |
| 11 | Compare the whole buffer Reference = 00 01 02 81 03 01 21 00 | Result of arrayCompare() is 0 | |

| | | | |
|----|---|-------------------------------|--|
| | 02 02 82 81 03 01 00 0F 10 11 12 13 | | |
| 12 | Initialize dstBuffer dstBuffer = 00h 01h 02h ... 13h | | |
| | Successful call, dstBuffer is part of a buffer dstBuffer.length = 20 dstOffset = 3 dstLength = 9 | Result of copy() is 12 | |
| 13 | Compare the whole buffer Reference = 00 01 02 81 03 01 21 00 02 02 82 81 0C 0D 0E 0F 10 11 12 13 | Result of arrayCompare() is 0 | |

6.2.8.10.4 Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | 9, 11, 13 |
| N2 | 8, 10, 12 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7 |
| C1 | Does not apply for Proactive Response Handler |

6.2.8.11 Method findTLV

Test Area Reference API_2_PRH_FINDBB

6.2.8.11.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte findTLV(byte tag, byte occurrence)
    throws ToolkitException
```

Normal execution

Looks for the indicated occurrence of a TLV element from the beginning of the TLV list (handler buffer):

CRRN1: the method is successful if the required occurrence exists then the corresponding TLV becomes current.

CRRN2: if the method is successful then it returns TLV_FOUND_CR_SET when Comprehension Required flag is set.

CRRN3: if the method is successful then it returns TLV_FOUND_CR_NOT_SET when Comprehension Required flag is not set.

CRRN4: if the required occurrence of the TLV element does not exist, the current TLV is no longer defined and TLV_NOT_FOUND is returned.

CRRN5: The search method is comprehension required flag independent.

Parameter errors

CRRP1: if an input parameter is not valid (e.g. occurrence = 0) an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException BAD_INPUT_PARAMETER.

Context errors

CRR1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.8.11.2 Test Suite files

Test Script: API_2_PRH_FINDBB_1.scr
 Test Applet: API_2_PRH_FINDBB_1.java
 Load Script: API_2_PRH_FINDBB_1.ldr
 Cleanup Script: API_2_PRH_FINDBB_1.clr
 Parameter File: API_2_PRH_FINDBB_1.par

6.2.8.11.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|--------------------------------|
| 1 | Send a DISPLAY TEXT command | | DISPLAY TEXT Proactive command |
| | Terminal Response with 2 General Result TLV 81 03 01 21 00 82 02 82 81 03 01 00 03 02 01 12 | | |
| | findTLV() with Invalid input parameter occurrence = 0 | ToolkitException.BAD_INPUT_PARAMETER is thrown | |
| 2 | Search 1st TLV tag = 01h occurrence = 1 | Result is TLV_FOUND_CR_SET | |
| 3 | Call the getValueLength() method | Result is 03h | |
| 4 | Search 2nd TLV tag = 02h occurrence = 1 | Result is TLV_FOUND_CR_SET | |
| 5 | Call the getValueLength() method | Result is 02h | |
| 6 | Select a TLV (tag 02h) | | |
| | Search a wrong tag tag = 04h occurrence = 1 | Result is TLV_NOT_FOUND | |
| 7 | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT shall be thrown | |
| 8 | Search a tag with wrong occurrence tag = 01h occurrence = 2 | Result is TLV_NOT_FOUND | |
| 9 | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT shall be thrown. | |
| 10 | Search 3rd TLV tag = 03h occurrence = 1 | Result is TLV_FOUND_CR_NOT_SET | |
| 11 | Call the getValueLength() method | Result is 01h | |
| 12 | Search 3rd TLV tag = 03h occurrence = 2 | Result is TLV_FOUND_CR_NOT_SET | |
| 13 | Call the getValueLength() method | Result is 02h | |
| 14 | Search tag 83h Tag = 83h Occurrence = 1 | Result is TLV_FOUND_CR_NOT_SET | |
| 15 | Search tag 82h Tag = 82h Occurrence = 1 | Result is TLV_FOUND_CR_SET | |

6.2.8.11.4 Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | 3, 5, 11, 13 |
| N2 | 2, 4 |
| N3 | 10, 12 |
| N4 | 6, 7, 8, 9 |
| N5 | 14, 15 |
| P1 | 1 |
| C1 | Does not apply for Proactive Response Handler |

6.2.8.12 Method getValueLength

Test Area Reference API_2_PRH_GVLE

6.2.8.12.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short getValueLength()
    throws ToolkitException
```

Normal execution

CRRN1: gets and returns the binary length of the value field for the last TLV element which has been found in the handler.

Parameter errors

No requirements

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

CRRC2: in case of unavailable TLV element an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException UNAVAILABLE_ELEMENT.

6.2.8.12.2 Test Suite files

Test Script: API_2_PRH_GVLE_1.scr
 Test Applet: API_2_PRH_GVLE_1.java
 Load Script: API_2_PRH_GVLE_1.ldr
 Cleanup Script: API_2_PRH_GVLE_1.clr
 Parameter File: API_2_PRH_GVLE_1.par

6.2.8.12.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|-----------------------------|
| 1 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response Text String TLV = 0D 00 | | |
| | ProactiveResponseHandler.getTheHandler() GetValueLength() | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| 2 | Search TLV 0Dh | | |
| | getValueLength() | Result is 00h | |
| 3 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response Text String TLV = 0D 02 04 41 | | |
| | Search TLV 0Dh (Text String TLV) | | |
| | getValueLength() | Result is 02h | |
| 4 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 7Eh Text String TLV = 0D 7F 04 01 02 ... 7E | | |
| | Search TLV 0Dh (Text String TLV) | | |
| | getValueLength() | Result is 7Fh | |
| 5 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 7Fh Text String TLV = 0D 81 80 04 01 02 ... 7E 7F | | |
| | Search TLV 0Dh (Text String TLV) | | |
| | getValueLength() | Result is 80h | |
| 6 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = EFh Text String TLV = 0D 81 F0 04 01 02 ... EF | | |
| | Search TLV 0Dh (Text String TLV) | | |
| | getValueLength() | Result is F0h | |

6.2.8.12.4 Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | 2, 3, 4, 5, 6 |
| C1 | Does not apply for Proactive Response Handler |
| C2 | 1 |

6.2.8.13 Method getValueByte

Test Area Reference API_2_PRH_GVBYS

6.2.8.13.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte getValueByte(short valueOffset)
    throws ToolkitException
```

Normal execution

CRRN1: Gets a byte from the last TLV element which has been found in the handler and returns its value (1 byte).

Parameter errors

CRRP1: if valueOffset is out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

CRRC2: in case of unavailable TLV element an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException UNAVAILABLE_ELEMENT.

6.2.8.13.2 Test Suite files

Test Script: API_2_PRH_GVBYS_1.scr
 Test Applet: API_2_PRH_GVBYS_1.java
 Load Script: API_2_PRH_GVBYS_1.ldr
 Cleanup Script: API_2_PRH_GVBYS_1.clr
 Parameter File: API_2_PRH_GVBYS_1.par

6.2.8.13.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|-----------------------------|
| 1 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 7Eh Text String TLV = 0D 7F 04 01 02 ... 7E | | |
| | ProactiveResponseHandler.getTheHandler() | | |
| | getValueByte(0) | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| 2 | Search TLV 01h (Command Details TLV) | | |
| | getValueByte(3) | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 3 | Search TLV 01h (Command Details TLV) | | |
| | getValueByte(2) | Result is 00h (qualifier) | |
| 4 | Search TLV 02h (Device Identities TLV) | | |
| | getValueByte(0) | Result is 82h (Source) | |
| 5 | Search TLV 0Dh (Text String TLV) | | |
| | getValueByte(7E) | Result is 7Eh | |
| 6 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = EFh Text String TLV = 0D 81 F0 04 01 02 ... 7E 7F ... EF | | |
| | Search TLV 0Dh (Text String TLV) | | |
| | getValueByte(7E) | Result is 7Eh | |
| 7 | GetValueByte(7F) | Result is 7Fh | |
| 8 | GetValueByte(EF) | Result is EFh | |

6.2.8.13.4 Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | 3, 4, 5, 6, 7, 8 |
| P1 | 2 |
| C1 | Does not apply for Proactive Response Handler |
| C2 | 1 |

6.2.8.14 Method copyValue

Test Area Reference API_2_PRH_CPYVS_BSS

6.2.8.14.1 Conformance requirement

The method with following header shall be compliant with its definition in the API.

```
public short copyValue(short valueOffset,
                      byte[] dstBuffer,
                      short dstOffset,
                      short dstLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: copies a part of the last TLV element which has been found, into a destination. buffer.

CRRN2: returns dstOffset + dstLength.

Parameter errors

CRRP1: if dstBuffer is null NullPointerException is thrown.

CRRP2: if dstOffset or dstLength or both would cause access outside array bounds, or if dstLength is negative ArrayIndexOutOfBoundsException is thrown.

CRRP3: if valueOffset, dstLength or both are out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

CRRC2: in case of unavailable TLV element an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException UNAVAILABLE_ELEMENT.

6.2.8.14.2 Test Suite files

Test Script: API_2_PRH_CPYVS_BSS_1.scr
 Test Applet: API_2_PRH_CPYVS_BSS_1.java
 Load Script: API_2_PRH_CPYVS_BSS_1.ldr
 Cleanup Script: API_2_PRH_CPYVS_BSS_1.clr
 Parameter File: API_2_PRH_CPYVS_BSS_1.par

6.2.8.14.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|-----------------------------|
| 1 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 5 Text String TLV = 0D 06 04 01 02 ... 05 | | |
| | ProactiveResponseHandler.getTheHandler() Select Text String TLV | | |
| | CopyValue() with a null dstBuffer | NullPointerException is thrown | |
| 2 | dstOffset > dstBuffer.length dstBuffer.length = 5 dstOffset = 6 dstLength = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | dstOffset < 0 dstBuffer.length = 5 dstOffset = -1 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 0 dstLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | dstOffset + dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 3 dstLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | dstLength < 0 dstBuffer.length = 5 dstOffset = 0 dstLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | valueOffset > Text String Length valueOffset = 7 dstBuffer.length = 15 dstOffset = 0 dstLength = 0 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 8 | valueOffset < 0 valueOffset = -1 dstBuffer.length = 15 dstOffset = 0 dstLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 9 | dstLength > Text String length valueOffset = 0 dstBuffer.length = 15 dstOffset = 0 dstLength = 7 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 10 | ValueOffset + dstLength > Text String length ValueOffset = 2 DstBuffer.length = 15 DstOffset = 0 DstLength = 5 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 11 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 16 Text String TLV = 0D 11 04 00 01 ... 0F | | |
| | ProactiveResponseHandler.getTheHandler | | |
| | CopyValue() | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| 12 | Select Text String TLV | | |
| | Successful call ValueOffset = 0 DstBuffer.length = 17 DstOffset = 0 DstLength = 17 | Result of copyValue() is 17 | |
| 13 | Compare buffer Buffer = 04 00 01 ... 0F | Result is 00h | |
| 14 | initialise dstBuffer dstBuffer = 55 55 ... 55 | | |
| | Successful call ValueOffset = 2 | Result of copyValue() is 15 | |

| | | | |
|----|---|---------------|--|
| | DstBuffer.length = 20 DstOffset = 3 DstLength = 12 | | |
| 15 | Compare buffer Buffer = 55 55 55 01 02 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55 | Result is 00h | |

6.2.8.14.4 Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | 13, 15 |
| N2 | 12, 14 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7, 8, 9, 10 |
| C1 | Does not apply for Proactive Response Handler |
| C2 | 11 |

6.2.8.15 Method compareValue

Test Area Reference API_2_PRH_CPRVS_BSS

6.2.8.15.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte compareValue(short valueOffset,
                        byte[] compareBuffer,
                        short compareOffset,
                        short compareLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

Compares the last found TLV element with a buffer:

CRRN1: returns 0 if identical.

CRRN2: returns -1 if the first miscomparing byte in simple TLV List is less than that in compareBuffer.

CRRN3: returns 1 if the first miscomparing byte in simple TLV List is greater than that in compareBuffer.

Parameter errors

CRRP1: if compareBuffer is null NullPointerException shall be thrown.

CRRP2: if compareOffset or compareLength or both would cause access outside array bounds, or if compareLength is negative ArrayIndexOutOfBoundsException shall be thrown.

CRRP3: if valueOffset, dstLength or both are out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

CRRC2: in case of unavailable TLV element an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException UNAVAILABLE_ELEMENT.

6.2.8.15.2 Test Suite files

Test Script: API_2_PRH_CPRVS_BSS_1.scr
 Test Applet: API_2_PRH_CPRVS_BSS_1.java
 Load Script: API_2_PRH_CPRVS_BSS_1.ldr
 Cleanup Script: API_2_PRH_CPRVS_BSS_1.clr
 Parameter File: API_2_PRH_CPRVS_BSS_1.par

6.2.8.15.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|-----------------------------|
| 1 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 5 Text String TLV = 0D 06 04 01 02 ... 05 | | |
| | ProactiveResponseHandler.getTheHandler() Select Text String TLV | | |
| | compareValue() with a null compareBuffer | NullPointerException is thrown | |
| 2 | compareOffset > compareBuffer.length compareBuffer.length = 5 compareOffset = 6 compareLength = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | compareOffset < 0 compareBuffer.length = 5 compareOffset = -1 compareLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | compareLength > compareBuffer.length compareBuffer.length = 5 compareOffset = 0 compareLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | compareOffset + compareLength > compareBuffer.length compareBuffer.length = 5 compareOffset = 3 compareLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | compareLength < 0 compareBuffer.length = 5 compareOffset = 0 compareLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | valueOffset > Text String Length valueOffset = 7 compareBuffer.length = 15 compareOffset = 0 compareLength = 0 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 8 | valueOffset < 0 valueOffset = -1 compareBuffer.length = 15 compareOffset = 0 compareLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 9 | compareLength > Text String length valueOffset = 0 compareBuffer.length = 15 compareOffset = 0 compareLength = 7 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 10 | valueOffset + compareLength > Text String length valueOffset = 2 compareBuffer.length = 15 compareOffset = 0 compareLength = 5 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 11 | Send a GET INPUT command | | GET INPUT Proactive |

| | | | |
|----|--|--|---------|
| | | | command |
| | Terminal Response, Text String length = 16 Text String TLV = 0D 11 04 00 01 ... 0F | | |
| | ProactiveResponseHandler.getTheHandler() CompareValue() | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| 12 | Select Text String TLV Initialise compareBuffer CompareBuffer = 04 00 01 ... 0F | | |
| | Compare buffers ValueOffset = 0 CompareOffset = 0 CompareLength = 17 | Result is 00h | |
| 13 | Initialise compareBuffer CompareBuffer = 04 00 01 ... 10 | | |
| | Compare buffers with same parameters | Result is -1 | |
| 14 | Initialise compareBuffer CompareBuffer = 03 00 01 ... 0F | | |
| | Compare buffers with same parameters | Result is +1 | |
| 15 | Initialise compareBuffer CompareBuffer = 55 55 55 01 02 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55 | | |
| | Compare buffers ValueOffset = 2 CompareOffset = 3 CompareLength = 12 | Result is 00h | |
| 16 | Initialise compareBuffer CompareBuffer = 55 55 55 02 01 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55 | | |
| | Compare buffers with same parameters | Result is -1 | |
| 17 | Initialise compareBuffer CompareBuffer = 55 55 55 01 02 03 04 05 06 07 08 09 0A 0A 0D 55 55 55 55 55 | | |
| | Compare buffers with same parameters | Result is +1 | |

6.2.8.15.4

Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | 12, 15 |
| N2 | 13, 16 |
| N3 | 14, 17 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7, 8, 9, 10 |
| C1 | Does not apply for Proactive Response Handler |
| C2 | 11 |

6.2.8.16 Method findAndCopyValue(byte tag, byte[] dstBuffer, short valueOffset)

Test Area Reference API_2_PRH_FACYB_BS

6.2.8.16.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short findAndCopyValue(byte tag,
                             byte[] dstBuffer,
                             short dstOffset)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: looks for the first occurrence of a TLV element from the beginning of a TLV list and copy its value into a destination buffer.

CRRN2: if no TLV element is found, the UNAVAILABLE_ELEMENT exception is thrown and the current TLV is no longer defined.

CRRN3: if the method is successful then the corresponding TLV becomes current and dstOffset + length of the copied value is returned.

CRRN4: The search method is comprehension required flag independent.

Parameter errors

CRRP1: if dstBuffer is null NullPointerException shall be thrown.

CRRP2: if dstOffset would cause access outside array bounds ArrayIndexOutOfBoundsException shall be thrown.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.8.16.2 Test Suite files

Test Script: API_2_PRH_FACYB_BS_1.scr
 Test Applet: API_2_PRH_FACYB_BS_1.java
 Load Script: API_2_PRH_FACYB_BS_1.ldr
 Cleanup Script: API_2_PRH_FACYB_BS_1.clr
 Parameter File: API_2_PRH_FACYB_BS_1.par

6.2.8.16.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|-----------------------------|
| 1 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 15 Text String TLV = 0D 10 04 01 02 ... 0F ProactiveResponseHandler.getTheHandler() FindAndCopyValue() with a null dstBuffer | NullPointerException is thrown | |
| 2 | dstOffset > dstBuffer.length tag = 0Dh dstBuffer.length = 20 dstOffset = 21 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | dstOffset < 0 | ArrayIndexOutOfBoundsException | |

| | | | |
|----|---|---|-----------------------------|
| | dstBuffer.length = 20 dstOffset = -1 | n is thrown | |
| 4 | length > dstBuffer.length dstBuffer.length = 15 dstOffset = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | dstOffset + length > dstBuffer.length dstBuffer.length = 20 dstOffset = 5 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 16 Text String TLV = 0D 11 04 00 01 ... 0F | | |
| | ProactiveResponseHandler.getTheHandler() | | |
| | Select a TLV (tag 02h) | | |
| | findAndCopyValue() tag = 04h | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 7 | Successful call Tag = 0Dh DstBuffer.length = 17 DstOffset = 0 | Result of findAndcopyValue() is 17 | |
| 8 | Compare buffer Buffer = 04 00 01 ... 0F | Result is 00h | |
| 9 | initialise dstBuffer dstBuffer = 55 55 ... 55 | | |
| | Successful call DstBuffer.length = 20 DstOffset = 2 | Result of findAndcopyValue() is 19 | |
| 10 | Compare buffer Buffer = 55 55 04 00 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0E 0F 55 | Result is 00h | |
| 11 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, with 2 Text String TLV 0D 11 04 00 01 ... 0F 0D 02 04 41 | | |
| | ProactiveResponseHandler.getTheHandler() | | |
| | Successful call Tag = 0Dh DstBuffer.length = 17 DstOffset = 0 | Result of findAndcopyValue() is 17 | |
| 12 | Compare buffer Buffer = 04 00 01 ... 0F | Result is 00h | |
| 13 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 16 Text String TLV = 0D 11 04 00 01 ... 0F | | |
| | ProactiveResponseHandler.getTheHandler() | | |
| | Successful call (with tag 8Dh) Tag = 8Dh DstBuffer.length = 17 DstOffset = 0 | Result of findAndcopyValue() is 17 | |
| 14 | Compare buffer Buffer = 04 00 01 ... 0F | Result is 00h | |

6.2.8.16.4 Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | 8, 10, 12 |
| N2 | 6 |
| N3 | 7, 9, 11 |
| N4 | 13, 14 |
| P1 | 1 |
| P2 | 2, 3, 4, 5 |
| C1 | Does not apply for Proactive Response Handler |

6.2.8.17 Method findAndCopyValue(byte tag, byte occurrence, short valueOffset, byte[] dstBuffer, short dstOffset, short dstLength)

Test Area Reference API_2_PRH_FACYBBS_BSS

6.2.8.17.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public short findAndCopyValue(byte tag,
                             byte occurrence,
                             short valueOffset,
                             byte[] dstBuffer,
                             short dstOffset,
                             short dstLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: looks for the indicated occurrence of a TLV element from the beginning of a TLV list and copy its value into a destination buffer.

CRRN2: if no TLV element is found, the UNAVAILABLE_ELEMENT exception is thrown and the current TLV is no longer defined.

CRRN3: if the method is successful then the corresponding TLV becomes current and dstOffset + dstLength is returned.

CRRN4: The search method is comprehension required flag independent.

Parameter errors

CRRP1: if dstBuffer is null NullPointerException shall be thrown.

CRRP2: if dstOffset or dstLength or both would cause access outside array bounds, or if dstLength is negative ArrayIndexOutOfBoundsException shall be thrown.

CRRP3: if valueOffset, dstLength or both are out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.8.17.2 Test Suite files

Test Script: API_2_PRH_FACYBBS_BSS_1.scr

Test Applet: API_2_PRH_FACYBBS_BSS_1.java
 Load Script: API_2_PRH_FACYBBS_BSS_1.ldr
 Cleanup Script: API_2_PRH_FACYBBS_BSS_1.clr
 Parameter File: API_2_PRH_FACYBBS_BSS_1.par

6.2.8.17.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|-----------------------------|
| 1 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 15 Text String TLV = 0D 10 04 01 02 ... 0F | | |
| | ProactiveResponseHandler.getTheHandler() findAndCopyValue() with a null dstBuffer | NullPointerException is thrown | |
| 2 | dstOffset > dstBuffer.length tag = 0Dh, occurrence = 1 valueOffset = 0 dstBuffer.length = 5 dstOffset = 6 dstLength = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | dstOffset < 0 dstBuffer.length = 5 dstOffset = -1 dstLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 0 dstLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | dstOffset + dstLength > dstBuffer.length dstBuffer.length = 5 dstOffset = 3 dstLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | dstLength < 0 dstBuffer.length = 5 dstOffset = 0 dstLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 5 Text String TLV = 0D 06 04 01 02 ... 05 | | |
| | ProactiveResponseHandler.getTheHandler() valueOffset > Text String Length tag = 0Dh, occurrence = 1 valueOffset = 7 dstBuffer.length = 15 dstOffset = 0 dstLength = 0 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 8 | valueOffset < 0 valueOffset = -1 dstBuffer.length = 15 dstOffset = 0 dstLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 9 | dstLength > Text String length valueOffset = 0 dstBuffer.length = 15 dstOffset = 0 dstLength = 7 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 10 | valueOffset + dstLength > Text String length valueOffset = 2 dstBuffer.length = 15 dstOffset = 0 dstLength = 5 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 11 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 16 Text String TLV = 0D 11 04 00 01 ... 0F | | |

| | | | |
|----|---|---|-----------------------------|
| | ProactiveResponseHandler.getTheHandler() | | |
| | Select a TLV (tag 02h) | | |
| | findAndCopyValue() tag = 0Dh occurrence = 2 | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 12 | Successful call Tag = 0Dh, occurrence = 1 ValueOffset = 0 DstBuffer.length = 17 DstOffset = 0 DstLength = 17 | Result of findAndCopyValue() is 17 | |
| 13 | Compare buffer Buffer = 04 00 01 ... 0F | Result is 00h | |
| 14 | initialise dstBuffer dstBuffer = 55 55 ... 55 | | |
| | Successful call Tag = 0Dh, occurrence = 1 ValueOffset = 2 DstBuffer.length = 20 DstOffset = 3 DstLength = 12 | Result of findAndcopyValue() is 15 | |
| 15 | Compare buffer Buffer = 55 55 55 01 02 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55 | Result is 00h | |
| 16 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, with 2 Text String TLV 0D 11 04 00 01 02 ... 0F 0D 06 00 11 22 33 44 55 (no specific DCS byte) | | |
| | ProactiveResponseHandler.getTheHandler() | | |
| | Successful call Tag = 0Dh, occurrence = 1 ValueOffset = 0 DstBuffer.length = 17 DstOffset = 0 DstLength = 17 | Result of findAndCopyValue() is 17 | |
| 17 | Compare buffer Buffer = 04 00 01 ... 0F | Result is 00h | |
| 18 | Successful call Tag = 0Dh, occurrence = 2 ValueOffset = 0 DstBuffer.length = 6 DstOffset = 0 DstLength = 6 | Result of findAndCopyValue() is 6 | |
| 19 | Compare buffer Buffer = 00 11 22 33 44 55 | Result is 00h | |
| 20 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 16 Text String TLV = 0D 11 04 00 01 ... 0F | | |
| | ProactiveResponseHandler.getTheHandler() | | |
| | Successful call (with tag 8Dh) Tag = 8Dh, occurrence = 1 ValueOffset = 0 DstBuffer.length = 17 DstOffset = 0 DstLength = 17 | Result of findAndcopyValue() is 17 | |
| 21 | Compare buffer Buffer = 04 00 01 ... 0F | Result is 00h | |

6.2.8.17.4 Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | 13, 15, 17, 19 |
| N2 | 11 |
| N3 | 12, 14, 16, 18 |
| N4 | 20, 21 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7, 8, 9, 10 |
| C1 | Does not apply for Proactive Response Handler |

6.2.8.18 Method findAndCompareValue(byte tag, byte[] compareBuffer, short compareOffset)

Test Area Reference API_2_PRH_FACRB_BS

6.2.8.18.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.

```
public byte findAndCompareValue(byte tag,
                               byte[] compareBuffer,
                               short compareOffset)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

Looks for the first occurrence of a TLV element from beginning of a TLV list and compare its value with a buffer:

CRRN1: if no TLV element is found, the UNAVAILABLE_ELEMENT exception is thrown and the current TLV is no longer defined.

CRRN2: if the method is successful then the corresponding TLV becomes current.

CRRN3: if identical returns 0.

CRRN4: if the first miscomparing byte in simple TLV is less than that in compareBuffer returns -1.

CRRN5: if the first miscomparing byte in simple TLV is greater than that in compareBuffer returns 1.

CRRN6: The search method is comprehension required flag independent.

Parameter errors

CRRP1: if compareBuffer is null NullPointerException shall be thrown.

CRRP2: if compareOffset would cause access outside array bounds ArrayIndexOutOfBoundsException shall be thrown.

Context errors

CRRC1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.8.18.2 Test Suite files

Test Script: API_2_PRH_FACRB_BS_1.scr

Test Applet: API_2_PRH_FACRB_BS_1.java

Load Script: API_2_PRH_FACRB_BS_1.ldr

Cleanup Script: API_2_PRH_FACRB_BS_1.clr

Parameter File: API_2_PRH_FACRB_BS_1.par

6.2.8.18.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|-----------------------------|
| 1 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 15 Text String TLV = 0D 10 04 01 02 ... 0F | | |
| | ProactiveResponseHandler.getTheHandler() | | |
| | FindAndCompareValue() with a null dstBuffer | NullPointerException is thrown | |
| 2 | compareOffset > compareBuffer.length tag = 0Dh compareBuffer.length = 20 compareOffset = 21 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | compareOffset < 0 compareBuffer.length = 20 compareOffset = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | length > compareBuffer.length compareBuffer.length = 15 compareOffset = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | CompareOffset + length > compareBuffer.length CompareBuffer.length = 20 CompareOffset = 5 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 16 Text String TLV = 0D 11 04 00 01 ... 0F | | |
| | ProactiveResponseHandler.getTheHandler() | | |
| | Select a TLV (tag 02h) | | |
| | findAndCompareValue() tag = 04h | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 7 | Initialise compareBuffer CompareBuffer = 04 00 01 ... 0F | | |
| | Compare buffers Tag = 0Dh CompareOffset = 0 | Result is 00h | |
| 8 | Verify current TLV GetValueLength() | Result is 17 | |
| 9 | Initialise compareBuffer CompareBuffer = 04 00 01 ... 10 | | |
| | Compare buffers with same parameters | Result is -1 | |
| 10 | Initialise compareBuffer CompareBuffer = 03 00 01 ... 0F | | |
| | Compare buffers with same parameters | Result is +1 | |
| 11 | Initialise compareBuffer CompareBuffer = 55 55 04 00 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0E 0F 55 | | |
| | Compare buffers CompareOffset = 2 | Result is 00h | |
| 12 | Send a GET INPUT command | | GET INPUT Proactive command |

| | | | |
|----|--|---------------|-----------------------------|
| | Terminal Response, with 2 Text String TLV 0D 11 04 00 01 ... 0F 0D 06 00 11 22 33 44 55 | | |
| | ProactiveResponseHandler.getTheHandler() | | |
| | Initialise compareBuffer CompareBuffer = 55 55 04 00 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0E 0F 55 | | |
| | Compare buffers CompareOffset = 2 | Result is 00h | |
| 13 | Initialise compareBuffer CompareBuffer = 55 55 04 01 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0E 0F 55 | | |
| | Compare buffers CompareOffset = 2 | Result is -1 | |
| 14 | Initialise compareBuffer CompareBuffer = 55 55 04 00 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0D 10 55 | | |
| | Compare buffers CompareOffset = 2 | Result is +1 | |
| 15 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 16 Text String TLV = 0D 11 04 00 01 ... 0F | | |
| | ProactiveResponseHandler.getTheHandler() | | |
| | Initialise compareBuffer CompareBuffer = 04 00 01 ... 0F | | |
| | Compare buffers (with tag 8Dh) Tag = 8Dh CompareOffset = 0 | Result is 00h | |

6.2.8.18.4 Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | 6 |
| N2 | 8 |
| N3 | 7, 11, 12 |
| N4 | 9, 13 |
| N5 | 10, 14 |
| N6 | 15 |
| P1 | 1 |
| P2 | 2, 3, 4, 5 |
| C1 | Does not apply for Proactive Response Handler |

6.2.8.19 Method findAndCompareValue(byte tag, byte occurrence, short valueOffset, byte[] compareBuffer, short compareOffset, short compareLength)

Test Area Reference API_2_PRH_FACRBBS_BSS

6.2.8.19.1 Conformance requirement

The method with following header shall be compliant to its definition in the API.


```
public byte findAndCompareValue(byte tag,
                               byte occurrence,
                               short valueOffset,
                               byte[] compareBuffer,
                               short compareOffset,
                               short compareLength)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

Looks for the indicated occurrence of a TLV element from the beginning of a TLV list and compare its value with a buffer:

CRRN1: if no TLV element is found, the UNAVAILABLE_ELEMENT exception is thrown and the current TLV is no longer defined.

CRRN2: if the method is successful then the corresponding TLV becomes current.

CRRN3: if identical 0 is returned.

CRRN4: if the first miscomparing byte in simple TLV is less than that in compareBuffer -1 is returned.

CRRN5: if the first miscomparing byte in simple TLV is greater than that in compareBuffer 1 is returned

CRRN6: The search method is comprehension required flag independent.

Parameter errors

CRRP1: if compareBuffer is null NullPointerException shall be thrown.

CRRP2: if compareOffset or compareLength or both would cause access outside array bounds, or if compareLength is negative ArrayIndexOutOfBoundsException shall be thrown.

CRRP3: if valueOffset, compareLength or both are out of the current TLV an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException OUT_OF_TLV_BOUNDARIES.

CRRP4: if an input parameter is not valid (e.g. occurrence = 0) an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException BAD_INPUT_PARAMETER.

Context errors

CRR1: if the handler is busy an instance of ToolkitException shall be thrown. The reason code shall be ToolkitException HANDLER_NOT_AVAILABLE.

6.2.8.19.2

Test Suite files

| | |
|-----------------|------------------------------|
| Test Script: | API_2_PRH_FACRBBS_BSS_1.scr |
| Test Applet: | API_2_PRH_FACRBBS_BSS_1.java |
| Load Script: | API_2_PRH_FACRBBS_BSS_1.ldr |
| Cleanup Script: | API_2_PRH_FACRBBS_BSS_1.clr |
| Parameter File: | API_2_PRH_FACRBBS_BSS_1.par |

6.2.8.19.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|-----------------------------|
| 1 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 15 Text String TLV = 0D 10 04 01 02 ... 0F | | |
| | ProactiveResponseHandler.getTheHandler() | | |
| | findAndCompareValue() with a null compareBuffer | NullPointerException is thrown | |
| 2 | compareOffset > compareBuffer.length tag = 0Dh, occurrence = 1 valueOffset = 0 compareBuffer.length = 5 compareOffset = 6 compareLength = 0 | ArrayIndexOutOfBoundsException is thrown | |
| 3 | compareOffset < 0 compareBuffer.length = 5 compareOffset = -1 compareLength = 1 | ArrayIndexOutOfBoundsException is thrown | |
| 4 | compareLength > compareBuffer.length compareBuffer.length = 5 compareOffset = 0 compareLength = 6 | ArrayIndexOutOfBoundsException is thrown | |
| 5 | CompareOffset + compareLength > compareBuffer.length CompareBuffer.length = 5 CompareOffset = 3 CompareLength = 3 | ArrayIndexOutOfBoundsException is thrown | |
| 6 | compareLength < 0 compareBuffer.length = 5 compareOffset = 0 compareLength = -1 | ArrayIndexOutOfBoundsException is thrown | |
| 7 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 5 Text String TLV = 0D 06 04 01 02 ... 05 | | |
| | ProactiveResponseHandler.getTheHandler() | | |
| | valueOffset ≥ Text String Length tag = 0Dh, occurrence = 1 valueOffset = 7 compareBuffer.length = 15 compareOffset = 0 compareLength = 0 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 8 | valueOffset < 0 valueOffset = -1 compareBuffer.length = 15 compareOffset = 0 compareLength = 1 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 9 | compareLength > Text String length valueOffset = 0 compareBuffer.length = 15 compareOffset = 0 compareLength = 7 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 10 | valueOffset + compareLength > Text String length valueOffset = 2 compareBuffer.length = 15 compareOffset = 0 compareLength = 5 | ToolkitException.OUT_OF_TLV_BOUNDARIES is thrown | |
| 11 | Invalid parameter Occurrence = 0 | ToolkitException.BAD_INPUT_PARAMETER is thrown | |
| 12 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 16 Text String TLV = 0D 11 04 00 01 ... 0F | | |
| | ProactiveResponseHandler.getTheHandler() | | |
| | Select a TLV (tag 02h) | | |

| | | | |
|----|--|---|-----------------------------|
| | findAndCompareValue() tag = 0Dh occurrence = 2 | ToolkitException.UNAVAILABLE_ELEMENT is thrown | |
| | Call the getValueLength() method | ToolkitException.UNAVAILABLE_ELEMENT is thrown. | |
| 13 | Initialise compareBuffer CompareBuffer = 04 00 01 ... 0F | | |
| | findAndCompareValue() tag = 0Dh, occurrence = 1 valueOffset = 0 compareOffset = 0 compareLength = 17 | Result is 00h | |
| 14 | Verify current TLV GetValueLength() | Result is 17 | |
| 15 | Initialise compareBuffer compareBuffer = 04 00 01 ... 10 | | |
| | Compare buffers with same parameters | Result is -1 | |
| 16 | Initialise compareBuffer compareBuffer = 03 00 01 ... 0F | | |
| | Compare buffers with same parameters | Result is +1 | |
| 17 | Initialise compareBuffer compareBuffer = 55 55 55 01 02 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55 | | |
| | Compare buffers valueOffset = 2 compareOffset = 3 compareLength = 12 | Result is 00h | |
| 18 | Initialise compareBuffer compareBuffer = 55 55 55 02 01 03 04 05 06 07 08 09 0A 0B 0C 55 55 55 55 55 | | |
| | Compare buffers with same parameters | Result is -1 | |
| 19 | Initialise compareBuffer compareBuffer = 55 55 55 01 02 03 04 05 06 07 08 09 0A 0A 0D 55 55 55 55 55 | | |
| | Compare buffers with same parameters | Result is +1 | |
| 20 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, with 2 Text String TLV 0D 11 04 00 01 ... 0F 0D 06 00 11 22 33 44 55 | | |
| | ProactiveResponseHandler.getTheHandler() | | |
| | Initialise compareBuffer compareBuffer = 04 00 01 ... 0F | | |
| | findAndCompareValue() tag = 0Dh, occurrence = 1 valueOffset = 0 compareOffset = 0 compareLength = 17 | Result is 00h | |
| 21 | Initialise compareBuffer compareBuffer = 00 11 22 33 44 55 | | |
| | findAndCompareValue() | Result is 00h | |

| | | | |
|----|--|---------------|-----------------------------|
| | tag = 0Dh, occurrence = 2 valueOffset = 0 compareOffset = 0 compareLength = 6 | | |
| 22 | Initialise compareBuffer compareBuffer = 00 11 22 33 44 66 | | |
| | findAndCompareValue() tag = 0Dh, occurrence = 2 valueOffset = 0 compareOffset = 0 compareLength = 6 | Result is -1 | |
| 23 | Send a GET INPUT command | | GET INPUT Proactive command |
| | Terminal Response, Text String length = 16 Text String TLV = 0D 11 04 00 01 ... 0F | | |
| | ProactiveResponseHandler.getTheHandler() | | |
| | Initialise compareBuffer CompareBuffer = 04 00 01 ... 0F | | |
| | Compare buffers (with tag 8Dh) tag = 8Dh, occurrence = 1 valueOffset = 0 compareOffset = 0 compareLength = 17 | Result is 00h | |

6.2.8.19.4 Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | 12 |
| N2 | 14 |
| N3 | 13, 17, 20, 21 |
| N4 | 15, 18, 22 |
| N5 | 16, 19 |
| N6 | 23 |
| P1 | 1 |
| P2 | 2, 3, 4, 5, 6 |
| P3 | 7, 8, 9, 10 |
| P4 | 11 |
| C1 | Does not apply for Proactive Response Handler |

6.2.9 Class ToolkitRegistry

6.2.9.1 Method allocateTimer

Test Area Reference: API_2_TKR_ATIM

6.2.9.1.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
public byte allocateTimer() throws ToolkitException
```

Normal execution

CRRN1: the returned timer identifier shall be between 01 and 08 inclusive.

CRRN2: the returned timer identifier shall be different from a previously allocated but not released one.

CRRN3: The SIM Toolkit Framework shall trigger the applet when receiving an ENVELOPE(TIMER EXPIRATION) command for the allocated timer.

CRRN4: A call to isEventSet() method for EVENT_TIMER_EXPIRATION should return true if the applet has at least one timer allocated.

Parameters error

No requirements

Context errors

CRRC1: Shall throw a ToolkitException with reason NO_TIMER_AVAILABLE if all the timers are allocated.

CRRC2: Shall throw a ToolkitException with reason NO_TIMER_AVAILABLE if the maximum number of timers have been allocated to this applet according to installation parameter.

6.2.9.1.2 Test suite files

Test Script: API_2_TKR_ATIM_1.scr

Test Applet: API_2_TKR_ATIM_1.java
API_2_TKR_ATIM_2.java
API_2_TKR_ATIM_3.java

Installation parameters:

For this test procedure the non-volatile memory of each instance is 200 (Hexa).

The maximum timer parameter value is as follows for each applet:

- applet 1 (API_2_TKR_ATIM_1): 8 timers
- applet 2 (API_2_TKR_ATIM_2): 4 timers
- applet 3 (API_2_TKR_ATIM_3): 0 timer

Load Script: API_2_TKR_ATIM_1.ldr

The load script installs the 6 instances.

Cleanup Script: API_2_TKR_ATIM_1.clr

Parameter File: API_2_TKR_ATIM_1.par

6.2.9.1.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|------------------|
| 1 | Allocates up to 8 timers (applet 1) 8 * allocateTimer(). | No exception shall be thrown. Timer ID returned shall be between 01 and 08 inclusive. It shall be different after each call. | |
| 2 | Allocate timers more than the maximum (applet 1) The applet 1 allocates 1 more timer. | Shall throw a ToolkitException with reason NO_TIMER_AVAILABLE. | |
| 3 | Check applet is Triggered by ENVELOPE(TIMER_EXPIRATION) command (applet1) Send ENVELOPE(TIMER_EXPIRATION) with all timers id (not in an increase order). Calls releaseTimer(id) each time a timer expires. | Shall trigger each time an ENVELOPE(TIMER_EXPIRATION) is sent to the SIM, for Timer ID = '01' to '08'. | |
| 4 | Allocate up to 4 timers (applet 2) 4 * allocateTimer(). | No exception shall be thrown. Each time, the returned timer identifier shall be between '01' and '08' inclusive. It shall be different after each call. | |
| 5 | Allocate timers more than the maximum (applet 3) The applet 3 allocates 1 more timer. | Shall throw a ToolkitException with reason NO_TIMER_AVAILABLE. | |

6.2.9.1.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 1,4 |
| N2 | 1,4 |
| N3 | 3 |
| N4 | 1 |
| C1 | 2 |
| C2 | 5 |

6.2.9.2 Method changeMenuEntry

Test Area Reference: API_2_TKR_CMETB_BSSBZBS

6.2.9.2.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
public void changeMenuEntry(byte id,
    byte[] menuEntry,
    short offset,
    short length,
    byte nextAction,
    boolean helpSupported,
    byte iconQualifier,
    short iconIdentifier)
    throws
        java.lang.NullPointerException,
        java.lang.ArrayIndexOutOfBoundsException,
        ToolkitException
```

Normal execution

- CRRN1: The SIM Toolkit Framework shall dynamically update the menu stored in the ME by issuing a SET UP MENU proactive command. The later will reflect the changes done for the entry. The SIM Toolkit Framework shall use the data of the EF sume file in order to build the SET UP MENU command.
- CRRN2: The default state of the changed menu entry is 'enabled'.
- CRRN3: a call to isEventSet() method on EVENT_MENU_SELECTION shall return true before and after the call.
- CRRN4: if helpSupported was true then a call to isEventSet() method on EVENT_MENU_SELECTION_HELP_REQUEST event shall return true.
- CRRN5: if helpSupported was true then after the completion of the SETUP MENU command, if an ENVELOPE(MENU_SELECTION_HELP_REQUEST) command is received by the SIM for this entry, then the SIM Toolkit framework shall trigger the applet.
- CRRN6: if help supported was true, the SIM Toolkit Framework shall issue a SETUP MENU command with command qualifier = '80'
- CRRN7: if helpSupported was false and if no entries is supporting help then a call to isEventSet() method on EVENT_MENU_SELECTION_HELP_REQUEST event shall return false .
- CRRN8: if helpSupported was false and if no entries is supporting help then after the completion of the SETUP MENU command, if an ENVELOPE(MENU_SELECTION_HELP_REQUEST) command is received by the SIM, then the SIM Toolkit framework shall not trigger the applet.
- CRRN9: The SIM Toolkit Framework shall supply in the SET UP MENU command with the icon identifier provided in the icon identifier list within the item icon identifier list Simple TLV if all the applets registered to the EVENT_MENU_SELECTION provide it.
- CRRN10: The SIM Toolkit Framework shall set in the SET UP MENU command with the Icon list qualifier transmitted to the ME as 'icon is not self explanatory' if one of the applet registered prefers this qualifier.
- CRRN11: If Next Action Indicator was different from '00', the SIM Toolkit Framework shall issue a SETUP MENU proactive command containing an Items Next Action Indicator simple TLV with the comprehension flag set to 0 as defined in GSM 11.14 [4].

Parameters error

- CRRP1: Shall throw java.lang.NullPointerException - if menuEntry is null
- CRRP2: Shall throw java.lang.ArrayIndexOutOfBoundsException - if offset would cause access outside array bounds
- CRRP3: Shall throw java.lang.ArrayIndexOutOfBoundsException - if length would cause access outside array bounds
- CRRP4: Shall throw java.lang.ArrayIndexOutOfBoundsException - if both offset and length would cause access outside array bounds

Context errors

- CRRC1: Shall throw a ToolkitException with MENU_ENTRY_NOT_FOUND reason if the Menu Identifier isn't associated to the calling applet instance.
- CRRC2: Shall throw ALLOWED_LENGTH_EXCEEDED if the menu entry string is bigger than the allocated space.

6.2.9.2.2 Test suite files

Additional requirements for the GSM personalisation:

- content of EF sume shall be:

- Title Alpha Identifier: "TOOLKIT TEST"

Test Script: API_2_TKR_CMETB_BBSSBZBS_1.scr

Test Applet: API_2_TKR_CMETB_BBSSBZBS_1.java

- entry '01' is "Init1"

- entry '02' is "Init2"

Installation parameter:

Same as default applet but with:

- Maximum text length for a menu entry: 15

- Maximum number of menu entries: 2

- Position / Identifier for each menu entry: '01'/'01','02'/'02'

Load Script: API_2_TKR_CMETB_BBSSBZBS_1.ldr

Cleanup Script: API_2_TKR_CMETB_BBSSBZBS_1.clr

Parameter File: API_2_TKR_CMETB_BBSSBZBS_1.par

6.2.9.2.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|---|
| 1 | <p>Applet changes the entry's title by menuEntry buffer, with a greater length than the initial length</p> <p>1- ChangeMenuEntry()with parameters: Id = '02' MenuEntry = "UseAllBuffer" Offset = 0 Length = menuEntry.length NextAction = 0 HelpSupported = false IconQualifier = 0 IconIdentifier = 0.</p> <p>2- isEventSet(EVENT_MENU_SELECTION).</p> <p>3- isEventSet(EVENT_MENU_SELECTION_HELP_REQUEST).</p> | <p>1- No exception shall be thrown.</p> <p>2- shall return true.</p> <p>3- shall return false.</p> | <p>The SIM shall issue a SETUP MENU proactive command which contains the new text for entry ID '02'.</p> |
| 2 | <p>Changing the title with part of menuEntry buffer</p> <p>1- changeMenuEntry()with parameters: Id = '01' MenuEntry = "UsePartOfBuffer" Offset = 3 Length = 12 NextAction = 0 HelpSupported = false IconQualifier = 0 IconIdentifier = 0.</p> <p>2- isEventSet(EVENT_MENU_SELECTION).</p> <p>3- isEventSet(EVENT_MENU_SELECTION_HELP_REQUEST)</p> | <p>1- No exception shall be thrown.</p> <p>2- Shall return true.</p> <p>3- Shall return false.</p> | <p>The SIM shall issue a SETUP MENU proactive command which contains the new text for entry ID '01'.</p> |
| 3 | <p>Length = 0</p> <p>1- changeMenuEntry() for entry '01' and entry '02', with parameters: Id = '01'/'02' MenuEntry = "LengthEquals0" Offset = 0 Length = 0 NextAction = 0 HelpSupported = false IconQualifier = 0 IconIdentifier = 0.</p> <p>2- isEventSet(EVENT_MENU_SELECTION).</p> <p>3- isEventSet(EVENT_MENU_SELECTION_HELP_REQUEST).</p> | <p>1- No exception shall be thrown.</p> <p>2- Shall return true.</p> <p>3- shall return false.</p> | <p>The SIM shall issue a SETUP MENU proactive command which contains for entry '01'and entry '02', no text part.</p> |
| 4 | <p>Setting a next action indicator != 0</p> <p>1- changeMenuEntry()with parameters: Id = '02' MenuEntry = "NextActionIndic" Offset = 0 Length = menuEntry.length NextAction = '10' (SETUP CALL) HelpSupported = false</p> | <p>1- No exception shall be thrown.</p> <p>2- Shall return true.</p> <p>3- Shall return false.</p> | <p>The SIM shall issue a SETUP MENU proactive command which contains an Items Next Action Indicator list and which contains a command qualifier '80'.</p> |

| | | | |
|---|---|--|---|
| | <pre> IconQualifier = 0 IconIdentifier = 0 2- isEventSet(EVENT_MENU_SELECTION). 3- isEventSet(EVENT_MENU_SELECTION_HELP_R EQUEST). 4- changeMenuEntry()with parameters: Id = '02' MenuEntry = "NextActionIndic" Offset = 0 Length = menuEntry.length NextAction = '10' (SETUP CALL) HelpSupported = true IconQualifier = 0 IconIdentifier = 0 </pre> | | |
| 5 | <p>Checking applet is triggered by a MENU_SELECTION_HELP_REQUEST</p> <pre> Send ENVELOPE(MENU_SELECTION_HELP_REQUEST) with Item Identifier = '02' </pre> | <p>Applet is triggered by a MENU_SELECTION_HELP_REQUEST and the Item Identifier is 02</p> | |
| 6 | <p>help supported=true</p> <pre> 1- changeMenuEntry()with parameters: Id = '01' MenuEntry = "HelpSupported" Offset = 0 Length = menuEntry.length NextAction = 0 HelpSupported = true IconQualifier = 0 IconIdentifier = 0 2- isEventSet(EVENT_MENU_SELECTION). 3- isEventSet(EVENT_MENU_SELECTION_HELP_R EQUEST). </pre> | <pre> 1- No exception shall be thrown. 2- Shall return true. 3- Shall return true. </pre> | <p>The SIM shall issue a SETUP MENU proactive command which contains a command qualifier '80'.</p> |
| 7 | <p>Checking applet is triggered by a MENU_SELECTION_HELP_REQUEST</p> <pre> Send ENVELOPE(MENU_SELECTION_HELP_REQUEST) with Item Identifier = '01' </pre> | <p>Applet is triggered by a MENU_SELECTION_HELP_REQUEST and the Item Identifier is 01</p> | |
| 8 | <p>Setting icons, help supported = false</p> <pre> 1- changeMenuEntry() for entries '01','02', with parameters: Id = '01'/'02' MenuEntry = "IconQualifier" Offset = 0 Length = menuEntry.length NextAction = 0 HelpSupported = false IconQualifier = '01' IconIdentifier = '02' / '01' 2- isEventSet(EVENT_MENU_SELECTION). 3- isEventSet(EVENT_MENU_SELECTION_HELP_R EQUEST). </pre> | <pre> 1- No exception shall be thrown. 2- Shall return true. 3- Shall return false. </pre> | <p>The SIM shall issue a SETUP MENU proactive command which contains an Icon Identifier List.</p> |
| 9 | <p>MenuEntry is disabled</p> <pre> 1- disableMenuEntry('01'). 2- changeMenuEntry()with parameters: </pre> | <pre> 1- No exception shall be thrown. 2- No exception shall be thrown. 3- Shall return true. </pre> | <p>The SIM shall issue a SETUP MENU proactive command which contains the entry. Without Icon identifier List Simple TLV</p> |

| | | | |
|-----------|---|---|--|
| | <p>Id = '01' MenuEntry = "EnableEntry" Offset = 0 Length = menuEntry.length NextAction = 0 HelpSupported = false IconQualifier = 0 IconIdentifier = 0</p> <p>3- isEventSet(EVENT_MENU_SELECTION).</p> <p>4- isEventSet(EVENT_MENU_SELECTION_HELP_REQUEST).</p> | <p>4- Shall return false.</p> | |
| <p>10</p> | <p>MenuEntry is null</p> <p>changeMenuEntry()with: MenuEntry = NULL</p> | <p>Shall throw java.lang.NullPointerException.</p> | |
| <p>11</p> | <p>Offset causes access outside array bounds</p> <p>Id = '01' MenuEntry = "Violation" Offset = menuEntry.length +1 Length = 0 NextAction = 0 HelpSupported = false IconQualifier = 0 IconIdentifier = 0</p> | <p>Shall throw java.lang.ArrayIndexOutOfBoundsException.</p> | |
| <p>12</p> | <p>Big Offset causes access outside array bounds</p> <p>Id = '01' MenuEntry = "Violation" Offset = 255 Length = 1 NextAction = 0 HelpSupported = false IconQualifier = 0 IconIdentifier = 0</p> | <p>Shall throw java.lang.ArrayIndexOutOfBoundsException.</p> | |
| <p>13</p> | <p>Offset < 0 causes access outside array bounds</p> <p>Id = '01' MenuEntry = "Violation" Offset = -1 Length = 1 NextAction = 0 HelpSupported = false IconQualifier = 0 IconIdentifier = 0</p> | <p>Shall throw java.lang.ArrayIndexOutOfBoundsException.</p> | |
| <p>14</p> | <p>Length causes access outside array bounds</p> <p>Id = '01' MenuEntry = "Violation" Offset = 0 Length = MenuEntry.length + 1 NextAction = 0 HelpSupported = false IconQualifier = 0 IconIdentifier = 0.</p> | <p>Shall throw java.lang.ArrayIndexOutOfBoundsException.</p> | |
| <p>15</p> | <p>Length < 0 causes access outside array bounds</p> <p>Id = '01' MenuEntry = "Violation" Offset = 0 Length = -1 NextAction = 0 HelpSupported = false IconQualifier = 0 IconIdentifier = 0.</p> | <p>Shall throw java.lang.ArrayIndexOutOfBoundsException.</p> | |

| | | | |
|-----------|--|---|---|
| <p>16</p> | <p>Both offset and length causes access outside array bounds</p> <pre> Id = '01' MenuEntry = "Violation" Offset ∈ [1, MenuEntry.length] Length = MenuEntry.length NextAction = 1 HelpSupported = false IconQualifier = 0 IconIdentifier = 0 </pre> | <p>Shall throw <code>java.lang.ArrayIndexOutOfBoundsException</code>.</p> | |
| <p>17</p> | <p>Invalid ID used</p> <pre> Id = '00' MenuEntry = contains text, != null Offset = 0 Length = menuEntry.length < 16 NextAction = 0 HelpSupported = false IconQualifier = 0 IconIdentifier = 0 </pre> | <p>Shall throw a <code>ToolkitException</code> with reason code: <code>MENU_ENTRY_NOT_FOUND</code>.</p> | |
| <p>18</p> | <p>ID isn't allocated to a menu entry of this applet instance</p> <pre> Id = '0A' MenuEntry = contains text, != null Offset = 0 Length = menuEntry.length < 16 NextAction = 0 HelpSupported = false IconQualifier = 0 IconIdentifier = 0 </pre> | <p>Shall throw a <code>ToolkitException</code> with reason code: <code>MENU_ENTRY_NOT_FOUND</code>.</p> | |
| <p>19</p> | <p>The text is bigger than the allocated space</p> <pre> Id = '02' MenuEntry = contains text, != null Offset = 0 Length = menuEntry.length > 15 NextAction = 0 HelpSupported = false IconQualifier = 0 IconIdentifier = 0 </pre> | <p>Shall throw a <code>ToolkitException</code> with reason code: <code>ALLOWED_LENGTH_EXCEEDED</code>.</p> | |
| <p>20</p> | <p>With a smaller text length than the initial length</p> <pre> 1. changeMenuEntry()with parameters: Id = '02' MenuEntry = "Init" Offset = 0 Length = menuEntry.length NextAction = 0 HelpSupported = false IconQualifier = 0 IconIdentifier = 0 2. isEventSet(EVENT_MENU_SELECTION) 3. isEventSet(EVENT_MENU_SELECTION_HELP_REQUEST) </pre> | <ol style="list-style-type: none"> 1. No exception shall be thrown. 2. Shall return true. 3. Shall return false. | <p>The SIM shall issue a <code>SETUP MENU</code> proactive command which contains the new text for entry ID '02'.</p> |

6.2.9.2.4 Test Coverage

| CRR number | Test case number |
|------------|--|
| N1 | 1,2,3,4,6,8,9,20 |
| N2 | 9 |
| N3 | 1,2,3,4,6,8,9,20 |
| N4 | 6 |
| N5 | 7,5 |
| N6 | 6 |
| N7 | 1,2,3,4,8,9,20 |
| N8 | To be checked in framework tests and insert cross reference here |
| N9 | 8, 9 |
| N10 | 8 |
| N11 | 4 |
| P1 | 10 |
| P2 | 11,12,13 |
| P3 | 14,15 |
| P4 | 16 |
| C1 | 17,18 |
| C2 | 19 |

6.2.9.3 Method clearEvent

Test Area Reference: API_2_TKR_CEVTB

6.2.9.3.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
public void clearEvent(byte event)
    throws ToolkitException
```

Normal execution

CRRN1: A call to isEventSet() method for a cleared event should return false after a call to clearEvent.

CRRN2: The SIM Toolkit Framework shall not trigger the applet on the occurrence of the cleared event anymore.

CRRN3: if event was EVENT_CALL_CONTROL_BY_SIM and after the call, no applet is registered to it, The SIM Toolkit Framework shall allow an applet to register to this event.

CRRN4: if event was EVENT_CALL_CONTROL_BY_SIM and one applet is still registered to these event, The SIM Toolkit Framework shall not allow an applet to register to this event.

CRRN5: if event was EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM and after the call, no applet is registered to it, The SIM Toolkit Framework shall allow an applet to register to this event.

CRRN6: if event was EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM and one applet is still registered to these event, The SIM Toolkit Framework shall not allow an applet to set this event.

Parameters error

CRRP1: Shall throw a Toolkit Exception with reason EVENT_NOT_ALLOWED if event was EVENT_MENU_SELECTION.

CRRP2: Shall throw a Toolkit Exception with reason EVENT_NOT_ALLOWED if event was EVENT_MENU_SELECTION_HELP_REQUEST.

CRRP3: Shall throw a Toolkit Exception with reason EVENT_NOT_ALLOWED if event was EVENT_TIMER_EXPIRATION.

CRRP4: Shall throw a Toolkit Exception with reason EVENT_NOT_ALLOWED if event was EVENT_STATUS_COMMAND.

Context errors

No requirements

6.2.9.3.2 Test suite files

Test Script: API_2_TKR_CEVTB_1.scr

Test Applet: API_2_TKR_CEVTB_1.java

As default but applet registers to an event list which contains all defined events in GSM 03.19 [7] excepted those that aren't allowed or supported by setEvent().

Load Script: API_2_TKR_CEVTB_1.ldr

Cleanup script: API_2_TKR_CEVTB_1.clr

Parameter File: API_2_TKR_CEVTB_1.par

6.2.9.3.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|------------------|
| 1 | <p>Clear ALLOWED unregistered events</p> <p>For events ranging from 1 to 127 excepted those that aren't allowed (EVENT_MENU_SELECTION, EVENT_MENU_SELECTION_HELP_REQUEST, EVENT_TIMER_EXPIRATION, EVENT_STATUS_COMMAND), the applet calls:</p> <p>1- clearEvent() method 2- isEventSet() method</p> | <p>1- No exception is thrown each time. 2- Shall return false each time.</p> | |
| 2 | <p>Clear registered events</p> <p>1- For each ALLOWED and SUPPORTED events, the applet calls setEvent() method. 2- For events ranging from 1 to 127 excepted those that aren't allowed, the applet calls:</p> <p>2.1- clearEvent() method 2.2- isEventSet() method</p> | <p>1- No exception shall be thrown. 2.1- No exception shall be thrown. 2.2- Shall return false.</p> | |
| 3 | <p>Clearing NOT ALLOWED events</p> <p>For each event among: EVENT_MENU_SELECTION, EVENT_MENU_SELECTION_HELP_REQUEST, EVENT_TIMER_EXPIRATION, EVENT_STATUS_COMMAND</p> <p>1- The applet calls clearEvent(event) method.</p> | <p>1- Each time, clearEvent shall throw a Toolkit Exception with reason EVENT_NOT_ALLOWED.</p> | |
| 4 | <p>Checking applet isn't triggered by an ENVELOPE(SMS-PP DOWNLOAD) command</p> <p>1 - reset and initialise the card 2 - An ENVELOPE(SMS-PP DOWNLOAD) is sent with a TAR referencing applet.</p> | <p>Applet is not triggered by an ENVELOPE(SMS-PP DOWNLOAD) command</p> | |

6.2.9.3.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 1,2 |
| N2 | 4 |
| N3 | Framework |
| N4 | Framework |
| N5 | Framework |
| N6 | Framework |
| P1 | 3 |
| P2 | 3 |
| P3 | 3 |
| P4 | 3 |

6.2.9.4 Method disableMenuEntry

Test Area Reference: API_2_TKR_DMETB

6.2.9.4.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
public void disableMenuEntry(byte id)
    throws ToolkitException
```

Normal execution

CRRN1: A call to isEventSet() method on EVENT_MENU_SELECTION shall return the same result before and after the call to disableMenuEntry() method.

CRRN2: A call to isEventSet() method on EVENT_MENU_SELECTION_HELP_REQUEST shall return the same result before and after the call to disableMenuEntry() method.

CRRN3: After invocation of this method the SIM Toolkit Framework shall dynamically update the menu stored in the ME .

CRRN4: After invocation of this method, if there is no more enabled menu entries then the SIM Toolkit framework shall issue a SETUP MENU proactive command containing Item Data Object for Item 1 TLV with a length of zero and no value part.

Parameters error

No requirements

Context errors

CRRC1: shall throw a ToolkitException with reason = ENTRY_NOT_FOUND if the menu entry doesn't exist for this applet

6.2.9.4.2 Test suite files

Additional requirements for the GSM personalisation:

- content of EF sume shall be:
- Title Alpha Identifier: "TOOLKIT TEST"

Test Script: API_2_TKR_DMETB_1.scr

Test Applet: API_2_TKR_DMETB_1.java

Installation parameter:

Same as default applet but with:

- Maximum text length for a menu entry: 15
- Maximum number of menu entries: 2
- Position / Identifier for each menu entry: '01'/'01', '02'/'02'

Load Script: API_2_TKR_DMETB_1.ldr

Cleanup script: API_2_TKR_DMETB_1.clr

Parameter File: API_2_TKR_DMETB_1.par

6.2.9.4.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|---|
| 1 | <p>Check the menu state before disabling a previously enabled entry not registered to EVENT_MENU_SELECTION_HELP_REQUEST</p> <p>1- reset and initialise the card 2- isEventSet(EVENT_MENU_SELECTION) 3- isEventSet(EVENT_MENU_SELECTION_HELP_REQUEST)</p> | <p>1- Shall return true 2- Shall return false</p> | <p>1- The SIM shall issue a SET UP MENU proactive command with entry '01' and '02'.</p> |
| 2 | <p>Check the menu state after disabling a previously enabled entry not registered to EVENT_MENU_SELECTION_HELP_REQUEST</p> <p>1- disableMenuEntry('01') 2- isEventSet(EVENT_MENU_SELECTION) 3- isEventSet(EVENT_MENU_SELECTION_HELP_REQUEST)</p> | <p>1- No exception shall be thrown. 2- Shall return true. 3- Shall return false.</p> | <p>3- The SIM shall issue a SET UP MENU proactive command with entry '02' only.</p> |
| 3 | <p>Check the menu before disabling a previously enabled entry registered to EVENT_MENU_SELECTION_HELP_REQUEST</p> <p>1- change Menu Entry '02' to indicate help supported 2- isEventSet(EVENT_MENU_SELECTION) 3- isEventSet(EVENT_MENU_SELECTION_HELP_REQUEST)</p> | <p>2- Shall return true 3- Shall return true</p> | <p>3- The SIM shall issue a SET UP MENU proactive command with entry '02', indicating help supported.</p> |
| 4 | <p>Check the menu after disabling a previously enabled entry registered to EVENT_MENU_SELECTION_HELP_REQUEST</p> <p>1- disableMenuEntry('02') 2- isEventSet(EVENT_MENU_SELECTION) 3- isEventSet(EVENT_MENU_SELECTION_HELP_REQUEST)</p> | <p>1- No exception shall be thrown. 2- Shall return true. 3- Shall return true.</p> | <p>3- The SIM shall issue a SET UP MENU proactive command with 1st Item TLV with a length of 0.</p> |
| 5 | <p>Disabling invalid entries</p> <p>For ID ranging from '00' to 'FF' except '01' and '02', the applet calls disableMenuEntry(ID) method.</p> | <p>Each time a Toolkit Exception with MENU_ENTRY_NOT_FOUND reason code shall be thrown.</p> | |

6.2.9.4.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 1,2,3,4 |
| N2 | 1,2,3,4 |
| N3 | 2,4 |
| N4 | 4 |
| C1 | 5 |

6.2.9.5 Method enableMenuEntry

Test Area Reference: API_2_TKR_EMETB

6.2.9.5.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
public void enableMenuEntry(byte id)
    throws ToolkitException
```

Normal execution

CRRN1: A call to isEventSet() method on EVENT_MENU_SELECTION shall return the same result before and after the call to enableMenuEntry() method.

CRRN2: A call to isEventSet() method on EVENT_MENU_SELECTION_HELP_REQUEST shall return the same result before and after the call to enableMenuEntry() method.

CRRN3: The SIM Toolkit Framework shall dynamically issue a SETUP MENU proactive command which does contain an ITEM SIMPLE TLV object for this entry.

Parameters error

No requirements

Context errors

CRRC1: shall throw a ToolkitException with reason = MENU_ENTRY_NOT_FOUND if the menu entry doesn't exist for this applet

6.2.9.5.2 Test suite files

Additional requirements for the GSM personalisation:

- content of EF sume shall be:
- Title Alpha Identifier: "TOOLKIT TEST"

Test Script: API_2_TKR_EMETB_1.scr

Test Applet: API_2_TKR_EMETB_1.java

Installation parameter:

Same as default applet but with:

- Maximum text length for a menu entry: 15
- Maximum number of menu entries: 2
- Position / Identifier for each menu entry: '01'/'01', '02'/'02'

Load Script: API_2_TKR_EMETB_1.ldr

Cleanup script: API_2_TKR_EMETB_1.clr

Parameter File: API_2_TKR_EMETB_1.par

6.2.9.5.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|--|
| 1 | <p>Check menu state before enabling a previously disabled entry not registered to EVENT_MENU_SELECTION_HELP_REQUEST</p> <p>1- isEventSet(EVENT_MENU_SELECTION) 2- isEventSet(EVENT_MENU_SELECTION_HELP_REQUEST) 3- disableMenuEntry('01')</p> | <p>1- Shall return true 2- Shall return false 3- No exception shall be thrown.</p> | <p>3- The SIM shall issue a SET UP MENU proactive command with entry '02' only.</p> |
| 2 | <p>Check menu state after enabling a previously disabled entry not registered to EVENT_MENU_SELECTION_HELP_REQUEST</p> <p>1- enableMenuEntry('01') 2- isEventSet(EVENT_MENU_SELECTION) 3- isEventSet(EVENT_MENU_SELECTION_HELP_REQUEST)</p> | <p>1- No exception shall be thrown. 2- Shall return true. 3- Shall return false.</p> | <p>3- The SIM shall issue a SET UP MENU proactive command with entry '01' and '02'.</p> |
| 3 | <p>Check menu state before enabling a previously enabled entry registered to EVENT_MENU_SELECTION_HELP_REQUEST</p> <p>1- change Menu Entry '02' to indicate help supported 2- isEventSet(EVENT_MENU_SELECTION) 3- isEventSet(EVENT_MENU_SELECTION_HELP_REQUEST) 4- disableMenuEntry('02')</p> | <p>2- Shall return true 3- Shall return true 4- No exception shall be thrown</p> | <p>4- The SIM shall issue a SET UP MENU proactive command with entry '01'. The help information available flag.is not verified</p> |
| 4 | <p>Check menu state after enabling a previously enabled entry registered to EVENT_MENU_SELECTION_HELP_REQUEST</p> <p>1- enableMenuEntry('02'). 2- isEventSet(EVENT_MENU_SELECTION) 3- isEventSet(EVENT_MENU_SELECTION_HELP_REQUEST)</p> | <p>1- No exception shall be thrown. 2- Shall return true. 3- Shall return true.</p> | <p>3- The SIM shall issue a SET UP MENU proactive command with entries '01' and '02' indicating help supported.</p> |
| 5 | <p>Enabling invalid entries</p> <p>For ID ranging from '00' to 'FF' except '01' and '02', the applet calls enableMenuEntry(ID) method.</p> | <p>Each time a Toolkit Exception with MENU_ENTRY_NOT_FOUND reason code shall be thrown.</p> | |

6.2.9.5.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 1,2,3,4 |
| N2 | 1,2,3,4 |
| N3 | 1,2,3,4 |
| C1 | 5 |

6.2.9.6 Method getEntry

Test Area Reference: API_2_TKR_GETY

6.2.9.6.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
public static ToolkitRegistry getEntry()
    throws ToolkitException
```

Normal execution

CRRN1: returns a reference to the applet ToolkitRegistry object of the calling applet.

CRRN2: Each successive call to getEntry() method shall return the same object.

Parameters error

No requirements

6.2.9.6.2 Test suite files

Test Script: API_2_TKR_GETY_1.scr

Test Applet: API_2_TKR_GETY_1.java

Load Script: API_2_TKR_GETY_1.ldr

Cleanup script: API_2_TKR_GETY_1.clr

Parameter File: API_2_TKR_GETY_1.par

6.2.9.6.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|------------------|
| 1 | <p>Installation</p> <p>In the constructor, the applet instance calls the getEntry() method.</p> | Returns a not null ToolkitRegistry instance. | |
| 2 | <p>Check it returns the same entry</p> <p>The applet calls the getEntry() method again.</p> | Returns the same ToolkitRegistry instance as for test case 1. | |

6.2.9.6.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 1 |
| N2 | 2 |

6.2.9.7 Method getPollInterval

Test Area Reference: API_2_TKR_GPOL

6.2.9.7.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
public short getPollInterval()
```

Normal execution

CRRN1: shall return a value between 1 and 15300 if applet is registered to EVENT_STATUS_COMMAND event.

CRRN2: shall return POLL_NO_DURATION value (0) if the toolkit applet is not registered to EVENT_STATUS_COMMAND event.

Parameters error

No requirements.

Context errors

No requirements.

6.2.9.7.2 Test suite files

- Test Script: API_2_TKR_GPOL_1.scr
- Test Applet: API_2_TKR_GPOL_1.java
- Load Script: API_2_TKR_GPOL_1.ldr
- Cleanup script: API_2_TKR_GPOL_1.clr
- Parameter File: API_2_TKR_GPOL_1.par

6.2.9.7.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | <p style="text-align: center;">Applet isn't registered to EVENT_STATUS_COMMAND</p> <p>getPollInterval().</p> | Shall return 0. | |
| 2 | <p style="text-align: center;">Requesting max duration</p> <p>1- requestPollInterval(15300) 2- Reset and initialize the card 3- getPollInterval()</p> | <p>1- No exception shall be thrown. 3- Shall return a value between 1 and 15300.</p> | |
| 3 | <p style="text-align: center;">Requesting System Duration</p> <p>1- requestPollInterval(POLL_SYSTEM_DURATION) 2- Reset and initialize the card 3- getPollInterval().</p> | <p>1- No exception shall be thrown. 3- Shall return a value between 1 and 15300.</p> | |
| 4 | <p style="text-align: center;">Requesting no Duration</p> <p>1- requestPollInterval(POLL_NO_DURATION) 2- Reset and initialize the card 3- getPollInterval().</p> | <p>1- No exception shall be thrown. 3- Shall return 0.</p> | |

6.2.9.7.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 2,3 |
| N2 | 1,4 |

6.2.9.8 Method initMenuEntry

Test Area Reference: API_2_TKR_IMET_BSSBZBS

6.2.9.8.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
public byte initMenuEntry(byte[] menuEntry,
    short offset,
    short length,
    byte nextAction,
    boolean helpSupported,
    byte iconQualifier,
    short iconIdentifier)
    throws java.lang.NullPointerException,
    java.lang.ArrayIndexOutOfBoundsException,
    ToolkitException
```

Normal execution

CRRN1: The SIM Toolkit Framework shall automatically update the menu stored in the ME by issuing a SETUP MENU proactive command. The later will reflect the changes done for the entry. The SIM Toolkit Framework shall use the data of the EF sume file in order to build the SET UP MENU command.

CRRN2: a call to isEventSet() method on EVENT_MENU_SELECTION shall return true after the 1st successful call (without an exception).

CRRN3: if helpSupported was true then a following call to isEventSet() method on EVENT_MENU_SELECTION_HELP_REQUEST event shall return true .

CRRN4: if helpSupported was true then after the completion of the SETUP MENU command, if an ENVELOPE(MENU_SELECTION_HELP_REQUEST) command is received by the SIM for this entry, then the SIM Toolkit framework shall trigger the applet.

CRRN5: if help supported was true, the SIM Toolkit Framework shall issue a SETUP MENU command with command qualifier = '80'

CRRN6: if helpSupported was false and there isn't any menu entry supporting help then a call to isEventSet() method on EVENT_MENU_SELECTION_HELP_REQUEST event shall return false.

CRRN7: The SIM Toolkit Framework shall supply in the SET UP MENU command with the icon identifier provided in the icon identifier list within the item icon identifier list Simple TLV if all the applets registered to the EVENT_MENU_SELECTION provide it.

CRRN8: The SIM Toolkit Framework shall set in the SET UP MENU command with the Icon list qualifier transmitted to the ME as 'icon is not self explanatory' if one of the applet registered prefers this qualifier.

CRRN9: If Next Action Indicator was different from '00', the SIM Toolkit Framework shall issue a SETUP MENU proactive command containing an Items Next Action Indicator simple TLV with the comprehension flag set to 0.

CRRN10: After the completion of the SETUP MENU command, if an ENVELOPE (MENU_SELECTION) command is received by the SIM for this identifier, then the SIM Toolkit framework shall trigger the applet.

Parameters error

CRRP1: Shall throw java.lang.NullPointerException - if menuEntry is null

CRRP2: Shall throw java.lang.ArrayIndexOutOfBoundsException - if offset would cause access outside array bounds

CRRP3: Shall throw java.lang.ArrayIndexOutOfBoundsException - if length would cause access outside array bounds

CRRP4: Shall throw java.lang.ArrayIndexOutOfBoundsException - if both offset and length would cause access outside array bounds

Context errors

CRRC1: Shall throw ALLOWED_LENGTH_EXCEEDED if the menu entry string is bigger than the allocated space

CRRC2: Shall throw REGISTRY_ERROR if the menu entry cannot be initialised (eg no more item data in applet loading parameter)

6.2.9.8.2 Test suite files

Additional requirements for the GSM personalisation:

- content of EF sume shall be:
 - Title Alpha Identifier: "TOOLKIT TEST"
 - Test case trigger: 1- Applet instantiation
 - 2- Menu selection
 - 3- Menu selection Help Supported

Test Script: API_2_TKR_IMET_BSSBZBS_1.scr

Test Applet: API_2_TKR_IMET_BSSBZBS_1.java

Installation parameter:

Same as default applet but with:

- Maximum text length for a menu entry: 15
- Maximum number of menu entries: 6
- Position / Identifier for each menu entry: '01/'01', '02/'02', '03/'03', '04/'04', '05/'05', and '06/'06'

Load Script: API_2_TKR_IMET_BSSBZBS_1.ldr

Cleanup script: API_2_TKR_IMET_BSSBZBS_1.clr

Parameter File: API_2_TKR_IMET_BSSBZBS_1.par

6.2.9.8.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|------------------|
| 1 | NULL as parameter to menuEntry MenuEntry = NULL | Shall throw a java.lang.NullPointerException. | |
| 2 | Offset > menuEntry.length MenuEntry = "ToolkitTest" Offset = 12 Length = 0 | Shall throw java.lang.ArrayIndexOutOfBoundsException. | |
| 3 | Offset < 0 MenuEntry = "ToolkitTest" Offset = -1 Length = 11 | Shall throw java.lang.ArrayIndexOutOfBoundsException. | |
| 4 | Offset = 255 MenuEntry = "ToolkitTest" Offset = 255 Length = 11 | Shall throw java.lang.ArrayIndexOutOfBoundsException. | |
| 5 | Length = menuEntry.length+1 MenuEntry = "ToolkitTest" Offset = 0 Length = 12 | Shall throw java.lang.ArrayIndexOutOfBoundsException. | |
| 6 | Length < 0 MenuEntry = "ToolkitTest" Offset = 0 Length = -1 | Shall throw java.lang.ArrayIndexOutOfBoundsException. | |
| 7 | Offset + length > menuEntry.length MenuEntry = "ToolkitTest" Offset = 11 Length = 1 | Shall throw java.lang.ArrayIndexOutOfBoundsException. | |
| 8 | MenuEntry.length > size allocated at loading for each menu entry MenuEntry = "ToolkitTest impossible" Offset = 0 Length = 16 | ALLOWED_LENGTH_EXCEEDED ToolkitException is thrown. | |
| 9 | Successful call, menuEntry is the whole buffer 1- initMenuEntry() MenuEntry = "TOOLKIT TEST 1" Offset = 0 Length = 14 NextAction = '00' HelpSupported = false IconQualifier = '00' IconIdentifier = 0 2- isEventSet(EVENT_MENU_SELECTION) | 1- No exception shall be thrown, Shall return ID '01'. 2- Shall return true. | |
| 10 | Successful call, menuEntry part of a buffer 1- initMenuEntry() MenuEntry = "1234567TOOLKIT TEST 2" Offset = 7 Length = 14 NextAction = '00' HelpSupported = false IconQualifier = '00' IconIdentifier = 0 2- isEventSet(EVENT_MENU_SELECTION_HELP_REQUEST) | 1- No exception shall be thrown, Shall return ID '02'. 2- Shall return false. | |

| | | | |
|-----------|--|--|--|
| <p>11</p> | <p>Successful call, menuEntry with help supported</p> <p>1- initMenuEntry() MenuEntry = "TOOLKIT TEST 3" Offset = 0 Length = 14 NextAction = '00' HelpSupported = true IconQualifier = '00' IconIdentifier = 0</p> <p>2- isEventSet(EVENT_MENU_SELECTION_HELP_REQUEST)</p> | <p>1- No exception shall be thrown, Shall return ID '03' 2- Shall return true.</p> | |
| <p>12</p> | <p>Successful call, menuEntry with an Icon</p> <p>MenuEntry = "TOOLKIT TEST 4" Offset = 0 Length = 14 NextAction = '00' HelpSupported = false IconQualifier = '01' [icon not self explanatory] IconIdentifier = 1</p> | <p>1- No exception shall be thrown. 2- Shall return ID '04'</p> | |
| <p>13</p> | <p>Successful call, menuEntry with a next action indication</p> <p>MenuEntry = "TOOLKIT TEST 5" Offset = 0 Length = 14 NextAction = '24' [Select Item] HelpSupported = false IconQualifier = '00' IconIdentifier = 0</p> | <p>1- No exception shall be thrown. 2- Shall return ID '05'</p> | |
| <p>14</p> | <p>Successful call, length = 0</p> <p>initMenuEntry() MenuEntry = "ToolkitTest" Offset = 0 Length = 0 NextAction = '00' HelpSupported = false IconQualifier = '00' IconIdentifier = 0</p> | <p>No exception shall be thrown, Shall return ID '06'.</p> | |
| <p>15</p> | <p>Initialize more entry than allocated at loading</p> <p>MenuEntry = "ToolkitTest" Offset = 0 Length = 11</p> | <p>REGISTRY_ERROR ToolkitException is thrown.</p> | |
| <p>16</p> | <p>Dynamic update of the menu stored by the ME</p> <p>Fetch</p> | | <p>Card shall Send a SetupMenu Proactive command: [CommandQualifier]=help supported [AlphaId]="TOOLKIT TEST" [ItemId=1] = "TOOLKIT TEST 1" [ItemId=2] = "TOOLKIT TEST 2" [ItemId=3] = "TOOLKIT TEST 3" [ItemId=4] = "TOOLKIT TEST 4" [ItemId=5] = "TOOLKIT TEST 5" [ItemId=6] = ""</p> |

| | | | |
|----|---|--|---------------------------------------|
| | | | [[ItemsNextAction]=0600000 0002400 |
| 17 | Check Applet is triggered by ENVELOPE(MENU_SELECTION) command Menu Entry ID = '01' | Applet is triggered by an ENVELOPE(MENU_SELECTION) command & Menu Entry ID = '01' | |
| 18 | Check Applet is triggered by ENVELOPE(MENU_SELECTION) command Menu Entry ID = '02' | Applet is triggered by an ENVELOPE(MENU_SELECTION) command & Menu Entry ID = '02' | |
| 19 | Check Applet is triggered by ENVELOPE(MENU_SELECTION) command Menu Entry ID = '03' | Applet is triggered by an ENVELOPE(MENU_SELECTION) command & Menu Entry ID = '03' | |
| 20 | Check Applet is triggered by ENVELOPE(MENU_SELECTION) command Menu Entry ID = '04' | Applet is triggered by an ENVELOPE(MENU_SELECTION) command & Menu Entry ID = '04' | |
| 21 | Check Applet is triggered by ENVELOPE(MENU_SELECTION) command Menu Entry ID = '05' | Applet is triggered by an ENVELOPE(MENU_SELECTION) command & Menu Entry ID = '05' | |
| 22 | Check Applet is triggered by ENVELOPE (MENU_SELECTION_HELP_REQUEST) command Menu Entry ID = '03' | Applet is triggered by an ENVELOPE(MENU_SELECTION_HELP_REQUEST) command & Menu Entry ID = '03' | |
| 23 | Check Applet is triggered by ENVELOPE(MENU_SELECTION) command Menu Entry ID = '06' | Applet is triggered by an ENVELOPE(MENU_SELECTION) command & Menu Entry ID = '06' | |

6.2.9.8.4

Test Coverage

| CRR number | Test case number |
|------------|------------------------------------|
| N1 | 16 |
| N2 | 9 |
| N3 | 11 |
| N4 | 22 |
| N5 | 11,16 |
| N6 | 10 |
| N7 | 12,16 |
| N8 | 12,16 |
| N9 | 13,16 |
| N10 | 9,10,11,12,13,14,17,18,19,20,21,23 |
| P1 | 1 |
| P2 | 2,3,4 |
| P3 | 5,6 |
| P4 | 7 |
| C1 | 8 |
| C2 | 14 |

6.2.9.9 Method isEventSet

Test Area Reference: API_2_TKR_IEVSB

6.2.9.9.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
public boolean isEventSet(byte event)
```

Normal execution

CRRN1: shall return true if the event is set in the Toolkit Registry for the applet

CRRN2: shall return false if the event isn't set in the Toolkit Registry for the applet

Parameters error

No requirements.

Context errors

No requirements

6.2.9.9.2 Test suite files

Test Script: API_2_TKR_IEVSB_1.scr

Test Applet: API_2_TKR_IEVSB_1.java

Installation parameter:

Same as default applet but with:

- Maximum text length for a menu entry: 15
- Maximum number of menu entries: 1
- Position / Identifier for each menu entry: '01'/'01'
- Maximum number of timers: 1

Load Script: API_2_TKR_IEVSB_1.ldr

Cleanup script: API_2_TKR_IEVSB_1.clr

Parameter File: API_2_TKR_IEVSB_1.par

6.2.9.9.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|------------------|
| 1 | Events aren't set Applet calls isEventSet() for each events ranging from 1 to 127 excepted EVENT_FORMATTED_SMS_PP_ENV and EVENT_MENU_SELECTION. | Shall return false each time. | |
| 2 | For EVENT_FORMATTED_SMS_PP_ENV isEventSet (EVENT_FORMATTED_SMS_PP_ENV) | Shall return true. | |
| 3 | For EVENT_MENU_SELECTION isEventSet (EVENT_MENU_SELECTION) | Shall return true | |
| 4 | After clearing EVENT_FORMATTED_SMS_PP_ENV 1- clearEvent(EVENT_FORMATTED_SMS_PP_ENV) 2- isEventSet(EVENT_FORMATTED_SMS_PP_ENV) . | 1- No exception shall be thrown. 2- Shall return false. | |
| 5 | Setting events 1- For each SUPPORTED and ALLOWED events for setEvent(), applet calls: 1.1- setEvent() method 1.2- isEventSet() method. | 1.1- No exception shall be thrown. 1.2- Shall return true each time. | |
| 6 | For EVENT_MENU_SELECTION_HELP_REQUEST 1- isEventSet (EVENT_MENU_SELECTION_HELP_REQUEST) 2- call changeMenuEntry with help supported 3- isEventSet (EVENT_MENU_SELECTION_HELP_REQUEST) | 1- Shall return false. 3- Shall return true | |
| 7 | For EVENT_TIMER_EXPIRATION 1- isEventSet(EVENT_TIMER_EXPIRATION) 2- call allocateTimer() 3- isEventSet(EVENT_TIMER_EXPIRATION) | 1- Shall return false. 3- Shall return true | |
| 8 | For EVENT_STATUS_COMMAND 1- isEventSet(EVENT_STATUS_COMMAND) 2- call requestPollInterval(POLL_SYSTEM_DURATION) 3- isEventSet(EVENT_STATUS_COMMAND) | 1- Shall return false. 3- Shall return true | |

6.2.9.9.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 2,3,4,5,6,7,8 |
| N2 | 1,5,6,7,8 |

6.2.9.10 Method releaseTimer

Test Area Reference: API_2_TKR_RTIMB

6.2.9.10.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
public void releaseTimer(byte timerIdentifier)
    throws ToolkitException
```

Normal execution

CRRN1: if it was the last allocated timer for the applet then a following call to isEventSet() method for EVENT_TIMER_EXPIRATION should return false.

CRRN2: if applet has timers allocated then a call to isEventSet(EVENT_TIMER_EXPIRATION) shall return true.

CRRN3: After invocation of the method the indicated timer shall be released and available for reallocation.

CRRN4: The applet is deregistered of the EVENT_TIMER_EXPIRATION for the indicated Timer Identifier.

Parameters error

CRRP1: shall throw a ToolkitException with INVALID_TIMER_ID reason if the timer identifier isn't between 1 and 8.

Context errors

CRRC1: shall throw a ToolkitException with INVALID_TIMER_ID reason if the timer is valid but isn't allocated to this applet.

6.2.9.10.2 Test suite files

Test Script: API_2_TKR_RTIMB_1.scr

Test Applet: API_2_TKR_RTIMB_1.java

Installation parameter:

As Default, except max timer which is set to 8.

Load Script: API_2_TKR_RTIMB_1.ldr

Cleanup script: API_2_TKR_RTIMB_1.clr

Parameter File: API_2_TKR_RTIMB_1.par

6.2.9.10.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|---|------------------|
| 1 | Releasing not allocated timers For each timer ID ranging from '00' to 'FF', applet calls releaseTimer(ID). | Each time, method shall throw a ToolkitException with reason code INVALID_TIMER_ID. | |
| 2 | Releasing allocated timers 1- 8 * allocateTimer() . 2- 7 * releaseTimer(id). 3- isEventSet(EVENT_TIMER_EXPIRATION) | 1- No exception shall be thrown. 2- Each time, no exception shall be thrown. 3- Shall return true | |
| 3 | Releasing invalid timer ID 1- releaseTimer('FF') method 2- isEventSet(EVENT_TIMER_EXPIRATION) | 1- Shall throw a ToolkitException with INVALID_TIMER_ID reason code. 2- Shall return true. | |
| 4 | Releasing last timer 1- releaseTimer(last timer allocated) 2- isEventSet(EVENT_TIMER_EXPIRATION) | 1- No exception shall be thrown. 2- Shall return false. | |
| 5 | Checking we can allocate timers after they have been released 8 * allocateTimer(). | No exception shall be thrown. | |
| 6 | Releasing all timers. For 1 to 8, releaseTimer(id). | No exception shall be thrown. | |
| 7 | Checking applet isn't triggered by ENVELOPE(TIMER_EXPIRATION) command Send ENVELOPE(TIMER_EXPIRATION) | Applet is not triggered by an ENVELOPE(TIMER_EXPIRATION) command | |

6.2.9.10.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 4 |
| N2 | 2,3 |
| N3 | 5,6 |
| N4 | 7 |
| P1 | 1,3 |
| C1 | Framework |

6.2.9.11 Method requestPollInterval

Test Area Reference: API_2_TKR_RPOLs

6.2.9.11.1 Conformance requirement:

The method with following header shall be compliant to its definition in the API.

```
public void requestPollInterval(short duration)
    throws ToolkitException
```

Normal execution

CRRN1: If duration is between 1 and 15300 or equal to POLL_SYSTEM_DURATION, the applet registers to EVENT_STATUS_COMMAND.

CRRN2: If duration is POLL_NO_DURATION, the applet is deregistered from EVENT_STATUS_COMMAND.

Parameters error

CRRP1: the method should throw a ToolkitException with REGISTRY_ERROR reason if duration is > 15300 or is < -1 (POLL_SYSTEM_DURATION).

Context errors

No Requirements.

6.2.9.11.2 Test suite files

Test Script: API_2_TKR_RPOLLS_1.scr
 Test Applet: API_2_TKR_RPOLLS_1.java
 Load Script: API_2_TKR_RPOLLS_1.ldr
 Cleanup script: API_2_TKR_RPOLLS_1.clr
 Parameter File: API_2_TKR_RPOLLS_1.par

6.2.9.11.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|---|------------------|
| 1 | Requesting a value between 1 and 15300 s 1- isEventSet(EVENT_STATUS_COMMAND) 2- requestPollInterval(duration) for boundaries values: 1, 255, 256, 15300. 3- isEventSet(EVENT_STATUS_COMMAND). | 1- Shall return false. 2- No exception shall be thrown. 3- Shall return true. | |
| 2 | Check Applet is triggered by a STATUS command 1- reset and card initialisation 2- Send STATUS command | 2- Applet is triggered by a STATUS command | |
| 3 | Requesting POLL SYSTEM DURATION 1- isEventSet(EVENT_STATUS_COMMAND). 2- RequestPollInterval(POLL_SYSTEM_DURATION). 3- IsEventSet(EVENT_STATUS_COMMAND). | 1- Shall return true. 2- No exception shall be thrown. 3- Shall return true. | |
| 4 | Check Applet is triggered by a STATUS command 1- reset and card initialisation 2- Send STATUS command | 2- Applet is triggered by a STATUS command | |
| 5 | Requesting invalid duration requestPollInterval(duration) for following values: 15301, 32767, -2, -32768 | Each time, a ToolkitException with REGISTRY_ERROR reason code, shall be thrown. | |
| 6 | Requesting POLL NO DURATION | 1- Shall return true. | |

| | | | |
|---|---|--|--|
| | 1- isEventSet(EVENT_STATUS_COMMAND) 2- requestPollInterval(POLL_NO_DURATION) 3- isEventSet(EVENT_STATUS_COMMAND) | 2- No exception shall be thrown. 3- Shall return false. | |
| 7 | Check Applet isn't triggered by an STATUS command. 1- reset and card initialisation 2- Send STATUS command | 2- Applet is not triggered by a STATUS command | |

6.2.9.11.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 1,2,3,4 |
| N2 | 6,7 |
| P1 | 5 |

6.2.9.12 Method setEvent

Test Area Reference: API_2_TKR_SEVTB

6.2.9.12.1 Conformance Requirement:

The method with following header shall be compliant to its definition in the API.

```
public void setEvent(byte id)
    throws ToolkitException
```

Normal execution

CRRN1: a following call to isEventSet() method with the same event id shall answer true for the applet.

CRRN2: the SIM Toolkit Framework shall trigger the applet if an occurrence of the set event happens.

CRRN3: this method shall accept all the events defined in GSM 0319 excepted: EVENT_MENU_SELECTION, EVENT_MENU_SELECTION_HELP_REQUEST, EVENT_TIMER_EXPIRATION, EVENT_STATUS_COMMAND

Parameters error

CRRP1: shall throw a ToolkitException with EVENT_NOT_SUPPORTED reason if event is 0.

CRRP2: shall throw a ToolkitException with EVENT_NOT_ALLOWED reason if event is EVENT_MENU_SELECTION.

CRRP3: shall throw a ToolkitException with EVENT_NOT_ALLOWED reason if event is EVENT_MENU_SELECTION_HELP_REQUEST.

CRRP4: shall throw a ToolkitException with EVENT_NOT_ALLOWED reason if event is EVENT_TIMER_EXPIRATION.

CRRP5: shall throw a ToolkitException with EVENT_NOT_ALLOWED reason if event is EVENT_STATUS_COMMAND.

Context errors

CRRC1: shall throw a ToolkitException with EVENT_ALREADY_REGISTERED if event is EVENT_CALL_CONTROL_BY_SIM but another applet is already registered to it.

CRRC2: shall throw a ToolkitException with EVENT_ALREADY_REGISTERED if event is EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM but another applet is already registered to it.

6.2.9.12.2 Test suite files

Test Script: API_2_TKR_SEVTB_1.scr
 Test Applet: API_2_TKR_SEVTB_1.java
 API_2_TKR_SEVTB_2.java
 Load Script: API_2_TKR_SEVTB_1.ldr

The load script installs the 2 instances.

Cleanup script: API_2_TKR_SEVTB_1.clr
 Parameter File: API_2_TKR_SEVTB_1.par

6.2.9.12.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | <p>Applet 1 is triggered by ENVELOPE(SMS_PP_FORMATTED) command.</p> <p>Send ENVELOPE(SMS_PP_FORMATTED)</p> | Applet 1 shall be triggered | |
| 2 | <p>Setting ALLOWED and SUPPORTED events</p> <p>1- For all events defined in GSM 0319 (from 1 to 19) and allowed: EVENT_PROFILE_DOWNLOAD, EVENT_FORMATTED_SMS_PP_ENV, EVENT_FORMATTED_SMS_PP_UPD, EVENT_FORMATTED_SMS_CB, EVENT_UNFORMATTED_SMS_PP_ENV, EVENT_UNFORMATTED_SMS_PP_UPD, EVENT_UNFORMATTED_SMS_CB, EVENT_CALL_CONTROL_BY_SIM, EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM, EVENT_EVENT_DOWNLOAD_MT_CALL, EVENT_EVENT_DOWNLOAD_CALL_CONNECTED, EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED, EVENT_EVENT_DOWNLOAD_LOCATION_STATUS, EVENT_EVENT_DOWNLOAD_USER_ACTIVITY, EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE, EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS, EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION, EVENT_EVENT_DOWNLOAD_BROWSER_TERMINATION.</p> <p>1.1- clearEvent(event) 1.2- isEventSet(event) 1.3- setEvent(event) 1.4- isEventSet(event) 1.5- clearEvent(event)</p> | <p>1.1- No exception shall be thrown. 1.2- Shall return false. 1.3- No exception shall be thrown. 1.4- Shall return true. 1.5- No exception shall be thrown.</p> | |
| 3 | <p>Event 0</p> <p>Call setEvent(0)</p> | Shall throw a ToolkitException with EVENT_NOT_SUPPORTED reason code. | |
| 4 | <p>Setting EVENT_MENU_SELECTION</p> <p>Call setEvent(EVENT_MENU_SELECTION)</p> | Shall throw a ToolkitException with EVENT_NOT_ALLOWED reason code. | |
| 5 | <p>Setting EVENT_MENU_SELECTION_HELP_REQUEST</p> <p>Call</p> | Shall throw a ToolkitException with EVENT_NOT_ALLOWED reason code. | |

| | | | |
|----|--|---|--|
| | setEvent(EVENT_MENU_SELECTION_HELP_REQUEST) | | |
| 6 | Setting EVENT_TIMER_EXPIRATION Call setEvent(EVENT_TIMER_EXPIRATION) | Shall throw a ToolkitException with EVENT_NOT_ALLOWED reason code. | |
| 7 | Setting EVENT_STATUS_COMMAND Call setEvent(EVENT_STATUS_COMMAND) | Shall throw a ToolkitException with EVENT_NOT_ALLOWED reason code. | |
| 8 | Setting EVENT_CALL_CONTROL_BY_SIM Call setEvent(EVENT_CALL_CONTROL_BY_SIM) | No Exception shall be thrown | |
| 9 | Setting EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM Call setEvent(EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM) | No Exception shall be thrown | |
| 10 | Check applet is triggered by an ENVELOPE(CALL_CONTROL_BY_SIM) Trigger the applet | Applet is triggered by an ENVELOPE(CALL_CONTROL_BY_SIM) | |
| 11 | Check applet is triggered by an ENVELOPE(MO_SHORT_MESSAGE_CONTROL_BY_SIM) Trigger the Applet | Applet is triggered by an ENVELOPE(MO_SHORT_MESSAGE_CONTROL_BY_SIM) | |
| 12 | Applet 2 is triggered by ENVELOPE(SMS_PP_DOWNLOAD) command. Trigger the applet 2 | Applet 2 is triggered by an ENVELOPE(SMS_PP_DOWNLOAD) command | |
| 13 | Applet 2 registers to CALL_CONTROL_BY_SIM but it is already assigned setEvent(EVENT_CALL_CONTROL_BY_SIM) | Shall throw a ToolkitException with EVENT_ALREADY_REGISTERED reason code. | |
| 14 | Applet 2 registers to MO_MESSAGE_CONTROL_BY_SIM but it is already assigned setEvent(EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM) | Shall throw a ToolkitException with EVENT_ALREADY_REGISTERED reason code. | |

6.2.9.12.4 Test Coverage

| CRR number | Test case number |
|------------|-------------------|
| N1 | 2 |
| N2 | 1, 8,9,10, 11, 12 |
| N3 | 2,4,5,6,7 |
| P1 | 3 |
| P2 | 4 |
| P3 | 5 |
| P4 | 6 |
| P5 | 7 |
| C1 | 13 |
| C2 | 14 |

6.2.9.13 Method setEventList

Test Area Reference: API_2_TKR_SEVL_BSS

6.2.9.13.1 Conformance Requirement:

The method with following header shall be compliant to its definition in the API.

```
public void setEventList(byte[] eventList,
                        short offset,
                        short length)
    throws java.lang.NullPointerException,
           java.lang.ArrayIndexOutOfBoundsException,
           ToolkitException
```

Normal execution

CRRN1: for all events set successfully by this method, a call to `isEventSet()` method should return true.

CRRN2: the SIM Toolkit Framework shall trigger the applet if an occurrence of one of the successfully registered events happens.

CRRN3: this method shall accept all the events defined in GSM 0319 excepted: `EVENT_MENU_SELECTION`, `EVENT_MENU_SELECTION_HELP_REQUEST`, `EVENT_TIMER_EXPIRATION`, `EVENT_STATUS_COMMAND`.

Parameters error

CRRP1: shall throw a `java.lang.NullPointerException` if `eventList` is null.

CRRP2: shall throw a `java.lang.ArrayIndexOutOfBoundsException` if `offset` would cause access outside array bounds.

CRRP3: shall throw a `java.lang.ArrayIndexOutOfBoundsException` if `length` would cause access outside array bounds.

CRRP4: shall throw a `java.lang.ArrayIndexOutOfBoundsException` if both `offset` and `length` would cause access outside array bounds.

CRRP5: shall throw a `ToolkitException` with `EVENT_NOT_SUPPORTED` reason if event is 0.

CRRP6: shall throw a `ToolkitException` with `EVENT_NOT_ALLOWED` reason if `eventList` contains `EVENT_MENU_SELECTION`.

CRRP7: shall throw a `ToolkitException` with `EVENT_NOT_ALLOWED` reason if `eventList` contains `EVENT_MENU_SELECTION_HELP_REQUEST`.

CRRP8: shall throw a `ToolkitException` with `EVENT_NOT_ALLOWED` reason if `eventList` contains `EVENT_TIMER_EXPIRATION`.

CRRP9: shall throw a `ToolkitException` with `EVENT_NOT_ALLOWED` reason if `eventList` contains `EVENT_STATUS_COMMAND`.

Context errors

CRRC1: shall throw a `ToolkitException` with `EVENT_ALREADY_REGISTERED` if `eventList` contains `EVENT_CALL_CONTROL_BY_SIM` but another applet is already registered to it.

CRRC2: shall throw a `ToolkitException` with `EVENT_ALREADY_REGISTERED` if `eventList` contains `EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM` but another applet is already registered to it.

6.2.9.13.2 Test suite files

Test Script: `API_2_TKR_SEVL_BSS_1.scr`

Test Applet: `API_2_TKR_SEVL_BSS_1.java`
`API_2_TKR_SEVL_BSS_2.java`

Load Script: `API_2_TKR_SEVL_BSS_1.ldr`

The load script installs the 2 instances.

Cleanup script: `API_2_TKR_SEVL_BSS_1.clr`

Parameter File: API_2_TKR_SEVL_BSS_1.par

6.2.9.13.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | <p>Applet 1 Registering all eventList buffer</p> <p>EventList = all allowed events defined in GSM 0319: EVENT_PROFILE_DOWNLOAD, EVENT_FORMATTED_SMS_PP_ENV, EVENT_FORMATTED_SMS_PP_UPD, EVENT_FORMATTED_SMS_CB, EVENT_UNFORMATTED_SMS_PP_ENV, EVENT_UNFORMATTED_SMS_PP_UPD, EVENT_UNFORMATTED_SMS_CB, EVENT_CALL_CONTROL_BY_SIM, EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM, EVENT_EVENT_DOWNLOAD_MT_CALL, EVENT_EVENT_DOWNLOAD_CALL_CONNECTED, EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED, EVENT_EVENT_DOWNLOAD_LOCATION_STATUS, EVENT_EVENT_DOWNLOAD_USER_ACTIVITY, EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE, EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS, EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION, EVENT_EVENT_DOWNLOAD_BROWSER_TERMINATION.</p> <p>1- For each event in EventList clearEvent(event)</p> <p>2- setEventList(eventList)</p> <p>Offset = 0 Length = eventList.length</p> <p>3- For all events in eventList isEventSet(event)</p> <p>4- For each event in EventList clearEvent(event)</p> | <p>1- No exception shall be thrown.</p> <p>2- No exception shall be thrown.</p> <p>3- Each time shall return true.</p> <p>4- No exception shall be thrown.</p> | |
| 2 | <p>Registering part of eventList buffer</p> <p>EventList = all allowed events defined in GSM 0319 (see test case 1).</p> <p>1- For each event in EventList clearEvent(event)</p> <p>2- setEventList(eventList, offset, length)</p> <p>Offset > 0 Length = eventList.length - offset</p> <p>3- For all events in eventList: isEventSet(event)</p> <p>4- For each event in EventList: clearEvent(event)</p> | <p>1- No exception shall be thrown.</p> <p>2- No exception shall be thrown.</p> <p>3- Each time shall return true for events ranging from offset to offset+length else shall return false.</p> <p>4- No exception shall be thrown.</p> | |
| 3 | <p>Null buffer</p> <p>EventList = null</p> | <p>Shall throw a java.lang.NullPointerException</p> | |
| 4 | <p>Out of bounds offset</p> <p>Offset = eventList.length Length = 1</p> | <p>Shall throw a java.lang.ArrayIndexOutOfBoundsException</p> | |
| 5 | <p>Out of bounds and big offset</p> | <p>Shall throw a java.lang.ArrayIndexOutOfBoundsException</p> | |

| | | | |
|----|---|---|--|
| | Offset = 255 Length = 1 | Exception | |
| 6 | Offset < 0 Offset = -1 Length = 1 | Shall throw a java.lang.ArrayIndexOutOfBoundsException | |
| 7 | Out of bounds length Offset = 0 Length = eventList.length + 1 | Shall throw a java.lang.ArrayIndexOutOfBoundsException | |
| 8 | Out of bounds and big length Offset = 0 Length = 255 | Shall throw a java.lang.ArrayIndexOutOfBoundsException | |
| 9 | Length < 0 Offset = 0 Length = -1 | Shall throw a java.lang.ArrayIndexOutOfBoundsException | |
| 10 | Out of bounds offset + Length Offset + length > eventList.length + 1 | Shall throw a java.lang.ArrayIndexOutOfBoundsException | |
| 11 | Event 0 Call setEventList(eventList) with eventList indicating event 0 | Shall throw a ToolkitException with EVENT_NOT_SUPPORTED reason code. | |
| 12 | EVENT_MENU_SELECTION Call setEventList(eventList) with eventList indicating EVENT_MENU_SELECTION | Shall throw a ToolkitException with reason code EVENT_NOT_ALLOWED. | |
| 13 | EVENT_MENU_SELECTION_HELP_REQUEST Call setEventList(eventList) with eventList indicating EVENT_MENU_SELECTION_HELP_REQUEST | Shall throw a ToolkitException with reason code EVENT_NOT_ALLOWED. | |
| 14 | EVENT_TIMER_EXPIRATION Call setEventList(eventList) with eventList indicating EVENT_TIMER_EXPIRATION | Shall throw a ToolkitException with reason code EVENT_NOT_ALLOWED. | |
| 15 | EVENT_STATUS_COMMAND Call setEventList(eventList) with eventList indicating EVENT_STATUS_COMMAND | Shall throw a ToolkitException with reason code EVENT_NOT_ALLOWED. | |
| 16 | Setting EVENT_CALL_CONTROL_BY_SIM setEventList(List, 0, 2) with List containing EVENT_CALL_CONTROL_BY_SIM & EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM | Shall not throw an exception | |
| 17 | Check applet is triggered by an ENVELOPE(CALL_CONTROL_BY_SIM) Reset and initialise the card Trigger the applet | Applet is triggered by an ENVELOPE(CALL_CONTROL_BY_SIM) | |
| 18 | Check applet is triggered by an ENVELOPE(MO_SHORT_MESSAGE_CONTROL_BY_SIM) Trigger the applet | Applet is triggered by an ENVELOPE(MO_SHORT_MESSAGE_CONTROL_BY_SIM) | |
| 19 | Applet 2 registers to CALL_CONTROL_BY_SIM but it is already assigned setEventList(MonoEventList,0,1) with MonoEventList containing | Shall throw a ToolkitException with EVENT_ALREADY_REGISTERED reason code. | |

| | | | |
|----|--|--|--|
| | EVENT_CALL_CONTROL_BY_SIM | | |
| 20 | <p>Applet 2 registers to MO_SHORT_MESSAGE_CONTROL_BY_SIM but it is already assigned setEventList(MonoEventList,0,1) with MonoEventList containing EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM</p> | <p>Shall throw a ToolkitException with EVENT_ALREADY_REGISTERED reason code.</p> | |

6.2.9.13.4 Test Coverage

| CRR number | Test case number |
|------------|---------------------|
| N1 | 1,2 |
| N2 | 16,17,18 |
| N3 | 1,2,11, 12,13,14,15 |
| P1 | 3 |
| P2 | 4,5,6 |
| P3 | 7,8,9 |
| P4 | 10 |
| P5 | 11 |
| P6 | 12 |
| P7 | 13 |
| P8 | 14 |
| P9 | 15 |
| C1 | 19 |
| C2 | 20 |

6.2.10 Class ViewHandler

It is not possible to test the methods provided by this class as it is declared 'abstract'; it will be done in the class inheriting it: EditHandler, EnvelopeHandler, ProactiveResponseHandler, ProactiveHandler.

6.2.11 Class ToolkitException

6.2.11.1 Exception Constants

Test Area Reference: API_2_TKE_CONS

6.2.11.1.1 Conformance requirement:

There is no API, only constants.

Normal execution

CRRN1: The Constants of the class ToolkitException shall all have the same name and value defined in the GSM03.19 .

Parameters error

No requirements

Context errors

No requirements

6.2.11.1.2 Test suite files

None

6.2.11.1.3 Test procedure

The constants in Java are resolved at compilation time, therefore a runtime test is not useful. No test of constants will be performed.

6.2.11.2 Constructor ToolkitException

Test Area Reference: API_2_TKE_COORS

6.2.11.2.1 Conformance requirement:

The constructor with following headers shall compliant to its definition in the API.

```
public ToolkitException(short reason)
```

Normal execution

CRRN1: Construct a ToolkitException instance with the specified reason.

Parameters error

No requirements

Context errors

No requirements

6.2.11.2.2 Test suite files

No additional requirements for the GSM personalisation:

Test Script: API_2_TKE_COORS_1.scr

Test Applet: API_2_TKE_COORS_1.java

Load Script: API_2_TKE_COORS_1.ldr

Cleanup script: API_2_TKE_COORS_1.clr

Parameter File: API_2_TKE_COORS_1.par

6.2.11.2.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|---------------------|--|------------------|
| 1 | reason = (short) 19 | ToolkitException.getReason() = (short)19 | |

6.2.11.2.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 1 |

6.2.11.3 Method throwIt

Test Area Reference: API_2_TKE_THITS

6.2.11.3.1 Conformance requirement:

The method with following header shall compliant to its definition in the API.

```
public static void throwIt(short reason)
    throws ToolkitException
```

Normal execution

CRRN1: Throws the JCRE instance of the ToolkitException class with the specified reason.

CRRN2: extends javacard.framework.CardRuntimeException

Parameters error

No requirements

Context errors

No requirements

6.2.11.3.2 Test suite files

No additional requirements for the GSM personalisation:

Test Script: API_2_TKE_THITS_1.scr
 Test Applet: API_2_TKE_THITS_1.java
 Load Script: API_2_TKE_THITS_1.ldr
 Cleanup Script: API_2_TKE_THITS_1.clr
 Parameter File: API_2_TKE_THITS_1.par

6.2.11.3.3 Test procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|-----------------|------------------|
| 1 | Throws the JCRE instance of ToolkitException with the specified reason | Reason = 0 | |
| 2 | Throws the JCRE instance of ToolkitException with the specified reason | Reason = 1 | |
| 3 | Throws the JCRE instance of ToolkitException with the specified reason | Reason = 15 | |
| 4 | ToolkitException extends javacard.framework.CardRuntimeException | Reason = 0 | |
| 5 | ToolkitException extends javacard.framework.CardRuntimeException | Reason = 1 | |
| 6 | ToolkitException extends javacard.framework.CardRuntimeException | Reason = 15 | |

6.2.11.3.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 1, 2, 3 |
| N2 | 4, 5, 6 |

6.3 SIM Toolkit Framework

6.3.1 Minimum Handler Availability

This test area tests the rules that define the minimum requirements for the availability of the system handlers.

6.3.1.1 ProactiveHandler

Test Area Reference: FWK_MHA_PAHD

6.3.1.1.1 Conformance Requirement

Normal Execution

CRRN1: If a proactive session is not ongoing the ProactiveHandler is available from the invocation to the termination of the processToolkit method for the following events:

EVENT_FORMATTED_SMS_PP_ENV
EVENT_UNFORMATTED_SMS_PP_ENV
EVENT_FORMATTED_SMS_CB
EVENT_UNFORMATTED_SMS_CB
EVENT_MENU_SELECTION
EVENT_MENU_SELECTION_HELP_REQUEST
EVENT_TIMER_EXPIRATION
EVENT_EVENT_DOWNLOAD_MT_CALL
EVENT_EVENT_DOWNLOAD_CALL_CONNECTED
EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED
EVENT_EVENT_DOWNLOAD_LOCATION_STATUS
EVENT_EVENT_DOWNLOAD_USER_ACTIVITY
EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE
EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS
EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION
EVENT_EVENT_DOWNLOAD_BROWSER_TERMINATION
EVENT_UNRECOGNIZED_ENVELOPE
EVENT_STATUS_COMMAND
EVENT_CALL_CONTROL
EVENT_SMS_MO_CONTROL
EVENT_PROFILE_DOWNLOAD

6.3.1.1.2 Test Suite Files

Test Script: FWK_MHA_PAHD_1.scr

Test Applet: FWK_MHA_PAHD_1.java

FWK_MHA_PAHD_2.java
 Load Script: FWK_MHA_PAHD_1.ldr
 Cleanup Script: FWK_MHA_PAHD_1.clr
 Parameter File: FWK_MHA_PAHD_1.par

6.3.1.1.3 Test Procedure

| Id | Description | API /Framework Expectation | APDU Expectation |
|----|--|---|------------------|
| 1 | <p>Applets registration to all events and Proactive Handler availability with EVENT_PROFILE_DOWNLOAD</p> <p>Applet1 is registered to all events defined in [7]. Using the methods initMenuEntry () for EVENT_MENU_SELECTION, requestPollInterval () for EVENT_STATUS_COMMAND, allocateTimer () for EVENT_TIMER_EXPIRATION and setEventList () for the rest of the events.</p> <p>Applet2 is registered to all events defined in [7], except EVENT_CALL_CONTROL_BY_SIM and EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM. Using the methods initMenuEntry () for EVENT_MENU_SELECTION, requestPollInterval () for EVENT_STATUS_COMMAND, allocateTimer () for EVENT_TIMER_EXPIRATION and setEventList () for the rest of the events.</p> <p>The priority of applet1 is higher than priority of applet2 1-Terminal Profile command is sent to SIM without the facility of SET_EVENT_LIST, POLL_INTERVAL,SET UP IDLE MODE TEXT and SET UP MENU.</p> <p>2-Applet1 gets the Proactive Handler Applet1 is deregistered to EVENT_PROFILE_DOWNLOAD</p> <p>3-Applet2 gets the Proactive Handler Applet2 is deregistered to EVENT_PROFILE_DOWNLOAD</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown</p> <p>Applet1 finalizes</p> | |
| 2 | <p>Proactive Handler availability with EVENT_MENU_SELECTION_HELP_REQUEST</p> <p>Perform SIM initialization with all the facilities supported</p> <p>1-Envelope menu selection with help request is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> <p>3-Envelope menu selection with help request is sent to the SIM</p> <p>4-Applet2 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown</p> | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|------------------|
| 3 | <p align="center">Proactive Handler availability with EVENT_MENU_SELECTION</p> <p>1-Envelope menu selection is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> <p>3-Envelope menu selection is sent to the SIM</p> <p>4-Applet2 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown.</p> | |
| 4 | <p align="center">Proactive Handler availability with EVENT_FORMATTED_SMS_PP_ENV</p> <p>1-Envelope dataDownLoad formatted is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> <p>3-Envelope dataDownLoad formatted is sent to the SIM</p> <p>4-Applet2 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown.</p> | |
| 5 | <p align="center">Proactive Handler availability with EVENT_UNFORMATTED_SMS_PP_ENV</p> <p>1-Envelope dataDownLoad unformatted is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> <p>3-Applet2 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown.</p> | |
| 6 | <p align="center">Proactive Handler availability with EVENT_FORMATTED_CELL BROADCAST</p> <p>1-Envelope cell broadcast formatted is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> <p>3-Envelope cell broadcast formatted is sent to the SIM</p> <p>4-Applet2 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2-No exception is thrown</p> <p>Applet1 finalizes</p> <p>3-Applet2 is triggered</p> <p>4-No exception is thrown</p> | |
| 7 | <p align="center">Proactive Handler availability with EVENT_UNFORMATTED_CELL BROADCAST</p> <p>1-Envelope cell broadcast unformatted is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown</p> | |

| Id | Description | API /Framework Expectation | APDU Expectation |
|----|--------------------------------------|---|------------------|
| | 3-Applet2 gets the Proactive Handler | Applet1 finalizes 3- Applet2 is triggered 4- No exception is thrown | |

| Id | Description | API /Framework Expectation | APDU Expectation |
|----|---|---|------------------|
| 8 | <p align="center">Proactive Handler availability with EVENT_TIMER_EXPIRATION</p> <p>1-Timer Id =1 Envelope Timer Expiration is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> <p>3-Timer id=2 Envelope Timer Expiration is sent to the SIM</p> <p>4- Applet2 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>Applet1 finalizes 3- Applet2 is triggered</p> <p>4- No exception is thrown</p> | |
| 9 | <p align="center">Proactive Handler availability with EVENT_CALL_CONTROL_BY_SIM</p> <p>1-Envelope call control by SIM is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> | |
| 10 | <p align="center">Proactive Handler availability with EVENT_MO_SHORT_MESSAGE_CONTROL</p> <p>1-Envelope mo short message control by SIM is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown</p> | |
| 11 | <p align="center">Proactive Handler availability with EVENT_EVENT_DOWNLOAD_MT_CALL</p> <p>1-Envelope event download mt call is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> <p>3-Applet2 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown</p> | |
| 12 | <p align="center">Proactive Handler availability with EVENT_EVENT_DOWNLOAD_CALL_CONNECTED</p> <p>1-Envelope event download call connected is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> <p>3-Applet2 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>Applet1 finalizes 3- Applet2 is triggered</p> <p>4- No exception is thrown</p> | |
| 13 | <p align="center">Proactive Handler availability with EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED</p> <p>1-Envelope event download call disconnected is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> | |

| Id | Description | API /Framework Expectation | APDU Expectation |
|----|--------------------------------------|--|------------------|
| | 3-Applet2 gets the Proactive Handler | Applet1 finalizes 3- Applet2 is triggered 4- No exception is thrown. | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|------------------|
| 14 | <p align="center">Applets triggering with EVENT_EVENT_LOCATION_STATUS</p> <p>1-Envelope event download location status is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> <p>3-Applet2 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown</p> | |
| 15 | <p align="center">Proactive Handler availability with EVENT_EVENT_DOWNLOAD_USER_ACTIVITY</p> <p>1-Envelope event download user activity is sent to SIM</p> <p>2-Applet1 gets the Proactive Handler</p> <p>3-Applet2 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown</p> | |
| 16 | <p align="center">Proactive Handler availability with EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE</p> <p>1-Envelope event download idle screen available is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> <p>3- Applet2 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown</p> | |
| 17 | <p align="center">Proactive Handler availability with EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS</p> <p>1-Envelope event download card reader status is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> <p>3-Applet2 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown</p> | |
| 18 | <p align="center">Proactive Handler availability with EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION</p> <p>1-Envelope event download language selection is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> <p>3-Applet2 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2-No exception is thrown.</p> <p>Applet1 finalizes</p> <p>Applet2 is triggered</p> <p>3-No exception is thrown</p> | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|------------------|
| 19 | <p align="center">Proactive Handler availability with EVENT_EVENT_DOWNLOAD_BROWSER_TERMINATION</p> <p>1-Envelope event download browser termination is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> <p>3-Applet2 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2-No exception is thrown.</p> <p>Applet1 finalizes</p> <p>Applet2 is triggered</p> <p>3-No exception is thrown</p> | |
| 20 | <p align="center">Proactive Handler availability with EVENT_STATUS_COMMAND</p> <p>1-Status command is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> <p>3- Applet2 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown.</p> | |
| 21 | <p align="center">Proactive Handler availability with UNRECOGNIZED_ENVELOPE</p> <p>1-An unrecognized Envelope (BER TLV Tag unrecognized) is sent to the SIM</p> <p>2-Applet1 gets the Proactive Handler</p> <p>3-Applet2 gets the Proactive Handler</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown</p> | |

6.3.1.1.4 Test Coverage

| CRR Number | Test Case Number |
|------------|---|
| CRRN1 | 1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21 |

6.3.1.2 ProactiveResponseHandler

Test Area Reference: FWK_MHA_PRHD

6.3.1.2.1 Conformance Requirement

Normal Execution

CRRN1: The ProactiveResponseHandler is available after the first call to the ProactiveHandler.send method to the termination of the processToolkit method for the following events:

- EVENT_FORMATTED_SMS_PP_ENV
- EVENT_UNFORMATTED_SMS_PP_ENV
- EVENT_FORMATTED_SMS_CB

EVENT_UNFORMATTED_SMS_CB
 EVENT_MENU_SELECTION
 EVENT_MENU_SELECTION_HELP_REQUEST
 EVENT_TIMER_EXPIRATION
 EVENT_EVENT_DOWNLOAD_MT_CALL
 EVENT_EVENT_DOWNLOAD_CALL_CONNECTED
 EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED
 EVENT_EVENT_DOWNLOAD_LOCATION_STATUS
 EVENT_EVENT_DOWNLOAD_USER_ACTIVITY
 EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE
 EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS
 EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION
 EVENT_EVENT_DOWNLOAD_BROWSER_TERMINATION
 EVENT_UNRECOGNIZED_ENVELOPE
 EVENT_STATUS_COMMAND
 EVENT_CALL_CONTROL
 EVENT_SMS_MO_CONTROL
 EVENT_PROFILE_DOWNLOAD

6.3.1.2.2 Test Suite Files

Test Script: FWK_MHA_PRHD_1.scr
 Test Applet: FWK_MHA_PRHD_1.java
 FWK_MHA_PRHD_2.java
 Load Script: FWK_MHA_PRHD_1.ldr
 Cleanup Script: FWK_MHA_PRHD_1.clr
 Parameter File: FWK_MHA_PRHD_1.par

6.3.1.2.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---------------------------|------------------|
| 1 | <p>Applets registration to all events and Proactive Response Handler availability with EVENT_PROFILE_DOWNLOAD</p> <p>1- Applet1 is registered to all events defined in [7], applet2 is registered to all events defined in [7] except EVENT_CALL_CONTROL_BY_SIM and EVENT_MO_SMS_CONTROL_BY_SIM. Using the methods initMenuEntry() for EVENT_MENU_SELECTION, requestPollInterval() for EVENT_STATUS_COMMAND, allocateTimer() for EVENT_TIMER_EXPIRATION and setEventList()</p> | | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|---|
| | <p>for the rest of the events.</p> <p>1-Terminal Profile command is sent to the SIM without the facility of SET_EVENT_LIST and POLL_INTERVAL, ,SET UP IDLE MODE TEXT and SET UP MENU.</p> <p>Applet1 builds a proactive command DISPLAY TEXT.</p> <p>2- ProactiveHandler.send() method is called</p> <p>3- ProactiveResponseHandler.getTheHandler() method is called</p> <p style="padding-left: 40px;">Applet1 is deregistered to EVENT_PROFILE_DOWNLOAD</p> <p>Applet2 builds a proactive command DISPLAY TEXT.</p> <p>4- ProactiveHandler.send() method is called</p> <p>5- ProactiveResponseHandler.getTheHandler() method is called</p> <p>Applet1 is deregistered to EVENT_PROFILE_DOWNLOAD</p> | <p>1-Applet1 is triggered No exception is thrown</p> <p>3- No exception is thrown</p> <p>Applet1 finalizes 4- Applet2 is triggered</p> <p>6- No exception is thrown</p> | <p>2- The proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> <p>5- The proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|---|
| 2 | <p>Proactive Response Handler availability with EVENT_MENU_SELECTION_HELP_REQUEST</p> <p>Perform SIM initialization with all the facilities supported</p> <p>1-Envelope menu selection with help request is sent to the SIM</p> <p>Applet1 builds a proactive command DISPLAY TEXT</p> <p>2- ProactiveHandler.send() method is called</p> <p>3- ProactiveResponseHandler.getTheHandler() method is called</p> <p>Envelope menu selection with help request is sent to the SIM</p> <p>Applet2 builds a proactive command DISPLAY TEXT</p> <p>4- ProactiveHandler.send() method is called</p> <p>5- ProactiveResponseHandler.getTheHandler() method is called</p> | <p>1- Applet1 is triggered</p> <p>3- No exception is thrown</p> <p>Applet1 finalizes</p> <p>4- Applet2 is triggered</p> <p>6- No exception is thrown</p> | <p>2- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> <p>5- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |
| 3 | <p>Proactive Response Handler availability with EVENT_MENU_SELECTION</p> <p>1-Envelope menu selection is sent to the SIM</p> <p>Applet1 builds a proactive command DISPLAY TEXT</p> <p>2- ProactiveHandler.send() method is called</p> <p>3-ProactiveResponseHandler.getTheHandler() method is called</p> <p>4-Envelope menu selection is sent to the SIM</p> <p>Applet2 builds a proactive command DISPLAY TEXT</p> <p>5- ProactiveHandler.send() method is called</p> <p>6-ProactiveResponseHandler.getTheHandler() method is called</p> | <p>1- Applet1 is triggered</p> <p>3- No exception is thrown</p> <p>Applet1 finalizes</p> <p>4- Applet2 is triggered</p> <p>6- No exception is thrown</p> | <p>2- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> <p>5- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|---|
| 4 | <p>Proactive Response Handler availability with EVENT_FORMATTED_SMS_PP_ENV</p> <p>1-Envelope dataDownload formatted is sent to the SIM</p> <p>Applet builds a proactive command DISPLAY TEXT</p> <p>2-ProactiveHandler.send() method is called</p> <p>3-ProactiveResponseHandler.getTheHandler() method is called</p> <p>4-Envelope dataDownload formatted is sent to the SIM</p> <p>Applet2 builds a proactive command DISPLAY TEXT</p> <p>5-ProactiveHandler.send() method is called</p> <p>6-ProactiveResponseHandler.getTheHandler() method is called</p> | <p>1- Applet1 is triggered</p> <p>3- No exception is thrown</p> <p>Applet1 finalizes</p> <p>4- Applet2 is triggered</p> <p>6- No exception is thrown</p> | <p>2- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> <p>5- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |
| 5 | <p>Proactive Response Handler availability with EVENT_UNFORMATTED_SMS_PP_ENV</p> <p>1-Envelope dataDownload unformatted is sent to the SIM</p> <p>Applet1 builds a proactive command DISPLAY TEXT</p> <p>2- ProactiveHandler.send() method is called</p> <p>3- ProactiveResponseHandler.getTheHandler() method is called</p> <p>Applet2 builds a proactive command DISPLAY TEXT</p> <p>4- ProactiveHandler.send() method is called</p> <p>5- ProactiveResponseHandler.getTheHandler() method is called</p> | <p>1- Applet1 is triggered</p> <p>3- No exception is thrown</p> <p>Applet1 finalizes</p> <p>4- Applet2 is triggered</p> <p>6- No exception is thrown</p> | <p>2- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> <p>5- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |
| 6 | <p>Proactive Response Handler availability with EVENT_FORMATTED_SMS_CB</p> <p>1-Envelope cell broadcast formatted is sent to the SIM</p> | <p>1- Applet1 is triggered</p> | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|---|
| | <p>Applet1 builds a proactive command DISPLAY TEXT</p> <p>2-ProactiveHandler.send() method is called</p> <p>3-ProactiveResponseHandler.getTheHandler() method is called.</p> <p>4-Envelope cell broadcast formatted is sent to the SIM</p> <p>Applet2 builds a proactive command DISPLAY TEXT</p> <p>5- ProactiveHandler.send() method is called</p> <p>6-ProactiveResponseHandler.getTheHandler() method is called</p> | <p>3- No exception is thrown</p> <p>Applet1 finalizes</p> <p>4- Applet2 is triggered</p> <p>6- No exception is thrown</p> | <p>2- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> <p>5- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |
| 7 | <p>Proactive Response Handler availability with EVENT_UNFORMATTED_SMS_CB</p> <p>1-Envelope call broadcast unformatted is sent to the SIM</p> <p>Applet1 builds a proactive command DISPLAY TEXT</p> <p>2-ProactiveHandler.send() method is called</p> <p>3-ProactiveResponseHandler.getTheHandler() method is called.</p> <p>Applet2 builds a proactive command DISPLAY TEXT</p> <p>4- ProactiveHandler.send() method is called</p> <p>5-ProactiveResponseHandler.getTheHandler() method is called</p> | <p>1- Applet1 is triggered</p> <p>3- No exception is thrown</p> <p>Applet1 finalizes</p> <p>4- Applet2 is triggered</p> <p>6- No exception is thrown</p> | <p>2- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> <p>5- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |
| 8 | <p>Proactive Response Handler availability with EVENT_TIMER_EXPIRATION</p> <p>Timer id=1</p> <p>1-Envelope Timer Expiration is sent to the SIM</p> <p>Applet builds a proactive command DISPLAY TEXT</p> <p>2-ProactiveHandler.send() method is called</p> | <p>1- Applet1 is triggered</p> | <p>2- A proactive command DISPLAY TEXT is fetched</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|---|
| | <p>3-ProactiveResponseHandler.getTheHandler() method is called</p> <p>Timer id=2 Envelope Timer Expiration is sent to the SIM</p> <p>Applet builds a proactive command DISPLAY TEXT</p> <p>4-ProactiveHandler.send() method is called</p> <p>5-ProactiveResponseHandler.getTheHandler() method is called</p> | <p>3- No exception is thrown</p> <p>Applet1 finalizes</p> <p>4- Applet2 is triggered</p> <p>5- No exception is thrown</p> <p>Applet2 finalizes</p> | <p>TERMINAL RESPONSE</p> <p>6- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |
| 9 | <p>Proactive Response Handler availability with EVENT_CALL_CONTROL_BY_SIM</p> <p>1-Envelope call control by sim is sent to the SIM</p> <p>Applet builds a proactive command DISPLAY TEXT</p> <p>2-ProactiveHandler.send() method is called</p> <p>3-ProactiveResponseHandler.getTheHandler() method is called</p> | <p>1- Applet1 is triggered</p> <p>3- No exception is thrown</p> | <p>2- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |
| 10 | <p>Proactive Response Handler availability with MO_SHORT_MESSAGE_CONTROL_BY_SIM</p> <p>1-Envelope mo short message control by sim is sent to the SIM</p> <p>Applet builds a proactive command DISPLAY TEXT</p> <p>2-ProactiveHandler.send() method is called</p> <p>3-ProactiveResponseHandler.getTheHandler() method is called</p> | <p>1- Applet1 is triggered</p> <p>3- No exception is thrown</p> | <p>2- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|---|
| 11 | <p>Proactive Response Handler availability with EVENT_EVENT_DOWNLOAD_MT_CALL</p> <p>1-Envelope event download mt call is sent to the SIM</p> <p>Applet1 builds a proactive command DISPLAY TEXT</p> <p>2-ProactiveHandler.send() method is called</p> <p>3-ProactiveResponseHandler.getTheHandler() method is called.</p> <p>Applet2 builds a proactive command DISPLAY TEXT</p> <p>4- ProactiveHandler.send() method is called</p> <p>5-ProactiveResponseHandler.getTheHandler() method is called</p> | <p>1- Applet1 is triggered</p> <p>3- No exception is thrown</p> <p>Applet1 finalizes</p> <p>4- Applet2 is triggered</p> <p>6- No exception is thrown</p> | <p>2- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> <p>5- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |
| 12 | <p>Proactive Response Handler availability with EVENT_EVENT_DOWNLOAD_CALL_CONNECTED</p> <p>1-Envelope event download call connected is sent to the SIM</p> <p>Applet1 builds a proactive command DISPLAY TEXT</p> <p>2-ProactiveHandler.send() method is called</p> <p>3-ProactiveResponseHandler.getTheHandler() method is called</p> <p>Applet builds a proactive command DISPLAY TEXT</p> <p>4- ProactiveHandler.send() method is called</p> <p>5-ProactiveResponseHandler.getTheHandler() method is called</p> | <p>1- Applet1 is triggered</p> <p>3- No exception is thrown</p> <p>Applet1 finalizes</p> <p>4- Applet2 is triggered</p> <p>6- No exception is thrown</p> | <p>2- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> <p>5- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|---|
| 13 | <p>Proactive Response Handler availability with EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED</p> <p>1-Envelope event download call disconnected is sent to the SIM</p> <p>Applet1 builds a proactive command DISPLAY TEXT</p> <p>2-ProactiveHandler.send() method is called</p> <p>3-ProactiveResponseHandler.getTheHandler() method is called</p> <p>Applet2 builds a proactive command DISPLAY TEXT</p> <p>4- ProactiveHandler.send() method is called</p> <p>5- ProactiveResponseHandler.getTheHandler() method is called</p> | <p>1- Applet1 is triggered</p> <p>3- No exception is thrown</p> <p>Applet1 finalizes</p> <p>4- Applet2 is triggered</p> <p>6- No exception is thrown</p> | <p>2- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> <p>5- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |
| 14 | <p>Proactive Response Handler availability with EVENT_EVENT_DOWNLOAD_CALL_CONNECTED</p> <p>1-Envelope event download location status is sent to the SIM</p> <p>Applet1 builds a proactive command DISPLAY TEXT</p> <p>2-ProactiveHandler.send() method is called</p> <p>3-ProactiveResponseHandler.getTheHandler() method is called</p> <p>Applet2 builds a proactive command DISPLAY TEXT</p> <p>4- ProactiveHandler.send() method is called</p> <p>5- ProactiveResponseHandler.getTheHandler() method is called</p> | <p>1- Applet1 is triggered</p> <p>3- No exception is thrown</p> <p>Applet1 finalizes</p> <p>4- Applet2 is triggered</p> <p>6- No exception is thrown</p> | <p>2-A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> <p>5- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|---|
| 15 | <p>Proactive Response Handler availability with EVENT_EVENT_DOWNLOAD_USER_ACTIVITY</p> <p>1-Envelope event download user activity is sent to the SIM</p> <p>Applet1 builds a proactive command DISPLAY TEXT</p> <p>2-ProactiveHandler.send() method is called</p> <p>3-ProactiveResponseHandler.getTheHandler() method is called</p> <p>Applet2 builds a proactive command DISPLAY TEXT</p> <p>4- ProactiveHandler.send() method is called</p> <p>5- ProactiveResponseHandler.getTheHandler() method is called</p> | <p>1- Applet1 is triggered</p> <p>3- No exception is thrown</p> <p>Applet1 finalizes</p> <p>4- Applet2 is triggered</p> <p>6- No exception is thrown</p> | <p>2-A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> <p>5- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |
| 16 | <p>Proactive Response Handler availability with EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE</p> <p>1-Envelope event download idle screen available is sent to the SIM</p> <p>Applet1 builds a proactive command DISPLAY TEXT</p> <p>2-ProactiveHandler.send() method is called</p> <p>3-ProactiveResponseHandler.getTheHandler() method is called</p> <p>Applet2 builds a proactive command DISPLAY TEXT</p> <p>4- ProactiveHandler.send() method is called</p> <p>5- ProactiveResponseHandler.getTheHandler() method is called</p> | <p>1- Applet1 is triggered</p> <p>3- No exception is thrown</p> <p>Applet1 finalizes</p> <p>4- Applet2 is triggered</p> <p>6- No exception is thrown</p> | <p>2- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> <p>5- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|--|
| 17 | <p>Proactive Response Handler availability with EVENT_EVENT_DOWNLOAD_CALL_CONNECTED</p> <p>1-Envelope event download card reader status is sent to the SIM</p> <p>Applet1 builds a proactive command DISPLAY TEXT</p> <p>2-ProactiveHandler.send() method is called</p> <p>3-ProactiveResponseHandler.getTheHandler() method is called</p> <p>Applet2 builds a proactive command DISPLAY TEXT</p> <p>4- ProactiveHandler.send() method is called</p> <p>5-ProactiveResponseHandler.getTheHandler() method is called</p> | <p>1- Applet1 is triggered</p> <p>3- No exception is thrown</p> <p>Applet1 finalizes</p> <p>4- Applet2 is triggered</p> <p>6- No exception is thrown</p> | <p>2-A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> <p>5- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |
| 18 | <p>Proactive Response Handler availability with EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION</p> <p>1-Envelope event download language selection is sent to the SIM</p> <p>Applet1 builds a proactive command DISPLAY TEXT</p> <p>2-ProactiveHandler.send() method is called</p> <p>3-ProactiveResponseHandler.getTheHandler() method is called</p> <p>Applet2 builds a proactive command DISPLAY TEXT</p> <p>4- ProactiveHandler.send() method is called</p> <p>5-ProactiveResponseHandler.getTheHandler() method is called</p> | <p>1- Applet1 is triggered</p> <p>3-No exception is thrown</p> <p>Applet1 finalizes</p> <p>Applet2 is triggered</p> | <p>2-A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> <p>4-A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|---|
| 19 | <p>Proactive Response Handler availability with EVENT_EVENT_DOWNLOAD_BROWSER_TERMINATION</p> <p>1-Envelope event download Browser termination is sent to the SIM</p> <p>Applet1 builds a proactive command DISPLAY TEXT</p> <p>2-ProactiveHandler.send() method is called</p> <p>3-ProactiveResponseHandler.getTheHandler() method is called</p> <p>Applet2 builds a proactive command DISPLAY TEXT</p> <p>4- ProactiveHandler.send() method is called</p> <p>5- ProactiveResponseHandler.getTheHandler() method is called</p> | <p>5-No exception is thrown</p> <p>1- Applet1 is triggered</p> <p>3-No exception is thrown</p> <p>Applet1 finalizes</p> <p>Applet2 is triggered</p> <p>5-No exception is thrown</p> | <p>2-A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> <p>4-A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |
| 20 | <p>Proactive Response Handler availability with EVENT_STATUS_COMMAND</p> <p>1-Status command is sent to the SIM</p> <p>Applet1 builds a proactive command DISPLAY TEXT</p> <p>2-ProactiveHandler.send() method is called</p> <p>3-ProactiveResponseHandler.getTheHandler() method is called</p> <p>Applet2 builds a proactive command DISPLAY TEXT</p> <p>4- ProactiveHandler.send() method is called</p> <p>5-</p> | <p>1- Applet1 is triggered</p> <p>3- No exception is thrown</p> <p>Applet1 finalizes</p> <p>4- Applet2 is triggered</p> | <p>2- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> <p>5- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|---|
| | ProactiveResponseHandler.getTheHandler() method is called | 6- No exception is thrown | |
| 21 | <p>Proactive Response Handler availability with UNRECOGNIZED_ENVELOPE</p> <p>1-An unrecognized Envelope is sent to the SIM</p> <p>Applet1 builds a proactive command DISPLAY TEXT</p> <p>2-ProactiveHandler.send() method is called</p> <p>3-ProactiveResponseHandler.getTheHandler() method is called</p> <p>Applet2 builds a proactive command DISPLAY TEXT</p> <p>4- ProactiveHandler.send() method is called</p> <p>5-ProactiveResponseHandler.getTheHandler() method is called</p> | <p>1- Applet1 is triggered</p> <p>3- No exception is thrown</p> <p>Applet1 finalizes</p> <p>4- Applet2 is triggered</p> <p>6- No exception is thrown</p> | <p>2- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> <p>5- A proactive command DISPLAY TEXT is fetched</p> <p>TERMINAL RESPONSE</p> |

6.3.1.2.4 Test Coverage

| CRR Number | Test Case Number |
|------------|---|
| CRRN1 | 1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21 |

6.3.1.3 EnvelopeHandler

Test Area Reference: FWK_MHA_ENHD

6.3.1.3.1 Conformance Requirement

Normal Execution

CRRN1: The EnvelopeHandler and its content are available for all toolkit applets triggered from the invocation to the termination of their processToolkit method for the following events:

- EVENT_FORMATTED_SMS_PP_ENV
- EVENT_UNFORMATTED_SMS_PP_ENV
- EVENT_FORMATTED_SMS_CB
- EVENT_UNFORMATTED_SMS_CB
- EVENT_MENU_SELECTION
- EVENT_MENU_SELECTION_HELP_REQUEST

EVENT_TIMER_EXPIRATION
EVENT_EVENT_DOWNLOAD_MT_CALL
EVENT_EVENT_DOWNLOAD_CALL_CONNECTED
EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED
EVENT_EVENT_DOWNLOAD_LOCATION_STATUS
EVENT_EVENT_DOWNLOAD_USER_ACTIVITY
EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE
EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS
EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION
EVENT_EVENT_DOWNLOAD_BROWSER_TERMINATION
EVENT_UNRECOGNIZED_ENVELOPE
EVENT_CALL_CONTROL
EVENT_SMS_MO_CONTROL

Context Errors

CRRC1: The EnvelopeHandler and its content are not available for any toolkit applet triggered from the invocation to the termination of their processToolkit method for the following events:

EVENT_STATUS_COMMAND
EVENT_PROFILE_DOWNLOAD

6.3.1.3.2 Test Suite Files

Test Script: FWK_MHA_ENHD_1.scr
Test Applet: FWK_MHA_ENHD_1.java
FWK_MHA_ENHD_2.java
Load Script: FWK_MHA_ENHD_1.ldr
Cleanup Script: FWK_MHA_ENHD_1.clr
Parameter File: FWK_MHA_ENHD_1.par

6.3.1.3.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | <p>Applet1 and Applet2 registration and Envelope Handler availability with EVENT_PROFILE_DOWNLOAD</p> <p>1- Applet1 is registered to all events defined [7]. Using the methods initMenuEntry() for EVENT_MENU_SELECTION, requestPollInterval() for EVENT_STATUS_COMMAND, allocateTimer() for EVENT_TIMER_EXPIRATION and setEventList() for the rest of the events.</p> <p>Applet2 is registered to all events defined [7] except EVENT_CALL_CONTROL_BY_SIM and EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM. Using the methods initMenuEntry() for EVENT_MENU_SELECTION, requestPollInterval() for EVENT_STATUS_COMMAND, allocateTimer for EVENT_TIMER_EXPIRATION and setEventList for the rest of the events.</p> <p>2-Terminal Profile command is sent to SIM without the facility of SET_EVENT_LIST ,SETUP_IDLE_MODE_TEXT ,POLL_INTERVAL and SETUP MENU</p> <p>3-EnvelopeHandler.getTheHandler() method is called by Applet1 Applet1 is deregistered to EVENT_PROFILE_DOWNLOAD</p> <p>4-EnvelopeHandler.getTheHandler() method is called by Applet2 Applet2 is deregistered to EVENT_PROFILE_DOWNLOAD</p> | <p>1- No exception is thrown</p> <p>2- Applet1 is triggered</p> <p>3- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown</p> <p>4- Applet2 is triggered</p> <p>5- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown</p> | |
| 2 | <p>Envelope Handler availability with EVENT_MENU_SELECTION_HELP_REQUEST</p> <p>Perform SIM initialization with all the facilities supported</p> <p>Envelope menu selection with help request is sent to the SIM</p> <p>1-EnvelopeHandler.getTheHandler() method is called by Applet1</p> <p>2-Envelope menu selection with help request is sent to the SIM</p> <p>3-EnvelopeHandler.getTheHandler() method is called by Applet2</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown. Applet1 finalizes.</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown.</p> | |
| 3 | <p>Envelope Handler availability with EVENT_MENU_SELECTION</p> <p>1-Envelope menu selection is sent to the SIM</p> | <p>1- Applet1 is triggered</p> | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|------------------|
| | 2-EnvelopeHandler.getTheHandler() method is called by Applet1 3-Envelope menu selection is sent to the SIM 4-EnvelopeHandler.getTheHandler() method is called by Applet2 | 2- No exception is thrown. Applet1 finalizes 3- Applet2 is triggered 4- No exception is thrown. | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|------------------|
| 4 | <p align="center">Envelope Handler availability with EVENT_FORMATTED_SMS_PP_ENV</p> <p>1-A EVENT_FORMATTED_SMS_PP_ENV envelope is sent to the SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called by Applet1</p> <p>3-A EVENT_FORMATTED_SMS_PP_ENV envelope is sent to the SIM</p> <p>4-EnvelopeHandler.getTheHandler() method is called by Applet2</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown.</p> | |
| 5 | <p align="center">Envelope Handler availability with EVENT_UNFORMATTED_SMS_PP_ENV</p> <p>1-An unformatted sms pp envelope is sent to the SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called by Applet1</p> <p>3-EnvelopeHandler.getTheHandler() method is called by Applet2</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown.</p> | |
| 6 | <p align="center">Envelope Handler availability with EVENT_FORMATTED_CB</p> <p>1-Envelope cell broadcast formatted is sent to the SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called by Applet1 Applet1 finalizes.</p> <p>3- Envelope cell broadcast formatted is sent to the SIM</p> <p>4-EnvelopeHandler.getTheHandler() method is called by Applet2</p> | <p>1- Applet1 is triggered</p> <p>2-No exception is thrown</p> <p>3- Applet2 is triggered</p> <p>4-No exception is thrown</p> | |
| 7 | <p align="center">Envelope Handler availability with EVENT_UNFORMATTED_CB</p> <p>1-Envelope cell broadcast unformatted is sent to the SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called by Applet1</p> <p>3-EnvelopeHandler.getTheHandler() method is called by Applet2</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown</p> | |
| 8 | <p align="center">Envelope Handler availability with EVENT_TIMER_EXPIRATION</p> <p>Timer id=1</p> <p>1-Envelope Timer Expiration is sent to the SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called by Applet1</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|------------------|
| | Timer id=2 3-Envelope Timer Expiration is sent to the SIM 4-EnvelopeHandler.getTheHandler() method is called by Applet2 Applet2 finalizes. | Applet1 finalizes 3- Applet2 is triggered 4- No exception is thrown. | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|------------------|
| 9 | <p align="center">Envelope Handler availability with EVENT_CALL_CONTROL_BY_SIM</p> <p>1-Envelope call control by sim is sent to the SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called by Applet1</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> | |
| 10 | <p align="center">Envelope Handler availability with EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM</p> <p>1-Envelope mo short message control by sim is sent to the SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called by Applet1.</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is throw</p> | |
| 11 | <p align="center">Envelope Handler availability with EVENT_EVENT_DOWNLOAD_MT_CALL</p> <p>1-Envelope event download mt call is sent to the SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called by Applet1</p> <p>3-EnvelopeHandler.getTheHandler() method is called by Applet2</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown.</p> | |
| 12 | <p align="center">Envelope Handler availability with EVENT_EVENT_DOWNLOAD_CALL_CONNECTED</p> <p>1-Envelope event download call connected is sent to the SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called by Applet1</p> <p>3-EnvelopeHandler.getTheHandler() method is called by Applet2</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown.</p> | |
| 13 | <p align="center">Envelope Handler availability with EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED</p> <p>1-Envelope event download call disconnected is sent to the SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called by Applet1</p> <p>3-EnvelopeHandler.getTheHandler() method is called by Applet2</p> | <p>1- Applet1 is triggered.</p> <p>2- No exception is thrown.</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown.</p> | |
| 14 | <p align="center">Envelope Handler availability with EVENT_EVENT_DOWNLOAD_LOCATION_STATUS</p> <p>1-Envelope event download location status</p> | | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|------------------|
| | is sent to the SIM 2-EnvelopeHandler.getTheHandler() method is called by Applet1 3-EnvelopeHandler.getTheHandler() method is called by Applet2 | 1- Applet1 is triggered 2- No exception is thrown. Applet1 finalizes 3- Applet2 is triggered 4- No exception is thrown. | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|------------------|
| 15 | <p>Envelope Handler availability with EVENT_EVENT_DOWNLOAD_USER_ACTIVITY</p> <p>1-Envelope event download user activity is sent to the SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called by Applet1</p> <p>3-EnvelopeHandler.getTheHandler() method is called by Applet2</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown</p> | |
| 16 | <p>Envelope Handler availability with EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE</p> <p>1-Envelope event download idle screen available is sent to the SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called by Applet1</p> <p>3-EnvelopeHandler.getTheHandler() method is called by Applet2</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown.</p> | |
| 17 | <p>Envelope Handler availability with EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS</p> <p>1-Envelope event download card reader status is sent to the SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called by Applet1</p> <p>3-EnvelopeHandler.getTheHandler() method is called by Applet2</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>Applet1 finalizes</p> <p>3- Applet2 is triggered</p> <p>4- No exception is thrown.</p> | |
| 18 | <p>Envelope Handler availability with EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION</p> <p>1-Envelope event download language selection is sent to the SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called by Applet1 Applet1 finalizes.</p> <p>3-EnvelopeHandler.getTheHandler() method is called by Applet2</p> | <p>1- Applet1 is triggered</p> <p>2-No exception is thrown.</p> <p>Applet2 is triggered</p> <p>3-No exception is thrown.</p> | |
| 19 | <p>Envelope Handler availability with EVENT_EVENT_DOWNLOAD_BROWSER_TERMINATION</p> <p>1-Envelope event download browser termination is sent to the SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called by Applet1 Applet1 finalizes.</p> | <p>1- Applet1 is triggered</p> <p>2-No exception is thrown.</p> | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|------------------|
| | 3-EnvelopeHandler.getTheHandler() method is called by Applet2 | Applet2 is triggered 3-No exception is thrown. | |
| 20 | <p align="center">Envelope Handler availability with EVENT_STATUS_COMMAND</p> 1-Status command is sent to the SIM 2-EnvelopeHandler.getTheHandler() method is called by Applet1 3-EnvelopeHandler.getTheHandler() method is called by Applet2 | 1- Applet1 is triggered 2- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown 3- Applet2 is triggered 4- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown | |
| 21 | <p align="center">Envelope Handler availability with EVENT_UNRECOGNIZED_ENVELOPE</p> 1-An unrecognized Envelope is sent to the SIM 2-EnvelopeHandler.getTheHandler() method is called by Applet1 3-EnvelopeHandler.getTheHandler() method is called by Applet2 | 1- Applet1 is triggered 2- No exception is thrown. Applet1 finalizes 3- Applet2 is triggered 4- No exception is thrown. | |

6.3.1.3.4 Test Coverage

| CRR Number | Test Case Number |
|------------|--|
| CRRN1 | 2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19, |
| CRRC1 | 1,20 |

6.3.1.4 EnvelopeResponseHandler

Test Area Reference: FWK_MHA_ERHD

6.3.1.4.1 Conformance Requirement

Normal Execution

CRRN1: The handler is available for all triggered toolkit applets from the invocation of the processToolkit method of the toolkit applet until a toolkit applet has posted an envelope response or the first invocation of the ProactiveHandler.send method for the following events:.

- EVENT_FORMATTED_SMS_PP_ENV
- EVENT_UNFORMATTED_SMS_PP_ENV
- EVENT_CALL_CONTROL

EVENT_SMS_MO_CONTROL

EVENT_UNRECOGNIZED_ENVELOPE

CRRN2: After a call to the post method the handler is not longer available

CRRN3: After a call to the send method the handler is not longer available

Context Errors

CRR1: The handler is not available for the following events:

EVENT_FORMATTED_SMS_CB

EVENT_UNFORMATTED_SMS_CB

EVENT_MENU_SELECTION

EVENT_MENU_SELECTION_HELP_REQUEST

EVENT_TIMER_EXPIRATION

EVENT_EVENT_DOWNLOAD_MT_CALL

EVENT_EVENT_DOWNLOAD_CALL_CONNECTED

EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED

EVENT_EVENT_DOWNLOAD_LOCATION_STATUS

EVENT_EVENT_DOWNLOAD_USER_ACTIVITY

EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE

EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS

EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION

EVENT_EVENT_DOWNLOAD_BROWSER_TERMINATION

EVENT_STATUS_COMMAND

EVENT_PROFILE_DOWNLOAD

6.3.1.4.2 Test Suite Files

Test Script: FWK_MHA_ERHD_1.scr

Test Applet: FWK_MHA_ERHD_1.java

FWK_MHA_ERHD_2.java

Load Script: FWK_MHA_ERHD_1.ldr

Cleanup Script: FWK_MHA_ERHD_1.clr

Parameter File: FWK_MHA_ERHD_1.par

6.3.1.4.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---------------------------|------------------|
| 1 | Toolkit Applet1 and Toolkit Applet2 registration and Envelope Response Handler availability with EVENT_PROFILE_DOWNLOAD | | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|------------------|
| | <p>1- Applet1 Toolkit 1 is registered to all events defined in [7]. Using the methods initMenuEntry() for EVENT_MENU_SELECTION, requestPollInterval() for EVENT_STATUS_COMMAND, allocateTimer() for EVENT_TIMER_EXPIRATION and setEventList() for the rest of the events.</p> <p>Applet2 Toolkit 2 is registered to EVENT_UNFORMATTED_SMS_PP_ENV and EVENT_UNRECOGNIZED_ENVELOPE.</p> <p>2-Terminal Profile command is sent to SIM without the facility of SET_EVENT_LIST, SETUP_IDLE_MODE_TEXT, SETUP_MENU and POLL_INTERVAL.</p> <p>32-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> <p>Applet1 is deregistered to EVENT_PROFILE_DOWNLOAD</p> | <p>1- No exception is thrown</p> <p>2- Applet1 is triggered</p> <p>3- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown</p> | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|------------------|
| 2 | <p>Envelope Response Handler availability with EVENT_MENU_SELECTION_HELP_REQUEST</p> <p>Perform SIM initialization with all the facilities supported</p> <p>1-Envelope menu selection with help request is sent to the SIM</p> <p>2-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> | <p>1- Applet1 is triggered.</p> <p>2- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown</p> | |
| 3 | <p>Envelope Response Handler availability with EVENT_MENU_SELECTION</p> <p>1-A envelope menu selection is sent to the SIM</p> <p>2-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> | <p>1- Applet1 is triggered</p> <p>2- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown</p> | |
| 4 | <p>Envelope Response Handler availability with EVENT_FORMATTED_CB</p> <p>1-Envelope cell broadcast formatted is sent to the SIM</p> <p>2-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> | <p>1- The applet1 is triggered.</p> <p>2-A Toolkit exception HANDLER_NOT_AVAILABLE is thrown</p> | |
| 5 | <p>Envelope Response Handler availability with EVENT_UNFORMATTED_CB</p> <p>1-Envelope cell broadcast unformatted is sent to the SIM</p> <p>2-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> | <p>1- Applet1 is triggered.</p> <p>2- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown</p> | |
| 6 | <p>Envelope Response Handler availability with EVENT_TIMER_EXPIRATION</p> <p>1-Envelope Timer Expiration is sent to the SIM</p> <p>2-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> | <p>1- Applet1 is triggered.</p> <p>2- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown</p> | |
| 7 | <p>Envelope Response Handler availability with EVENT_EVENT_DOWNLOAD_MT_CALL</p> <p>1-Envelope event download mt call is sent to the SIM</p> | <p>1- Applet1 is triggered.</p> | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|------------------|
| | 2-EnvelopeResponseHandler.getTheHandler() method is called by Applet1 | 2 -A Toolkit exception HANDLER_NOT_AVAILABLE is thrown | |
| 8 | <p>Envelope Response Handler availability with EVENT_EVENT_DOWNLOAD_CALL_CONNECTED</p> <p>1-Envelope event download call connected is sent to the SIM</p> <p>2-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> | <p>1- Applet1 is triggered.</p> <p>2- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown</p> | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|------------------|
| 9 | <p>Envelope Response Handler availability with EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED</p> <p>1-Envelope event download call disconnected is sent to the SIM</p> <p>2-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> | <p>1- Applet1 is triggered.</p> <p>2- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown</p> | |
| 10 | <p>Envelope Response Handler availability with EVENT_EVENT_DOWNLOAD_LOCATION_STATUS</p> <p>1-Envelope event download location status is sent to the SIM</p> <p>2-Applet A obtains the Envelope Response Handler</p> | <p>1- Applet1 is triggered.</p> <p>2- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown</p> | |
| 11 | <p>Envelope Response Handler availability with EVENT_EVENT_DOWNLOAD_USER_ACTIVITY</p> <p>1-Envelope event download user activity is sent to the SIM</p> <p>2-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> | <p>1- Applet1 is triggered.</p> <p>2- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown</p> | |
| 12 | <p>Envelope Response Handler availability with EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE</p> <p>1-Envelope event download idle screen available is sent to the SIM</p> <p>2-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> | <p>1- Applet1 is triggered.</p> <p>2- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown</p> | |
| 13 | <p>Envelope Response Handler availability with EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS</p> <p>1-Envelope event download card reader status is sent to the SIM</p> <p>2-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> | <p>1- Applet1 is triggered</p> <p>2- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown</p> | |
| 14 | <p>Envelope Response Handler availability with EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION</p> <p>1-Envelope event download language</p> | | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|---|
| | <p>selection is sent to the SIM</p> <p>2-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> | <p>1- Applet1 is triggered</p> <p>2-A Toolkit exception HANDLER_NOT_AVAILABLE is thrown</p> | |
| 15 | <p>Envelope Response Handler availability with EVENT_EVENT_DOWNLOAD_BROWSER_TERMINATION</p> <p>1-Envelope event download browser termination is sent to the SIM</p> <p>2-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> | <p>1- Applet1 is triggered</p> <p>2-A Toolkit exception HANDLER_NOT_AVAILABLE is thrown</p> | |
| 16 | <p>Envelope Response Handler availability with EVENT_STATUS_COMMAND</p> <p>1-Status command is sent to the SIM</p> <p>2-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> | <p>1- Applet1 is triggered</p> <p>2- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown</p> | |
| 17 | <p>Envelope Response Handler availability with EVENT_FORMATTED_SMS_PP_ENV</p> <p>1-A formatted sms pp envelope is sent to the SIM</p> <p>2-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> <p>3-Applet1 builds an additional information for response packet and it calls the post method</p> <p>4-Applet1 calls all methods of the Envelope Response Handler (including the inherited method)</p> <p>5-A EVENT_FORMATTED_SMS_PP_ENV envelope is sent to the SIM</p> <p>6-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> <p>7-Applet1 builds a proactive command and it calls the send() method</p> <p>8-Applet1 calls all methods of the Envelope Response Handler (including the inherited method)</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>4- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown for each method</p> <p>Applet1 finalizes</p> <p>5- Applet1 is triggered</p> <p>6- No Exception is thrown</p> <p>8- Toolkit exception HANDLER_NOT_AVAILABLE is thrown for each method</p> | <p>3- The response packet is sent</p> <p>7- The proactive command is sent</p> |
| 18 | <p>Envelope Response Handler availability with EVENT_UNFORMATTED_SMS_PP_ENV</p> | | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|---|
| | <p>1-A unformatted sms pp envelope is sent to the SIM</p> <p>2-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> <p>3-Applet1 builds the envelope response and it calls the post() method</p> <p>4- Applet1 calls all methods of the Envelope Response Handler (including the inherited method)</p> <p>5-EnvelopeResponseHandler.getTheHandler() method is called</p> <p>6-A unformatted sms pp envelope is sent to the SIM</p> <p>7-EnvelopeResponseHandler.getTheHandler() method is called.</p> <p>8-Applet1 builds a proactive command and it calls the send() method</p> <p>9-Applet1 calls all methods of the Envelope Response Handler (including the inherited method)</p> <p>10-EnvelopeResponseHandler.getTheHandler() method is called by Applet2</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>4- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown for each method Applet1 finalizes</p> <p>5- Applet2 is triggered.</p> <p>6- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown.</p> <p>Applet2 finalizes</p> <p>7- Applet1 is triggered</p> <p>8- No exception is thrown.</p> <p>10- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown for each method Applet1 finalizes</p> <p>11- Applet2 is triggered</p> <p>12- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown</p> | <p>3- The envelope response is sent</p> <p>9- The proactive command is fetched and the Terminal response is issued.</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|--|
| 19 | <p>Envelope Response Handler availability with EVENT_CALL_CONTROL_BY_SIM</p> <p>1-Envelope call control by sim is sent to the SIM</p> <p>2-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> <p>3-Applet1 builds the envelope response and it calls the postAsBERTLV() method</p> <p>4-Applet1 calls all methods of the Envelope Response Handler (including the inherited method)</p> <p>5-Envelope call control by sim is sent to the SIM</p> <p>6-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> <p>7-Applet1 builds a proactive command and it calls the send() method</p> <p>8-Applet1 calls all methods of the Envelope Response Handler (including the inherited method)</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>4- Toolkit exception HANDLER_NOT_AVAILABLE is thrown for each method Applet1 finalizes</p> <p>5- Applet1 is triggered</p> <p>6- No Exception is thrown</p> <p>8- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown for each method</p> | <p>3- The envelope response is sent</p> <p>7- The proactive command is fetched and the Terminal response is issued</p> |
| 20 | <p>Envelope Response Handler availability with EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM</p> <p>1-Envelope mo short message control by sim is sent to the SIM</p> <p>2-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> <p>3-Applet1 builds the envelope response and it calls the postAsBERTLV() method</p> <p>4-Applet1 calls all methods of the Envelope Response Handler (including the inherited method)</p> <p>5-Envelope mo short message control by sim is sent to the SIM</p> <p>6-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> <p>7-Applet1 builds a proactive command and it calls the send method</p> <p>8-Applet1 calls all methods of the Envelope Response Handler (including the inherited method)</p> | <p>1- Applet1 is triggered</p> <p>2- No exception is thrown.</p> <p>4- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown for each method</p> <p>Applet1 finalizes</p> <p>5- Applet1 is triggered</p> <p>6- No exception is thrown</p> <p>8- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown for each method</p> | <p>3-The envelope response is sent</p> <p>7- The proactive command is fetched and the Terminal Response is issued</p> |
| 21 | <p>Envelope Response Handler availability with EVENT_UNRECOGNIZED_ENVELOPE</p> <p>1-An unrecognized Envelope is sent to the SIM</p> <p>2-EnvelopeResponseHandler.getTheHandler()</p> | <p>1- Applet1 is triggered</p> | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|--|
| | <p>method is called by Applet1</p> <p>3-Applet1 builds the envelope response and it calls the postAsBERTLV() or post method</p> <p>4-Applet1 calls all methods of Envelope Response Handler (including the inherited method)</p> <p>54-EnvelopeResponseHandler.getTheHandler() method is called</p> <p>6-An unrecognized Envelope is sent to the SIM</p> <p>7-EnvelopeResponseHandler.getTheHandler() method is called</p> <p>8-Applet1 builds a proactive command and it calls the send() method</p> <p>9-Applet1 calls all methods of the Envelope Response Handler (including the inherited method)</p> <p>10-EnvelopeResponseHandler.getTheHandler() method is called by Applet2</p> | <p>2- No exception is thrown.</p> <p>4- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown for each method</p> <p>Applet1 finalizes</p> <p>5- Applet2 is triggered.</p> <p>6- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown for each method</p> <p>Applet2 finalizes</p> <p>7- Applet1 is triggered.</p> <p>8- No exception is thrown.</p> <p>10- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown for each method</p> <p>Applet1 finalizes</p> <p>11- Applet2 is triggered</p> <p>12- A Toolkit exception HANDLER_NOT_AVAILABLE is thrown for each method</p> | <p>3- The envelope response is sent</p> <p>9- The proactive command is fetched and the Terminal response is issued</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|--|
| 22 | <p>The envelope response is sent when a proactive session is ongoing</p> <p>1-A formatted SMS PP envelope is sent to the SIM.</p> <p>2-Proactive command DISPLAY TEXT is built and it calls the send() method.</p> <p>3-A call control by sim envelope is sent to the SIM.</p> <p>4-EnvelopeResponseHandler.getTheHandler() method is called by Applet1</p> <p>5-Applet1 builds the envelope response and it calls the postAsBERTLV</p> | <p>1- Applet1 is triggered.</p> <p>3- Applet1 is triggered</p> <p>4- No exception is thrown</p> | <p>2- 91 XX</p> <p>5-The envelope response is sent 9F YY</p> <p>GET RESPONSE Data 91 XX Fetch DISPLAY TEXT</p> <p>Terminal Response DISPLAY TEXT</p> |

Note: Due to an inconsistency in [7] specification it is not possible to cover the test case when an applet, which is not the first toolkit applet triggered, try to post data in multitrigging.

6.3.1.4.4 Test Coverage

| CRR Number | Test Case Number |
|------------|--|
| CRRN1 | 17,18, 19,20,21,22 |
| CRRN2 | 17,18, 19,20,21,22 |
| CRRN3 | 17,18, 19,20,21,22 |
| CRRC1 | 1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16 |

6.3.2 Handler Integrity

6.3.2.1 ProactiveHandler

Test Area Reference: FWK_HIN_PAHD

6.3.2.1.1 Conformance Requirement

Normal Execution

CRRN1: At the processToolkit invocation the TLV-List is cleared.

CRRN2: After a call to ProactiveHandler.send method the handler will remain unchanged until the ProactiveHandler.init or appendTLV method are called.

6.3.2.1.2 Test Suite Files:

Test Script: FWK_HIN_PAHD_1.scr

Test Applet: FWK_HIN_PAHD_1.java

FWK_HIN_PAHD_2.java

Load Script: FWK_HIN_PAHD_1.ldr

Cleanup Script: FWK_HIN_PAHD_1.clr

Parameter File: FWK_HIN_PAHD_1.par

6.3.2.1.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|---|
| 1 | <p>At the processToolkit invocation the TLV-List is cleared</p> <p>Applet1 and Applet2 are registered to EVENT_UNFORMATTED_SMS_PP_ENV.</p> <p>1-An envelope containing an unformatted sms pp is sent to the SIM</p> <p>2-ProactiveHandler.getLength() method is called by Applet1</p> | <p>1- Applet1 is triggered.</p> <p>2- The return value is 0</p> | |
| 2 | <p>TLV-List change after the init method invocation</p> <p>ProactiveHandler.init() method is called by Applet1</p> <p>1-ProactiveHandler.getLength() method is called by Applet1</p> | <p>1- The return value is 9</p> | |
| 3 | <p>The TLV-List remains unchanged after the send() method invocation</p> <p>1-ProactiveHandler.send() method is called by Applet1</p> <p>2-ProactiveHandler.getLength() method is called by Applet1</p> <p>It's checked that the content is the same than before the calling to send method using ProactiveHandler.copyValue and Util.arrayCompare methods</p> | <p>2- The return value is 9, and its contents is the same than before the calling to send method</p> <p>Applet1 finalizes</p> | <p>1- The proactive command is fetched and the terminal response is issued.</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|------------------|
| 4 | <p>At the processToolkit invocation the TLV-List is cleared</p> <p>1-ProactiveHandler.getLength() method is called by Applet2</p> <p>2-ProactiveHandler.getValueLength() method is called by Applet2</p> | <p>1- Applet2 is triggered</p> <p>2- The return value is 0</p> <p>3- ToolkitException UNAVAILABLE_ELEMENT is thrown</p> | |

6.3.2.1.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1, 2, 3, 4 |
| CRRN2 | 3 |

6.3.2.2 ProactiveResponseHandler

Test Area Reference: FWK_HIN_PRHD

6.3.2.2.1 Conformance Requirement

Normal Execution

CRRN1: The ProactiveResponseHandler content is changed after the call to ProactiveHandler.send method and remains unchanged until next call to the ProactiveHandler.send method.

CRRN2: The ProactiveResponseHandler may not be available before the first call to ProactiveHandler.send method, if available the content is cleared.

6.3.2.2.2 Test Suite Files

- Test Script: FWK_HIN_PRHD_1.scr
- Test Applet: FWK_HIN_PRHD_1.java
- Load Script: FWK_HIN_PRHD_1.ldr
- Cleanup Script: FWK_HIN_PRHD_1.clr
- Parameter File: FWK_HIN_PRHD_1.par

6.3.2.2.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|---|
| 1 | <p align="center">Applet registration and ProactiveResponseHandler obtaining</p> <p>1-Applet is registered to all events defined in [7]. Using the methods initMenuEntry for EVENT_MENU_SELECTION, requestPollInterval() for EVENT_STATUS_COMMAND, allocateTimer() for EVENT_TIMER_EXPIRATION and setEventList() for the rest of the events.</p> <p>Terminal Profile command is sent to the SIM without the facilities SET_EVENT_LIST ,SETUP_IDLE_MODE_TEXT, SETUP_MENU and POLL_INTERVAL.</p> <p>For each event:</p> <p>2-ProactiveResponseHandler.getTheHandler() is called</p> <p>If handler is available, ProactiveResponseHandler.getLength() is called</p> | <p>1- No exception is thrown</p> <p>2- Applet is triggered.</p> <p>3- Behaviour 1: Toolkit Exception HANDLER_NOT_AVAILABLE is thrown.</p> <p>Behaviour 2: No exception is thrown, the return value is 0</p> | |
| 2 | <p align="center">The ProactiveResponseHandler remains unchanged after send method invocation until next send method invocation</p> <p>1-Applet builds a proactive command ProactiveHandler.send() method is called</p> <p>2-ProactiveResponseHandler.getLength() method is called</p> <p>3-ProactiveHandler.init() method is called</p> <p>4-ProactiveHandler.send() method is called</p> <p>5-ProactiveResponseHandler.getLength() method is called</p> | <p>1- The ProactiveResponseHandler contains the terminal response</p> <p>3- The return value is 12</p> <p>4- No exception is thrown and the Proactive Response Handler remains unchanged</p> <p>5- The ProactiveResponseHandler contains the terminal response of the second proactive command</p> <p>7- The return value is 15</p> | <p>2- A proactive command is fetched</p> <p>The terminal response is sent with length 12</p> <p>6- A proactive command is fetched</p> <p>The terminal response is sent with length 15</p> |

6.3.2.2.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1,2 |
| CRRN2 | 1 |

6.3.2.3 EnvelopeHandler

Test Area Reference: FWK_HIN_ENHD

6.3.2.3.1 Conformance Requirement

Normal Execution

CRRN1: The EnvelopeHandler and its content are available for all triggered toolkit applets, from the invocation to the termination of their processToolkit method.

CRRN2: The SIM Toolkit Framework guarantees that all triggered toolkit applets receive the data.

6.3.2.3.2 Test Suite Files

Test Script: FWK_HIN_ENHD_1.scr
 Test Applet: FWK_HIN_ENHD_1.java
 Load Script: FWK_HIN_ENHD_1.ldr
 Cleanup Script: FWK_HIN_ENHD_1.clr
 Parameter File: FWK_HIN_ENHD_1.par

6.3.2.3.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|------------------|
| 1 | <p>Applet initialization and Envelope Handler integrity checks with EVENT_MENU_SELECTION_HELP_REQUEST</p> <p>1- Applet is registered to all events defined in [7] except EVENT_PROFILE_DOWNLOAD and EVENT_STATUS_COMMAND. Using the methods initMenuEntry() for EVENT_MENU_SELECTION, allocateTimer() for EVENT_TIMER_EXPIRATION, and setEventList() for the rest of the events. Perform SIM initialization with all the facilities supported</p> <p>2-Envelope menu selection with help request is sent to the SIM</p> <p>3-EnvelopeHandler.getTheHandler() method is called</p> <p>4-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy() The EnvelopeHandler.findTLV() method is called with TAG_HELP_REQUEST</p> <p>5-A proactive command DISPLAY TEXT is sent</p> <p>6-Envelope call control by sim is sent to SIM</p> <p>EnvelopeHandler.getTheHandler() method is called</p> <p>7- It's checked that the contents of the envelope handler is the envelope call control using EnvelopeHandler.copy() and Util.arrayCompare() methods The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>Call Control execution is finished.</p> | <p>1-No exception is thrown</p> <p>2- Applet is triggered</p> <p>3- No exception is thrown.</p> <p>4- No exception is thrown</p> <p>6- Applet is triggered</p> <p>7- No exception is thrown and the handler contains the envelope call control by SIM</p> | <p>5- 91 xx.</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|--|
| | <p>Check that the TAG_HELP_REQUEST is the TLV selected</p> <p>8-The contents of EnvelopeHandler are compared with buffer1 using Util.arrayCompare()</p> | <p>8- The contents of the envelope handler shall be the same as stored in buffer 1</p> | <p>A proactive command Display Text is fetched</p> <p>The terminal Response of DISPLAY TEXT is sent to the SIM</p> |
| 2 | <p>Envelope Handler integrity checks with EVENT_MENU_SELECTION</p> <p>1-An envelope menu selection is sent to SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called</p> <p>3-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy()</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_ITEM_IDENTIFIER</p> <p>4-A proactive command DISPLAY TEXT is sent</p> <p>5-Envelope call control by sim is sent to SIM</p> <p>EnvelopeHandler.getTheHandler() method is called</p> <p>6- It's checked the contents of the envelope handler is the envelope call control using EnvelopeHandler.copy() and Util.arrayCompare() methods</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>Call Control execution is finished.</p> <p>It's checked that the TAG_ITEM_IDENTIFIER is the TLV selected</p> <p>7- The contents of EnvelopeHandler are compared with buffer1 using Util.arrayCompare()</p> | <p>1- Applet is triggered</p> <p>2- No exception is thrown.</p> <p>3- No exception is thrown.</p> <p>5- Applet is triggered</p> <p>6- No exception is thrown and the handler contains the envelope call control by SIM</p> <p>7- The contents of the envelope handler shall be the same as stored in buffer 1</p> | <p>4- 91 XX</p> <p>Proactive command Display Text is fetched</p> <p>The terminal Response of DISPLAY TEXT is sent to the SIM</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|---|
| 3 | <p>Envelope Handler integrity checks with EVENT_FORMATTED_SMS_PP_ENV</p> <p>1-A formatted sms pp envelope is sent to SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called</p> <p>3-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy()</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_SMS_TPDU</p> <p>4-A proactive command DISPLAY TEXT is sent</p> <p>5-Envelope call control by sim is sent to SIM</p> <p>EnvelopeHandler.getTheHandler() method is called</p> <p>6-It's checked that the contents of the envelope handler is the envelope call control using EnvelopeHandler.copy() and Util.arrayCompare methods</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>Call Control execution is finished.</p> <p>It's checked that the TAG_SMS_TPDU is the TLV selected</p> <p>7- The contents of EnvelopeHandler are compared with buffer1 using Util.arrayCompare()</p> | <p>1- Applet is triggered</p> <p>2- No exception is thrown.</p> <p>3- No exception is thrown.</p> <p>5- Applet is triggered</p> <p>6- No exception is thrown and the handler contains the envelope call control by SIM</p> <p>7- The contents of the envelope handler shall be the same as stored in buffer 1</p> | <p>4- 91 XX</p> <p>Proactive command Display Text is fetched The terminal Response of DISPLAY TEXT is sent to the SIM</p> |
| 4 | <p>Envelope Handler integrity checks with EVENT_UNFORMATTED_SMS_PP_ENV</p> <p>1-A unformatted sms pp envelope is sent to SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called</p> <p>3-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy()</p> <p>The EnvelopeHandler.findTLV method is called with TAG_DEVICE_IDENTITIES</p> <p>4-A proactive command DISPLAY TEXT is sent</p> <p>5-Envelope call control by sim is sent to SIM</p> <p>EnvelopeHandler.getTheHandler() method is called</p> <p>6-It's checked that the contents of the</p> | <p>1- Applet is triggered</p> <p>2- No exception is thrown.</p> <p>3- No exception is thrown.</p> <p>5- Applet is triggered</p> | <p>4- 91 XX</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|--|
| | <p>envelope handler is the envelope call control using EnvelopeHandler.copy() and Util.arrayCompare() methods</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>Call Control execution is finished.</p> <p>It's checked that the TAG_DEVICE_IDENTITIES is the TLV selected</p> <p>7- The contents of EnvelopeHandler are compared with buffer1 using Util.arrayCompare()</p> | <p>6- No exception is thrown and the handler contains the envelope call control by SIM</p> <p>7- The contents of the envelope handler shall be the same as stored in buffer 1.</p> | <p>Proactive command Display Text is fetched</p> <p>The terminal Response of DISPLAY TEXT is sent to the SIM</p> |
| 5 | <p>Envelope Handler integrity checks with EVENT_UNFORMATTED_SMS_CB</p> <p>1-A unformatted cellbroadcast envelope is sent to SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called</p> <p>3-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy()</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_CELLBROADCAST_PAGE</p> <p>4-A proactive command DISPLAY TEXT is sent</p> <p>5-Envelope call control by sim is sent to SIM</p> <p>EnvelopeHandler.getTheHandler() method is called</p> <p>6-It's checked that the contents of the envelope handler is the envelope call control using EnvelopeHandler.copy and Util.arrayCompare() methods</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>Call Control execution is finished.</p> <p>It's checked that the TAG_CELLBROADCAST_PAGE is the TLV selected</p> <p>7- The contents of EnvelopeHandler are compared with buffer1 using Util.arrayCompare()</p> | <p>1- Applet is triggered</p> <p>2- No exception is thrown.</p> <p>3- No exception is thrown.</p> <p>5- Applet is triggered</p> <p>6- No exception is thrown and the handler contains the envelope call control by SIM</p> <p>7- The contents of the envelope handler shall be the same as stored in buffer 1.</p> | <p>4- 91 XX</p> <p>Proactive command Display Text is fetched</p> <p>The terminal Response of DISPLAY TEXT is sent to the SIM</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|--|
| 6 | <p align="center">Envelope Handler integrity checks with EVENT_TIMER_EXPIRATION</p> <p>1-A timer expiration envelope is sent to SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called</p> <p>3-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy()</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_TIMER_ID</p> <p>4-A proactive command DISPLAY TEXT is sent</p> <p>5-Envelope call control by sim is sent to SIM</p> <p>EnvelopeHandler.getTheHandler() method is called</p> <p>6-It's checked that the contents of the envelope handler is the envelope call control using EnvelopeHandler.copy() and Util.arrayCompare() methods</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>Call Control execution is finished.</p> <p>It's checked that the TAG_TIMER_ID is the TLV selected</p> <p>7- The contents of EnvelopeHandler are compared with buffer1 using Util.arrayCompare()</p> | <p>1- Applet is triggered</p> <p>2- No exception is thrown.</p> <p>3- No exception is thrown.</p> <p>5- Applet is triggered</p> <p>6- No exception is thrown and the handler contains the envelope call control by SIM</p> <p>7- The contents of the envelope handler shall be the same as stored in buffer 1</p> | <p>4- 91 XX</p> <p>Proactive command Display Text is fetched</p> <p>The terminal Response of DISPLAY TEXT is sent to the SIM</p> |
| 7 | <p align="center">Envelope Handler integrity checks with EVENT_CALL_CONTROL_BY_SIM</p> <p>1-A call control envelope is sent to SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called</p> <p>3-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy()</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_ADDRESS</p> <p>4-A proactive command DISPLAY TEXT is sent</p> <p>5-Envelope call control by sim is sent to SIM</p> <p>EnvelopeHandler.getTheHandler() method is</p> | <p>1- Applet is triggered</p> <p>2- No exception is thrown.</p> <p>3- No exception is thrown.</p> <p>5- Applet is triggered</p> | <p>4- 91 XX</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|--|
| | <p>called</p> <p>6-It's checked that the contents of the envelope handler is the envelope call control using EnvelopeHandler.copy() and Util.arrayCompare() methods</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>Call Control execution is finished.</p> <p>It's checked that the TAG_ADDRESS is the TLV selected</p> <p>7- The contents of EnvelopeHandler are compared with buffer1 using Util.arrayCompare()</p> | <p>6- No exception is thrown and the handler contains the envelope call control by SIM</p> <p>7- The contents of the envelope handler shall be the same as stored in buffer 1</p> | <p>Proactive command Display Text is fetched</p> <p>The terminal Response of DISPLAY TEXT is sent to the SIM</p> |
| 8 | <p>Envelope Handler integrity checks with EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM</p> <p>1-A mo short message control by sim envelope is sent to SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called</p> <p>3-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy()</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_ADDRESS</p> <p>4-A proactive command DISPLAY TEXT is sent</p> <p>5-Envelope call control by sim is sent to SIM</p> <p>EnvelopeHandler.getTheHandler() method is called</p> <p>6-It's checked that the contents of the envelope handler is the envelope call control using EnvelopeHandler.copy() and Util.arrayCompare() methods</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>Call Control execution is finished.</p> <p>It's checked that the TAG_ADDRESS is the TLV selected</p> <p>7- The contents of EnvelopeHandler are compared with buffer1 using Util.arrayCompare()</p> | <p>1- Applet is triggered</p> <p>2- No exception is thrown.</p> <p>3- No exception is thrown.</p> <p>5- Applet is triggered</p> <p>6- No exception is thrown and the handler contains the envelope call control by SIM</p> <p>7- The contents of the envelope handler shall be the same as stored in buffer 1.</p> | <p>4- 91 XX</p> <p>Proactive command Display Text is fetched</p> <p>The terminal Response of DISPLAY TEXT is sent to the SIM</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|--|
| 9 | <p>Envelope Handler integrity checks with EVENT_EVENT_DOWNLOAD_MT_CALL</p> <p>1-A event download mt call envelope is sent to SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called</p> <p>3-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy() The EnvelopeHandler.findTLV() method is called with TAG_ADDRESS</p> <p>4-A proactive command DISPLAY TEXT is sent</p> <p>5-Envelope call control by sim is sent to SIM</p> <p>EnvelopeHandler.getTheHandler() method is called</p> <p>6-It's checked that the contents of the envelope handler is the envelope call control using EnvelopeHandler.copy() and Util.arrayCompare() methods The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>Call Control execution is finished.</p> <p>It's checked that the TAG_ADDRESS is the TLV selected</p> <p>7- The contents of EnvelopeHandler are compared with buffer1 using Util.arrayCompare()</p> | <p>1- Applet is triggered</p> <p>2- No exception is thrown.</p> <p>3- No exception is thrown.</p> <p>5- Applet is triggered</p> <p>6- No exception is thrown and the handler contains the envelope call control by SIM</p> <p>7- The contents of the envelope handler shall be the same as stored in buffer 1</p> | <p>4- 91 XX</p> <p>Proactive command Display Text is fetched</p> <p>The terminal Response of DISPLAY TEXT is sent to the SIM</p> |
| 10 | <p>Envelope Handler integrity checks with EVENT_EVENT_DOWNLOAD_CALL_CONNECTED</p> <p>1-A event download call connected envelope is sent to SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called</p> <p>3-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy() The EnvelopeHandler.findTLV() method is called with TAG_ADDRESS</p> <p>4-A proactive command DISPLAY TEXT is sent</p> <p>5-Envelope call control by sim is sent to SIM</p> | <p>1- Applet is triggered</p> <p>2- No exception is thrown.</p> <p>3- No exception is thrown.</p> <p>5- Applet is triggered</p> | <p>4- 91 XX</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|--|
| | <p>EnvelopeHandler.getTheHandler() method is called</p> <p>6-It's checked that the contents of the envelope handler is the envelope call control using EnvelopeHandler.copy and Util.arrayCompare() methods</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>Call Control execution is finished.</p> <p>It's checked that the TAG_ADDRESS is the TLV selected</p> <p>7- The contents of EnvelopeHandler are compared with buffer1 using Util.arrayCompare()</p> | <p>6- No exception is thrown and the handler contains the envelope call control by SIM</p> <p>7- The contents of the envelope handler shall be the same as stored in buffer 1.</p> | <p>Proactive command Display Text is fetched</p> <p>The terminal Response of DISPLAY TEXT is sent to the SIM</p> |
| 11 | <p>Envelope Handler integrity checks with EVENT_DOWNLOAD_CALL_DISCONNECTED</p> <p>1-A event download call disconnected envelope is sent to SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called</p> <p>3-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy()</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_ADDRESS</p> <p>4-A proactive command DISPLAY TEXT is sent</p> <p>5-Envelope call control by sim is sent to SIM</p> <p>EnvelopeHandler.getTheHandler() method is called</p> <p>6-It's checked that the contents of the envelope handler is the envelope call control using EnvelopeHandler.copy and Util.arrayCompare() methods</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>Call Control execution is finished.</p> <p>It's checked that the TAG_ADDRESS is the TLV selected</p> <p>7- The contents of EnvelopeHandler are compared with buffer1 using</p> | <p>1- Applet is triggered</p> <p>2- No exception is thrown.</p> <p>3- No exception is thrown.</p> <p>5- Applet is triggered</p> <p>6- No exception is thrown and the handler contains the envelope call control by SIM</p> <p>7- The contents of the envelope handler shall be the same as stored</p> | <p>4- 91 XX</p> <p>Proactive command Display Text is fetched</p> <p>The terminal Response of DISPLAY TEXT is sent to the SIM</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|---|
| 12 | <p>Envelope Handler integrity checks with EVENT_ EVENT_DOWNLOAD_LOCATION_STATUS</p> <p>1-A event download location status envelope is sent to SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called</p> <p>3-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy()</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_LOCATION_STATUS</p> <p>4-A proactive command DISPLAY TEXT is sent</p> <p>5-Envelope call control by sim is sent to SIM</p> <p>EnvelopeHandler.getTheHandler() method is called</p> <p>6-It's checked that the contents of the envelope handler is the envelope call control using EnvelopeHandler.copy() and Util.arrayCompare() methods</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>Call Control execution is finished.</p> <p>It's checked that the TAG_LOCATION_STATUS is the TLV selected</p> <p>7- The contents of EnvelopeHandler are compared with buffer1 using Util.arrayCompare()</p> | <p>in buffer 1.</p> <p>1- Applet is triggered</p> <p>2- No exception is thrown.</p> <p>3- No exception is thrown.</p> <p>5- Applet is triggered</p> <p>6- No exception is thrown and the handler contains the envelope call control by SIM</p> <p>7- The contents of the envelope handler shall be the same as stored in buffer 1</p> | <p>4-91 XX</p> <p>Proactive command Display Text is fetched</p> <p>The terminal Response of DISPLAY TEXT is sent to the SIM</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|--|
| 13 | <p>Envelope Handler integrity checks with EVENT_DOWNLOAD_USER_ACTIVITY</p> <p>1-A event download user activity envelope is sent to SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called</p> <p>3-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy() The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>4-A proactive command DISPLAY TEXT is sent</p> <p>5-Envelope call control by sim is sent to SIM EnvelopeHandler.getTheHandler() method is called</p> <p>6-It's checked that the contents of the envelope handler is the envelope call control using EnvelopeHandler.copy() and Util.arrayCompare() methods The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>Call Control execution is finished.</p> <p>It's checked that the TAG_DEVICE_IDENTITIES is the TLV selected</p> <p>7- The contents of EnvelopeHandler are compared with buffer1 using Util.arrayCompare()</p> | <p>1- Applet is triggered</p> <p>2- No exception is thrown.</p> <p>3- No exception is thrown.</p> <p>5- Applet is triggered</p> <p>6- No exception is thrown and the handler contains the envelope call control by SIM</p> <p>7- The contents of the envelope handler shall be the same as stored in buffer 1</p> | <p>4- 91 XX</p> <p>Proactive command Display Text is fetched</p> <p>The terminal Response of DISPLAY TEXT is sent to the SIM</p> |
| 14 | <p>Envelope Handler integrity checks with EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE</p> <p>1-A event download idle screen available envelope is sent to SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called</p> <p>3-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy() The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>4-A proactive command DISPLAY TEXT is sent</p> <p>5-Envelope call control by sim is sent to SIM EnvelopeHandler.getTheHandler() method is called</p> | <p>1- Applet is triggered</p> <p>2- No exception is thrown.</p> <p>3- No exception is thrown.</p> <p>5- Applet is triggered</p> | <p>4- 91 XX</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|---|
| | <p>6-It's checked that the contents of the envelope handler is the envelope call control using EnvelopeHandler.copy() and Util.arrayCompare() methods</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>Call Control execution is finished.</p> <p>It's checked that the TAG_DEVICE_IDENTITIES is the TLV selected</p> <p>7- The contents of EnvelopeHandler are compared with buffer1 using Util.arrayCompare()</p> | <p>6- No exception is thrown and the handler contains the envelope call control by SIM</p> <p>7- The contents of the envelope handler shall be the same as stored in buffer 1</p> | <p>Proactive command Display Text is fetched</p> <p>The terminal Response of DISPLAY TEXT is sent to the SIM</p> |
| 15 | <p>Envelope Handler integrity checks with EVENT_DOWNLOAD_CARD_READER_STATUS</p> <p>1-A event download card reader status envelope is sent to SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called</p> <p>3-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy()</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_CARD_READER_STATUS</p> <p>4-A proactive command DISPLAY TEXT is sent</p> <p>5-Envelope call control by sim is sent to SIM</p> <p>EnvelopeHandler.getTheHandler() method is called</p> <p>6-It's checked that the contents of the envelope handler is the envelope call control using EnvelopeHandler.copy and Util.arrayCompare() methods</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>It's checked that the TAG_CARD_READER_STATUS is the TLV selected</p> <p>7- The contents of EnvelopeHandler are compared with buffer1 using Util.arrayCompare()</p> | <p>1- Applet is triggered</p> <p>2- No exception is thrown.</p> <p>3- No exception is thrown.</p> <p>5- Applet is triggered</p> <p>6- No exception is thrown and the handler contains the envelope call control by SIM</p> <p>7- The contents of the envelope handler shall be the same as stored in buffer 1</p> | <p>4- 91 XX</p> <p>Proactive command Display Text is fetched</p> <p>The terminal Response of DISPLAY TEXT is sent to the SIM</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|--|
| 16 | <p align="center">Envelope Handler integrity checks with UNRECOGNIZED_ENVELOPE</p> <p>1-A unrecognized envelope is sent to SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called</p> <p>3-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy()</p> <p>4-A proactive command DISPLAY TEXT is sent</p> <p>5-Envelope call control by sim is sent to SIM</p> <p>EnvelopeHandler.getTheHandler() method is called The EnvelopeHandler.getValueLength() is called</p> <p>6-It's checked that the contents of the envelope handler is the envelope call control using EnvelopeHandler.copy() and Util.arrayCompare() methods</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>Call Control execution is finished.</p> <p>7- The contents of EnvelopeHandler are compared with buffer1 using Util.arrayCompare()</p> | <p>1- Applet is triggered</p> <p>2- No exception is thrown.</p> <p>3- No exception is thrown.</p> <p>5- Applet is triggered</p> <p>6- No exception is thrown and the handler contains the envelope call control by SIM</p> <p>7- The contents of the envelope handler shall be the same as stored in buffer 1</p> | <p>4- 91 XX</p> <p>Proactive command Display Text is fetched</p> <p>The terminal Response of DISPLAY TEXT is sent to the SIM</p> |
| 17 | <p align="center">Envelope Handler integrity checks with EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION</p> <p>1-A event download language selection envelope is sent to SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called</p> <p>3-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy()</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_EVENT_LIST</p> <p>4-A proactive command DISPLAY TEXT is sent</p> <p>5-Envelope call control by sim is sent to SIM</p> <p>EnvelopeHandler.getTheHandler() method is called</p> <p>6-It's checked that the contents of the envelope handler is the envelope call control using EnvelopeHandler.copy() and Util.arrayCompare() methods</p> | <p>1- Applet is triggered</p> <p>2-No exception is thrown.</p> <p>3-No exception is thrown.</p> <p>5- Applet is triggered</p> <p>6- No exception is thrown and the handler contains the envelope call</p> | <p>4-91 XX</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|---|
| 18 | <p>Envelope Handler integrity checks with EVENT_EVENT_DOWNLOAD_BROWSER_TERMINATION</p> <p>1-A event download browser termination envelope is sent to SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called</p> <p>3-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy() The EnvelopeHandler.findTLV() method is called with TAG_EVENT_LIST</p> <p>4-A proactive command DISPLAY TEXT is sent</p> <p>5-Envelope call control by sim is sent to SIM</p> <p>EnvelopeHandler.getTheHandler() method is called</p> <p>6-It's checked that the contents of the envelope handler is the envelope call control using EnvelopeHandler.copy() and Util.arrayCompare() methods The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>Call Control execution is finished.</p> <p>It's checked that the TAG_EVENT_LIST is the TLV selected</p> <p>7- The contents of EnvelopeHandler are compared with buffer1 using Util.arrayCompare()</p> | <p>1- Applet is triggered</p> <p>2-No exception is thrown.</p> <p>3-No exception is thrown.</p> <p>5- Applet is triggered</p> <p>6- No exception is thrown and the handler contains the envelope call control by SIM</p> <p>7- The contents of the envelope handler shall be the same as stored in buffer 1</p> | <p>4-91 XX</p> <p>Proactive command Display Text is fetched</p> <p>The terminal Response of DISPLAY TEXT is sent to the SIM</p> |
| 19 | <p>Envelope Handler integrity checks with EVENT_FORMATTED_SMS_CB</p> <p>1-An envelope SMS-CB formatted according to [8] is sent to the SIM</p> <p>2-EnvelopeHandler.getTheHandler() method is called</p> <p>3-Copy the contents of the envelope handler in buffer 1 using EnvelopeHandler.copy() The EnvelopeHandler.findTLV() method is called with TAG_CELL_BROADCAST_PAGE</p> <p>4-A proactive command DISPLAY TEXT is sent</p> <p>5-Envelope call control by sim is sent to SIM</p> | <p>1- Applet is triggered</p> <p>2-No exception is thrown.</p> <p>3-No exception is thrown.</p> | <p>4-91 XX</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|--|
| | <p>EnvelopeHandler.getTheHandler() method is called</p> <p>6-It's checked that the contents of the envelope handler is the envelope call control using EnvelopeHandler.copy() and Util.arrayCompare() methods</p> <p>The EnvelopeHandler.findTLV() method is called with TAG_DEVICE_IDENTITIES</p> <p>Call Control execution is finished.</p> <p>It's checked that the TAG_CELL_BROADCAST_PAGE is the TLV selected</p> <p>7- The contents of EnvelopeHandler are compared with buffer1 using Util.arrayCompare()</p> | <p>5- Applet is triggered</p> <p>6- No exception is thrown and the handler contains the envelope call control by SIM</p> <p>7- The contents of the envelope handler shall be the same as stored in buffer 1</p> | <p>Proactive command Display Text is fetched</p> <p>The terminal Response of DISPLAY TEXT is sent to the SIM</p> |

6.3.2.3.4 Test Coverage

| CRR Number | Test Case Number |
|------------|--|
| CRRN1 | 1,2,3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16,17,18,19 |
| CRRN2 | 1,2,3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16,17,18,19 |

6.3.3 Applet Triggering

6.3.3.1 EVENT_PROFILE_DOWNLOAD

Test Area Reference: FWK_APT_EPDW

6.3.3.1.1 Conformance Requirement

Normal Execution

CRRN1: Upon the reception of Terminal Profile command by the SIM, the STF stores the ME Profile and then triggers the registered toolkit applets.

CRRN2: The applet is not triggered by the EVENT_PROFILE_DOWNLOAD once it has deregistered from this event.

CRRN3: The STF shall not reply busy to a Terminal Profile command

6.3.3.1.2 Test Suite Files

Test Script: FWK_APT_EPDW_1.scr

Test Applet: FWK_APT_EPDW_1.java

FWK_APT_EPDW_2.java

FWK_APT_EPDW_3.java
 Load Script: FWK_APT_EPDW_1.ldr
 Cleanup Script: FWK_APT_EPDW_1.clr
 Parameter File: FWK_APT_EPDW_1.par

6.3.3.1.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|---|
| 1 | <p>Applets registration to EVENT_PROFILE_DOWNLOAD and triggering</p> <p>Applet1 is registered to the EVENT_PROFILE_DOWNLOAD</p> <p>Applet2 is registered to the EVENT_PROFILE_DOWNLOAD</p> <p>Applet3 is not registered to the EVENT_PROFILE_DOWNLOAD and is registered to EVENT_FORMATTED_SMS_PP_ENV.</p> <p>1-Terminal Profile command is sent to SIM</p> | <p>1- Applet1 is triggered</p> <p>Applet1 finalizes</p> <p>2- Applet2 is triggered</p> <p>Applet2 finalizes</p> <p>3- Applet3 is not triggered</p> | |
| 2 | <p>The STF shall not reply busy to a Terminal Profile command</p> <p>1-Formatted sms pp envelope is sent to SIM</p> <p>Applet3 builds a REFRESH proactive command in sim initialization mode</p> <p>2-ProactiveHandler.send() method is called by applet3</p> <p>3-Terminal Profile command is sent to SIM</p> <p>Applet1 calls Toolkit Registry.clearEvent(EVENT_PROFILE_DOWNLOAD)</p> <p>4-Applet2 calls Toolkit Registry.clearEvent(EVENT_PROFILE_DOWNLOAD)</p> <p>ToolkitRegistry.setEvent(EVENT_PROFILE_DOWNLOAD) method is called</p> | <p>1- Applet3 is triggered by the EVENT_FORMATTED_SMS_PP_ENV</p> <p>Applet3 is suspended until the terminal response</p> <p>3- Applet1 is triggered by EVENT_PROFILE_DOWNLOAD</p> <p>4- Applet2 is triggered by EVENT_PROFILE_DOWNLOAD</p> | <p>2- A proactive command is sent</p> <p>The terminal Response of the proactive command is sent</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|------------------|
| 3 | <p>Deregistered applets are not triggered</p> <p>Terminal Profile command is sent to SIM</p> | <p>Applet3 is triggered (Applet1 and Applet2 are not triggered)</p> | |

6.3.3.1.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1 |
| CRRN2 | 3 |
| CRRN3 | 2 |

6.3.3.2 EVENT_MENU_SELECTION

Test Area Reference: FWK_APT_EMSE

6.3.3.2.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_MENU_SELECTION when an Envelope Menu Selection is received with the item identifier of a menu entry of this applet if no proactive session is ongoing.

6.3.3.2.2 Test Suite Files

Test Script: FWK_APT_EMSE_1.scr

Test Applet: FWK_APT_EMSE_1.java
FWK_APT_EMSE_2.java

Load Script: FWK_APT_EMSE_1.ldr

Cleanup Script: FWK_APT_EMSE_1.clr

Parameter File: FWK_APT_EMSE_1.par

6.3.3.2.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | <p>Applet registration to EVENT_MENU_SELECTION and triggering</p> <p>ToolkitRegistry.initMenuEntry() method is called in the constructor of applet1 and Applet2.</p> <p>For applet1: MenuEntry="Applet1" Offset=0 Length=menuEntry.length HelpSupported=false IconQualifier=0 IconIdentifier=0</p> <p>For applet2: MenuEntry="Applet2" Offset=0 Length=menuEntry.length HelpSupported=false IconQualifier=0 IconIdentifier=0</p> <p>event= EVENT_MENU_SELECTION 1-ToolkitRegistry.isEventSet() is called in constructor.</p> <p>Perform SIM initialization the facility SET UP MENU and without the facilities SET EVENT LIST and POLL INTEVAL features</p> <p>2-Item Identifier = 1 Event Menu Selection envelope is sent to the SIM with the item identifier of a menu entry of applet</p> <p>3-Item Identifier = 2 Event Menu Selection envelope is sent to the SIM with the item identifier of a menu entry of applet</p> | <p>1- The method must return true.</p> <p>2- Applet1 is triggered and applet2 is not triggered</p> <p>3- Applet2 is triggered and applet1 is not triggered</p> | |

6.3.3.2.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1 |

6.3.3.3 EVENT_MENU_SELECTION_HELP_REQUEST

Test Area Reference: FWK_APT_EMESH

6.3.3.3.1 Conformance Requirement

Normal Execution

CRRN1: If and ENVELOPE (MENU_SELECTION_HELP_SUPPORTED) command is received for one entry supporting help, then STF shall trigger the corresponding applet.

6.3.3.3.2 Test Suite Files

Test Script: FWK_APT_EMESH_1.scr

Test Applet: FWK_APT_EMESH_1.java

FWK_APT_EMESH_2.java
 Load Script: FWK_APT_EMESH_1.ldr
 Cleanup Script: FWK_APT_EMESH_1.clr
 Parameter File: FWK_APT_EMESH_1.par

6.3.3.3.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | <p style="text-align: center;">Applet registration to EVENT_MENU_SELECTION_HELP_REQUEST and triggering</p> <p>ToolkitRegistry.InitMenuEntry() method is called in the constructor of applet1 and Applet2.</p> <p>For Applet1: MenuEntry="Applet1" Offset=0 Length=menuEntry.length HelpSupported=true IconQualifier=0 IconIdentifier=0</p> <p>For Applet2: MenuEntry="Applet2" Offset=0 Length=menuEntry.length HelpSupported=true IconQualifier=0 IconIdentifier=0</p> <p>event= EVENT_MENU_SELECTION_HELP_REQUEST 1-ToolkitRegistry.isEventSet() is called in constructor.</p> <p>Perform SIM initialization the facility SET UP MENU and without the facilities SET EVENT LIST and POLL INTEVAL features</p> <p>2-Item identifier =1 Menu Selection Help Request envelope is sent to the SIM with the item identifier of a menu entry of applet</p> <p>3-Item identifier =2 Menu Selection Help Request envelope is sent to the SIM with the item identifier of a menu entry of applet</p> | <p>1-The command must return true.</p> <p>2- Applet1 is triggered and applet2 is not triggered</p> <p>3- Applet2 is triggered and applet1 is not triggered</p> | |

6.3.3.3.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1 |

6.3.3.4 EVENT_FORMATTED_SMS_PP_ENV

Test Area Reference: FWK_APT_EFSE

6.3.3.4.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_FORMATTED_SMS_PP_ENV once:

- it has been registered to this event,
- an envelope APDU carrying an SMS TPDU formatted according to [8], is received,
- the toolkit applet to be triggered is registered with the corresponding TAR in the SMS TPDU, the security is verified

CRRN2: The applet is not triggered by the EVENT_FORMATTED_SMS_PP_ENV once it has deregistered from this event.

6.3.3.4.2 Test Suite Files

- Test Script: FWK_APT_EFSE_1.scr
- Test Applet: FWK_APT_EFSE_1.java
- Load Script: FWK_APT_EFSE_1.ldr
- Cleanup Script: FWK_APT_EFSE_1.clr
- Parameter File: FWK_APT_EFSE_1.par

6.3.3.4.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|------------------|
| 1 | <p>Applet registration to EVENT FORMATTED_SMS_PP_ENV and triggering</p> <p>Applet is registered to EVENT_FORMATTED_SMS_PP_ENV and EVENT_UNRECOGNIZED_ENVELOPE</p> <p>1-An Envelope EVENT_FORMATTED_SMS_PP_ENV is sent to the SIM.</p> | 1- Applet is triggered | |
| 2 | <p>Applet deregistration</p> <p>ToolkitRegistry.clearEvent() method is called for EVENT_FORMATTED_SMS_PP_ENV</p> <p>2-A formatted sms pp envelope is sent to the SIM.</p> <p>An unrecognized envelope is sent to the sim</p> <p>ToolkitRegistry.setEvent() method is called for EVENT_FORMATTED_SMS_PP_ENV</p> <p>3-An Envelope FORMATTED_SMS_PP_ENV is sent to the SIM</p> | <p>2- Applet is not triggered</p> <p>3- Applet is triggered</p> | |

6.3.3.4.4 Test Coverage

| CRR Number | Test Case Number |
|--------------------|------------------|
| CRRN1 (See note 1) | 1, 2 |
| CRRN2 | 2 |

Note 1: The security checks are not relevant to the test designed in this test area; they will be checked in the "Framework Security Management" section.

6.3.3.5 EVENT_UNFORMATTED_SMS_PP_ENV

Test Area Reference: FWK_APT_EUSE

6.3.3.5.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_UNFORMATTED_SMS_PP_ENV once it has registered to this event and an Unformatted Envelope DataDownload is received if no proactive session is ongoing

CRRN2: The applet is not triggered by the EVENT_UNFORMATTED_SMS_PP_ENV once it has deregistered from this event.

6.3.3.5.2 Test Suite Files

Test Script: FWK_APT_EUSE_1.scr
Test Applet: FWK_APT_EUSE_1.java
Load Script: FWK_APT_EUSE_1.ldr
Cleanup Script: FWK_APT_EUSE_1.clr
Parameter File: FWK_APT_EUSE_1.par

6.3.3.5.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|------------------|
| 1 | <p align="center">Applet registration to EVENT_UNFORMATTED_SMS_PP_ENV and triggering</p> <p>Applet is registered to the EVENT_UNFORMATTED_SMS_PP_ENV and ENVENT_FORMATTED_SMS_PP_ENV.</p> <p>1-Toolkit Registry.isEventSet() method is called for EVENT_UNFORMATTED_SMS_PP_ENV</p> <p>2-An Envelope UNFORMATTED_SMS_PP_ENV is sent to the SIM.</p> | <p>1- The method returns true</p> <p>2- Applet is triggered</p> | |
| 2 | <p align="center">Applet deregistration</p> <p>Toolkit Registry.clearEvent()method is called for EVENT_UNFORMATTED_SMS_PP_ENV</p> <p>1-An unformatted sms pp envelope is sent to the SIM.</p> <p>A formatted sms pp envelope is sent to the sim</p> <p>Toolkit Registry.setEvent() method is called for EVENT_UNFORMATTED_SMS_PP_ENV</p> <p>2-An Envelope UNFORMATTED_SMS_PP_ENV is sent to the SIM</p> | <p>1- Applet isn't triggered</p> <p>2- Applet is triggered</p> | |

6.3.3.5.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1, 2 |
| CRRN2 | 2 |

6.3.3.6 EVENT_CALL_CONTROL_BY_SIM

Test Area Reference: FWK_APT_ECCN

6.3.3.6.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_CALL_CONTROL_BY_SIM once it has registered to this event and an Envelope Call Control is received

CRRN2: The applet is not triggered by the EVENT_CALL_CONTROL_BY_SIM once it has deregistered from this event.

6.3.3.6.2 Test Suite Files

Test Script: FWK_APT_ECCN_1.scr

Test Applet: FWK_APT_ECCN_1.java

Load Script: FWK_APT_ECCN_1.ldr

Cleanup Script: FWK_APT_ECCN_1.clr

Parameter File: FWK_APT_ECCN_1.par

6.3.3.6.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|--|
| 1 | <p style="text-align: center;">Applets registration to EVENT_CALL_CONTROL_BY_SIM and triggering</p> <p>Applet1 is registered to EVENT_CALL_CONTROL_BY_SIM.</p> <p>Applet2 is registered to EVENT_FORMATTED_SMS_PP_ENV</p> <p>1-An Envelope Call control by SIM is sent to SIM</p> | <p>1- Applet1 is triggered</p> <p>Applet1 finalizes</p> | |
| 2 | <p style="text-align: center;">Applet deregistration and registration of the third applet to EVENT_CALL- CONTROL_BY_SIM.</p> <p>1-An Envelope Formatted SMS PP envelope is sent to SIM</p> <p>Applet2 constructs a DISPLAY TEXT proactive command.</p> <p>2-ProactiveHandler.send() method is called</p> <p>3-An Envelope Call control by SIM envelope is sent to SIM</p> <p>ToolkitRegistry.clearEvent() is called for EVENT_CALL_CONTROL_BY_SIM. Applet1 finalizes.</p> <p>ToolkitRegistry.setEvent() method is called for EVENT_CALL_CONTROL_BY_SIM.</p> | <p>1-Applet2 is triggered by EVENT_FORMATTED_SMS_PP_ ENV.</p> <p>3- Applet1 is triggered</p> <p>Applet1 finalizes</p> <p>Applet2 finalizes</p> | <p>2- A proactive command DISPLAY TEXT is sent and applet is suspended until the terminal response</p> <p>TERMINAL RESPONSE of DISPLAY TEXT is sent to the SIM</p> |
| 3 | <p style="text-align: center;">Applet triggering</p> <p>An Envelope Call control by SIM envelope is sent ot SIM</p> | <p>Applet2 is triggered. (Applet1 is not triggered)</p> | |

6.3.3.6.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1,2,3 |
| CRRN2 | 3 |

6.3.3.7 EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM

Test Area Reference: FWK_APT_EMCN

6.3.3.7.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM once it has registered to this event and an Envelope MO Short Message Control.

CRRN2: The applet is not triggered by the EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM once it has deregistered from this event.

6.3.3.7.2 Test Suite Files

Test Script: FWK_APT_EMCN_1.scr
Test Applet: FWK_APT_EMCN_1.java
FWK_APT_EMCN_2.java
Load Script: FWK_APT_EMCN_1.ldr
Cleanup Script: FWK_APT_EMCN_1.clr
Parameter File: FWK_APT_EMCN_1.par

6.3.3.7.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|--|
| 1 | <p>Applet registration to EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM and triggering</p> <p>Applet1 is reggistered to EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM.</p> <p>Applet2 is registered to EVENT_FORMATTED_SMS_PP_ENV.</p> <p>1-An Envelope MO short message envelope is sent to SIM</p> | <p>1- Applet1 is triggered.</p> <p>Applet1 finalizes</p> | |
| 2 | <p>Applet deregistration and registration of the third applet to EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM. The STF shall not reply busy to a call control envelope</p> <p>1-An Envelope formatted SMS PP envelope is sent to SIM.</p> <p>Applet2 builds a DISPLAY TEXT proactive command.</p> <p>2-ProactiveHandler.send() method is called.</p> <p>3-An Envelope MO Short message envelope is sent to SIM</p> <p>ToolkitRegistry.clearEvent() for EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM.</p> <p>ToolkitRegistry.setEvent() method is called for EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM.</p> | <p>1- Applet2 is triggered.</p> <p>3- Applet1 is triggered.</p> <p>Applet1 finalizes</p> <p>Applet2 finalizes</p> | <p>2- A Proactive command DISPLAY TEXT is sent and applet is suspended until the terminal response</p> <p>TERMINAL RESPONSE of DISPLAY TEXT is sent to the SIM</p> |
| 3 | <p>Applet3 triggering</p> <p>An Envelope MO SMS control by SIM envelope is sent ot SIM</p> | <p>Applet2 is triggered. (Applet1 is not triggered)</p> | |

6.3.3.7.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1,2,3 |
| CRRN2 | 3 |

6.3.3.8 EVENT_TIMER_EXPIRATION

Test Area Reference: FWK_APT_ETEX

6.3.3.8.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_TIMER_EXPIRATION once it has been registered to this event and an Envelope Timer Expiration with a Timer Identifier of the applet is received if no proactive session is ongoing.

CRRN2: The applet is not triggered by the EVENT_TIMER_EXPIRATION once it has been deregistered from this event.

6.3.3.8.2 Test Suite Files

- Test Script: FWK_APT_ETEX_1.scr
- Test Applet: FWK_APT_ETEX_1.java
- Load Script: FWK_APT_ETEX_1.ldr
- Cleanup Script: FWK_APT_ETEX_1.clr
- Parameter File: FWK_APT_ETEX_1.par

6.3.3.8.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | <p>Applet registration to EVENT_TIMER_EXPIRATION and triggering</p> <p>Applet is registered to the EVENT_TIMER_EXPIRATION using the allocateTimer() method and to EVENT_FORMATTED_SMS_PP_ENV.</p> <p>event= EVENT_TIMER_EXPIRATION 1-Toolkit Registry.isEventSet() method is called.</p> <p>2-An Envelope TIMER_EXPIRATION is sent to the SIM.</p> | <p>1- The method returns true</p> <p>2- Applet is triggered.</p> | |
| 2 | <p>Applet deregistration</p> <p>Timer id=1 Toolkit Registry.ReleaseTimer() method is called</p> <p>1-An Envelope timer expiration is sent to the SIM.</p> <p>An Envelope formatted sms pp envelope is sent to the sim</p> <p>Toolkit Registry.AllocateTimer() method is called</p> | <p>1- Applet isn't triggered</p> | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---------------------------|------------------|
| | 2-An Envelope TIMER_EXPIRATION is sent to the SIM. | 2- Applet is triggered | |

6.3.3.8.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1,2 |
| CRRN2 | 2 |

6.3.3.9 EVENT_UNFORMATTED_SMS_CB

Test Area Reference: FWK_APT_EUCB

6.3.3.9.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_UNFORMATTED_SMS_CB once it has registered to this event and an Envelope Cell Broadcast DownLoad is received.

CRRN2: The applet is not triggered by the EVENT_UNFORMATTED_SMS_CB once it has deregistered from this event.

6.3.3.9.2 Test Suite Files

Test Script: FWK_APT_EUCB_1.scr
 Test Applet: FWK_APT_EUCB_1.java
 Load Script: FWK_APT_EUCB_1.ldr
 Cleanup Script: FWK_APT_EUCB_1.clr
 Parameter File: FWK_APT_EUCB_1.par

6.3.3.9.3 Test Procedure

| Id | Description | API Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | <p>Applet registration to EVENT_UNFORMATTED_SMS_CB and triggering</p> <p>Applet is registered to the EVENT_UNFORMATTED_SMS_CB and EVENT_FORMATTED_SMS_PP_ENV.</p> <p>event= EVENT_UNFORMATTED_SMS_CB 1-Toolkit Registry.isEventSet() method is called.</p> <p>2-An Envelope UNFORMATTED_SMS_CB is sent to the SIM.</p> | <p>1- Method returns true.</p> <p>2- Applet is triggered</p> | |
| 2 | <p>Applet deregistration</p> <p>Toolkit Registry.ClearEvent()method is called for EVENT_UNFORMATTED_SMS_CB</p> <p>1-An Envelope UNFORMATTED_SMS_CB is sent to the SIM.</p> | <p>1- Applet isn't triggered</p> | |

| Id | Description | API Expectation | APDU Expectation |
|----|---|-------------------------------|------------------|
| | <p>An Envelope formatted sms pp envelope is sent to the sim</p> <p>event= EVENT_UNFORMATTED_SMS_CB</p> <p>Toolkit Registry.setEvent() method is called for EVENT_UNFORMATTED_SMS_CB</p> <p>2-An Envelope UNFORMATTED_SMS_CB is sent to the SIM.</p> | <p>2- Applet is triggered</p> | |

6.3.3.9.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1,2 |
| CRRN2 | 2 |

6.3.3.10 EVENT_EVENT_DOWNLOAD_MT_CALL

Test Area Reference: FWK_APT_EDMC

6.3.3.10.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_EVENT_DOWNLOAD_MT_CALL once it has registered to this event and an Envelope Event DownLoad MT Call is received.

CRRN2: The applet is not triggered by the EVENT_EVENT_DOWNLOAD_MT_CALL once it has deregistered from this event.

6.3.3.10.2 Test Suite Files

- Test Script: FWK_APT_EMSE_1.scr
- Test Applet: FWK_APT_EMSE_1.java
- Load Script: FWK_APT_EMSE_1.ldr
- Cleanup Script: FWK_APT_EMSE_1.clr
- Parameter File: FWK_APT_EMSE_1.par

6.3.3.10.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|------------------|
| 1 | <p align="center">Applet registration to EVENT_EVENT_DOWNLOAD_MT_CALL and triggering</p> <p>Applet is registered to the EVENT_EVENT_DOWNLOAD_MT_CALL and to EVENT_FORMATTED_SMS_PP_ENV.</p> <p>event= EVENT_EVENT_DOWNLOAD_MT_CALL 1-Toolkit Registry.isEventSet() method is called.</p> <p>2-An Envelope EVENT_DOWNLOAD_MT_CALL is sent to the SIM.</p> | <p>1- The method returns true</p> <p>2- Applet is triggered</p> | |
| 2 | <p align="center">Applet deregistration</p> <p>event= EVENT_EVENT_DOWNLOAD_MT_CALL Toolkit Registry.clearEvent()method is called</p> <p>Perform SIM initialization with all the facilities supported</p> <p>1-An Envelope EVENT_DOWNLOAD_MT_CALL is sent to the SIM.</p> <p>An Envelope formatted sms pp envelope is sent to the sim</p> <p>event= EVENT_EVENT_DOWNLOAD_MT_CALL Toolkit Registry.setEvent() method is called</p> <p>Perform SIM initialization with all the facilities supported</p> <p>2-An Envelope EVENT_DOWNLOAD_MT_CALL is sent to the SIM.</p> | <p>1- Applet isn't triggered</p> <p>2- Applet is triggered</p> | |

6.3.3.10.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1,2 |
| CRRN2 | 2 |

6.3.3.11 EVENT_EVENT_DOWNLOAD_CALL_CONNECTED

Test Area Reference: FWK_APT_EDCC

6.3.3.11.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_EVENT_DOWNLOAD_CALL_CONNECTED once it has registered to this event and an Envelope Event DownLoad Call Connected is received.

CRRN2: The applet is not triggered by the EVENT_EVENT_DOWNLOAD_CALL_CONNECTED once it has deregistered from this event.

6.3.3.11.2 Test Suite Files

Test Script: FWK_APT_EDCC_1.scr
 Test Applet: FWK_APT_EDCC_1.java
 Load Script: FWK_APT_EDCC_1.ldr
 Clean-up Script: FWK_APT_EDCC_1.clr

6.3.3.11.3 Test Procedure

| | | | |
|---|--|--|--|
| 1 | <p>Applet registration to EVENT_EVENT_DOWNLOAD_CALL_CONNECTED and triggering</p> <p>Applet is registered to the EVENT_EVENT_DOWNLOAD_CALL_CONNECTED and to EVENT_FORMATTED_SMS_PP_ENV.</p> <p>event= EVENT_EVENT_DOWNLOAD_CALL_CONNECTED 1-Toolkit Registry.isEventSet() method is called.</p> <p>2-An Envelope EVENT_DOWNLOAD_CALL_CONNECTED is sent to the SIM.</p> | <p>1- Method returns true</p> <p>2- Applet is triggered.</p> | |
| 2 | <p>Applet deregistration</p> <p>event=EVENT_EVENT_DOWNLOAD_CALL_CONNECTED Toolkit Registry.clearEvent()method is called</p> <p>Perform SIM initialization with all the facilities supported</p> <p>1-A call connected event dowload is sent to the SIM.</p> <p>An Envelope formatted sms pp envelope is sent to the sim</p> <p>Event= EVENT_EVENT_DOWNLOAD_CALL_CONNECTED Toolkit Registry.setEvent() method is called</p> <p>Perform SIM initialization with all the facilities supported</p> <p>2-An Envelope EVENT_DOWNLOAD_CALL_CONNECTED is sent to the SIM.</p> | <p>1- Applet isn't triggered</p> <p>2- Applet is triggered</p> | |

6.3.3.11.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1,2 |
| CRRN2 | 2 |

6.3.3.12 EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED

Test Area Reference: FWK_APT_EDCD

6.3.3.12.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED once it has registered to this event and an Envelope Event DownLoad Call Disconnected is received.

CRRN2: The applet is not triggered by the EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED once it has deregistered from this event.

6.3.3.12.2 Test Suite Files

Test Script: FWK_APT_EDCD_1.scr
 Test Applet: FWK_APT_EDCD_1.java
 Load Script: FWK_APT_EDCD_1.ldr
 Cleanup Script: FWK_APT_EDCD_1.clr
 Parameter File: FWK_APT_EDCD_1.par

6.3.3.12.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|------------------|
| 1 | <p>Applet registration to EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED and triggering</p> <p>Applet is registered to the EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED and to EVENT_FORMATTED_SMS_PP_ENV.</p> <p>Event=EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED</p> <p>1-Toolkit Registry.isEventSet() method is called.</p> <p>2-An Envelope EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED is sent to the SIM.</p> | <p>1- Method returns true</p> <p>2- Applet is triggered.</p> | |
| 2 | <p>Applet deregistration</p> <p>Event=EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED Toolkit Registry.clearEvent()method is called</p> <p>Perform SIM initialization with all the facilities supported</p> <p>1-An Envelope EVENT_DOWNLOAD_CALL_DISCONNECTED is sent to the SIM.</p> <p>a formatted sms pp envelope is sent to the sim.</p> <p>Event=EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED Toolkit Registry.setEvent() method is called</p> <p>Perform SIM initialization with all the facilities supported</p> <p>2-An Envelope EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED is</p> | <p>1- Applet isn't triggered</p> <p>2- Applet is triggered</p> | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|------------------|---------------------------|------------------|
| | sent to the SIM. | | |

6.3.3.12.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1,2 |
| CRRN2 | 2 |

6.3.3.13 EVENT_EVENT_DOWNLOAD_LOCATION_STATUS

Test Area Reference: FWK_APT_EDLS

6.3.3.13.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_EVENT_DOWNLOAD_LOCATION_STATUS once it has registered to this event and an Envelope Event DownLoad Location Status is received.

CRRN2: The applet is not triggered by the EVENT_EVENT_DOWNLOAD_LOCATION_STATUS once it has deregistered from this event.

6.3.3.13.2 Test Suite Files

- Test Script: FWK_APT_EDLS_1.scr
- Test Applet: FWK_APT_EDLS_1.java
- Load Script: FWK_APT_EDLS_1.ldr
- Cleanup Script: FWK_APT_EDLS_1.clr
- Parameter File: FWK_APT_EDLS_1.par

6.3.3.13.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | <p>Applet registration to EVENT_EVENT_DOWNLOAD_LOCATION_STATUS and triggering</p> <p>Applet is registered to the EVENT_EVENT_DOWNLOAD_LOCATION_STATUS and to EVENT_FORMATTED_SMS_PP_ENV.</p> <p>Event=EVENT_EVENT_DOWNLOAD_LOCATION_STATUS 1-Toolkit Registry.isEventSet() method is called.</p> <p>2-An Envelope EVENT_EVENT_DOWNLOAD_LOCATION_STATUS is sent to the SIM.</p> | <p>1- Method returns true</p> <p>2- Applet is triggered.</p> | |
| 2 | <p>Applet deregistration</p> <p>Event=EVENT_EVENT_DOWNLOAD_LOCATION_STATUS Toolkit Registry.clearEvent()method is called Perform SIM initialization with all the facilities supported</p> | | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---------------------------|------------------|
| | 1-An Envelope EVENT_DOWNLOAD_LOCATION_STATUS is sent to the SIM. a formatted sms pp envelope is sent to the sim Event= EVENT_EVENT_DOWNLOAD_LOCATION_STATUS Toolkit Registry.setEvent() method is called Perform SIM initialization with all the facilities supported | 1- Applet isn't triggered | |
| | 2-An Envelope EVENT_DOWNLOAD_LOCATION_STATUS is sent to the SIM. | 2- Applet is triggered | |

6.3.3.13.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1,2 |
| CRRN2 | 2 |

6.3.3.14 EVENT_EVENT_DOWNLOAD_USER_ACTIVITY

Test Area Reference: FWK_APT_EDUA

6.3.3.14.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_EVENT_DOWNLOAD_USER_ACTIVITY once it has registered to this event and an Envelope Event DownLoad User Activity is received.

CRRN2: The applet is not triggered by the EVENT_EVENT_DOWNLOAD_USER_ACTIVITY once it has deregistered from this event.

6.3.3.14.2 Test Suite Files

- Test Script: FWK_APT_EDUA_1.scr
- Test Applet: FWK_APT_EDUA_1.java
- Load Script: FWK_APT_EDUA_1.ldr
- Cleanup Script: FWK_APT_EDUA_1.clr
- Parameter File: FWK_APT_EDUA_1.par

6.3.3.14.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | <p align="center">Applet registration to EVENT_EVENT_DOWNLOAD_USER_ACTIVITY and triggering</p> <p>Applet is registered to the EVENT_EVENT_DOWNLOAD_USER_ACTIVITY and to EVENT_FORMATTED_SMS_PP_ENV.</p> <p>Event= EVENT_EVENT_DOWNLOAD_USER_ACTIVITY</p> <p>1-Toolkit Registry.isEventSet() method is called.</p> <p>2-An Envelope EVENT_DOWNLOAD_USER_ACTIVITY is sent to the SIM.</p> | <p>1- Method returns true</p> <p>2- Applet is triggered</p> | |
| 2 | <p align="center">Applet deregistration</p> <p>Event= EVENT_EVENT_DOWNLOAD_USER_ACTIVITY Toolkit Registry.clearEvent()method is called</p> <p>Perform SIM initialization with all the facilities supported</p> <p>1-An Envelope EVENT_DOWNLOAD_USER_ACTIVITY is sent to the SIM.</p> <p>a formatted sms pp envelope is sent to the sim</p> <p>Event= EVENT_EVENT_DOWNLOAD_USER_ACTIVITY Toolkit Registry.setEvent() method is called</p> <p>Perform SIM initialization with all the facilities supported</p> <p>2-An Envelope EVENT_DOWNLOAD_USER_ACTIVITY is sent to the SIM.</p> | <p>1- Applet isn't triggered</p> <p>2- Applet is triggered</p> | |

6.3.3.14.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1,2 |
| CRRN2 | 2 |

6.3.3.15 EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE

Test Area Reference: FWK_APT_EDIS

6.3.3.15.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE once it has registered to this event and an Envelope Event Download Idle Screen Available is received.

CRRN2: The applet is not triggered by the EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE once it has deregistered from this event.

6.3.3.15.2 Test Suite Files

Test Script: FWK_APT_EDIS_1.scr

Test Applet: FWK_APT_EDIS_1.java
 Load Script: FWK_APT_EDIS_1.ldr
 Cleanup Script: FWK_APT_EDIS_1.clr
 Parameter File: FWK_APT_EDIS_1.par

6.3.3.15.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | <p align="center">Applet registration to EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE and triggering</p> <p>Applet is registered to the EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE and to EVENT_FORMATTED_SMS_PP_ENV Event= EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE 1-Toolkit Registry.isEventSet() method is called.</p> <p>2-An Envelope EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE is sent to the SIM.</p> | <p>1- Method returns true</p> <p>2- Applet is triggered</p> | |
| 2 | <p align="center">Applet deregistration</p> <p>Event=EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE</p> <p>Toolkit Registry.clearEvent()method is called Perform SIM initialization with all the facilities supported</p> <p>1-An Envelope EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE is sent to the SIM.</p> <p>a formatted sms pp envelope is sent to the sim</p> <p>Event= EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE</p> <p>Toolkit Registry.setEvent() method is called Perform SIM initialization with all the facilities supported</p> <p>2-An Envelope EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE is sent to the SIM.</p> | <p>1- Applet isn't triggered</p> <p>2- Applet is triggered</p> | |

6.3.3.15.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1,2 |
| CRRN2 | 2 |

6.3.3.16 EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS

Test Area Reference: FWK_APT_EDCR

6.3.3.16.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS once it has registered to this event and Envelope Event Download Card Reader Status is received.

CRRN2: The applet is not triggered by the EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS once it has deregistered from this event.

6.3.3.16.2 Test Suite Files

Test Script: FWK_APT_EDCR_1.scr
 Test Applet: FWK_APT_EDCR_1.java
 Load Script: FWK_APT_EDCR_1.ldr
 Cleanup Script: FWK_APT_EDCR_1.clr
 Parameter File: FWK_APT_EDCR_1.par

6.3.3.16.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|------------------|
| 1 | <p>Applet registration to EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS and triggering</p> <p>Applet is registered to the EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS and to EVENT_FORMATTED_SMS_PP_ENV</p> <p>Event=EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS 1-Toolkit Registry.isEventSet() method is called.</p> <p>2-An Envelope EVENT_DOWNLOAD_CARD_READER_STATUS is sent to the SIM.</p> | <p>1- Method returns true</p> <p>2- Applet is triggered</p> | |
| 2 | <p>Applet deregistration</p> <p>Event=EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS</p> <p>Toolkit Registry.clearEvent()method is called</p> <p>Perform SIM initialization with all the facilities supported</p> <p>1-An Envelope EVENT_DOWNLOAD_CARD_READER_STATUS is sent to the SIM.</p> <p>An Envelope formatted sms pp envelope is sent to the sim</p> <p>Event=EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS</p> <p>Toolkit Registry.setEvent() method is called</p> <p>Perform SIM initialization with all the facilities supported</p> | <p>1- Applet isn't triggered</p> | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---------------------------|------------------|
| | 2-An Envelope EVENT_DOWNLOAD_CARD_READER_STATUS is sent to the SIM. | 2- Applet is triggered | |

6.3.3.16.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1,2 |
| CRRN2 | 2 |

6.3.3.17 EVENT_UNRECOGNIZED_ENVELOPE

Test Area Reference: FWK_APT_EUEV

6.3.3.17.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_UNRECOGNIZED_ENVELOPE once it has registered to this event and an Unrecognized Envelope is received.

CRRN2: The applet is not triggered by the EVENT_UNRECOGNIZED_ENVELOPE once it has deregistered from this event.

6.3.3.17.2 Test Suite Files

Test Script: FWK_APT_EUEN_1.scr
 Test Applet: FWK_APT_EUEN_1.java
 Load Script: FWK_APT_EUEN_1.ldr
 Cleanup Script: FWK_APT_EUEN_1.clr
 Parameter File: FWK_APT_EUEN_1.par

6.3.3.17.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | <p align="center">Applet registration to EVENT_UNRECOGNIZED_ENVELOPE and triggering</p> <p>Applet is registered to the EVENT_UNRECOGNIZED_ENVELOPE and to EVENT_FORMATTED_SMS_PP_ENV</p> <p>Event= EVENT_UNRECOGNIZED_ENVELOPE 1-Toolkit Registry.isEventSet() method is called.</p> <p>2-An Envelope UNRECOGNIZED_ENVELOPE is sent to the SIM.</p> | <p>1- Method returns true</p> <p>2- Applet is triggered</p> | |
| 2 | <p align="center">Applet deregistration</p> <p>Event= EVENT_UNRECOGNIZED_ENVELOPE Toolkit Registry.clearEvent()method is called</p> <p>1-An Envelope UNRECOGNIZED_ENVELOPE is sent to the SIM.</p> <p>a formatted sms pp envelope is sent to the sim</p> <p>Event= EVENT_UNRECOGNIZED_ENVELOPE Toolkit Registry.setEvent() method is called</p> <p>2-An Envelope UNRECOGNIZED_ENVELOPE is sent to the SIM.</p> | <p>1- Applet isn't triggered</p> <p>2- Applet is triggered</p> | |

6.3.3.17.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1,2 |
| CRRN2 | 2 |

6.3.3.18 EVENT_STATUS_COMMAND

Test Area Reference: FWK_APT_ESTC

6.3.3.18.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_STATUS_COMMAND once it has registered to this event and a Status Command is received.

CRRN2: The applet is not triggered by the EVENT_STATUS_COMMAND once it has deregistered from this event.

6.3.3.18.2 Test Suite Files

Test Script: FWK_APT_ESTC_1.scr

Test Applet: FWK_APT_ESTC_1.java

FWK_APT_ESTC_2.java

FWK_APT_ESTC_3.java

Load Script: FWK_APT_ESTC_1.ldr
 Cleanup Script: FWK_APT_ESTC_1.clr
 Parameter File: FWK_APT_ESTC_1.par

6.3.3.18.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|---|
| 1 | <p align="center">Applets registration to EVENT_STATUS_COMMAND and triggering</p> <p>Applet1 is registered to EVENT_STATUS_COMMAND using the requestPollInterval() command.</p> <p>Applet2 is registered to EVENT_STATUS_COMMAND using the RequestPollInterval() command.</p> <p>Applet3 is registered to EVENT_FORMATTED_SMS_PP_ENV.</p> <p>1-A status command is sent to SIM</p> | <p>1- Applet1 is triggered.</p> <p>Applet1 finalizes 2- Applet2 is triggered.</p> <p>Applet2 finalizes 3- Applet 3 is not triggered</p> | |
| 2 | <p align="center">Applet deregistration and registration of the third applet to EVENT_STATUS_COMMAND. The STF shall not reply busy to a call control envelope</p> <p>1-A formatted sms pp envelope is sent to SIM</p> <p>Applet3 builds a DISPLAY TEXT.</p> <p>2- ProactiveHandler.send() is called</p> <p>3-A status command is sent to SIM.</p> <p>requestPollInteval with POLL_NO_DURATION is called</p> <p>requestPollInteval with POLL_NO_DURATION is called Applet2 finalized</p> <p>requestPollInterval() method is called.</p> | <p>1- Applet3 is triggered.</p> <p>3- Applet1 is triggered.</p> <p>Applet1 finalizes 4- Applet2 is triggered.</p> <p>Applet3 finalizes</p> | <p>2- A proactive command DISPLAY TEXT is sent and applet is suspended until the terminal response</p> <p>5- TERMINAL RESPONSE of DISPLAY TEXT is sent to the SIM</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|------------------|
| 3 | <p data-bbox="395 219 608 248">Applet3 triggering</p> <p data-bbox="229 271 735 320">Perform SIM initialization with all the facilities supported</p> <p data-bbox="229 342 616 365">Status command is sent to SIM.</p> | <p data-bbox="783 331 1091 412">Applet3 is triggered. (Applet1 and Applet2 are not triggered)</p> | |

6.3.3.18.4 Test Coverage

| CR Number | Test Case Number |
|-----------|------------------|
| CRRN1 | 1,2,3 |
| CRRN2 | 3 |

6.3.3.19 EVENT_FORMATTED_SMS_CB

Test Area Reference: FWK_APT_EFCB

6.3.3.19.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_FORMATTED_SMS_CB once:

- it has been registered to this event,
- an envelope APDU carrying a Cell Broadcast Page, formatted according to [8], is received,
- the toolkit applet to be triggered is registered with the corresponding TAR in the CB page,
- the security is verified

CRRN2: The applet is not triggered by the EVENT_FORMATTED_SMS_CB once it has deregistered from this event.

6.3.3.19.2 Test Suite Files

Test Script: FWK_APT_EFCB_1.scr

Test Applet: FWK_APT_EFCB_1.java

Load Script: FWK_APT_EFCB_1.ldr

Cleanup Script: FWK_APT_EFCB_1.clr

Parameter File: FWK_APT_EFCB_1.par

6.3.3.19.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|------------------|
| 1 | <p>Applet registration to EVENT_FORMATTED_SMS_CB and triggering</p> <p>Applet is registered to EVENT_FORMATTED_SMS_CB and EVENT_FORMATTED_SMS_PP_ENV</p> <p>1-An Envelope EVENT_FORMATTED_SMS_CB is sent to the SIM.</p> | 1-Applet is triggered | |
| 2 | <p>Applet deregistration</p> <p>ToolkitRegistry.clearEvent() method is called for EVENT_FORMATTED_SMS_CB</p> <p>1-A formatted SMS CB envelope is sent to the SIM.</p> <p>2-An envelope SMS-PP formatted is sent to the SIM</p> <p>ToolkitRegistry.setEvent() method is called for EVENT_FORMATTED_SMS_CB</p> <p>3-An Envelope FORMATTED_SMS_CB is sent to the SIM</p> | <p>1- Applet is not triggered</p> <p>2- Applet is triggered</p> <p>3- Applet is triggered</p> | |

6.3.3.19.4 Test Coverage

| CR Number | Test Case Number |
|--------------------|-------------------------|
| CRRN1 (See note 1) | 1,2 |
| CRRN2 | 2 |

Note 1: The security checks are not relevant to the test designed in this test area; they will be checked in the "Framework Security Management" section.

6.3.3.20 EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION

Test Area Reference: FWK_APT_EDLG

6.3.3.20.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION once it has registered to this event and an Envelope Event DownLoad Language Selection is received.

CRRN2: The applet is not triggered by the EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION once it has deregistered from this event.

6.3.3.20.2 Test Suite Files

Test Script: FWK_APT_EDLG_1.scr

Test Applet: FWK_APT_EDLG_1.java

Load Script: FWK_APT_EDLG_1.ldr

Cleanup Script: FWK_APT_EDLG_1.clr

Parameter File: FWK_APT_EDLG_1.par

6.3.3.20.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | <p align="center">Applet registration to EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION and triggering</p> <p>Applet is registered to the EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION and to EVENT_FORMATTED_SMS_PP_ENV.</p> <p>Event= EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION</p> <p>1-Toolkit Registry.isEventSet() method is called.</p> <p>2-An Envelope EVENT_DOWNLOAD_LANGUAGE_SELECTION is sent to the SIM.</p> | <p>1-Method returns true</p> <p>2- Applet is triggered</p> | |
| 2 | <p align="center">Applet deregistration</p> <p>Event= EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION Toolkit Registry.clearEvent()method is called</p> <p>Perform SIM initialization with Profile Download, SMS PP Data Download, Command Result and Language Selection facilities.</p> <p>1-An Envelope EVENT_DOWNLOAD_LANGUAGE_SELECTION is sent to the SIM.</p> <p>a formatted sms pp envelope is sent to the sim</p> <p>Event= EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION Toolkit Registry.setEvent() method is called</p> <p>Perform SIM initialization with Profile Download, SMS PP Data Download, Command Result and Language Selection facilities.</p> <p>2-An Envelope EVENT_DOWNLOAD_LANGUAGE_SELECTION is sent to the SIM.</p> | <p>1- Applet isn't triggered</p> <p>2- Applet is triggered</p> | |

6.3.3.20.4 Test Coverage

| CR Number | Test Case Number |
|------------------|-------------------------|
| CRRN1 | 1, 2 |
| CRRN2 | 2 |

6.3.3.21 EVENT_EVENT_DOWNLOAD_BROWSER_TERMINATION

Test Area Reference: FWK_APT_EDBT

6.3.3.21.1 Conformance Requirement

Normal Execution

CRRN1: The applet is triggered by the EVENT_EVENT_DOWNLOAD_BROWSER_TERMINATION once it has registered to this event and an Envelope Event DownLoad Browser Termination is received.

CRRN2: The applet is not triggered by the EVENT_EVENT_DOWNLOAD_BROWSER_TERMINATION once it has deregistered from this event.

6.3.3.21.2 Test Suite Files

Test Script: FWK_APT_EDBT_1.scr
Test Applet: FWK_APT_EDBT_1.java
Load Script: FWK_APT_EDBT_1.ldr
Cleanup Script: FWK_APT_EDBT_1.clr
Parameter File: FWK_APT_EDBT_1.par

6.3.3.21.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|------------------|
| 1 | <p align="center">Applet registration to EVENT_EVENT_DOWNLOAD_ BROWSER_TERMINATION and triggering</p> <p>Applet is registered to the EVENT_EVENT_DOWNLOAD_BROWSER_TERMINATION and to EVENT_FORMATTED_SMS_PP_ENV</p> <p>Event= EVENT_EVENT_DOWNLOAD_BROWSER_TERMINATION</p> <p>1-Toolkit Registry.isEventSet() method is called.</p> <p>2-An Envelope EVENT_DOWNLOAD_BROWSER_TERMINATION is sent to the SIM.</p> | <p>1-Method returns true</p> <p>2- Applet is triggered</p> | |
| 2 | <p align="center">Applet deregistration</p> <p>Event= EVENT_EVENT_DOWNLOAD_BROWSER_TERMINATION Toolkit Registry.clearEvent()method is called</p> <p>Perform SIM initialization with Profile Download, SMS PP Data Download, Command Result and Browser Termination facilities.</p> <p>1-An Envelope EVENT_DOWNLOAD_BROWSER_TERMINATION is sent to the SIM.</p> <p>a formatted sms pp envelope is sent to the sim</p> <p>Event= EVENT_EVENT_DOWNLOAD_BROWSER_TERMINATION Toolkit Registry.setEvent() method is called</p> <p>Perform SIM initialization with Profile Download, SMS PP Data Download, Command Result and Browser Termination facilities.</p> <p>2-An Envelope EVENT_DOWNLOAD_BROWSER_TERMINATION is sent to the SIM.</p> | <p>1- Applet isn't triggered</p> <p>2- Applet is triggered</p> | |

6.3.3.21.4 Test Coverage

| CR Number | Test Case Number |
|------------------|-------------------------|
| CRRN1 | 1, 2 |
| CRRN2 | 2 |

6.3.4 Proactive Command Sending by the STF

6.3.4.1 System Proactive Commands

Test Area Reference: FWK_PCS_SPCO

6.3.4.1.1 Conformance Requirements

Normal Execution

CRRN1: When a toolkit applet changes a menu entry of its registry object, the SIM Toolkit Framework shall dynamically* update the menu stored in the ME during the current card session

CRRN2: The STF shall use the data of the EFsume file when issuing the SET UP MENU proactive command.

CRRN3: For all EVENT_EVENT_DOWNLOAD_*: When a toolkit applet changes one or more of these requested events of its registry object, the STF shall dynamically* update the event list stored in the ME during the current card session by SET UP EVENT LIST proactive command.

*The STF shall send its system proactive command as soon as no proactive session is pending and all the applets registered to the current events have been triggered and have returned from the processToolkit method invocation.

6.3.4.1.2 Test Suite Files

Test Script: FWK_PCS_SPCO_1.scr

Test Applet: FWK_PCS_SPCO_1.java

Load Script: FWK_PCS_SPCO_1.ldr

Cleanup Script: FWK_PCS_SPCO_1.clr

Parameter File: FWK_PCS_SPCO_1.par

6.3.4.1.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---------------------------|---|
| 1 | <p>Install Applet 1, Registered to the EVENT_EVENT_DOWNLOAD_MT_CALL and EVENT_EVENT_DOWNLOAD_LOCATION_STATUS</p> <p>Perform SIM initialization with EVENT_DOWNLOAD facilities supported</p> | | <p>setEventList proactive command</p> <p>[Event list]= '19020003' or '99020003'</p> |
| 2 | <p>Trigger the applet by ENVELOPE (SMS_FORMATTED_PP) command</p> <p>Clear the events and build a display text command</p> | | <p>1. DISPLAY TEXT Proactive command</p> <p>2. SET UP EVENT LIST Proactive command</p> <p>[CommandQualifier]= 00h</p> |

6.3.4.1.4 Test Coverage

| CRR number | Test case number |
|------------|---|
| N1 | <p>see:</p> <p>chapter 6.2.9.2, CRRN1, chapter 6.2.9.4, CRRN3, chapter 6.2.9.5 CRRN4, chapter 6.2.9.8 CRRN1</p> |
| N2 | <p>see:</p> <p>chapter 6.2.9.2 CRRN1, chapter 6.2.9.8 CRRN1</p> |
| N3 | 1,2 |

6.3.4.2 Interaction with GSM commands

Test Area Reference: FWK_PCS_IGCO

6.3.4.2.1 Conformance Requirements

Normal Execution

CRRN1: The STF shall process a GSM command even when a proactive command is pending (before and after the FETCH command until the terminal response). The STF shall answer with the SW1 and SW2 described in [3] and [4].

6.3.4.2.2 Test Suite Files

- Test Script: FWK_PCS_IGCO_1.scr
- Test Applet: FWK_PCS_IGCO_1.java
- Load Script: FWK_PCS_IGCO_1.ldr
- Cleanup Script: FWK_PCS_IGCO_1.clr
- Parameter File: FWK_PCS_IGCO_1.par

6.3.4.2.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---------------------------|---|
| 1 | <p>Interaction with GSM Commands after TERMINAL PROFILE in connection with FETCH and TERMINAL RESPONSE</p> <p>Applet is registered to Menu Selection</p> <p>RST TERMINAL PROFILE (Profile: supports all facilities except: SET UP EVENT LIST, POLL INTERVAL and POLLING OFF) 1- System issues a proactive command SETUP_MENU</p> <p>2- SELECT MF 3- GET RESPONSE (6 Bytes) 4- Failed SELECT File 5- FETCH</p> <p>6- SELECT MF 7- GET RESPONSE (6 Bytes) 8- TERMINAL RESPONSE</p> | | <p>1- 91xx</p> <p>2- 9Fxx 3- 91xx 4- 9404 5- Proactive Command: SETUP MENU</p> <p>6- 9Fxx 7- 9000 8- 9000</p> |
| 2 | <p>Interaction with GSM Commands after ENVELOPE (MENU SELECTION) in connection with FETCH and TERMINAL RESPONSE</p> <p>Menu Entry ID = 0x01</p> <p>1- SELECT MF 2- GET RESPONSE (6 Bytes) 3- Failed SELECT File 4- FETCH</p> <p>5- SELECT MF 6- GET RESPONSE (6 Bytes)</p> | | <p>1- 9FXX 2- 91XX 3- 9404 4- Proactive Command: DISPLAY TEXT</p> <p>5- 9FXX</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---------------------------|--|
| | 7- TERMINAL RESPONSE | | 6- 9000 7- 9000 |
| 3 | <p>Interaction with GSM Commands after TERMINAL RESPONSE in proactive command session in connection with FETCH and TERMINAL RESPONSE</p> <p>Menu Entry ID = 0x02</p> <p>1- SELECT MF 2- GET RESPONSE (6 Bytes) 3- FETCH</p> <p>4- SELECT MF 5- GET RESPONSE (6 Bytes) 6- Failed SELECT File 7- TERMINAL RESPONSE</p> <p>8- SELECT MF 9- GET RESPONSE (6 Bytes) 10-Failed SELECT File 11-FETCH</p> <p>12-SELECT MF 13-GET RESPONSE (6 Bytes) 14-TERMINAL RESPONSE</p> | | <p>1- 9FXX 2- 91XX</p> <p>3- Proactive Command: DISPLAY TEXT 4- 9FXX 5- 9000 6- 9404 7- 9000</p> <p>8- 9FXX 9- 91XX 10-9404</p> <p>11-Proactive Command: DISPLAY TEXT</p> <p>12-9FXX 13-9000 14-9000</p> |

6.3.4.2.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 1,2,3 |

6.3.5 Exception Handling

6.3.5.1 Hide Exceptions from the ME

Test Area Reference: FWK_EXH_HEME

6.3.5.1.1 Conformance Requirements

Normal Execution

CRRN1 : A toolkit applet may throw an exception, but this error will not be sent to the ME.

* Because the behaviour of the SIM is not exactly defined for the above CRRN, there are no tests defined here yet.

6.3.5.2 Interaction with Multiple Triggering

Test Area Reference: FWK_EXH_IMTG

6.3.5.2.1 Conformance Requirements

Normal Execution:

CRRN1 : An exception thrown by a toolkit applet, will not influence toolkit applets registered to the same event

6.3.5.2.2 Test Suite Files

Test Script: FWK_EXH_IMTG_1.scr
 Test Applet: : FWK_EXH_IMTG_1.java
 Load Script: : FWK_EXH_IMTG_1.ldr
 Cleanup Script: FWK_EXH_IMTG_1.clr
 Parameter File: FWK_EXH_IMTG_1.par

6.3.5.2.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|------------------|
| 0 | Load/install 2 toolkit applets registered to EVENT_STATUS_COMMAND, EVENT_PROFILE_DOWNLOAD, EVENT_UNRECOGNISED_ENVELOPE, EVENT_EVENT_DOWNLOAD_MT_CALL, EVENT_UNFORMATTED_SMS_PP_ENV, EVENT_UNFORMATTED_SMS_PP_UPD, EVENT_UNFORMATTED_SMS_CB applet1: Priority= 0x01, applet2: Priority= 0x02, (i.e. applet1 is triggered before applet2) | | |
| 1 | Status_Command is sent | 1- Applet1 is triggered : 2- NullPointerException is thrown 3- Applet2 is triggered | |
| 2 | Profile_Download is sent | 1- Applet1 is triggered 2- NullPointerException is thrown 3- Applet2 is triggered | |
| 3 | Unrecognised_Envelope is sent | 1- Applet2 is triggered 2- NullPointerException is thrown 3- Applet2 is triggered | |
| 4 | Event_Download_MT_Call is sent | 1- Applet21is triggered 2- NullPointerException is thrown 3- Applet2 is triggered | |
| 5 | Unformatted_SMS_PP_Env is sent | 1- Applet1is triggered NullPointerException is thrown 3- Applet2 is triggered | |
| 6 | Unformatted_SMS_PP_Upd is sent | 1- Applet1 is triggered | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|-----------------------------------|--|------------------|
| | | NullPointerException is thrown 3- Applet2 is triggered | |
| 7 | Unformatted_SMS_CB is sent | 1- Applet1 is triggered NullPointerException is thrown 3- Applet2 is triggered | |

6.3.5.2.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1,2,3,4,5,6,7 |

6.3.6 Framework Security Management

Security Parameters

The table that follows contains the security parameters that shall be used when the 03.48 security is required in the test cases developed in the current section.

| Parameter | Value in hexadecimal |
|-------------------|-------------------------|
| KIC | 11 |
| KID | 11 |
| CNTR | 00 00 00 00 01 |
| Key for ciphering | 01 41 42 7F DA E8 91 A7 |
| Key for RC/CC/DS | 01 23 45 67 89 AB CD EF |

If a parameter is not listed explicitly in the above table, the default values of section 4.7.3.1 apply.

6.3.6.1 Input Data

Test Area Reference: FWK_FWS_INDA

6.3.6.1.1 Conformance Requirements

Normal Execution

CRRN1: If the SIM receives an envelope APDU containing an SMS_PP_DATADOWNLOAD BER TLV formatted according to [8], the SIM Toolkit Framework shall verify the security of the SMS TPDU.

CRRN2: The toolkit applet will only be triggered if the TAR is known and the security verified.

CRRN3: If the SIM receives an envelope APDU containing an SMS_CB_DATADOWNLOAD formatted according to [8], the SIM Toolkit Framework shall verify the security of the cell broadcast page.

6.3.6.1.2 Test Area Files

- Test Script: FWK_FWS_INDA_1.scr
- Test Applet: FWK_FWS_INDA_1.java
- FWK_FWS_INDA_2.java
- FWK_FWS_INDA_3.java

FWK_FWS_INDA_4.java
 Load Script: FWK_FWS_INDA_1.ldr
 Cleanup Script: FWK_FWS_INDA_1.clr
 Parameter File: FWK_FWS_INDA_1.par

6.3.6.1.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|---|
| 1 | <p>Framework checks the Cryptographic checksum and deciphers the data</p> <p>Applet1 is loaded and installed</p> <p>1-Envelope(SMS-PP) formatted is sent to the SIM with this features: Ciphering; Cryptographic checksum; No proof of receipt; Data = 01</p> | The applet is triggered. | |
| 2 | <p>Triggering two different applets with different security</p> <p>Applet2 is installed</p> <p>1-Envelope(SMS-PP) 03.48 formatted is sent to the SIM with this features: Ciphering; Cryptographic checksum; No proof of receipt; TAR of Applet 1 Data = 02</p> <p>2-Envelope(SMS-PP) 03.48 formatted is sent to the SIM with this features: No ciphering; No cryptographic checksum; No proof of receipt; TAR of Applet 2 Data = 03</p> | <p>1- Applet1 is triggered</p> <p>3- Applet2 is triggered</p> | <p>2- The SIM answers to the Envelope with status words 9000</p> <p>4- The SIM answers to the Envelope with status words 9000</p> |
| 3 | <p>Envelope(SMS-PP) formatted with wrong cryptographic checksum</p> <p>No ciphering; Wrong Cryptographic checksum; No proof of receipt; TAR of Applet 1 Data = 04</p> | No applet is triggered | 1- The SIM answers to the Envelope with status words 9000 |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|---|
| 4 | <p>Framework checks the Cryptographic checksum and deciphers the data</p> <p>Applet3 is loaded and installed</p> <p>1-Envelope(SMS-CB) formatted is sent to the SIM with this features: Ciphering; Cryptographic checksum; No proof of receipt; Data = 01</p> | <p>1- Applet3 is triggered.</p> | <p>2- The SIM answers to the Envelope with status words 9000</p> |
| 5 | <p>Triggering two different applets with different security on Envelope(SMS-CB) formatted</p> <p>Applet4 is installed</p> <p>1-Envelope(SMS-CB) formatted is sent to the SIM with this features: Ciphering; Cryptographic checksum; No proof of receipt; TAR of Applet 3 Data = 02</p> <p>2-Envelope(SMS-CB) formatted is sent to the SIM with this features: No ciphering; No cryptographic checksum; No proof of receipt; TAR of Applet 4 Data = 03</p> | <p>1- Applet3 is triggered</p> <p>3- Applet4 is triggered</p> | <p>2- The SIM answers to the Envelope with status words 9000</p> <p>4- The SIM answers to the Envelope with status words 9000</p> |
| 6 | <p>Envelope(SMS-CB) formatted with wrong cryptographic checksum</p> <p>No ciphering; Wrong Cryptographic checksum; No proof of receipt; TAR of Applet 3 Data = 04</p> | <p>No applet is triggered</p> | <p>1- The SIM answers to the Envelope with status words 9000</p> |

6.3.6.1.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1,2,3 |
| CRRN2 | 3,6 |
| CRRN3 | 4,5,6 |

6.3.6.2 Output Data

Test Area Reference: FWK_FWS_OUDA

6.3.6.2.1 Conformance Requirements

Normal Execution

CRRN1: The SIM Toolkit Framework shall secure and send the response packet.

6.3.6.2.2 Test Area Files

Test Script: FWK_FWS_OUDA_1.scr
 Test Applet: FWK_FWS_OUDA_1.java
 Load Script: FWK_FWS_OUDA_1.ldr
 Cleanup Script: FWK_FWS_OUDA_1.clr
 Parameter File: FWK_FWS_OUDA_1.par

6.3.6.2.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|---|
| 1 | Envelope(SMS-PP) formatted Ciphering; Cryptographic checksum; proof of receipt response shall be sent using SMS-Deliver-Report; no security applied to proof of receipt Data in plain text = "APPLET1" | The applet is triggered and sends a "Display Text" proactive command with the data received in the Envelope. | The SIM answers to the Envelope with status words 9Fxx and a PoR is retrieved with a GetResponse command. The PoR has no application data. The SIM answers to the Get Response command with status words 91xx to issue a Display Text "APPLET1". |
| 2 | Envelope(SMS-PP) formatted Ciphering; Cryptographic checksum; proof of receipt response shall be sent using SMS-Deliver-Report; no security applied to proof of receipt Data in plain text = "APPLET1" | The applet posts application data. It does not call the ProactiveHandler.send() method | The SIM answers to the Envelope with status words 9Fxx and a PoR is retrieved with a GetResponse command. The PoR has the application data posted by the application. The SIM answers to the Get Response command with status words 9000. |
| 3 | Envelope(SMS-PP) formatted Ciphering; Cryptographic checksum; proof of receipt response shall be sent using SMS-Deliver-Report; no security applied to proof of receipt Data in plain text = "TEST" | The applet posts application data and calls the ProactiveHandler.send() method to send a "Display Text" proactive command with the data received in the Envelope. | The SIM answers to the Envelope with status words 9Fxx and a PoR is retrieved with a GetResponse command. The PoR has the application data posted by the application. The SIM answers to the Get Response command with status words 91xx to issue the Display Text "TEST". |
| 4 | Envelope(SMS-PP) formatted Ciphering; Cryptographic checksum; proof of receipt response shall be sent using SMS-Deliver-Report; proof of receipt shall be ciphered Data in plain text = "TEST" | The applet posts application data and calls the ProactiveHandler.send() method to send a "Display Text" proactive command with the data received in the Envelope. | The SIM answers to the Envelope with status words 9Fxx and a PoR is retrieved with a GetResponse command. The PoR has the application data posted by the application. The SIM answers to the Get Response command with status words 91xx to issue the Display Text "TEST". |
| 5 | Envelope(SMS-PP) formatted The Terminal Profile command shall be issued with the facility "'9EXX' response code for SIM data download error" enabled The Envelope(SMS-PP) formatted has to be issued with the following features: No ciphering; Wrong Cryptographic checksum; proof of receipt response shall be sent | No applet is triggered | The SIM answers to the Envelope with status words 9Exx and a PoR is retrieved with a GetResponse command. The Response Status Code Octet shall be '01'. |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---------------------------|------------------|
| | using SMS-Deliver-Report; no security applied to proof of receiptData in plain text = "TEST" | | |

6.3.6.2.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1,2,3,4,5 |

6.3.7 Envelope Response Posting

6.3.7.1 EVENT_CALL_CONTROL_BY_SIM

Test Area Reference: FWK_ERP_ECCN

6.3.7.1.1 Conformance Requirements

Normal Execution

CRRN1: The SIM Toolkit Framework can't reply busy when an Envelope(Call Control) is sent to the SIM.

6.3.7.1.1 Test Area Files

Test Script: FWK_ERP_ECCN_1.scr
 Test Applet: FWK_ERP_ECCN_1.java
 FWK_ERP_ECCN_2.java
 FWK_ERP_ECCN_3.java
 Load Script: FWK_ERP_ECCN_1.ldr
 Cleanup Script: FWK_ERP_ECCN_1.clr
 Parameter File: FWK_ERP_ECCN_1.par

6.3.7.1.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|--|
| 1 | <p>Applet 1 is registered on the EVENT_CALL_CONTROL_BY_SIM, Applet2 is registered and triggered on the EVENT_MENU_SELECTION.</p> <p>1-Applet2 invokes the method send()and no fetch is performed</p> <p>2-Envelope(Call Control) is sent to the SIM</p> <p>3-Applet1 calls the method EnvelopeResponseHandler.postASBRTLTV() to change any incoming dialling number into +11 22 33 44.</p> <p>4-A Fetch command is sent to the SIM</p> <p>5-A Terminal Response command is sent to the SIM</p> <p>6-Delete applet1 & applet2</p> <p>7-Install applet3</p> | <p>Applet2 is suspended</p> <p>Applet1 is triggered.</p> <p>Applet2's execution shall continue.</p> | <p>The SIM answer 9Fxx to the Envelope(Call Control)</p> <p>The dialling number is retrieved with a GetResponse command. The SIM answers to the Get Response command with status words 91xx.</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|---|
| 2 | <p>Applet 3 is registered on both the events EVENT_CALL_CONTROL_BY_SIM and EVENT_MENU_SELECTION.</p> <p>1-Envelope Menu Selection is sent to the SIM.</p> <p>2-Applet3 invokes the method send()and no fetch is performed)</p> <p>3-Envelope(Call Control) is sent to the SIM</p> <p>4-Applet3 calls the method EnvelopeResponseHandler.postASBRTLTV() to change any incoming dialling number into +11 22 33 44.</p> <p>5-A Fetch command is sent to the SIM</p> <p>6-A Terminal Response command is sent to the SIM</p> | <p>Applet3 is triggered on the EVENT_MENU_SELECTION</p> <p>Applet3 is suspended on the send() method</p> <p>Applet3 is triggered on the EVENT_CALL_CONTROL_BY_SIM.</p> <p>The Applet3's execution shall continue.</p> | <p>The SIM answer 9Fxx to the Envelope(Call Control)</p> <p>The dialling number is retrieved with a GetResponse command.</p> <p>The SIM answers to the Get Response command with status words 91xx.</p> |

6.3.7.1.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1,2 |

6.3.7.2 EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM

Test Area Reference: FWK_ERP_EMCN

6.3.7.2.1 Conformance Requirements

Normal Execution

CRRN1: The SIM Toolkit Framework can't reply busy when an Envelope(MO-Short Message Control) is sent to the SIM.

6.3.7.2.2 Test Area Files

Test Script: FWK_ERP_EMCN_1.scr

Test Applet: FWK_ERP_EMCN_1.java
 FWK_ERP_EMCN_2.java
 FWK_ERP_EMCN_3.java
 Load Script: FWK_ERP_EMCN_1.ldr
 Cleanup Script: FWK_ERP_EMCN_1.clr
 Parameter File: FWK_ERP_EMCN_1.par

6.3.7.2.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---|---|
| 1 | <p>Applet 1 is registered on the EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM; Applet2 is registered and triggered on the EVENT_MENU_SELECTION.</p> <p>.</p> <p>1-Applet2 invokes the method send()and no fetch is performed)</p> <p>2-Envelope(MO-SM control) is sent to the SIM</p> <p>3-Applet1 calls the method EnvelopeResponseHandler.postASBERTLV() to change any incoming TP_Destination_Address and any RP_Destination_Address of the Service Center into +11 22 33 44</p> <p>4-A Fetch command is sent to the SIM</p> <p>5-A Terminal Response command is sent to the SIM</p> <p>6-Delete applet1 & applet2</p> <p>7-Install applet3</p> | <p>Applet2 is suspended</p> <p>Applet 1 is triggered.</p> <p>The Applet's execution shall continue.</p> | <p>The SIM answers 9Fxx to the Envelope(MO-Short Message Control)</p> <p>The TP_Destination_Address is retrieved with a GetResponse command.</p> <p>The SIM answers to the Get Response command with status words 91xx.</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|---|
| 2 | <p>Applet 3 is registered on both the events EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM and EVENT_MENU_SELECTION.</p> <p>1-Applet3 invokes the method send()and no fetch is performed)</p> <p>2-Envelope(MO-SM control) is sent to the SIM</p> <p>3-Applet3 calls the method EnvelopeResponseHandler.postASBRTLTV() to change any incoming TP_Destination_Address and any RP_Destination_Address of the Service Center into +11 22 33 44.</p> <p>4-A Fetch command is sent to the SIM</p> <p>5-A Terminal Response command is sent to the SIM</p> | <p>Applet 3 is suspended on the send() method</p> <p>Applet3 is triggered on the EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM.</p> <p>The Applet3's execution shall continue.</p> | <p>The SIM answers 9Fxx to the Envelope(MO-Short Message Control)</p> <p>The TP_Destination_Address is retrieved with a GetResponse command.</p> <p>The SIM answers to the Get Response command with status words 91xx.</p> |

6.3.7.2.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1,2 |

6.3.7.3 EVENT_UNRECOGNIZED_ENVELOPE

Test Area Reference: FWK_ERP_EUEN

6.3.7.3.1 Conformance Requirements

Normal Execution

CRRN1: The EnvelopeResponseHandler is available for the EVENT_UNRECOGNIZED_ENVELOPE.

6.3.7.3.2 Test Area Files

- Test Script: FWK_ERP_EUEN_1.scr
- Test Applet: FWK_ERP_EUEN_1.java
- Load Script: FWK_ERP_EUEN_1.ldr
- Cleanup Script: FWK_ERP_EUEN_1.clr
- Parameter File: FWK_ERP_EUEN_1.par

6.3.7.3.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|--|--|
| 1 | An applet triggered on the EVENT_UNRECOGNIZED_ENVELOPE calls the EnvelopeResponseHandler.post() method | The post() method returns no exception | The SIM answers to the Envelope with status words 9Fxx. The data retrieved with the GetResponse command are the ones posted by the applet. |

6.3.7.3.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1 |

6.3.8 Toolkit Installation

6.3.8.1 Timers Allocation

Test Area Reference: FWK_TIN_TMAL

6.3.8.1.1 Conformance Requirements

Normal execution

CRRN1: One toolkit applet can register to several timers, but a timer can only be allocated to one toolkit applet.

Context errors

CRRC1 : Allocated timers shall not exceed the maximum number of timers allowed for this applet instance defined during installation.

CRRC2 : The total number of timers allocated for all the applets shall not exceed 8.

6.3.8.1.2 Test suite files

- Test Script: FWK_TIN_TMAL_1.scr
- Test Applet: FWK_TIN_TMAL_1.java
FWK_TIN_TMAL_2.java
FWK_TIN_TMAL_3.java
- Load Script: FWK_TIN_TMAL_1.ldr
- Cleanup Script: FWK_TIN_TMAL_1.clr
- Parameter File: FWK_TIN_TMAL_1.par

6.3.8.1.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|---|--|---|--|
| 1 | <p>More than 8 timers at the instantiation of applet1: check that applet1 is not installed or that it is not possible to allocate more than 8 timers.</p> <p>Install for install of applet1 with maximum 9 timers allocated.</p> <p>applet1 is triggered: we allocate 9 timers</p> <p>applet1 is selected</p> | <p>Shall throw a ToolkitException with reason NO_TIMER_AVAILABLE only on the 9th allocateTimer()</p> | <p>The SIM answers to the Envelope with status words 90 00</p> <p>2 behaviours may be expected :</p> <ol style="list-style-type: none"> 1. applet1 is not found, status word 6X XX 2. applet1 has been installed and only 8 timers are allocated |
| Reset the card and delete instance of applet1 | | | |
| 2 | <p>Good installation of applet2</p> <p>Install for install of applet2 (maximum 4 timers allocated).</p> | | <p>The SIM answers to the Envelope with status words 90 00</p> |
| 3 | <p>Allocate 4 timers Applet2</p> | No exception shall be thrown. | |
| 4 | <p>Allocate one more timer Applet2</p> | Shall throw a ToolkitException with reason NO_TIMER_AVAILABLE | |
| 5 | <p>Good installation of applet3</p> <p>Install for install of applet3 (maximum 8 timers allocated).</p> | | <p>The SIM answers to the Envelope with status words 90 00</p> |
| 6 | <p>Allocate 4 timers Applet3</p> | No exception shall be thrown. | |
| 7 | <p>Allocate one more timer Applet3</p> | Shall throw a ToolkitException with reason NO_TIMER_AVAILABLE | |
| 8 | <p>Check that each timerId (allocated by applet2 and applet3) is between 1 and 8 and is different from each other</p> | | |

6.3.8.1.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 2,3,8 |
| C1 | 1, 7 |
| C2 | 4,5,6 |

6.3.8.2 Item Identifier

Test Area Reference: FWK_TIN_ITID

6.3.8.2.1 Conformance Requirements

Normal execution

CRRN1: If the requested item identifier in the range [1-127] is not already allocated, then this item identifier shall be allocated to the current applet.

CRRN2: If the requested item identifier is '00', the card shall take the first free value in the range [128,255].

Parameters error

CRRP1: If the requested item identifier is in the range [128,255], then the card shall reject the install command.

Context errors

CRRC1: If the requested item identifier in the range [1-127] is already allocated, then the card shall reject the install command.

6.3.8.2.2 Test suite files

Test Script: FWK_TIN_ITID_1.scr

Test Applet: FWK_TIN_ITID_1.java

FWK_TIN_ITID_2.java

FWK_TIN_ITID_3.java

Load Script: FWK_TIN_ITID_1.ldr

Cleanup Script: FWK_TIN_ITID_1.clr

Parameter File: FWK_TIN_ITID_1.par

6.3.8.2.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---------------------------|---|
| 1 | <p align="center">Bad installation of applet1</p> <p>Install for install of applet1. The following parameters item Id equal to 128</p> <p>applet1 is selected</p> | | applet1 is not found, status word 6X XX |
| 2 | <p align="center">Good installation of applet1</p> <p>Install for install of applet1. item Id = 1 for the first menu and 127 for the second one</p> <p>A Terminal Profile is sent to the card with only PROFILE_DOWNLOAD, SMS_PP_DOWNLOAD, MENU_SELECTION, SET_UP_MENU and COMMAND_RESULT facilities.</p> | | <p>The SIM answers to the Envelope with status words 91xx to send back to the ME the 2 new menus.</p> <p>The menus are (position/itemId/text) 01/01/menu11 02/127/menu12</p> |
| 3 | <p align="center">Bad installation of applet2 Item identifier already allocated</p> <p>Install for install of applet2. item Id = 127</p> <p>applet2 is selected</p> | | applet2 is not found, status word 6X XX |
| 4 | <p align="center">Good installation of applet2</p> <p>Install for install of applet2. item Id = 0</p> | | <p>The SIM answers to the Envelope with status words 91xx to send back to the ME the 3 menus.</p> <p>The menus are 01/01/menu11 02/127/menu12 03/128/menu21</p> |
| 5 | <p align="center">Good installation of applet3</p> <p>Install for install of applet3. item Id = 0</p> | | <p>The SIM answers to the Envelope with status words 91xx to send back to the ME the 4 menus.</p> <p>The menus are 01/01/menu11 02/127/menu12 03/128/menu21 04/129/menu31</p> |
| 6 | <p align="center">Good delete and installation of applet2</p> <p>Delete instance of applet2</p> <p>Perform a RESET and a Terminal Profile with the facilities of PROFILE_DOWNLOAD, SMS-PP_DATA_DOWNLOAD, MENU_SELECTION, COMMAND_RESULT and SET_UP_MENU</p> | | <p>The SIM answers to the Terminal Profile with status words 91xx to send back to the ME the 3 menus.</p> <p>The menus are 01/01/menu11</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---------------------------|--|
| | Install for install of applet2. item Id = 0 | | 02/127/menu12 03/129/menu31 The SIM answers to the Envelope with status words 91xx to send back to the ME the 4 menus. The menus are 01/01/menu11 02/127/menu12 03/128/menu21 04/129/menu31 |

6.3.8.2.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 2 |
| N2 | 4,5,6 |
| P1 | 1 |
| C1 | 3 |

6.3.8.3 Item Position

Test Area Reference: FWK_TIN_ITPO

6.3.8.3.1 Conformance Requirements

Normal execution

CRRN1: The position of the new menu entries is an absolute position among the existing ones.

CRRN2: If the position identifier is 00h, the menu shall have the last position

6.3.8.3.2 Test suite files

- Test Script: FWK_TIN_ITPO_1.scr
- Test Applet: FWK_TIN_ITPO_1.java
FWK_TIN_ITPO_2.java
FWK_TIN_ITPO_3.java
- Load Script: FWK_TIN_ITPO_1.ldr
- Cleanup Script: FWK_TIN_ITPO_1.clr
- Parameter File: FWK_TIN_ITPO_1.par

6.3.8.3.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---------------------------|--|
| 1 | <p align="center">Installation of applet1</p> Perform Install for install of applet1.Position/ItemId 01/01 02/02 A Terminal Profile is sent to the card | | The menus are (position/itemId/text) 01/01/menu11 02/02/menu12 |
| 2 | <p align="center">Installation of applet2</p> Perform Install for install of applet2. Position/ItemId 03/03 04/04 | | The SIM answers to the Envelope with status words 91xx to send back to the ME the 4 menus. The menus are (position/itemId/text) 01/01/menu11 02/02/menu12 03/03/menu21 04/04/menu22 |
| 3 | <p align="center">Installation of applet3</p> Perform Install for install of applet3. Position/ItemId 00/05 | | The SIM answers to the Envelope with status words 91xx to send back to the ME the 5 menus. The menus are (position/itemId/text) 01/01/menu11 02/02/menu12 03/03/menu21 04/04/menu22 05/05/menu31 |

6.3.8.3.4 Test Coverage

Note : As Item Position management is not fully specified in the [7] or [8] all possible tests cannot be performed.

| CRR number | Test case number |
|------------|------------------|
| N1 | 1,2 |
| N2 | 3 |

6.3.8.4 Maximum Text Length for a menu entry

Test Area Reference: FWK_TIN_MLME

6.3.8.4.1 Conformance Requirements

Normal execution

CRRN1: The maximum length of item text string is defined at the installation of the toolkit applet.

Parameters errors

CRRP1: If initMenuEntry length parameter is greater than the allocated space (Maximum Text Length for a menu entry), then a ToolkitException ALLOWED_LENGTH_EXCEEDED is thrown.

CRRP2: If changeMenuEntry length parameter is greater than the allocated space (Maximum Text Length for a menu entry), then a ToolkitException ALLOWED_LENGTH_EXCEEDED is thrown.

6.3.8.4.2 Test suite files

Test Script: FWK_TIN_MLME_1.scr
 Test Applet: FWK_TIN_MLME_1.java
 Load Script: FWK_TIN_MLME_1.ldr
 Cleanup Script: FWK_TIN_MLME_1.clr
 Parameter File: FWK_TIN_MLME_1.par

6.3.8.4.3 Test Procedure

| Id | Description | API / Framework Expectation | APDU Expectation |
|----|--|---|---|
| 1 | <p>Installation of applet with 2 menus not exceeding the maximum text length</p> <p>Install one applet with 2 menu entries allowed and max. text length equal to 10. initMenuEntry defined at the install (install) command MenuEntry = "MenuEntry1", "MenuEntry2" Offset = 0 Length = 10 NextAction = '00' HelpSupported = false IconQualifier = '00' IconIdentifier = 0</p> | | |
| 2 | <p>initMenuEntry with a too large length</p> <p>initMenuEntry with length equal to 11 MenuEntry = " MenuEntry03" Offset = 0 Length = 11 NextAction = '00' HelpSupported = false IconQualifier = '00' IconIdentifier = 0</p> | <p>ToolkitException ALLOWED_LENGTH_EXCEEDED is thrown</p> | |
| 3 | <p>initMenuEntry with a right length</p> <p>initMenuEntry with length parameter equal to 10 MenuEntry = " MenuEntry3" Offset = 0 Length = 10 NextAction = '00' HelpSupported = false IconQualifier = '00' IconIdentifier = 0</p> | | <p>a SET UP MENU (2 items) is issued with TLV item length equal to 11 (Identifier + Text string of item)</p> |
| 4 | <p>changeMenuEntry with a right length</p> <p>Applet1 is triggered by a EVENT_MENU_SELECTION. changeMenuEntry of menu 1, with length parameter equal to 10 Id = '01' MenuEntry = "MenuEntry4" Offset = 0 Length = menuEntry.length NextAction = 0 HelpSupported = false IconQualifier = 0 IconIdentifier = 0</p> <p>Return from processToolkit</p> | | <p>a SET UP MENU (2 items) is issued with TLV item length equal to 11 (Identifier + Text string of item)</p> |
| 5 | <p>changeMenuEntry with a too large length</p> <p>Applet1 is triggered by a EVENT_MENU_SELECTION.</p> | <p>ToolkitException ALLOWED_LENGTH_EXCEEDED is thrown</p> | <p>Shall not receive a SET UP MENU different from the previous one</p> |

| Id | Description | API / Framework Expectation | APDU Expectation |
|----|---|-----------------------------|------------------|
| | ChangeMenuEntry of menu 1, with length parameter equal to 11 Id = '02' MenuEntry = "MenuEntry05" Offset = 0 Length = menuEntry.length NextAction = 0 HelpSupported = false IconQualifier = 0 IconIdentifier = 0 Return from processToolkit | | |

6.3.8.4.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| CRRN1 | 1, 3, 4 |
| CRRP1 | 2 |
| CRRP2 | 5 |

6.3.8.5 Maximum number of menu entries

Test Area Reference: FWK_TIN_NBME

6.3.8.5.1 Conformance Requirements

Normal execution

CRRN1: The maximum number of menu entries is defined at the installation of the toolkit applet and can be the maximum number of successful invocations of the method initMenuEntry .

Parameters errors

CRRP1: If the menu entry cannot be initialised (e.g. no more item data in applet loading parameter), a ToolkitException with the REGISTRY_ERROR reason code is thrown.

6.3.8.5.2 Test suite files

- Test Script: FWK_TIN_NBME_1.scr
- Test Applet: FWK_TIN_NBME_1.java
FWK_TIN_NBME_2.java
- Load Script: FWK_TIN_NBME_1.ldr
- Cleanup Script: FWK_TIN_NBME_1.clr
- Parameter File: FWK_TIN_NBME_1.par

6.3.8.5.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---------------------------|------------------|
| 1 | <p style="text-align: center;">Installation of applet with 3 menus</p> Install (install) applet with max. number of menu entry is '3', defined at the install (install) command. initMenuEntry for each menu entry allowed (3 times) MenuEntry = "menu1", "menu2", "menu3" Offset = 0 Length = 5 | No Exception is thrown | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|--|
| | NextAction = '00' HelpSupported = false IconQualifier = '00' IconIdentifier = 0 | | |
| 2 | <p style="text-align: center;">init of a 4th menu</p> initMenuEntry one more time MenuEntry = "menu4" Offset = 0 Length = 5 NextAction = '00' HelpSupported = false IconQualifier = '00' IconIdentifier = 0 | ToolkitException REGISTRY_ERROR is thrown | SET UP MENU (3 items) is issued with TLV item length equal to 6 (Identifier + Text string of item) |
| 3 | <p style="text-align: center;">Installation of 2nd applet with 0 menu</p> Install (install) another applet, with max. number of menu entry is '0', defined at the install (install) command. initMenuEntry once MenuEntry = "menu1" Offset = 0 Length = 5 NextAction = '00' HelpSupported = false IconQualifier = '00' IconIdentifier = 0 | ToolkitException REGISTRY_ERROR is thrown | Shall not receive a SET UP MENU different from the previous one |

6.3.8.5.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| CRRN1 | 1 |
| CRRP1 | 2, 3 |

6.3.8.6 Access Domain

Test Area Reference: FWK_TIN_ACDO

6.3.8.6.1 Conformance Requirements

Normal execution

CRRN1: The Access Domain parameter indicates the mechanism used to control the applet instance access to the GSM file System ('00' means full access to the GSM File System, 'FF' means no access to the GSM File System).

Parameters errors

CRRP1: If the Access Domain Parameter requested is not supported, the card shall return the Status Word '6A80', incorrect parameters in data field, to the Install(Install) command.

CRRP2: If an applet with Access Domain Parameter 'FF' (i.e. No Access to the GSM File System) tries to access a GSM file (e.g. invoke the updateBinary(..) method) the framework shall throw a SIMViewException with a AC_NOT_FULFILLED reason.

6.3.8.6.2 Test suite files

- Test Script: FWK_TIN_ACDO_1.scr
- Test Applet: FWK_TIN_ACDO_1.java
- FWK_TIN_ACDO_2.java
- FWK_TIN_ACDO_3.java
- Load Script: FWK_TIN_ACDO_1.ldr

Cleanup Script: FWK_TIN_ACDO_1.clr

Parameter File: FWK_TIN_ACDO_1.par

6.3.8.6.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|------------------|
| 0 | Install (install) applet1 with: - Length of Access Domain field value is '1' - Access Domain Parameter value is '00' (full access to the GSM File System) Install (install) applet2 with: - Length of Access Domain field value is '1' - Access Domain Parameter value is 'FF' (No access to the GSM File System) Install (install) applet3 with: - Length of Access Domain field value is '1' - Access Domain Parameter value is '00' (full access to the GSM File System) | | |
| 1 | <p style="text-align: center;">readBinary/readRecord method with full Access Domain Parameter</p> 1- Select EF-TARU file whose Read access condition is ALWAYS Perform the readBinary method: fileOffset = 0 resp = abRead[] respOffset = 0 respLength = 3 2- Select EF-SMS file whose Read access condition is CHV1 Perform the readRecord method: recNumber = 1 mode = REC_ACC_MODE_ABSOLUTE_CURRENT recOffset = 0 resp = abRead[] respOffset = 0 respLength = 3 3- Select EF-TRAC file whose Read access condition is CHV2 Perform the readBinary method: fileOffset = 0 resp = abRead[] respOffset = 0 respLength = 3 4- Select EF-SUME file Read access condition is ADM0 Perform the readBinary method: fileOffset = 0 resp = abRead[] respOffset = 0 respLength = 3 5- Select EF-TNR file whose Read access condition is NEVER Perform the readBinary method: fileOffset = 0 resp = abRead[] respOffset = 0 respLength = 3 | 1 to 4- no exception is thrown 5- SIMViewException AC_NOT_FULFILLED is thrown | |
| 2 | <p style="text-align: center;">updateBinary/updateRecord method with full Access Domain Parameter</p> | 1 to 4- no exception is thrown | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|------------------|
| | <p>For each case, send an Envelope that triggers the applet with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>1- Select EF-TNR file whose Update access condition is ALWAYS Perform the updateBinary method: fileOffset = 0 resp = abUpdate[FFFFFF] respOffset = 0 respLength = 3</p> <p>2- Select EF-SMS file whose Update access condition is CHV1 Perform the updateRecord method: recNumber = 1 mode = REC_ACC_MODE_ABSOLUTE_CURRENT recOffset = 0 resp = abUpdate[] respOffset = 0 respLength = 3</p> <p>3- Select EF-FDN file whose Update access condition is CHV2 Perform the updateBinary method: recNumber = 1 mode = REC_ACC_MODE_ABSOLUTE_CURRENT recOffset = 0 resp = abUpdate[] respOffset = 0 respLength = 3</p> <p>4- Select EF-SUME file Update access condition is ADM0 Perform the updateBinary method: fileOffset = 0 resp = abUpdate[] respOffset = 0 respLength = 3</p> <p>5- Select EF-TNU file whose Update access condition is NEVER Perform the updateBinary method: fileOffset = 0 resp = abUpdate[] respOffset = 0 respLength = 3</p> | <p>5- SIMViewException AC_NOT_FULFILLED is thrown</p> | |
| 3 | <p>invalidate method with full Access Domain Parameter</p> <p>1- Select EF-TNR file whose Invalidate access condition is ALWAYS Perform the invalidate method</p> <p>2- Select EF-TIAC file whose Invalidate access condition is CHV1 Perform the invalidate method</p> <p>3- Select EF-ADN file whose Invalidate access condition is CHV2 Perform the invalidate method</p> <p>4- Select EF-SUME file Invalidate access condition is ADM0 Perform the invalidate method</p> <p>5- Select EF-CNIV file whose Invalidate access condition is NEVER Perform the invalidate method</p> | <p>1 to 4- no exception is thrown</p> <p>5- SIMViewException AC_NOT_FULFILLED is thrown</p> | |
| 4 | <p>rehabilitate method with full Access Domain Parameter</p> <p>1- Select EF-TNR file whose Rehabilitate access condition is ALWAYS</p> | <p>1 to 4- no exception is thrown</p> <p>5- SIMViewException AC_NOT_FULFILLED is thrown</p> | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|------------------|
| | <p>access condition is ALWAYS Perform the rehabilitate method</p> <p>2- Select EF-IMSI file whose Rehabilitate access condition is CHV1 Perform the rehabilitate method</p> <p>3- Select EF-ADN file whose Rehabilitate access condition is CHV2 Perform the rehabilitate method</p> <p>4- Select EF-SUME file Rehabilitate access condition is ADM0 Perform the rehabilitate method</p> <p>5- Select EF-CNRI file whose Rehabilitate access condition is NEVER Perform the rehabilitate method</p> | | |
| 5 | <p>increase method with full Access Domain Parameter</p> <p>1- Select EF-CNU file whose Increase access condition is ALWAYS Perform the increase method: incr = abIncreaseValue[] incrOffset = 0 resp = abRead[] respOffset = 0</p> <p>2- Select EF-ACM file whose Increase access condition is CHV1 Perform the increase method: incr = abIncreaseValue[] incrOffset = 0 resp = abRead[] respOffset = 0</p> <p>3- Select EF-CIAC file whose Increase access condition is CHV2 Perform the increase method: incr = abIncreaseValue[] incrOffset = 0 resp = abRead[] respOffset = 0</p> <p>4- Select EF-CIAA file Increase access condition is ADM0 Perform the increase method: incr = abIncreaseValue[] incrOffset = 0 resp = abRead[] respOffset = 0</p> <p>5- Select EF-CNR file whose Increase access condition is NEVER Perform the increase method</p> | <p>1 to 4- no exception is thrown</p> <p>5- SIMViewException AC_NOT_FULFILLED is thrown</p> <p>Applet1 finalizes</p> | |
| 6 | <p>readBinary method with no Access Domain Parameter</p> <p>Send an Envelope that triggers the applet with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>Select EF-TARU file whose Read access condition is ALWAYS Perform the readBinary method: fileOffset = 0 resp = abRead[] respOffset = 0 respLength = 3 t</p> | <p>SIMViewException AC_NOT_FULFILLED is thrown</p> | |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|------------------|
| 7 | <p>updateRecord method with no Access Domain Parameter</p> <p>Send an Envelope that triggers the applet with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>Select EF-SMS file whose Update access condition is CHV1 Perform the updateRecord method: fileOffset = 0 resp = abUpdate[] respOffset = 0 respLength = 3</p> | <p>SIMViewException AC_NOT_FULFILLED is thrown</p> | |
| 8 | <p>invalidate method with no Access Domain Parameter</p> <p>Send an Envelope that triggers the applet with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>Select EF-ADN file whose Invalidate access condition is CHV2 Perform the invalidate method</p> | <p>SIMViewException AC_NOT_FULFILLED is thrown</p> | |
| 9 | <p>rehabilitate method with no Access Domain Parameter</p> <p>Send an Envelope that triggers the applet with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>Select EF-SUME file Rehabilitate access condition is ADM0 Perform the rehabilitate method</p> | <p>SIMViewException AC_NOT_FULFILLED is thrown</p> | |
| 10 | <p>increase method with no Access Domain Parameter</p> <p>Send an Envelope that triggers the applet with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>Select EF-CNR file whose Increase access condition is NEVER Perform the increase method</p> <p>Applet3 restore EF-SUME</p> | <p>SIMViewException AC_NOT_FULFILLED is thrown</p> <p>Applet2 finalizes</p> | |

6.3.8.6.4 Test Coverage

Note : As Item Position management is not fully specified in the [7] or [8] all possible tests cannot be performed.

| CRR number | Test case number |
|------------|------------------|
| CRRN1 | 1, 2, 3, 4, 5 |
| CRRP1 | Not tested |
| CRRP2 | 6, 7, 8, 9, 10 |

6.3.8.7 Priority Level

Test Area Reference: FWK_TIN_PRLV

6.3.8.7.1 Conformance Requirements

Normal execution

CRRN1: The priority specifies the order of activation of an applet compared to the other applet registered to the same event ('01': Highest priority level, 'FF': Lowest priority level)

CRRN2: If two or more applets are registered to the same event and have the same priority level, the applets are activated according to their installation date (i.e. the most recent applet is activated first)

6.3.8.7.2 Test suite files

Test Script: FWK_TIN_PRLV_x.scr, x from 1 to 12

Test Applet: FWK_TIN_PRLV_x.java, x from 1 to 12, 8A, 8B, 9A, 9B, 10A, 10B

Load Script: FWK_TIN_PRLV_x.ldr, x from 1 to 12

Cleanup Script: FWK_TIN_PRLV_x.clr, x from 1 to 12

Parameter File: FWK_TIN_PRLV_x.par, x from 1 to 12, 8A, 8B, 9A, 9B, 10A, 10B

6.3.8.7.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|------------------|
| 0 | All applets are registered on an EVENT_UNFORMATTED_SMS_PP_ENV event | | |
| 1 | <p>Trigger 2 applets with 2 different maximum Priority Levels</p> <p>Install (install) applet1 with priority level '2' and applet2 with priority level '1', from package fwk_tin_prlv_1.</p> <p>Send an Envelope that triggers the 2 applets with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>Delete applets instances and packages</p> | A static variable is used to validate triggering order: applet2 is triggered before applet1 | |
| 2 | <p>Trigger 2 applets with 2 different maximum Priority Levels</p> <p>Install (install) applet1 with priority level '1' and applet2 with priority level '2', from package fwk_tin_prlv_2.</p> <p>Send an Envelope that triggers the 2 applets with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>Delete applets instances and packages</p> | A static variable is used to validate triggering order: applet1 is triggered before applet2. | |
| 3 | <p>Trigger 2 applets with 2 different Priority Levels</p> <p>Install (install) applet1 with priority level '80' and applet2 with priority level '7F', from package fwk_tin_prlv_3.</p> <p>Send an Envelope that triggers the 2 applets with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>Delete applets instances and packages</p> | A static variable is used to validate triggering order: applet2 is triggered before applet1 | |

| | | | |
|----------|--|--|--|
| <p>4</p> | <p>Trigger 2 applets with 2 different Priority Levels</p> <p>Install (install) applet1 with priority level '7F' and applet2 with priority level '80', from package fwk_tin_prlv_4.</p> <p>Send an Envelope that triggers the 2 applets with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>Delete applets instances and packages</p> | <p>A static variable is used to validate triggering order: applet2 is triggered before applet1</p> | |
| <p>5</p> | <p>Trigger 3 applets with the same Priority Level</p> <p>Install (install) applet 1, 2, 3 in this order with same priority level from package fwk_tin_prlv_5.</p> <p>Send an Envelope that triggers the 3 applets with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>Delete applets instances and packages.</p> | <p>A static variable is used to validate triggering order: applet3 is triggered before applet2, and applet2 is triggered before applet1.</p> | |
| <p>6</p> | <p>Trigger 2 applets from 2 classes, with 2 different Priority Level</p> <p>Install (install) applet1 from class A with priority level '2' Install (install) applet2 from class B with priority level '1'</p> <p>Send an Envelope that triggers the 2 applets with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>Delete applets instances and packages</p> | <p>A static variable is used to validate triggering order: applet2 is triggered before applet1</p> | |
| <p>7</p> | <p>Trigger 2 applets from 2 classes, with the same Priority Level</p> <p>Install (install) applet1 from class A with priority level '1' Install (install) applet2 from class B with priority level '1'</p> <p>Send an Envelope that triggers the 2 applets with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>Delete applets instances and packages</p> | <p>A static variable is used to validate triggering order: applet2 is triggered before applet1</p> | |
| <p>8</p> | <p>Trigger 2 applets from 2 packages, with 2 different Priority Level</p> <p>Install package fwk_tin_prlv_8. Install (install) applet1 from package fwk_tin_prlv_8A with priority level '2' Install (install) applet2 from package fwk_tin_prlv_8B with priority level '1'</p> | | |

| | | | |
|----|--|---|--|
| | <p>Send an Envelope that triggers the 2 applets with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>Delete applets instances ad packages</p> | <p>A static variable is used to validate triggering order: applet2 is triggered before applet1</p> | |
| 9 | <p>Trigger 2 applets from 2 packages, with the same Priority Level</p> <p>Install package fwk_tin_prlv_9. Install (install) applets 1 from package fwk_tin_prlv_9A and applet2 from package fwk_tin_prlv_9B in this order, with same priority level</p> <p>Send an Envelope that triggers the 2 applets with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>Delete applets instances and packages</p> | <p>A static variable is used to validate triggering order: applet2 is triggered before applet1</p> | |
| 10 | <p>Trigger 4 applets from 2 packages</p> <p>1-Install packages fwk_tin_prlv_10, fwk_tin_prlv_10A and fwk_tin_prlv_10B. Install (install) 2 applets 1 then 2 from package fwk_tin_prlv_10A, with respectively priority levels 1 and 2.</p> <p>Send an Envelope that triggers the 2 applets with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>2- Install (install) 2 applets 3 then 4 from package fwk_tin_prlv_10B, with respectively priority levels 1 and 2.</p> <p>Send an Envelope that triggers the 4 applets.</p> <p>Delete applets instances and packages</p> | <p>1- A static variable is used to validate triggering order: applet1 is triggered before applet2</p> <p>2- Applet3 is triggered before applets 1, 4, then 2.</p> | |
| 11 | <p>Trigger 4 applets with the same Priority Level then delete them one after another and trigger them each time</p> <p>1- Install (install) applet1, 2, 3, 4 in this order with same priority level from package fwk_tin_prlv_11.</p> <p>Send an Enveloppe that triggers the 4 applets with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>Delete applet instance 4</p> <p>2- Send an Enveloppe that triggers the 3 applets with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>Delete applet instance 3</p> <p>3- Send an Enveloppe that triggers the 2 applets with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> | <p>1- A static variable is used to validate triggering order: applets are triggered in order 4, 3, 2, 1.</p> <p>2- Applets are triggered in order 3, 2, 1.</p> | |

| | | | |
|----|--|--|--|
| | Delete remaining applet instances and packages | 3- Applets are triggered in order 2, 1. | |
| 12 | <p>Trigger 5 applets with different Priority Levels, alternating install and delete</p> <p>1- Install (install) applets 1, 2, 3, 4 in this order with respective priority levels 1, 2, 1, 2</p> <p>Send an Enveloppe that triggers the 4 applets with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>2- Delete applet instance 1 and install (install) applet5 with priority level 2</p> <p>Send an Enveloppe that triggers the 4 applets with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> <p>3- Re-install (install) applet1 with priority level 1</p> <p>Send an Enveloppe that triggers the 5 applets with the EVENT_UNFORMATTED_SMS_PP_ENV event.</p> | <p>1- A static variable is used to validate triggering order: applets are triggered in order 3, 1, 4, 2</p> <p>2- Applets are triggered in order 3, 5, 4, 2</p> <p>3- Applets are triggered in order 1, 3, 5, 4, 2</p> | |

6.3.8.7.4 Test Coverage

| CRR number | Test case number |
|------------|--------------------------|
| CRRN1 | 1, 2, 3, 4, 6, 8, 10, 12 |
| CRRN2 | 5, 7, 9, 11 |

6.3.9 File System Context

6.3.9.1 Initial Context

Test Area Reference: FWK_FSC_INIT

6.3.9.1.1 Conformance Requirements

Normal Execution

CRRN1: At the invocation of the processToolkit method of a toolkit applet, the current file is the MF.

6.3.9.1.2 Test Suite Files

- Test Script: FWK_FSC_INIT_1.scr
- Test Applet: FWK_FSC_INIT_1.java
FWK_FSC_INIT_2.java
- Load Script: FWK_FSC_INIT_1.ldr

Cleanup Script: FWK_FSC_INIT_1.clr

FWK_FSC_INIT_2.clr

Parameter File: FWK_FSC_INIT_1.par

6.3.9.1.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|------------------|
| 0 | SIM Initialisation | Responses ignored. | |
| 1 | MF is the selected DF in processToolkit() An ENVELOPE APDU containing a formatted SMS PP for Applet 1 is issued to the SIM byte[] fci = new byte[10] fciOffset = 0 fciLength = 7 status() | No exception shall be thrown. Shall return 7. fci shall contain the following part of the FCI structure: < XX XX XX XX 3F 00 01 > | |
| 2 | No EF is selected rehabilitate () | SIMView exception shall be thrown with reason NO_EF_SELECTED | |
| 3 | MF is selected even when an applet triggered before selected any other file... Applets 1 and 2 register to EVENT_DOWNLOAD_USER_ACTIVITY. Applet 1 has higher priority than Applet 2. An ENVELOPE "EVENT - USER ACTIVITY" is sent to the SIM 1 - Applet 1: - is triggered by event_event_download_user_activity - selects DF_GSM and EF_IMSI 2 - Applet 2: - is triggered by event_event_download_user_activity fciOffset = 0 fciLength = 7 status() 3 - rehabilitate () | 1 - No exception shall be thrown. 2 - No exception shall be thrown. Shall return 7. fci shall contain the following part of the FCI structure: < XX XX XX XX 3F 00 01 > 3 - SIMView exception shall be thrown with reason NO_EF_SELECTED | |

6.3.9.1.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1, 2, 3 |

6.3.9.2 Context Preservation (current file)

Test Area Reference: FWK_FSC_CUFI

6.3.9.2.1 Conformance Requirements

Normal execution

CRRN1: When calling the method select (), the current files (file context) of any other applets shall not be changed (see GSM 03.19 [] - §5.2).

CRRN2: The select() methods select a file without changing the current file of any other applet or of the subscriber session.

CRRN3: After invocation of ProactiveHandler.send() method: the current file context of the toolkit applet is unchanged (see GSM 03.19 [] - §5.2).

6.3.9.2.2 Test Suite Files

- Test Script: FWK_FSC_CUFI_1.scr
- Test Applet: FWK_FSC_CUFI_1.java
FWK_FSC_CUFI_2.java
- Load Script: FWK_FSC_CUFI_1.ldr
- Cleanup Script: FWK_FSC_CUFI_1.clr
FWK_FSC_CUFI_2.clr
- Parameter File: FWK_FSC_CUFI_1.par

6.3.9.2.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|--|
| 0 | SIM Initialisation | Responses ignored. | |
| 1 | <p>No change to file context by another applet</p> <p>Applet1 registers to EVENT_FORMATTED_SMS_PP_ENV. Applet2 registers to EVENT_CALL_CONTROL_BY_SIM</p> <p>1 - Applet 1: - is triggered by a formatted SMS - selects DF_SIMTEST and EF_TARU - fileOffset = 0; dataLength = 2; dataOffset = 0; - buffer = {0xCA, 0xFE } - updateBinary (): first 2 bytes of EF_TARU are written as 'CA FE'. - issues a proactive command "Get Inkey".</p> <p>2 - An ENVELOPE APDU containing a CALL CONTROL BY SIM is issued to the SIM</p> <p>Applet 2: - is triggered by a CALL CONTROL BY SIM - selects DF_TELECOM and EF_ADN.</p> <p>3 - The terminal response for Get Inkey reactivates Applet 1: - fileOffset = 0; respLength = 2; respOffset = 0; - readBinary () info buffer2</p> | <p>1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - No exception shall be thrown. The value of buffer2 is { 0xCA, 0xFE }</p> | <p>A GET INKEY proactive command is fetched from the SIM</p> |
| 2 | <p>No change to file context by subscriber session</p> <p>1 - Applet 1 - issues a proactive command "Get Inkey".</p> <p>2 - Subscriber session selects DF_TELECOM and EF_ADN.</p> <p>3 - The terminal response for Get Inkey reactivates Applet 1: - fileOffset = 0; respLength = 2; respOffset = 0; - readBinary () info buffer2</p> | <p>1 - No exception shall be thrown. 3 - No exception shall be thrown. The value of buffer2 is { 0xCA, 0xFE }</p> | <p>1 - A GET INKEY proactive command is fetched from the SIM</p> |
| 3 | <p>No change by applet of subscriber session context</p> <p>1 - Applet 1: - selects DF_SIMTEST and EF_TNU - issues a proactive command "Get Inkey".</p> <p>2 - subscriber session reads record 1 of current file (shall be EF_ADN)</p> <p>3 - The terminal response for Get Inkey</p> | <p>1 - No exception shall be thrown. 3 - No exception shall be thrown.</p> | <p>1 - A GET INKEY proactive command is fetched from the SIM</p> <p>2 - READ RECORD absolute number 1 shall read "FF FF</p> |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|--|---------------------------|--|
| | reactivates Applet 1, which terminates execution | | FF FF FF FF FF FF" (from EF _{ADN}) |

6.3.9.2.4 Test Coverage

| CRR Number | Test Case Number |
|------------|------------------|
| CRRN1 | 1 |
| CRRN2 | 1,2,3 |
| CRRN3 | 1,2 |

6.3.9.3 Context Preservation (current record pointer)

Test Area Reference: FWK_FSC_CURE

6.3.9.3.1 Conformance Requirements

Normal execution

CRRN1: When the seek method is called by one applet, the record pointer of any other applet is not changed.

CRRN2: *updateRecord*: the current record pointer of other applets / subscriber shall not be changed in case of linear fixed EF

CRRN3: *updateRecord*: the record pointer of a cyclic EF shall be changed for all other applets / subscriber to the record number 1.

CRRN4: *readRecord*: read data bytes of the linear fixed or cyclic EF currently selected by the applet without changing the current record pointer of any other applet / subscriber.

CRRN5: *increase*: the last updated record of the cyclic EF currently selected becomes record number 1 for every other applet and subscriber session.

6.3.9.3.2 Test Suite Files

- Test Script: FWK_FSC_CURE_1.scr
- Test Applet: FWK_FSC_CURE_1.java
FWK_FSC_CURE_2.java
- Load Script: FWK_FSC_CURE_1.ldr
- Cleanup Script: FWK_FSC_CURE_1.clr
FWK_FSC_CURE_2.clr
- Parameter File: FWK_FSC_CURE_1.par

6.3.9.3.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|---|
| 0 | SIM Initialisation | Responses ignored. | |
| 1 | Seek without affecting another record pointer Applet1 registers to EVENT_FORMATTED_SMS_PP_ENV Applet 2 registers to EVENT_CALL_CONTROL_BY_SIM 1 - Applet 1: - is triggered by a formatted SMS event - selects DF_SIMTEST and EF_LARU - reads record 2 using NEXT so that the | 1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - No exception shall be thrown. | 1 - A GET INKEY proactive command is fetched from the SIM |

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|--|--|
| | <p>current record pointer is set to record 2 - issues a proactive command, e.g. Get Inkey.</p> <p>2 - An ENVELOPE APDU containing a CALL CONTROL BY SIM is issued to the SIM</p> <p>Applet 2: - is triggered by a CALL CONTROL event - selects DF_SIMTEST and EF_LARU - performs a seek of pattern {0x55} from beginning forward, which finds record 1. - returns from processToolkit</p> <p>3 - The terminal response for Get Inkey reactivates Applet 1: - call readRecord() using CURRENT - the record read should still be record 2 of EF_LARU, containing {0xAA, 0xAA, 0xAA, 0xAA}</p> | | |
| 2 | <p>updateRecord in linear fixed EF without affecting current pointer of others</p> <p>1 - Applet 1: - is triggered by a formatted SMS event - selects DF_SIMTEST and EF_LARU - reads record 2 using NEXT so that the current record pointer is set to record 2 - issues a proactive command, e.g. Get Inkey.</p> <p>2 - An ENVELOPE APDU containing a CALL CONTROL BY SIM is issued to the SIM</p> <p>Applet 2: - is triggered by a CALL CONTROL BY SIM event - selects DF_SIMTEST and EF_LARU - updates record 1, by using mode "NEXT". - returns from processToolkit</p> <p>3 - The terminal response for Get Inkey reactivates Applet 1: - call readRecord() using CURRENT - the record read should still be record 2 of EF_LARU, containing {0xAA, 0xAA, 0xAA, 0xAA}</p> | <p>1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - No exception shall be thrown.</p> | <p>1 - A GET INKEY proactive command is fetched from the SIM</p> |
| 3 | <p>readRecord in linear fixed EF without affecting current pointer of others</p> <p>1 - Applet 1: - is triggered by a formatted SMS event - selects DF_SIMTEST and EF_LARU - reads record 2 using NEXT so that the current record pointer is set to record 2 - issues a proactive command, e.g. Get Inkey.</p> <p>2 - An ENVELOPE APDU containing a CALL CONTROL BY SIM is issued to the SIM</p> <p>Applet 2: - is triggered by a CALL CONTROL BY SIM event - selects DF_SIMTEST and EF_LARU - reads record 1, by using mode "NEXT". - returns from processToolkit</p> <p>3 - The terminal response for Get Inkey reactivates Applet 1: - call readRecord() using CURRENT - the record read should still be record 2 of EF_LARU, containing {0xAA, 0xAA, 0xAA, 0xAA}</p> | <p>1 - No exception shall be thrown. 2 - No exception shall be thrown. 3 - No exception shall be thrown.</p> | <p>1 - A GET INKEY proactive command is fetched from the SIM</p> |

6.3.9.3.4 Test Coverage

| CRR Number | Test Case Number |
|------------|-----------------------|
| CRRN1 | 1 |
| CRRN2 | 2 |
| CRRN3 | not tested (see Note) |
| CRRN4 | 3 |
| CRRN5 | not tested (see Note) |

Note: These requirements have not been tested because of an inconsistent behavior in 03.19, which is foreseen to be corrected in future releases.

6.3.10 Other parts transferred to framework from API

6.3.10.1 A handler is a temporary JCRE Entry Point object

Test Area Reference: FWK_API_HEPO

6.3.10.1.1 Conformance Requirement:

Normal execution

CRRN1: The EnvelopeHandler is a Temporary JCRE Entry Point Object (see Javacard 2.1 Runtime Environment (JCRE) Specification [12]).

CRRN2: The EnvelopeResponseHandler is a Temporary JCRE Entry Point Object (see Javacard 2.1 Runtime Environment (JCRE) Specification [12]).

CRRN3: The ProactiveHandler is a Temporary JCRE Entry Point Object (see Javacard 2.1 Runtime Environment (JCRE) Specification [12]).

CRRN4: The ProactiveResponseHandler is a Temporary JCRE Entry Point Object (see Javacard 2.1 Runtime Environment (JCRE) Specification [12]).

Parameters error

Context errors

6.3.10.1.2 Test suite files

Test Script: FWK_API_HEPO_1.scr

Test Applet: FWK_API_HEPO_1.java

Load Script: FWK_API_HEPO_1.ldr

Cleanup Script: FWK_API_HEPO_1.clr

Parameter File: FWK_API_HEPO_1.par

6.3.10.1.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|-----------------------------|------------------|
| 1 | EnvelopeHandler.getTheHandler and store it in a static field of the toolkit applet | SecurityException is thrown | |
| 2 | EnvelopeHandler.getTheHandler and store it in a field of the toolkit applet | SecurityException is thrown | |
| 3 | EnvelopeResponseHandler.getTheHandler and store it in a static field of the toolkit applet | SecurityException is thrown | |
| 4 | EnvelopeResponseHandler.getTheHandler and store it in a field of the toolkit applet | SecurityException is thrown | |

| | | | |
|---|---|-----------------------------|---|
| 5 | ProactiveHandler.getTheHandler and store it in a static field of the toolkit applet | SecurityException is thrown | |
| 6 | ProactiveHandler.getTheHandler and store it in a field of the toolkit applet | SecurityException is thrown | |
| 7 | Build and send a DISPLAY TEXT command to be able to get the reference of the ProactiveReponseHandler ProactiveResponseHandler.getTheHandler and store it in a static field of the toolkit applet | SecurityException is thrown | Proactive command fetched and terminal response is issued |
| 8 | ProactiveResponseHandler.getTheHandler and store it in a field of the toolkit applet | SecurityException is thrown | |

6.3.10.1.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 1, 2 |
| N2 | 3, 4 |
| N3 | 5, 6 |
| N4 | 7, 8 |

6.3.10.2 Transaction

Test Area Reference: FWK_API_TRAN

6.3.10.2.1 Conformance Requirement:

Normal execution

CRRN1: A pending toolkit applet transaction at the ProactiveHandler.send() method invocation is aborted..

6.3.10.2.2 Test suite files

- Test Script: FWK_API_TRAN_1.scr
- Test Applet: FWK_API_TRAN_1.java
- Load Script: FWK_API_TRAN_1.ldr
- Cleanup Script: FWK_API_TRAN_1.clr
- Parameter File: FWK_API_TRAN_1.par

6.3.10.2.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---------------------------|---|
| 1 | Verify that transaction is aborted when a proactive command is sent Initialise a byte field with 0x05 Build a display text proactive command. beginTransaction() Update the byte with 0x02 send the proactive command Verify that the byte value is 0x05 JCSystem.getTransactionDepth() | Shall return 0 | Proactive command fetched and terminal response is issued |

6.3.10.2.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 1 |

6.3.10.3 Timer Id between Applets

Test Area Reference: FWK_API_TMID

6.3.10.3.1 Conformance Requirement:

Context errors

CRRC1: The method ToolkitRegistry.releaseTimer() shall throw a ToolkitException with INVALID_TIMER_ID reason if the timer is valid but isn't allocated to this applet.

6.3.10.3.2 Test suite files

Test Script: FWK_API_TMID_1.scr
 Test Applet: FWK_API_TMID_1.java
 Load Script: FWK_API_TMID_1.ldr
 Cleanup Script: FWK_API_TMID_1.clr
 Parameter File: FWK_API_TMID_1.par

6.3.10.3.3 Test Procedure

| Id | Description | API/Framework Expectation | APDU Expectation |
|----|---|---|------------------|
| 1 | <p>During installation : First instance allocate a timer and store the returned value in a static field. Second instance allocate a timer. Trig second instance and try to releaseTimer() with the static field value.</p> | <p>releaseTimer() shall throw a ToolkitException with INVALID_TIMER_ID reason</p> | |

6.3.10.3.4 Test Coverage

| CRR number | Test case number |
|------------|------------------|
| N1 | 1 |

Annex A (normative): Class and Methods AID numbering and acronyms

A.1 Sim.access

| Class Name | Acronyms | Numbering on 5 bits |
|------------------|----------|---------------------|
| SIMView | SVW | 00001 |
| SIMSystem | SSY | 00010 |
| SIMViewException | SVE | 00011 |

A.1.1 SIMView methods

| Method Name | Acronyms | Numbering on 6 bits |
|---|-------------|---------------------|
| static final Constants | | 000001 |
| short increase(byte[] incr, short incrOffset, byte[] resp, short respOffset) | INCR_BS_BS | 000010 |
| void invalidate() | INVL | 000011 |
| void readBinary(short fileOffset, byte[] resp, short respOffset, short respLength) | REDBS_BSS | 000100 |
| short readRecord(short recNumber, byte mode, short recOffset, byte[] resp, short respOffset, short respLength) | REDRSBS_BSS | 000101 |
| void rehabilitate() | REHA | 000110 |
| short seek(byte mode, byte[] patt, short pattOffset, short pattLength) | SEEKB_BSS | 000111 |
| void select(short fid) | SLCTS | 001000 |
| short select(short fid, byte[] fci, short fciOffset, short fciLength) | SLCTS_BSS | 001001 |
| short status(byte[] fci, short fciOffset, short fciLength) | STAT_BSS | 001010 |
| short updateBinary(short fileOffset, byte[] data, short dataOffset, short dataLength) | UPDBS_BSS | 001011 |
| void updateRecord(short recNumber, byte mode, short recOffset, byte[] data, short dataOffset, short dataLength) | UPDRSBS_BSS | 001100 |

A.1.2 SIMSystem methods

| Method Name | Acronyms | Numbering on 6 bits |
|--------------------------------|----------|---------------------|
| static SIMView getTheSIMView() | GETS | 000001 |

A.1.3 SIMViewException methods

| Method Name | Acronyms | Numbering on 6 bits |
|-----------------------------------|----------|---------------------|
| static void throwIt(short reason) | THITS | 000001 |
| SIMViewException(short reason) | COORS | 000010 |
| Constants | CONS | 000011 |

A.2 Sim.toolkit

| Class Name | Acronyms | Numbering on 5 bits |
|--------------------------|----------|---------------------|
| ToolkitConstants | TKC | 00001 |
| ToolkitInterface | TKI | 00010 |
| EditHandler | EDH | 00011 |
| EnvelopeHandler | ENH | 00100 |
| EnvelopeResponseHandler | ERH | 00101 |
| MEProfile | MEP | 00110 |
| ProactiveHandler | PAH | 00111 |
| ProactiveResponseHandler | PRH | 01000 |
| ToolkitRegistry | TKR | 01001 |
| ViewHandler | VWH | 01010 |
| ToolkitException | TKE | 01011 |

A.2.1 ToolkitConstants

| Method Name | Acronyms | Numbering on 6 bits |
|-------------|----------|---------------------|
| Constants | CONS | 000001 |

A.2.2 ToolkitInterface methods

| Method Name | Acronyms | Numbering on 6 bits |
|----------------------------------|----------|---------------------|
| void processToolkit (byte event) | PRTKB | 000001 |

A.2.3 EditHandler methods

The numbering of the EditHandler methods it will be done in the classes inherit it: EnvelopeResponseHandler, ProactiveHandler, because the methods provided by this class as it is declared 'abstract'.

A.2.4 EnvelopeHandler methods

| Method Name | Acronyms | Numbering on 6 bits |
|---|-------------|---------------------|
| byte getEnvelopeTag() | GENT | 000001 |
| byte getItemIdentifier() | GIID | 000010 |
| short getSecuredDataLength() | GSDL | 000011 |
| short getSecuredDataOffset() | GSDO | 000100 |
| EnvelopeHandler getTheHandler() | GTHD | 000101 |
| short getTPUDLOffset() | GTPO | 000110 |
| Inherited Method Name: ViewHandler | | |
| Byte compareValue(short valueOffset,byte[] compareBuffer, short compareOffset, short compareLength) | CPRVS_BSS | 000111 |
| Short copy(byte[] dstBuffer,short dstOffset,short dstLength) | COPY_BSS | 001000 |
| Short copyValue(short valueOffset, byte[] dstBuffer,short dstOffset,short dstLength) | CPYVS_BSS | 001001 |
| Byte findAndCompareValue(byte tag,byte[] compareBuffer,short compareOffset) | FACRB_BS | 001010 |
| Byte findAndCompareValue(byte tag,byte occurrence, short valueOffset,byte[] compareBuffer,short compare Offset,short compareLength) | FACRBBS_BSS | 001011 |
| Short FindAndCopyValue(byte tag,byte occurrence,short value | FACYBBS_BSS | 001100 |

| | | |
|--|----------|--------|
| Offset, byte[] dstBuffer, short dstOffset, short dstLength) | | |
| Short findAndCopyValue(byte tag,byte[] dstBuffer,short dstOffset) | FACYB_BS | 001101 |
| Byte FindTLV(byte tag,byte occurrence) | FINDBB | 001110 |
| Short GetLength() | GLEN | 001111 |
| Byte GetValueByte(short valueOffset) | GVBYS | 010000 |
| Short GetValueLength() | GVLE | 010001 |

A.2.5 EnvelopeResponseHandler methods

| Method Name | Acronym | Numbering on 6 bits |
|--|-------------|---------------------|
| EnvelopeResponseHandler getTheHandler() | GTHD | 000001 |
| Void post(byte statusType) | POSTB | 000010 |
| Void postAsBERTLV(byte statusType, byte tag) | POSTBB | 000011 |
| | | |
| Inherited Method Name: EditHandler | | |
| Void appendArray(byte[] buffer, short offset, short length) | APDA_BSS | 000100 |
| Void appendTLV(byte tag, byte value) | APTLBB | 000101 |
| Void appendTLV(byte tag, byte[] value, short valueOffset, short valueLength) | APTLB_BSS | 000110 |
| Void appendTLV(byte tag, byte value1, byte value2) | APTLBBB | 000111 |
| Void appendTLV(byte tag, byte value1, byte[] value2, short value2Offset, short value2Length) | APTLBB_BSS | 001000 |
| Void clear() | CLER | 001001 |
| | | |
| Inherited Method Name: ViewHandler | | |
| Byte compareValue(short valueOffset,byte[] compareBuffer, short compareOffset, short compareLength) | CPRVS_BSS | 001010 |
| Short Copy(byte[] dstBuffer,short dstOffset,short dstLength) | COPY_BSS | 001011 |
| Short CopyValue(short valueOffset, byte[] dstBuffer,short dstOffset,short dstLength) | CPYVS_BSS | 001100 |
| Byte FindAndCompareValue(byte tag,byte[] compareBuffer,short compareOffset) | FACRB_BS | 001101 |
| Byte findAndCompareValue(byte tag,byte occurrence, short valueOffset,byte[] compareBuffer,short compareOffset,short compareLength) | FACRBBS_BSS | 001110 |
| Short FindAndCopyValue(byte tag,byte occurrence,short valueOffset, byte[] dstBuffer, short dstOffset, short dstLength) | FACYBBS_BSS | 001111 |
| Short findAndCopyValue(byte tag,byte[] dstBuffer,short dstOffset) | FACYB_BS | 010000 |
| Byte FindTLV(byte tag,byte occurrence) | FINDBB | 010001 |
| Short GetLength() | GLEN | 010010 |
| Byte GetValueByte(short valueOffset) | GVBYS | 010011 |
| Short GetValueLength() | GVLE | 010100 |

A.2.6 MEProfile methods

| Method Name | Acronym | Numbering on 6 bits |
|--|-----------|---------------------|
| static boolean check(byte index) | CHECB | 000001 |
| static boolean check(byte[] mask, short offset, short length) | CHECBSS | 000010 |
| static boolean check(short index) | CHECS | 000011 |
| static short copy(short startOffset, byte[] dstBuffer, short dstOffset, short dstLength) | COPYS_BSS | 000100 |
| static short getValue(short indexMSB, short indexLSB) | GVALSS | 000101 |

A.2.7 ProactiveHandler methods

| Method Name | Acronyms | Numbering on 6 bits |
|---|--------------|---------------------|
| GetTheHandler() | GTHD | 000001 |
| Init(byte type, byte qualifier, byte dstDevice) | INITBBB | 000010 |
| InitDisplayText(byte qualifier, byte dcs, byte[] buffer, short offset, short length) | INDTBB_BSS | 000011 |
| InitGetInkey(byte qualifier, byte dcs, byte[] buffer, short offset, short length) | INGKBB_BSS | 000100 |
| InitGetInput(byte qualifier, byte dcs, byte[] buffer, short offset, short length, short minRespLength, short maxRespLength) | INGPBB_BSSSS | 000101 |
| Byte send() | SEND | 000110 |
| Inherited Method Name: EditHandler | | |
| Void appendArray(byte[] buffer, short offset, short length) | APDA_BSS | 000111 |
| Void appendTLV(byte tag, byte value) | APTLBB | 001000 |
| Void appendTLV(byte tag, byte[] value, short valueOffset, short valueLength) | APTLB_BSS | 001001 |
| Void appendTLV(byte tag, byte value1, byte value2) | APTLBBB | 001010 |
| Void appendTLV(byte tag, byte value1, byte[] value2, short value2Offset, short value2Length) | APTLBB_BSS | 001011 |
| Void clear() | CLER | 001100 |
| Inherited Method Name: ViewHandler | | |
| Byte CompareValue(short valueOffset, byte[] compareBuffer, short compareOffset, short compareLength) | CPRVS_BSS | 001101 |
| Short Copy(byte[] dstBuffer, short dstOffset, short dstLength) | COPY_BSS | 001110 |
| Short CopyValue(short valueOffset, byte[] dstBuffer, short dstOffset, short dstLength) | CPYVS_BSS | 001111 |
| Byte FindAndCompareValue(byte tag, byte[] compareBuffer, short compareOffset) | FACRB_BS | 010000 |
| Byte findAndCompareValue(byte tag, byte occurrence, short valueOffset, byte[] compareBuffer, short compareOffset, short compareLength) | FACRBBS_BSS | 010001 |
| Short FindAndCopyValue(byte tag, byte occurrence, short valueOffset, byte[] dstBuffer, short dstOffset, short dstLength) | FACYBBS_BSS | 010010 |
| Short findAndCopyValue(byte tag, byte[] dstBuffer, short dstOffset) | FACYB_BS | 010011 |
| Byte FindTLV(byte tag, byte occurrence) | FINDBB | 010100 |
| Short GetLength() | GLEN | 010101 |
| Byte GetValueByte(short valueOffset) | GVBYS | 010110 |
| Short GetValueLength() | GVLE | 010111 |

A.2.8 ProactiveResponseHandler methods

| Method Name | Acronyms | Numbering on 6 bits |
|--|-------------|---------------------|
| Short CopyAdditionalInformation(byte[] dstBuffer, short dstOffset, short dstLength) | CPAI_BSS | 000001 |
| Short copyTextString(byte[] dstBuffer, short dstOffset) | CPTS_BS | 000010 |
| Short getAdditionalInformationLength() | GTIL | 000011 |
| Byte getGeneralResult() | GTGR | 000100 |
| Byte getItemIdentifier() | GTII | 000101 |
| Byte getTextStringCodingScheme() | GTCS | 000110 |
| Short getTextStringLength() | GTTL | 000111 |
| GetTheHandler() | GTHD | 001000 |
| Inherited Method Name: ViewHandler | | |
| Byte CompareValue(short valueOffset, byte[] compareBuffer, short compareOffset, short compareLength) | CPRVS_BSS | 001001 |
| Short Copy(byte[] dstBuffer, short dstOffset, short dstLength) | COPY_BSS | 001010 |
| Short CopyValue(short valueOffset, byte[] dstBuffer, short dstOffset, short dstLength) | CPYVS_BSS | 001011 |
| Byte FindAndCompareValue(byte tag, byte[] compareBuffer, short compareOffset) | FACRB_BS | 001100 |
| Byte findAndCompareValue(byte tag, byte occurrence, short valueOffset, byte[] compareBuffer, short compareOffset, short compareLength) | FACRBBS_BSS | 001101 |
| Short FindAndCopyValue(byte tag, byte occurrence, short valueOffset, byte[] dstBuffer, short dstOffset, short dstLength) | FACYBBS_BSS | 001110 |
| Short findAndCopyValue(byte tag, byte[] dstBuffer, short dstOffset) | FACYB_BS | 001111 |
| Byte FindTLV(byte tag, byte occurrence) | FINDBB | 010000 |
| Short GetLength() | GLEN | 010001 |
| Byte GetValueByte(short valueOffset) | GVBYS | 010010 |
| Short GetValueLength() | GVLE | 010011 |

A.2.9 ToolkitRegistry methods

| Method Name | Acronyms | Numbering on 6 bits |
|--|---------------|---------------------|
| AllocateTimer() | ATIM | 000001 |
| changeMenuEntry(byte id, byte[] menuEntry, short offset, short length, byte nextAction, boolean helpSupported, byte iconQualifier, short iconIdentifier) | CMETB_BSSBZBS | 000010 |
| clearEvent(byte event) | CEVTB | 000011 |
| disableMenuEntry(byte id) | DMETB | 000100 |
| enableMenuEntry(byte id) | EMETB | 000101 |
| getEntry() | GETY | 000110 |
| getPollInterval() | GPOL | 000111 |
| initMenuEntry(byte[] menuEntry, short offset, short length, byte nextAction, boolean helpSupported, byte iconQualifier, short iconIdentifier) | IMET_BSSBZBS | 001000 |
| isEventSet(byte event) | IEVSB | 001001 |
| releaseTimer(byte timerIdentifier) | RTIM | 001010 |
| requestPollInterval(short duration) | RPOL | 001011 |
| setEvent(byte event) | SEVTB | 001100 |
| setEventList(byte[] eventList, short offset, short length) | SEVL_BSS | 001101 |

A.2.10 ViewHandler methods

The numbering of the ViewHandler methods it will be done in the classes inherit it: EditHandler, EnvelopeHandler, ProactiveResponseHandler, ProactiveHandler, because the methods provided by this class as it is declared 'abstract'.

A.2.11 ToolkitException methods

| Method Name | Acronyms | Numbering on 6 bits |
|-----------------------------------|----------|---------------------|
| Static void throwIt(short reason) | THITS | 000001 |
| ToolkitException(short reason) | COORS | 000010 |
| Constants | CONS | 000011 |

Annex B (normative): Script file syntax and format description

B.1 Syntax description

Following is a syntax description in BNF.

```

<statement list> ::= [ <statement> \n ] +
<statement> ::= <simple> | <switch> | <blank line>
<simple> ::= <reset> | <init> | <command> | <remark>
<reset> ::= RST
<init> ::= INI <hexdata>
<command> ::= CMD <hexdata> [ <response> ] ( <status> )
<response> ::= [ <hexdata> ]
<status> ::= ( <hexdata> )
<remark> ::= REM <text line>
<switch> ::= SWI { [ <labelled list> ] + }
<labelled list> ::= <label> : \n <statement list>

```

Description of syntax metalanguage :

\n represents a linebreak
 [x] means x can appear optionally
 [x] + means 1 or more appearances of x
 x | y means x or y
 [] { } : (bold) these are characters that appear literally in the script files
 <text line> any character until the end of the line
 <blank line> a line containing no text is acceptable
 <hexdata> data written in hexadecimal, each byte separated from the following by a whitespace

Each simple statement beginning with 3 characters different than the ones defined indicates another tool command, and shall be ignored by the parser if not recognised.

' ', '\t' : Can be used as separator

A long statement can be broken into several lines by using the character '\n' at the end of each line which is not the last one in the statement.

For more details refer to the examples in B.3.

B.2 Semantics

Following is the meaning of each of the statements :

CMD : Sends an APDU Command to the card, including (optionally) the expected response data and also (optionally) the expected status words SW1, SW2.

RST : Resets and powers on the card

INI : Performs the terminal profile with the following data. Afterwards, it shall perform all the fetch and terminal response commands until there is no proactive session in progress.

REM : Used for comments

SWI : Activates a switch condition. Every labelled list represents a list of statements to be executed, if the label matches the SW resulting from the previously executed command.

Evaluation of expected response and status in the case of a CMD:

<response> data within [...] has to be checked, it needs to be present for an outgoing command. Bytes written as XX shall not be checked by the APDU tool.

<status> status contained within (...) has to be checked; when several status are valid they shall be separated by commas. Bytes written as XX shall not be checked by the APDU tool.

B.3 Example

```
REM this is an example
```

```
RST
```

```
INI FF FF FF FF FF FF FF FF FF FF FF FF FF FF FF FF
```

```
REM Case 1 example
```

```
CMD A0 C2 00 00 00 (91 33 , 69 XX)
```

```
REM Case 2 example
```

```
CMD A0 B6 00 00 07 \
  [XX XX XX 55 55 XX 55] \
  (91 33 , 67 XX)
```

```
CMD A0 B6 00 00 07 \
  (91 33 , 67 XX)
```

```
CMD A0 C0 00 00 1F \
  [10 A0 00 00 00 09 00 02 FF FF FF FF 89 28 A4 05 \
  02 0D CC CC CC CC CC CC CC CC CC CC CC CC CC ] \
  (90 00)
```

```
REM Case 3 example
```

```
CMD A0 C2 00 00 33 \
  D1 31 82 02 83 81 06 05 80 11 22 33 44 8B 24 40 \
  08 00 24 23 85 18 41 04 51 10 10 00 00 00 00 13 \
  02 70 00 00 0E 0D 00 00 00 00 28 A4 05 00 00 00 \
  00 00 00 \
  (90 00)
```

```
REM Case 4 example with switch statement
```

```
CMD 00 A4 04 00 10 \
  A0 00 00 00 09 00 02 FF FF FF FF 89 41 04 44 02 \
  (61 XX, 6A 82)
```

```
SWI {
```

```
61 XX:
```

```
CMD 00 C0 00 00 14 \
  [10 A0 00 00 00 09 00 02 FF FF FF FF 89 41 04 44 \
  02 02 CC CC] \
  (90 00)
```

```
CMD A0 A4 00 00 02 \
  3F 00
```

```
6A 82:
```

```
RST
```

```
}
```

B.4 Style and formatting

In order to show a common appearance all the scripts shall follow those format rules:

- start always with a 'RST' followed by an 'INI' command.
- The command, data to be checked and status to be checked shall be presented in the following order:
CMD COMMAND [EXPECTED DATA] (EXPECTED STATUS)
- APDU shall be presented with command (CLA INS P1 P2 P3) in one line and data (if present) in next line grouped 16 bytes per line (see example above).
- The expected data (if present) shall be presented in 16 bytes groups per line (see example above).

Annex C (normative): Default Prepersonalisation

C.1 General Default Prepersonalisation

This table shows the default prepersonalisation, the file system and the files' content, that the test SIM cards shall contain unless otherwise stated.

| Name | Identifier | Default Value | Special Features |
|-----------------------|------------|--|--|
| EF _{ICCID} | 2FE2 | 0F FF FF FF FF FF FF FF FF | This value is not compliant with GSM 11.11 |
| EF _{IMSI} | 6F07 | FF FF FF FF FF FF FF FF | This value is not compliant with GSM 11.11 |
| EF _{LP} | 6F05 | 01 FF FF FF | |
| EF _{Kc} | 6F20 | FF FF FF FF FF FF FF FF 07 | |
| EF _{PLMNsel} | 6F30 | FF FF FF FF FF FF FF FF FF FF FF FF FF FF FF FF | |
| EF _{HPLMN} | 6F31 | 05 | |
| EF _{ACMmax} | 6F37 | 00 00 00 | Access condition UPDATE: CHV1 |
| EF _{SST} | 6F38 | FF 3F C3 0F 0C 00 FF 0F 00 33 | |
| EF _{ACM} | 6F39 | 00 00 00 | Access condition UPDATE: CHV1 |
| EF _{PUCT} | 6F41 | FF FF FF 00 00 | Access condition UPDATE: CHV1 |
| EF _{BCCH} | 6F74 | FF FF FF FF FF FF FF FF FF FF FF FF | |
| EF _{ACC} | 6F78 | 00 00 | |
| EF _{FPLMN} | 6F7B | FF FF FF FF FF FF FF FF FF FF FF FF | |
| EF _{LOCI} | 6F7E | FF FF FF FF 00 F0 00 00 00 FF 01 | |
| EF _{AD} | 6FAD | 00 FF FF | |
| EF _{Phase} | 6FAE | 03 | |
| EF _{FDN} | 6F3B | Default value in all the records: FF | Records: 5 |
| EF _{SMSP} | 6F42 | FF | Records: 1 |
| EF _{LND} | 6F44 | FF | Records: 1 |
| EF _{SMSS} | 6F43 | FF FF | |
| EF _{SMS} | 6F3C | 1 st record: 00 FF ... FF(length 176) 2 nd record: 00 FF ... FF(length 176) 3 rd record: 00 FF ... FF(length 176) | Records: 3 |
| EF _{ADN} | 6F3A | FF | Records: 1 |
| EF _{CCP} | 6F3D | FF FF FF FF FF FF FF FF FF FF | |
| EF _{MSISDN} | 6F40 | FF | Records: 1 |
| EF _{SDN} | 6F49 | FF | Records: 1 |
| EF _{SUME} | 6F54 | 85 0C 54 4F 4F 4C 4B 49 54 20 54 45 53 54 FF FF FF FF | |
| EF _{CBMI} | 6F45 | FF FF | |
| EF _{CBMID} | 6F48 | 10 80 | |
| EF _{CBMIR} | 6F50 | 10 80 10 9F | |
| EF _{IM} | 4F20 | FF FF FF FF FF FF FF FF FF FF FF FF | |

The default value for the CHV1 shall be "0x31 0x31 0x31 0x31 0xFF 0xFF 0xFF 0xFF" and its state shall be 'disabled' during test applets execution.

C.2 Sim.Access.SimView test default prepersonalisation

C.2.1 DF_{SIMTEST} (SIM Test)

Identifier: '0319'

C.2.2 EF_{TNR} (Transparent Never Read)

| Identifier: '6F01' | | Structure: transparent | | Mandatory | | | | | | | | | |
|---|-------------|------------------------|----------------------|-----------|--|------|-------|--------|--------|------------|--------|--------------|--------|
| File size: 3 bytes | | | Update activity: low | | | | | | | | | | |
| Access Conditions: <table style="margin-left: auto; margin-right: auto;"> <tr> <td>READ</td> <td>NEVER</td> </tr> <tr> <td>UPDATE</td> <td>ALWAYS</td> </tr> <tr> <td>INVALIDATE</td> <td>ALWAYS</td> </tr> <tr> <td>REHABILITATE</td> <td>ALWAYS</td> </tr> </table> | | | | | | READ | NEVER | UPDATE | ALWAYS | INVALIDATE | ALWAYS | REHABILITATE | ALWAYS |
| READ | NEVER | | | | | | | | | | | | |
| UPDATE | ALWAYS | | | | | | | | | | | | |
| INVALIDATE | ALWAYS | | | | | | | | | | | | |
| REHABILITATE | ALWAYS | | | | | | | | | | | | |
| Bytes | Description | Default Value | M/O | Length | | | | | | | | | |
| 1 - 3 | Test Data | AA AA AA | M | 3 bytes | | | | | | | | | |

C.2.3 EF_{TNU} (Transparent Never Update)

| Identifier: '6F02' | | Structure: transparent | | Mandatory | | | | | | | | | |
|---|-------------|------------------------|----------------------|-----------|--|------|--------|--------|-------|------------|--------|--------------|--------|
| File size: 3 bytes | | | Update activity: low | | | | | | | | | | |
| Access Conditions: <table style="margin-left: auto; margin-right: auto;"> <tr> <td>READ</td> <td>ALWAYS</td> </tr> <tr> <td>UPDATE</td> <td>NEVER</td> </tr> <tr> <td>INVALIDATE</td> <td>ALWAYS</td> </tr> <tr> <td>REHABILITATE</td> <td>ALWAYS</td> </tr> </table> | | | | | | READ | ALWAYS | UPDATE | NEVER | INVALIDATE | ALWAYS | REHABILITATE | ALWAYS |
| READ | ALWAYS | | | | | | | | | | | | |
| UPDATE | NEVER | | | | | | | | | | | | |
| INVALIDATE | ALWAYS | | | | | | | | | | | | |
| REHABILITATE | ALWAYS | | | | | | | | | | | | |
| Bytes | Description | Default Value | M/O | Length | | | | | | | | | |
| 1 - 3 | Test Data | 55 55 55 | M | 3 bytes | | | | | | | | | |

C.2.4 EF_{TARU} (Transparent Always Read and Update)

| Identifier: '6F03' | | Structure: transparent | | Mandatory | | | | | | | | | |
|--|-------------|------------------------|----------------------|-----------|--|------|--------|--------|--------|------------|--------|--------------|--------|
| File size: 260 bytes | | | Update activity: low | | | | | | | | | | |
| Access Conditions: <table style="margin-left: auto; margin-right: auto;"> <tr> <td>READ</td> <td>ALWAYS</td> </tr> <tr> <td>UPDATE</td> <td>ALWAYS</td> </tr> <tr> <td>INVALIDATE</td> <td>ALWAYS</td> </tr> <tr> <td>REHABILITATE</td> <td>ALWAYS</td> </tr> </table> | | | | | | READ | ALWAYS | UPDATE | ALWAYS | INVALIDATE | ALWAYS | REHABILITATE | ALWAYS |
| READ | ALWAYS | | | | | | | | | | | | |
| UPDATE | ALWAYS | | | | | | | | | | | | |
| INVALIDATE | ALWAYS | | | | | | | | | | | | |
| REHABILITATE | ALWAYS | | | | | | | | | | | | |
| Bytes | Description | Default Value | M/O | Length | | | | | | | | | |
| 1 - 260 | Test Data | FF ... FF | M | 260 bytes | | | | | | | | | |

C.2.5 EF_{CNR} (Cyclic Never Read)

| Identifier: '6F04' | | Structure: cyclic | | Mandatory | | | | | | | | | | | |
|---|-------------|-------------------|-----------------------|-----------|--|------|-------|--------|--------|----------|--------|------------|--------|--------------|--------|
| Record length: 3 bytes | | | Update activity: high | | | | | | | | | | | | |
| <p style="text-align: center;">Access Conditions:</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">READ</td> <td style="width: 50%;">NEVER</td> </tr> <tr> <td>UPDATE</td> <td>ALWAYS</td> </tr> <tr> <td>INCREASE</td> <td>ALWAYS</td> </tr> <tr> <td>INVALIDATE</td> <td>ALWAYS</td> </tr> <tr> <td>REHABILITATE</td> <td>ALWAYS</td> </tr> </table> | | | | | | READ | NEVER | UPDATE | ALWAYS | INCREASE | ALWAYS | INVALIDATE | ALWAYS | REHABILITATE | ALWAYS |
| READ | NEVER | | | | | | | | | | | | | | |
| UPDATE | ALWAYS | | | | | | | | | | | | | | |
| INCREASE | ALWAYS | | | | | | | | | | | | | | |
| INVALIDATE | ALWAYS | | | | | | | | | | | | | | |
| REHABILITATE | ALWAYS | | | | | | | | | | | | | | |
| Logical Record Number | Description | Default Value | M/O | Length | | | | | | | | | | | |
| 1 | Test Data | 00 00 00 | M | 3 bytes | | | | | | | | | | | |
| 2 | Test Data | 00 00 00 | M | 3 bytes | | | | | | | | | | | |

C.2.6 EF_{CNU} (Cyclic Never Update)

| Identifier: '6F05' | | Structure: cyclic | | Mandatory | | | | | | | | | | | |
|--|-------------|-------------------|-----------------------|-----------|--|------|--------|--------|-------|----------|-------|------------|--------|--------------|--------|
| Record length: 3 bytes | | | Update activity: high | | | | | | | | | | | | |
| <p style="text-align: center;">Access Conditions:</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">READ</td> <td style="width: 50%;">ALWAYS</td> </tr> <tr> <td>UPDATE</td> <td>NEVER</td> </tr> <tr> <td>INCREASE</td> <td>NEVER</td> </tr> <tr> <td>INVALIDATE</td> <td>ALWAYS</td> </tr> <tr> <td>REHABILITATE</td> <td>ALWAYS</td> </tr> </table> | | | | | | READ | ALWAYS | UPDATE | NEVER | INCREASE | NEVER | INVALIDATE | ALWAYS | REHABILITATE | ALWAYS |
| READ | ALWAYS | | | | | | | | | | | | | | |
| UPDATE | NEVER | | | | | | | | | | | | | | |
| INCREASE | NEVER | | | | | | | | | | | | | | |
| INVALIDATE | ALWAYS | | | | | | | | | | | | | | |
| REHABILITATE | ALWAYS | | | | | | | | | | | | | | |
| Logical Record Number | Description | Default Value | M/O | Length | | | | | | | | | | | |
| 1 | Test Data | 00 00 00 | M | 3 bytes | | | | | | | | | | | |
| 2 | Test Data | 00 00 00 | M | 3 bytes | | | | | | | | | | | |

C.2.7 EF_{CNIC} (Cyclic Never Increase)

| Identifier: '6F06' | | Structure: cyclic | | Mandatory | | | | | | | | | | | |
|---|-------------|-------------------|-----------------------|-----------|--|------|--------|--------|--------|----------|-------|------------|--------|--------------|--------|
| Record length: 3 bytes | | | Update activity: high | | | | | | | | | | | | |
| <p style="text-align: center;">Access Conditions:</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">READ</td> <td style="width: 50%;">ALWAYS</td> </tr> <tr> <td>UPDATE</td> <td>ALWAYS</td> </tr> <tr> <td>INCREASE</td> <td>NEVER</td> </tr> <tr> <td>INVALIDATE</td> <td>ALWAYS</td> </tr> <tr> <td>REHABILITATE</td> <td>ALWAYS</td> </tr> </table> | | | | | | READ | ALWAYS | UPDATE | ALWAYS | INCREASE | NEVER | INVALIDATE | ALWAYS | REHABILITATE | ALWAYS |
| READ | ALWAYS | | | | | | | | | | | | | | |
| UPDATE | ALWAYS | | | | | | | | | | | | | | |
| INCREASE | NEVER | | | | | | | | | | | | | | |
| INVALIDATE | ALWAYS | | | | | | | | | | | | | | |
| REHABILITATE | ALWAYS | | | | | | | | | | | | | | |
| Logical Record Number | Description | Default Value | M/O | Length | | | | | | | | | | | |
| 1 | Test Data | 00 00 00 | M | 3 bytes | | | | | | | | | | | |
| 2 | Test Data | 00 00 00 | M | 3 bytes | | | | | | | | | | | |

C.2.8 EF_{CNIV} (Cyclic Never Invalidate)

| Identifier: '6F07' | | Structure: cyclic | | Mandatory | |
|--|-------------|-------------------|-----------------------|-----------|--|
| Record length: 3 bytes | | | Update activity: high | | |
| Access Conditions: READ ALWAYS UPDATE ALWAYS INCREASE ALWAYS INVALIDATE NEVER REHABILITATE ALWAYS | | | | | |
| Logical Record Number | Description | Default Value | M/O | Length | |
| 1 | Test Data | 00 00 00 | M | 3 bytes | |
| 2 | Test Data | 00 00 00 | M | 3 bytes | |

C.2.9 EF_{CNRH} (Cyclic Never Rehabilitate)

| Identifier: '6F08' | | Structure: cyclic | | Mandatory | |
|--|-------------|-------------------|-----------------------|-----------|--|
| Record length: 3 bytes | | | Update activity: high | | |
| Access Conditions: READ ALWAYS UPDATE ALWAYS INCREASE ALWAYS INVALIDATE ALWAYS REHABILITATE NEVER | | | | | |
| Logical Record Number | Description | Default Value | M/O | Length | |
| 1 | Test Data | 00 00 00 | M | 3 bytes | |
| 2 | Test Data | 00 00 00 | M | 3 bytes | |

C.2.10 EF_{CARU} (Cyclic Always Read and Update)

| Identifier: '6F09' | | Structure: cyclic | | Mandatory | |
|---|-------------|-------------------|-----------------------|-----------|--|
| Record length: 3 bytes | | | Update activity: high | | |
| Access Conditions: READ ALWAYS UPDATE ALWAYS INCREASE ALWAYS INVALIDATE ALWAYS REHABILITATE ALWAYS | | | | | |
| Logical Record Number | Description | Default Value | M/O | Length | |
| 1 | Test Data | 55 55 55 | M | 3 bytes | |
| 2 | Test Data | AA AA AA | M | 3 bytes | |

C.2.14 EF_{CINA} (Cyclic Increase Not Allowed)

| Identifier: '6F0D' | | Structure: cyclic | | Mandatory | | | | | | | | | | | |
|---|---------------------|-------------------|-----------------------|-----------|--|------|--------|--------|--------|----------|---------------------|------------|--------|--------------|--------|
| Record length: 3 bytes | | | Update activity: high | | | | | | | | | | | | |
| <p style="text-align: center;">Access Conditions:</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">READ</td> <td style="width: 50%;">ALWAYS</td> </tr> <tr> <td>UPDATE</td> <td>ALWAYS</td> </tr> <tr> <td>INCREASE</td> <td>ALWAYS (see note 1)</td> </tr> <tr> <td>INVALIDATE</td> <td>ALWAYS</td> </tr> <tr> <td>REHABILITATE</td> <td>ALWAYS</td> </tr> </table> | | | | | | READ | ALWAYS | UPDATE | ALWAYS | INCREASE | ALWAYS (see note 1) | INVALIDATE | ALWAYS | REHABILITATE | ALWAYS |
| READ | ALWAYS | | | | | | | | | | | | | | |
| UPDATE | ALWAYS | | | | | | | | | | | | | | |
| INCREASE | ALWAYS (see note 1) | | | | | | | | | | | | | | |
| INVALIDATE | ALWAYS | | | | | | | | | | | | | | |
| REHABILITATE | ALWAYS | | | | | | | | | | | | | | |
| Logical Record Number | Description | Default Value | M/O | Length | | | | | | | | | | | |
| 1 | Test Data | 00 00 00 | M | 3 bytes | | | | | | | | | | | |
| 2 | Test Data | 00 00 00 | M | 3 bytes | | | | | | | | | | | |
| <p>Note 1: This file will be personalised in a way such that increase is not allowed, as indicated by the FCI byte 8, bit 7 (GSM 11.11: FCI structure of an EF returned by the SELECT command)</p> | | | | | | | | | | | | | | | |

C.2.15 EF_{TRAC} (Transparent Read Access Condition CHV2)

| Identifier: '6F0E' | | Structure: transparent | | Mandatory | | | | | | | | | | | |
|--|-------------|------------------------|----------------------|-----------|--|------|------|--------|--------|----------|--------|------------|--------|--------------|--------|
| Record length: 3 bytes | | | Update activity: low | | | | | | | | | | | | |
| <p style="text-align: center;">Access Conditions:</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">READ</td> <td style="width: 50%;">CHV2</td> </tr> <tr> <td>UPDATE</td> <td>ALWAYS</td> </tr> <tr> <td>INCREASE</td> <td>ALWAYS</td> </tr> <tr> <td>INVALIDATE</td> <td>ALWAYS</td> </tr> <tr> <td>REHABILITATE</td> <td>ALWAYS</td> </tr> </table> | | | | | | READ | CHV2 | UPDATE | ALWAYS | INCREASE | ALWAYS | INVALIDATE | ALWAYS | REHABILITATE | ALWAYS |
| READ | CHV2 | | | | | | | | | | | | | | |
| UPDATE | ALWAYS | | | | | | | | | | | | | | |
| INCREASE | ALWAYS | | | | | | | | | | | | | | |
| INVALIDATE | ALWAYS | | | | | | | | | | | | | | |
| REHABILITATE | ALWAYS | | | | | | | | | | | | | | |
| Logical Record Number | Description | Default Value | M/O | Length | | | | | | | | | | | |
| 1 | Test Data | 00 00 00 | M | 3 bytes | | | | | | | | | | | |

C.2.16 EF_{TIAC} (Transparent Invalidate Access Condition CHV1)

| Identifier: '6F0F' | | Structure: transparent | | Mandatory | | | | | | | | | | | |
|--|-------------|------------------------|----------------------|-----------|--|------|--------|--------|--------|----------|--------|------------|------|--------------|--------|
| Record length: 3 bytes | | | Update activity: low | | | | | | | | | | | | |
| <p style="text-align: center;">Access Conditions:</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">READ</td> <td style="width: 50%;">ALWAYS</td> </tr> <tr> <td>UPDATE</td> <td>ALWAYS</td> </tr> <tr> <td>INCREASE</td> <td>ALWAYS</td> </tr> <tr> <td>INVALIDATE</td> <td>CHV1</td> </tr> <tr> <td>REHABILITATE</td> <td>ALWAYS</td> </tr> </table> | | | | | | READ | ALWAYS | UPDATE | ALWAYS | INCREASE | ALWAYS | INVALIDATE | CHV1 | REHABILITATE | ALWAYS |
| READ | ALWAYS | | | | | | | | | | | | | | |
| UPDATE | ALWAYS | | | | | | | | | | | | | | |
| INCREASE | ALWAYS | | | | | | | | | | | | | | |
| INVALIDATE | CHV1 | | | | | | | | | | | | | | |
| REHABILITATE | ALWAYS | | | | | | | | | | | | | | |
| Logical Record Number | Description | Default Value | M/O | Length | | | | | | | | | | | |
| 1 | Test Data | 00 00 00 | M | 3 bytes | | | | | | | | | | | |

C.2.17EF_{CIAc} (Cyclic Increase Access Condition CHV2)

| Identifier: '6F10' | | Structure: cyclic | | Mandatory | |
|---|-------------|-------------------|----------------------|-----------|--|
| Record length: 3 bytes | | | Update activity: low | | |
| Access Conditions: READ ALWAYS UPDATE ALWAYS INCREASE CHV2 INVALIDATE ALWAYS REHABILITATE ALWAYS | | | | | |
| Logical Record Number | Description | Default Value | M/O | Length | |
| 1 | Test Data | 00 00 00 | M | 3 bytes | |
| 2 | Test Data | 00 00 00 | M | 3 bytes | |

C.2.18EF_{CIAA} (Cyclic Increase Access Condition ADM)

| Identifier: '6F11' | | Structure: cyclic | | Mandatory | |
|--|-------------|-------------------|----------------------|-----------|--|
| Record length: 3 bytes | | | Update activity: low | | |
| Access Conditions: READ ALWAYS UPDATE ALWAYS INCREASE ADM INVALIDATE ALWAYS REHABILITATE ALWAYS | | | | | |
| Logical Record Number | Description | Default Value | M/O | Length | |
| 1 | Test Data | 00 00 00 | M | 3 bytes | |
| 2 | Test Data | 00 00 00 | M | 3 bytes | |

C.2.19EF_{CNRI} (Cyclic Never Rehabilitate Invalidated)

| Identifier: '6F12' | | Structure: cyclic | | Mandatory | |
|--|-------------|-------------------|----------------------|-----------|--|
| Record length: 3 bytes | | | Update activity: low | | |
| Access Conditions: READ ALWAYS UPDATE ALWAYS INCREASE ALWAYS INVALIDATE ALWAYS REHABILITATE NEVER | | | | | |
| Logical Record Number | Description | Default Value | M/O | Length | |
| 1 | Test Data | 00 00 00 | M | 3 bytes | |
| 2 | Test Data | 00 00 00 | M | 3 bytes | |

The file status shall be invalidated as defined in [3]

Annex D (normative): sim.test.util package and loading , testing and cleaning script examples.

See attached files:

- Annex_D_SimTestUtil.zip
- Annex_D_Examples.zip

Annex E (normative): Test Area files.

See attached file:

- Annex_E_SourceCode.zip

Annex F (Normative): AID numbering and acronyms for Framework tests

F.1 Toolkit Installation Parameters (TIN)

| Test Area within the chapter | Acronyms | Numbering on 6 bits |
|------------------------------------|----------|---------------------|
| Timer allocation | TMAL | 000001 |
| Item identifier | ITID | 000010 |
| Item position | ITPO | 000011 |
| Access conditions | ACCO | 000100 |
| Priority level | PRLV | 000101 |
| Maximum length for each menu entry | MLME | 000110 |
| Number of menu entries | NBME | 000111 |
| Memory space | MESP | 001000 |

F.2 Minimum Handler Availability (MHA)

| Test Area within the chapter | Acronyms | Numbering on 6 bits |
|------------------------------|----------|---------------------|
| ProactiveHandler | PAHD | 000001 |
| ProactiveResponseHandler | PRHD | 000010 |
| EnvelopeHandler | ENHD | 000011 |
| EnvelopeResponseHandler | ERHD | 000100 |

F.3 Handler Integrity (HIN)

| Test Area within the chapter | Acronyms | Numbering on 6 bits |
|-------------------------------|----------|---------------------|
| ProactiveHandler | PAHD | 000001 |
| ProactiveResponseHandler | PRHD | 000010 |
| EnvelopeHandler | ENHD | 000011 |
| RFU (EnvelopeResponseHandler) | (ERHD) | 000100 |

F.4 Applet Triggering (APT)

| Test Area within the chapter | Acronyms | Numbering on 6 bits |
|--|----------|---------------------|
| EVENT_PROFILE_DOWNLOAD | EPDW | 000001 |
| EVENT_MENU_SELECTION | EMSE | 000010 |
| EVENT_MENU_SELECTION_HELP_REQUEST | EMSH | 000011 |
| EVENT_FORMATTED_SMS_PP_ENV | EFSE | 000100 |
| EVENT_UNFORMATTED_SMS_PP_ENV | EUSE | 000101 |
| EVENT_CALL_CONTROL_BY_SIM | ECCN | 000110 |
| EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM | EMCN | 000111 |
| EVENT_TIMER_EXPIRATION | ETEX | 001000 |
| EVENT_UNFORMATTED_SMS_CB | EUCB | 001001 |
| EVENT_EVENT_DOWNLOAD_MT_CALL | EDMC | 001010 |
| EVENT_EVENT_DOWNLOAD_CALL_CONNECTED | EDCC | 001011 |
| EVENT_EVENT_DOWNLOAD_CALL_DISCONNECTED | EDCD | 001100 |
| EVENT_EVENT_DOWNLOAD_LOCATION_STATUS | EDLS | 001101 |
| EVENT_EVENT_DOWNLOAD_USER_ACTIVITY | EDUA | 001110 |
| EVENT_EVENT_DOWNLOAD_IDLE_SCREEN_AVAILABLE | EDIS | 001111 |
| EVENT_EVENT_DOWNLOAD_CARD_READER_STATUS | EDCR | 010000 |
| RFU (EVENT_UNRECOGNIZED_ENVELOPE) | (EUEN) | 010001 |
| EVENT_STATUS_COMMAND | ESTC | 010010 |
| EVENT_EVENT_DOWNLOAD_LANGUAGE_SELECTION | EDLG | 010011 |
| EVENT_EVENT_DOWNLOAD_BROWSER_TERMINATION | EDBT | 010100 |
| EVENT_FORMATTED_SMS_CB | EFCB | 010101 |

F.5 Proactive Command Sending (PCS)

| Test Area within the chapter | Acronyms | Numbering on 6 bits |
|---|----------|---------------------|
| System Proactive commands | SPCO | 000001 |
| Interaction with GSM commands | IGCO | 000010 |
| Errors during proactive command sending | EPCS | 000011 |

F.6 Envelope Response Posting (ERP)

| Test Area within the chapter | Acronyms | Numbering on 6 bits |
|---------------------------------------|----------|---------------------|
| EVENT_CALL_CONTROL_BY_SIM | ECCN | 000001 |
| EVENT_MO_SHORT_MESSAGE_CONTROL_BY_SIM | EMCN | 000010 |
| EVENT_UNRECOGNIZED_ENVELOPE | EUEN | 000011 |

F.7 Framework Security (FWS)

| Test Area within the chapter | Acronyms | Numbering on 6 bits |
|------------------------------|----------|---------------------|
| Input data | INDA | 000001 |
| Output data | OU DA | 000010 |

F.8 File System Context (FSC)

| Test Area within the chapter | Acronyms | Numbering on 6 bits |
|---|----------|---------------------|
| Initial Context | INIT | 000001 |
| Context Preservation for Current File | CUFI | 000010 |
| Context Preservation for Current Record | CURE | 000011 |

F.9 Exception Handling (EXH)

| Test Area within the chapter | Acronyms | Numbering on 6 bits |
|-----------------------------------|----------|---------------------|
| Hide exception to the mobile | HEME | 000001 |
| Interaction with multi-triggering | IMTG | 000010 |

F.10 Other parts transferred to framework from API (API)

| Test Area within the chapter | Acronyms | Numbering on 6 bits |
|--|----------|---------------------|
| A handler is a temporary JCRE Entry Point object | HEPO | 000001 |
| Transaction | TRAN | 000010 |
| Timer Id between Applets | TMID | 000011 |

Annex G (Normative): Configuration Parameters File

This file describes all the mandatory and optional parameters that are used in order to create the loading script(s) for one test area. The configuration parameters file contains the values for the parameters needed in order to generate the loading and cleanup scripts.

The name of the parameters file will be *<test area reference>_<n>.par*.

The number <n> is associated with the loading/cleanup script number, i.e. API_2_TKR_SEVL_BSS_1.par is used to generate API_2_TKR_SEVL_BSS_1.ldr etc.

G.1 Syntax

The general syntax for this file will be:

```
<file> ::= <section>+
<section> ::= <section heading> <line break> <section body>
<section heading> ::= '[' <name> ']'
<section body> ::= <parameter assignment>+
<parameter assignment> ::= <name> '=' <value> <line break>
```

Where '+' indicates one or more repetitions of the previous syntax element.

Any text included between the symbol ';' and the end of line is considered a comment and ignored by parsing tools.

Empty values are considered valid. They are used to indicate that an optional value is not present.

Names of sections, names of parameters and values are case-sensitive.

Blank spaces and Tabs between tokens are allowed and will be ignored by the parser.

When values represent a sequence of bytes, they are expressed in hexadecimal format, where every 2 digits represent one byte. Blank space between bytes is optional.

Example:

```
; comment

[Section1]
Parameter11 = 00 11 22 33
Parameter12 = 0101 ; another comment

[Section2]
Parameter21 = vvwxyz
```

G.2 File Contents and Organisation

Parameters in this file are organised in the following sections:

| | |
|--------------------|---|
| [CONVERT] | Conversion parameters used during conversion (i.e. CAP file generation) |
| [INSTALL(load)] | Parameters used by the Install for Load command |
| [LOAD] | Parameters used by the Load command |
| [INSTALL(install)] | Parameters used by the Install for Install command |

All sections may appear only once in the file, except for the “INSTALL(install)” section. If that section appears more than once, it will apply to different applet instances, in sequence.

G.2.1 Default values, order and processing

The ordering of the parameters and the sections is relevant, since parameter names may be repeated and apply to different applets.

When one single parameter is repeated within one section, it refers to different applets. The value of the n^{th} appearance of the parameter applies to applet n .

When one section is repeated (INSTALL(install)), then the n^{th} appearance of the section applies to applet n . Parameter/value pairs which are found in one appearance of the section are valid for the subsequent applets as long as they are not overridden. For example, first INSTALL(install) may contain all values for parameters, whereas the subsequent INSTALL(install) sections may only contain parameters whose values change.

If one required parameter is missing from one section, the last defined value of this parameter in a previous section of the same file will be used.

G.2.2 CONVERT Section

These parameters allow configuration of the conversion process of the Java class file(s) into one CAP file.

| Parameter | Description |
|-----------------|-------------------------------------|
| PackageAID | AID of the package |
| PackageName | Fully qualified name of the package |
| PackageVersion | Version of the package |
| AppletClassAID | AID of the applet |
| AppletClassName | Name of the applet |

G.2.3 INSTALL(load) Section

Here are the parameters to be included in the Install(Load) command (as specified in GSM 03.48 [8]).

| Parameter | Description |
|--------------------------------|---|
| PackageAID | AID of the package |
| PackageNonVolatileMemSize | Non Volatile memory space (in bytes) required for package loading |
| InstallationNonVolatileMemSize | Non volatile memory required for installation, in bytes |
| InstallationVolatileMemSize | Volatile memory required for installation, in bytes |

G.2.4 LOAD Section

Here are the parameters to be included in the Load command (as specified in GSM 03.48 [8]).

| Parameter | Description |
|--------------------------|--|
| MaxLoadCommandDataLength | Maximum length of the data provided in the load command (P3 parameter of the LOAD APDU embedded in the command packet) |

G.2.5 INSTALL(install) Section

Here are the parameters to be included in the Install(Install) command (as specified in GSM 03.48 [8]).

| Parameter | Description |
|--------------------------------|--|
| PackageAID | AID of the package |
| AppletClassAID | AID of the applet |
| InstanceAID | AID of the instance of the applet |
| InstallationNonVolatileMemSize | Non volatile memory required for installation, in bytes |
| InstallationVolatileMemSize | Volatile memory required for installation, in bytes |
| AccessDomain | Specify the SIM files that may be accessed by the applet and the operations allowed on these files. This parameter includes the Access Domain Parameter (ADP) and Access Domain Data (ADD) |
| PriorityLevel | Priority level of the Toolkit applet instance |
| MaxNumberOfTimers | Maximum number of timers allowed for this applet instance |
| MaxMenuEntryTextLength | Maximum text length for a menu entry |
| MaxNumberOfMenuEntries | Maximum number of menu entries allowed for this applet instance |
| MenuEntriesPositionIdentifier | For each menu entry: Position and identifier of that menu entry |
| AppletSpecificParameters | Parameters specific to the applet |

The applet shall be installed with install(install and make selectable) command.

G.3 Full example

```
[CONVERT]

PackageAID = A0 00 00 00 30 00 02 FF FF FF FF 89 00 00 01 00

PackageName = sim.test.access.api_1_svw_updrbs

PackageVersion = 1.0

AppletClassAID = A0 00 00 00 30 00 02 FF FF FF FF 89 00 00 01 01

AppletClassName = API_1_SVW_UPDRBS_1

AppletClassAID = A0 00 00 00 30 00 02 FF FF FF FF 89 00 00 01 02

AppletClassName = API_1_SVW_UPDRBS_2

[INSTALL(load)]

PackageNonVolatileMemSize = 0D27

;InstallationNonVolatileMemSize = 0400

;InstallationVolatileMemSize = 0000

[LOAD]

MaxLoadCommandDataLength = 6C ; max value

[INSTALL(install)]

AppletClassAID = A0 00 00 00 30 00 02 FF FF FF FF 89 00 00 01 01

InstanceAID = A0 00 00 00 30 00 02 FF FF FF FF 89 00 00 01 01

InstallationNonVolatileMemSize = 0400

InstallationVolatileMemSize = 0000

AccessDomain = 00

PriorityLevel = FF

MaxNumberOfTimers = 00

MaxMenuEntryTextLength = 10
```

```
MaxNumberOfMenuEntries = 01
MenuEntriesPositionIdentifier = 0001
AppletSpecificParameters =

[INSTALL(install)]
AppletClassAID = A0 00 00 00 30 00 02 FF FF FF FF 89 00 00 01 02
InstanceAID =    A0 00 00 00 30 00 02 FF FF FF FF 89 00 00 01 02
InstallationNonVolatileMemSize = 0200
InstallationVolatileMemSize = 0000
MenuEntriesPositionIdentifier = 0002
```

; rest of INSTALL(install) parameters are taken from previous INSTALL(install)...

Annex H (informative): Change history

The table below indicates all changes that have been made to the present document since drafting work began.

| Change history | | | | | | | | |
|----------------|-------|---------|----|-----|-----|-----------------|-----|-----|
| Date | TSG # | TSG Doc | CR | Rev | Cat | Subject/Comment | Old | New |
| | | | | | | | | |
| | | | | | | | | |